


Appendix A. Test Result of AC Power Line Conducted Emission

Antenna 1


Site :HY-SR01
Condition :Line
Mode :TX_2.4G Wireless_2444MHz
test by :Jimmy

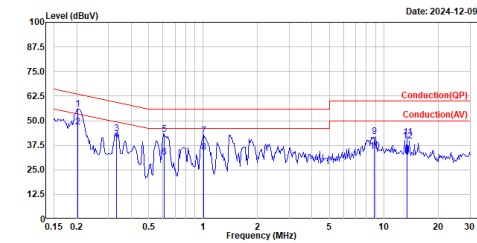

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV	Line	Limit	Level	dB	
1	0.203	55.94	63.48	-7.54	46.26	9.68	QP
2	0.203	46.83	53.48	-6.65	37.15	9.68	Average
3	0.333	43.51	59.37	-15.86	33.83	9.68	QP
4	0.333	39.86	49.37	-9.51	30.18	9.68	Average
5	0.609	43.01	56.00	-12.99	33.32	9.69	QP
6	0.609	31.33	46.00	-14.67	21.64	9.69	Average
7	1.012	42.38	56.00	-13.62	32.66	9.72	QP
8	1.012	33.89	46.00	-12.11	24.17	9.72	Average
9	8.847	42.03	60.00	-17.97	31.22	10.81	QP
10	8.847	34.27	50.00	-15.73	23.46	10.81	Average
11	13.470	41.41	60.00	-18.59	30.42	10.79	QP
12	13.470	39.49	50.00	-10.51	28.70	10.79	Average

Note:
1. Level = Read Level + Factor
2. Factor = LISN insertion loss + Cable loss
3. Over Limit = Level - Limit Line

Site :HY-SR01
Condition :Neutral
Mode :TX_2.4G Wireless_2444MHz
test by :Jimmy

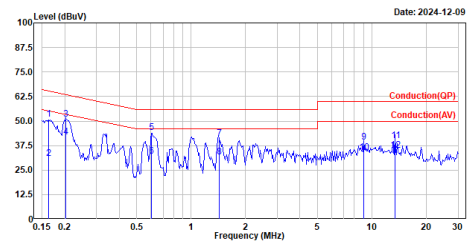


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV	Line	Limit	Level	dB	
1	0.164	50.89	65.27	-14.38	41.23	9.66	QP
2	0.164	30.79	55.27	-24.48	21.13	9.66	Average
3	0.203	50.82	63.47	-12.65	41.16	9.66	QP
4	0.203	41.07	53.47	-11.60	32.21	9.66	Average
5	0.602	44.04	56.00	-11.96	34.37	9.67	QP
6	0.602	32.07	46.00	-13.93	22.40	9.67	Average
7	1.426	41.26	56.00	-14.74	31.51	9.75	QP
8	1.426	31.72	46.00	-14.28	21.97	9.75	Average
9	9.050	39.24	60.00	-20.76	28.45	10.79	QP
10	9.050	34.00	50.00	-16.00	23.21	10.79	Average
11	13.468	40.08	60.00	-19.92	29.26	10.82	QP
12	13.468	35.02	50.00	-14.98	24.20	10.82	Average

Note:
1. Level = Read Level + Factor
2. Factor = LISN insertion loss + Cable loss
3. Over Limit = Level - Limit Line

Antenna 2


Site :HY-SR01
Condition :Line
Mode :TX_2.4G Wireless_2444MHz
test by :Jimmy

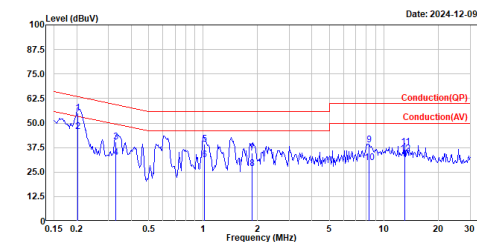

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV	Line	Limit	Level	dB	
1	0.203	55.07	63.50	-8.43	45.39	9.68	QP
2	0.203	45.80	53.50	-7.70	36.12	9.68	Average
3	0.329	40.44	59.48	-19.04	30.76	9.68	QP
4	0.329	32.60	49.48	-16.88	22.92	9.68	Average
5	1.014	39.20	56.00	-16.80	29.48	9.72	QP
6	1.014	31.34	46.00	-14.66	21.62	9.72	Average
7	1.867	34.76	56.00	-21.24	24.95	9.81	QP
8	1.867	26.71	46.00	-19.29	16.90	9.81	Average
9	8.286	38.71	60.00	-21.29	27.90	10.81	QP
10	8.286	29.87	50.00	-20.13	19.06	10.81	Average
11	13.080	37.74	60.00	-22.26	26.95	10.79	QP
12	13.080	34.30	50.00	-15.70	23.51	10.79	Average

Note:
1. Level = Read Level + Factor
2. Factor = LISN insertion loss + Cable loss
3. Over Limit = Level - Limit Line

Site :HY-SR01
Condition :Neutral
Mode :TX_2.4G Wireless_2444MHz
test by :Jimmy

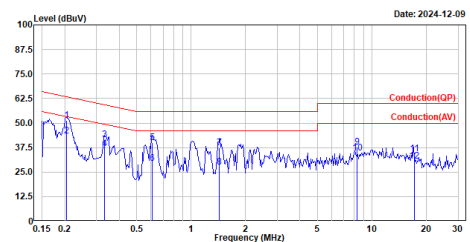

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV	Line	Limit	Level	dB	
1	0.205	51.36	63.40	-12.04	41.70	9.66	QP
2	0.205	43.25	53.40	-10.15	33.59	9.66	Average
3	0.334	41.37	59.36	-17.99	31.71	9.66	QP
4	0.334	37.01	49.36	-12.35	27.35	9.66	Average
5	0.608	40.14	56.00	-15.86	30.47	9.67	QP
6	0.608	29.37	46.00	-16.63	19.70	9.67	Average
7	1.436	37.19	56.00	-18.81	27.44	9.75	QP
8	1.436	27.56	46.00	-18.44	17.81	9.75	Average
9	8.248	37.75	60.00	-22.25	26.95	10.80	QP
10	8.248	34.05	50.00	-15.15	24.05	10.80	Average
11	17.102	34.42	60.00	-25.58	23.61	10.81	QP
12	17.102	30.58	50.00	-19.42	19.77	10.81	Average

Note:
1. Level = Read Level + Factor
2. Factor = LISN insertion loss + Cable loss
3. Over Limit = Level - Limit Line


Appendix B. Test Result of 6dB Bandwidth

Antenna 1

Modulation	Frequency (MHz)	Measured Value (kHz)	Limit (kHz)	Result
OFDM	2417	9080	>500	Pass
	2444	9080	>500	Pass
	2470	9040	>500	Pass

Antenna 2

Modulation	Frequency (MHz)	Measured Value (kHz)	Limit (kHz)	Result
OFDM	2417	9080	>500	Pass
	2444	9040	>500	Pass
	2470	9080	>500	Pass

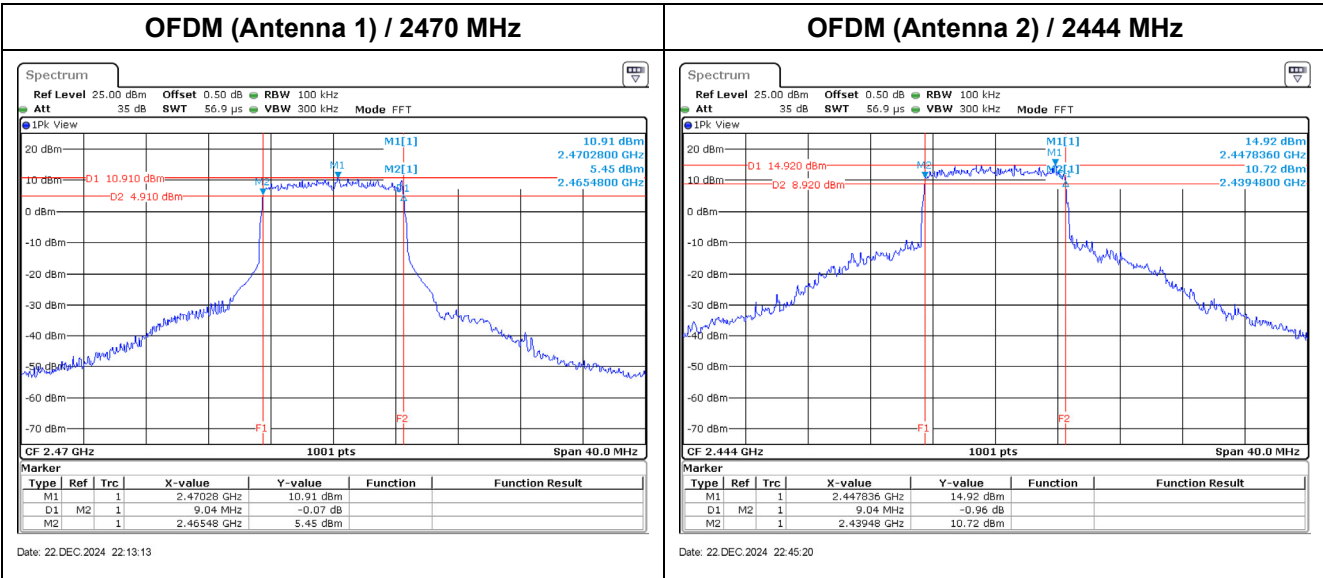

Appendix C. Test Result of Maximum Conducted Output Power**Antenna 1**

Modulation	Frequency (MHz)	Average Output Power (dBm)	Limit (dBm)	Result
OFDM	2417	25.85	<30	Pass
	2444	25.78	<30	Pass
	2470	21.32	<30	Pass

Antenna 2

Modulation	Frequency (MHz)	Average Output Power (dBm)	Limit (dBm)	Result
OFDM	2417	25.76	<30	Pass
	2444	25.70	<30	Pass
	2470	20.40	<30	Pass


Appendix D. Test Result of Power Spectral Density

Antenna 1


Modulation	Frequency (MHz)	Measure Value (dBm/10kHz)	Duty factor (dB)	Total PSD (dBm)	Limit (dBm/10kHz)	Result
OFDM	2417	-4.45	0.36	-4.09	8.00	Pass
	2444	-3.75	0.36	-3.39	8.00	Pass
	2470	-7.99	0.36	-7.63	8.00	Pass

Antenna 2


Modulation	Frequency (MHz)	Measure Value (dBm/10kHz)	Duty factor (dB)	Total PSD (dBm)	Limit (dBm/10kHz)	Result
OFDM	2417	-3.28	0.36	-2.92	8.00	Pass
	2444	-3.78	0.36	-3.42	8.00	Pass
	2470	-9.53	0.36	-9.17	8.00	Pass

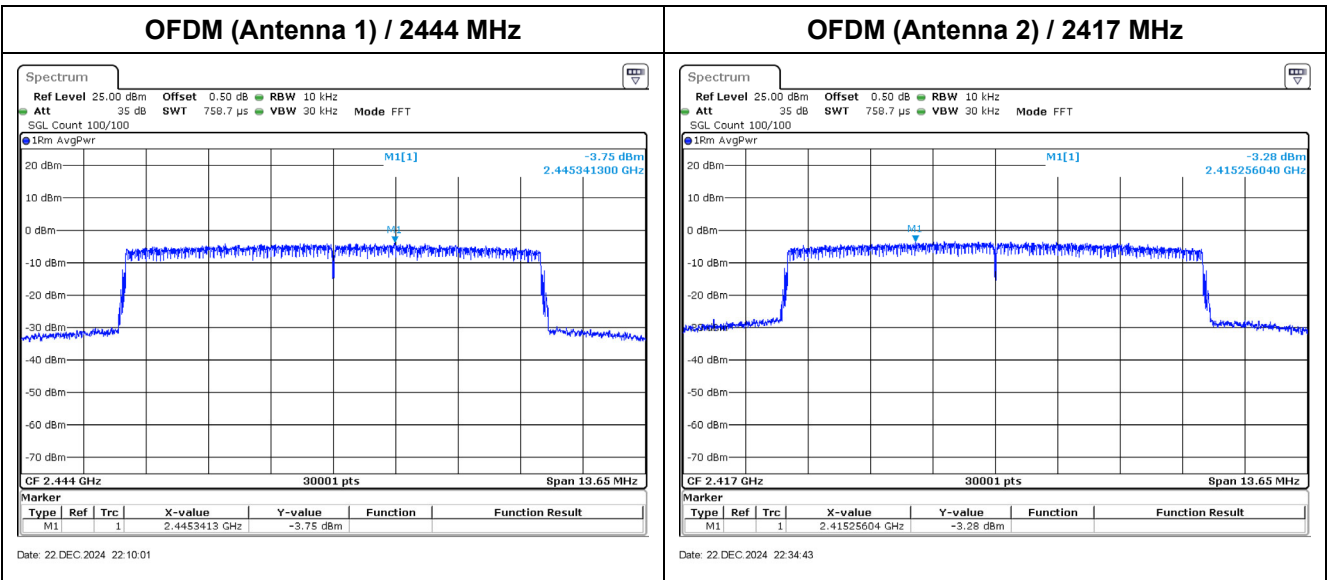

Appendix E. Test Result of Antenna Port Conducted Emission

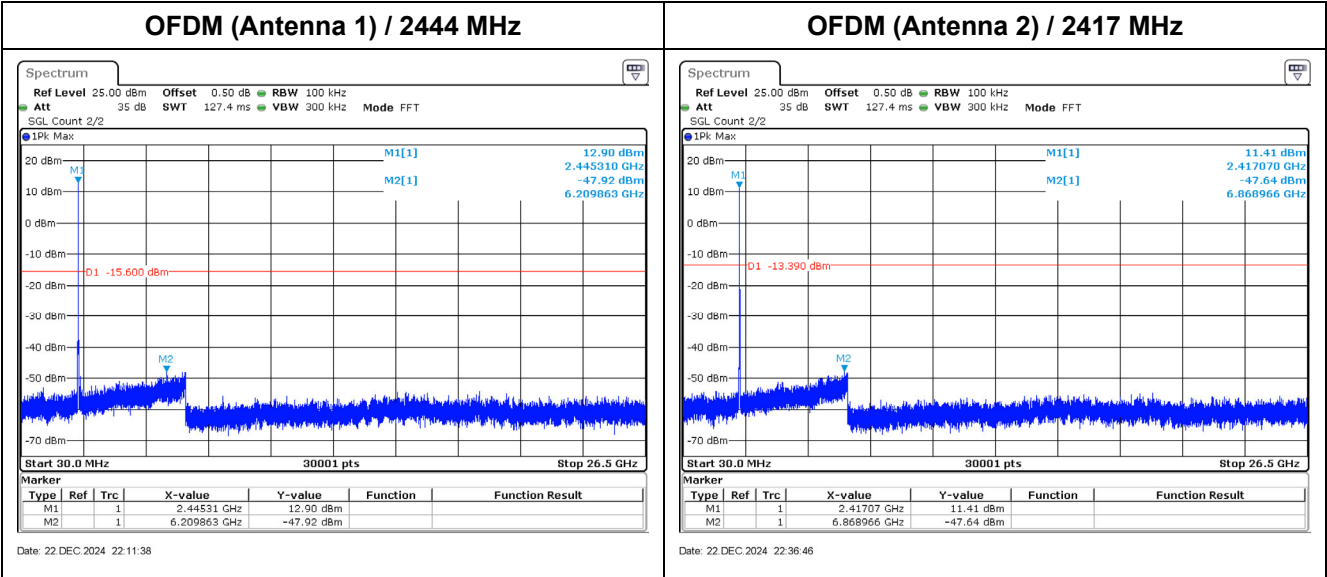


Modulation	Measurement Level Δ (dB)	Result
OFDM (Antenna 1)	> 20	PASS
OFDM (Antenna 2)	> 20	PASS

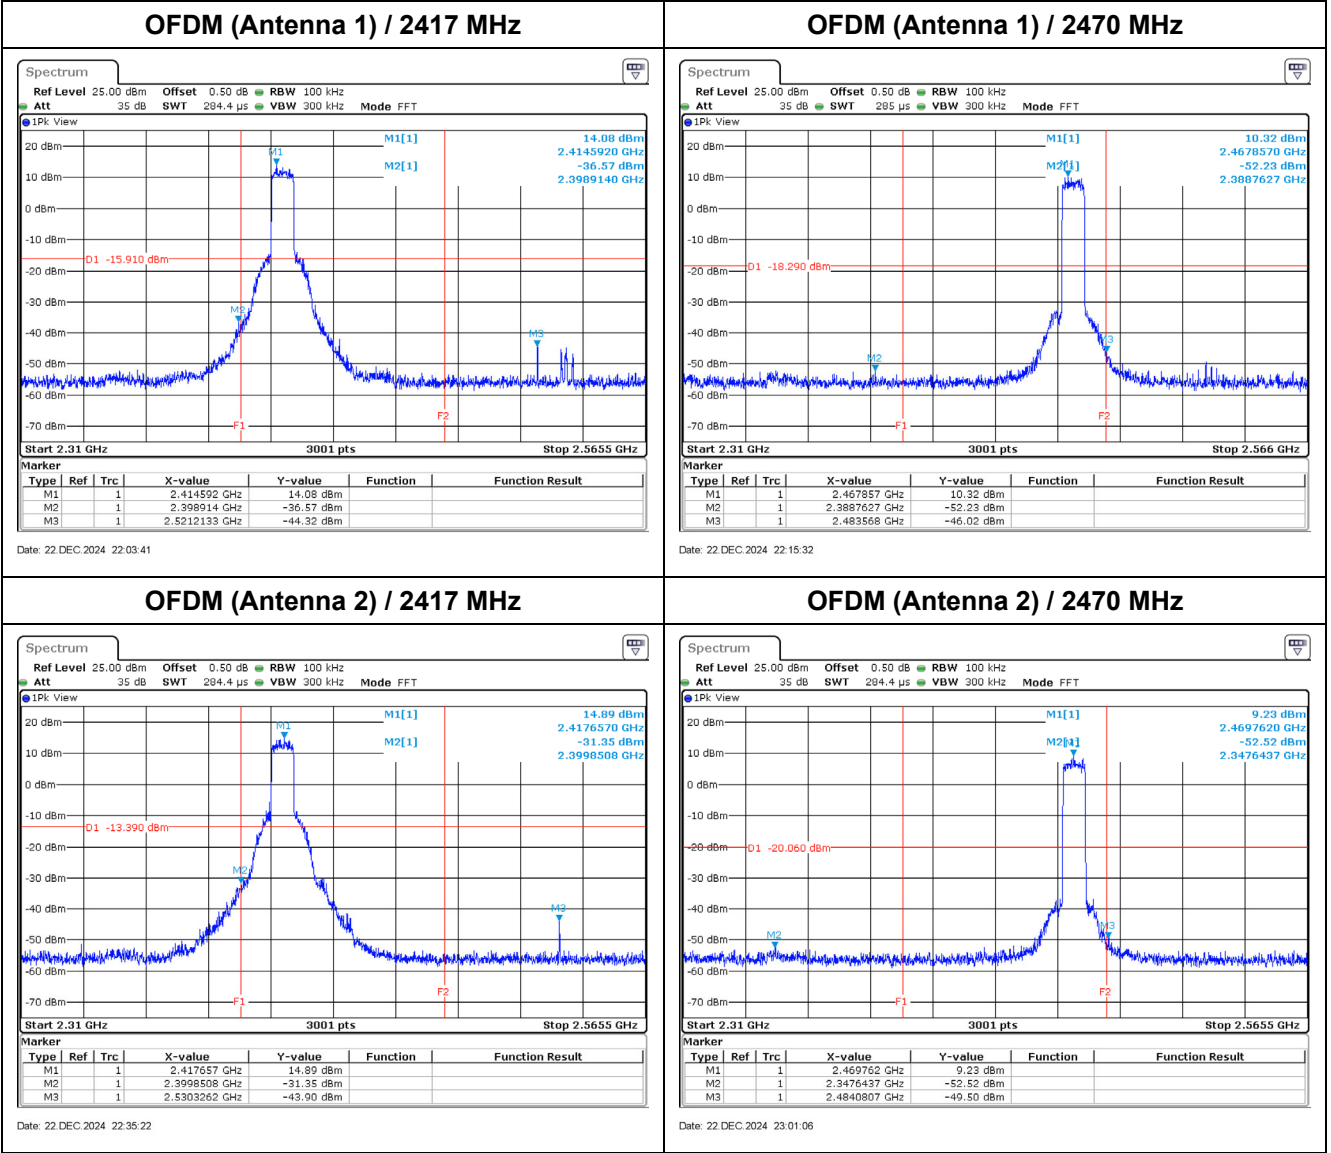

Appendix F. Test Result of Radiated Emission

Antenna 1


Site :HY-CB03
Condition :3m Horizontal
Mode :TX_2417MHz
Test BY :Ashton

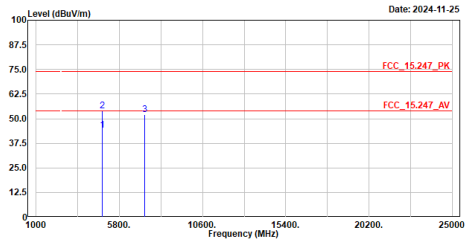

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4834.000	44.15	54.00	-9.85	58.17	-14.02	Average
2	4834.000	54.07	74.00	-19.93	68.09	-14.02	Peak
3	7251.000	51.95	74.00	-22.05	58.50	-6.55	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m Vertical
Mode :TX_2417MHz
Test BY :Ashton

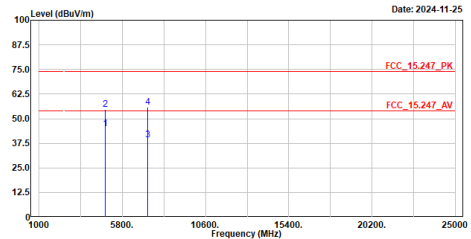

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4834.000	44.74	54.00	-9.26	58.76	-14.02	Average
2	4834.000	54.84	74.00	-19.16	68.86	-14.02	Peak
3	7251.000	39.18	54.00	-14.82	45.73	-6.55	Average
4	7251.000	55.86	74.00	-18.14	62.41	-6.55	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m Horizontal
Mode :TX_2444MHz
Test BY :Ashton

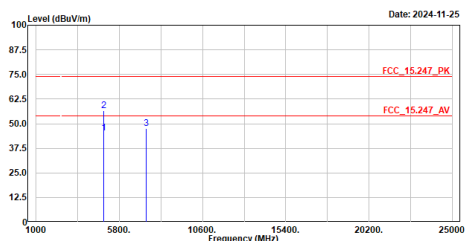

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4888.000	45.35	54.00	-8.65	59.07	-13.72	Average
2	4888.000	56.57	74.00	-17.43	70.29	-13.72	Peak
3	7332.000	47.59	74.00	-26.41	53.97	-6.38	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m Vertical
Mode :TX_2444MHz
Test BY :Ashton

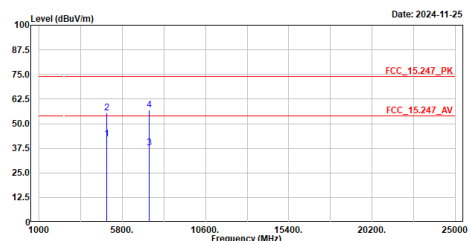

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4888.000	42.37	54.00	-11.63	56.09	-13.72	Average
2	4888.000	55.60	74.00	-18.40	69.32	-13.72	Peak
3	7332.000	37.83	54.00	-16.17	44.21	-6.38	Average
4	7332.000	56.88	74.00	-17.12	63.26	-6.38	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m Horizontal
Mode :TX_2470MHz
Test BY :Bob

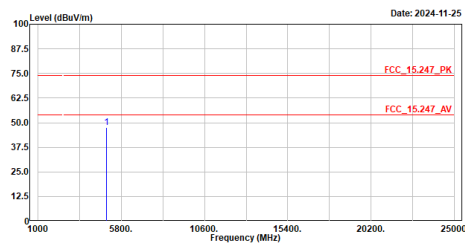

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4940.000	47.50	74.00	-26.50	60.81	-13.31	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m Vertical
Mode :TX_2470MHz
Test BY :Bob

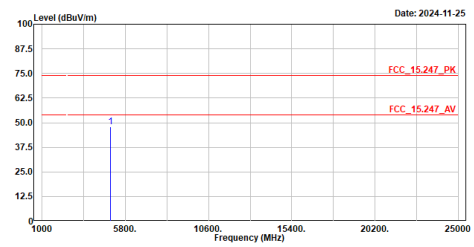

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4940.000	47.81	74.00	-26.19	61.12	-13.31	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m Horizontal
Mode :TX_2444MHz
Test BY :Bob

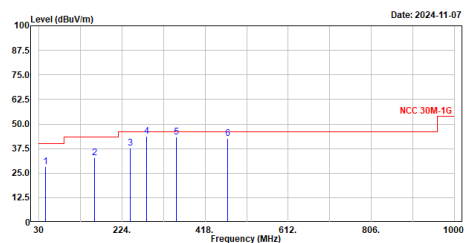

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	44.550	28.23	40.00	-11.77	51.83	-23.60	QP
2	159.980	33.00	43.50	-10.50	56.79	-23.79	QP
3	243.400	37.60	46.00	-8.40	62.40	-24.80	QP
4	281.230	43.94	46.00	-2.06	67.30	-23.36	QP
5	351.070	43.55	46.00	-2.45	65.30	-21.75	QP
6	470.380	42.64	46.00	-3.36	61.00	-18.36	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.


Site :HY-CB03
Condition :3m Vertical
Mode :TX_2444MHz
Test BY :Bob

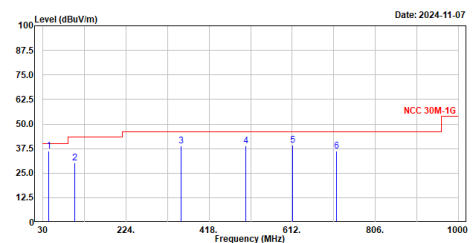

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	43.580	36.17	40.00	-3.83	59.80	-23.63	QP
2	104.690	30.05	43.50	-13.45	57.43	-27.38	QP
3	352.040	39.03	46.00	-6.97	60.76	-21.73	QP
4	504.330	38.92	46.00	-7.08	56.69	-17.77	QP
5	613.940	39.21	46.00	-6.79	54.50	-15.29	QP
6	714.820	36.37	46.00	-9.63	50.00	-13.63	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_2417MHz
Test BY :Ashton

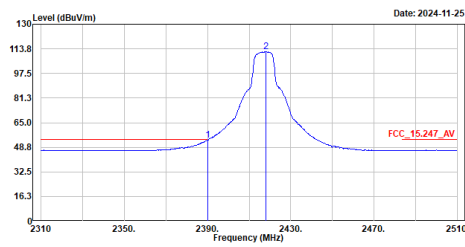


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2390.000	53.47	54.00	-0.53	22.96	30.51	Average
2	2418.200	111.91	-----	-----	81.29	30.62	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_2417MHz
Test BY :Ashton

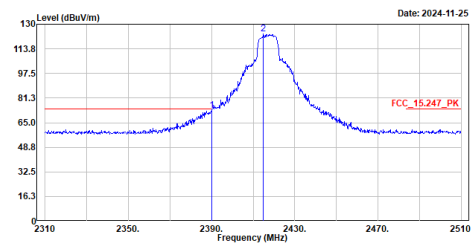


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2390.000	72.86	74.00	-1.14	42.35	30.51	Peak
2	2415.000	123.69	-----	-----	93.07	30.62	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_2417MHz
Test BY :Ashton

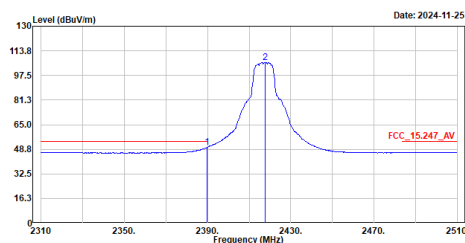


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2389.800	49.99	54.00	-4.01	19.48	30.51	Average
2	2417.800	106.10	-----	-----	75.48	30.62	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_2417MHz
Test BY :Ashton

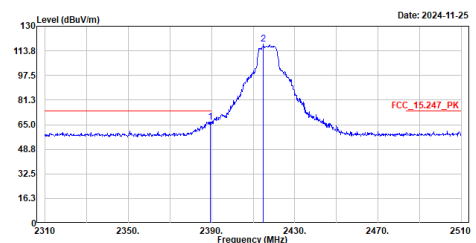


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2389.400	66.77	74.00	-7.23	36.26	30.51	Peak
2	2415.000	118.04	-----	-----	87.42	30.62	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_2444MHz
Test BY :Ashton

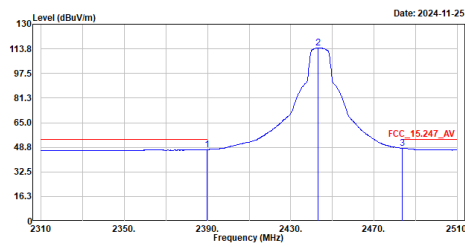


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2389.800	47.26	54.00	-6.74	16.75	30.51	Average
2	2443.000	114.43	-----	-----	83.99	30.44	Average
3	2483.600	48.12	54.00	-5.88	17.61	30.51	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_2444MHz
Test BY :Ashton

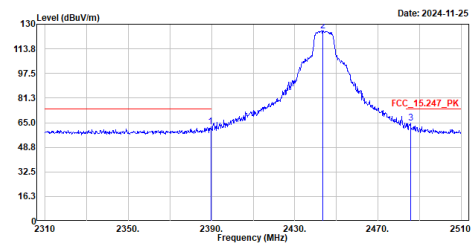


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2389.600	62.44	74.00	-11.56	31.93	30.51	Peak
2	2443.600	125.75	-----	-----	95.31	30.44	Peak
3	2485.600	64.84	74.00	-9.16	34.31	30.53	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_2444MHz
Test BY :Ashton

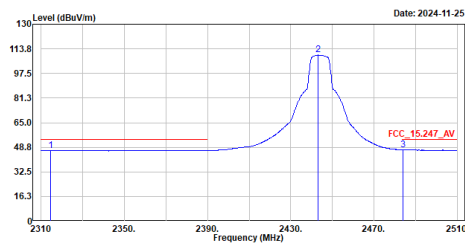


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2314.600	46.72	54.00	-7.28	16.06	30.66	Average
2	2443.200	109.68	-----	-----	79.24	30.44	Average
3	2483.800	47.17	54.00	-6.83	16.66	30.51	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_2444MHz
Test BY :Ashton

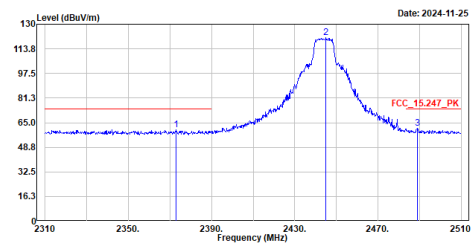


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2372.800	60.53	74.00	-13.47	30.03	30.50	Peak
2	2445.000	120.94	-----	-----	90.50	30.44	Peak
3	2488.800	61.45	74.00	-12.55	30.89	30.56	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m Horizontal
Mode :TX_2470MHz
Test BY :Ashton

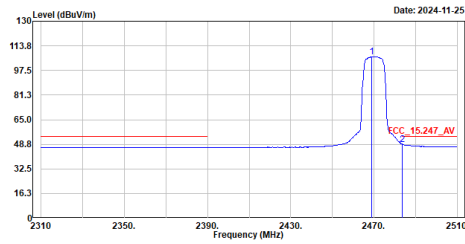

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2469.000	106.57	-----	-----	76.10	30.47	Average
2	2483.500	48.72	54.00	-5.28	18.21	30.51	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m Horizontal
Mode :TX_2470MHz
Test BY :Ashton

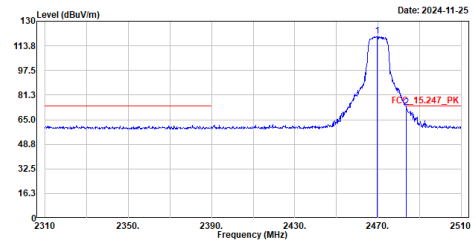

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2469.600	120.37	-----	-----	89.91	30.46	Peak
2	2483.500	73.08	74.00	-0.92	42.57	30.51	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m Vertical
Mode :TX_2470MHz
Test BY :Ashton

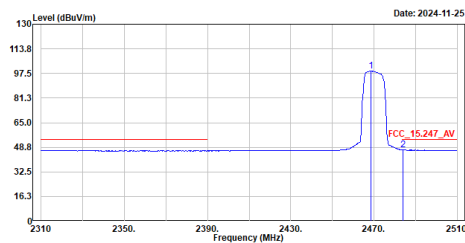

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2468.600	99.10	-----	-----	68.63	30.47	Average
2	2484.000	47.00	54.00	-7.00	16.49	30.51	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_2470MHz
Test BY :Ashton

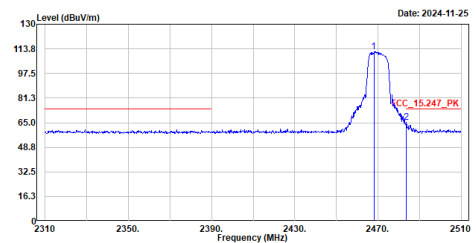


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2468.000	111.00	-----	-----	81.32	30.48	Peak
2	2483.600	65.47	74.00	-8.53	34.96	30.51	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Antenna 2


Site :HY-CB03
Condition :3m Horizontal
Mode :TX_2417MHz
Test BY :Bob

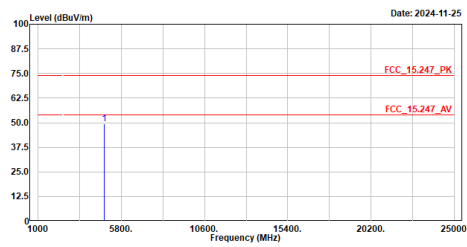

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4834.000	49.58	74.00	-24.42	63.60	-14.02	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m Vertical
Mode :TX_2417MHz
Test BY :Bob

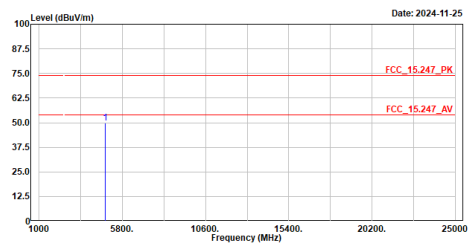

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4834.000	49.91	74.00	-24.09	63.93	-14.02	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m Horizontal
Mode :TX_2444MHz
Test BY :Ashton

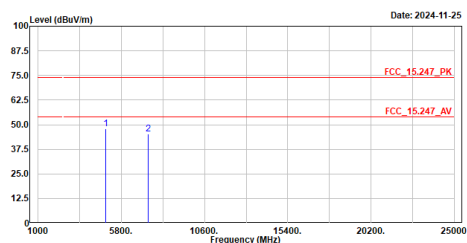

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4888.000	47.82	74.00	-26.18	61.54	-13.72	Peak
2	7332.000	45.12	74.00	-28.88	51.50	-6.38	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m Vertical
Mode :TX_2444MHz
Test BY :Ashton

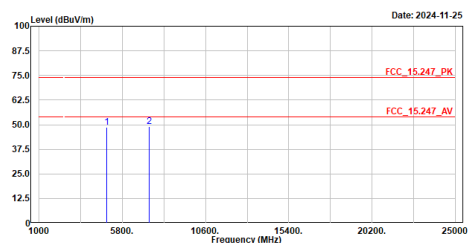

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4888.000	48.64	74.00	-25.36	62.36	-13.72	Peak
2	7332.000	49.00	74.00	-25.00	55.38	-6.38	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m Horizontal
Mode :TX_2470MHz
Test BY :Bob

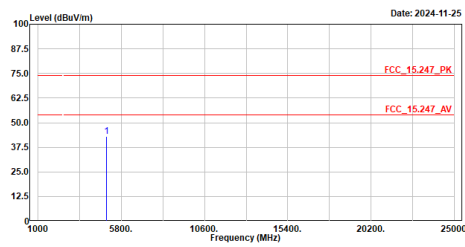

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4940.000	42.94	74.00	-31.06	56.25	-13.31	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m Vertical
Mode :TX_2470MHz
Test BY :Bob

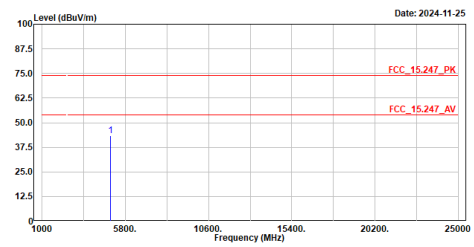

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4940.000	43.25	74.00	-30.75	56.56	-13.31	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m Horizontal
Mode :TX_2444MHz
Test BY :Bob

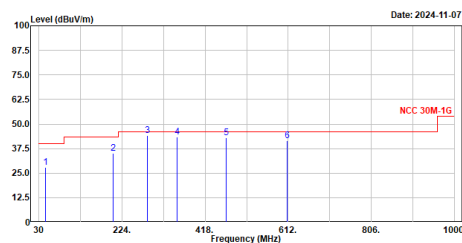

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	44.550	27.81	40.00	-12.19	51.41	-23.60	QP
2	203.630	35.22	43.50	-8.28	61.77	-26.55	QP
3	203.170	44.22	46.00	-1.78	67.49	-23.27	QP
4	352.040	43.27	46.00	-2.73	65.00	-21.73	QP
5	466.500	42.94	46.00	-3.06	61.30	-18.36	QP
6	610.060	41.39	46.00	-4.61	56.70	-15.31	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.


Site :HY-CB03
Condition :3m Vertical
Mode :TX_2444MHz
Test BY :Bob

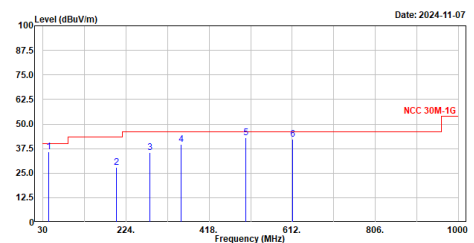

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	43.580	35.97	40.00	-4.03	59.60	-23.63	QP
2	201.690	27.96	43.50	-15.54	54.57	-26.61	QP
3	280.260	35.60	46.00	-10.40	59.01	-23.41	QP
4	353.010	39.55	46.00	-6.45	61.26	-21.71	QP
5	503.360	42.95	46.00	-3.05	60.75	-17.80	QP
6	612.970	42.27	46.00	-3.73	57.57	-15.30	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.


Site :HY-CB03
Condition :3m Horizontal
Mode :TX_2417MHz
Test BY :Ashton

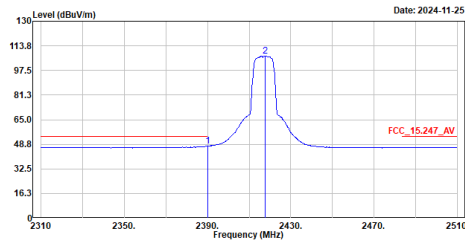

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2390.000	47.57	54.00	-6.43	17.06	30.51	Average
2	2417.600	107.81	54.00	53.81	76.39	30.62	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m Horizontal
Mode :TX_2417MHz
Test BY :Ashton

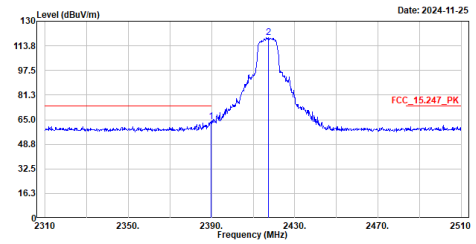

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2389.800	63.76	74.00	-10.24	33.25	30.51	Peak
2	2417.400	119.40	54.00	65.40	88.78	30.62	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m Vertical
Mode :TX_2417MHz
Test BY :Ashton

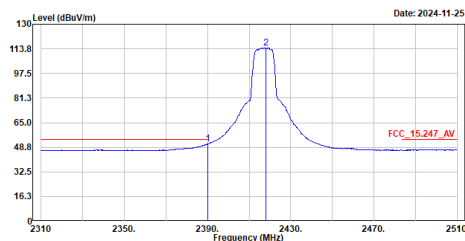

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2390.000	50.93	54.00	-3.07	20.42	30.51	Average
2	2418.200	114.52	54.00	60.52	83.90	30.62	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m Vertical
Mode :TX_2417MHz
Test BY :Ashton

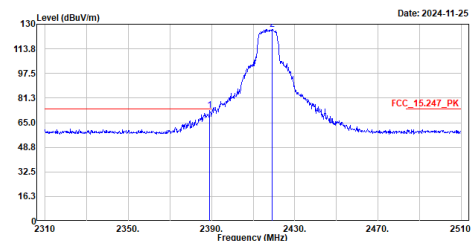

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2389.200	73.31	74.00	-0.69	42.80	30.51	Peak
2	2419.200	126.59	54.00	72.59	95.97	30.62	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_2444MHz
Test BY :Ashton

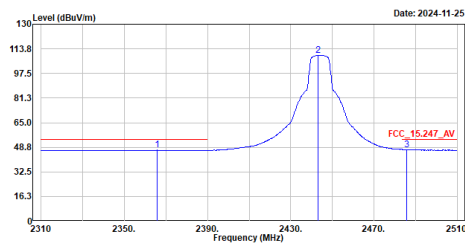


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2365.800	46.85	54.00	-7.15	16.36	30.49	Average
2	2443.200	109.59	-----	-----	79.15	30.44	Average
3	2485.600	47.33	54.00	-6.67	16.80	30.53	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_2444MHz
Test BY :Ashton

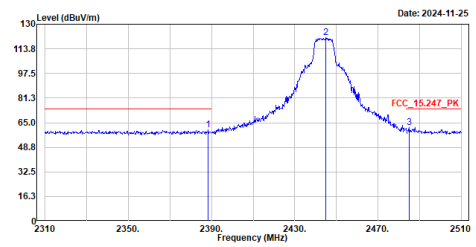


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2388.400	60.10	74.00	-13.90	29.59	30.51	Peak
2	2444.800	121.07	-----	-----	90.63	30.44	Peak
3	2485.000	61.85	74.00	-12.15	31.33	30.52	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_2444MHz
Test BY :Ashton

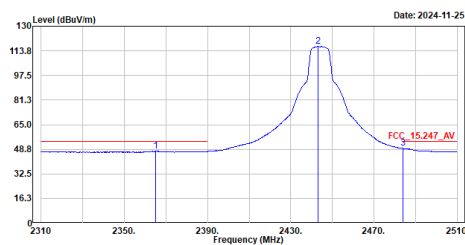


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2365.200	47.40	54.00	-6.60	16.91	30.49	Average
2	2443.200	116.62	-----	-----	86.18	30.44	Average
3	2483.800	49.41	54.00	-4.59	18.90	30.51	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_2444MHz
Test BY :Ashton

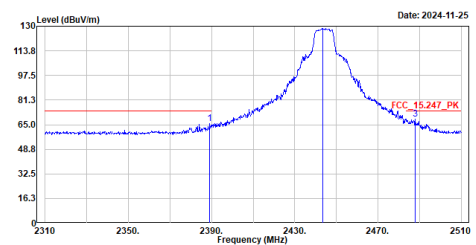


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2389.200	65.56	74.00	-8.44	35.05	30.51	Peak
2	2443.400	128.33	-----	-----	97.89	30.44	Peak
3	2488.000	68.91	74.00	-5.09	38.36	30.55	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m Horizontal
Mode :TX_2470MHz
Test BY :Ashton

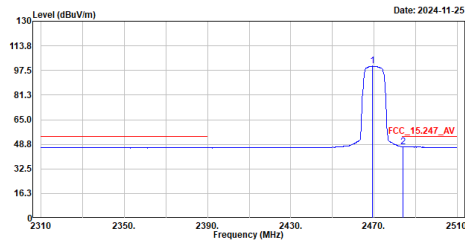

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2469.400	100.33	-----	-----	69.86	30.47	Average
2	2483.800	47.21	54.00	-6.79	16.70	30.51	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m Horizontal
Mode :TX_2470MHz
Test BY :Ashton

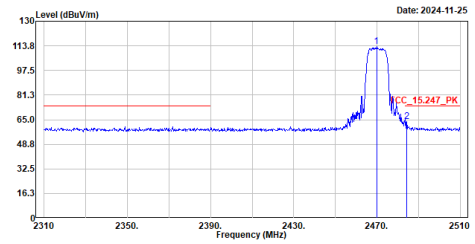

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2469.800	113.16	-----	-----	82.70	30.46	Peak
2	2484.400	63.64	74.00	-10.36	33.13	30.51	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m Vertical
Mode :TX_2470MHz
Test BY :Ashton

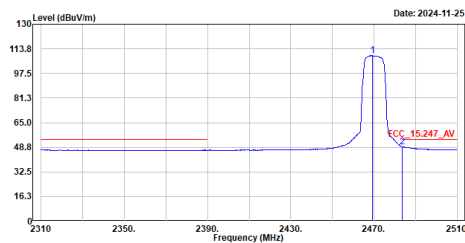

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2469.400	109.28	-----	-----	78.81	30.47	Average
2	2483.600	49.17	54.00	-4.83	18.66	30.51	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_2470MHz
Test BY :Ashton

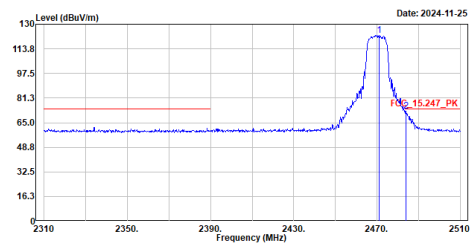

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2471.200	122.87	-----	-----	92.41	30.46	Peak
2	2483.800	72.65	74.00	-1.35	42.14	30.51	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.