

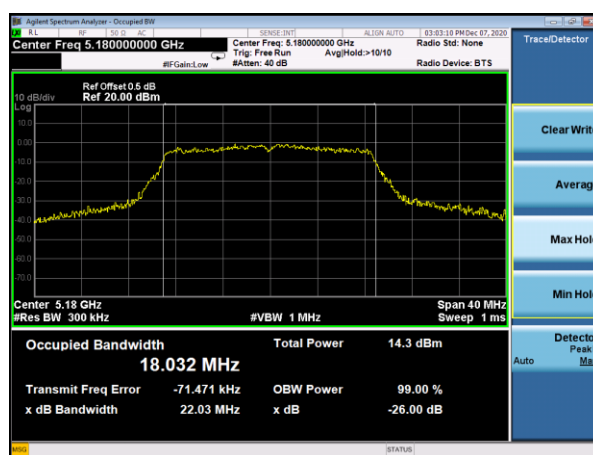
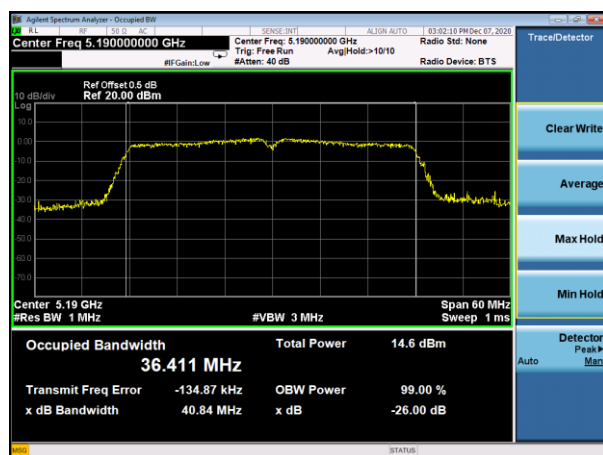


Test plot


(802.11 n40) 26dB&99%Bandwidth plot on channel 38 (802.11 AC20) -26dB&99%Bandwidth plot on channel 36

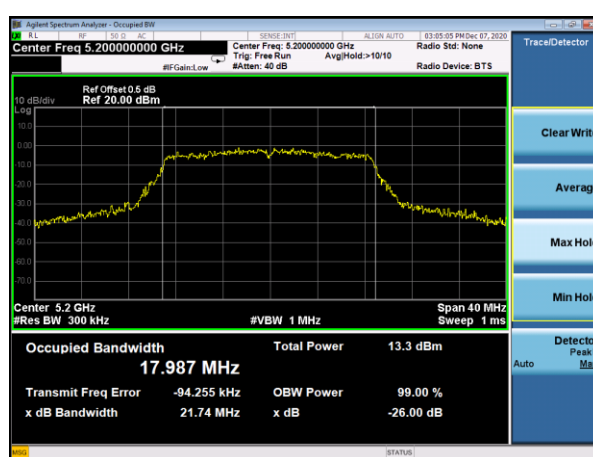

(802.11 n40) 26dB&99%Bandwidth plot on channel 46 (802.11 AC20) -26dB&99%Bandwidth plot on channel 40

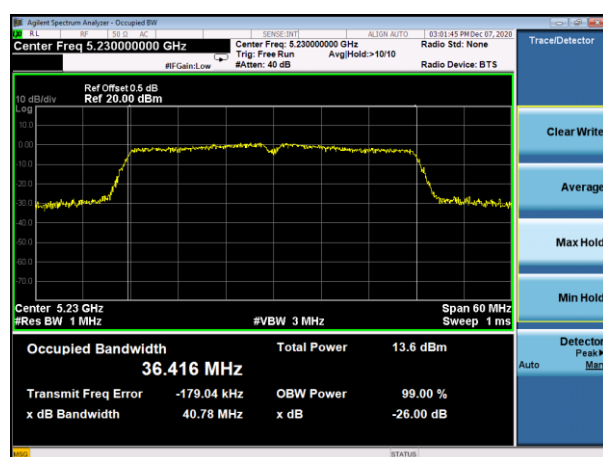


(802.11 AC20) -26dB&99%Bandwidth plot on channel 48


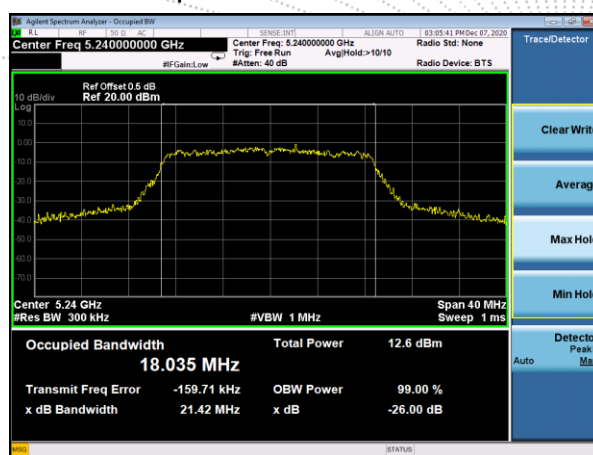


Test plot

(802.11 AC40) -26dB&99%Bandwidth plot
on channel 38

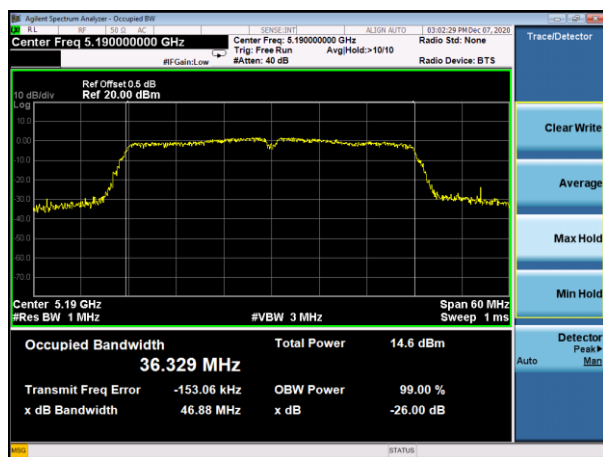



(802.11 AC40) -26dB&99%Bandwidth
plot on channel 46

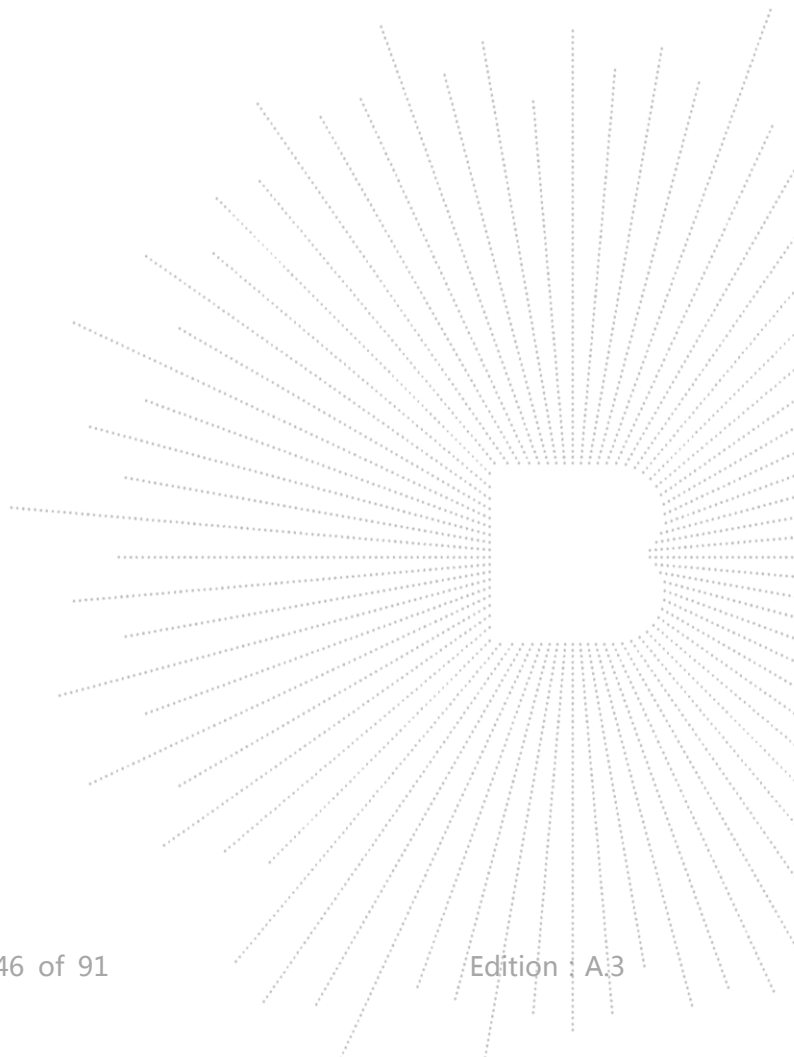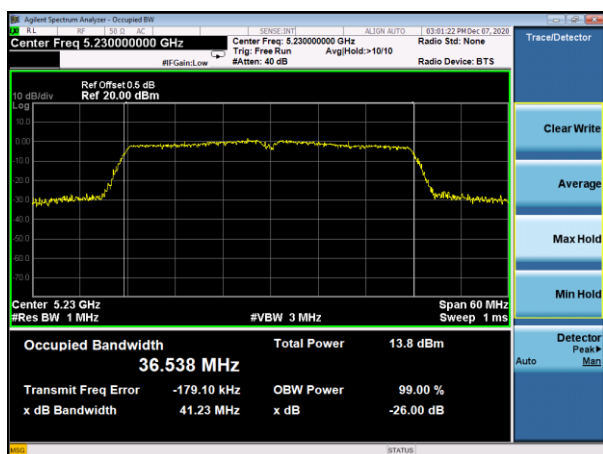


Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 12V
Test Mode :	TX Frequency U-NII-3(5745-5825MHz)		

Mode	Channel	Frequency (MHz)	99% bandwidth (MHz)	6dB bandwidth (MHz)	Limit kHz	Result
802.11a	CH149	5745	16.905	16.08	≥500	Pass
	CH157	5785	16.897	16.33	≥500	Pass
	CH165	5825	16.904	16.38	≥500	Pass
802.11 n20	CH149	5745	17.903	17.30	≥500	Pass
	CH157	5785	17.940	17.32	≥500	Pass
	CH165	5825	17.941	17.34	≥500	Pass
802.11 n40	CH151	5755	36.481	35.95	≥500	Pass
	CH159	5795	36.417	35.54	≥500	Pass
802.11 AC20	CH149	5745	17.918	17.17	≥500	Pass
	CH157	5785	17.937	17.30	≥500	Pass
	CH165	5825	17.981	17.31	≥500	Pass
802.11 AC40	CH151	5755	36.472	35.80	≥500	Pass
	CH159	5795	36.329	35.54	≥500	Pass


5725-5850MHz

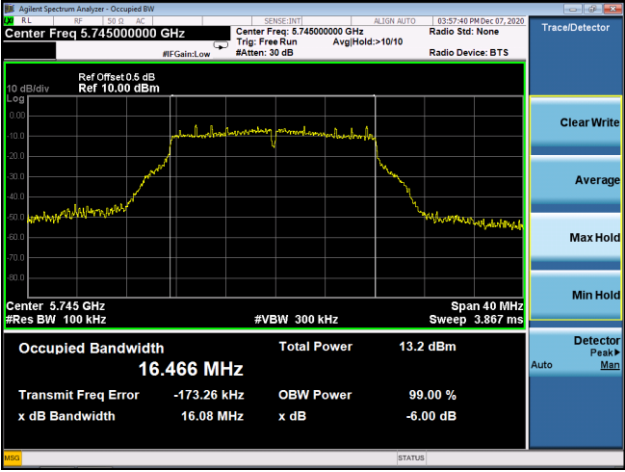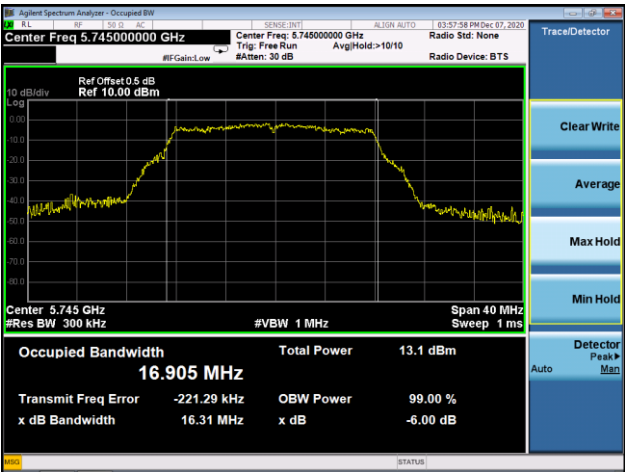Mode:	802.11a
5745MHz 6dB bandwidth	 Agilent Spectrum Analyzer - Occupied BW Center Freq 5.745000000 GHz Ref Offset 0.5 dB Ref 10.00 dBm Center 5.745 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 3.867 ms Occupied Bandwidth 16.466 MHz Total Power 13.2 dBm Transmit Freq Error -173.26 kHz OBW Power 99.00 % x dB Bandwidth 16.08 MHz x dB -6.00 dB
5745MHz 99% bandwidth	 Agilent Spectrum Analyzer - Occupied BW Center Freq 5.745000000 GHz Ref Offset 0.5 dB Ref 10.00 dBm Center 5.745 GHz #Res BW 300 kHz #VBW 1 MHz Span 40 MHz Sweep 1 ms Occupied Bandwidth 16.905 MHz Total Power 13.1 dBm Transmit Freq Error -221.29 kHz OBW Power 99.00 % x dB Bandwidth 16.31 MHz x dB -6.00 dB


5785MHz
6dB bandwidth

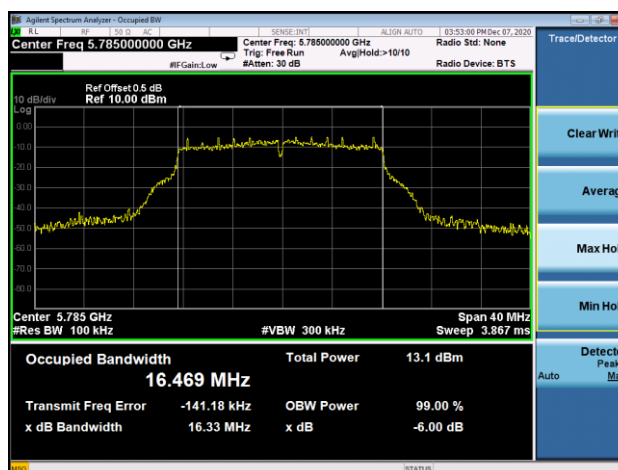


5785MHz
99% bandwidth


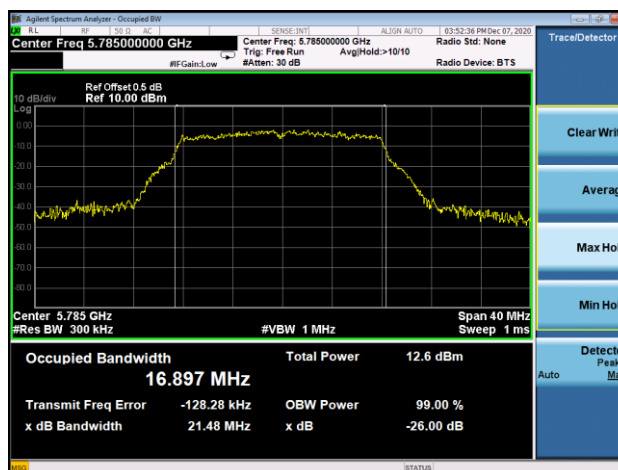


5825MHz
6dB bandwidth

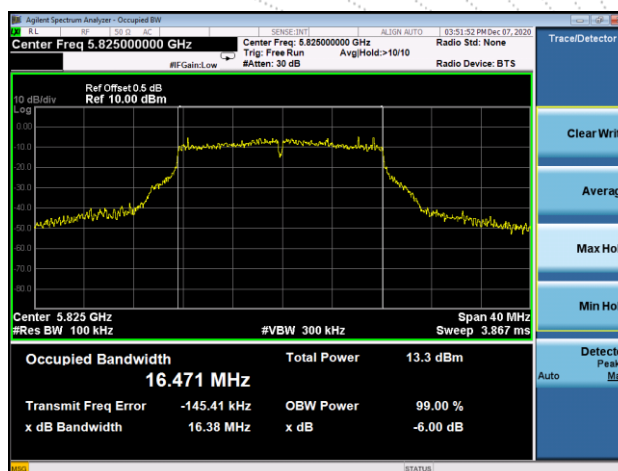


5825MHz
99% bandwidth

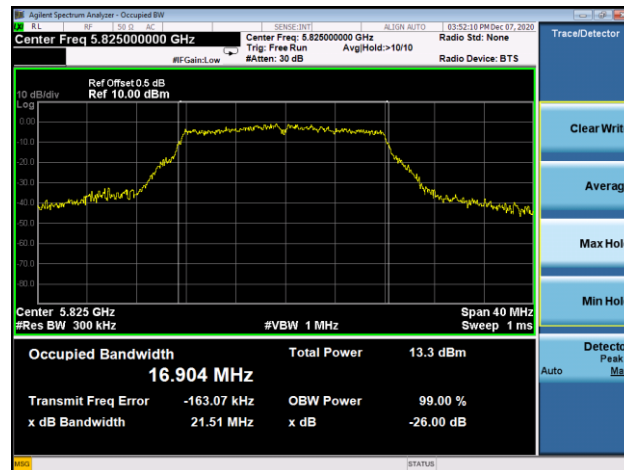


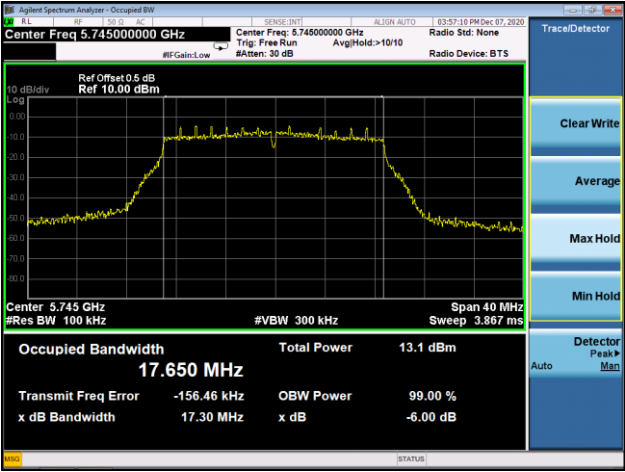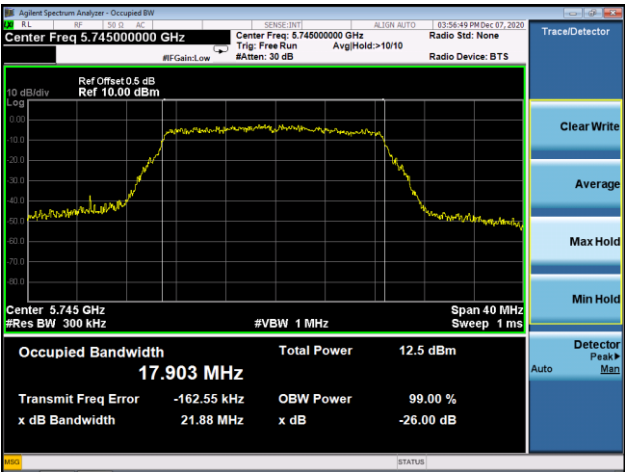Mode:	802.11n-HT20
5745MHz 6dB bandwidth	 Agilent Spectrum Analyzer - Occupied BW Center Freq 5.745000000 GHz Ref Offset 0.5 dB Ref 10.00 dBm Occupied Bandwidth: 17.650 MHz Total Power: 13.1 dBm Transmit Freq Error: -156.46 kHz OBW Power: 99.00 % x dB Bandwidth: 17.30 MHz x dB: -6.00 dB
5745MHz 99% bandwidth	 Agilent Spectrum Analyzer - Occupied BW Center Freq 5.745000000 GHz Ref Offset 0.5 dB Ref 10.00 dBm Occupied Bandwidth: 17.903 MHz Total Power: 12.5 dBm Transmit Freq Error: -162.55 kHz OBW Power: 99.00 % x dB Bandwidth: 21.88 MHz x dB: -26.00 dB


5785MHz
6dB bandwidth

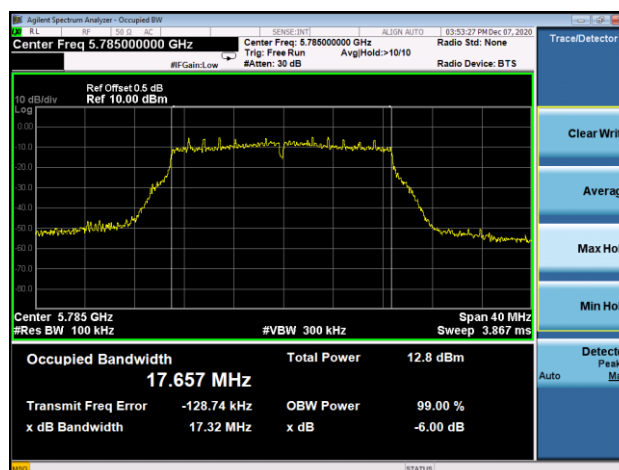


5785MHz
99% bandwidth


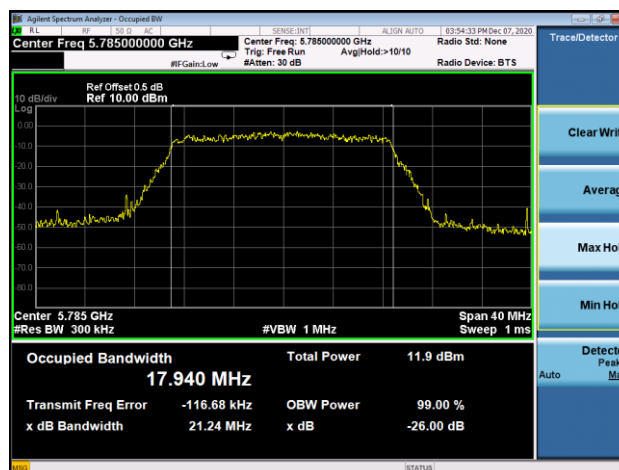


5825MHz
6dB bandwidth

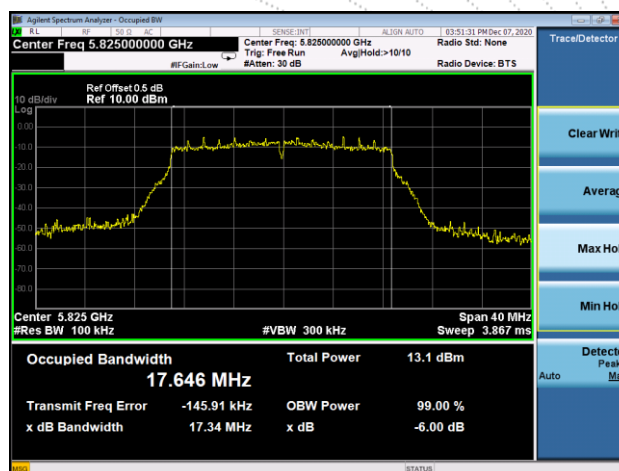


5825MHz
99% bandwidth

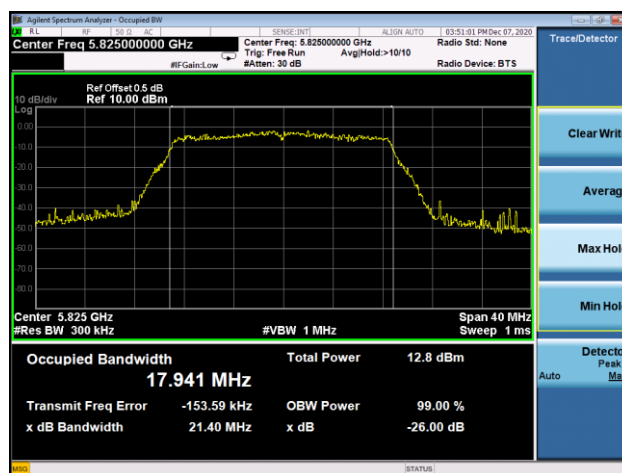


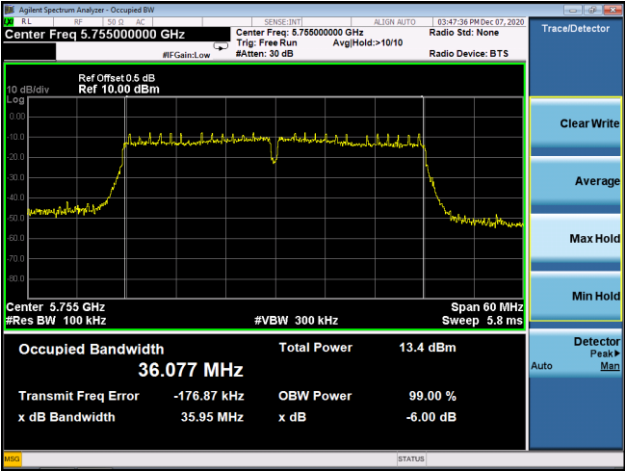
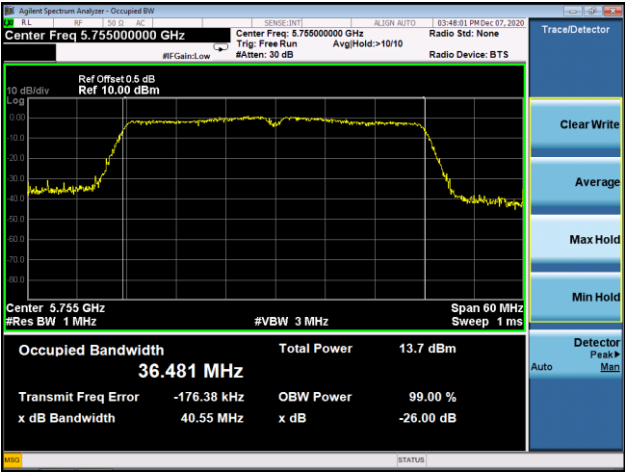
Mode:	802.11n-HT40
5755 MHz 6dB bandwidth	 Agilent Spectrum Analyzer - Occupied BW Center Freq 5.755000000 GHz Ref Offset 0.5 dB Ref 10.00 dBm Occupied Bandwidth: 36.077 MHz Total Power: 13.4 dBm Transmit Freq Error: -176.87 kHz OBW Power: 99.00 % x dB Bandwidth: 35.95 MHz x dB: -6.00 dB
5755 MHz 99% bandwidth	 Agilent Spectrum Analyzer - Occupied BW Center Freq 5.755000000 GHz Ref Offset 0.5 dB Ref 10.00 dBm Occupied Bandwidth: 36.481 MHz Total Power: 13.7 dBm Transmit Freq Error: -176.38 kHz OBW Power: 99.00 % x dB Bandwidth: 40.55 MHz x dB: -26.00 dB

5795 MHz
6dB bandwidth

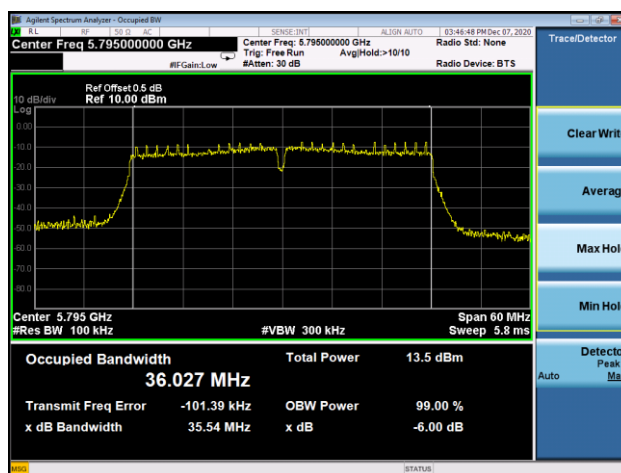


5795 MHz
99% bandwidth

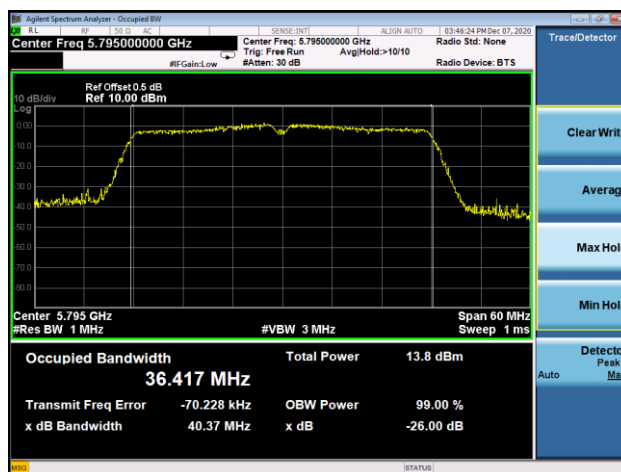


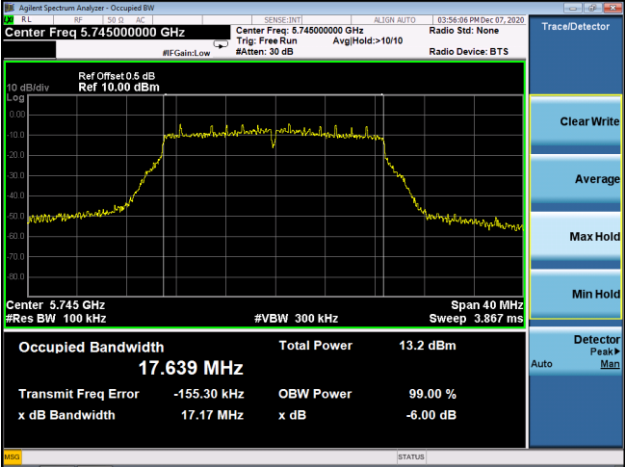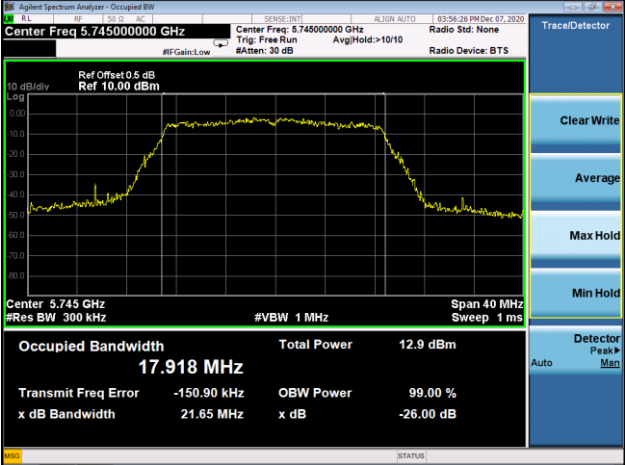Mode:	802.11ac-HT20
5745MHz 6dB bandwidth	
5745MHz 99% bandwidth	


5785MHz
6dB bandwidth

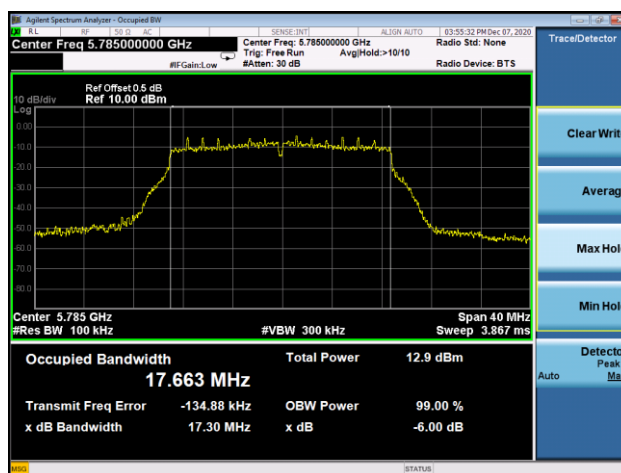


5785MHz
99% bandwidth

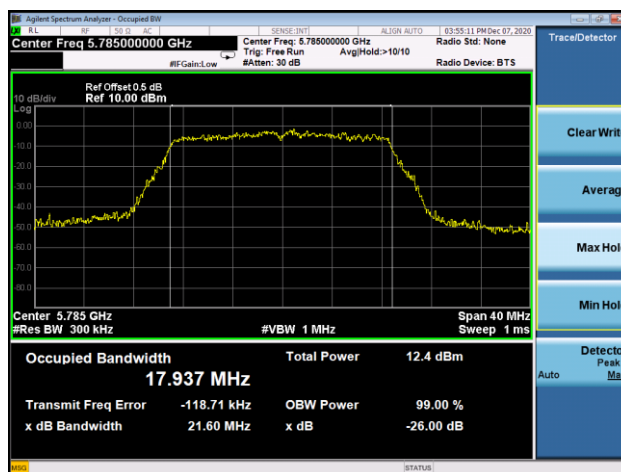

5825MHz
6dB bandwidth

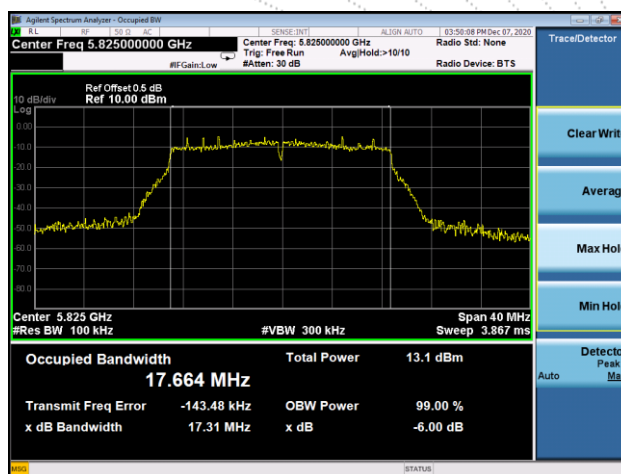


5825MHz
99% bandwidth

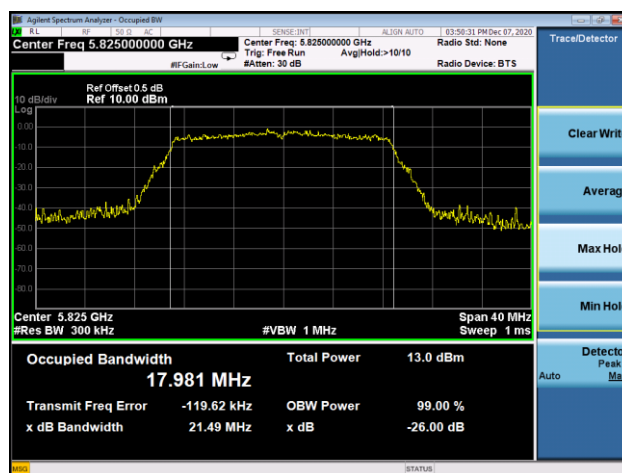


Mode:

802.11ac-HT40


5755 MHz
6dB bandwidth

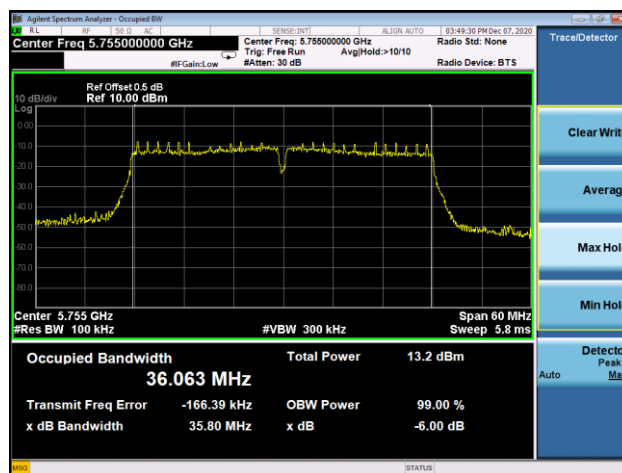


5755 MHz
99% bandwidth

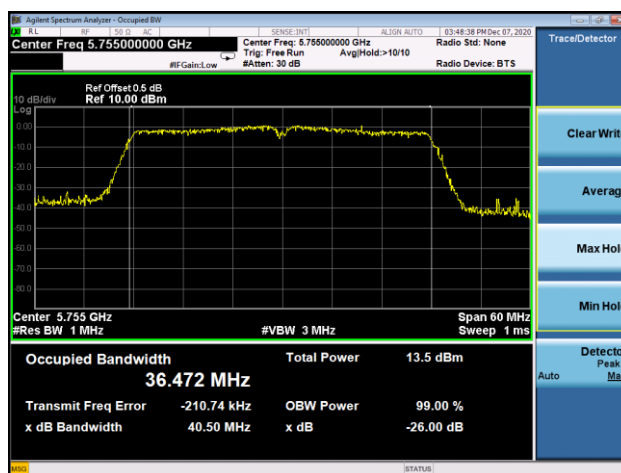

5795 MHz
6dB bandwidth

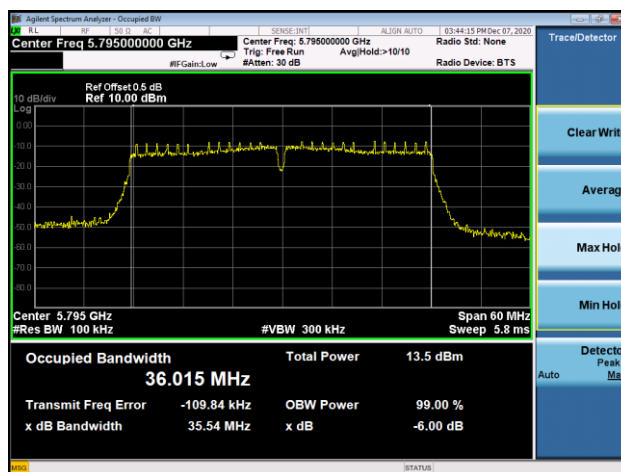

5795 MHz
99% bandwidth

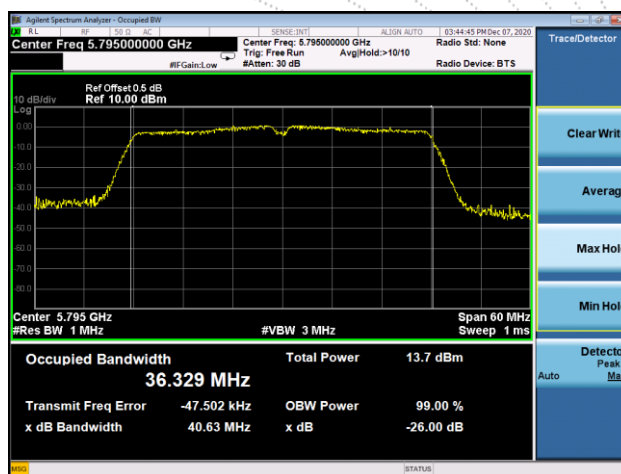

10. MAXIMUM CONDUCTED OUTPUT POWER

10.1 Block Diagram Of Test Setup



10.2 Limit

According to FCC §15.407

The maximum conducted output power should not exceed:

Frequency Band(MHz)	Limit
5150~5250	1W
5725~5850	1W

10.3 Test procedure

Maximum conducted output power may be measured using a spectrum analyzer/EMI receiver or an RF power meter.

1. Device Configuration

If possible, configure or modify the operation of the EUT so that it transmits continuously at its maximum power control level (see section II.B.).

a) The intent is to test at 100 percent duty cycle; however a small reduction in duty cycle (to no lower than 98 percent) is permitted if required by the EUT for amplitude control purposes. Manufacturers are expected to provide software to the test lab to permit such continuous operation.

b) If continuous transmission (or at least 98 percent duty cycle) cannot be achieved due to hardware limitations (e.g., overheating), the EUT shall be operated at its maximum power control level with the transmit duration as long as possible and the duty cycle as high as possible.

2. Measurement using a Spectrum Analyzer or EMI Receiver (SA)

Measurement of maximum conducted output power using a spectrum analyzer requires integrating the spectrum across a frequency span that encompasses, at a minimum, either the EBW or the 99-percent occupied bandwidth of the signal.¹ However, the EBW must be used to determine bandwidth dependent limits on maximum conducted output power in accordance with § 15.407(a).

a) The test method shall be selected as follows: (i) Method SA-1 or SA-1 Alternative (averaging with the EUT transmitting at full power throughout each sweep) shall be applied if either of the following conditions can be satisfied:

- The EUT transmits continuously (or with a duty cycle ≥ 98 percent).

- Sweep triggering or gating can be implemented in a way that the device transmits at the maximum power control level throughout the duration of each of the instrument sweeps to be averaged. This condition can generally be achieved by triggering the instrument's sweep if the duration of the sweep (with the analyzer configured as in Method SA-1, below) is equal to or shorter than the duration T of each transmission from the EUT and if those transmissions exhibit full power throughout their durations.

(ii) Method SA-2 or SA-2 Alternative (averaging across on and off times of the EUT transmissions, followed by duty cycle correction) shall be applied if the conditions of (i) cannot be achieved and the transmissions exhibit a constant duty cycle during the measurement duration. Duty cycle will be considered to be constant if variations are less than ± 2 percent.

(iii) Method SA-3 (RMS detection with max hold) or SA-3 Alternative (reduced VBW with max hold) shall be applied if the conditions of (i) and (ii) cannot be achieved.

b) Method SA-1 (trace averaging with the EUT transmitting at full power throughout each sweep): (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.

(ii) Set RBW = 1 MHz.

(iii) Set VBW ≥ 3 MHz.

(iv) Number of points in sweep ≥ 2 Span / RBW. (This ensures that bin-to-bin spacing is $\leq$ RBW/2, so that narrowband signals are not lost between frequency bins.)

(v) Sweep time = auto.

(vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.

(vii) If transmit duty cycle < 98 percent, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle ≥ 98 percent, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run".

(viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode.

(ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum

10.4 EUT operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

10.5 Test Result

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 12V
Test Mode :	TX (5.1G) Mode Frequency U-NII-1 (5180-5240MHz)		


Test Channel	Frequency	Maximum output power. Antenna port (AV)	LIMIT	Result
	(MHz)	(dBm)	dBm	
TX 802.11a Mode				
CH36	5180	11.241	23.98	Pass
CH40	5200	10.747	23.98	Pass
CH48	5240	10.582	23.98	Pass
TX 802.11 n20M Mode				
CH36	5180	10.792	23.98	Pass
CH40	5200	10.596	23.98	Pass
CH48	5240	9.860	23.98	Pass
TX 802.11 n40M Mode				
CH38	5190	8.127	23.98	Pass
CH46	5230	6.993	23.98	Pass
TX 802.11 AC20M Mode				
CH36	5180	10.931	23.98	Pass
CH40	5200	10.349	23.98	Pass
CH48	5240	9.383	23.98	Pass
TX 802.11 AC40M Mode				
CH38	5190	7.883	23.98	Pass
CH46	5230	7.440	23.98	Pass

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 12V
Test Mode :	TX (5.8G) Mode Frequency U-NII-3 (5745-5825MHz)		

Test Channel	Frequency	Maximum output power. Antenna port (AV)	LIMIT	Result
	(MHz)	(dBm)	dBm	
TX 802.11a Mode				
CH 149	5745	10.569	30	Pass
CH 157	5785	9.773	30	Pass
CH 165	5825	10.274	30	Pass
TX 802.11 n20M Mode				
CH 149	5745	10.010	30	Pass
CH 157	5785	9.665	30	Pass
CH 165	5825	10.784	30	Pass
TX 802.11 n40M Mode				
CH 151	5755	7.975	30	Pass
CH 159	5795	6.385	30	Pass
TX 802.11 AC20M Mode				
CH 149	5745	10.205	30	Pass
CH 157	5785	9.974	30	Pass
CH 165	5825	10.852	30	Pass
TX 802.11 AC40M Mode				
CH 151	5755	6.376	30	Pass
CH 159	5795	6.535	30	Pass

11. OUT OF BAND EMISSIONS

11.1 Block Diagram Of Test Setup

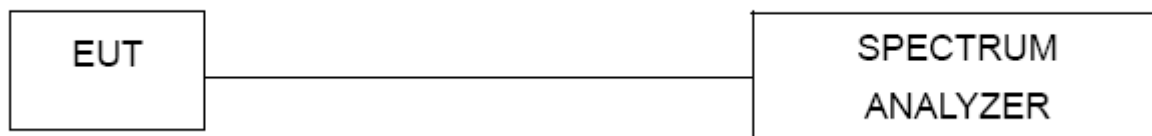

11.2 Limit

According to FCC §15.407(b)

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

11.3 Test procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

11.4 EUT operating Conditions


The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data

11.5 Test Result


Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 12V

5.180~5.240 GHz


(802.11a) Band Edge, Left Side

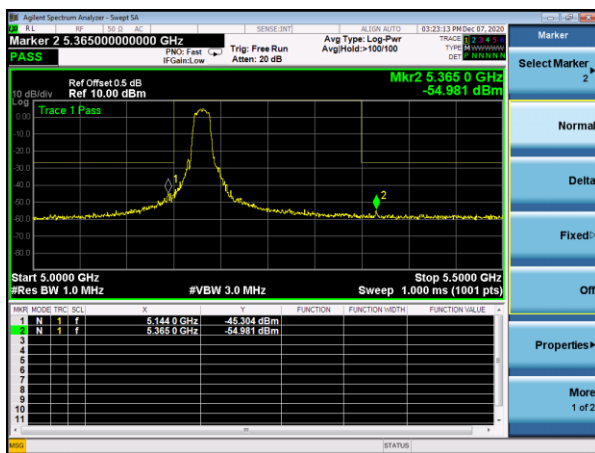


(802.11n20) Band Edge, Left Side

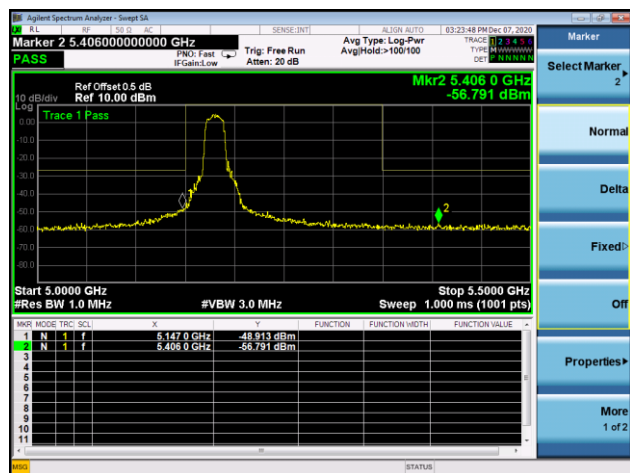

(802.11a) Band Edge, Right Side

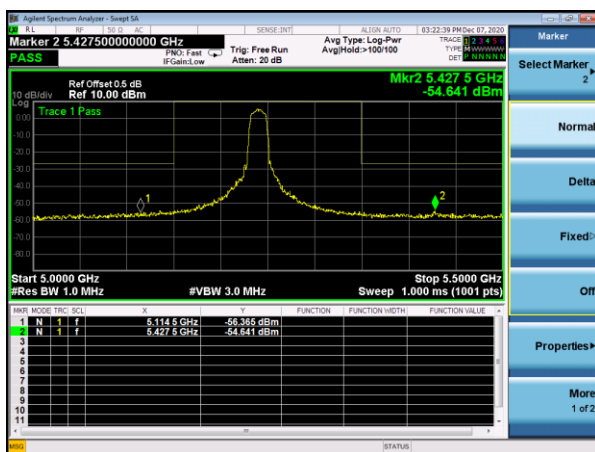


(802.11n20) Band Edge, Right Side

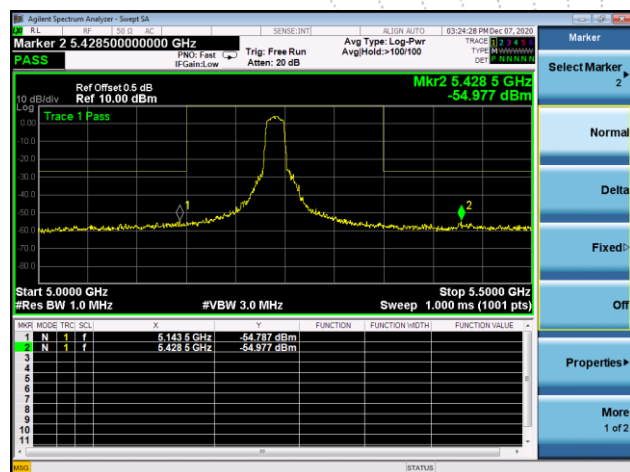


5.180~5.240 GHz


(802.11n40) Band Edge, Left Side

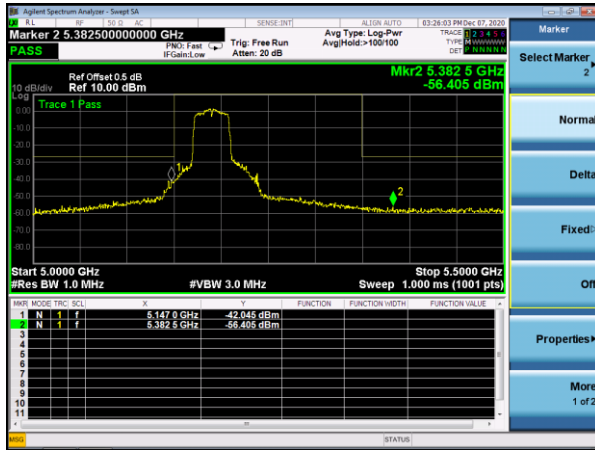


(802.11ac20) Band Edge, Left Side

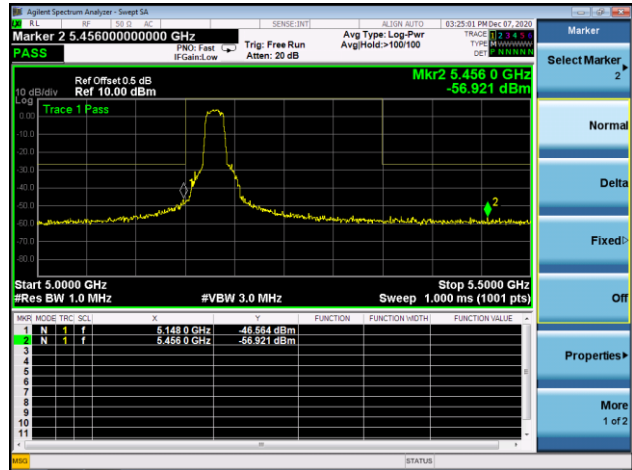

(802.11n40) Band Edge, Right Side

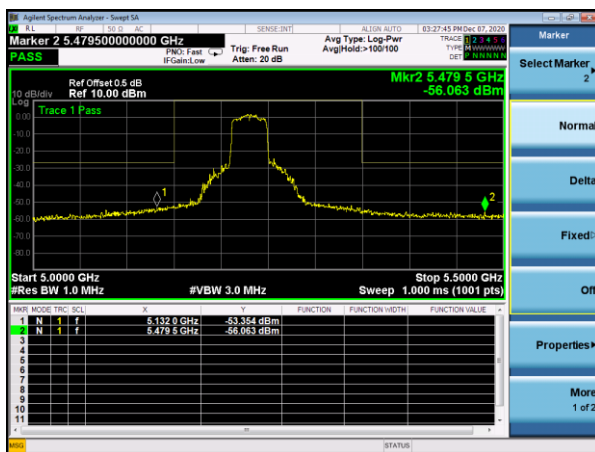


(802.11ac20) Band Edge, Right Side

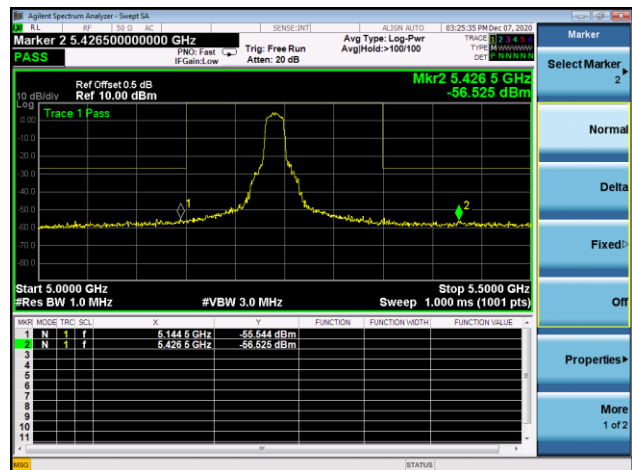


5.180~5.240 GHz

(802.11ac40) Band Edge, Left Side

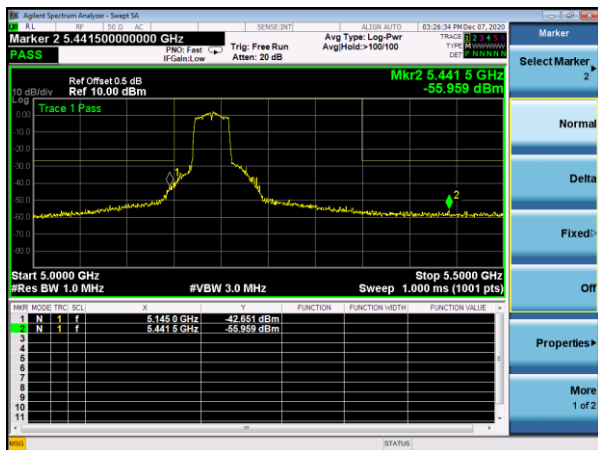


(802.11ac40) Band Edge, Right Side

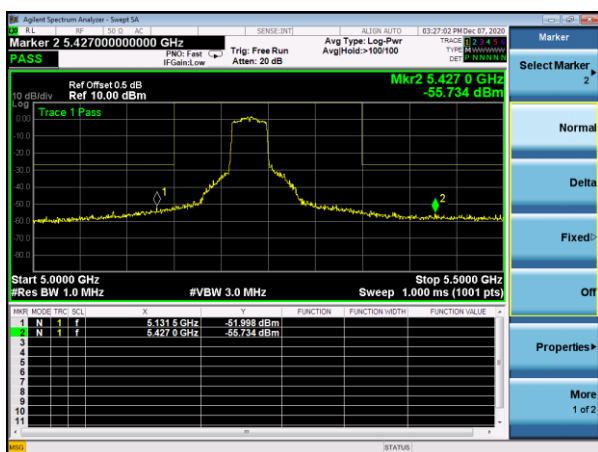


5.745~5.825 GHz


(802.11a) Band Edge, Left Side

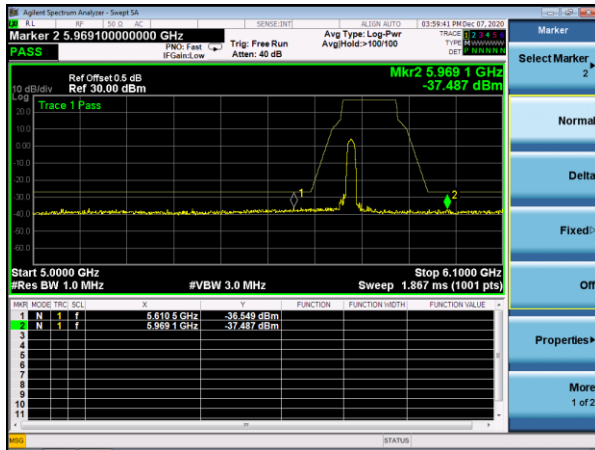

(802.11n20) Band Edge, Left Side

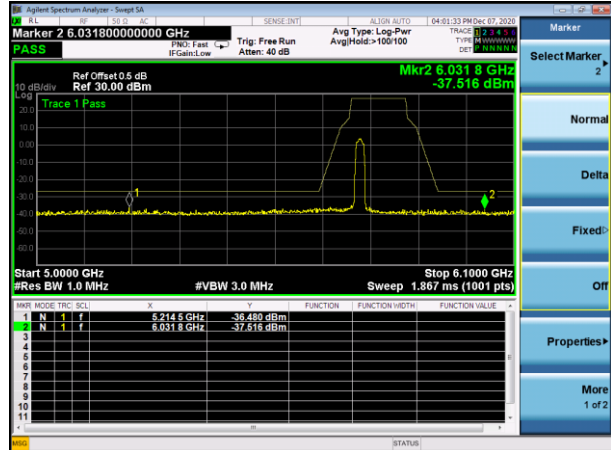

(802.11a) Band Edge, Right Side

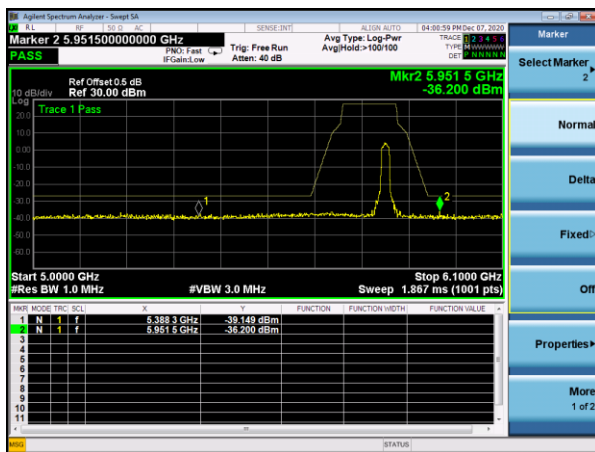

(802.11n20) Band Edge, Right Side

