

FCC Test Report

(PART 90)

Report No.: RF181001C19-12

FCC ID: A4RG020G

Test Model: G020G

Received Date: Oct. 01, 2018

Test Date: Oct. 04, 2018 ~ Oct. 25, 2018

Issued Date: Dec. 27, 2018

Applicant: Google LLC

Address: 1600 Amphitheatre Parkway, Mountain View, CA 94043, USA

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan
(R.O.C)

Test Location (1): No. 19, Hwa Ya 2nd Rd, Wen Hwa Vil, Kwei Shan Dist., Taoyuan City
33383, Taiwan (R.O.C)

Test Location (2): B2F., No.215, Sec. 3, Beixin Rd., Xindian Dist., New Taipei City 231,
Taiwan, R.O.C

**FCC Registration /
Designation Number:** 427177 / TW0011



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	7
2.2 Test Site and Instruments	8
3 General Information	10
3.1 General Description of EUT	10
3.2 Configuration of System under Test	11
3.2.1 Description of Support Units	11
3.3 Test Mode Applicability and Tested Channel Detail	12
3.4 EUT Operating Conditions	15
3.5 General Description of Applied Standards	15
4 Test Types and Results	16
4.1 Output Power Measurement	16
4.1.1 Limits of Output Power Measurement	16
4.1.2 Test Procedures	16
4.1.3 Test Setup	17
4.1.4 Test Results	18
4.2 Modulation Characteristics Measurement	26
4.2.1 Limits of Modulation Characteristics	26
4.2.2 Test Setup	26
4.2.3 Test Procedure	26
4.2.4 Test Results	27
4.3 Frequency Stability Measurement	29
4.3.1 Limits of Frequency Stability Measurement	29
4.3.2 Test Procedure	29
4.3.3 Test Setup	29
4.3.4 Test Results	30
4.4 Occupied Bandwidth Measurement	37
4.4.1 Limits of Occupied Bandwidth Measurement	37
4.4.2 Test Procedure	37
4.4.3 Test Setup	37
4.4.4 Test Results	38
4.5 Emission Mask Measurement	46
4.5.1 Limits of Emission Mask Measurement	46
4.5.2 Test Setup	46
4.5.3 Test Procedures	46
4.5.4 Test Results	47
4.6 Band Edge Measurement	62
4.6.1 Limits of Band Edge Measurement	62
4.6.2 Test Setup	62
4.6.3 Test Procedures	62
4.6.4 Test Results	63
4.7 Conducted Spurious Emissions	69
4.7.1 Limits of Conducted Spurious Emissions Measurement	69
4.7.2 Test Setup	69
4.7.3 Test Procedure	69
4.7.4 Test Results	70
4.8 Radiated Emission Measurement	77
4.8.1 Limits of Radiated Emission Measurement	77
4.8.2 Test Procedure	77
4.8.3 Deviation from Test Standard	77
4.8.4 Test Setup	78

4.8.5 Test Results	79
5 Pictures of Test Arrangements.....	107
Appendix – Information on the Testing Laboratories	108

Release Control Record

Issue No.	Description	Date Issued
RF181001C19-12	Original Release	Dec. 27, 2018

1 Certificate of Conformity

Product: Smartphone

Test Model: G020G

Sample Status: Identical Prototype


Applicant: Google LLC

Test Date: Oct. 04, 2018 ~ Oct. 25, 2018

Standards: FCC Part 90, Subpart I, S, R
FCC Part 2

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by :



Date:

Dec. 27, 2018

Ivonne Wu / Supervisor

Approved by :



Date:

Dec. 27, 2018

Dylan Chiou / Project Engineer

2 Summary of Test Results

Applied Standard: FCC Part 90 & Part 2 (CDMA)			
FCC Clause	Test Item	Result	Remarks
2.1046 90.635 (b)	Effective Radiated Power	Pass	Meet the requirement of limit.
2.1047	Modulation Characteristics	Pass	Meet the requirement.
2.1055 90.213	Frequency Stability	Pass	Meet the requirement of limit.
2.1049 90.209	Occupied Bandwidth	Pass	Meet the requirement of limit.
2.1051 90.210	Emission Masks	Pass	Meet the requirement of limit.
2.1051 90.691	Conducted Spurious Emissions	Pass	Meet the requirement of limit.
2.1053 90.691	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -39.57 dB at 1641.00 MHz.

Applied Standard: FCC Part 90 & Part 2 (LTE 14)			
FCC Clause	Test Item	Result	Remarks
2.1046 90.542 (a)(7)	Effective Radiated Power	Pass	Meet the requirement of limit.
2.1047	Modulation Characteristics	Pass	Meet the requirement.
2.1055 90.539 (e)	Frequency Stability	Pass	Meet the requirement of limit.
2.1049	Occupied Bandwidth	Pass	Meet the requirement of limit.
90.210 (n)	Emission Masks	Pass	Meet the requirement of limit.
2.1053 90.543 (e)(2)(3)	Band Edge Measurements	Pass	Meet the requirement of limit.
2.1051 90.543 (e)(3)	Conducted Spurious Emissions	Pass	Meet the requirement of limit.
2.1053 90.543 (e)(f)	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -7.89 dB at 1586.00 MHz.

Applied Standard: FCC Part 90 & Part 2 (LTE 26)			
FCC Clause	Test Item	Result	Remarks
2.1046 90.635 (b)	Effective Radiated Power	Pass	Meet the requirement of limit.
2.1047	Modulation Characteristics	Pass	Meet the requirement.
2.1055 90.213	Frequency Stability	Pass	Meet the requirement of limit.
2.1049 90.209	Occupied Bandwidth	Pass	Meet the requirement of limit.
2.1051 90.210	Emission Masks	Pass	Meet the requirement of limit.
2.1051 90.691	Conducted Spurious Emissions	Pass	Meet the requirement of limit.
2.1053 90.691	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -33.01 dB at 2457.00 MHz.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) ($\pm$)
Radiated Emissions up to 1 GHz	30 MHz ~ 200 MHz	2.0153 dB
	200 MHz ~ 1000 MHz	2.0224 dB
Radiated Emissions above 1 GHz	1 GHz ~ 18 GHz	1.0121 dB
	18 GHz ~ 40 GHz	1.1508 dB

2.2 Test Site and Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver Agilent Technologies	N9038A	MY52260177	Aug. 20, 2018	Aug. 19, 2019
Spectrum Analyzer ROHDE & SCHWARZ	FSU43	101261	Jan. 11, 2018	Jan. 10, 2019
Spectrum Analyzer ROHDE & SCHWARZ	FSW26	102023	Oct. 12, 2017 Oct. 11, 2018	Oct. 11, 2018 Oct. 10, 2019
BILOG Antenna SCHWARZBECK	VULB9168	9168-616	Dec. 14, 2017	Dec. 13, 2018
HORN Antenna ETS-Lindgren	3117	00143293	Dec. 13, 2017	Dec. 12, 2018
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-969	Dec. 12, 2017	Dec. 11, 2018
Fixed Attenuator Mini-Circuits	MDCS18N-10	MDCS18N-10-01	Apr. 16, 2018	Apr. 15, 2019
MXG Vector signal generator Agilent	N5182B	MY53052658	May 24, 2018	May 23, 2019
Preamplifier Agilent	310N	187226	Jun. 19, 2018	Jun. 18, 2019
Preamplifier Agilent	83017A	MY39501357	Jun. 19, 2018	Jun. 18, 2019
RF signal cable ETS-LINDGREN	5D-FB	Cable-CH1-01(RFC -SMS-100-SMS-12 0+RFC-SMS-100-S MS-400)	Jun. 19, 2018	Jun. 18, 2019
RF signal cable ETS-LINDGREN	8D-FB	Cable-CH1-02(RFC -SMS-100-SMS-24)	Jun. 19, 2018	Jun. 18, 2019
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
Software BV ADT	E3 8.130425b	NA	NA	NA
Antenna Tower MF	NA	NA	NA	NA
Turn Table MF	NA	NA	NA	NA
Antenna Tower & Turn Table Controller MF	MF-7802	NA	NA	NA
Universal Radio Communication Tester R&S	CMU200	123112	Dec. 28, 2017	Dec. 27, 2018
Radio Communication Analyzer Anritsu	MT8820C	6201300640	Aug. 16, 2017	Aug. 15, 2019
Temperature & Humidity Chamber	GTH-120-40-CP-AR	MAA1306-019	Sep. 05, 2018	Sep. 04, 2019
DC Power Supply Topward	33010D	807748	NA	NA

- Note:
1. The calibration interval of the above test instruments is 12 / 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HsinTien Chamber 1.
 3. The horn antenna and preamplifier (model: 83017A) are used only for the measurement of emission frequency above 1 GHz if tested.
 4. The IC Site Registration No. is 7450I-1.

3 General Information

3.1 General Description of EUT

Product	Smartphone	
Test Model	G020G	
Status of EUT	Identical Prototype	
Power Supply Rating	3.85 Vdc (Li-ion battery) 5.0 Vdc or 9 Vdc (adapter) 5.0 Vdc (host equipment)	
Modulation Type	CDMA	QPSK, OQPSK, HPSK
	LTE	QPSK, 16QAM, 64QAM
Frequency Range	CDMA BC10	817.9 ~ 823.1 MHz
	LTE Band 14 (Channel Bandwidth: 5 MHz)	790.5 ~ 795.5 MHz
	LTE Band 14 (Channel Bandwidth: 10 MHz)	793 MHz
	LTE Band 26 (Channel Bandwidth: 1.4 MHz)	814.7 ~ 823.3 MHz
	LTE Band 26 (Channel Bandwidth: 3 MHz)	815.5 ~ 822.5 MHz
	LTE Band 26 (Channel Bandwidth: 5 MHz)	816.5 ~ 821.5 MHz
	LTE Band 26 (Channel Bandwidth: 10 MHz)	819 MHz
Emission Designator	CDMA BC10	1M28F9W
	LTE Band 14 (Channel Bandwidth: 5 MHz)	4M51W7D
	LTE Band 14 (Channel Bandwidth: 10 MHz)	8M97W7D
	LTE Band 26 (Channel Bandwidth: 1.4 MHz)	1M09W7D
	LTE Band 26 (Channel Bandwidth: 3 MHz)	2M70G7D
	LTE Band 26 (Channel Bandwidth: 5 MHz)	4M49W7D
	LTE Band 26 (Channel Bandwidth: 10 MHz)	8M98W7D
Max. ERP Power	CDMA BC10	90.16 mW
	LTE Band 14 (Channel Bandwidth: 5 MHz)	74.49 mW
	LTE Band 14 (Channel Bandwidth: 10 MHz)	74.94 mW
	LTE Band 26 (Channel Bandwidth: 1.4 MHz)	77.80 mW
	LTE Band 26 (Channel Bandwidth: 3 MHz)	78.34 mW
	LTE Band 26 (Channel Bandwidth: 5 MHz)	79.07 mW
	LTE Band 26 (Channel Bandwidth: 10 MHz)	79.80 mW
Antenna Type	PIFA Antenna	
Antenna Gain	CDMA BC10	-5.5 dBi (Main) / -5 dBi (Aux.)
	LTE Band 14	-6.5 dBi (Main) / -3.7 dBi (Aux.)
	LTE Band 26	-5.5 dBi (Main) / -3.4 dBi (Aux.)
Accessory Device	Refer to Note as below	
Data Cable Supplied	Refer to Note as below	

Note:

1. There're 2 configurations for the EUT listed as below.

Main Sample: EUT + Battery 1

2nd Sample: EUT + Battery 2


✧ After pre-tested with the EUT, only the worst configuration (main sample) was chosen for the final test.

2. The EUT's accessories list refers to Ext. Pho.


3. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

3.2 Configuration of System under Test

<Radiated Emission Test>

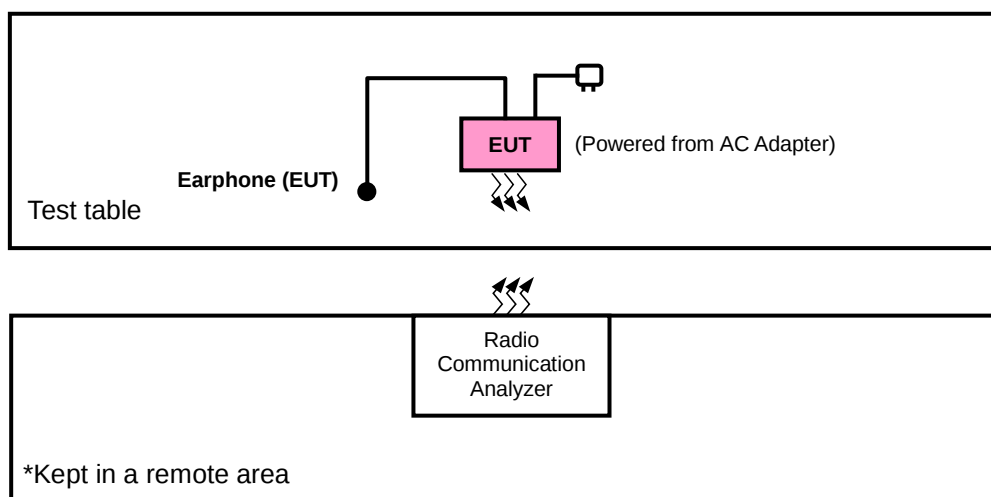

<E.R.P. Test>

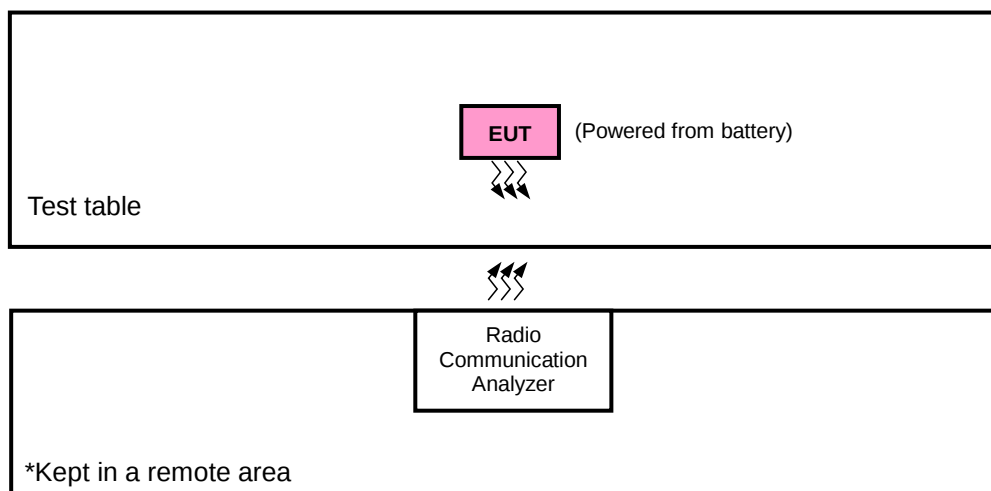

3.2.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units.

3.3 Test Mode Applicability and Tested Channel Detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis, and antenna ports

The worst case was found when positioned as the table below. Following channel(s) was (were) selected for the final test as listed below:

Band	ERP	Radiated Emission
CDMA	X-plane	Y-axis
LTE Band 14	X-plane	X-axis
LTE Band 26	X-plane	Z-axis

CDMA

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Mode
-	ERP	476 to 684	476, 580, 684	1xRTT
-	Modulation Characteristics	476 to 684	580	1xRTT
-	Frequency Stability	476 to 684	476, 684	1xRTT
-	Occupied Bandwidth	476 to 684	476, 580, 684	1xRTT
-	Emission Mask	476 to 684	476, 580, 684	1xRTT
-	Conducted Emission	476 to 684	476, 580, 684	1xRTT
-	Radiated Emission	476 to 684	476, 580, 684	1xRTT

LTE Band 14

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	ERP	23305 to 23355	23305, 23330, 23355	5 MHz	QPSK, 16QAM, 64QAM	1 RB / 24 RB Offset
		23330	23330	10 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
-	Modulation Characteristics	23330	23330	10 MHz	QPSK, 16QAM, 64QAM	50 RB / 0 RB Offset
-	Frequency Stability	23305 to 23355	23305, 23355	5 MHz	QPSK	1 RB / 0 RB Offset
		23330	23330	10 MHz	QPSK	1 RB / 0 RB Offset
-	Occupied Bandwidth	23305 to 23355	23305, 23330, 23355	5 MHz	QPSK, 16QAM, 64QAM	25 RB / 0 RB Offset
		23330	23330	10 MHz	QPSK, 16QAM, 64QAM	50 RB / 0 RB Offset
-	Emission Mask	23305 to 23355	23305, 23330, 23355	5 MHz	QPSK, 16QAM, 64QAM	25 RB / 0 RB Offset
		23330	23330	10 MHz	QPSK, 16QAM, 64QAM	50 RB / 0 RB Offset
-	Band Edge	23305 to 23355	23305, 23355	5 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
						25 RB / 0 RB Offset
		23330	23330	10 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
						50 RB / 0 RB Offset
-	Conducted Emission	23305 to 23355	23305, 23330, 23355	5 MHz	QPSK	1 RB / 24 RB Offset
		23330	23330	10 MHz	QPSK	1 RB / 0 RB Offset
-	Radiated Emission	23305 to 23355	23305, 23330, 23355	5 MHz	QPSK	1 RB / 24 RB Offset
		23330	23330	10 MHz	QPSK	1 RB / 0 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

LTE Band 26

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	ERP	26697 to 26783	26697, 26740, 26783	1.4 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		26705 to 26775	26705, 26740, 26775	3 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		26715 to 26765	26715, 26740, 26765	5 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		26740	26740	10 MHz	QPSK, 16QAM, 64QAM	1 RB / 24 RB Offset
-	Modulation Characteristics	26740	26740	10 MHz	QPSK, 16QAM, 64QAM	50 RB / 0 RB Offset
-	Frequency Stability	26697 to 26783	26697, 26783	1.4 MHz	QPSK	1 RB / 0 RB Offset
		26705 to 26775	26705, 26775	3 MHz	QPSK	1 RB / 0 RB Offset
		26715 to 26765	26715, 26765	5 MHz	QPSK	1 RB / 0 RB Offset
		26740	26740	10 MHz	QPSK	1 RB / 0 RB Offset
-	Occupied Bandwidth	26697 to 26783	26697, 26740, 26783	1.4 MHz	QPSK, 16QAM, 64QAM	6 RB / 0 RB Offset
		26705 to 26775	26705, 26740, 26775	3 MHz	QPSK, 16QAM, 64QAM	15 RB / 0 RB Offset
		26715 to 26765	26715, 26740, 26765	5 MHz	QPSK, 16QAM, 64QAM	25 RB / 0 RB Offset
		26740	26740	10 MHz	QPSK, 16QAM, 64QAM	50 RB / 0 RB Offset
-	Emission Mask	26697 to 26783	26697, 26740, 26783	1.4 MHz	QPSK, 16QAM, 64QAM	6 RB / 0 RB Offset
		26705 to 26775	26705, 26740, 26775	3 MHz	QPSK, 16QAM, 64QAM	15 RB / 0 RB Offset
		26715 to 26765	26715, 26740, 26765	5 MHz	QPSK, 16QAM, 64QAM	25 RB / 0 RB Offset
		26740	26740	10 MHz	QPSK, 16QAM, 64QAM	50 RB / 0 RB Offset
-	Conducted Emission	26697 to 26783	26697, 26740, 26783	1.4 MHz	QPSK	1 RB / 0 RB Offset
		26705 to 26775	26705, 26740, 26775	3 MHz	QPSK	1 RB / 0 RB Offset
		26715 to 26765	26715, 26740, 26765	5 MHz	QPSK	1 RB / 0 RB Offset
		26740	26740	10 MHz	QPSK	1 RB / 24 RB Offset
-	Radiated Emission	26697 to 26783	26697, 26740, 26783	1.4 MHz	QPSK	1 RB / 0 RB Offset
		26715 to 26765	26715, 26740, 26765	5 MHz	QPSK	1 RB / 0 RB Offset
		26740	26740	10 MHz	QPSK	1 RB / 24 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

Test Condition:

Test Item	Environmental Conditions	Input Power	Tested By
ERP	25 deg. C, 65 % RH	3.85 Vdc	Karl Lee
Frequency Stability	25 deg. C, 65 % RH	3.85 Vdc	Wayne Lin
Occupied Bandwidth	25 deg. C, 65 % RH	3.85 Vdc	Wayne Lin
Peak to Average Ratio	25 deg. C, 65 % RH	3.85 Vdc	Wayne Lin
Emission Mask	25 deg. C, 65 % RH	3.85 Vdc	Wayne Lin
Band Edge	25 deg. C, 65 % RH	3.85 Vdc	Wayne Lin
Conducted Emission	25 deg. C, 65 % RH	3.85 Vdc	Wayne Lin
Radiated Emission	25 deg. C, 65 % RH	120 Vac, 60 Hz	Karl Lee / Charles Hsiao

3.4 EUT Operating Conditions

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 90

KDB 971168 D01 Power Meas License Digital Systems v03r01

KDB 971168 D02 Misc Rev Approv License Devices v02r01

ANSI/TIA/EIA-603-E 2016

ANSI 63.26-2015

Note: All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Output Power Measurement

4.1.1 Limits of Output Power Measurement

LTE Band 14

Portable stations (hand-held devices) transmitting in the 758-768 MHz band and the 788-798 MHz band are limited to 3 watts ERP.

CDMA / LTE Band 26

The maximum output power of the transmitter for mobile stations is 100 watts (20 dBw).

4.1.2 Test Procedures

EIRP / ERP Measurement:

- All measurements were done at low, middle and high operational frequency range. RBW and VBW is 5 MHz for CDMA and 10 MHz for LTE mode.
- Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a tx cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step b. Record the power level of S.G.
- $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$. E.R.P power can be calculated from E.I.R.P power by subtracting the gain of dipole, $E.R.P \text{ power} = E.I.P.R \text{ power} - 2.15 \text{ dB}$.


Conducted Power Measurement:

- The EUT was set up for the maximum power with CDMA and LTE link data modulation and link up with simulator.
- Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.


4.1.3 Test Setup

EIRP / ERP Measurement:

<Radiated Emission below or equal 1 GHz>

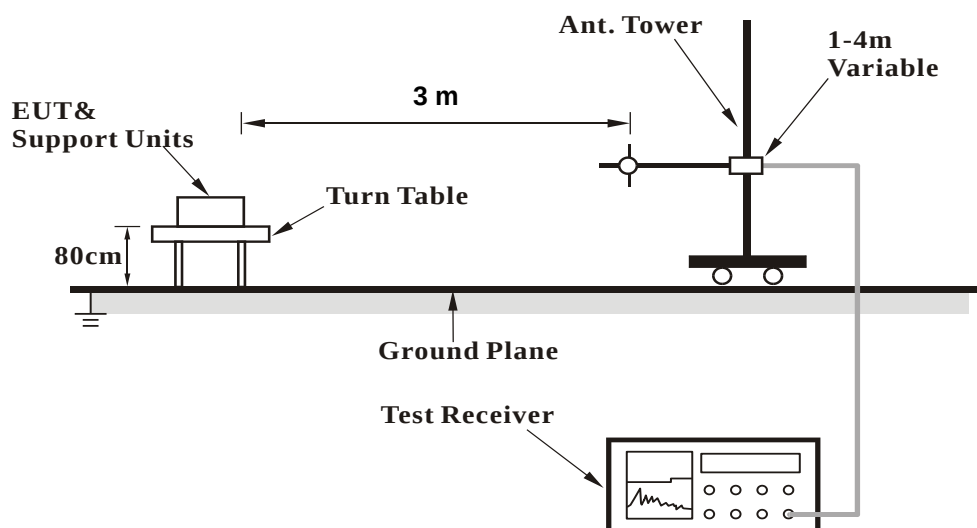


<Radiated Emission above 1 GHz>

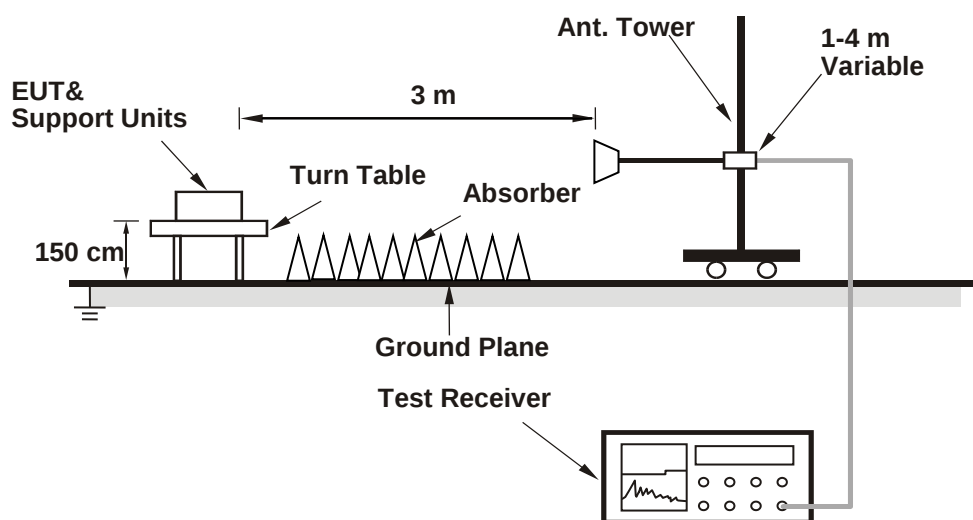

For the actual test configuration, please refer to the attached file (Test Setup Photo).

Conducted Power Measurement:



4.1.4 Test Results

The worst configuration mode is presented in the report as below. Please refer to SAR test report for more detail test mode.

Band		TX Antenna	WLAN Function	Body-Worn/Hotspot
CDMA	BC10	Ant 0	WLAN-Off	Body-Worn/Hotspot
LTE	B14	Ant 0	WLAN-Off	Body-Worn/Hotspot
	B26	Ant 0	WLAN-Off	Body-Worn/Hotspot

Conducted Output Power (dBm)

Band	CDMA BC10		
Mode	Body-Worn / Hotspot		
Tx Antenna	Ant-0		
Channel	476	580	684
Frequency (MHz)	817.9	820.5	823.1
RC1+SO55	24.56	24.62	24.25
RC3+SO55	24.59	24.65	24.28
RC3+SO32(+ F-SCH)	24.52	24.58	24.21
RC3+SO32(+SCH)	24.50	24.56	24.19
RTAP 153.6	24.56	24.62	24.25
RETAP 4096	24.55	24.61	24.24

LTE Band 14															
Body-Worn / Hotspot															
Ant-0															
BW	MCS Index	RB Size	RB Offset		Mid		3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel			23330					Channel		23305	23330	23355	
		Frequency (MHz)			793					Frequency (MHz)		790.5	793	795.5	
10M	QPSK	1	0		24.47		0	5M	QPSK	1	0	24.28	24.31	24.25	0
		1	24		24.41		0			1	12	24.33	24.36	24.30	0
		1	49		24.36		0			1	24	24.39	24.42	24.36	0
		25	0		23.56		1			12	0	23.48	23.51	23.45	1
		25	12		23.59		1			12	6	23.51	23.54	23.48	1
		25	25		23.61		1			12	13	23.53	23.56	23.50	1
		50	0		23.53		1			25	0	23.45	23.48	23.42	1
	16QAM	1	0		23.34		1		16QAM	1	0	23.26	23.29	23.23	1
		1	24		23.39		1			1	12	23.31	23.34	23.28	1
		1	49		23.45		1			1	24	23.37	23.40	23.34	1
		25	0		22.54		2			12	0	22.46	22.49	22.43	2
		25	12		22.57		2			12	6	22.49	22.52	22.46	2
		25	25		22.59		2			12	13	22.51	22.54	22.48	2
		50	0		22.51		2			25	0	22.43	22.46	22.40	2
	64QAM	1	0		22.33		2		64QAM	1	0	22.25	22.28	22.22	2
		1	24		22.38		2			1	12	22.30	22.33	22.27	2
		1	49		22.44		2			1	24	22.36	22.39	22.33	2
		25	0		21.53		3			12	0	21.45	21.48	21.42	3
		25	12		21.56		3			12	6	21.48	21.51	21.45	3
		25	25		21.58		3			12	13	21.50	21.53	21.47	3
		50	0		21.50		3			25	0	21.42	21.45	21.39	3

LTE Band 26																	
Body-Worn / Hotspot																	
Ant-0																	
BW	MCS Index	RB Size	RB Offset		Mid		3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)		
		Channel		26740		Channel				26715	26740	26765					
		Frequency (MHz)		819.0		Frequency (MHz)				816.5	819.0	821.5					
10M	QPSK	1	0		24.62		0	5M	QPSK	1	0	24.56	24.62	24.72	0		
		1	24		24.68		0			1	12	24.62	24.68	24.66	0		
		1	49		24.61		0			1	24	24.55	24.61	24.65	0		
		25	0		23.77		1			12	0	23.71	23.77	23.81	1		
		25	12		23.80		1			12	6	23.74	23.80	23.84	1		
		25	25		23.71		1			12	13	23.65	23.71	23.75	1		
		50	0		23.75		1			25	0	23.69	23.75	23.79	1		
	16QAM	1	0		23.60		1		16QAM	1	0	23.54	23.60	23.64	1		
		1	24		23.66		1			1	12	23.60	23.66	23.70	1		
		1	49		23.59		1			1	24	23.53	23.59	23.63	1		
		25	0		22.75		2			12	0	22.69	22.75	22.79	2		
		25	12		22.78		2			12	6	22.72	22.78	22.82	2		
		25	25		22.69		2			12	13	22.63	22.69	22.73	2		
		50	0		22.73		2			25	0	22.67	22.73	22.77	2		
	64QAM	1	0		22.61		2		64QAM	1	0	22.55	22.61	22.65	2		
		1	24		22.67		2			1	12	22.61	22.67	22.71	2		
		1	49		22.60		2			1	24	22.54	22.60	22.64	2		
		25	0		21.76		3			12	0	21.70	21.76	21.80	3		
		25	12		21.79		3			12	6	21.73	21.79	21.83	3		
		25	25		21.70		3			12	13	21.64	21.70	21.74	3		
		50	0		21.74		3			25	0	21.68	21.74	21.78	3		
	BW	MCS Index	RB Size	RB Offset	Low	Mid	High		3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
			Channel		26705	26740	26775					Channel		26697	26740	26783	
			Frequency (MHz)		815.5	819.0	822.5					Frequency (MHz)		814.7	819.0	823.3	
3M	QPSK	1	0	24.59	24.48	24.67	0	1.4M	QPSK	1	0	24.54	24.56	24.65	0		
		1	7	24.65	24.67	24.60	0			1	2	24.60	24.55	24.51	0		
		1	14	24.58	24.49	24.64	0			1	5	24.53	24.57	24.57	0		
		8	0	23.74	23.75	23.76	1			3	0	24.48	24.68	24.75	0		
		8	3	23.77	23.67	23.76	1			3	1	24.51	24.71	24.76	0		
		8	7	23.68	23.61	23.61	1			3	3	24.42	24.69	24.74	0		
		15	0	23.72	23.74	23.73	1			6	0	23.67	23.65	23.64	1		
	16QAM	1	0	23.57	23.47	23.49	1		16QAM	1	0	23.52	23.52	23.55	1		
		1	7	23.63	23.60	23.67	1			1	2	23.58	23.53	23.58	1		
		1	14	23.56	23.59	23.63	1			1	5	23.51	23.45	23.53	1		
		8	0	22.72	22.68	22.65	2			3	0	23.46	23.63	23.66	1		
		8	3	22.75	22.66	22.81	2			3	1	23.49	23.68	23.79	1		
		8	7	22.66	22.62	22.73	2			3	3	23.40	23.65	23.63	1		
		15	0	22.70	22.65	22.63	2			6	0	22.65	22.64	22.64	2		
	64QAM	1	0	22.58	22.61	22.57	2		64QAM	1	0	22.53	22.54	22.52	2		
		1	7	22.64	22.67	22.66	2			1	2	22.59	22.57	22.64	2		
		1	14	22.57	22.60	22.64	2			1	5	22.52	22.45	22.62	2		
		8	0	21.73	21.62	21.77	3			3	0	22.47	22.69	22.78	2		
		8	3	21.76	21.79	21.74	3			3	1	22.50	22.64	22.79	2		
		8	7	21.67	21.59	21.59	3			3	3	22.41	22.55	22.64	2		
		15	0	21.71	21.67	21.70	3			6	0	21.66	21.62	21.70	3		

ERP Power (dBm)

CDMA							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
X	476	817.9	-9.52	31.208	19.54	89.91	H
	580	820.5	-9.60	31.3	19.55	90.16	
	684	823.1	-9.56	31.222	19.51	89.37	
	476	817.9	-13.83	31.504	15.52	35.68	V
	580	820.5	-13.42	31.117	15.55	35.87	
	684	823.1	-14.28	31.922	15.49	35.42	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 14							
Channel Bandwidth: 5 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
X	23305	790.5	-11.92	32.771	18.70	74.15	H
	23330	793.0	-11.87	32.741	18.72	74.49	
	23355	795.5	-12.03	32.854	18.67	73.69	
	23305	790.5	-18.65	32.5	11.70	14.79	V
	23330	793.0	-18.69	32.52	11.68	14.72	
	23355	795.5	-18.82	32.62	11.65	14.62	
Channel Bandwidth: 5 MHz / 16QAM							
X	23305	790.5	-12.93	32.771	17.69	58.76	H
	23330	793.0	-12.88	32.741	17.71	59.03	
	23355	795.5	-13.03	32.854	17.67	58.53	
	23305	790.5	-19.65	32.5	10.70	11.75	V
	23330	793.0	-19.70	32.52	10.67	11.67	
	23355	795.5	-19.82	32.62	10.65	11.61	
Channel Bandwidth: 5 MHz / 64QAM							
X	23305	790.5	-13.94	32.771	16.68	46.57	H
	23330	793.0	-13.89	32.741	16.70	46.78	
	23355	795.5	-14.04	32.854	16.66	46.39	
	23305	790.5	-20.65	32.5	9.70	9.33	V
	23330	793.0	-20.71	32.52	9.66	9.25	
	23355	795.5	-20.82	32.62	9.65	9.23	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 14							
Channel Bandwidth: 10 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
X	23330	793.0	-11.84	32.737	18.75	74.94	H
	23330	793.0	-18.65	32.52	11.72	14.86	V
Channel Bandwidth: 10 MHz / 16QAM							
X	23330	793.0	-12.85	32.737	17.74	59.39	H
	23330	793.0	-19.65	32.52	10.72	11.80	V
Channel Bandwidth: 10 MHz / 64QAM							
X	23330	793.0	-13.86	32.737	16.73	47.07	H
	23330	793.0	-20.66	32.52	9.71	9.35	V

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 26							
Channel Bandwidth: 1.4 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
X	26697	814.7	-10.18	31.208	18.88	77.23	H
	26740	819.0	-10.24	31.3	18.91	77.80	
	26783	823.3	-10.26	31.222	18.81	76.07	
	26697	814.7	-15.50	31.504	13.85	24.29	V
	26740	819.0	-15.08	31.117	13.89	24.47	
	26783	823.3	-15.94	31.922	13.83	24.17	
Channel Bandwidth: 1.4 MHz / 16QAM							
X	26697	814.7	-11.18	31.208	17.88	61.35	H
	26740	819.0	-11.25	31.3	17.90	61.66	
	26783	823.3	-11.26	31.222	17.81	60.42	
	26697	814.7	-16.51	31.504	12.84	19.25	V
	26740	819.0	-16.08	31.117	12.89	19.44	
	26783	823.3	-16.94	31.922	12.83	19.20	
Channel Bandwidth: 1.4 MHz / 64QAM							
X	26697	814.7	-12.19	31.208	16.87	48.62	H
	26740	819.0	-12.26	31.3	16.89	48.87	
	26783	823.3	-12.27	31.222	16.80	47.89	
	26697	814.7	-17.52	31.504	11.83	15.25	V
	26740	819.0	-17.09	31.117	11.88	15.41	
	26783	823.3	-17.97	31.922	11.80	15.14	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 26							
Channel Bandwidth: 3 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
X	26705	815.5	-10.14	31.208	18.92	77.95	H
	26740	819.0	-10.21	31.3	18.94	78.34	
	26775	822.5	-10.22	31.222	18.85	76.77	
	26705	815.5	-15.46	31.504	13.89	24.51	V
	26740	819.0	-15.04	31.117	13.93	24.70	
	26775	822.5	-15.90	31.922	13.87	24.39	
Channel Bandwidth: 3 MHz / 16QAM							
X	26705	815.5	-11.14	31.208	17.92	61.92	H
	26740	819.0	-11.22	31.3	17.93	62.09	
	26775	822.5	-11.23	31.222	17.84	60.84	
	26705	815.5	-16.46	31.504	12.89	19.47	V
	26740	819.0	-16.05	31.117	12.92	19.57	
	26775	822.5	-16.91	31.922	12.86	19.33	
Channel Bandwidth: 3 MHz / 64QAM							
X	26705	815.5	-12.15	31.208	16.91	49.07	H
	26740	819.0	-12.23	31.3	16.92	49.20	
	26775	822.5	-12.24	31.222	16.83	48.22	
	26705	815.5	-17.46	31.504	11.89	15.47	V
	26740	819.0	-17.05	31.117	11.92	15.55	
	26775	822.5	-17.91	31.922	11.86	15.35	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 26							
Channel Bandwidth: 5 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
X	26715	816.5	-10.11	31.208	18.95	78.49	H
	26740	819.0	-10.17	31.3	18.98	79.07	
	26765	821.5	-10.18	31.222	18.89	77.48	
	26715	816.5	-15.42	31.504	13.93	24.74	V
	26740	819.0	-15.00	31.117	13.97	24.93	
	26765	821.5	-15.86	31.922	13.91	24.62	
Channel Bandwidth: 5 MHz / 16QAM							
X	26715	816.5	-11.12	31.208	17.94	62.20	H
	26740	819.0	-11.18	31.3	17.97	62.66	
	26765	821.5	-11.18	31.222	17.89	61.55	
	26715	816.5	-16.42	31.504	12.93	19.65	V
	26740	819.0	-16.01	31.117	12.96	19.76	
	26765	821.5	-16.86	31.922	12.91	19.55	
Channel Bandwidth: 5 MHz / 64QAM							
X	26715	816.5	-12.13	31.208	16.93	49.26	H
	26740	819.0	-12.18	31.3	16.97	49.77	
	26765	821.5	-12.18	31.222	16.89	48.89	
	26715	816.5	-17.43	31.504	11.92	15.57	V
	26740	819.0	-17.02	31.117	11.95	15.66	
	26765	821.5	-17.86	31.922	11.91	15.53	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 26							
Channel Bandwidth: 10 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
X	26740	819.0	-10.13	31.3	19.02	79.80	H
	26740	819.0	-14.96	31.117	14.01	25.16	V
Channel Bandwidth: 10 MHz / 16QAM							
X	26740	819.0	-11.14	31.3	18.01	63.24	H
	26740	819.0	-15.96	31.117	13.01	19.98	V
Channel Bandwidth: 10 MHz / 64QAM							
X	26740	819.0	-12.14	31.3	17.01	50.23	H
	26740	819.0	-16.96	31.117	12.01	15.87	V

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

4.2 Modulation Characteristics Measurement

4.2.1 Limits of Modulation Characteristics

N/A

4.2.2 Test Setup



4.2.3 Test Procedure


Connect the EUT to Communication Simulator via the antenna connector. The frequency band is set as EUT supported Modulation and Channels, the EUT output is matched with 50 ohm load, the waveform quality and constellation of the EUT was tested.

Spectrum Plot of Measurement


LTE Band 26

Channel 26740


QPSK

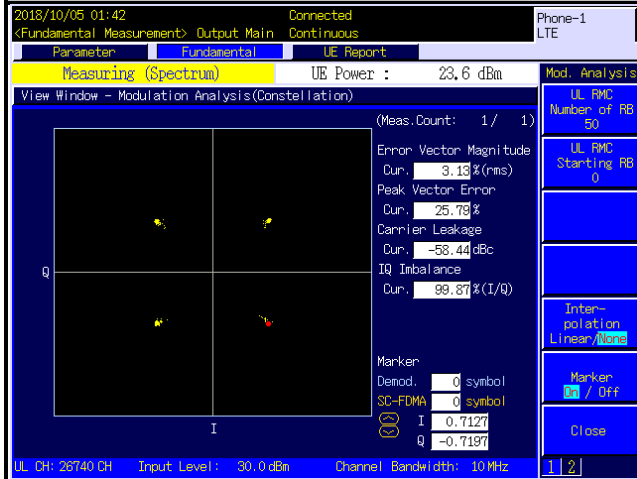

16QAM

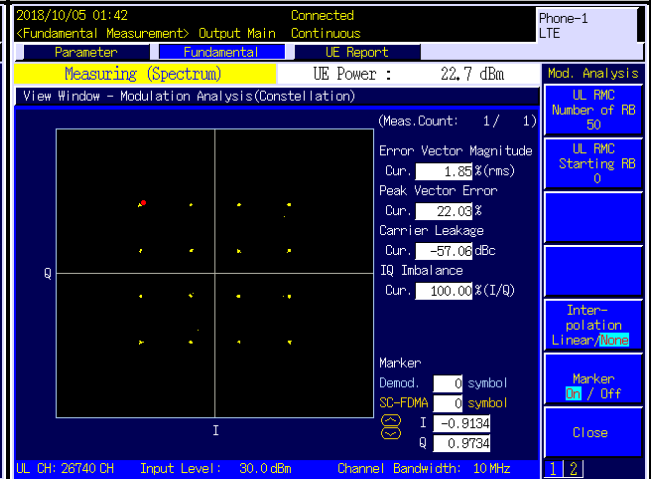

64QAM

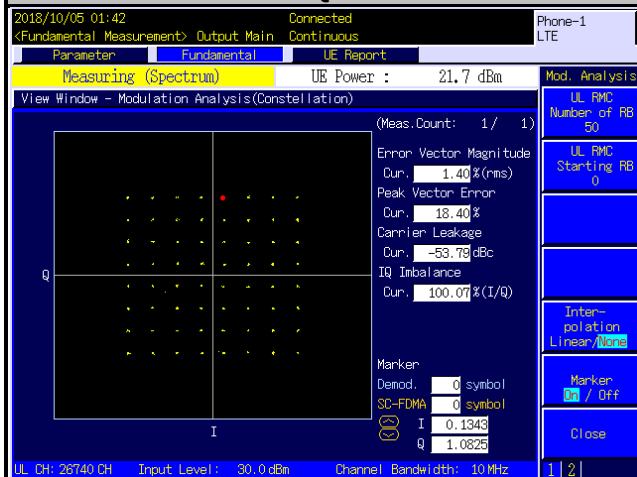

4.3 Frequency Stability Measurement

4.3.1 Limits of Frequency Stability Measurement

LTE Band 14

The frequency stability of mobile, portable and control transmitters operating in the wideband segment must be 1.25 parts per million or better when AFC is locked to a base station, and 5 parts per million or better when AFC is not locked.

CDMA / LTE Band 26


1.5 ppm is for base and fixed station. 2.5 ppm is for mobile station.

4.3.2 Test Procedure

- Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the ± 0.5 °C during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

4.3.3 Test Setup

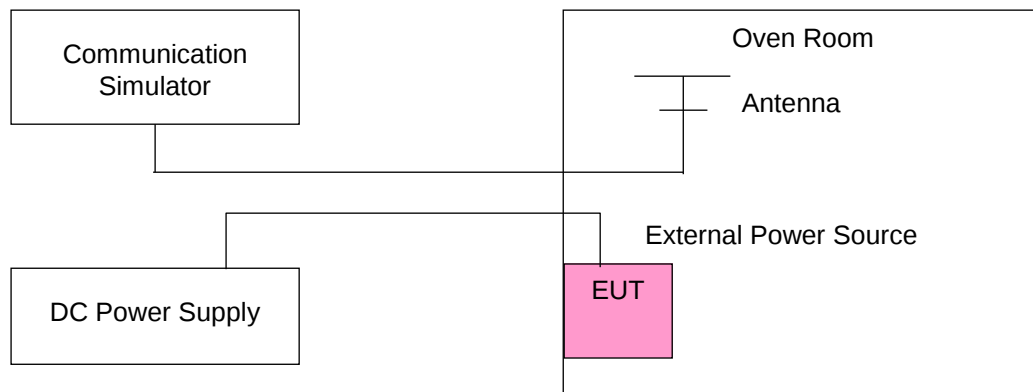

4.3.4 Test Results

Frequency Error vs. Voltage

Voltage (Volts)	CDMA				Limit (ppm)
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.85	817.900002	0.003	823.100004	0.005	2.5
3.6	817.900002	0.003	823.100004	0.004	2.5
4.4	817.900003	0.004	823.100002	0.002	2.5

Note: The applicant defined the normal working voltage of the battery is from 3.6 Vdc to 4.4 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	CDMA				Limit (ppm)
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	817.900004	0.005	823.100002	0.003	2.5
-20	817.900001	0.001	823.100003	0.004	2.5
-10	817.900002	0.003	823.100002	0.003	2.5
0	817.900004	0.005	823.100003	0.004	2.5
10	817.900003	0.004	823.100004	0.004	2.5
20	817.899998	-0.003	823.099997	-0.003	2.5
30	817.899998	-0.002	823.099997	-0.004	2.5
40	817.899998	-0.003	823.099998	-0.002	2.5
50	817.899999	-0.002	823.099997	-0.004	2.5
55	817.899999	-0.001	823.099998	-0.003	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 14				Limit (ppm)
	Channel Bandwidth: 5 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.85	790.500004	0.004	795.500000	0.003	2.5
3.6	790.500004	0.005	795.500000	0.005	2.5
4.4	790.500004	0.005	795.500000	0.003	2.5

Note: The applicant defined the normal working voltage of the battery is from 3.6 Vdc to 4.4 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 14				Limit (ppm)
	Channel Bandwidth: 5 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	790.500003	0.004	795.500000	0.002	2.5
-20	790.500003	0.004	795.500000	0.004	2.5
-10	790.500004	0.004	795.500000	0.005	2.5
0	790.500002	0.003	795.500000	0.005	2.5
10	790.500002	0.002	795.500000	0.005	2.5
20	790.499996	-0.005	795.500000	-0.003	2.5
30	790.499997	-0.004	795.500000	-0.003	2.5
40	790.499998	-0.002	795.500000	-0.003	2.5
50	790.499997	-0.004	795.500000	-0.002	2.5
55	790.499997	-0.004	795.500000	-0.004	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 14		Limit (ppm)
	Channel Bandwidth: 10 MHz		
	Frequency (MHz)	Frequency Error (ppm)	
3.85	793.000003	0.004	2.5
3.6	793.000003	0.003	2.5
4.4	793.000002	0.002	2.5

Note: The applicant defined the normal working voltage of the battery is from 3.6 Vdc to 4.4 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 14		Limit (ppm)
	Channel Bandwidth: 10 MHz		
	Frequency (MHz)	Frequency Error (ppm)	
-30	793.000001	0.002	2.5
-20	793.000003	0.003	2.5
-10	793.000004	0.005	2.5
0	793.000004	0.005	2.5
10	793.000004	0.005	2.5
20	792.999998	-0.003	2.5
30	792.999998	-0.002	2.5
40	792.999997	-0.003	2.5
50	792.999996	-0.005	2.5
55	792.999999	-0.002	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 26				Limit (ppm)
	Channel Bandwidth: 1.4 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.85	814.700003	0.004	823.300000	0.005	2.5
3.6	814.700002	0.002	823.300000	0.003	2.5
4.4	814.700004	0.004	823.300000	0.004	2.5

Note: The applicant defined the normal working voltage of the battery is from 3.6 Vdc to 4.4 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 26				Limit (ppm)
	Channel Bandwidth: 1.4 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	814.700003	0.004	823.300000	0.004	2.5
-20	814.700003	0.003	823.300000	0.004	2.5
-10	814.700004	0.005	823.300000	0.002	2.5
0	814.700002	0.002	823.300000	0.003	2.5
10	814.700002	0.002	823.300000	0.003	2.5
20	814.699999	-0.001	823.300000	-0.003	2.5
30	814.699996	-0.004	823.300000	-0.004	2.5
40	814.699997	-0.003	823.300000	-0.004	2.5
50	814.699997	-0.004	823.300000	-0.003	2.5
55	814.699998	-0.002	823.300000	-0.003	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 26				Limit (ppm)
	Channel Bandwidth: 3 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.85	815.500002	0.002	822.500000	0.003	2.5
3.6	815.500002	0.002	822.500000	0.003	2.5
4.4	815.500001	0.001	822.500000	0.004	2.5

Note: The applicant defined the normal working voltage of the battery is from 3.6 Vdc to 4.4 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 26				Limit (ppm)
	Channel Bandwidth: 3 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	815.500003	0.004	822.500000	0.004	2.5
-20	815.500004	0.004	822.500000	0.002	2.5
-10	815.500003	0.003	822.500000	0.002	2.5
0	815.500003	0.004	822.500000	0.004	2.5
10	815.500004	0.005	822.500000	0.001	2.5
20	815.499997	-0.003	822.500000	-0.005	2.5
30	815.499998	-0.003	822.500000	-0.003	2.5
40	815.499997	-0.004	822.500000	-0.004	2.5
50	815.499998	-0.003	822.500000	-0.002	2.5
55	815.499996	-0.005	822.500000	-0.002	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 26				Limit (ppm)
	Channel Bandwidth: 5 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.85	816.500002	0.003	821.500000	0.004	2.5
3.6	816.500002	0.003	821.500000	0.003	2.5
4.4	816.500002	0.003	821.500000	0.005	2.5

Note: The applicant defined the normal working voltage of the battery is from 3.6 Vdc to 4.4 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 26				Limit (ppm)
	Channel Bandwidth: 5 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	816.500001	0.002	821.500000	0.004	2.5
-20	816.500003	0.004	821.500000	0.005	2.5
-10	816.500003	0.003	821.500000	0.003	2.5
0	816.500003	0.004	821.500000	0.004	2.5
10	816.500003	0.004	821.500000	0.004	2.5
20	816.499998	-0.002	821.500000	-0.003	2.5
30	816.499997	-0.004	821.500000	-0.005	2.5
40	816.499998	-0.003	821.500000	-0.001	2.5
50	816.499996	-0.004	821.500000	-0.003	2.5
55	816.499997	-0.004	821.500000	-0.005	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 26		Limit (ppm)
	Channel Bandwidth: 10 MHz		
	Frequency (MHz)	Frequency Error (ppm)	
3.85	819.000001	0.001	2.5
3.6	819.000004	0.004	2.5
4.4	819.000003	0.004	2.5

Note: The applicant defined the normal working voltage of the battery is from 3.6 Vdc to 4.4 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 26		Limit (ppm)
	Channel Bandwidth: 10 MHz		
	Frequency (MHz)	Frequency Error (ppm)	
-30	819.000003	0.004	2.5
-20	819.000004	0.005	2.5
-10	819.000002	0.002	2.5
0	819.000002	0.003	2.5
10	819.000004	0.004	2.5
20	818.999998	-0.002	2.5
30	818.999997	-0.004	2.5
40	818.999999	-0.001	2.5
50	818.999998	-0.003	2.5
55	818.999996	-0.005	2.5

4.4 Occupied Bandwidth Measurement


4.4.1 Limits of Occupied Bandwidth Measurement

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

4.4.2 Test Procedure

The EUT makes a call to the communication simulator. All measurements were done at low, middle and high operational frequency range. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.


4.4.3 Test Setup

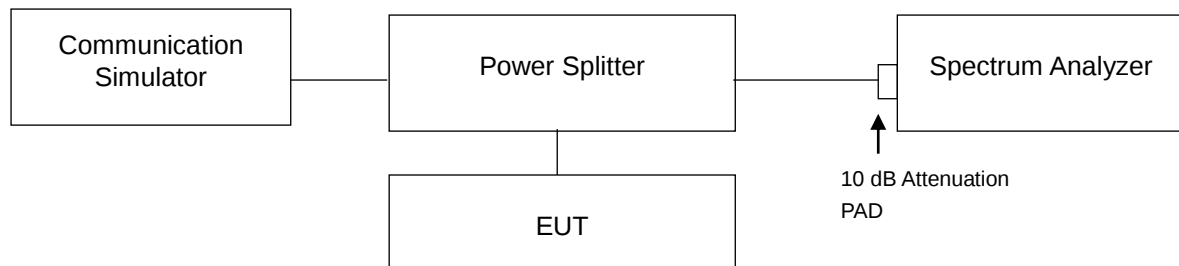


4.4.4 Test Results

<99 % Occupied Bandwidth>


CDMA		
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)
476	817.9	1.2747
580	820.5	1.2767
684	823.1	1.2760

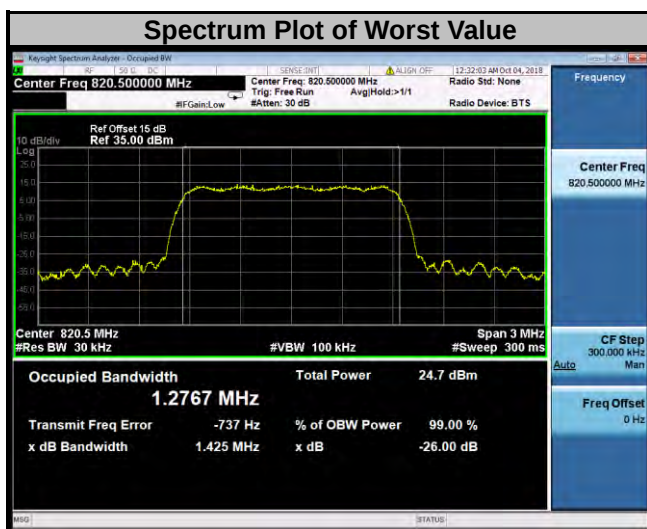


LTE Band 14								
Channel Bandwidth: 5 MHz					Channel Bandwidth: 10 MHz			
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)			Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)	
		QPSK	16QAM	64QAM			QPSK	16QAM 64QAM
23305	790.5	4.4891	4.4899	4.4967	23330	793.0	8.9652	8.9699 8.9704
23330	793.0	4.4901	4.4915	4.4995				
23355	795.5	4.4930	4.4944	4.5055				

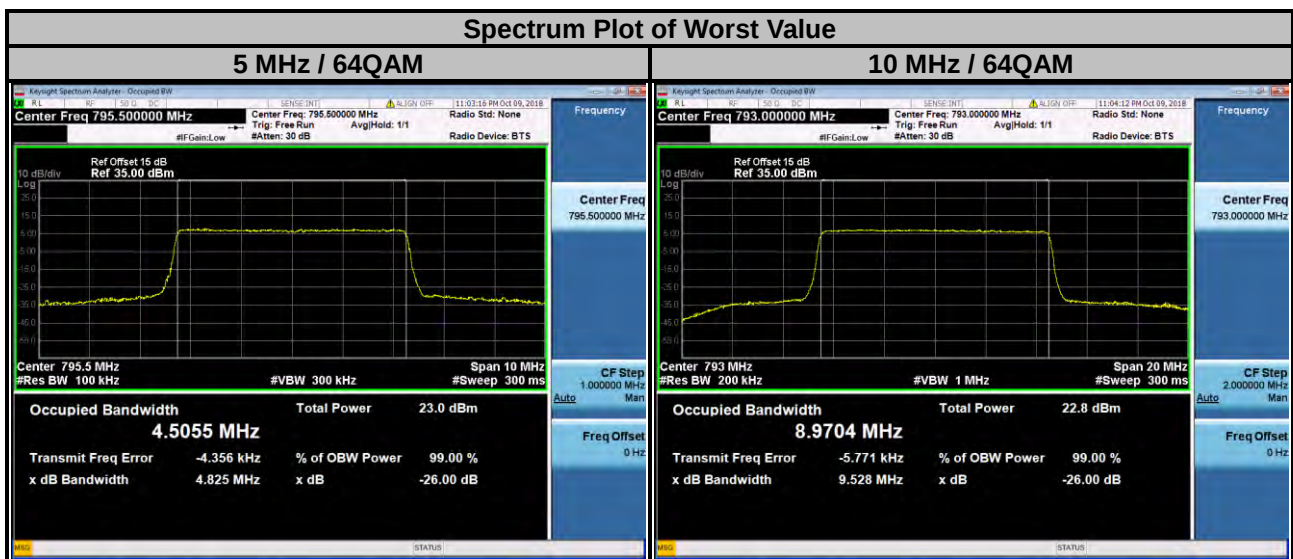

LTE Band 26									
Channel Bandwidth: 1.4 MHz					Channel Bandwidth: 3 MHz				
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)			Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
26697	814.7	1.0865	1.0886	1.0883	26705	815.5	2.6981	2.6952	2.6979
26740	819.0	1.0875	1.0874	1.0882	26740	819.0	2.7002	2.6979	2.6978
26783	823.3	1.0866	1.0876	1.0894	26775	822.5	2.7007	2.6972	2.6989

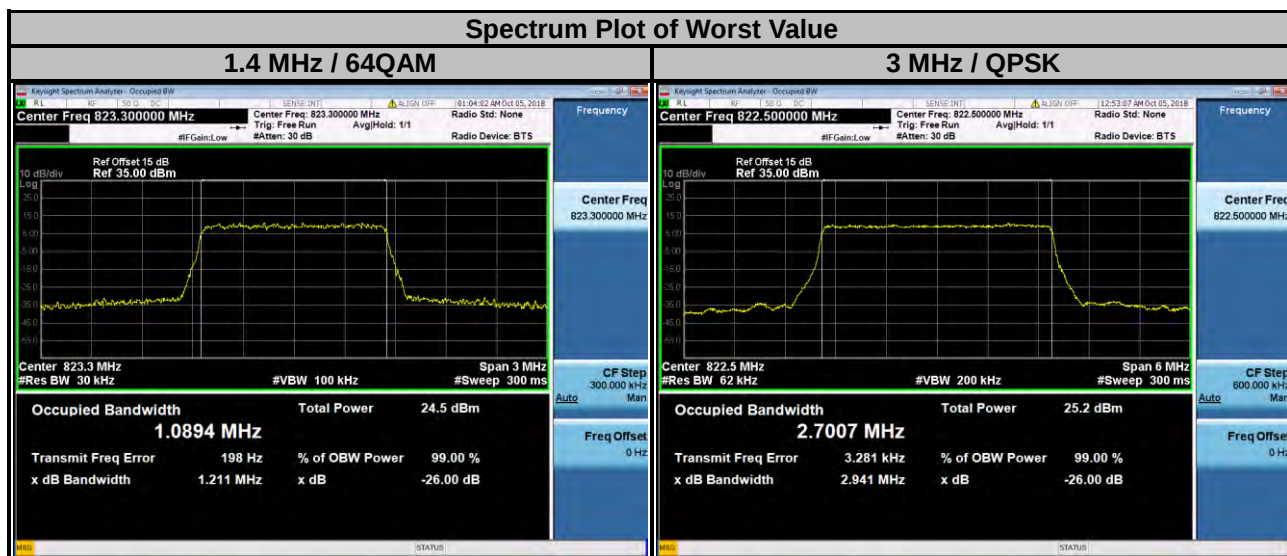


LTE Band 26								
Channel Bandwidth: 5 MHz					Channel Bandwidth: 10 MHz			
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)			Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)	
		QPSK	16QAM	64QAM			QPSK	16QAM
26715	816.5	4.4884	4.4919	4.4926	26740	819.0	8.9734	8.9747
26740	819.0	4.4915	4.4921	4.4929				
26765	821.5	4.4906	4.4923	4.4943				
								8.9784

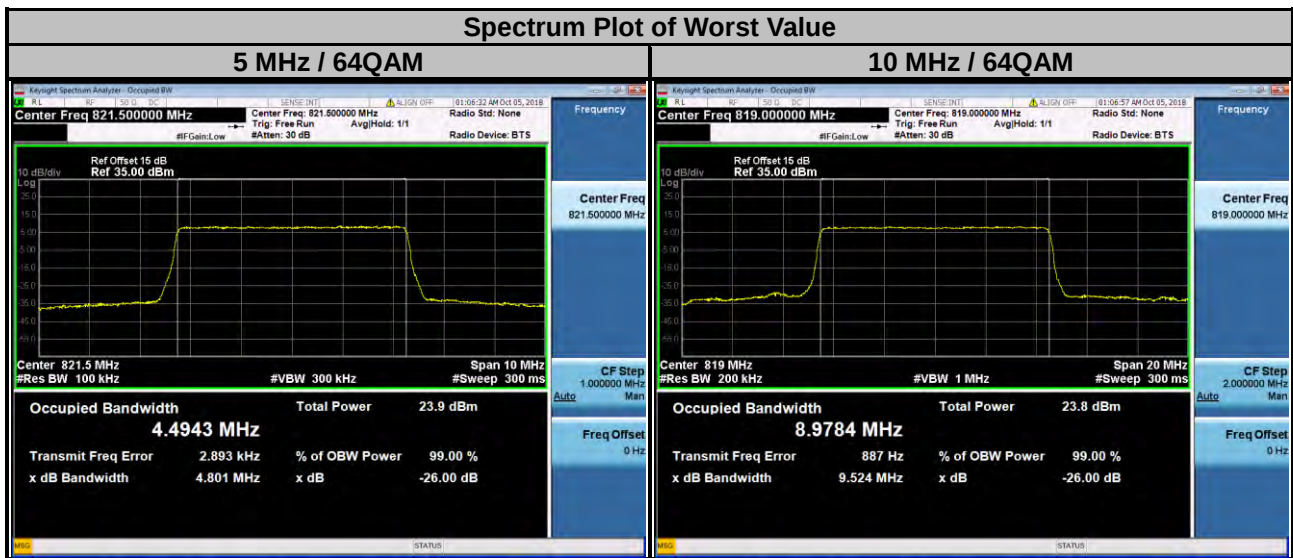


<26 dB Bandwidth>


CDMA		
Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
476	817.9	1.426
580	820.5	1.425
684	823.1	1.427

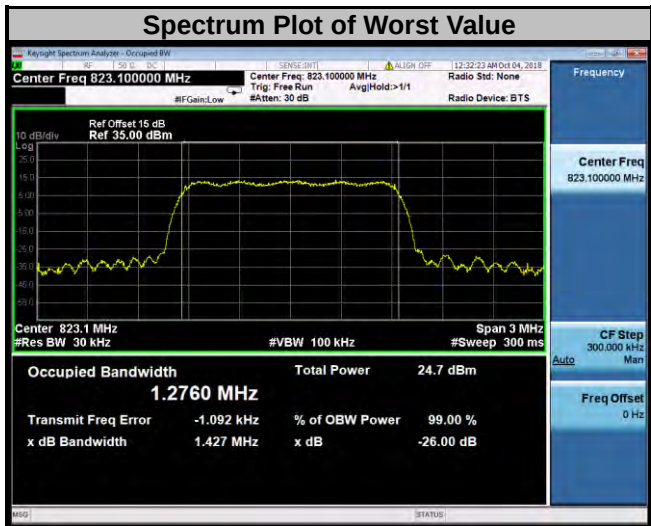


LTE Band 14									
Channel Bandwidth: 5 MHz					Channel Bandwidth: 10 MHz				
Channel	Frequency (MHz)	26 dB Bandwidth (MHz)			Channel	Frequency (MHz)	26 dB Bandwidth (MHz)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
23305	790.5	4.813	4.809	4.836	23330	793.0	9.521	9.512	9.528
23330	793.0	4.815	4.806	4.846					
23355	795.5	4.848	4.805	4.825					

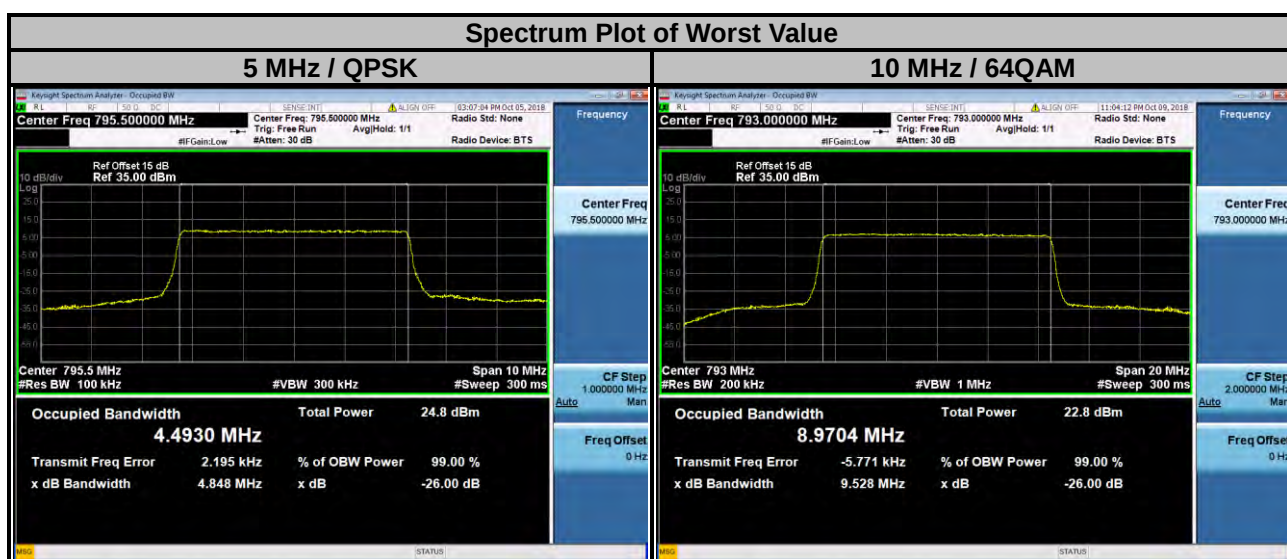

LTE Band 26									
Channel Bandwidth: 1.4 MHz					Channel Bandwidth: 3 MHz				
Channel	Frequency (MHz)	26 dB Bandwidth (MHz)			Channel	Frequency (MHz)	26 dB Bandwidth (MHz)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
26697	814.7	1.219	1.214	1.212	26705	815.5	2.938	2.924	2.938
26740	819.0	1.217	1.211	1.213	26740	819.0	2.931	2.928	2.928
26783	823.3	1.222	1.214	1.211	26775	822.5	2.941	2.927	2.931

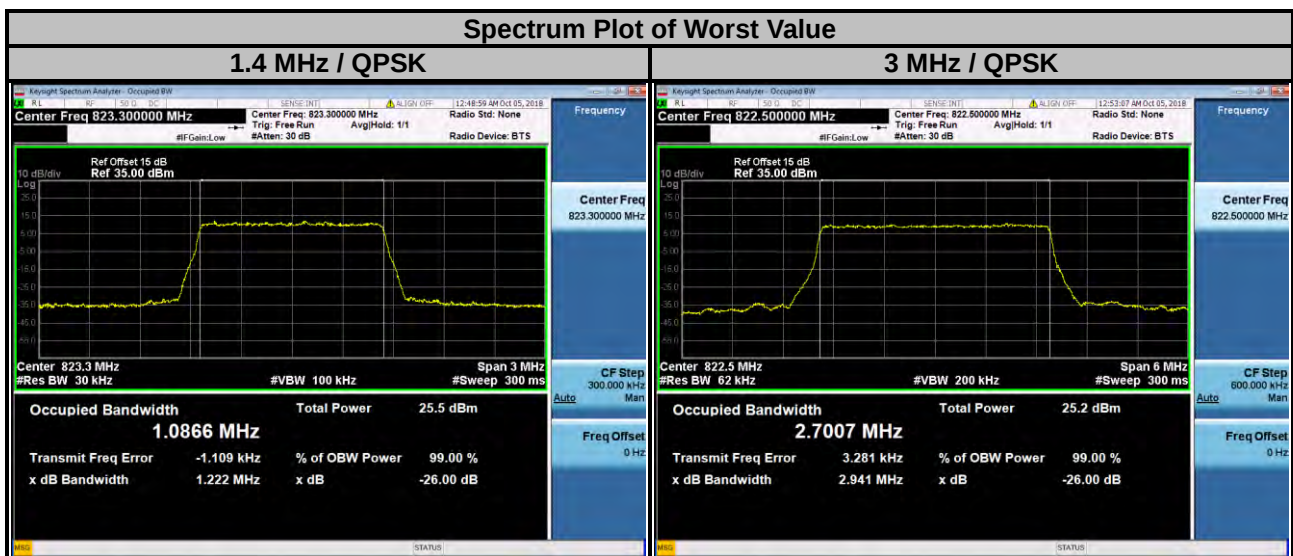

LTE Band 26									
Channel Bandwidth: 5 MHz					Channel Bandwidth: 10 MHz				
Channel	Frequency (MHz)	26 dB Bandwidth (MHz)			Channel	Frequency (MHz)	26 dB Bandwidth (MHz)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
26715	816.5	4.829	4.817	4.814	26740	819.0	9.537	9.532	9.524
26740	819.0	4.832	4.814	4.803					
26765	821.5	4.834	4.806	4.801					

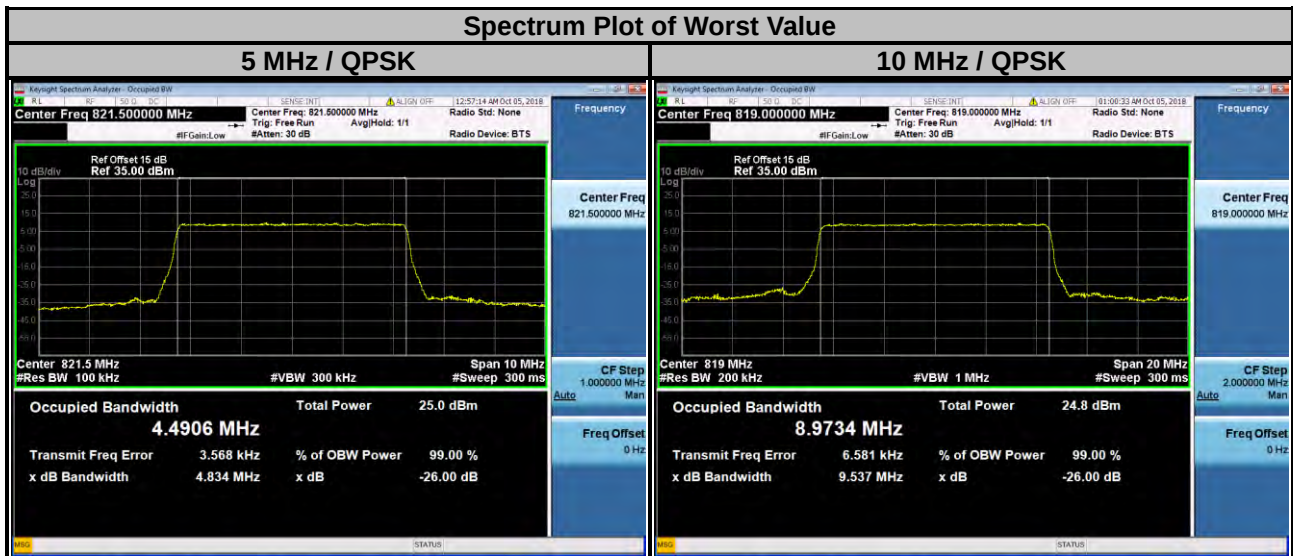

4.5 Emission Mask Measurement

4.5.1 Limits of Emission Mask Measurement

LTE Band 14

1. On any frequency removed from the assigned frequency by more than 50 percent, but not more than 100 percent of the authorized bandwidth: At least 25 dB.
2. On any frequency removed from the assigned frequency by more than 100 percent, but not more than 250 percent of the authorized bandwidth: At least 35 dB.
3. On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least $43 + 10 \log (P)$ dB.


CDMA / LTE Band 26

According to FCC part 90.691 shall be tested the emission mask. For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116 \log_{10}(f/6.1)$ decibels or $50 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

For §90.691(a), RBW=300 Hz for offset less than 37.5 kHz from channel edge and RBW=100 kHz for offsets greater than 37.5 kHz is allowed.


4.5.2 Test Setup

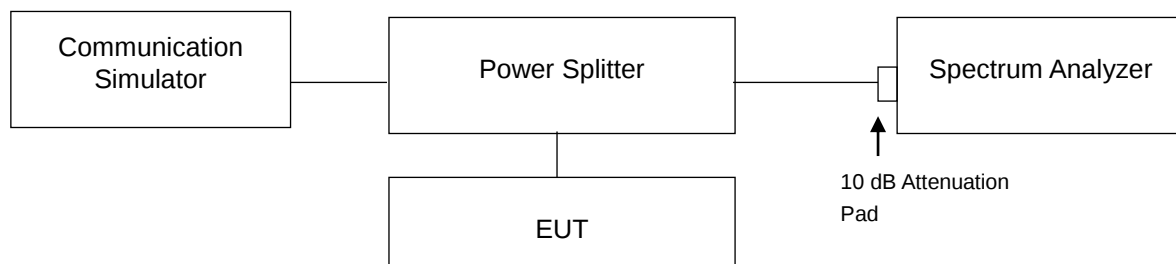


4.5.3 Test Procedures

- a. The measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.
- b. Record the test plot.

4.5.4 Test Results

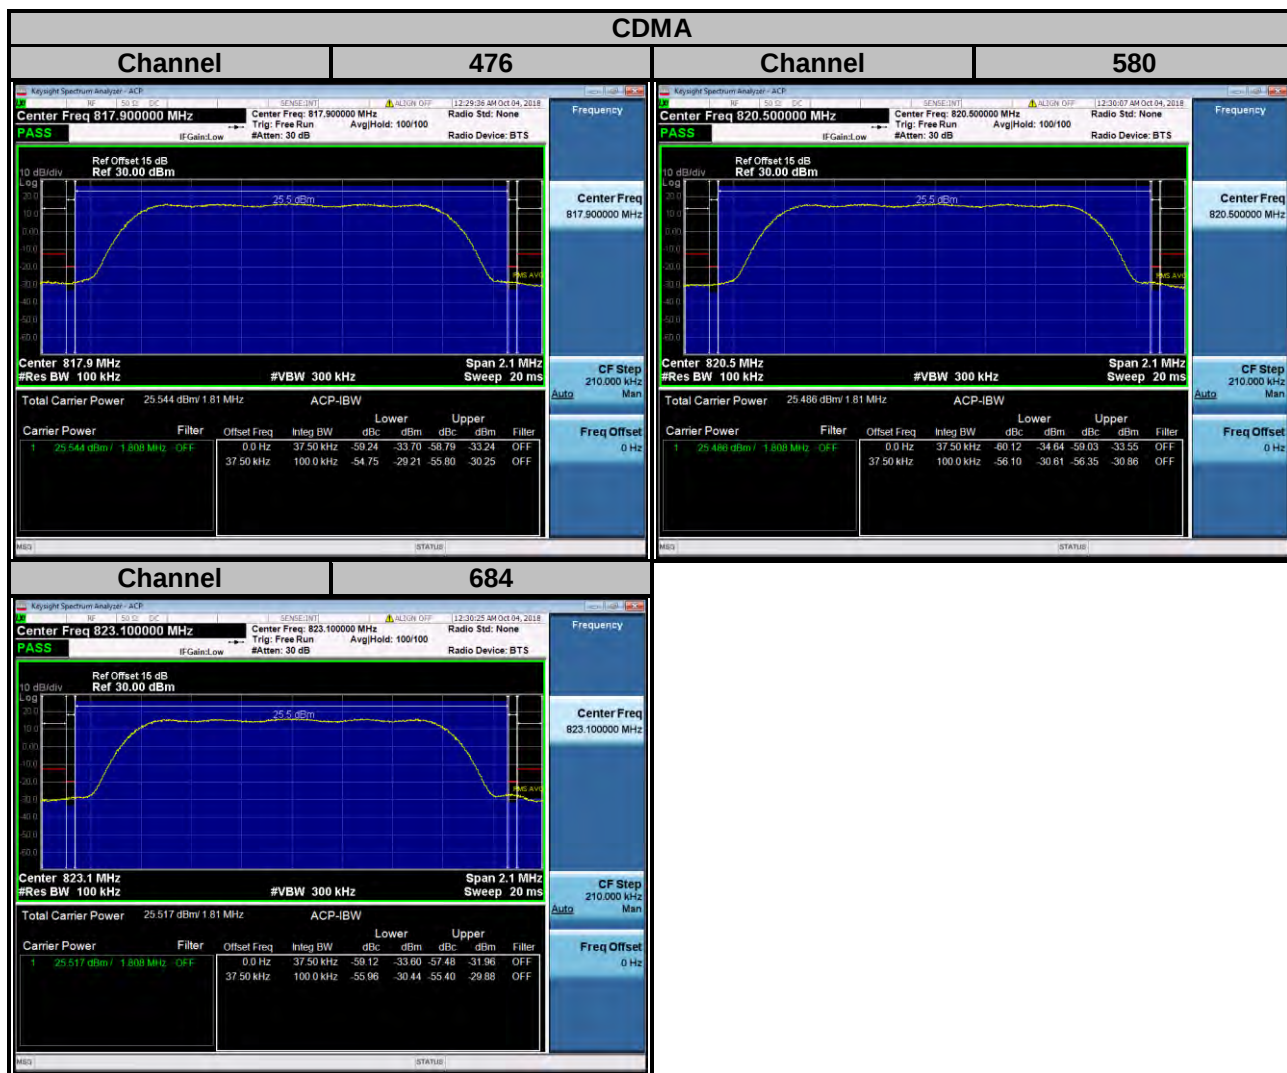

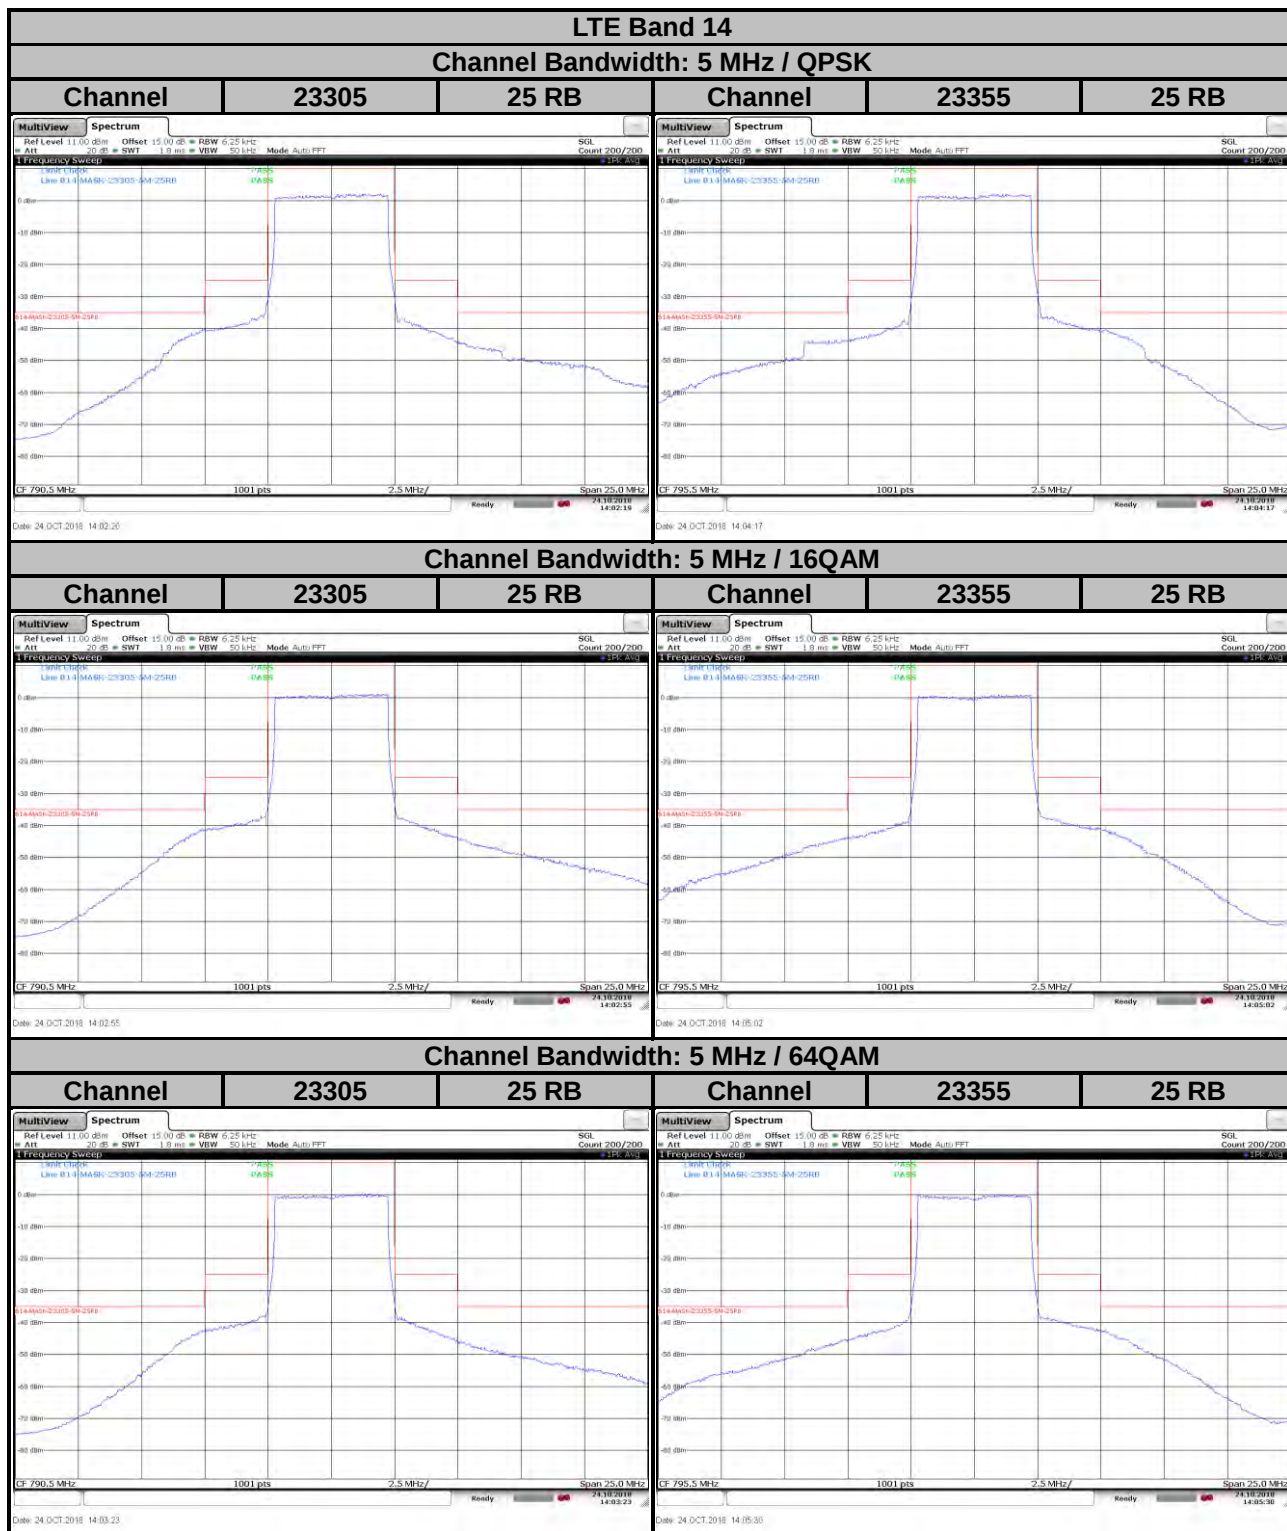


LTE Band 14

Channel Bandwidth: 10 MHz / QPSK

Channel Bandwidth: 10 MHz / 16QAM


Channel 23330 50 RB

Channel 23330 50 RB

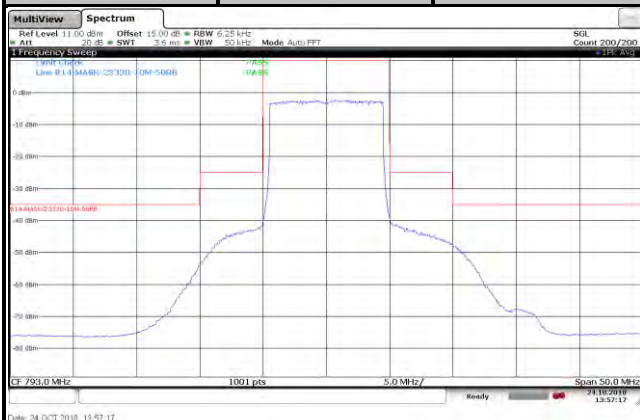


Channel Bandwidth: 10 MHz / 64QAM


Channel 23330 50 RB

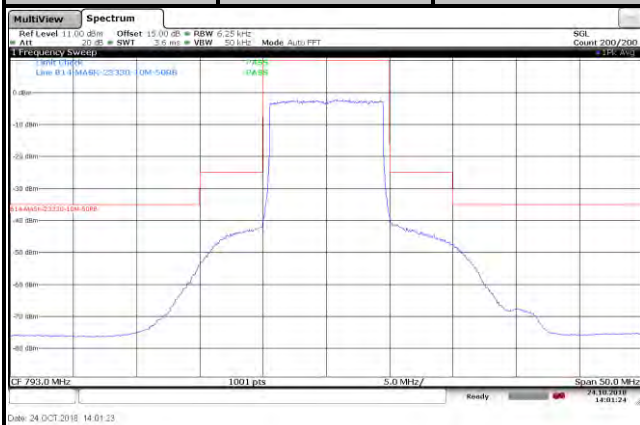


LTE Band 26

Channel Bandwidth: 1.4 MHz / QPSK

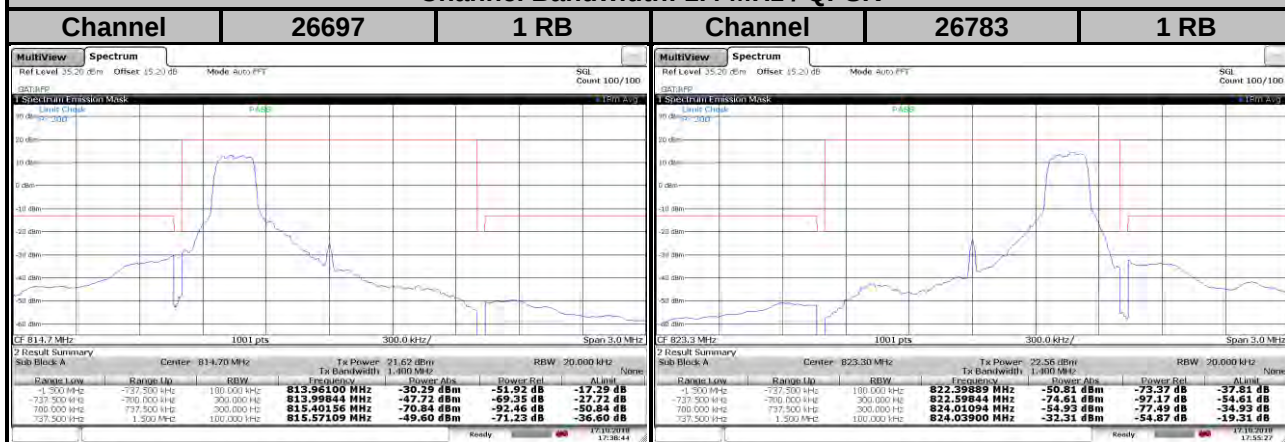

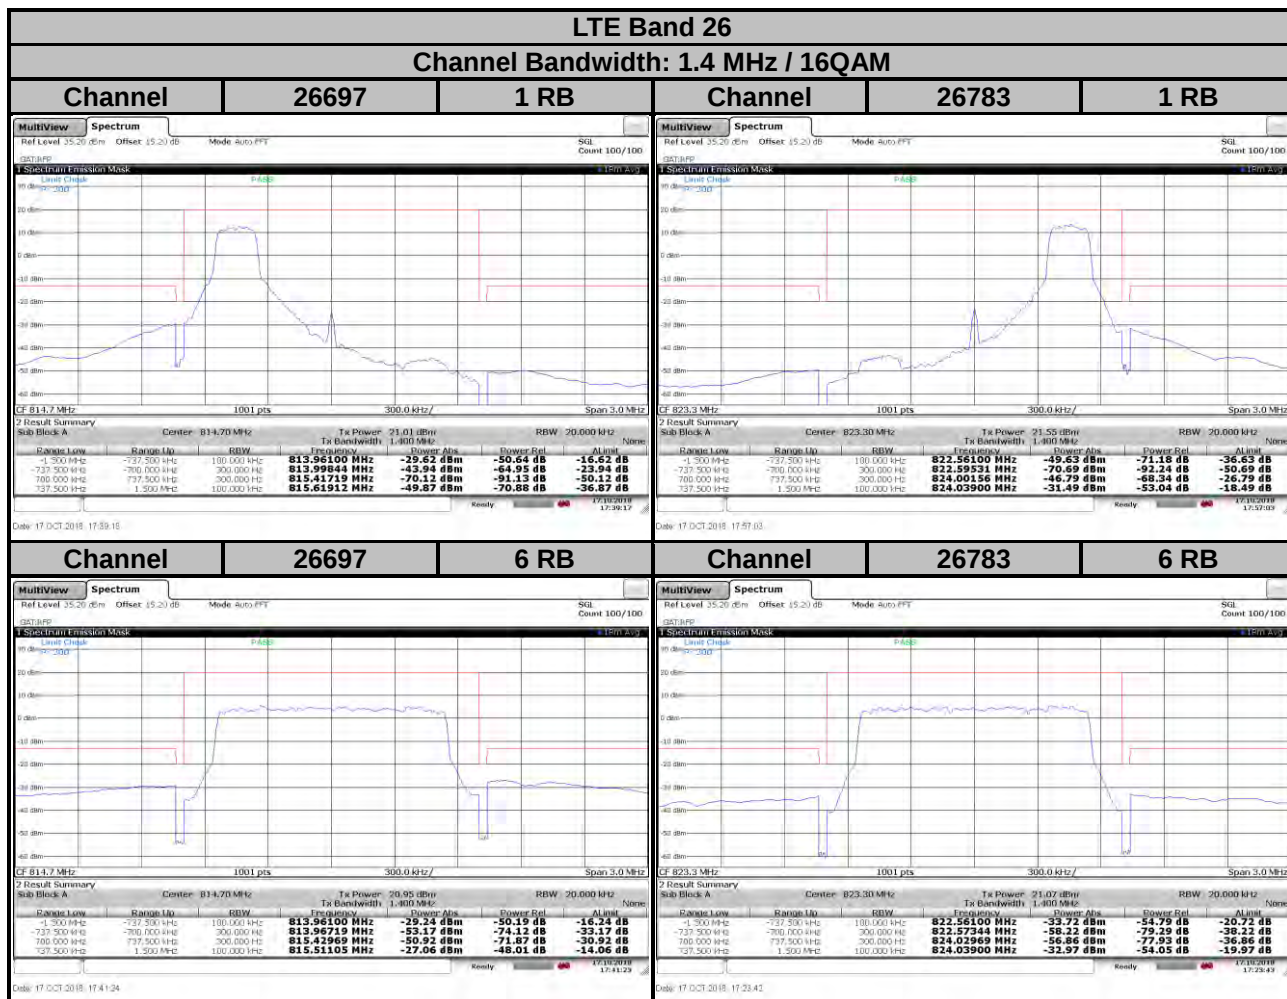


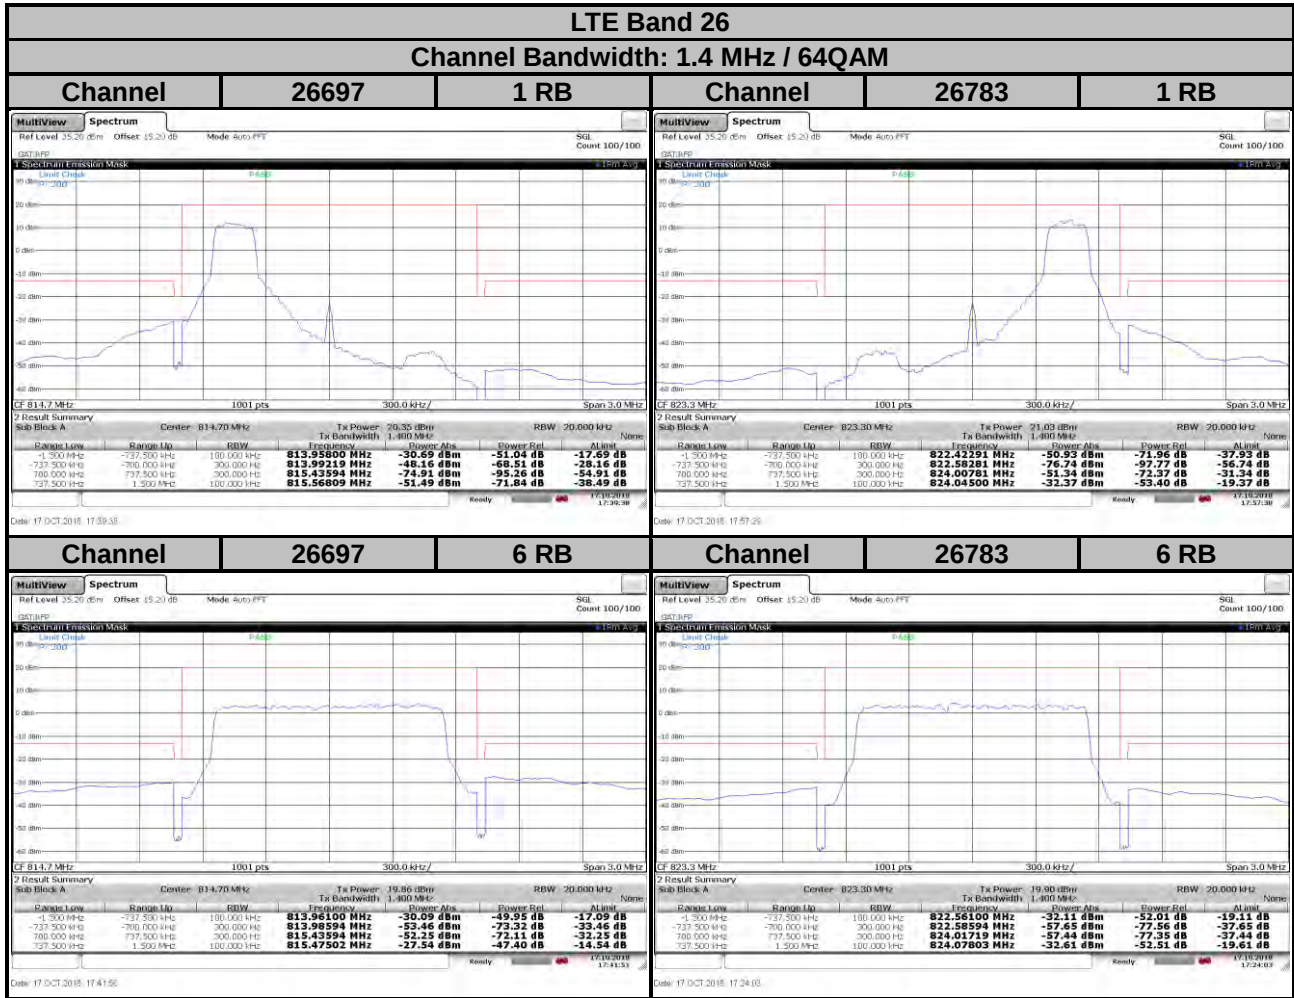


LTE Band 26

Channel Bandwidth: 3 MHz / QPSK


Channel 26705 1 RB

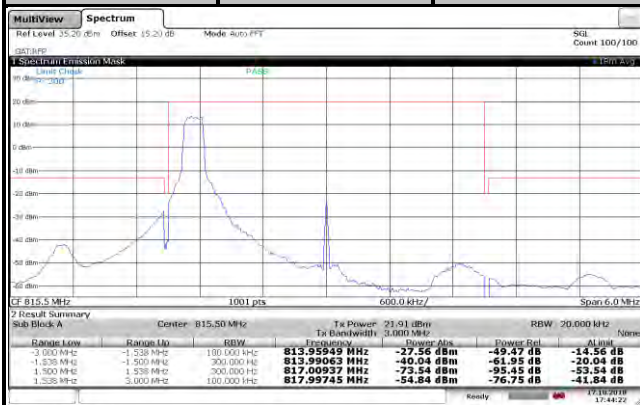


Channel 26775 1 RB

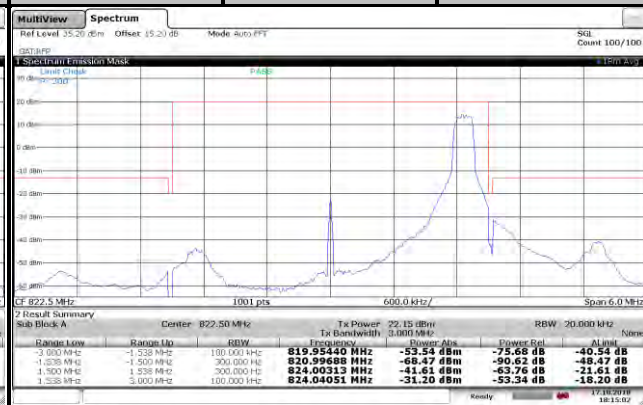



Channel 26705 15 RB

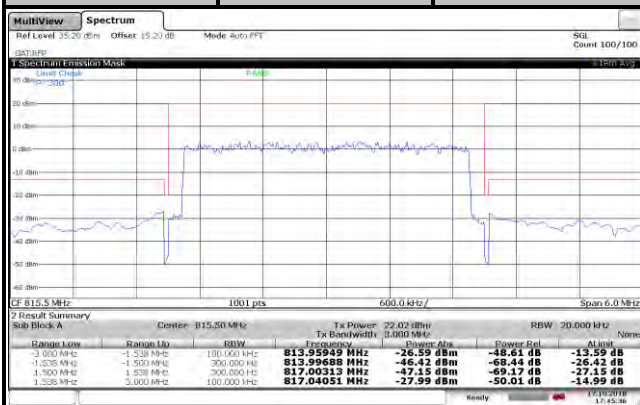

Channel 26775 15 RB

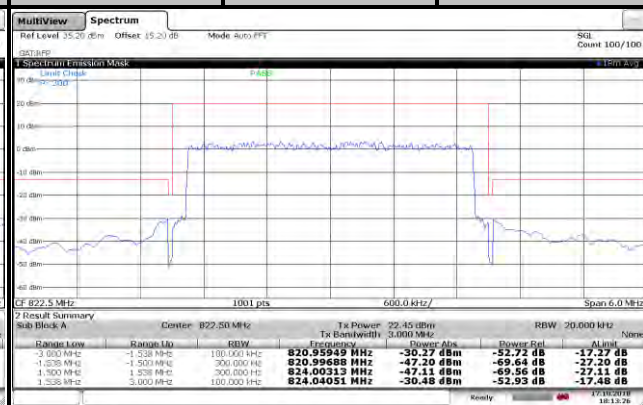


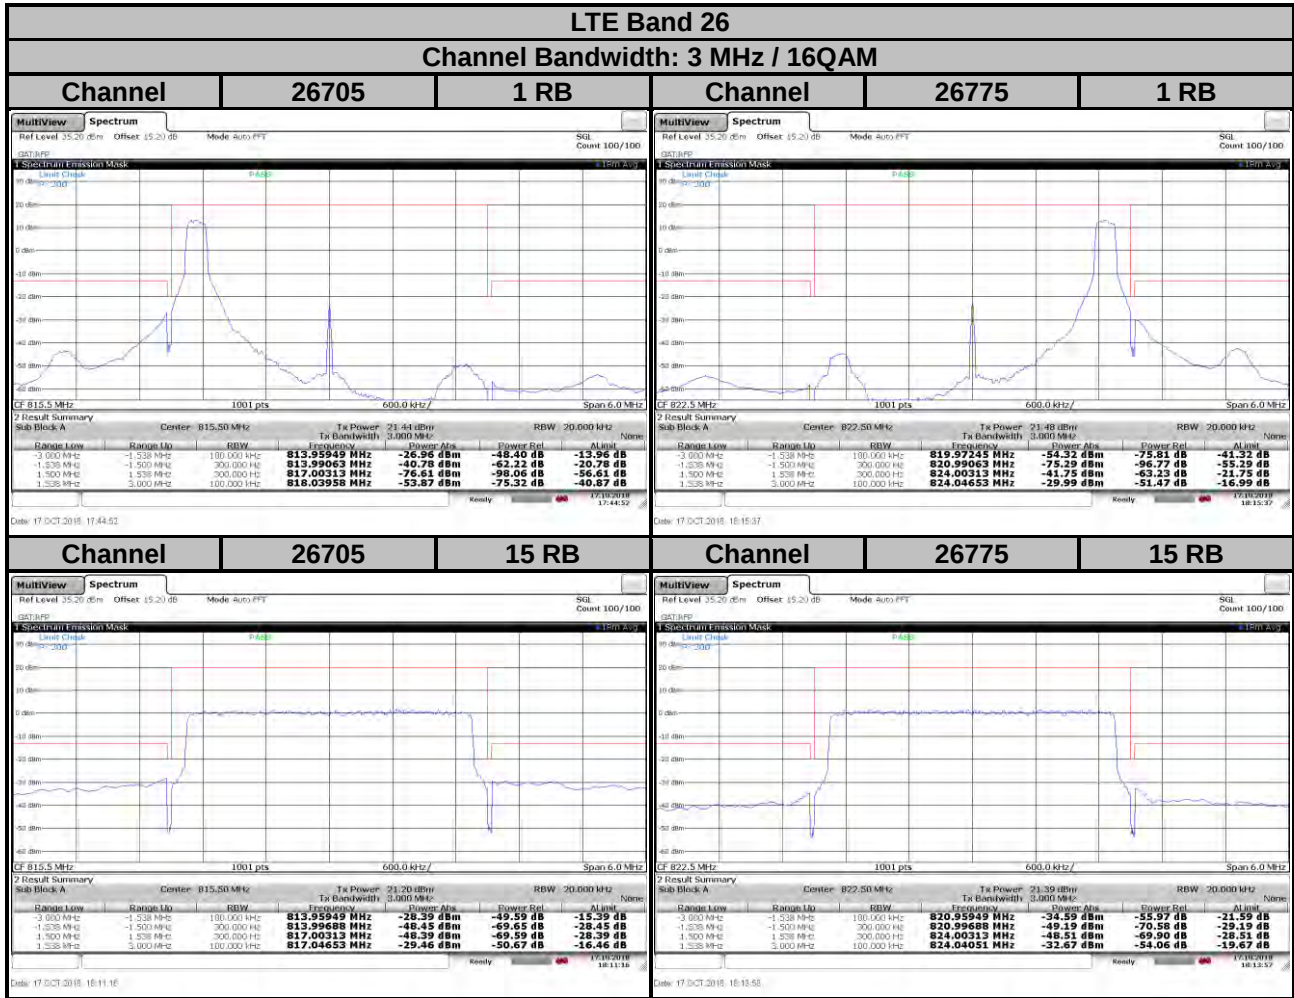


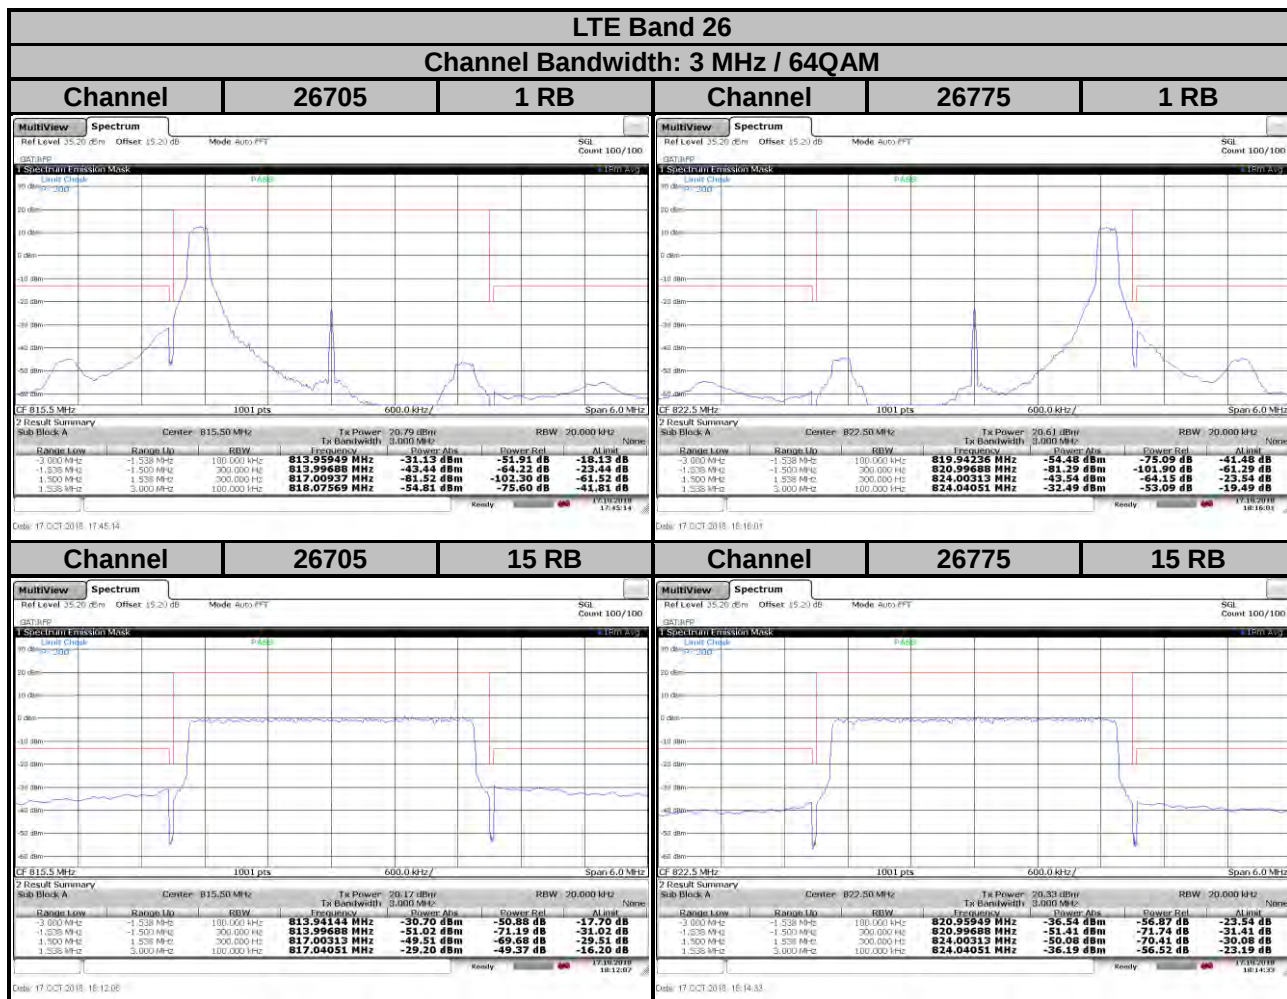



LTE Band 26

Channel Bandwidth: 5 MHz / QPSK

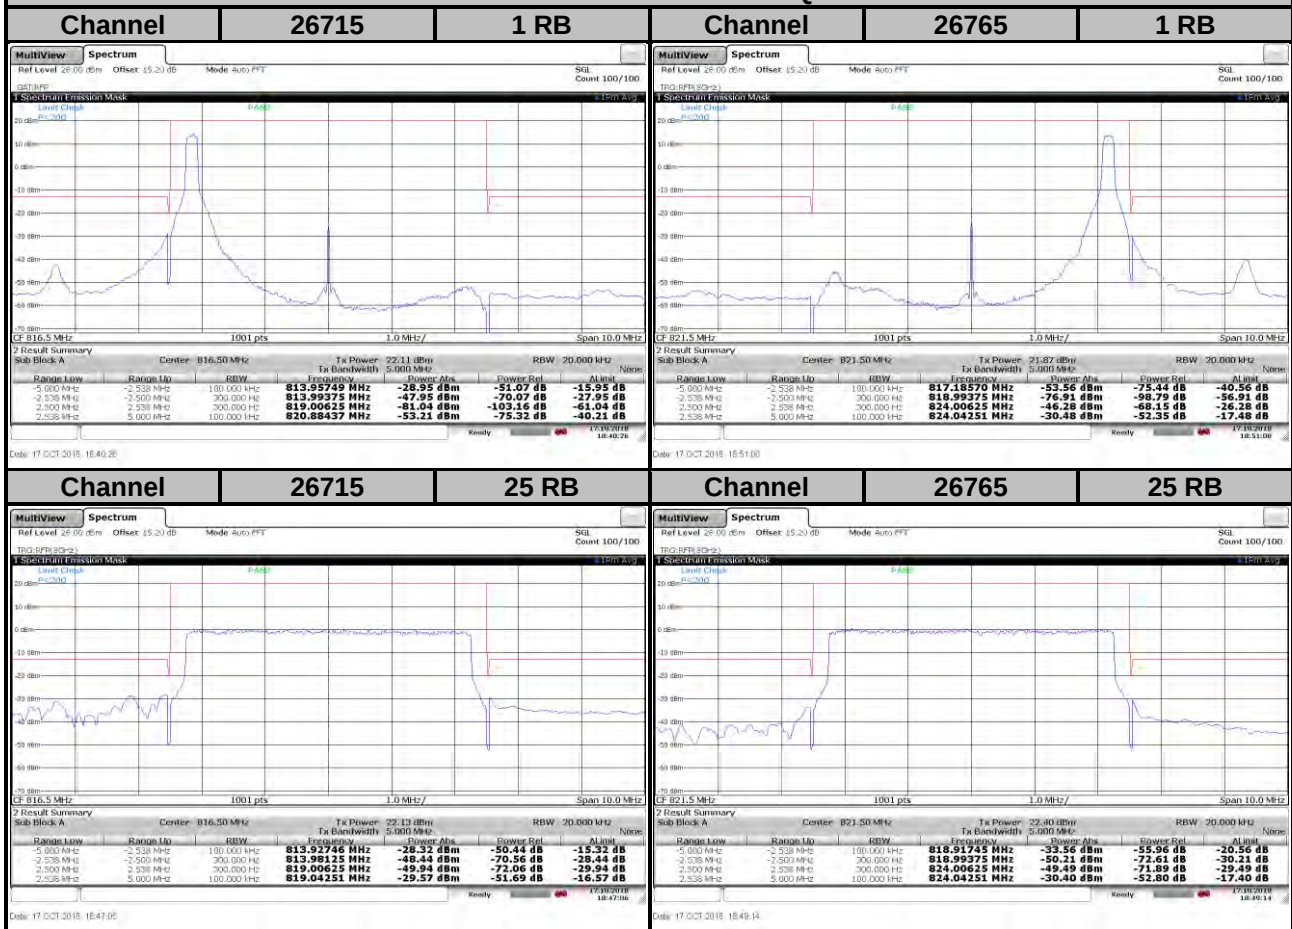

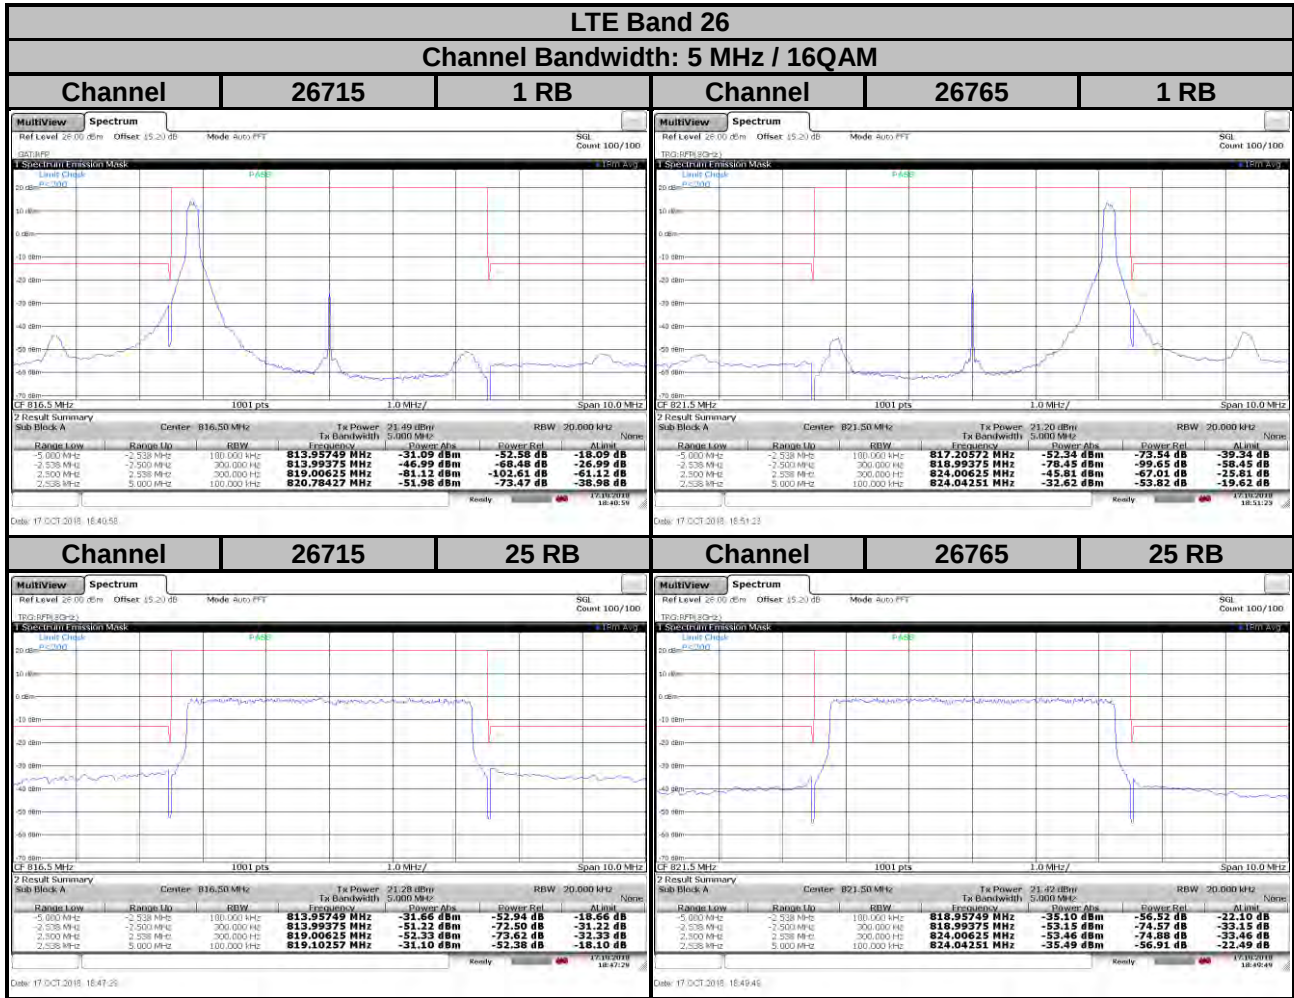

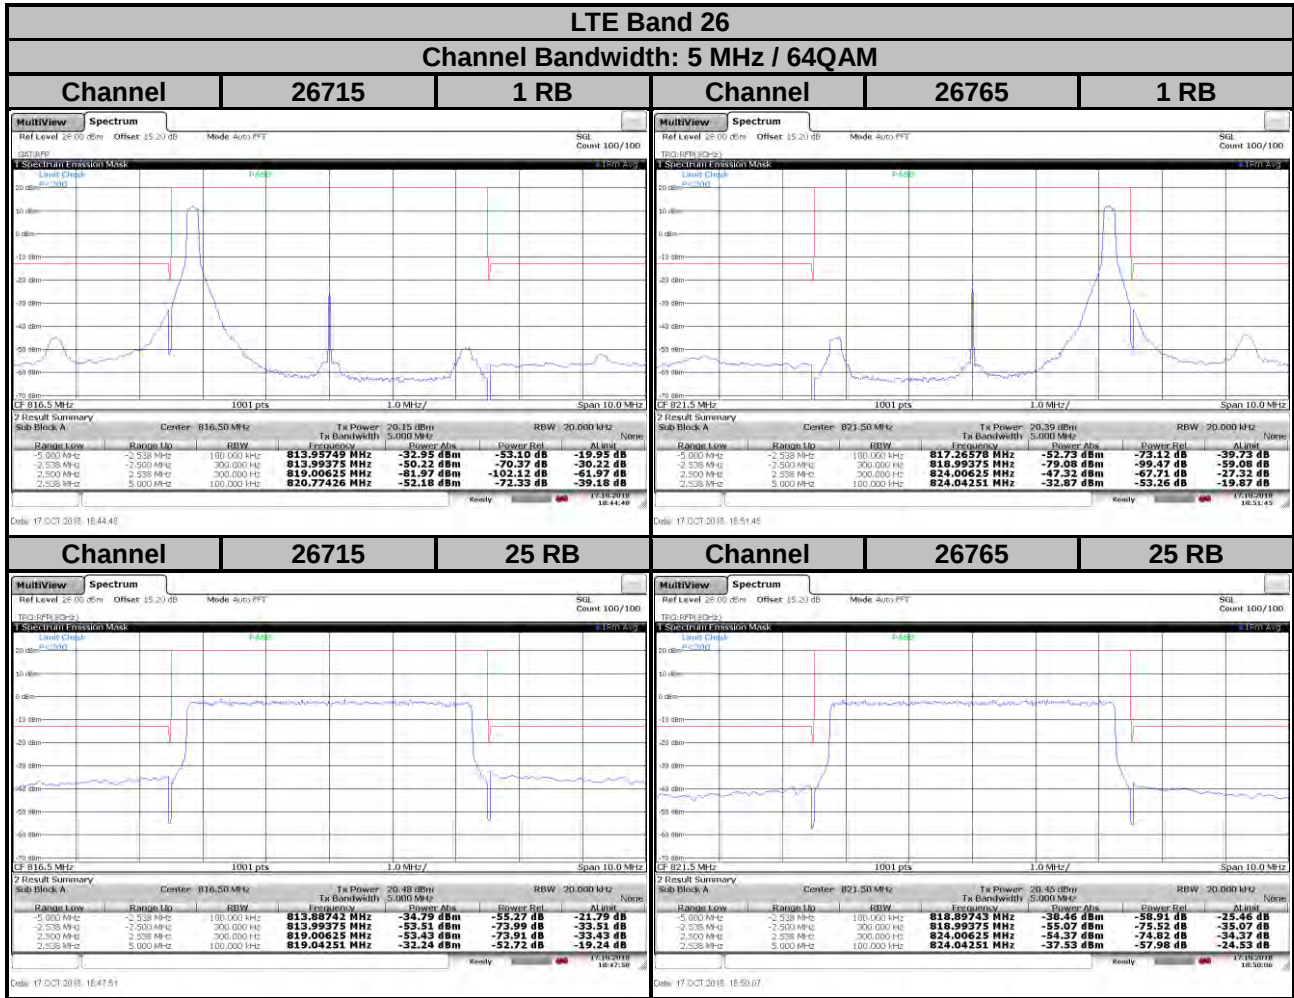


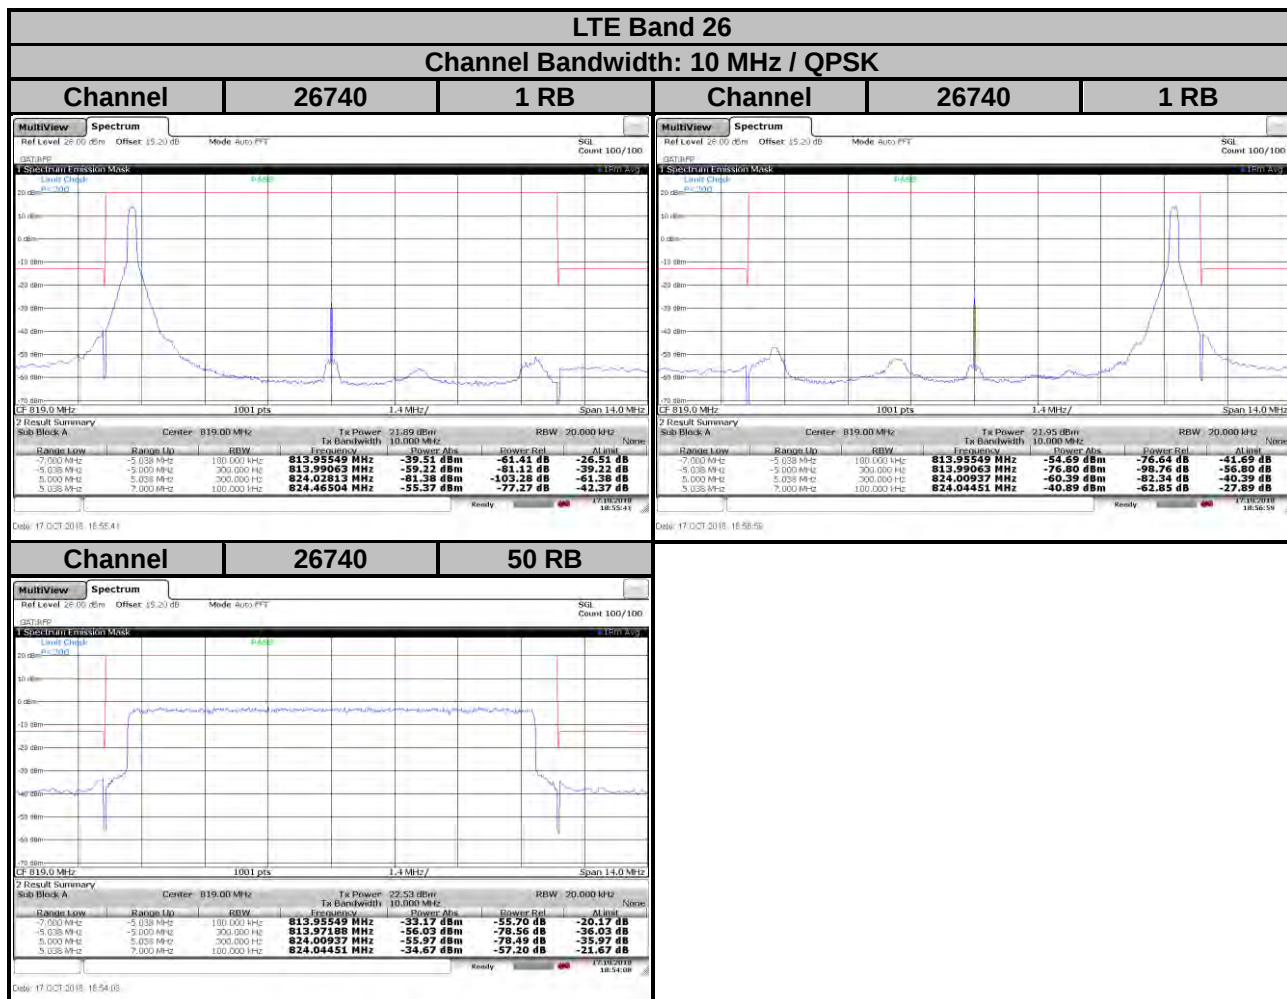

LTE Band 26


Channel Bandwidth: 10 MHz / 16QAM

Channel 26740 1 RB

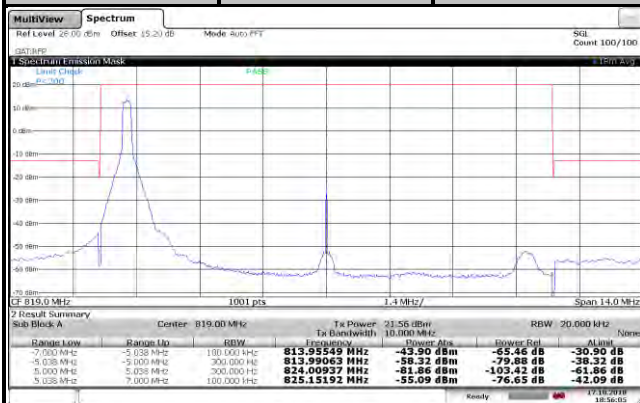


Date: 17 OCT 2018 16:58:05

Channel 26740 1 RB

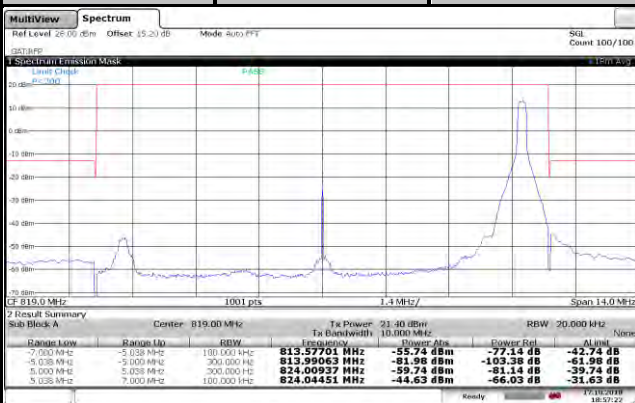


Date: 17 OCT 2018 16:57:22

Channel 26740 50 RB

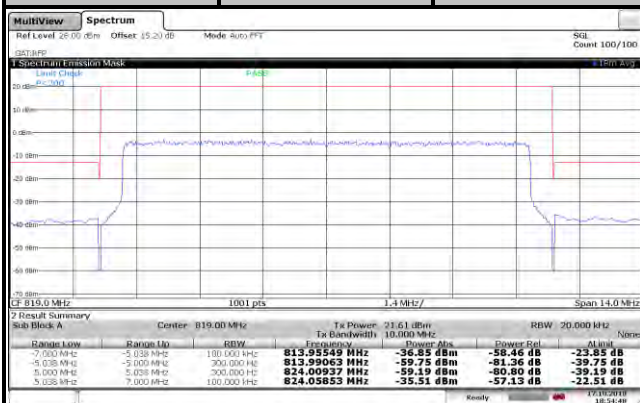

Date: 17 OCT 2018 16:54:48

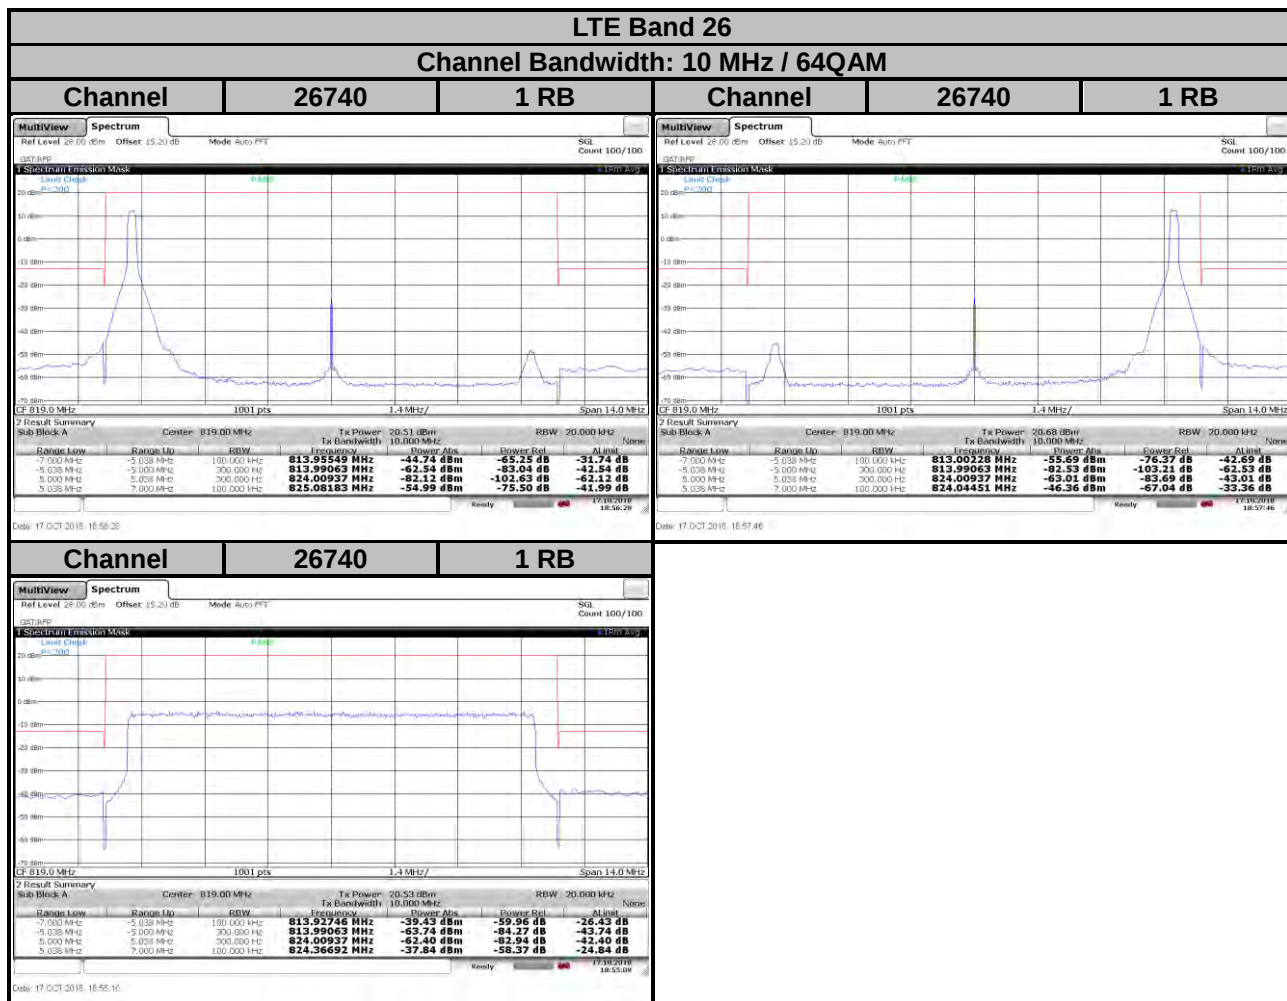


4.6 Band Edge Measurement

4.6.1 Limits of Band Edge Measurement

- (1) On all frequencies between 769 - 775 MHz and 799 - 805 MHz, by a factor not less than $76 + 10 \log (P)$ dB in a 6.25 kHz band segment, for base and fixed stations.
- (2) On all frequencies between 769 - 775 MHz and 799 - 805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations.
- (3) On any frequency between 775 - 788 MHz, above 805 MHz, and below 758 MHz, by at least $43 + 10 \log (P)$.


4.6.2 Test Setup

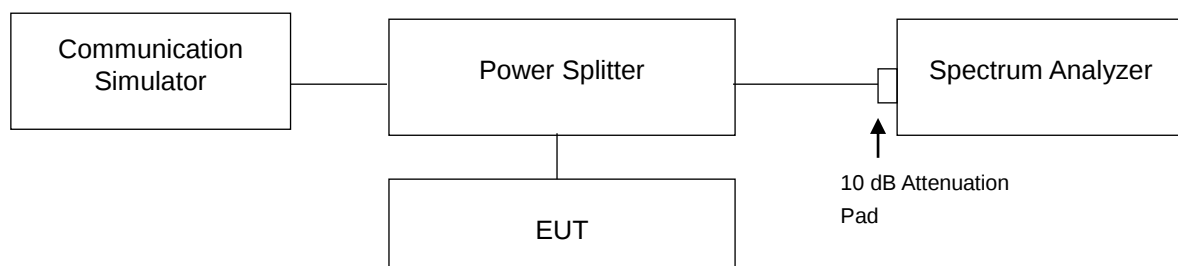

4.6.3 Test Procedures

- a. All measurements were done at low and high operational frequency range.
- b. The band edge measurement used the power splitter via EUT RF power connector between signal generator and spectrum analyzer. This splitter loss, attenuator loss and cable loss are the worst loss 15 dB in the transmitted path track.
- c. Record the max. trace plot into the test report.

4.6.4 Test Results

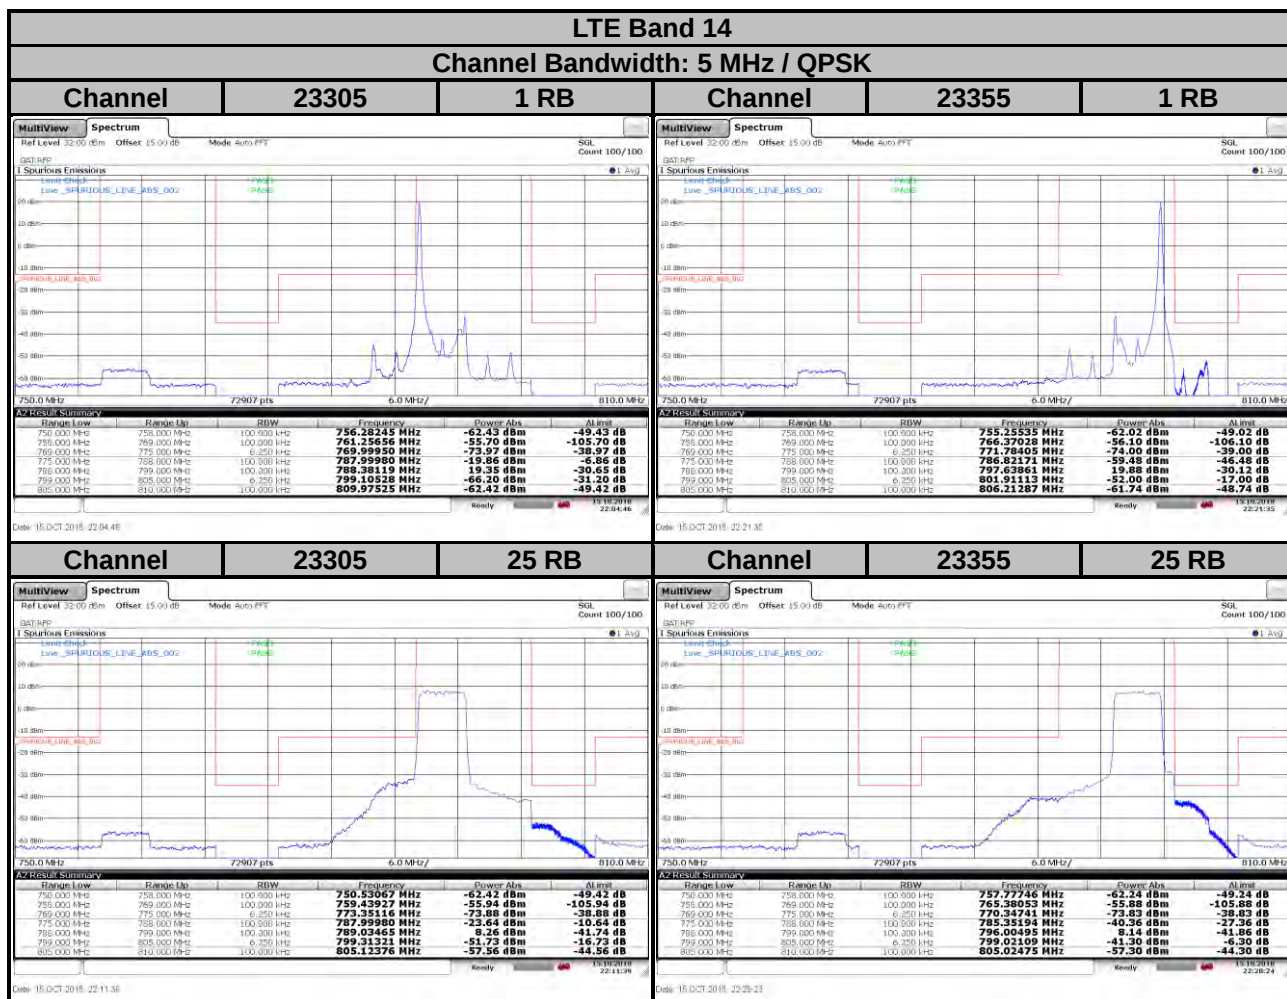


LTE Band 14


Channel Bandwidth: 5 MHz / 16QAM

Channel 23305 1 RB

Channel 23355 1 RB

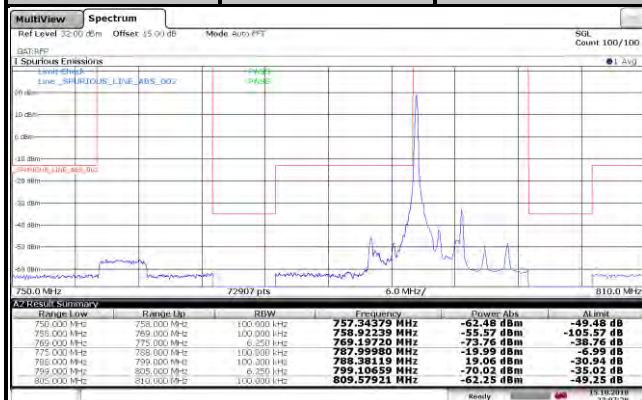


Date: 15.OCT.2018 22:07:28

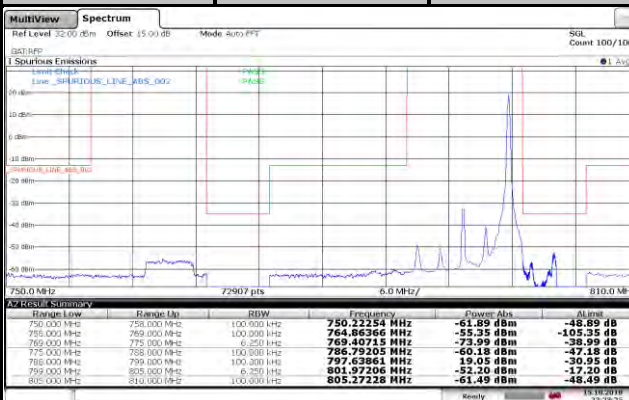


Date: 15.OCT.2018 22:23:25

Channel 23305 25 RB


Channel 23355 25 RB

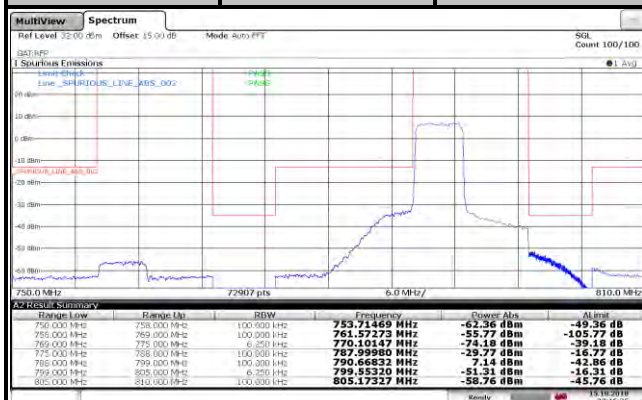

Date: 15.OCT.2018 22:16:35

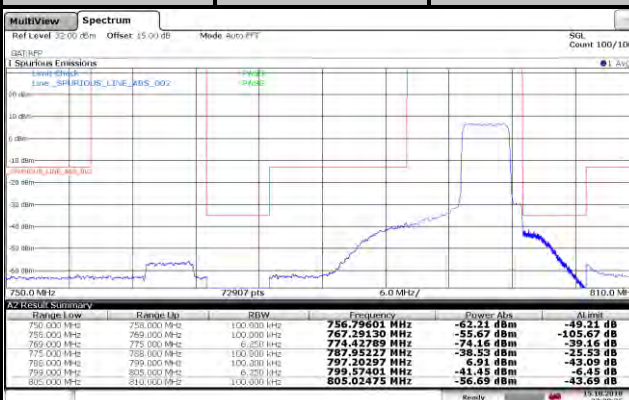


Date: 15.OCT.2018 22:30:34

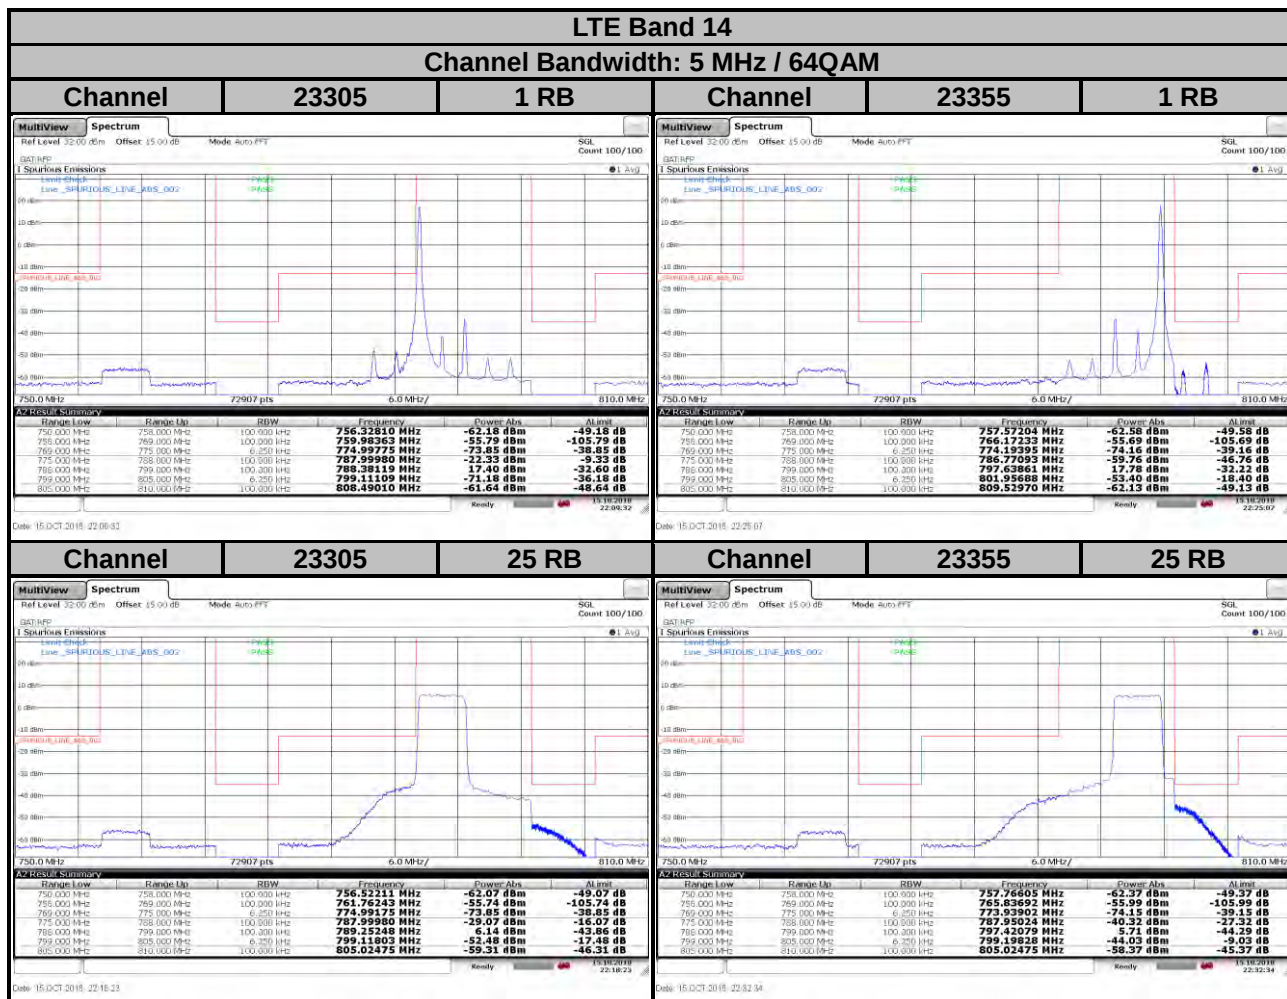

LTE Band 14


Channel Bandwidth: 10 MHz / QPSK

Channel 23330 1 RB

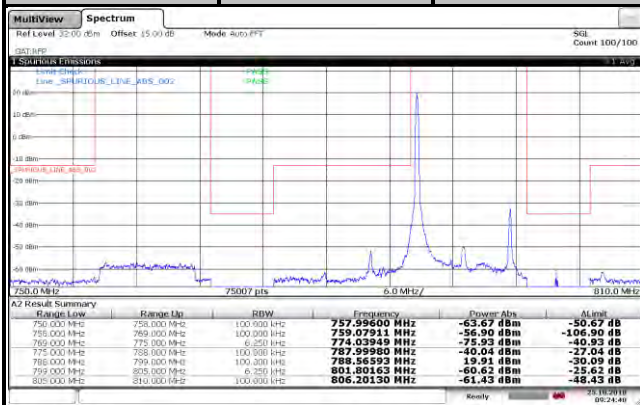


Date: 25 OCT 2018, 08:24:40

Channel 23330 1 RB


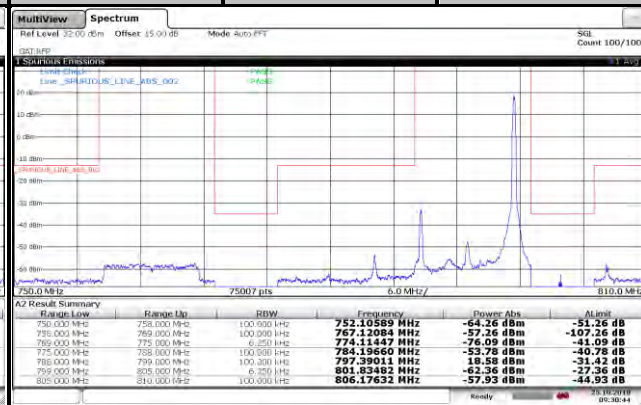


Date: 25 OCT 2018, 08:30:44

Channel 23330 50 RB

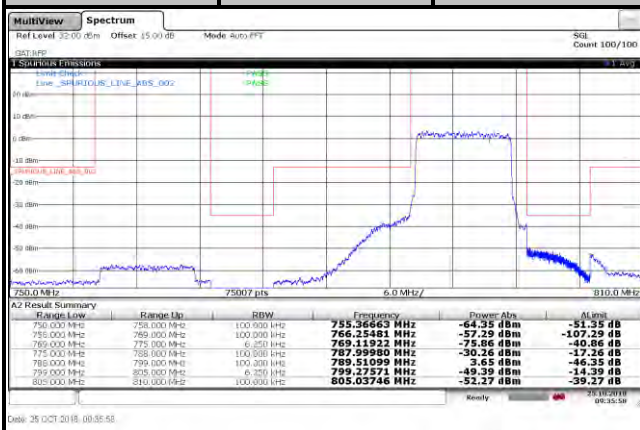


Date: 25 OCT 2018, 08:35:38

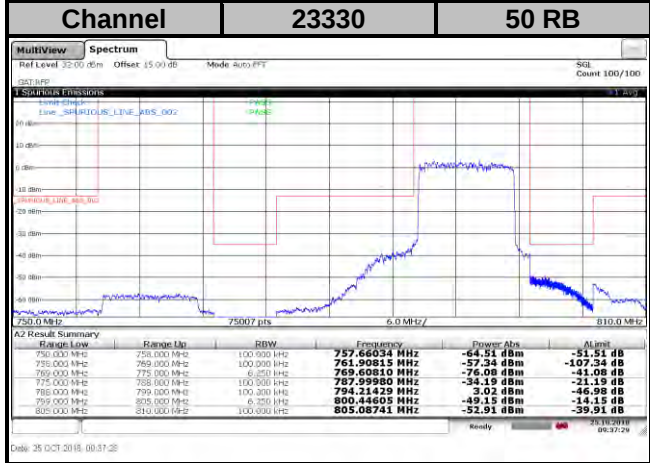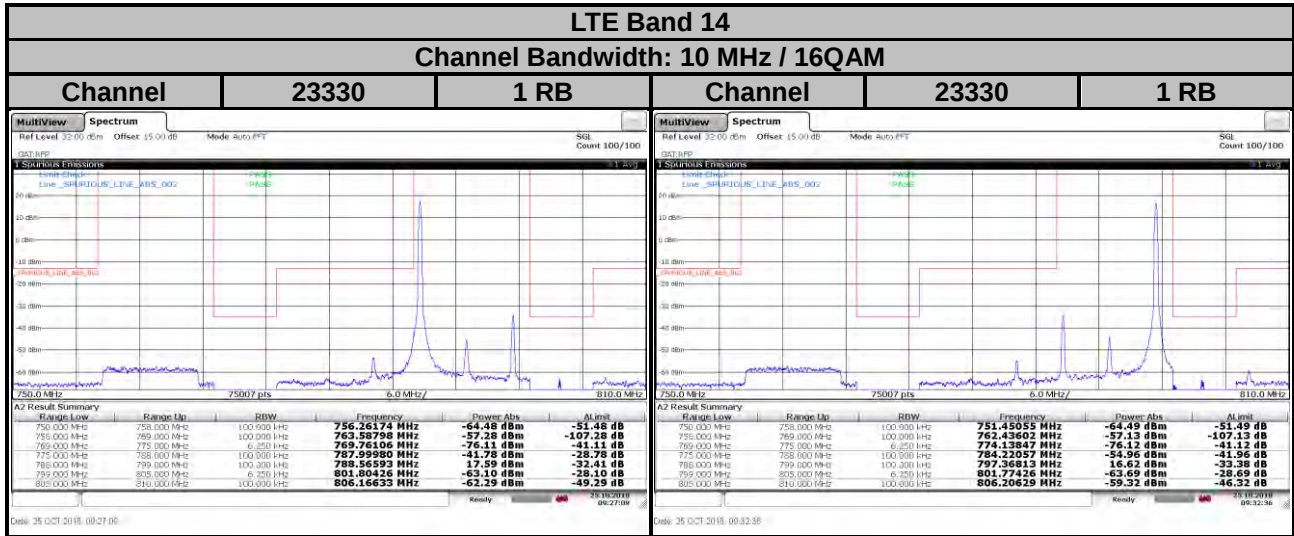


LTE Band 14

Channel Bandwidth: 10 MHz / 64QAM


Channel 23330 1 RB

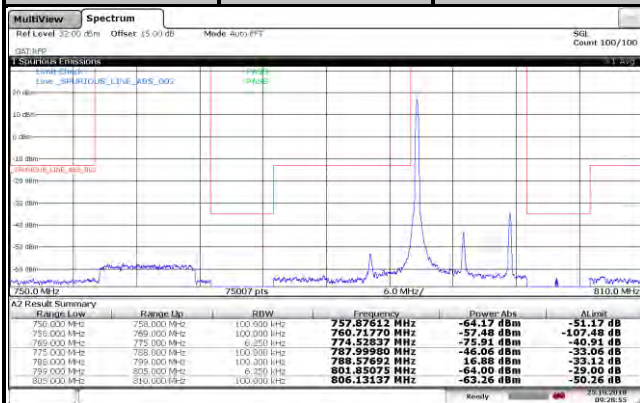

Channel 23330 1 RB

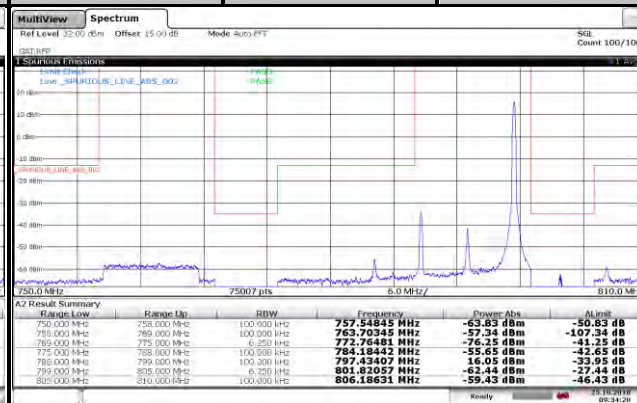

Channel 23330 50 RB

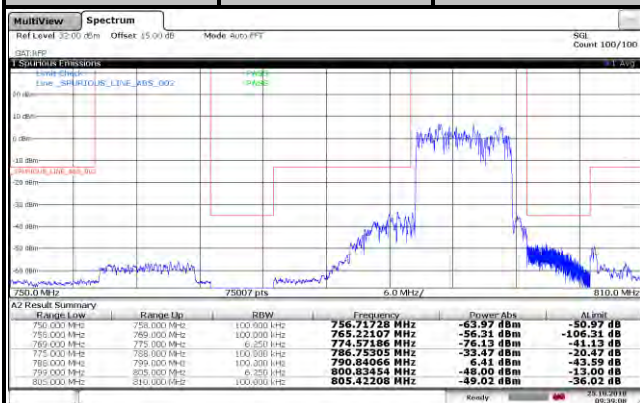


4.7 Conducted Spurious Emissions

4.7.1 Limits of Conducted Spurious Emissions Measurement

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10}(P)$ dB. The limit of emission is equal to -13 dBm.


4.7.2 Test Setup

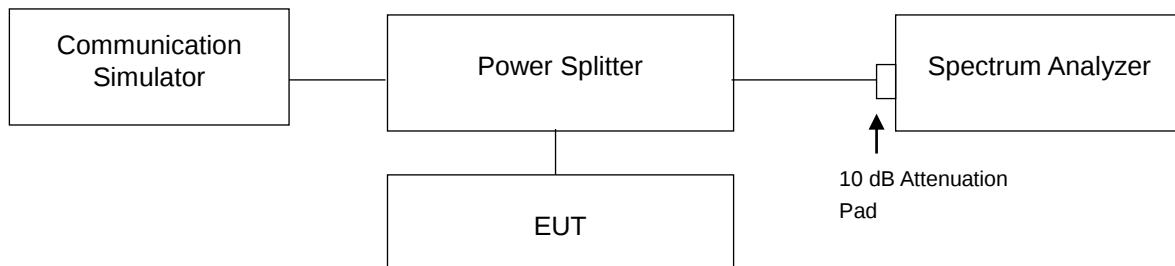

4.7.3 Test Procedure

- The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- Measuring frequency range is from 9 kHz to 1 GHz. 10 dB attenuation pad is connected with spectrum. RBW = 100 kHz and VBW = 300 kHz are used for conducted emission measurement.
- Measuring frequency range is from 1 GHz to 10 GHz. 10 dB attenuation pad is connected with spectrum. RBW = 1 MHz and VBW = 3 MHz are used for conducted emission measurement.

4.7.4 Test Results

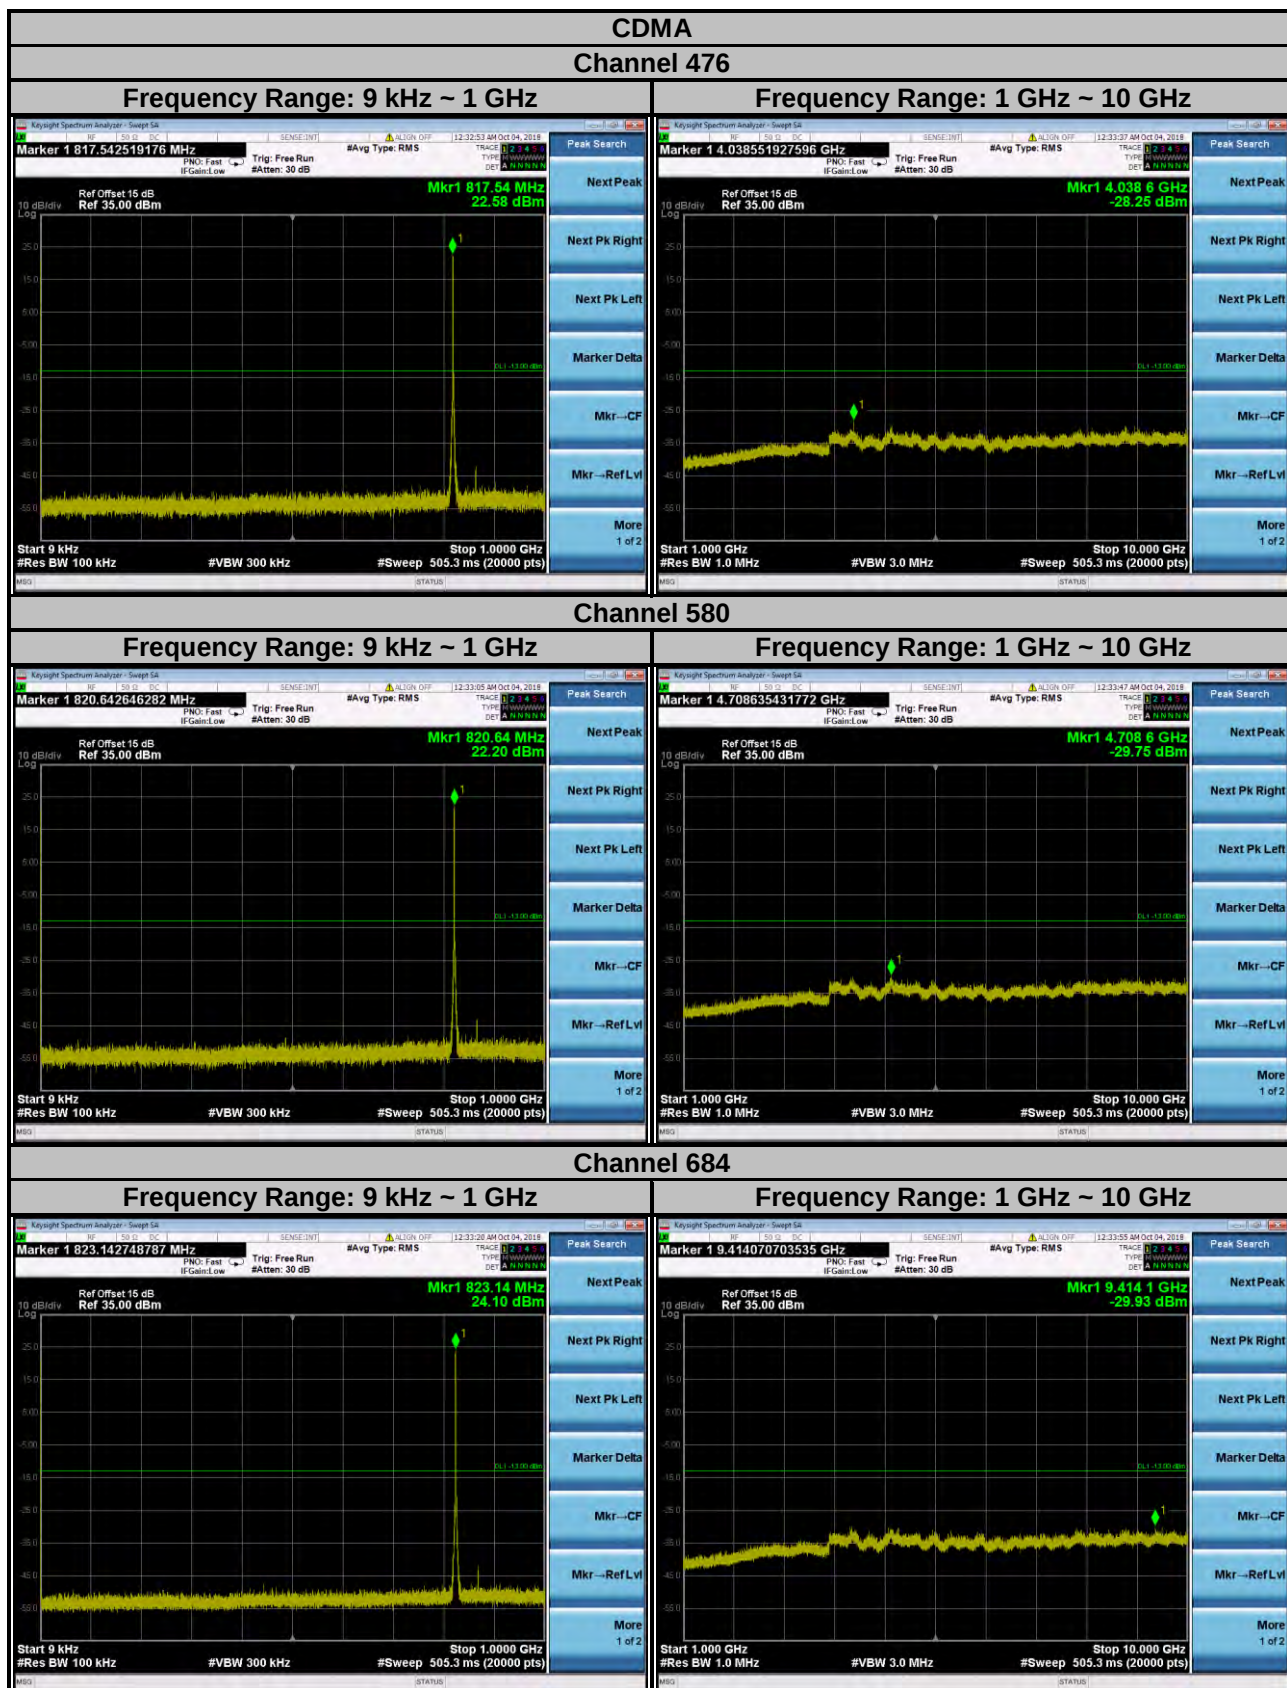


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

LTE Band 14


Channel Bandwidth: 5 MHz

Channel 23305

Frequency Range: 9 kHz ~ 1 GHz

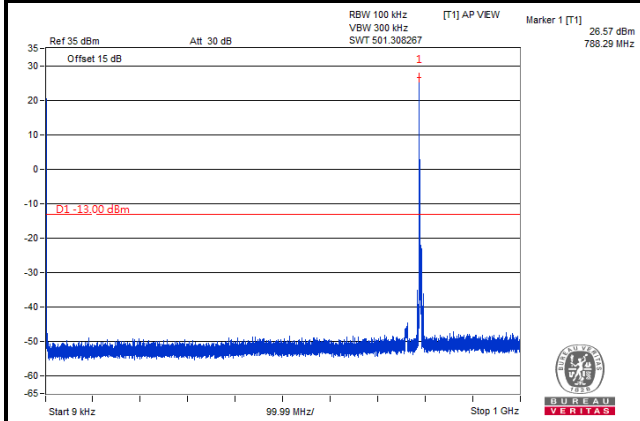


Frequency Range: 1 GHz ~ 10 GHz

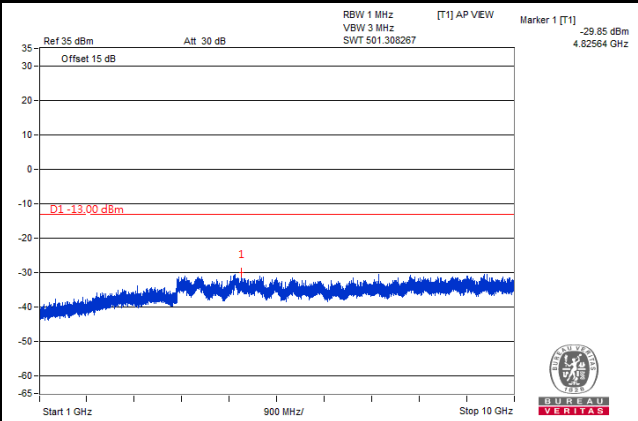


Channel 23330

Frequency Range: 9 kHz ~ 1 GHz

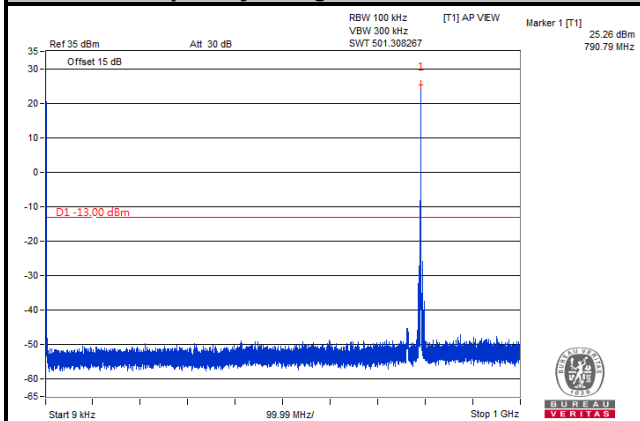


Frequency Range: 1 GHz ~ 10 GHz

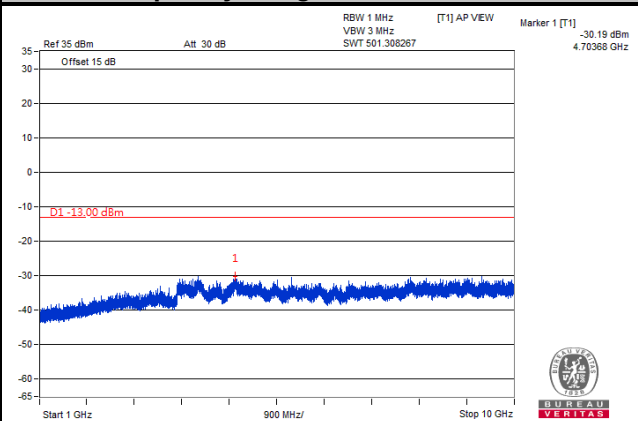


Channel 23355


Frequency Range: 9 kHz ~ 1 GHz

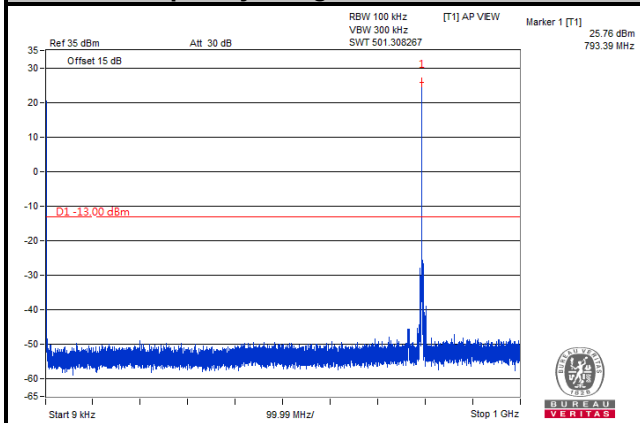

Frequency Range: 1 GHz ~ 10 GHz

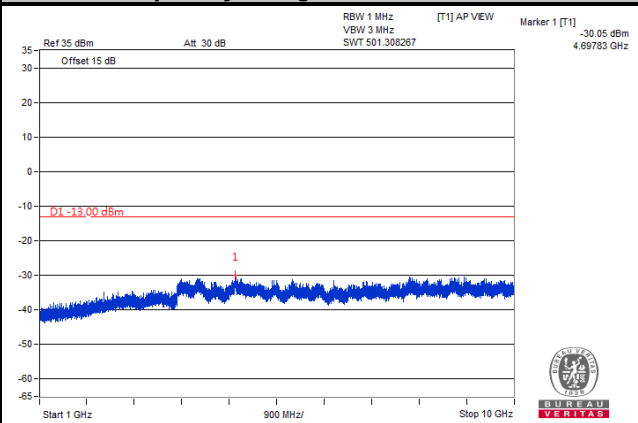

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

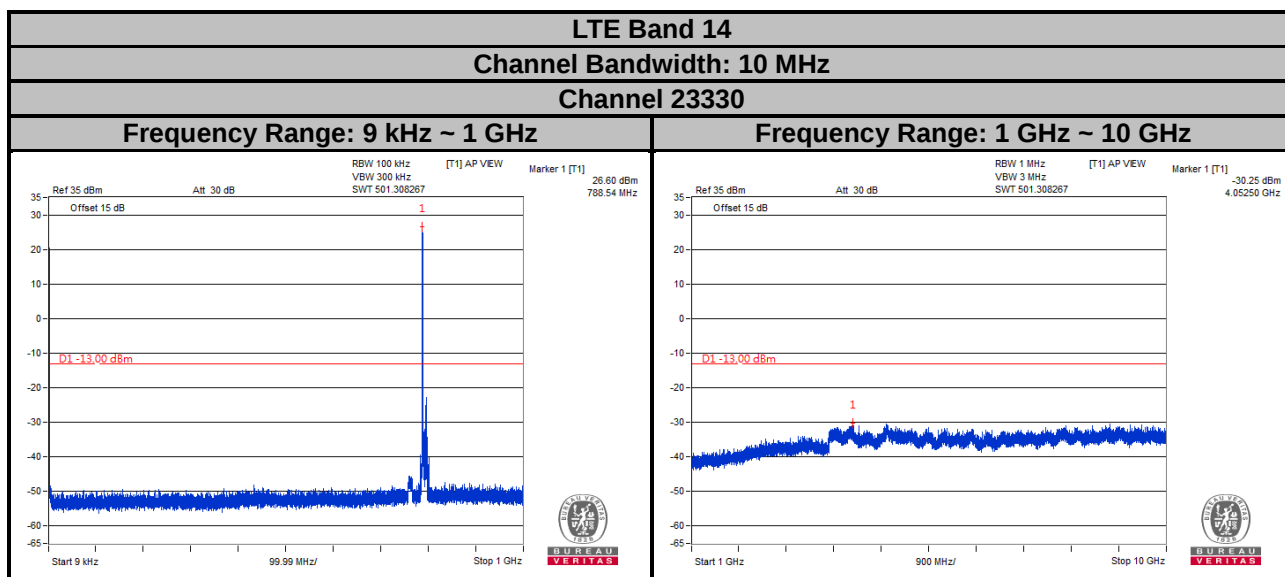


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

LTE Band 26


Channel Bandwidth: 1.4 MHz

Channel 26697

Frequency Range: 9 kHz ~ 1 GHz

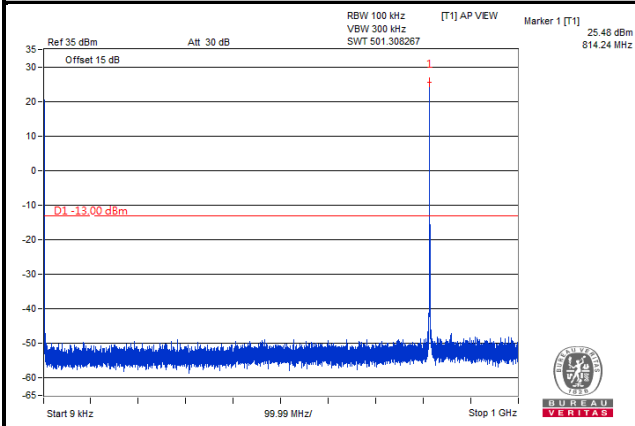


Frequency Range: 1 GHz ~ 10 GHz

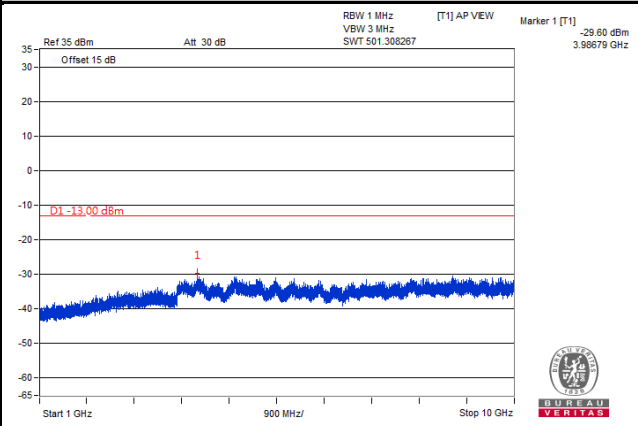


Channel 26740

Frequency Range: 9 kHz ~ 1 GHz

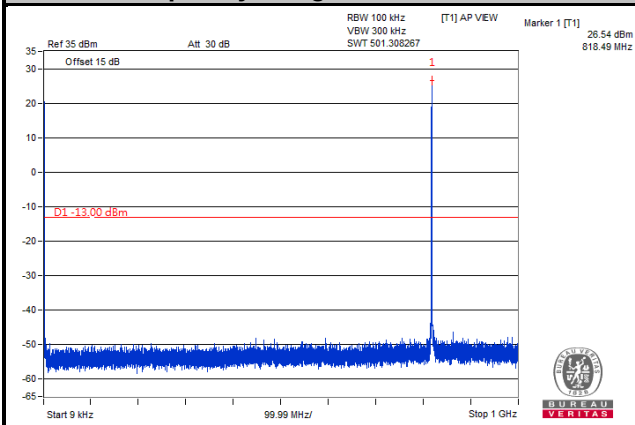


Frequency Range: 1 GHz ~ 10 GHz

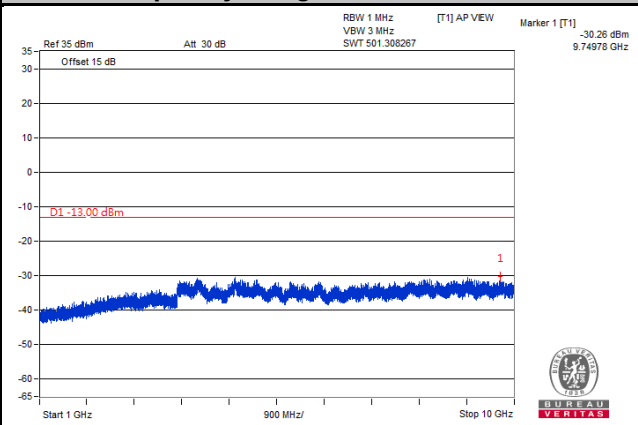


Channel 26783

Frequency Range: 9 kHz ~ 1 GHz

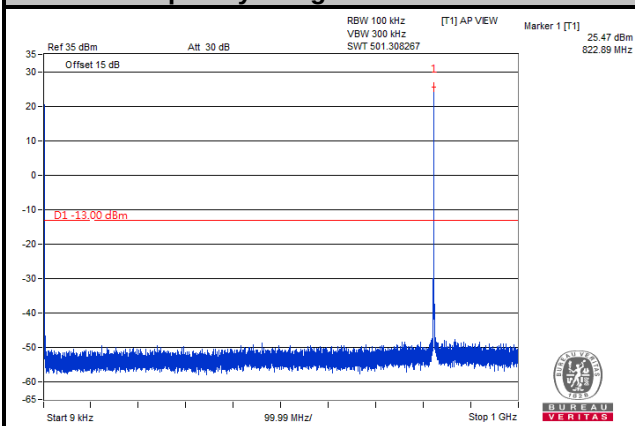

Frequency Range: 1 GHz ~ 10 GHz

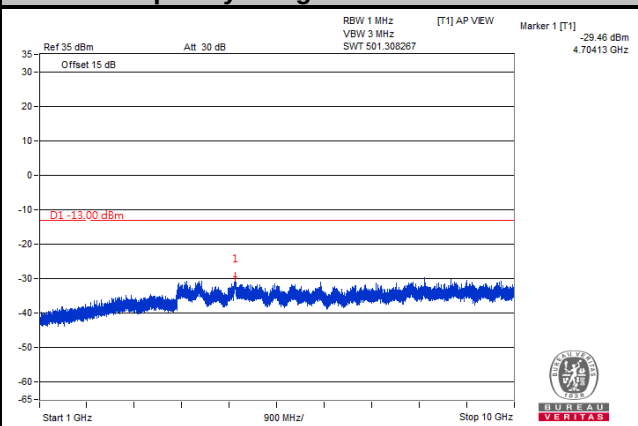


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

LTE Band 26


Channel Bandwidth: 3 MHz

Channel 26705

Frequency Range: 9 kHz ~ 1 GHz

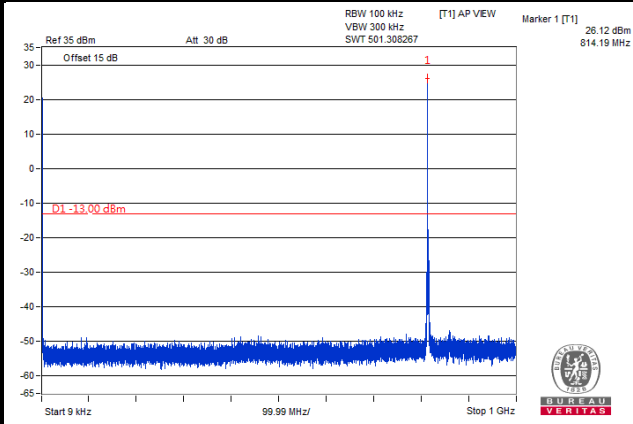


Frequency Range: 1 GHz ~ 10 GHz

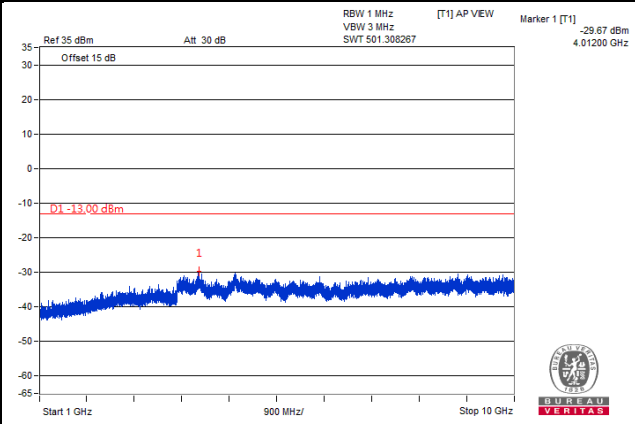


Channel 26740

Frequency Range: 9 kHz ~ 1 GHz

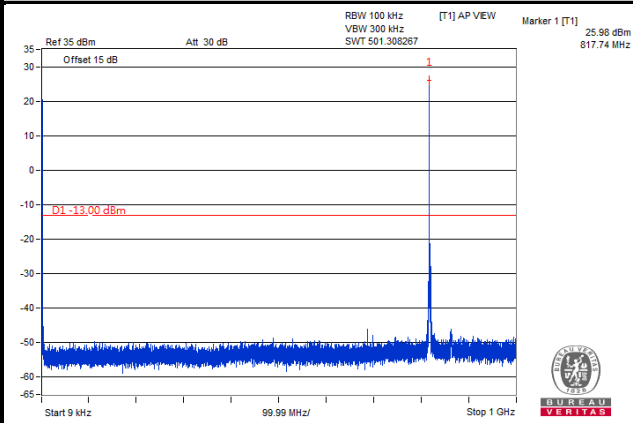


Frequency Range: 1 GHz ~ 10 GHz

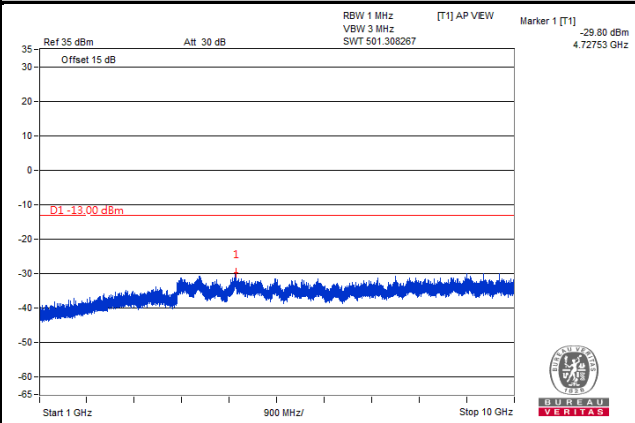


Channel 26775

Frequency Range: 9 kHz ~ 1 GHz

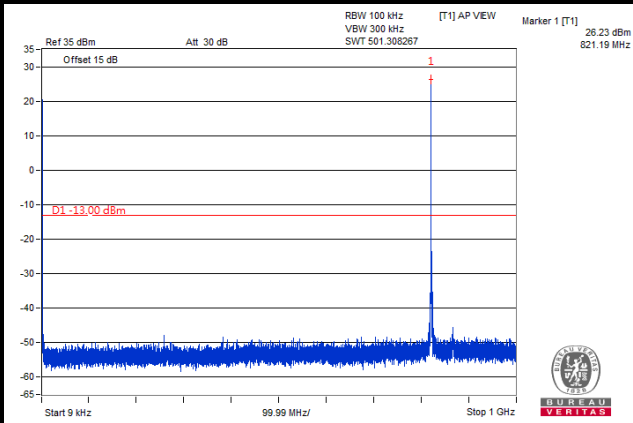

Frequency Range: 1 GHz ~ 10 GHz

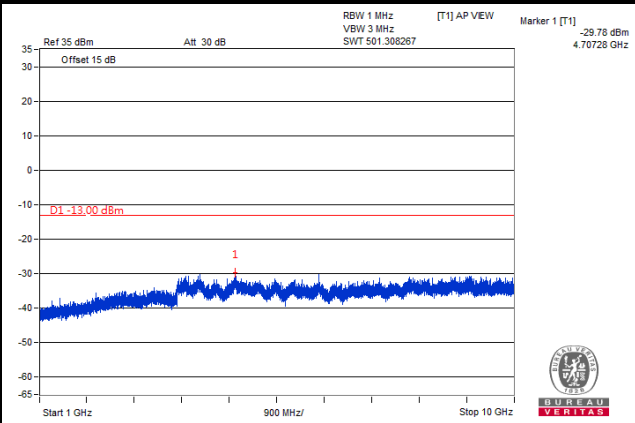


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

LTE Band 26


Channel Bandwidth: 5 MHz

Channel 26715

Frequency Range: 9 kHz ~ 1 GHz

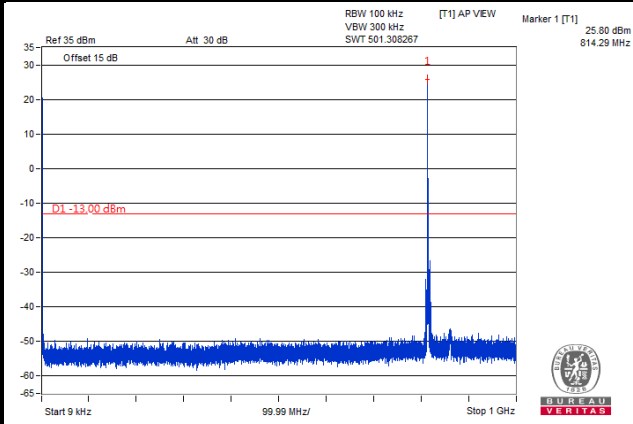


Frequency Range: 1 GHz ~ 10 GHz

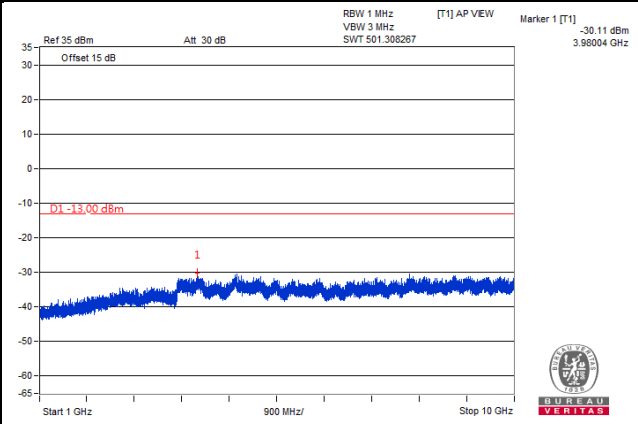


Channel 26740

Frequency Range: 9 kHz ~ 1 GHz

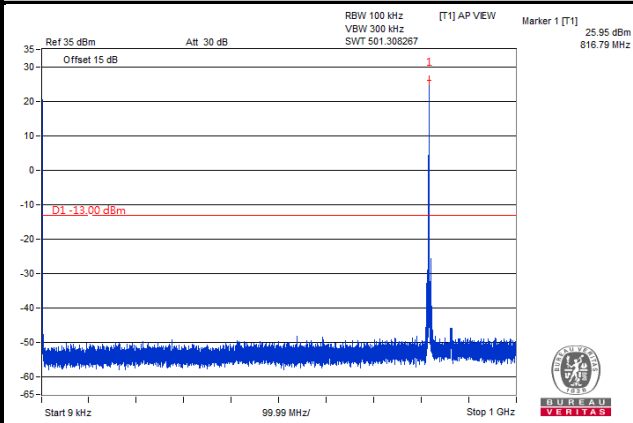


Frequency Range: 1 GHz ~ 10 GHz

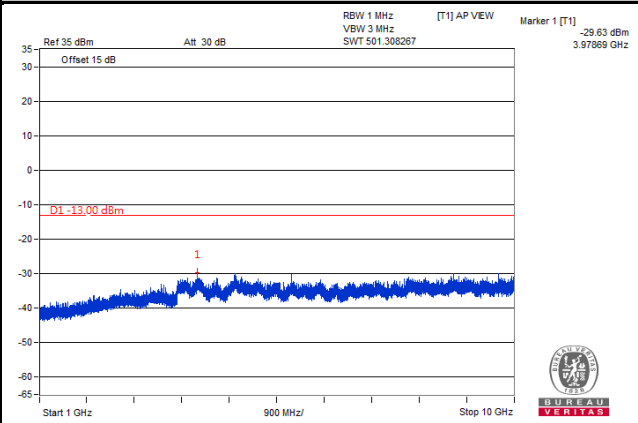


Channel 26765


Frequency Range: 9 kHz ~ 1 GHz

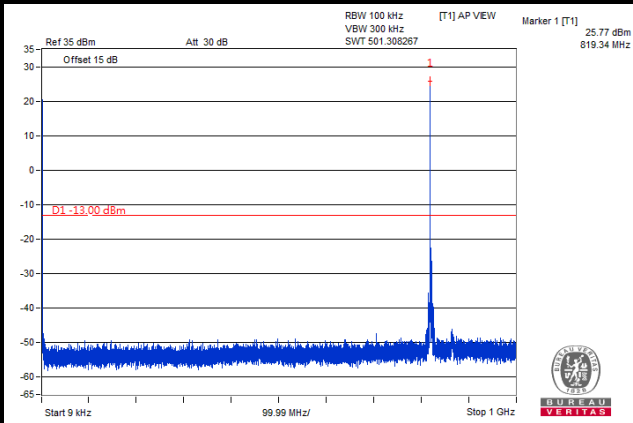

Frequency Range: 1 GHz ~ 10 GHz

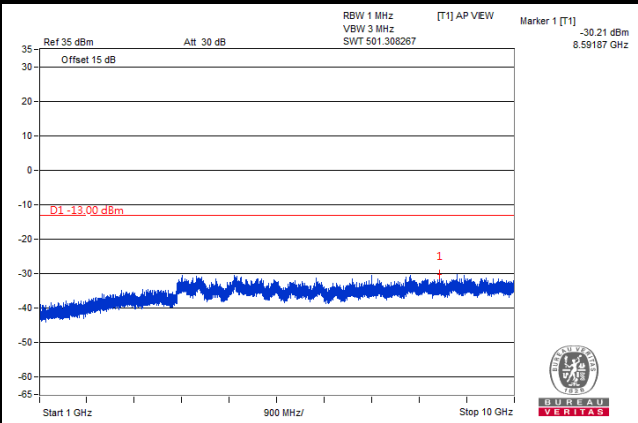

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

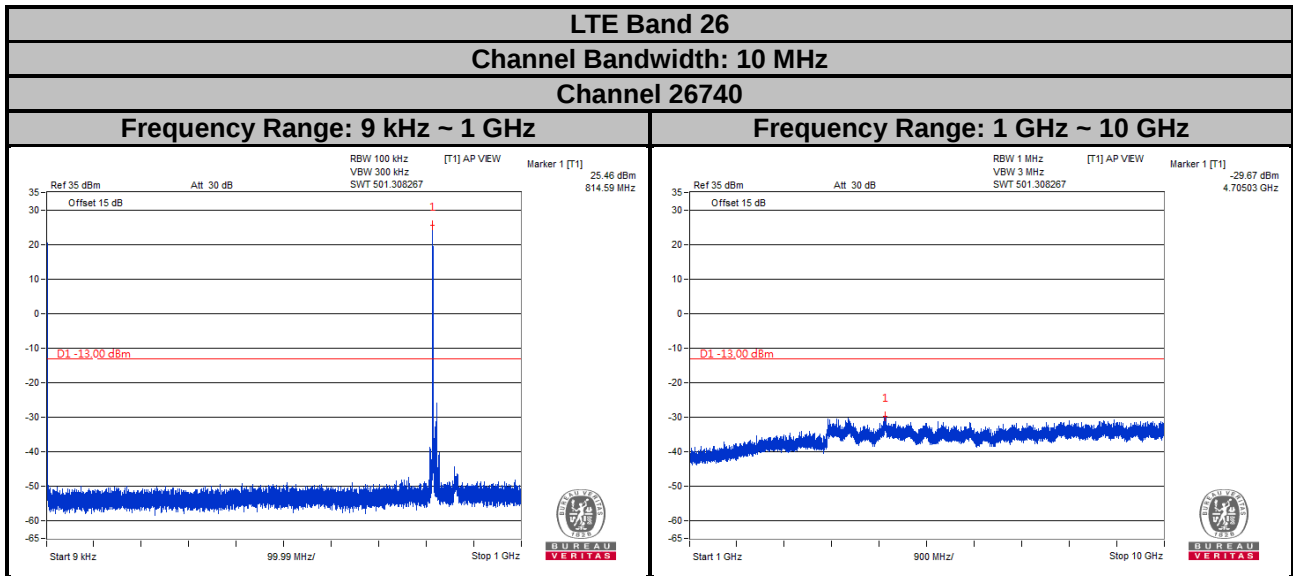

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

4.8 Radiated Emission Measurement

4.8.1 Limits of Radiated Emission Measurement

- (1) The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB. The limit of emission is equal to -13 dBm.
- (2) For operations in the 758-775 MHz and 788-805 MHz bands, all emissions including harmonics in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.

4.8.2 Test Procedure

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step a. Record the power level of S.G.
- c. $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$.
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, $E.R.P \text{ power} = E.I.P.R \text{ power} - 2.15 \text{ dB}$.


Note: The resolution bandwidth of spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz.

4.8.3 Deviation from Test Standard


No deviation.

4.8.4 Test Setup

<Radiated Emission below or equal 1 GHz>

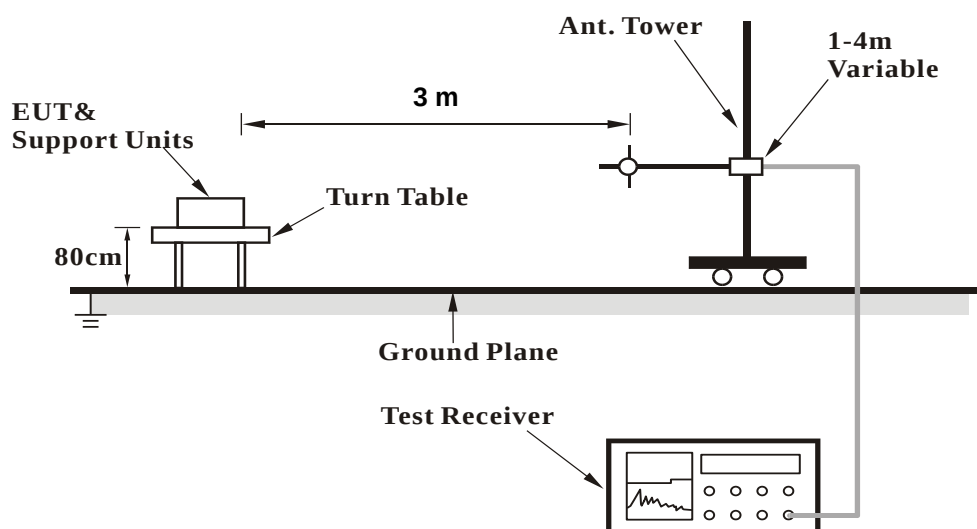

<Radiated Emission above 1 GHz>

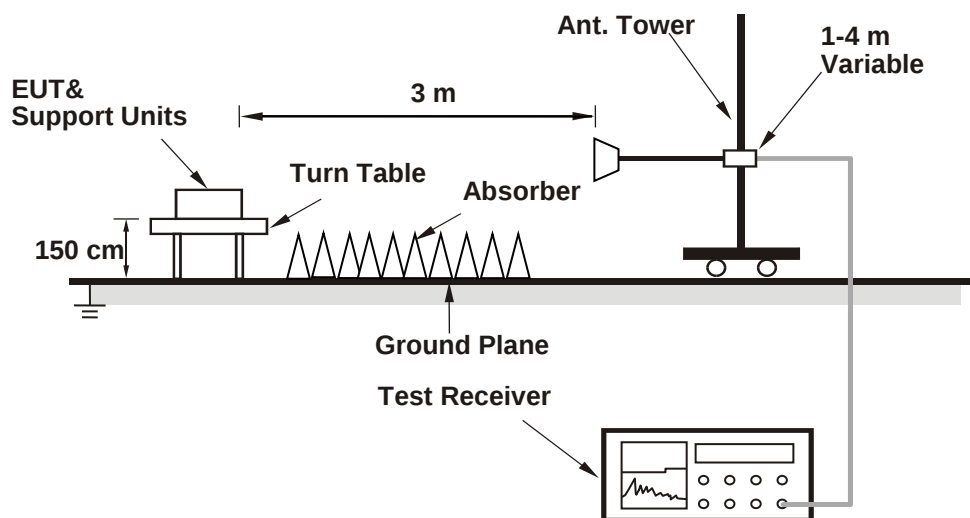

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.8.5 Test Results

CDMA:

Low Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

Date: 2018-10-21

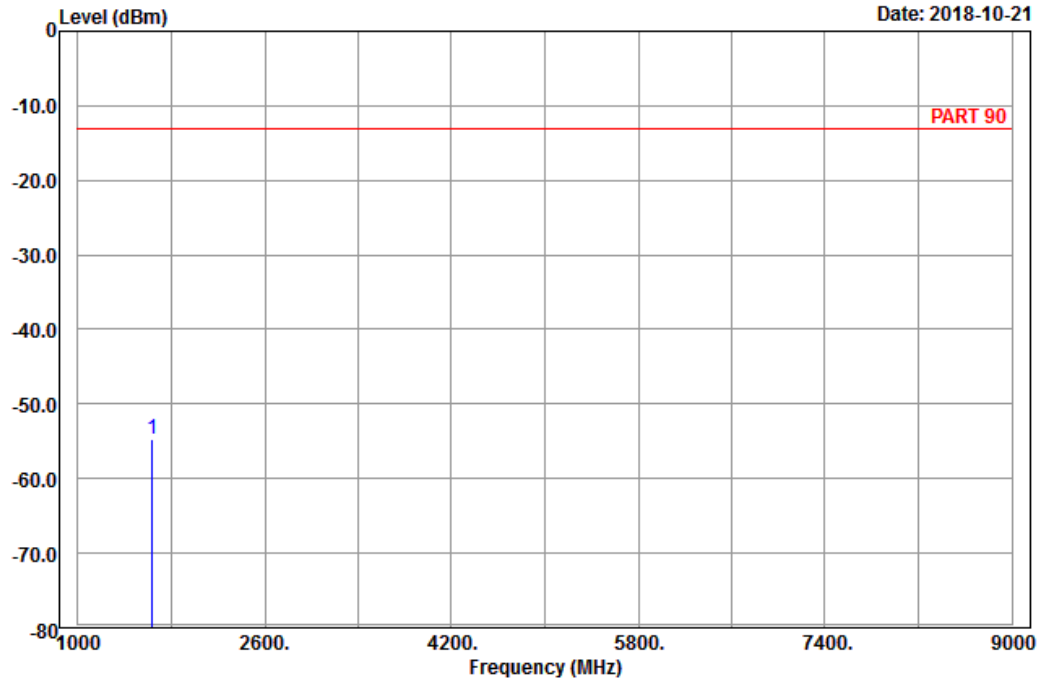

Site : 966 chamber 1
Condition: PART 90 Horizontal
Remark : BC 0_Link_CH476
Tested by: Charles Hsiao

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 1635.80	-54.78	-62.34	-13.00	-41.78	7.56	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 2018-10-21

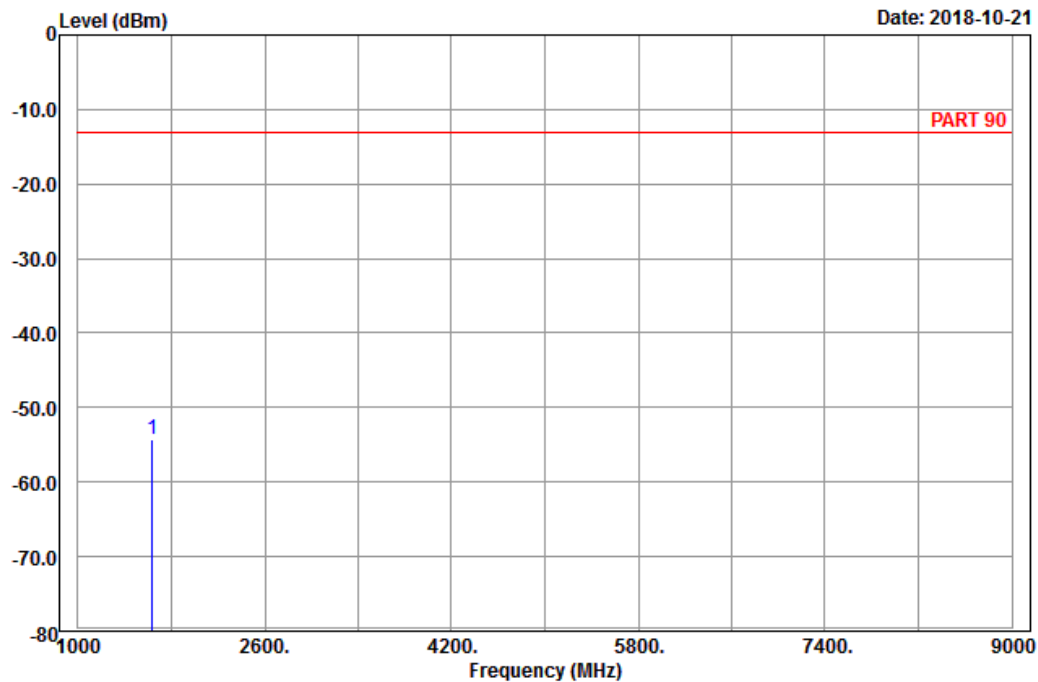

Site : 966 chamber 1
Condition: PART 90 Vertical
Remark : BC 0_Link_CH476
Tested by: Charles Hsiao

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 1635.80	-54.33	-61.89	-13.00	-41.33	7.56	Peak


Middle Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 9

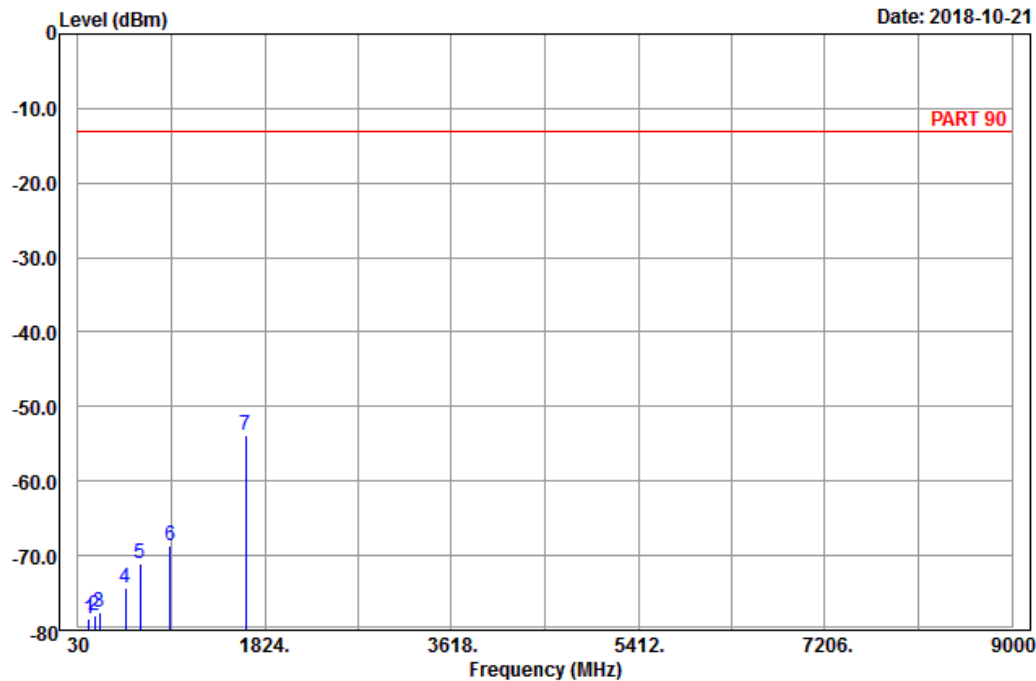

Site : 966 chamber 1
 Condition: PART 90 Horizontal
 Remark : BC 0_Link_CH580
 Tested by: Charles Hsiao

		Read	Limit	Over			
	Freq	Level	Level	Line	Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	132.60	-78.54	-70.88	-13.00	-65.54	-7.66	Peak
2	192.27	-78.12	-72.30	-13.00	-65.12	-5.82	Peak
3	238.17	-77.50	-71.84	-13.00	-64.50	-5.66	Peak
4	486.20	-74.32	-69.45	-13.00	-61.32	-4.87	Peak
5	624.80	-70.98	-71.13	-13.00	-57.98	0.15	Peak
6	914.60	-68.74	-72.28	-13.00	-55.74	3.54	Peak
7 pp	1641.00	-53.84	-61.57	-13.00	-40.84	7.73	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 10

Date: 2018-10-21

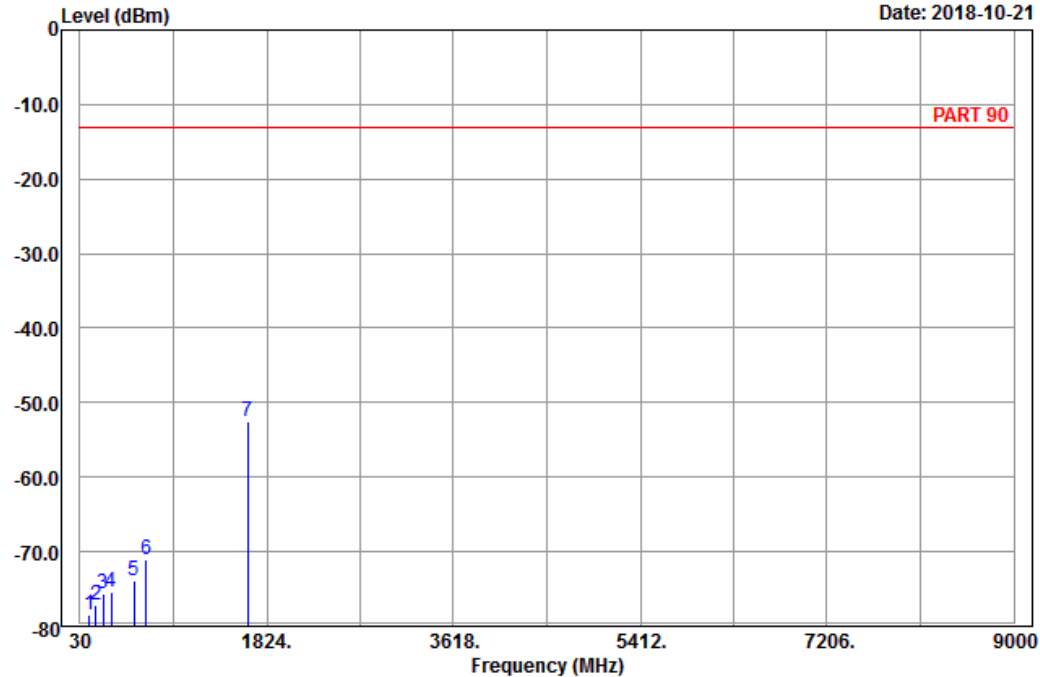

Site : 966 chamber 1
Condition: PART 90 Vertical
Remark : BC 0_Link_CH580
Tested by: Charles Hsiao

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	122.07	-78.44	-70.31	-13.00	-65.44	-8.13	Peak
2	185.52	-77.12	-71.47	-13.00	-64.12	-5.65	Peak
3	251.13	-75.57	-70.05	-13.00	-62.57	-5.52	Peak
4	332.90	-75.38	-69.80	-13.00	-62.38	-5.58	Peak
5	545.00	-73.80	-71.78	-13.00	-60.80	-2.02	Peak
6	663.30	-71.12	-70.92	-13.00	-58.12	-0.20	Peak
7 pp	1641.00	-52.57	-60.30	-13.00	-39.57	7.73	Peak


High Channel



Bureau Veritas Consumer Products Services Ltd.,Taoyuan Branch

A D T

Data: 3

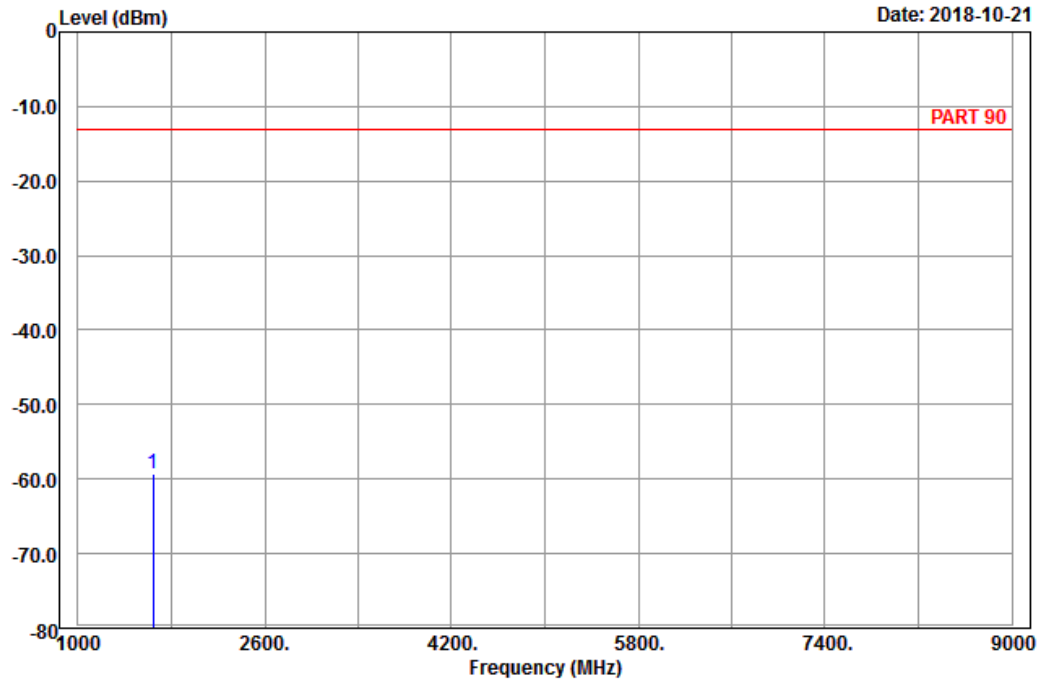

Site : 966 chamber 1
Condition: PART 90 Horizontal
Remark : BC 0_Link_CH684
Tested by: Charles Hsiao

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 1646.20	-59.24	-66.97	-13.00	-46.24	7.73	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 2018-10-21

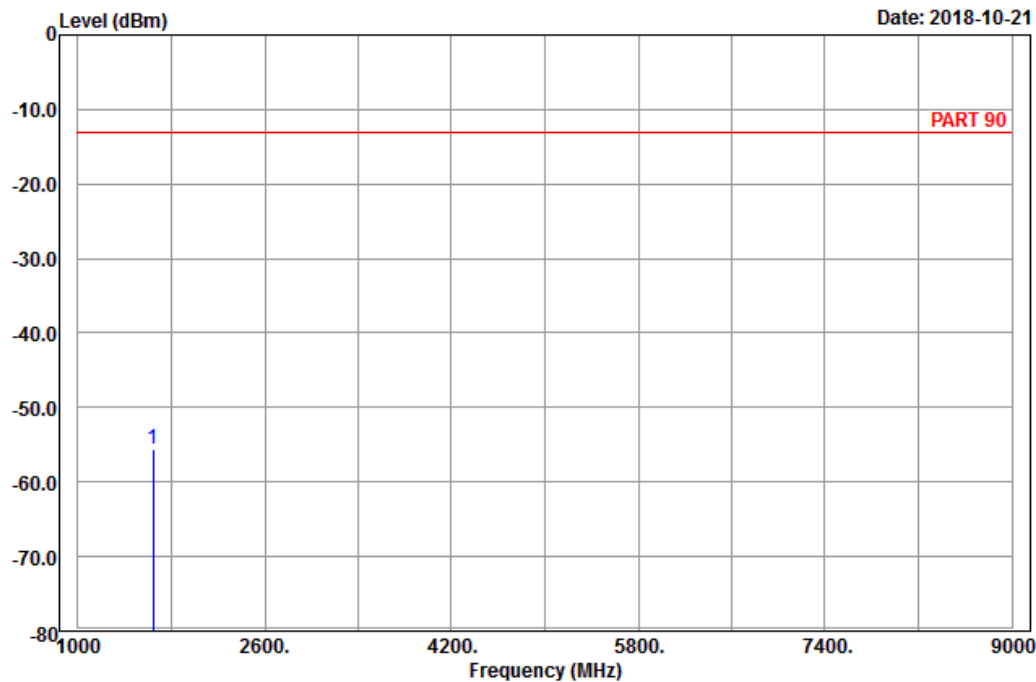

Site : 966 chamber 1
Condition: PART 90 Vertical
Remark : BC 0_Link_CH684
Tested by: Charles Hsiao

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 1646.20	-55.62	-63.35	-13.00	-42.62	7.73	Peak

LTE Band 14
Channel Bandwidth: 5 MHz / QPSK
Low Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

Date: 2018-10-21

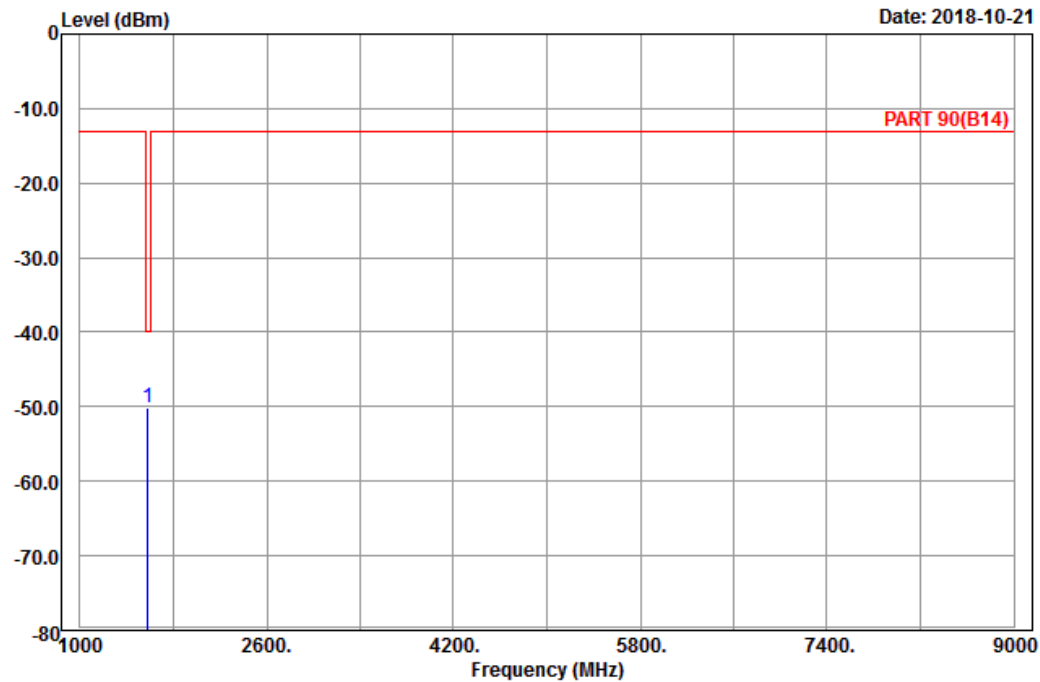

Site : 966 chamber 1
Condition: PART 90(B14) Horizontal
Remark : LTE_Band 14_Link_CH23305
Tested by: Karl Lee

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 1581.00	-50.17	-57.21	-40.00	-10.17	7.04	Peak




Bureau Veritas Consumer Products Services Ltd.,Taoyuan Branch

A D T

Data: 6

Date: 2018-10-21

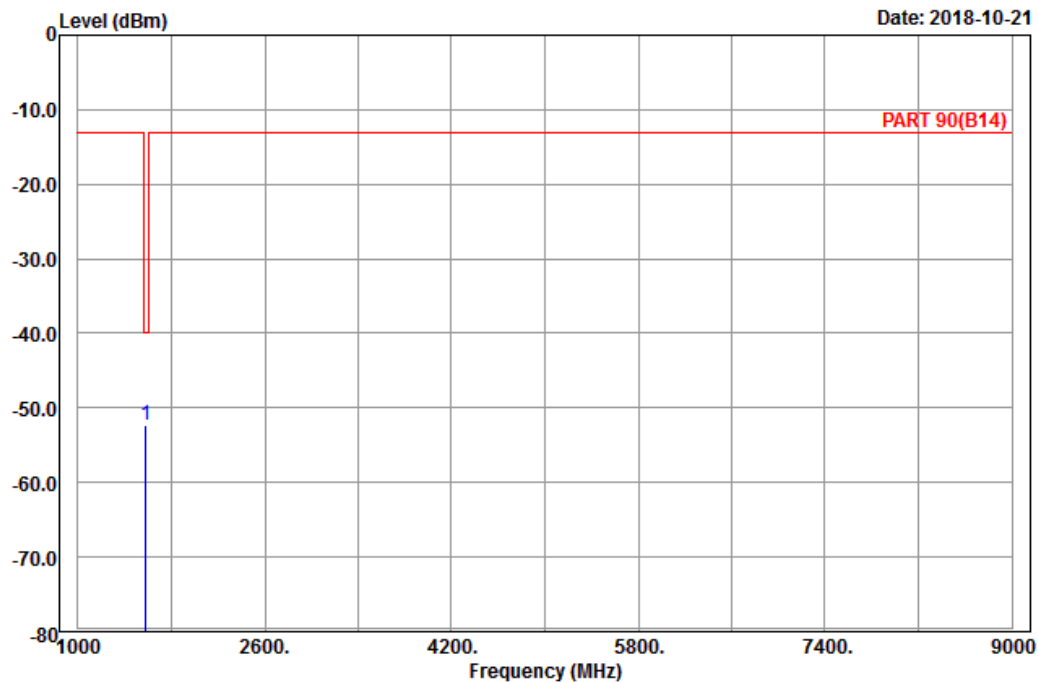

Site : 966 chamber 1
Condition: PART 90(B14) Vertical
Remark : LTE_Band 14_Link_CH23305
Tested by: Karl Lee

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1 pp	1581.00	-52.31	-59.35	-40.00	-12.31	7.04	Peak


Middle Channel



Bureau Veritas Consumer Products Services Ltd.,Taoyuan Branch

A D T

Data: 5

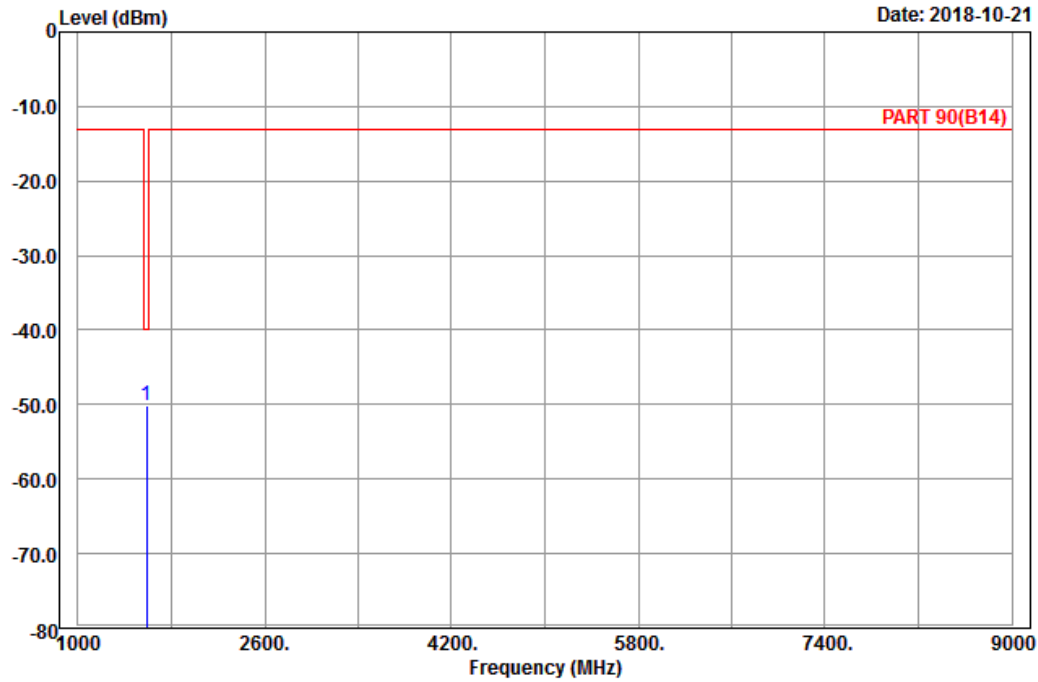

Site : 966 chamber 1
Condition: PART 90(B14) Horizontal
Remark : LTE_Band 14_Link_CH23330
Tested by: Karl Lee

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 1586.00	-50.20	-57.41	-40.00	-10.20	7.21	Peak




Bureau Veritas Consumer Products Services Ltd.,Taoyuan Branch

A D T

Data: 6

Date: 2018-10-21

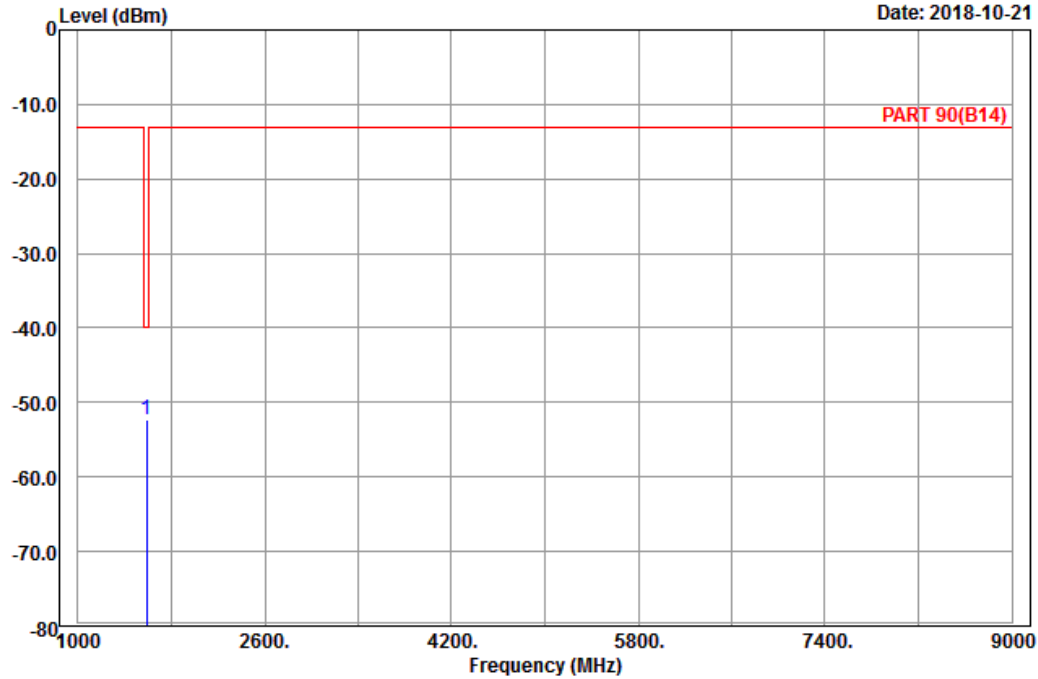

Site : 966 chamber 1
Condition: PART 90(B14) Vertical
Remark : LTE_Band 14_Link_CH23330
Tested by: Karl Lee

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 1586.00	-52.24	-59.45	-40.00	-12.24	7.21	Peak


High Channel



Bureau Veritas Consumer Products Services Ltd.,Taoyuan Branch

A D T

Data: 5

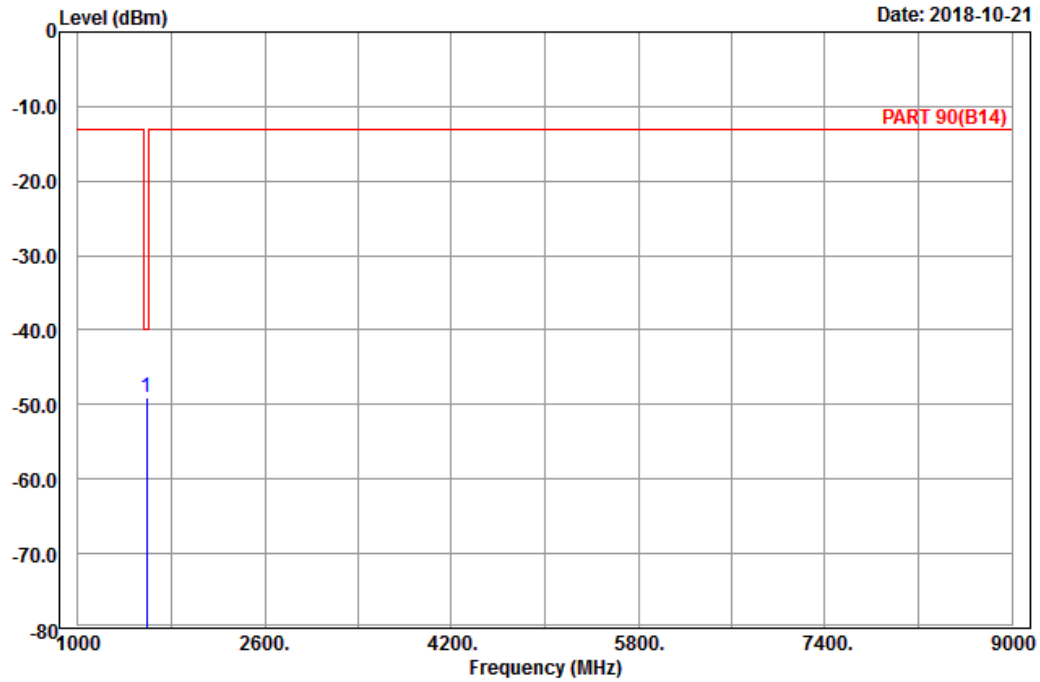

Site : 966 chamber 1
Condition: PART 90(B14) Horizontal
Remark : LTE_Band 14_Link_CH23355
Tested by: Karl Lee

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 1591.00	-49.02	-56.23	-40.00	-9.02	7.21	Peak




Bureau Veritas Consumer Products Services Ltd.,Taoyuan Branch

A D T

Data: 6

Date: 2018-10-21

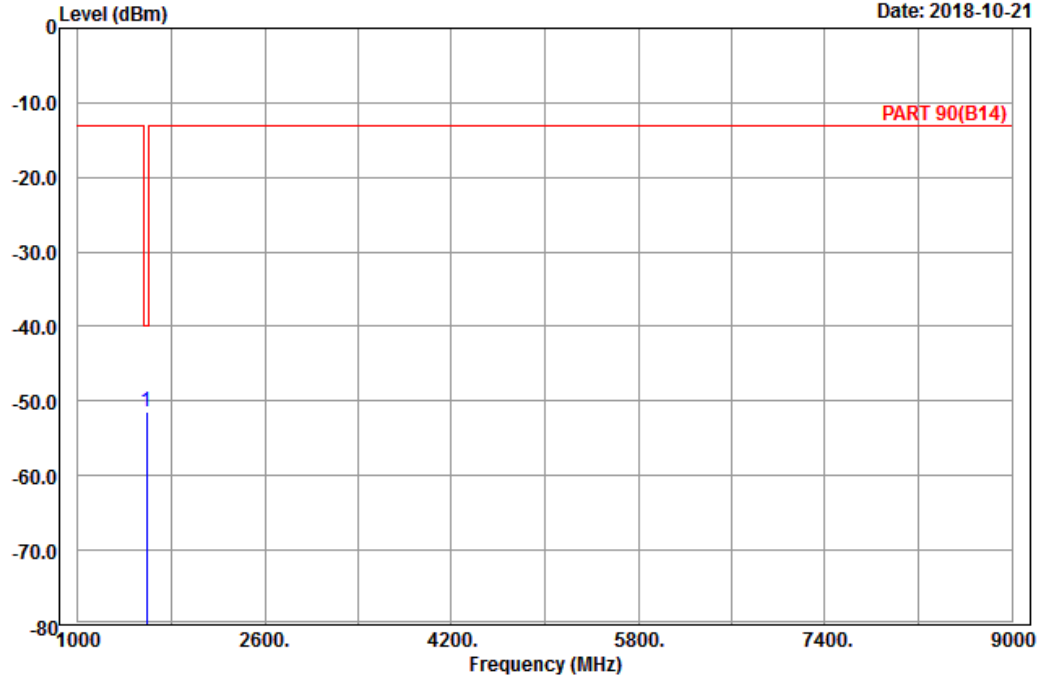

Site : 966 chamber 1
Condition: PART 90(B14) Vertical
Remark : LTE_Band 14_Link_CH23355
Tested by: Karl Lee

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 1591.00	-51.37	-58.58	-40.00	-11.37	7.21	Peak

Channel Bandwidth: 10 MHz / QPSK
Middle Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 9

Date: 2018-10-21

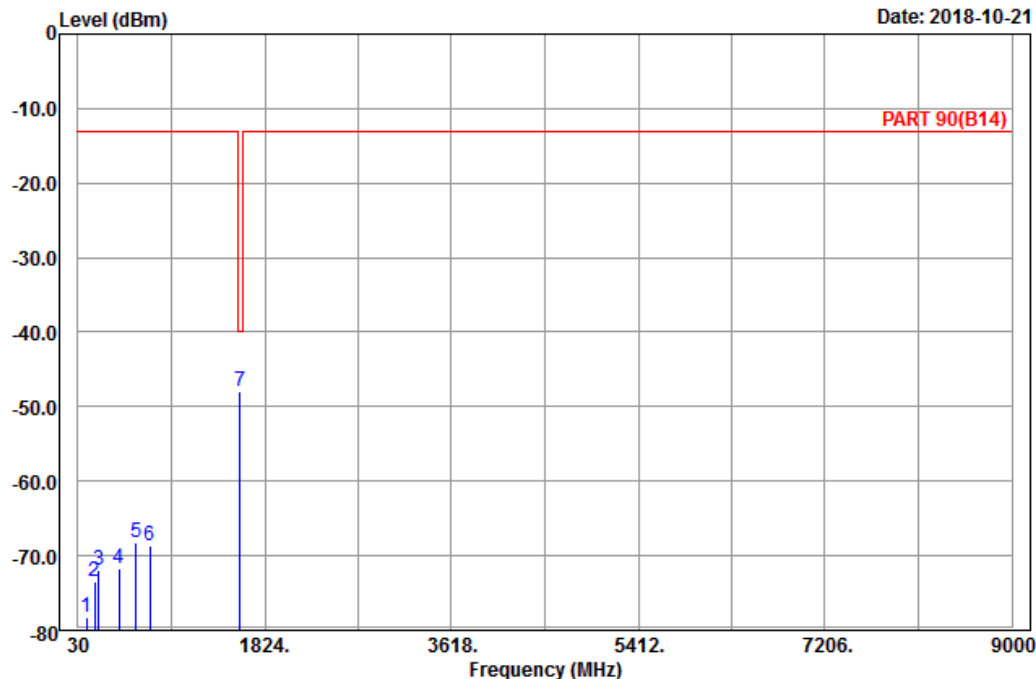

Site : 966 chamber 1
Condition: PART 90(B14) Horizontal
Remark : LTE_Band 14_Link_CH23330
Tested by: Karl Lee

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	108.03	-78.21	-69.03	-13.00	-65.21	-9.18	Peak
2	188.22	-73.55	-67.85	-13.00	-60.55	-5.70	Peak
3	227.64	-71.88	-66.07	-13.00	-58.88	-5.81	Peak
4	424.60	-71.62	-68.33	-13.00	-58.62	-3.29	Peak
5	590.50	-68.20	-68.23	-13.00	-55.20	0.03	Peak
6	716.50	-68.74	-68.05	-13.00	-55.74	-0.69	Peak
7 pp	1586.00	-47.89	-55.10	-40.00	-7.89	7.21	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 10

Date: 2018-10-21

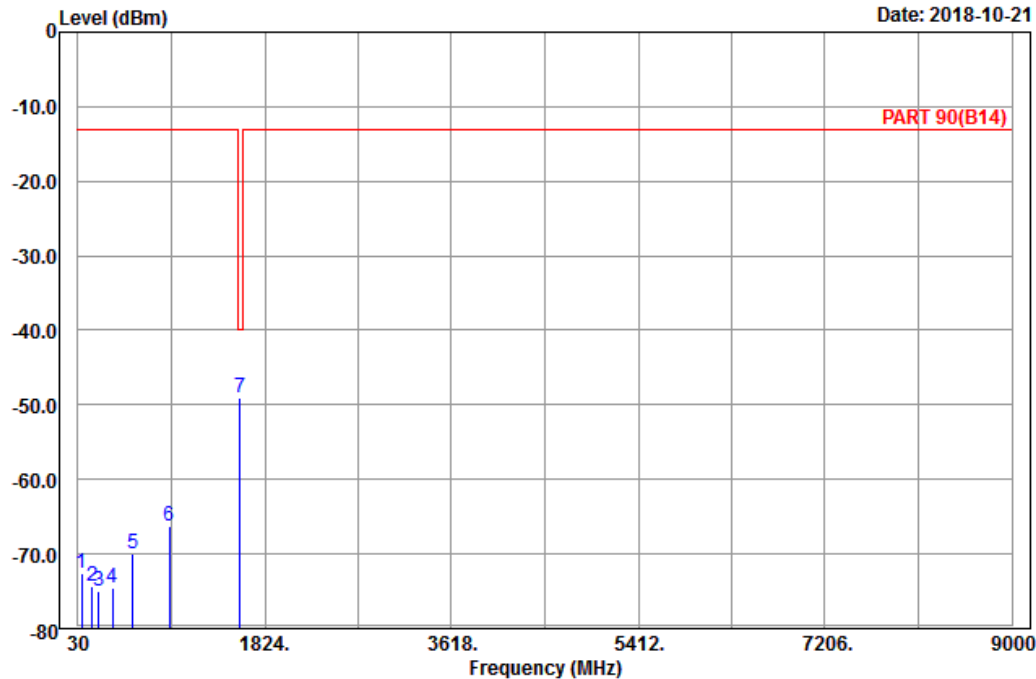

Site : 966 chamber 1
Condition: PART 90(B14) Vertical
Remark : LTE_Band 14_Link_CH23330
Tested by: Karl Lee

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	66.72	-72.57	-59.47	-13.00	-59.57	-13.10	Peak
2	165.27	-74.43	-67.24	-13.00	-61.43	-7.19	Peak
3	229.26	-74.96	-69.17	-13.00	-61.96	-5.79	Peak
4	365.10	-74.52	-69.92	-13.00	-61.52	-4.60	Peak
5	556.20	-70.06	-68.64	-13.00	-57.06	-1.42	Peak
6	906.20	-66.35	-69.50	-13.00	-53.35	3.15	Peak
7 pp	1586.00	-49.13	-56.34	-40.00	-9.13	7.21	Peak

LTE Band 26
Channel Bandwidth: 1.4 MHz / QPSK
Low Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

Date: 2018-10-19

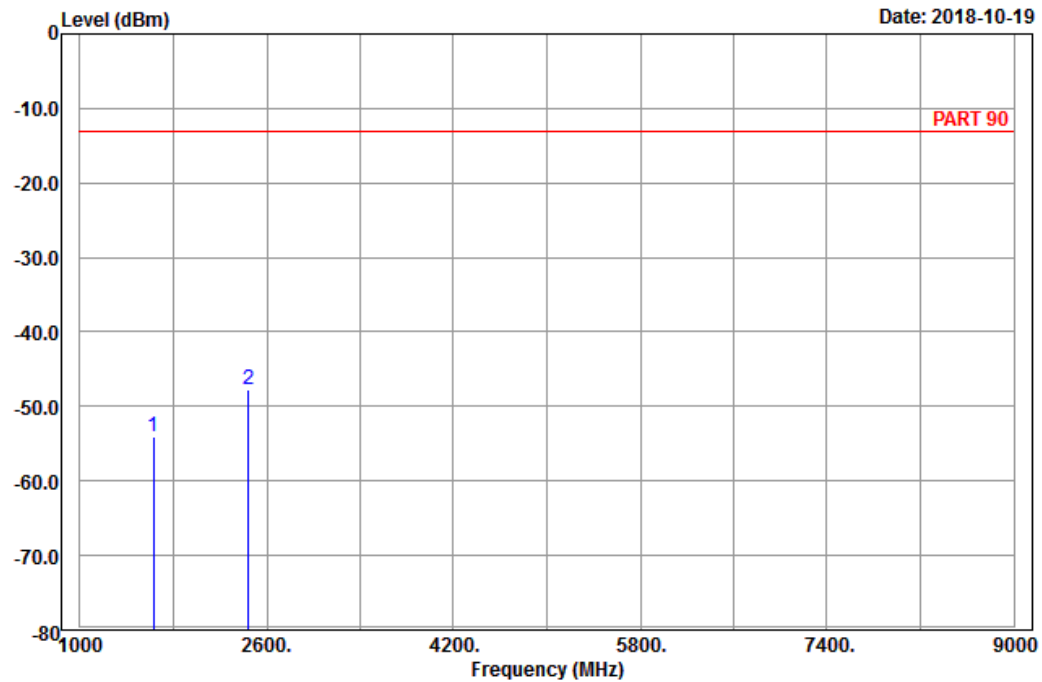

Site : 966 chamber 1
Condition: PART 90 Horizontal
Remark : LTE_Band 26_Link_CH26697
Tested by: Charles Hsiao

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1	1629.40	-54.07	-61.63	-13.00	-41.07	7.56 Peak
2 pp	2444.10	-47.78	-58.78	-13.00	-34.78	11.00 Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 6

Date: 2018-10-19

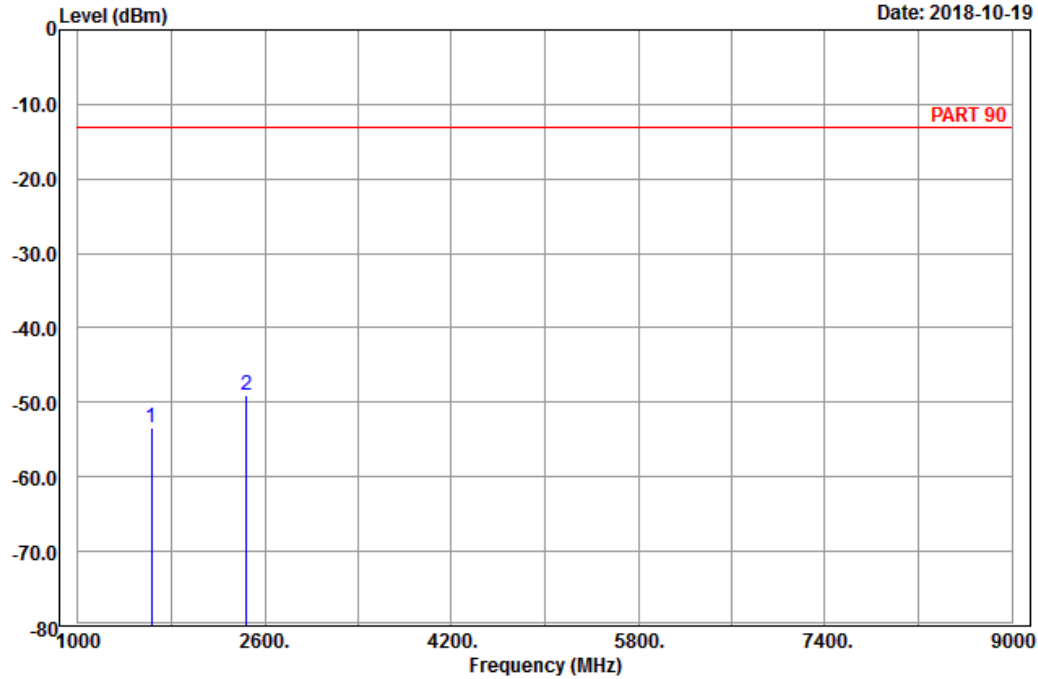

Site : 966 chamber 1
Condition: PART 90 Vertical
Remark : LTE_Band 26_Link_CH26697
Tested by: Charles Hsiao

			Read	Limit	Over		
	Freq	Level	Level	Line	Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	1629.40	-53.46	-61.02	-13.00	-40.46	7.56	Peak
2	pp 2444.10	-49.12	-60.12	-13.00	-36.12	11.00	Peak


Middle Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

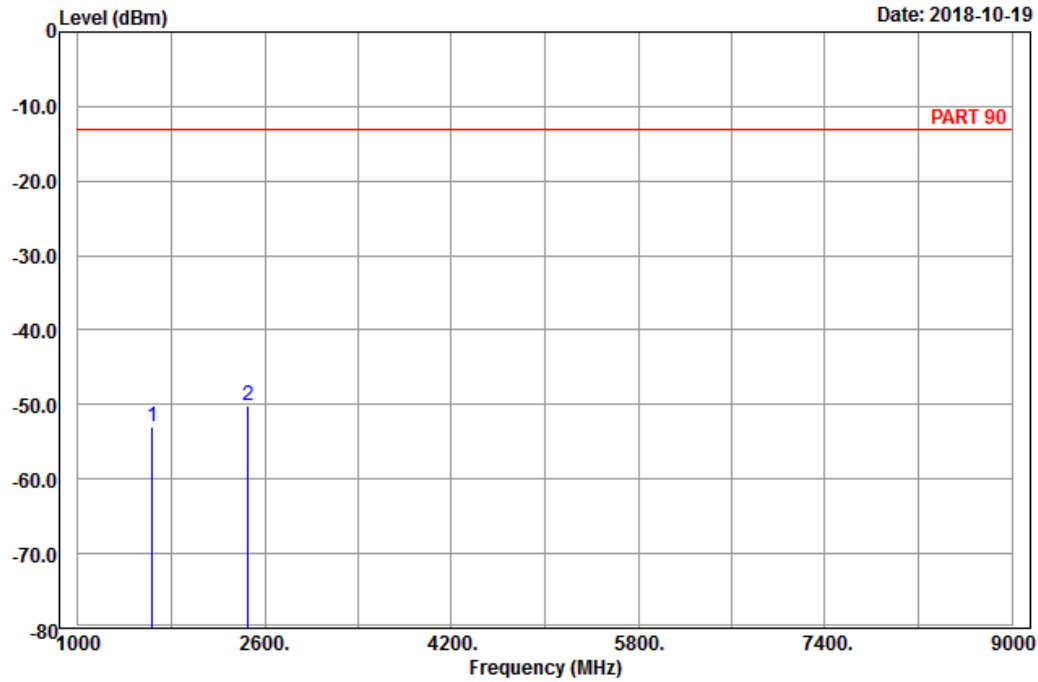

Site : 966 chamber 1
 Condition: PART 90 Horizontal
 Remark : LTE_Band 26_Link_CH26740
 Tested by: Charles Hsiao

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1	1638.00	-52.98	-60.54	-13.00	-39.98	7.56 Peak
2 pp	2457.00	-50.12	-61.14	-13.00	-37.12	11.02 Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 6

Date: 2018-10-19

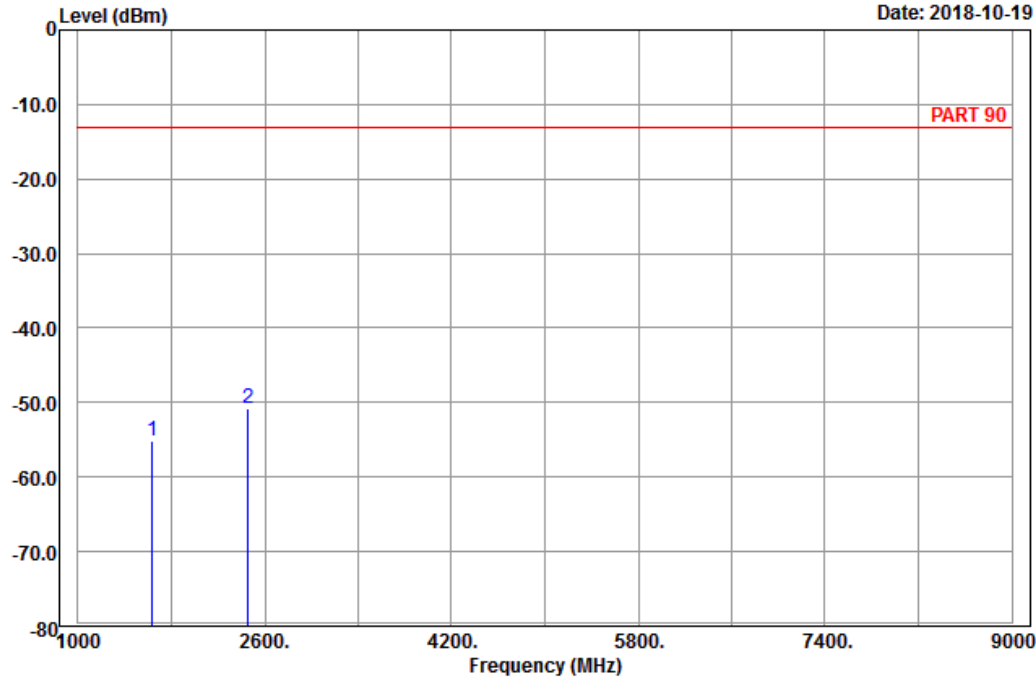

Site : 966 chamber 1
Condition: PART 90 Vertical
Remark : LTE_Band 26_Link_CH26740
Tested by: Charles Hsiao

			Read	Limit	Over		
	Freq	Level	Level	Line	Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	1638.00	-55.14	-62.70	-13.00	-42.14	7.56	Peak
2	2457.00	-50.79	-61.81	-13.00	-37.79	11.02	Peak


High Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

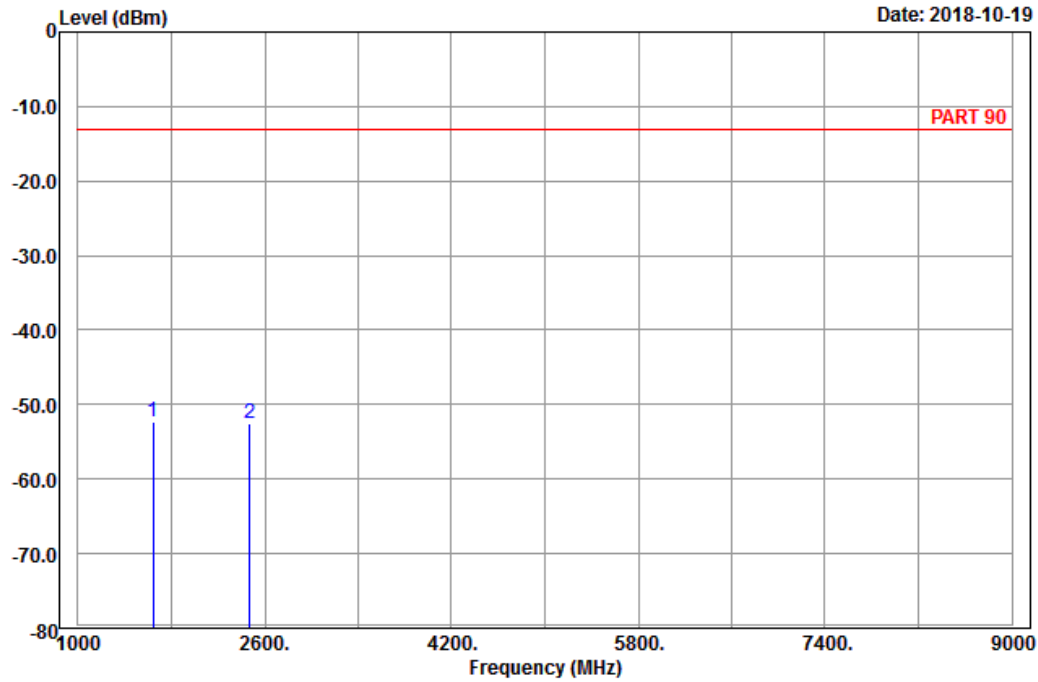

Site : 966 chamber 1
 Condition: PART 90 Horizontal
 Remark : LTE_Band 26_Link_CH26783
 Tested by: Charles Hsiao

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp	1646.60	-52.33	-60.06	-13.00	-39.33	7.73 Peak
2	2469.90	-52.57	-63.60	-13.00	-39.57	11.03 Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 6

Date: 2018-10-19

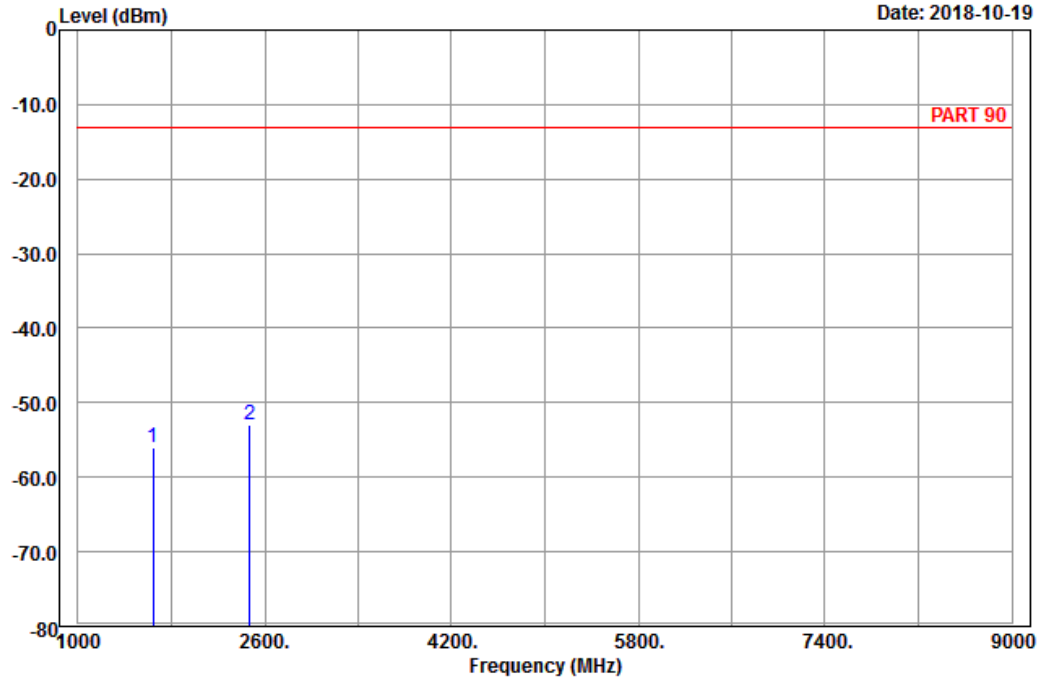

Site : 966 chamber 1
Condition: PART 90 Vertical
Remark : LTE_Band 26_Link_CH26783
Tested by: Charles Hsiao

			Read	Limit	Over		
	Freq	Level	Level	Line	Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	1646.60	-55.98	-63.71	-13.00	-42.98	7.73	Peak
2	2469.90	-52.99	-64.02	-13.00	-39.99	11.03	Peak

Channel Bandwidth: 5 MHz / QPSK
Low Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

Date: 2018-10-19

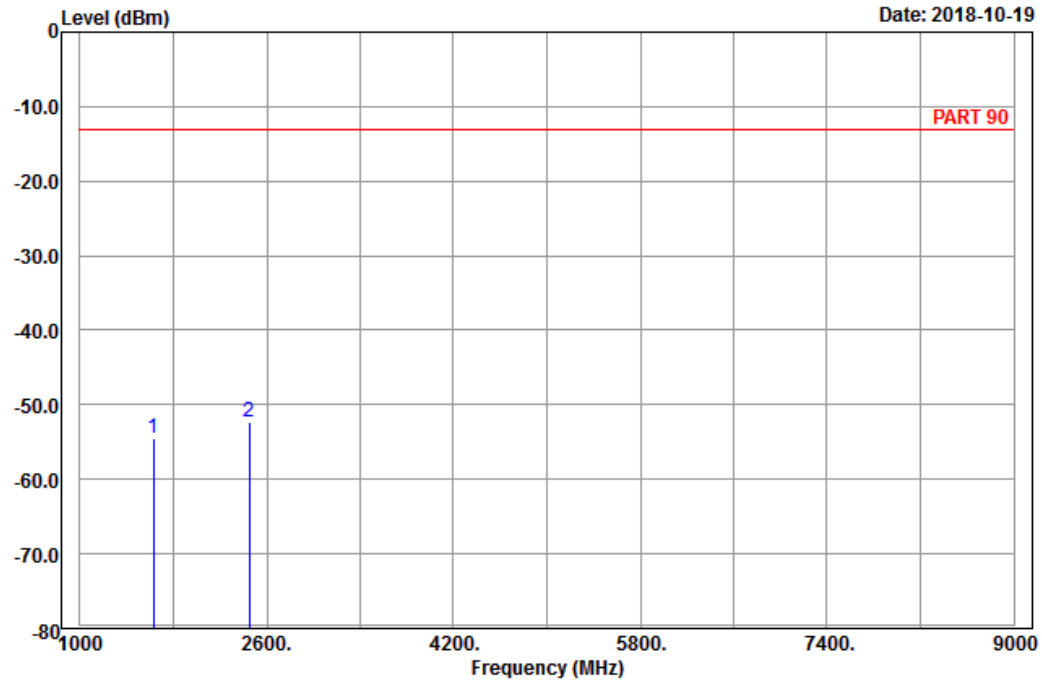

Site : 966 chamber 1
Condition: PART 90 Horizontal
Remark : LTE_Band 26_Link_CH26715
Tested by: Karl Lee

		Read	Limit	Over			
	Freq	Level	Level	Line	Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	1633.00	-54.57	-62.13	-13.00	-41.57	7.56	Peak
2 pp	2449.50	-52.27	-63.29	-13.00	-39.27	11.02	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 6

Date: 2018-10-19

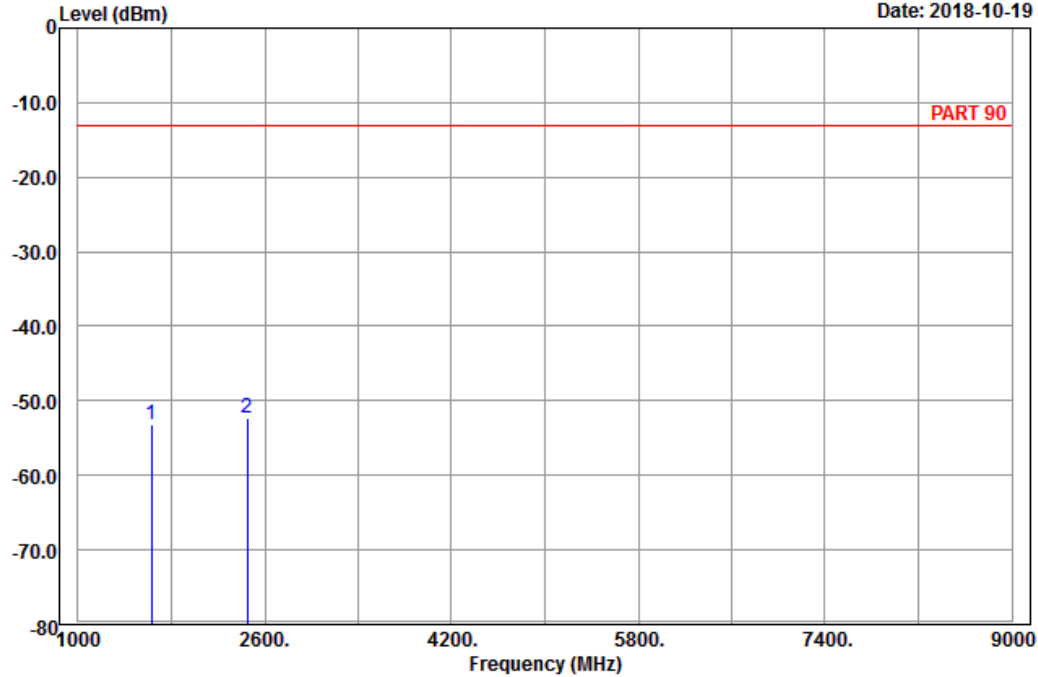

Site : 966 chamber 1
Condition: PART 90 Vertical
Remark : LTE_Band 26_Link_CH26715
Tested by: Karl Lee

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	1633.00	-53.18	-60.74	-13.00	-40.18	7.56	Peak
2 pp	2449.50	-52.22	-63.24	-13.00	-39.22	11.02	Peak


Middle Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

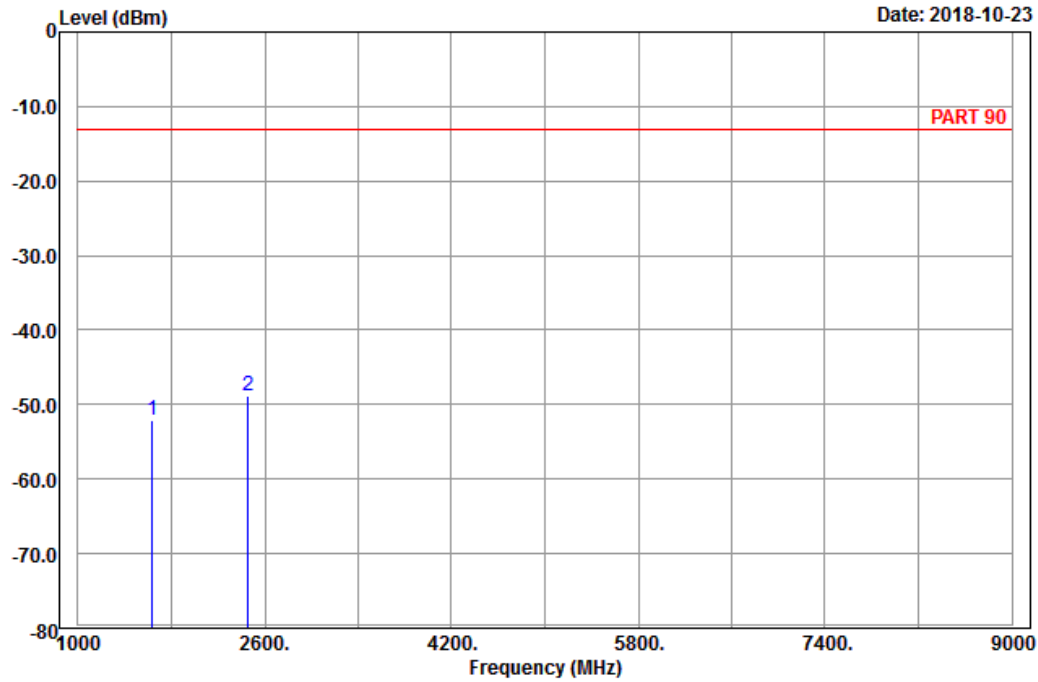

Site : 966 chamber 1
 Condition: PART 90 Horizontal
 Remark : LTE_Band 26_Link_CH26740
 Tested by: Karl Lee

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1	1638.00	-52.14	-59.70	-13.00	-39.14	7.56 Peak
2 pp	2457.00	-48.77	-59.79	-13.00	-35.77	11.02 Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 6

Date: 2018-10-23

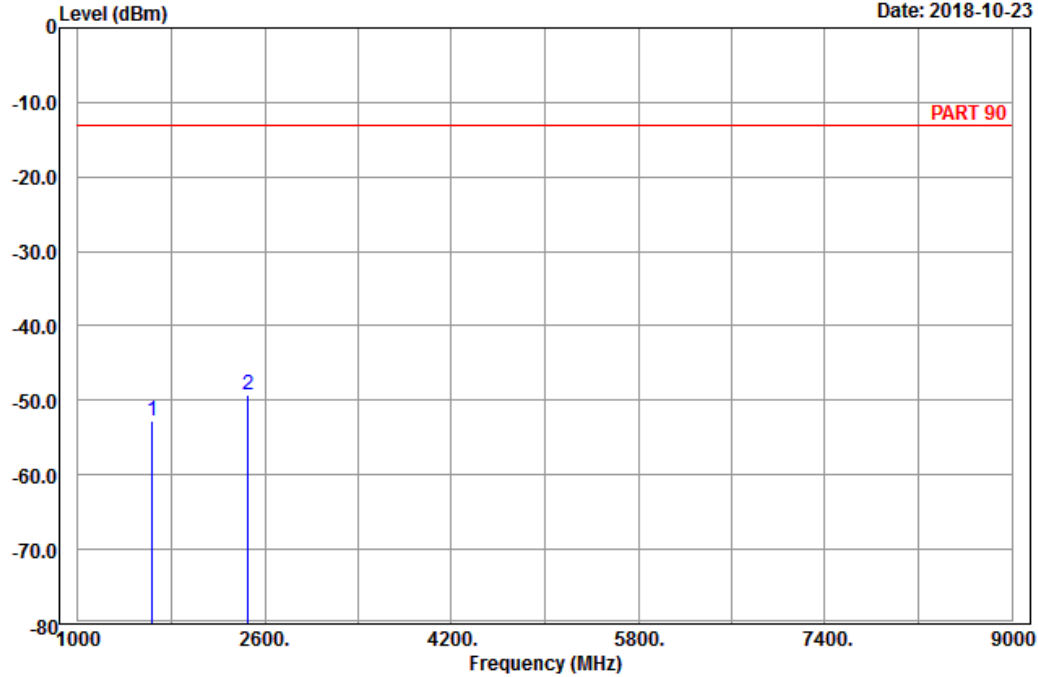

Site : 966 chamber 1
Condition: PART 90 Vertical
Remark : LTE_Band 26_Link_CH26740
Tested by: Karl Lee

			Read	Limit	Over		
	Freq	Level	Level	Line	Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	1638.00	-52.65	-60.21	-13.00	-39.65	7.56	Peak
2 pp	2457.00	-49.23	-60.25	-13.00	-36.23	11.02	Peak


High Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

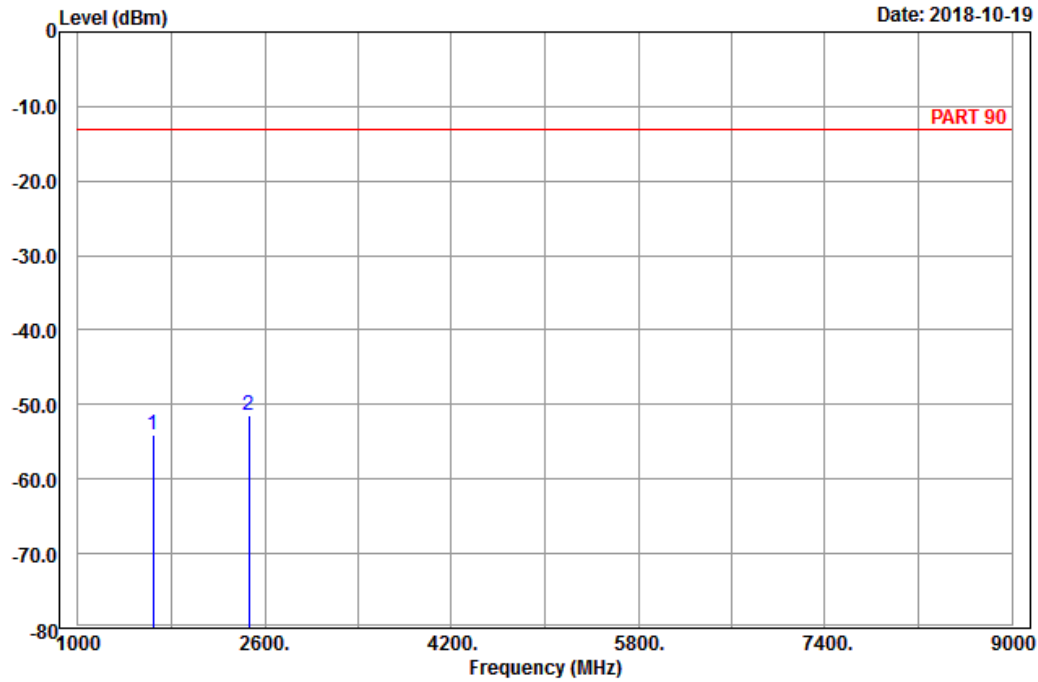

Site : 966 chamber 1
 Condition: PART 90 Horizontal
 Remark : LTE_Band 26_Link_CH26765
 Tested by: Karl Lee

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1	1643.00	-54.07	-61.80	-13.00	-41.07	7.73 Peak
2 pp	2464.50	-51.34	-62.36	-13.00	-38.34	11.02 Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 6

Date: 2018-10-19

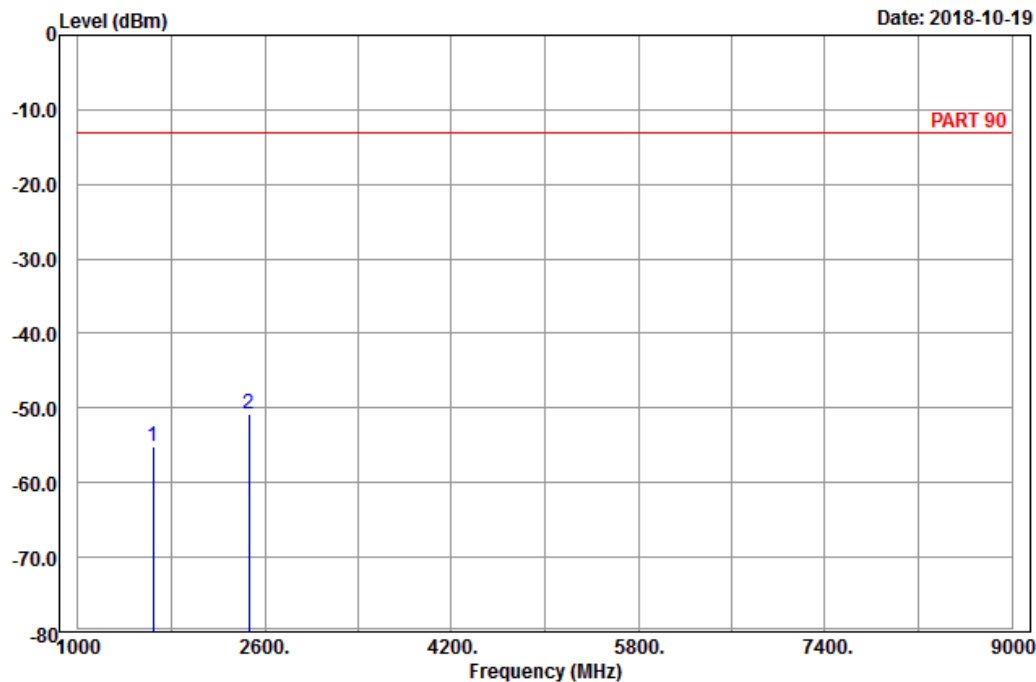

Site : 966 chamber 1
Condition: PART 90 Vertical
Remark : LTE_Band 26_Link_CH26765
Tested by: Karl Lee

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	1643.00	-55.20	-62.93	-13.00	-42.20	7.73	Peak
2 pp	2464.50	-50.86	-61.88	-13.00	-37.86	11.02	Peak

Channel Bandwidth: 10 MHz / QPSK
Middle Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 9

Date: 2018-10-19

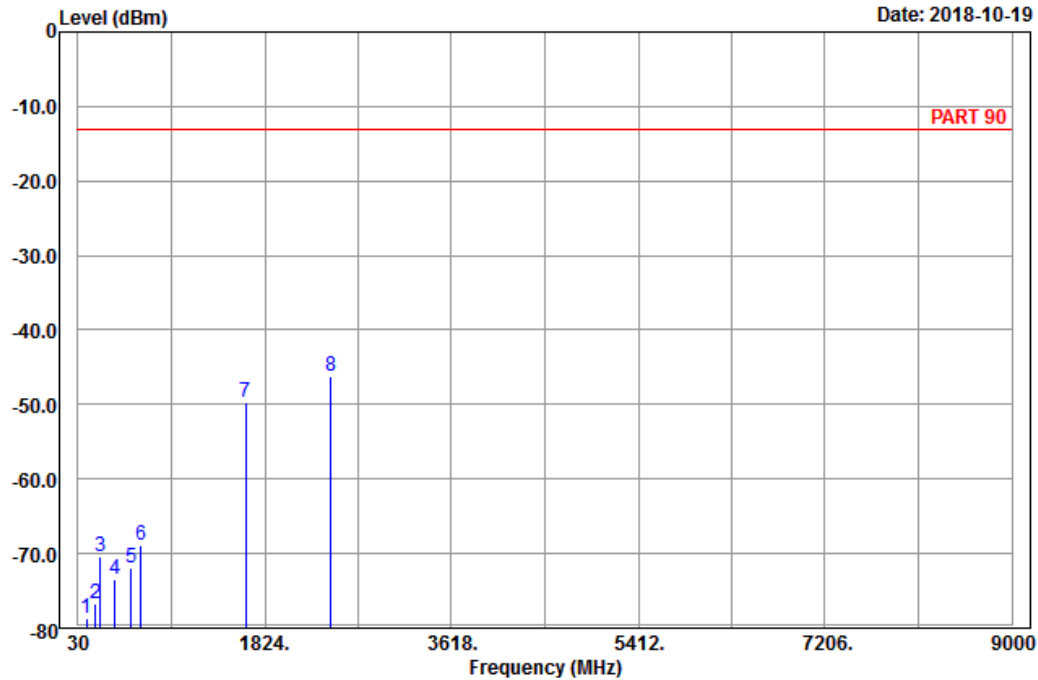

Site : 966 chamber 1
Condition: PART 90 Horizontal
Remark : LTE_Band 26_Link_CH26740
Tested by: Karl Lee

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	113.97	-78.77	-70.14	-13.00	-65.77	-8.63	Peak
2	196.86	-76.67	-70.62	-13.00	-63.67	-6.05	Peak
3	241.14	-70.50	-64.88	-13.00	-57.50	-5.62	Peak
4	381.20	-73.37	-69.65	-13.00	-60.37	-3.72	Peak
5	539.40	-71.98	-69.54	-13.00	-58.98	-2.44	Peak
6	636.70	-68.93	-68.95	-13.00	-55.93	0.02	Peak
7	1638.00	-49.61	-57.17	-13.00	-36.61	7.56	Peak
8 pp	2457.00	-46.12	-57.14	-13.00	-33.12	11.02	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 10

Date: 2018-10-19

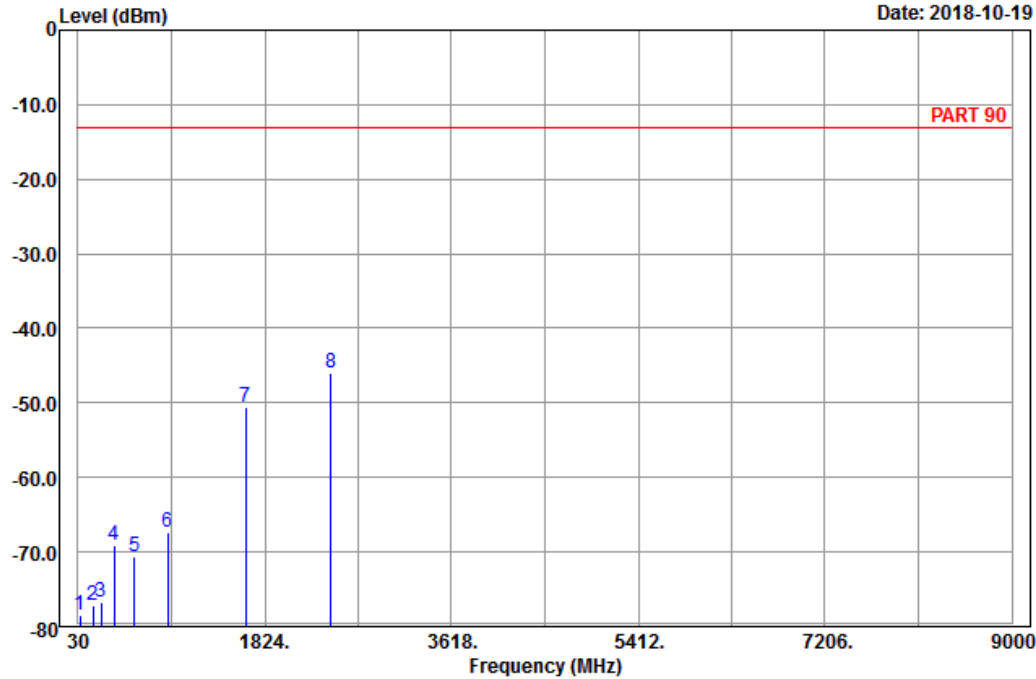

Site : 966 chamber 1
 Condition: PART 90 Vertical
 Remark : LTE_Band 26_Link_CH26740
 Tested by: Karl Lee

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	48.63	-78.45	-65.02	-13.00	-65.45	-13.43	Peak
2	172.56	-77.19	-70.79	-13.00	-64.19	-6.40	Peak
3	252.21	-76.75	-71.23	-13.00	-63.75	-5.52	Peak
4	377.00	-69.08	-65.15	-13.00	-56.08	-3.93	Peak
5	568.80	-70.63	-69.73	-13.00	-57.63	-0.90	Peak
6	888.70	-67.38	-69.93	-13.00	-54.38	2.55	Peak
7	1638.00	-50.66	-58.22	-13.00	-37.66	7.56	Peak
8 pp	2457.00	-46.01	-57.03	-13.00	-33.01	11.02	Peak

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---