

## Test Report

Test Report Number	EOTEL094
Applied Standard(s)	FCC Part15 Subpart C / RSS210 / RSS-Gen
Date of Issue	26th December, 2014
Testing Laboratory Address	Astronaut Noborito Laboratory 294 Noborito, Tama-ku Kawasaki-shi, Kanagawa, 214-0014 Japan
Test Date(s)	25th December, 2014
Product Name	Digital Signage
Model Number	MG-31MBPACK
Serial Number	—
Applicant (Client) Address	CASIO COMPUTER CO., LTD. 2-1, Sakaecho 3-chome, Hamura-shi, Tokyo 205-8555, Japan
Manufacturer Address	YAMAGATA CASIO CO., LTD. 5400-1 Higashine-ko, Higashine-city, Yamagata, 999-3701 Japan

## Test Result

The test result for the electromagnetic compatibility tests as described in the section 1 to 2 and in this page was:

**Pass**

Tested by: <u>Katsutoshi Hatanaka</u> Katsutoshi Hatanaka Test Enginner	Approved by: <u>Koji Imai</u> Koji Imai Testing Group Leader
---	--

Checked box (☒) indicates that the listed condition, standard or equipment is applicable for this Report.  
Blank box (☐) indicates that the listed condition, standard or equipment is not applicable for this Report.  
It is not allowed to copy this report, except in full, without written permission of the test laboratory.  
Test results of this report refer only to the EUT tested here.

	Page
Cover Page.....	1
Table of Contents.....	2
1. Summary.....	3
1.1 Terms and definitions .....	3
1.2 Standard(s) and Result.....	3
1.3 Deviations from Standard(s).....	4
1.4 Antenna Requirements.....	4
2. Equipment Under Test (EUT).....	5
2.1 General Descriptions .....	5
2.2 Detailed Descriptions.....	5
2.3 Operation Mode(s) of the EUT for EMC the Test(s) .....	5
2.4 Labeling Requirements.....	6
2.5 Measurement Condition .....	6
3. Test Data.....	8
3.1 Test specification.....	8
3.2 20dB Bandwidth/99% Bandwidth.....	9
3.3 Frequency Stability Tolerance .....	11
3.4 In-Band Radiated Spurious Emission .....	12
3.5 Out-of-Band Radiated Spurious Emission .....	12
3.6 Line Conducted Measurement Data .....	16
4. Test facility .....	18
4.1 Test Instruments.....	18
4.2 Test equipment.....	18

## 1. Summary

### 1.1 Terms and definitions

**AV**  
Average

**DoC**  
Declaration of Conformity

**EUT**  
Equipment Under Test

**QP**  
Quasi-peak

### 1.2 Standard(s) and Result

Applied Standard(s)	Normative Reference(s)	Test Limit	FCC Part and	Result	Reference Clause No.
FCC Part15 Subpart C	20dB Bandwidth 99% Bandwidth	within 13.110 - 14.010MHz	15.215(c) N/A	Pass	3.2
	Frequency Stability Tolerance	±0.01% of Operating Frequency	15.225(e) RSS-210 A2.6	Pass	3.3
	In-Band Emissions	15.848μV/m @30m 13.553 - 13.567 MHz  334μV/m @30m 13.410 - 13.553 MHz 13.567 - 13.710 MHz  106μV/m @30m 13.110 - 13.410 MHz 13.710 - 14.010 MHz	15.225 (a)(b)(c) RSS-210 A2.6(a)(b)(c)	Pass	3.4
	Out-of-Band Emissions	Emissions outside of the specified band (13.110 - 14.010 MHz) must meet the radiated limits detailed in FCC15.209 or RSS-210 A2.6(d)	15.225(d), 15.209 RSS-210 A2.6(d)	Pass	3.5
	AC Conducted Emission 150 kHz - 30 MHz	< FCC 15.207 limits or RSS-Gen table 2 limits>	15.207 RSS-Gen 7.2.2	Pass	3.6

**Table1 Standard and result**

### 1.3 Deviations from Standard(s)

There was no deviation from the standard.

### 1.4 Antenna Requirements

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

The antennas are permanently attached.

There are no provisions for connection to an external antenna

Conclusion:

The CASIO COMPUTER CO., LTD. , Digital Signage,FCC ID: BBQ-MG31MBPACK equipment complies with the requirement of §15.203.

### 1.5 Modular transmitter Requirements

Excerpt from §15.212 of the FCC Rules/Regulations:

“Single modular transmitters must meet the following requirements to obtain a modular transmitter approval.”

- (i) The radio elements of the modular transmitter must have their own shielding. The physical crystal and tuning capacitors may be located external to the shielded radio elements.
- (ii) The modular transmitter must have buffered modulation/data inputs (if such inputs are provided) to ensure that the module will comply with Part 15 requirements under conditions of excessive data rates or over-modulation.
- (iii) The modular transmitter must have its own power supply regulation.
- (iv) The modular transmitter must comply with the antenna and transmission system requirements of Sections 15.203, 15.204(b) and 15.204(c). The antenna must either be permanently attached or employ a “unique” antenna coupler (at all connections between the module and the antenna, including the cable). The “professional installation” provision of Section 15.203 is not applicable to modules but can apply to limited modular approvals under paragraph (b) of this section.
- (v) The modular transmitter must be tested in a stand-alone configuration, i.e., the module must not be inside another device during testing for compliance with Part 15 requirements. Unless the transmitter module will be battery powered, it must comply with the AC line conducted requirements found in Section 15.207. AC or DC power lines and data input/output lines connected to the module must not contain ferrites, unless they will be marketed with the module (see Section 15.27(a)). The length of these lines shall be the length typical of actual use or, if that length is unknown, at least 10 centimeters to insure that there is no coupling between the case of the module and supporting equipment. Any accessories, peripherals, or support equipment connected to the module during testing shall be unmodified and commercially available (see Section 15.31(i)).
- (vi) The modular transmitter must be equipped with either a permanently affixed label or must be capable of electronically displaying its FCC identification number.
- (vii) The modular transmitter must comply with any specific rules or operating requirements that ordinarily apply to a complete transmitter and the manufacturer must provide adequate instructions along with the module to explain any such requirements. A copy of these instructions must be included in the application for equipment authorization.
- (viii) The modular transmitter must comply with any applicable RF exposure requirements in its final configuration.

## 2. Equipment Under Test (EUT)

### 2.1 General Descriptions

The TR63024 is a highly integrated IC Card Reader/Writer contactless communication at 13.56 MHz. It operates from a single +5 V supply DC, the upper interface allows you to select the UART or USB. Corresponding RF telecommunications standard corresponds to four kinds "ISO/IEC14443-A, B, JIS X 6319-4, ISO/IEC15693."

### 2.2 Detailed Descriptions

Product Name	Digital Signage
Model Number	MG-31MBPACK
Serial Number	—
Power Supply	AC120V
Dimension	268mm(W) x 350mm(D) x 110mm(H)
Operating Frequency	13.56MHz
Equipment Category	Indoor equipment
Normal Placement	Table-top
Condition of the EUT	Prototype
FCC ID	BBQ-MG31MBPACK
Industry Canada	—
Company Number and UPN Number	—

**Table2 Detailed Description**

### 2.3 WORST-CASE CONFIGURATION AND MODE

#### (a) EUT axes

The fundamental was measured in three different orientations X, Y and Z to find worst-case orientation, and it was found that Y orientation is worst-case; therefore final testing for radiated emissions was performed with EUT in Y orientation with Cable.

#### (b) Communication standard

The EUT supports following 4 communication standards.

ASK 106kbps  
ASK 212kbps  
ASK 424kbps  
ASK 837kbps

The fundamental level and spurious level were measured in 4 standards.  
The ASK 837kbps was selected as a worst case of standard.

## 2.4 Labeling Requirements

Per 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the trade name and FCC ID must be displayed on the device per Section 15.19(b)(2). Please see attachment for FCC ID label and label location.

## 2.5 Measurement Condition

### 2.5.1 EUT Operation

The EUT was measured by transmitter mode continuously.

### 2.5.2 Configuration and Peripherals

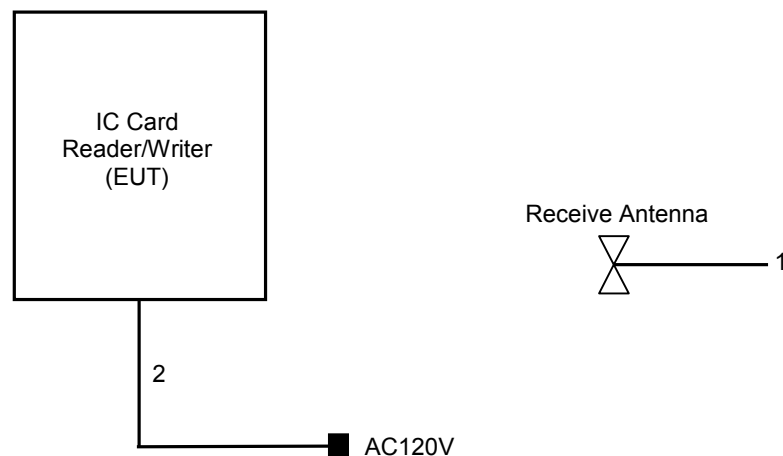


Figure 1 configuration and Peripherals

### 2.5.3 EUT

Mark	Description	Model number	Serial Number	FCC ID Code or DoC status	Manufacturer
1	Digital Signage	MG-31MBPACK	–	verification	CASIO COMPUTER CO., LTD.

**Table3 EUT**

### 2.5.4 Peripheral Devices

Mark	Description	Model number	Serial Number	FCC ID Code or DoC status	Manufacturer
1	Personal computer	Vostro 3360	–	DoC	Dell

**Table4 Peripheral Devices**

### 2.5.5 Interconnecting Cables

Mark	Description	Length (m)	Shielded		Tested Port(s) (Note:1)	
			Cable	Connector	Applicable	Interface
1	Antenna cable	7.0	Shielded	Shielded	No	RF Signal
2	USB cable	1.5	None	None	No	DC Power, I/O Signal
3	Power cable	2.0	None	None	No	AC Power

Note1: Tested port(s) required for applicable standard(s).

Remarks: The length described here is the length of the cable typically used in the tests, but different length of the cable may be used in some tests to satisfy the requirements for the test.

**Table5 Interconnecting Cables**

### 3.Test Data

#### 3.1 Test specification

Standard	FCC Part15 Subpart C 15.207 15.209 15.215 15.225 ANSI C63.4-2003		
	RSS210 A2.6		
Tested Frequency	13.56 MHz		
Test Date	25 <sup>th</sup> December 2014		
Test Location	Astronaut Noborito Laboratory Thermostatic chamber		
Test Engineer	Katsutoshi Hatanaka		
Temperature	19.8 °C		
Humidity	46.3 % RH		
Power Supply			
Normal	AC120V		
High	AC108V	*1	
Low	AC132V	*1	
Tested Temperature			
Normal	+20 °C		
High	+35 °C	*1	
Low	+5 °C	*1	

Remark: \*1 : Frequency Stability only.

**Table6 Test specification**



## 3.2 20dB Bandwidth / 99% Bandwidth

### 3.2.1 Test Result

Pass

### 3.2.2 Test Detail

The measurement was performed in the antenna height to gain the maximum of Electric field strength

### 3.2.3 Test data

#### 3.2.3.1 20dB Bandwidth

Item	Limit	Result	UNIT
		20dB	
Lower	13.110	13.3783	MHz
Upper	14.010	13.8411	
Total	0.900	0.3463	

Table7 20dB Bandwidth

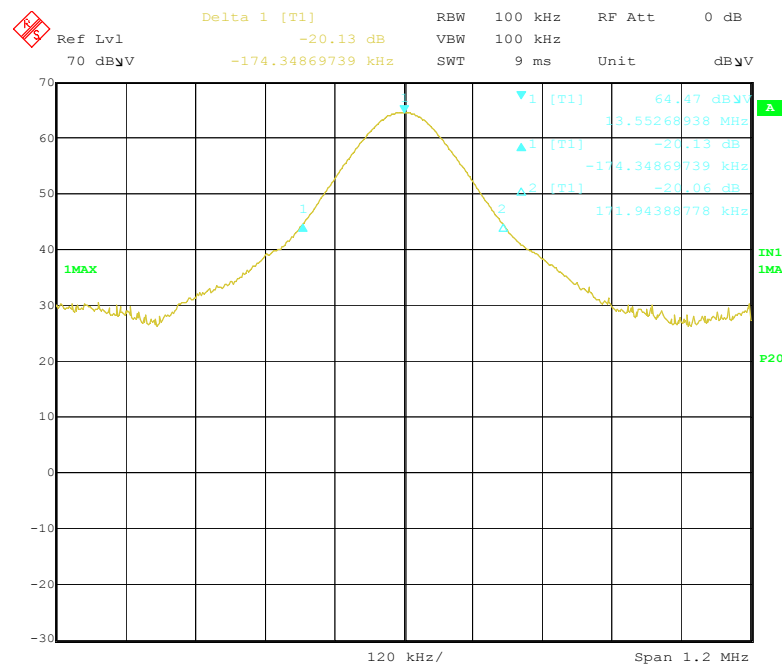


Figure 2 20dB Bandwidth Plot

### 3.2.3.2 99% Bandwidth

Item	Result	UNIT
	99%	
OBW	0.3295	MHz

Table8 99% Bandwidth

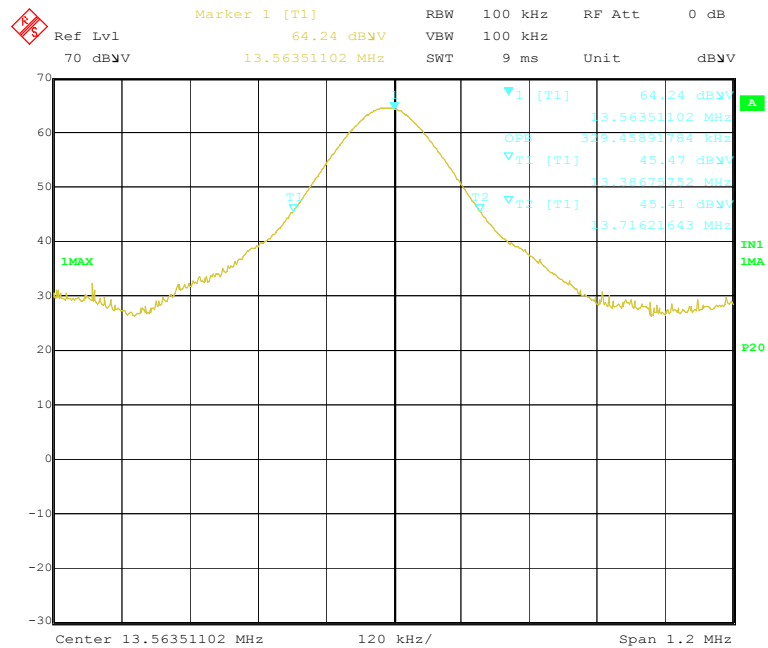


Figure 3 99% Bandwidth Plot

### 3.3 Frequency Stability Tolerance

#### 3.3.1 Test Result

**Pass**

#### 3.3.2 Test Detail

The frequency stability of the transmitter is measured by:

1. Temperature: The temperature is varied from +5°C to +35°C using an environmental chamber.
2. Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

The frequency tolerance of the carrier shall be maintained within  $\pm 0.01\%$  of the operating Frequency

#### 3.3.3 Test data

Operating Frequency: 13,560,000 Hz

Reference Voltage: AC120 V

Deviation Limit:  $\pm 0.01$  % = 1356Hz

Voltage (%)	Power Supply (V AC)	Temp (°C)	Frequency (MHz)	Freq. Dev. (Hz)	Deviation (%)
100	120V	+20 (Ref)	13.5601336	133.6	0.0009853
		+5	13.5601205	120.5	0.0008886
		+10	13.5601140	114.0	0.0008407
		+30	13.5600954	95.4	0.0007035
		+35	13.5600964	96.4	0.0007109
85	102V	+20	13.5601147	114.7	0.0008459
115	138V	+20	13.5601149	114.9	0.0008473

**Table 9 Frequency Stability Tolerance**

### 3.4 In-Band Radiated Spurious Emission

#### 3.4.1 Test Result

**Pass**


#### 3.4.2 Test Detail

Radiated emission testing was performed in the band 13.110 - 14.010 MHz.

#### 3.4.3 Test data

Frequency (MHz)	Level (dB $\mu$ V)	Factor (dB)	Ant Pol. (H/V)	3m Field Strength (dB $\mu$ V/m)	30m Field Strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
13.559	42.80	16.80	V	59.60	39.60	84.00	44.40
13.237	7.80	16.80	V	24.60	4.60	40.50	35.90
13.381	9.20	16.80	V	26.00	6.00	40.50	34.50
13.839	7.40	16.80	V	24.20	4.20	40.50	36.30
13.560	46.50	16.80	H	63.30	43.30	84.00	40.70
13.431	9.60	16.80	H	26.40	6.40	50.50	44.10
13.666	10.30	16.80	H	27.10	7.10	50.50	43.40
13.727	10.90	16.80	H	27.70	7.70	40.50	32.80

**Table 10 In-Band Radiated Spurious Emission**

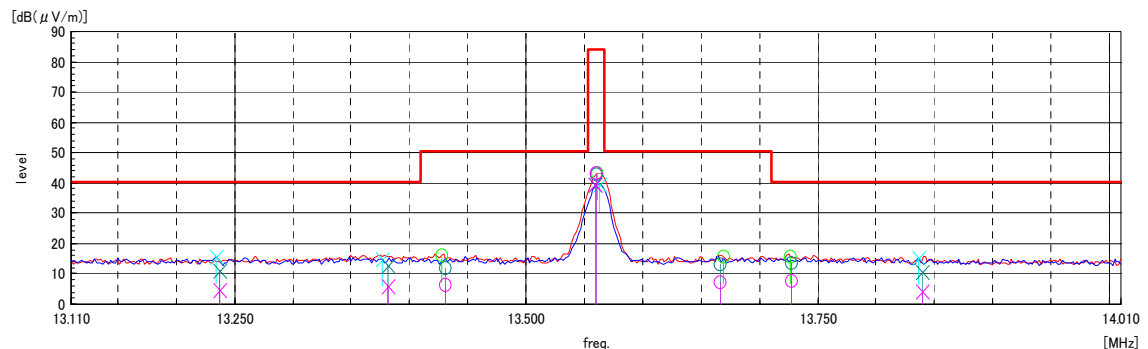

**Figure 4 In-Band Radiated Spurious Emission Plot**

Notes:

1. All measurements were performed using a loop antenna. The antenna was positioned in three orthogonal positions (X front, Y side, Z top) and the position with the highest emission level was recorded. The EUT was positioned in three orthogonal planes to determine the orientation resulting in the worst case emissions.
2. The EUT is supplied with nominal AC voltage.  
Measurements were performed at 3m and the data was extrapolated to the specified measurement distance of 30m using the square of an inverse linear distance extrapolation factor (40 dB/decade) as specified in  

$$\S 15.31(f)(2). \text{ Extrapolation Factor} = 20 \log_{10}(30/3)^2 = 40_{\text{[dB]}}$$
3. All measurements were recorded using a spectrum analyzer employing a quasi-peak detector.  

$$\text{Field Strength Level}_{\text{[dB}_{\mu\text{V/m}}]} = \text{Analyzer Level}_{\text{[dB}_{\mu\text{V}}]} + \text{Factor}_{\text{[dB/m]}}.$$

$$\text{Factor}_{\text{[dB/m]}} = \text{Antenna Factor}_{\text{[dBm]}} + \text{Cable Loss}_{\text{[dB]}} - \text{Extrapolation Factor}_{\text{[dB]}}$$

$$\text{Margin}_{\text{[dB]}} = \text{Field Strength Level}_{\text{[dB}_{\mu\text{V/m}}]} - \text{Limit}_{\text{[dB}_{\mu\text{V/m}}]}}$$

### 3.5 Out-of-Band Radiated Spurious Emission

#### 3.5.1 Test Result

**Pass**

#### 3.5.2 Test Detail

The EUT was tested from 9 kHz up to the 140MHz excluding the band 13.110 - 14.010 MHz. All measurements up to 140 MHz were recorded with a spectrum analyzer employing a quasi-peak detector. All out-of-band emissions must not exceed the limits shown in the following table. A loop antenna was used to investigate emissions below 30 MHz.

The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz. Radiated emission limits in these bands are based on measurements employing an average detector.


Frequency (MHz)	Field Strength ( $\mu\text{V/m}$ )	Measured Distance (Meters)
0.009 - 0.490	2400/F (kHz)	300 *1
0.490 - 1.705	24000/F (kHz)	30 *2
1.705 - 30.00	30	30 *2
30.00 - 88.00	100	3
88.00 - 140.0	150	3

**Table 11 Radiated Limits, Out-of-Band**

#### 3.5.3 Test data

Frequency (MHz)	Level (dB $\mu\text{V}$ )	Factor (dB/m)	ANT Pol. (H/V)	3m Field Strength (dB $\mu\text{V/m}$ )	Limit (dB $\mu\text{V/m}$ )	Margin (dB)
5.969	14.6	16.8	H	31.4	49.5	18.1
90.155	-2.8	15.7	H	12.9	43.5	30.6
0.601	26.4	16.4	V	42.8	52.0	9.2
5.200	15.7	16.8	V	32.5	49.5	17.0
12.650	8.9	16.8	V	25.7	49.5	23.8
45.599	0.0	19.3	V	19.3	40.0	20.7
50.834	2.1	17.7	V	19.8	40.0	20.2
63.366	6.7	14.4	V	21.1	40.0	18.9
117.984	4.3	19.2	V	23.5	43.5	20.0
135.459	-1.9	22.2	V	20.3	43.5	23.2

**Table 12 Radiated Spurious Emission measurements, Out-of-Band**

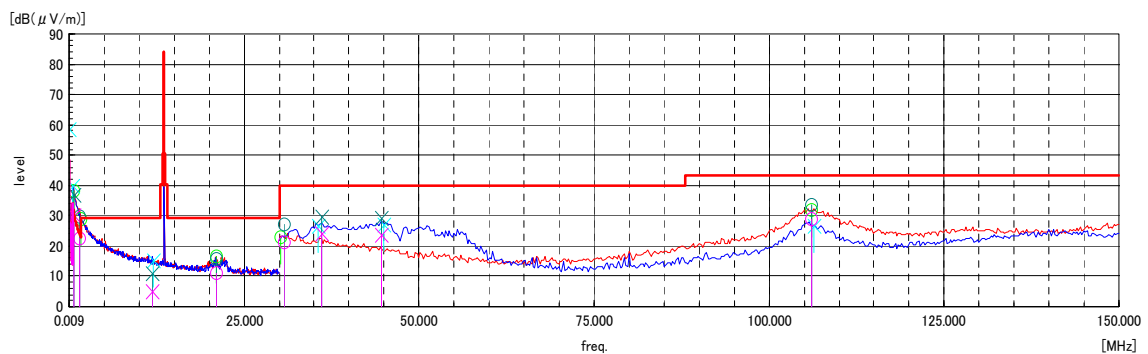

**Figure 5 Radiated Spurious Emission, Out-of-Band Plot**

Notes:

1. Both Vertical and Horizontal polarities of the receive antenna were evaluated with the worst case emissions being reported. Below 30 MHz the loop antenna was positioned in 3 orthogonal planes (X front, Y side, Z top) to determine the orientation resulting in the worst case emissions.
2. Measurements were performed at 3m and the data was extrapolated to the specified measurement distance of 30m or 300m using the square of an inverse linear distance extrapolation factor (40 dB/decade) as specified in  

$$\S 15.31(f)(2). \text{ Extrapolation Factor} = 20 \log_{10}(300/3)^2 = 80 \text{ [dB]} \quad *1$$

$$= 20 \log_{10}(30/3)^2 = 40 \text{ [dB]} \quad *2$$
3. All measurements were recorded using a spectrum analyzer employing a quasi-peak detector for emissions below 140.0 MHz.  
 But quasi-peak detector except for the frequency bands 9-90 kHz and 110-490 kHz Radiated emission limits in these two bands are based on measurements employing an average detector.  

$$\text{Field Strength Level [dB}\mu\text{V/m]} = \text{Analyzer Level [dB}\mu\text{V]} + \text{Factor [dB/m]}.$$

$$\text{Factor [dB/m]} = \text{Antenna Factor [dB/m]} + \text{Cable Loss [dB]} + \text{Priamp Gain [dB]} - \text{Extrapolation Factor [dB]}$$

$$\text{Margin [dB]} = \text{Field Strength Level [dB}\mu\text{V/m]} - \text{Limit [dB}\mu\text{V/m]}$$
4. The EUT is supplied with nominal AC voltage.
5. The spectrum is measured from 9 kHz to the 10<sup>th</sup> harmonic and the worst-case emissions are reported.

## 3.6 Line Conducted Measurement Data

### 3.6.1 Test Result

Pass

### 3.6.2 Test Detail

Onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN).

### 3.6.3 Test data

Frequency [MHz]	Line [A/B]	Factor [dB]	Level[dB $\mu$ V]		Result[dB $\mu$ V]		Limit[dB $\mu$ V]		Margin[dB]	
			QP	AV	QP	AV	QP	AV	QP	AV
0.16065	A	10.1	41.0	22.7	51.1	32.8	65.4	55.4	14.3	22.6
0.63022	A	10.1	27.6	11.1	37.7	21.2	56.0	46.0	18.3	24.8
0.68030	A	10.1	30.6	13.2	40.7	23.3	56.0	46.0	15.3	22.7
0.75175	A	10.1	27.0	11.6	37.1	21.7	56.0	46.0	18.9	24.3
3.09631	A	9.9	29.7	20.5	39.6	30.4	56.0	46.0	16.4	15.6
0.16645	B	10.1	41.4	22.1	51.5	32.2	65.1	55.1	13.6	22.9
0.61587	B	10.2	28.9	11.8	39.1	22.0	56.0	46.0	16.9	24.0
0.68072	B	10.1	29.8	12.2	39.9	22.3	56.0	46.0	16.1	23.7
2.45864	B	9.9	29.0	19.1	38.9	29.0	56.0	46.0	17.1	17.0
3.41174	B	10.0	29.1	19.9	39.1	29.9	56.0	46.0	16.9	16.1

Table 13 Line-Conducted Test Data

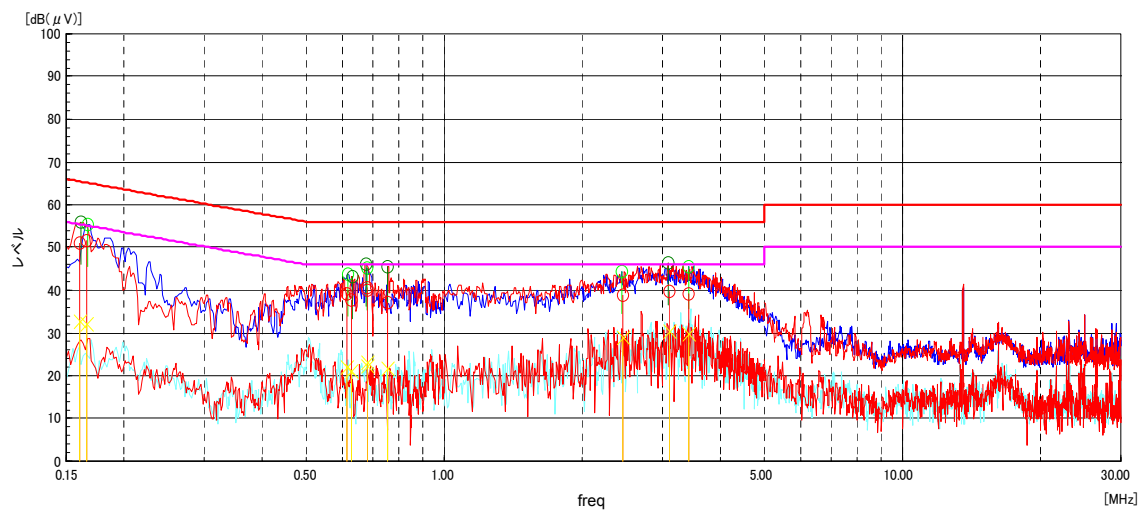


Figure 6 Line-Conducted Test Plot



Note:

1. All modes of operation were investigated and the worst-case emissions are reported.  
The limit for Class B device(s) from 150 kHz to 30 MHz are specified in section 15.207 of the Title 47 CFR.  
Line A = Phase; Line B = Neutral  
Factor (dB) = Cable loss (dB) + LISN insertion factor (dB)  
Result (dB $\mu$ V) = Level (dB $\mu$ V) + Factor (dB)  
Margin (dB) = Limit (dB $\mu$ V) - Result (dB $\mu$ V)  
Traces shown in plot are made using a peak detector.
2. 13.56 MHz is the fundamental signal and it is excluded from this data.

## 4. Test facility

### 4.1 Test Instruments

#### 4.1.1 Conducted Emissions

Product Name	Manufacturer	Model Number	Serial Number	Calibration Date	Due Date
EMI Test Receiver	Rohde & Schwarz	ESIB40	100263	2014/10/16	2015/10/31
LISN	Rohde&Schwarz	ENV216/02	100466	2014/07/22	2015/07/31

**Table 14 Conducted Emissions**

#### 4.1.2 Radiated Spurious Emissions

Product Name	Manufacturer	Model Number	Serial Number	Calibration Date	Due Date
EMI Test Receiver	Rohde & Schwarz	ESIB40	100263	2014/10/16	2015/10/31
Pre-Amplifier	SONOMA	310N	270610	2014/7/11	2015/7/31
Loop Antenna	EMCO	6507	9108-1268	2014/4/16	2015/4/30
Biconical Antenna	Schwarzbeck	VHA9103B+BBA9106	91032542	2014/8/12	2015/8/31
Thermostatic chamber	Espec	LHU-113	1012003589	2013/12/16	2014/12/31

**Table 15 Radiated Spurious Emissions**

### 4.2 Test equipment

Dimension	Material	Measurement
2.50m(W) × 1.00m(H) × 0.80m(D)	Wood	AC Conducted Emission

**Table 16 Test equipment**