



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	Arcadyan Technology Corporation
Applicant Address	No.8, Sec.2, Guangfu Rd.,Hsinchu, 30071 Taiwan
FCC ID	RAXWA8001BAC
Manufacturer's company	Arcadyan Technology Corporation
Manufacturer Address	No.8, Sec.2, Guangfu Rd.,Hsinchu, 30071 Taiwan

Product Name	4x4 Video bridge
Brand Name	AIRSONICS
Model No.	GXT542U
Test Rule Part(s)	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	5725 ~ 5850MHz
Received Date	Jan. 22, 2015
Final Test Date	Mar. 16, 2015
Submission Type	Original Equipment

Statement

Test result included is only for the IEEE 802.11n and IEEE 802.11a/ac of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2013, 47 CFR FCC Part 15 Subpart C, KDB 558074 D01 v03r02, KDB 662911 D01 v02r01, KDB644545 D01 v01r02.**

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Table of Contents

1. VERIFICATION OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	4
3.3. Table for Filed Antenna.....	5
3.4. Table for Carrier Frequencies	5
3.5. Table for Test Modes	6
3.6. Table for Testing Locations.....	7
3.7. Table for Supporting Units	8
3.8. Table for Parameters of Test Software Setting	9
3.9. EUT Operation during Test	9
3.10. Duty Cycle	10
3.11. Test Configurations	11
4. TEST RESULT	15
4.1. AC Power Line Conducted Emissions Measurement.....	15
4.2. Maximum Conducted Output Power Measurement.....	19
4.3. Power Spectral Density Measurement	21
4.4. 6dB Spectrum Bandwidth Measurement	39
4.5. Radiated Emissions Measurement	49
4.6. Emissions Measurement	70
4.7. Antenna Requirements	92
5. LIST OF MEASURING EQUIPMENTS	93
6. MEASUREMENT UNCERTAINTY.....	95
APPENDIX A. PHOTOGRAPHS OF EUT	A1 ~ A19
APPENDIX B. TEST PHOTOS.....	B1 ~ B5
APPENDIX C. MAXIMUM PERMISSIBLE EXPOSURE.....	C1 ~ C3

History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR511636AA	Rev. 01	Initial issue of report	Mar. 26, 2015



1. VERIFICATION OF COMPLIANCE

Product Name : 4x4 Video bridge
Brand Name : AIRSONICS
Model No. : GXT542U
Applicant : Arcadyan Technology Corporation
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Jan. 22, 2015 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

A handwritten signature in blue ink that reads "Sam Chen".

Sam Chen

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	14.19 dB
4.2	15.247(b)(3)	Maximum Conducted Output Power	Complies	1.65 dB
4.3	15.247(e)	Power Spectral Density	Complies	6.47 dB
4.4	15.247(a)(2)	6dB Spectrum Bandwidth	Complies	-
4.5	15.247(d)	Radiated Emissions	Complies	3.06 dB
4.6	15.247(d)	Band Edge Emissions	Complies	-
4.7	15.203	Antenna Requirements	Complies	-

3. GENERAL INFORMATION

3.1. Product Details

Items	Description
Product Type	WLAN (4TX, 4RX)
Radio Type	Intentional Transceiver
Power Type	From power adapter
Modulation	IEEE 802.11a: OFDM IEEE 802.11n/ac: see the below table
Data Modulation	IEEE 802.11a/n: OFDM (BPSK / QPSK / 16QAM / 64QAM) IEEE 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)
Data Rate (Mbps)	IEEE 802.11a: OFDM (6/9/12/18/24/36/48/54) IEEE 802.11n/ac: see the below table
Frequency Range	5725 ~ 5850MHz
Channel Number	5 for 20MHz bandwidth ; 2 for 40MHz bandwidth 1 for 80MHz bandwidth
Channel Band Width (99%)	<u>For Non-Beamforming Mode</u> IEEE 802.11a: 16.58 MHz IEEE 802.11ac MCS0/Nss1 (VHT20): 17.97 MHz IEEE 802.11ac MCS0/Nss1 (VHT40): 37.62 MHz IEEE 802.11ac MCS0/Nss1 (VHT80): 76.41 MHz <u>For Beamforming Mode</u> IEEE 802.11ac MCS0/Nss1 (VHT20): 18.23 MHz IEEE 802.11ac MCS0/Nss1 (VHT40): 37.92 MHz IEEE 802.11ac MCS0/Nss1 (VHT80): 76.12 MHz
Maximum Conducted Output Power	<u>For Non-Beamforming Mode</u> IEEE 802.11a: 25.46 dBm IEEE 802.11ac MCS0/Nss1 (VHT20): 25.50 dBm IEEE 802.11ac MCS0/Nss1 (VHT40): 28.35 dBm IEEE 802.11ac MCS0/Nss1 (VHT80): 27.41 dBm <u>For Beamforming Mode</u> IEEE 802.11ac MCS0/Nss1 (VHT20): 26.06 dBm IEEE 802.11ac MCS0/Nss1 (VHT40): 28.35 dBm IEEE 802.11ac MCS0/Nss1 (VHT80): 28.25 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Items	Description	
Beamforming Function	☒ With beamforming For 802.11n/ac.	☐ Without beamforming

Antenna and Band width

Antenna	Four (TX)		
Band width Mode	20 MHz	40 MHz	80 MHz
IEEE 802.11a	V	X	X
IEEE 802.11n	V	V	X
IEEE 802.11ac	V	V	V

IEEE 802.11n/ac Spec.

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11n (HT20)	4	MCS0-31
802.11n (HT40)	4	MCS0-31
802.11ac (VHT20)	4	MCS 0-9/Nss1-4
802.11ac (VHT40)	4	MCS 0-9/Nss1-4
802.11ac (VHT80)	4	MCS 0-9/Nss1-4
Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput). Then EUT supports HT20 and HT40. Note 2: IEEE Std. 802.11ac modulation consists of VHT20, VHT40, VHT80 and VHT160 (VHT: Very High Throughput). Then EUT supports VHT20, VHT40 and VHT80. Note 3: Modulation modes consist of below configuration: HT20/HT40: IEEE 802.11n, VHT20/VHT40/VHT80: IEEE 802.11ac		

3.2. Accessories

Power	Brand	Model	Rating
Adapter	APD	WA-18G12U	Input:100-240V~50-60Hz 0.5A(Max) Output:12V, 1.5A

3.3. Table for Filed Antenna


Ant.	Brand	P/N	Antenna Type	Connector	Gain (dBi)
1	Airgain	N5x20SC-PK1-B30UR1	PIFA Antenna	I-PEX	-1.38
2	Airgain	N5x20SC-PK1-B30UR1	PIFA Antenna	I-PEX	-1.38
3	Airgain	N5x20SC-PK1-B30UR1	PIFA Antenna	I-PEX	-1.38
4	Airgain	N5x20SC-PK1-B30UR1	PIFA Antenna	I-PEX	-1.38

Note: The EUT has four antennas.

For IEEE 802.11a/n/ac mode (4TX/4RX)

Chain 1, Chain 2, Chain 3 and Chain 4 can be used as transmitting/receiving antenna.

Chain 1, Chain 2, Chain 3 and Chain 4 could transmit/receive simultaneously.

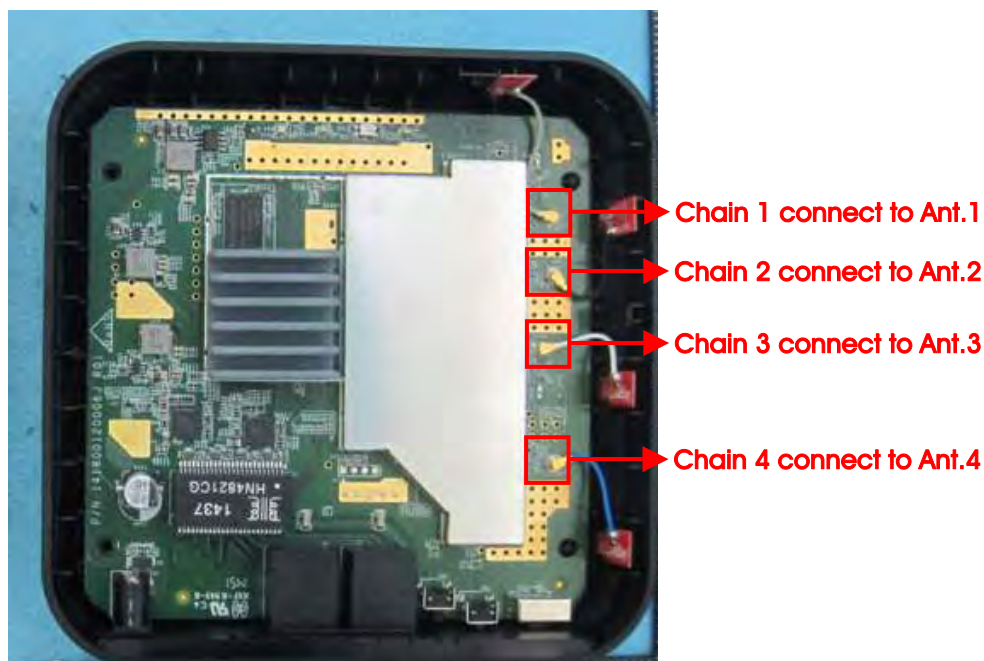

3.4. Table for Carrier Frequencies

There are three bandwidth systems.

For 20MHz bandwidth systems, use Channel 149, 153, 157, 161, 165.

For 40MHz bandwidth systems, use Channel 151, 159.

For 80MHz bandwidth systems, use Channel 155.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5725~5850 MHz Band 4	149	5745 MHz	157	5785 MHz
	151	5755 MHz	159	5795 MHz
	153	5765 MHz	161	5805 MHz
	155	5775 MHz	165	5825 MHz

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	Chain
AC Power Line Conducted Emissions	Normal Link	-	-	-
Maximum Conducted Output Power	11a/BPSK	6 Mbps	149/157/165	1+2+3+4
	11ac VHT20	MCS0/Nss1	149/157/165	1+2+3+4
	11ac VHT40	MCS0/Nss1	151/159	1+2+3+4
	11ac VHT80	MCS0/Nss1	155	1+2+3+4
Power Spectral Density	11a/BPSK	6 Mbps	149/157/165	1+2+3+4
	11ac VHT20	MCS0/Nss1	149/157/165	1+2+3+4
	11ac VHT40	MCS0/Nss1	151/159	1+2+3+4
	11ac VHT80	MCS0/Nss1	155	1+2+3+4
6dB Spectrum Bandwidth	11a/BPSK	6 Mbps	149/157/165	1+2+3+4
	11ac VHT20	MCS0/Nss1	149/157/165	1+2+3+4
	11ac VHT40	MCS0/Nss1	151/159	1+2+3+4
	11ac VHT80	MCS0/Nss1	155	1+2+3+4
Radiated Emissions Below 1GHz	Normal Link	-	-	-
Radiated Emissions Above 1GHz	11a/BPSK	6 Mbps	149/157/165	1+2+3+4
	11ac VHT20	MCS0/Nss1	149/157/165	1+2+3+4
	11ac VHT40	MCS0/Nss1	151/159	1+2+3+4
	11ac VHT80	MCS0/Nss1	155	1+2+3+4
Band Edge Emissions	11a/BPSK	6 Mbps	149/157/165	1+2+3+4
	11ac VHT20	MCS0/Nss1	149/157/165	1+2+3+4
	11ac VHT40	MCS0/Nss1	151/159	1+2+3+4
	11ac VHT80	MCS0/Nss1	155	1+2+3+4

Note 1: VHT20/VHT40 covers HT20/HT40, due to same modulation.

Note 2: There are two modes of EUT, one is beamforming mode, and the other is non-beamforming mode for 802.11n/ac. All test results were recorded in the report.

The following test modes were performed for all tests:

For Conducted Emission test:

Mode 1. AP Mode

Mode 2. STA Mode

Mode 2 is the worst case, so it was selected to record in this test report.

For Radiated Emission test (Below 1G):

Mode 1. AP Mode

Mode 2. STA Mode

Mode 2 is the worst case, so it was selected to record in this test report.

For Radiated Emission test (Above 1G):

Mode 1. CTX - EUT X axis

3.6. Table for Testing Locations

Test Site Location				
Address:	No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.			
TEL:	886-3-656-9065			
FAX:	886-3-656-9085			
Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D
TH01-CB	OVEN Room	Hsin Chu	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

3.7. Table for Supporting Units

For Test Site No: 03CH01-CB (Below 1G)

Support Unit	Brand	Model	FCC ID
Notebook	DELL	M1330	E2K4965AGNM
Notebook	DELL	E6430	DoC
AP	D-Link	DIR-860L	QDS-BRCM1049LE

For Test Site No: 03CH01-CB (Above 1G)

For Non-Beamforming Mode:

Support Unit	Brand	Model	FCC ID
Notebook	DELL	M1330	E2K4965AGNM

For Beamforming Mode:

Support Unit	Brand	Model	FCC ID
Notebook	DELL	M1330	E2K4965AGNM
Notebook	DELL	E6430	DoC
WLAN ac Dongle	Netgear	A6200	PY31220200

For Test Site No: CO01-CB

Support Unit	Brand	Model	FCC ID
Notebook*2	DELL	E6430	DoC
AP	D-LINK	DIR-860L	DoC

For Test Site No: TH01-CB

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E6220	DoC

3.8. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

For Non-Beamforming Mode

Test Software Version	DOS					
Mode	Test Frequency (MHz)					
	NCB: 20MHz			NCB: 40MHz		NCB: 80MHz
	5745 MHz	5785 MHz	5825 MHz	5755 MHz	5795 MHz	5775 MHz
802.11a	20	20	19	-	-	-
802.11ac MCS0/Nss1 VHT20	19	20	20	-	-	-
802.11ac MCS0/Nss1 VHT40	-	-	-	22	23	-
802.11ac MCS0/Nss1 VHT80	-	-	-	-	-	22

For Beamforming Mode

Test Software Version	DOS					
Mode	Test Frequency (MHz)					
	NCB: 20MHz			NCB: 40MHz		NCB: 80MHz
	5745 MHz	5785 MHz	5825 MHz	5755 MHz	5795 MHz	5775 MHz
802.11ac MCS0/Nss1 VHT20	20	18	17	-	-	-
802.11ac MCS0/Nss1 VHT40	-	-	-	22	23	-
802.11ac MCS0/Nss1 VHT80	-	-	-	-	-	23

3.9. EUT Operation during Test

For Non-Beamforming Mode

The EUT was programmed to be in continuously transmitting mode.

For Beamforming Mode

For Conducted Mode:

The EUT was programmed to be in continuously transmitting mode.

For Radiated Mode:

During the test, the following programs under WIN XP were executed.

The program was executed as follows:

1. During the test, the EUT operation to normal function.
2. Executed command fixed test channel under DOS.
3. Executed "Lantest.exe" to link with the remote workstation to receive and transmit packet by WLAN ac Dongle and transmit duty cycle no less 98%

3.10. Duty Cycle

For Non-Beamforming Mode


Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
802.11a	5.338	5.453	97.89%	0.09	0.19
802.11ac MCS0/Nss1 VHT20	4.980	5.022	99.16%	0.04	0.01
802.11ac MCS0/Nss1 VHT40	2.391	2.456	97.35%	0.12	0.42
802.11ac MCS0/Nss1 VHT80	1.104	1.195	92.38%	0.34	0.91

For Beamforming Mode

Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
802.11ac MCS0/Nss1 VHT20	1.741	1.948	89.36%	0.49	0.57
802.11ac MCS0/Nss1 VHT40	0.872	1.050	83.09%	0.80	1.15
802.11ac MCS0/Nss1 VHT80	0.811	0.902	89.91%	0.46	1.23

3.11. Test Configurations


3.11.1. AC Power Line Conduction Emissions Test Configuration

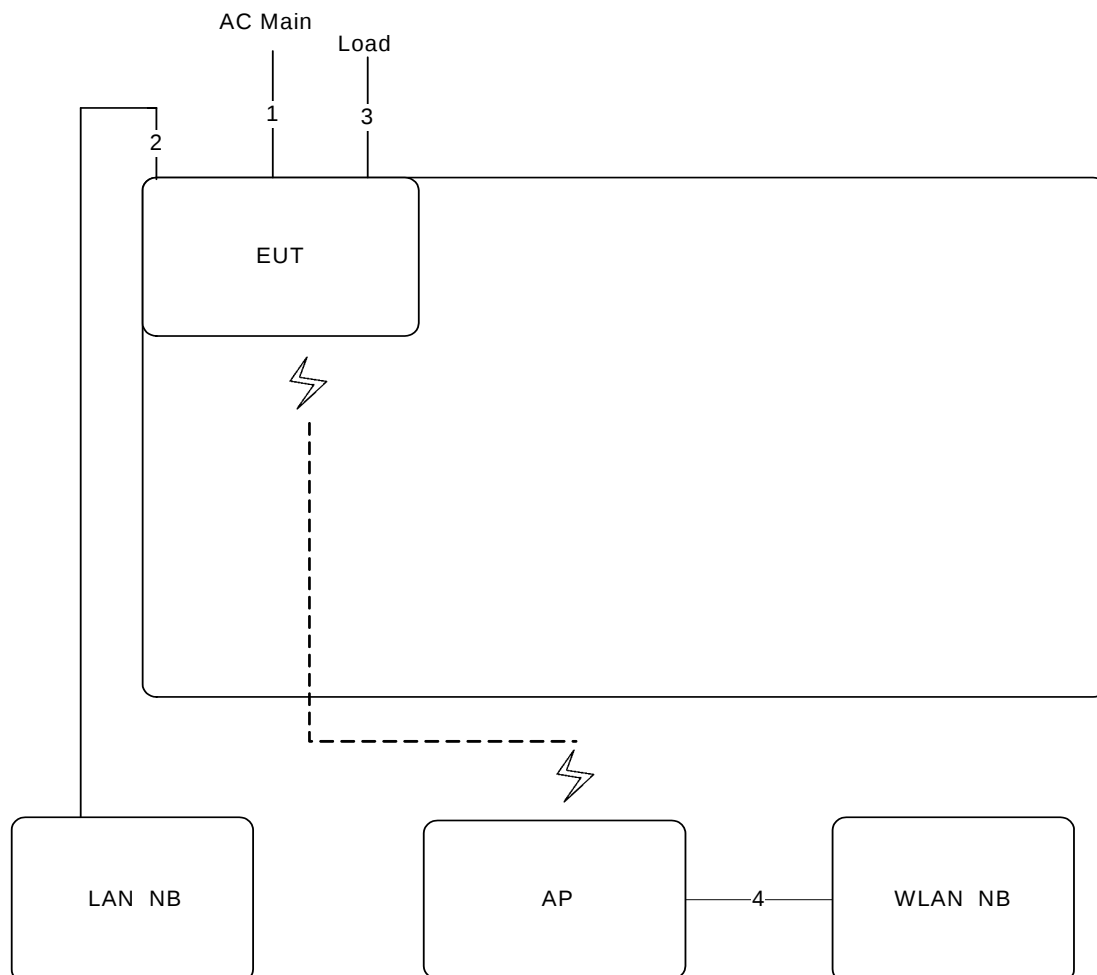

Item	Connection	Shielded	Length	Remark
1	Power cable	No	1.5m	-
2	RJ-45 cable	No	10m	-
3	RJ-45 cable	No	3m	Load
4	RJ-45 cable	No	3m	-

3.11.2. Radiation Emissions Test Configuration


Test Configuration: 30MHz~1GHz

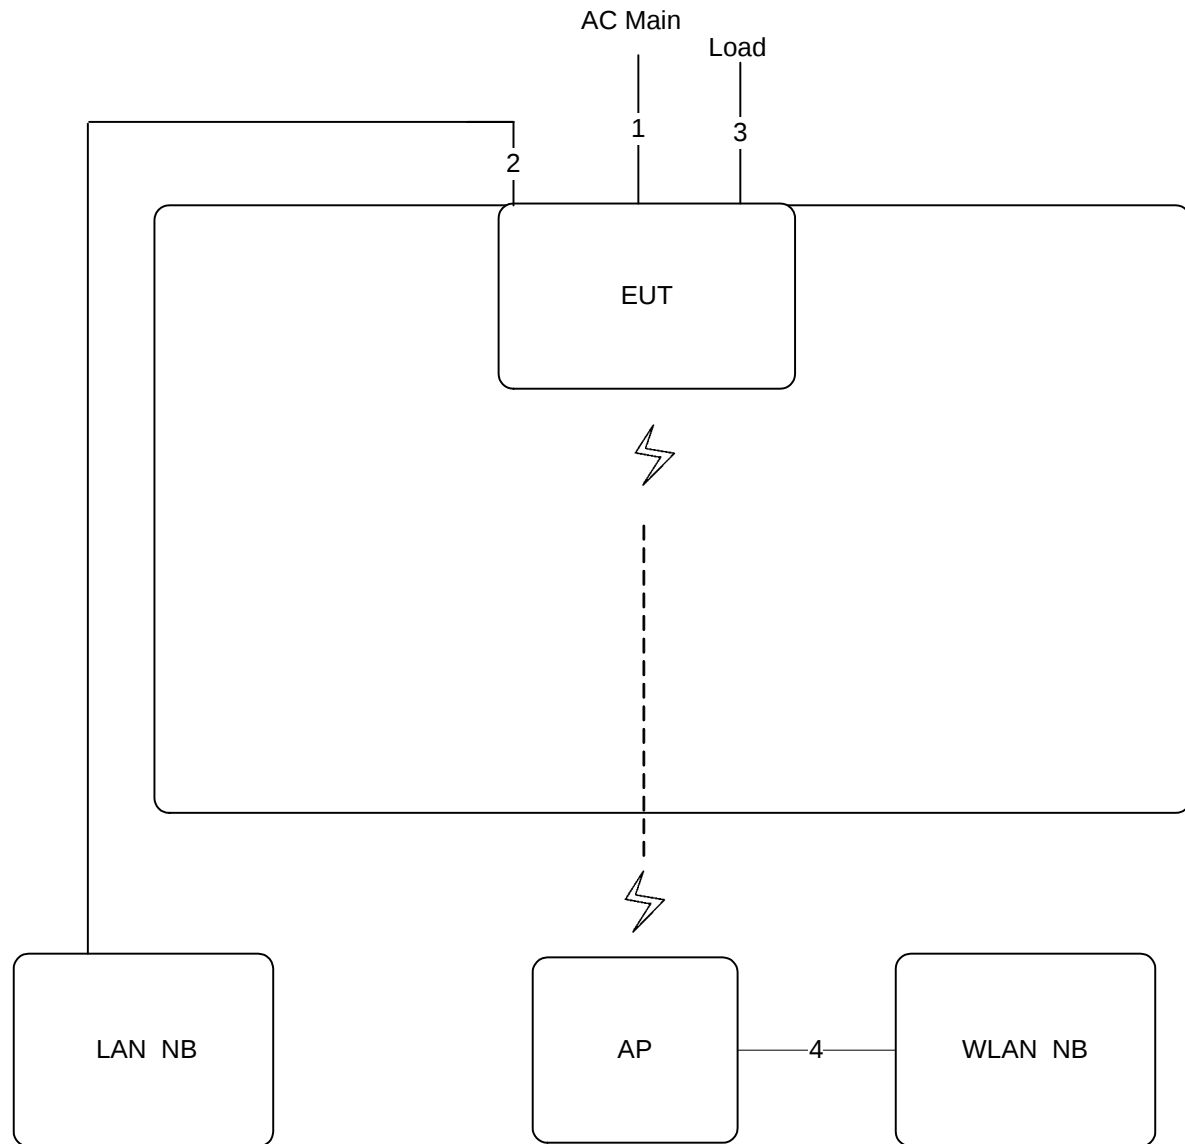

Item	Connection	Shielded	Length	Remark
1	Power cable	No	1.5m	-
2	RJ-45 cable	No	10m	-
3	RJ-45 cable	No	1m	Load
4	RJ-45 cable	No	3m	-


Test Configuration: above 1GHz

For Non-Beamforming mode

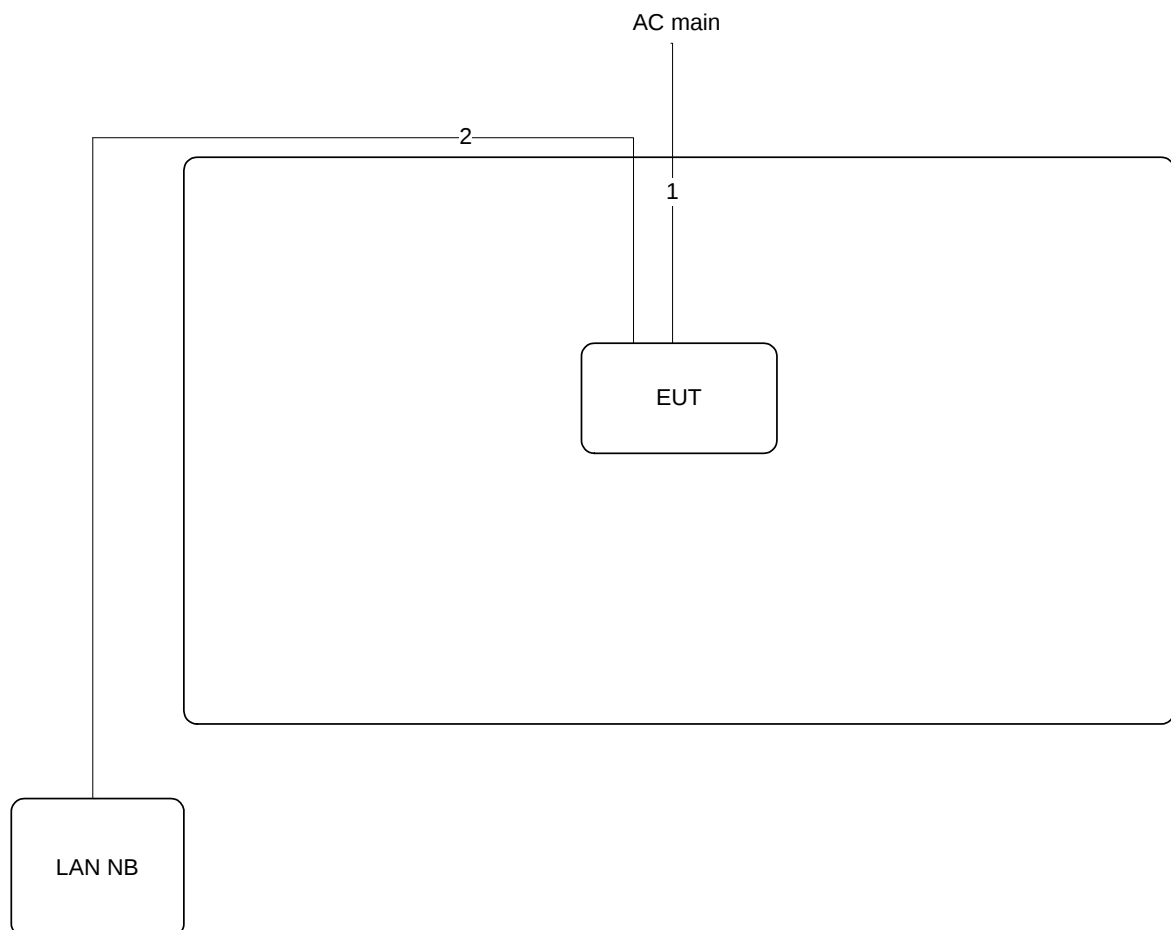

Item	Connection	Shielded	Length
1	Power cable	No	1.5m
2	RJ-45 cable	No	10m

For Beamforming mode

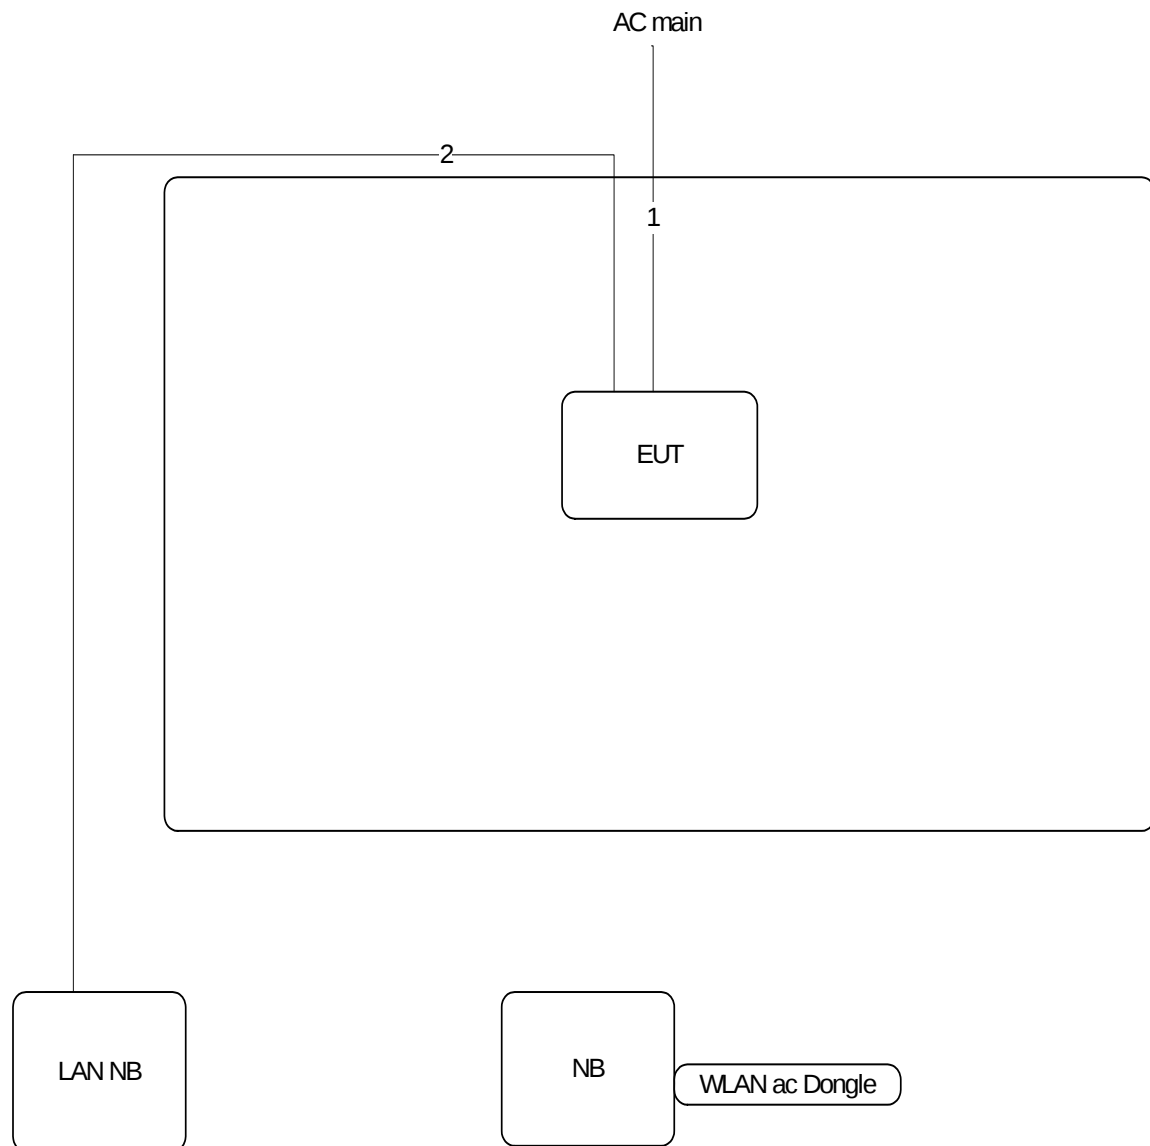

Item	Connection	Shielded	Length
1	Power cable	No	1.5m
2	RJ-45 cable	No	10m

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

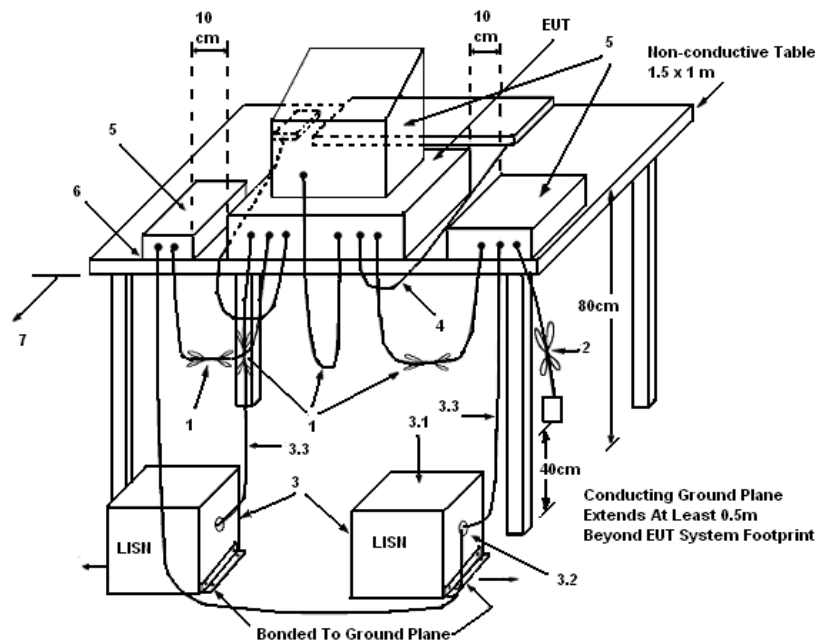

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω . LISN can be placed on top of, or immediately beneath, reference ground plane.
- (3.1) All other equipment powered from additional LISN(s).
- (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
- (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	24°C	Humidity	54%
Test Engineer	Sollo Luo	Phase	Line
Configuration	Normal Link	Test Mode	Mode 2

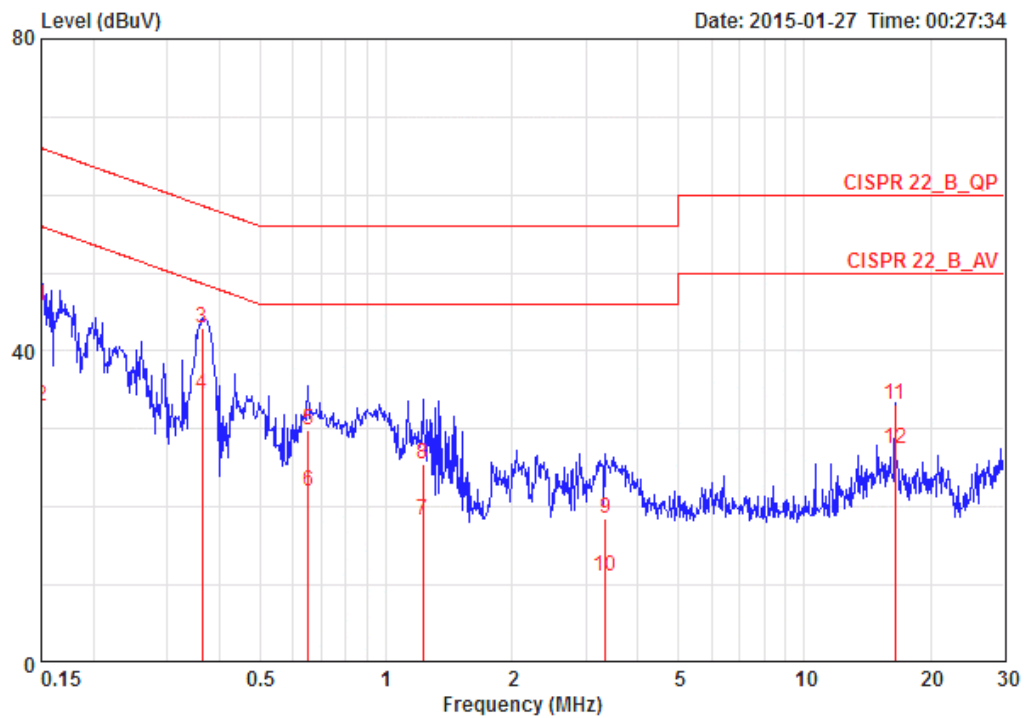

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.15000	45.78	-20.22	66.00	35.85	9.77	0.16	QP	LINE
2	0.15000	32.83	-23.17	56.00	22.90	9.77	0.16	AVERAGE	LINE
3 @	0.36338	42.98	-15.67	58.65	33.03	9.77	0.18	QP	LINE
4 @	0.36338	34.46	-14.19	48.65	24.51	9.77	0.18	AVERAGE	LINE
5	0.65084	29.85	-26.15	56.00	19.89	9.77	0.19	QP	LINE
6	0.65084	22.02	-23.98	46.00	12.06	9.77	0.19	AVERAGE	LINE
7	1.223	18.29	-27.71	46.00	8.31	9.76	0.21	AVERAGE	LINE
8	1.223	25.47	-30.53	56.00	15.49	9.76	0.21	QP	LINE
9	3.346	18.56	-37.44	56.00	8.55	9.72	0.29	QP	LINE
10	3.346	11.14	-34.86	46.00	1.13	9.72	0.29	AVERAGE	LINE
11	16.464	33.05	-26.95	60.00	23.09	9.49	0.47	QP	LINE
12	16.464	27.53	-22.47	50.00	17.57	9.49	0.47	AVERAGE	LINE

Temperature	24°C	Humidity	54%
Test Engineer	Sollo Luo	Phase	Neutral
Configuration	Normal Link	Test Mode	Mode 2

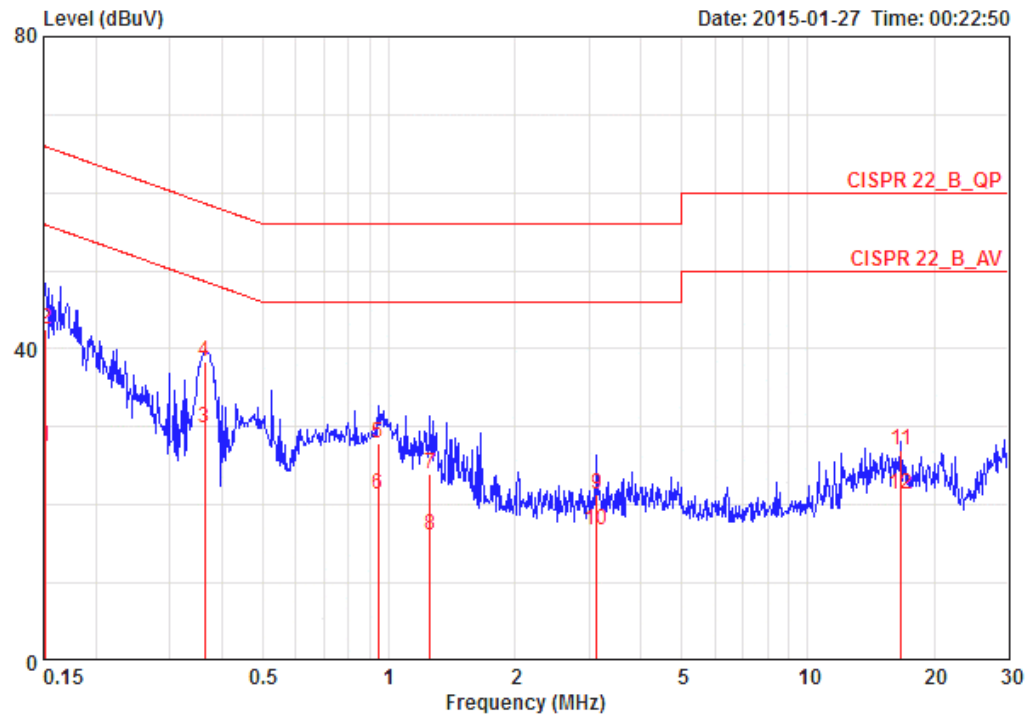

	Freq	Level	Over	Limit	Read	LISN	Cable		Pol/Phase
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark	
			dB	dBuV	dBuV	dB	dB		
1	0.15160	27.55	-28.36	55.91	17.47	9.92	0.16	AVERAGE	NEUTRAL
2	0.15160	42.59	-23.32	65.91	32.51	9.92	0.16	QP	NEUTRAL
3 @	0.36338	29.82	-18.83	48.65	19.73	9.91	0.18	AVERAGE	NEUTRAL
4	0.36338	38.40	-20.25	58.65	28.31	9.91	0.18	QP	NEUTRAL
5	0.94308	27.93	-28.07	56.00	17.81	9.92	0.20	QP	NEUTRAL
6	0.94308	21.29	-24.71	46.00	11.17	9.92	0.20	AVERAGE	NEUTRAL
7	1.255	24.00	-32.00	56.00	13.87	9.91	0.22	QP	NEUTRAL
8	1.255	16.17	-29.83	46.00	6.04	9.91	0.22	AVERAGE	NEUTRAL
9	3.140	21.31	-34.69	56.00	11.15	9.87	0.28	QP	NEUTRAL
10	3.140	16.82	-29.18	46.00	6.66	9.87	0.28	AVERAGE	NEUTRAL
11	16.661	27.11	-32.89	60.00	16.91	9.73	0.47	QP	NEUTRAL
12	16.661	21.37	-28.63	50.00	11.17	9.73	0.47	AVERAGE	NEUTRAL

Note:

Level = Read Level + LISN Factor + Cable Loss

4.2. Maximum Conducted Output Power Measurement

4.2.1. Limit

Systems operating in the 5725-5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter output power.

4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Detector	Average

4.2.3. Test Procedures

1. Test procedures refer KDB 558074 D01 v03r02 section 9.2.3.2 Measurement using a power meter (PM).
2. Multiple antenna system was performed in accordance with KDB 662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
3. This procedure provides an alternative for determining the RMS output power using a broadband RF average power meter with a thermocouple detector.

4.2.4. Test Setup Layout

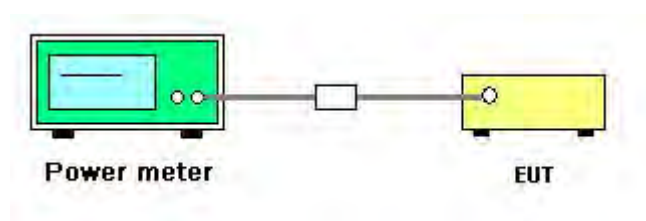

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of Maximum Conducted Output Power

Temperature	26°C	Humidity	63%
Test Engineer	Mars Lin	Test Date	Mar. 13, 2015

For Non-Beamforming Mode

Mode	Frequency	Conducted Power (dBm)					Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
802.11a	5745 MHz	19.57	18.46	18.75	18.67	24.90	30.00	Complies
	5785 MHz	19.47	18.80	19.82	19.62	25.46	30.00	Complies
	5825 MHz	19.52	18.14	18.82	18.86	24.88	30.00	Complies
802.11ac MCS0/Nss1 VHT20	5745 MHz	19.61	18.82	19.03	18.90	25.12	30.00	Complies
	5785 MHz	19.09	19.46	19.70	19.66	25.50	30.00	Complies
	5825 MHz	18.94	19.12	19.09	19.93	25.31	30.00	Complies
802.11ac MCS0/Nss1 VHT40	5755 MHz	21.52	20.38	22.16	21.16	27.37	30.00	Complies
	5795 MHz	22.38	22.10	22.30	22.53	28.35	30.00	Complies
802.11ac MCS0/Nss1 VHT80	5775 MHz	21.93	19.83	20.96	22.42	27.41	30.00	Complies

For Beamforming Mode

Mode	Frequency	Conducted Power (dBm)					Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
802.11ac MCS0/Nss1 VHT20	5745 MHz	20.62	19.52	19.72	20.20	26.06	30.00	Complies
	5785 MHz	18.52	17.76	18.22	18.02	24.16	30.00	Complies
	5825 MHz	16.63	15.66	17.08	16.95	22.63	30.00	Complies
802.11ac MCS0/Nss1 VHT40	5755 MHz	21.52	20.38	22.16	21.16	27.37	30.00	Complies
	5795 MHz	22.38	22.10	22.30	22.53	28.35	30.00	Complies
802.11ac MCS0/Nss1 VHT80	5775 MHz	22.53	21.45	21.96	22.84	28.25	30.00	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 4.64\text{dBi} < 6\text{dBi}$, so the limit doesn't reduce.

4.3. Power Spectral Density Measurement

4.3.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Set the span to 1.5 times the DTS channel bandwidth.
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100\text{kHz}$
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto couple

4.3.3. Test Procedures

1. Test was performed in accordance with KDB 558074 D01 v03r02 for Performing Compliance Measurements on Digital Transmission Systems (DTS) - section 10.2 Method PKPSD (peak PSD) and KDB 662911 D01 v02r01 section In-Band Power Spectral Density (PSD) Measurements option (b) Measure and sum spectral maximal across the outputs.
2. Use this procedure when the maximum conducted output power in the fundamental emission is used to demonstrate compliance. The EUT must be configured to transmit continuously at full power over the measurement duration.
3. Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span/RBW}$ (use of a greater number of measurement points than this minimum requirement is recommended).
4. Use the peak marker function to determine the maximum level in any 3 kHz band segment within the fundamental EBW.
5. The resulting PSD level must be $\leq 8 \text{ dBm}$.

4.3.4. Test Setup Layout

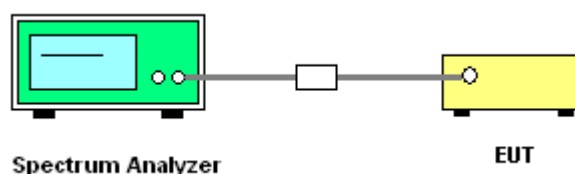

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Power Spectral Density

Temperature	26°C	Humidity	63%
Test Engineer	Mars Lin		

For Non-Beamforming Mode

Mode	Frequency	Power Density (dBm/3kHz)					Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
802.11a	5745 MHz	-7.80	-9.54	-8.35	-7.76	-2.29	8.00	Complies
	5785 MHz	-7.10	-10.34	-9.46	-9.85	-2.97	8.00	Complies
	5825 MHz	-9.92	-11.17	-7.58	-7.80	-2.85	8.00	Complies
802.11ac MCS0/Nss1 VHT20	5745 MHz	-6.25	-9.83	-9.98	-7.76	-2.15	8.00	Complies
	5785 MHz	-7.42	-9.95	-8.42	-8.95	-2.57	8.00	Complies
	5825 MHz	-7.19	-9.50	-8.88	-8.91	-2.51	8.00	Complies
802.11ac MCS0/Nss1 VHT40	5755 MHz	-5.05	-9.66	-8.54	-7.58	-1.34	8.00	Complies
	5795 MHz	-5.84	-8.82	-1.19	-5.66	1.53	8.00	Complies
802.11ac MCS0/Nss1 VHT80	5775 MHz	-5.10	-12.10	-12.76	-10.57	-2.91	8.00	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 4.64\text{dBi} < 6\text{dBi}$, so the limit doesn't reduce.

For Beamforming Mode

Mode	Frequency	Power Density (dBm/3kHz)					Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
802.11ac MCS0/Nss1 VHT20	5745 MHz	-7.55	-9.93	-9.82	-8.16	-2.72	8.00	Complies
	5785 MHz	-9.81	-10.98	-10.09	-10.83	-4.38	8.00	Complies
	5825 MHz	-9.66	-12.27	-8.37	-12.11	-4.27	8.00	Complies
802.11ac MCS0/Nss1 VHT40	5755 MHz	-5.05	-9.66	-8.54	-7.58	-1.34	8.00	Complies
	5795 MHz	-5.84	-8.82	-1.19	-5.66	1.53	8.00	Complies
802.11ac MCS0/Nss1 VHT80	5775 MHz	-7.61	-9.46	-1.96	-6.72	0.55	8.00	Complies


Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 4.64\text{dBi} < 6\text{dBi}$, so the limit doesn't reduce.

Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.


For Non-Beamforming Mode

Power Density Plot on Configuration IEEE 802.11a / 5745 MHz / Chain 1

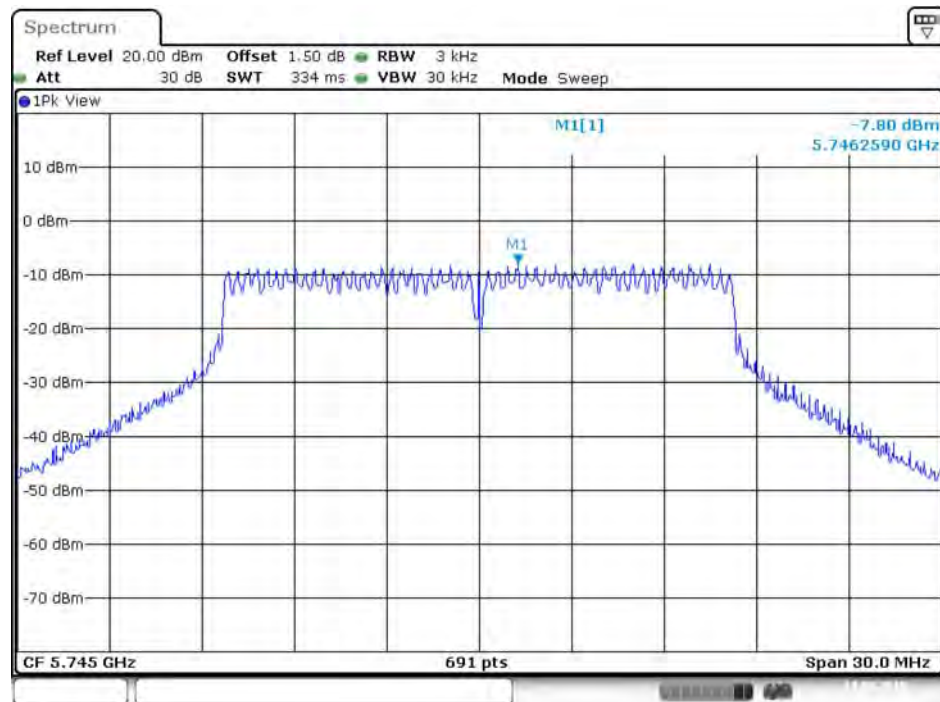


Date: 13.MAR.2015 16:46:53

Power Density Plot on Configuration IEEE 802.11a / 5745 MHz / Chain 2

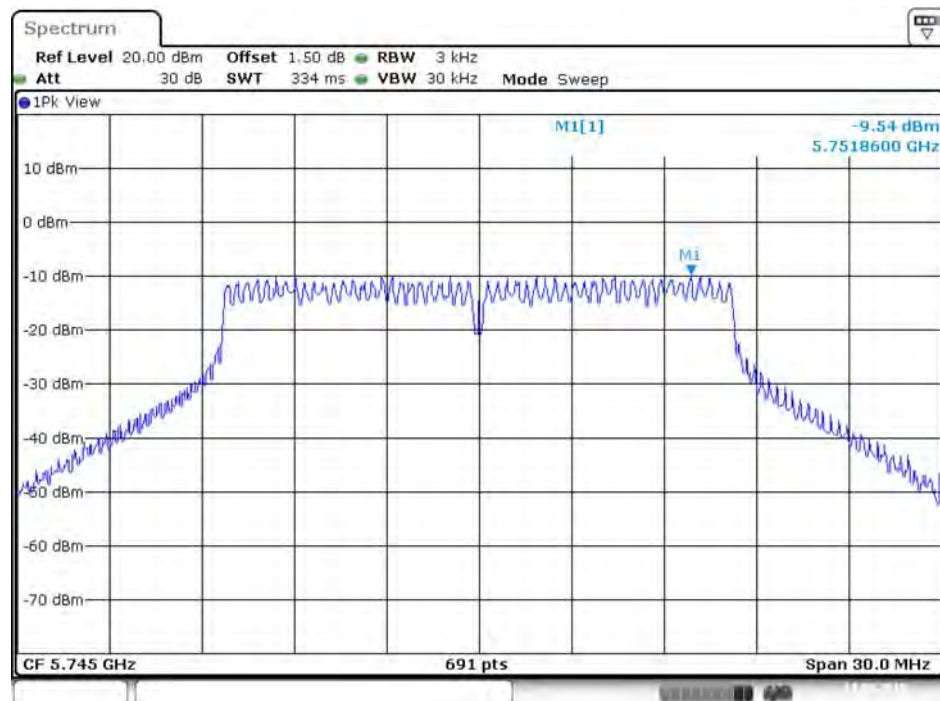


Date: 13.MAR.2015 16:48:16

Power Density Plot on Configuration IEEE 802.11a / 5745 MHz / Chain 3

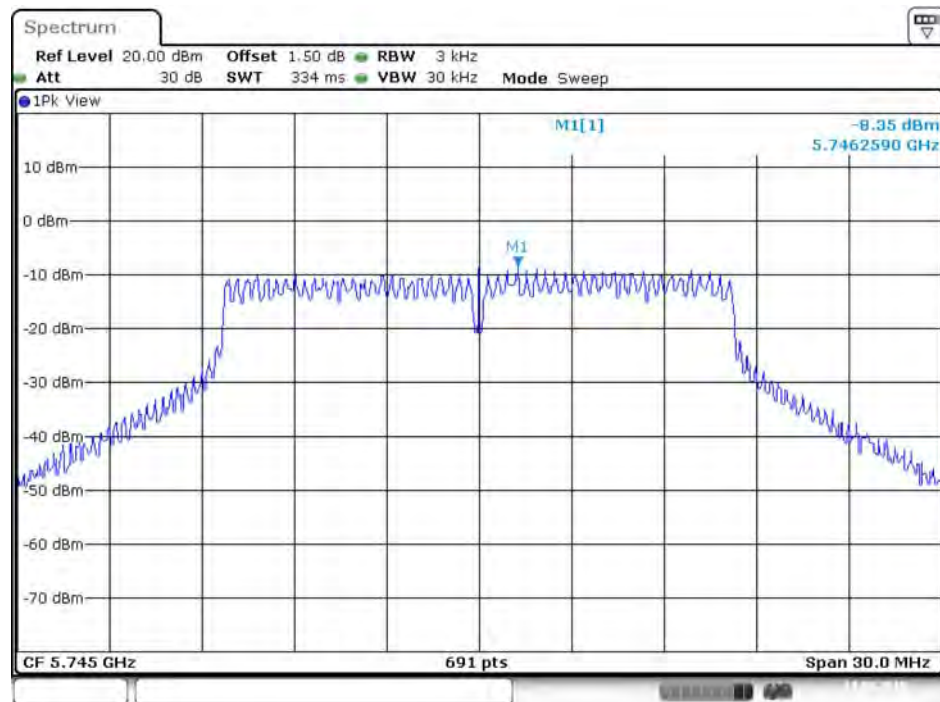


Date: 13.MAR.2015 16:50:01

Power Density Plot on Configuration IEEE 802.11a / 5745 MHz / Chain 4

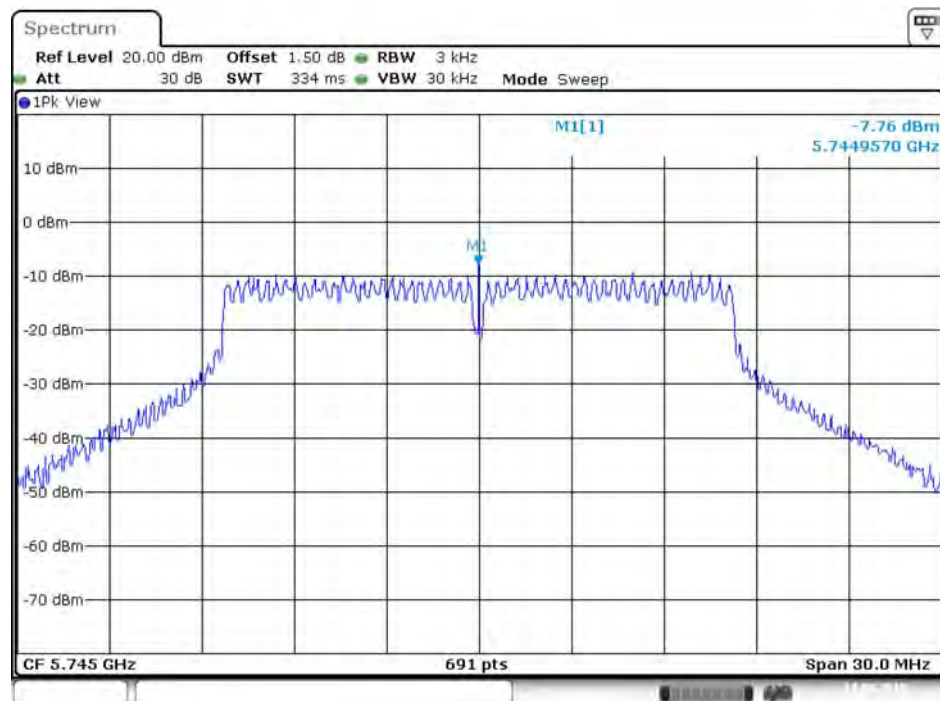


Date: 13.MAR.2015 16:56:02

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 5745 MHz / Chain 1

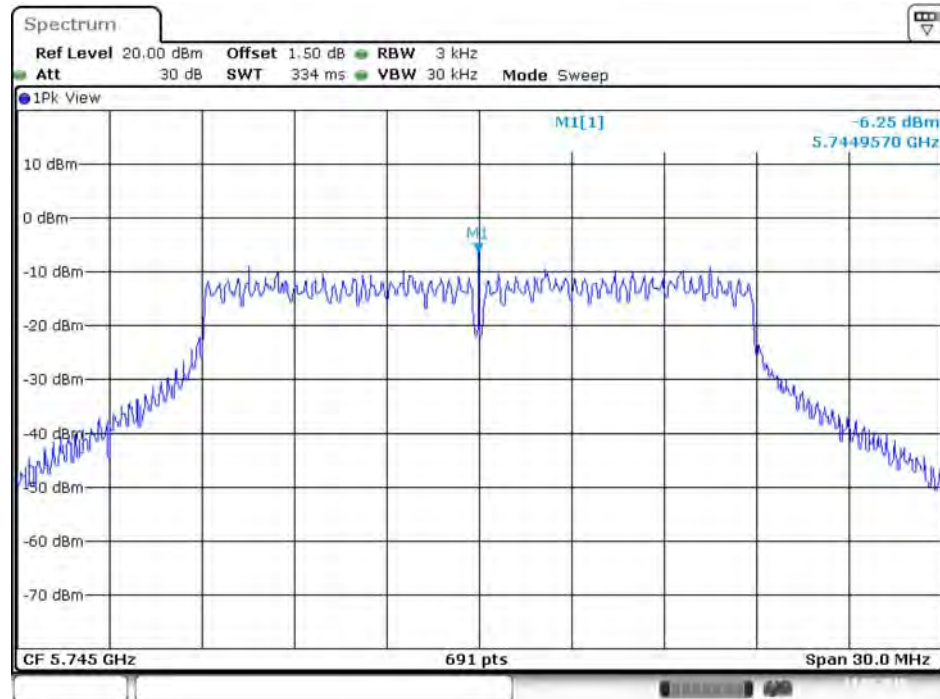


Date: 13.MAR.2015 17:09:03

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 5745 MHz / Chain 2

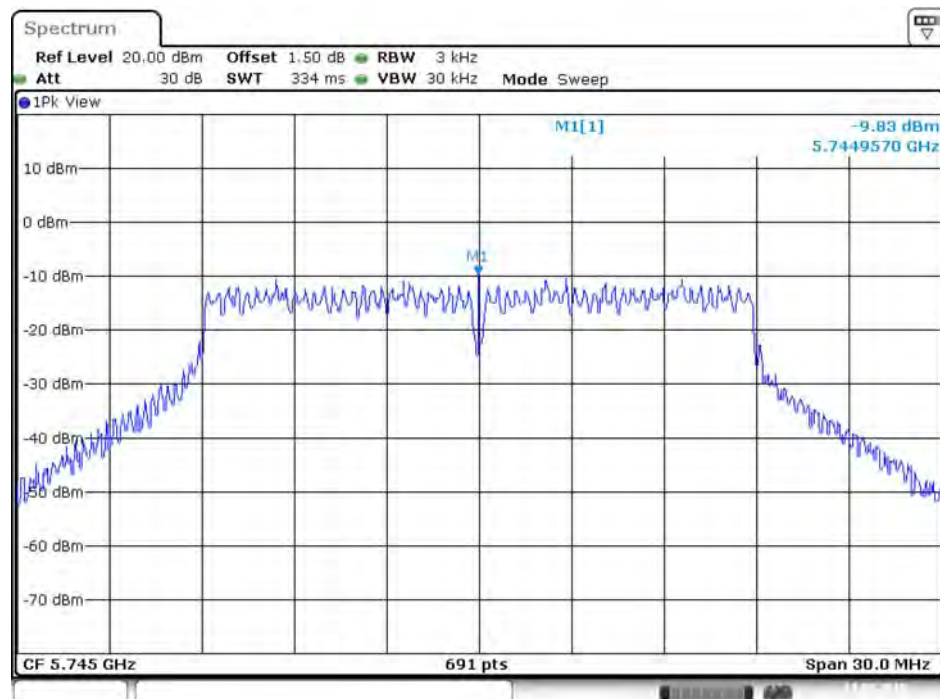


Date: 13.MAR.2015 17:08:19

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 5745 MHz / Chain 3

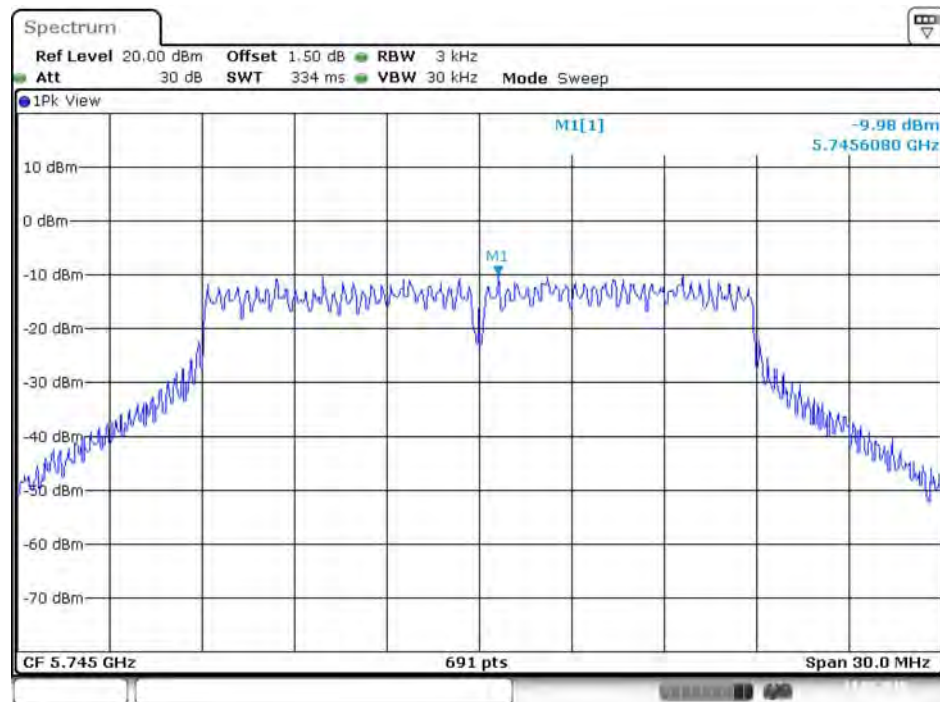


Date: 13.MAR.2015 17:07:21

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 5745 MHz / Chain 4

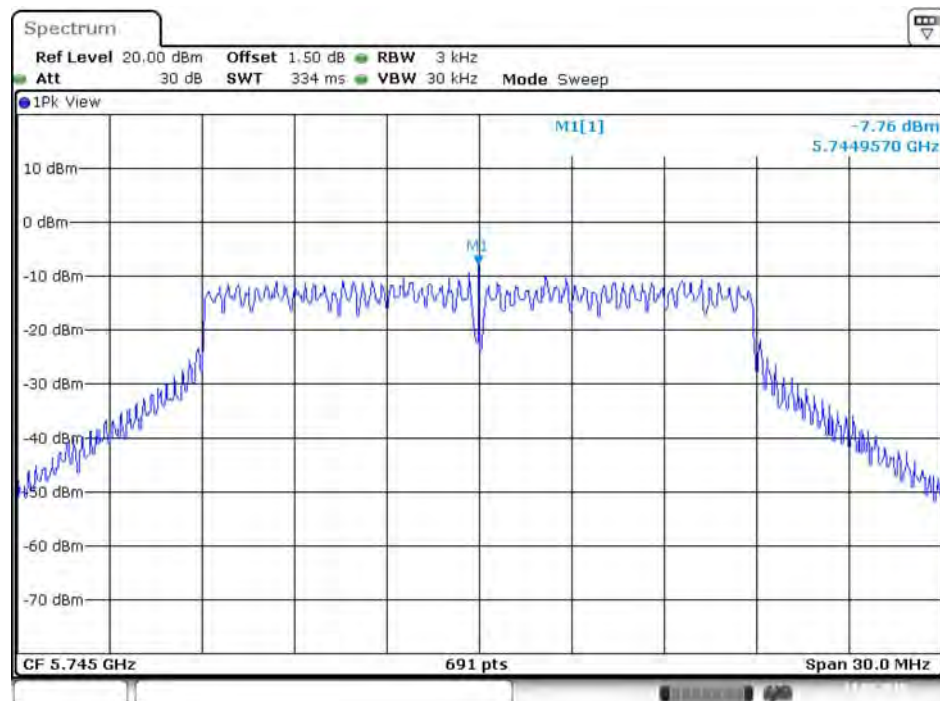


Date: 13.MAR.2015 17:07:52

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 5755 MHz / Chain 1

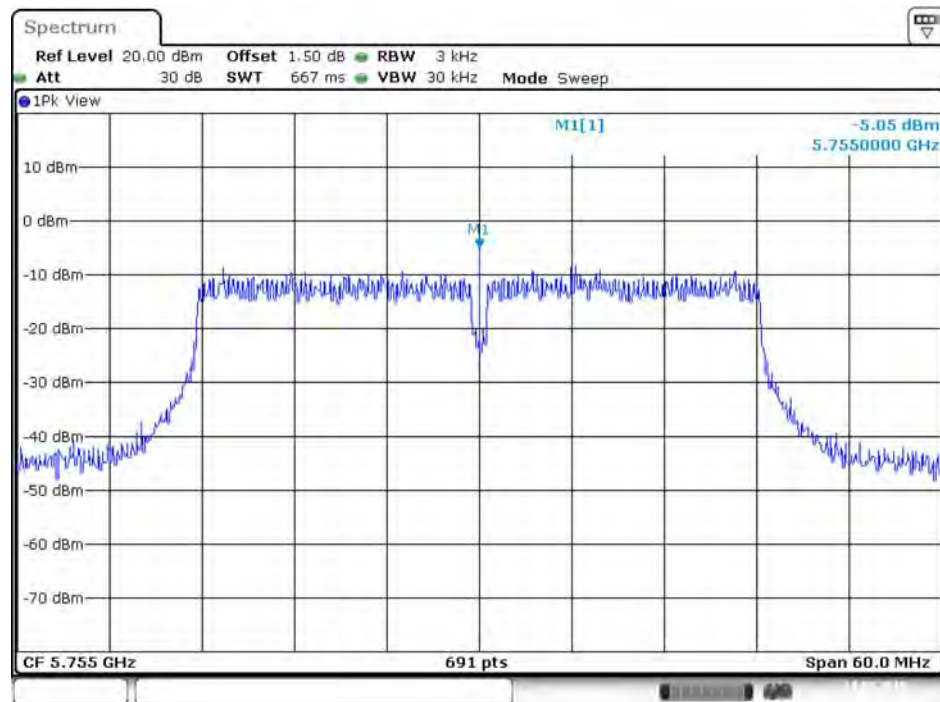


Date: 13.MAR.2015 17:19:31

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 5755 MHz / Chain 2

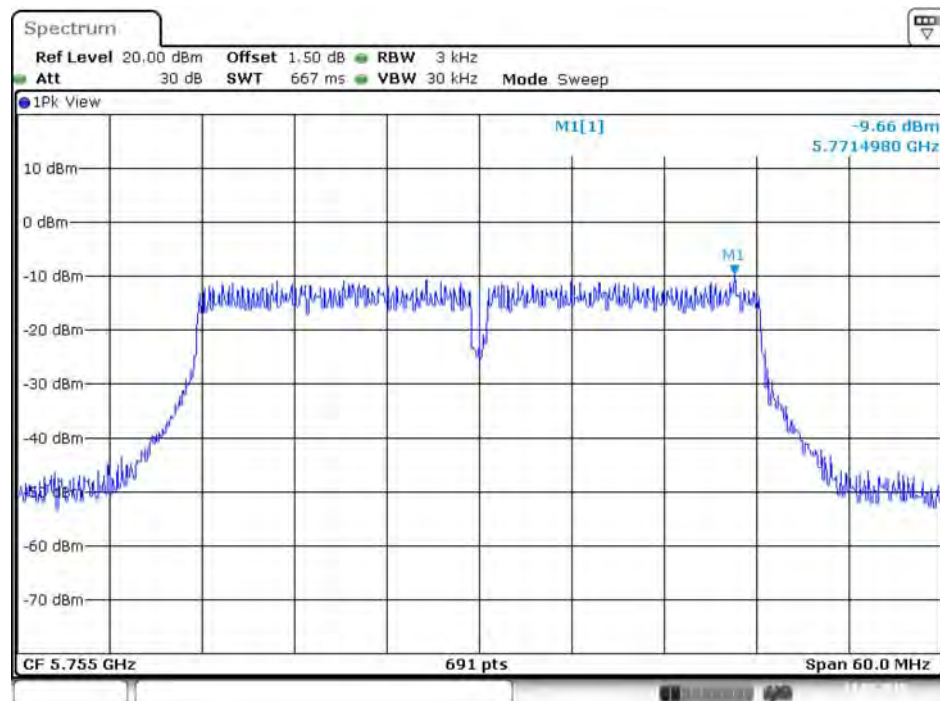


Date: 13.MAR.2015 17:18:57

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 5755 MHz / Chain 3

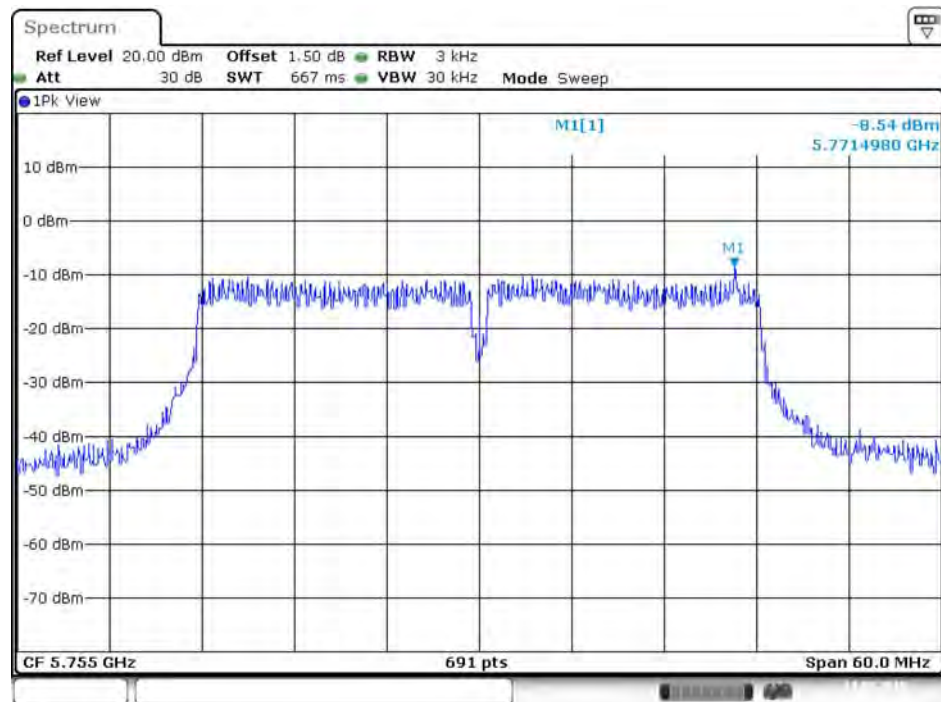


Date: 13.MAR.2015 17:18:29

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 5755 MHz / Chain 4

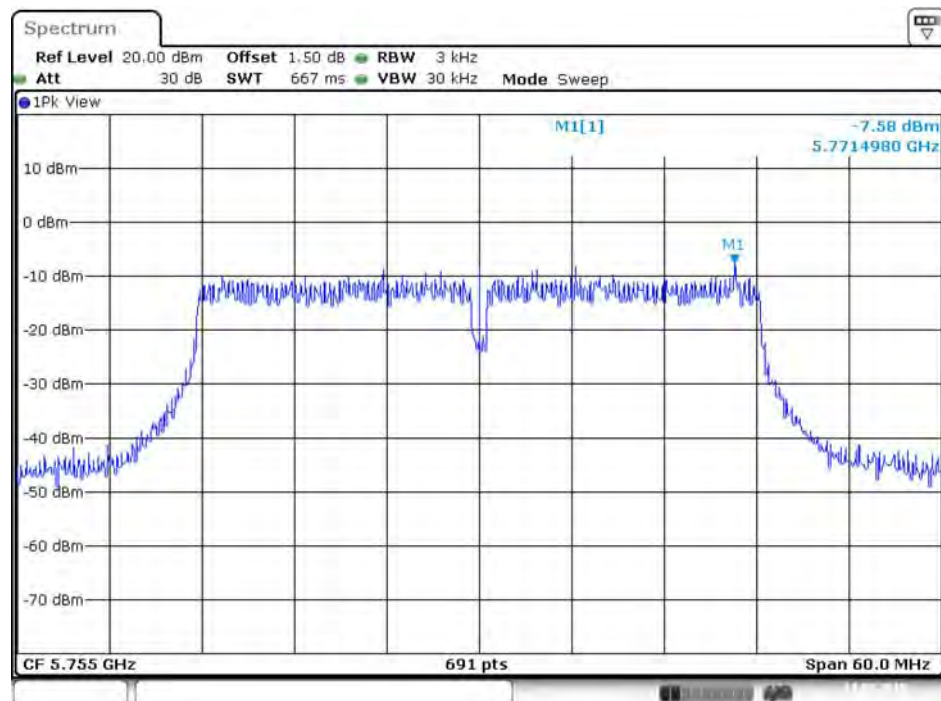


Date: 13.MAR.2015 17:18:03

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / 5775 MHz / Chain 1

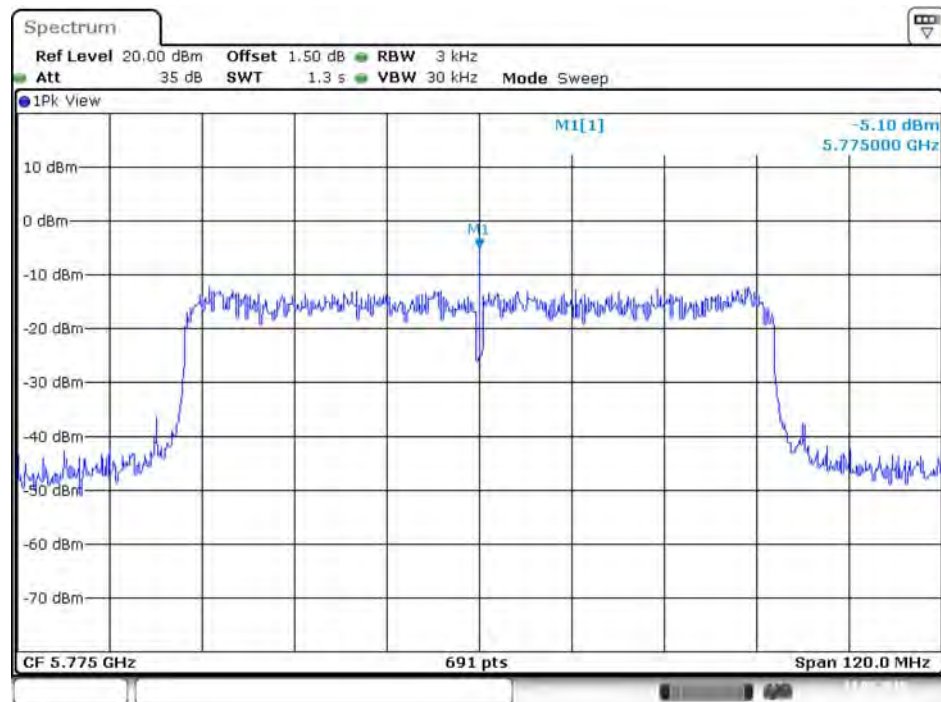


Date: 13.MAR.2015 17:25:38

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / 5775 MHz / Chain 2

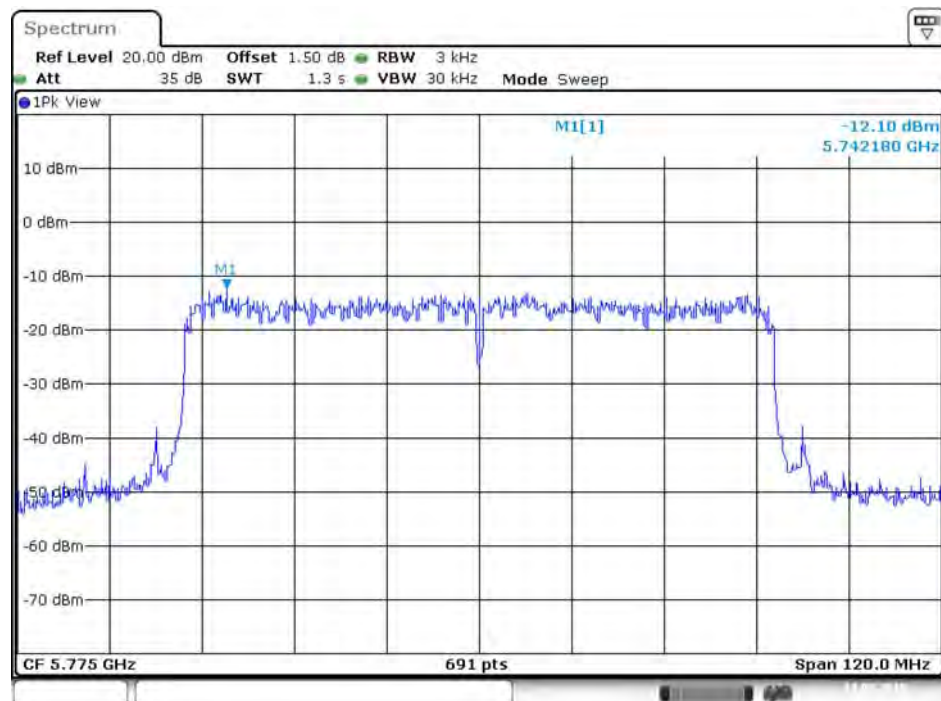


Date: 13.MAR.2015 17:25:16

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / 5775 MHz / Chain 3

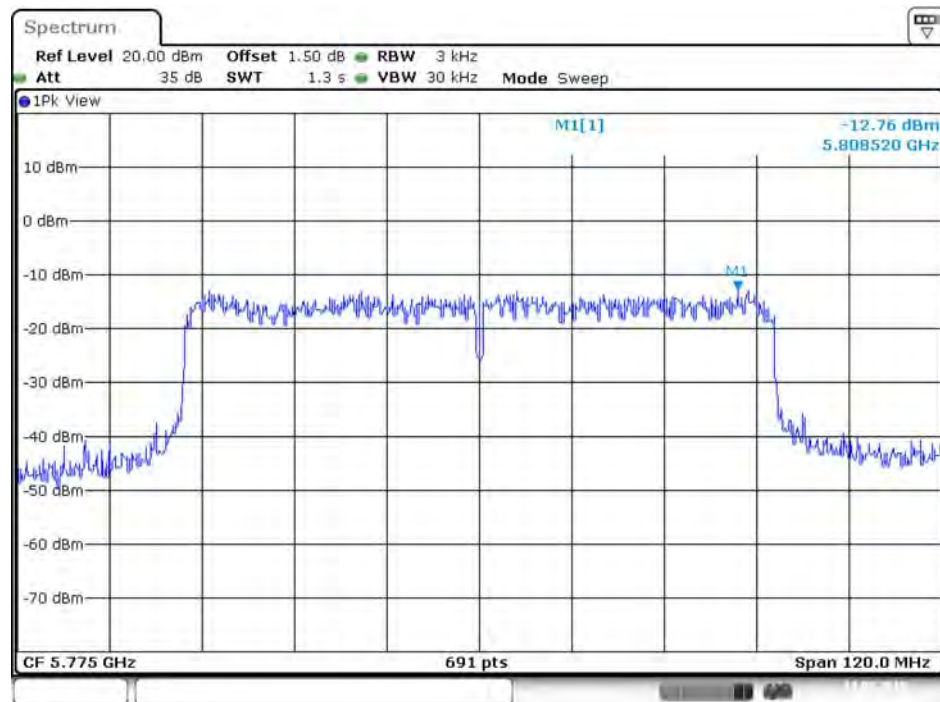

Date: 13.MAR.2015 17:24:45


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / 5775 MHz / Chain 4

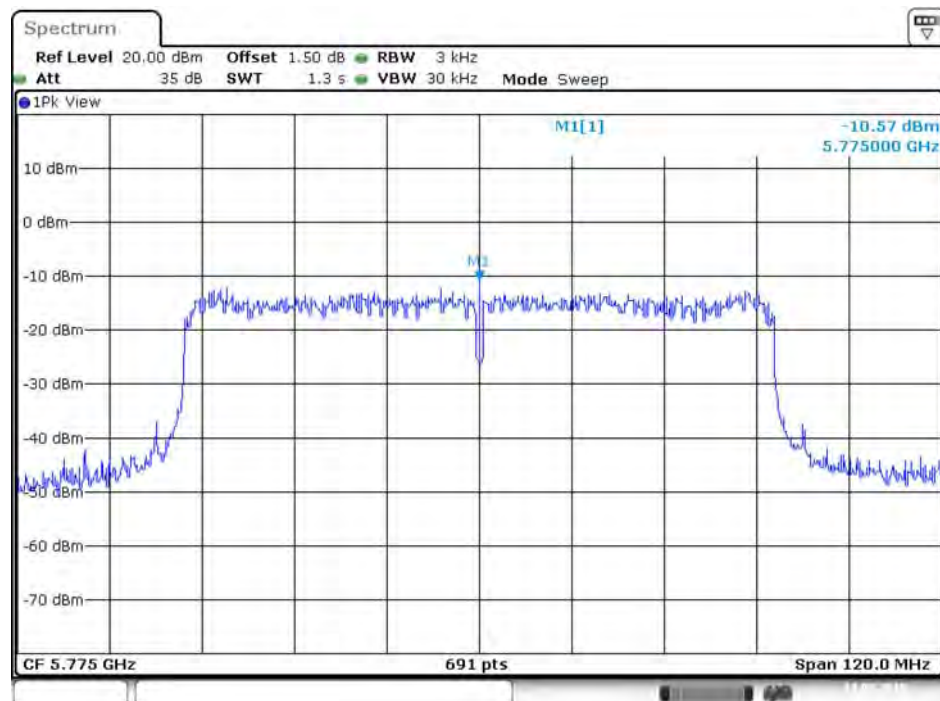

Date: 13.MAR.2015 17:24:14


For Beamforming Mode

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 5745 MHz / Chain 1

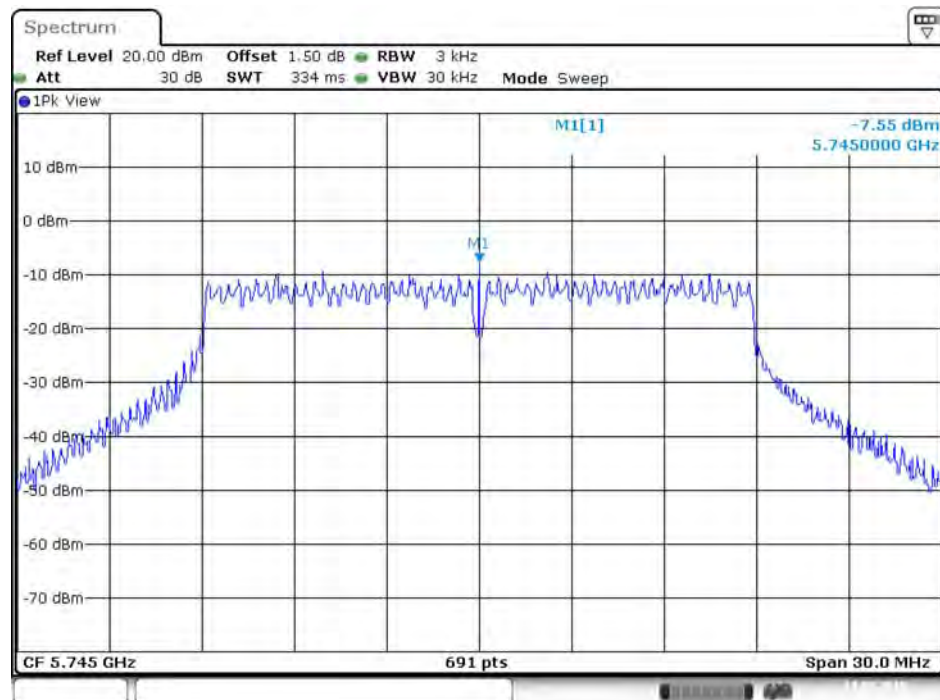


Date: 13.MAR.2015 17:32:13

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 5745 MHz / Chain 2

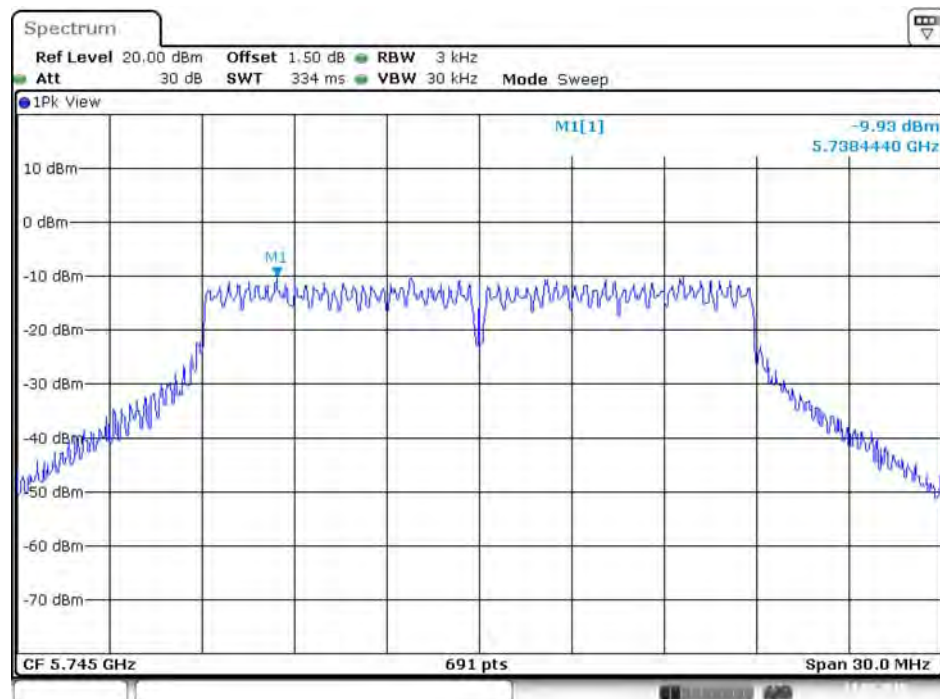


Date: 13.MAR.2015 17:31:52

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 5745 MHz / Chain 3

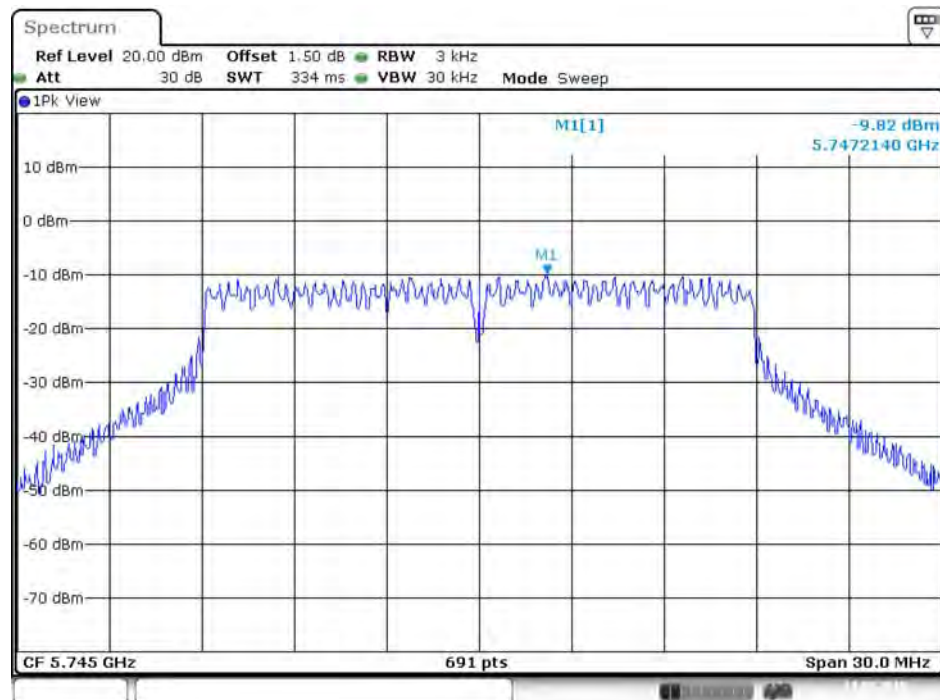


Date: 13.MAR.2015 17:31:31

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 5745 MHz / Chain 4

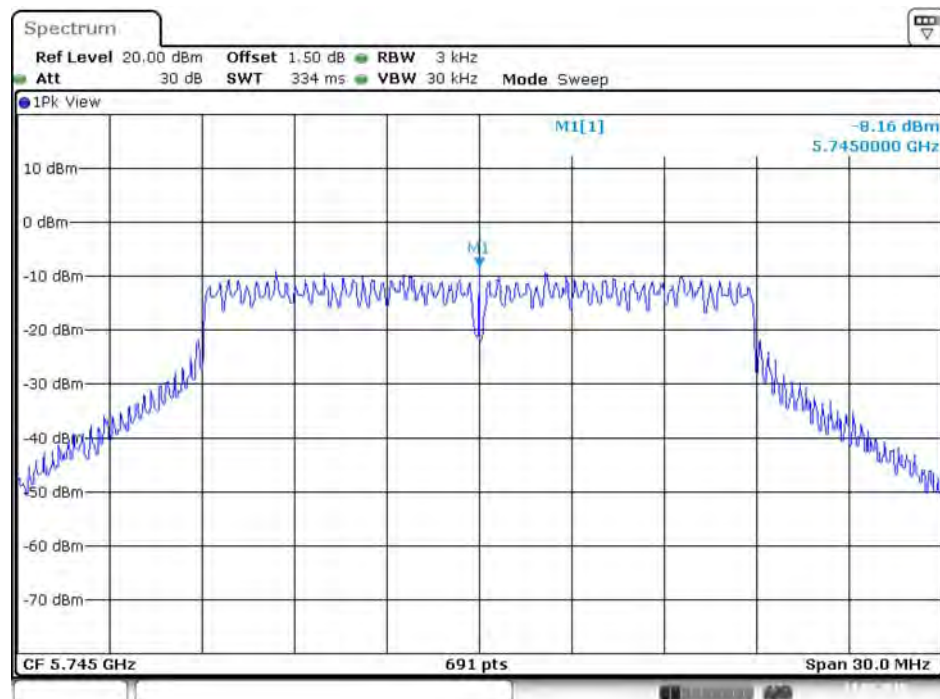


Date: 13.MAR.2015 17:31:08

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 5755 MHz / Chain 1

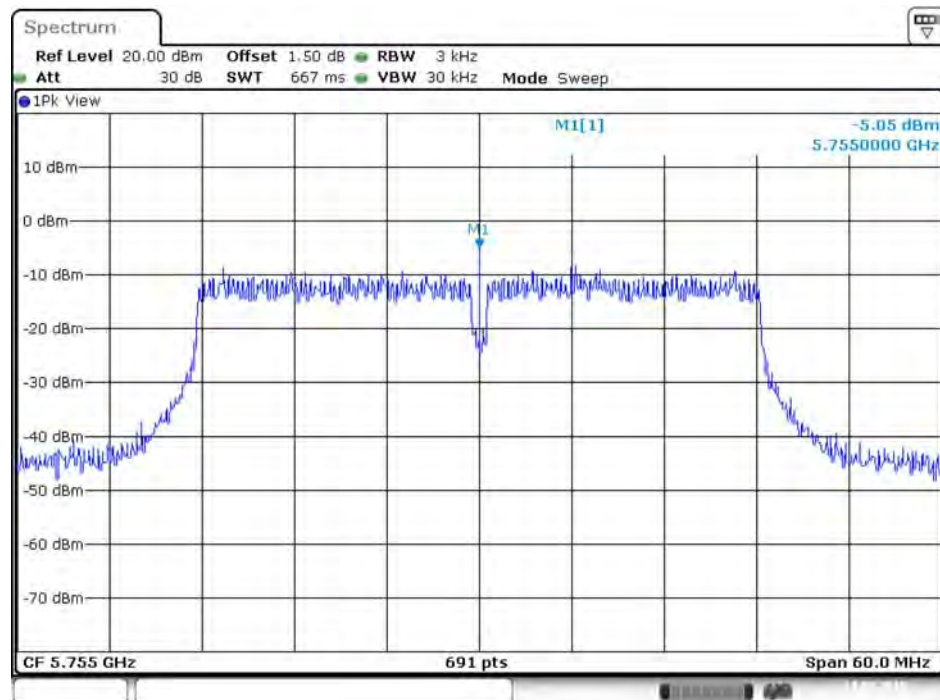


Date: 13.MAR.2015 17:19:31

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 5755 MHz / Chain 2

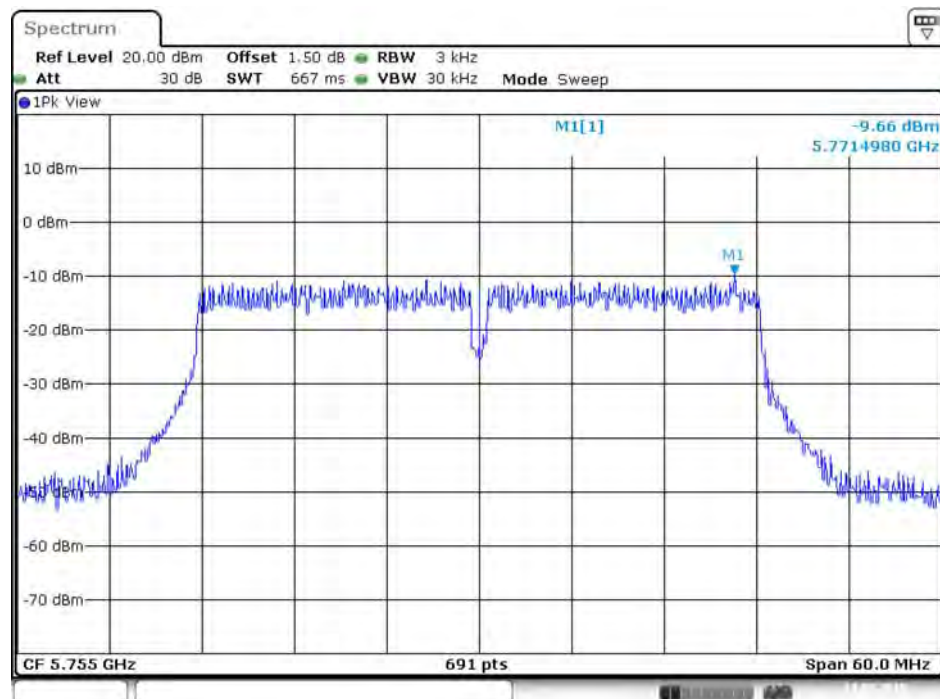


Date: 13.MAR.2015 17:18:57

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 5755 MHz / Chain 3

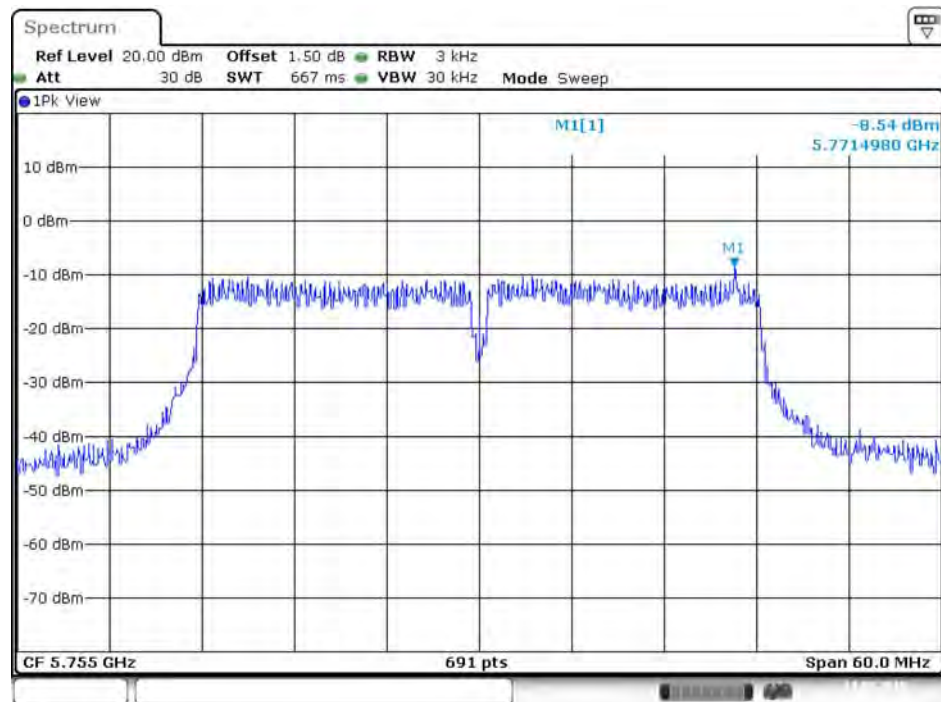


Date: 13.MAR.2015 17:18:29

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 5755 MHz / Chain 4

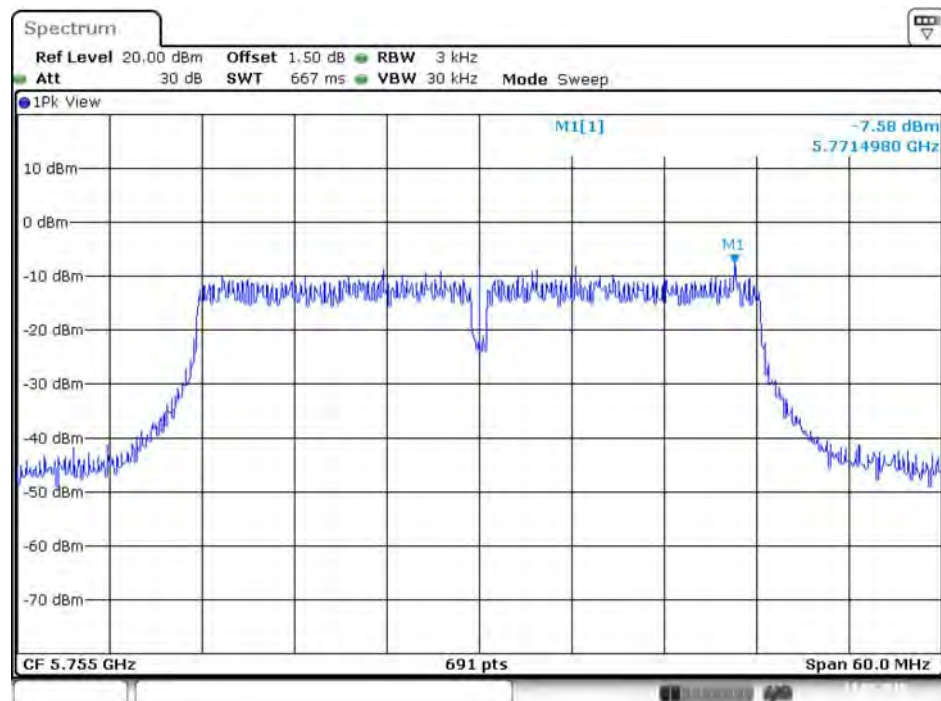


Date: 13.MAR.2015 17:18:03

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / 5775 MHz / Chain 1

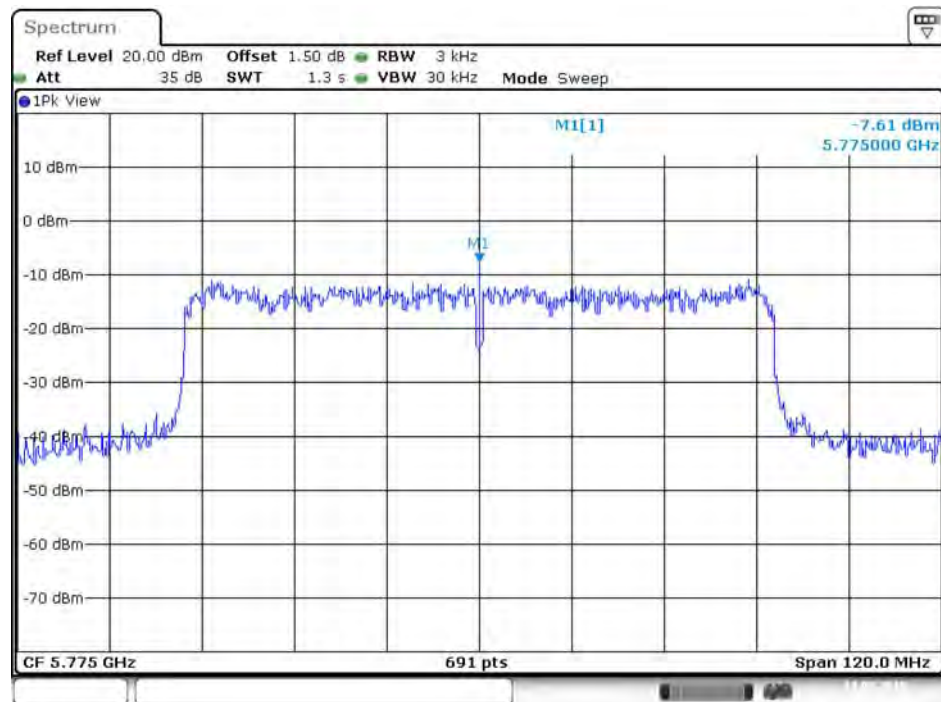


Date: 13.MAR.2015 17:28:35

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / 5775 MHz / Chain 2

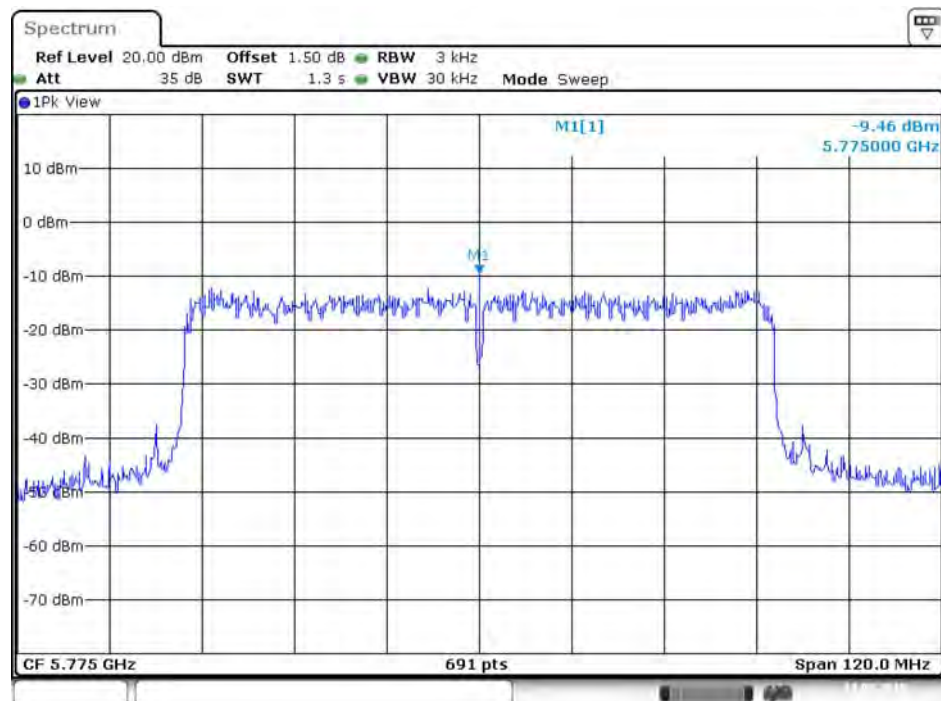


Date: 13.MAR.2015 17:29:04

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / 5775 MHz / Chain 3

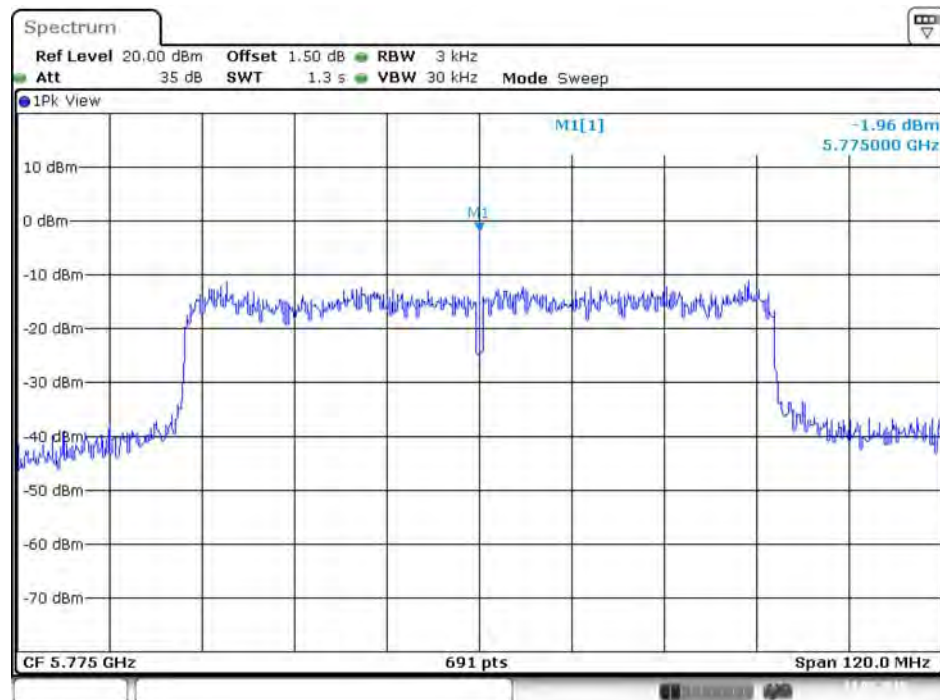

Date: 13.MAR.2015 17:29:32

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / 5775 MHz / Chain 4

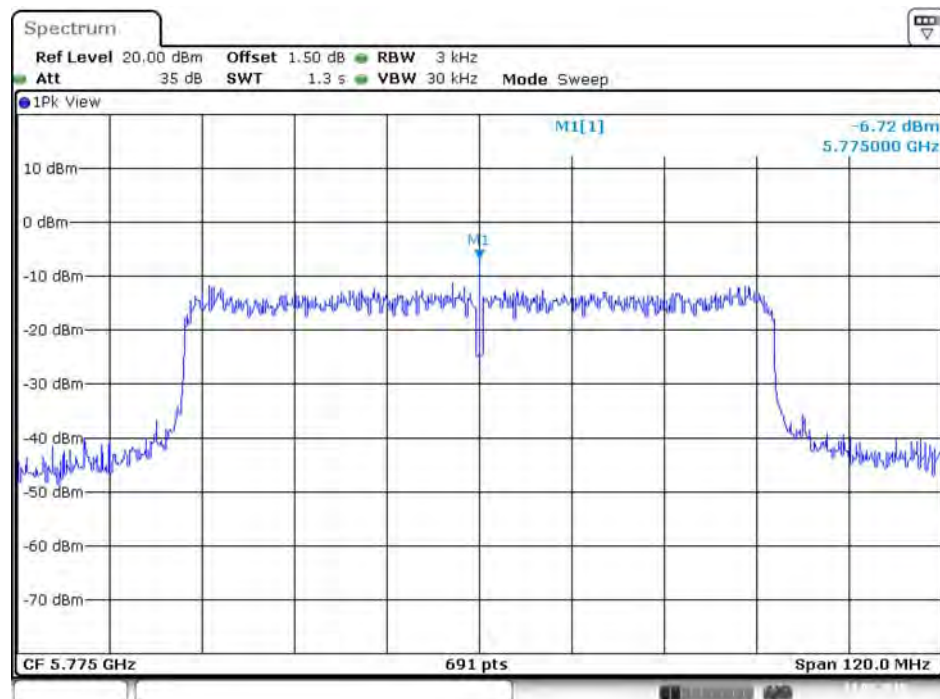

Date: 13.MAR.2015 17:29:58

4.4. 6dB Spectrum Bandwidth Measurement

4.4.1. Limit

For digital modulation systems, the minimum 6dB bandwidth shall be at least 500 kHz.

4.4.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

6dB Spectrum Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RBW	100kHz
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto
99% Occupied Bandwidth	
Spectrum Parameters	Setting
Span	1.5 times to 5.0 times the OBW
RBW	1 % to 5 % of the OBW
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold

4.4.3. Test Procedures

For Radiated 6dB Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Test was performed in accordance with KDB 558074 D01 v03r02 for Performing Compliance Measurements on Digital Transmission Systems (DTS) - section 8.0 DTS bandwidth => 8.1 Option 1.
3. Multiple antenna system was performed in accordance with KDB 662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. Measured the spectrum width with power higher than 6dB below carrier.

4.4.4. Test Setup Layout

For Radiated 6dB Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.5.4.

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of 6dB Spectrum Bandwidth

Temperature	26°C	Humidity	63%
Test Engineer	Mars Lin		

For Non-Beamforming Mode

Mode	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
802.11a	5745 MHz	15.01	16.58	500	Complies
	5785 MHz	11.94	16.58	500	Complies
	5825 MHz	13.74	16.50	500	Complies
802.11ac MCS0/Nss1 VHT20	5745 MHz	11.88	17.89	500	Complies
	5785 MHz	8.75	17.97	500	Complies
	5825 MHz	12.52	17.80	500	Complies
802.11ac MCS0/Nss1 VHT40	5755 MHz	33.86	37.34	500	Complies
	5795 MHz	32.58	37.62	500	Complies
802.11ac MCS0/Nss1 VHT80	5775 MHz	74.49	76.41	500	Complies

For Beamforming Mode


Mode	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
802.11ac MCS0/Nss1 VHT20	5745 MHz	17.57	18.23	500	Complies
	5785 MHz	17.57	18.23	500	Complies
	5825 MHz	17.57	18.23	500	Complies
802.11ac MCS0/Nss1 VHT40	5755 MHz	36.29	37.77	500	Complies
	5795 MHz	36.29	37.92	500	Complies
802.11ac MCS0/Nss1 VHT80	5775 MHz	75.36	76.12	500	Complies

Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.

For Non-Beamforming Mode

6 dB Bandwidth Plot on Configuration IEEE 802.11a / 5785 MHz / Chain 1 + Chain 2 + Chain 3+ Chain 4

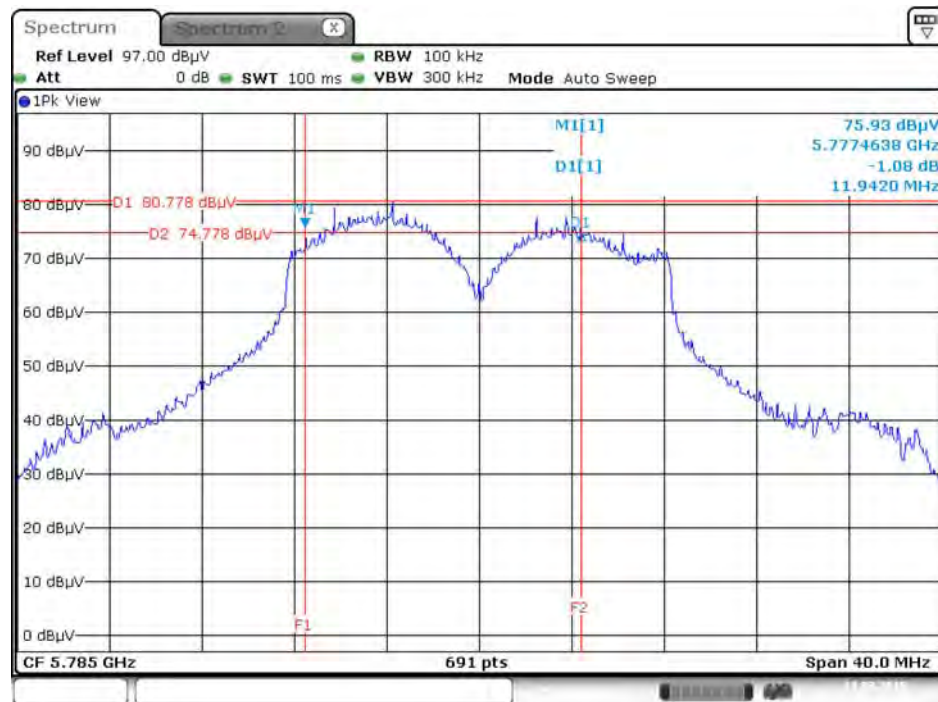


Date: 13.MAR.2015 19:20:52

99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / 5785 MHz / Chain 1 + Chain 2 + Chain 3+ Chain 4



Date: 13.MAR.2015 19:21:10

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 5785 MHz / Chain 1 + Chain 2 + Chain 3+ Chain 4

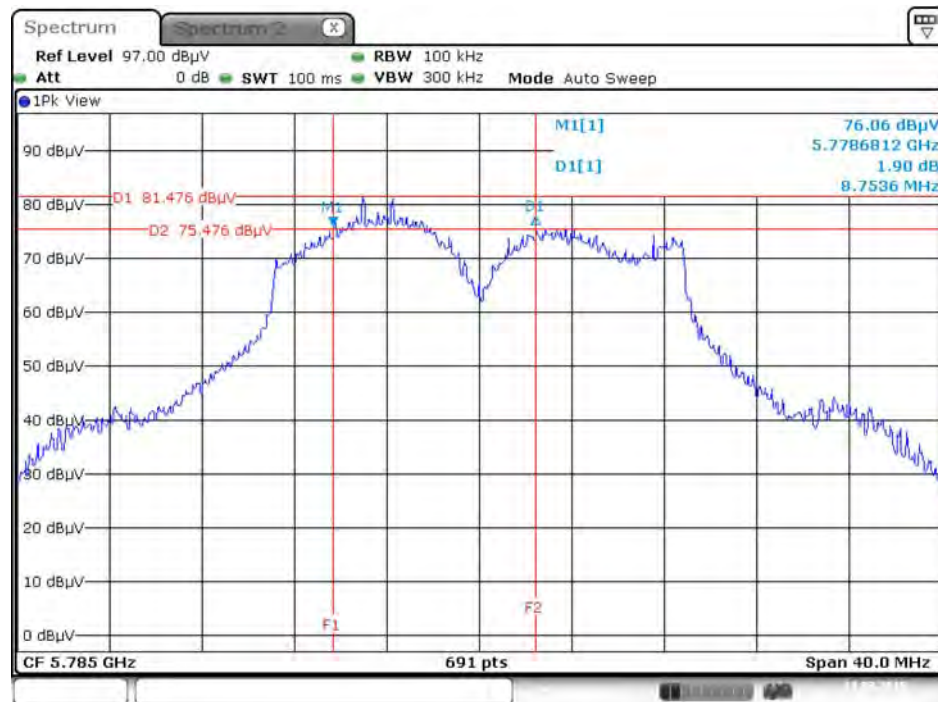


Date: 13.MAR.2015 19:15:48

99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 5785 MHz / Chain 1 + Chain 2 + Chain 3+ Chain 4



Date: 13.MAR.2015 19:15:20

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 5795MHz / Chain 1 + Chain 2 + Chain 3+ Chain 4

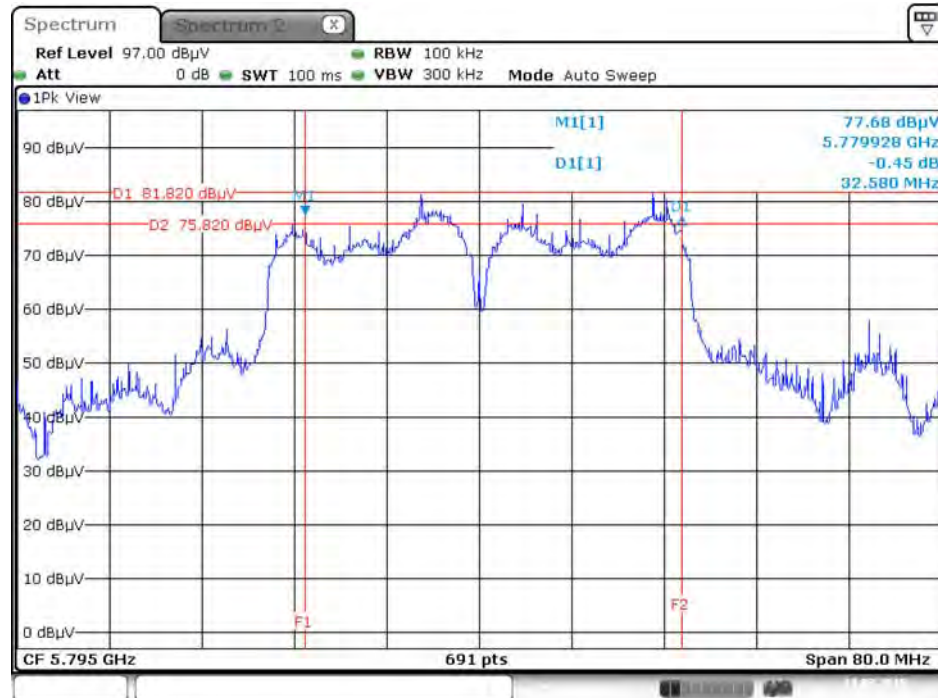


Date: 13.MAR.2015 19:05:45

99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 5795MHz / Chain 1 + Chain 2 + Chain 3+ Chain 4




Date: 13.MAR.2015 19:05:00

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / 5775 MHz / Chain 1 + Chain 2 + Chain 3+ Chain 4

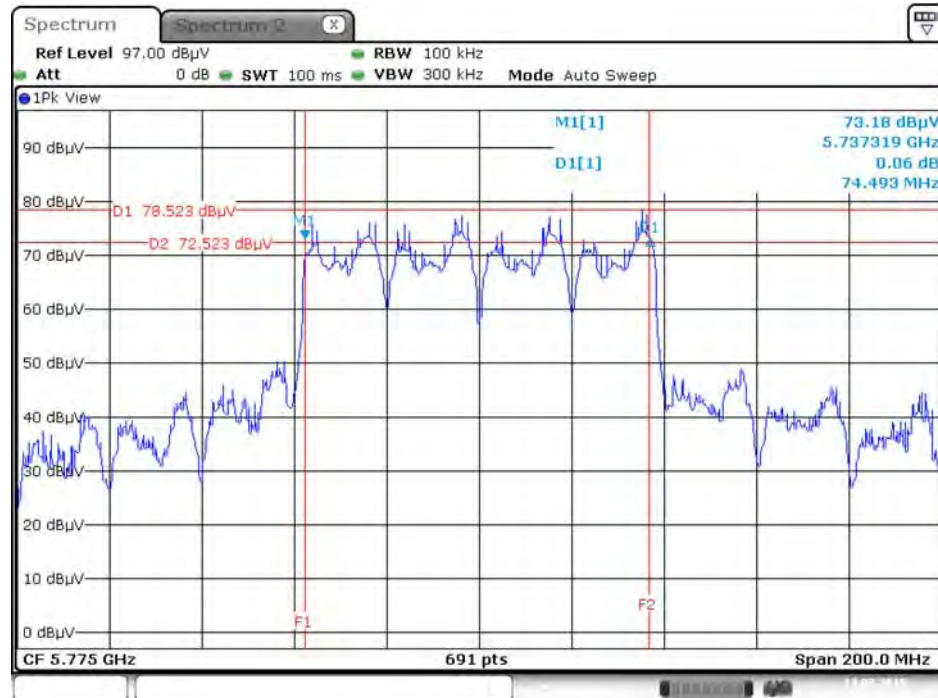

Date: 13.MAR.2015 19:23:58


99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / 5775 MHz / Chain 1 + Chain 2 + Chain 3+ Chain 4

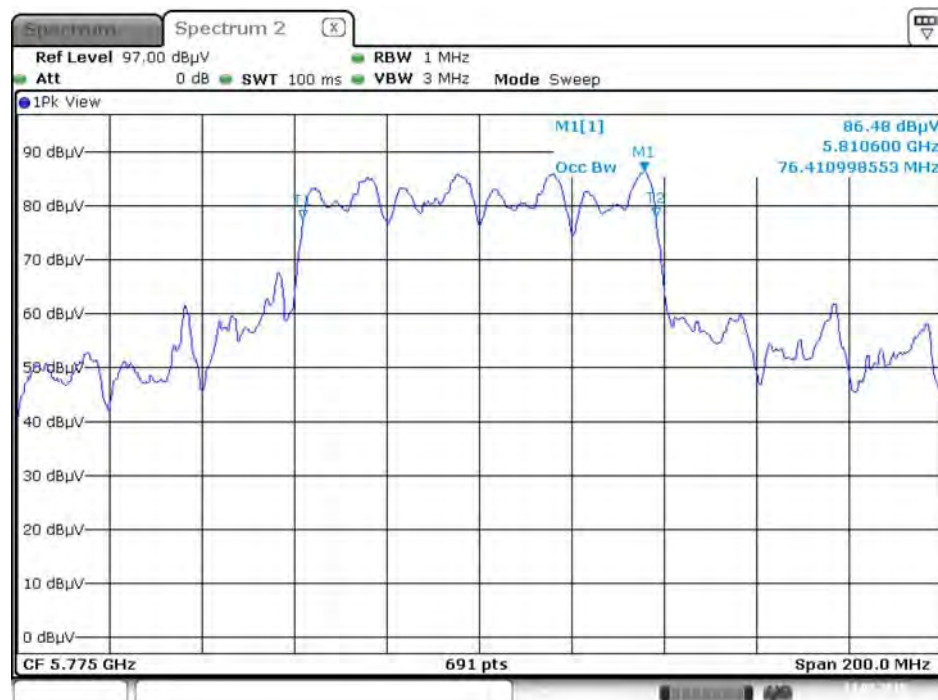

Date: 13.MAR.2015 19:23:15




**6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 5785 MHz / Chain 1 + Chain 2
+ Chain 3+ Chain 4**




Date: 16 MAR 2015 10:23:40

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 5795MHz / Chain 1 + Chain 2 + Chain 3+ Chain 4

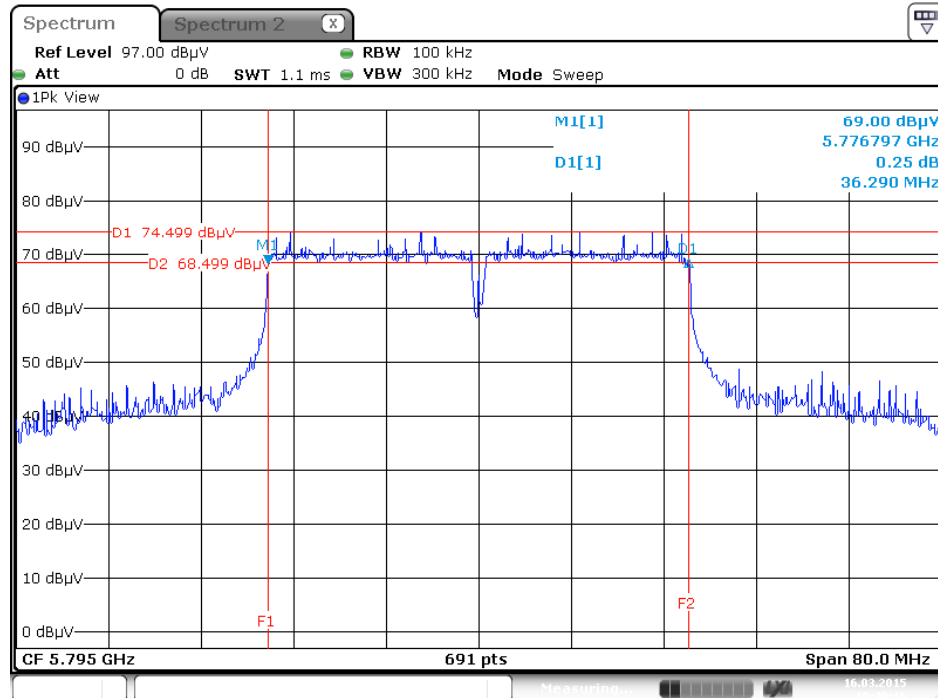


Date: 16 MAR 2015 10:40:16

99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 5795MHz / Chain 1 + Chain 2 + Chain 3+ Chain 4

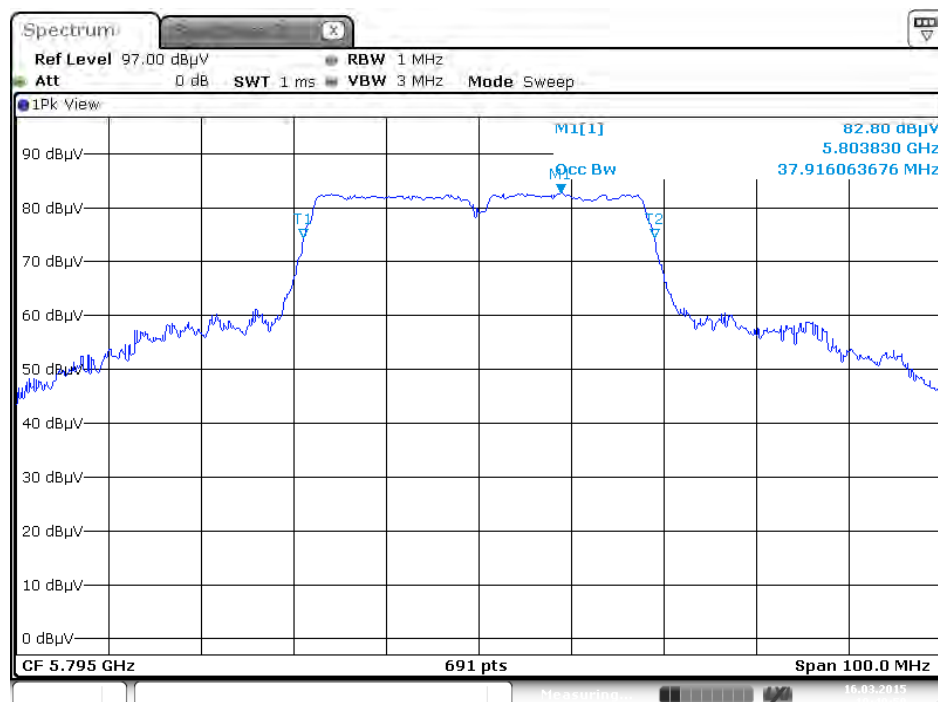


Date: 16 MAR 2015 10:40:50

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / 5775 MHz / Chain 1 + Chain 2 + Chain 3+ Chain 4

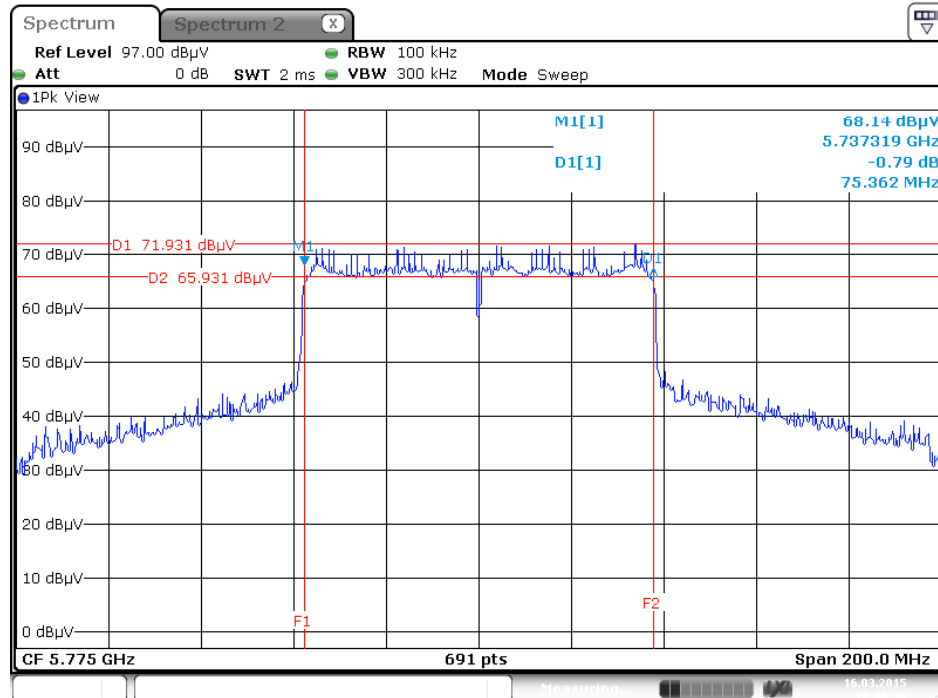

Date: 16 MAR 2015 10:46:38

99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / 5775 MHz / Chain 1 + Chain 2 + Chain 3+ Chain 4

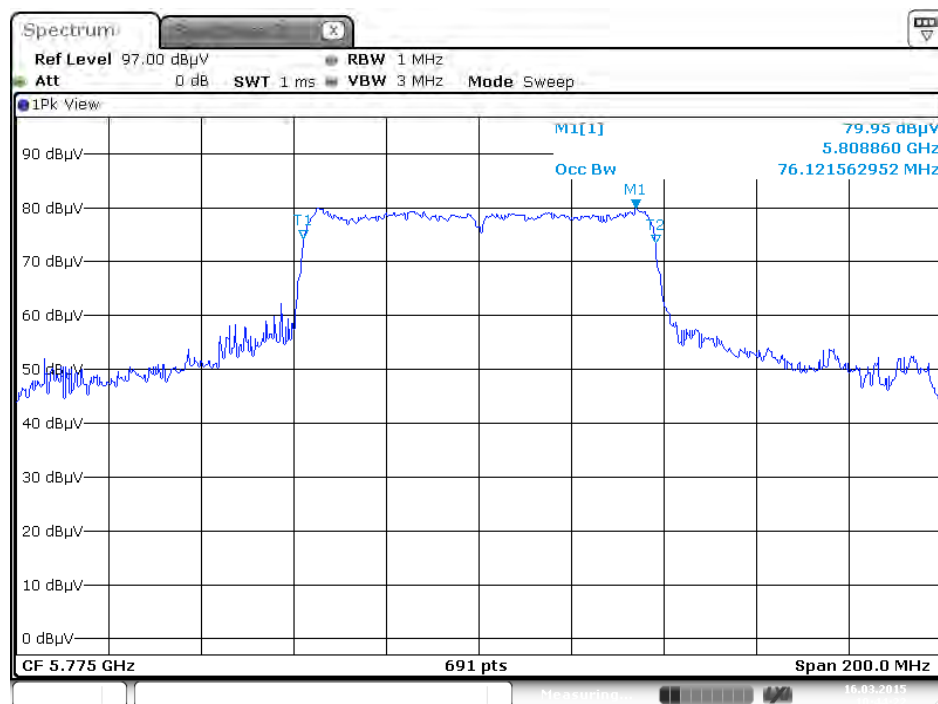

Date: 16 MAR 2015 10:44:22

4.5. Radiated Emissions Measurement

4.5.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	100kHz / 300kHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1GHz / RBW 120kHz for QP

4.5.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 1/T VBW for average reading in spectrum analyzer.
7. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
8. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
9. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.5.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

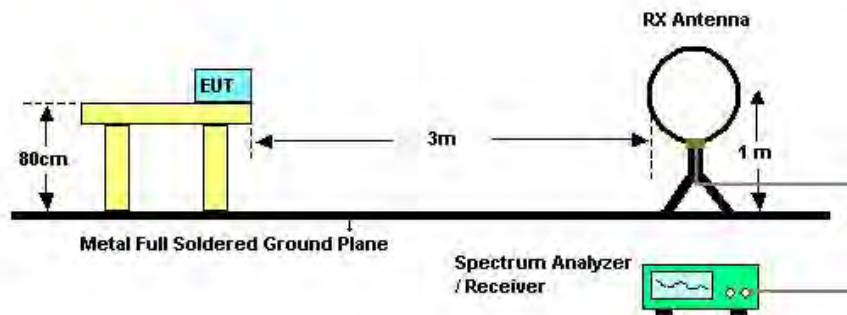

For Radiated Emissions: 30MHz~1GHz

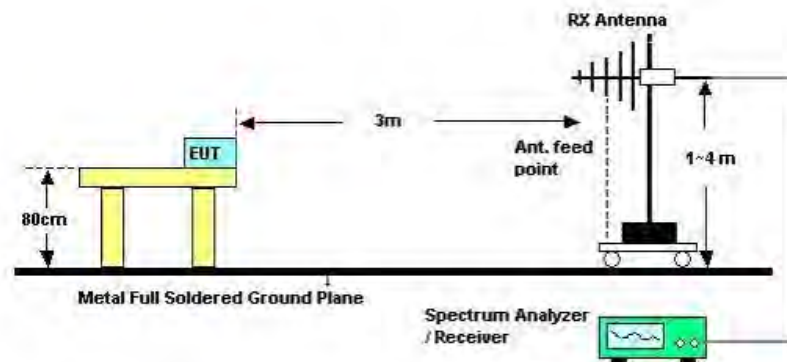

For Radiated Emissions: Above 1GHz

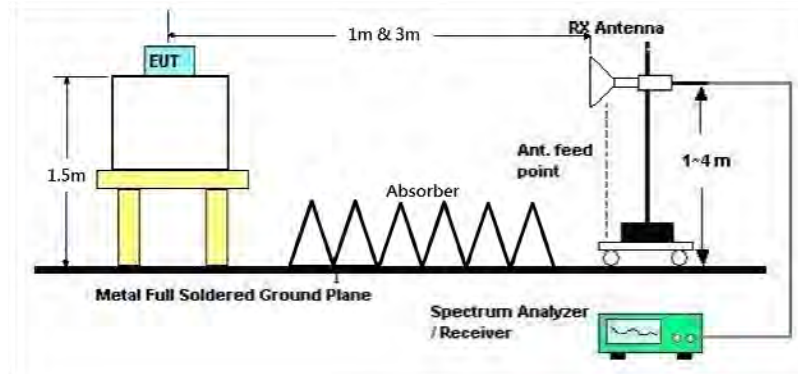

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

For Non-Beamforming Mode:

The EUT was programmed to be in continuously transmitting mode.

For Beamforming Mode:

The EUT was programmed to be in beamforming transmitting mode.

4.5.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	25°C	Humidity	40%
Test Engineer	Peter Wu, Akina Chiu	Configurations	Normal Link
Test Date	Jan. 28, 2015	Test Mode	Mode 2

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.5.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	25°C	Humidity	40%
Test Engineer	Peter Wu, Akina Chiu	Configurations	Normal Link / Mode 2

Horizontal

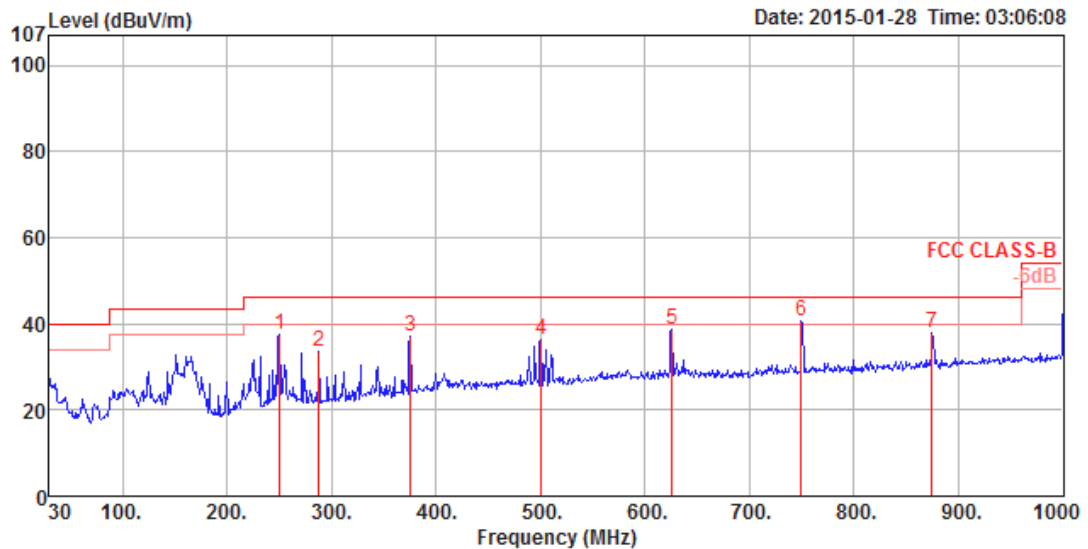

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	Pol/Phase	deg	cm	
1	250.19	37.36	46.00	-8.64	55.54	1.13	32.33	13.02	HORIZONTAL	155	125	Peak
2	288.02	33.49	46.00	-12.51	50.92	1.21	32.30	13.66	HORIZONTAL	55	125	Peak
3	375.32	36.96	46.00	-9.04	51.97	1.38	32.32	15.93	HORIZONTAL	86	100	Peak
4	500.45	36.26	46.00	-9.74	49.26	1.60	32.41	17.81	HORIZONTAL	140	100	Peak
5	625.58	38.86	46.00	-7.14	50.32	1.81	32.53	19.26	HORIZONTAL	239	200	Peak
6	749.74	40.50	46.00	-5.50	50.75	1.97	32.42	20.20	HORIZONTAL	132	125	Peak
7	874.87	38.07	46.00	-7.93	46.64	2.13	32.05	21.35	HORIZONTAL	149	100	Peak

Vertical

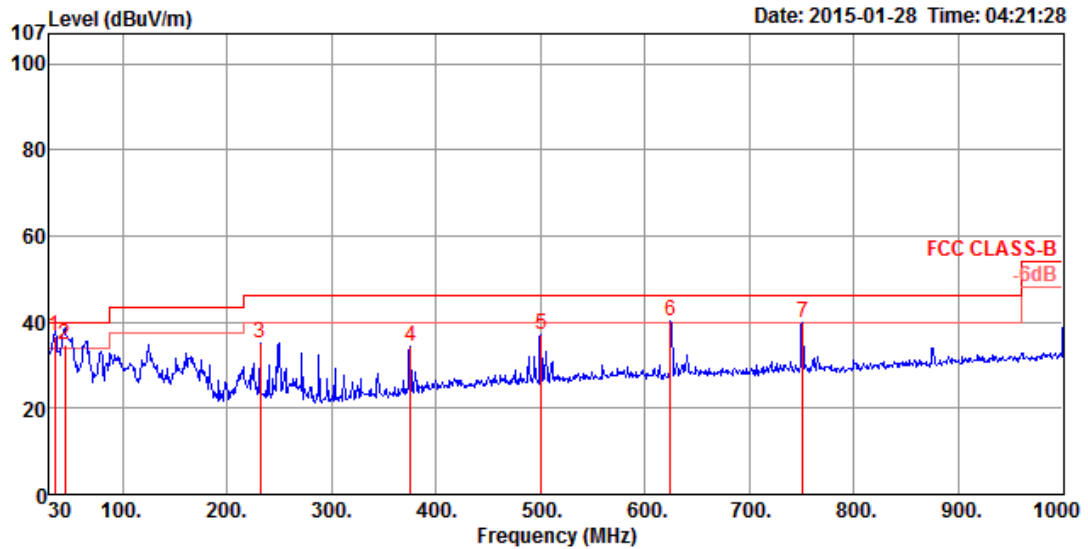

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	Pol/Phase	deg	cm	
1	34.85	36.77	40.00	-3.23	51.76	0.42	32.41	17.00	VERTICAL	223	100	QP
2	44.55	34.70	40.00	-5.30	55.45	0.48	32.43	11.20	VERTICAL	147	100	QP
3	231.76	35.30	46.00	-10.70	54.92	1.09	32.19	11.48	VERTICAL	299	100	Peak
4	375.32	34.34	46.00	-11.66	49.37	1.38	32.32	15.91	VERTICAL	142	125	Peak
5	500.45	37.30	46.00	-8.70	50.31	1.60	32.41	17.80	VERTICAL	193	125	Peak
6	624.61	40.10	46.00	-5.90	51.58	1.81	32.54	19.25	VERTICAL	230	100	Peak
7	750.71	39.73	46.00	-6.27	49.97	1.97	32.42	20.21	VERTICAL	257	100	Peak

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.5.9. Results for Radiated Emissions (1GHz~10th Harmonic)

For Non-Beamforming Mode

Temperature	25°C	Humidity	40%
Test Engineer	Peter Wu, Akina Chiu	Configurations	IEEE 802.11a CH 149 / Chain 1 + Chain 2 + Chain 3 + Chain4
Test Date	Mar. 07, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	ReadAntenna Level Factor	Cable Loss Factor	Aux Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	11497.15	59.63	74.00	-14.37	48.42	39.10	6.96	0.00	100	94 Peak	HORIZONTAL
2	11497.61	46.84	54.00	-7.16	35.63	39.10	6.96	0.00	100	94 Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	ReadAntenna Level Factor	Cable Loss Factor	Aux Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	11487.51	50.05	54.00	-3.95	38.85	39.10	6.95	0.00	104	299 Average	VERTICAL
2	11494.95	63.23	74.00	-10.77	52.02	39.10	6.96	0.00	104	299 Peak	VERTICAL

Temperature	25°C	Humidity	40%
Test Engineer	Peter Wu, Akina Chiu	Configurations	IEEE 802.11a CH 157 / Chain 1 + Chain 2 + Chain 3 + Chain4
Test Date	Mar. 07, 2015		

Horizontal

	Freq	Level	Limit	Over	ReadAntenna	Cable	Aux	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	11577.76	46.79	54.00	-7.21	35.62	39.01	7.01	0.00	110	95 Average	HORIZONTAL
2	11578.51	59.10	74.00	-14.90	47.93	39.01	7.01	0.00	110	95 Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	ReadAntenna	Cable	Aux	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	11570.06	63.95	74.00	-10.05	52.78	39.01	7.01	0.00	102	315 Peak	VERTICAL
2	11570.20	50.76	54.00	-3.24	39.59	39.01	7.01	0.00	102	315 Average	VERTICAL

Temperature	25°C	Humidity	40%
Test Engineer	Peter Wu, Akina Chiu	Configurations	IEEE 802.11a CH 165 / Chain 1 + Chain 2 + Chain 3 + Chain4
Test Date	Mar. 07, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	ReadAntenna Level	Factor	Cable Loss	Aux Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		
1	11656.57	43.01	54.00	-10.99	31.92	38.89	7.05	0.00	104	31	Average	HORIZONTAL
2	11656.92	56.20	74.00	-17.80	45.11	38.89	7.05	0.00	104	31	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	ReadAntenna Level	Factor	Cable Loss	Aux Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		
1	11650.06	62.42	74.00	-11.58	51.29	38.93	7.05	0.00	106	309	Peak	VERTICAL
2	11650.09	50.18	54.00	-3.82	39.05	38.93	7.05	0.00	106	309	Average	VERTICAL

Temperature	25°C	Humidity	40%
Test Engineer	Peter Wu, Akina Chiu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 149 / Chain 1 + Chain 2 + Chain 3 + Chain4
Test Date	Mar. 07, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	ReadAntenna Level	Factor	Cable Loss	Aux Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		
1	11495.47	46.14	54.00	-7.86	34.93	39.10	6.96	0.00	112	13	Average	HORIZONTAL
2	11495.82	59.78	74.00	-14.22	48.57	39.10	6.96	0.00	112	13	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	ReadAntenna Level	Antenna Factor	Cable Loss	Aux Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		
1	11489.77	50.26	54.00	-3.74	39.06	39.10	6.95	0.00	106	317	Average	VERTICAL
2	11489.97	63.93	74.00	-10.07	52.73	39.10	6.95	0.00	106	317	Peak	VERTICAL

Temperature	25°C	Humidity	40%
Test Engineer	Peter Wu, Akina Chiu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 157 / Chain 1 + Chain 2 + Chain 3 + Chain4
Test Date	Mar. 07, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	ReadAntenna Level	Factor	Cable Loss	Aux Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		
1	11577.41	46.13	54.00	-7.87	34.96	39.01	7.01	0.00	111	14	Average	HORIZONTAL
2	11578.83	59.47	74.00	-14.53	48.30	39.01	7.01	0.00	111	14	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	ReadAntenna Level	Factor	Cable Loss	Aux Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		
1	11568.38	65.73	74.00	-8.27	54.58	39.01	6.99	0.00	103	304	Peak	VERTICAL
2	11569.16	50.92	54.00	-3.08	39.75	39.01	7.01	0.00	103	304	Average	VERTICAL

Temperature	25°C	Humidity	40%
Test Engineer	Peter Wu, Akina Chiu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 165 / Chain 1 + Chain 2 + Chain 3 + Chain4
Test Date	Mar. 07, 2015		

Horizontal

	Freq	Level	Limit	Over	ReadAntenna	Cable	Aux	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	11658.94	59.57	74.00	-14.43	48.48	38.89	7.05	0.00	101	94 Peak	HORIZONTAL
2	11659.06	45.94	54.00	-8.06	34.85	38.89	7.05	0.00	101	94 Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	ReadAntenna	Cable	Aux	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	11649.28	64.61	74.00	-9.39	53.48	38.93	7.05	0.00	113	307 Peak	VERTICAL
2	11649.94	50.83	54.00	-3.17	39.70	38.93	7.05	0.00	113	307 Average	VERTICAL

Temperature	25°C	Humidity	40%
Test Engineer	Peter Wu, Akina Chiu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 151 / Chain 1 + Chain 2 + Chain 3 + Chain4
Test Date	Mar. 09, 2015		

Horizontal

	Freq	Level	Limit	Over	ReadAntenna	Cable	Aux	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	11497.84	48.12	54.00	-5.88	36.91	39.10	6.96	0.00	100	94 Average	HORIZONTAL
2	11516.51	60.70	74.00	-13.30	49.49	39.10	6.96	0.00	100	94 Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	ReadAntenna	Cable	Aux	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	11514.05	50.94	54.00	-3.06	39.73	39.10	6.96	0.00	100	264 Average	VERTICAL
2	11515.07	62.68	74.00	-11.32	51.47	39.10	6.96	0.00	100	264 Peak	VERTICAL

Temperature	25°C	Humidity	40%
Test Engineer	Peter Wu, Akina Chiu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 159 / Chain 1 + Chain 2 + Chain 3 + Chain4
Test Date	Mar. 09, 2015		

Horizontal

	Freq	Level	Limit	Over	ReadAntenna	Cable	Aux	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	11597.82	59.95	74.00	-14.05	48.81	38.97	7.02	0.00	101	92 Peak	HORIZONTAL
2	11598.18	48.46	54.00	-5.54	37.32	38.97	7.02	0.00	101	92 Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	ReadAntenna	Cable	Aux	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	11594.34	50.69	54.00	-3.31	39.56	38.97	7.01	0.00	100	264 Average	VERTICAL
2	11595.14	62.52	74.00	-11.48	51.38	38.97	7.02	0.00	100	264 Peak	VERTICAL

Temperature	25°C	Humidity	40%
Test Engineer	Peter Wu, Akina Chiu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 155 / Chain 1 + Chain 2 + Chain 3 + Chain43
Test Date	Mar. 09, 2015		

Horizontal

	Freq	Level	Limit	Over	ReadAntenna	Cable	Aux	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	11535.67	58.91	74.00	-15.09	47.72	39.06	6.98	0.00	100	97 Peak	HORIZONTAL
2	11556.87	45.51	54.00	-8.49	34.36	39.01	6.99	0.00	100	97 Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	ReadAntenna	Cable	Aux	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	11550.14	46.96	54.00	-7.04	35.76	39.06	6.99	0.00	102	260 Average	VERTICAL
2	11554.56	59.77	74.00	-14.23	48.62	39.01	6.99	0.00	102	260 Peak	VERTICAL

For Beamforming Mode

Temperature	25°C	Humidity	40%
Test Engineer	Peter Wu, Akina Chiu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 149 / Chain 1 + Chain 2 + Chain 3 + Chain4
Test Date	Mar. 10, 2015		

Horizontal

	Freq	Level	Limit	Over	ReadAntenna	Cable	Aux	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	11490.07	46.42	54.00	-7.58	35.22	39.10	6.95	0.00	101	92	Average
2	11492.68	59.17	74.00	-14.83	47.96	39.10	6.96	0.00	101	92	Peak

Vertical

	Freq	Level	Limit Line	Over Limit	ReadAntenna Level Factor	Cable Loss	Aux Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	11490.36	50.13	54.00	-3.87	38.93	39.10	6.95	0.00	122	328	Average
2	11492.24	64.28	74.00	-9.72	53.07	39.10	6.96	0.00	122	328	Peak

Temperature	25°C	Humidity	40%
Test Engineer	Peter Wu, Akina Chiu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 157 / Chain 1 + Chain 2 + Chain 3 + Chain4
Test Date	Mar. 10, 2015		

Horizontal

	Freq	Level	Limit	Over	ReadAntenna	Cable	Aux	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	11561.92	56.80	74.00	-17.20	45.65	39.01	6.99	0.00	105	19 Peak	HORIZONTAL
2	11576.95	44.50	54.00	-9.50	33.33	39.01	7.01	0.00	105	19 Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	ReadAntenna	Cable	Aux	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	11567.48	63.78	74.00	-10.22	52.63	39.01	6.99	0.00	100	313 Peak	VERTICAL
2	11568.31	50.18	54.00	-3.82	39.03	39.01	6.99	0.00	100	313 Average	VERTICAL

Temperature	25°C	Humidity	40%
Test Engineer	Peter Wu, Akina Chiu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 165 / Chain 1 + Chain 2 + Chain 3 + Chain4
Test Date	Mar. 10, 2015		

Horizontal

	Freq	Level	Limit	Over	ReadAntenna	Cable	Aux	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	11652.61	44.00	54.00	-10.00	32.91	38.89	7.05	0.00	113	35 Average	HORIZONTAL
2	11670.48	56.61	74.00	-17.39	45.51	38.89	7.05	0.00	113	35 Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	ReadAntenna	Cable	Aux	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	11649.35	63.97	74.00	-10.03	52.84	38.93	7.05	0.00	105	313 Peak	VERTICAL
2	11650.43	50.31	54.00	-3.69	39.18	38.93	7.05	0.00	105	313 Average	VERTICAL

Temperature	25°C	Humidity	40%
Test Engineer	Peter Wu, Akina Chiu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 151 / Chain 1 + Chain 2 + Chain 3 + Chain4
Test Date	Mar. 10, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm		
1	11489.74	45.45	54.00	-8.55	30.38	10.71	39.39	35.03	49	116 Average	HORIZONTAL
2	11505.66	57.19	74.00	-16.81	42.10	10.72	39.40	35.03	49	116 Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm		
1	11502.19	50.58	54.00	-3.42	35.49	10.72	39.40	35.03	258	105 Average	VERTICAL
2	11506.67	63.71	74.00	-10.29	48.62	10.72	39.40	35.03	258	105 Peak	VERTICAL

Temperature	25°C	Humidity	40%
Test Engineer	Peter Wu, Akina Chiu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 159 / Chain 1 + Chain 2 + Chain 3 + Chain4
Test Date	Mar. 10, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm		
1	11588.12	48.95	54.00	-5.05	33.77	10.76	39.45	35.03	94	102 Average	HORIZONTAL
2	11590.14	62.58	74.00	-11.42	47.40	10.76	39.45	35.03	94	102 Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm		
1	11572.49	48.89	54.00	-5.11	33.72	10.76	39.44	35.03	254	113 Average	VERTICAL
2	11594.49	61.53	74.00	-12.47	46.35	10.76	39.45	35.03	254	113 Peak	VERTICAL

Temperature	25°C	Humidity	40%
Test Engineer	Peter Wu, Akina Chiu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 155 / Chain 1 + Chain 2 + Chain 3 + Chain43
Test Date	Mar. 10, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11537.73	46.21	54.00	-7.79	31.09	10.73	39.42	35.03	76	110	Average	HORIZONTAL
2	11537.73	55.37	74.00	-18.63	40.25	10.73	39.42	35.03	76	110	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11532.63	50.75	54.00	-3.25	35.63	10.73	39.42	35.03	260	112	Average	VERTICAL
2	11533.33	63.73	74.00	-10.27	48.61	10.73	39.42	35.03	260	112	Peak	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6. Emissions Measurement

4.6.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average
RBW / VBW (30dBc in any 100 kHz bandwidth emission)	100 kHz / 300 kHz for Peak

4.6.3. Test Procedures

For Radiated band edges Measurement:

- The test procedure is the same as section 4.5.3, only the frequency range investigated is limited to 100MHz around band edges.

For Radiated Out of Band Emission Measurement:

- Test was performed in accordance with KDB 558074 D01 v03r02 for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 10.1 Unwanted Emissions into Non-Restricted Frequency Bands Measurement Procedure

4.6.4. Test Setup Layout

For Radiated band edges Measurement:

This test setup layout is the same as that shown in section 4.5.4.

For Radiated Out of Band Emission Measurement:

This test setup layout is the same as that shown in section 4.5.4.

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

For non-beamforming mode:

The EUT was programmed to be in continuously transmitting mode.

For beamforming mode:

The EUT was programmed to be in beamforming transmitting mode.


4.6.7. Test Result of Band Edge and Fundamental Emissions

Temperature	26°C	Humidity	63%
Test Engineer	Mars Lin		


For Non-Beamforming Mode

For Emission not in Restricted Band

Plot on Configuration IEEE 802.11a / Reference Level

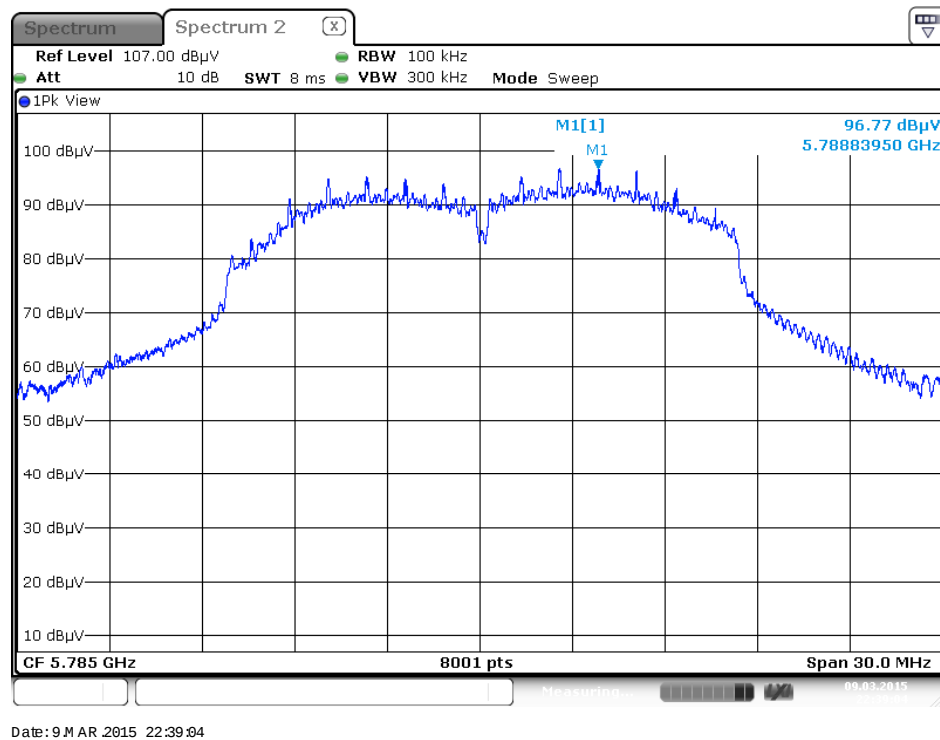


Plot on Configuration IEEE 802.11a / CH 149 / 30MHz~5725MHz (down 30dBc)

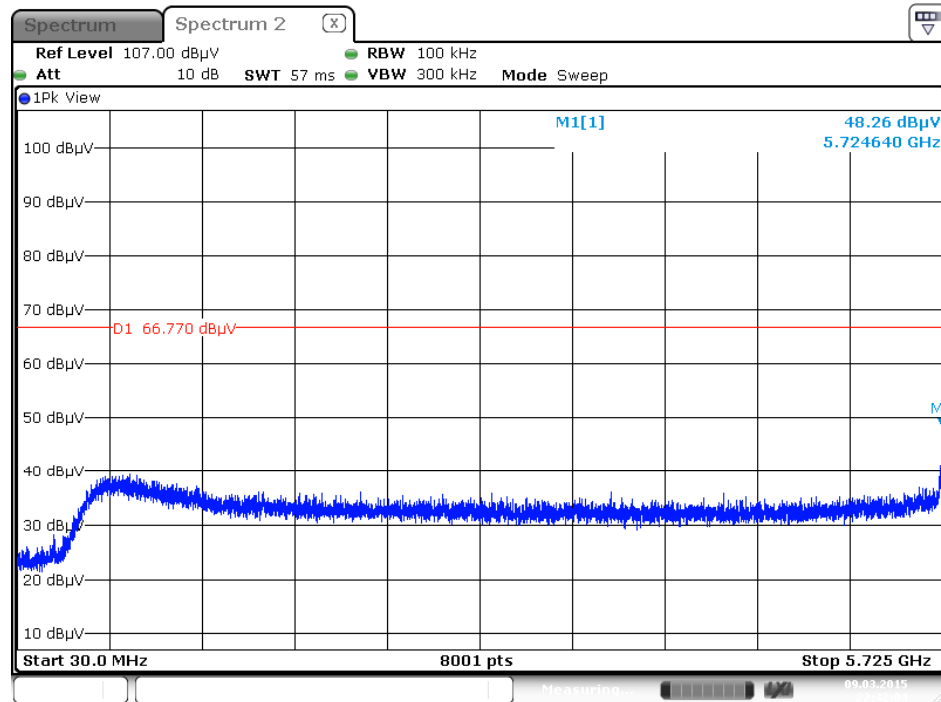


Date: 9 MAR 2015 22:42:04

Plot on Configuration IEEE 802.11a / CH 149 / 5850MHz~40000MHz (down 30dBc)

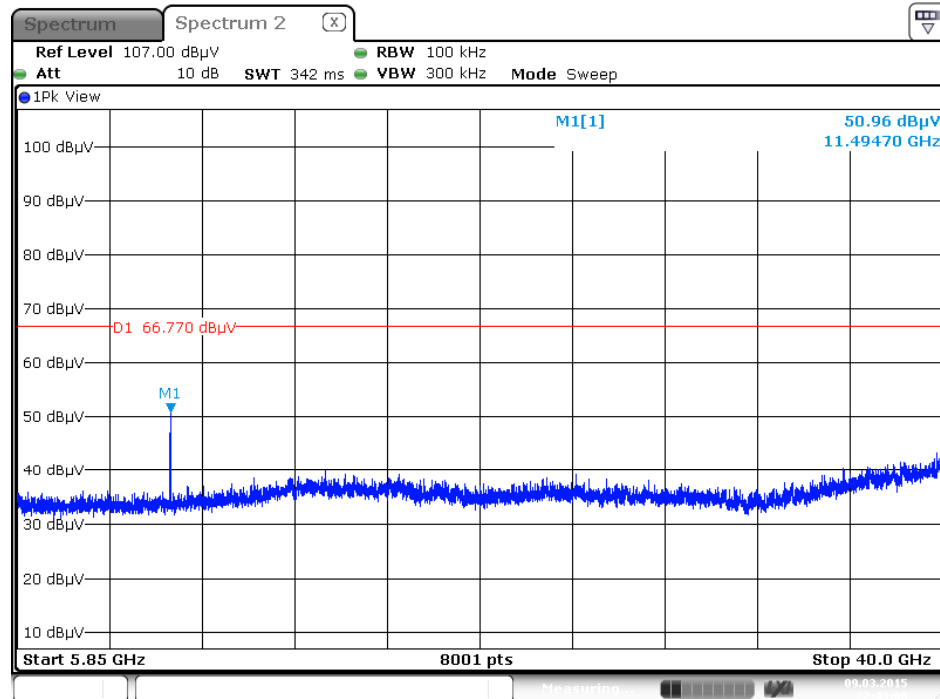


Date: 9 MAR 2015 22:43:00

Plot on Configuration IEEE 802.11a / CH 165 / 30MHz~5725MHz (down 30dBc)

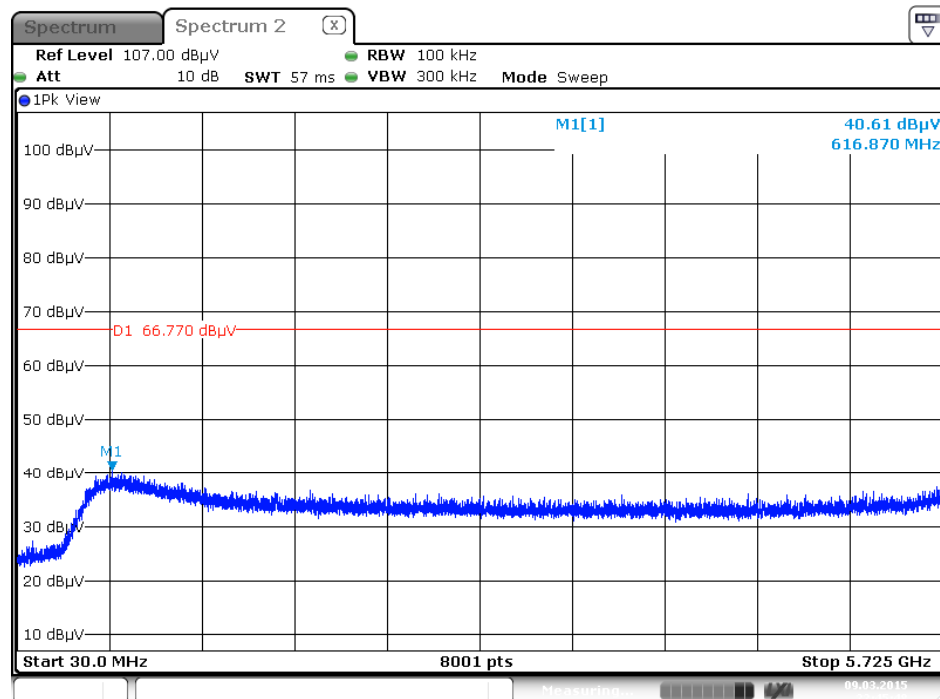


Date: 9 MAR 2015 22:45:49

Plot on Configuration IEEE 802.11a / CH 165 / 5850MHz~40000MHz (down 30dBc)

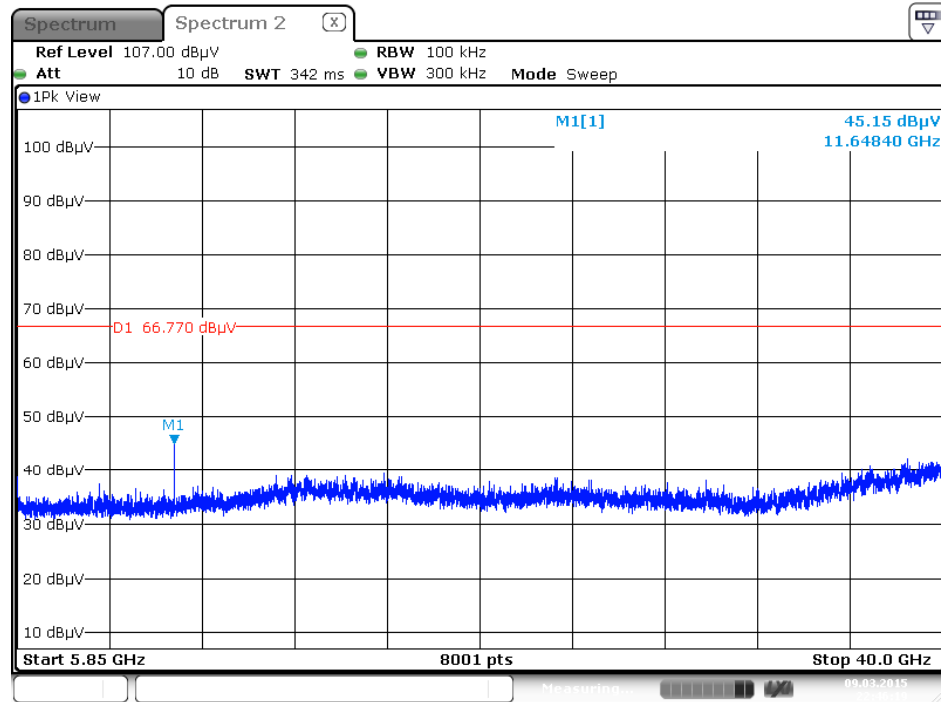


Date: 9 MAR 2015 22:46:19

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Reference Level

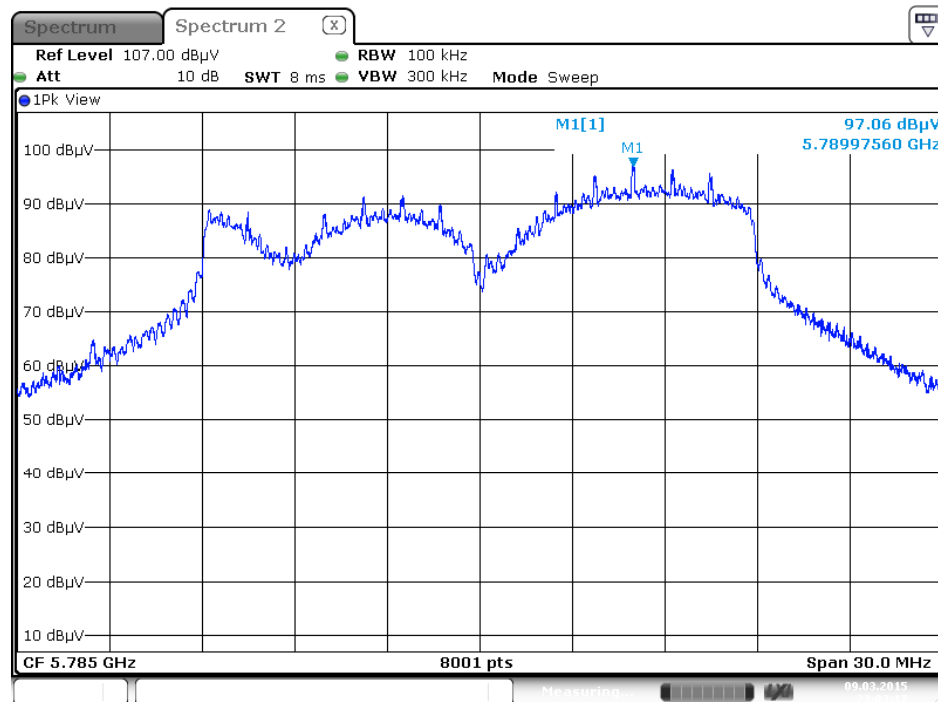


Date: 9 MAR 2015 23:03:17

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 149 / 30MHz~5725MHz (down 30dBc)

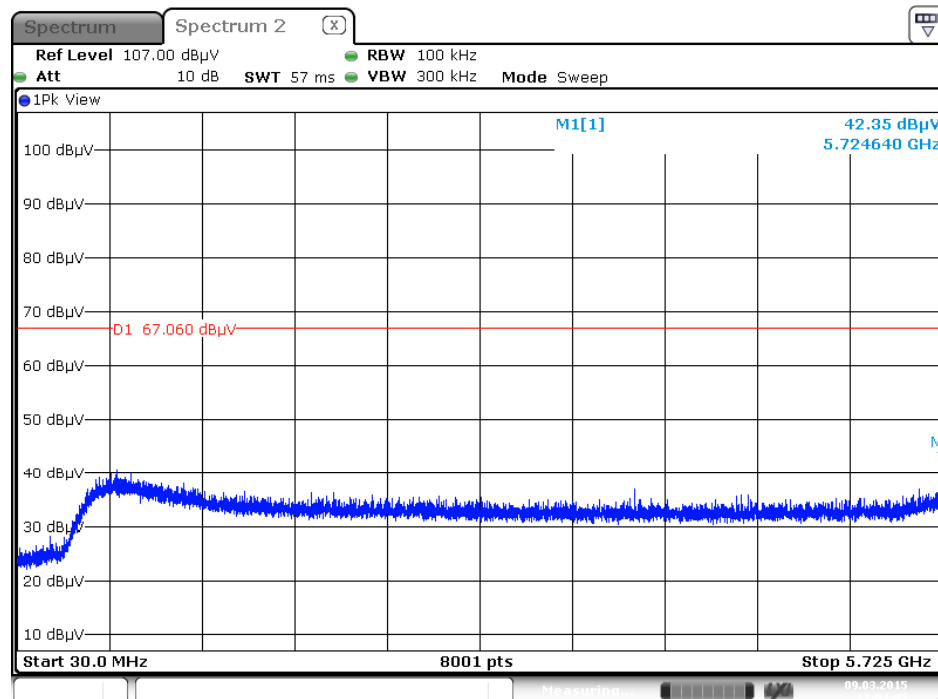


Date: 9 MAR 2015 23:04:45

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 149 / 5850MHz~40000MHz (down 30dBc)

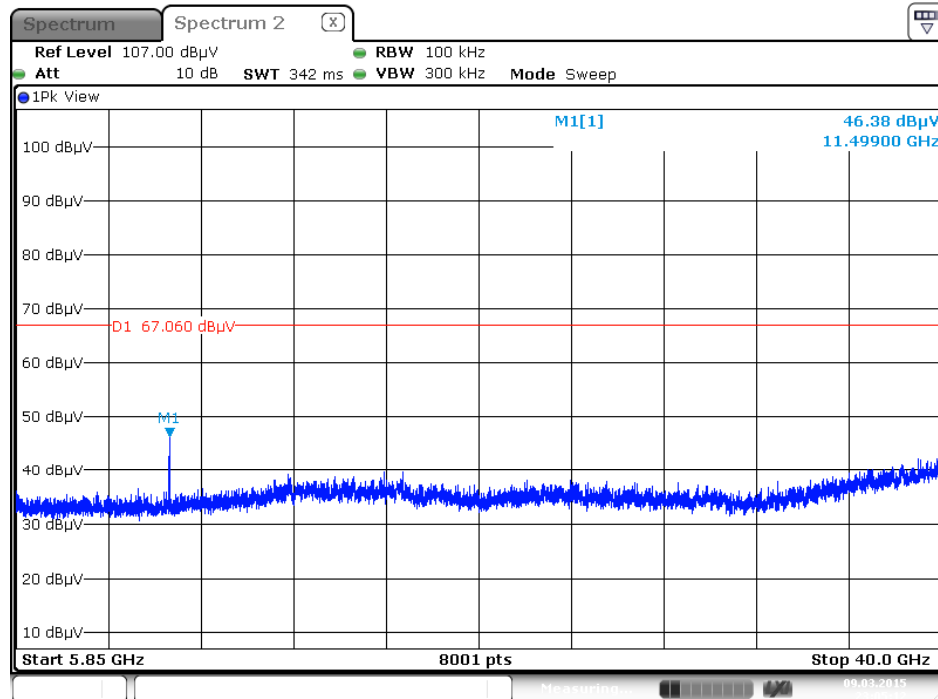


Date: 9 MAR 2015 23:05:13

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 165 / 30MHz~5725MHz (down 30dBc)

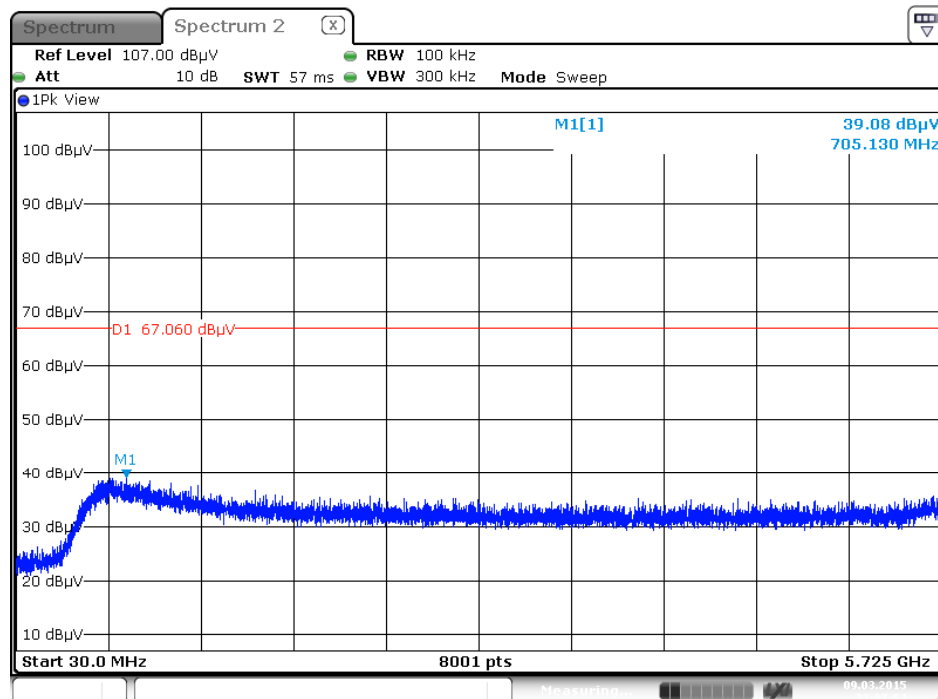


Date: 9 MAR 2015 23:07:54

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 165 / 5850MHz~40000MHz (down 30dBc)

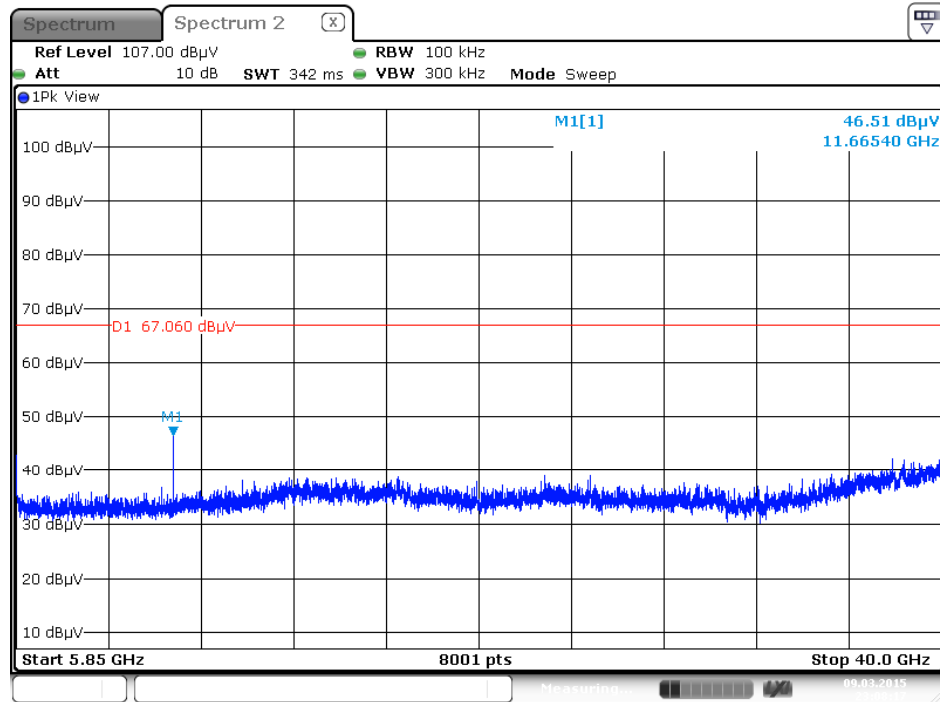


Date: 9 MAR 2015 23:08:17

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Reference Level

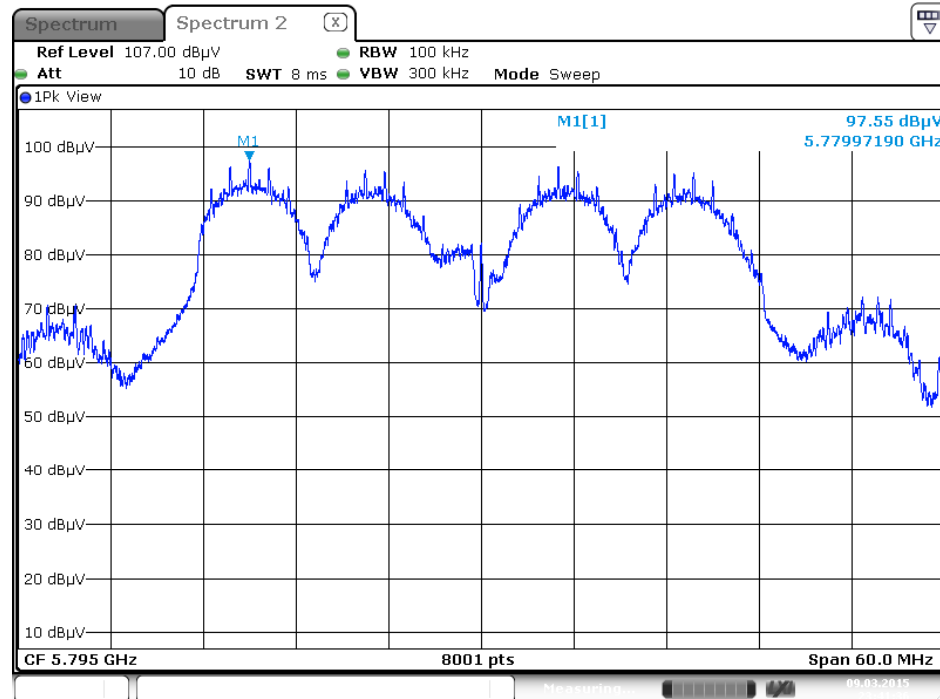


Date: 9 MAR 2015 23:41:37

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 151 / 30MHz~5725MHz (down 30dBc)

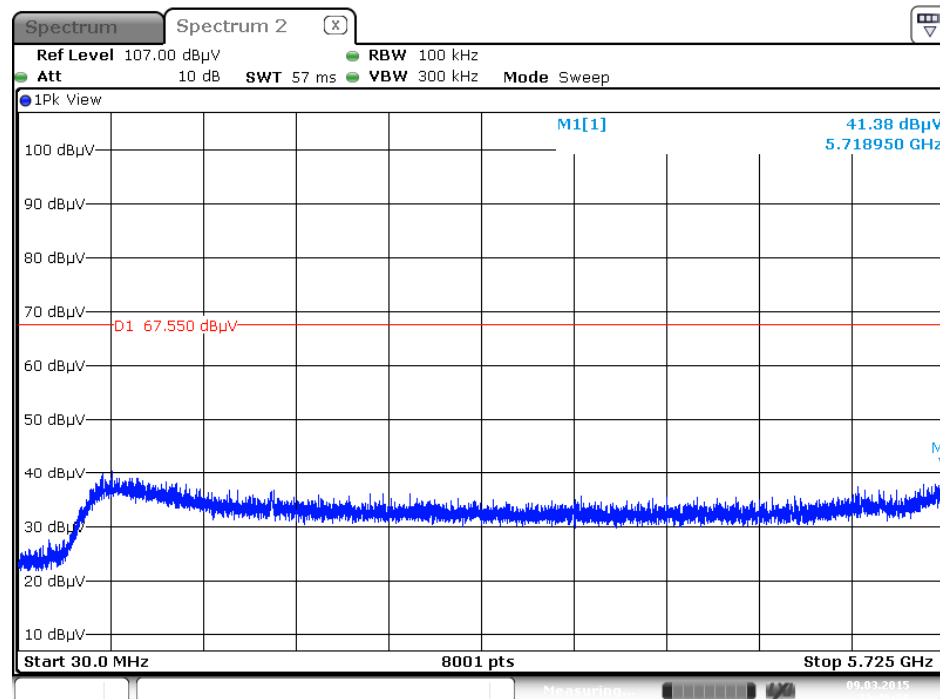


Date: 9 MAR 2015 23:46:50

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 151 / 5850MHz~40000MHz (down 30dBc)

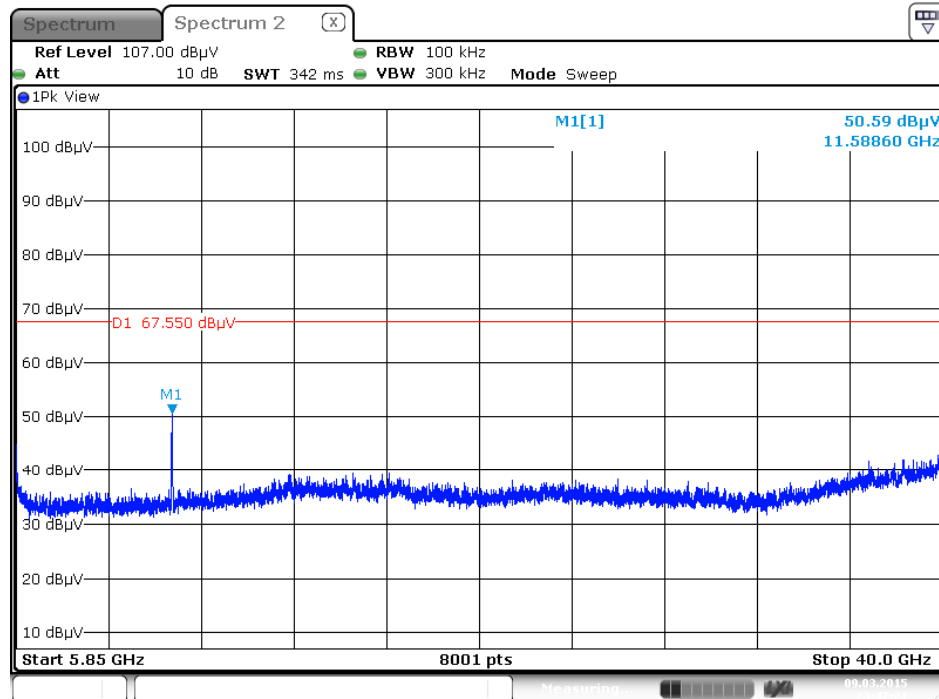


Date: 9 MAR 2015 23:47:22

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 159 / 30MHz~5725MHz (down 30dBc)

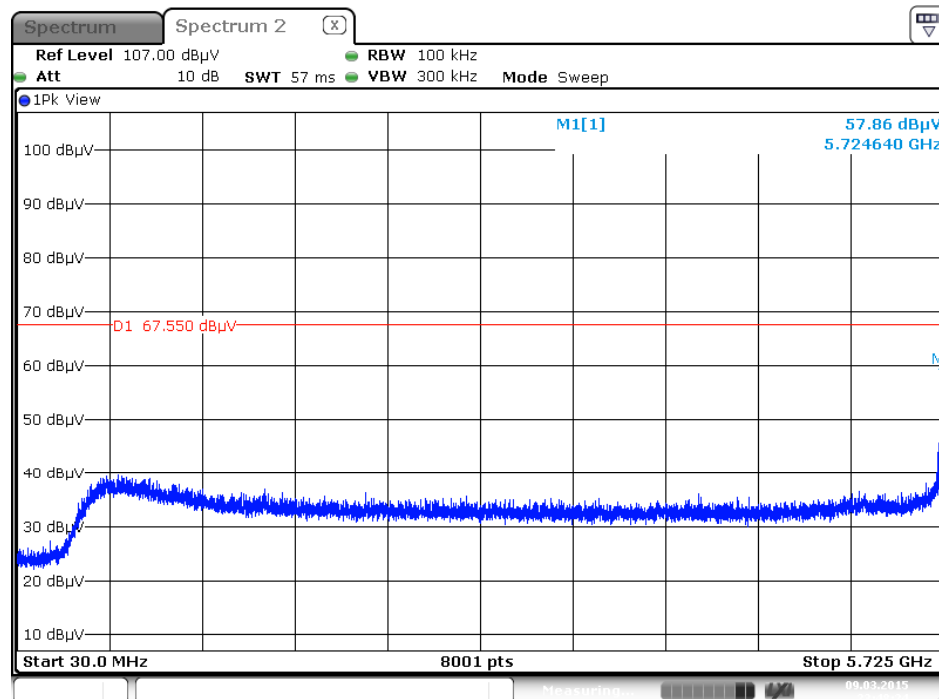


Date: 9 MAR 2015 23:48:24

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 159 / 5850MHz~40000MHz (down 30dBc)

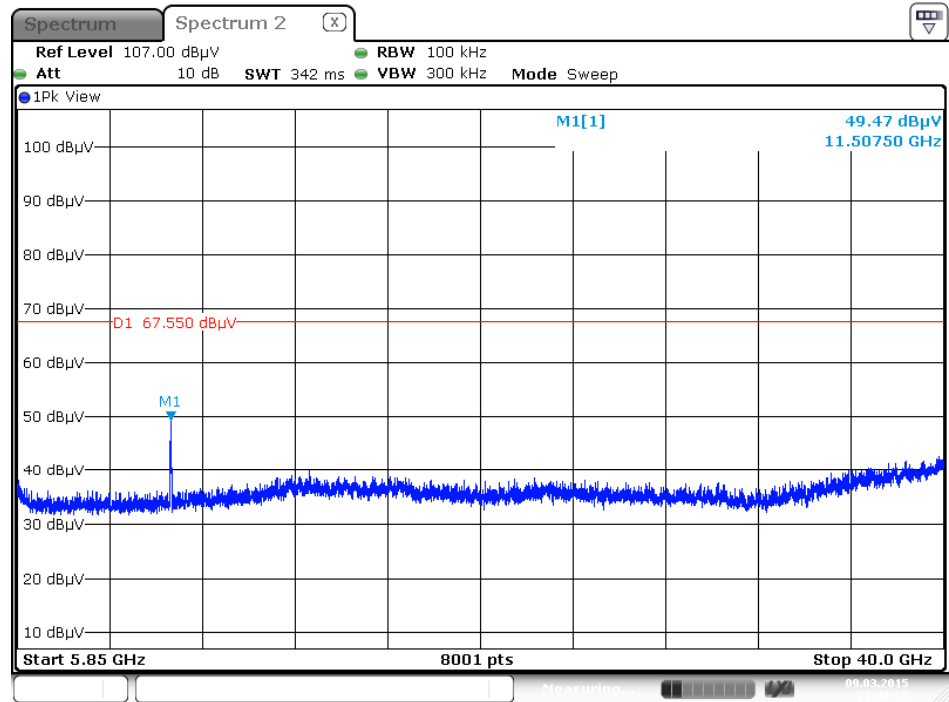


Date: 9 MAR 2015 23:48:56

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Reference Level

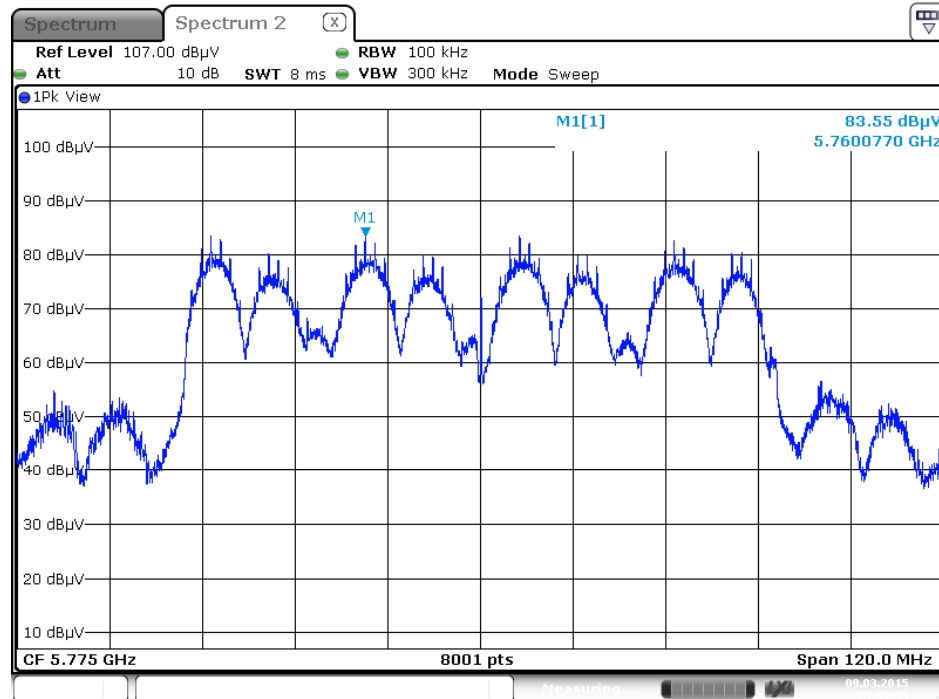


Date: 9 MAR 2015 23:59:59

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / CH 155 / 30MHz~5725MHz (down 30dBc)

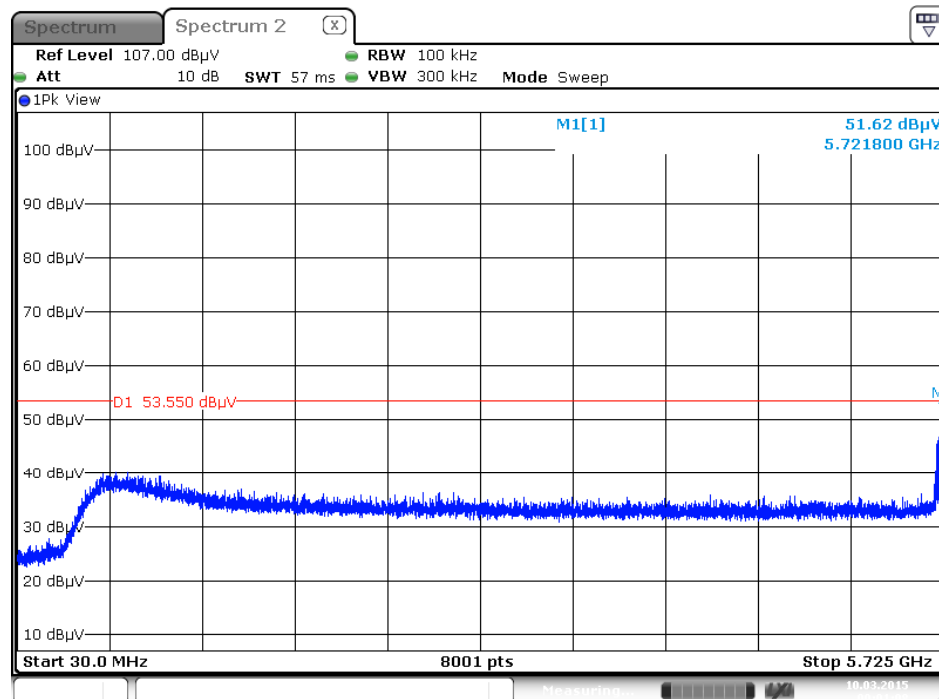

Date: 10 MAR 2015 00:01:08


Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / CH 155 / 5850MHz~40000MHz (down 30dBc)

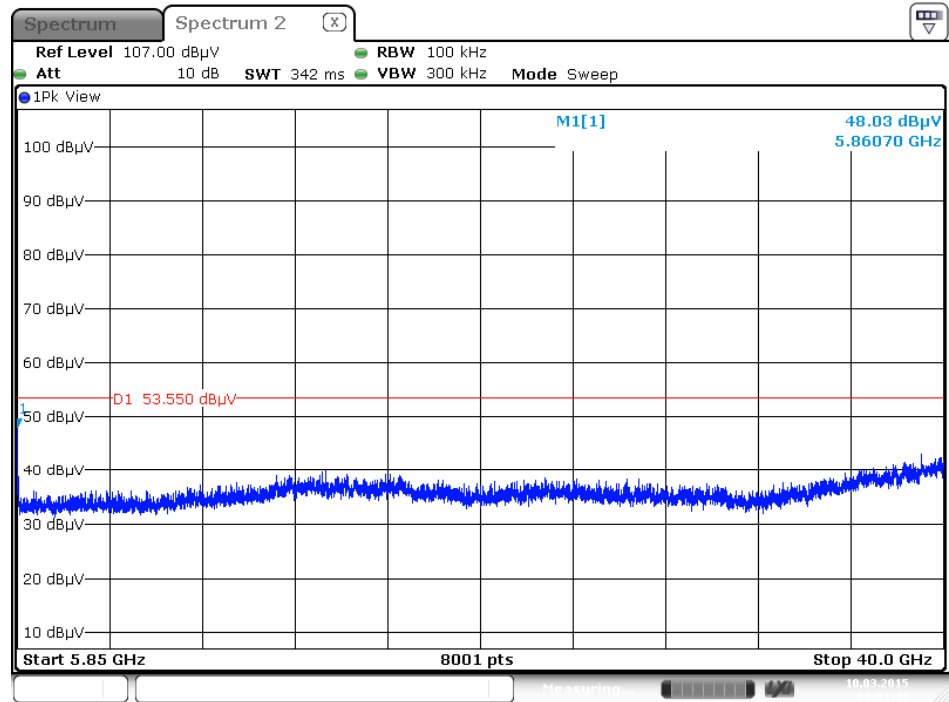


Date: 10 MAR 2015 00:01:43

For Beamforming Mode


Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Reference Level

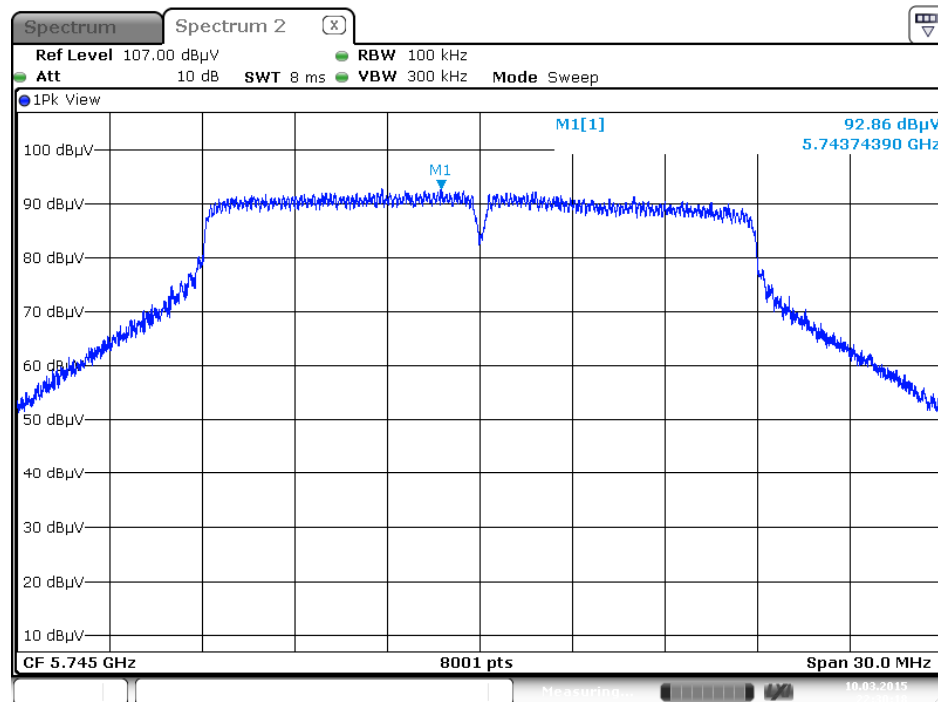

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 149 / 30MHz~5725MHz (down 30dBc)

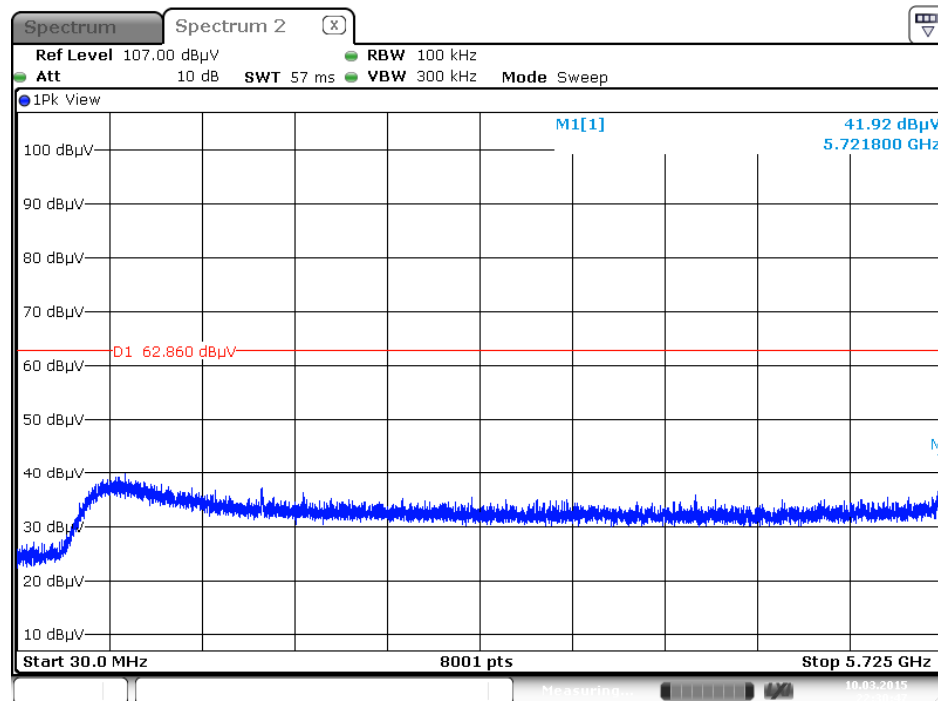


Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 149 / 5850MHz~40000MHz (down 30dBc)

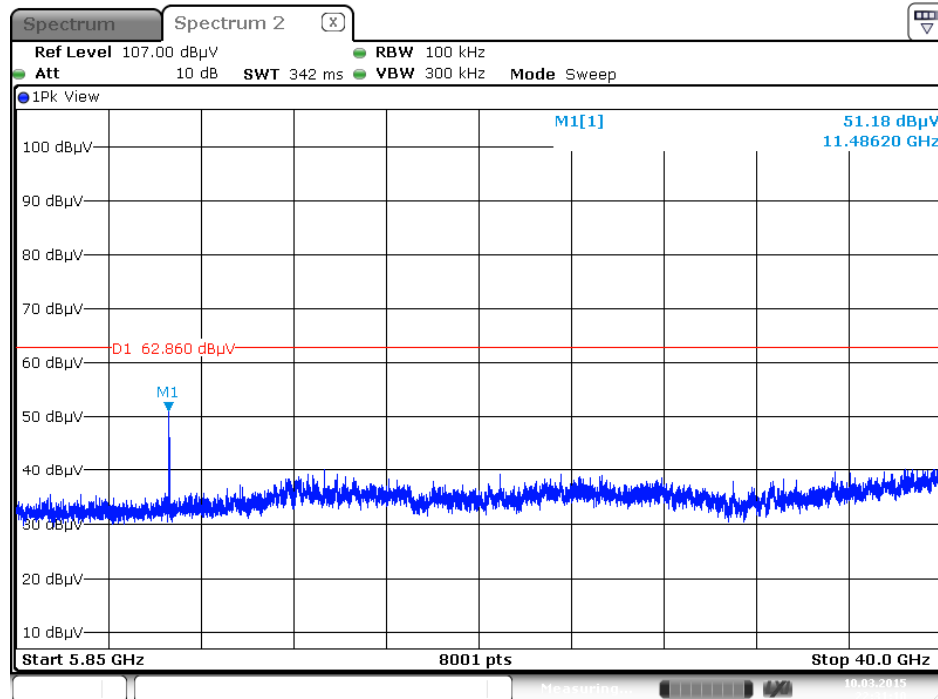


Date: 10 MAR 2015 22:31:11

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 165 / 30MHz~5725MHz (down 30dBc)

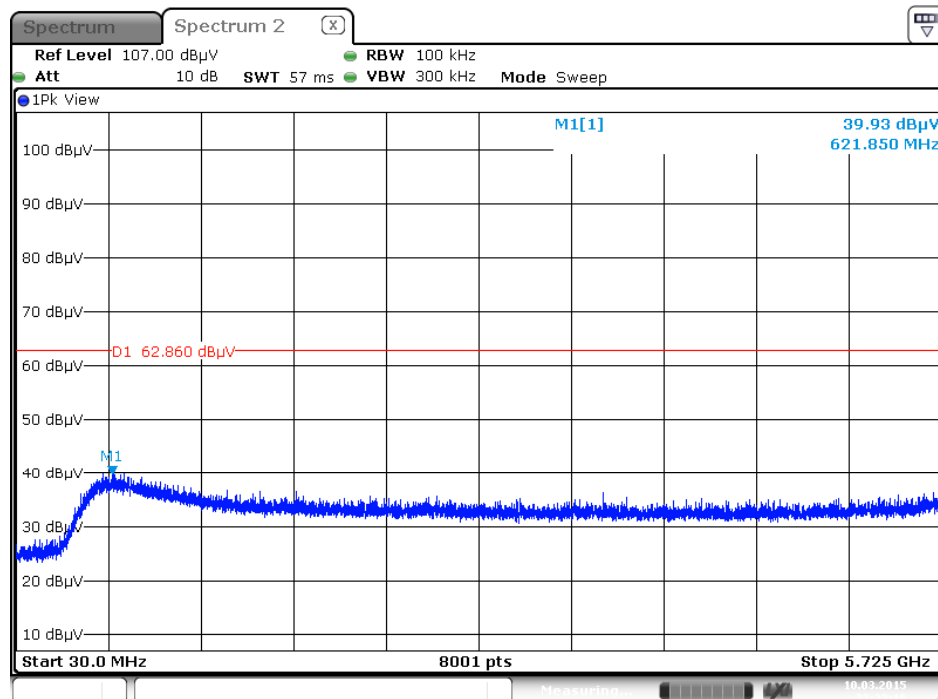


Date: 10 MAR 2015 22:32:17

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 165 / 5850MHz~40000MHz (down 30dBc)

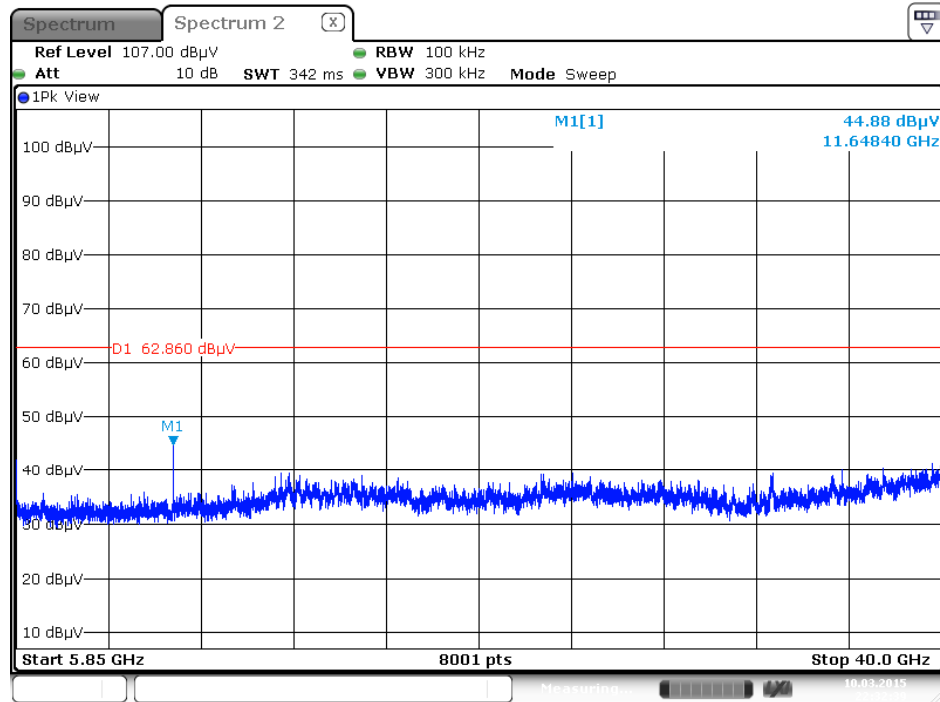


Date: 10 MAR 2015 22:32:39

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Reference Level

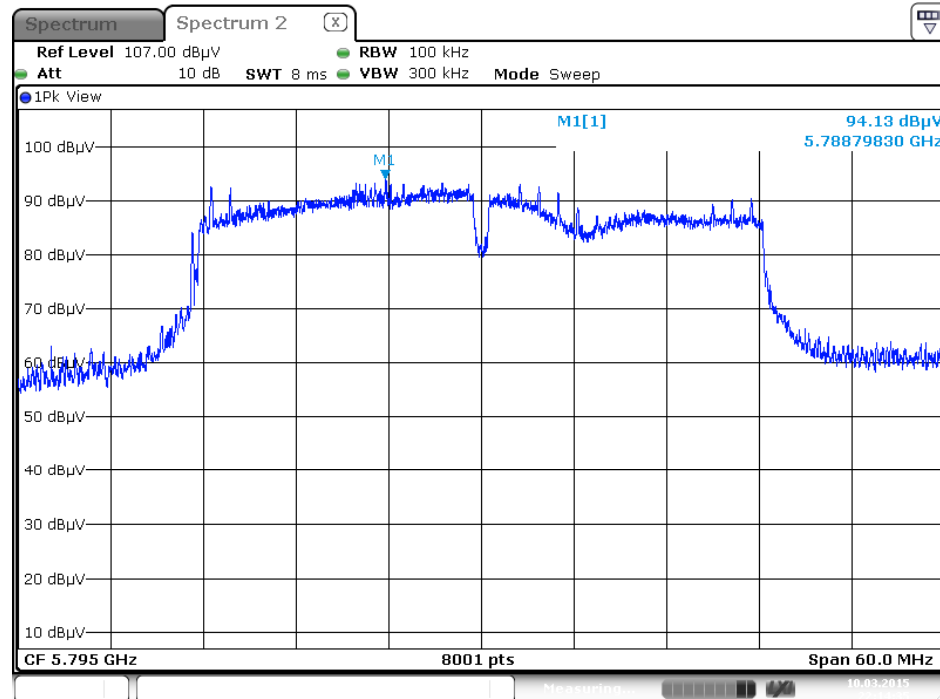


Date: 10 MAR 2015 22:14:35

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 151 / 30MHz~5725MHz (down 30dBc)

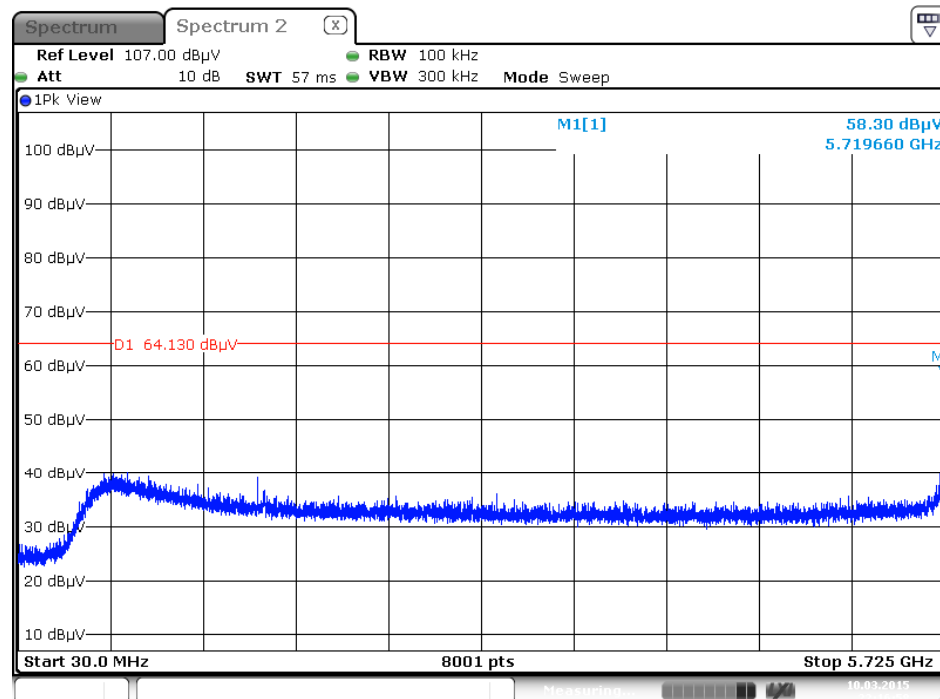


Date: 10 MAR 2015 22:16:58

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 151 / 5850MHz~40000MHz (down 30dBc)

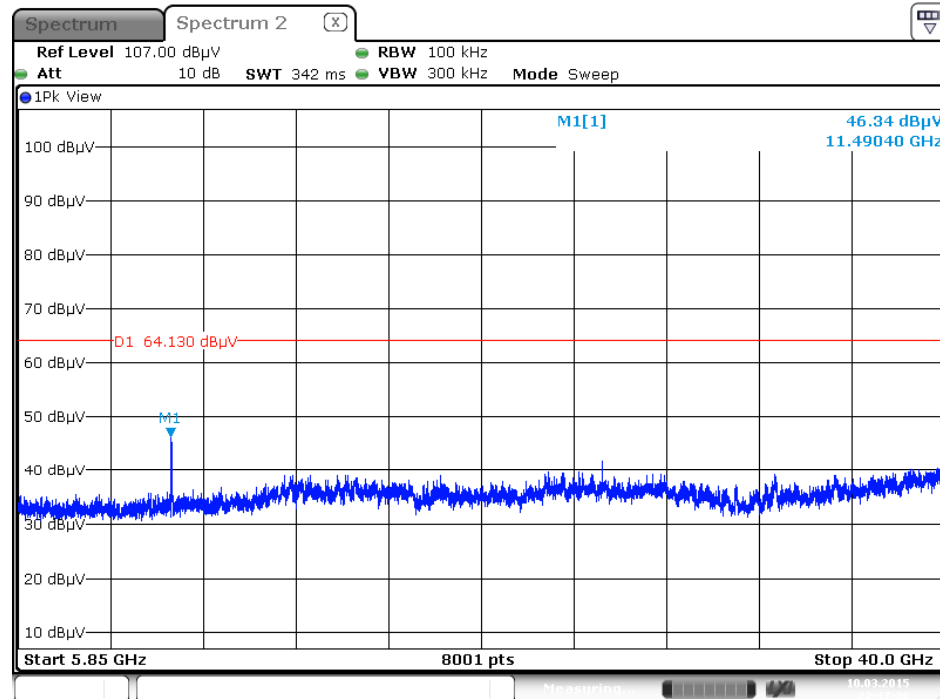


Date: 10 MAR 2015 22:17:26

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 159 / 30MHz~5725MHz (down 30dBc)

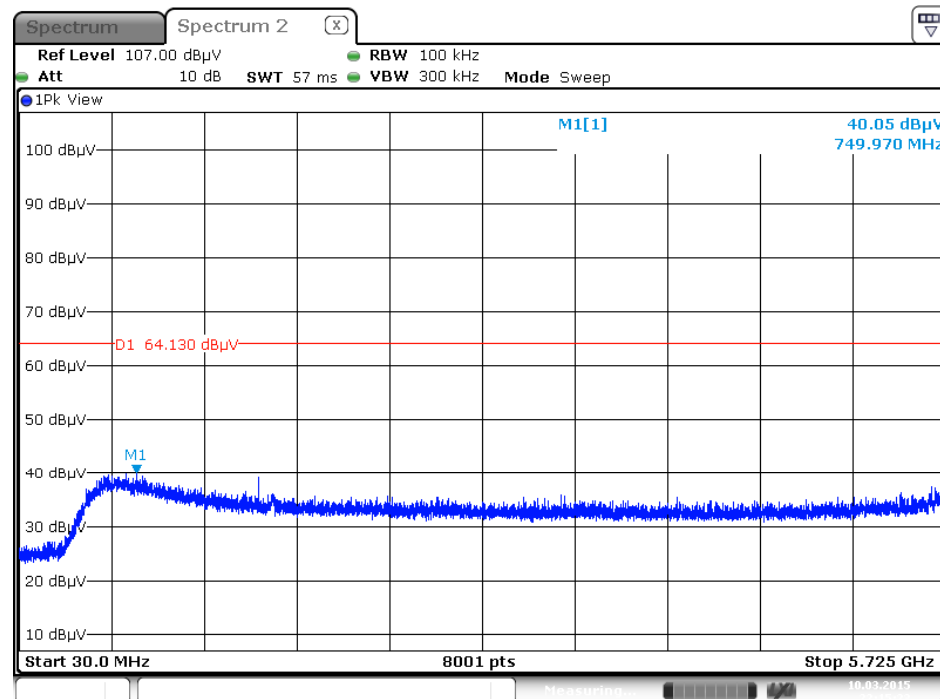


Date: 10 MAR 2015 22:15:24

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 159 / 5850MHz~40000MHz (down 30dBc)

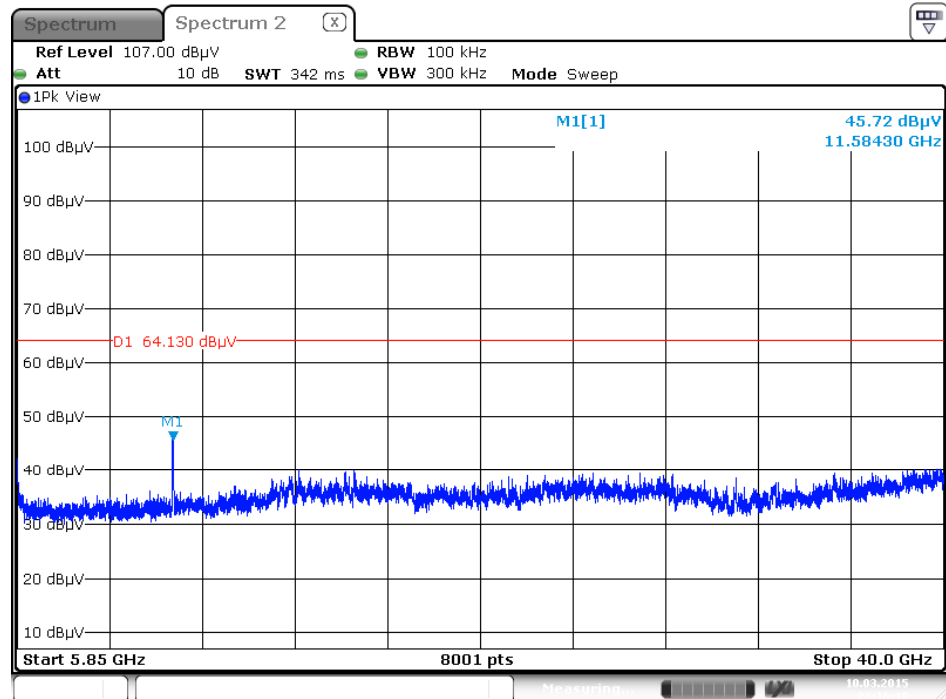


Date: 10 MAR 2015 22:16:10

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Reference Level

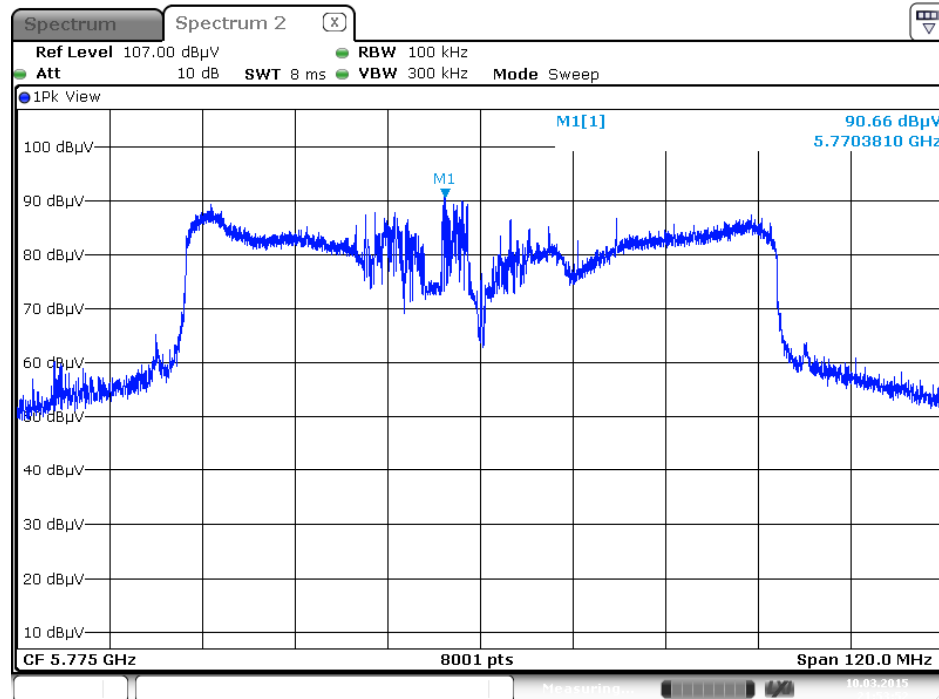


Date: 10 MAR 2015 21:53:52

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / CH 155 / 30MHz~5725MHz (down 30dBc)

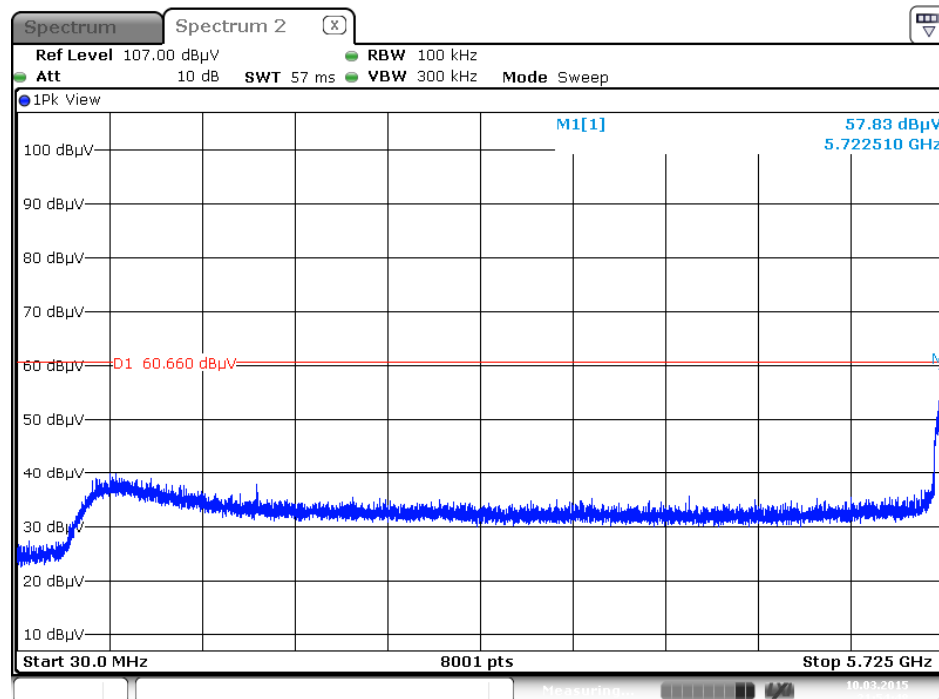

Date: 10 MAR 2015 21:54:48

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / CH 155 / 5850MHz~40000MHz (down 30dBc)

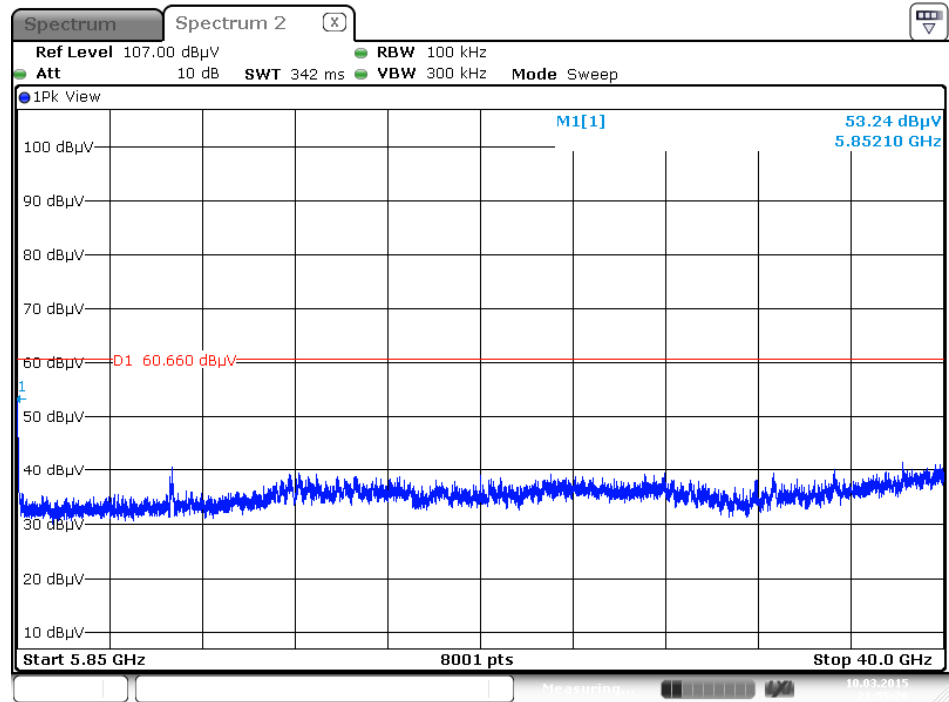

Date: 10 MAR 2015 21:55:26

4.7. Antenna Requirements

4.7.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.7.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100355	9kHz ~ 2.75GHz	Apr. 23, 2014	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Dec. 02, 2014	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Dec. 02, 2014	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	150kHz ~ 30MHz	Dec. 03, 2014	Conduction (CO01-CB)
Software	Audix	E3	5.410e	-	N.C.R.	Conduction (CO01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	May 26, 2014	Radiation (03CH01-CB)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz - 30 MHz	Jul. 28, 2014	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz ~ 18GHz	Oct. 28, 2014	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Aug. 22, 2014	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Nov. 15, 2014	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Jan. 12, 2015	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26GHz ~ 40GHz	Nov. 25, 2014	Radiation (03CH01-CB)
Spectrum Analyzer	R&S	FSP40	100056	9kHz ~ 40GHz	Nov. 06, 2014	Radiation (03CH01-CB)
EMI Test Receiver	Agilent	N9038A	MY52260123	9kHz ~ 8GHz	Jan. 21, 2015	Radiation (03CH01-CB)
EMI Test Receiver	R&S	ESR26	101289	9kHz~26GHz	Aug. 22, 2014	Radiation (03CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N.C.R.	Radiation (03CH01-CB)
Antenna Mast	INN CO	CO 2000	N/A	1 m - 4 m	N.C.R.	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz - 1 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-1	N/A	1 GHz ~ 40 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-2	N/A	1 GHz ~ 40 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSV40	100979	9kHz~40GHz	Dec.12, 2014	Conducted (TH01-CB)
RF Power Divider	Woken	2 Way	TH01-DV-02	1GHz ~ 6GHz	Jan. 10, 2015	Conducted (TH01-CB)
RF Power Divider	Woken	4 Way	TH01-DV-01	1GHz ~ 6GHz	Jan. 10, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-7	1 GHz ~ 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-8	1 GHz ~ 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-9	1 GHz ~ 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
RF Cable-high	Woken	RG402	High Cable-10	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-6	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
Power Sensor	Agilent	U2021XA	MY53410001	50MHz~18GHz	Nov. 03, 2014	Conducted (TH01-CB)
Power Sensor	Agilent	U2021XA	MY53410002	50MHz~18GHz	Nov. 03, 2014	Conducted (TH01-CB)
Power Sensor	Agilent	U2021XA	MY54320014	50MHz~18GHz	Sep. 12, 2014	Conducted (TH01-CB)
Power Sensor	Agilent	U2021XA	MY54320015	50MHz~18GHz	Aug. 15, 2014	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

N.C.R. means Non-Calibration required.

6. MEASUREMENT UNCERTAINTY

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	2.4 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%