


## Appendix B. Radiated Emission Co-location Report

## 1. Results of Radiated Emissions for Co-located


Temperature	22°C	Humidity	55%
Test Engineer	Stim Sung / Owen Hsu	Configurations	2.4GHz + 5GHz

### Horizontal

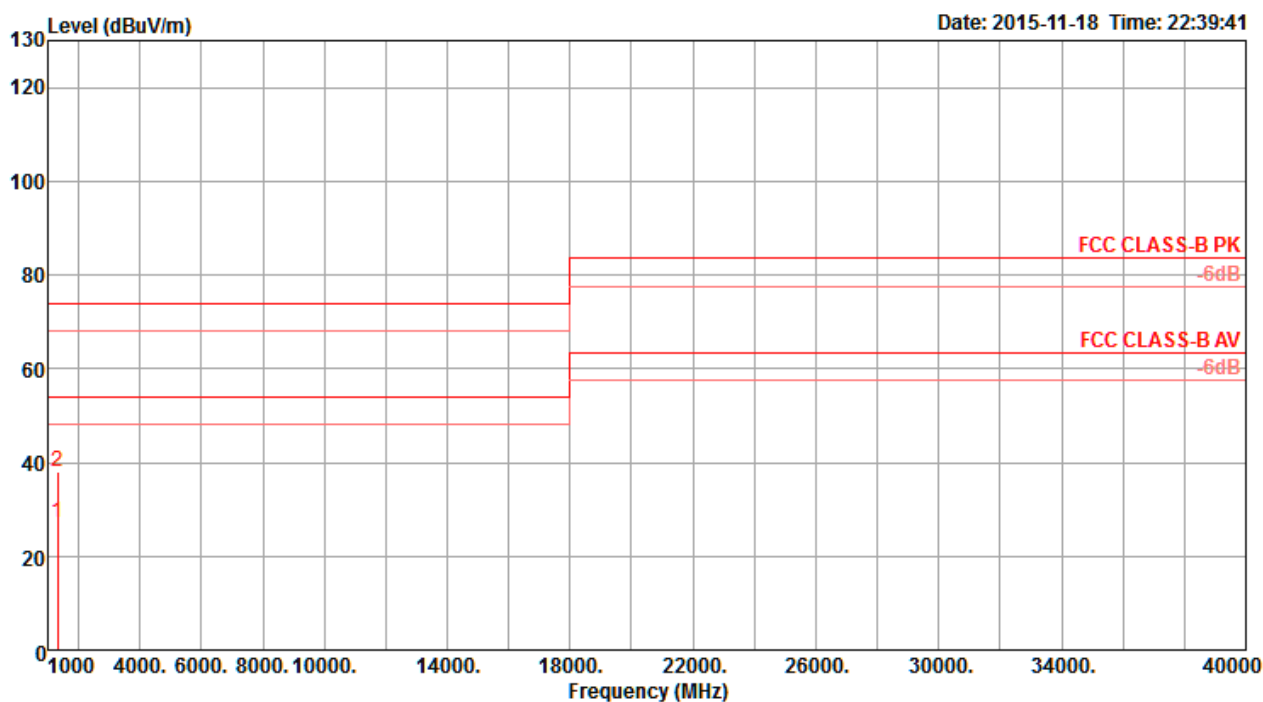

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	1323.10	27.23	54.00	-26.77	34.75	2.67	24.99	35.18	262	106	Average	HORIZONTAL
2	1323.30	38.19	74.00	-35.81	45.71	2.67	24.99	35.18	262	106	Peak	HORIZONTAL

## Vertical

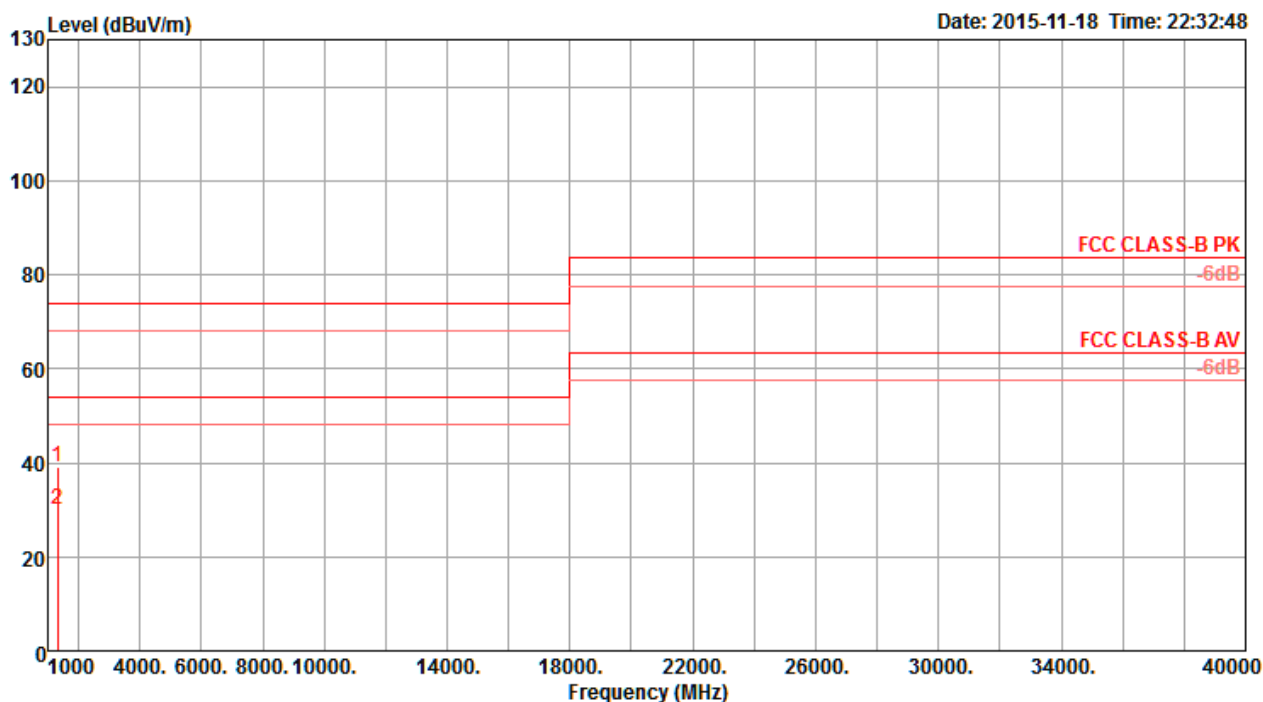

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	1310.04	38.95	74.00	-35.05	46.56	2.66	24.93	35.20	43	100	Peak	VERTICAL
2	1312.60	30.18	54.00	-23.82	37.77	2.66	24.94	35.19	43	100	Average	VERTICAL