






Test Graphs of Spurious Emissions outside of the 5.25-5.35 GHz band

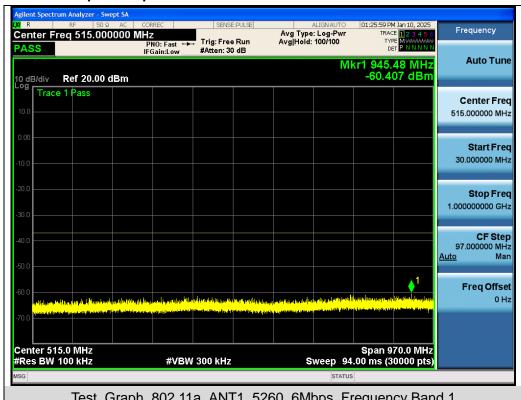


Test_Graph_802.11a_ANT1_5260_6Mbps_Frequency Band 1

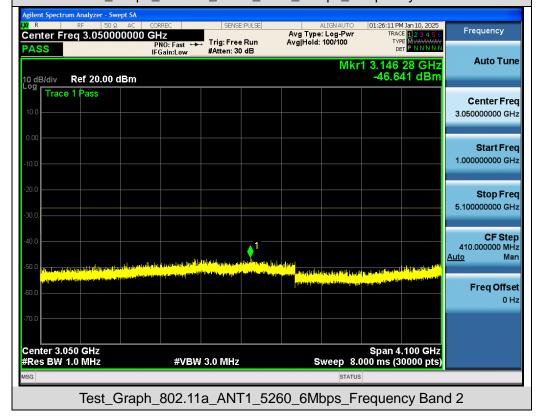







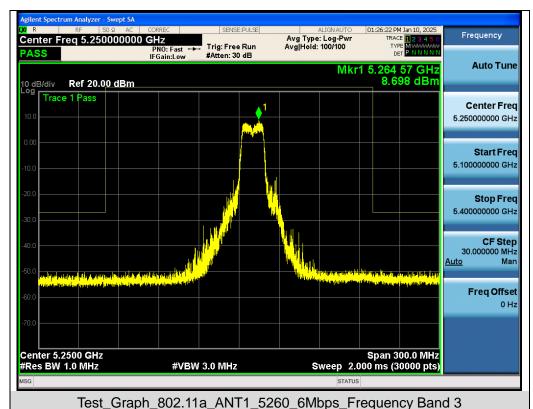









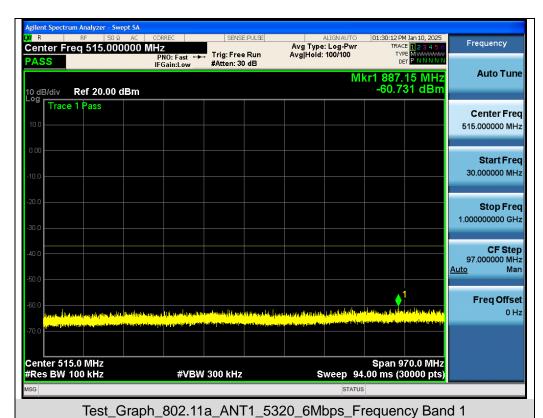

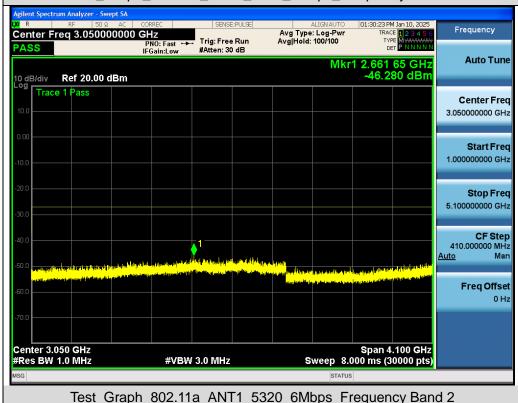

























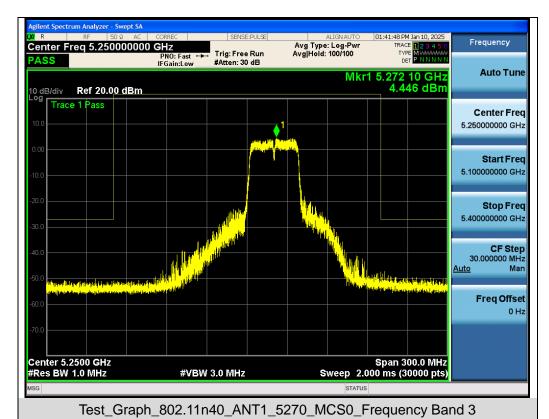



















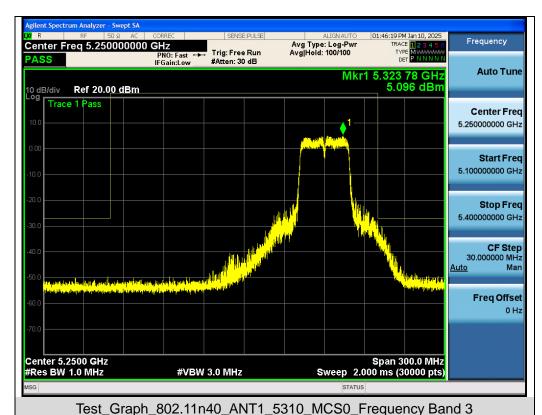










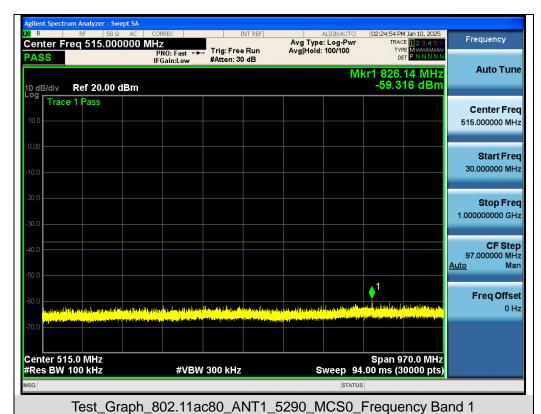


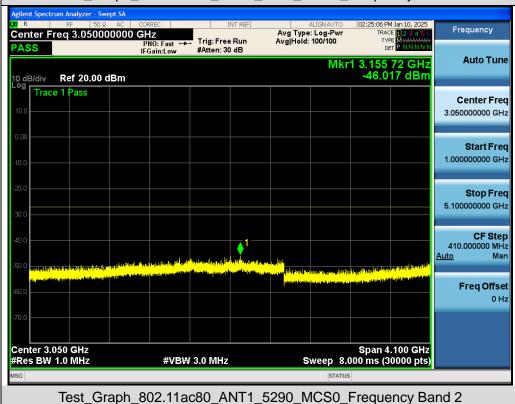






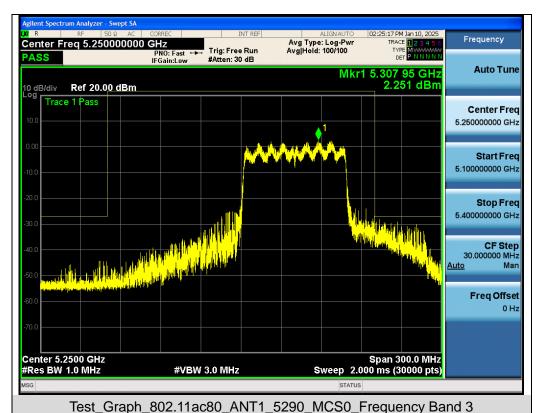


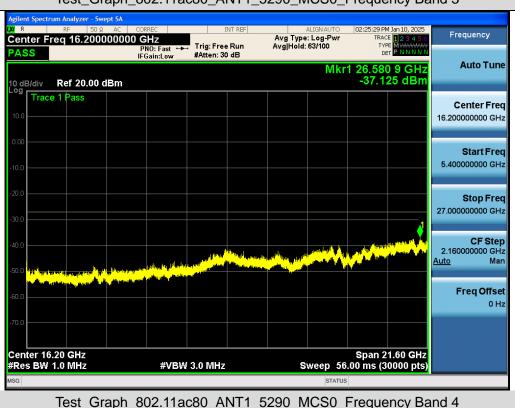







Test Graphs of Spurious Emissions outside of the 5.470-5.725 GHz band

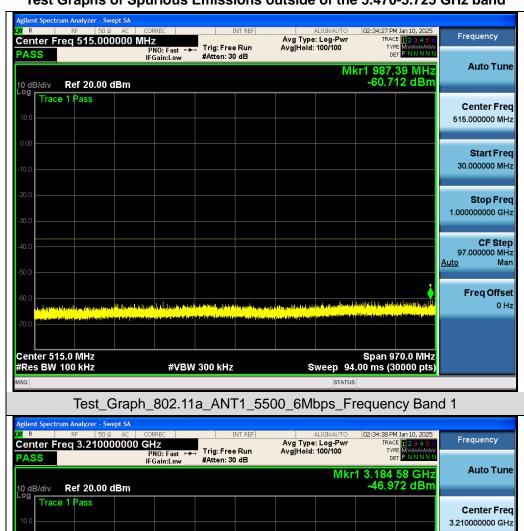








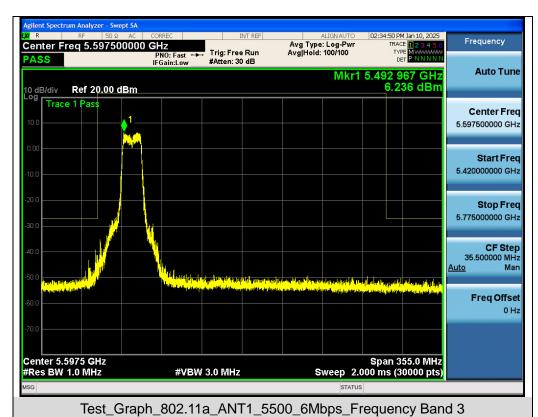


















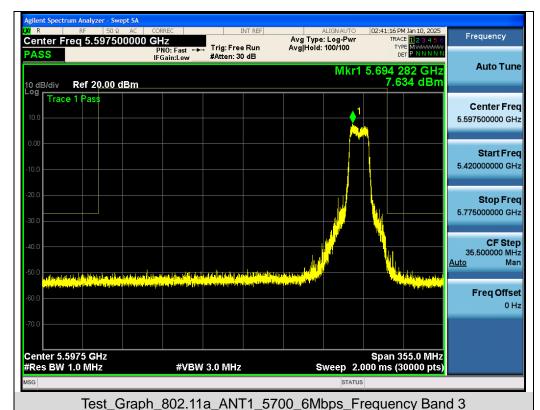


















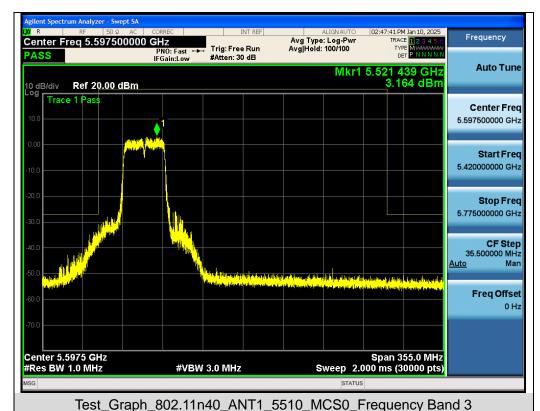



















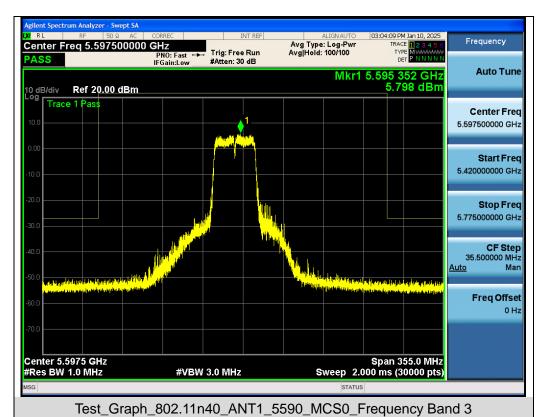









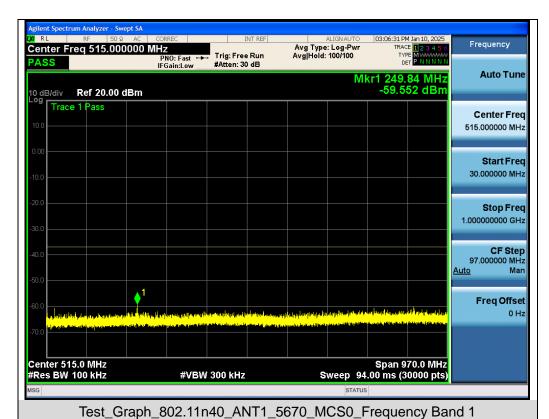









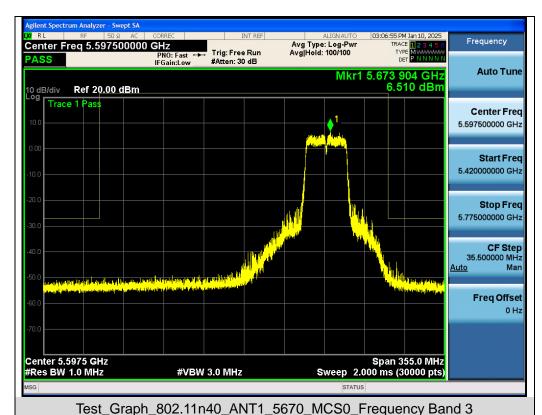









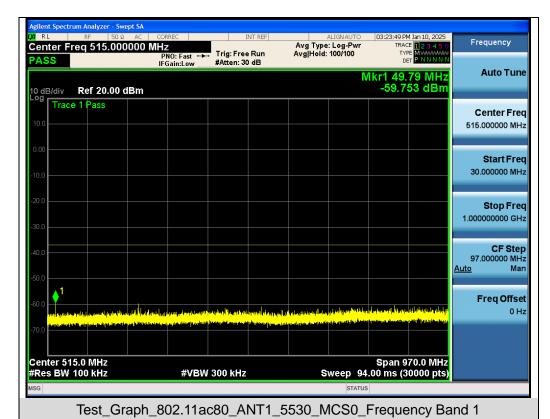









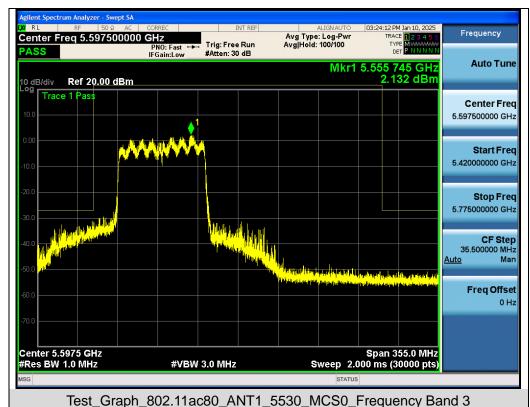









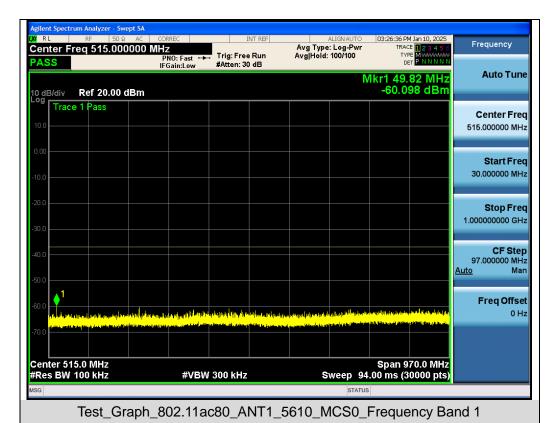








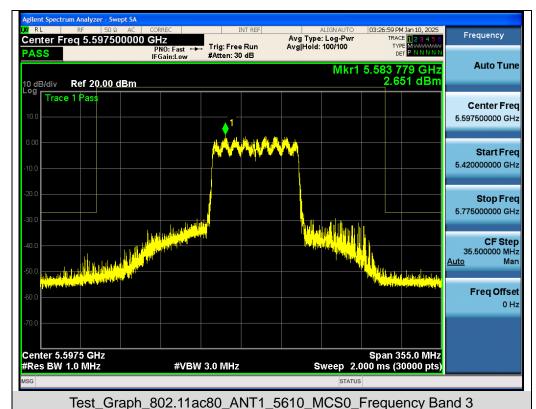








Test Graphs of Spurious Emissions outside of the 5.725-5.85 GHz band

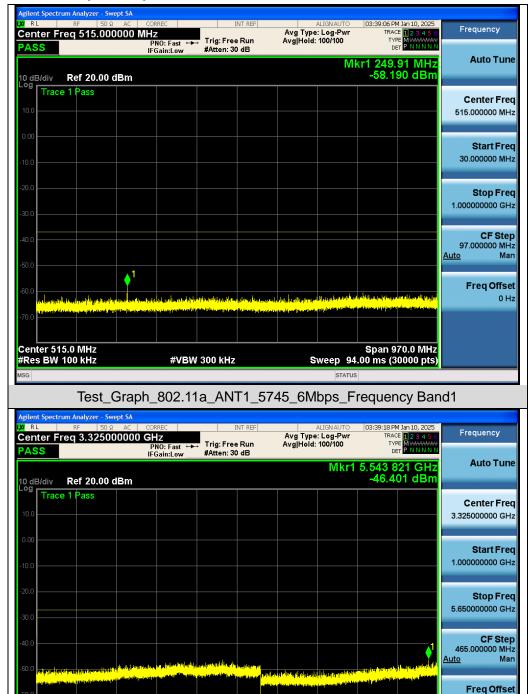


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_802.11a_ANT1_5745_6Mbps_Frequency Band2


#VBW 3.0 MHz

Span 4.650 GHz Sweep 8.000 ms (30000 pts)


Center 3.325 GHz #Res BW 1.0 MHz






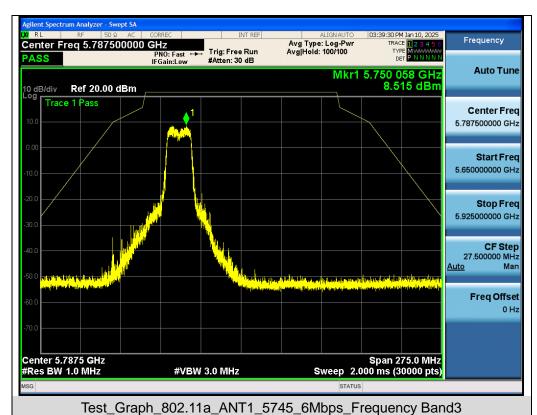









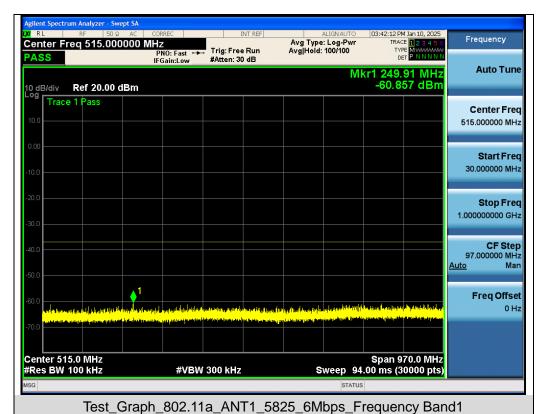









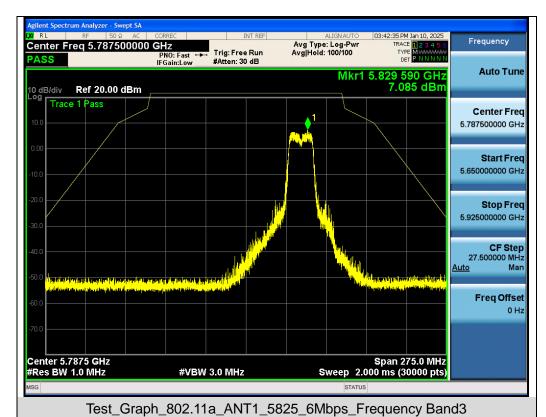









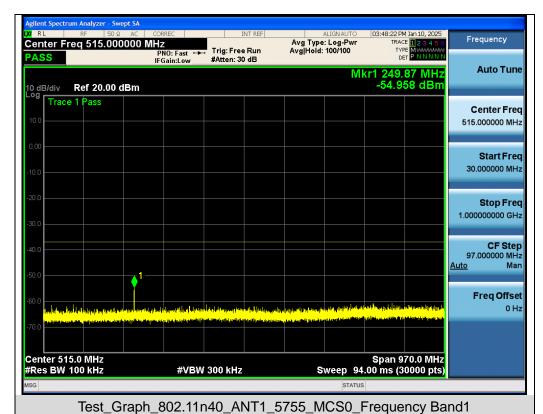









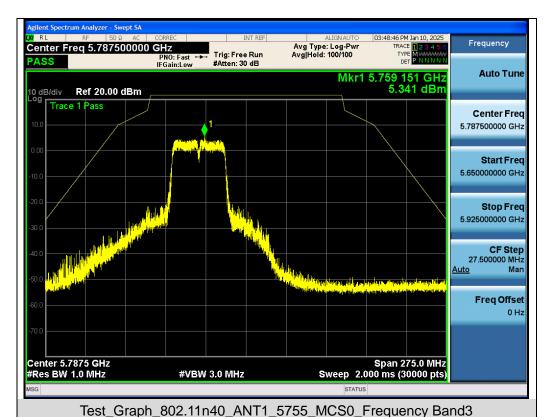









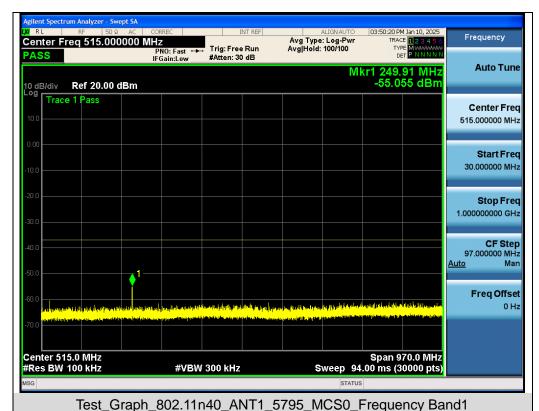









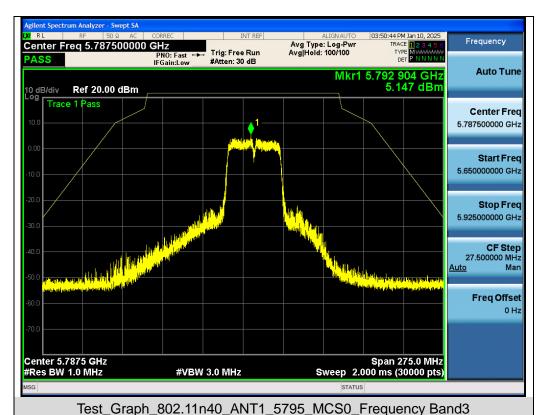










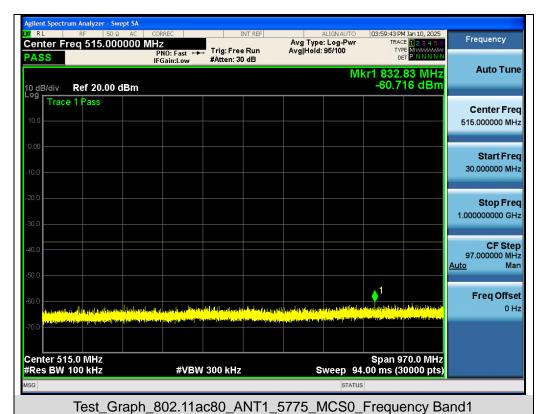

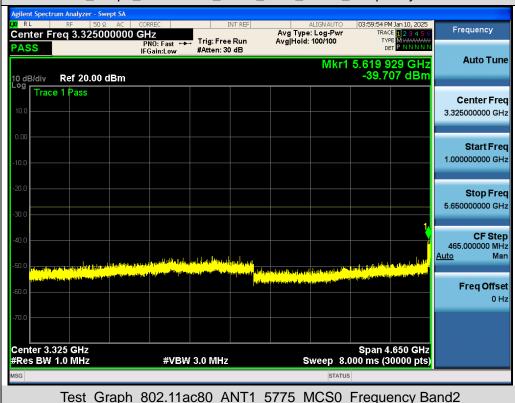





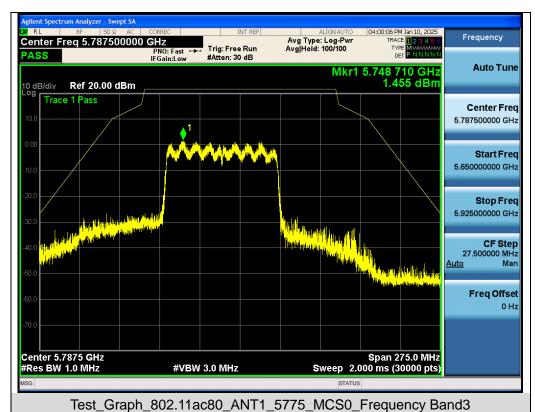





Web: http://www.agccert.com/



Report No.: AGC03285241203FR04

Page 152 of 193

11. Radiated Spurious Emission

11.1 Measurement Limit

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

NOTE:

- 1. The lower limit shall apply at the transition frequencies.
- 2. Emission level (dBuV/m) = 20 log Emission level (uV/m).

3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

	Applicable to	Limit	
Restricted bands	789033 D02 General UNII Test Procedures New Rules v02r01	Field strength at 3m (dBuV/m)	
		PK: 74	AV: 54
Out of the restricted bands	Applicable to	EIRP Limit (dBm/MHz)	Equivalent field Strength at 3m (dBuV/m)
	FCC 15.407(b)(1)		PK: 68.2
	15.407(b)(2)	PK: -27	
	15.407(b)(3)		
	15.407(b)(4)	See Note 2	

Note 1: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

E =
$$\frac{1000000 - \sqrt{30 P}}{^3}$$
 µV/m, where P is the eirp (Watts).

Note 2: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.



Page 153 of 193

11.2 Measurement Procedure

- The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.



Page 154 of 193

The following table is the setting of spectrum analyzer and receiver.

Receiver Parameter	Setting		
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP		
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP		
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP		

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04.Section G) Unwanted emissions measurement.

♦ Procedure for Unwanted Emissions Measurements Below 1000MHz:

- RBW = 120 kHz
- VBW = 300 kHz
- Detector = Peak
- Trace mode = max hold

♦ Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz:


- RBW = 1 MHz
- VBW ≥ 3 MHz
- Detector = Peak
- Sweep time = auto
- Trace mode = max hold

Procedures for Average Unwanted Emissions Measurements Above 1000MHz:

- RBW = 1 MHz
- VBW = 10 Hz, when duty cycle is no less than 98 percent.
- VBW ≥ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

Procedures for Average Unwanted Emissions Measurements Above 1000MHz:


- RBW = 1 MHz
- VBW = 3 MHz Detector = power averaging (rms), set span/(# of points in sweep) ≥ RBW/2.
- Averaging type = power averaging (RMS)
- The correction factor shall be offset is 10 $\log (1/x)$, where x is the duty cycle.






11.3 Measurement Setup (Block Diagram of Configuration)


Radiated Emission Test Setup 9kHz-30MHz

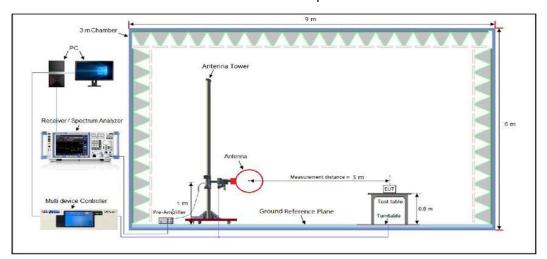

Radiated Emission Test Setup 30MHz-1000MHz

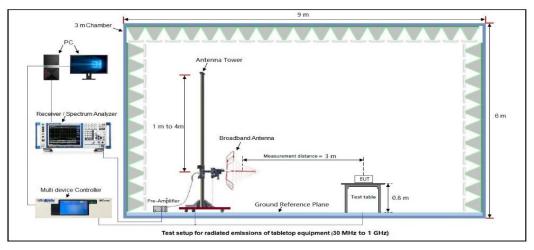

Radiated Emission Test Setup Above 1000MHz

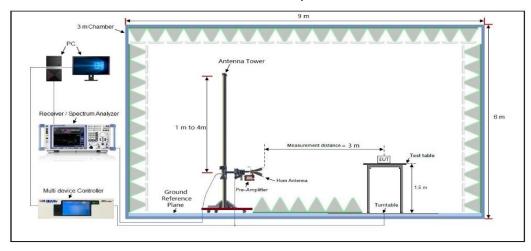




11.4 Measurement Result

Radiated Emission Below 30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.

Radiated Emission Test Results at 30MHz-1GHz

Radiated Emission Test Results at 30MHz-1GHz						
EUT Name	Bluetooth and WIFI combo module	Model Name	FSC-BW121			
Temperature	21.8℃	Relative Humidity	56.3%			
Pressure	960hPa	Test Voltage	Normal Voltage			
Test Mode	802.11n(20MHz)_5180MHz	Antenna Polarity	Horizontal			
ECC Part 15C						

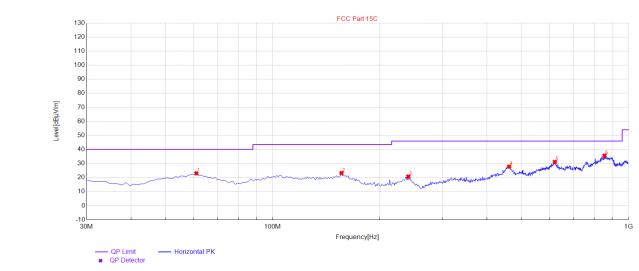

Final Data List Freq. Level Factor Limit Margin Height Angle NO. Polarity [MHz] [dBµV/m] [dB] [dBµV/m] [dB] [cm] [°] 1 61.04 23.05 17.54 40.00 16.95 150 290 Horizontal 2 156.1 23.21 17.56 43.50 20.29 150 260 Horizontal 240.49 20.74 15.92 46.00 25.26 150 220 Horizontal 3 27.81 24.36 4 461.65 46.00 18.19 150 130 Horizontal 5 620.73 31.18 25.82 46.00 14.82 150 190 Horizontal

46.00

10.35

150

40

Horizontal

Result: Pass

856.44

6


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

35.65

29.89



Radiated Emission Test Results at 30MHz-1GHz						
EUT Name	Bluetooth and WIFI combo module	Model Name	FSC-BW121			
Temperature	21.8℃	Relative Humidity	56.3%			
Pressure	960hPa	Test Voltage	Normal Voltage			
Test Mode	802.11n(20MHz)_5180MHz	Antenna Polarity	Vertical			

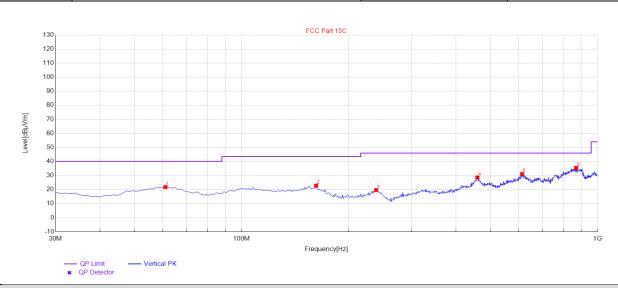

Fina	П	Data	Т	ist
1 1116		Data	_	

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	61.04	21.78	17.54	40.00	18.22	150	100	Vertical
2	161.92	22.77	17.30	43.50	20.73	150	200	Vertical
3	238.55	19.61	15.80	46.00	26.39	150	120	Vertical
4	459.71	28.59	24.69	46.00	17.41	150	230	Vertical
5	613.94	31.06	25.24	46.00	14.94	150	80	Vertical
6	870.99	35.48	29.64	46.00	10.52	150	10	Vertical

Result: Pass

Note:

- 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.
- 2. All test modes had been pre-tested, Refer to Chapter 5 of the report for details.



Page 158 of 193

Radiated Emissions Test Results Above 1GHz

EUT Name	Bluetooth and WIFI combo module	Model Name	FSC-BW121
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n20_5180MHz	Antenna	Horizontal/Vertical

Radiated Emission Above 1GHz-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Туре
10360.000	48.36	9.16	57.52	68.20	-10.68	peak
15540.000	48.14	10.33	58.47	74.00	-15.53	peak
15540.000	31.05	10.33	41.38	54.00	-12.62	AVG

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

Radiated Emission Above 1GHz-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	туре
10360.000	48.41	9.16	57.57	68.20	-10.63	peak
15540.000	49.63	10.33	59.96	74.00	-14.04	peak
15540.000	30.14	10.33	40.47	54.00	-13.53	AVG
Domorke						

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

Result: Pass



Page 159 of 193

Radiated Emissions Test Results Above 1GHz

EUT Name	Bluetooth and WIFI combo module	Model Name	FSC-BW121
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n20_5200MHz	Antenna	Horizontal/Vertical

Radiated Emission Above 1GHz-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value - Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Туре
10400.000	48.14	9.14	57.28	68.20	-10.92	peak
15600.000	48.33	10.22	58.55	74.00	-15.45	peak
15600.000	31.52	10.22	41.74	54.00	-12.26	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Radiated Emission Above 1GHz-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	туре
10400.000	48.15	9.14	57.29	68.20	-10.91	peak
15600.000	48.12	10.22	58.34	74.00	-15.66	peak
15600.000	31.52	10.22	41.74	54.00	-12.26	AVG
Remark:						

Result: Pass



Page 160 of 193

Radiated Emissions Test Results Above 1GHz

EUT Name	Bluetooth and WIFI combo module	Model Name	FSC-BW121
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n20_5240MHz	Antenna	Horizontal/Vertical

Radiated Emission Above 1GHz-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Туре
10480.000	49.51	9.27	58.78	68.20	-9.42	peak
15720.000	49.33	10.38	59.71	74.00	-14.29	peak
15720.000	30.17	10.38	40.55	54.00	-13.45	AVG
Domorle						

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Radiated Emission Above 1GHz-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Туре
10480.000	47.51	9.27	56.78	68.20	-11.42	peak
15720.000	48.63	10.38	59.01	74.00	-14.99	peak
15720.000	30.52	10.38	40.90	54.00	-13.10	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Result: Pass



Page 161 of 193

Radiated Emissions Test Results Above 1GHz

EUT Name	Bluetooth and WIFI combo module	Model Name	FSC-BW121
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n20_5260MHz	Antenna	Horizontal/Vertical

Radiated Emission Above 1GHz-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Туре
10520.000	47.51	9.42	56.93	68.20	-11.27	peak
15780.000	47.63	10.51	58.14	74.00	-15.86	AVG
15780.000	30.17	10.51	40.68	54.00	-13.32	peak
Demonstr						

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Radiated Emission Above 1GHz-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Type
10520.000	48.63	9.42	58.05	68.20	-10.15	peak
15780.000	48.51	10.51	59.02	74.00	-14.98	AVG
15780.000	31.11	10.51	41.62	54.00	-12.38	peak

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

Result: Pass



Page 162 of 193

Radiated Emissions Test Results Above 1GHz

EUT Name	Bluetooth and WIFI combo module	Model Name	FSC-BW121
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n20_5300MHz	Antenna	Horizontal/Vertical

Radiated Emission Above 1GHz-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Туре
10600.000	48.63	9.14	57.77	74.00	-16.23	peak
10600.000	30.11	9.14	39.25	54.00	-14.75	AVG
15900.000	47.36	10.22	57.58	74.00	-16.42	peak
15900.000	31.78	10.22	42.00	54.00	-12.00	AVG
Pemark:						

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

Radiated Emission Above 1GHz-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Type
10600.000	47.63	9.14	56.77	74.00	-17.23	peak
10600.000	31.11	9.14	40.25	54.00	-13.75	AVG
15900.000	48.69	10.22	58.91	74.00	-15.09	peak
15900.000	30.41	10.22	40.63	54.00	-13.37	AVG
		-		_		

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

Result: Pass



Page 163 of 193

Radiated Emissions Test Results Above 1GHz

EUT Name	Bluetooth and WIFI combo module	Model Name	FSC-BW121
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n20_5320MHz	Antenna	Horizontal/Vertical

Radiated Emission Above 1GHz-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Type
10640.000	50.11	9.14	59.25	74.00	-14.75	peak
10640.000	33.63	9.14	42.77	54.00	-11.23	AVG
15960.000	49.78	10.22	60.00	74.00	-14.00	peak
15960.000	32.51	10.22	42.73	54.00	-11.27	AVG
Remark:						

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

Radiated Emission Above 1GHz-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Турс
10640.000	50.15	9.14	59.29	74.00	-14.71	peak
10640.000	30.33	9.14	39.47	54.00	-14.53	AVG
15960.000	49.36	10.22	59.58	74.00	-14.42	peak
15960.000	30.17	10.22	40.39	54.00	-13.61	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Result: Pass



Page 164 of 193

Radiated Emissions Test Results Above 1GHz

EUT Name	Bluetooth and WIFI combo module	Model Name	FSC-BW121
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n20_5500MHz	Antenna	Horizontal/Vertical

Radiated Emission Above 1GHz-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value - Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Туре
11000.000	49.52	9.14	58.66	74.00	-15.34	peak
11000.000	31.58	9.14	40.72	54.00	-13.28	AVG
16500.000	41.52	10.22	51.74	68.20	-16.46	peak

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

Radiated Emission Above 1GHz-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value - Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Турс
11000.000	49.52	9.14	58.66	74.00	-15.34	peak
11000.000	30.11	9.14	39.25	54.00	-14.75	AVG
16500.000	41.00	10.22	51.22	68.20	-16.98	peak
		<u> </u>			·	

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Result: Pass



Page 165 of 193

Radiated Emissions Test Results Above 1GHz

EUT Name	Bluetooth and WIFI combo module	Model Name	FSC-BW121
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n20_5600MHz	Antenna	Horizontal/Vertical

Radiated Emission Above 1GHz-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Туре	
11120.000	48.69	9.14	57.83	74.00	-16.17	peak	
11120.000	32.05	9.14	41.19	54.00	-12.81	AVG	
16800.000	41.52	10.22	51.74	68.20	-16.46	peak	
Remark:	Remark:						

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

Radiated Emission Above 1GHz-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Туре
11120.000	49.11	9.14	58.25	74.00	-15.75	peak
11120.000	34.15	9.14	43.29	54.00	-10.71	AVG
16800.000	41.58	10.22	51.80	68.20	-16.40	peak
Remark:						

Result: Pass



Page 166 of 193

Radiated Emissions Test Results Above 1GHz

EUT Name	Bluetooth and WIFI combo module	Model Name	FSC-BW121
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.1n20_5700MHz	Antenna	Horizontal/Vertical

Radiated Emission Above 1GHz-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value - Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Туре
11400.000	49.52	9.14	58.66	74.00	-15.34	peak
11400.000	31.77	9.14	40.91	54.00	-13.09	AVG
17100.000	40.25	10.22	50.47	68.20	-17.73	peak
					-	
Domonle						

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Radiated Emission Above 1GHz-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Туре
11400.000	48.58	9.14	57.72	74.00	-16.28	peak
11400.000	33.56	9.14	42.70	54.00	-11.30	AVG
17100.000	41.14	10.22	51.36	68.20	-16.84	peak

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Result: Pass



Page 167 of 193

Radiated Emissions Test Results Above 1GHz

EUT Name	Bluetooth and WIFI combo module	Model Name	FSC-BW121
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n20_5745MHz	Antenna	Horizontal/Vertical

Radiated Emission Above 1GHz-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Туре
11490.000	49.58	9.42	59.00	74.00	-15.00	peak
11490.000	31.78	9.42	41.20	54.00	-12.80	AVG
17235.000	41.63	10.51	52.14	68.20	-16.06	peak

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Radiated Emission Above 1GHz-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Type
11490.000	50.58	9.42	60.00	74.00	-14.00	peak
11490.000	32.11	9.42	41.53	54.00	-12.47	AVG
17235.000	42.51	10.51	53.02	68.20	-15.18	peak
				_		

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

Result: Pass



Page 168 of 193

Radiated Emissions Test Results Above 1GHz

EUT Name	Bluetooth and WIFI combo module	Model Name	FSC-BW121
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n20_5785MHz	Antenna	Horizontal/Vertical

Radiated Emission Above 1GHz-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Type
11570.000	50.25	9.42	59.67	74.00	-14.33	peak
11570.000	32.11	9.42	41.53	54.00	-12.47	AVG
17355.000	43.26	10.51	53.77	68.20	-14.43	peak

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

Radiated Emission Above 1GHz-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Туре
11570.000	49.58	9.42	59.00	74.00	-15.00	peak
11570.000	31.52	9.42	40.94	54.00	-13.06	AVG
17355.000	41.63	10.51	52.14	68.20	-16.06	peak

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

Result: Pass



Page 169 of 193

Radiated Emissions Test Results Above 1GHz

EUT Name	Bluetooth and WIFI combo module	Model Name	FSC-BW121
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n20_5825MHz	Antenna	Horizontal/Vertical

Radiated Emission Above 1GHz-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Type
11650.000	51.12	9.62	60.74	74.00	-13.26	peak
11650.000	31.52	9.62	41.14	54.00	-12.86	AVG
17475.000	43.58	10.75	54.33	68.20	-13.87	peak
Remark:						

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

Radiated Emission Above 1GHz-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Туре
11650.000	50.15	9.62	59.77	74.00	-14.23	peak
11650.000	32.63	9.62	42.25	54.00	-11.75	AVG
17475.000	41.74	10.75	52.49	68.20	-15.71	peak


Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Result: Pass

Note:

- 1. The amplitude of other spurious emissions from 1GHz to 40 GHz which are attenuated more than 20 dB below the permissible value need not be reported.
- 2. Factor = Antenna Factor + Cable loss Amplifier gain, Margin=Measure Result-Limit.
- 3. The "Factor" value can be calculated automatically by software of measurement system.
- 4. All test modes had been pre-tested. Refer to Chapter 5 of the report for details.





EUT Name	Bluetooth and WIFI combo module	Model Name	FSC-BW121
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a_5180MHz	Antenna	Horizontal


Test Graph for Peak Measurement



Test Graph for Average Measurement



Result: Pass





EUT Name	Bluetooth and WIFI combo module	Model Name	FSC-BW121
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a_5180MHz	Antenna	Vertical


Test Graph for Peak Measurement



Test Graph for Average Measurement



Result: Pass





EUT Name	Bluetooth and WIFI combo module	Model Name	FSC-BW121
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40_5190MHz	Antenna	Horizontal


Test Graph for Peak Measurement



Test Graph for Average Measurement



Result: Pass





EUT Name	Bluetooth and WIFI combo module	Model Name	FSC-BW121
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40_5190MHz	Antenna	Vertical


Test Graph for Peak Measurement



Test Graph for Average Measurement



Result: Pass





EUT Name	Bluetooth and WIFI combo module	Model Name	FSC-BW121
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11ac80_5210MHz	Antenna	Horizontal


Test Graph for Peak Measurement



Test Graph for Average Measurement



Result: Pass





EUT Name	Bluetooth and WIFI combo module	Model Name	FSC-BW121	
Temperature	25°C	Relative Humidity	55.4%	
Pressure	960hPa	Test Voltage	Normal Voltage	
Test Mode	802.11ac80_5210MHz	Antenna	Vertical	


Test Graph for Peak Measurement



Test Graph for Average Measurement



Result: Pass





EUT Name	Bluetooth and WIFI combo module	Model Name	FSC-BW121
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a_5320MHz	Antenna	Horizontal


Test Graph for Peak Measurement



Test Graph for Average Measurement



Result: Pass





EUT Name	Bluetooth and WIFI combo module	Model Name	FSC-BW121
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a_5320MHz	Antenna	Vertical


Test Graph for Peak Measurement



Test Graph for Average Measurement



Result: Pass





EUT Name	Bluetooth and WIFI combo module	Model Name	FSC-BW121
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40_5310MHz	Antenna	Horizontal


Test Graph for Peak Measurement



Test Graph for Average Measurement



Result: Pass





EUT Name	Bluetooth and WIFI combo module	Model Name	FSC-BW121
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40_5310MHz	Antenna	Vertical


Test Graph for Peak Measurement



Test Graph for Average Measurement



Result: Pass





EUT Name	Bluetooth and WIFI combo module	Model Name	FSC-BW121
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11ac80_5290MHz	Antenna	Horizontal


Test Graph for Peak Measurement



Test Graph for Average Measurement



Result: Pass





EUT Name	Bluetooth and WIFI combo module	Model Name	FSC-BW121
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11ac80_5290MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement



Result: Pass