


EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

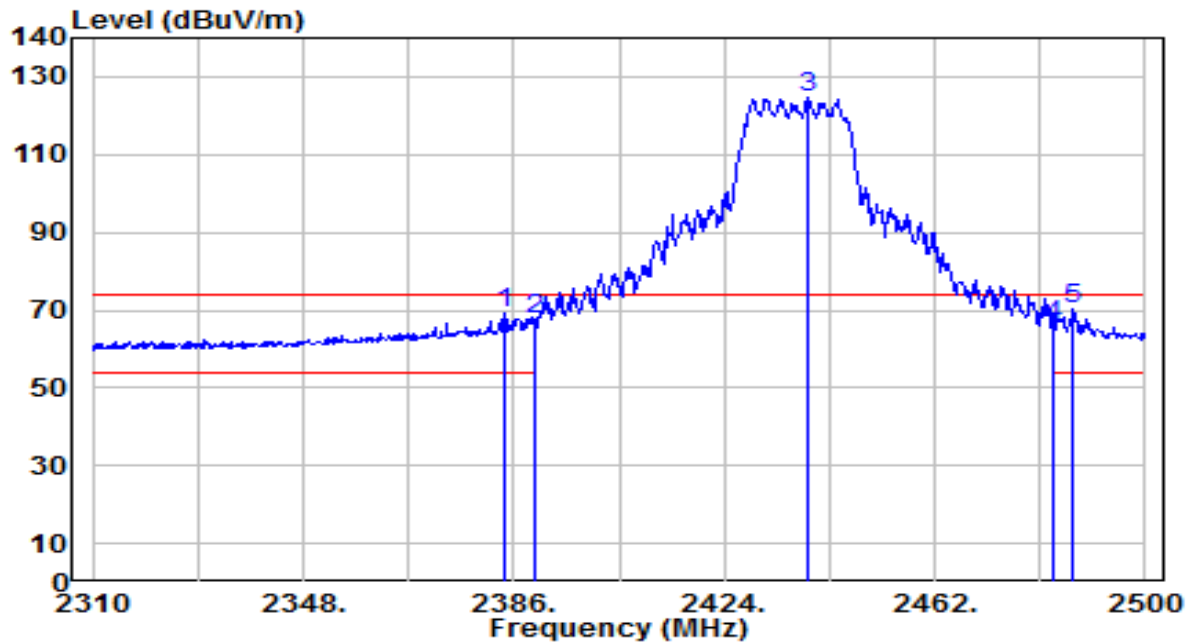


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2384.480	37.19	31.93	69.11	-4.89	74.00	205	350	Peak
2	2390.000	35.81	31.95	67.75	-6.25	74.00	205	350	Peak
3	2439.010	92.43	32.13	124.56	N/A	N/A	205	350	Peak
4	2483.500	33.57	32.30	65.87	-8.13	74.00	205	350	Peak
5	* 2486.890	37.74	32.31	70.05	-3.95	74.00	205	350	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

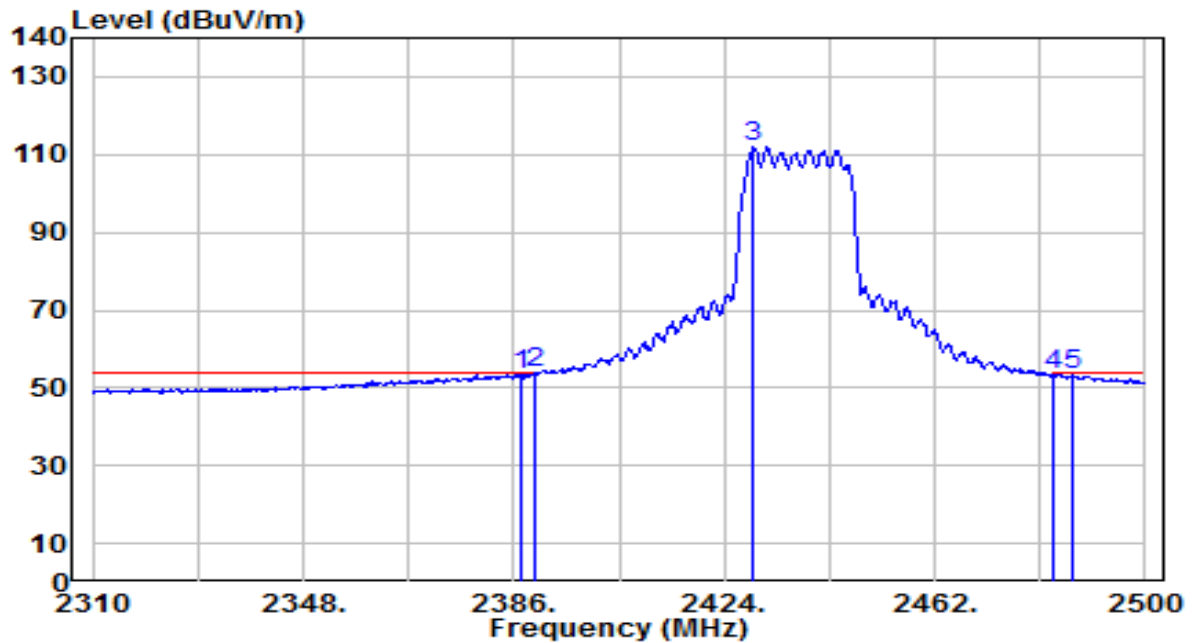


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.140	21.45	31.94	53.39	-0.61	54.00	205	350	Average
2	*	2390.000	21.77	31.95	53.72	-0.28	54.00	205	350	Average
3		2429.130	79.76	32.09	111.86	N/A	N/A	205	350	Average
4		2483.500	20.91	32.30	53.20	-0.80	54.00	205	350	Average
5		2486.700	20.79	32.31	53.10	-0.90	54.00	205	350	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

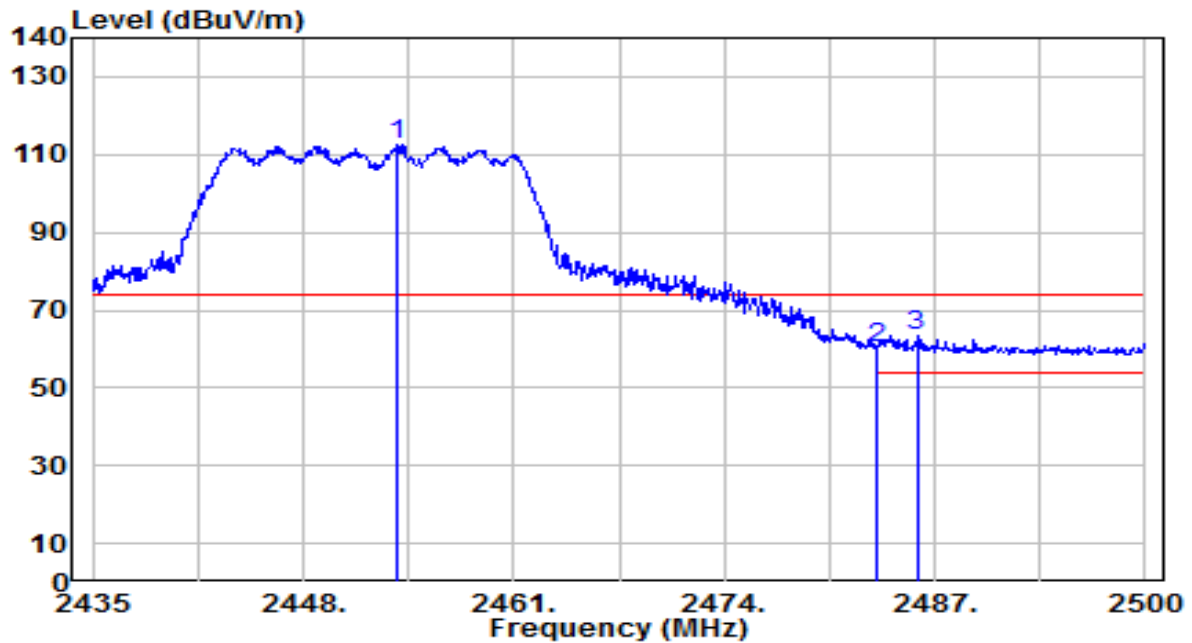


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2453.785	80.41	32.19	112.60	N/A	N/A	195	325	Peak
2		2483.500	27.96	32.30	60.26	-13.74	74.00	195	325	Peak
3		2485.895	31.32	32.31	63.63	-10.37	74.00	195	325	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

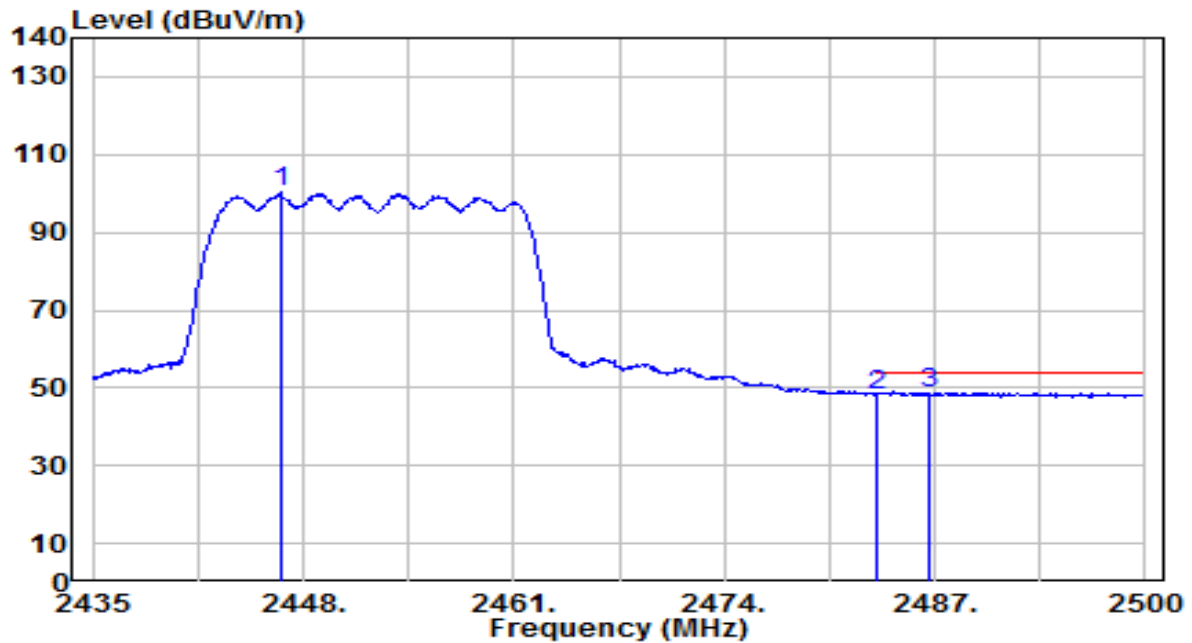


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2446.570	68.04	32.16	100.20	N/A	N/A	195	325	Average
2	2483.500	15.90	32.30	48.19	-5.81	54.00	195	325	Average
3	* 2486.675	16.38	32.31	48.69	-5.31	54.00	195	325	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

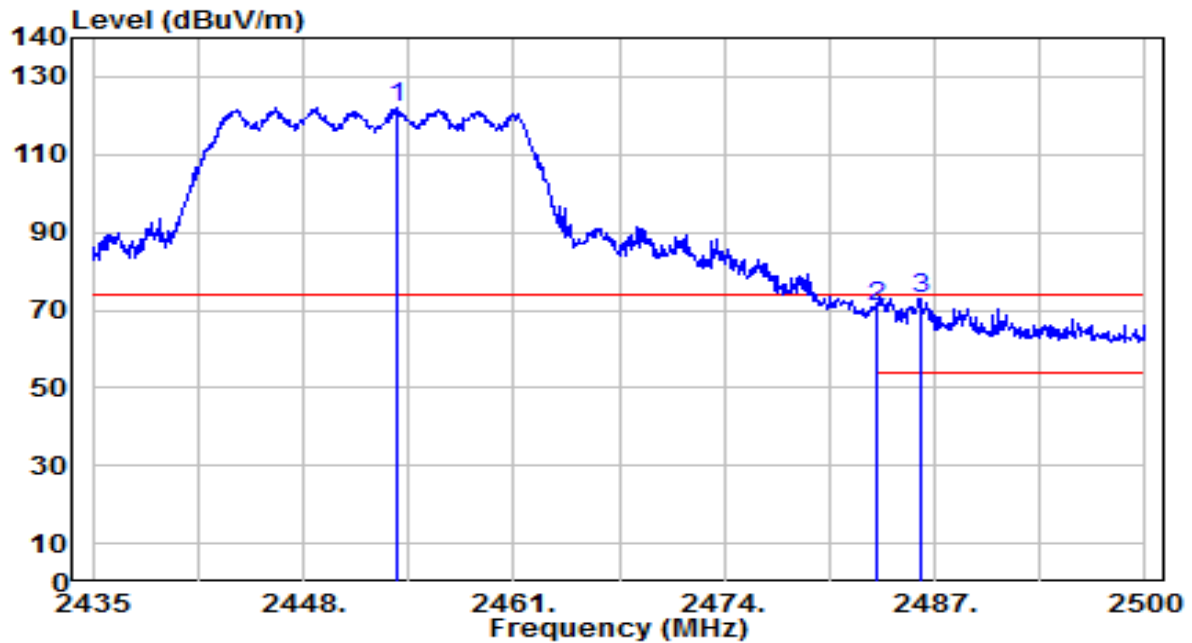


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2453.850	89.70	32.19	121.89	N/A	N/A	160	10	Peak
2		2483.500	38.56	32.30	70.85	-3.15	74.00	160	10	Peak
3		2486.155	40.73	32.31	73.04	-0.96	74.00	160	10	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

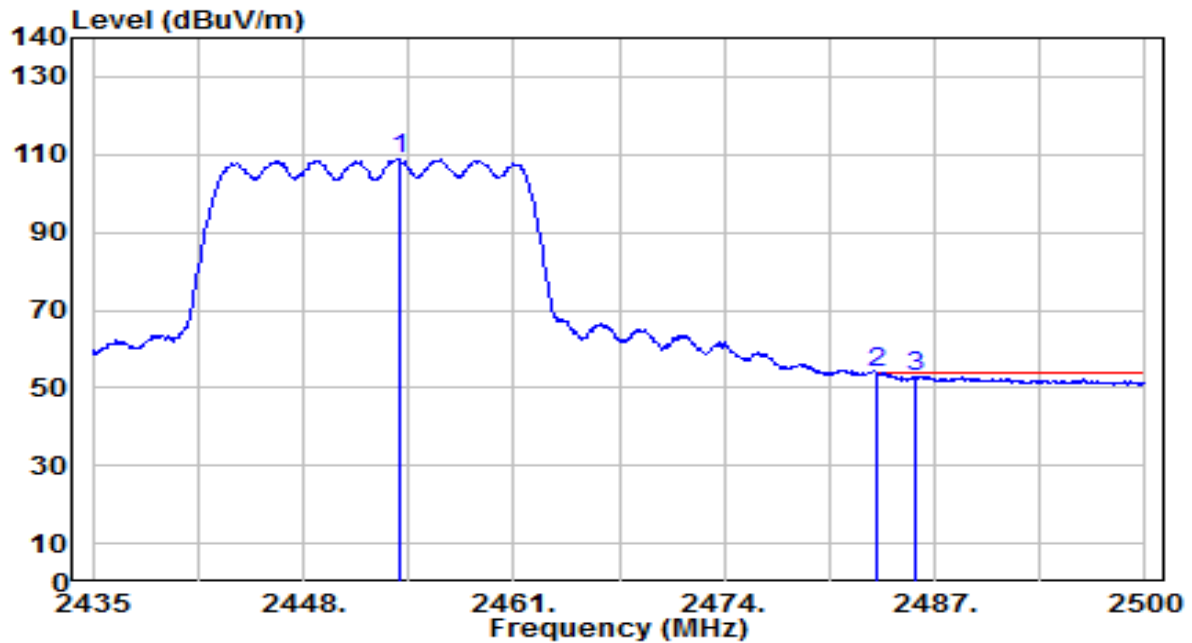


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2453.915	76.80	32.19	108.98	N/A	N/A	160	10	Average
2	*	2483.500	21.56	32.30	53.86	-0.14	54.00	160	10	Average
3		2485.765	20.63	32.31	52.93	-1.07	54.00	160	10	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

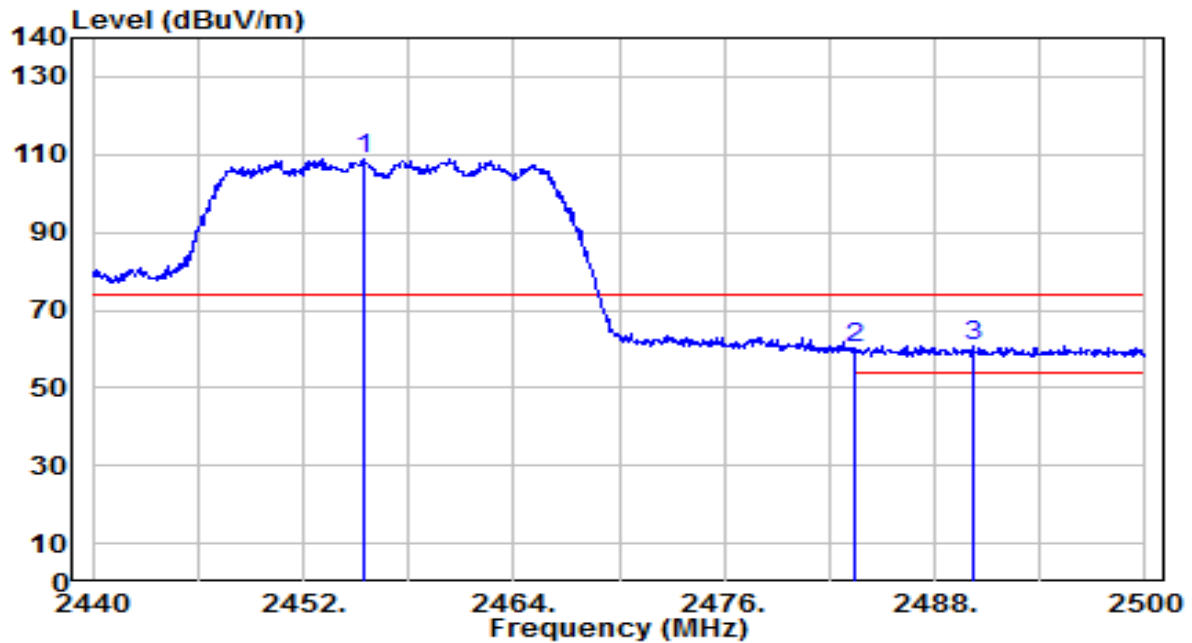


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2455.480	76.83	32.19	109.02	N/A	N/A	105	5	Peak
2	2483.500	27.93	32.30	60.23	-13.77	74.00	105	5	Peak
3	* 2490.160	28.67	32.32	61.00	-13.00	74.00	105	5	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

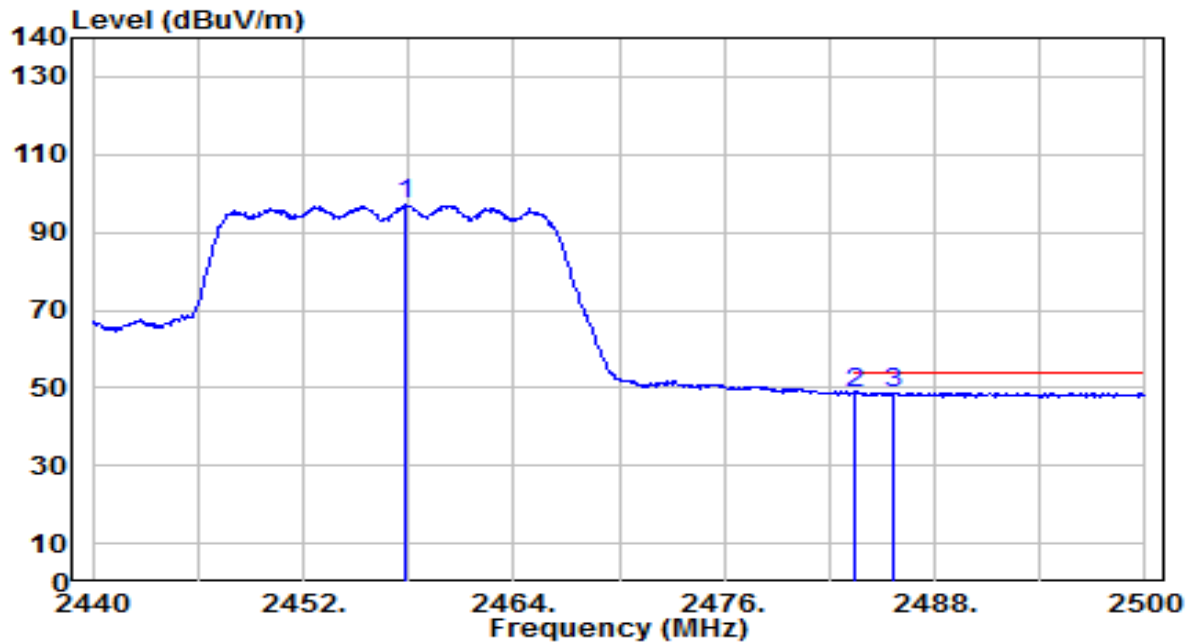


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2457.880	64.76	32.20	96.96	N/A	N/A	105	5	Average
2	2483.500	16.37	32.30	48.67	-5.33	54.00	105	5	Average
3	* 2485.600	16.51	32.31	48.81	-5.19	54.00	105	5	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

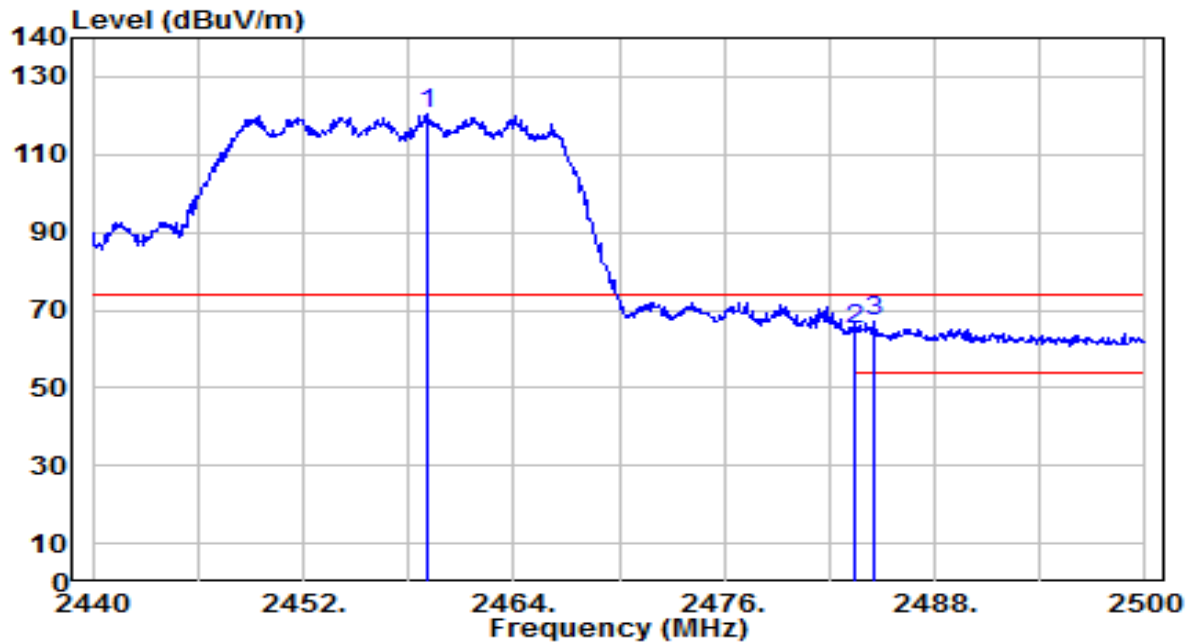


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2459.140	88.33	32.21	120.54	N/A	N/A	165	355	Peak
2	2483.500	32.58	32.30	64.88	-9.12	74.00	165	355	Peak
3	* 2484.520	34.88	32.30	67.19	-6.81	74.00	165	355	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

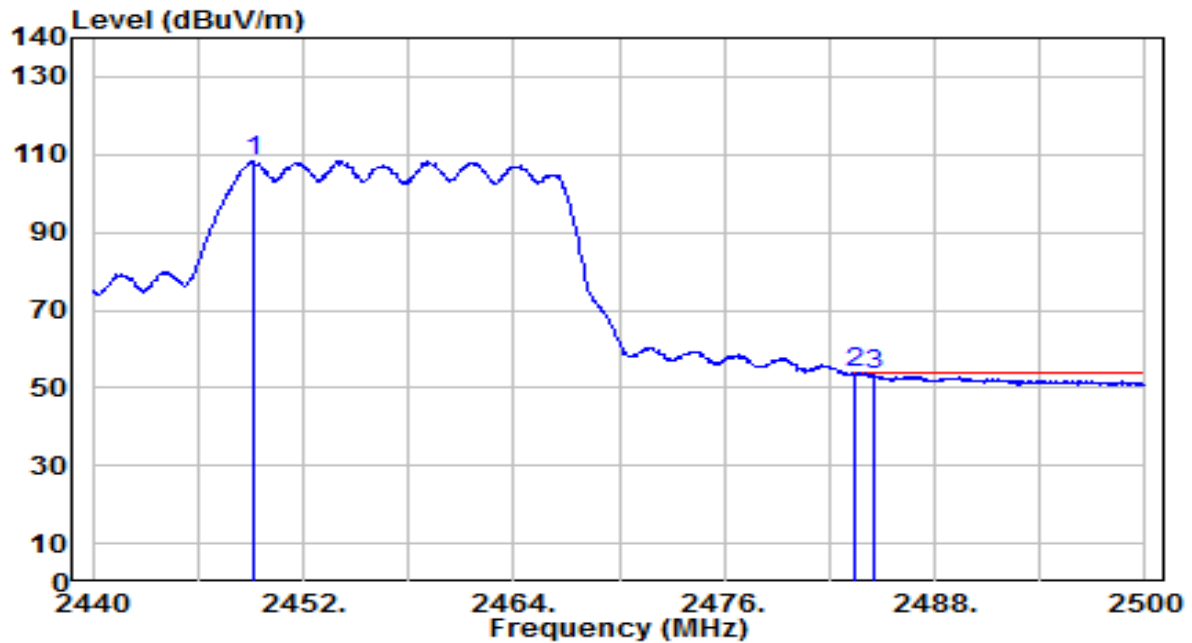


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2449.180	76.23	32.17	108.40	N/A	N/A	165	355	Average
2	*	2483.500	21.42	32.30	53.71	-0.29	54.00	165	355	Average
3		2484.580	21.12	32.30	53.42	-0.58	54.00	165	355	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

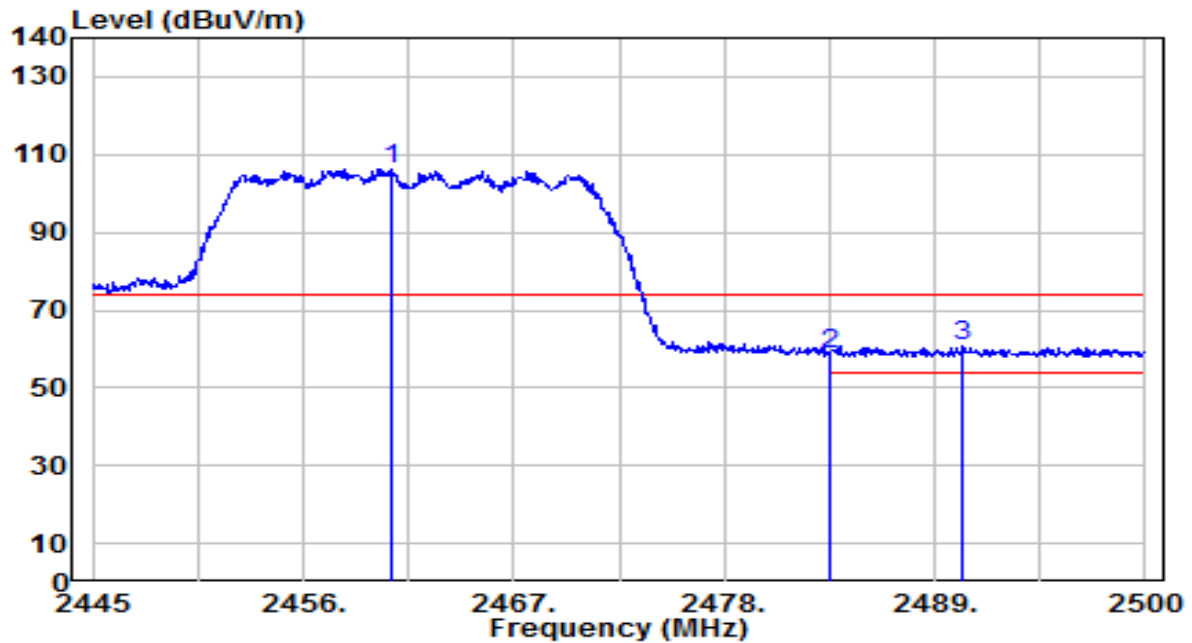


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.675	74.09	32.21	106.30	N/A	N/A	105	5	Peak
2	2483.500	26.24	32.30	58.54	-15.46	74.00	105	5	Peak
3	* 2490.485	28.40	32.32	60.73	-13.27	74.00	105	5	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

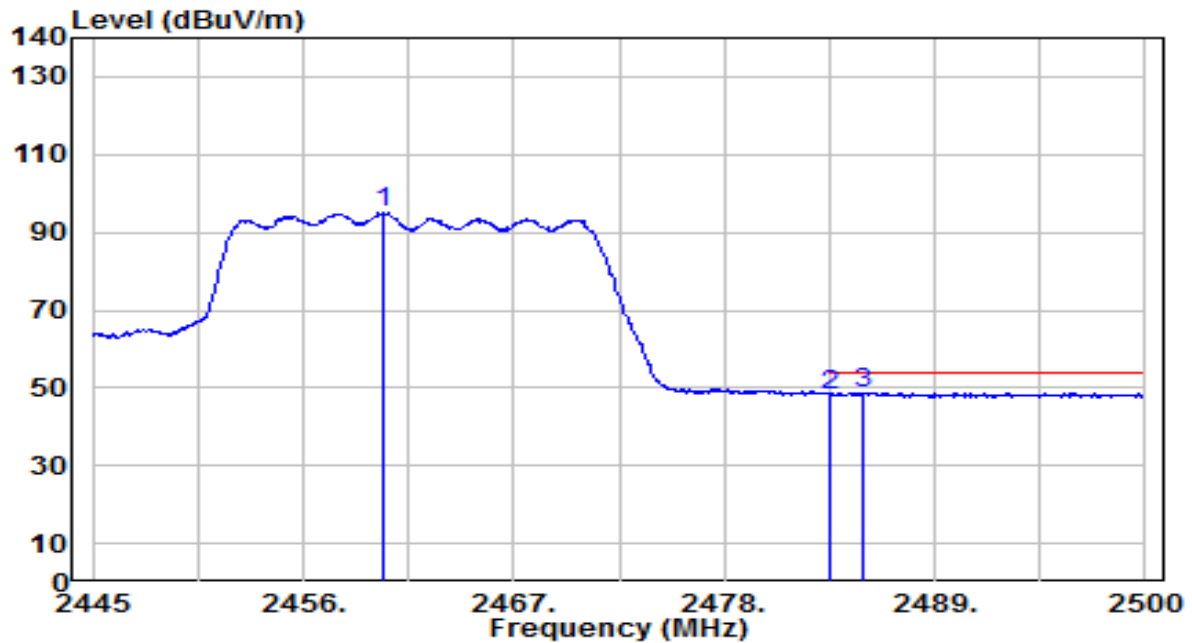


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.235	62.91	32.21	95.12	N/A	N/A	105	5	Average
2	2483.500	16.00	32.30	48.30	-5.70	54.00	105	5	Average
3	* 2485.260	16.48	32.30	48.78	-5.22	54.00	105	5	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

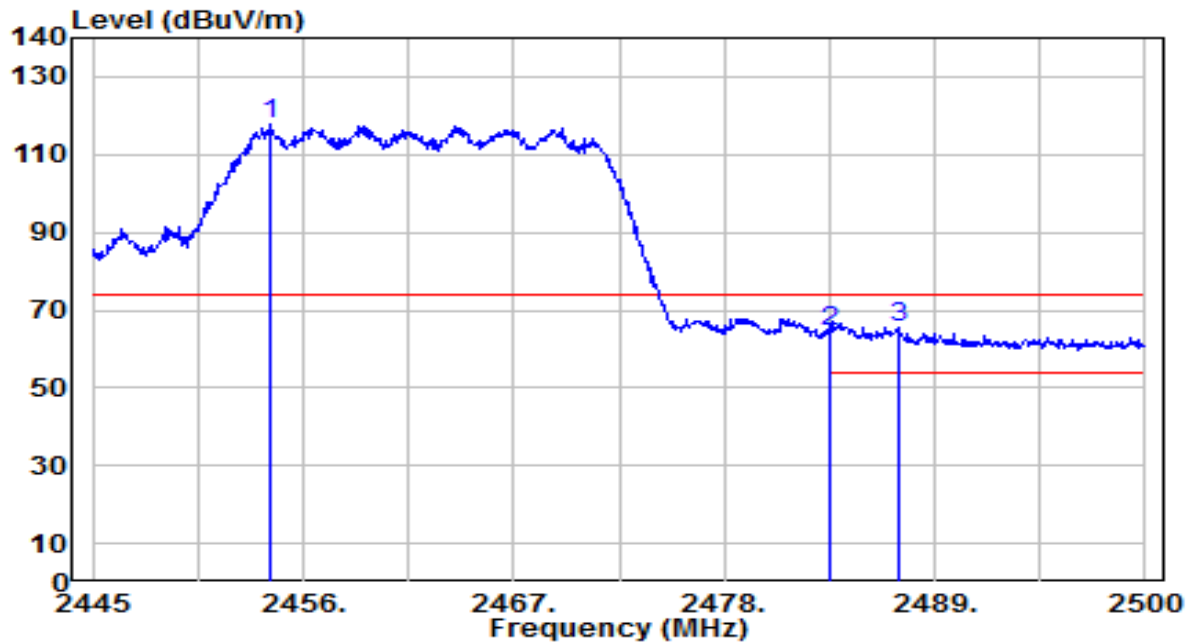


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2454.240	85.43	32.19	117.62	N/A	N/A	165	355	Peak
2	2483.500	32.07	32.30	64.37	-9.63	74.00	165	355	Peak
3	* 2487.075	33.40	32.31	65.71	-8.29	74.00	165	355	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

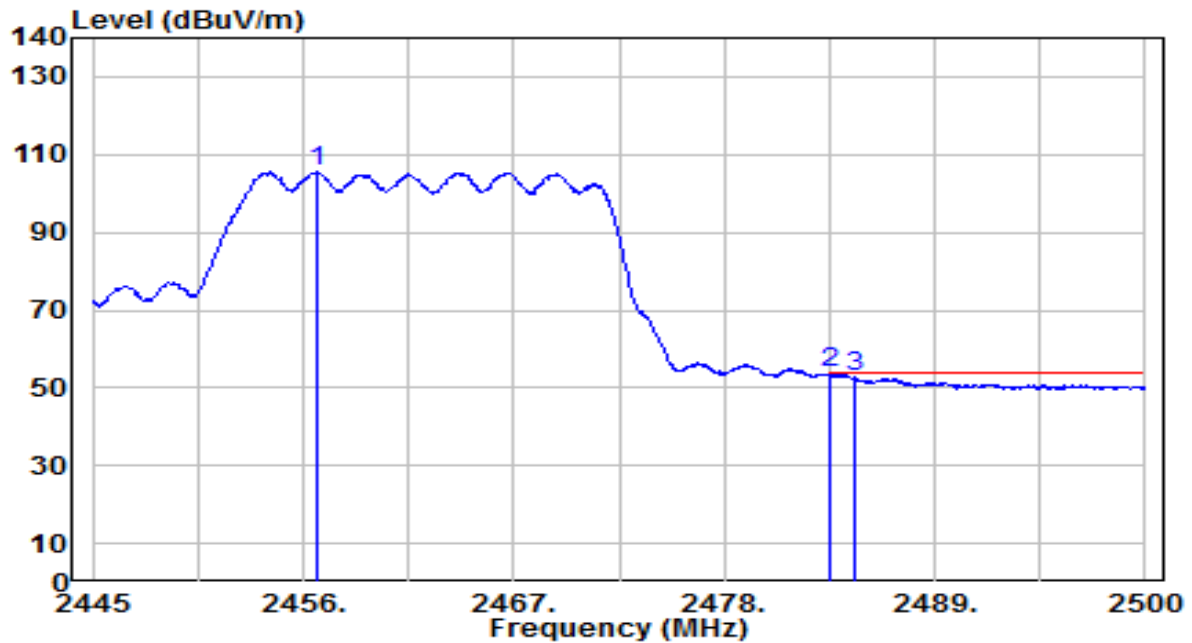


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2456.715	73.44	32.20	105.64	N/A	N/A	165	355	Average
2	*	2483.500	21.49	32.30	53.79	-0.21	54.00	165	355	Average
3		2484.820	20.50	32.30	52.80	-1.20	54.00	165	355	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

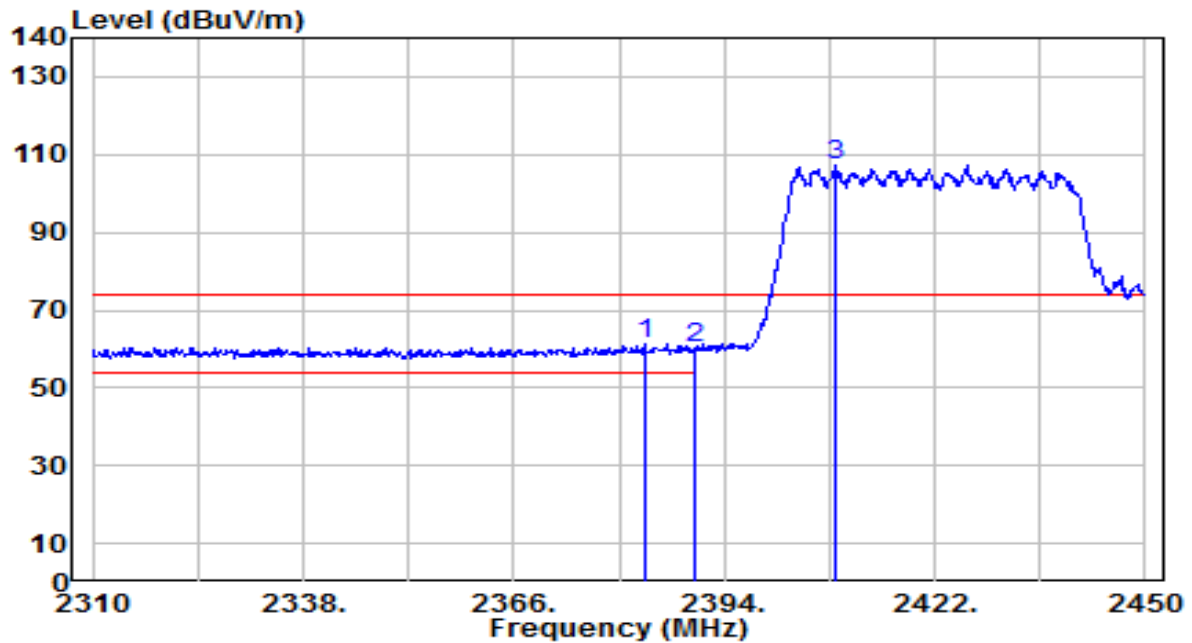


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2383.500	29.22	31.92	61.14	-12.86	74.00	180	30	Peak
2		2390.000	28.23	31.95	60.18	-13.82	74.00	180	30	Peak
3		2408.700	75.20	32.02	107.22	N/A	N/A	180	30	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

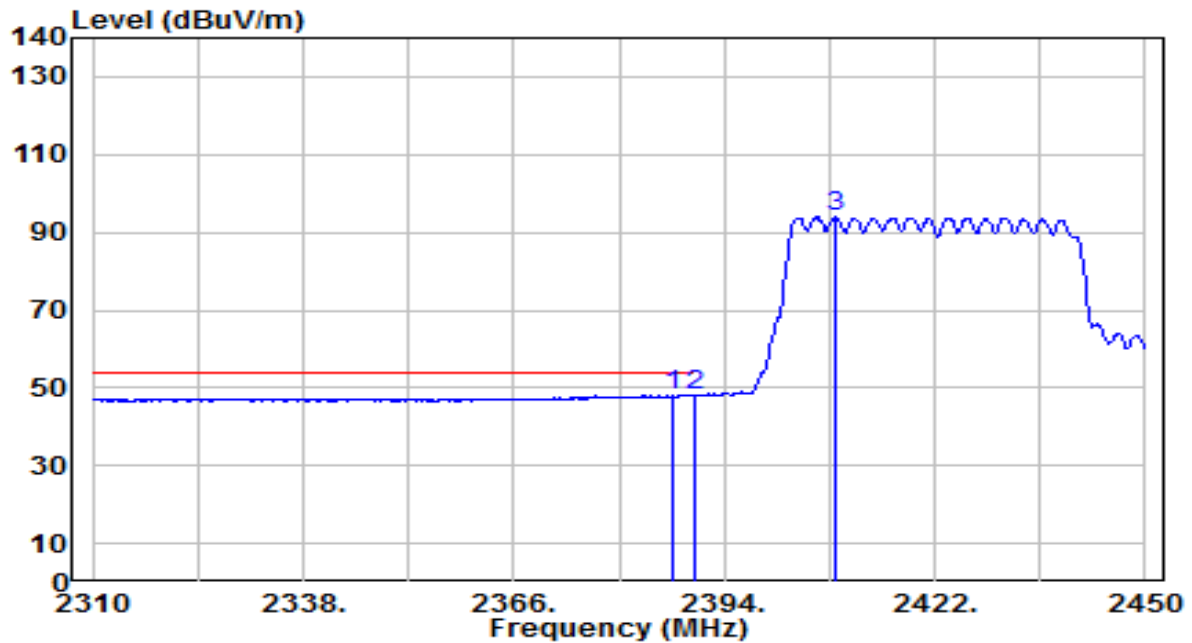


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.000	16.07	31.94	48.01	-5.99	54.00	180	30	Average
2		2390.000	15.99	31.95	47.94	-6.06	54.00	180	30	Average
3		2408.700	61.82	32.02	93.84	N/A	N/A	180	30	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

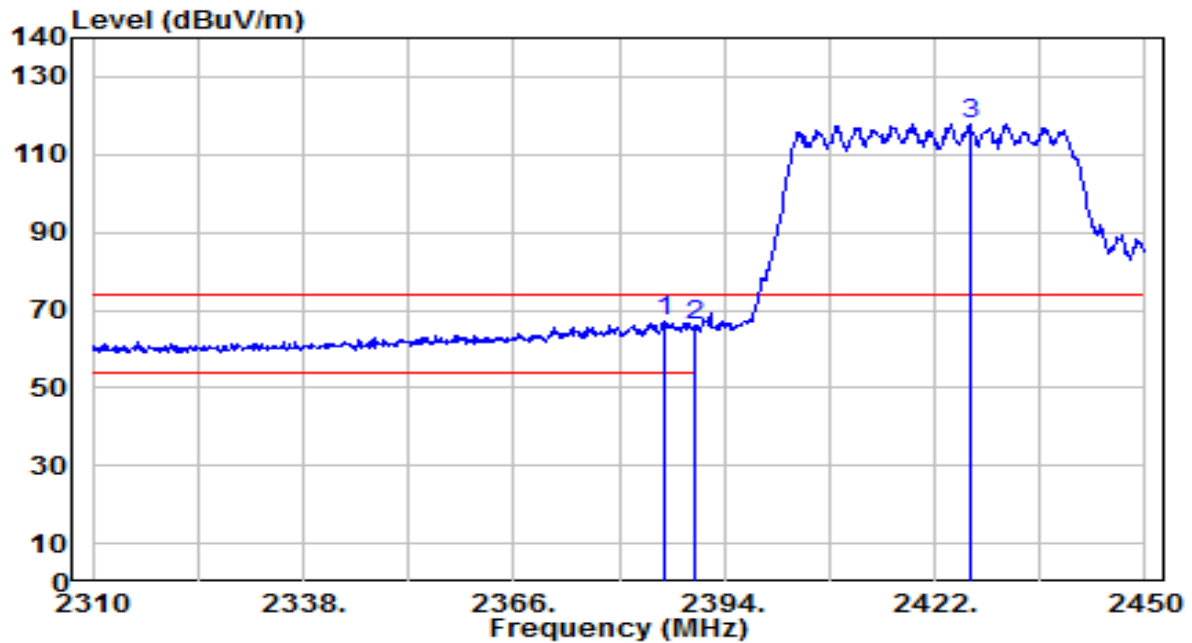


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.160	35.17	31.93	67.11	-6.89	74.00	165	360	Peak
2		2390.000	33.85	31.95	65.80	-8.20	74.00	165	360	Peak
3		2426.760	85.82	32.09	117.91	N/A	N/A	165	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

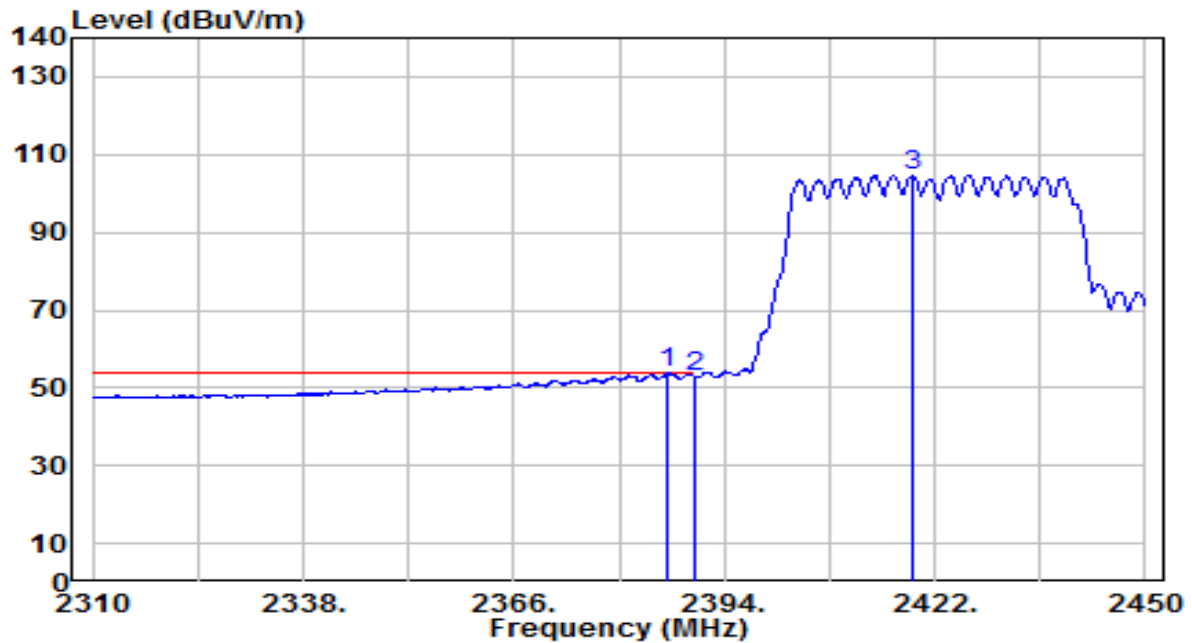


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.580	21.78	31.94	53.72	-0.28	54.00	165	360	Average
2		2390.000	21.09	31.95	53.04	-0.96	54.00	165	360	Average
3		2419.060	72.68	32.06	104.74	N/A	N/A	165	360	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

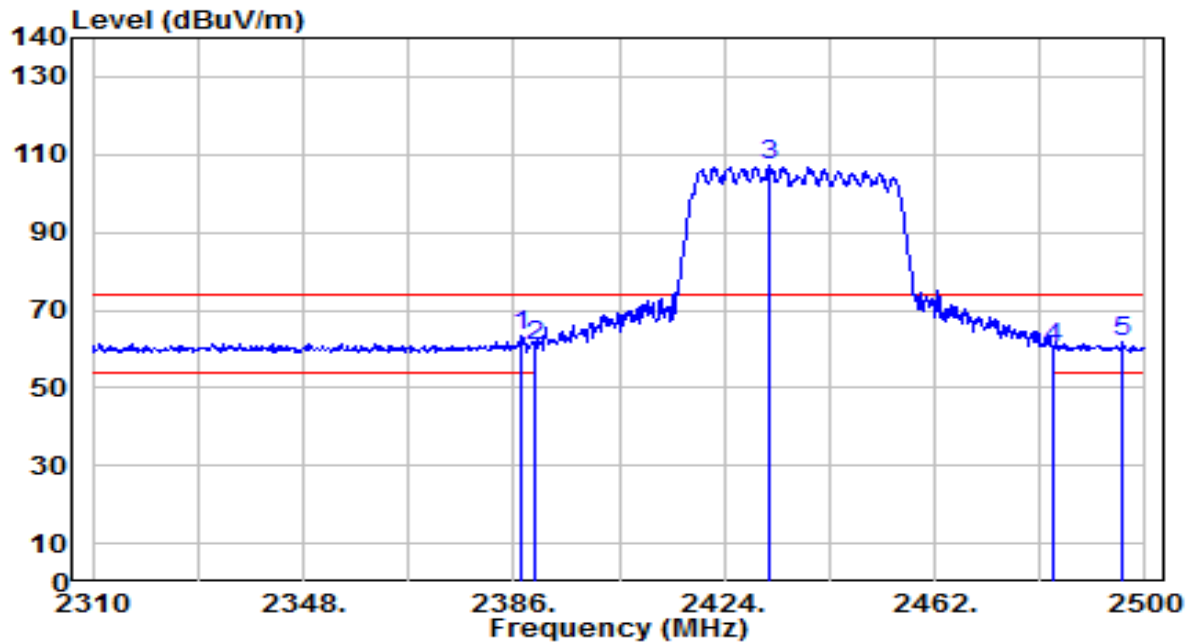


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.140	31.43	31.94	63.37	-10.63	74.00	200	270	Peak
2		2390.000	28.72	31.95	60.67	-13.33	74.00	200	270	Peak
3		2431.980	75.29	32.11	107.40	N/A	N/A	200	270	Peak
4		2483.500	28.08	32.30	60.38	-13.62	74.00	200	270	Peak
5		2496.010	29.26	32.35	61.61	-12.39	74.00	200	270	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

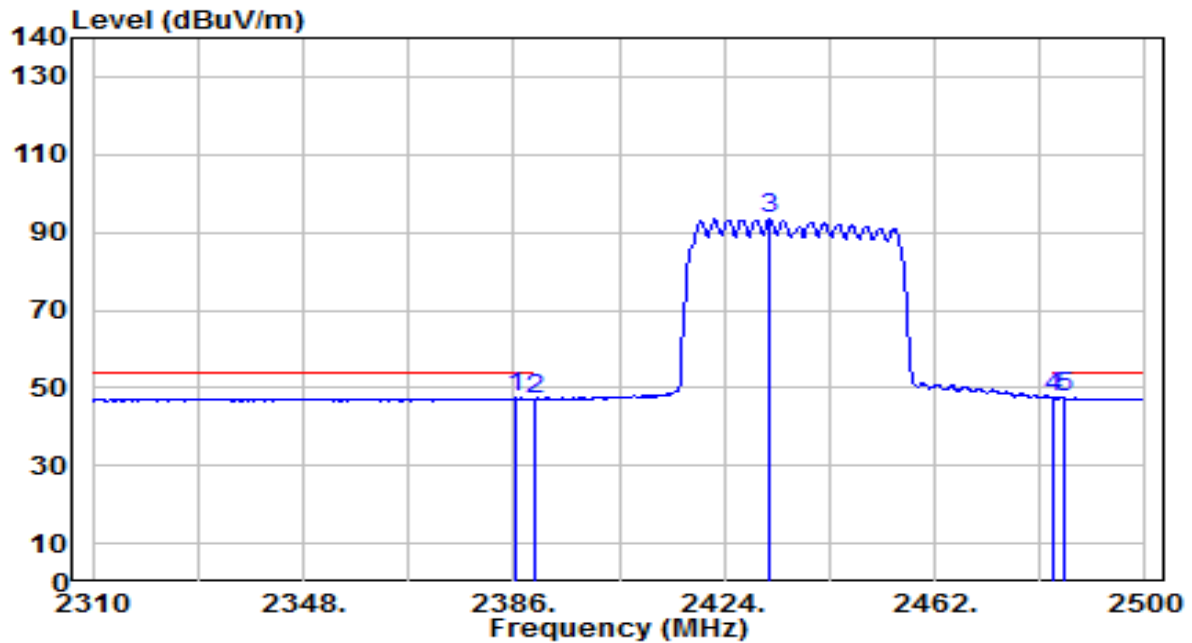


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2386.380	15.41	31.94	47.34	-6.66	54.00	200	270	Average
2	2390.000	15.26	31.95	47.21	-6.79	54.00	200	270	Average
3	2431.980	61.28	32.11	93.38	N/A	N/A	200	270	Average
4	* 2483.500	15.18	32.30	47.48	-6.52	54.00	200	270	Average
5	2485.370	15.11	32.31	47.41	-6.59	54.00	200	270	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

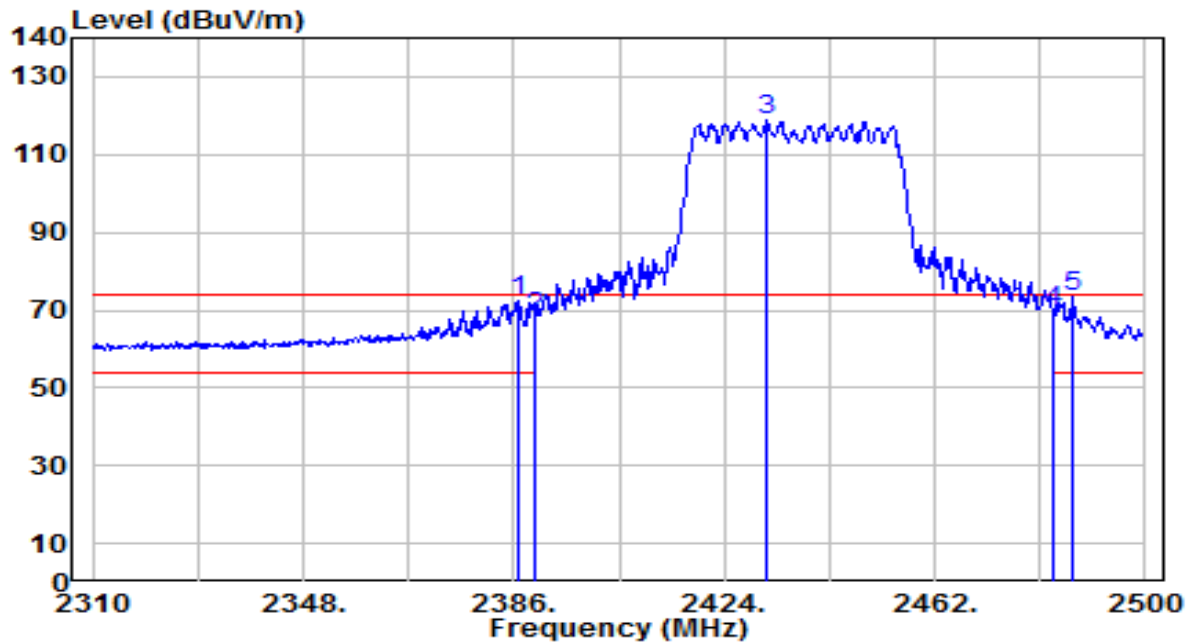


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2386.950	40.20	31.94	72.14	-1.86	74.00	205	350	Peak
2	2390.000	35.96	31.95	67.91	-6.09	74.00	205	350	Peak
3	2431.790	86.57	32.10	118.68	N/A	N/A	205	350	Peak
4	2483.500	37.52	32.30	69.82	-4.18	74.00	205	350	Peak
5	* 2487.080	41.31	32.31	73.62	-0.38	74.00	205	350	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

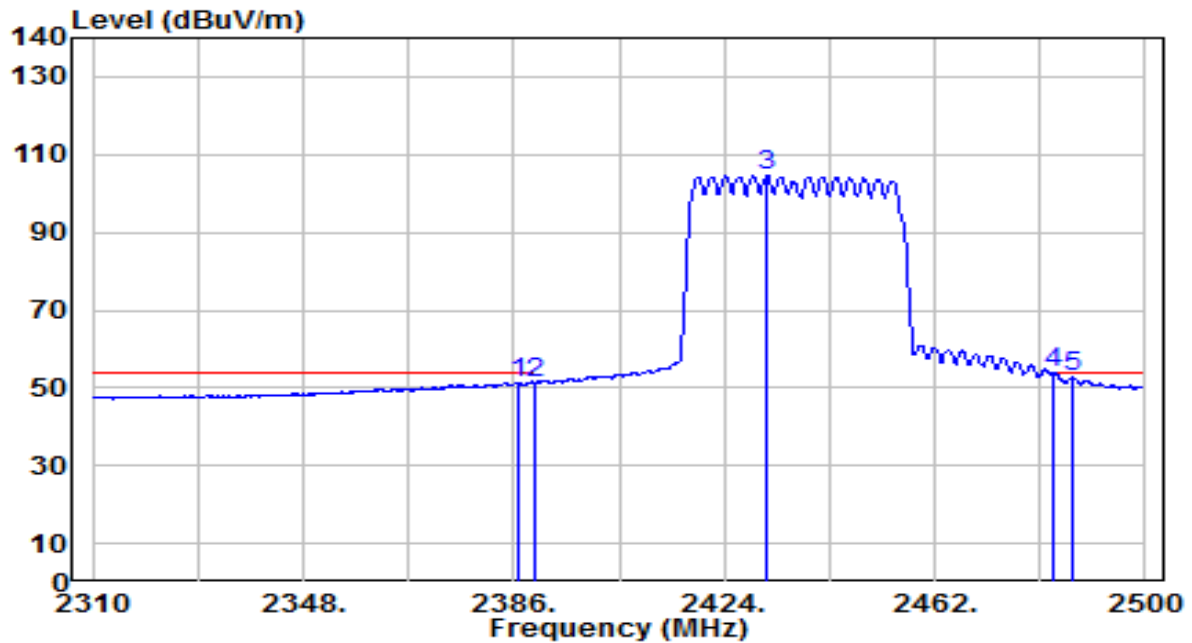


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2386.760	19.31	31.94	51.25	-2.75	54.00	205	350	Average
2	2390.000	19.23	31.95	51.18	-2.82	54.00	205	350	Average
3	2431.790	72.66	32.10	104.77	N/A	N/A	205	350	Average
4	* 2483.500	21.42	32.30	53.72	-0.28	54.00	205	350	Average
5	2486.890	20.42	32.31	52.73	-1.27	54.00	205	350	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

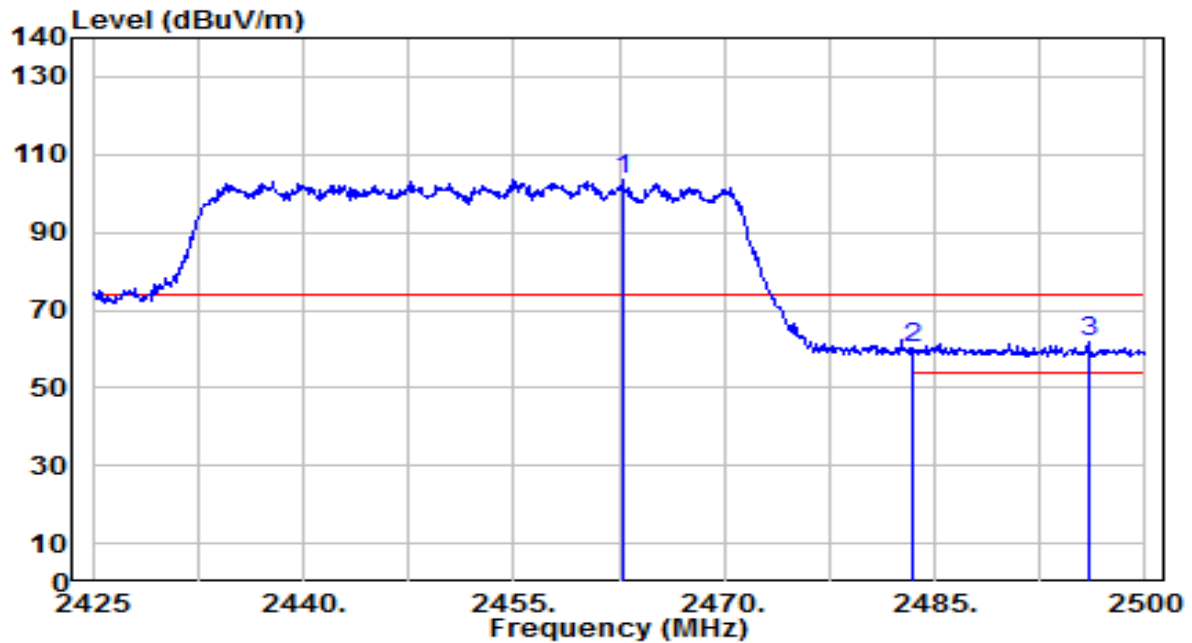


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2462.800	71.13	32.22	103.35	N/A	N/A	105	5	Peak
2	2483.500	27.87	32.30	60.16	-13.84	74.00	105	5	Peak
3	* 2495.950	29.41	32.34	61.75	-12.25	74.00	105	5	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

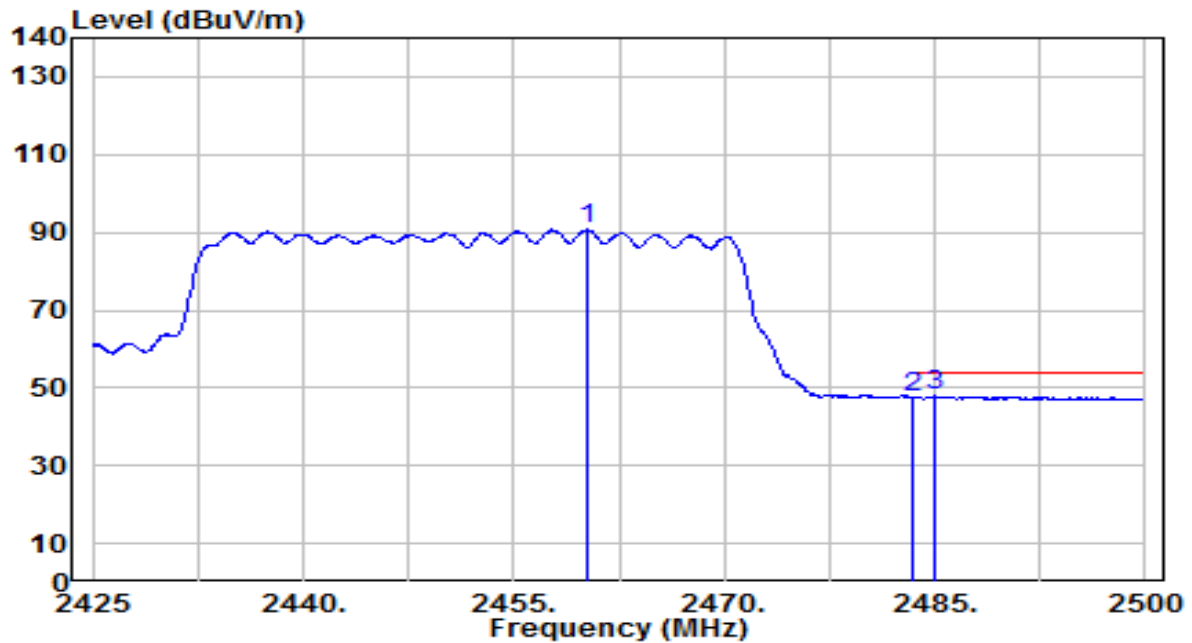


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.325	58.44	32.21	90.65	N/A	N/A	105	5	Average
2	2483.500	15.22	32.30	47.52	-6.48	54.00	105	5	Average
3	* 2485.075	15.55	32.30	47.85	-6.15	54.00	105	5	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

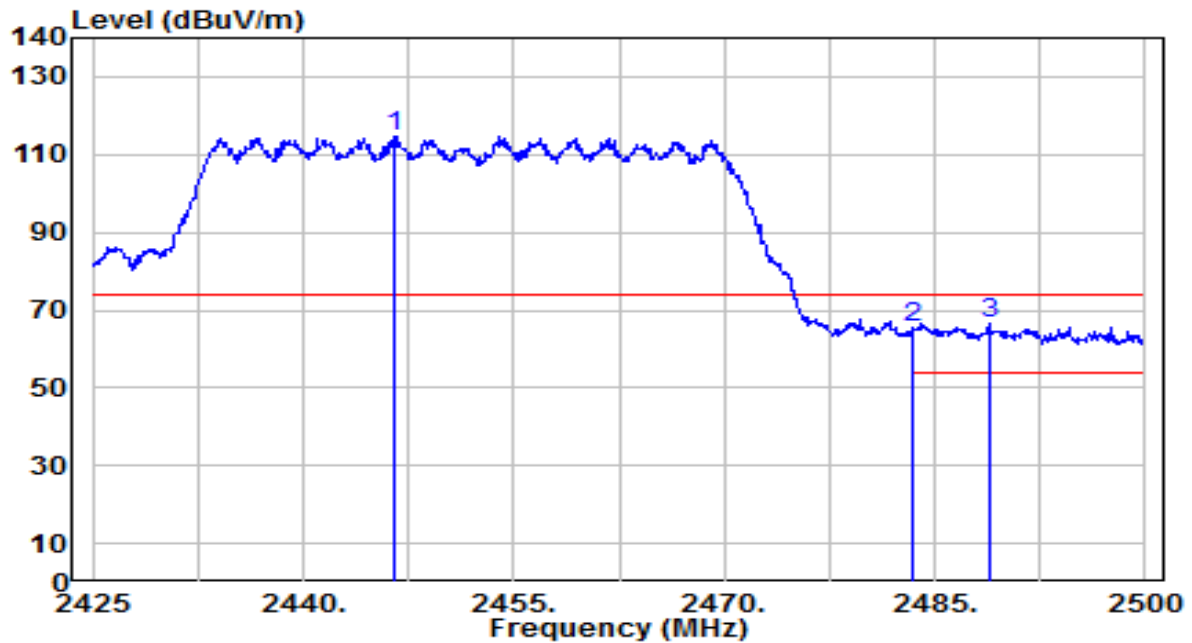


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2446.525	82.59	32.16	114.75	N/A	N/A	165	355	Peak
2	2483.500	32.99	32.30	65.29	-8.71	74.00	165	355	Peak
3	* 2488.900	33.99	32.32	66.31	-7.69	74.00	165	355	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

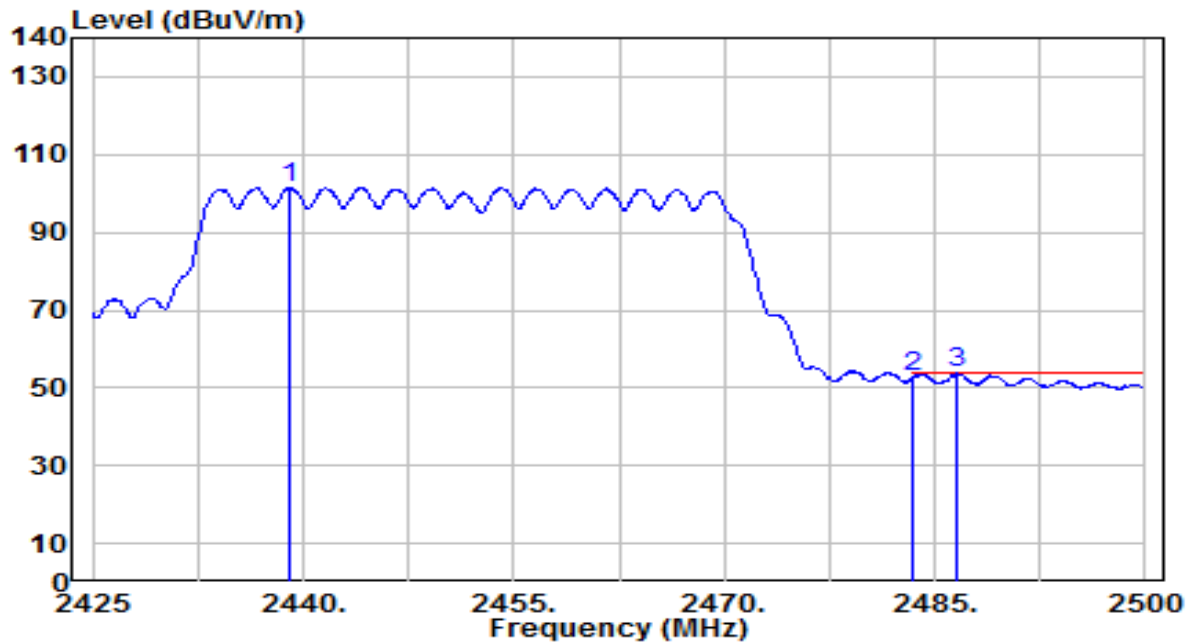


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2439.025	69.33	32.13	101.46	N/A	N/A	165	355	Average
2	2483.500	20.48	32.30	52.78	-1.22	54.00	165	355	Average
3	* 2486.650	21.42	32.31	53.73	-0.27	54.00	165	355	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

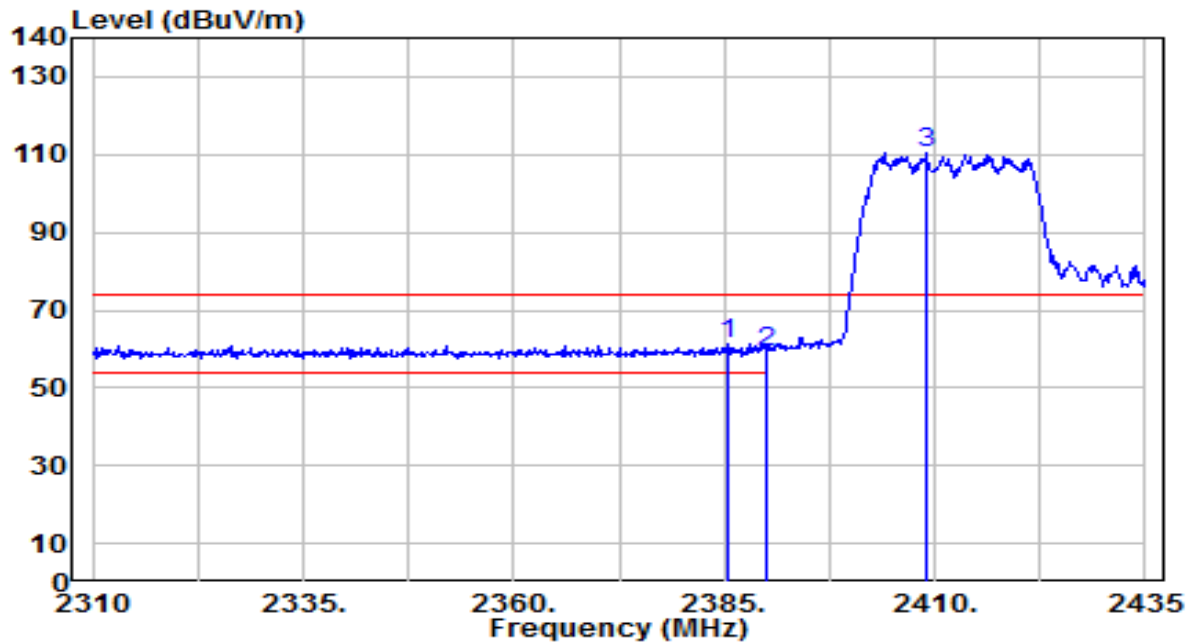


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.500	29.18	31.93	61.11	-12.89	74.00	180	30	Peak
2		2390.000	27.07	31.95	59.02	-14.98	74.00	180	30	Peak
3		2409.000	78.23	32.02	110.25	N/A	N/A	180	30	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

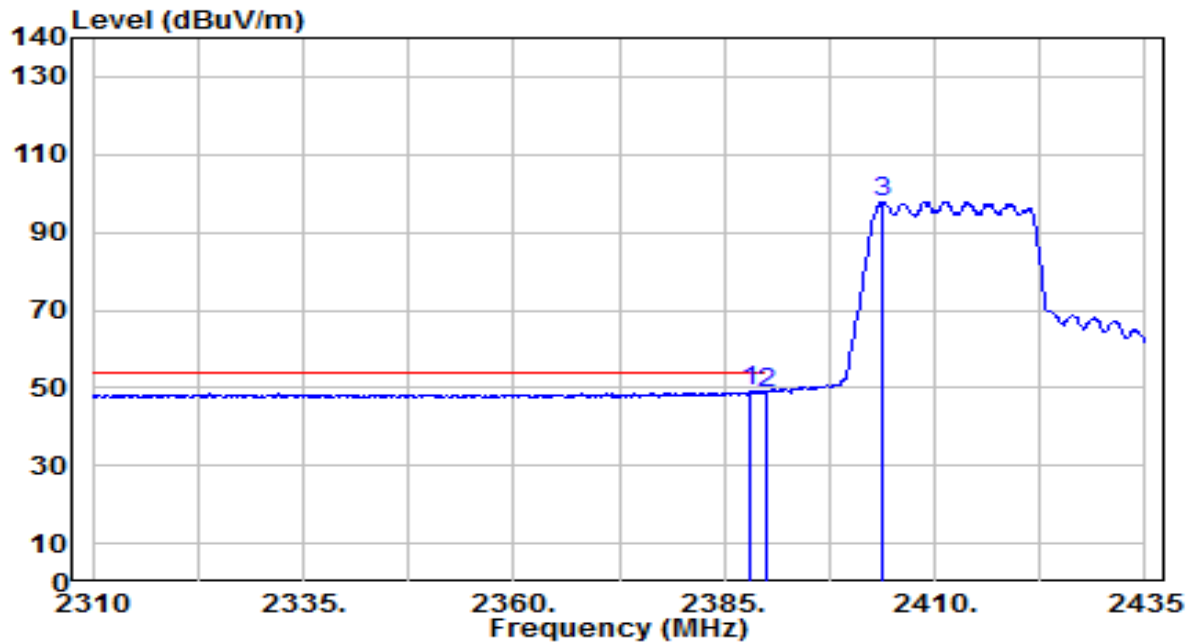


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.000	16.96	31.94	48.90	-5.10	54.00	180	30	Average
2		2390.000	16.65	31.95	48.60	-5.40	54.00	180	30	Average
3		2403.875	65.97	32.00	97.97	N/A	N/A	180	30	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

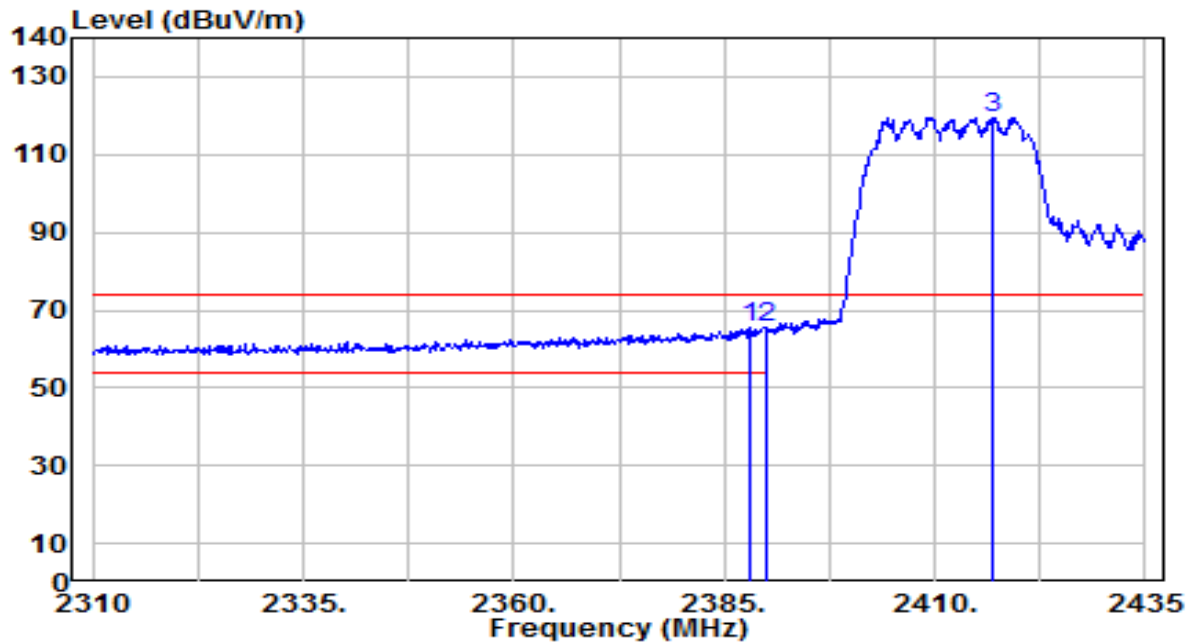


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.000	33.70	31.94	65.64	-8.36	74.00	200	345	Peak
2		2390.000	33.69	31.95	65.64	-8.36	74.00	200	345	Peak
3		2417.000	87.55	32.05	119.59	N/A	N/A	200	345	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

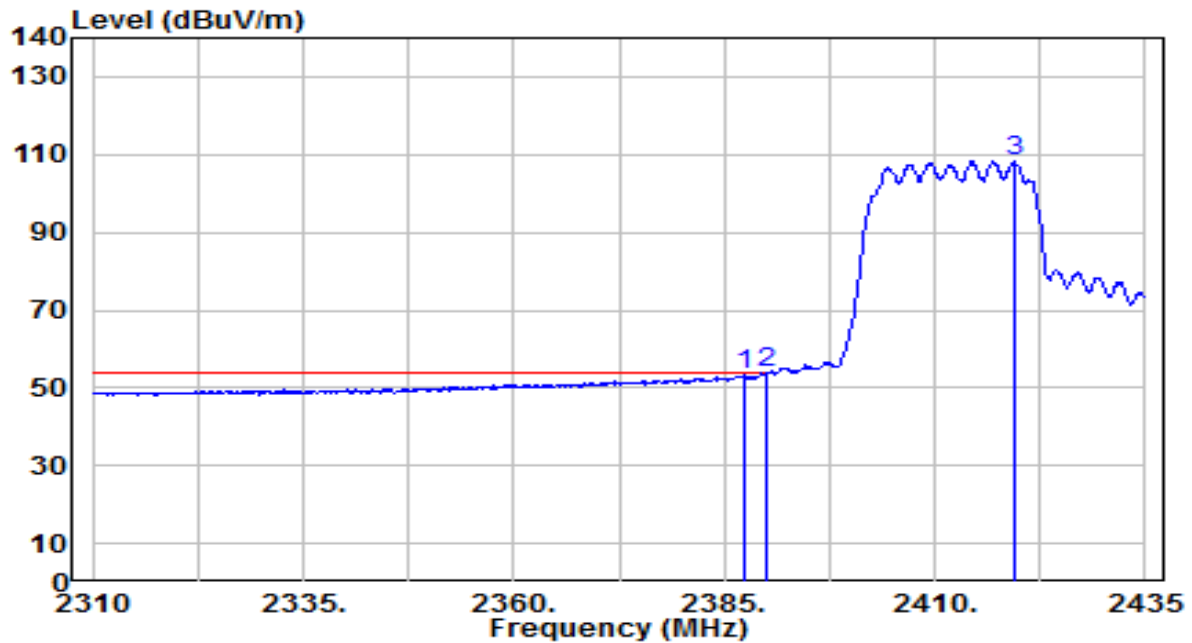


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.375	21.31	31.94	53.25	-0.75	54.00	200	345	Average
2	*	2390.000	21.76	31.95	53.71	-0.29	54.00	200	345	Average
3		2419.375	76.34	32.06	108.40	N/A	N/A	200	345	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 2_ANT 0+1	Test Voltage	AC 120V/60Hz

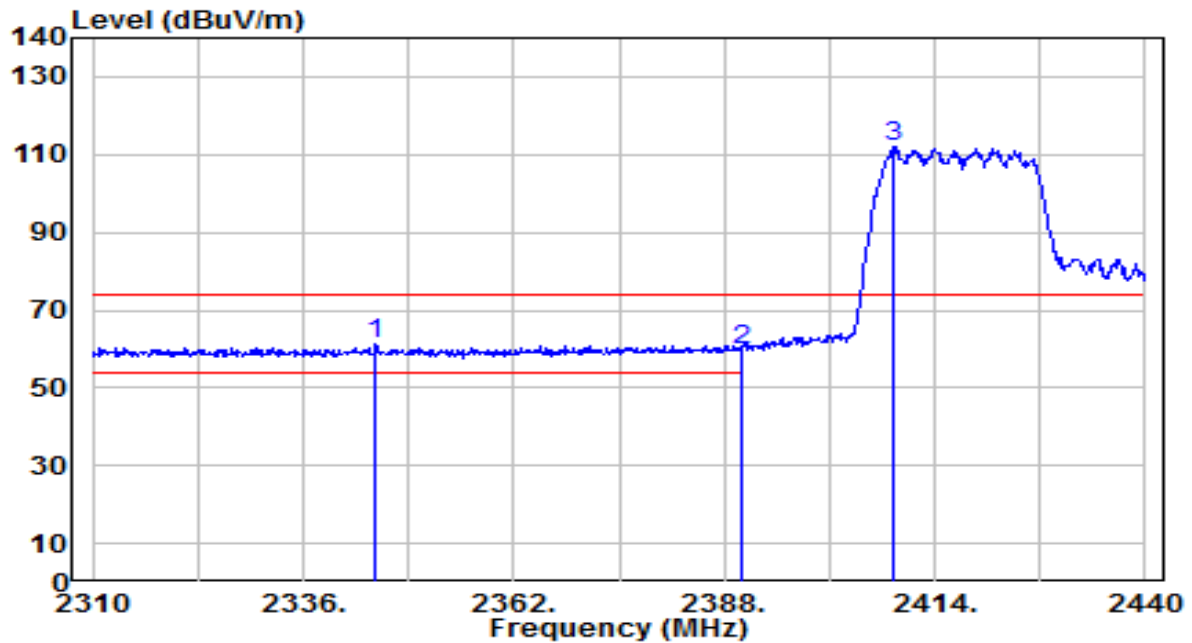


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2344.840	29.50	31.78	61.28	-12.72	74.00	150	320	Peak
2		2390.000	27.80	31.95	59.75	-14.25	74.00	150	320	Peak
3		2408.800	79.96	32.02	111.98	N/A	N/A	150	320	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 2_ANT 0+1	Test Voltage	AC 120V/60Hz

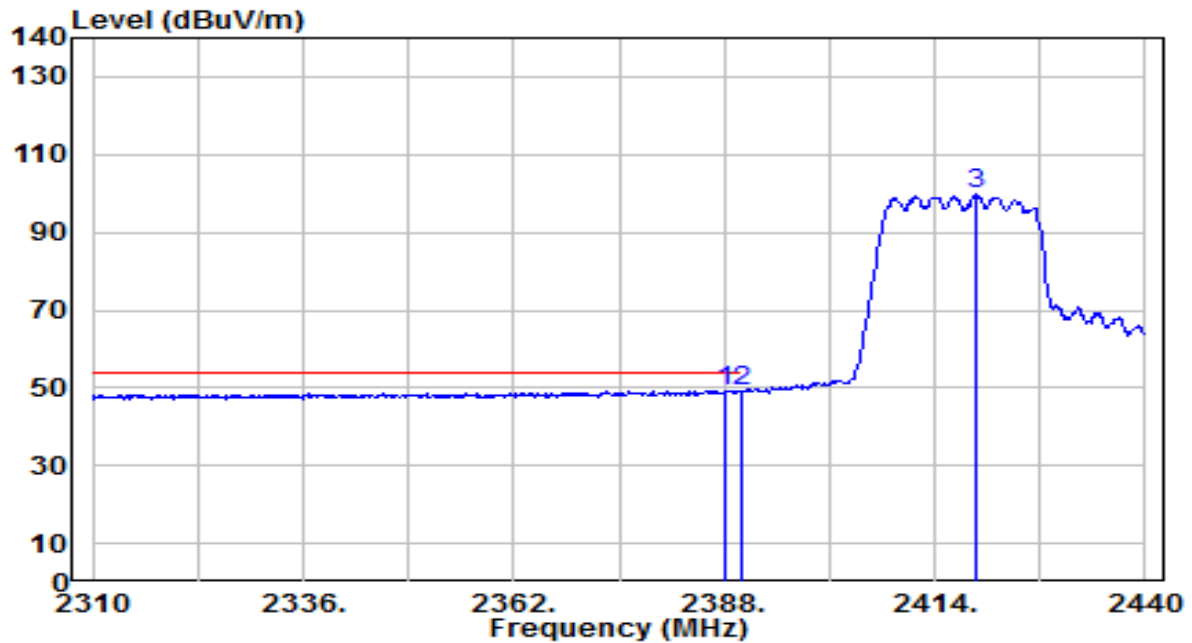


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.000	17.22	31.94	49.16	-4.84	54.00	150	320	Average
2		2390.000	17.11	31.95	49.06	-4.94	54.00	150	320	Average
3		2419.200	67.69	32.06	99.75	N/A	N/A	150	320	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 2_ANT 0+1	Test Voltage	AC 120V/60Hz

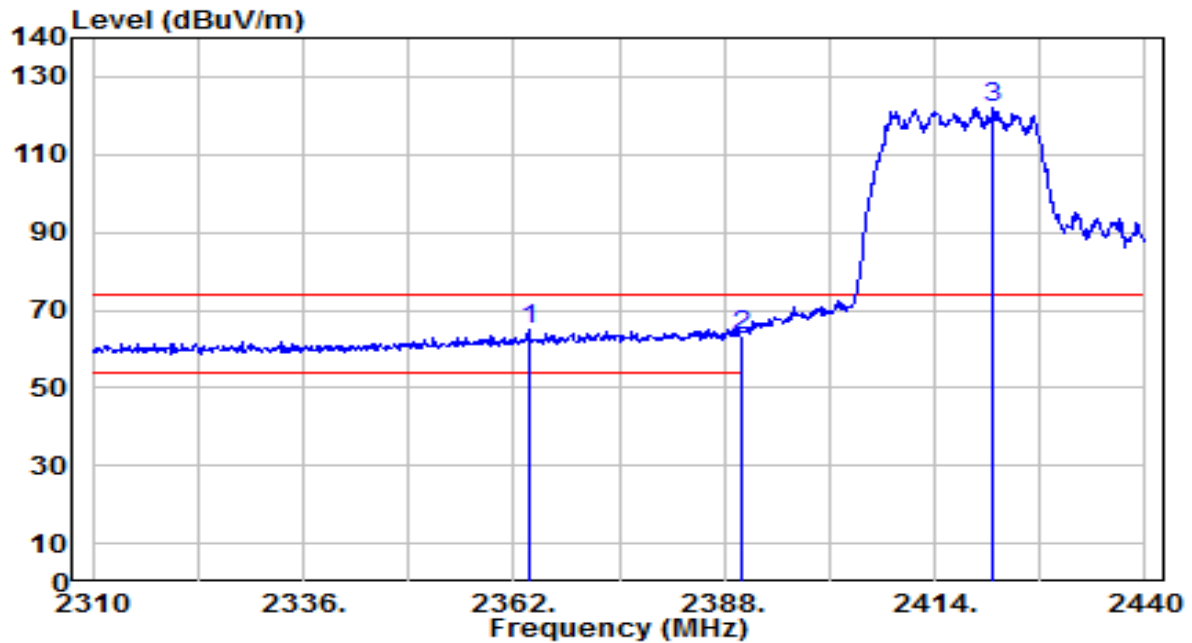


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2363.820	33.21	31.85	65.06	-8.94	74.00	195	175	Peak
2		2390.000	31.38	31.95	63.33	-10.67	74.00	195	175	Peak
3		2421.150	89.81	32.07	121.88	N/A	N/A	195	175	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 2_ANT 0+1	Test Voltage	AC 120V/60Hz

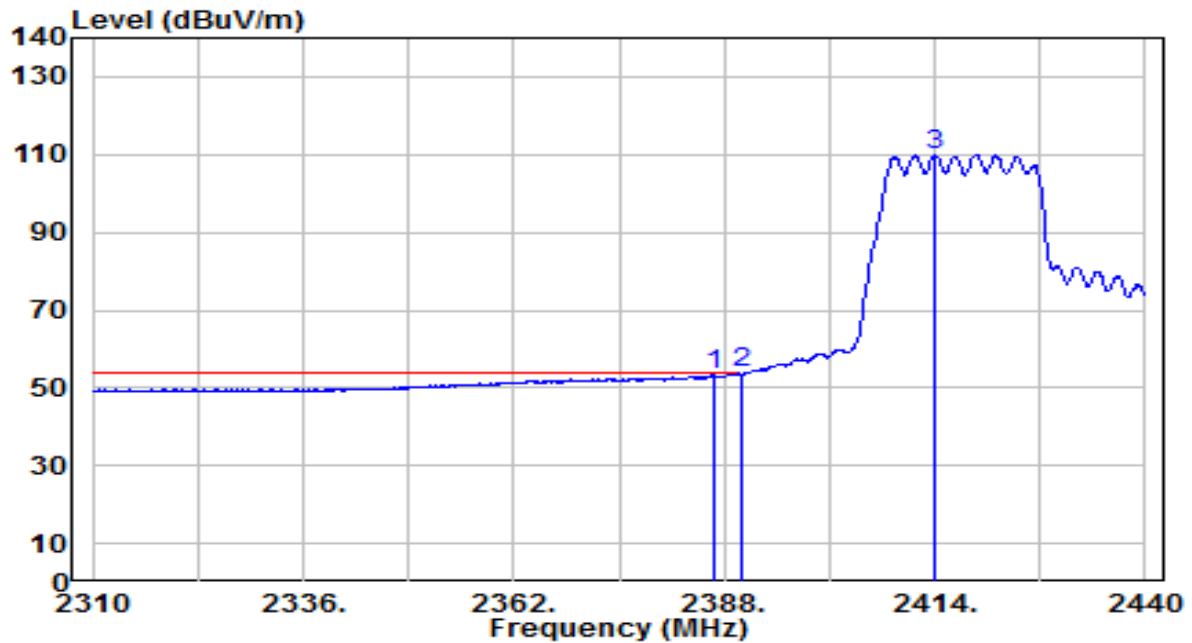


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2386.700	21.27	31.94	53.21	-0.79	54.00	195	175	Average
2	*	2390.000	21.80	31.95	53.75	-0.25	54.00	195	175	Average
3		2414.130	77.80	32.04	109.84	N/A	N/A	195	175	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

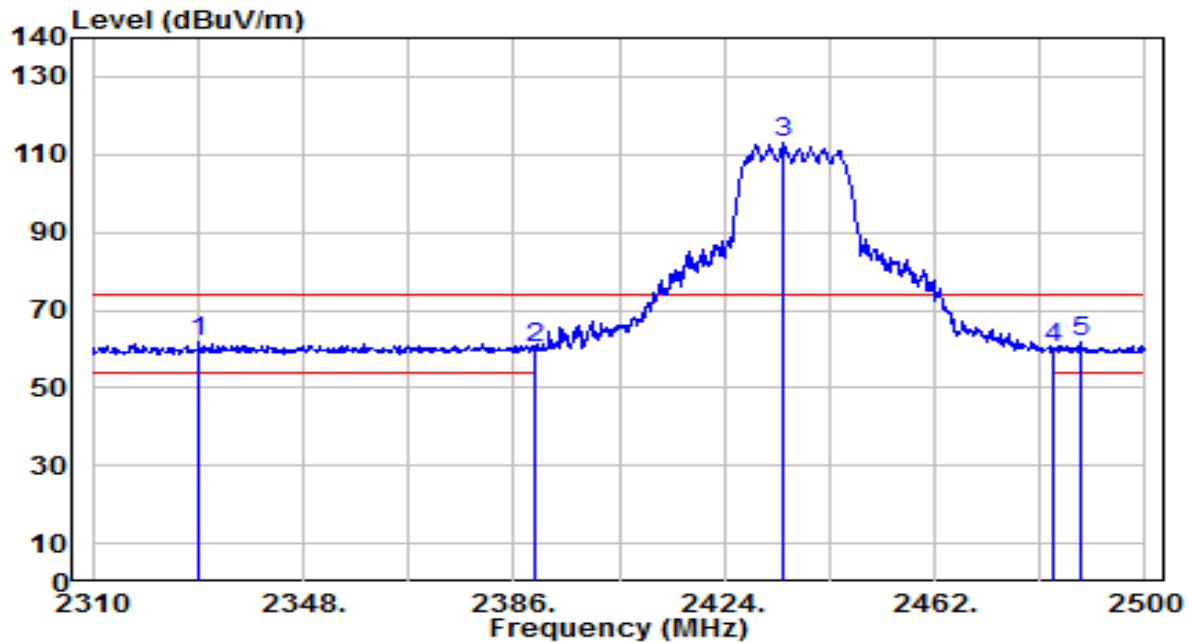


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2329.190	29.85	31.72	61.57	-12.43	74.00	200	270	Peak
2	2390.000	28.39	31.95	60.33	-13.67	74.00	200	270	Peak
3	2434.830	80.75	32.12	112.87	N/A	N/A	200	270	Peak
4	2483.500	27.96	32.30	60.26	-13.74	74.00	200	270	Peak
5	* 2488.220	29.59	32.32	61.91	-12.09	74.00	200	270	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

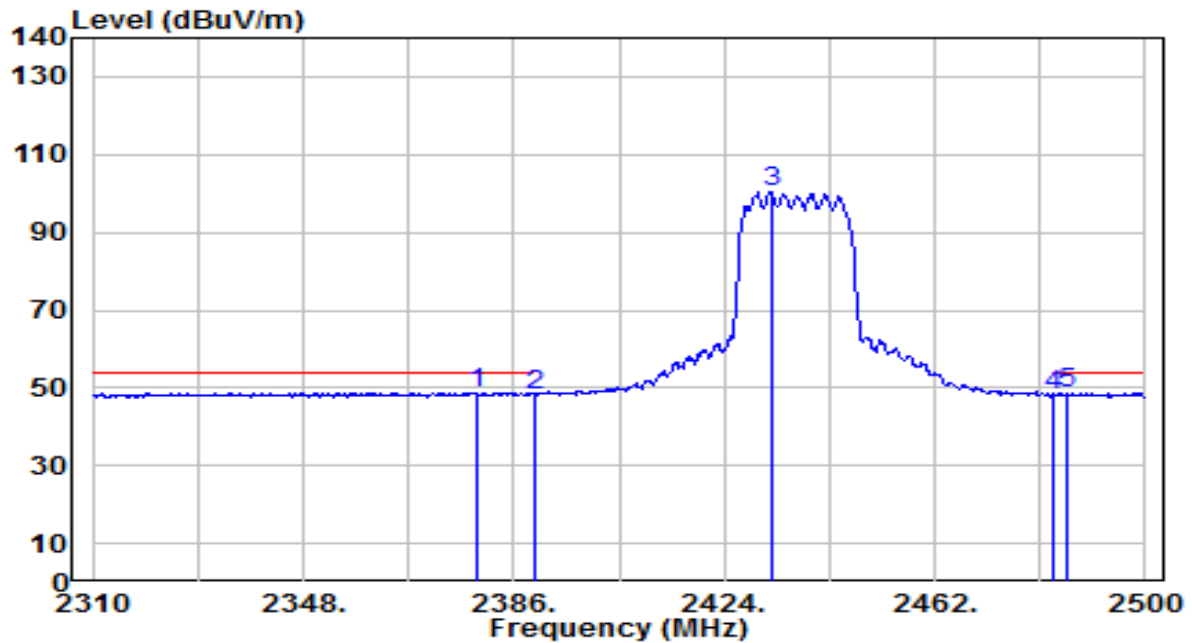


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2379.160	16.89	31.91	48.79	-5.21	54.00	200	270	Average
2		2390.000	16.31	31.95	48.26	-5.74	54.00	200	270	Average
3		2432.550	68.52	32.11	100.63	N/A	N/A	200	270	Average
4		2483.500	15.92	32.30	48.22	-5.78	54.00	200	270	Average
5		2485.750	16.40	32.31	48.71	-5.29	54.00	200	270	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

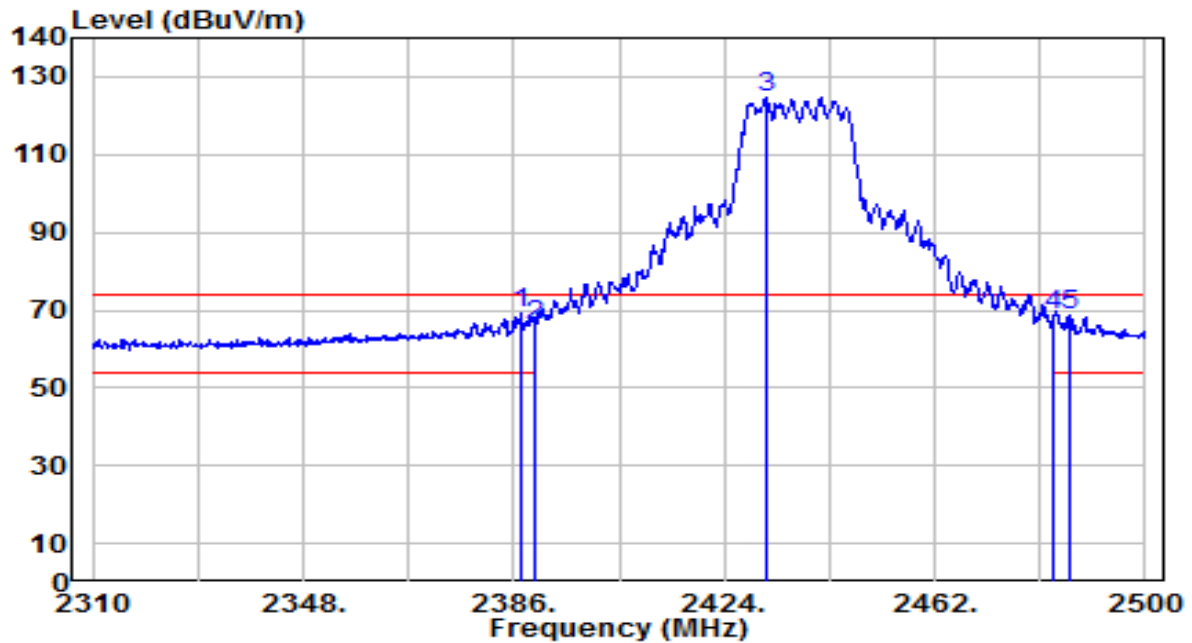


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.140	37.23	31.94	69.17	-4.83	74.00	200	5	Peak
2		2390.000	34.03	31.95	65.98	-8.02	74.00	200	5	Peak
3		2431.410	92.77	32.10	124.88	N/A	N/A	200	5	Peak
4		2483.500	36.28	32.30	68.58	-5.42	74.00	200	5	Peak
5		2486.510	36.41	32.31	68.72	-5.28	74.00	200	5	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

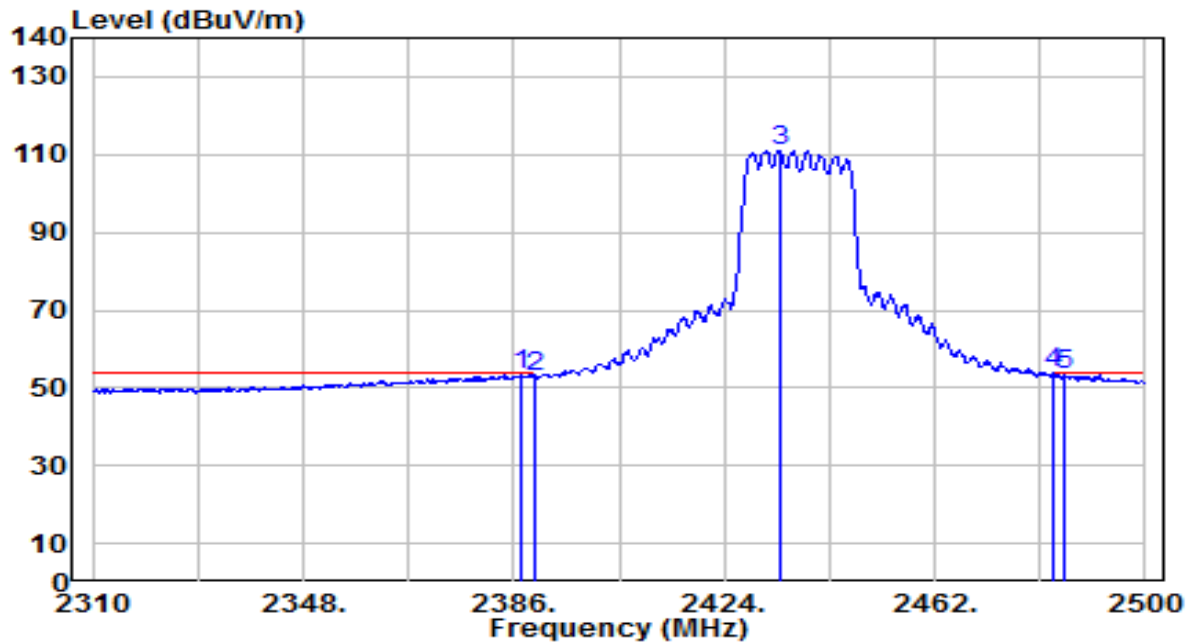


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.140	21.41	31.94	53.35	-0.65	54.00	200	5	Average
2	2390.000	20.89	31.95	52.84	-1.16	54.00	200	5	Average
3	2434.070	78.98	32.11	111.09	N/A	N/A	200	5	Average
4	* 2483.500	21.42	32.30	53.71	-0.29	54.00	200	5	Average
5	2485.180	21.03	32.30	53.33	-0.67	54.00	200	5	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

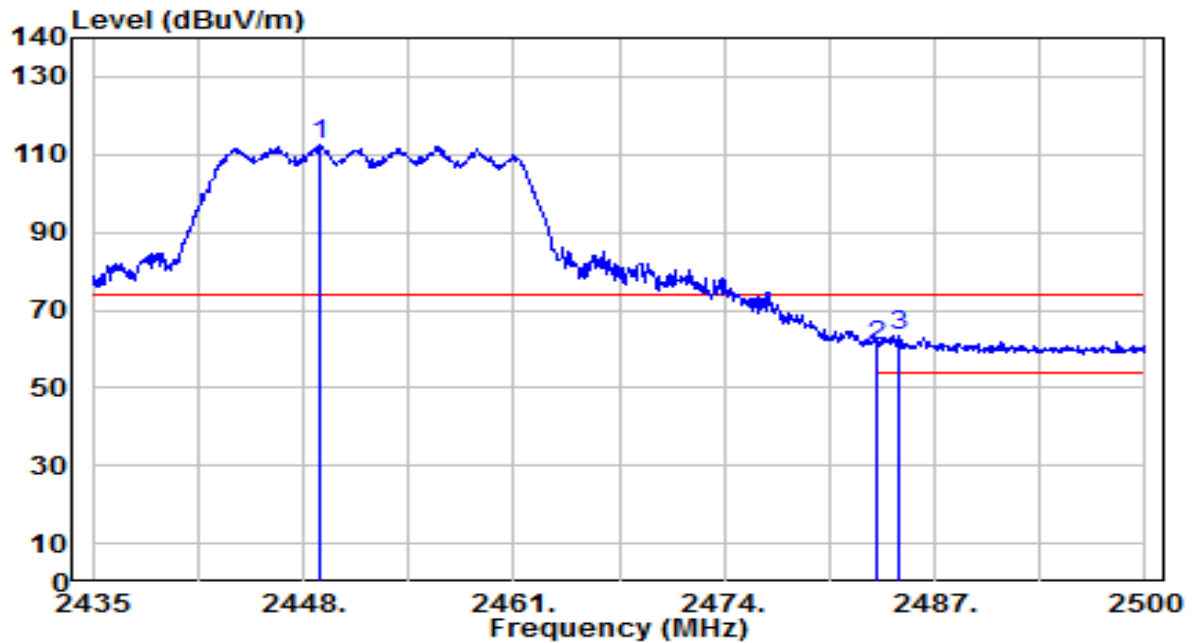


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2449.040	80.31	32.17	112.47	N/A	N/A	195	325	Peak
2	2483.500	28.33	32.30	60.63	-13.37	74.00	195	325	Peak
3	* 2484.855	31.29	32.30	63.59	-10.41	74.00	195	325	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

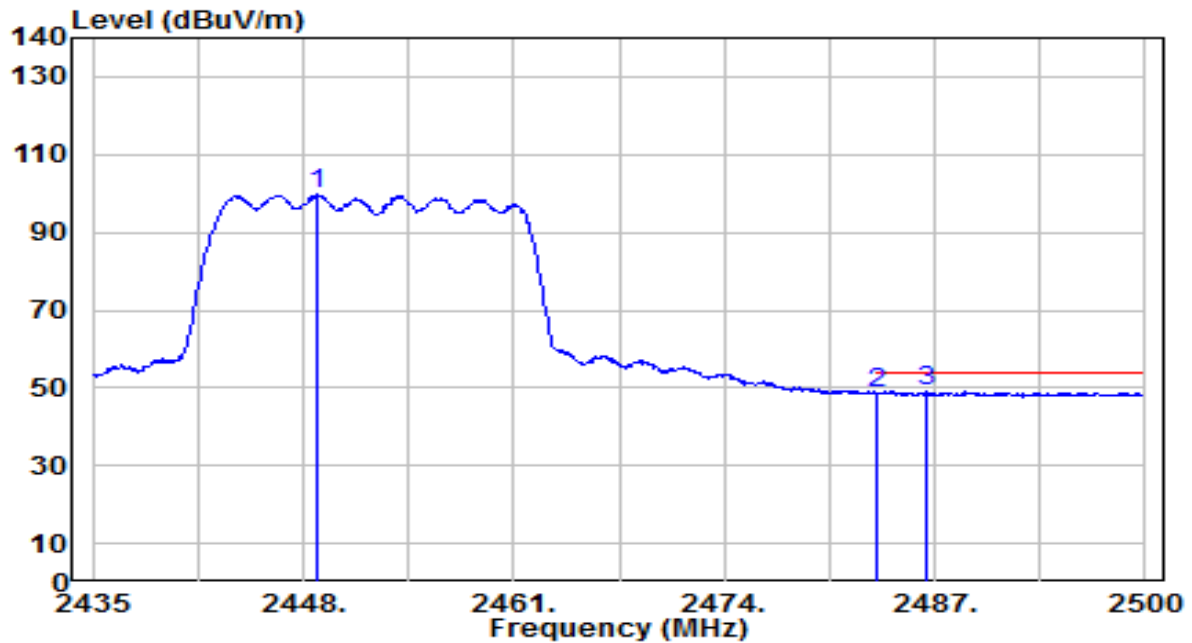


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2448.780	67.66	32.17	99.83	N/A	N/A	195	325	Average
2	2483.500	16.28	32.30	48.58	-5.42	54.00	195	325	Average
3	* 2486.480	16.56	32.31	48.87	-5.13	54.00	195	325	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

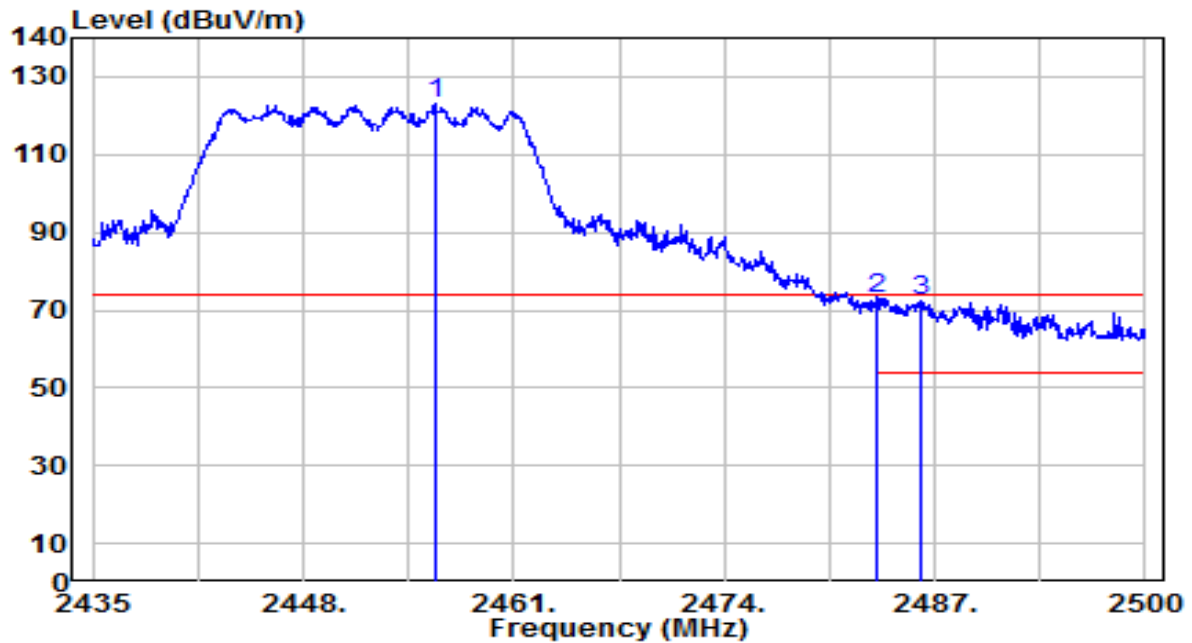


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2456.190	90.78	32.20	122.97	N/A	N/A	210	10	Peak
2	*	2483.500	40.39	32.30	72.69	-1.31	74.00	210	10	Peak
3		2486.090	39.82	32.31	72.12	-1.88	74.00	210	10	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

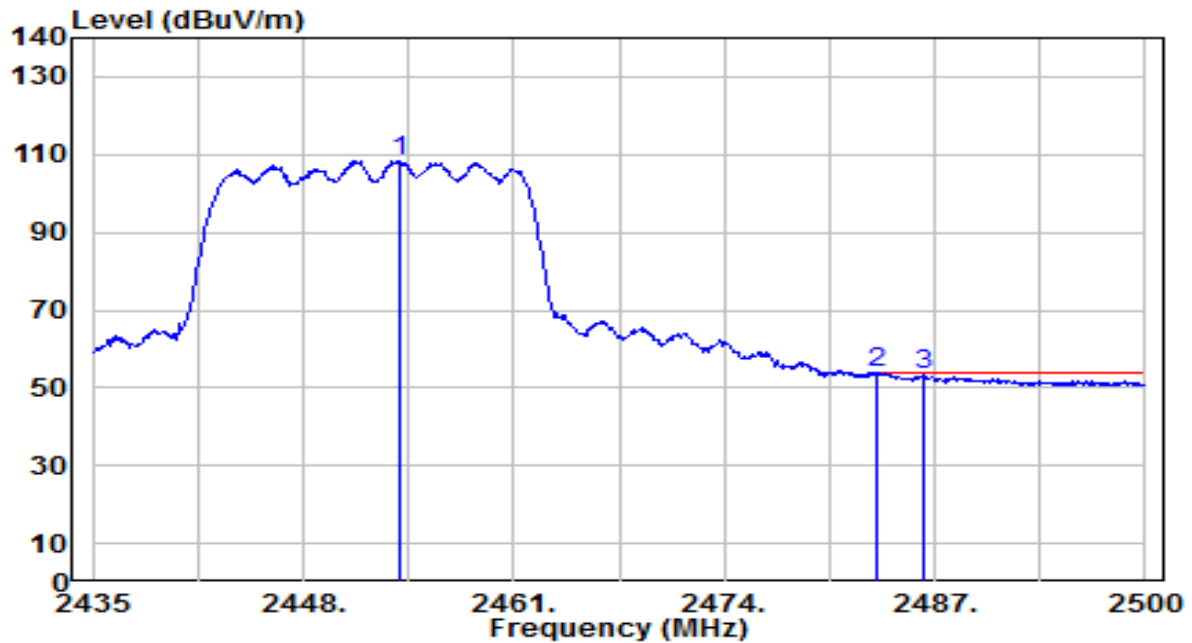


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2454.045	76.23	32.19	108.42	N/A	N/A	210	10	Average
2	*	2483.500	21.42	32.30	53.71	-0.29	54.00	210	10	Average
3		2486.285	20.79	32.31	53.10	-0.90	54.00	210	10	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

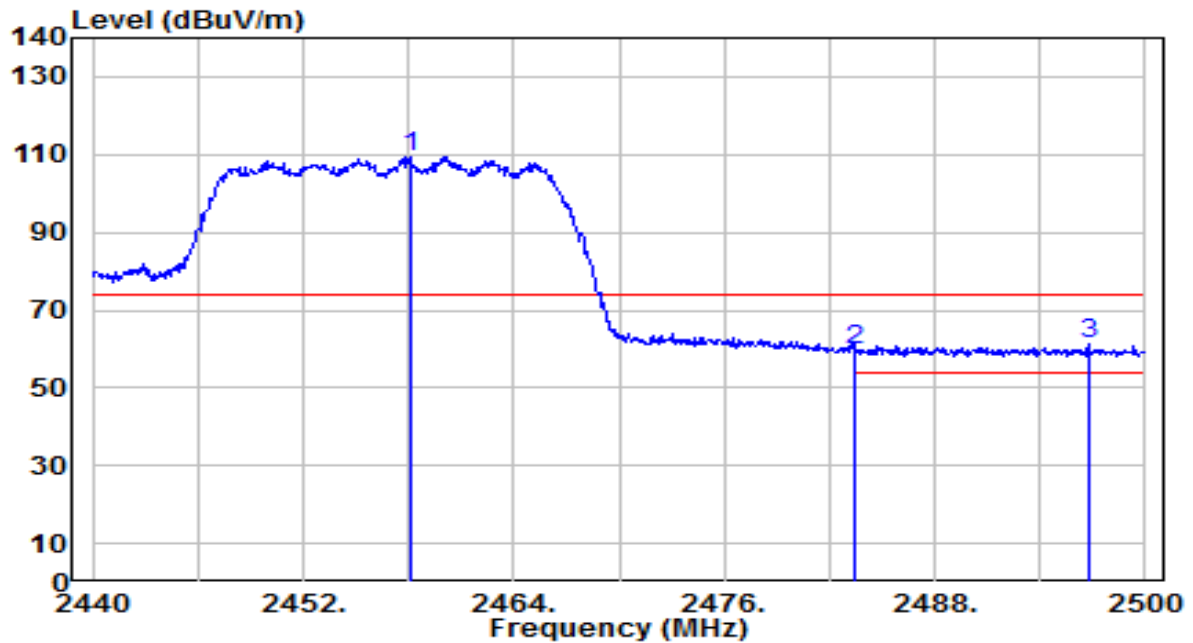


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2458.120	77.34	32.20	109.55	N/A	N/A	105	5	Peak
2	2483.500	27.19	32.30	59.49	-14.51	74.00	105	5	Peak
3	* 2496.760	28.95	32.35	61.30	-12.70	74.00	105	5	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

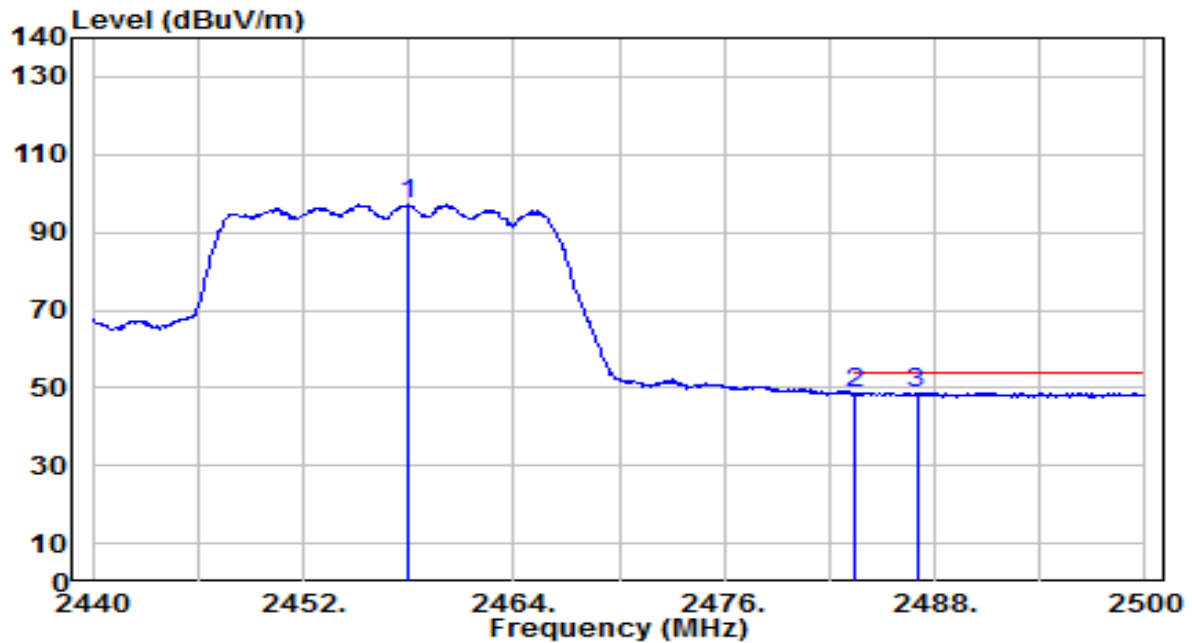


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2458.000	64.91	32.20	97.12	N/A	N/A	105	5	Average
2	2483.500	16.16	32.30	48.46	-5.54	54.00	105	5	Average
3	* 2486.980	16.46	32.31	48.77	-5.23	54.00	105	5	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

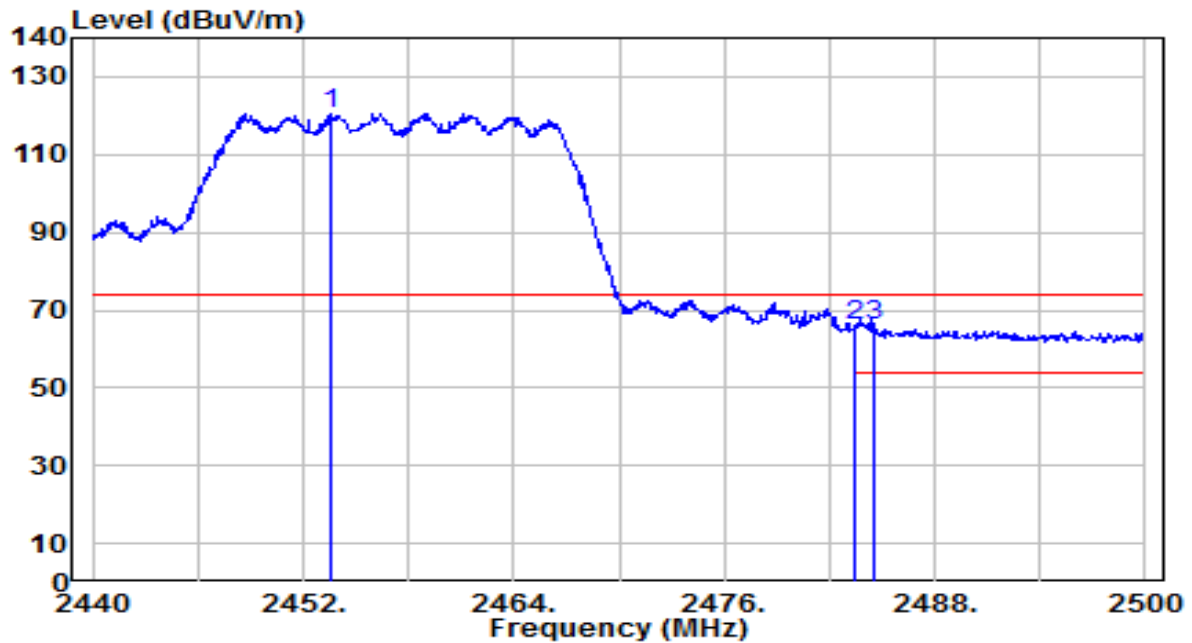


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2453.560	88.36	32.19	120.54	N/A	N/A	190	5	Peak
2		2483.500	33.83	32.30	66.13	-7.87	74.00	190	5	Peak
3		2484.520	33.73	32.30	66.04	-7.96	74.00	190	5	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

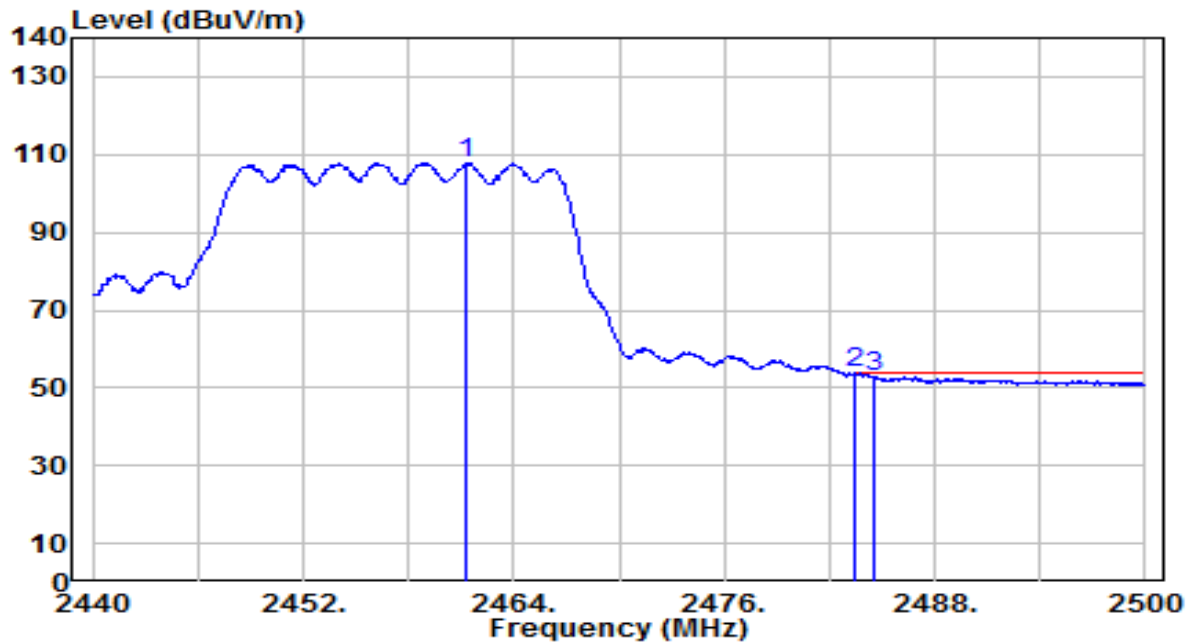


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2461.300	75.81	32.22	108.02	N/A	N/A	190	5	Average
2	*	2483.500	21.45	32.30	53.75	-0.25	54.00	190	5	Average
3		2484.580	20.65	32.30	52.95	-1.05	54.00	190	5	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

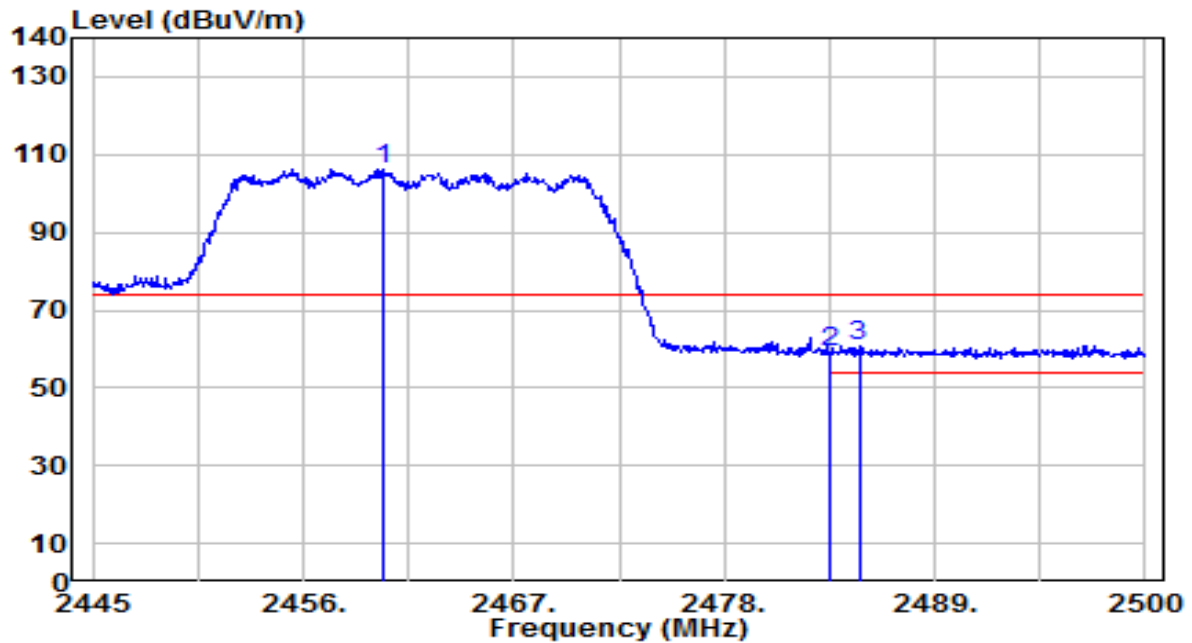


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.125	74.20	32.21	106.41	N/A	N/A	105	5	Peak
2	2483.500	26.73	32.30	59.03	-14.97	74.00	105	5	Peak
3	* 2485.040	28.54	32.30	60.84	-13.16	74.00	105	5	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

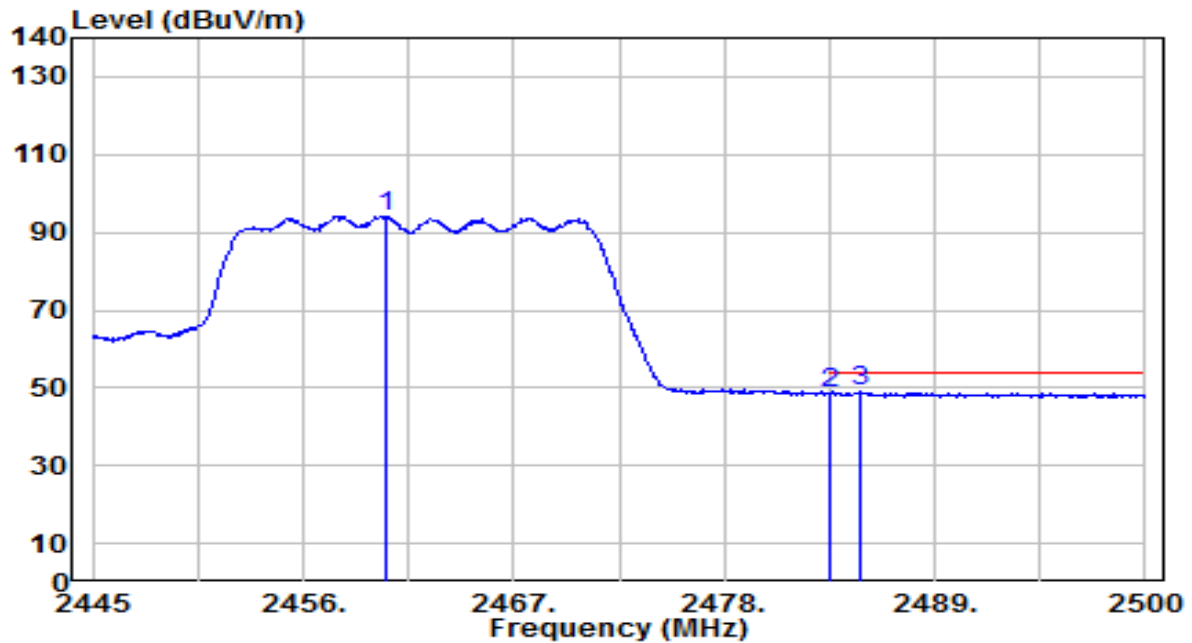


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.290	62.04	32.21	94.26	N/A	N/A	105	5	Average
2	2483.500	16.13	32.30	48.43	-5.57	54.00	105	5	Average
3	* 2485.095	16.60	32.30	48.91	-5.09	54.00	105	5	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

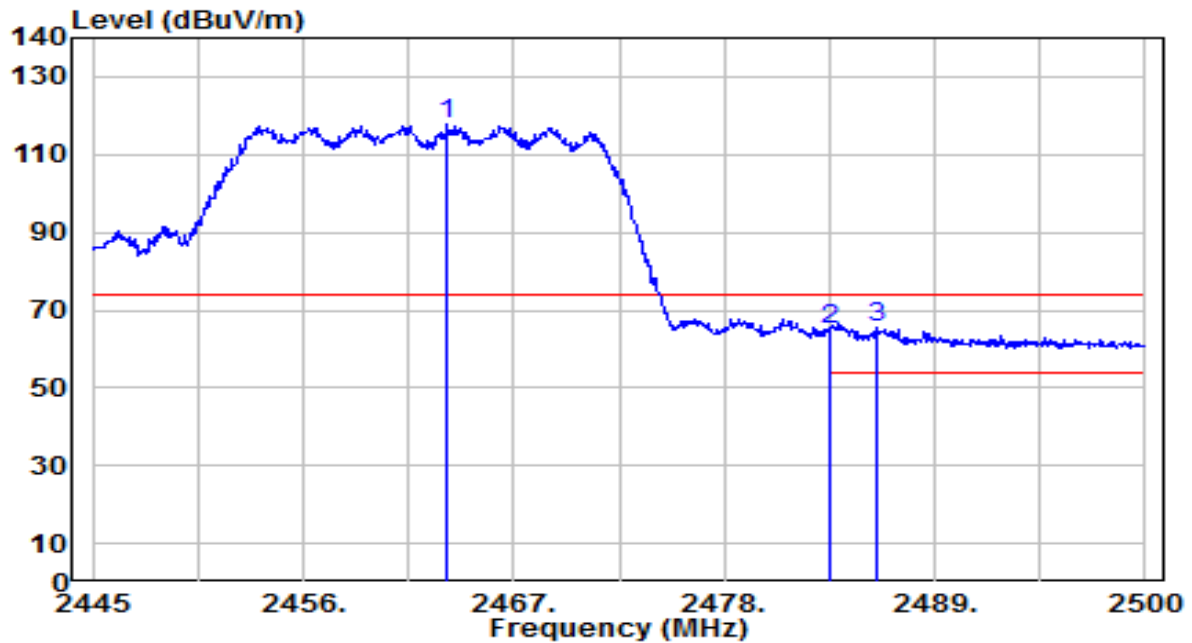


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.535	85.36	32.22	117.58	N/A	N/A	190	5	Peak
2	2483.500	32.49	32.30	64.79	-9.21	74.00	190	5	Peak
3	* 2486.030	32.99	32.31	65.29	-8.71	74.00	190	5	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

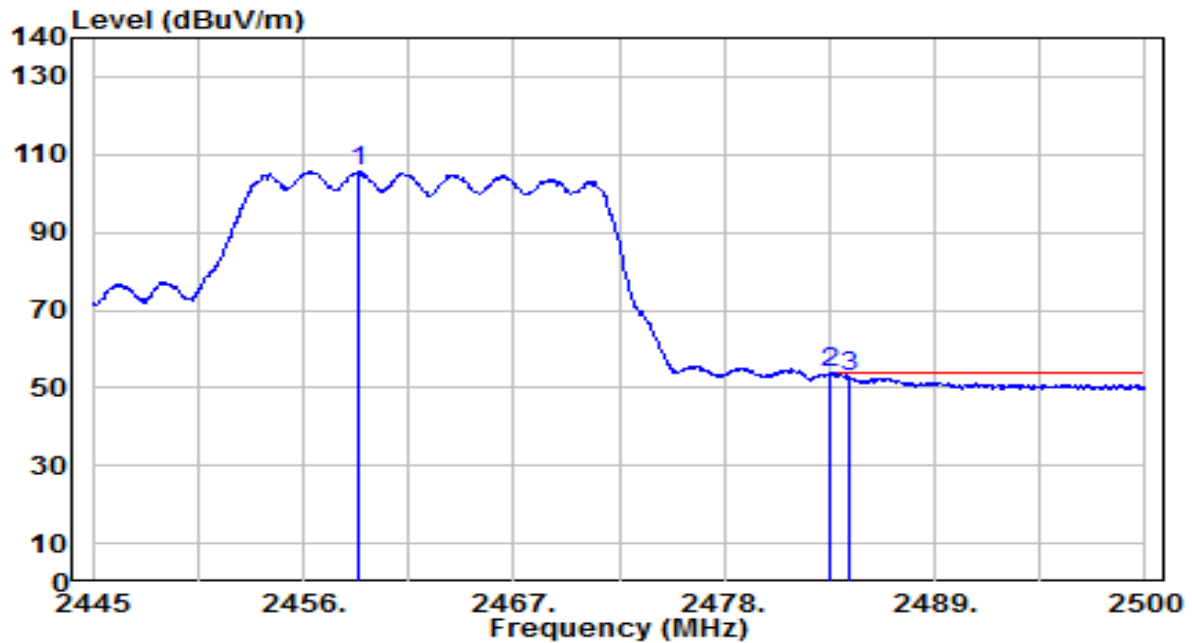


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2458.915	73.51	32.21	105.71	N/A	N/A	190	5	Average
2	*	2483.500	21.41	32.30	53.70	-0.30	54.00	190	5	Average
3		2484.545	20.66	32.30	52.96	-1.04	54.00	190	5	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

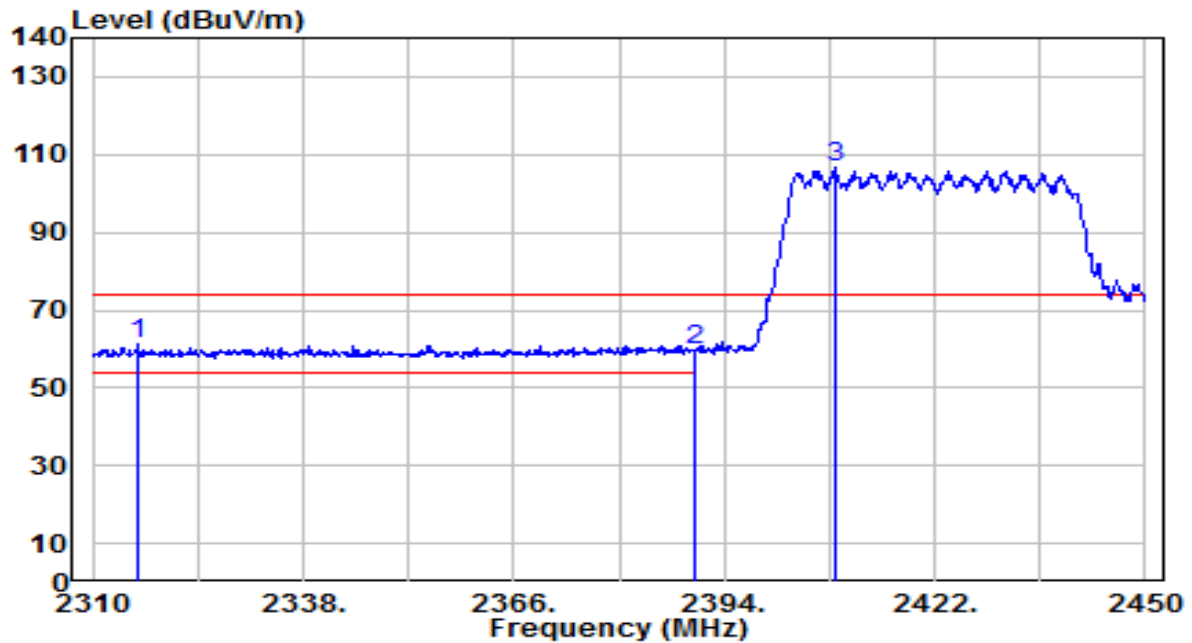


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2316.020	29.48	31.67	61.15	-12.85	74.00	180	30	Peak
2		2390.000	27.73	31.95	59.68	-14.32	74.00	180	30	Peak
3		2408.700	74.79	32.02	106.81	N/A	N/A	180	30	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

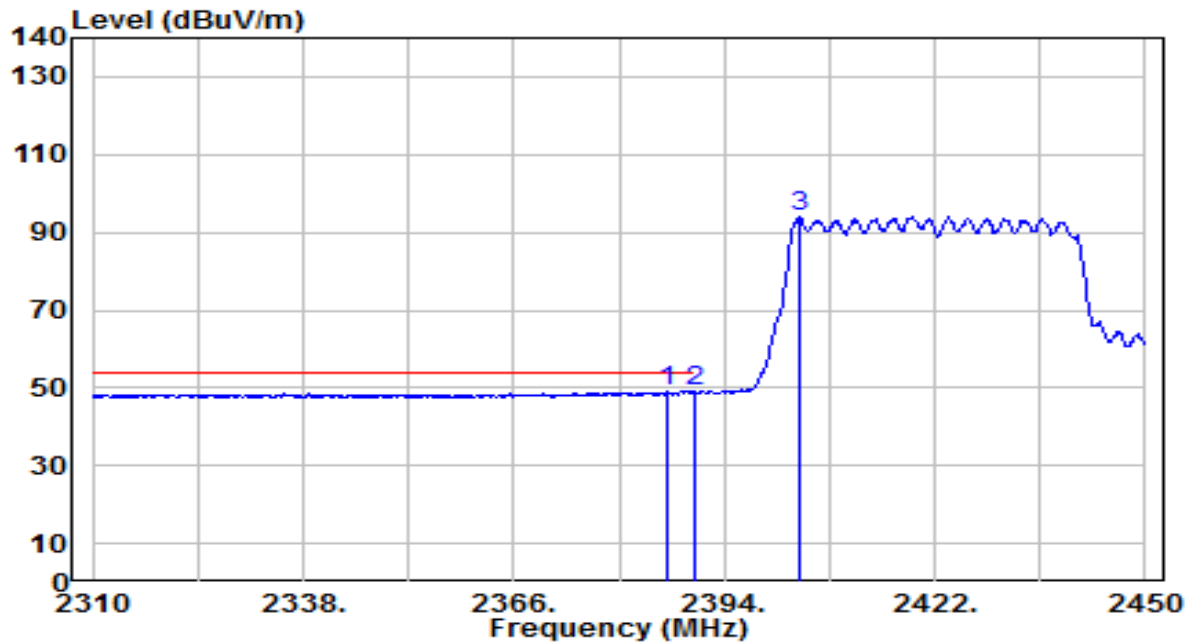


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2386.580	16.99	31.94	48.92	-5.08	54.00	180	30	Average
2	*	2390.000	16.98	31.95	48.93	-5.07	54.00	180	30	Average
3		2404.080	61.85	32.00	93.85	N/A	N/A	180	30	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

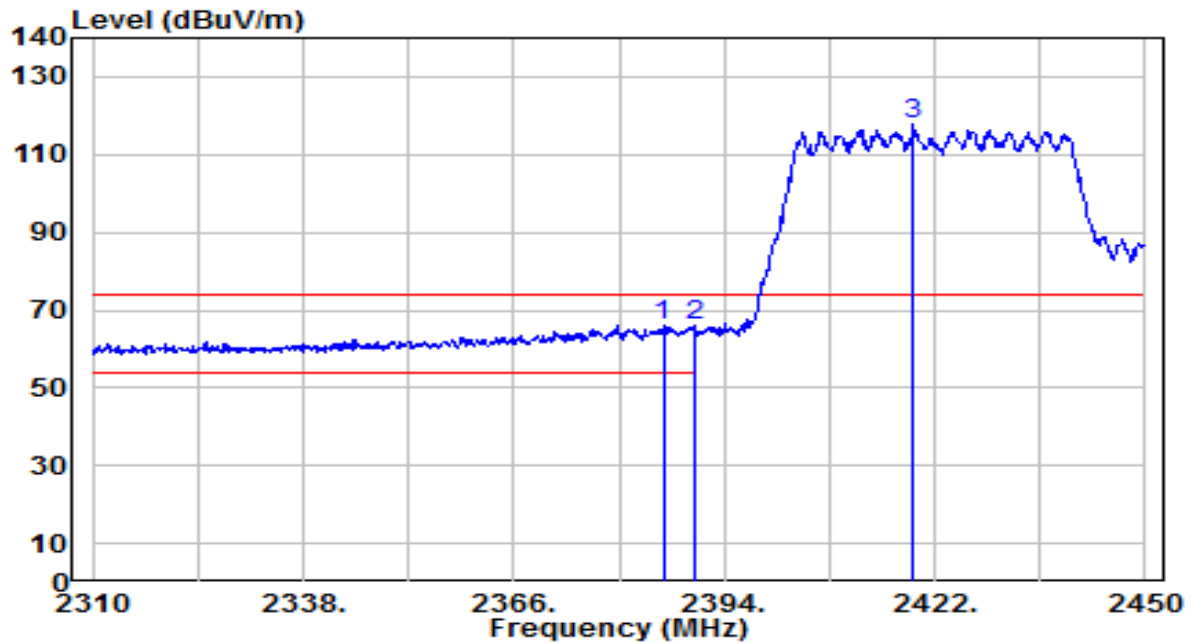


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.880	34.16	31.93	66.10	-7.90	74.00	200	345	Peak
2		2390.000	33.91	31.95	65.86	-8.14	74.00	200	345	Peak
3		2419.200	85.70	32.06	117.76	N/A	N/A	200	345	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

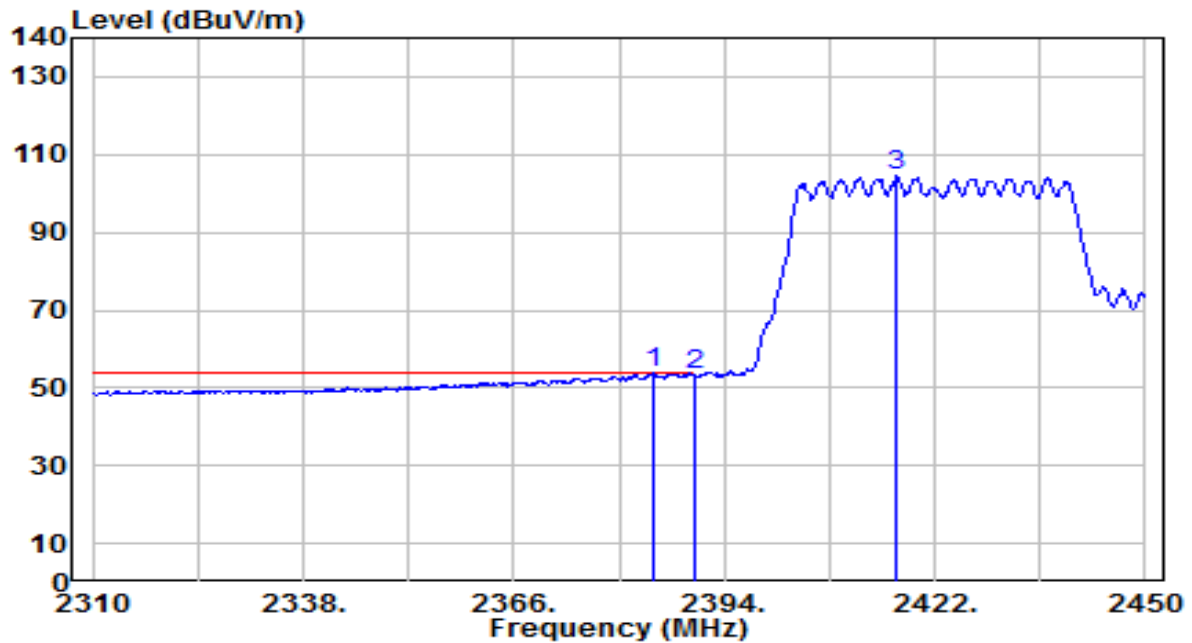


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2384.760	21.77	31.93	53.70	-0.30	54.00	200	345	Average
2		2390.000	21.57	31.95	53.52	-0.48	54.00	200	345	Average
3		2416.960	72.30	32.05	104.35	N/A	N/A	200	345	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

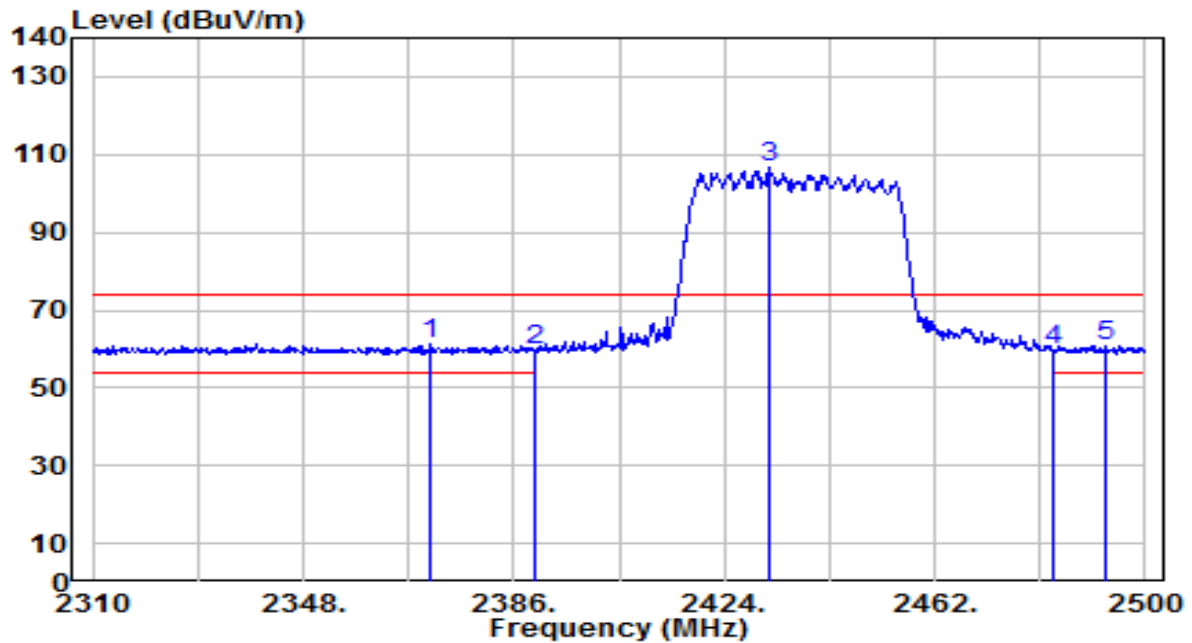


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2370.990	29.45	31.88	61.32	-12.68	74.00	200	270	Peak
2		2390.000	27.56	31.95	59.51	-14.49	74.00	200	270	Peak
3		2432.170	74.38	32.11	106.49	N/A	N/A	200	270	Peak
4		2483.500	27.24	32.30	59.53	-14.47	74.00	200	270	Peak
5		2492.970	28.44	32.33	60.78	-13.22	74.00	200	270	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

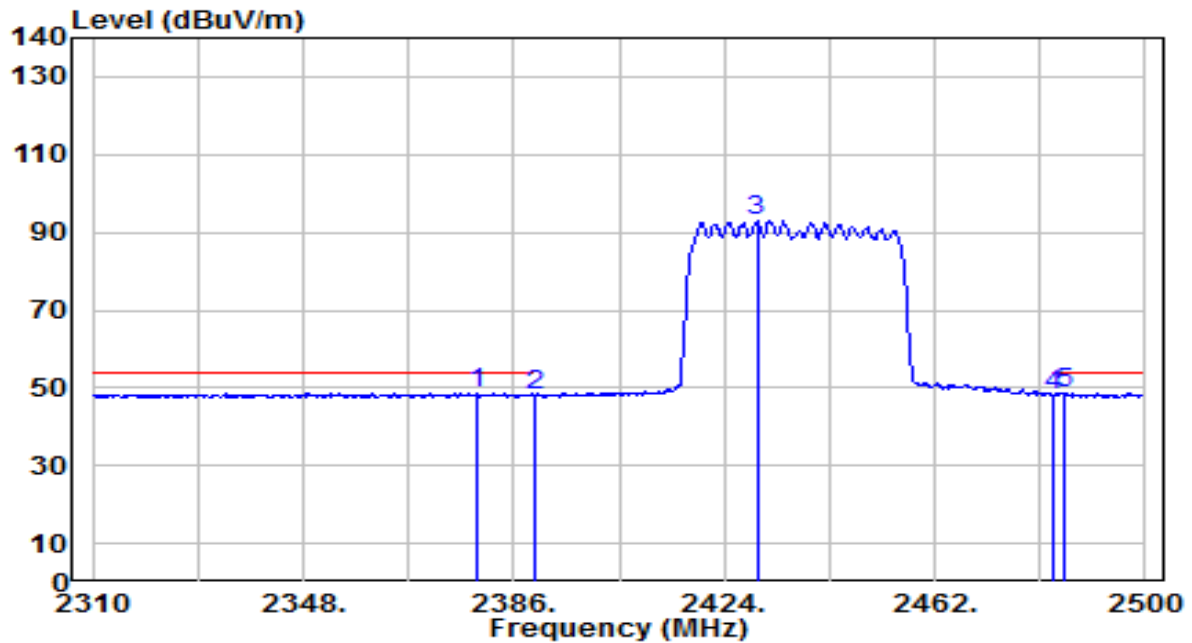


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2379.350	16.62	31.91	48.53	-5.47	54.00	200	270	Average
2		2390.000	16.33	31.95	48.28	-5.72	54.00	200	270	Average
3		2429.890	60.83	32.10	92.93	N/A	N/A	200	270	Average
4		2483.500	15.89	32.30	48.18	-5.82	54.00	200	270	Average
5		2485.370	16.11	32.31	48.41	-5.59	54.00	200	270	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

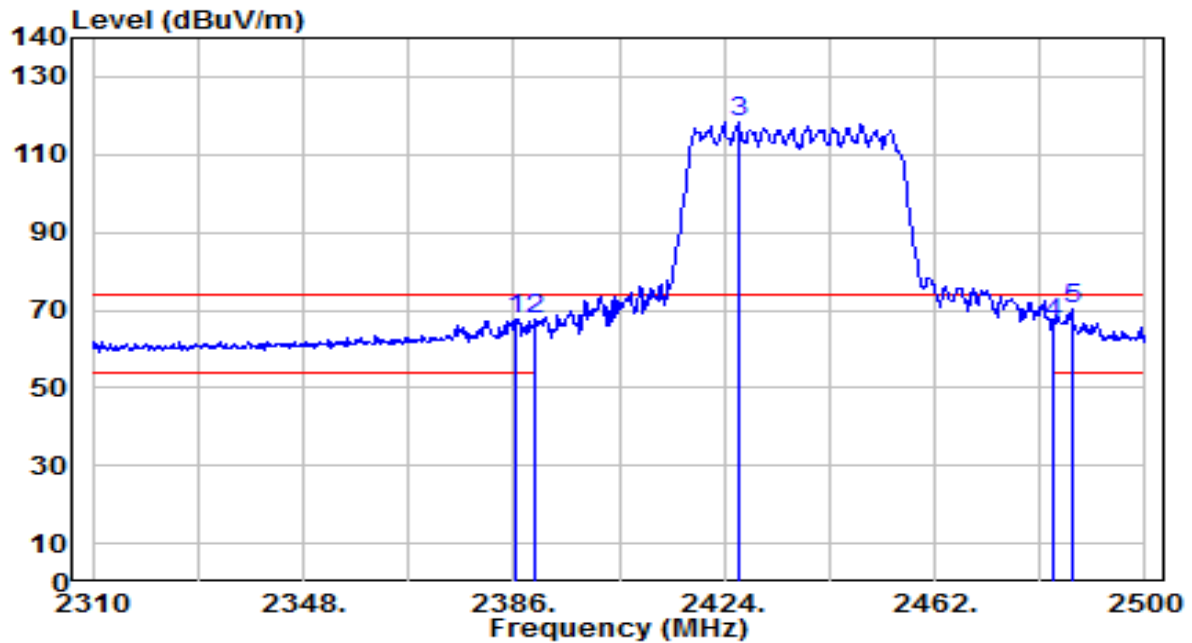


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2386.380	35.74	31.94	67.68	-6.32	74.00	200	5	Peak
2	2390.000	35.61	31.95	67.55	-6.45	74.00	200	5	Peak
3	2426.470	86.28	32.09	118.36	N/A	N/A	200	5	Peak
4	2483.500	34.26	32.30	66.56	-7.44	74.00	200	5	Peak
5	* 2486.700	37.90	32.31	70.21	-3.79	74.00	200	5	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

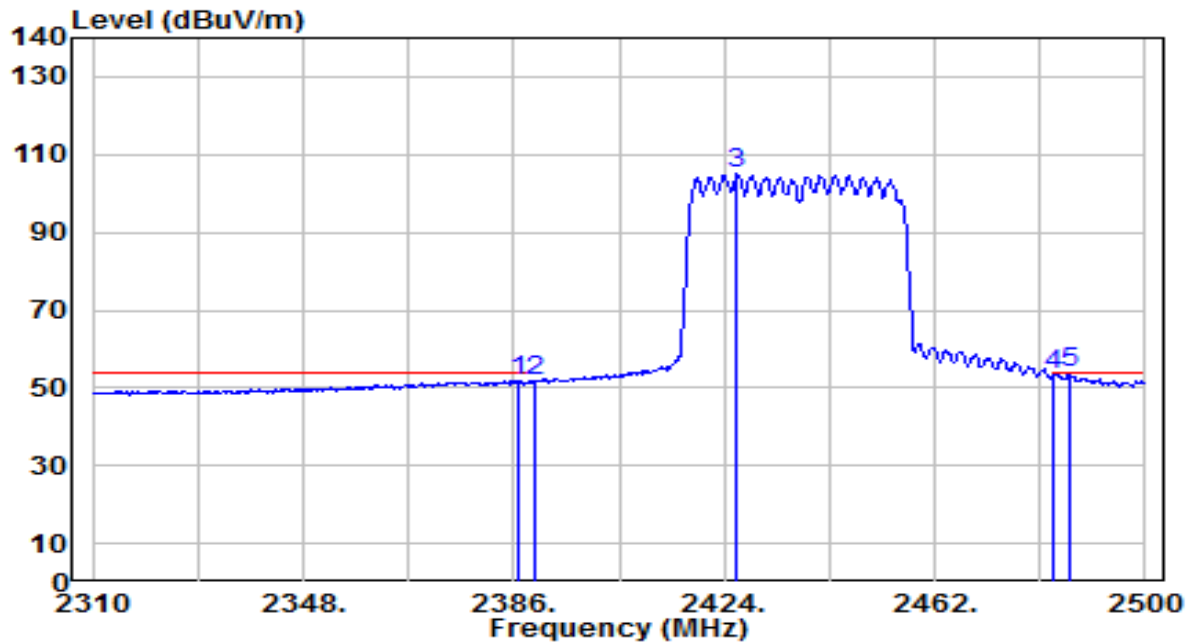


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2386.760	19.89	31.94	51.83	-2.17	54.00	200	5	Average
2		2390.000	19.88	31.95	51.83	-2.17	54.00	200	5	Average
3		2426.280	72.81	32.08	104.90	N/A	N/A	200	5	Average
4		2483.500	21.03	32.30	53.33	-0.67	54.00	200	5	Average
5	*	2486.320	21.41	32.31	53.72	-0.28	54.00	200	5	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

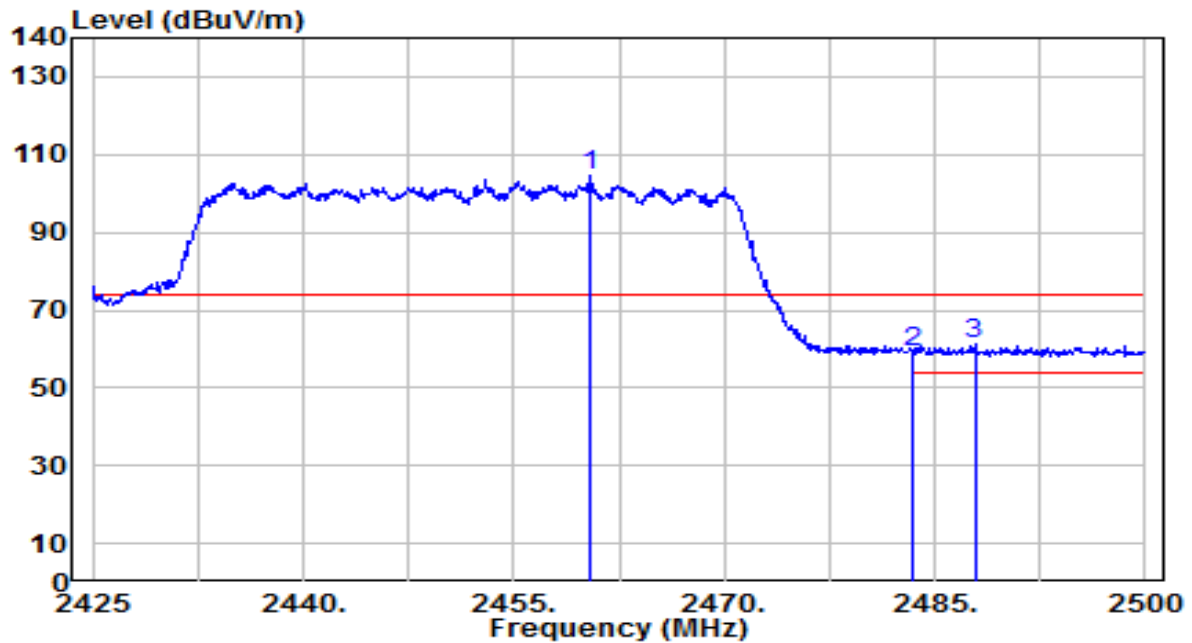


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.400	72.35	32.21	104.56	N/A	N/A	105	5	Peak
2	2483.500	26.81	32.30	59.11	-14.89	74.00	105	5	Peak
3	* 2487.850	29.23	32.31	61.54	-12.46	74.00	105	5	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

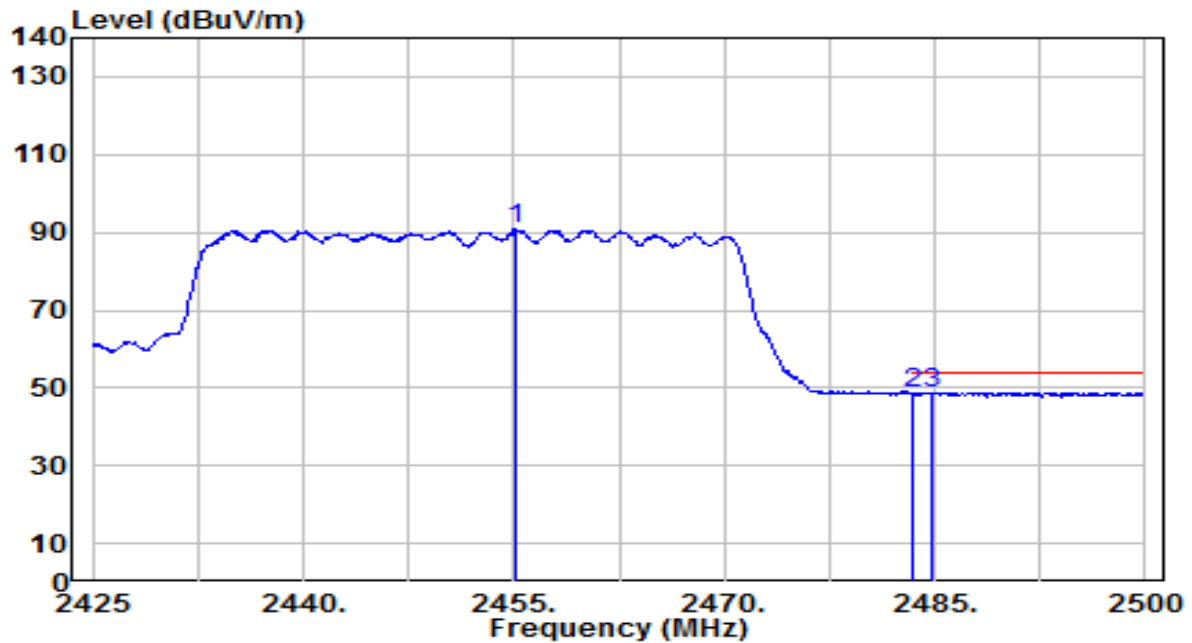


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2455.150	58.60	32.19	90.80	N/A	N/A	105	5	Average
2	2483.500	16.09	32.30	48.39	-5.61	54.00	105	5	Average
3	* 2484.850	16.54	32.30	48.85	-5.15	54.00	105	5	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

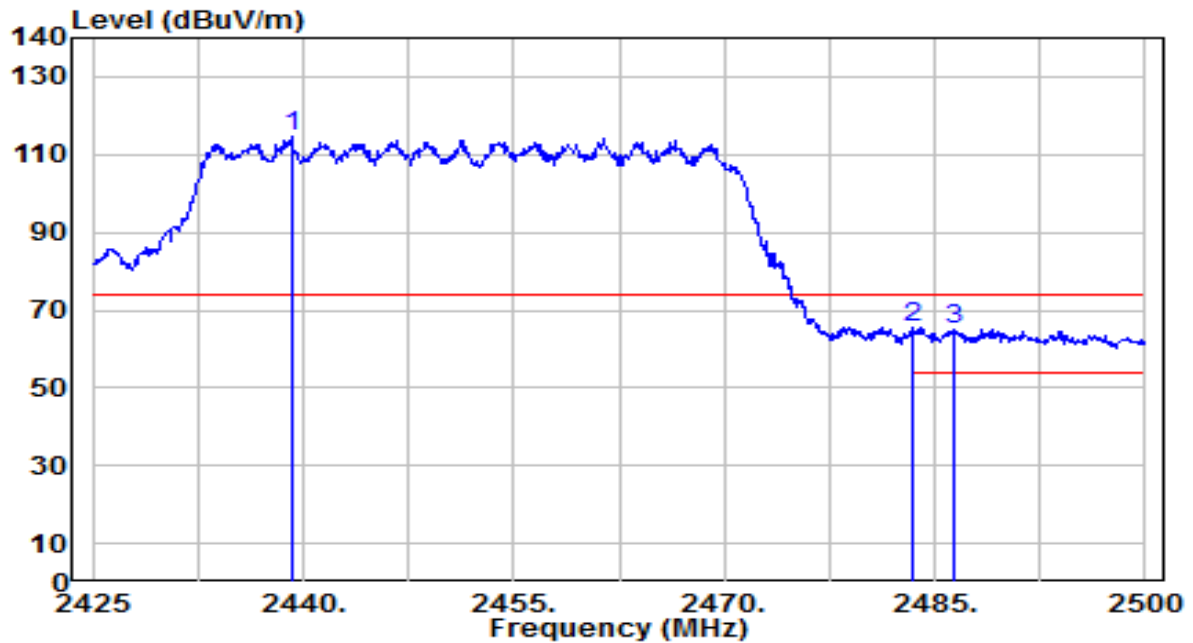


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2439.175	82.57	32.13	114.70	N/A	N/A	190	5	Peak
2	*	2483.500	33.03	32.30	65.33	-8.67	74.00	190	5	Peak
3		2486.350	32.63	32.31	64.94	-9.06	74.00	190	5	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

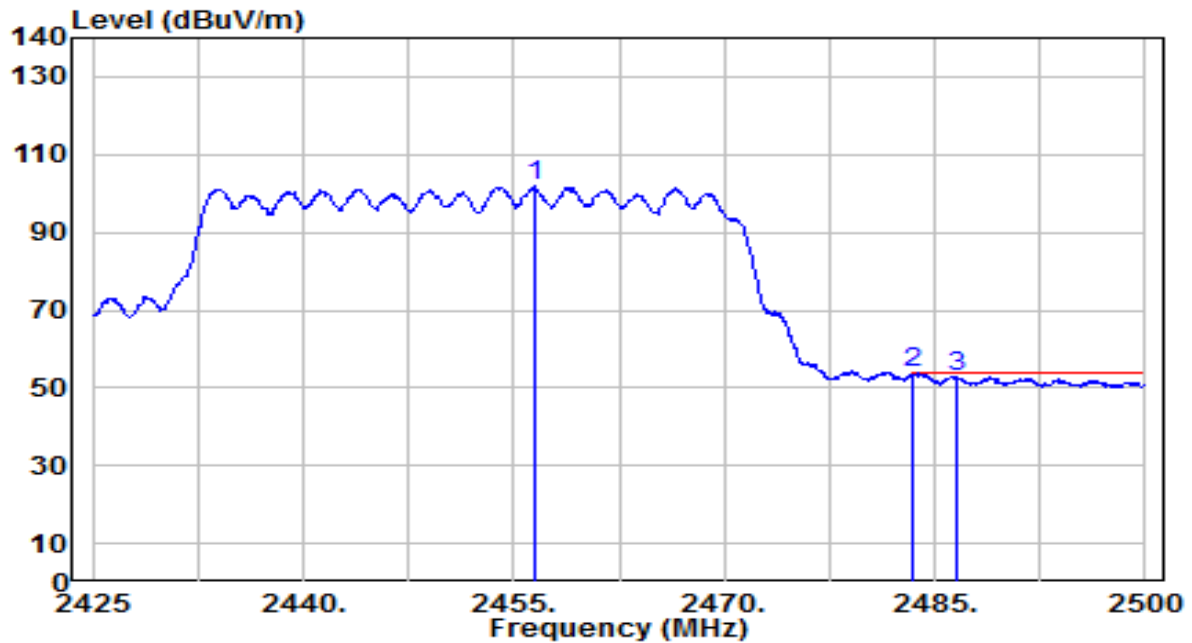

No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2456.425	69.52	32.20	101.71	N/A	N/A	190	5	Average
2	*	2483.500	21.42	32.30	53.72	-0.28	54.00	190	5	Average
3		2486.500	20.72	32.31	53.03	-0.97	54.00	190	5	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.8. AC Conducted Emissions Measurement


7.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.8.2. Test Setup

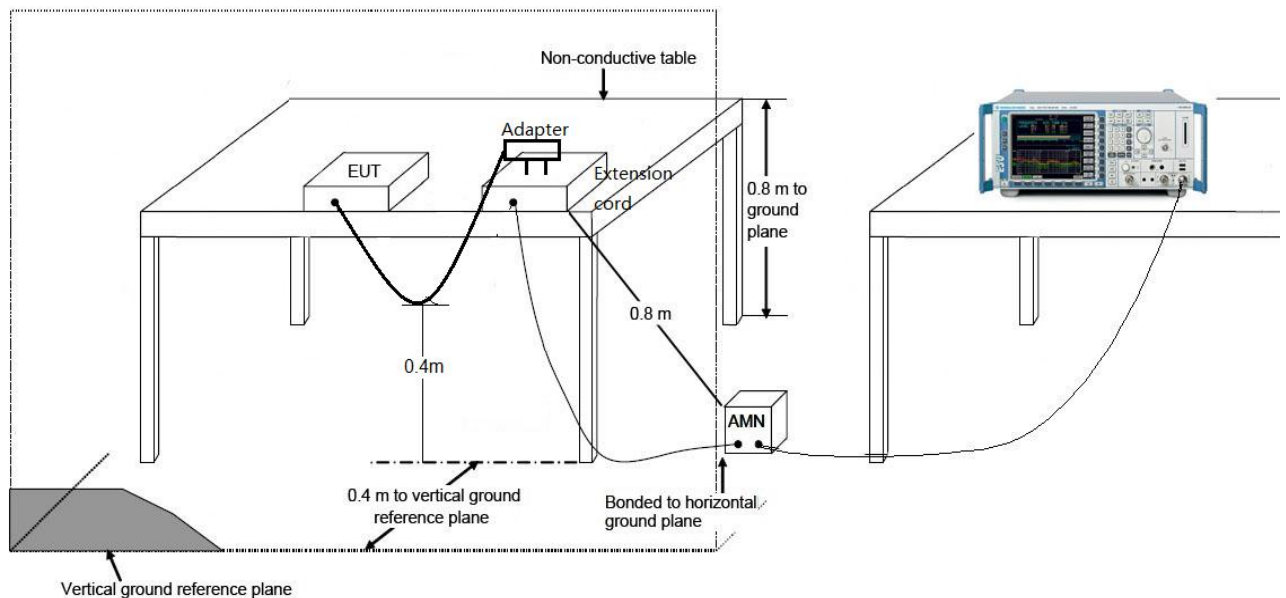

7.8.3.Test Result

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	19.6°C /56%
Polarity	Line1	Site / Test Engineer	SR2 / Ryan
Test Mode	802.11n-20MHz_TX_CH6_Ant 0+1	Test Voltage	AC 120V/60Hz

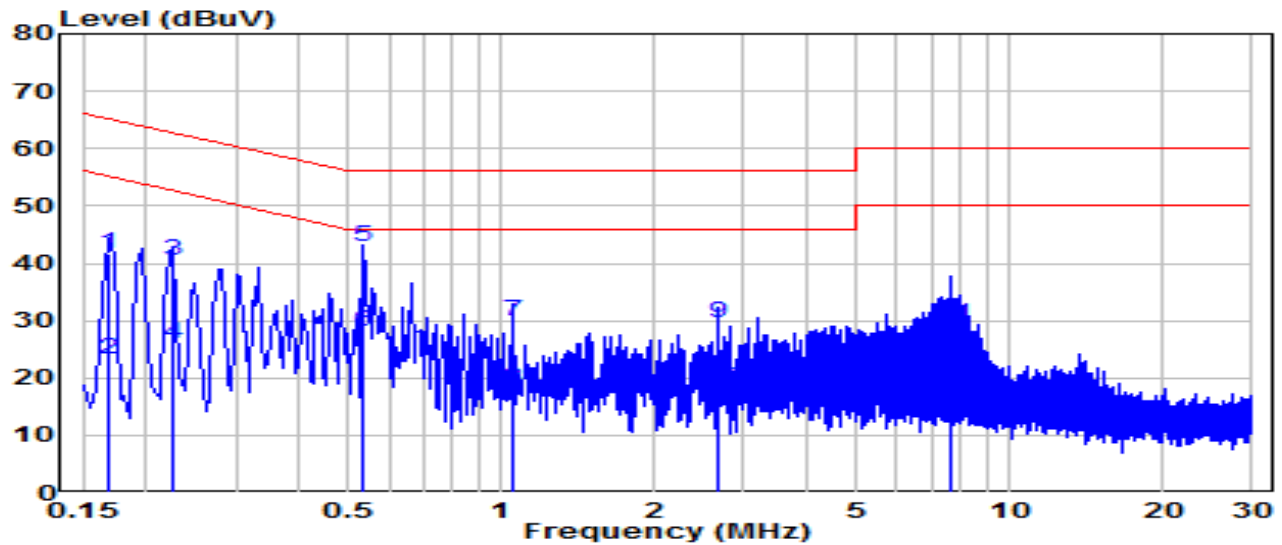


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.168	31.94	9.63	41.57	-23.49	65.06	QP
2	0.168	13.59	9.63	23.22	-31.84	55.06	Average
3	0.226	30.69	9.63	40.32	-22.25	62.58	QP
4	0.226	16.26	9.63	25.89	-26.68	52.58	Average
5	* 0.532	33.33	9.65	42.98	-13.02	56.00	QP
6	* 0.532	18.46	9.65	28.11	-17.89	46.00	Average
7	1.059	20.32	9.68	30.00	-26.00	56.00	QP
8	1.059	8.46	9.68	18.14	-27.86	46.00	Average
9	2.661	20.00	9.71	29.71	-26.29	56.00	QP
10	2.661	8.29	9.71	18.00	-28.00	46.00	Average
11	7.691	19.49	9.81	29.30	-30.70	60.00	QP
12	7.691	4.98	9.81	14.80	-35.20	50.00	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	19.6°C /56%
Polarity	Neutral	Site / Test Engineer	SR2 / Ryan
Test Mode	802.11n-20MHz_TX_CH6_Ant 0+1	Test Voltage	AC 120V/60Hz

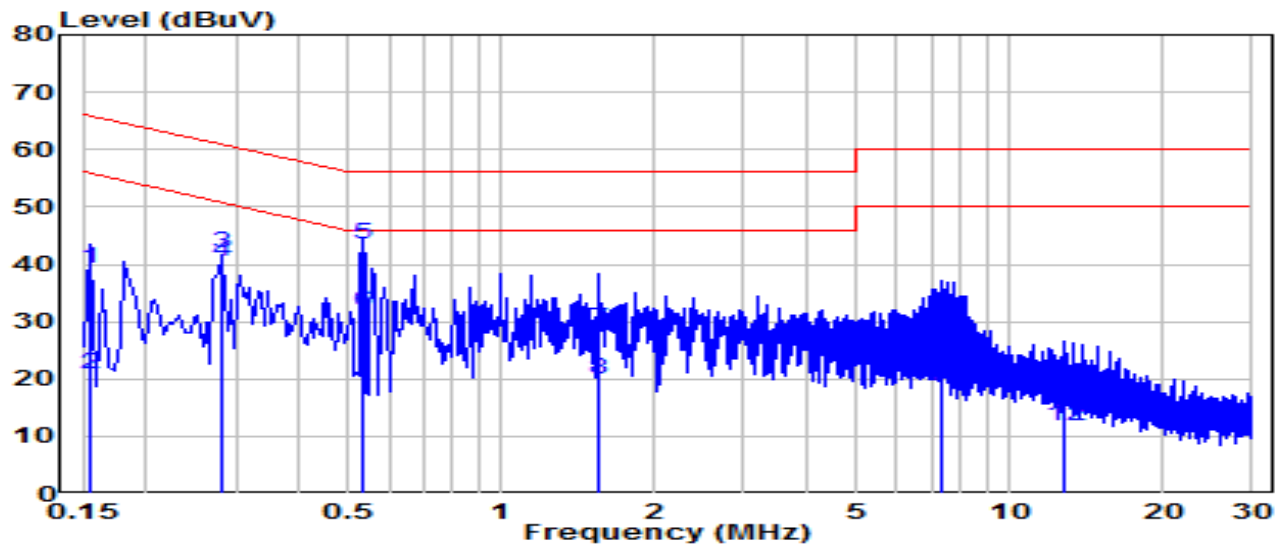

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.154	29.57	9.63	39.20	-26.56	65.75	QP
2	0.154	11.21	9.63	20.84	-34.92	55.75	Average
3	* 0.280	32.19	9.64	41.83	-18.97	60.80	QP
4	* 0.280	30.87	9.64	40.51	-10.29	50.80	Average
5	0.532	33.85	9.65	43.50	-12.50	56.00	QP
6	0.532	21.96	9.65	31.61	-14.39	46.00	Average
7	1.563	18.88	9.70	28.57	-27.43	56.00	QP
8	1.563	10.35	9.70	20.04	-25.96	46.00	Average
9	7.331	21.28	9.82	31.10	-28.90	60.00	QP
10	7.331	8.95	9.82	18.77	-31.23	50.00	Average
11	12.740	7.75	9.92	17.66	-42.34	60.00	QP
12	12.740	1.87	9.92	11.78	-38.22	50.00	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the device is compliance with Part 15C of the FCC Rules.

Appendix A : Test Setup Photograph

Refer to “2412TW0110-UT” file.

Appendix B : External Photograph

Refer to “2412TW0110-UE” file.

Appendix C : Internal Photograph

Refer to “2412TW0110-UI” file.

_____ The End _____