



TEST REPORT

APPLICANT : Realme Chongqing Mobile
Telecommunications Corp., Ltd.

PRODUCT NAME : Mobile Phone

MODEL NAME : RMX3511

BRAND NAME : realme

FCC ID : 2AUYFRMX3511

STANDARD(S) : 47 CFR Part 15 Subpart E

RECEIPT DATE : 2021-11-26

TEST DATE : 2021-12-02 to 2022-01-12

ISSUE DATE : 2022-01-17

Edited by: Peng Mi
Peng Mi (Rapporteur)

Approved by: Shen Junsheng
Shen Junsheng (Supervisor)

NOTE: This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.





DIRECTORY

1. Technical Information	3
1.1. Applicant and Manufacturer Information	3
1.2. Equipment Under Test (EUT) Description	3
1.3. Modulation Type and Data Rate of EUT	5
1.4. The Channel Number and Frequency	6
1.5. Test Standards and Results	7
1.6. Environmental Conditions	8
2. 47 CFR Part 15E Requirements	9
2.1. Antenna Requirement	9
2.2. Duty Cycle of the Test Signal	10
2.3. Maximum Conducted Output Power	15
2.4. Emission Bandwidth	20
2.5. Peak Power Spectral Density	56
2.6. Frequency Stability	92
2.7. Conducted Emission	95
2.8. Restricted Frequency Bands	99
2.9. Radiated Emission	118
Annex A Test Uncertainty	149
Annex B Testing Laboratory Information	150

Change History		
Version	Date	Reason for change
1.0	2022-01-17	First edition



1. Technical Information

Note: Provide by applicant.

1.1. Applicant and Manufacturer Information

Applicant:	Realme Chongqing Mobile Telecommunications Corp., Ltd.
Applicant Address:	No.178 Yulong Avenue, Yufengshan, Yubei District, Chongqing, China
Manufacturer:	Realme Chongqing Mobile Telecommunications Corp., Ltd.
Manufacturer Address:	No.178 Yulong Avenue, Yufengshan, Yubei District, Chongqing, China

1.2. Equipment Under Test (EUT) Description

Product Name:	Mobile Phone	
Sample No.:	5#	
Hardware Version:	11	
Software Version:	Android 11	
Modulation Technology:	OFDM	
Modulation Mode:	802.11a, 802.11n (HT20), 802.11n (HT40) 802.11ac (VHT20), 802.11ac (VHT40), 802.11ac (VHT80)	
Operating Frequency Range:	5180MHz-5240MHz; 5260MHz-5320MHz; 5500MHz-5720MHz; 5745MHz-5825MHz	
Channel Number:	Refer to 1.3	
Antenna Type:	PIFA Antenna	
Antenna Gain:	1.77dBi	
Accessory Information:	Battery 1	
	Brand Name:	realme
	Model No.:	BLP877
	Serial No.:	N/A
	Capacity:	Typical: 5000mAh, Rated: 4890mAh
	Rated Voltage:	3.87V
	Charge Limit:	4.45V
	Manufacturer:	Huizhou Desay Battery Co., Ltd



Accessory Information:	Battery 2	
	Brand Name:	realme
	Model No.:	BLP877
	Serial No.:	N/A
	Capacity:	Typical: 5000mAh, Rated: 4890mAh
	Rated Voltage:	3.87V
	Charge Limit:	4.45V
	Manufacturer:	Dongguan NVT Technology Co., Ltd.
	Battery 3	
	Brand Name:	realme
	Model No.:	BLP877
	Serial No.:	N/A
	Capacity:	Typical: 5000mAh, Rated: 4890mAh
	Rated Voltage:	3.87V
	Charge Limit:	4.45V
	Manufacturer:	TWS Technology (Guangzhou) Limited
	AC Adapter 1	
	Brand Name:	realme
	Model No.:	OP92JAUH
	Serial No.:	N/A
	Rated Output:	5V=2A; 9V=2A
	Rated Input:	100-240V~50/60Hz, 0.5A
	Manufacturer:	Huizhou Golden Lake Industrial Co., Ltd.
	AC Adapter 2	
	Brand Name:	realme
	Model No.:	OP92CAUH
	Serial No.:	N/A
	Rated Output:	5V=2A; 9V=2A
	Rated Input:	100-240V~50/60Hz, 0.5A
	Manufacturer:	Dongguan YOHO Electronic Technology Co., Ltd.

Accessory Information:	AC Adapter 3	
	Brand Name:	realme
	Model No.:	OP92YAUH
	Serial No.:	N/A
	Rated Output:	5V=2A; 9V=2A
	Rated Input:	100-240V~50/60Hz, 0.5A
	Manufacturer:	Jiangsu Chenyang Electron Co., Ltd.
	USB Cable	
	Model No.:	DL143
	Earphone	
	Model No.:	MH156
	Length:	1.2m

Note 1: WiFi hotspot only support U-NII-1 and U-NII-3 band.

Note 2: We use the dedicated software to control the EUT continuous transmission.

Note 3: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

1.3. Modulation Type and Data Rate of EUT

Modulation Technology	Modulation Type	Data Rate (Mbps) ^{Note1}
OFDM (802.11a)	BPSK	6/9
	QPSK	12/18
	16QAM	24/36
	64QAM	48/54
OFDM (802.11n)	BPSK	6.5
	QPSK	13/19.5
	16QAM	26/39
	64QAM	52/58.5/65
OFDM (802.11ac)	BPSK	6.5
	QPSK	13/19.5
	16QAM	26/39
	64QAM	52/58.5/65
	256QAM	78

Note1: The worst-case mode(black bold) in all data rates has been determined during the pre-scan, only the test data of the worst-case were recorded in this report.

1.4. The Channel Number and Frequency

(U-NII-1) 5180MHz-5240MHz				
Bandwidth	Channel	Frequency (MHz)	Channel	Frequency (MHz)
20MHz	36	5180	40	5200
	44	5220	48	5240
40MHz	38	5190	46	5230
80MHz	42	5210		
(U-NII-2A) 5260MHz-5320MHz				
Bandwidth	Channel	Frequency (MHz)	Channel	Frequency (MHz)
20MHz	52	5260	56	5280
	60	5300	64	5320
40MHz	54	5270	62	5310
80MHz	58	5290		
(U-NII-2C) 5500MHz-5700MHz				
Bandwidth	Channel	Frequency (MHz)	Channel	Frequency (MHz)
20MHz	100	5500	105	5520
	108	5540	112	5560
	116	5580	120	5600
	124	5620	128	5640
	132	5660	136	5680
	140	5700		
40MHz	102	5510	110	5550
	118	5590	126	5630
	134	5670	142	5710
80MHz	106	5530	122	5610
	138	5690		
(U-NII-3) 5745MHz-5825MHz				
Bandwidth	Channel	Frequency (MHz)	Channel	Frequency (MHz)
20MHz	149	5745	153	5765
	157	5785	161	5805
	165	5825		
40MHz	151	5775	159	5795
80MHz	155	5775		

Note 1: The black bold channels were selected for test.



1.5. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart E (U-NII band) for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15(5-1-14 Edition)	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Test Date	Test Engineer	Result	Method Determination /Remark
1	15.203	Antenna Requirement	N/A	N/A	PASS	No deviation
2	ANSI C63.10	Duty Cycle of the Test Signal	Dec 03, 2021	Su Xiaoxian	PASS	No deviation
3	15.407(a)	Maximum Conducted Output Power	Jan 13, 2022	Su Xiaoxian	PASS	No deviation
4	15.407(a) (e)	Emission Bandwidth	Dec 03, 2021	Su Xiaoxian	PASS	No deviation
5	15.407(a)	Peak Power Spectral Density	Dec 03, 2021	Su Xiaoxian	PASS	No deviation
6	15.407(g)	Frequency Stability	Dec 03, 2021	Su Xiaoxian	PASS	No deviation
7	15.207	Conducted Emission	Dec 14, 2021	Yang Lian	PASS	No deviation
8	15.407(b)	Restricted Frequency Bands	Dec 28&30, 2021 Jan 12, 2022	Gao Jianrou	PASS	No deviation
9	15.407(b)	Radiated Emission	Dec 28, 2021 Jan 04, 2022	Gao Jianrou	PASS	No deviation

Note 1: The DFS test report was documented in a separate report (Report No.: SZ21110383W05).

Note 2: The tests of Conducted Emission and Radiated Emission were performed according to the method of measurements prescribed in ANSI C63.102013.

Note 3: These RF tests were performed according to the method of measurements prescribed in KDB789033 D02 v02r01.



Note 4: The path loss during the RF test is calibrated to correct the results by the offset setting in the test equipments. The ref offset 12.5dB contains two parts that cable loss 2.5dB and Attenuator 10dB.

Note 5: Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.

Note 6: When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% confidence intervals.

1.6. Environmental Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15-35
Relative Humidity (%):	30-60
Atmospheric Pressure (kPa):	86-106



2.47 CFR Part 15E Requirements

2.1. Antenna Requirement

2.1.1. Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

2.1.2. Test Result: Compliant

Inside of the EUT has a PIFA antenna coupled with the I-PEX connector. Please refer to the EUT internal photos.

2.2. Duty Cycle of the Test Signal


2.2.1. Requirement

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%). When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be used to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration (T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data are being acquired (i.e., no transmitter OFF-time is to be considered).

When continuous transmission cannot be achieved and sweep triggering/signal gating cannot be implemented, alternative procedures are provided that can be used to measure the average power; however, they will require an additional measurement of the transmitter duty cycle (D). Within this sub clause, the duty cycle refers to the fraction of time over which the transmitter is ON and is transmitting at its maximum power control level. The duty cycle is considered to be constant if variations are less than $\pm 2\%$; otherwise, the duty cycle is considered to be nonconstant.

2.2.2. Test Description

Test Setup:

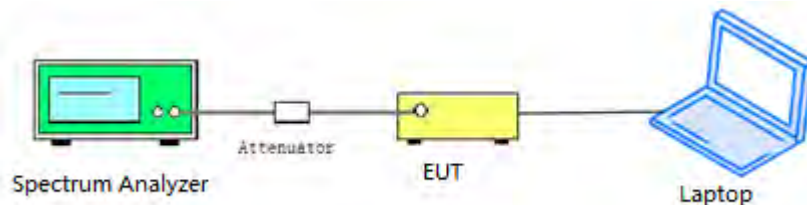

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

2.2.3. Test Procedure

KDB 789033 Section B was used in order to prove compliance.




2.2.4. Test Result


A. Test Verdict:

Test Mode	Duty Cycle (%) (D)	Duty Factor (10*log[1/D])
802.11a	91.10	0.40
802.11n (HT20)	91.21	0.40
802.11n (HT40)	88.77	0.52
802.11ac (VHT20)	90.91	0.41
802.11ac (VHT40)	80.00	0.97
802.11ac (VHT80)	70.76	1.50


B. Test Plot:

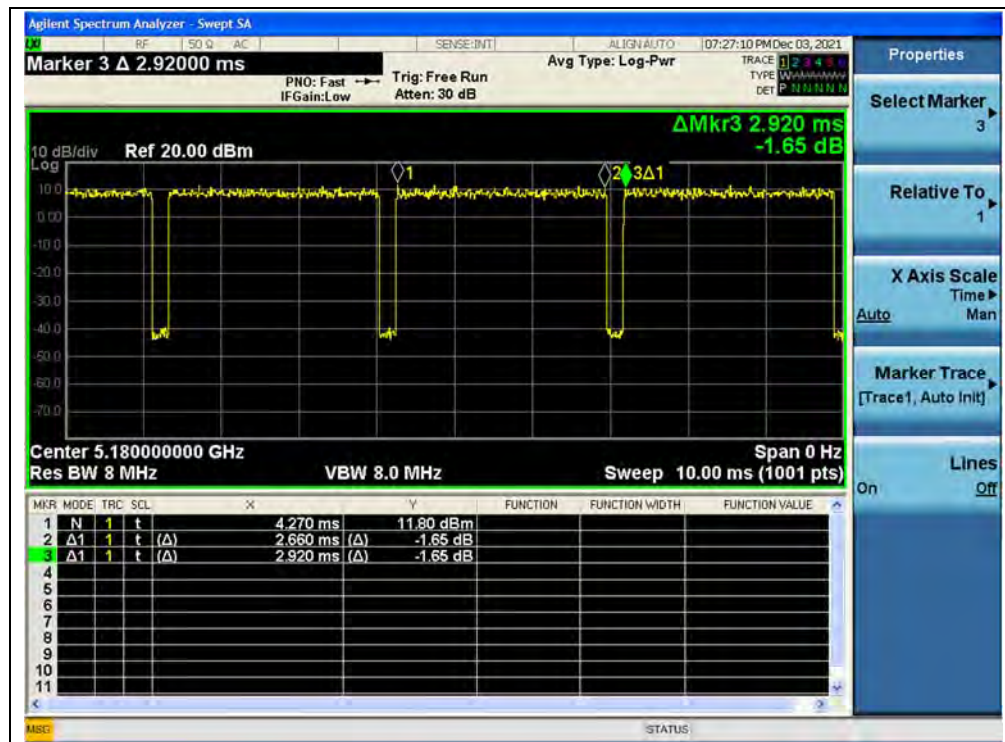


(Channel 36, 5180MHz, 802.11a)

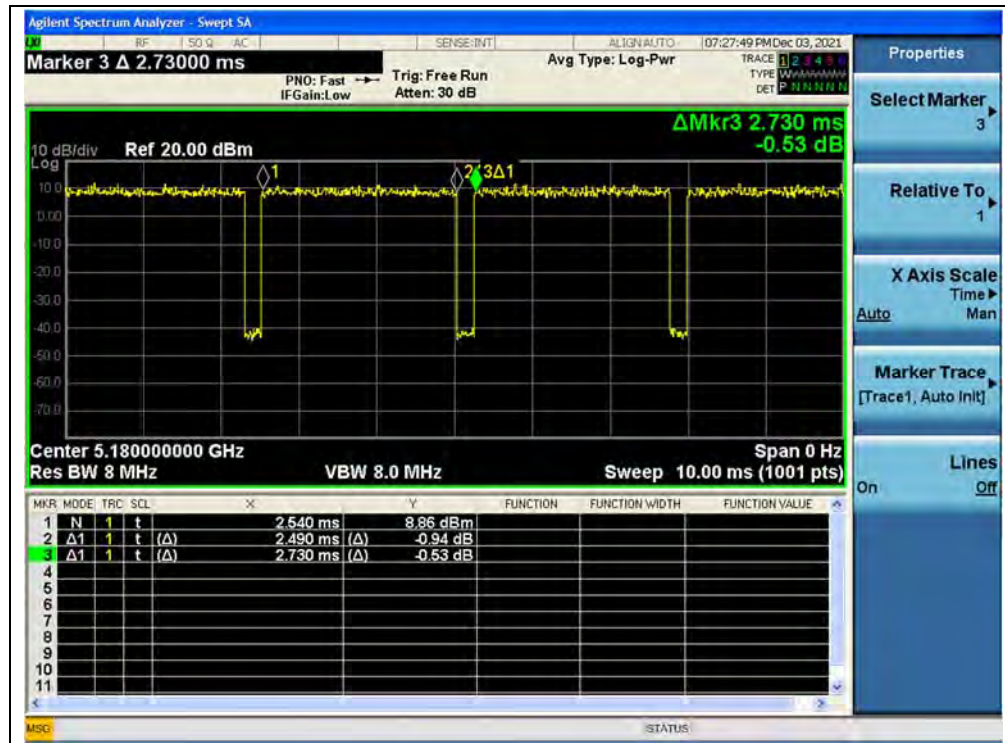

(Channel 36, 5180MHz, 802.11n (HT20))

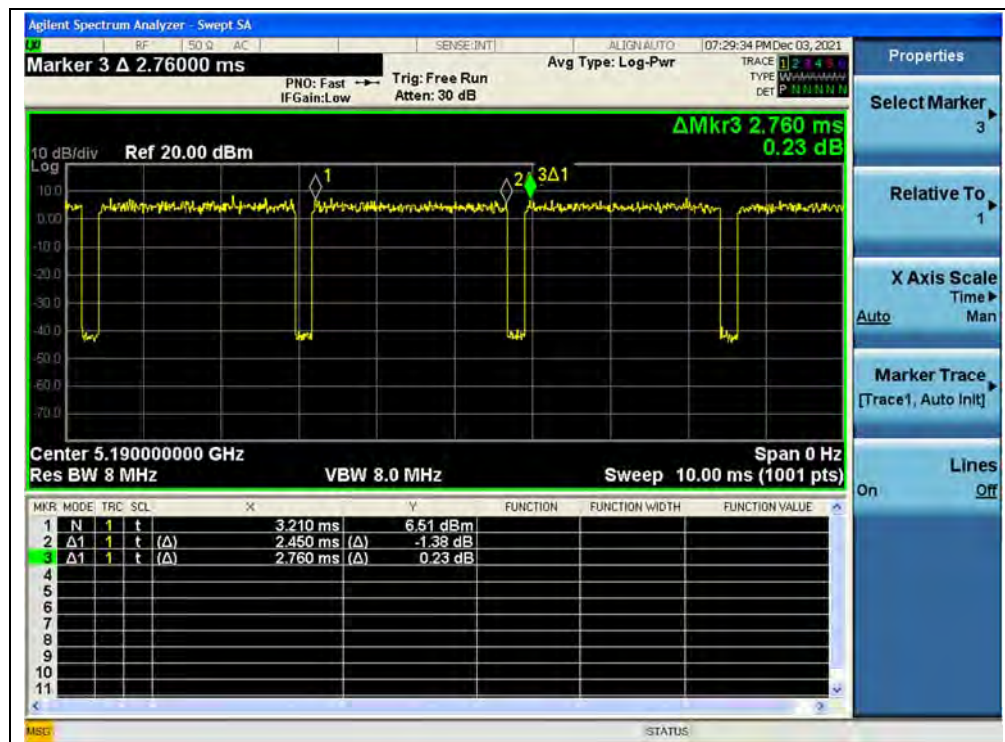


(Channel 38, 5190MHz, 802.11n (HT40))

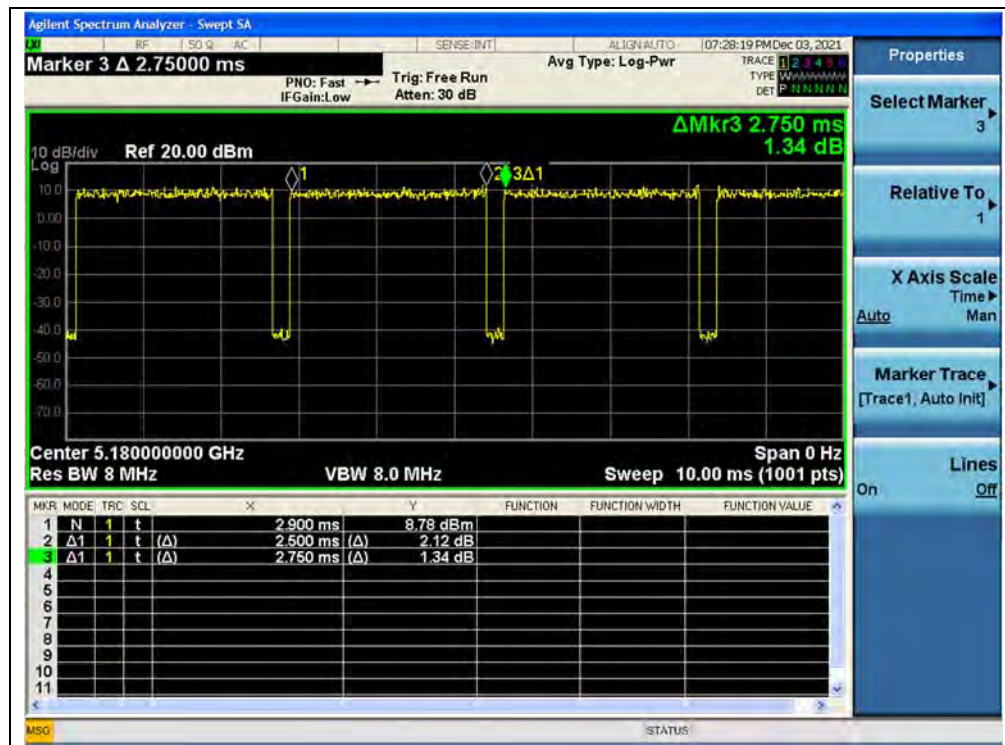

(Channel 36, 5180MHz, 802.11ac (VHT20))



(Channel 38, 5190MHz, 802.11ac (VHT40))

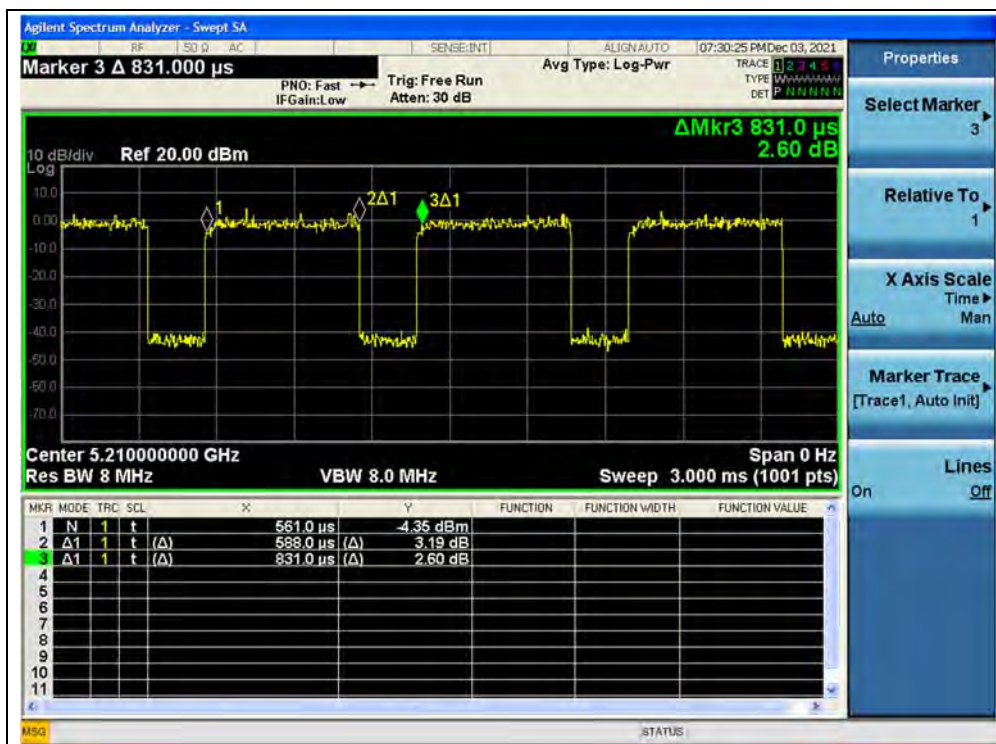

(Channel 42, 5210MHz, 802.11ac (VHT80))

2.3. Maximum Conducted Output Power

2.3.1. Requirement

(1) For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250mW provided the maximum antenna gain does not exceed 6dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250mW or $11\text{dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


(4) According to KDB662911D01 Measure-and-sum technique, the conducted emission level (e.g., transmit power or power in specified bandwidth) is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in units that are directly proportional to power.

(5) According to KDB 662911 D01, the directional gain = $G_{\text{ANT}} + 10\log(N_{\text{ANT}})\text{dBi}$, where G_{ANT} is the antenna gain in dBi, N_{ANT} is the number of outputs.

2.3.2. Test Description


Section E) 3) of KDB 789033 defines a methodology using a USB Wideband Power Sensor.

Test Setup:

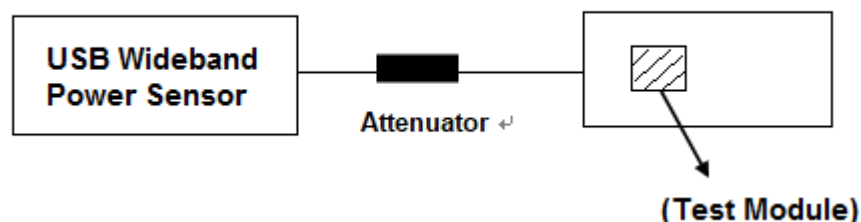

The EUT (Equipment under the test) which is coupled to the USB Wideband Power Sensor; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading, all test result in USB Wideband Power Sensor.

For ac (VHT80) mode power

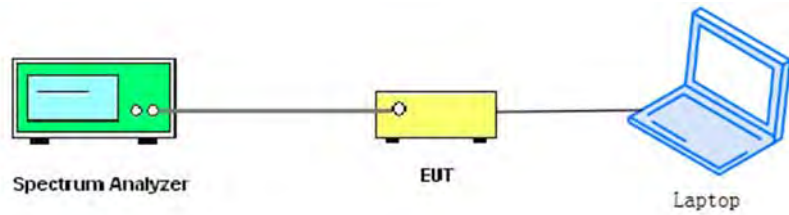

The EUT (Equipment under the test) is coupled to the Spectrum analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading, all test result in Spectrum analyzer.

2.3.3. Limits

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz.

Mode	Band	Channel (MHz)	26dB BW (MHz)	$11+10\log(26\text{dB BW})$	Limits (dBm)
a	UNII-2a	5260	20.71	24.16	24.00
		5300	21.23	24.27	24.00
		5320	21.67	24.36	24.00
	UNII-2c	5500	21.63	24.35	24.00
		5600	21.37	24.30	24.00
		5700	22.22	24.47	24.00
n20	UNII-2a	5260	22.54	24.53	24.00
		5300	22.78	24.58	24.00
		5320	22.39	24.50	24.00
	UNII-2c	5500	22.49	24.52	24.00
		5600	22.85	24.59	24.00
		5700	22.74	24.57	24.00
ac20	UNII-2a	5260	22.35	24.49	24.00
		5300	22.61	24.54	24.00
		5320	22.81	24.58	24.00
	UNII-2c	5500	22.54	24.53	24.00
		5600	22.73	24.57	24.00
		5700	22.65	24.55	24.00



2.3.4. Test Result

Maximum Average Conducted Output Power

802.11a Mode

Frequency (MHz)	Average Power				Limit		Verdict
	Measured	Duty Factor	Duty factor Calculated				
	dBm		dBm	W	dBm	W	
5180	16.35	0.40	16.75	0.047	24	0.25	PASS
5220	16.39		16.79	0.048			
5240	16.80		17.20	0.052			
5260	16.86		17.26	0.053			
5300	17.03		17.43	0.055			
5320	16.88		17.28	0.053			
5500	15.96		16.36	0.043			
5600	16.66		17.06	0.051			
5700	16.27		16.67	0.046			
5745	15.28		15.68	0.037	30	1	
5785	16.12		16.52	0.045			
5825	16.17		16.57	0.045			

802.11n (HT20) Mode

Frequency (MHz)	Average Power				Limit		Verdict
	Measured	Duty Factor	Duty factor Calculated				
	dBm		dBm	W	dBm	W	
5180	15.34	0.40	15.74	0.037	24	0.25	PASS
5220	15.77		16.17	0.041			
5240	16.52		16.92	0.049			
5260	16.47		16.87	0.049			
5300	16.10		16.50	0.045			
5320	16.37		16.77	0.048			
5500	15.55		15.95	0.039			
5600	15.74		16.14	0.041			
5700	15.49		15.89	0.039			
5745	15.34		15.74	0.037	30	1	
5785	15.40		15.80	0.038			
5825	15.48		15.88	0.039			

**802.11n (HT40) Mode**

Frequency (MHz)	Average Power				Limit		Verdict
	Measured	Duty Factor	Duty factor Calculated				
	dBm		dBm	W	dBm	W	
5190	16.31	0.52	16.83	0.048	24	0.25	PASS
5230	16.78		17.30	0.054			
5270	17.02		17.54	0.057			
5310	16.70		17.22	0.053			
5510	15.93		16.45	0.044			
5630	16.90		17.42	0.055			
5670	16.28		16.80	0.048			
5755	16.21		16.73	0.047	30	1	
5795	15.86		16.38	0.043			

802.11ac (VHT20) Mode

Frequency (MHz)	Average Power				Limit		Verdict
	Measured	Duty Factor	Duty factor Calculated		dBm	W	
	dBm		dBm	W			
5180	16.19	0.41	16.60	0.046	24	0.25	PASS
5220	16.25		16.66	0.046			
5240	16.66		17.07	0.051			
5260	16.60		17.01	0.050			
5300	16.64		17.05	0.051			
5320	16.57		16.98	0.050			
5500	15.71		16.12	0.041			
5600	16.27		16.68	0.047			
5700	16.02		16.43	0.044			
5745	15.83		16.24	0.042	30	1	
5785	15.79		16.20	0.042			
5825	15.98		16.39	0.044			

**802.11ac (VHT40) Mode**

Frequency (MHz)	Average Power				Limit		Verdict
	Measured	Duty Factor	Duty factor Calculated				
	dBm		dBm	W	dBm	W	
5190	15.92	0.97	16.89	0.049	24	0.25	PASS
5230	16.18		17.15	0.052			
5270	16.37		17.34	0.054			
5310	16.04		17.01	0.050			
5510	15.23		16.20	0.042			
5630	16.02		16.99	0.050			
5670	15.58		16.55	0.045			
5755	15.56		16.53	0.045	30	1	
5795	15.28		16.25	0.042			

802.11ac (VHT80) Mode

Frequency (MHz)	Average Power				Limit		Verdict
	Measured	Duty Factor	Duty factor Calculated				
	dBm		dBm	W	dBm	W	
5210	15.66	1.50	17.16	0.052	24	0.25	PASS
5290	15.68		17.18	0.052			
5530	15.24		16.74	0.047			
5610	15.48		16.98	0.050			
5690	15.06		16.56	0.045			
5775	15.21		16.71	0.047	30	1	


2.4. Emission Bandwidth

2.4.1. Requirement

For purposes of this subpart the emission bandwidth shall be determined by measuring the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, that are 26 dB down relative to the maximum level of the modulated carrier. Determination of the emissions bandwidth is based on the use of measurement instrumentation employing a peak detector function with an instrument resolution bandwidth approximately equal to 1.0 percent of the emission bandwidth of the device under measurement. Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

2.4.2. Test Description

Test Setup:

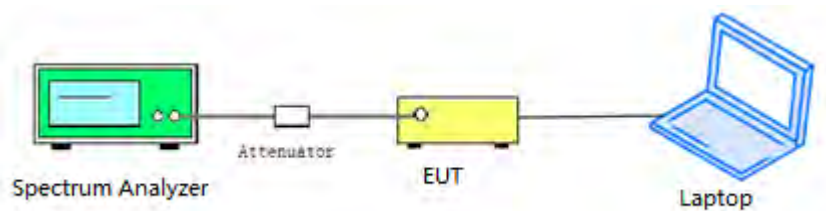

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50 Ohm; the path loss as the factor is calibrated to correct the reading.

2.4.3. Test Procedure

1. KDB 789033 Section C) 1) Emission Bandwidth was used in order to prove compliance
 - a) Set RBW = approximately 1% of the emission bandwidth.
 - b) Set VBW > RBW.
 - c) Detector = Peak.
 - d) Trace mode = max hold.
 - e) Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
 2. KDB 789033 Section C) 2) minimum emission bandwidth for the band 5.725-5.85GHz was used in order to prove compliance.
- Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.715-5.85 GHz. The following procedure shall be used for measuring this bandwidth:



- a) Set RBW = 100 kHz.
- b) Set video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

2.4.4. Test Result

802.11a Mode

A. Test Verdict:

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
36	5180	27.06
44	5220	25.59
48	5240	24.77
52	5260	25.84
60	5300	26.23
64	5320	26.38
100	5500	26.90
120	5600	27.39
140	5700	28.22
Channel	Frequency (MHz)	6 dB Bandwidth (MHz)
149	5745	16.35
157	5785	16.37
165	5825	16.36




B. Test Plot:



(Channel 36, 5180MHz, 802.11a)




(Channel 44, 5220 MHz, 802.11a)

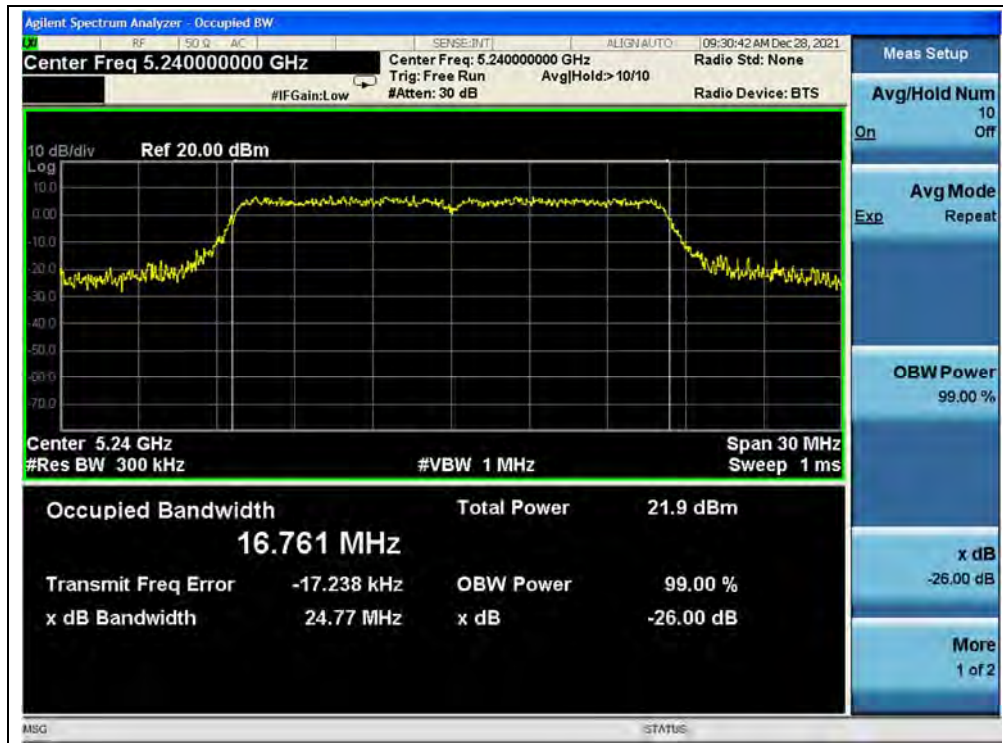

(Channel 48, 5240MHz, 802.11a)



(Channel 52, 5260MHz, 802.11a)

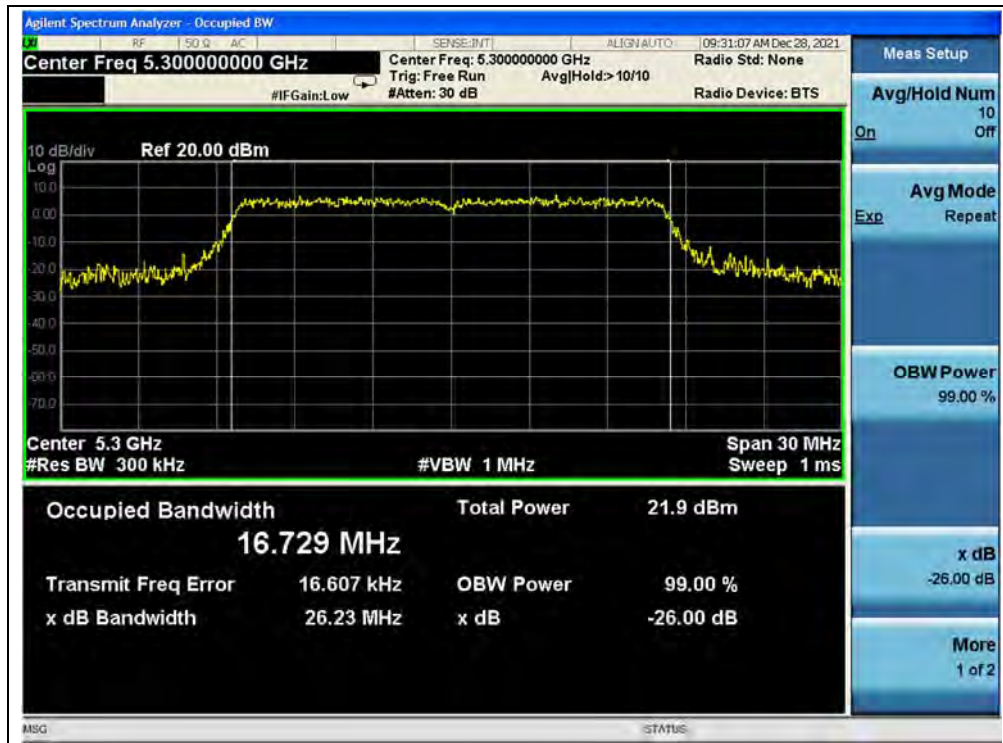

(Channel 60, 5300 MHz, 802.11a)




(Channel 64, 5320MHz, 802.11a)



(Channel 100, 5500 MHz, 802.11a)




(Channel 120, 5600 MHz, 802.11a)

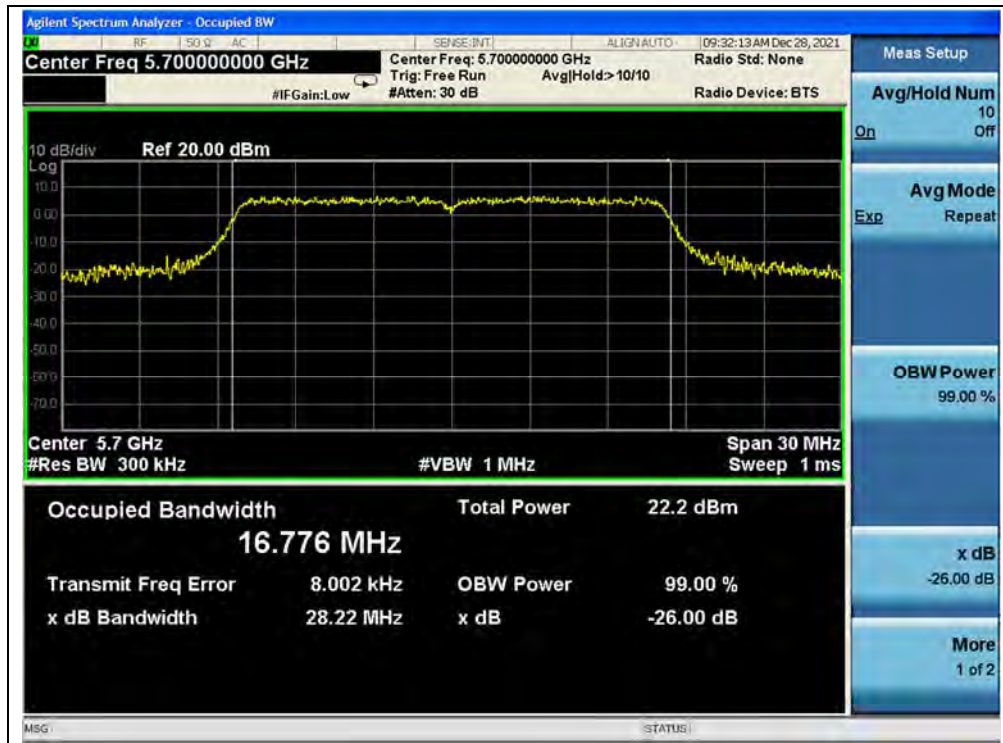

(Channel 140, 5700MHz, 802.11a)



(Channel 149, 5745MHz, 802.11a)

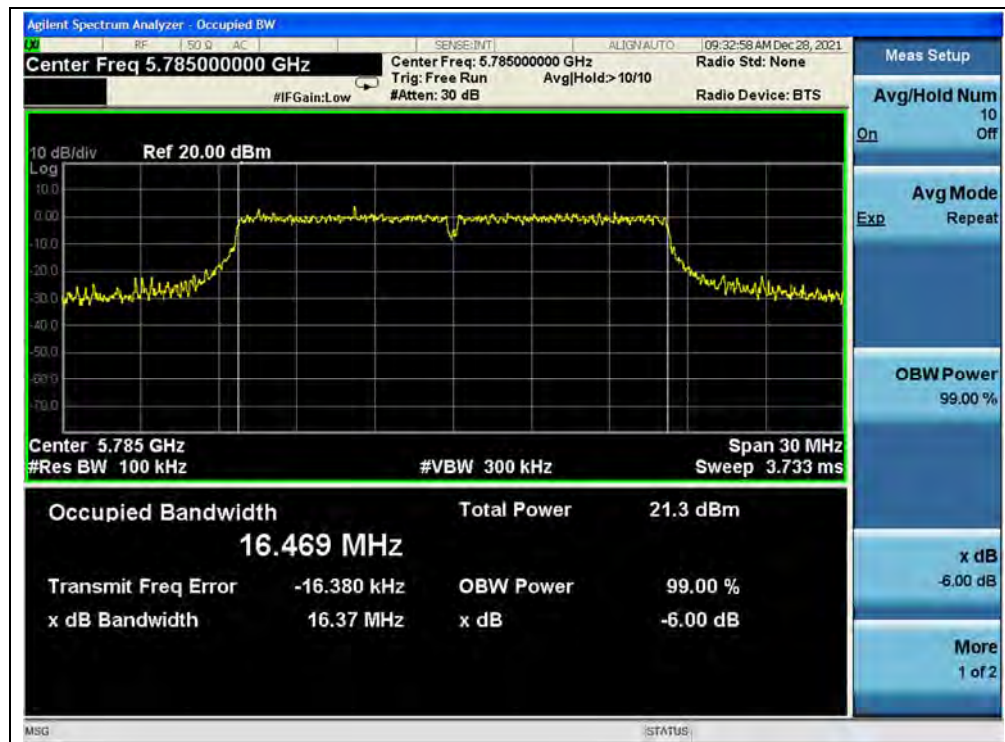

(Channel 157, 5785MHz, 802.11a)



(Channel 165, 5825MHz, 802.11a)



802.11n (HT20) Mode


A. Test Verdict:

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
36	5180	28.59
44	5220	28.51
48	5240	29.20
52	5260	27.65
60	5300	27.68
64	5320	27.83
100	5500	26.90
120	5600	28.49
140	5700	27.94
Channel	Frequency (MHz)	6 dB Bandwidth (MHz)
149	5745	17.51
157	5785	17.57
165	5825	17.56

B. Test Plot:




(Channel 36, 5180MHz, 802.11n (HT20))

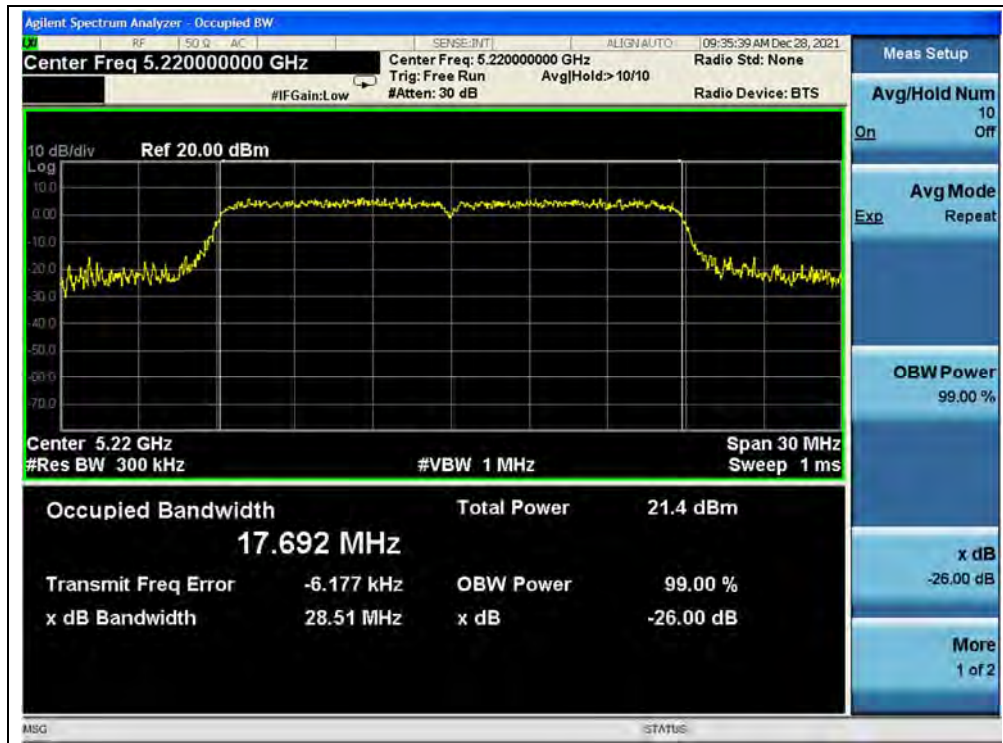

(Channel 44, 5220MHz, 802.11n (HT20))



(Channel 48, 5240MHz, 802.11n (HT20))

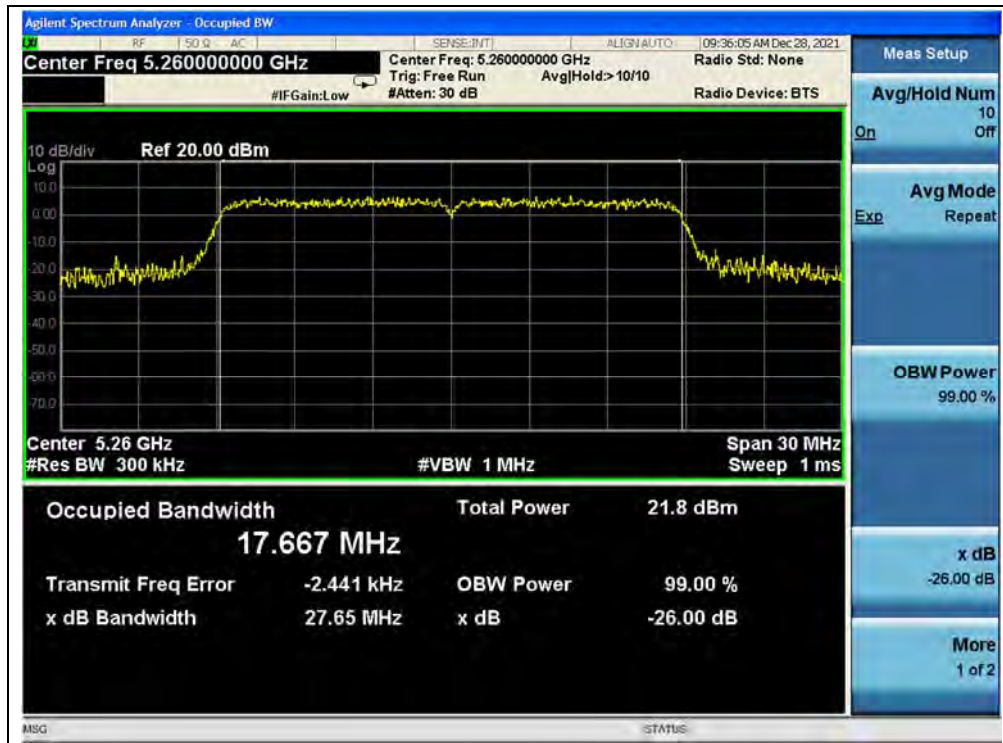


(Channel 52, 5260MHz, 802.11n (HT20))




(Channel 60, 5300MHz, 802.11n (HT20))



(Channel 64, 5320MHz, 802.11n (HT20))

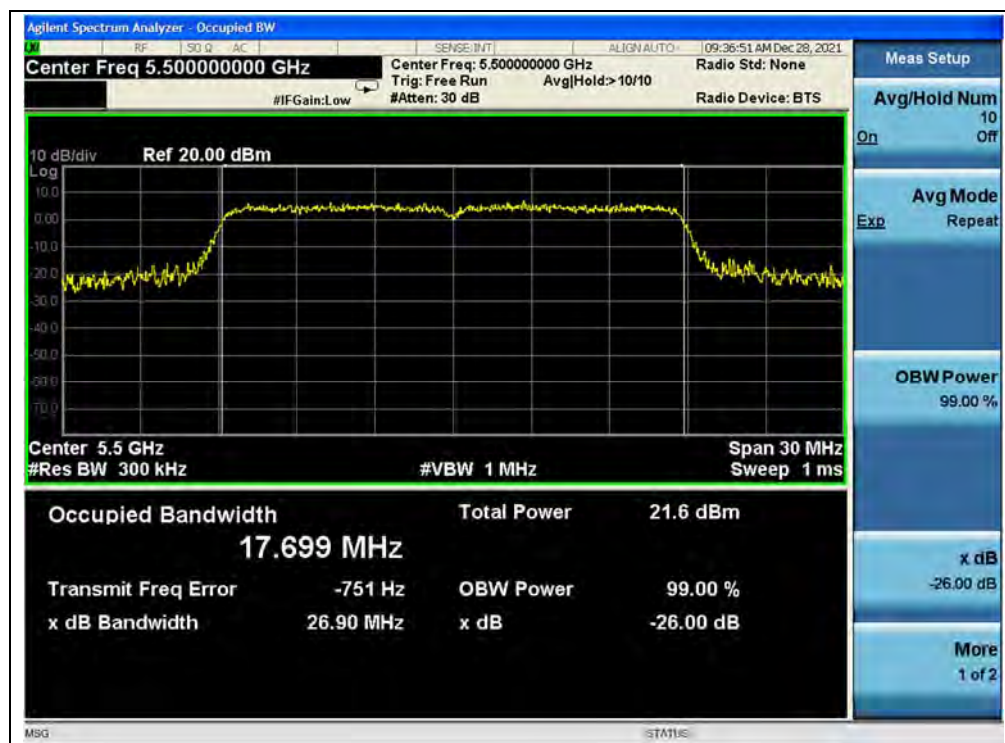


(Channel 100, 5500MHz, 802.11n (HT20))

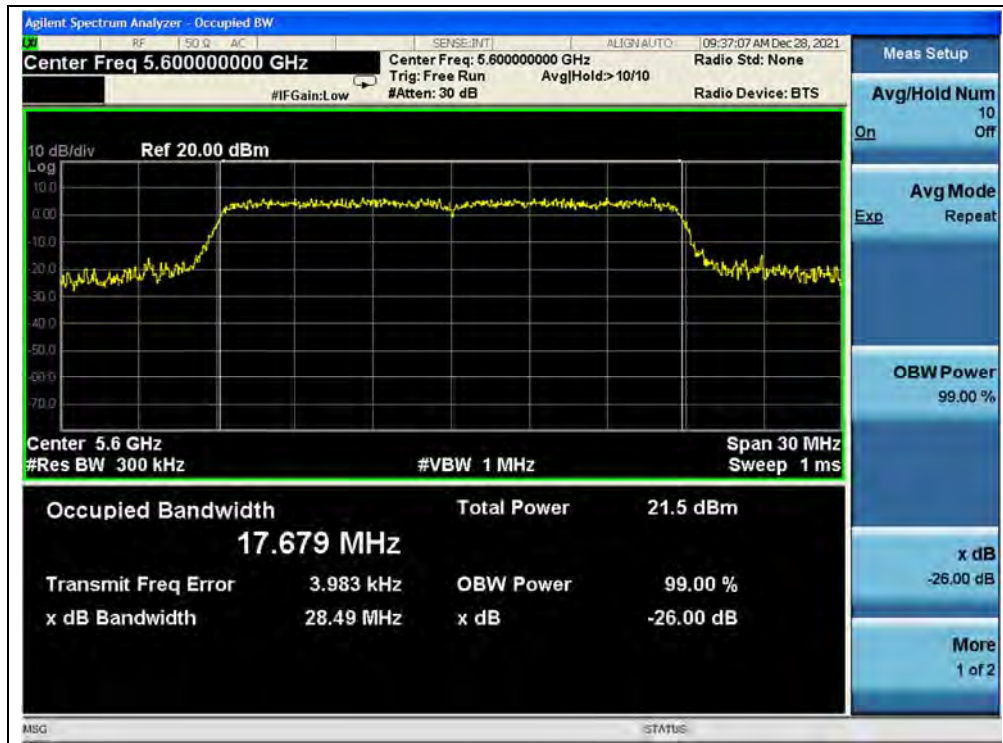

(Channel 120, 5600MHz, 802.11n (HT20))



(Channel 140, 5700MHz, 802.11n (HT20))

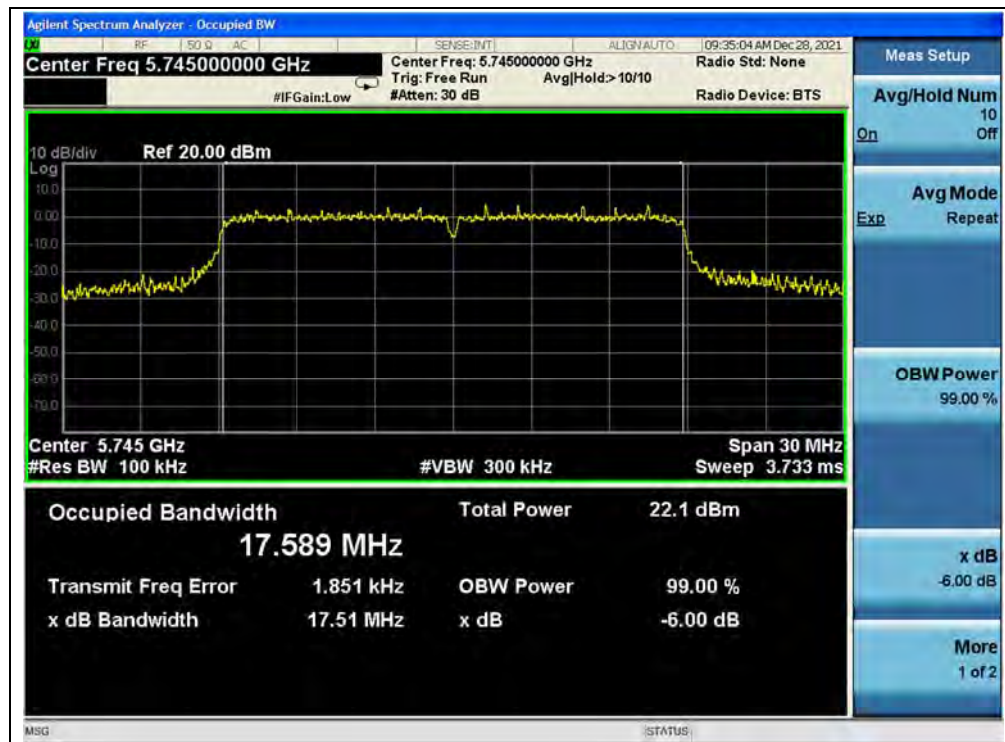

(Channel 149, 5745MHz, 802.11 n (HT20))



(Channel 157, 5785MHz, 802.11 n (HT20))



(Channel 165, 5825MHz, 802.11 n (HT20))



802.11n (HT40) Test mode


A. Test Verdict:

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
38	5190	53.73
46	5230	54.39
54	5270	56.62
62	5310	52.82
102	5510	55.75
126	5630	58.36
134	5670	53.54
Channel	Frequency (MHz)	6 dB Bandwidth (MHz)
151	5755	35.38
159	5795	35.92

B. Test Plot:




(Channel 38, 5190MHz, 802.11n (HT40))

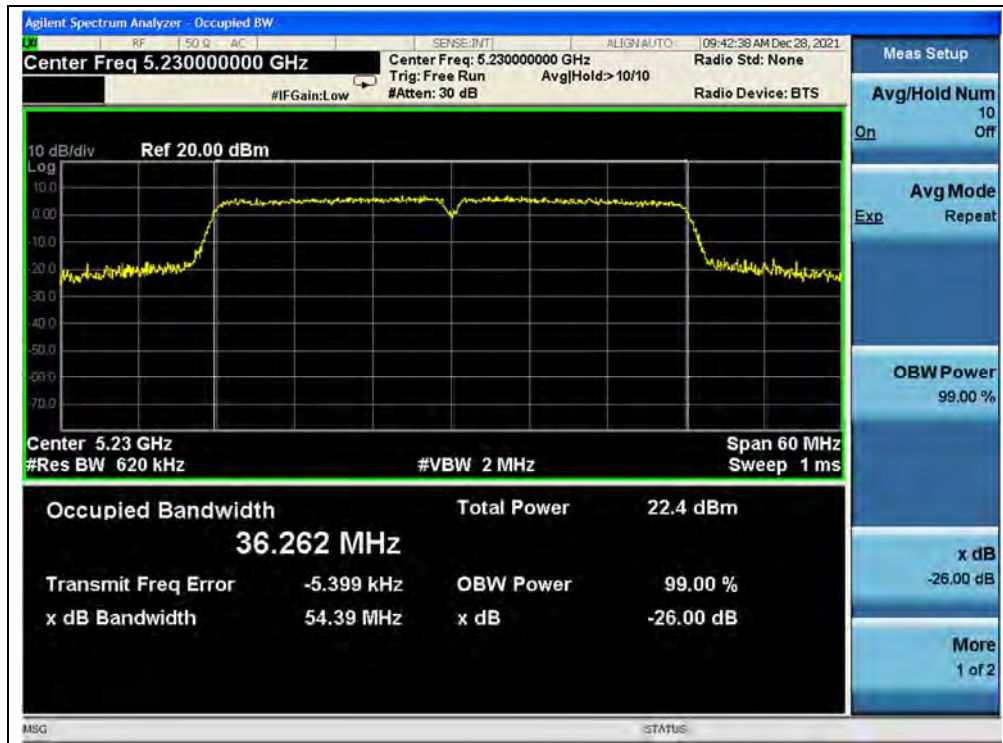

(Channel 46, 5230MHz, 802.11n (HT40))




(Channel 54, 5270MHz, 802.11n (HT40))

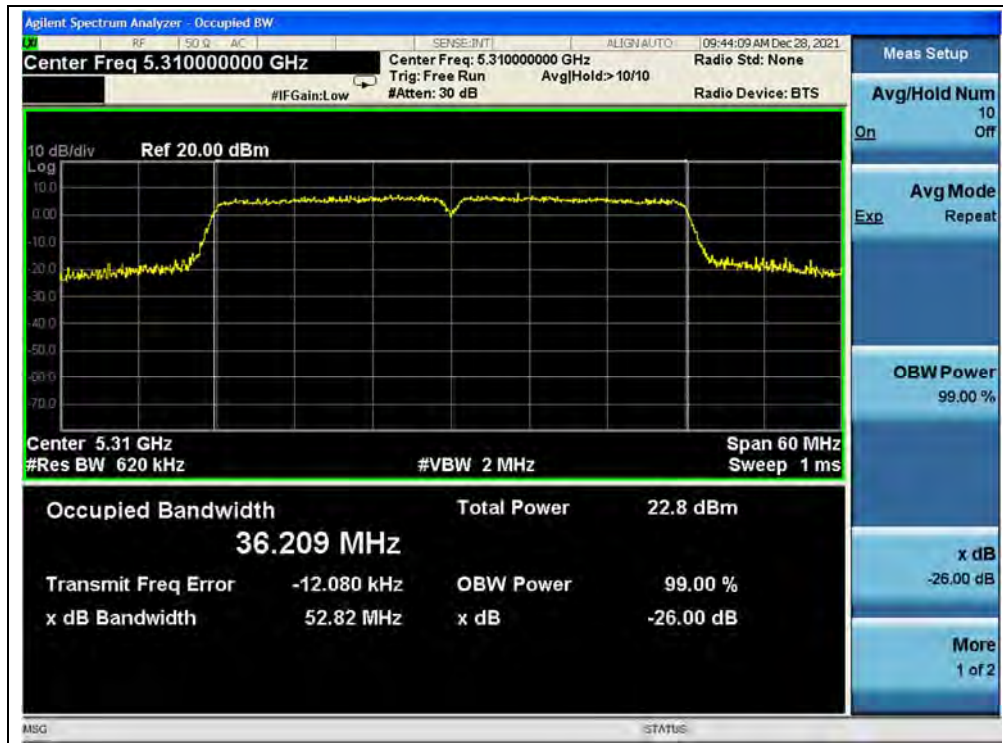

(Channel 62, 5310MHz, 802.11n (HT40))



(Channel 102, 5510MHz, 802.11n (HT40))

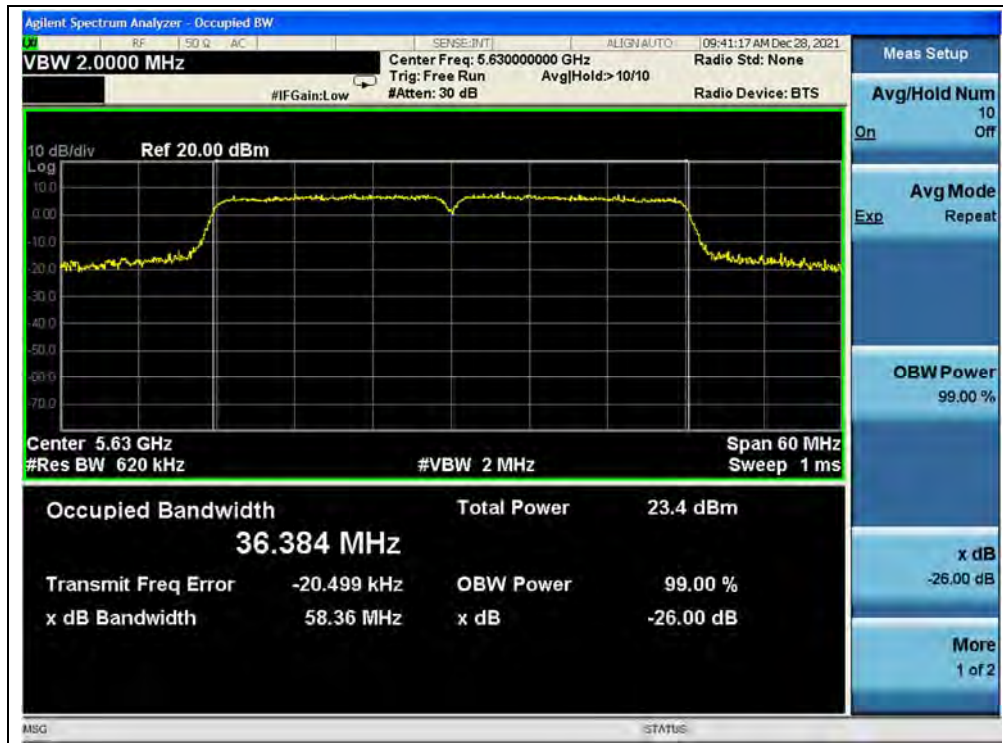

(Channel 126, 5630MHz, 802.11n (HT40))



(Channel 134, 5670MHz, 802.11n (HT40))



(Channel 151, 5755MHz, 802.11n (HT40))



(Channel 159, 5795MHz, 802.11n (HT40))



802.11ac (VHT20) Mode

A. Test Verdict:

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
36	5180	29.07
44	5220	27.46
48	5240	27.83
52	5260	29.22
60	5300	28.96
64	5320	28.16
100	5500	24.73
120	5600	28.62
140	5700	27.13
Channel	Frequency (MHz)	6 dB Bandwidth (MHz)
149	5745	17.32
157	5785	17.30
165	5825	17.32

B. Test Plot:




(Channel 36, 5180MHz, 802.11ac (VHT20))



(Channel 44, 5220MHz, 802.11ac (VHT20))



(Channel 48, 5240MHz, 802.11ac (VHT20))

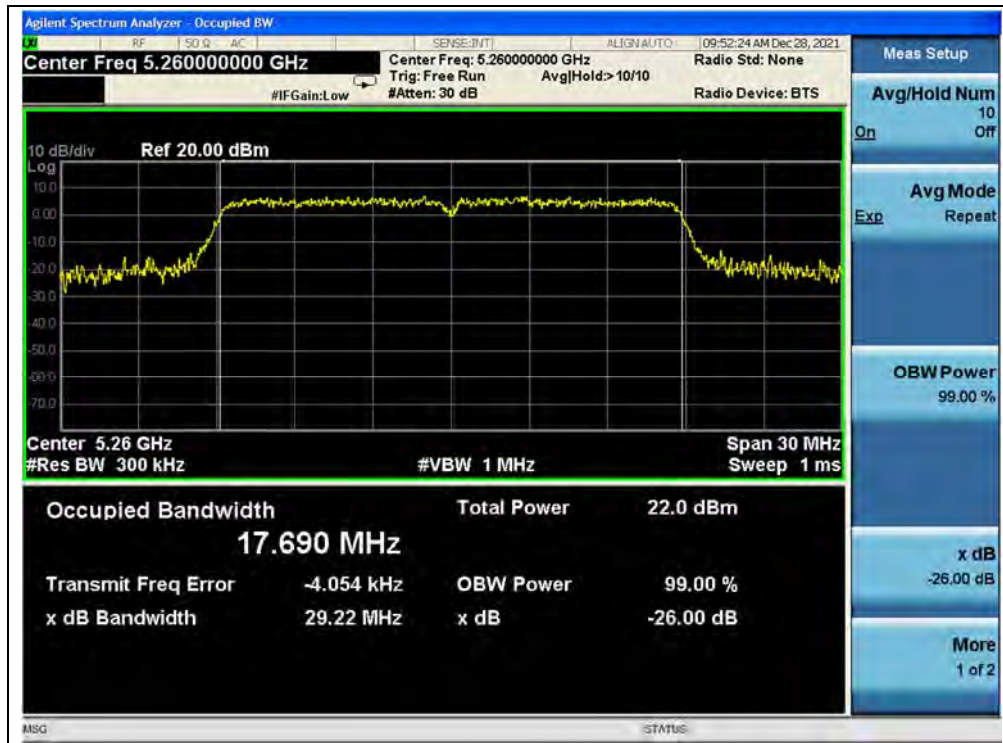

(Channel 52, 5260MHz, 802.11ac (VHT20))




(Channel 60, 5300MHz, 802.11ac (VHT20))



(Channel 64, 5320MHz, 802.11ac (VHT20))




(Channel 100, 5500MHz, 802.11ac (VHT20))

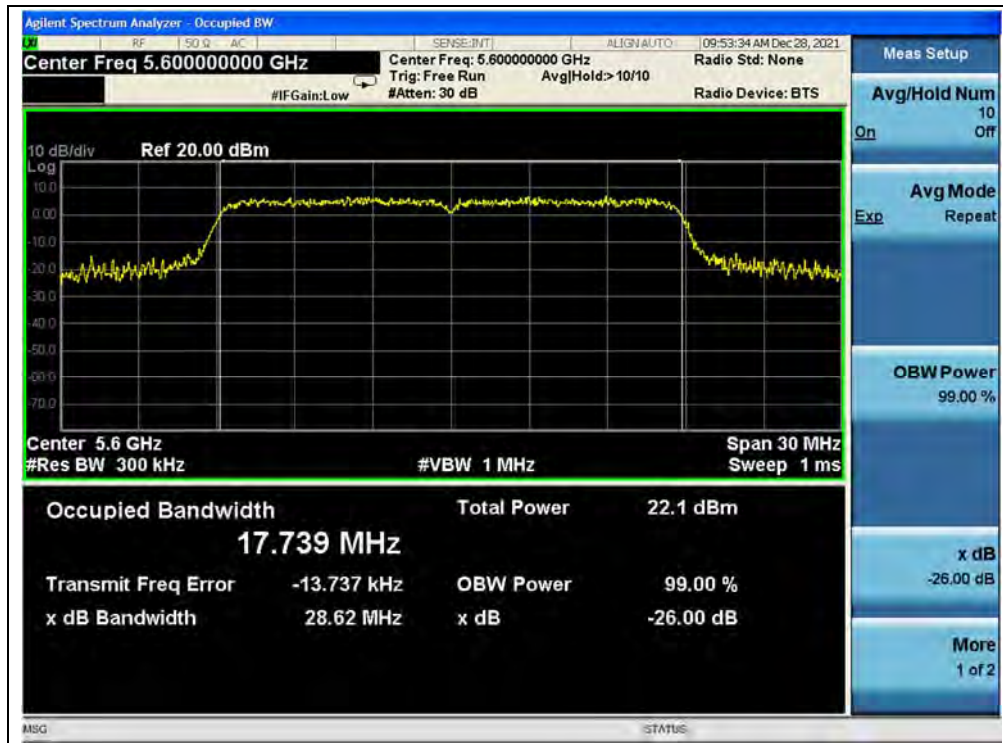

(Channel 120, 5600MHz, 802.11ac (VHT20))



(Channel 140, 5700MHz, 802.11ac (VHT20))

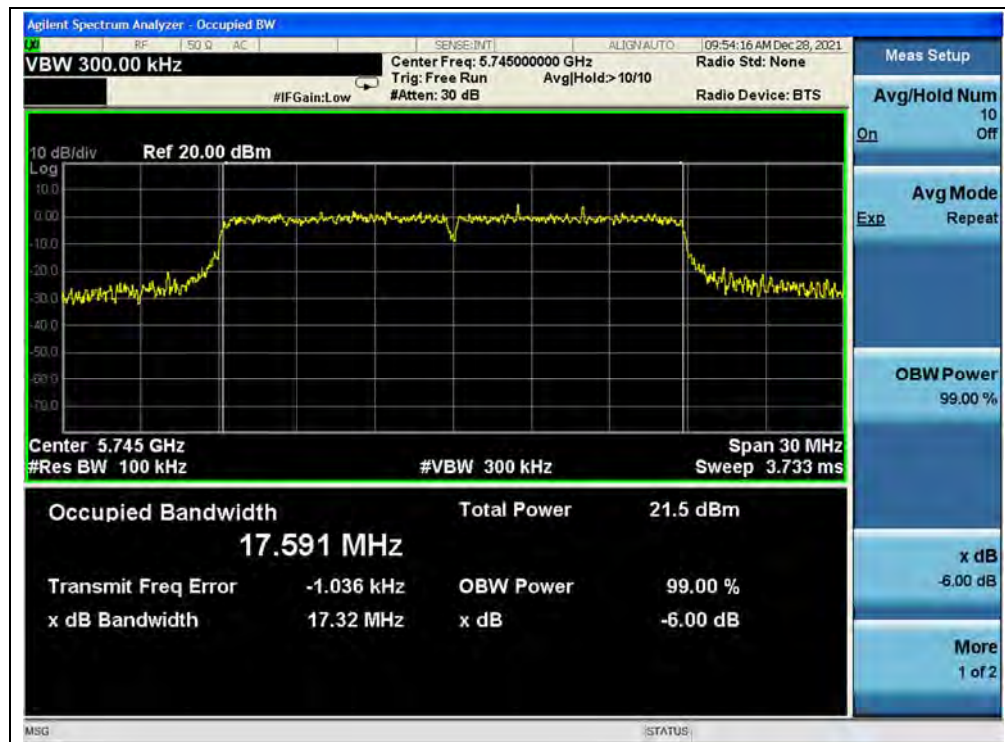

(Channel 149, 5745MHz, 802.11 ac (VHT20))



(Channel 157, 5785MHz, 802.11 ac (VHT20))



(Channel 165, 5825MHz, 802.11 ac (VHT20))



802.11ac (VHT40) Mode

A. Test Verdict:

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
38	5190	47.82
46	5230	41.88
54	5270	49.77
62	5310	46.61
102	5510	44.19
126	5630	43.19
134	5670	46.20
Channel	Frequency (MHz)	6 dB Bandwidth (MHz)
151	5755	35.41
159	5795	36.04

B. Test Plot:



(Channel 38, 5190MHz, 802.11ac (VHT40))



(Channel 46, 5230MHz, 802.11ac (VHT40))



(Channel 54, 5270MHz, 802.11ac (VHT40))



(Channel 62, 5310MHz, 802.11ac (VHT40))



(Channel 102, 5510MHz, 802.11ac (VHT40))



(Channel 126, 5630MHz, 802.11ac (VHT40))



(Channel 134, 5670MHz, 802.11ac (VHT40))




(Channel 151, 5755MHz, 802.11ac (VHT40))




(Channel 159, 5795MHz, 802.11ac (VHT40))

**802.11ac (VHT80) Mode****A. Test Verdict:**


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
42	5210	101.10
58	5290	93.05
106	5530	102.60
122	5610	93.18
138	5690	94.83
Channel	Frequency (MHz)	6 dB Bandwidth (MHz)
138	5690	75.87
155	5775	75.99

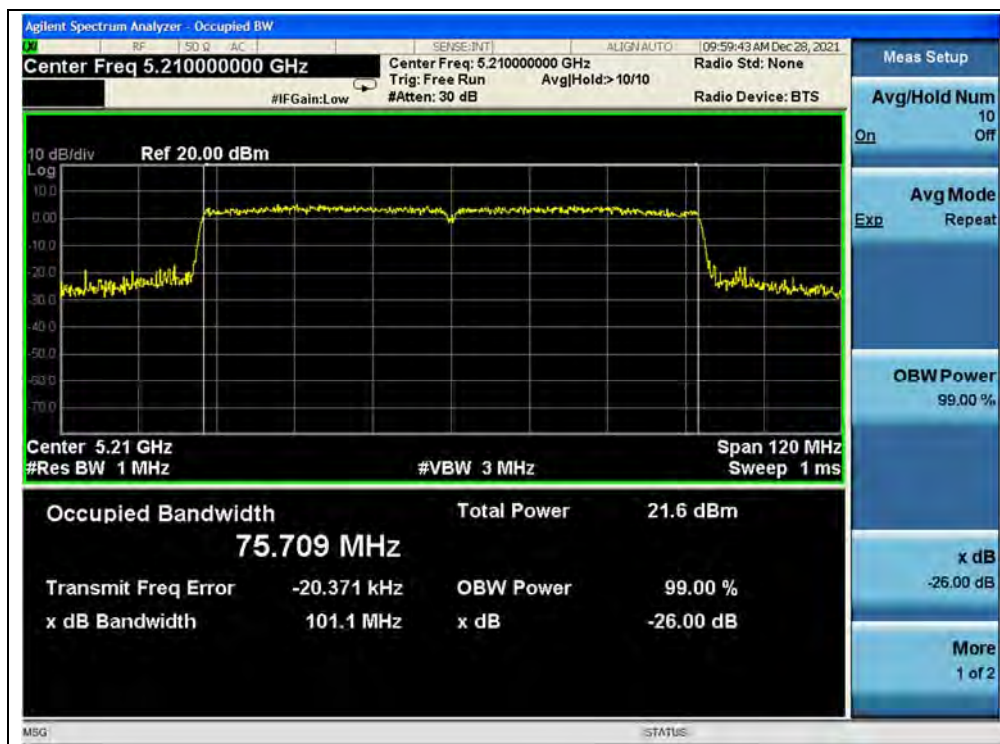B. Test Plot:

(Channel 42, 5210MHz, 802.11ac (VHT80))

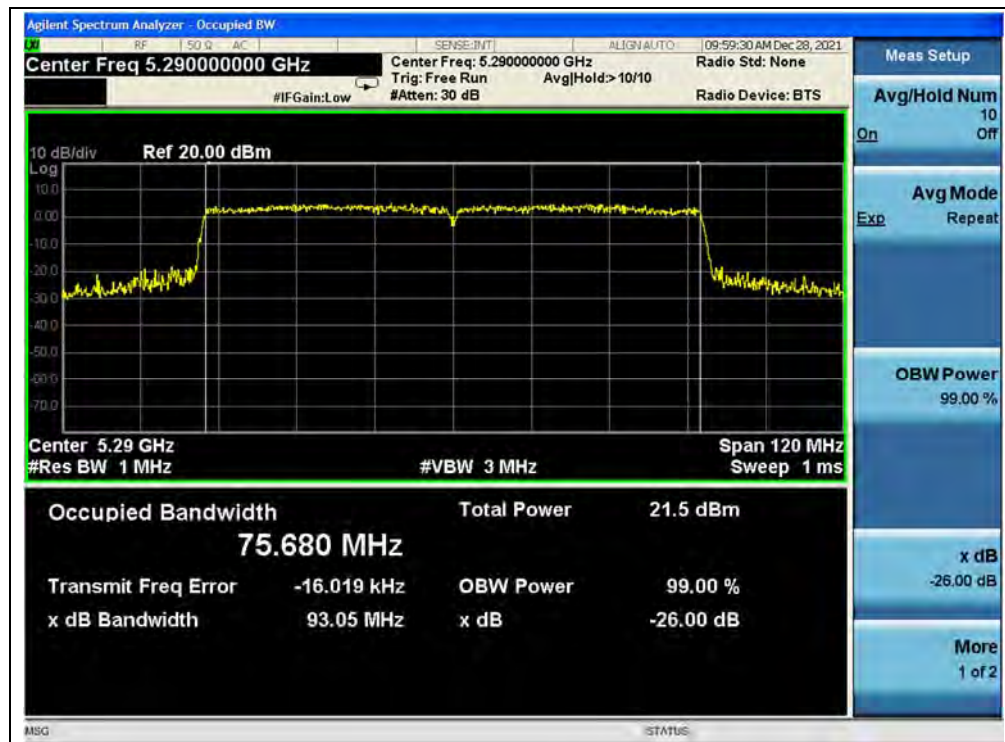

(Channel 58, 5290MHz, 802.11ac (VHT80))

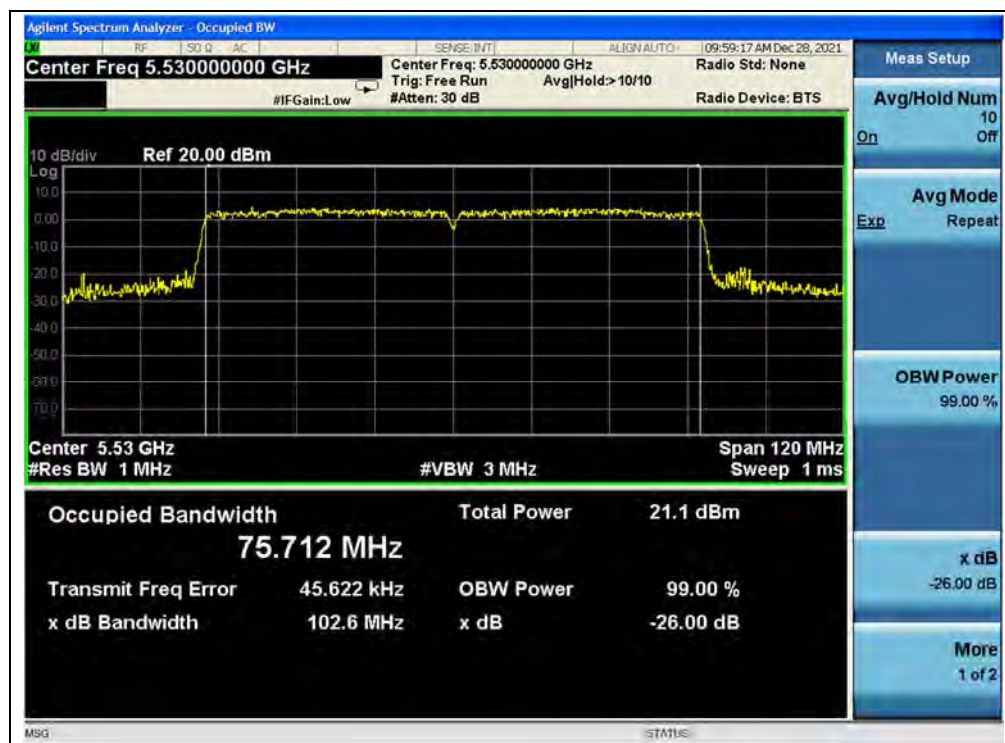


(Channel 106, 5530MHz, 802.11ac (VHT80))



(Channel 122, 5610MHz, 802.11ac (VHT80))



(Channel 138, 5690MHz, 802.11ac (VHT80))

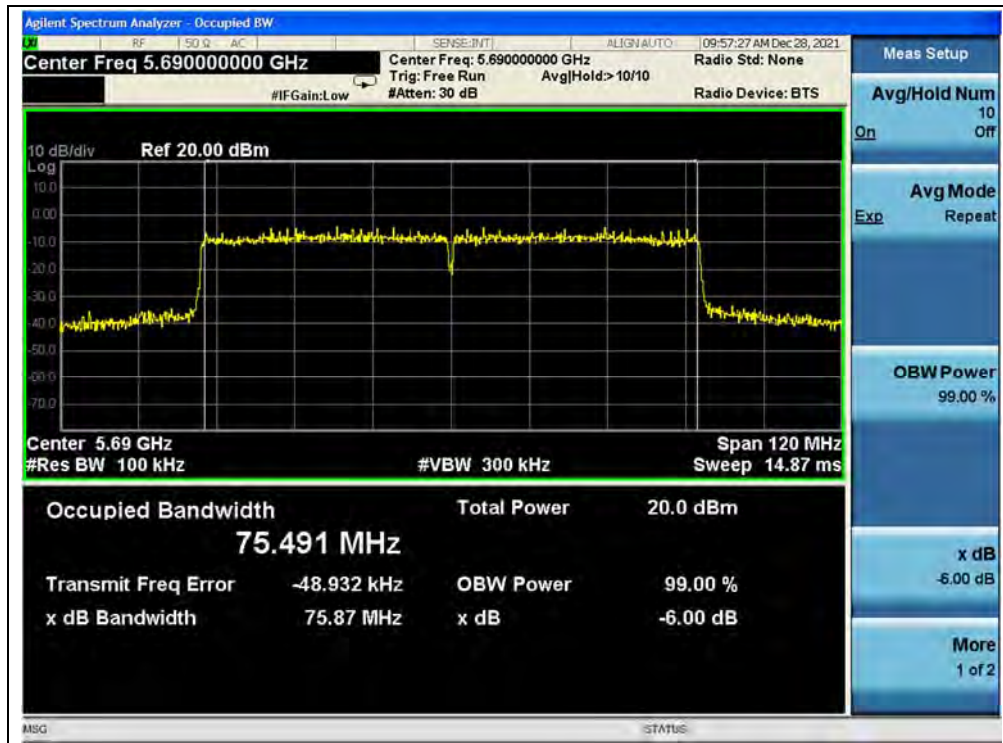

(Channel 138, 5690MHz, 802.11ac (VHT80))



(Channel 155, 5775MHz, 802.11ac (VHT80))

2.5. Peak Power Spectral Density

2.5.1. Requirement

(1) For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

(3) For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30dBm in any 500kHz band.


If transmitting antennas of directional gain greater than 6dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(4) According to KDB662911D01 Measure-and-sum technique, the conducted emission level (e.g., transmit power or power in specified bandwidth) is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in units that are directly proportional to power.

(5) According to KDB 662911 D01, the directional gain = $G_{ANT} + 10\log(N_{ANT})$ dBi, where G_{ANT} is the antenna gain in dBi, N_{ANT} is the number of outputs.

2.5.2. Test Description

Test Setup:

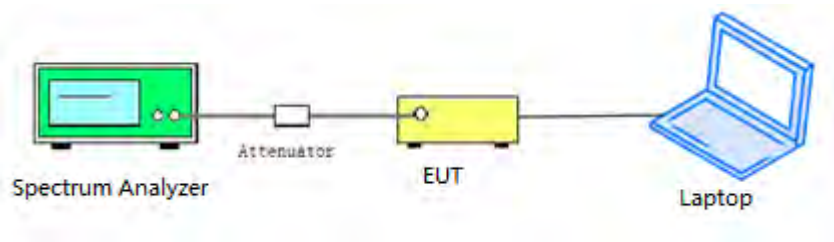

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.



2.5.3. Test Procedure

KDB 789033 Section F) Maximum Power Spectral Density (PSD) Method SA-3 was used in order to prove compliance

- 1) Set span to encompass the entire 26-dB emission bandwidth
- 2) Set RBW = 1MHz. Set VBW $\geq$ 3MHz
- 3) Number of points in sweep $\geq$ 2 Span / RBW. Sweep time = auto
- 4) Detector = Average
- 5) Trace mode=Max hold
- 6) Record the max value

2.5.4. Test Result

802.11a Mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured PPSD (dBm/MHz)	Duty Factor	Corrected PPSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
36	5180	6.08	0.40	6.48	11	PASS
44	5220	6.36		6.76		
48	5240	6.57		6.97		
52	5260	6.51		6.91		
60	5300	6.83		7.23		
64	5320	6.89		7.29		
100	5500	5.51		5.91		
120	5600	5.95		6.35		
140	5700	5.93		6.33		
Channel	Frequency (MHz)	Measured PPSD (dBm/500KHz)	Duty Factor	Corrected PPSD (dBm/500KHz)	Limit (dBm/500KHz)	Verdict
149	5745	3.51	0.40	3.91	30	PASS
157	5785	3.42		3.82		
165	5825	3.07		3.47		



B. Test Plot:



(Channel 36, 5180MHz, 802.11a)



(Channel 44, 5220MHz, 802.11a)



(Channel 48, 5240MHz, 802.11a)



(Channel 52, 5260MHz, 802.11a)



(Channel 60, 5300MHz, 802.11a)



(Channel 64, 5320MHz, 802.11a)



(Channel 100, 5500MHz, 802.11a)



(Channel 120, 5600MHz, 802.11a)



(Channel 140, 5700MHz, 802.11a)



(Channel 149, 5745MHz, 802.11a)



(Channel 157, 5785MHz, 802.11a)



(Channel 165, 5825MHz, 802.11a)

**802.11n (HT20) Mode****A. Test Verdict:**

Channel	Frequency (MHz)	Measured PPSD (dBm/MHz)	Duty Factor	Corrected PPSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
36	5180	5.73	0.40	6.13	11	PASS
44	5220	5.90		6.30		
48	5240	6.22		6.62		
52	5260	6.23		6.63		
60	5300	6.54		6.94		
64	5320	6.52		6.92		
100	5500	5.24		5.64		
120	5600	5.60		6.00		
140	5700	5.65		6.05		
Channel	Frequency (MHz)	Measured PPSD (dBm/500KHz)	Duty Factor	Corrected (dBm/500KHz)	Limit (dBm/500KHz)	Verdict
149	5745	3.80	0.09	4.20	30	PASS
157	5785	3.12		3.52		
165	5825	2.67		3.07		

B. Test Plot:



(Channel 36, 5180MHz, 802.11n (HT20))



(Channel 44, 5220MHz, 802.11n (HT20))



(Channel 48, 5240MHz, 802.11n (HT20))



(Channel 52, 5260MHz, 802.11n (HT20))



(Channel 60, 5300MHz, 802.11n (HT20))



(Channel 64, 5320MHz, 802.11n (HT20))




(Channel 100, 5500MHz, 802.11n (HT20))



(Channel 120, 5600MHz, 802.11n (HT20))



(Channel 140, 5700MHz, 802.11n (HT20))

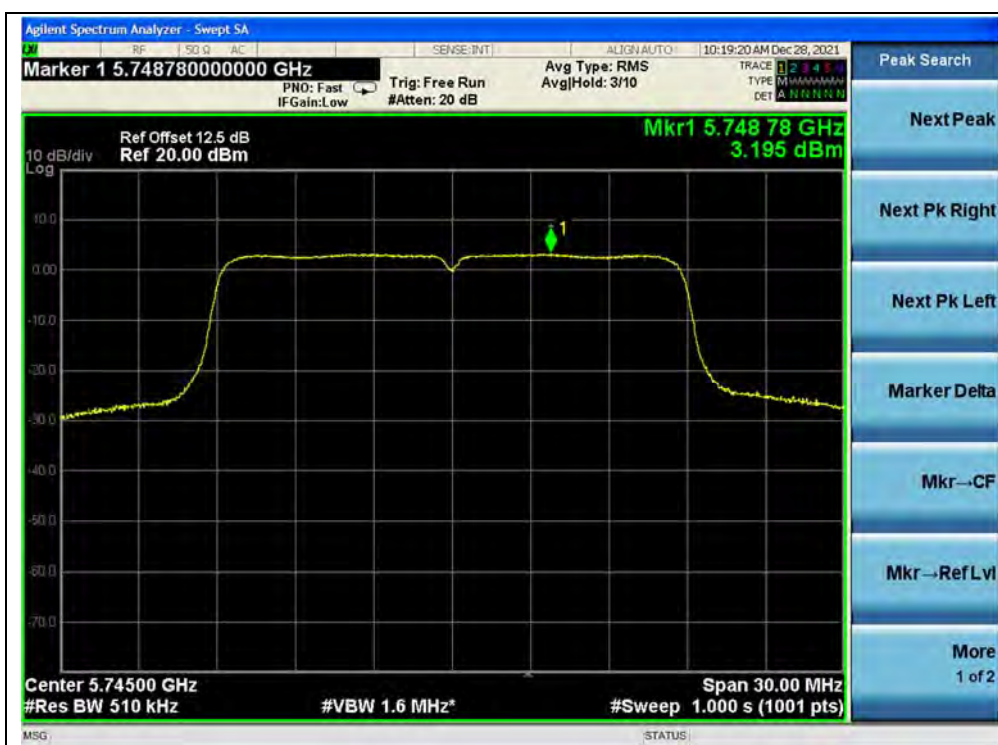

(Channel 149, 5745MHz, 802.11n (HT20))



(Channel 157, 5785MHz, 802.11n (HT20))



(Channel 165, 5825MHz, 802.11n (HT20))



802.11n (HT40) Mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured PSD (dBm/MHz)	Duty Factor	Corrected PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
38	5190	3.88	0.52	4.40	11	PASS
46	5230	4.02		4.54		
54	5270	4.20		4.72		
62	5310	4.23		4.75		
102	5510	2.94		3.46		
126	5630	3.74		4.26		
134	567	3.40		3.92		
Channel	Frequency (MHz)	Measured PSD (dBm/500KHz)	Duty Factor	Corrected (dBm/500KHz)	Limit (dBm/500KHz)	Verdict
151	5755	1.13	0.52	1.65	30	PASS
159	5795	0.61		1.13		

B. Test Plot:



(Channel 38, 5190MHz, 802.11n (HT40))



(Channel 46, 5230MHz, 802.11n (HT40))



(Channel 54, 5270MHz, 802.11n (HT40))



(Channel 62, 5310MHz, 802.11n (HT40))



(Channel 102, 5510MHz, 802.11n (HT40))



(Channel 126, 5630 MHz, 802.11n (HT40))



(Channel 134, 5670MHz, 802.11n (HT40))



(Channel 151, 5755MHz, 802.11n (HT40))



(Channel 159, 5795MHz, 802.11n (HT40))

**802.11ac (VHT20) Mode****A. Test Verdict:**

Channel	Frequency (MHz)	Measured PPSD (dBm/MHz)	Duty Factor	Corrected PPSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
36	5180	5.60	0.41	6.01	11	PASS
44	5220	5.92		6.33		
48	5240	6.14		6.55		
52	5260	6.09		6.50		
60	5300	6.47		6.88		
64	5320	6.43		6.84		
100	5500	5.13		5.54		
120	5600	5.62		6.03		
140	5700	5.69		6.10		
Channel	Frequency (MHz)	Measured PPSD (dBm/500KHz)	Duty Factor	Corrected (dBm/500KHz)	Limit (dBm/500KHz)	Verdict
149	5745	3.26	0.41	3.67	30	PASS
157	5785	3.16		3.57		
165	5825	2.76		3.17		

B. Test Plot:



(Channel 36, 5180MHz, 802.11ac (VHT20))



(Channel 44, 5220MHz, 802.11ac (VHT20))



(Channel 48, 5240MHz, 802.11ac (VHT20))



(Channel 52, 5260MHz, 802.11ac (VHT20))



(Channel 60, 5300MHz, 802.11ac (VHT20))



(Channel 64, 5320MHz, 802.11ac (VHT20))