

Test Report

FCC Part 15.247



Equipment under test brid.zzz**Model name** SLDHF1**FCC ID** 2A2OI-SLDHF1**Applicant** DEVICEDSIGN CO. ,LTD**Manufacturer** DEVICEDSIGN CO. ,LTD**Date of test(s)** 2023.03.21 ~ 2023.04.10**Date of issue** 2023.04.11**Issued to****DEVICEDSIGN CO. ,LTD**#815 AceGwanggyoTower, 17, Daehak 4-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, Korea

Tel: +82- 031-221-1655 / Fax: +82-031-221-1641

Issued by**KES Co., Ltd.**3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si,
Gyeonggi-do, 14057, Korea

473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, Korea

Tel: +82-31-425-6200 / Fax: +82-31-424-0450

Test and report completed by :	Report approval by :
	
Do-won, Ahn Test engineer	Young-Jin Lee Technical manager

This test report is not related to KS Q ISO/IEC 17025 and KOLAS.

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-RF-23T0053

Page (2) of (73)

Revision history

Revision	Date of issue	Test report No.	Description
-	2023.04.11	KES-RF-23T0053	Initial

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

TABLE OF CONTENTS

1.	General information	4
1.1.	EUT description	4
1.2.	Requirements for Bluetooth transmitter	5
1.3.	Test configuration	6
1.4.	Information about derivative model	6
1.5.	Accessory information	6
1.6.	Sample calculation	6
1.7.	Measurement Uncertainty	6
1.8.	Frequency/channel operations	7
2.	Summary of tests	8
3.	Test results	9
3.1.	20 dB bandwidth	9
3.2.	Output power	15
3.3.	Carrier frequency separation	17
3.4.	Number of hopping frequency	19
3.5.	Time of occupancy	22
3.6.	Radiated restricted band and emissions	29
3.7.	Conducted band edge and out of band emissions	65
Appendix A.	Measurement equipment	72
Appendix B.	Test setup photo	73

1. General information

Applicant: DEVICEDESIGN CO., LTD
Applicant address: #815 AceGwanggyoTower, 17, Daehak 4-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, Korea
Test site: KES Co., Ltd.
Test site address: ☐ 3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
☒ 473-21, Gayeo-ro, Yeoju-si, Gyeonggi-do, Korea
Test Facility FCC Accreditation Designation No.: KR0100, Registration No.: 444148
ISED Registration No.: 23298
FCC rule part(s): 15.247
FCC ID: 2A2OI-SLDHF1
Test device serial No.: ☒ Production ☐ Pre-production ☐ Engineering

1.1. EUT description

Equipment under test brid.zzz
Frequency range **2 402 MHz ~ 2 480 MHz (BDR/EDR)**
2 402 MHz ~ 2 480 MHz (LE 1Mbps)
Model SLDHF1
Modulation technique **GFSK, $\pi/4$ QPSK, 8DPSK**
Number of channels **2 402 MHz ~ 2 480 MHz (BDR/EDR) : 79ch**
2 402 MHz ~ 2 480 MHz (LE 1Mbps) : 40ch
Antenna specification FPCB Antenna // Peak gain: 0.73 dBi (Left)
FPCB Antenna // Peak gain: 1.11 dBi (Right)
Power source DC 3.7 V
H/W Version 1.2
S/W Version 1.0
Serial Number BZ23100001

1.2. Requirements for Bluetooth transmitter

15.247(a)(1) that the rx input bandwidths shift frequencies in synchronization with the transmitted signals.

Pseudorandom frequency hopping sequence

The channel is represented by a pseudo-random hopping sequence hopping through the 79 RF channels. The hopping sequence is unique for the piconet and is determined by the Bluetooth device address of the master; the phase in the hopping sequence is determined by the Bluetooth clock of the master. The channel is divided into time slots where each slot corresponds to an RF hop frequency. Consecutive hops correspond to different RF hop frequencies. The nominal hop rate is 1 600 hops/s.

Equal hopping frequency use

The channels of this system will be used equally over the long-term distribution of the hopsets.

Example of a 79 hopping sequence in data mode:

67, 41, 2, 34, 4, 8, 73, 22, 50, 3, 56, 11, 77, 54, 7, 35, 27, 40, 62, 42, 29, 14, 72, 53, 36, 13, 12, 17, 48, 70, 26, 16, 19, 31, 18, 25, 60, 23, 30, 45, 46, 6, 52, 44, 75, 74, 55, 65, 00, 68, 57, 63, 1, 37, 38, 33, 64, 78, 47, 51, 20, 15, 32, 76, 49, 21, 61, 71, 69, 10, 5, 39, 66, 58, 43, 59, 9, 28, 24, 72, 50, 18, 25, 54, 22, 23, 39, 33, 37, 29, 13, 56, 74, 78, 49, 40, 1, 7, 63, 6, 46, 57, 15, 36, 16, 5, 28, 4, 69, 26, 30, 77, 9, 3, 52, 67, 47, 68, 73, 44, 64, 45, 42, 41, 70, 8, 31, 34, 00, 58, 35, 43, 24, 61, 76, 11, 27, 38, 71, 66, 32, 60, 20, 55, 21, 48, 12, 65, 10, 51, 53, 17, 75, 14, 59, 62, 19, 2

System receiver input bandwidth

Each channel bandwidth is 1 MHz.

The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

15.247(g): In accordance with the Bluetooth Industry Standard, the system is designed to comply with all of the regulations in Section 15.247 when the transmitter is presented with a continuous data (or information) system.

15.247(h): In accordance with the Bluetooth Industry Standard, the system does not coordinate its channels selection/ hopping sequence with other frequency hopping systems for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters.

1.3. Test configuration

The **DEVICEDESIGN CO.,LTD // brid.zzz // SLDHF1 // FCC ID: 2A2OI-SLDHF1**

was tested according to the specification of EUT, the EUT must comply with following standards and KDB documents.

FCC Part 15.247

KDB 558074 D01 v05 r02

ANSI C63.10-2013

1.4. Information about derivative model

N/A

1.5. Accessory information

Equipment	Manufacturer	Model	Serial No.	Power source
-	-	-	-	-

1.6. Sample calculation

Where relevant, the following sample calculation is provided

For all conducted test items :

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 0.56 + 10 = 10.56 \text{ (dB)}\end{aligned}$$

For Radiation test :

Field strength level (dB μ V/m) = Measured level (dB μ V) + Antenna factor (dB) + Cable loss (dB) – Amplifier gain (dB)

1.7. Measurement Uncertainty

Test Item		Uncertainty
Uncertainty for Conduction emission test		2.38 dB
Uncertainty for Radiation emission test (include Fundamental emission)	Below 1GHz	4.50 dB
	Above 1GHz	4.90 dB
Note. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.		

1.8. Frequency/channel operations

Ch.	Frequency (MHz)	Mode
00	2 402	BDR 1 Mbps, EDR 2 Mbps, EDR 3 Mbps
.	.	.
40	2 442	BDR 1 Mbps, EDR 2 Mbps, EDR 3 Mbps
.	.	.
78	2 480	BDR 1 Mbps, EDR 2 Mbps, EDR 3 Mbps

Ch.	Frequency (MHz)	Mode
00	2 402	BLE 1 Mbps
.	.	.
20	2 442	BLE 1 Mbps
.	.	.
39	2 480	BLE 1 Mbps

2. Summary of tests


Section in FCC Part 15	Parameter	Test results
15.247(a)(1)(iii)	20 dB bandwidth	Pass
15.247(b)(1)	Output power	Pass
15.247(a)(1)	Channel separation	Pass
15.247(a)(1)(iii)	Number of channels	Pass
15.247(a)(1)(iii)	Time of occupancy	Pass
15.205, 15.209	Radiated restricted band and emission	Pass
15.207(a)	AC Conducted emissions	N/A ⁽¹⁾
15.207(d)	Conducted spurious emission and band edge	Pass

Note.

1. This product is powered by lithium coin battery DC 3.7V.
2. By the request of the applicant, test was performed with condition below:
Setting power : BDR 1 Mbps: 5
EDR 2 Mbps: 5
EDR 3 Mbps: 5

3. Test results**3.1. 20 dB bandwidth****Test procedure**

ANSI 63.10-2013

Test setup**Test setting**

1. Span = Set between two times and five times the OBW
2. RBW $\geq 1\%$ to 5% of the OBW
3. VBW $\geq 3 * RBW$
4. Sweep = Auto
5. Detector function = Peak
6. Sweep = Auto couple
7. Trace mode = Max hold
8. All the trace to stabilize

Limit


Not applicable

(Right)


Frequency(MHz)	Channel no.	Data rate(Mbps)	Measured bandwidth(MHz)
2 402	00	BDR 1 Mbps	0.819
2 442	40		0.814
2 480	78		0.814
2 402	00	EDR 2 Mbps	1.329
2 442	40		1.329
2 480	78		1.329
2 402	00	EDR 3 Mbps	1.284
2 442	40		1.289
2 480	78		1.279

(Left)


Frequency(MHz)	Channel no.	Data rate(Mbps)	Measured bandwidth(MHz)
2 402	00	BDR 1 Mbps	0.819
2 442	40		0.844
2 480	78		0.819
2 402	00	EDR 2 Mbps	1.329
2 442	40		1.329
2 480	78		1.329
2 402	00	EDR 3 Mbps	1.289
2 442	40		1.294
2 480	78		1.289

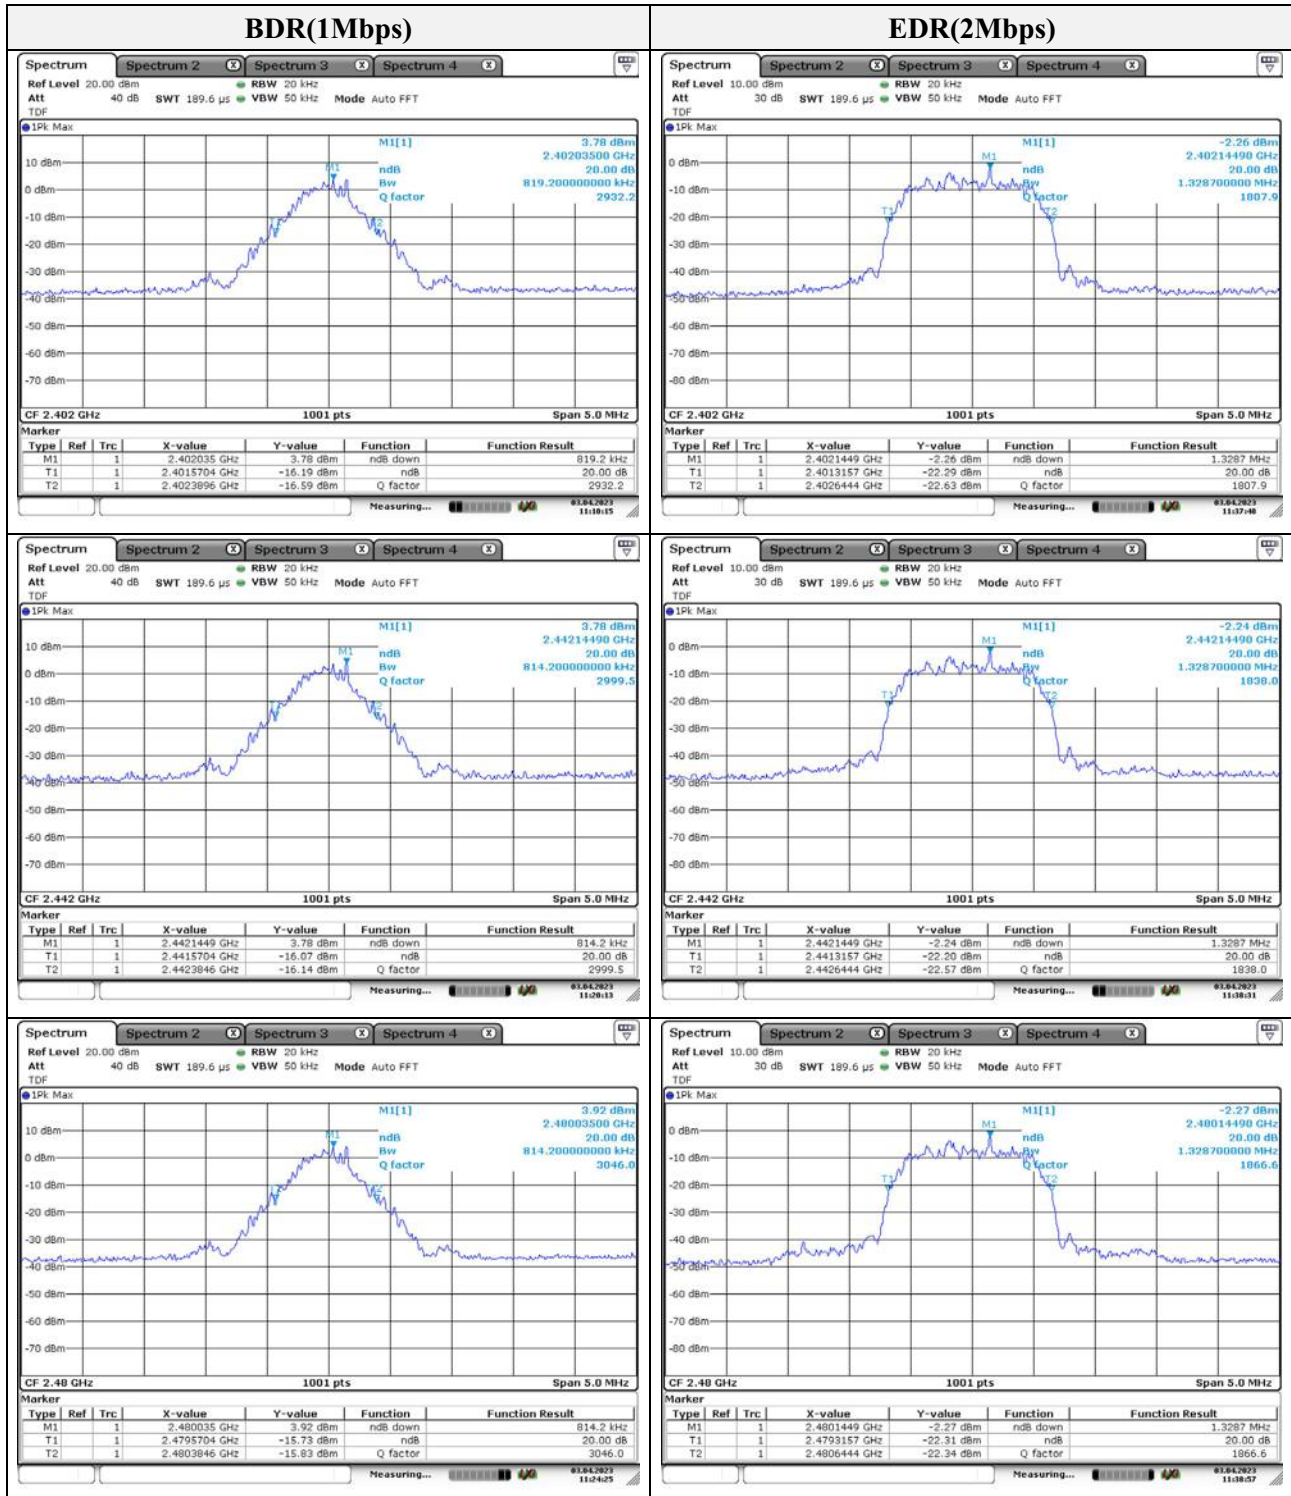




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

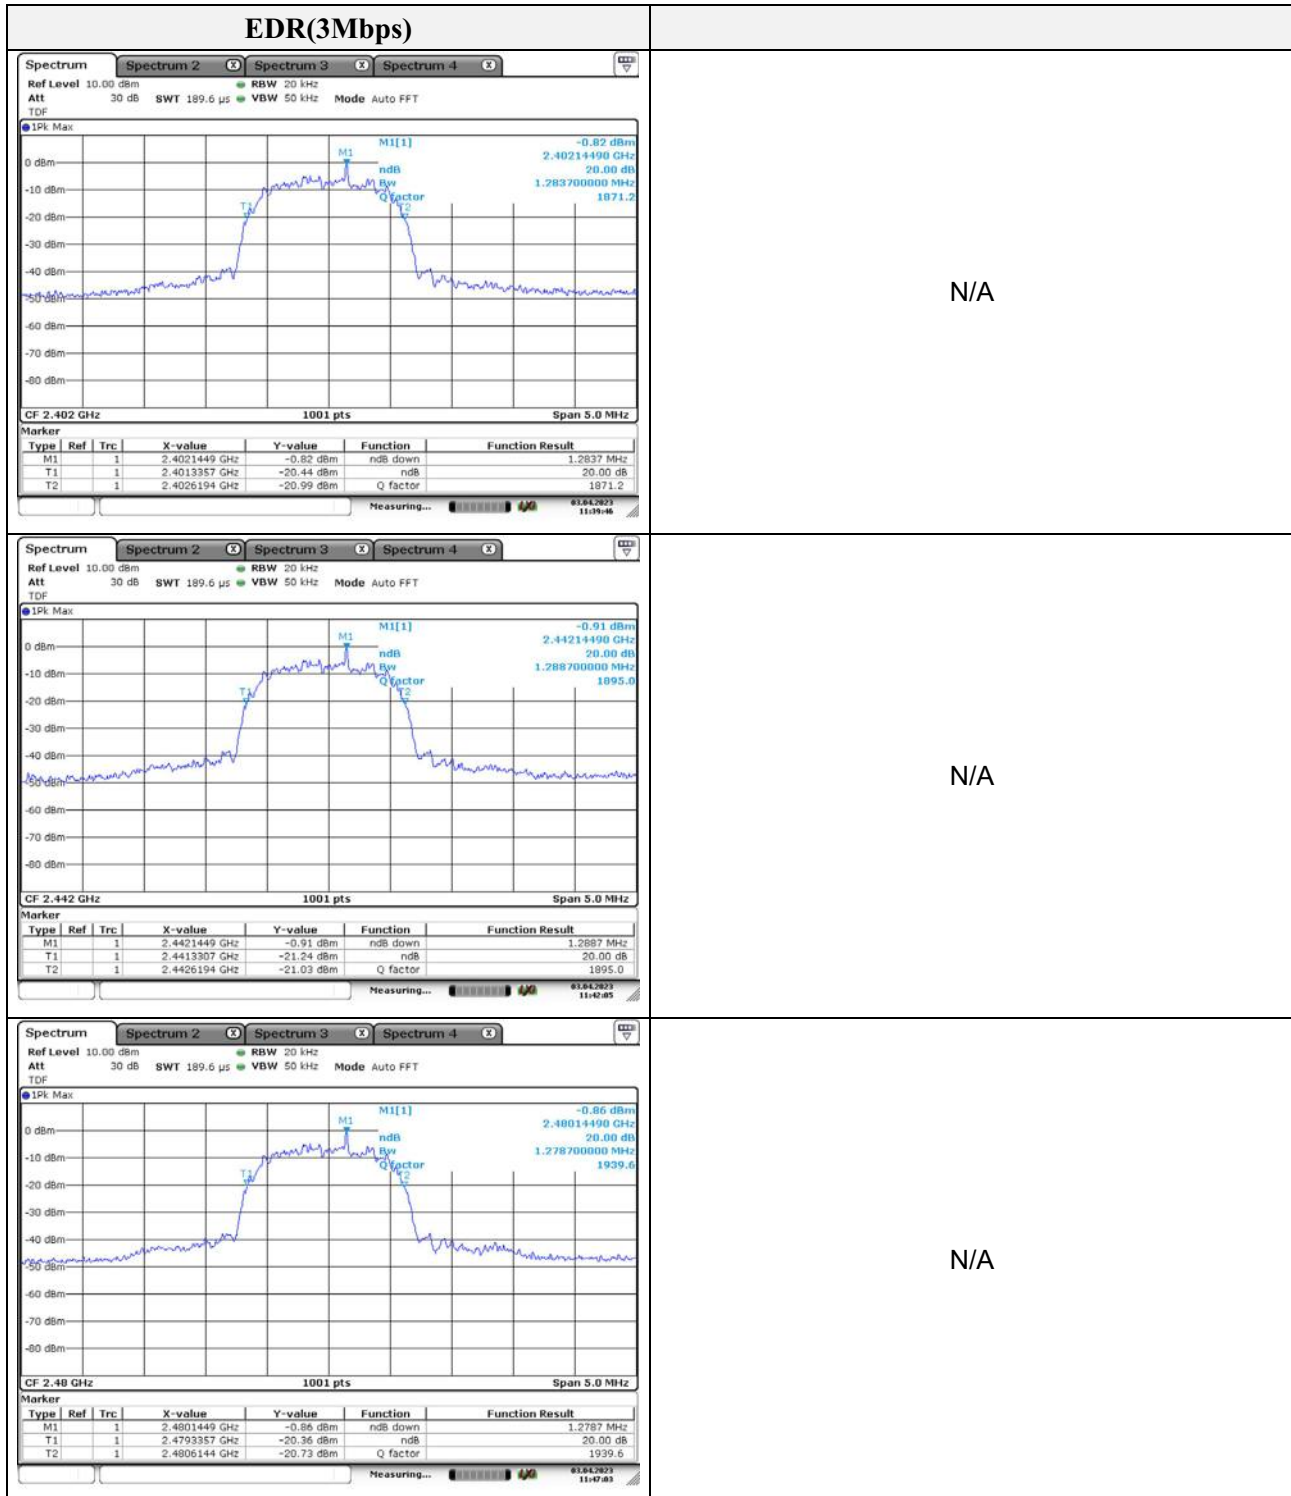

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

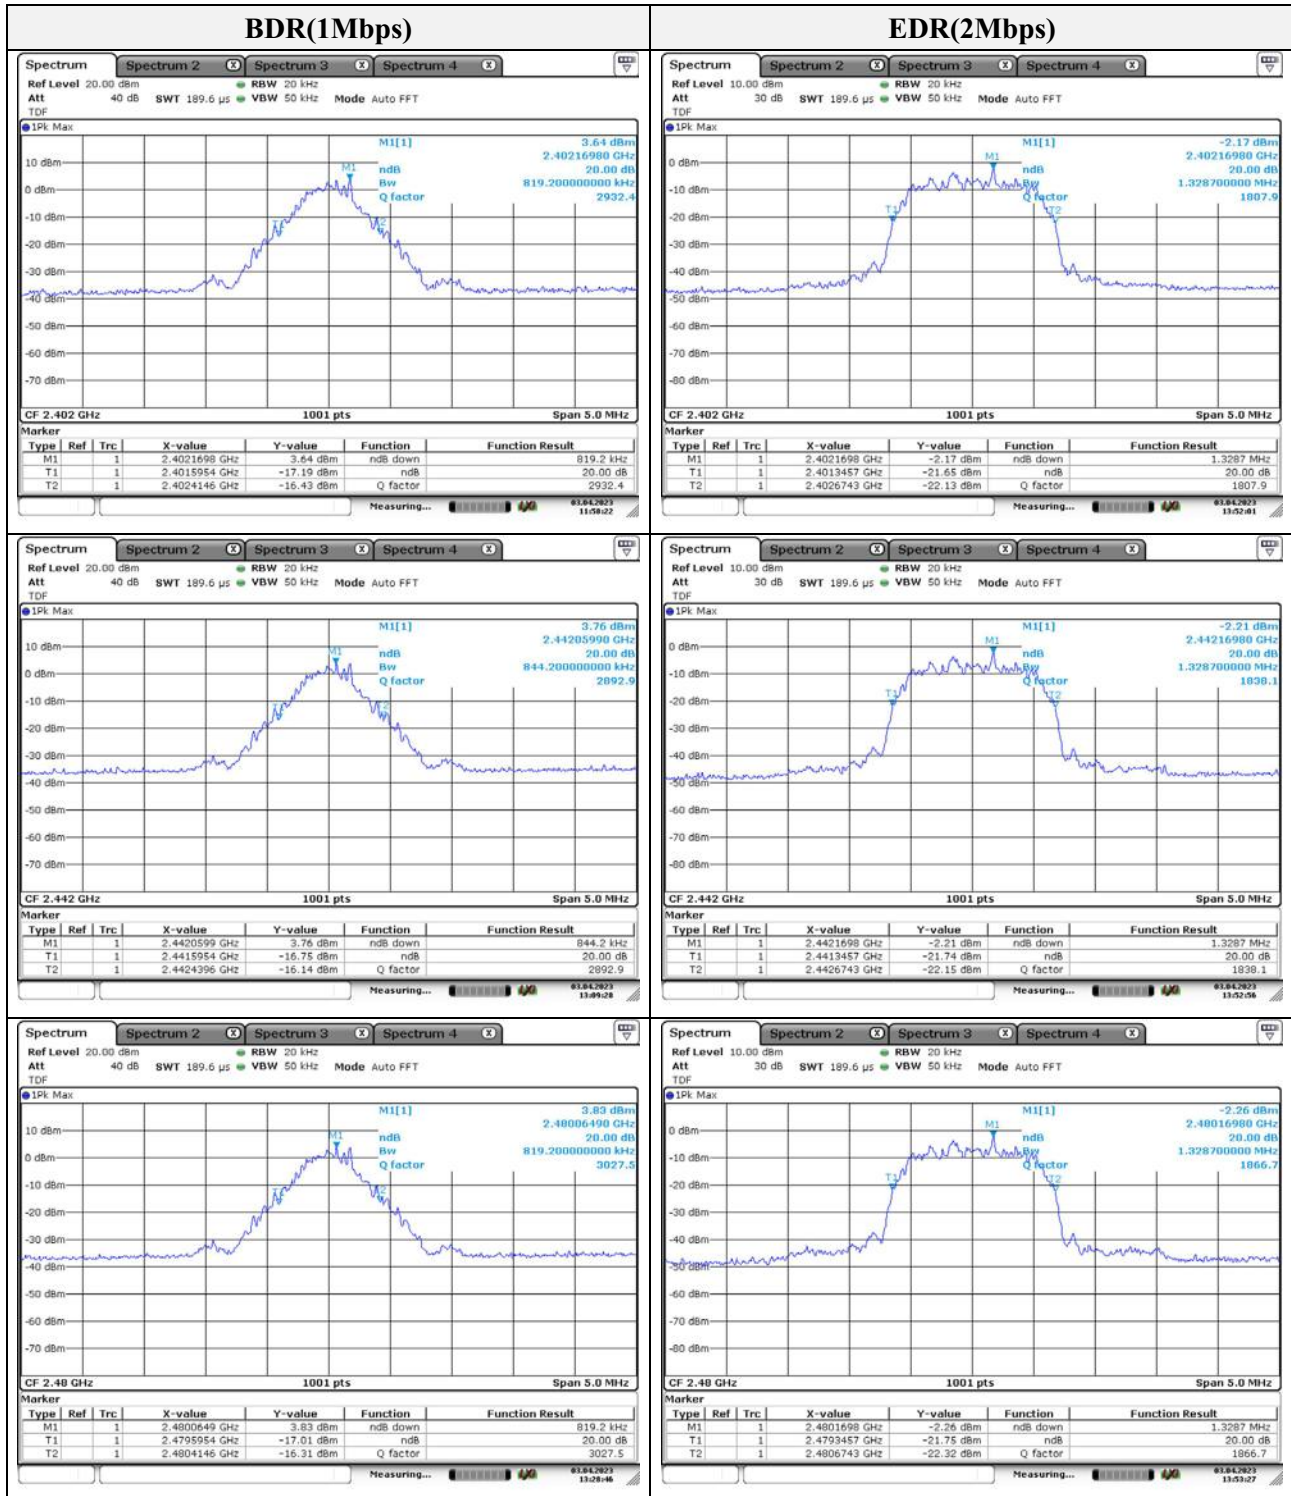

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

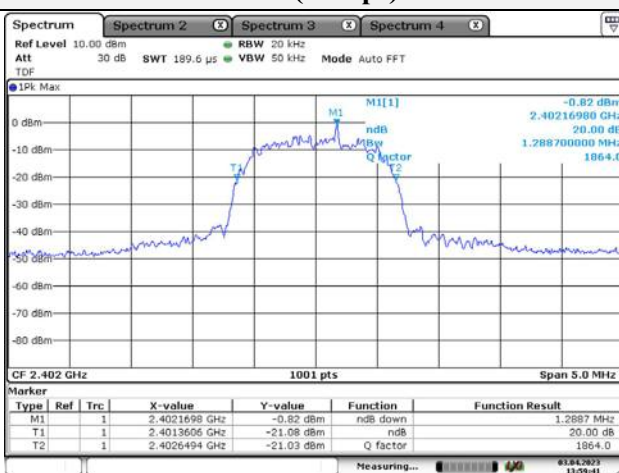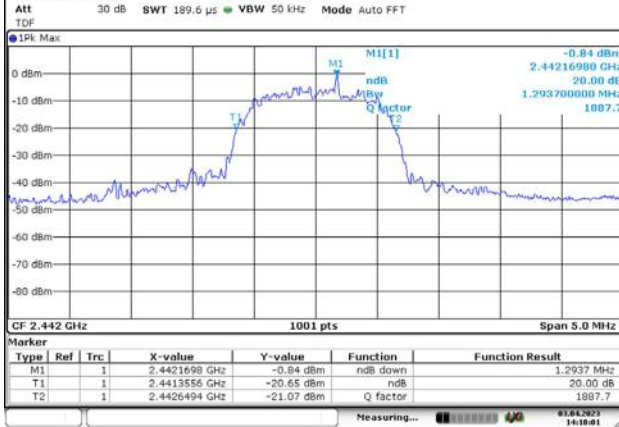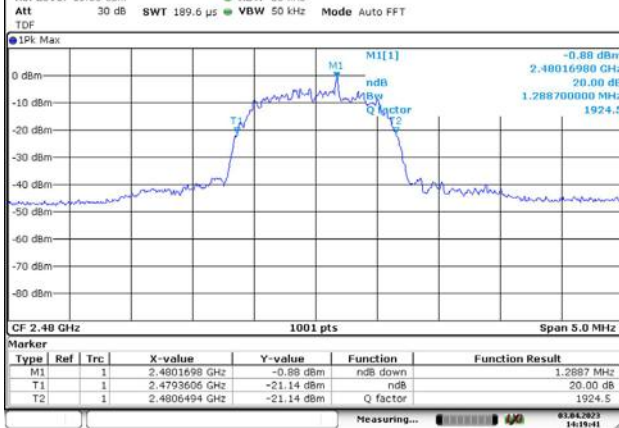
<div>EDR(3Mbps)</div> <div><div>Spectrum</div><div><div>Spectrum 2</div><div>Spectrum 3</div><div>Spectrum 4</div></div><div>Ref Level 10.00 dBm Att 30 dB SWT 189.6 μs RBW 20 kHz VBW 50 kHz Mode Auto FFT TDF</div><div><div>1PK Max</div><div></div></div><div>CF 2.402 GHz 1001 pts Span 5.0 MHz</div><div><table><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-value</th><th>Y-value</th><th>Function</th><th>Function Result</th></tr><tr><td>M1</td><td>1</td><td></td><td>2.4021698 GHz</td><td>-0.82 dBm</td><td>ndb down</td><td>1.2887 MHz</td></tr><tr><td>T1</td><td>1</td><td></td><td>2.4013606 GHz</td><td>-21.08 dBm</td><td>ndb</td><td>20.00 dB</td></tr><tr><td>T2</td><td>1</td><td></td><td>2.4026494 GHz</td><td>-21.03 dBm</td><td>Q factor</td><td>1864.0</td></tr></table></div><div>Measuring... 81.84.2923 13:59:41</div></div>		Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.4021698 GHz	-0.82 dBm	ndb down	1.2887 MHz	T1	1		2.4013606 GHz	-21.08 dBm	ndb	20.00 dB	T2	1		2.4026494 GHz	-21.03 dBm	Q factor	1864.0	N/A
Type	Ref	Trc	X-value	Y-value	Function	Function Result																								
M1	1		2.4021698 GHz	-0.82 dBm	ndb down	1.2887 MHz																								
T1	1		2.4013606 GHz	-21.08 dBm	ndb	20.00 dB																								
T2	1		2.4026494 GHz	-21.03 dBm	Q factor	1864.0																								
<div><div>Spectrum</div><div><div>Spectrum 2</div><div>Spectrum 3</div><div>Spectrum 4</div></div><div>Ref Level 10.00 dBm Att 30 dB SWT 189.6 μs RBW 20 kHz VBW 50 kHz Mode Auto FFT TDF</div><div><div>1PK Max</div><div></div></div><div>CF 2.442 GHz 1001 pts Span 5.0 MHz</div><div><table><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-value</th><th>Y-value</th><th>Function</th><th>Function Result</th></tr><tr><td>M1</td><td>1</td><td></td><td>2.4421698 GHz</td><td>-0.84 dBm</td><td>ndb down</td><td>1.2937 MHz</td></tr><tr><td>T1</td><td>1</td><td></td><td>2.4413556 GHz</td><td>-20.65 dBm</td><td>ndb</td><td>20.00 dB</td></tr><tr><td>T2</td><td>1</td><td></td><td>2.4426494 GHz</td><td>-21.07 dBm</td><td>Q factor</td><td>1887.7</td></tr></table></div><div>Measuring... 81.84.2923 14:10:01</div></div>		Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.4421698 GHz	-0.84 dBm	ndb down	1.2937 MHz	T1	1		2.4413556 GHz	-20.65 dBm	ndb	20.00 dB	T2	1		2.4426494 GHz	-21.07 dBm	Q factor	1887.7	N/A
Type	Ref	Trc	X-value	Y-value	Function	Function Result																								
M1	1		2.4421698 GHz	-0.84 dBm	ndb down	1.2937 MHz																								
T1	1		2.4413556 GHz	-20.65 dBm	ndb	20.00 dB																								
T2	1		2.4426494 GHz	-21.07 dBm	Q factor	1887.7																								
<div><div>Spectrum</div><div><div>Spectrum 2</div><div>Spectrum 3</div><div>Spectrum 4</div></div><div>Ref Level 10.00 dBm Att 30 dB SWT 189.6 μs RBW 20 kHz VBW 50 kHz Mode Auto FFT TDF</div><div><div>1PK Max</div><div></div></div><div>CF 2.48 GHz 1001 pts Span 5.0 MHz</div><div><table><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-value</th><th>Y-value</th><th>Function</th><th>Function Result</th></tr><tr><td>M1</td><td>1</td><td></td><td>2.4801698 GHz</td><td>-0.88 dBm</td><td>ndb down</td><td>1.2887 MHz</td></tr><tr><td>T1</td><td>1</td><td></td><td>2.4793606 GHz</td><td>-21.14 dBm</td><td>ndb</td><td>20.00 dB</td></tr><tr><td>T2</td><td>1</td><td></td><td>2.4806494 GHz</td><td>-21.14 dBm</td><td>Q factor</td><td>1924.5</td></tr></table></div><div>Measuring... 81.84.2923 14:19:41</div></div>		Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.4801698 GHz	-0.88 dBm	ndb down	1.2887 MHz	T1	1		2.4793606 GHz	-21.14 dBm	ndb	20.00 dB	T2	1		2.4806494 GHz	-21.14 dBm	Q factor	1924.5	N/A
Type	Ref	Trc	X-value	Y-value	Function	Function Result																								
M1	1		2.4801698 GHz	-0.88 dBm	ndb down	1.2887 MHz																								
T1	1		2.4793606 GHz	-21.14 dBm	ndb	20.00 dB																								
T2	1		2.4806494 GHz	-21.14 dBm	Q factor	1924.5																								

3.2. Output power

Test procedure

KDB 558074 v05r02 & ANSI 63.10-2013 – Section 11.9.2.1 and 11.9.2.3.2

Test setup



Test setting

Alternatively, measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Because the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

Limit

According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

According to §15.247(b)(1), For frequency hopping systems operating in the 2 400 ~ 2 483.5 MHz employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5 725 ~ 5 805 MHz band: 1 Watt.

According to §15.247(a)(4), The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi.

Limit

For FHSs operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W if the hopset uses 75 or more hopping channels; the maximum peak conducted output power shall not exceed 0.125 W if the hopset uses less than 75 hopping channels. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e)

Test results

(Right)

Frequency(MHz)	Channel no.	Data rate(Mbps)	Average Power (dBm)	Peak Power (dBm)	Power Limit (dBm)
2 402	00	BDR 1 Mbps	7.12	7.22	20.97
2 442	40		7.19	7.30	20.97
2 480	78		7.20	7.31	20.97
2 402	00	EDR 2 Mbps	2.18	5.18	20.97
2 442	40		2.18	5.19	20.97
2 480	78		2.18	5.19	20.97
2 402	00	EDR 3 Mbps	2.19	5.69	20.97
2 442	40		2.19	5.69	20.97
2 480	78		2.19	5.76	20.97

(Left)

Frequency(MHz)	Channel no.	Data rate(Mbps)	Average Power (dBm)	Peak Power (dBm)	Power Limit (dBm)
2 402	00	BDR 1 Mbps	7.08	7.34	20.97
2 442	40		7.22	7.47	20.97
2 480	78		7.34	7.58	20.97
2 402	00	EDR 2 Mbps	2.36	5.26	20.97
2 442	40		2.30	5.24	20.97
2 480	78		2.31	5.31	20.97
2 402	00	EDR 3 Mbps	2.30	5.74	20.97
2 442	40		2.31	5.80	20.97
2 480	78		2.33	5.86	20.97


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

3.3. Carrier frequency separation

Test procedure

KDB 558074 v05r02 & ANSI 63.10-2013

Test setup



Test Setting

1. The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:
2. Span = wide enough to capture the peaks of two adjacent channels
3. RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
4. Video (or Average) Bandwidth (VBW) \geq RBW
5. Sweep = auto
6. Detector function = peak
7. Trace = max hold
8. Allow the trace to stabilize.

Use the marker-delta function to determine the separation between the peaks of the adjacent channels. Compliance of an EUT with the appropriate regulatory limit shall be determined. A plot of the data shall be included in the test report.

Limit

According to 15.247(a)(1), frequency hopping system operating in 2 400 ~ 2 483.5 MHz. Band may have hopping channel carrier frequencies that are separated by 25 kHz or two-third of 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Limit



FHSs shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, FHSs operating in the band 2400-2483.5 MHz may have hopping channel carrier frequencies that are separated by 25 kHz or two thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided that the systems operate with an output power no greater than 0.125 W

Test results
(Right)

Frequency(MHz)	Channel no.	Data rate(Mbps)	Channel Separation (MHz)	Limit (MHz)
2 442	40	BDR 1 Mbps	1.001	≥ 0.543
2 442	40	EDR 3 Mbps	1.001	≥ 0.859

(Left)

Frequency(MHz)	Channel no.	Data rate(Mbps)	Channel Separation (MHz)	Limit (MHz)
2 442	40	BDR 1 Mbps	1.001	≥ 0.563
2 442	40	EDR 3 Mbps	1.001	≥ 0.863

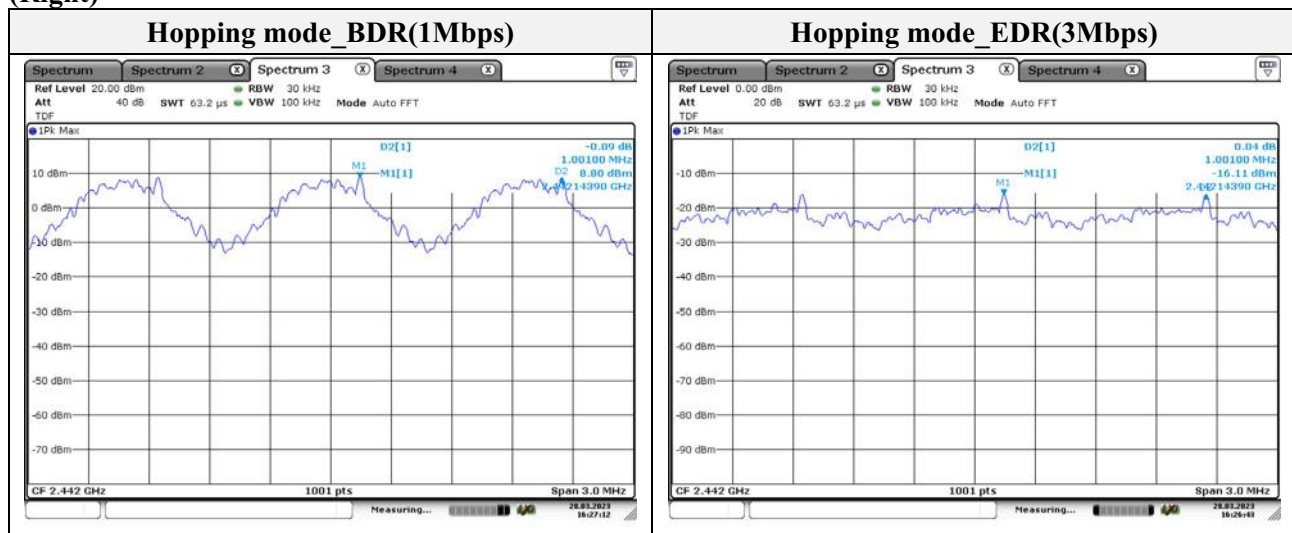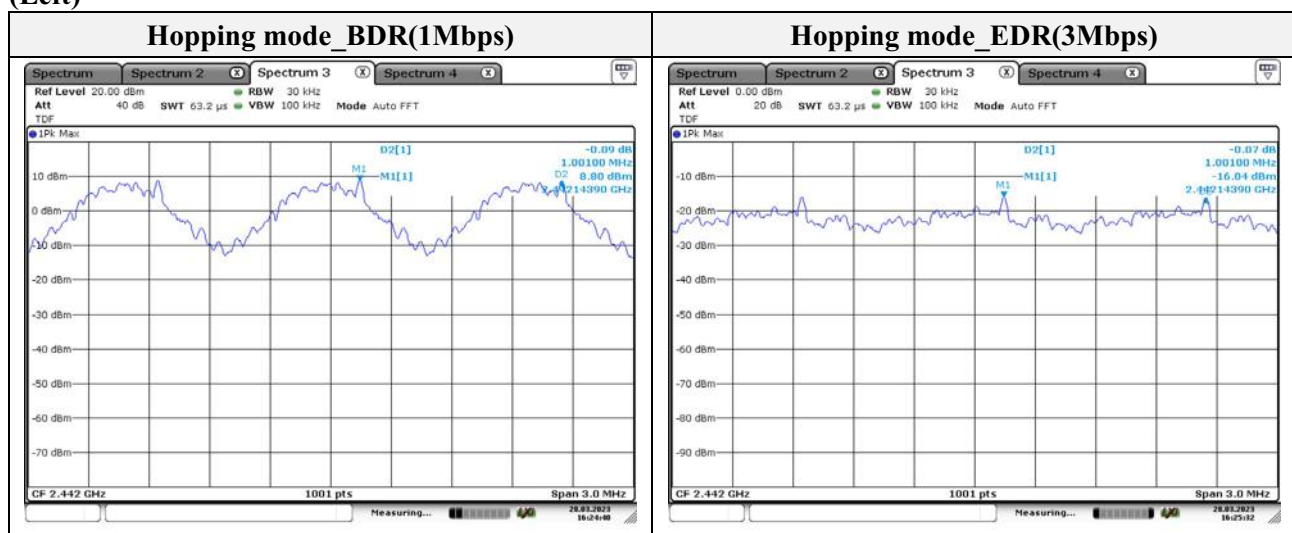(Right)

(Left)


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

3.4. Number of hopping frequency

Test procedure

KDB 558074 v05r02 & ANSI 63.10-2013

Test setup



Test setting

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings.

1. Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
2. RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
3. VBW \geq RBW.
4. Sweep = auto
5. Detector function = peak
6. Trace = max hold

All the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

Limit

According to 15.247(a)(1)(iii), for frequency hopping system operating in the 2 400 ~ 2 483.5 MHz bands shall use at least 15 hopping frequencies.

Limit

FHSs operating in the band 2400-2483.5 MHz shall use at least 15 hopping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds, multiplied by the number of hopping channels employed. Transmissions on particular hopping frequencies may be avoided or suppressed provided that at least 15 hopping channels are used.

Test results


(Right)

Frequency	Data rate(Mbps)	Number of hopping frequency	Limit
2 402 ~ 2 480 MHz	BDR 1 Mbps	79	≥ 15
2 402 ~ 2 480 MHz	EDR 3 Mbps	79	≥ 15

(Left)


Frequency	Data rate(Mbps)	Number of hopping frequency	Limit
2 402 ~ 2 480 MHz	BDR 1 Mbps	79	≥ 15
2 402 ~ 2 480 MHz	EDR 3 Mbps	79	≥ 15

(Right)

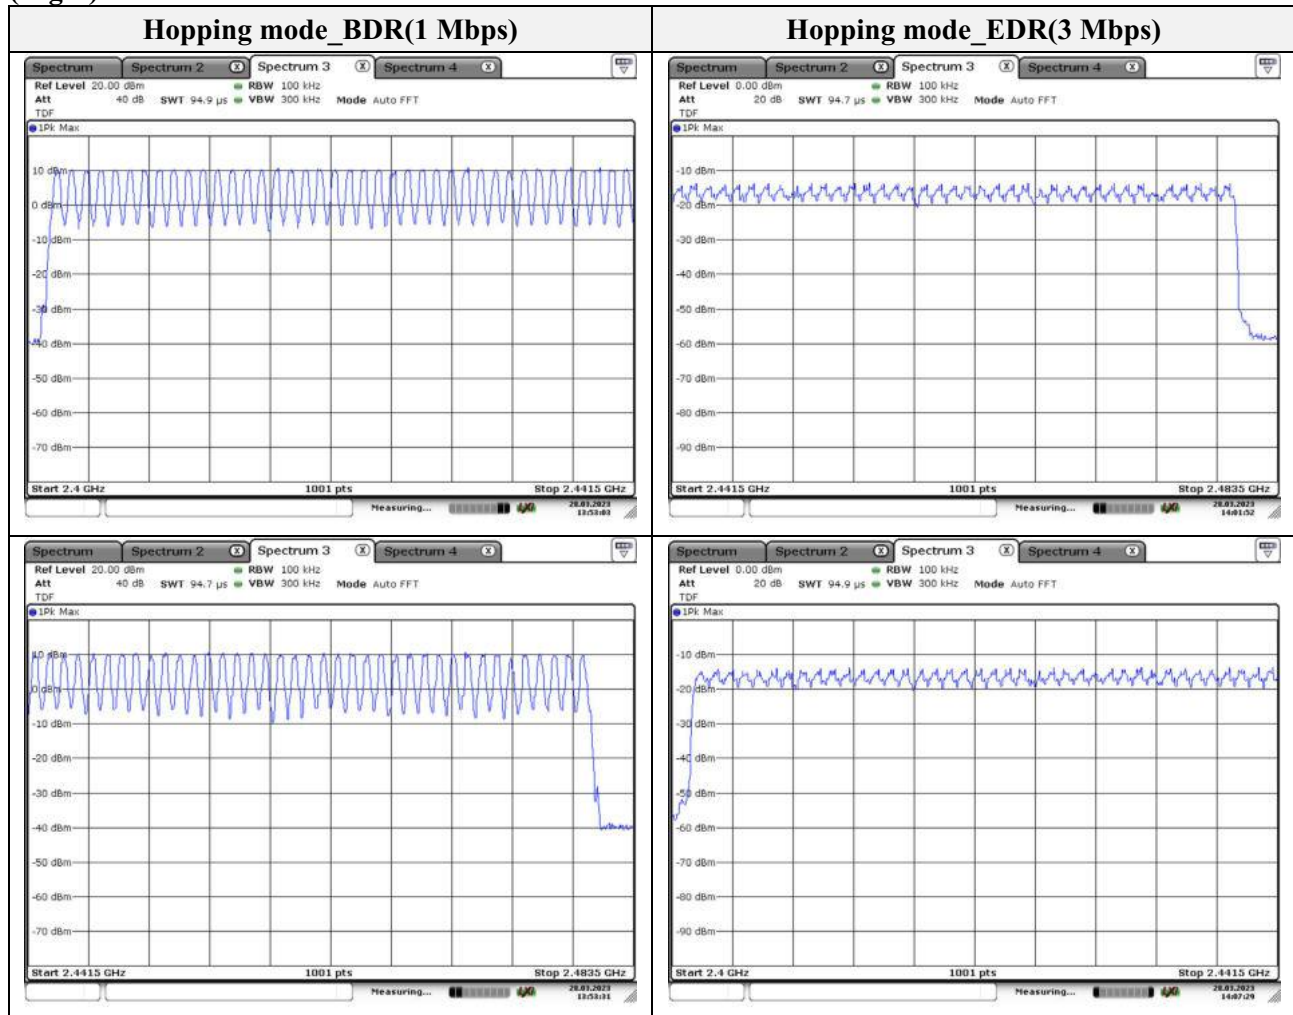

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

(Left)

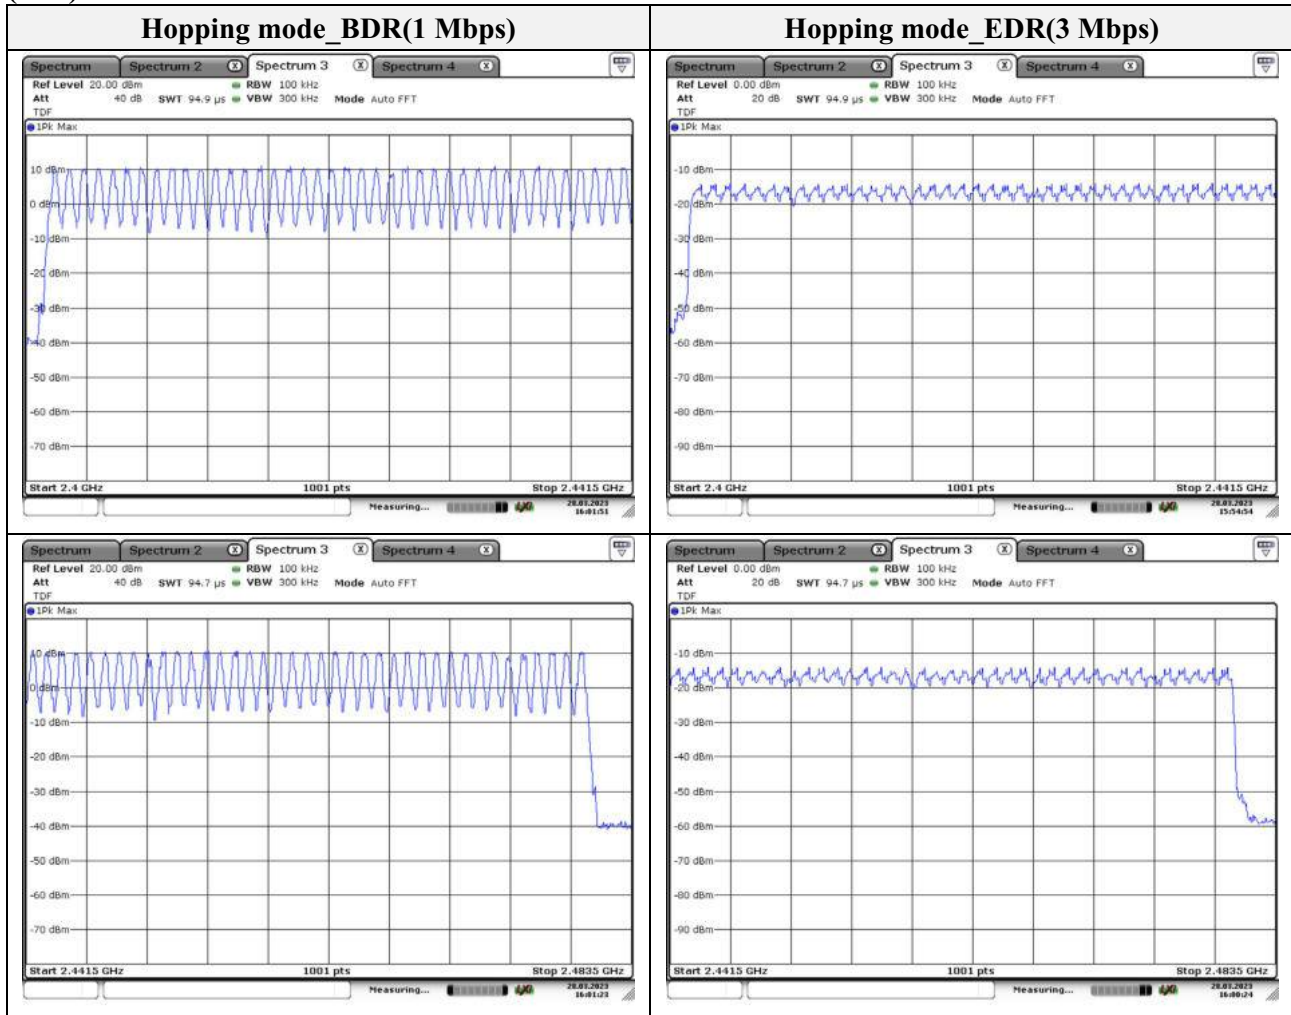


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

3.5. Time of occupancy

Test procedure

KDB 558074 v05r02 & ANSI 63.10-2013

Test setup



Test setting

1. The EUT must have its hopping function enabled.
2. Span = zero span, centered on a hopping channel
3. RBW shall be \leq channel spacing and where possible RBW should be set $\gg 1 / T$, where T is the expected dwell time per channel.
4. Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.
5. Detector function = peak
6. Trace = max hold

Limit

According to 15.247(a)(1)(iii), for frequency hopping system operating in the 2 400 ~ 2 483.5 MHz band, the average time of occupancy on any frequency shall not be greater than 0.4 second within a 31.6 second period.

$$\text{A period time} = 0.4(\text{s}) \times 79 = 31.6(\text{s})$$

Time of occupancy on the TX channel in 31.6 sec

$$= \text{time domain slot length} \times (\text{hop rate} \div \text{number of hop per channel}) \times 31.6$$

**Operation mode: GFSK, $\pi/4$ -DQPSK, 8DPSK
(Right)**

Packet type	Frequency (MHz)	Dwell time (ms)	Time of occupancy on the Tx channel in 31.6 sec (ms)	Limit for time of occupancy on the Tx channel in 31.6 sec (ms)
DH1	2 442	0.38	121.6	400
DH3	2 442	1.63	260.8	400
DH5	2 442	2.88	307.2	400
2-DH1	2 442	0.38	121.6	400
2-DH3	2 442	1.63	260.8	400
2-DH5	2 442	2.88	307.2	400
3-DH1	2 442	0.38	121.6	400
3-DH3	2 442	1.63	260.8	400
3-DH5	2 442	2.88	307.2	400

Note:
Normal Mode

DH1: Dwell time (ms) $\times [(1\ 600 \div 2) \div 79] \times 31.6(s) = 121.6\ (ms)$

DH3: Dwell time (ms) $\times [(1\ 600 \div 4) \div 79] \times 31.6(s) = 260.8\ (ms)$

DH5: Dwell time (ms) $\times [(1\ 600 \div 6) \div 79] \times 31.6(s) = 307.2\ (ms)$

2-DH1: Dwell time (ms) $\times [(1\ 600 \div 2) \div 79] \times 31.6(s) = 121.6\ (ms)$

2-DH3: Dwell time (ms) $\times [(1\ 600 \div 4) \div 79] \times 31.6(s) = 260.8\ (ms)$

2-DH5: Dwell time (ms) $\times [(1\ 600 \div 6) \div 79] \times 31.6(s) = 307.2\ (ms)$

3-DH1: Dwell time (ms) $\times [(1\ 600 \div 2) \div 79] \times 31.6(s) = 121.6\ (ms)$

3-DH3: Dwell time (ms) $\times [(1\ 600 \div 4) \div 79] \times 31.6(s) = 260.8\ (ms)$

3-DH5: Dwell time (ms) $\times [(1\ 600 \div 6) \div 79] \times 31.6(s) = 307.2\ (ms)$

(Left)

Packet type	Frequency (MHz)	Dwell time (ms)	Time of occupancy on the Tx channel in 31.6 sec (ms)	Limit for time of occupancy on the Tx channel in 31.6 sec (ms)
DH1	2 442	0.38	121.6	400
DH3	2 442	1.63	260.8	400
DH5	2 442	2.88	307.2	400
2-DH1	2 442	0.38	121.6	400
2-DH3	2 442	1.63	260.8	400
2-DH5	2 442	2.88	307.2	400
3-DH1	2 442	0.38	121.6	400
3-DH3	2 442	1.63	260.8	400
3-DH5	2 442	2.88	307.2	400

Note:

Normal Mode

DH1: Dwell time (ms) $\times [(1\ 600 \div 2) \div 79] \times 31.6(s) = 121.6\ (ms)$

DH3: Dwell time (ms) $\times [(1\ 600 \div 4) \div 79] \times 31.6(s) = 260.8\ (ms)$

DH5: Dwell time (ms) $\times [(1\ 600 \div 6) \div 79] \times 31.6(s) = 307.2\ (ms)$

2-DH1: Dwell time (ms) $\times [(1\ 600 \div 2) \div 79] \times 31.6(s) = 121.6\ (ms)$


2-DH3: Dwell time (ms) $\times [(1\ 600 \div 4) \div 79] \times 31.6(s) = 260.8\ (ms)$

2-DH5: Dwell time (ms) $\times [(1\ 600 \div 6) \div 79] \times 31.6(s) = 307.2\ (ms)$

3-DH1: Dwell time (ms) $\times [(1\ 600 \div 2) \div 79] \times 31.6(s) = 121.6\ (ms)$

3-DH3: Dwell time (ms) $\times [(1\ 600 \div 4) \div 79] \times 31.6(s) = 260.8\ (ms)$


3-DH5: Dwell time (ms) $\times [(1\ 600 \div 6) \div 79] \times 31.6(s) = 307.2\ (ms)$

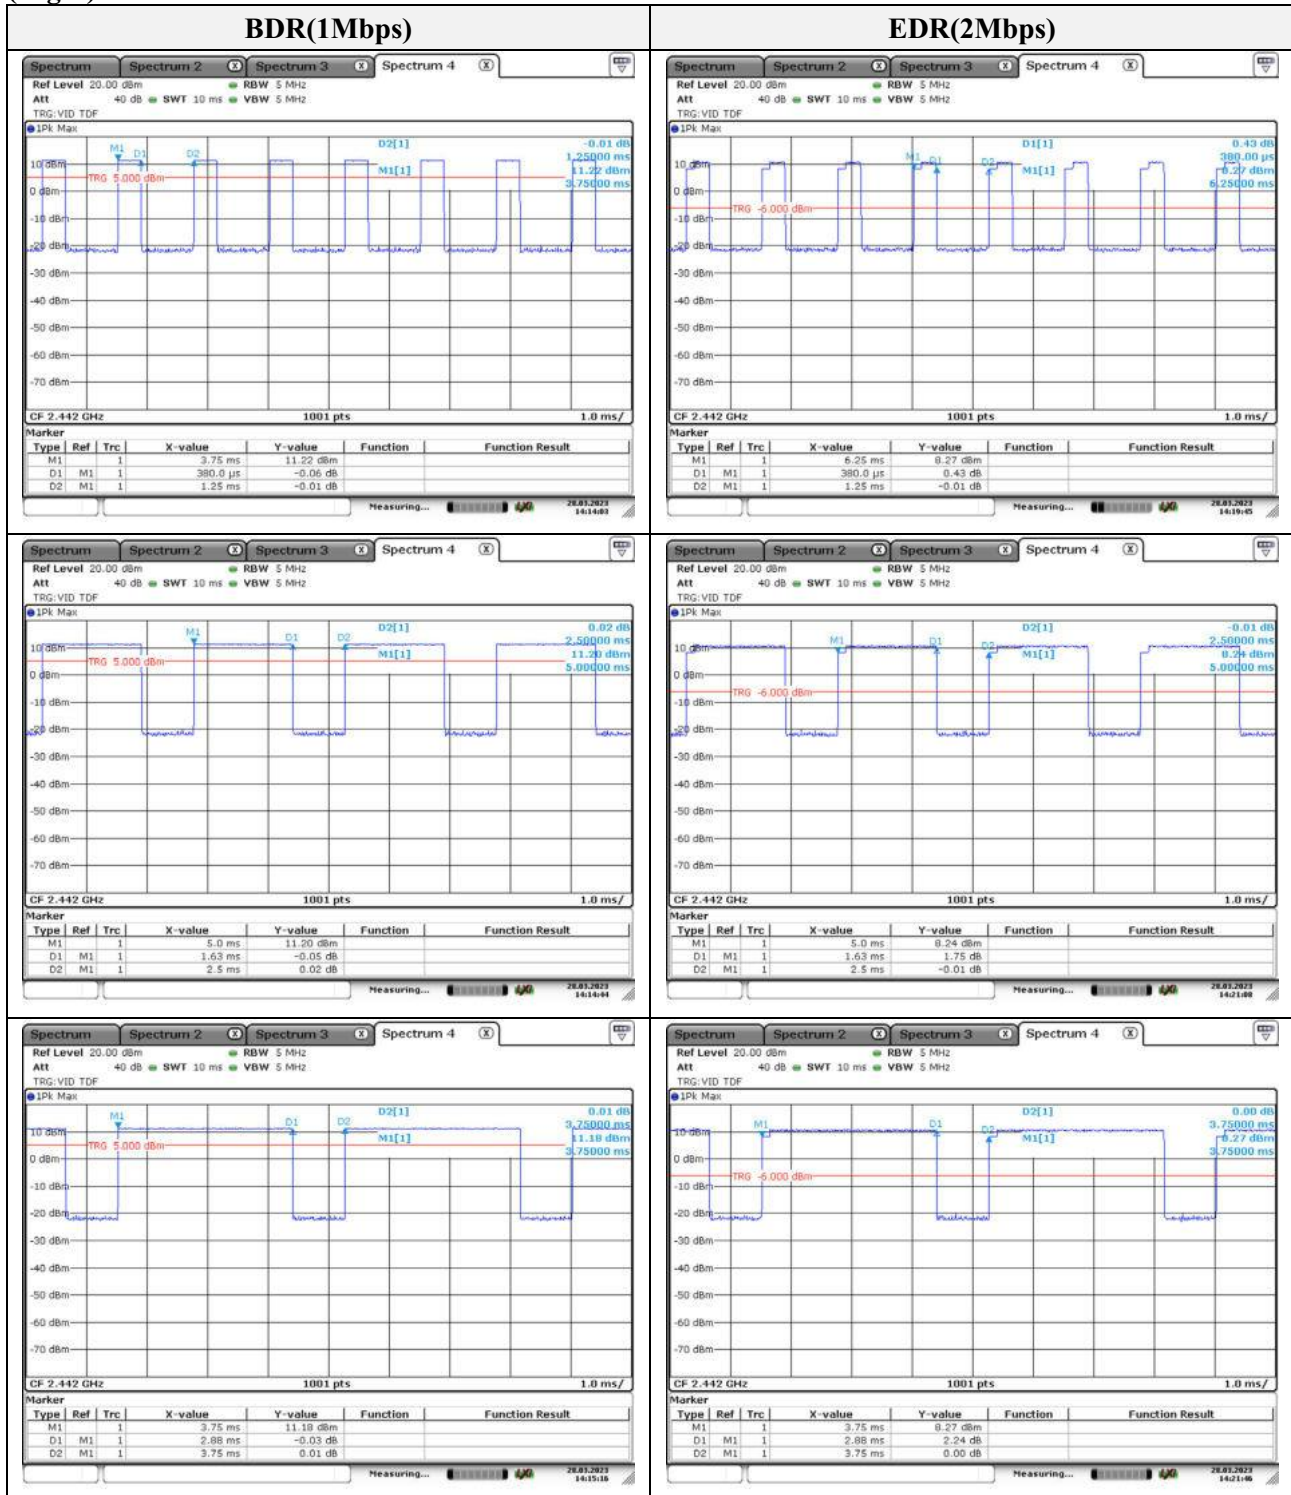(Right)


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr


<div><div>EDR(3Mbps)</div><div><div>Spectrum</div><div>Spectrum 2</div><div>Spectrum 3</div><div>Spectrum 4</div></div><div><div>Ref Level 20.00 dBm</div><div>ATT 40 dB</div><div>TRG:VID TDF</div></div><div><div>RBW 5 MHz</div><div>SWT 10 ms</div><div>VBW 5 MHz</div></div><div><div>1Pk Max</div><div><div>M1</div><div>D1</div><div>D2</div><div>M1[1]</div><div>D1[1]</div></div><div><div>8.31 dBm</div><div>6.25000 ms</div><div>2.02 dB</div><div>380.00 μs</div></div></div><div><div>CF 2.442 GHz</div><div>1001 pts</div><div>1.0 ms/</div></div><div><div>Marker</div><table><thead><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-value</th><th>Y-value</th><th>Function</th><th>Function Result</th></tr></thead><tbody><tr><td>M1</td><td></td><td>1</td><td>6.25 ms</td><td>8.31 dBm</td><td></td><td></td></tr><tr><td>D1</td><td>M1</td><td>1</td><td>380.0 μs</td><td>2.02 dB</td><td></td><td></td></tr><tr><td>D2</td><td>M1</td><td>1</td><td>1.25 ms</td><td>-0.01 dB</td><td></td><td></td></tr></tbody></table></div><div><div>Measuring...</div><div>28.01.2023</div><div>14:23:11</div></div></div>	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1		1	6.25 ms	8.31 dBm			D1	M1	1	380.0 μs	2.02 dB			D2	M1	1	1.25 ms	-0.01 dB			N/A
Type	Ref	Trc	X-value	Y-value	Function	Function Result																							
M1		1	6.25 ms	8.31 dBm																									
D1	M1	1	380.0 μs	2.02 dB																									
D2	M1	1	1.25 ms	-0.01 dB																									
<div><div>Spectrum</div><div>Spectrum 2</div><div>Spectrum 3</div><div>Spectrum 4</div></div> <div><div>Ref Level 20.00 dBm</div><div>ATT 40 dB</div><div>TRG:VID TDF</div></div> <div><div>RBW 5 MHz</div><div>SWT 10 ms</div><div>VBW 5 MHz</div></div> <div><div>1Pk Max</div><div><div>M1</div><div>D1</div><div>D2</div><div>M1[1]</div><div>D1[1]</div></div><div><div>8.29 dBm</div><div>5.00000 ms</div><div>0.87 dB</div><div>1.63000 ms</div></div></div> <div><div>CF 2.442 GHz</div><div>1001 pts</div><div>1.0 ms/</div></div> <div><div>Marker</div><table><thead><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-value</th><th>Y-value</th><th>Function</th><th>Function Result</th></tr></thead><tbody><tr><td>M1</td><td></td><td>1</td><td>5.0 ms</td><td>8.29 dBm</td><td></td><td></td></tr><tr><td>D1</td><td>M1</td><td>1</td><td>1.63 ms</td><td>0.87 dB</td><td></td><td></td></tr><tr><td>D2</td><td>M1</td><td>1</td><td>2.5 ms</td><td>-0.01 dB</td><td></td><td></td></tr></tbody></table></div> <div><div>Measuring...</div><div>28.01.2023</div><div>14:24:21</div></div>	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1		1	5.0 ms	8.29 dBm			D1	M1	1	1.63 ms	0.87 dB			D2	M1	1	2.5 ms	-0.01 dB			N/A
Type	Ref	Trc	X-value	Y-value	Function	Function Result																							
M1		1	5.0 ms	8.29 dBm																									
D1	M1	1	1.63 ms	0.87 dB																									
D2	M1	1	2.5 ms	-0.01 dB																									
<div><div>Spectrum</div><div>Spectrum 2</div><div>Spectrum 3</div><div>Spectrum 4</div></div> <div><div>Ref Level 20.00 dBm</div><div>ATT 40 dB</div><div>TRG:VID TDF</div></div> <div><div>RBW 5 MHz</div><div>SWT 10 ms</div><div>VBW 5 MHz</div></div> <div><div>1Pk Max</div><div><div>M1</div><div>D1</div><div>D2</div><div>M1[1]</div><div>D1[1]</div></div><div><div>8.31 dBm</div><div>3.75000 ms</div><div>1.59 dB</div><div>2.88000 ms</div></div></div> <div><div>CF 2.442 GHz</div><div>1001 pts</div><div>1.0 ms/</div></div> <div><div>Marker</div><table><thead><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-value</th><th>Y-value</th><th>Function</th><th>Function Result</th></tr></thead><tbody><tr><td>M1</td><td></td><td>1</td><td>3.75 ms</td><td>8.31 dBm</td><td></td><td></td></tr><tr><td>D1</td><td>M1</td><td>1</td><td>2.88 ms</td><td>1.59 dB</td><td></td><td></td></tr><tr><td>D2</td><td>M1</td><td>1</td><td>3.75 ms</td><td>0.00 dB</td><td></td><td></td></tr></tbody></table></div> <div><div>Measuring...</div><div>28.01.2023</div><div>14:24:32</div></div>	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1		1	3.75 ms	8.31 dBm			D1	M1	1	2.88 ms	1.59 dB			D2	M1	1	3.75 ms	0.00 dB			N/A
Type	Ref	Trc	X-value	Y-value	Function	Function Result																							
M1		1	3.75 ms	8.31 dBm																									
D1	M1	1	2.88 ms	1.59 dB																									
D2	M1	1	3.75 ms	0.00 dB																									

(Left)

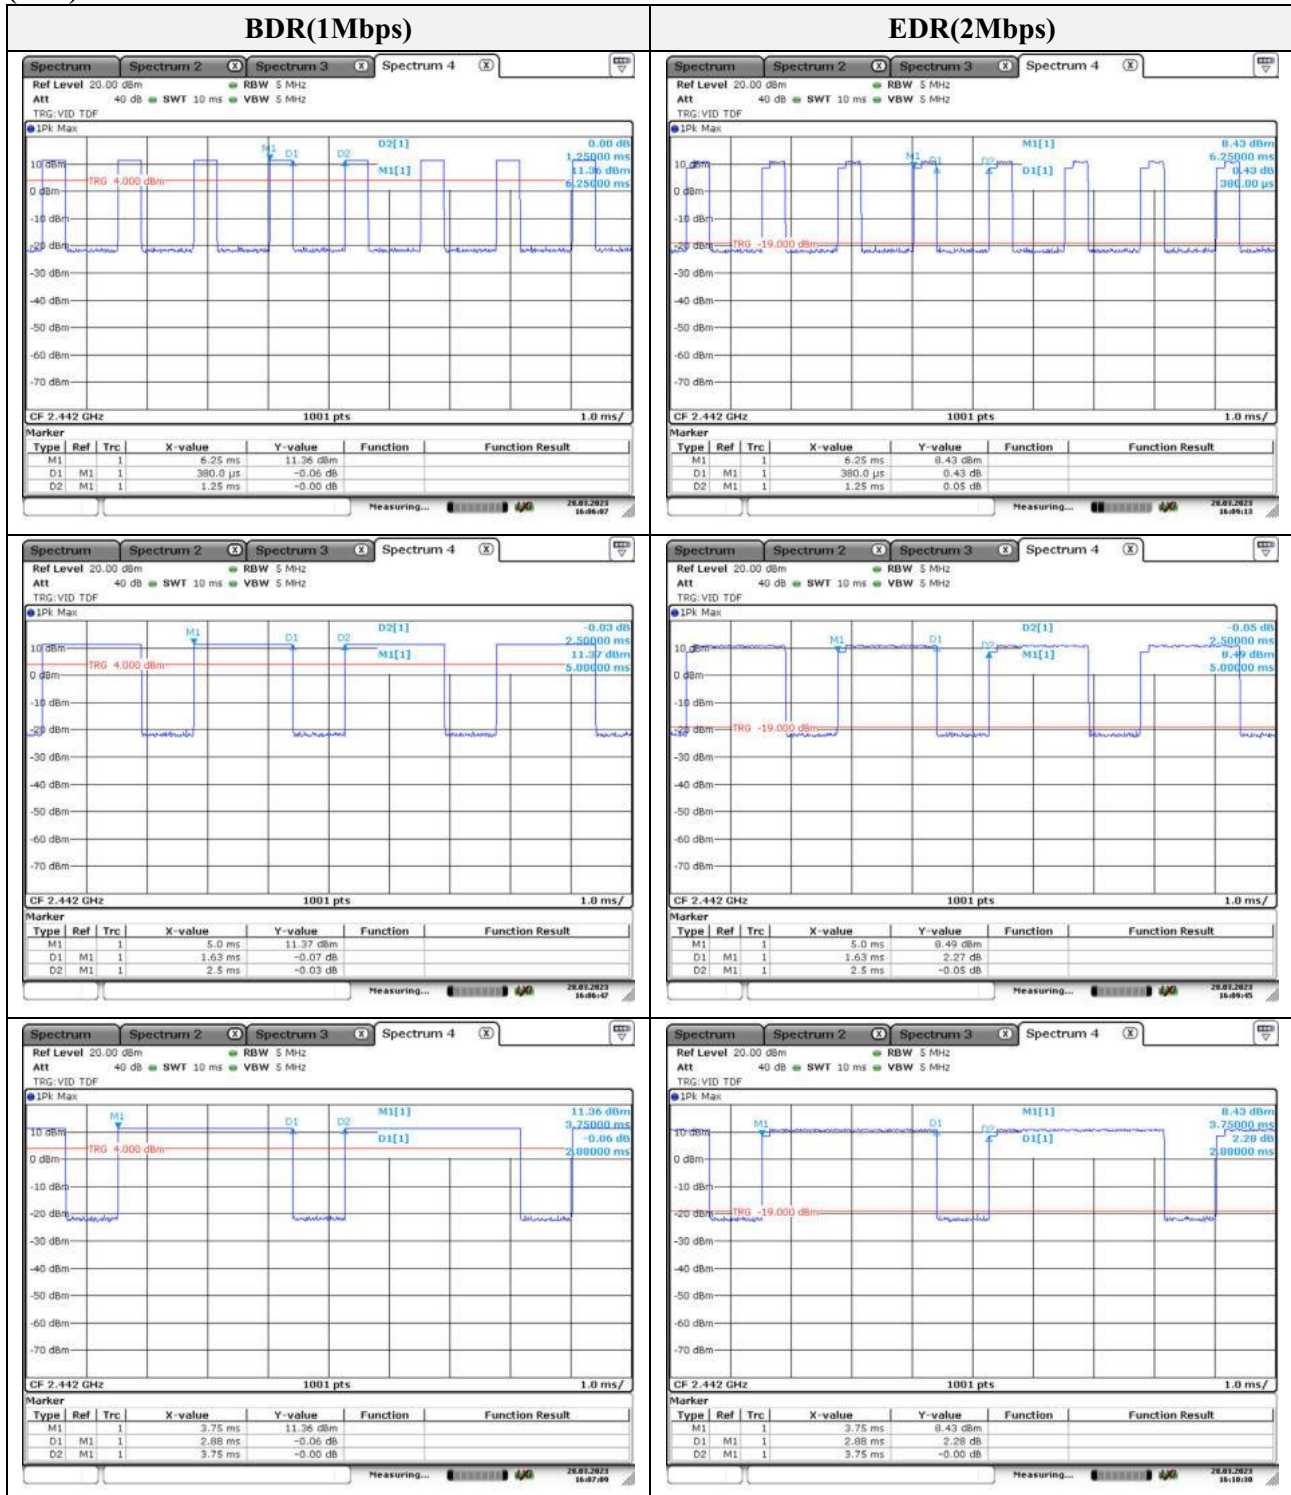


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr


EDR(3Mbps)

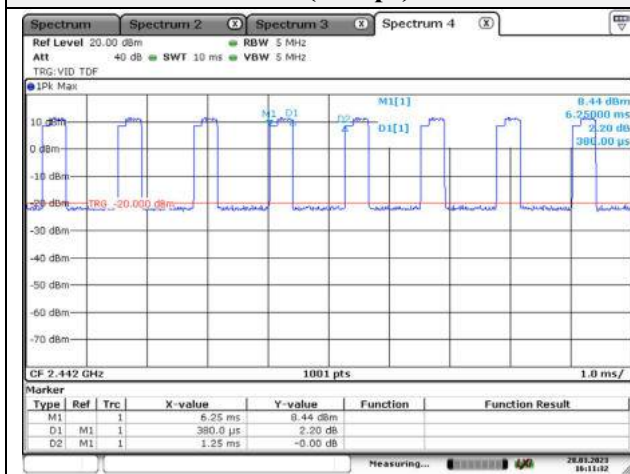

N/A

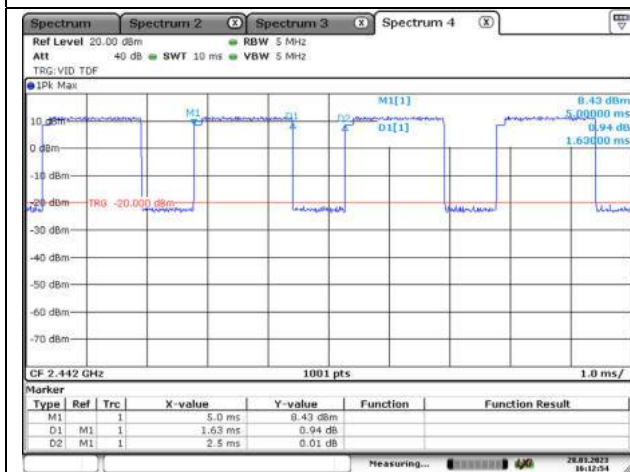

N/A

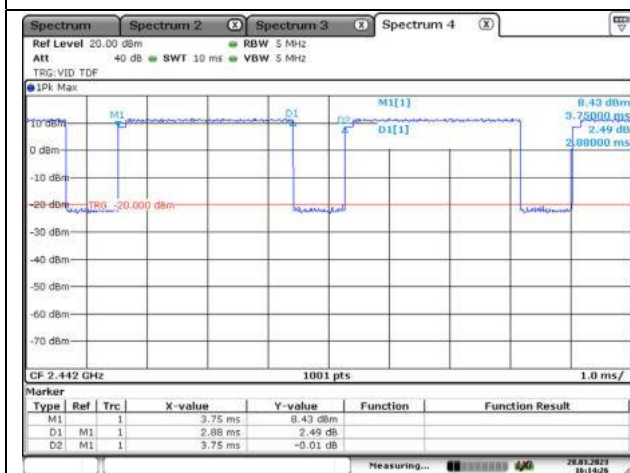


N/A


3.6. Radiated restricted band and emissions

Test setup


The diagram below shows the test setup that is utilized to make the measurements for emission from 9 kHz to 30 MHz Emissions.

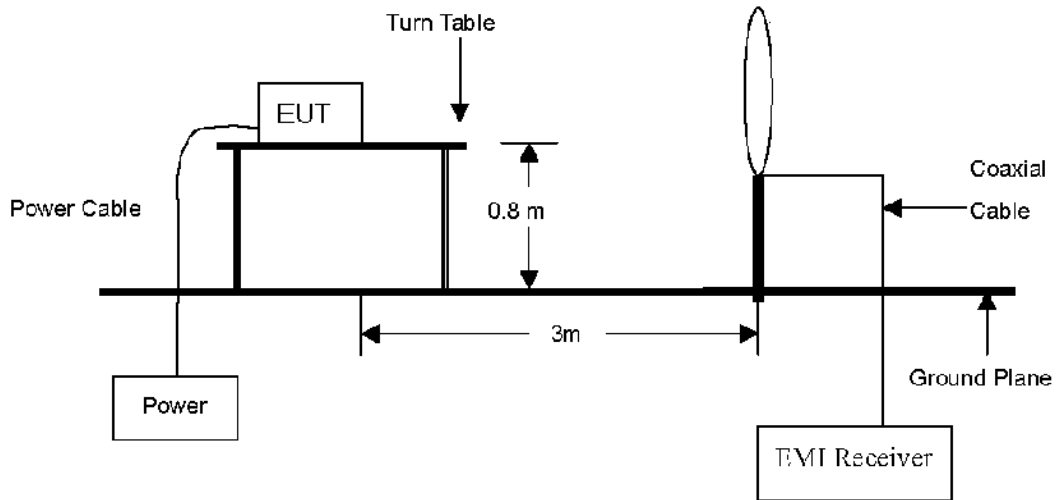

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz emissions.

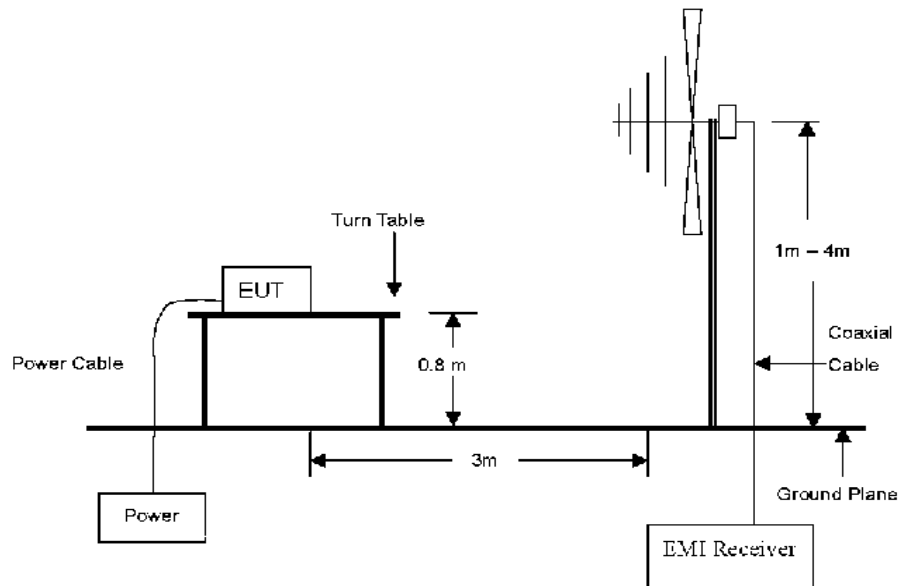

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz emissions, whichever is lower.

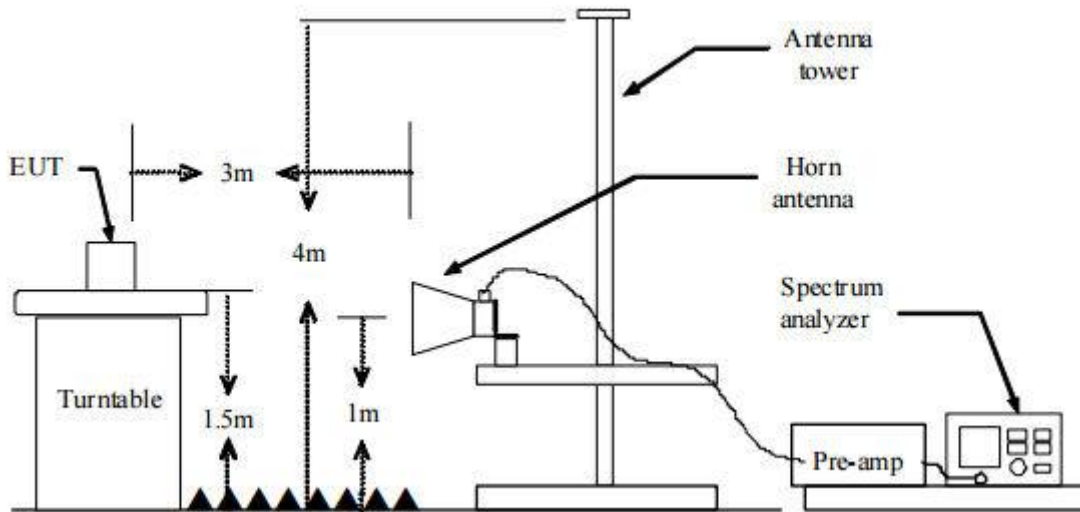

Test procedure

Radiated emissions from the EUT were measured according to the dictates in section 11.11 & 11.12 of ANSI C63.10-2013.

Test procedure below 30 MHz

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
2. Then antenna is a loop antenna is fixed at one meter above the ground to determine the maximum value of the field strength. Both parallel, ground parallel and perpendicular of the antenna are set to make the measurement. It was determined that parallel was worst-case orientation; therefore, all final radiated testing was performed with the EUT in parallel.
3. For each suspected emission, the EUT was arranged to its worst case and then the table was turned from 0 degrees to 360 degrees to find the maximum reading.
4. The test-receiver system was set to average or quasi peak detect function and Specified Bandwidth with Maximum hold mode.

Test procedure above 30 MHz

1. The EUT was placed on the top of a rotating table 0.8 meters(30-1000MHz) / 1.5 meters(above 1GHz)above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The antenna is a bi-log antenna, a horn antenna, and its height are varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
4. The test receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
5. Spectrum analyzer settings for $f < 1$ GHz:
 - ① Span = wide enough to fully capture the emission being measured

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

-
- ② RBW = 100 kHz
 - ③ VBW \geq RBW
 - ④ Detector = quasi peak
 - ⑤ Sweep time = auto
 - ⑥ Trace = max hold
6. Spectrum analyzer settings for $f \geq 1$ GHz: Peak
- ① Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
 - ② RBW = 1 MHz
 - ③ VBW ≥ 3 MHz
 - ④ Detector = peak
 - ⑤ Sweep time = auto
 - ⑥ Trace = max hold
 - ⑦ Trace was allowed to stabilize
7. Spectrum analyzer settings for $f \geq 1$ GHz: Average
- ① Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
 - ② RBW = 1 MHz
 - ③ VBW $\geq 3 \times$ RBW
 - ④ Detector = RMS, if span/(# of points in sweep) \leq (RBW/2). Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.
 - ⑤ Averaging type = power(i.e., RMS)
 - 1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
 - 2) Some instruments require linear display mode in order to use linear voltage averaging. Log or dB averaging shall not be used.
 - ⑥ Sweep = auto
 - ⑦ Trace = max hold
 - ⑧ Perform a trace average of at least 100 traces.
 - ⑨ A correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle. The correction factor is computed as follows:
 - 1) If power averaging (RMS) mode was used in step ⑤, then the applicable correction factor is $10 \log(1/x)$, where x is the duty cycle.
 - 2) If linear voltage averaging mode was used in step ⑤, then the applicable correction factor is $20 \log(1/x)$, where x is the duty cycle.
 - 3) If a specific emission is demonstrated to be continuous (≥ 98 percent duty cycle) rather than turning on and off with the transmit cycle, then no duty cycle correction is required for that emission.

Note.

1. $f < 30$ MHz, extrapolation factor of 40 dB/decade of distance. $F_d = 40\log(D_m/D_s)$
 $f \geq 30$ MHz, extrapolation factor of 20 dB/decade of distance. $F_d = 20\log(D_m/D_s)$
Where:
 F_d = Distance factor in dB
 D_m = Measurement distance in meters
 D_s = Specification distance in meters
2. Field strength(dB μ V/m) = Level(dB μ V) + CF (dB) + or DCF(dB)
3. Margin(dB) = Limit(dB μ V/m) - Field strength(dB μ V/m)
4. Emissions below 18 GHz were measured at a 3 meter test distance while emissions above 18 GHz were measured at a 1 meter test distance with the application of a distance correction factor.
7. The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z, it was determined that **X orientation** was worst-case orientation; therefore, all final radiated testing was performed with the EUT in **X orientation**.
8. The worst-case emissions are reported however emissions whose levels were not within 20 dB of respective limits were not reported.
9. According to exploratory test no any obvious emission were detected from 9 kHz to 30 MHz. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30 m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

Limit

According to 15.209(a), for an intentional radiator devices, the general required of field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values :

Frequency (MHz)	Distance (Meters)	Radiated (μ V/m)
0.009 ~ 0.490	300	2400/F(kHz)
0.490 ~ 1.705	30	24000/F(kHz)
1.705 ~ 30.0	30	30
30 ~ 88	3	100**
88 ~ 216	3	150**
216 ~ 960	3	200**
Above 960	3	500

**Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54 ~ 72 MHz, 76 ~ 88 MHz, 174 ~ 216 MHz or 470 ~ 806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

Duty cycle

Regarding to KDB 558074 D01_v05 r02, 6. Measurements of duty cycle and transmission duration shall be performed using one of the following techniques:

- A diode detector and an oscilloscope that together have sufficiently short response time to permit accurate measurements of the on- and off-times of the transmitted signal.
- The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on- and off-times of the transmitted signal.

(Right)

Mode	T _{on} time (ms)	Period (ms)	Duty cycle (Linear)	Duty cycle (%)	Duty cycle correction factor (dB)
BDR(1 Mbps)	2.880	3.750	0.768	76.80	1.15
EDR(3 Mbps)	2.880	3.750	0.768	76.80	1.15


(Left)

Mode	T _{on} time (ms)	Period (ms)	Duty cycle (Linear)	Duty cycle (%)	Duty cycle correction factor (dB)
BDR(1 Mbps)	2.880	3.750	0.768	76.80	1.15
EDR(3 Mbps)	2.880	3.750	0.768	76.80	1.15


Duty cycle (Linear) = T_{on} time/Period

DCF(Duty cycle correction factor (dB)) = 10log(1/duty cycle)

(Right)

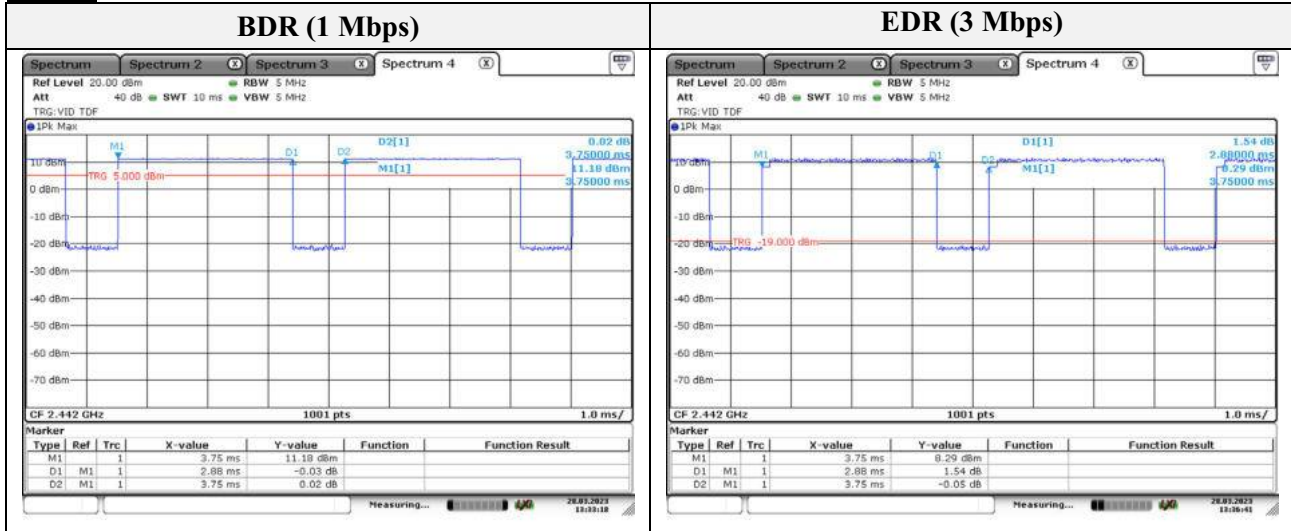


(Left)

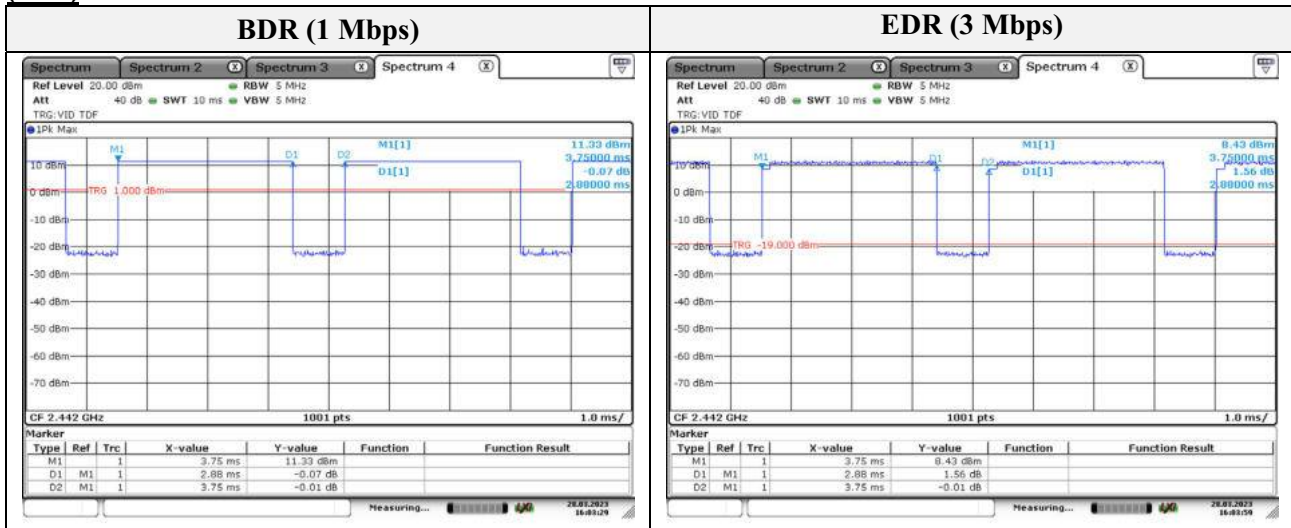

Test results (Below 30 MHz)

Mode: BDR (Right)

Distance of measurement: 3 meter

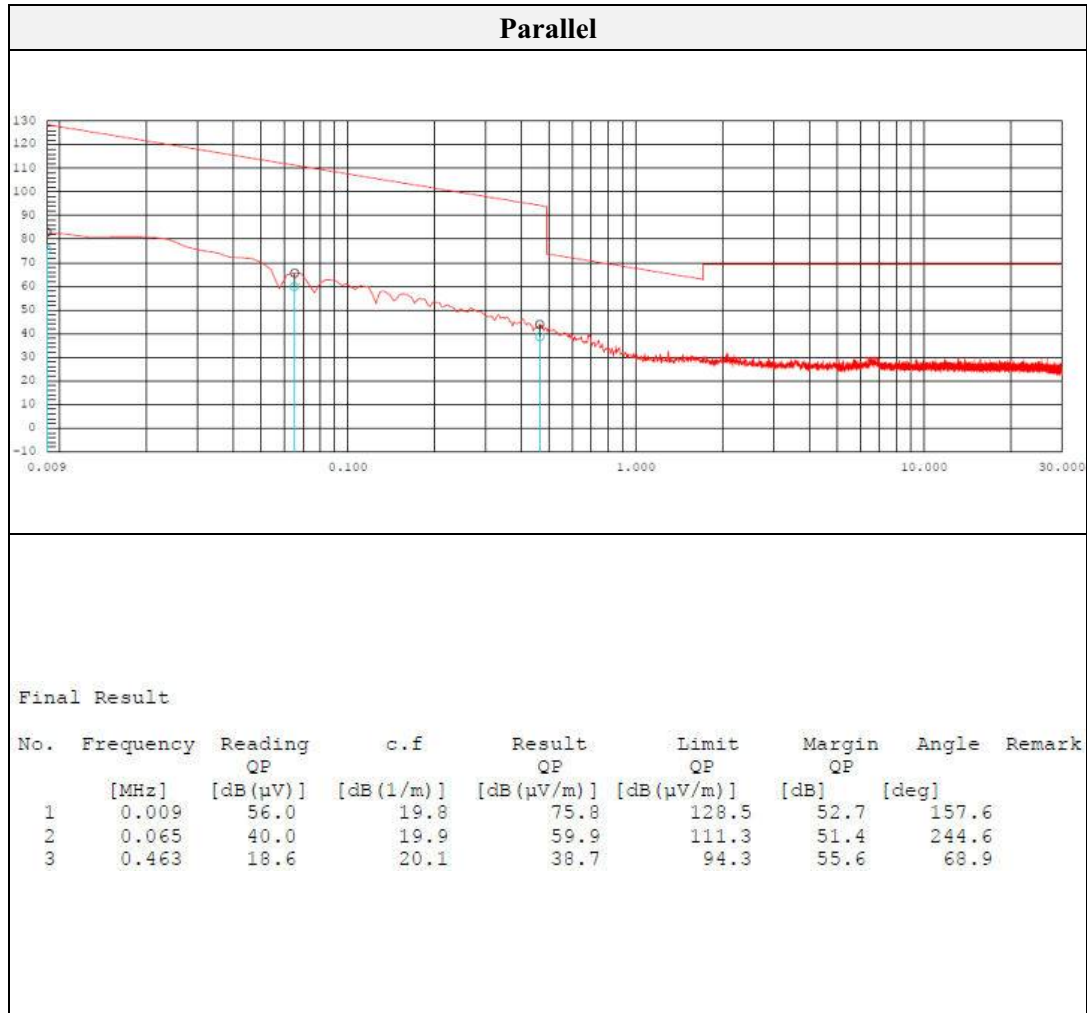
Channel: 78 (Worst case)


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Mode: BDR (Left)

Distance of measurement: 3 meter


Channel: 78 (Worst case)

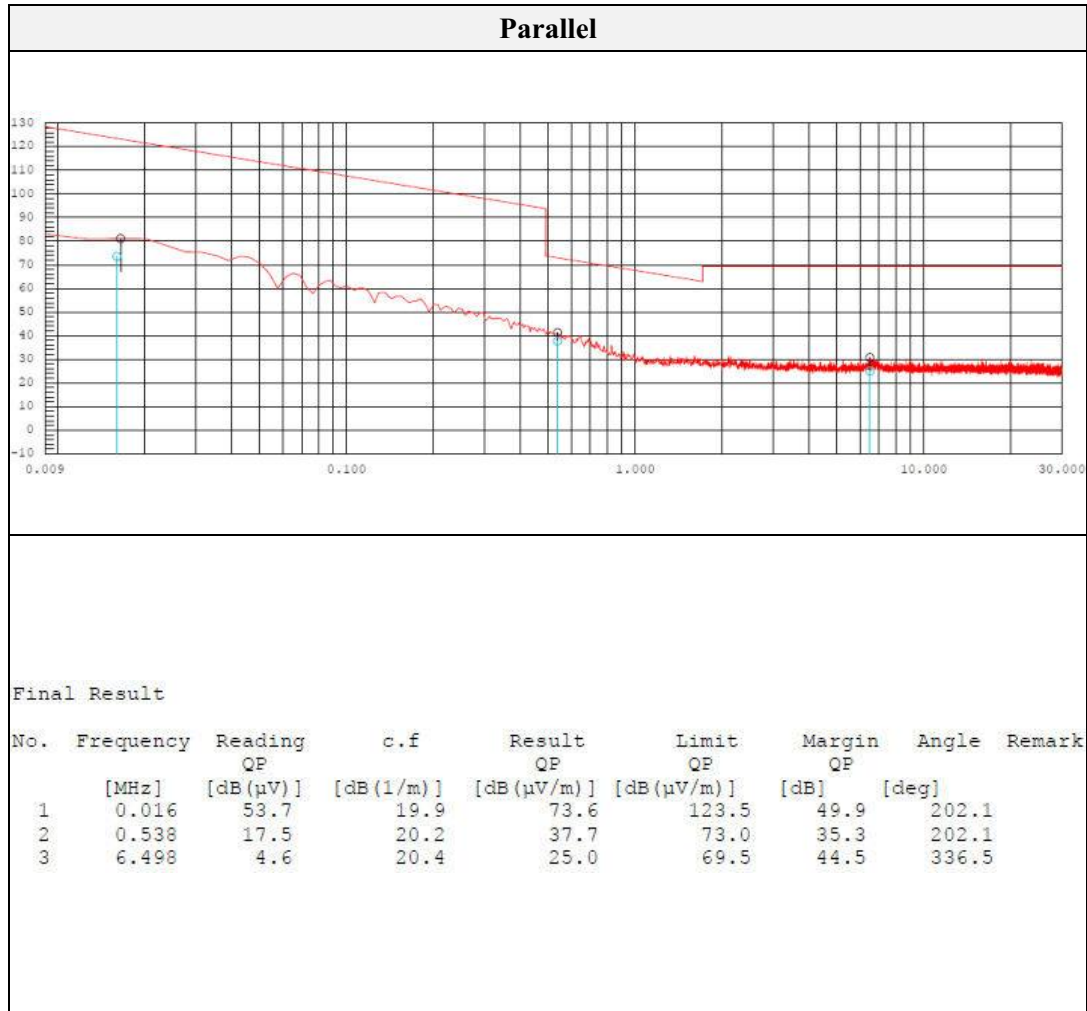

Test results (Below 1 000 MHz) – Worst case

Mode: BDR (Right)

Distance of measurement: 3 meter

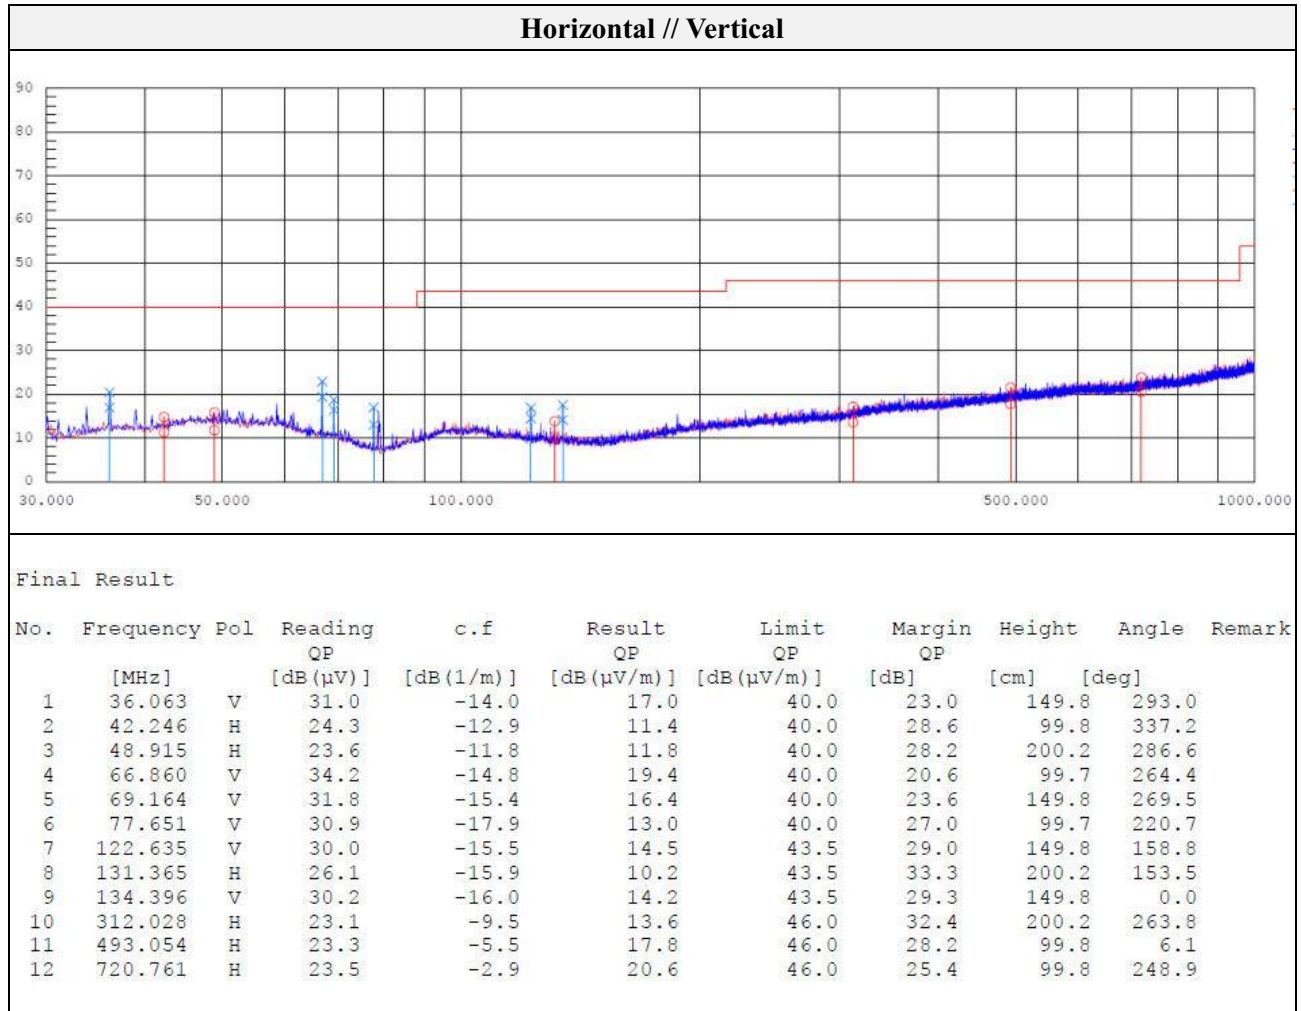
Channel: 78 (Worst case)


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Mode: BDR (Left)

Distance of measurement: 3 meter

Channel: 78 (Worst case)

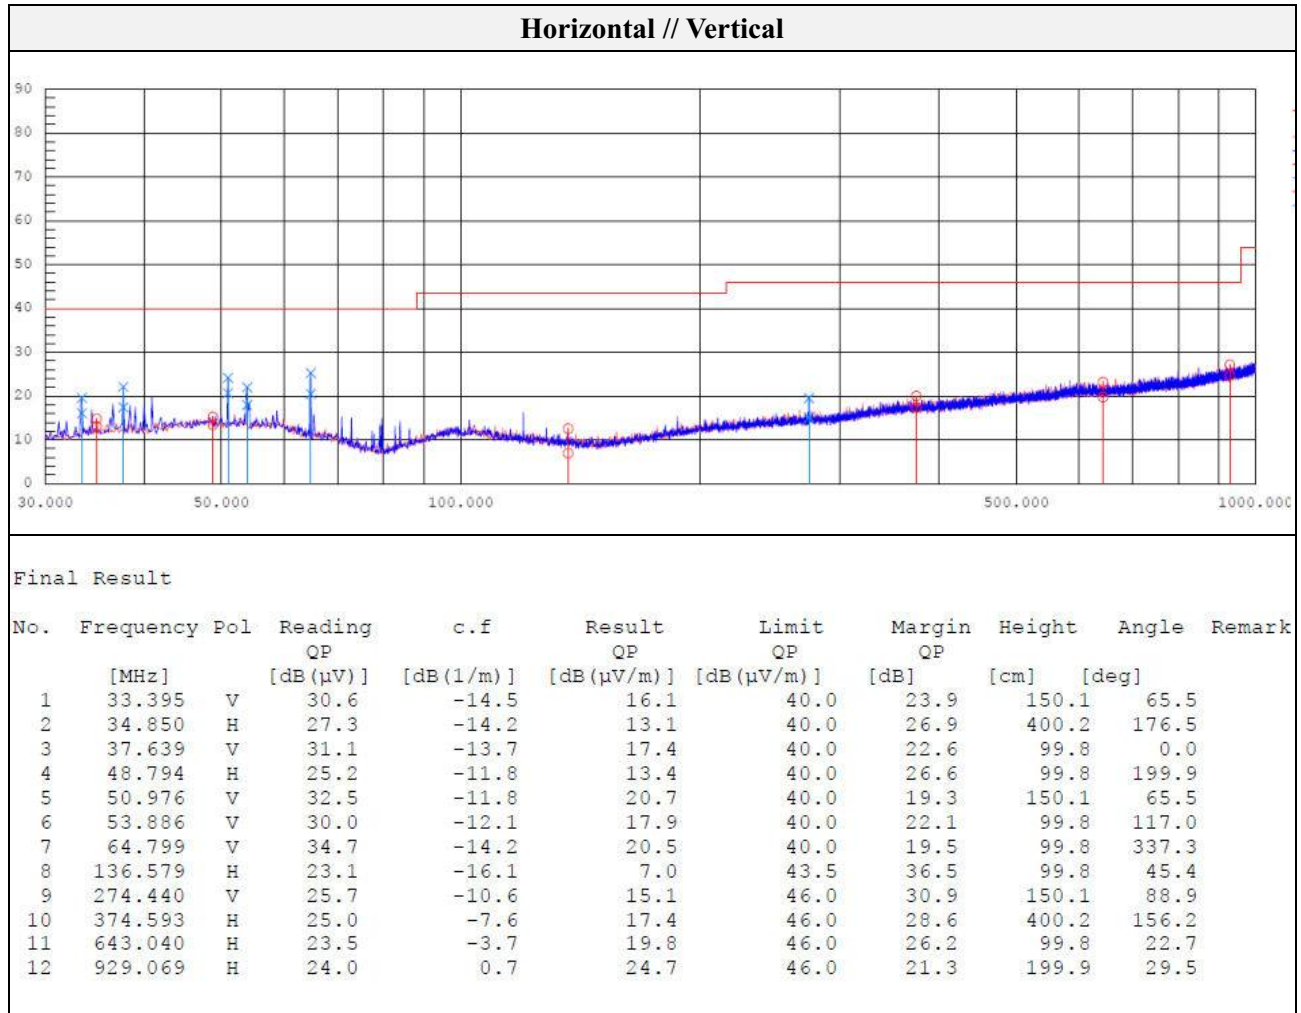

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Test results (Above 1 000 MHz)

Mode: BDR (Right)

Distance of measurement: 3 meter


Channel: 00

- Spurious


Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 073.97	46.47	Peak	H	-9.48	-	36.99	74.00	37.01
1 732.88	50.25	Peak	V	-4.36	-	45.89	74.00	28.11
3 603.03	46.98	Average	H	0.70	1.15	48.83	54.00	5.17
3 603.03	56.25	Peak	H	0.70	-	56.95	74.00	17.05
3 603.03	47.06	Peak	V	0.70	-	47.76	74.00	26.24
4 802.05	48.42	Peak	H	5.15	-	53.57	74.00	20.43
4 803.93	38.40	Average	H	5.16	1.15	44.71	54.00	9.29

- Band edge

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
2 324.38	42.50	Peak	V	-1.88	-	40.62	74.00	33.38
2 373.60	43.01	Peak	H	-1.87	-	41.14	74.00	32.86

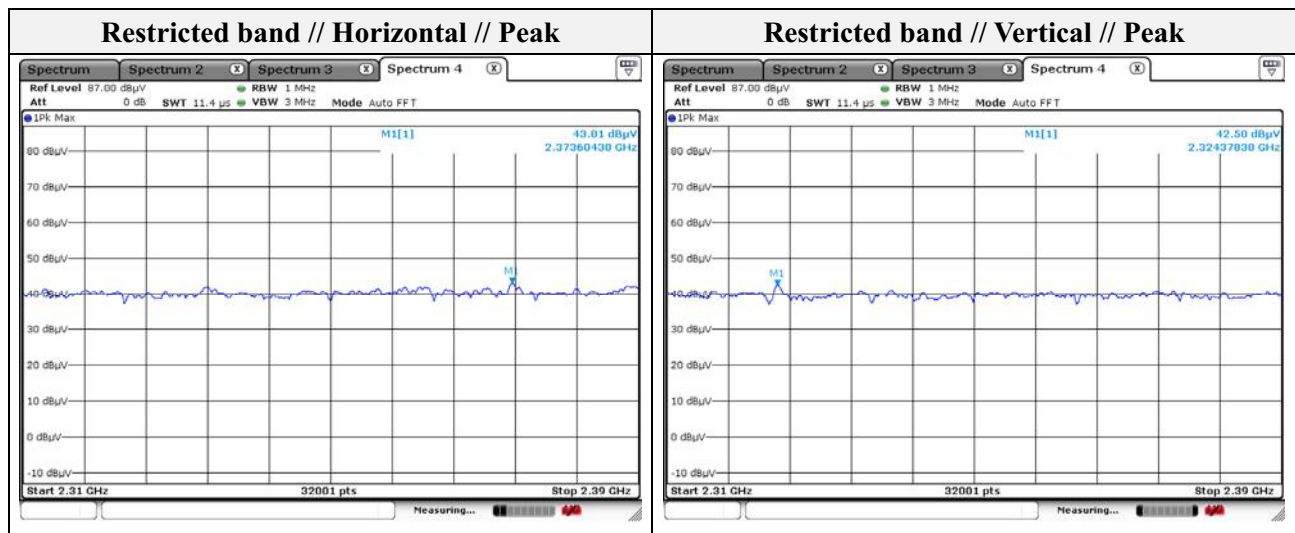

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

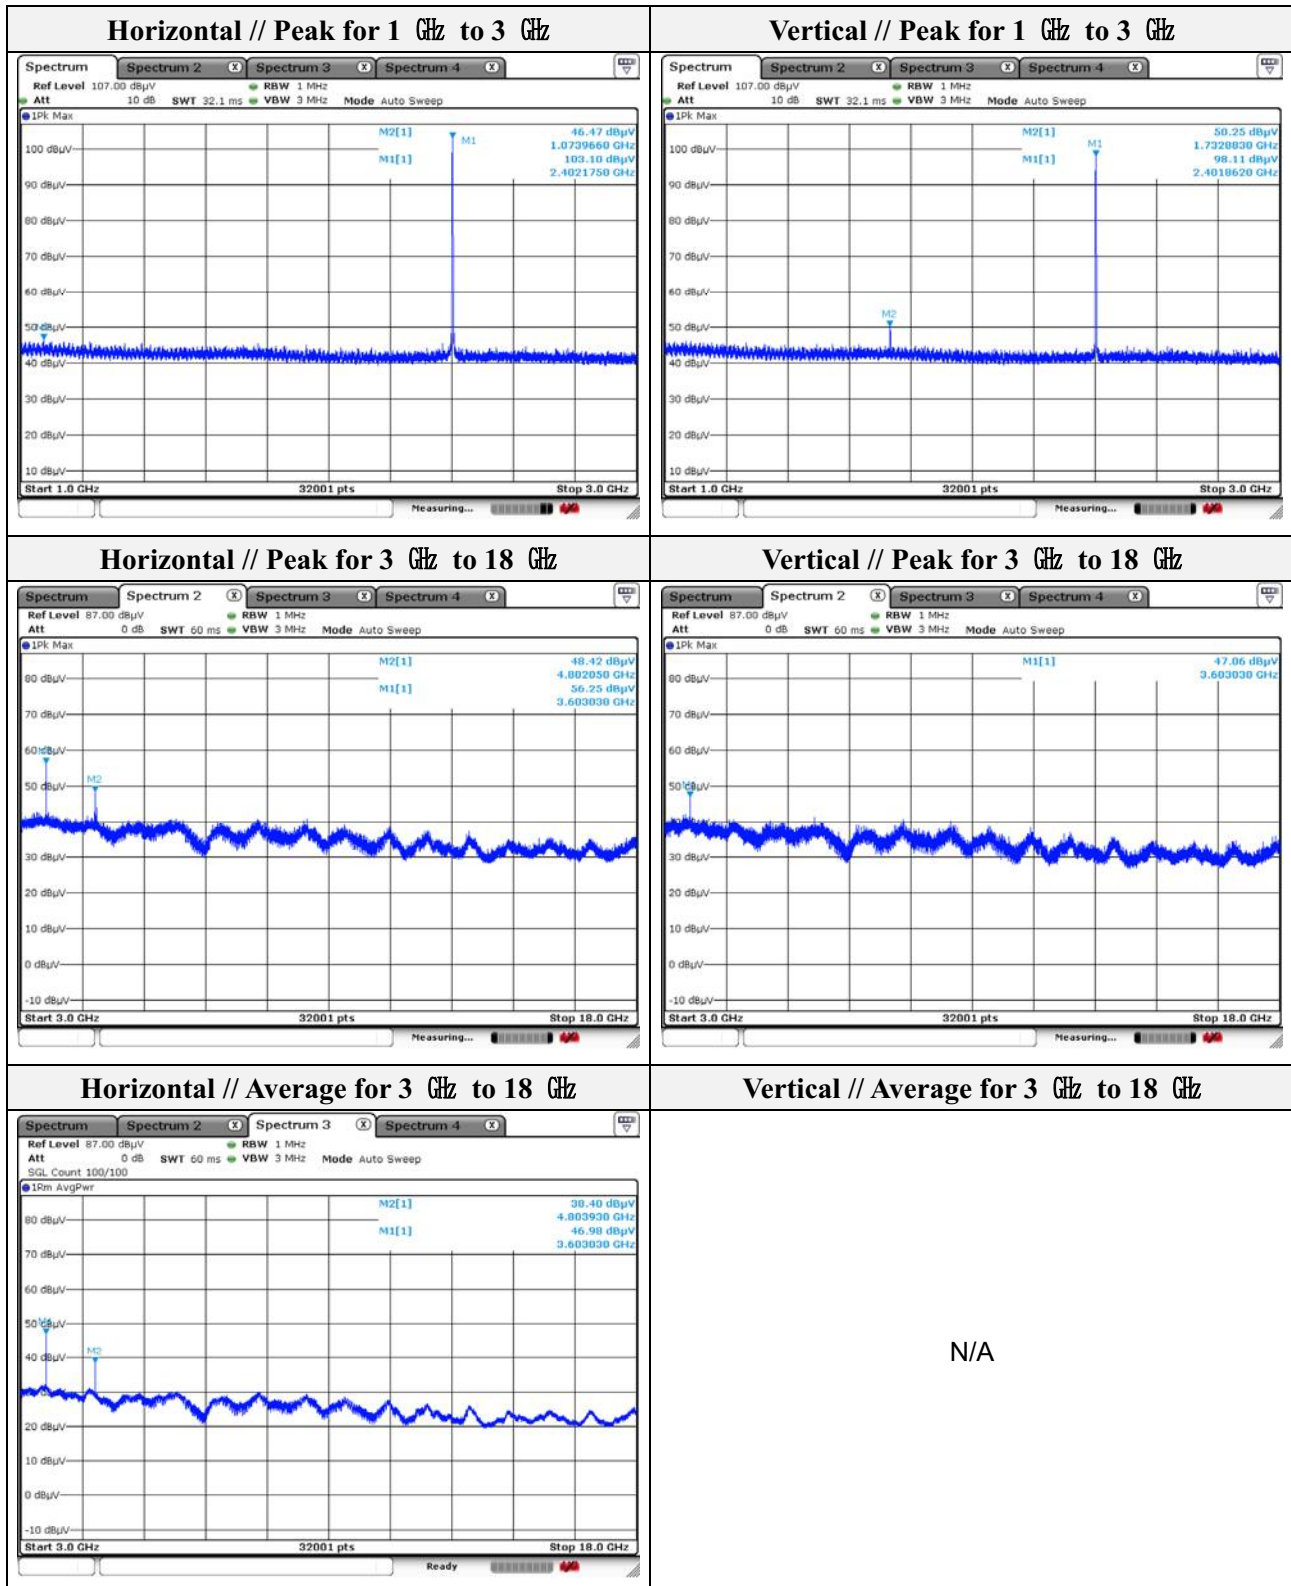

Note.

1. Average test would be performed if the peak result were greater than the average limit.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:


KES-RF-23T0053

Page (41) of (73)

Mode: BDR (Right)Distance of measurement: 3 meterChannel: 40

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
1 083.28	45.87	Peak	H	-9.42	-	36.45	74.00	37.55
1 722.88	49.13	Peak	V	-4.49	-	44.64	74.00	29.36
3 663.03	53.98	Peak	H	1.16	-	55.14	74.00	18.86
3 663.03	46.60	Average	H	1.16	1.15	48.91	54.00	5.09
3 663.49	50.17	Peak	V	1.17	-	51.34	74.00	22.66
4 882.21	47.33	Peak	H	5.70	-	53.03	74.00	20.97
4 884.08	33.71	Average	H	5.71	1.15	40.57	54.00	13.43

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

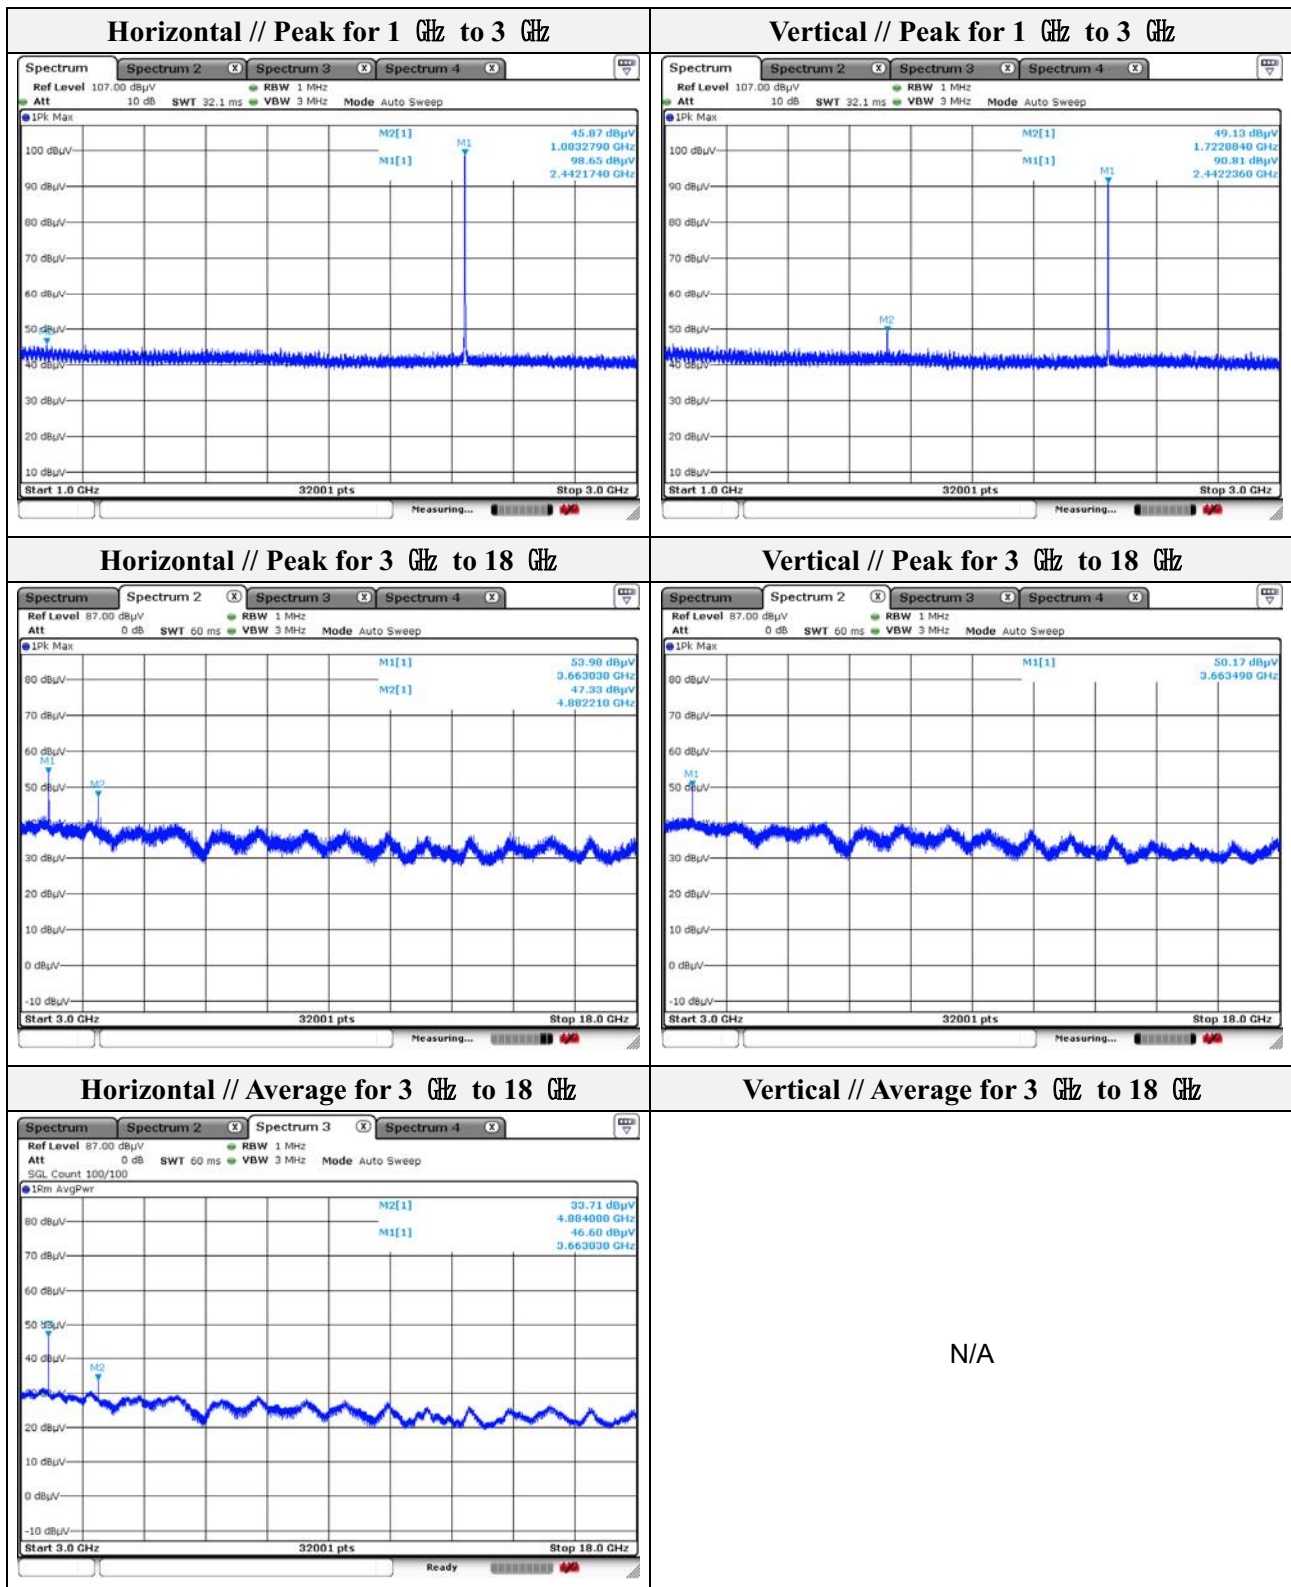

Note.

1. Average test would be performed if the peak result were greater than the average limit.

Mode: BDR (Right)

Transfer rate: 1 Mbps

Distance of measurement: 3 meter


Channel: 78


- Spurious

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 044.34	45.50	Peak	V	-9.68	-	35.82	74.00	38.18
1 724.32	46.54	Peak	H	-4.47	-	42.07	74.00	31.93
3 720.21	46.07	Peak	V	1.61	-	47.68	74.00	26.32
3 720.21	52.17	Peak	H	1.61	-	53.78	74.00	20.22
4 958.14	44.83	Peak	H	6.22	-	51.05	74.00	22.95

- Band edge

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
2 483.50	48.98	Peak	H	-1.66	-	47.32	74.00	26.68
2 483.50	45.24	Peak	V	-1.66	-	43.58	74.00	30.42

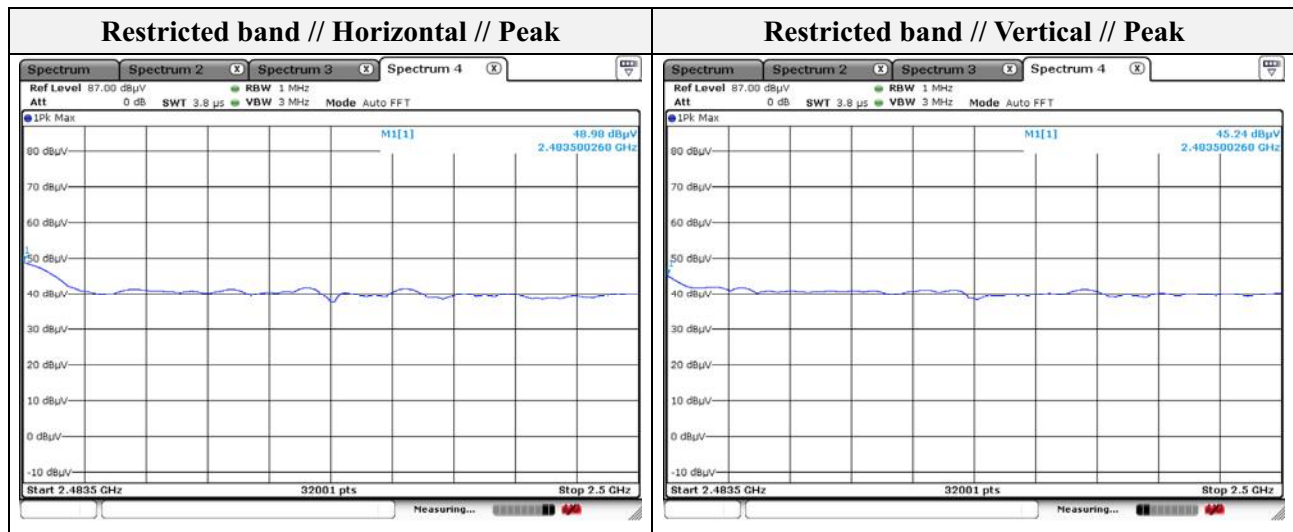

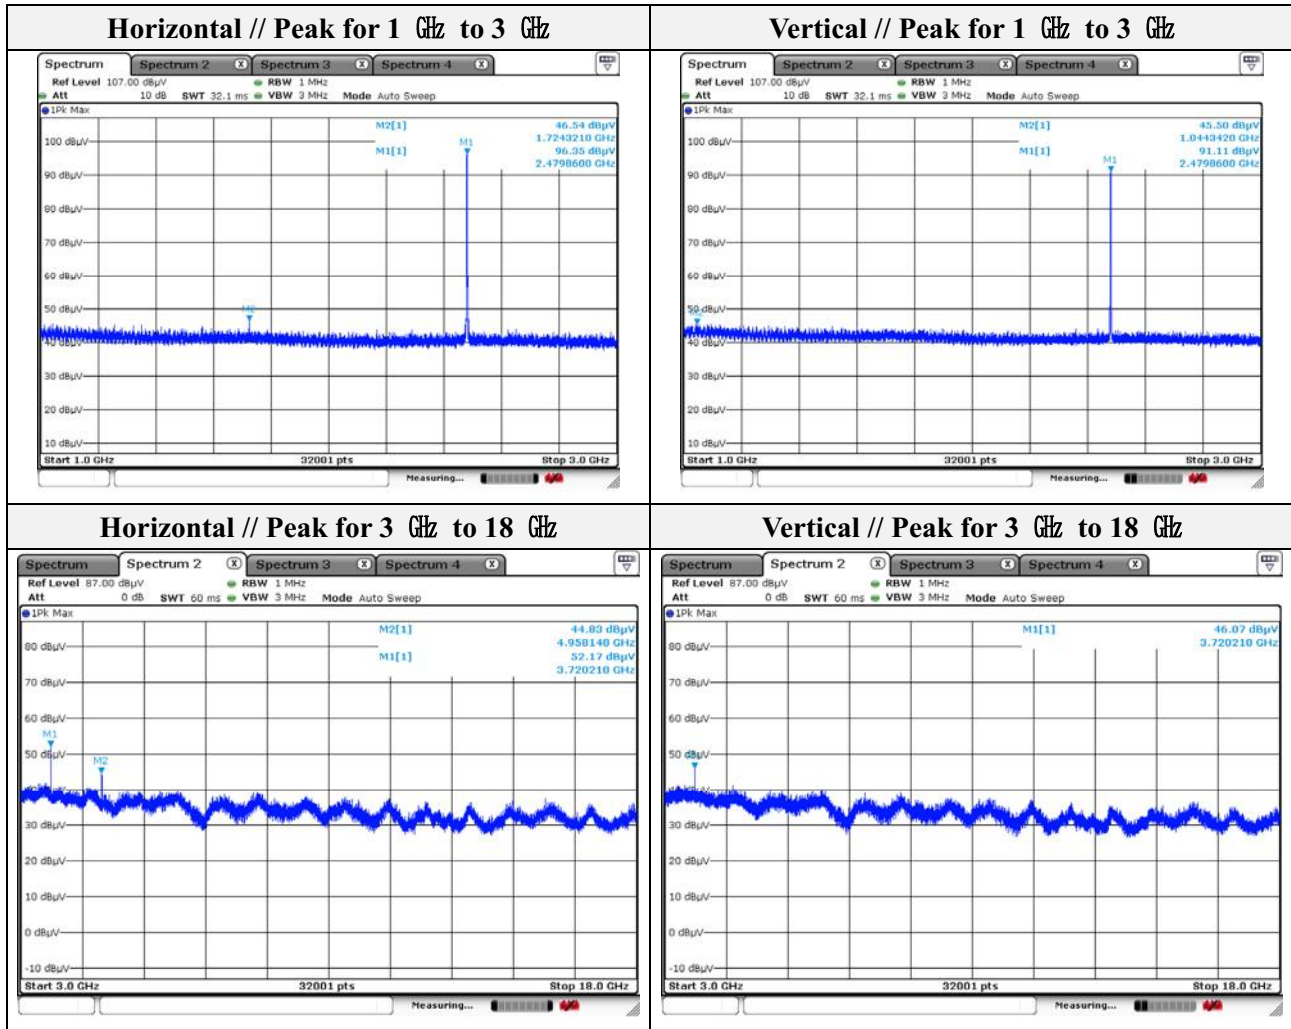

Note.

1. Average test would be performed if the peak result were greater than the average limit.

Mode: BDR (Left)

Distance of measurement: 3 meter


Channel: 00

- Spurious


Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 126.34	46.28	Peak	H	-9.13	-	37.15	74.00	36.85
1 177.84	47.06	Peak	V	-8.79	-	38.27	74.00	35.73
3 603.03	53.98	Peak	H	0.70	-	54.68	74.00	19.32
3 603.03	46.62	Average	H	0.70	1.15	48.47	54.00	5.53
3 603.50	47.39	Peak	V	0.71	-	48.10	74.00	25.90
4 802.05	44.81	Peak	H	5.15	-	49.96	74.00	24.04
4 803.93	38.83	Average	H	5.16	1.15	45.14	54.00	8.86

- Band edge

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
2 388.71	41.66	Peak	V	-1.86	-	39.80	74.00	34.20
2 389.53	42.70	Peak	H	-1.86	-	40.84	74.00	33.16

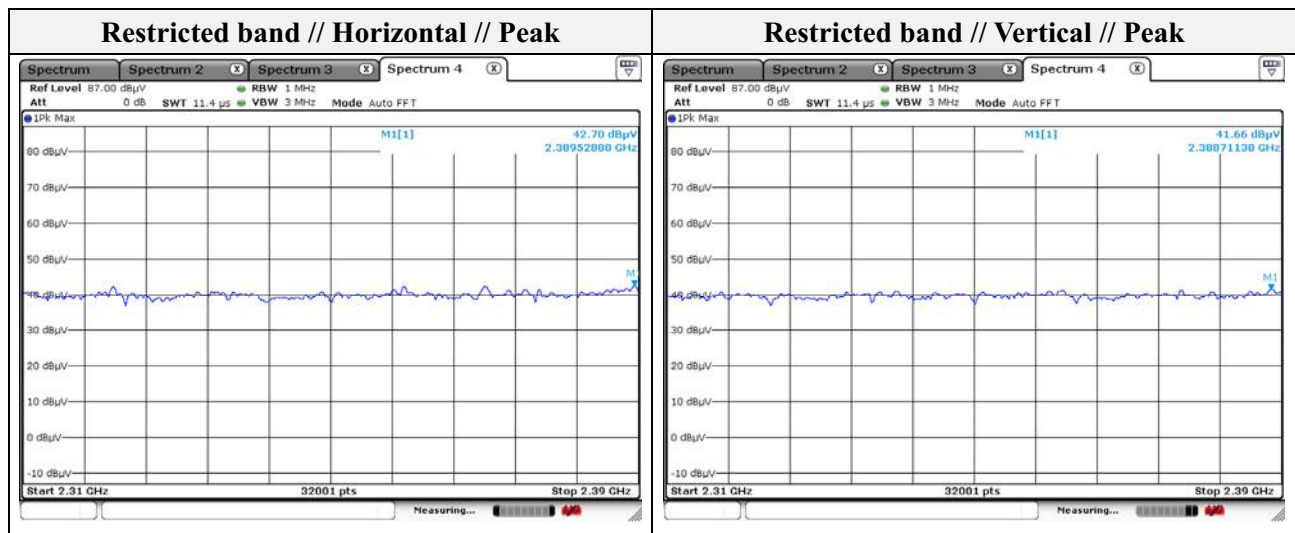

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

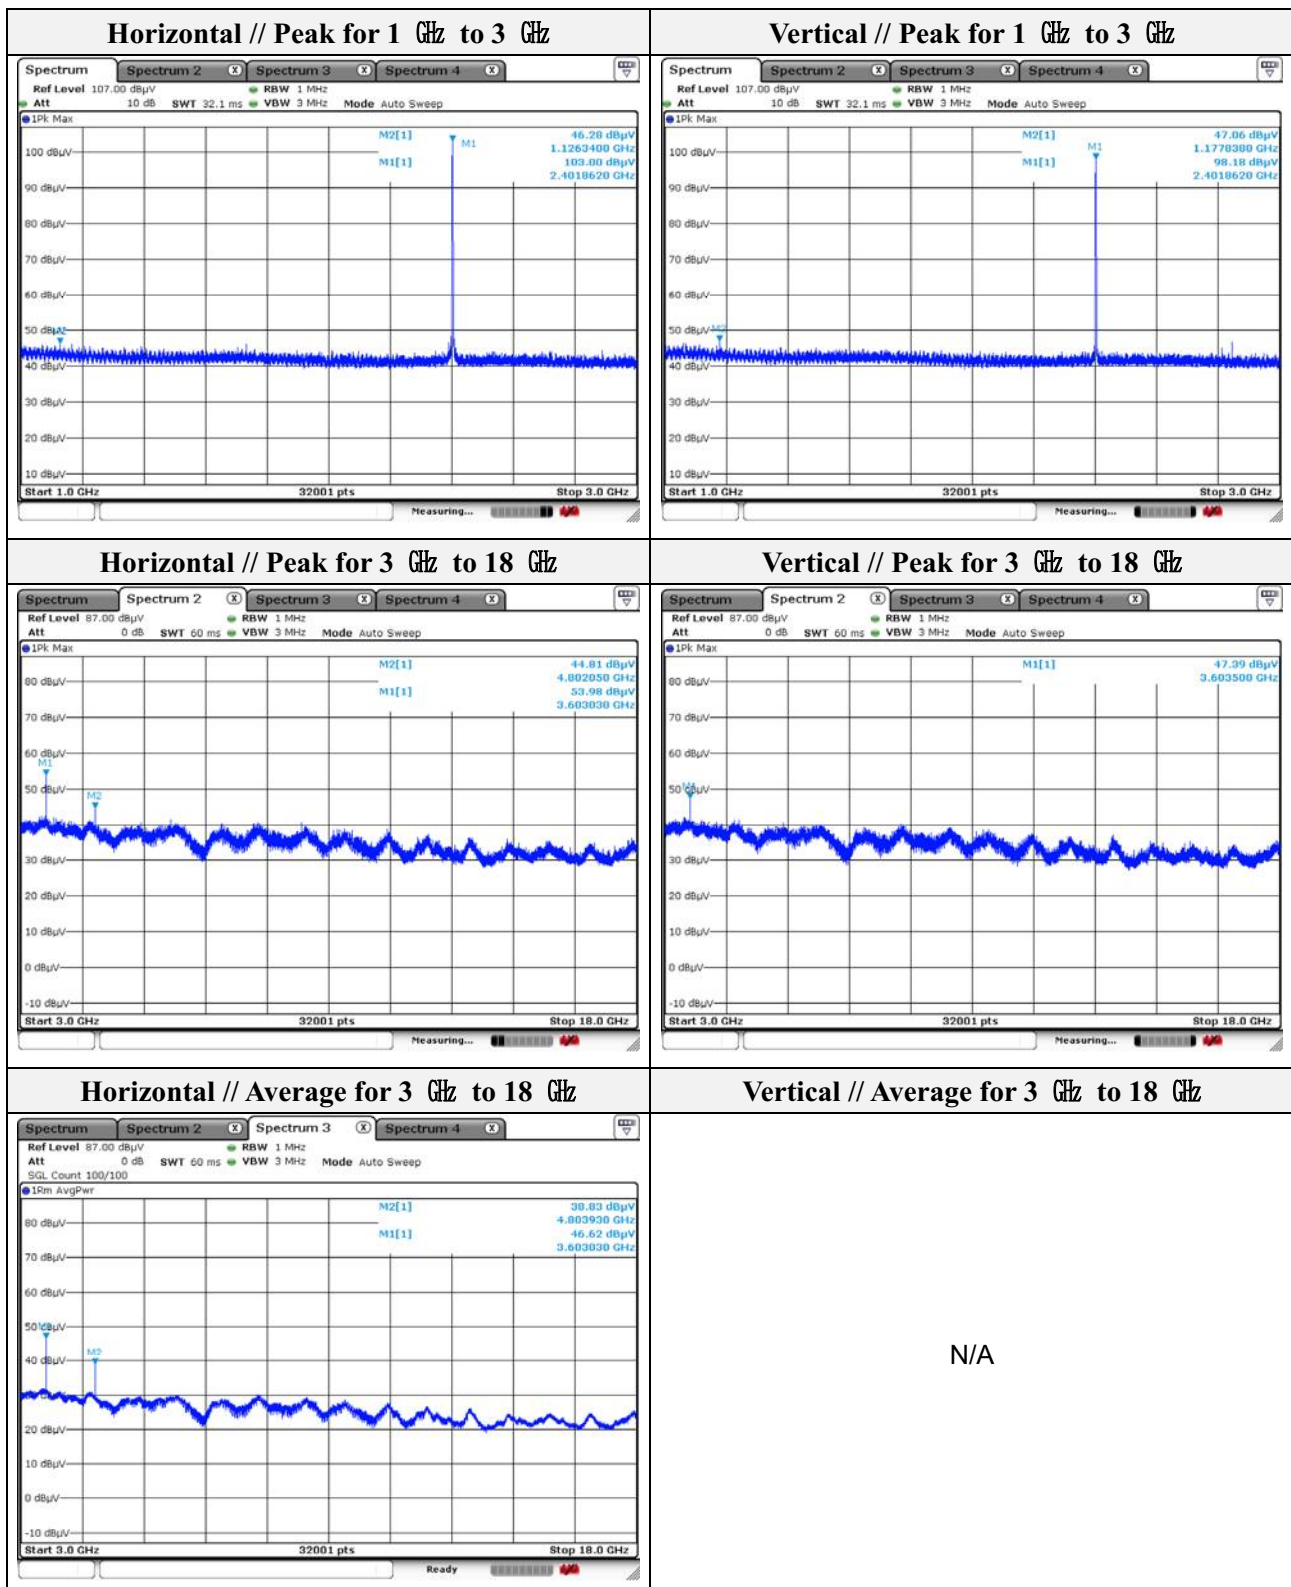

Note.

1. Average test would be performed if the peak result were greater than the average limit.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:


KES-RF-23T0053

Page (47) of (73)

Mode: BDR (Left)
Distance of measurement: 3 meter
Channel: 40

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
1 098.15	46.52	Peak	V	-9.32	-	37.20	74.00	36.80
2 580.67	46.66	Peak	H	-1.19	-	45.47	74.00	28.53
3 663.03	46.46	Average	H	1.16	1.15	48.77	54.00	5.23
3 663.03	54.58	Peak	H	1.16	-	55.74	74.00	18.26
3 663.49	50.46	Peak	V	1.17	-	51.63	74.00	22.37
4 882.21	42.99	Peak	H	5.70	-	48.69	74.00	25.31
4 882.21	32.79	Average	H	5.70	1.15	39.64	54.00	14.36

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

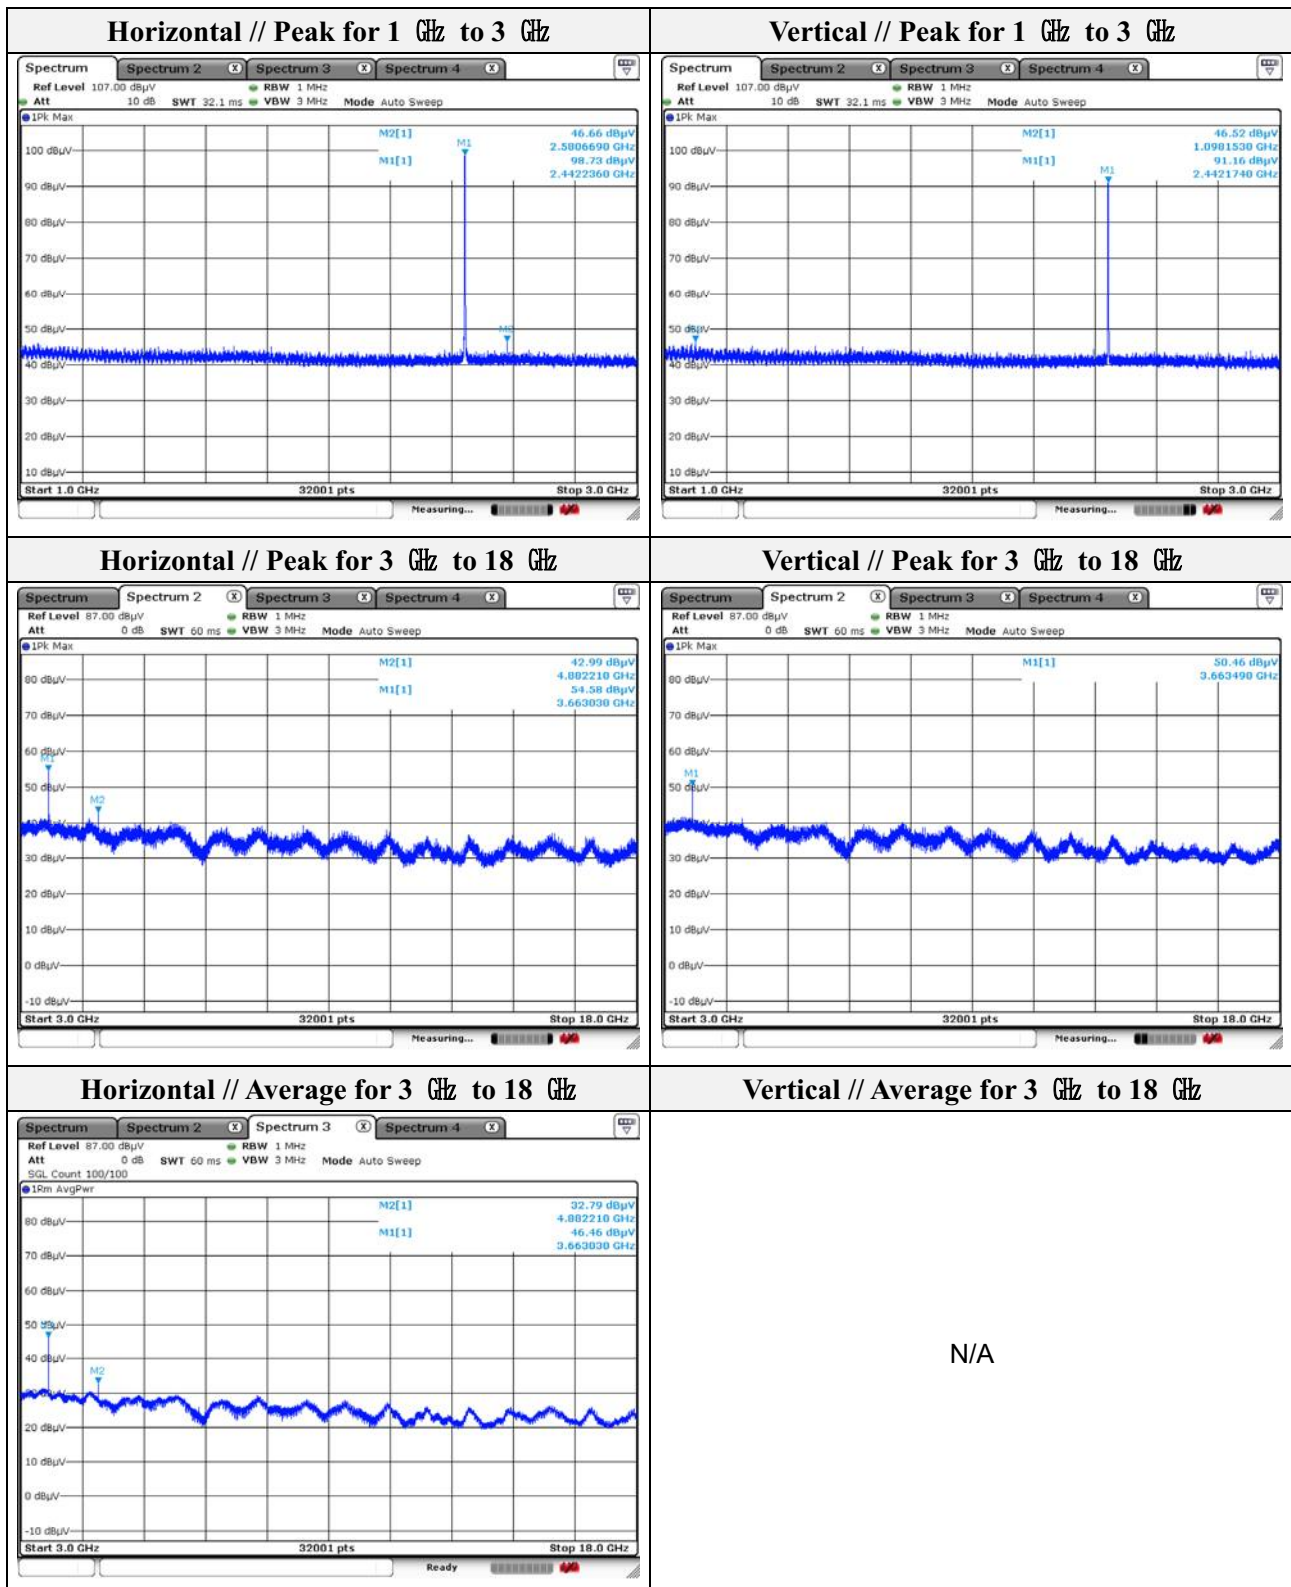

Note.

1. Average test would be performed if the peak result were greater than the average limit.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Mode: BDR (Left)

Transfer rate: 1 Mbps

Distance of measurement: 3 meter


Channel: 78


- Spurious

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 195.28	45.67	Peak	H	-8.68	-	36.99	74.00	37.01
1 730.51	47.23	Peak	V	-4.39	-	42.84	74.00	31.16
3 719.27	44.86	Peak	V	1.60	-	46.46	74.00	27.54
3 719.74	53.26	Peak	H	1.60	-	54.86	74.00	19.14
3 720.21	47.46	Average	H	1.61	1.15	49.07	54.00	4.93
4 958.14	46.26	Peak	H	6.22	-	52.48	74.00	21.52
4 960.02	35.22	Average	H	6.23	1.15	41.45	54.00	12.55

- Band edge

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
2 483.50	49.17	Peak	H	-1.66	-	47.51	74.00	26.49
2 483.50	45.20	Peak	V	-1.66	-	43.54	74.00	30.46

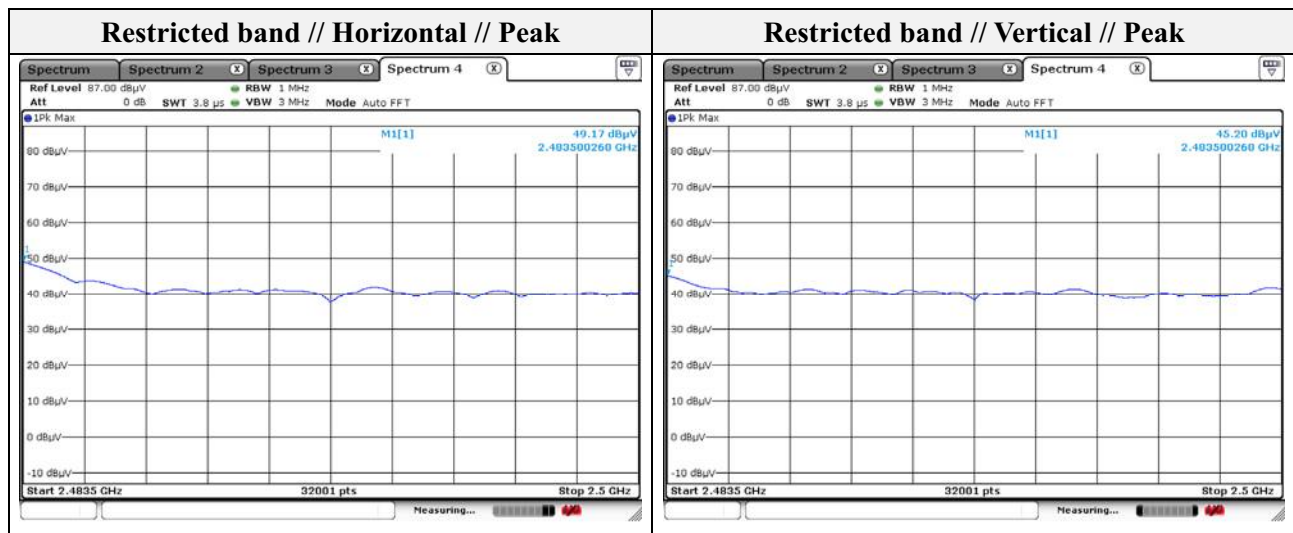

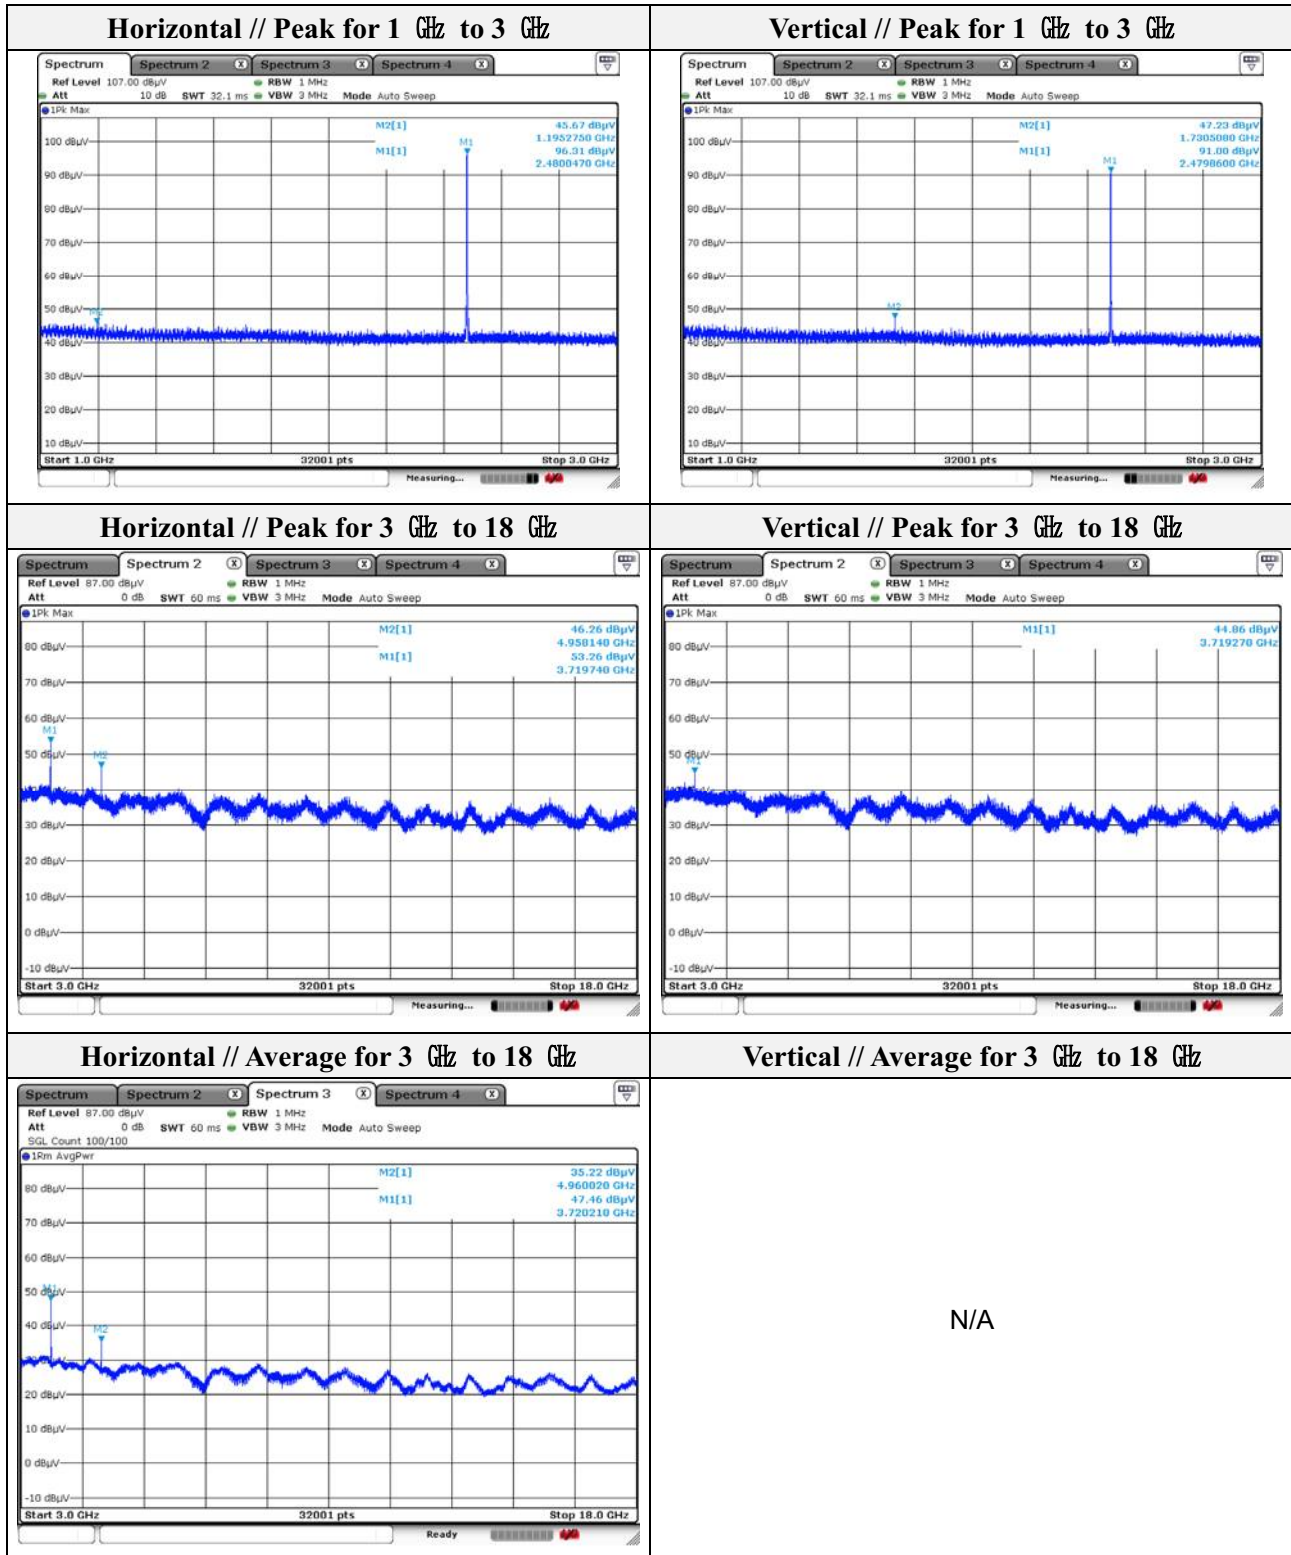

Note.

1. Average test would be performed if the peak result were greater than the average limit.

Mode: EDR (Right)

Transfer rate: 3 Mbps(Worst case)

Distance of measurement: 3 meter


Channel: 00


- Spurious

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 682.76	50.53	Peak	H	-4.99	-	45.54	74.00	28.46
2 222.49	41.00	Peak	V	-1.89	-	39.11	74.00	34.89
3 602.56	51.78	Peak	H	0.70	-	52.48	74.00	21.52
3 603.50	44.27	Peak	V	0.71	-	44.98	74.00	29.02
3 797.08	47.18	Peak	H	2.20	-	49.38	74.00	24.62
4 803.93	43.54	Peak	H	5.16	-	48.70	74.00	25.30

- Band edge

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
2 376.04	48.46	Peak	H	-1.87	-	46.59	74.00	27.41
2 374.23	42.83	Peak	V	-1.87	-	40.96	74.00	33.04

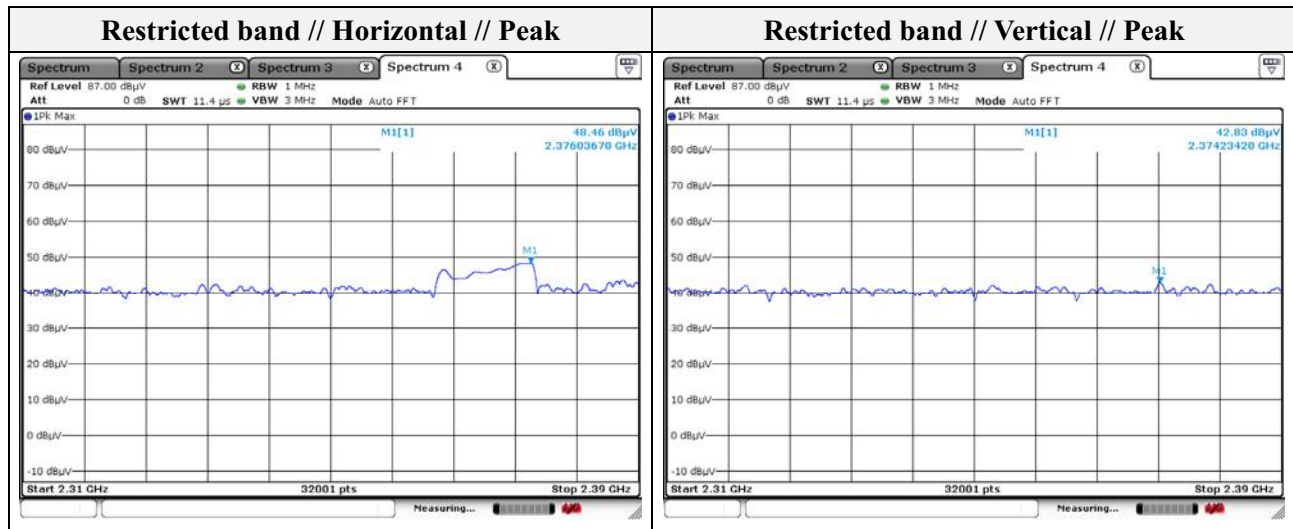

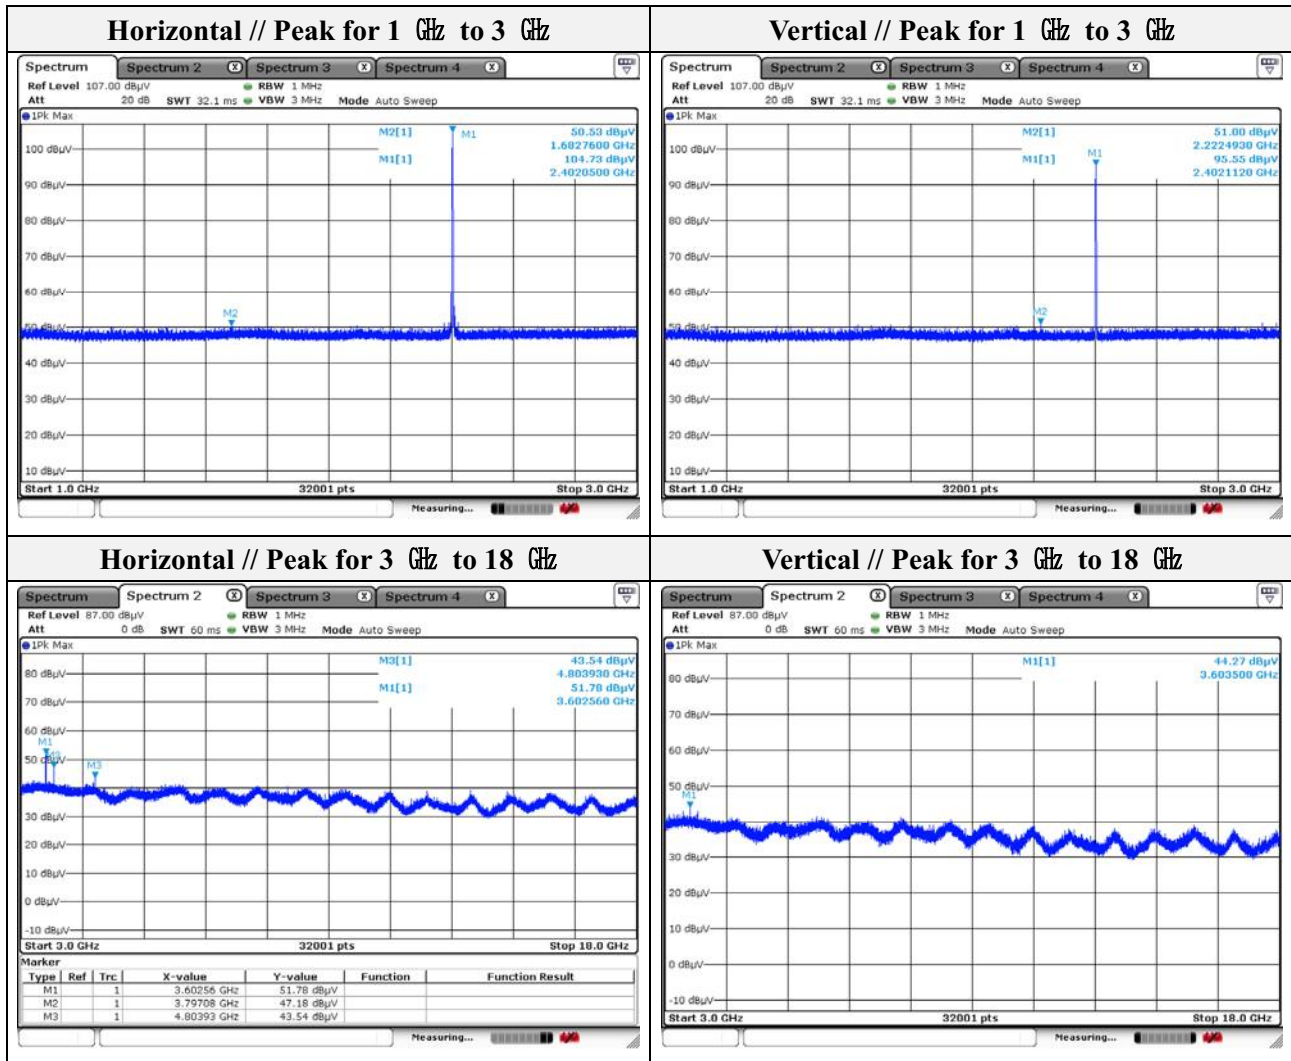

Note.

1. Average test would be performed if the peak result were greater than the average limit.

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-RF-23T0053


Page (53) of (73)

Mode: EDR (Right)
Transfer rate: 3 Mbps(Worst case)
Distance of measurement: 3 meter
Channel: 40

- Spurious

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 026.03	50.98	Peak	V	-9.80	-	41.18	74.00	32.82
1 690.45	50.59	Peak	H	-4.90	-	45.69	74.00	28.31
3 663.03	52.99	Peak	H	1.16	-	54.15	74.00	19.85
3 663.03	46.95	Average	H	1.16	1.15	49.26	54.00	4.74
3 663.03	44.79	Peak	V	1.16		45.95	74.00	28.05
3 798.49	48.55	Peak	H	2.21	-	50.76	74.00	23.24

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

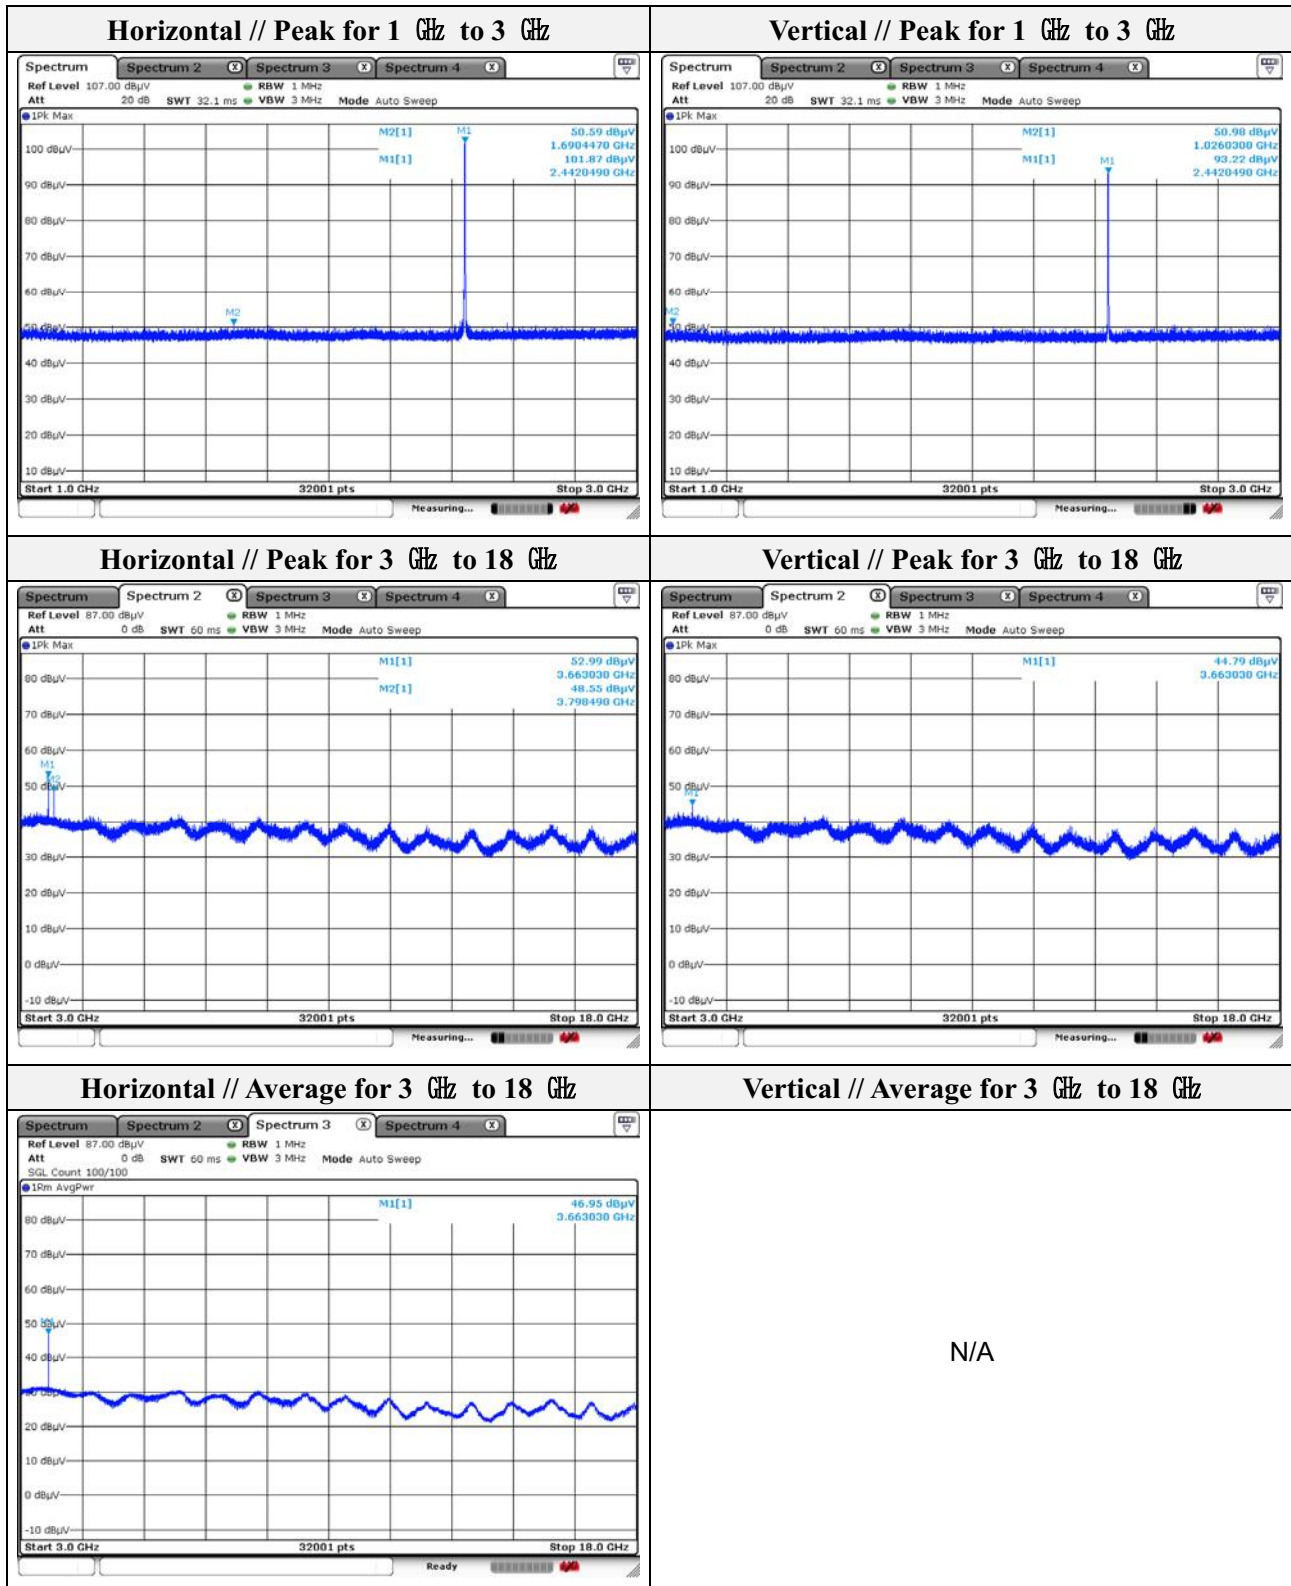

Note.

1. Average test would be performed if the peak result were greater than the average limit.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Mode: EDR (Right)

Transfer rate: 3 Mbps(Worst case)

Distance of measurement: 3 meter


Channel: 78

- Spurious


Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 753.07	51.01	Peak	H	-4.11	-	46.90	74.00	27.10
2 123.31	50.97	Peak	V	-2.00	-	48.97	74.00	25.03
3 719.74	45.95	Peak	V	1.60	-	47.55	74.00	26.45
3 720.21	52.64	Peak	H	1.61	-	54.25	74.00	19.75
3 720.21	48.19	Average	H	1.61	1.15	49.80	54.00	4.20

- Band edge

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
2 483.50	53.84	Peak	H	-1.66	-	52.18	74.00	21.82
2 484.24	45.27	Peak	V	-1.66	-	43.61	74.00	30.39

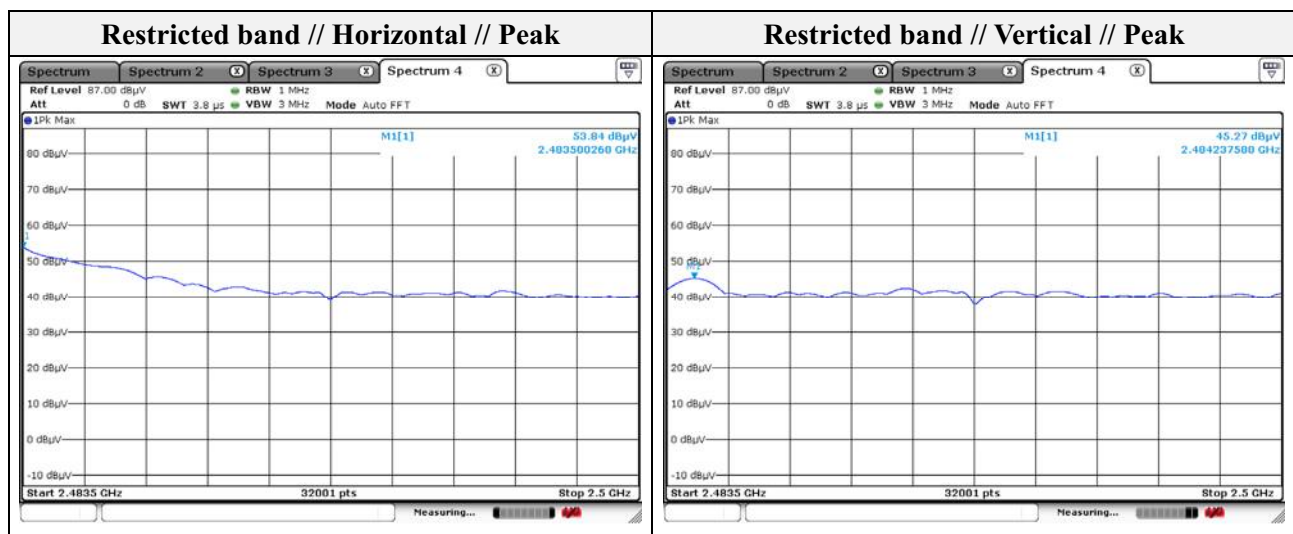

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

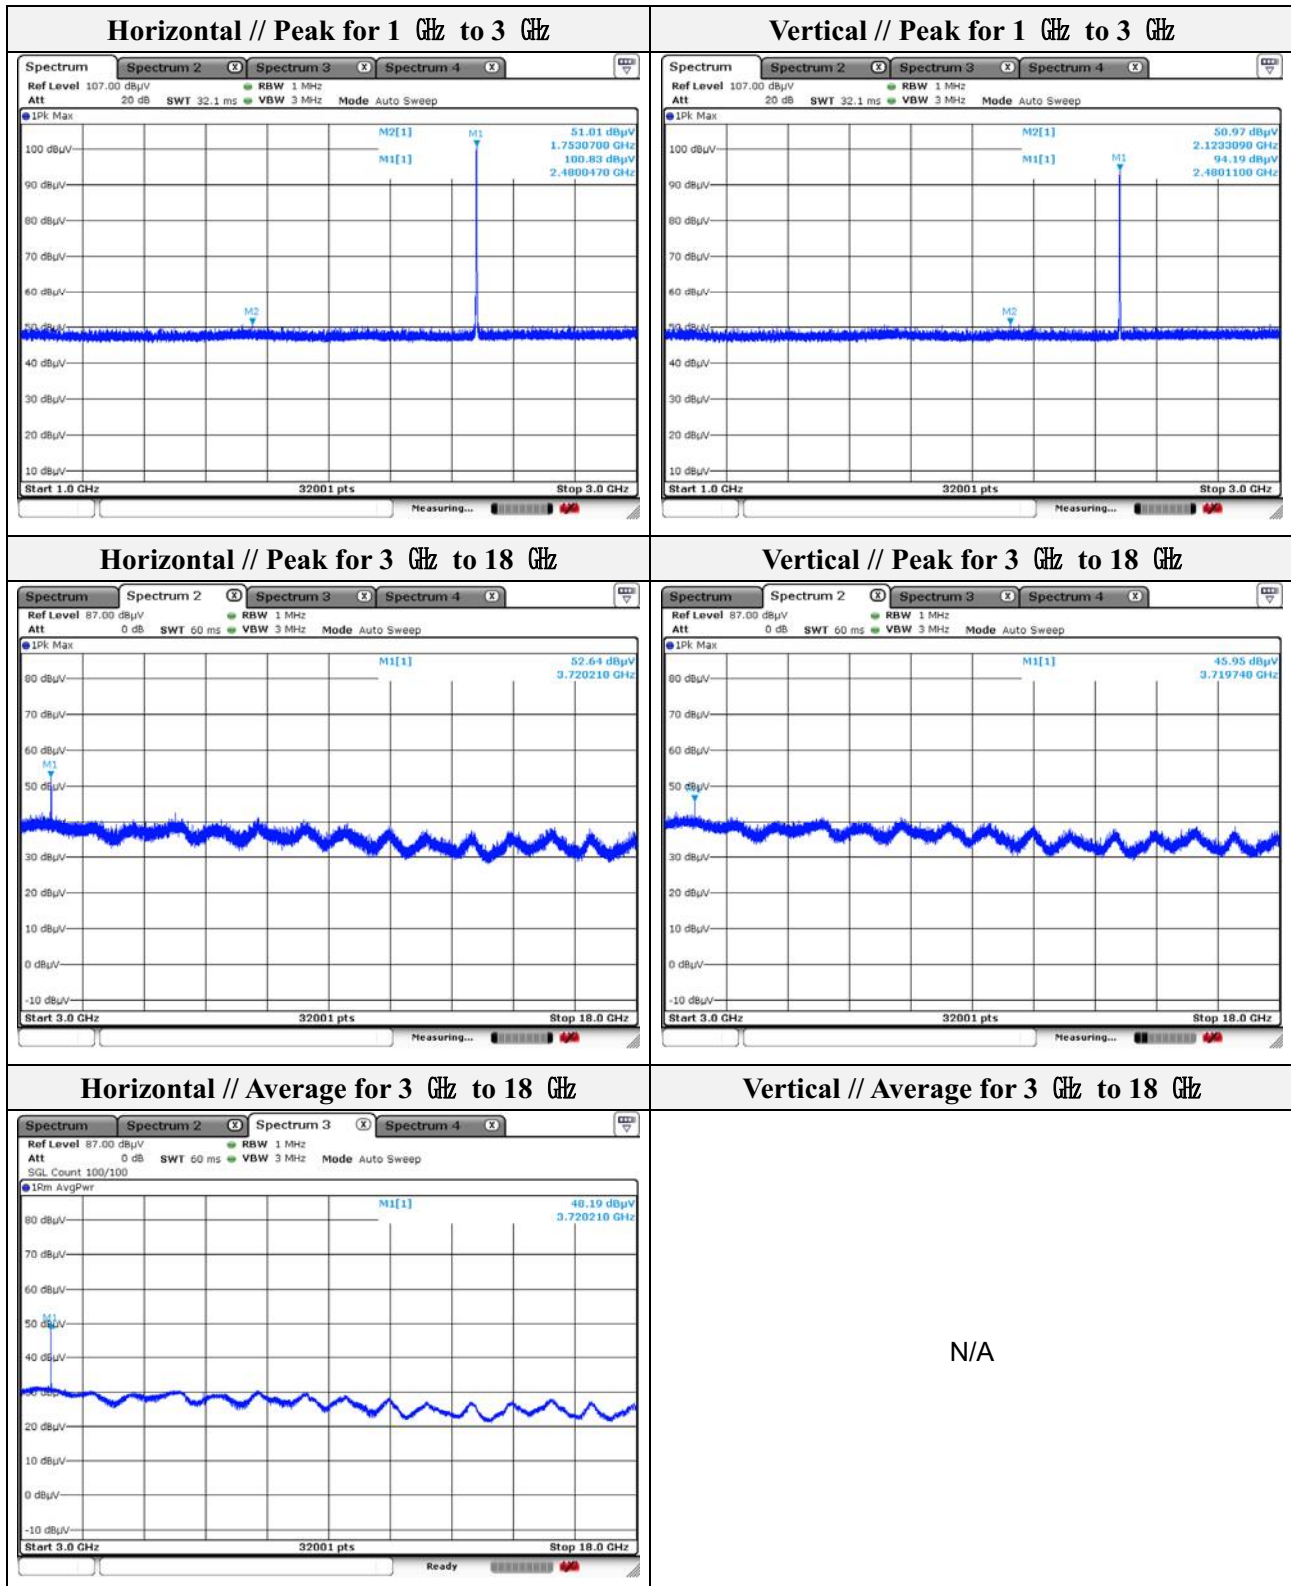

Note.

1. Average test would be performed if the peak result were greater than the average limit.

Mode: EDR (Left)

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Transfer rate: 3 Mbps(Worst case)

Distance of measurement: 3 meter


Channel: 00

- Spurious


Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 042.03	50.17	Peak	V	-9.69	-	40.48	74.00	33.52
1 761.76	51.04	Peak	H	-4.00	-	47.04	74.00	26.96
3 603.97	45.91	Peak	V	0.71	-	46.62	74.00	27.38
3 603.50	50.64	Peak	H	0.71	-	51.35	74.00	22.65
4 803.46	41.81	Peak	V	5.16	-	46.97	74.00	27.03
4 804.40	45.35	Peak	H	5.17	-	50.52	74.00	23.48

- Band edge

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
2 348.94	42.52	Peak	V	-1.87	-	40.65	74.00	33.35
2 370.13	42.73	Peak	H	-1.87	-	40.86	74.00	33.14

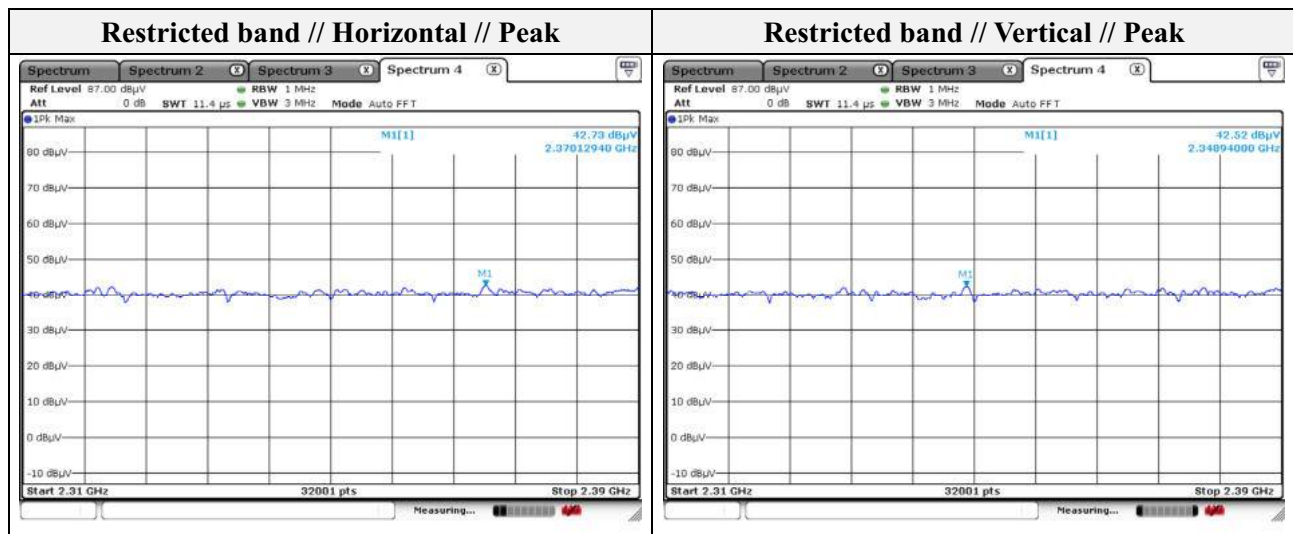

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

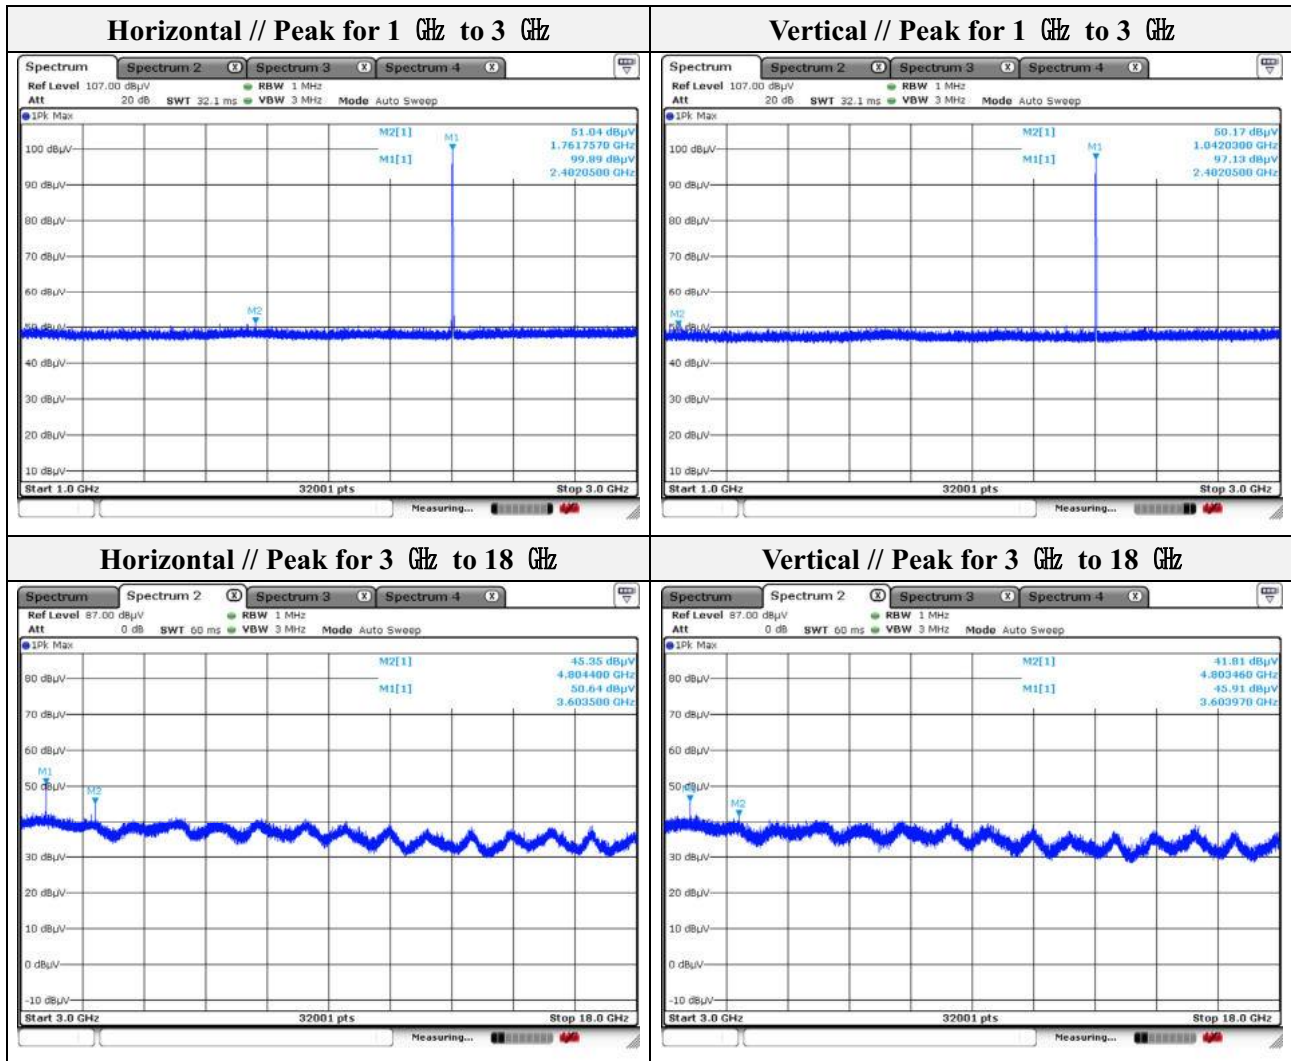

Note.

1. Average test would be performed if the peak result were greater than the average limit.

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-RF-23T0053


Page (59) of (73)

Mode: EDR (Left)
Transfer rate: 3 Mbps(Worst case)
Distance of measurement: 3 meter
Channel: 40

- Spurious

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 737.45	50.87	Peak	V	-4.31	-	46.56	74.00	27.44
1 947.31	52.00	Peak	H	-2.52	-	49.48	74.00	24.52
3 663.03	49.85	Peak	H	1.16	-	51.01	74.00	22.99
3 663.49	44.19	Peak	V	1.17	-	45.36	74.00	28.64
4 884.55	45.71	Peak	H	5.72	-	51.43	74.00	22.57

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

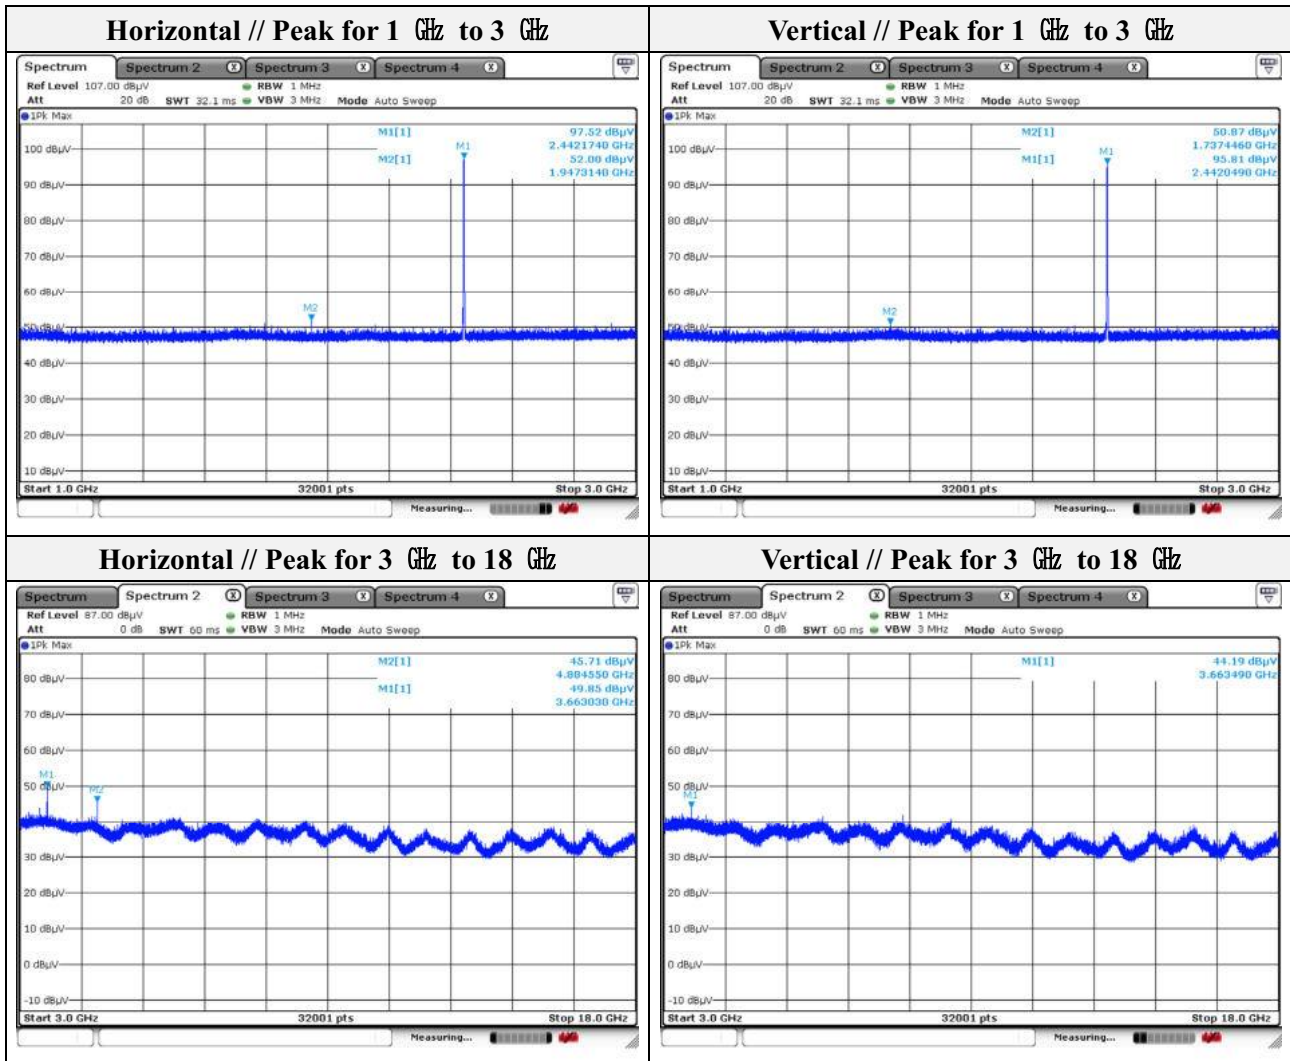

Note.

1. Average test would be performed if the peak result were greater than the average limit.

Mode: EDR (Left)

Transfer rate: 3 Mbps(Worst case)

Distance of measurement: 3 meter


Channel: 78

- Spurious


Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 657.64	50.61	Peak	V	-5.31	-	45.30	74.00	28.70
1 745.45	51.12	Peak	H	-4.21	-	46.91	74.00	27.09
3 719.74	49.10	Peak	H	1.60	-	50.70	74.00	23.30
3 720.21	44.54	Peak	V	1.61	-	46.15	74.00	27.85

- Band edge

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
2 483.50	47.81	Peak	H	-1.66	-	46.15	74.00	27.85
2 483.50	47.68	Peak	V	-1.66	-	46.02	74.00	27.98

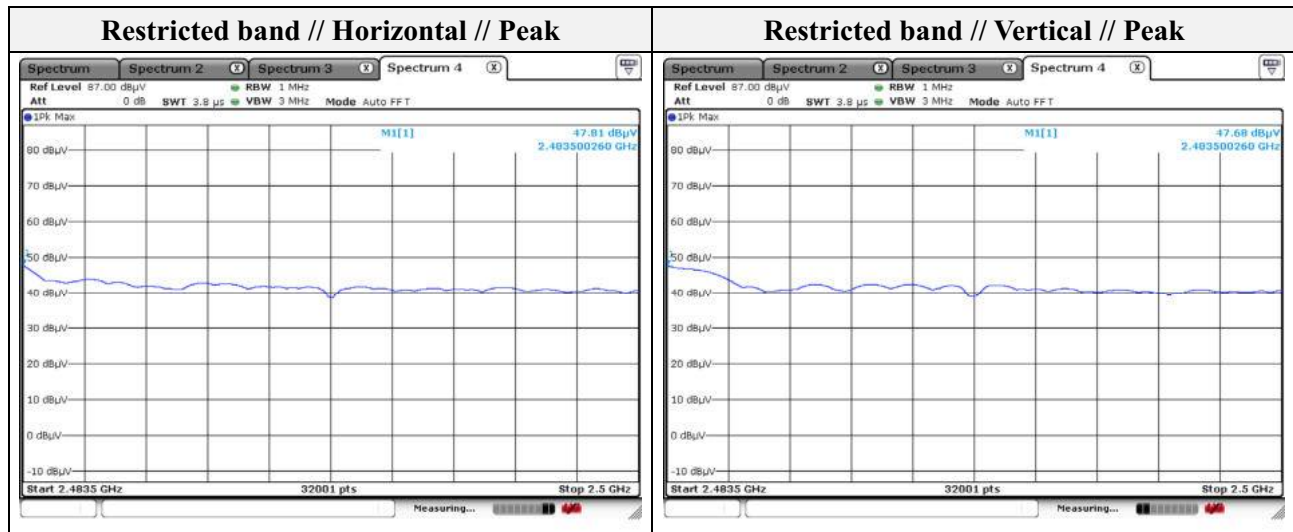

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

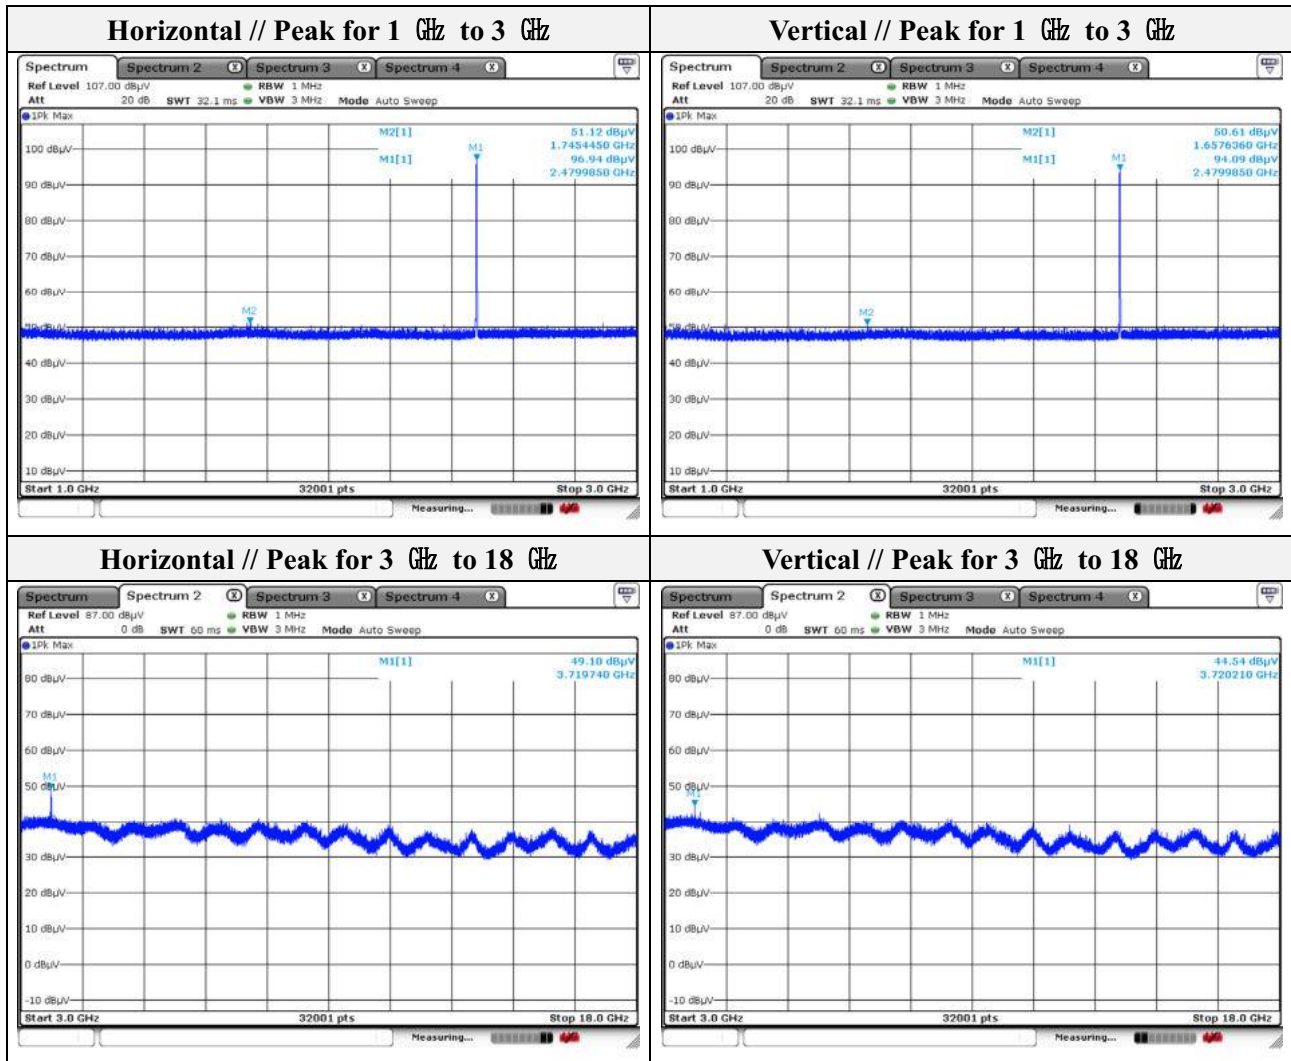


Note.

1. Average test would be performed if the peak result were greater than the average limit.

Test results (18 GHz to 25 GHz) – Worst case

Mode: BDR (Right)


Distance of measurement: 3 meter

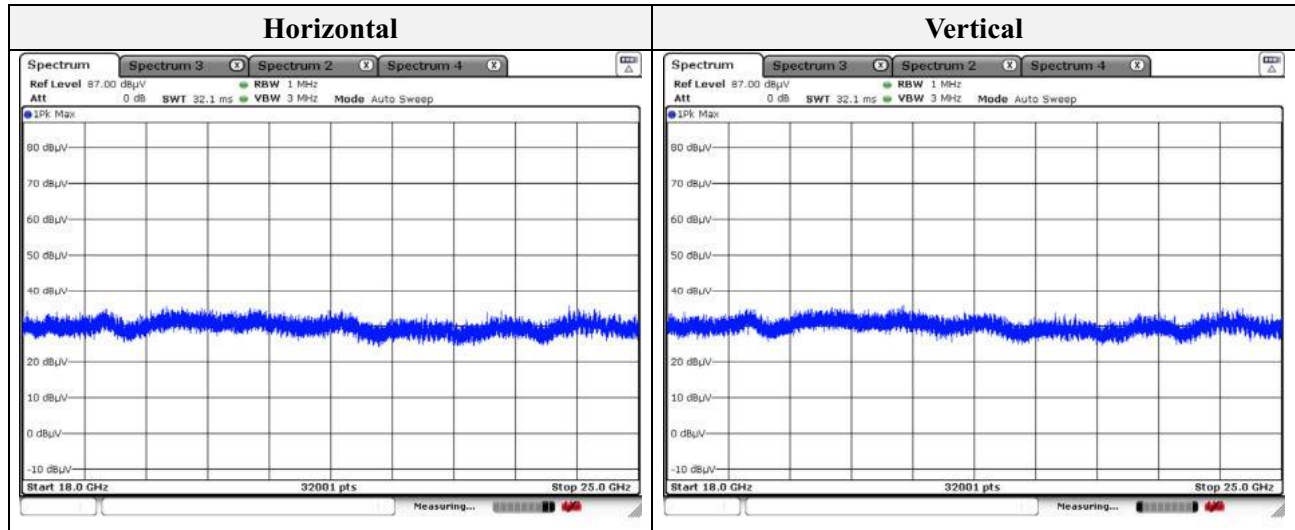Channel: 78 (Worst case)


Note.

1. No spurious emission were detected above 18 GHz.

Mode: BDR (Left)
Distance of measurement: 3 meter
Channel: 78 (Worst case)

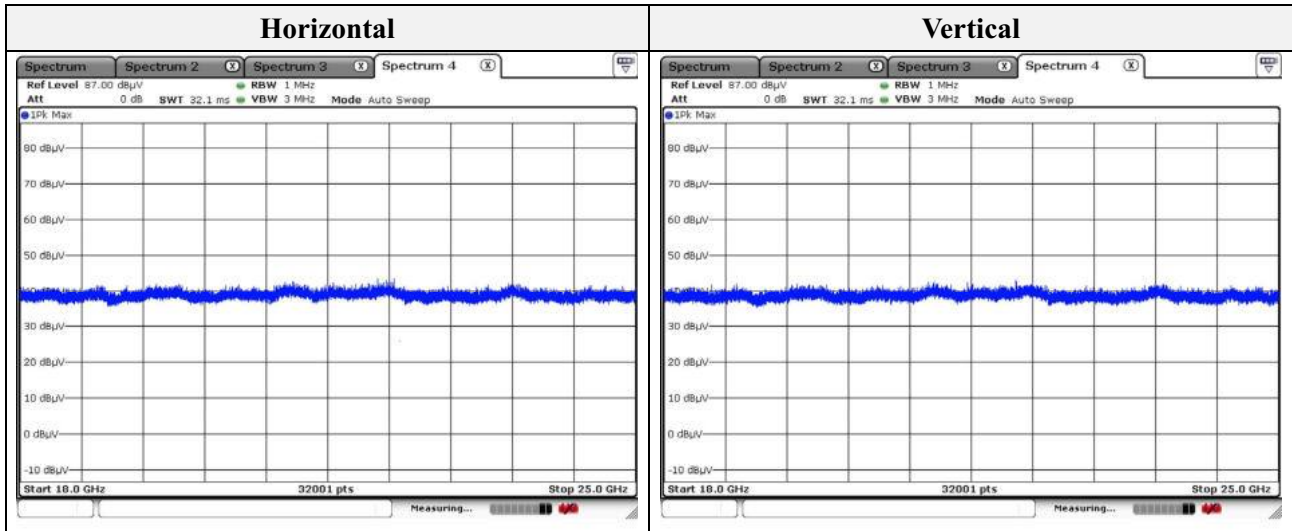

Note.


1. No spurious emission were detected above 18 GHz.

3.7. Conducted band edge and out of band emissions

Test procedure

KDB 558074 v05r02 & ANSI 63.10-2013

Test setup




Test setting







1. Span = wide enough to capture the peak level of the in-band emission and all spurious emissions(e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic.
2. RBW = 100 kHz
3. VBW \geq 300 kHz
4. Detector = Peak
5. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = max hold
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Limit

According to 15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph(b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in section 15.209(a) is not required. In addition, radiated emission which in the restricted band, as define in section 15.205(a), must also comply the radiated emission limits specified in section 15.209(a) (see section 15.205(c))

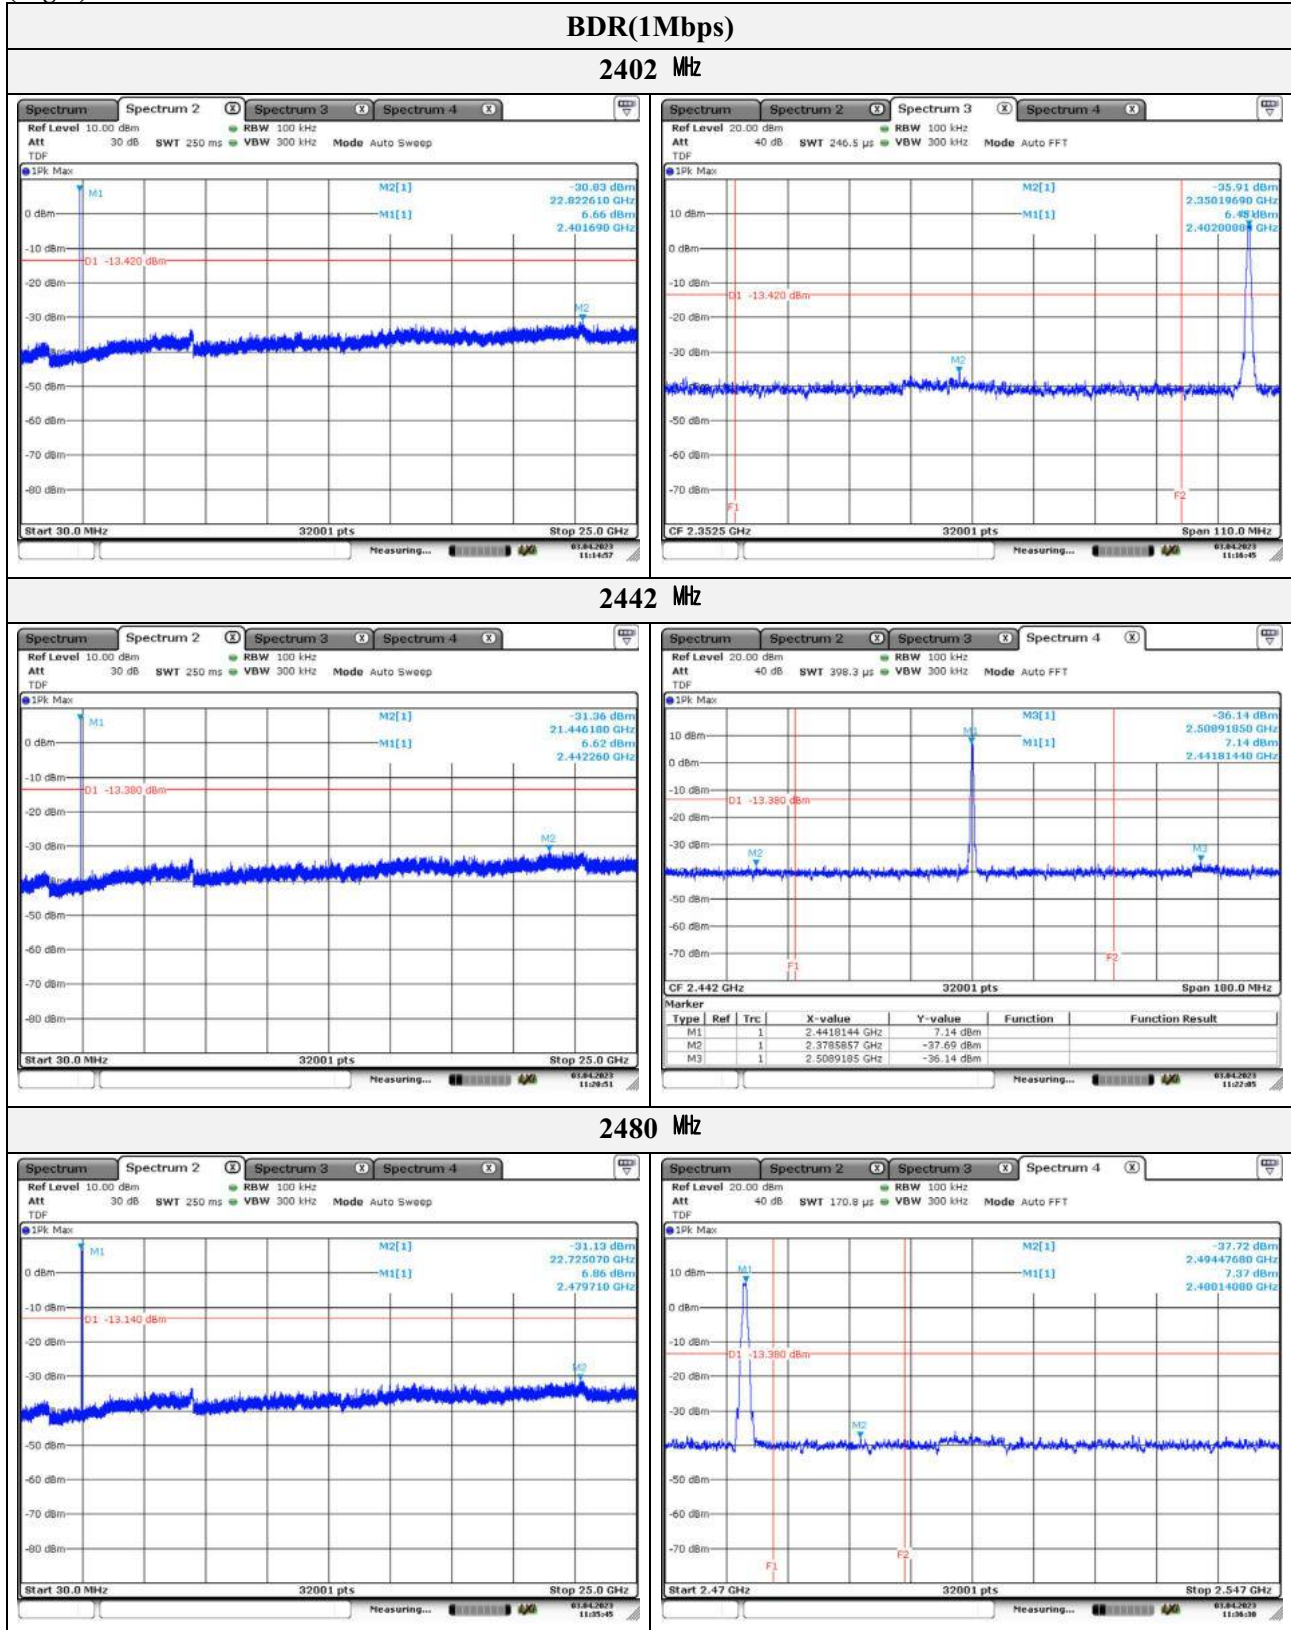
**Test result
(Right)**


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

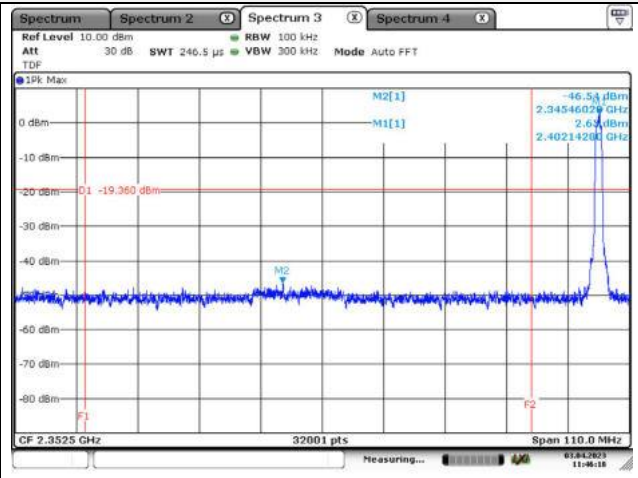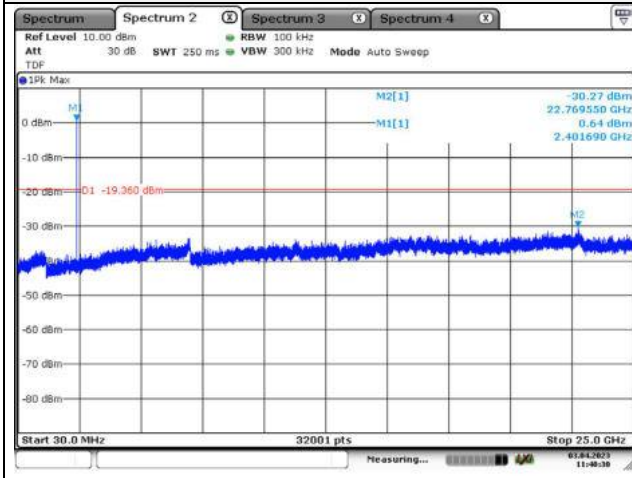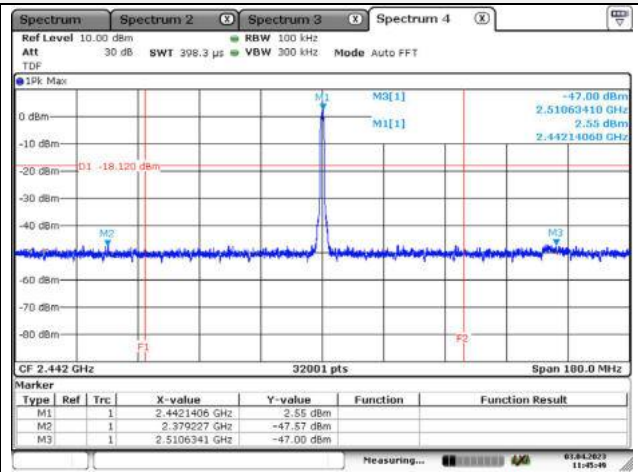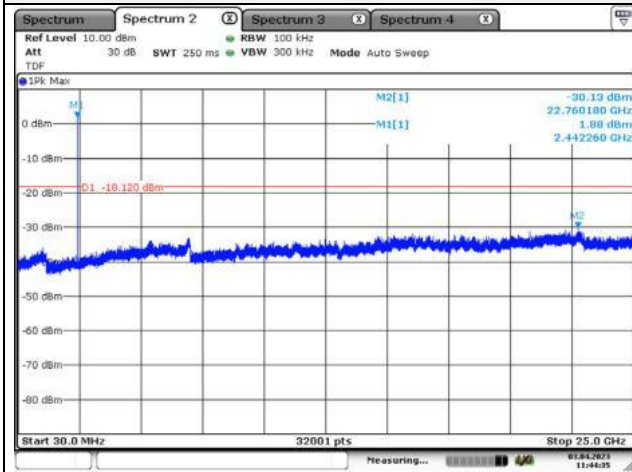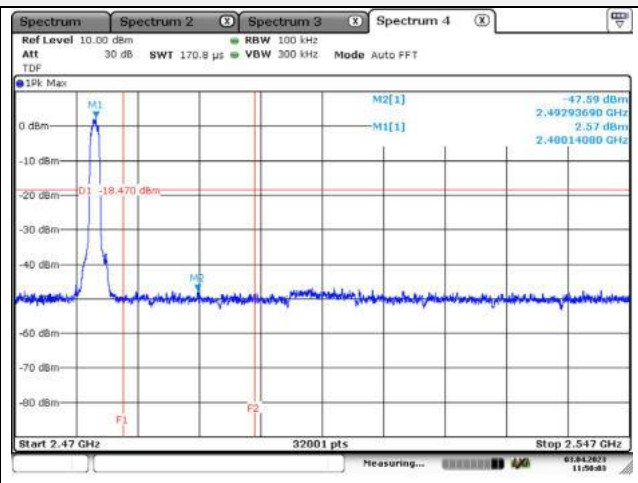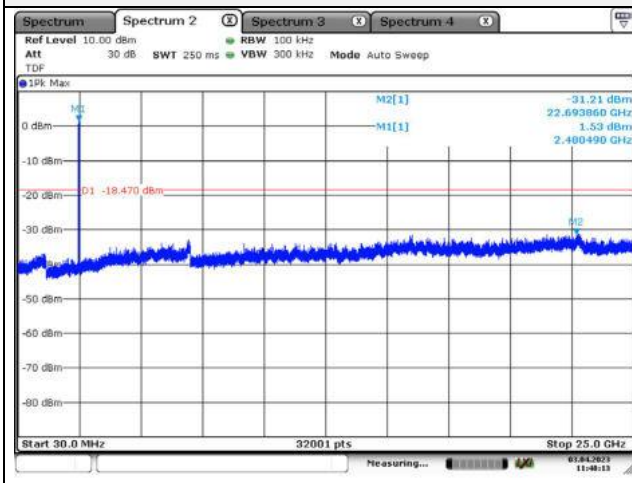
EDR(3Mbps)
2402 MHz

2442 MHz

2480 MHz

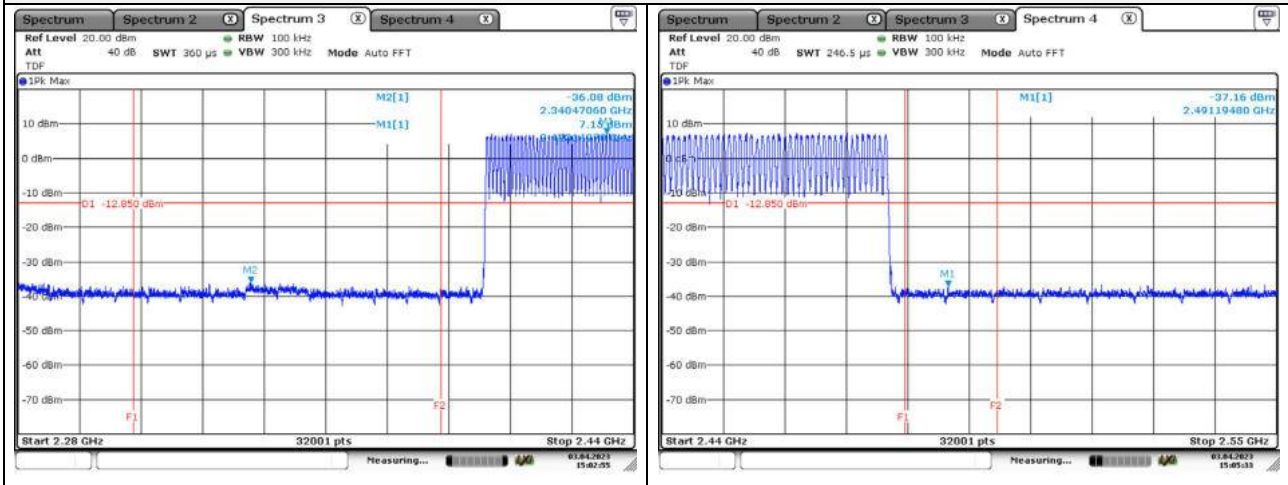
This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Hopping mode_BDR(1Mbps)

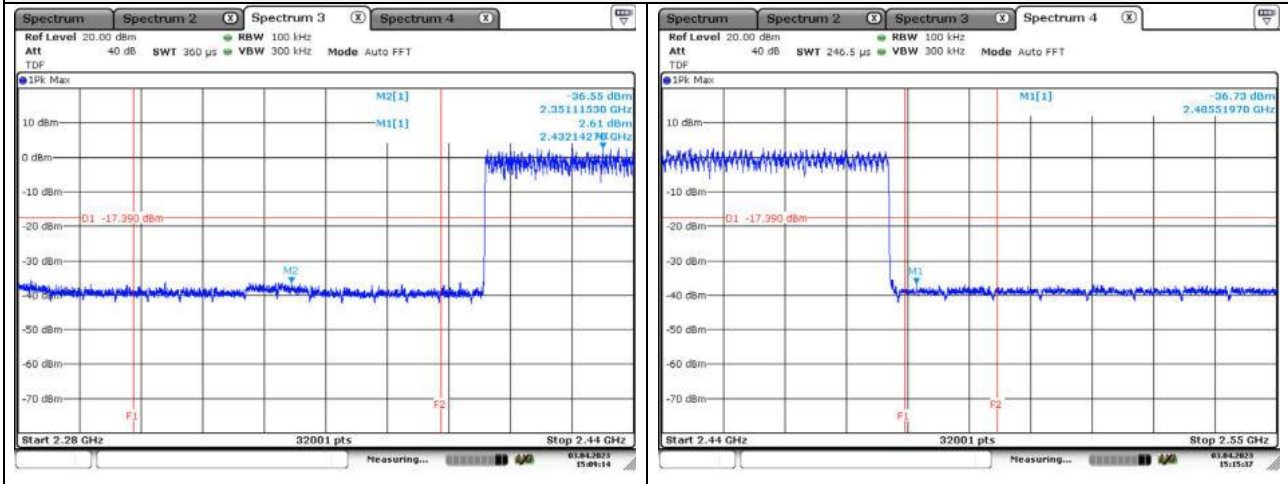


Hopping mode_EDR(3Mbps)









This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

(Left)

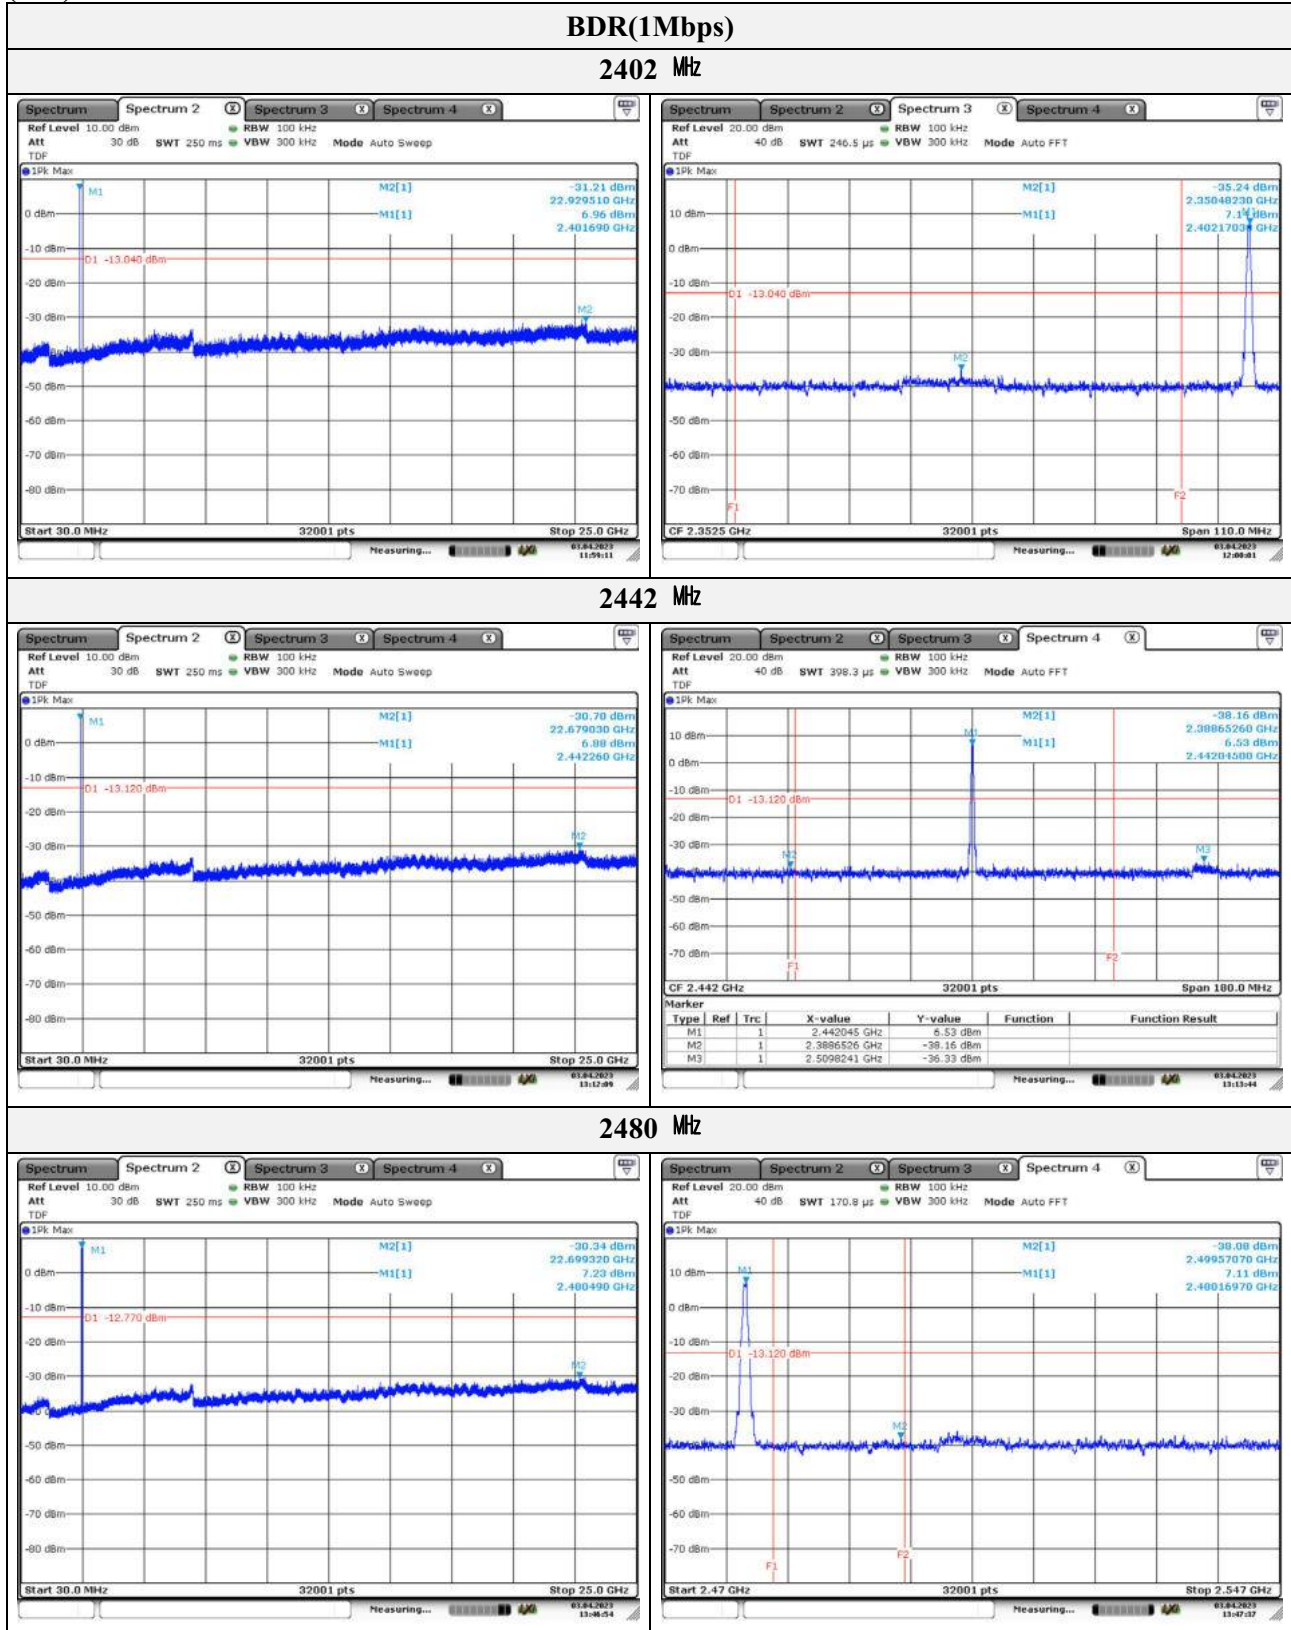


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

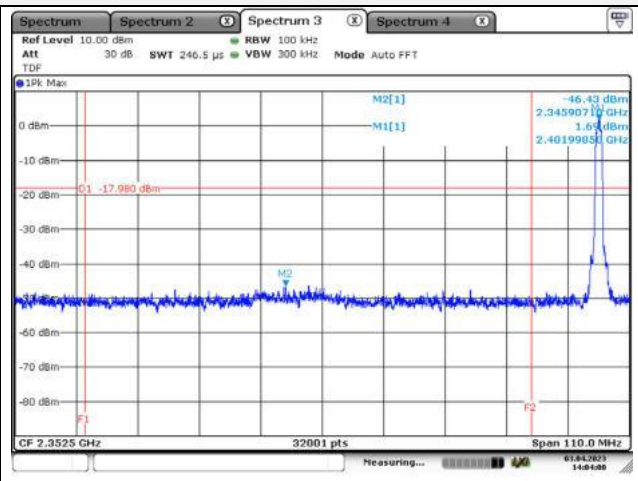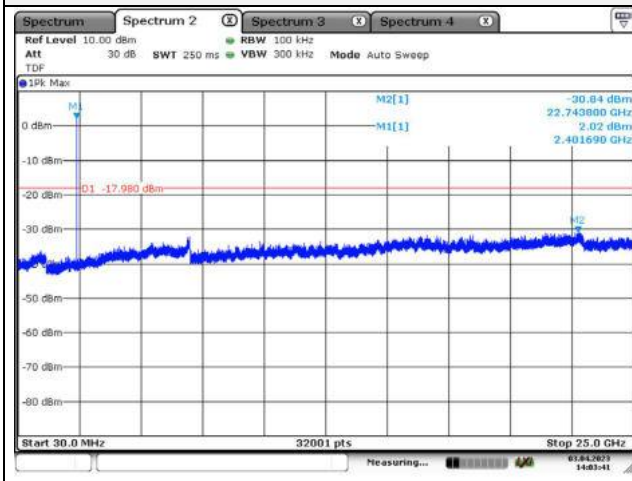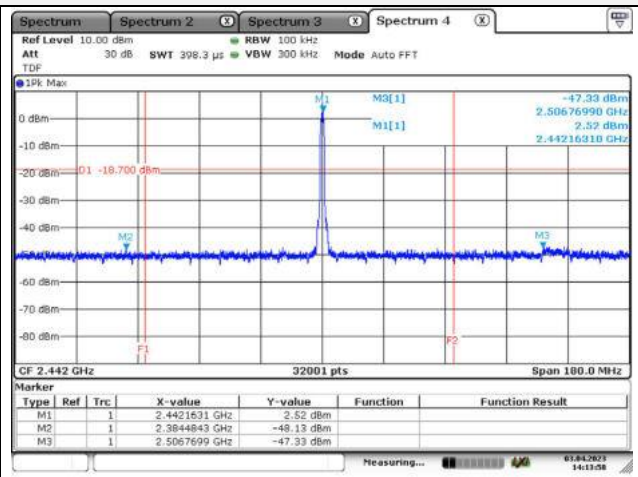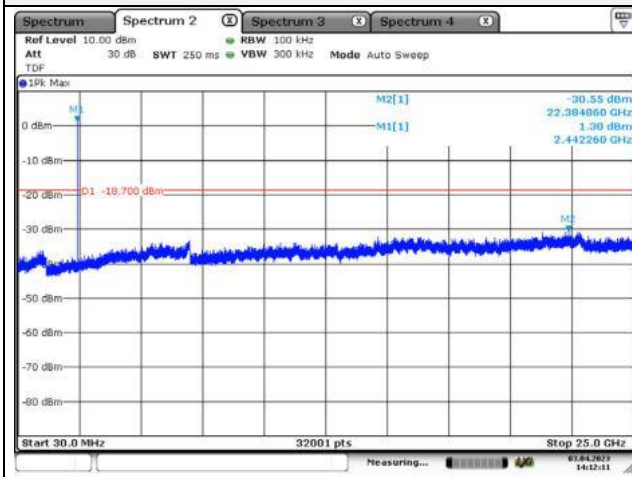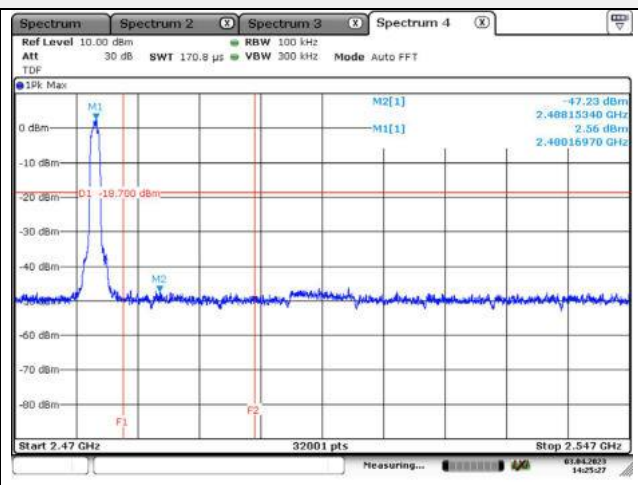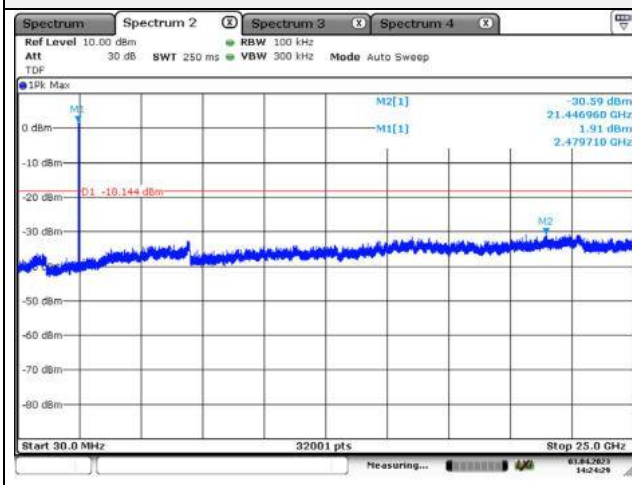
EDR(3Mbps)
2402 Mhz

2442 Mhz

2480 Mhz

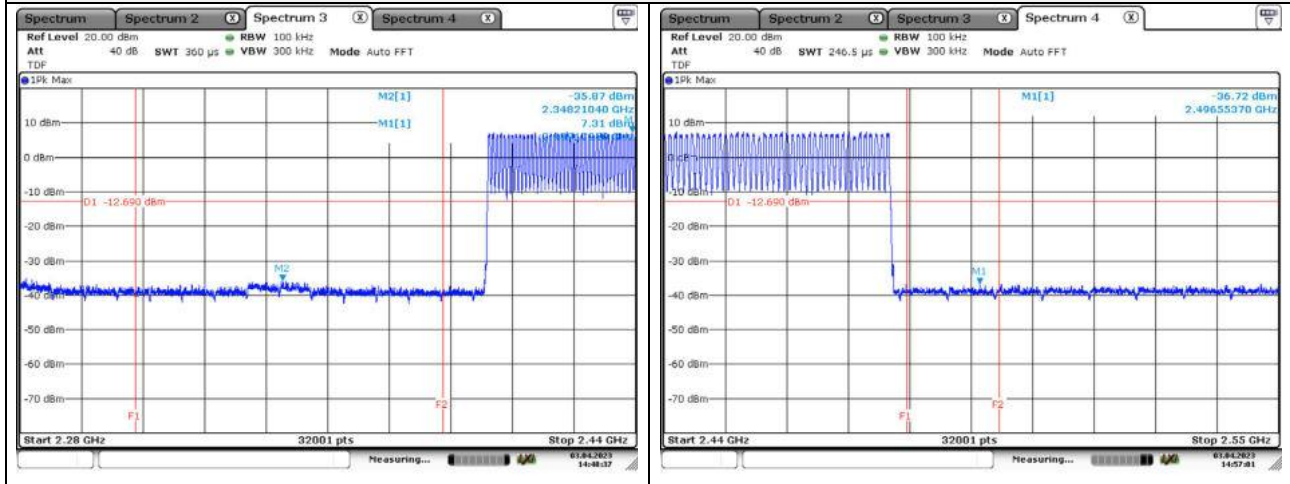
This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Hopping mode_BDR(1Mbps)

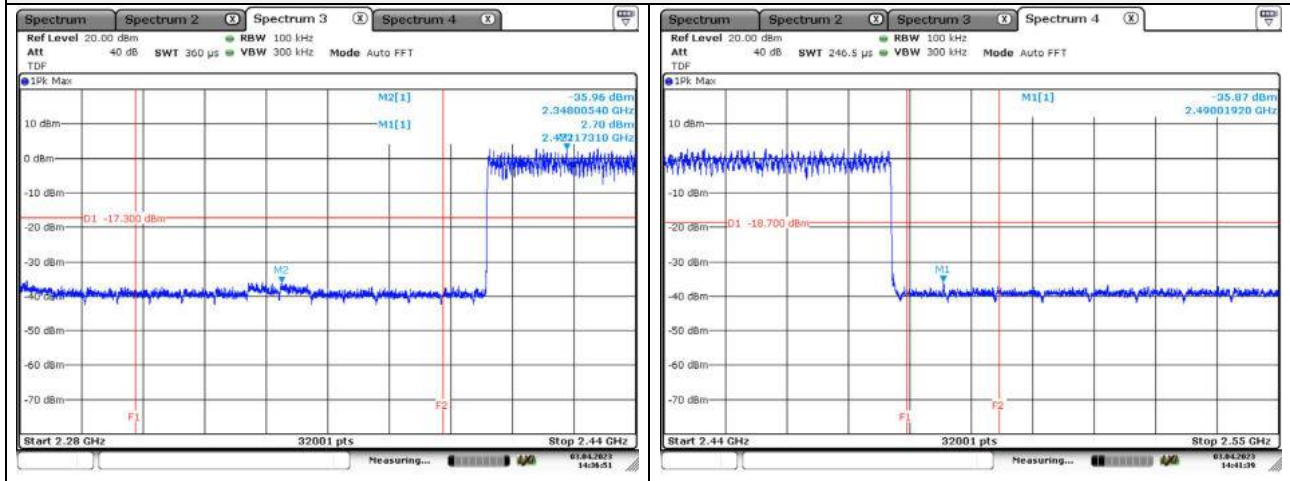

Hopping mode_EDR(3Mbps)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Appendix A. Measurement equipment

Equipment	Manufacturer	Model	Serial No.	Calibration interval	Calibration due.
EMI Test Receiver	R&S	ESU26	100552	1 year	2023.08.01
Spectrum Analyzer	R&S	FSV40	101002	1 year	2023.06.17
Spectrum Analyzer	R&S	FSV40	101725	1 year	2023.06.16
ATTENUATOR	KEYSIGHT	8493C	82506	1 year	2024.01.17
Power Meter	Anritsu	ML2495A	1438001	1 year	2024.01.13
Pulse Power Sensor	Anritsu	MA2411B	1339205	1 year	2024.01.13
SIGNAL GENERATOR	KEYSIGHT	N5182B	MY59100115	1 year	2023.04.27
SIGNAL GENERATOR	Anritsu	68369B	002118	1 year	2024.01.14
BAND REJECT FILTER	MICRO-TRONICS	BRM50702	G272	1 year	2024.01.12
Attenuator	KEYSIGHT	-	-	1 year	2024.03.21
Loop Antenna	Schwarzbeck	FMZB1513	1513-257	2 years	2023.03.18
Horn Antenna	A.H	SAS-571	414	1 year	2024.01.16
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA 9170550	1 year	2024.01.16
TRILOG- BROADBAND ANTENNA	VULB9163	Schwarzbeck	714	2 years	2024.04.19
Amplifier	SONOMA INSTRUMENT	310N	186549	1 year	2023.04.21
PREAMPLIFIER	HP	8449B	3008A00538	1 year	2023.06.02
BROADBAND AMPLIFIER	SCHWARZBECK	BBV9721	PS9721-003	1 year	2024.01.16
DC POWER SUPPLY	AGILENT	6632B	MY43004130	1 year	2023.06.17

Peripheral devices

Device	Manufacturer	Model No.	Serial No.
Notebook computer	LG Electronics Inc.,	LG15N54	504NZJV027828
Jig board	-	-	-

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr