
TEST REPORT FOR SAR TESTING

Report No.: SRTC2019-9004(F)-19030705(H)

Product Name: Mobile Phone

Product Model: HLTE315E

Marketing Name: Hisense H30

Applicant: Hisense International Co., Ltd.

Manufacturer: Hisense Communications Co., Ltd.

Specification: Part 2.1093

IEEE Std 1528

KDB Procedures

FCC ID: 2ADOBHLTE315E

The State Radio_monitoring_center Testing Center (SRTC)

15th Building, No.30 Shixing Street, Shijingshan District, Beijing, P.R.China

Tel: 86-10-57996183 Fax: 86-10-57996388

Contents

1. GENERAL INFORMATION.....	2
1.1 NOTES OF THE TEST REPORT	2
1.2 INFORMATION ABOUT THE TESTING LABORATORY	2
1.3 APPLICANT'S DETAILS	2
1.4 MANUFACTURER'S DETAILS	2
1.5 TEST ENVIRONMENT	3
2. DESCRIPTION OF THE DEVICE UNDER TEST	4
2.1 FINAL EQUIPMENT BUILD STATUS.....	4
2.2 SUPPORT EQUIPMENT	5
3. REFERENCE SPECIFICATION.....	5
4. TEST CONDITIONS	6
4.1 PICTURE TO DEMONSTRATE THE REQUIRED LIQUID DEPTH	6
4.2 TEST SIGNAL, FREQUENCIES AND OUTPUT POWER	6
4.3 SAR MEASUREMENT SET-UP	6
4.4 PHANTOMS	7
4.5 TISSUE SIMULANTS	7
4.6 DESCRIPTION OF THE TEST PROCEDURE	8
5 RESULT SUMMAR	10
6 TEST RESULT	12
6.1 MANUFACTURING TOLERANCE.....	12
6.2 GSM MEASUREMENT RESULT	34
6.3 WCDMA MEASUREMENT RESULT	38
6.4 LTE MEASUREMENT RESULT	43
6.5 CARRIER AGGREGATION POWER MEASUREMENT RESULT	105
6.6 BLUETOOTH MEASUREMENT RESULT	105
6.7 WI-FI MEASUREMENT RESULT	106
6.8 STANDALONE SAR TEST EXCLUSION CONSIDERATIONS.....	108
6.9 RF EXPOSURE CONDITIONS	111
6.10 SYSTEM CHECKING	114
6.11 SAR TEST RESULT	117
6.11 SAR MEASUREMENT VARIABILITY	157
6.12 SIMULTANEOUS TRANSMISSION SAR ANALYSIS.....	158
7 MEASUREMENT UNCERTAINTY.....	162
8 TEST EQUIPMENTS.....	164
ANNEX A – TEST PLOTS	172
ANNEX B – RELEVANT PAGES FROM CALIBRATION REPORTS	255

1. GENERAL INFORMATION

1.1 Notes of the test report

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written permission of The State Radio_monitoring_center Testing Center (SRTC).

The test results relate only to individual items of the samples which have been tested.

The certification and accreditation identifiers used in this report shall not be applicable to the tested or calibrated samples thereof. The manufacturer shall not mark the tested samples or items (or a separate part of the item) with the identifiers of certification and accreditation to mislead relevant parties about the tested samples or items.

1.2 Information about the testing laboratory

Company:	The State Radio_monitoring_center Testing Center (SRTC)
Address:	15th Building, No.30 Shixing Street, Shijingshan District, Beijing P.R.China
City:	Beijing
Country or Region:	P.R.China
Contacted person:	Liu Jia
Tel:	+86 10 57996183
Fax:	+86 10 57996388
Email:	liujiaf@srtc.org.cn

1.3 Applicant's details

Company:	Hisense International Co., Ltd.
Address:	Floor 22, Hisense Tower, 17 Donghai Xi Road, Qingdao, 266071, China
City:	Qingdao
Country or Region:	China
Contacted person:	Geng Ruifeng
Tel:	+86-532-55753706
Fax:	---
Email:	gengruifeng@hisense.com

1.4 Manufacturer's details

Company:	Hisense Communications Co., Ltd.
Address:	218 Qianwangang Road, Qingdao Economic & Technological Development Zone, Qingdao, China
City:	Qingdao
Country or Region:	Qingdao
Contacted person:	Zhangchuanzhu
Tel:	+86-532-55756010
Fax:	---
Email:	zhangchuanzhu@hisense.com

1.5 Test Environment

Date of Receipt of test sample at SRTC:	2019.03.07
Testing Start Date:	2019.04.01
Testing End Date:	2019.04.26

Environmental Data:	Temperature (°C)	Humidity (%)
Ambient	22.5	35

Normal Supply Voltage (Vdc.):	3.85
-------------------------------	------

2. DESCRIPTION OF THE DEVICE UNDER TEST

2.1 Final Equipment Build Status

Wireless Technology and Frequency Bands	☒ GSM Band: GSM850/PCS1900 ☒ WCDMA Band: FDD2/4/5 ☒ LTE Band: 2/4/5/7/12/66 ☒ Bluetooth Band: 2.4GHz ☒ Wi-Fi Band: 2.4GHz/5.2GHz/5.3GHz/5.6GHz/5.8GHz
Mode	GSM ☒ Voice (GMSK) ☒ GPRS (GMSK) ☒ EGPRS (GMSK) WCDMA ☒ UMTS Rel. 99 (Voice & Data) ☒ HSDPA (Rel. 5) ☒ HSUPA (Rel. 6) ☒ HSPA+ (Rel.) ☐ DC-HSDPA (Rel.) Wi-Fi 2.4GHz ☒ 802.11b ☒ 802.11g ☒ 802.11n (20MHz) Wi-Fi 5GHz ☒ 802.11a ☒ 802.11n (20MHz/40MHz) ☒ 802.11ac (20MHz/40MHz/80MHz) Bluetooth ☒ BR(GFSK) ☒ EDR ($\pi/4$ DQPSK, 8-DPSK) ☒ BLE(GFSK) LTE ☒ QPSK ☒ 16QAM ☒ 64QAM
Duty Cycle	GSM Voice: 12.5%; GPRS: 12.5% (1 Slot), 25% (2 Slots), 37.5% (3 Slots), 50% (4 Slots)
GPRS/EGPRS Multi-Slot Class	☐ Class 8 - One Up ☐ Class 10 - Two Up ☒ Class 12 - Four Up ☐ Class 33 - Four Up
Mobile Phone Capability	☐ Class A - Mobile phones can be connected to both GPRS and GSM services simultaneously. ☒ Class B - Mobile phones can be attached to both GPRS and GSM services, using one service at a time. ☐ Class C - Mobile phones are attached to either GPRS or GSM voice service. You need to switch manually between services
DTM	Not Supported

2.2 Support Equipment

The following support equipment was used to exercise the DUT during testing:

State of sample	Normal
Headset1	NLD-303K-09SH
Batteries	LPN385440C
H/W Version S/W Version	V1.00 L1604.6.01.00.MX05, L1604.6.01.00.MX02
IMEI	IMEI1:002101545359733 IMEI2: 002101545359261
Notes	As the information described above, we use test sample offered by the customer. The relevant tests have been performed in order to verify in which combination case the EUT would have the worst features.

3. REFERENCE SPECIFICATION

Specification	Version	Title
Part 2.1093	2019	Radiofrequency radiation exposure evaluation: portable devices.
IEEE Std 1528	2013	IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
IEEE Std 1528a	2005	IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques Amendment 1: CAD File for Human Head Model (SAM Phantom)
KDB 447498 D01	v06	General RF Exposure Guidance
KDB 648474 D04	v01r03	Handset SAR
KDB 941225 D01	v03r01	3G SAR Procedures
KDB 248227 D01	v02r02	SAR GUIDANCE FOR IEEE 802.11 (Wi-Fi) TRANSMITTERS
KDB 865664 D01	v01r04	SAR Measurement from 100 MHz to 6 GHz
KDB 865664 D02	v01r02	RF Exposure Reporting
KDB 941225 D05	v02r05	SAR for LTE Devices
KDB 941225 D05A	v01r02	LTE Rel.10 KDB Inquiry Sheet

4. TEST CONDITIONS

4.1 Picture to demonstrate the required liquid depth

The liquid depth in the used SAM phantoms



Liquid depth for SAR Measurement

4.2 Test Signal, Frequencies and Output Power

The device was put into operation by using a call tester. Communication between the device and the call tester was established by air link.

The device output power was set to maximum power level for all tests; a fully charged battery was used for every test sequence.

In all operating bands the measurements were performed on middle channel, and few of them were also performed on lowest and highest channels.

4.3 SAR Measurement Set-up

The system is based on a high precision robot (working range greater than 0.9m), which positions the probes with a positional repeatability of better than $\pm 0.02\text{mm}$. Special E-field probes have been developed for measurements close to material discontinuity, the sensors of which are directly loaded with a Schottky diode and connected via highly resistive lines (length = 300mm) to the data acquisition unit. A cell controller system contains the power supply, robot controller, teaches pendant (Joystick), and remote control, is used to drive the robot motors.

The PC consists of the Micron Pentium IV computer with Win7 system and SAR Measurement Software DASY5 Professional, A/D interface card, monitor, mouse, and

keyboard. The Stäubli Robot is connected to the cell controller to allow software manipulation of the robot.

A data acquisition electronic (DAE) circuit performs the signal amplification; signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card. The DAE consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines.

The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection

The robot uses its own controller with a built in VME-bus computer.

4.4 Phantoms

The phantom used for all tests i.e. for both system checks and device testing, was the twin headed "SAM Phantom", manufactured by SPEAG. The phantom conforms to the requirements of IEEE 1528 - 2013.

System checking was performed using the flat section, whilst Head SAR tests used the left and right head profile sections. Body SAR testing also used the flat section between the head profiles.

The SPEAG device holder (see Section 5.1) was used to position the device in all tests whilst a tripod was used to position the validation dipoles against the flat section of phantom.

4.5 Tissue Simulants

Recommended values for the dielectric parameters of the tissue simulants are given in IEEE 1528 - 2013 and FCC Supplement C to OET Bulletin 65. All tests were carried out using simulants whose dielectric parameters were within $\pm 5\%$ of the recommended values. All tests were carried out within 24 hours of measuring the dielectric parameters.

The depth of the tissue simulant was 15.0 ± 0.5 cm measured from the ear reference point during system checking and device measurements.

4.5.1 Tissue Stimulant Recipes

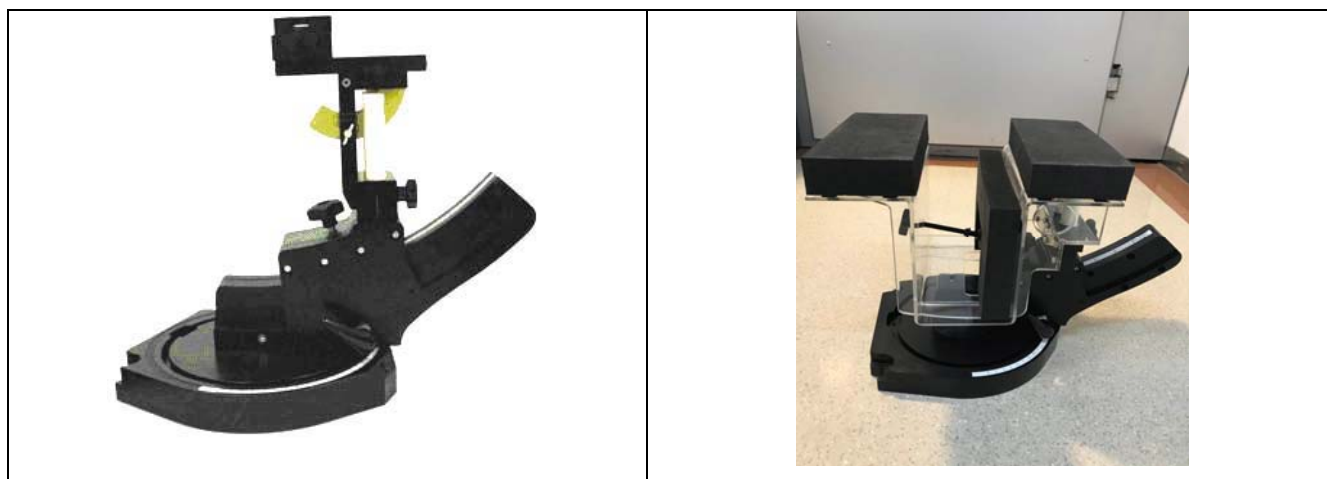
The following tissue stimulants were used for Head and Body test:

Name	Broadband tissue-equivalent liquid
Type for Head	HBBL600-6000V6 Head Simulating Liquid
Type for Body	MBBL600-6000V6 Body Simulating Liquid

4.6 DESCRIPTION OF THE TEST PROCEDURE

4.6.1 Device Holder

The device was placed in the device holder (illustrated below) that is supplied by SPEAG as an integral part of the Dasy5 system.



Device holder supplied by SPEAG

4.6.2 Test positions

4.6.2.1 Against Phantom Head

Measurements were made in “cheek” and “tilt” positions on both the left hand and right-hand sides of the phantom.

The positions used in the measurements were according to IEEE 1528 - 2013 "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques".

4.6.2.2 Body Worn Configuration

The device was placed in the SPEAG holder below the flat section of the phantom. The distance between the device and the phantom was kept at the separation distance using a separate flat spacer that was removed before the start of the measurements. And the distance is 10mm. The device was oriented with its antenna facing the phantom since this orientation gives higher results.

4.6.3 Scan Procedure

First, area scans were used for determination of the field distribution and the approximate location of the local peak SAR values. The SAR distribution is scanned along the inside surface, at least for an area larger than the projection of the handset and antenna. The angle between the probe axis and the surface normal line is recommended but not required to be less than 30°. The SAR distribution is first measured on a 2-D coarse grid. The scan region should cover all areas that are exposed and encompassed by the projection of the handset. There are 15 mm × 15 mm (equal or less than 2GHz), 12 mm × 12 mm (from 2GHz~3GHz) and 10mm x 10mm (above 5GHz) measurement grid used when two staggered one-dimensional cubic splines are used to estimate the maximum SAR location. Next, a zoom scan, a minimum of 7x7x7 points covering a volume of at least 30x30x30mm, was performed around the highest E-field value to determine the averaged SAR value. Drift was determined by measuring the same point at the start of the area scan and again at the end of the zoom scan.

4.6.4 SAR Averaging Methods

The maximum SAR value was averaged over a cube of tissue using interpolation and extrapolation.

The interpolation, extrapolation and maximum search routines within DASY5 are all based on the modified Quadratic Shepard's method (Robert J. Renka, Multivariate Interpolation of Large Sets of Scattered Data", University of North Texas ACM Transactions on Mathematical Software, vol. 14, no. 2, June 1988, pp. 139-148).

The interpolation scheme combines a least-square fitted function method with a weighted average method. A triradiant 3-D / bivariate 2-D quadratic function is computed for each measurement point and fitted to neighboring points by a least-square method. For the zoom scan, inverse distance weighting is incorporated to fit distant points more accurately. The interpolating function is finally calculated as a weighted average of the quadratics.

In the zoom scan, the interpolation function is used to extrapolate the Peak SAR from the deepest measurement points to the inner surface of the phantom.


5 RESULT SUMMAR

The maximum reported SAR values for Head configuration and Body Worn configuration are given as follows. The device conforms to the requirements of the standard(s) when the maximum reported SAR value is less than or equal to the limit.

Exposure Position	Frequency Band	1g-SAR Result(W/kg)	Highest 1g-SAR Result(W/kg)		Limit (W/kg)/1g	Result
Head	GSM 850	0.78	1.18			
	GSM 1900	0.77				
	WCDMA Band 2	0.99				
	WCDMA Band 4	1.18				
	WCDMA Band 5	0.80				
	LTE Band 2	0.76				
	LTE Band 4	1.08				
	LTE Band 5	0.79				
	LTE Band 7	0.65				
	LTE Band 12	0.48				
	LTE Band 66	0.80				
	BT/BLE 2.4GHz Band	0.01				
	WLAN 2.4GHz Band	0.24				
	WLAN 5GHz Band(1&2A)	0.34				
	WLAN 5GHz Band(2C)	0.39				
	WLAN 5GHz Band(3)	0.40				
Body-Worn (10mm Gap)	GSM 850	0.56	1.11	1.14	1.6	pass
	GSM 1900	0.79				
	WCDMA Band 2	0.73				
	WCDMA Band 4	0.38				
	WCDMA Band 5	0.23				
	LTE Band 2	0.77				
	LTE Band 4	0.53				
	LTE Band 5	0.34				
	LTE Band 7	1.11				
	LTE Band 12	0.18				
	LTE Band 66	0.56				
	BT/BLE 2.4GHz Band	0.01				
	WLAN 2.4GHz Band	0.04				
	WLAN 5GHz Band(1&2A)	0.04				
	WLAN 5GHz Band(2C)	0.04				
	WLAN 5GHz Band(3)	0.05				
Hotspot (10mm Gap)	GSM 850	0.56	1.14			
	GSM 1900	0.88				
	WCDMA Band 2	0.96				
	WCDMA Band 4	0.34				
	WCDMA Band 5	0.24				
	LTE Band 2	1.14				
	LTE Band 4	0.53				
	LTE Band 5	0.34				
	LTE Band 7	1.11				
	LTE Band 12	0.56				
	LTE Band 66	0.52				
	WLAN 2.4GHz Band	0.04				
	WLAN 5GHz Band(1&2A)	0.04				
	WLAN 5GHz Band(2C)	0.04				
	WLAN 5GHz Band(3)	0.05				

Simultaneous Transmission Summary

Exposure Position	Frequency Band	1g-SAR Result (W/kg)	Highest 1g-SAR Result(W/kg)	Limit (W/kg)/ 1g	Result
Head	GSM & Wi-Fi(2.4G/5G)	1.10	1.48	1.6	pass
	WCDMA & Wi-Fi(2.4G/5G)	1.48			
	LTE & Wi-Fi(2.4G/5G)	1.41			
	GSM & BT/BLE&Wi-Fi 5G	1.10			
	WCDMA & BT/BLEBLE&Wi-Fi 5G	1.48			
	LTE & BT/BLEBLE&Wi-Fi 5G	1.42			
Body-Worn (10mm Gap)	GSM & Wi-Fi(2.4G/5G)	0.83	1.15	1.48	pass
	WCDMA & Wi-Fi(2.4G/5G)	0.77			
	LTE & Wi-Fi(2.4G/5G)	1.15			
	GSM & BT/BLEBLE&Wi-Fi 5G	0.83			
	WCDMA & BT/BLEBLE&Wi-Fi 5G	0.77			
	LTE & BT/BLEBLE&Wi-Fi 5G	1.15			
hotspot (10mm Gap)	GSM & Wi-Fi(2.4G/5G)	0.88	1.17	1.48	pass
	WCDMA & Wi-Fi(2.4G/5G)	0.96			
	LTE & Wi-Fi(2.4G/5G)	1.17			

This Test Report Is Issued by: Mr. Peng Zhen 	Checked by: Mr. Li Bin 
Tested by: Mr. He Dengshun 	Issued date: 20190426

6 TEST RESULT

6.1 Manufacturing Tolerance

Up Antenna

GSM

GSM 850			
Channel	Channel 128	Channel 189	Channel 251
Tolerance (dBm)	27.0~31.0	27.0~31.0	27.0~31.0

GSM 850 GPRS				
Channel		128	189	251
1 Txslot	Tolerance (dBm)	27.0~31.0	27.0~31.0	27.0~31.0
2 Txslot	Tolerance (dBm)	26.0~30.0	26.0~30.0	26.0~30.0
3 Txslot	Tolerance (dBm)	24.5~28.5	24.5~28.5	24.5~28.5
4 Txslot	Tolerance (dBm)	23.5~27.5	23.5~27.5	23.5~27.5
GSM 850 EGPRS(GMSK)				
Channel		128	189	251
1 Txslot	Tolerance (dBm)	27.0~31.0	27.0~31.0	27.0~31.0
2 Txslot	Tolerance (dBm)	26.0~30.0	26.0~30.0	26.0~30.0
3 Txslot	Tolerance (dBm)	24.5~28.5	24.5~28.5	24.5~28.5
4 Txslot	Tolerance (dBm)	23.5~27.5	23.5~27.5	23.5~27.5
GSM 850 EGPRS(8DPSK)				
Channel		128	189	251
1 Txslot	Tolerance (dBm)	21.0~25.0	21.0~25.0	21.0~25.0
2 Txslot	Tolerance (dBm)	20.0~24.0	20.0~24.0	20.0~24.0
3 Txslot	Tolerance (dBm)	18.0~22.0	18.0~22.0	18.0~22.0
4 Txslot	Tolerance (dBm)	16.5~20.5	16.5~20.5	16.5~20.5

GSM 1900			
Channel	Channel 512	Channel 661	Channel 810
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0

GSM 1900 GPRS				
Channel		512	661	810
1 Txslot	Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
2 Txslot	Tolerance (dBm)	18.5~22.5	18.5~22.5	18.5~22.5
3 Txslot	Tolerance (dBm)	17.0~21.0	17.0~21.0	17.0~21.0
4 Txslot	Tolerance (dBm)	15.5~19.5	15.5~19.5	15.5~19.5

GSM 1900 EGPRS(GMSK)				
Channel		512	661	810
1 Txslot	Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
2 Txslot	Tolerance (dBm)	18.5~22.5	18.5~22.5	18.5~22.5
3 Txslot	Tolerance (dBm)	17.0~21.0	17.0~21.0	17.0~21.0
4 Txslot	Tolerance (dBm)	15.5~19.5	15.5~19.5	15.5~19.5
GSM 1900 EGPRS(8DPSK)				
Channel		512	661	810
1 Txslot	Tolerance (dBm)	18.0~20.0	18.0~20.0	18.0~20.0
2 Txslot	Tolerance (dBm)	15.0~19.0	15.0~19.0	15.0~19.0
3 Txslot	Tolerance (dBm)	12.5~16.5	12.5~16.5	12.5~16.5
4 Txslot	Tolerance (dBm)	11.5~15.5	11.5~15.5	11.5~15.5

WCDMA

WCDMA Band2			
Channel	9262	9400	9538
Tolerance (dBm)	13.0~17.0	13.0~17.0*	13.0~17.0*

HSDPA Band2				
Channel		9262	9400	9538
Sub test 1	Tolerance (dBm)	12.5~16.5	12.5~16.5	12.5~16.5
Sub test 2	Tolerance (dBm)	12.5~16.5	12.5~16.5	12.5~16.5
Sub test 3	Tolerance (dBm)	12.5~16.5	12.5~16.5	12.5~16.5
Sub test 4	Tolerance (dBm)	12.5~16.5	12.5~16.5	12.5~16.5
HSUPA Band2				
Channel		9262	9400	9538
Sub test 1	Tolerance (dBm)	12.5~16.5	12.5~16.5	12.5~16.5
Sub test 2	Tolerance (dBm)	12.5~16.5	12.5~16.5	12.5~16.5
Sub test 3	Tolerance (dBm)	12.5~16.5	12.5~16.5	12.5~16.5
Sub test 4	Tolerance (dBm)	12.5~16.5	12.5~16.5	12.5~16.5
Sub test 5	Tolerance (dBm)	12.5~16.5	12.5~16.5	12.5~16.5
HSPA+ Band2				
Channel		9262	9400	9538
Sub test 1	Tolerance (dBm)	12.0~16.0	12.0~16.0	12.0~16.0

WCDMA Band4			
Channel	1312	1412	1513
Tolerance (dBm)	15.5~19.5	15.5~19.5	15.5~19.5

HSDPA Band4 Upper Antenna				
Channel		1312	1412	1513
Sub test 1	Tolerance (dBm)	15.0~19.0	15.0~19.0	15.0~19.0
Sub test 2	Tolerance (dBm)	15.0~19.0	15.0~19.0	15.0~19.0
Sub test 3	Tolerance (dBm)	15.0~19.0	15.0~19.0	15.0~19.0
Sub test 4	Tolerance (dBm)	15.0~19.0	15.0~19.0	15.0~19.0
HSUPA Band4 Upper Antenna				
Channel		1312	1412	1513
Sub test 1	Tolerance (dBm)	15.0~19.0	15.0~19.0	15.0~19.0
Sub test 2	Tolerance (dBm)	15.0~19.0	15.0~19.0	15.0~19.0
Sub test 3	Tolerance (dBm)	15.0~19.0	15.0~19.0	15.0~19.0
Sub test 4	Tolerance (dBm)	15.0~19.0	15.0~19.0	15.0~19.0
Sub test 5	Tolerance (dBm)	15.0~19.0	15.0~19.0	15.0~19.0
HSPA+ Band4 Upper Antenna				
Channel		1312	1412	1513
Sub test 1	Tolerance (dBm)	14.5~18.5	14.5~18.5	14.5~18.5

WCDMA Band5			
Channel	4132	4183	4233
Tolerance (dBm)	19.5~23.5	19.5~23.5	19.5~23.5

HSDPA Band5				
Channel		4132	4183	4233
Sub test 1	Tolerance (dBm)	19.5~23.5	19.5~23.5	19.5~23.5
Sub test 2	Tolerance (dBm)	19.5~23.5	19.5~23.5	19.5~23.5
Sub test 3	Tolerance (dBm)	19.5~23.5	19.5~23.5	19.5~23.5
Sub test 4	Tolerance (dBm)	19.5~23.5	19.5~23.5	19.5~23.5

HSUPA Band5				
Channel		4132	4183	4233
Sub test 1	Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
Sub test 2	Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
Sub test 3	Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
Sub test 4	Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
Sub test 5	Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0

HSPA+ Band5				
Channel		4132	4183	4233
Sub test 1	Tolerance (dBm)	18.5~22.5	18.5~22.5	18.5~22.5

LTE

Band 2

QPSK

20BW 100%RB			
Channel	Channel 19300	Channel 19575	Channel 19850
Tolerance (dBm)	12.0~16.0	12.0~16.0	12.0~16.0
20BW 50%RB			
Channel	Channel 19300	Channel 19575	Channel 19850
Tolerance (dBm)	12.0~16.0	12.0~16.0	12.0~16.0
20BW 1RB			
Channel	Channel 19300	Channel 19575	Channel 19850
Tolerance (dBm)	13.0~17.0	13.0~17.0	13.0~17.0

16QAM

20BW 100%RB			
Channel	Channel 19300	Channel 19575	Channel 19850
Tolerance (dBm)	11.0~15.0	11.0~15.0	11.0~15.0
20BW 50%RB			
Channel	Channel 19300	Channel 19575	Channel 19850
Tolerance (dBm)	11.0~15.0	11.0~15.0	11.0~15.0
20BW 1RB			
Channel	Channel 19300	Channel 19575	Channel 19850
Tolerance (dBm)	12.0~16.0	12.0~16.0	12.0~16.0

64QAM

20BW 100%RB			
Channel	Channel 19300	Channel 19575	Channel 19850
Tolerance (dBm)	11.0~15.0	11.0~15.0	11.0~15.0
20BW 50%RB			
Channel	Channel 19300	Channel 19575	Channel 19850
Tolerance (dBm)	11.0~15.0	11.0~15.0	11.0~15.0
20BW 1RB			
Channel	Channel 19300	Channel 19575	Channel 19850
Tolerance (dBm)	12.0~16.0	12.0~16.0	12.0~16.0

Band 4
QPSK

20BW 100%RB			
Channel	Channel 20050	Channel 20175	Channel 20300
Tolerance (dBm)	14.5~18.5	14.5~18.5	14.5~18.5
20BW 50%RB			
Channel	Channel 20050	Channel 20175	Channel 20300
Tolerance (dBm)	14.5~18.5	14.5~18.5	14.5~18.5
20BW 1RB			
Channel	Channel 20050	Channel 20175	Channel 20300
Tolerance (dBm)	15.5~19.5	15.5~19.5	15.5~19.5

16QAM

20BW 100%RB			
Channel	Channel 20050	Channel 20175	Channel 20300
Tolerance (dBm)	14.0~18.0	14.0~18.0	14.0~18.0
20BW 50%RB			
Channel	Channel 20050	Channel 20175	Channel 20300
Tolerance (dBm)	14.0~18.0	14.0~18.0	14.0~18.0
20BW 1RB			
Channel	Channel 20050	Channel 20175	Channel 20300
Tolerance (dBm)	15.0~19.0	15.0~19.0	15.0~19.0

64QAM

20BW 100%RB			
Channel	Channel 20050	Channel 20175	Channel 20300
Tolerance (dBm)	14.0~18.0	14.0~18.0	14.0~18.0
20BW 50%RB			
Channel	Channel 20050	Channel 20175	Channel 20300
Tolerance (dBm)	14.0~18.0	14.0~18.0	14.0~18.0
20BW 1RB			
Channel	Channel 20050	Channel 20175	Channel 20300
Tolerance (dBm)	15.0~19.0	15.0~19.0	15.0~19.0

Band 5

QPSK

10BW 100%RB			
Channel	Channel 20450	Channel 20525	Channel 20600
Tolerance (dBm)	18.5~22.5	18.5~22.5	18.5~22.5
10BW 50%RB			
Channel	Channel 20450	Channel 20525	Channel 20600
Tolerance (dBm)	18.5~22.5	18.5~22.5	18.5~22.5
10BW 1RB			
Channel	Channel 20450	Channel 20525	Channel 20600
Tolerance (dBm)	19.5~23.5	19.5~23.5	19.5~23.5

16QAM

10BW 100%RB			
Channel	Channel 20450	Channel 20525	Channel 20600
Tolerance (dBm)	17.5~21.5	17.5~21.5	17.5~21.5
10BW 50%RB			
Channel	Channel 20450	Channel 20525	Channel 20600
Tolerance (dBm)	17.5~21.5	17.5~21.5	17.5~21.5
10BW 1RB			
Channel	Channel 20450	Channel 20525	Channel 20600
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0

64QAM

10BW 100%RB			
Channel	Channel 20450	Channel 20525	Channel 20600
Tolerance (dBm)	17.5~21.5	17.5~21.5	17.5~21.5
10BW 50%RB			
Channel	Channel 20450	Channel 20525	Channel 20600
Tolerance (dBm)	17.5~21.5	17.5~21.5	17.5~21.5
10BW 1RB			
Channel	Channel 20450	Channel 20525	Channel 20600
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0

Band 7
QPSK

20BW 100%RB			
Channel	Channel 20850	Channel 21100	Channel 21350
Tolerance (dBm)	11.0~15.0	11.0~15.0	11.0~15.0
20BW 50%RB			
Channel	Channel 20850	Channel 21100	Channel 21350
Tolerance (dBm)	11.0~15.0	11.0~15.0	11.0~15.0
20BW 1RB			
Channel	Channel 20850	Channel 21100	Channel 21350
Tolerance (dBm)	11.5~15.5	11.5~15.5	11.5~15.5

16QAM

20BW 100%RB			
Channel	Channel 20850	Channel 21100	Channel 21350
Tolerance (dBm)	10.0~14.0	10.0~14.0	10.0~14.0
20BW 50%RB			
Channel	Channel 20850	Channel 21100	Channel 21350
Tolerance (dBm)	10.0~14.0	10.0~14.0	10.0~14.0
20BW 1RB			
Channel	Channel 20850	Channel 21100	Channel 21350
Tolerance (dBm)	11.0~15.0	10.0~14.0	10.0~14.0

64QAM

20BW 100%RB			
Channel	Channel 20850	Channel 21100	Channel 21350
Tolerance (dBm)	10.0~14.0	10.0~14.0	10.0~14.0
20BW 50%RB			
Channel	Channel 20850	Channel 21100	Channel 21350
Tolerance (dBm)	10.0~14.0	10.0~14.0	10.0~14.0
20BW 1RB			
Channel	Channel 20850	Channel 21100	Channel 21350
Tolerance (dBm)	11.0~15.0	11.0~15.0	11.0~15.0

Band 12

QPSK

10BW 100%RB			
Channel	Channel 23060	Channel 23095	Channel 23130
Tolerance (dBm)	18.0~22.0	18.0~22.0	18.0~22.0
10BW 50%RB			
Channel	Channel 23060	Channel 23095	Channel 23130
Tolerance (dBm)	18.0~22.0	18.0~22.0	18.0~22.0
10BW 1RB			
Channel	Channel 23060	Channel 23095	Channel 23130
Tolerance (dBm)	19.5~23.5	19.5~23.5	19.5~23.5

16QAM

10BW 100%RB			
Channel	Channel 23060	Channel 23095	Channel 23130
Tolerance (dBm)	18.0~22.0	18.0~22.0	18.0~22.0
10BW 50%RB			
Channel	Channel 23060	Channel 23095	Channel 23130
Tolerance (dBm)	18.0~22.0	18.0~22.0	18.0~22.0
10BW 1RB			
Channel	Channel 23060	Channel 23095	Channel 23130
Tolerance (dBm)	18.5~22.5	18.5~22.5	18.5~22.5

64QAM

10BW 100%RB			
Channel	Channel 23060	Channel 23095	Channel 23130
Tolerance (dBm)	18.0~22.0	18.0~22.0	18.0~22.0
10BW 50%RB			
Channel	Channel 23060	Channel 23095	Channel 23130
Tolerance (dBm)	18.0~22.0	18.0~22.0	18.0~22.0
10BW 1RB			
Channel	Channel 23060	Channel 23095	Channel 23130
Tolerance (dBm)	18.5~22.5	18.5~22.5	18.5~22.5

Band 66

QPSK

20BW 100%RB			
Channel	Channel 132072	Channel 132322	Channel 132572
Tolerance (dBm)	13.5~17.5	13.5~17.5	13.5~17.5
20BW 50%RB			
Channel	Channel 132072	Channel 132322	Channel 132572
Tolerance (dBm)	13.5~17.5	13.5~17.5	13.5~17.5
20BW 1RB			
Channel	Channel 132072	Channel 132322	Channel 132572
Tolerance (dBm)	14.5~18.5	14.5~18.5	14.5~18.5

16QAM

20BW 100%RB			
Channel	Channel 132072	Channel 132322	Channel 132572
Tolerance (dBm)	13.0~17.0	13.0~17.0	13.0~17.0
20BW 50%RB			
Channel	Channel 132072	Channel 132322	Channel 132572
Tolerance (dBm)	13.0~17.0	13.0~17.0	13.0~17.0
20BW 1RB			
Channel	Channel 132072	Channel 132322	Channel 132572
Tolerance (dBm)	14.0~18.0	14.0~18.0	14.0~18.0

64QAM

20BW 100%RB			
Channel	Channel 132072	Channel 132322	Channel 132572
Tolerance (dBm)	13.0~17.0	13.0~17.0	13.0~17.0
20BW 50%RB			
Channel	Channel 132072	Channel 132322	Channel 132572
Tolerance (dBm)	13.0~17.0	13.0~17.0	13.0~17.0
20BW 1RB			
Channel	Channel 132072	Channel 132322	Channel 132572
Tolerance (dBm)	14.0~18.0	14.0~18.0	14.0~18.0

Down Antenna GSM

GSM 850			
Channel	Channel 128	Channel 189	Channel 251
Tolerance (dBm)	29.0~33.0	29.0~33.0	29.0~33.0

GSM 850 GPRS				
Channel		128	189	251
1 Txslot	Tolerance (dBm)	29.0~33.0	29.0~33.0	29.0~33.0
2 Txslot	Tolerance (dBm)	26.0~32.0	26.0~32.0	26.0~32.0
3 Txslot	Tolerance (dBm)	26.5~30.5	26.5~30.5	26.5~30.5
4 Txslot	Tolerance (dBm)	25.5~29.5	25.5~29.5	25.5~29.5
GSM 850 EGPRS(GMSK)				
Channel		128	189	251
1 Txslot	Tolerance (dBm)	29.0~33.0	29.0~33.0	29.0~33.0
2 Txslot	Tolerance (dBm)	26.0~32.0	26.0~32.0	26.0~32.0
3 Txslot	Tolerance (dBm)	26.5~30.5	26.5~30.5	26.5~30.5
4 Txslot	Tolerance (dBm)	25.5~29.5	25.5~29.5	25.5~29.5
GSM 850 EGPRS(8DPSK)				
Channel		128	189	251
1 Txslot	Tolerance (dBm)	23.0~27.0	23.0~27.0	23.0~27.0
2 Txslot	Tolerance (dBm)	22.0~26.0	22.0~26.0	22.0~26.0
3 Txslot	Tolerance (dBm)	20.0~24.0	20.0~24.0	20.0~24.0
4 Txslot	Tolerance (dBm)	18.5~22.5	18.5~22.5	18.5~22.5

GSM 1900			
Channel	Channel 512	Channel 661	Channel 810
Tolerance (dBm)	26.0~30.0	26.0~30.0	26.0~30.0

GSM 1900 GPRS				
Channel		512	661	810
1 Txslot	Tolerance (dBm)	26.0~30.0	26.0~30.0	26.0~30.0
2 Txslot	Tolerance (dBm)	25.5~29.5	25.5~29.5	25.5~29.5
3 Txslot	Tolerance (dBm)	24.0~28.0	24.0~28.0	24.0~28.0
4 Txslot	Tolerance (dBm)	22.5~26.5	22.5~26.5	22.5~26.5
GSM 1900 EGPRS(GMSK)				
Channel		512	661	810
1 Txslot	Tolerance (dBm)	26.0~30.0	26.0~30.0	26.0~30.0
2 Txslot	Tolerance (dBm)	25.5~29.5	25.5~29.5	25.5~29.5
3 Txslot	Tolerance (dBm)	24.0~28.0	24.0~28.0	24.0~28.0
4 Txslot	Tolerance (dBm)	22.5~26.5	22.5~26.5	22.5~26.5
GSM 1900 EGPRS(8DPSK)				
Channel		512	661	810
1 Txslot	Tolerance (dBm)	25.0~27.0	25.0~27.0	25.0~27.0

2 Txslot	Tolerance (dBm)	22.0~26.0	22.0~26.0	22.0~26.0
3 Txslot	Tolerance (dBm)	19.5~23.5	19.5~23.5	19.5~23.5
4 Txslot	Tolerance (dBm)	18.5~22.5	18.5~22.5	18.5~22.5

WCDMA

WCDMA Band2				
Channel	9262	9400	9538	
Tolerance (dBm)	20.0~24.0	20.0~24.0	20.0~24.0	

HSDPA Band2				
Channel	9262	9400	9538	
Sub test 1	Tolerance (dBm)	19.5~23.5	19.5~23.5	19.5~23.5
Sub test 2	Tolerance (dBm)	19.5~23.5	19.5~23.5	19.5~23.5
Sub test 3	Tolerance (dBm)	19.5~23.5	19.5~23.5	19.5~23.5
Sub test 4	Tolerance (dBm)	19.5~23.5	19.5~23.5	19.5~23.5
HSUPA Band2				
Channel	9262	9400	9538	
Sub test 1	Tolerance (dBm)	19.5~23.5	19.5~23.5	19.5~23.5
Sub test 2	Tolerance (dBm)	19.5~23.5	19.5~23.5	19.5~23.5
Sub test 3	Tolerance (dBm)	19.5~23.5	19.5~23.5	19.5~23.5
Sub test 4	Tolerance (dBm)	19.5~23.5	19.5~23.5	19.5~23.5
Sub test 5	Tolerance (dBm)	19.5~23.5	19.5~23.5	19.5~23.5
HSPA+ Band2				
Channel	9262	9400	9538	
Sub test 1	Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0

WCDMA Band4			
Channel	1312	1412	1513
Tolerance (dBm)	19.5~23.5	19.5~23.5	19.5~23.5

HSDPA Band4				
Channel		1312	1412	1513
Sub test 1	Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
Sub test 2	Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
Sub test 3	Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
Sub test 4	Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
HSUPA Band4				
Channel		1312	1412	1513
Sub test 1	Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
Sub test 2	Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
Sub test 3	Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
Sub test 4	Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
Sub test 5	Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
HSPA+ Band4				
Channel		1312	1412	1513
Sub test 1	Tolerance (dBm)	18.5~22.5	18.5~22.5	18.5~22.5

WCDMA Band5			
Channel	4132	4183	4233
Tolerance (dBm)	19.5~23.5	19.5~23.5	19.5~23.5

HSDPA Band5				
Channel		4132	4183	4233
Sub test 1	Tolerance (dBm)	19.5~23.5	19.5~23.5	19.5~23.5
Sub test 2	Tolerance (dBm)	19.5~23.5	19.5~23.5	19.5~23.5
Sub test 3	Tolerance (dBm)	19.5~23.5	19.5~23.5	19.5~23.5
Sub test 4	Tolerance (dBm)	19.5~23.5	19.5~23.5	19.5~23.5
HSUPA Band5				
Channel		4132	4183	4233
Sub test 1	Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
Sub test 2	Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
Sub test 3	Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
Sub test 4	Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
Sub test 5	Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
HSPA+ Band5				
Channel		4132	4183	4233
Sub test 1	Tolerance (dBm)	18.5~22.5	18.5~22.5	18.5~22.5

LTE

Band 2

QPSK

20BW 100%RB			
Channel	Channel 19300	Channel 19575	Channel 19850
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
20BW 50%RB			
Channel	Channel 19300	Channel 19575	Channel 19850
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
20BW 1RB			
Channel	Channel 19300	Channel 19575	Channel 19850
Tolerance (dBm)	20.0~24.0	20.0~24.0	20.0~24.0

16QAM

20BW 100%RB			
Channel	Channel 19300	Channel 19575	Channel 19850
Tolerance (dBm)	18.0~22.0	18.0~22.0	18.0~22.0
20BW 50%RB			
Channel	Channel 19300	Channel 19575	Channel 19850
Tolerance (dBm)	18.0~22.0	18.0~22.0	18.0~22.0
20BW 1RB			
Channel	Channel 19300	Channel 19575	Channel 19850
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0

64QAM

20BW 100%RB			
Channel	Channel 19300	Channel 19575	Channel 19850
Tolerance (dBm)	18.0~22.0	18.0~22.0	18.0~22.0
20BW 50%RB			
Channel	Channel 19300	Channel 19575	Channel 19850
Tolerance (dBm)	18.0~22.0	18.0~22.0	18.0~22.0
20BW 1RB			
Channel	Channel 19300	Channel 19575	Channel 19850
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0

Band 4
QPSK

20BW 100%RB			
Channel	Channel 20050	Channel 20175	Channel 20300
Tolerance (dBm)	18.5~22.5	18.5~22.5	18.5~22.5
20BW 50%RB			
Channel	Channel 20050	Channel 20175	Channel 20300
Tolerance (dBm)	18.5~22.5	18.5~22.5	18.5~22.5
20BW 1RB			
Channel	Channel 20050	Channel 20175	Channel 20300
Tolerance (dBm)	19.5~23.5	19.5~23.5	19.5~23.5

16QAM

20BW 100%RB			
Channel	Channel 20050	Channel 20175	Channel 20300
Tolerance (dBm)	18.0~22.0	18.0~22.0	18.0~22.0
20BW 50%RB			
Channel	Channel 20050	Channel 20175	Channel 20300
Tolerance (dBm)	18.0~22.0	18.0~22.0	18.0~22.0
20BW 1RB			
Channel	Channel 20050	Channel 20175	Channel 20300
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0

64QAM

20BW 100%RB			
Channel	Channel 20050	Channel 20175	Channel 20300
Tolerance (dBm)	18.0~22.0	18.0~22.0	18.0~22.0
20BW 50%RB			
Channel	Channel 20050	Channel 20175	Channel 20300
Tolerance (dBm)	18.0~22.0	18.0~22.0	18.0~22.0
20BW 1RB			
Channel	Channel 20050	Channel 20175	Channel 20300
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0

Band 5

QPSK

10BW 100%RB			
Channel	Channel 20450	Channel 20525	Channel 20600
Tolerance (dBm)	18.5~22.5	18.5~22.5	18.5~22.5
10BW 50%RB			
Channel	Channel 20450	Channel 20525	Channel 20600
Tolerance (dBm)	18.5~22.5	18.5~22.5	18.5~22.5
10BW 1RB			
Channel	Channel 20450	Channel 20525	Channel 20600
Tolerance (dBm)	19.5~23.5	19.5~23.5	19.5~23.5

16QAM

10BW 100%RB			
Channel	Channel 20450	Channel 20525	Channel 20600
Tolerance (dBm)	17.5~21.5	17.5~21.5	17.5~21.5
10BW 50%RB			
Channel	Channel 20450	Channel 20525	Channel 20600
Tolerance (dBm)	17.5~21.5	17.5~21.5	17.5~21.5
10BW 1RB			
Channel	Channel 20450	Channel 20525	Channel 20600
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0

64QAM

10BW 100%RB			
Channel	Channel 20450	Channel 20525	Channel 20600
Tolerance (dBm)	17.5~21.5	17.5~21.5	17.5~21.5
10BW 50%RB			
Channel	Channel 20450	Channel 20525	Channel 20600
Tolerance (dBm)	17.5~21.5	17.5~21.5	17.5~21.5
10BW 1RB			
Channel	Channel 20450	Channel 20525	Channel 20600
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0

Band 7
QPSK

20BW 100%RB			
Channel	Channel 20850	Channel 21100	Channel 21350
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
20BW 50%RB			
Channel	Channel 20850	Channel 21100	Channel 21350
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
20BW 1RB			
Channel	Channel 20850	Channel 21100	Channel 21350
Tolerance (dBm)	19.5~23.5	19.5~23.5	19.5~23.5

16QAM

20BW 100%RB			
Channel	Channel 20850	Channel 21100	Channel 21350
Tolerance (dBm)	18.0~22.0	18.0~22.0	18.0~22.0
20BW 50%RB			
Channel	Channel 20850	Channel 21100	Channel 21350
Tolerance (dBm)	18.0~22.0	18.0~22.0	18.0~22.0
20BW 1RB			
Channel	Channel 20850	Channel 21100	Channel 21350
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0

64QAM

20BW 100%RB			
Channel	Channel 20850	Channel 21100	Channel 21350
Tolerance (dBm)	18.0~22.0	18.0~22.0	18.0~22.0
20BW 50%RB			
Channel	Channel 20850	Channel 21100	Channel 21350
Tolerance (dBm)	18.0~22.0	18.0~22.0	18.0~22.0
20BW 1RB			
Channel	Channel 20850	Channel 21100	Channel 21350
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0

Band 12

QPSK

10BW 100%RB			
Channel	Channel 23060	Channel 23095	Channel 23130
Tolerance (dBm)	18.0~22.0	18.0~22.0	18.0~22.0
10BW 50%RB			
Channel	Channel 23060	Channel 23095	Channel 23130
Tolerance (dBm)	18.0~22.0	18.0~22.0	18.0~22.0
10BW 1RB			
Channel	Channel 23060	Channel 23095	Channel 23130
Tolerance (dBm)	19.5~23.5	19.5~23.5	19.5~23.5

16QAM

10BW 100%RB			
Channel	Channel 23060	Channel 23095	Channel 23130
Tolerance (dBm)	18.0~22.0	18.0~22.0	18.0~22.0
10BW 50%RB			
Channel	Channel 23060	Channel 23095	Channel 23130
Tolerance (dBm)	18.0~22.0	18.0~22.0	18.0~22.0
10BW 1RB			
Channel	Channel 23060	Channel 23095	Channel 23130
Tolerance (dBm)	18.5~22.5	18.5~22.5	18.5~22.5

64QAM

10BW 100%RB			
Channel	Channel 23060	Channel 23095	Channel 23130
Tolerance (dBm)	18.0~22.0	18.0~22.0	18.0~22.0
10BW 50%RB			
Channel	Channel 23060	Channel 23095	Channel 23130
Tolerance (dBm)	18.0~22.0	18.0~22.0	18.0~22.0
10BW 1RB			
Channel	Channel 23060	Channel 23095	Channel 23130
Tolerance (dBm)	18.5~22.5	18.5~22.5	18.5~22.5

Band 66

QPSK

20BW 100%RB			
Channel	Channel 132072	Channel 132322	Channel 132572
Tolerance (dBm)	18.5~22.5	18.5~22.5	18.5~22.5
20BW 50%RB			
Channel	Channel 132072	Channel 132322	Channel 132572
Tolerance (dBm)	18.5~22.5	18.5~22.5	18.5~22.5
20BW 1RB			
Channel	Channel 132072	Channel 132322	Channel 132572
Tolerance (dBm)	19.5~23.5	18.5~22.5	18.5~22.5

16QAM

20BW 100%RB			
Channel	Channel 132072	Channel 132322	Channel 132572
Tolerance (dBm)	18.0~22.0	18.0~22.0	18.0~22.0
20BW 50%RB			
Channel	Channel 132072	Channel 132322	Channel 132572
Tolerance (dBm)	18.0~22.0	18.0~22.0	18.0~22.0
20BW 1RB			
Channel	Channel 132072	Channel 132322	Channel 132572
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0

64QAM

20BW 100%RB			
Channel	Channel 132072	Channel 132322	Channel 132572
Tolerance (dBm)	18.0~22.0	18.0~22.0	18.0~22.0
20BW 50%RB			
Channel	Channel 132072	Channel 132322	Channel 132572
Tolerance (dBm)	18.0~22.0	18.0~22.0	18.0~22.0
20BW 1RB			
Channel	Channel 132072	Channel 132322	Channel 132572
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0

Bluetooth

GFSK			
Channel	0	39	78
Tolerance (dBm)	5.0~9.0	5.0~9.0	5.0~9.0
$\pi/4$ DQPSK			
Channel	0	39	78
Tolerance (dBm)	3.0~7.0	3.0~7.0	3.0~7.0
8DPSK			
Channel	0	39	78
Tolerance (dBm)	3.0~7.0	3.0~7.0	3.0~7.0

Bluetooth (BLE)

GFSK			
Channel	0	19	39
Tolerance (dBm)	2.0~6.0	2.0~6.0	2.0~6.0

WLAN 2.4GHz

802.11b			
Channel	1	6	11
Tolerance (dBm)	10.5~14.5	10.5~14.5	10.5~14.5
802.11g			
Channel	1	6	11
Tolerance (dBm)	10.0~14.0	10.0~14.0	10.0~14.0
802.11n HT20			
Channel	1	6	11
Tolerance (dBm)	9.5~13.5	9.5~13.5	9.5~13.5

WIFI-5GHz (U-NII 1)

802.11a	
Tolerance (dBm)	7.5~11.5
802.11n HT20	
Tolerance (dBm)	7.5~11.5
802.11n HT40	
Tolerance (dBm)	7.0~11.0
802.11ac VHT20	
Tolerance (dBm)	7.5~11.5
802.11ac VHT40	
Tolerance (dBm)	7.0~11.0
802.11ac VHT80	
Tolerance (dBm)	6.0~10.0

WIFI-5GHz (U-NII 2A)

802.11a	
Tolerance (dBm)	8.0~12.0
802.11n HT20	
Tolerance (dBm)	8.0~12.0
802.11n HT40	
Tolerance (dBm)	8.0~12.0
802.11ac VHT20	
Tolerance (dBm)	7.5~11.5
802.11ac VHT40	
Tolerance (dBm)	6.5~10.5
802.11ac VHT80	
Tolerance (dBm)	6.0~10.0

WIFI-5GHz (U-NII 2C)

802.11a	
Tolerance (dBm)	7.5~11.5
802.11n HT20	
Tolerance (dBm)	7.5~11.5
802.11n HT40	
Tolerance (dBm)	7.0~11.0
802.11ac VHT20	
Tolerance (dBm)	7.5~11.5
802.11ac VHT40	
Tolerance (dBm)	7.0~11.0
802.11ac VHT80	
Tolerance (dBm)	6.5~10.5

WIFI-5GHz (U-NII 3)

802.11a	
Tolerance (dBm)	7.5~11.5
802.11n HT20	
Tolerance (dBm)	7.5~11.5
802.11n HT40	
Tolerance (dBm)	7.0~11.0
802.11ac VHT20	
Tolerance (dBm)	7.5~11.5
802.11ac VHT40	
Tolerance (dBm)	6.5~10.5
802.11ac VHT80	
Tolerance (dBm)	6.0~10.0

6.2 GSM Measurement result

Up Antenna

GSM Measured Power

Mode	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency (MHz)	824.2	836.4	848.8	1850.2	1880.0	1909.8
Measured Power(dBm)	30.48	30.45	30.40	22.78	22.89	22.97

GSM Frame Average Power

Mode	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency (MHz)	824.2	836.4	848.8	1850.2	1880.0	1909.8
Frame Average Power (dBm)	21.45	21.42	21.37	13.75	13.86	13.94

GPRS Measured Power

Mode	GPRS850			GPRS1900		
Channel	128	189	251	512	661	810
Frequency (MHz)	824.2	836.4	848.8	1850.2	1880.0	1909.8
4Downlink1uplinkPower(dBm)	30.45	30.43	30.38	22.78	22.89	22.97
3Downlink2uplinkPower(dBm)	29.88	29.85	29.81	22.15	22.22	22.32
2Downlink3uplinkPower(dBm)	28.32	28.24	28.19	20.48	20.58	20.67
1Downlink4uplinkPower(dBm)	27.18	27.12	27.08	19.37	19.42	19.43

GPRS Frame Average Power

Mode	GPRS850			GPRS1900		
Channel	128	189	251	512	661	810
Frequency (MHz)	824.2	836.4	848.8	1850.2	1880.0	1909.8
4Downlink1uplinkPower(dBm)	21.42	21.40	21.35	13.75	13.86	13.94
3Downlink2uplinkPower(dBm)	23.86	23.83	23.79	16.13	16.20	16.30
2Downlink3uplinkPower(dBm)	24.06	23.98	23.93	16.22	16.32	16.41
1Downlink4uplinkPower(dBm)	24.17	24.11	24.07	16.36	16.41	16.42

EGPRS Measured Power

Mode	EGPRS850(GMSK)			EGPRS1900(GMSK)		
	EGPRS850 (8PSK)			EGPRS1900 (8PSK)		
Channel	128	189	251	512	661	810
Frequency(MHz)	824.2	836.4	848.8	1850.2	1880.0	1909.8
4Downlink1uplinkPower(dBm)	30.47	30.45	30.39	22.74	22.85	22.97
	24.89	24.92	24.98	19.33	19.42	19.51
3Downlink2uplinkPower(dBm)	29.9	29.87	29.8	22.27	22.32	22.41
	23.64	23.72	23.81	18.47	18.55	18.63
2Downlink3uplinkPower(dBm)	28.29	28.23	28.19	20.46	20.54	20.65
	21.36	21.47	21.56	16.27	16.36	16.44
1Downlink4uplinkPower(dBm)	27.17	27.13	27.09	19.38	19.44	19.51
	20.09	20.15	20.28	15.07	15.14	15.23

EGPRS Frame Average Power

Mode	EGPRS850(GMSK)			EGPRS1900(GMSK)		
	EGPRS850 (8PSK)			EGPRS1900 (8PSK)		
Channel	128	189	251	512	661	810
Frequency(MHz)	824.2	836.4	848.8	1850.2	1880.0	1909.8
4Downlink1uplinkPower(dBm)	21.44	21.42	21.36	13.71	13.82	13.94
	15.86	15.89	15.95	10.30	10.39	10.48
3Downlink2uplinkPower(dBm)	23.88	23.85	23.78	16.25	16.30	16.39
	17.62	17.70	17.79	12.45	12.53	12.61
2Downlink3uplinkPower(dBm)	24.03	23.97	23.93	16.20	16.28	16.39
	17.10	17.21	17.30	12.01	12.10	12.18
1Downlink4uplinkPower(dBm)	24.16	24.12	24.08	16.37	16.43	16.50
	17.08	17.14	17.27	12.06	12.13	12.22

Division Factors (for Measured Power and Frame Average Power):

To average the power, the division factor is as follows:

1TX-slot (4Downlink1uplink) = 1 transmit time slot out of 8 time slots=> conducted power divided by (8/1) => -9.03dB

2TX-slots(3Downlink2uplink) = 2 transmit time slots out of 8 time slots=> conducted power divided by (8/2) => -6.02dB

3TX-slots (2Downlink3uplink) = 3 transmit time slots out of 8 time slots=> conducted power divided by (8/3) => -4.26dB

4TX-slots (1Downlink4uplink) = 4 transmit time slots out of 8 time slots=> conducted power divided by (8/4) => -3.01dB

There is a little difference for modulation type GMSK between GPRS and EDGE (EGPRS), the bit rate is not the same, so we also test the power of GMSK type for EDGE. According to the frame average conducted power as above, the SAR measurements are performed with **4Txslots (1Downlink4uplink)** of GPRS (GMSK).

Down Antenna

GSM Measured Power

Mode	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency (MHz)	824.2	836.4	848.8	1850.2	1880.0	1909.8
Measured Power(dBm)	32.48	32.45	32.40	29.78	29.89	29.97

GSM Frame Average Power

Mode	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency (MHz)	824.2	836.4	848.8	1850.2	1880.0	1909.8
Frame Average Power (dBm)	23.45	23.42	23.37	20.75	20.86	20.94

GPRS Measured Power

Mode	GPRS850			GPRS1900		
Channel	128	189	251	512	661	810
Frequency (MHz)	824.2	836.4	848.8	1850.2	1880.0	1909.8
4Downlink1uplinkPower(dBm)	32.45	32.43	32.38	29.78	29.89	29.97
3Downlink2uplinkPower(dBm)	31.88	31.85	31.81	29.15	29.22	29.32
2Downlink3uplinkPower(dBm)	30.32	30.24	30.19	27.48	27.58	27.67
1Downlink4uplinkPower(dBm)	29.18	29.12	29.08	26.37	26.42	26.43

GPRS Frame Average Power

Mode	GPRS850			GPRS1900		
Channel	128	189	251	512	661	810
Frequency (MHz)	824.2	836.4	848.8	1850.2	1880.0	1909.8
4Downlink1uplinkPower(dBm)	23.42	23.40	23.35	20.75	20.86	20.94
3Downlink2uplinkPower(dBm)	25.86	25.83	25.79	23.13	23.20	23.30
2Downlink3uplinkPower(dBm)	26.06	25.98	25.93	23.22	23.32	23.41
1Downlink4uplinkPower(dBm)	26.17	26.11	26.07	23.36	23.41	23.42

EGPRS Measured Power

Mode	EGPRS850(GMSK)			EGPRS1900(GMSK)		
	EGPRS850 (8PSK)			EGPRS1900 (8PSK)		
Channel	128	189	251	512	661	810
Frequency(MHz)	824.2	836.4	848.8	1850.2	1880.0	1909.8
4Downlink1uplinkPower(dBm)	32.47	32.45	32.39	29.74	29.85	29.97
	26.89	26.92	26.98	26.33	26.42	26.51
3Downlink2uplinkPower(dBm)	31.90	31.87	31.80	29.27	29.32	29.41
	25.64	25.72	25.81	25.47	25.55	25.63
2Downlink3uplinkPower(dBm)	30.29	30.23	30.19	27.46	27.54	27.65
	23.36	23.47	23.56	23.27	23.36	23.44
1Downlink4uplinkPower(dBm)	29.17	29.13	29.09	26.38	26.44	26.51
	22.09	22.15	22.28	22.07	22.14	22.23

EGPRS Frame Average Power

Mode	EGPRS850(GMSK)			EGPRS1900(GMSK)		
	EGPRS850 (8PSK)			EGPRS1900 (8PSK)		
Channel	128	189	251	512	661	810
Frequency(MHz)	824.2	836.4	848.8	1850.2	1880.0	1909.8
4Downlink1uplinkPower(dBm)	23.44	23.42	23.36	20.71	20.82	20.94
	17.86	17.89	17.95	17.30	17.39	17.48
3Downlink2uplinkPower(dBm)	25.88	25.85	25.78	23.25	23.30	23.39
	19.62	19.70	19.79	19.45	19.53	19.61
2Downlink3uplinkPower(dBm)	26.03	25.97	25.93	23.20	23.28	23.39
	19.10	19.21	19.30	19.01	19.10	19.18
1Downlink4uplinkPower(dBm)	26.16	26.12	26.08	23.37	23.43	23.50
	19.08	19.14	19.27	19.06	19.13	19.22

Division Factors (for Measured Power and Frame Average Power):

To average the power, the division factor is as follows:

1TX-slot (4Downlink1uplink) = 1 transmit time slot out of 8 time slots=> conducted power divided by (8/1) => -9.03dB

2TX-slots(3Downlink2uplink) = 2 transmit time slots out of 8 time slots=> conducted power divided by (8/2) => -6.02dB

3TX-slots (2Downlink3uplink) = 3 transmit time slots out of 8 time slots=> conducted power divided by (8/3) => -4.26dB

4TX-slots (1Downlink4uplink) = 4 transmit time slots out of 8 time slots=> conducted power divided by (8/4) => -3.01dB

There is a little difference for modulation type GMSK between GPRS and EDGE (EGPRS), the bit rate is not the same, so we also test the power of GMSK type for EDGE. According to the frame average conducted power as above, the SAR measurements are performed with **4Txslots (1Downlink4uplink)** of GPRS (GMSK).

6.3 WCDMA Measurement result

The following procedures are according to FCC KDB Publication 941225 D01.

Release 99

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1 specification. The DUT supports power Class 3, which has a nominal maximum output power of 24 dBm (+1.7/-3.7).

Mode	Subtest	Rel99
WCDMA General Settings	Loopback Mode	Test Mode 1
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_c/β_d	8/15

HSDPA

The following 4 Sub-tests were completed according to Release 5 procedures in section 5.2 of 3GPP TS34.121.

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	CM(dB) ⁽²⁾
1	2/15	15/15	64	2/15	4/15	0.0
2	12/15 ⁽³⁾	15/15 ⁽³⁾	64	12/15 ⁽³⁾	24/15	1.0
3	15/15	8/15	64	15/18	30/15	1.5
4	15/15	4/15	64	15/4	30/15	1.5

Note1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$.

Note2: CM=1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$.

Note3: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period(TF1,TF0) is achieved by setting the signaled gain factors for the reference TFC(TF1,TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

HSUPA

The following 5 Sub-tests were completed according to Release 6 procedures in section 5.2 of 3GPP TS34.121.

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	β_{ec}	β_{ed}	β_{ed} (SF)	β_{ed} (code s)	CM ⁽²⁾ (dB)	MP R (dB)	AG ⁽⁴⁾ Index	E-TF CI
1	11/15 ⁽³⁾	15/15 ⁽³⁾	64	11/15 ⁽³⁾	22/15	209/25	1039/25	4	1	1.0	2.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4	2	2.0	2.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 ⁽⁴⁾	15/15 ⁽⁴⁾	64	15/15 ⁽⁴⁾	30/15	24/15	134/15	4	1	1.0	2.0	21	81

Note1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$.

Note2: CM=1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period(TF1,TF0) is

achieved by setting the signaled gain factors for the reference TFC(TF1,TF1) to $\beta_c=10/15$ and $\beta_d=15/15$.

Note4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period(TF1,TF0) is achieved by setting the signaled gain factors for the reference TFC(TF1,TF1) to $\beta_c=14/15$ and $\beta_d=15/15$.

NOTE5: Testing UE using E-DPDCH Physical layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g.

NOTE6: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Up Antenna

R99 Measured Results

Mode	Band II			Band IV		
Channel	9262	9400	9538	1312	1412	1513
Frequency (MHz)	1852.4	1880	1907.6	1712.4	1732.4	1752.6
RB test mode1+64kRMC(dBm)	23.58	23.65	23.71	22.16	22.18	22.21
RB test mode1+12.2kRMC(dBm)	23.70	23.77	23.79	22.39	22.42	22.47
RB test mode1+144kRMC(dBm)	23.42	23.67	23.71	22.24	22.23	22.18
RB test mode1+384kRMC(dBm)	23.24	23.52	23.63	22.13	22.16	22.15

Mode	Band V		
Channel	4132	4183	4233
Frequency(MHz)	826.4	836.4	846.6
RB test mode1+64kRMC(dBm)	23.26	23.31	23.35
RB test mode1+12.2kRMC(dBm)	23.38	23.37	23.41
RB test mode1+144kRMC(dBm)	23.27	23.32	23.35
RB test mode1+384kRMC(dBm)	23.21	23.28	23.34

HSDPA Measured Results

Mode	HSDPA Band II			HSDPA Band IV		
Channel	9262	9400	9538	1312	1412	1513
Frequency (MHz)	1852.4	1880	1907.6	1712.6	1740.0	1752.4
sub-test1(dBm)	23.34	23.36	23.35	21.81	21.84	21.83
sub-test2(dBm)	23.44	23.41	23.42	21.86	21.81	21.82
sub-test3(dBm)	23.37	23.36	23.35	21.85	21.82	21.81
sub-test4(dBm)	23.34	23.32	23.35	21.84	21.91	21.88

Mode	HSDPA Band V		
Channel	4132	4183	4233
Frequency(MHz)	826.4	836.4	846.6
sub-test1(dBm)	23.11	23.13	23.15
sub-test2(dBm)	23.17	23.09	23.12
sub-test3(dBm)	23.10	23.13	23.12
sub-test4(dBm)	23.15	23.14	23.17

HSUPA Measured Results

Mode	HSUPA Band II			HSUPA Band IV		
Channel	9262	9400	9538	1312	1412	1513
Frequency (MHz)	1852.4	1880	1907.6	1712.6	1740.0	1752.4
sub-test1(dBm)	23.33	23.32	23.33	21.74	21.72	21.74
sub-test2(dBm)	23.31	23.34	23.35	21.81	21.73	21.77
sub-test3(dBm)	23.38	23.41	23.43	21.78	21.73	21.76
sub-test4(dBm)	23.34	23.30	23.28	21.72	21.81	21.71
sub-test5(dBm)	23.27	23.25	23.33	21.75	21.73	21.71

Mode	HSUPA Band V		
Channel	4132	4183	4233
Frequency (MHz)	826.4	836.4	846.6
sub-test1(dBm)	22.98	22.97	23.01
sub-test2(dBm)	22.93	22.97	22.94
sub-test3(dBm)	22.99	22.96	22.96
sub-test4(dBm)	22.93	22.95	22.97
sub-test5(dBm)	22.95	22.96	22.98

HSPA+ Measured Results

Mode	HSPA+ Band II	
Carrier frequency (MHz)	Channel No.	RF Power Output (dBm)
1852.4	9262	22.62
1880.0	9400	22.61
1907.6	9538	22.64

Mode	HSPA+ Band IV	
Carrier frequency (MHz)	Channel No.	RF Power Output (dBm)
1712.4	1312	21.39
1732.4	1412	21.22
1752.6	1513	21.21

Mode	HSPA+ Band V	
Carrier frequency (MHz)	Channel No.	RF Power Output (dBm)
826.4	4132	22.32
836.6	4183	22.35
846.6	4233	22.34

Note: UMTS SAR was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01.HSPA SAR was not required since the average output power of the HSPA subtests was not more than 0.25 dB higher than the RMC level and SAR was less than 1.2 W/kg.

Down Antenna

R99 Measured Results

Mode	Band II			Band IV		
Channel	9262	9400	9538	1312	1412	1513
Frequency (MHz)	1852.4	1880	1907.6	1712.4	1732.4	1752.6
RB test mode1+64kRMC(dBm)	23.58	23.65	23.71	23.16	23.18	23.21
RB test mode1+12.2kRMC(dBm)	23.70	23.77	23.79	23.39	23.42	23.47
RB test mode1+144kRMC(dBm)	23.42	23.67	23.71	23.24	23.23	23.18
RB test mode1+384kRMC(dBm)	23.24	23.52	23.63	23.13	23.16	23.15

Mode	Band V		
Channel	4132	4183	4233
Frequency(MHz)	826.4	836.4	846.6
RB test mode1+64kRMC(dBm)	23.26	23.31	23.35
RB test mode1+12.2kRMC(dBm)	23.38	23.37	23.41
RB test mode1+144kRMC(dBm)	23.27	23.32	23.35
RB test mode1+384kRMC(dBm)	23.21	23.28	23.34

HSDPA Measured Results

Mode	HSDPA Band II			HSDPA Band IV		
Channel	9262	9400	9538	1312	1412	1513
Frequency (MHz)	1852.4	1880	1907.6	1712.6	1740.0	1752.4
sub-test1(dBm)	23.34	23.36	23.35	22.81	22.84	22.83
sub-test2(dBm)	23.44	23.41	23.42	22.86	22.81	22.82
sub-test3(dBm)	23.37	23.36	23.35	22.85	22.82	22.81
sub-test4(dBm)	23.34	23.32	23.35	22.84	22.91	22.88

Mode	HSDPA Band V		
Channel	4132	4183	4233
Frequency(MHz)	826.4	836.4	846.6
sub-test1(dBm)	23.11	23.13	23.15
sub-test2(dBm)	23.17	23.09	23.12
sub-test3(dBm)	23.10	23.13	23.12
sub-test4(dBm)	23.15	23.14	23.17

HSUPA Measured Results

Mode	HSUPA Band II			HSUPA Band IV		
Channel	9262	9400	9538	1312	1412	1513
Frequency (MHz)	1852.4	1880	1907.6	1712.6	1740.0	1752.4
sub-test1(dBm)	23.33	23.32	23.33	22.74	22.72	22.74
sub-test2(dBm)	23.31	23.34	23.35	22.81	22.73	22.77
sub-test3(dBm)	23.38	23.41	23.43	22.78	22.73	22.76
sub-test4(dBm)	23.34	23.30	23.28	22.72	22.81	22.71
sub-test5(dBm)	23.27	23.25	23.33	22.75	22.73	22.71

Mode	HSUPA Band V		
Channel	4132	4183	4233
Frequency (MHz)	826.4	836.4	846.6
sub-test1(dBm)	22.98	22.97	23.01
sub-test2(dBm)	22.93	22.97	22.94
sub-test3(dBm)	22.99	22.96	22.96
sub-test4(dBm)	22.93	22.95	22.97
sub-test5(dBm)	22.95	22.96	22.98

HSPA+ Measured Results

Mode	HSPA+ Band II	
Carrier frequency (MHz)	Channel No.	RF Power Output (dBm)
1852.4	9262	22.62
1880.0	9400	22.61
1907.6	9538	22.64

Mode	HSPA+ Band IV	
Carrier frequency (MHz)	Channel No.	RF Power Output (dBm)
1712.4	1312	22.39
1732.4	1412	22.22
1752.6	1513	22.21

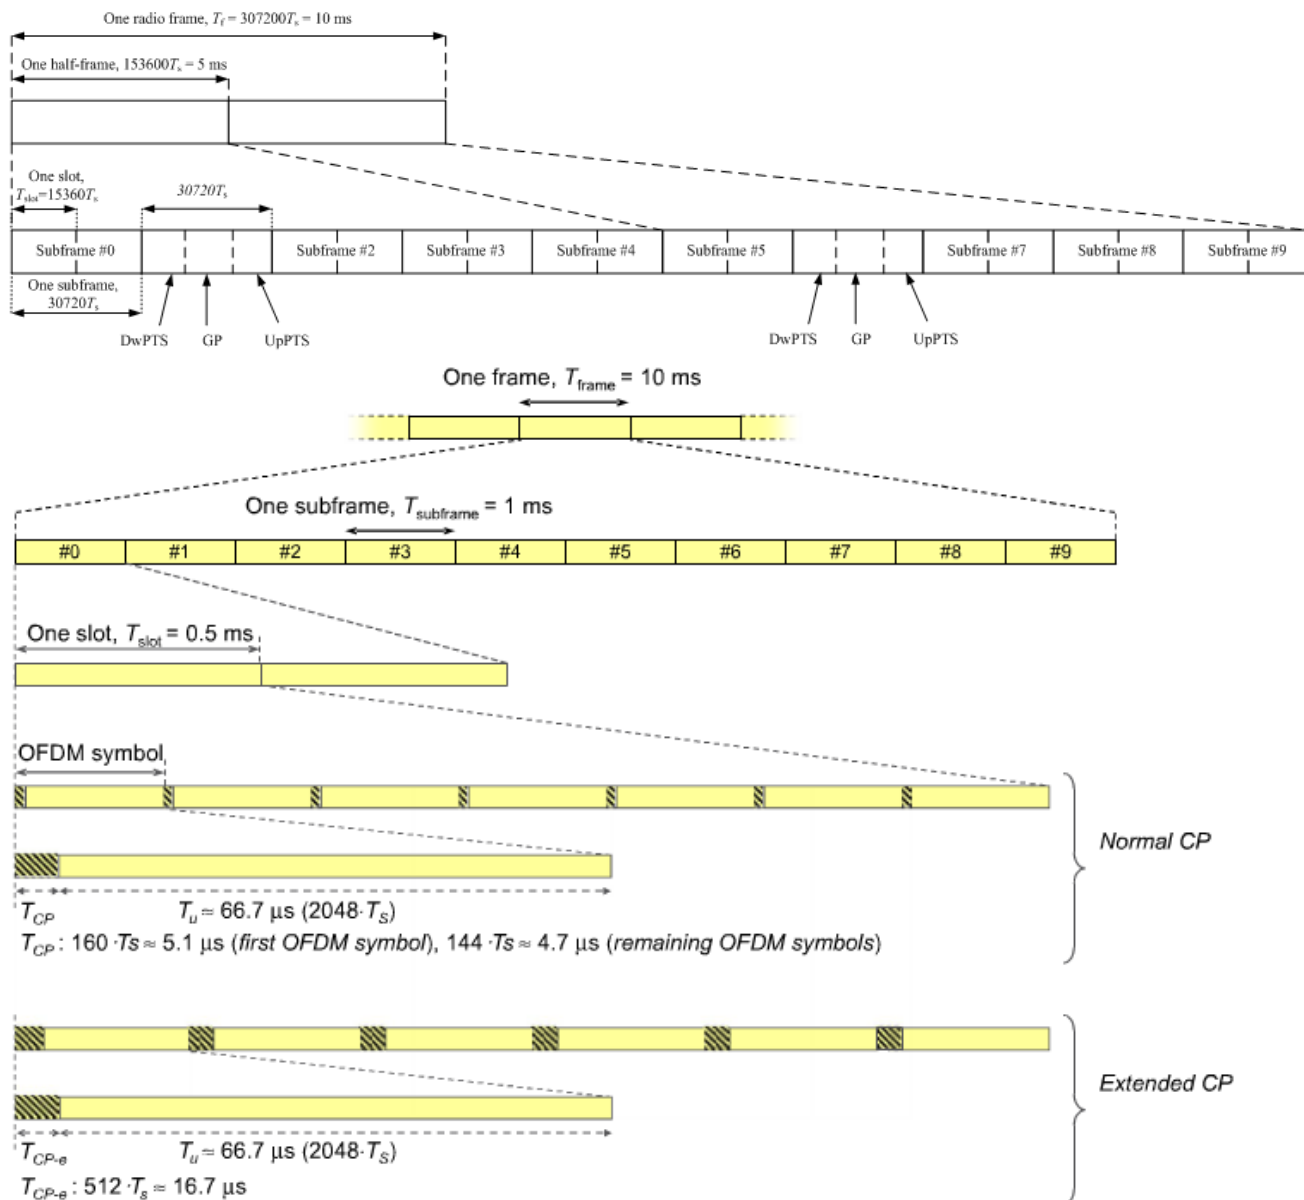
Mode	HSPA+ Band V	
Carrier frequency (MHz)	Channel No.	RF Power Output (dBm)
826.4	4132	22.32
836.6	4183	22.35
846.6	4233	22.34

Note: UMTS SAR was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01.HSPA SAR was not required since the average output power of the HSPA subtests was not more than 0.25 dB higher than the RMC level and SAR was less than 1.2 W/kg.

6.4 LTE Measurement result

General description:

TDD-LTE frame structure



Uplink-downlink configuration

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Special sub-frame configuration

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$7680 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
5	$6592 \cdot T_s$			$20480 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			-	-	-
8	$24144 \cdot T_s$			-	-	-

Special sub-frame with cyclic prefix uplink

Special sub-frame configuration		Duty factor with normal cyclic prefix in uplink	Duty factor with extended cyclic prefix in uplink
Normal cyclic prefix in downlink	0~4	7.13%	8.33%
	5~9	14.3%	16.7%
Extended cyclic prefix in downlink	0~3	7.13%	8.33%
	4~7	14.3%	16.7%

So we perform SAR test with maximum duty factor equal to 63.3% by using uplink-downlink configuration 0.

Note: One sub-frame is $30720T_s=1\text{ms}$, when UpPTS(uplink) in special sub-frame with extended cyclic prefix, duty factor = $5120/30720=0.167$. There are 5 sub-frames in half frame(3up link),so the final duty factor is $(30720 \cdot 3 + 5120)/(30720 \cdot 5)=63.3\%$ which we used to evaluate the SAR compliance (worst case)

Up Antenna

LTE band2

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1850.7	18607	1.4	1	0	16.46
				1	5	16.46
				3	2	15.68
				6	0	15.57
	1880	18900		1	0	16.44
				1	5	16.44
				3	2	15.70
				6	0	15.61
	1909.3	19193		1	0	16.45
				1	5	16.45
				3	2	15.76
				6	0	15.68
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
16QAM	1850.7	18607	1.4	1	0	15.71
				1	5	15.71
				3	2	14.59
				6	0	14.51
	1880	18900		1	0	15.74
				1	5	15.74
				3	2	14.68
				6	0	14.54
	1909.3	19193		1	0	15.76
				1	5	15.76
				3	2	14.73
				6	0	14.67
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	1850.7	18607	1.4	1	0	15.46
				1	5	15.46
				3	2	14.57
				6	0	14.49
	1880	18900		1	0	15.48
				1	5	15.48
				3	2	14.60
				6	0	14.53
	1909.3	19193		1	0	15.53
				1	5	15.53
				3	2	14.64

				6	0	14.60
--	--	--	--	---	---	-------

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1851.5	18615	3	1	0	16.43
				1	14	16.43
				8	4	15.65
				15	0	15.54
	1880	18900		1	0	16.41
				1	14	16.41
				8	4	15.67
				15	0	15.58
	1908.5	19185		1	0	16.42
				1	14	16.42
				8	4	15.73
				15	0	15.65
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
16QAM	1851.5	18615	3	1	0	15.68
				1	14	15.68
				8	4	14.56
				15	0	14.48
	1880	18900		1	0	15.71
				1	14	15.71
				8	4	14.65
				15	0	14.51
	1908.5	19185		1	0	15.73
				1	14	15.73
				8	4	14.70
				15	0	14.64
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	1851.5	18615	3	1	0	15.43
				1	14	15.43
				8	4	14.54
				15	0	14.46
	1880	18900		1	0	15.45
				1	14	15.45
				8	4	14.57
				15	0	14.50
	1908.5	19185		1	0	15.50
				1	14	15.50
				8	4	14.61
				15	0	14.57

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1852.5	18625	5	1	0	16.42
				1	24	16.42
				12	6	15.64
				25	0	15.53
	1880	18900		1	0	16.40
				1	24	16.40
				12	6	15.66
				25	0	15.57
	1907.5	19175		1	0	16.41
				1	24	16.41
				12	6	15.72
				25	0	15.64
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
16QAM	1852.5	18625	5	1	0	15.67
				1	24	15.67
				12	6	14.55
				25	0	14.47
	1880	18900		1	0	15.70
				1	24	15.70
				12	6	14.64
				25	0	14.50
	1907.5	19175		1	0	15.72
				1	24	15.72
				12	6	14.69
				25	0	14.63
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	1852.5	18625	5	1	0	15.42
				1	24	15.42
				12	6	14.53
				25	0	14.45
	1880	18900		1	0	15.44
				1	24	15.44
				12	6	14.56
				25	0	14.49
	1907.5	19175		1	0	15.49
				1	24	15.49
				12	6	14.60
				25	0	14.56

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1855	18650	10	1	0	16.48
				1	49	16.48
				24	12	15.70
				50	0	15.59
	1880	18900		1	0	16.46
				1	49	16.46
				24	12	15.72
				50	0	15.63
	1905	19150		1	0	16.47
				1	49	16.47
				24	12	15.78
				50	0	15.70
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
16QAM	1855	18650	10	1	0	15.73
				1	49	15.73
				24	12	14.61
				50	0	14.53
	1880	18900		1	0	15.76
				1	49	15.76
				24	12	14.70
				50	0	14.56
	1905	19150		1	0	15.78
				1	49	15.78
				24	12	14.75
				50	0	14.69
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	1855	18650	10	1	0	15.48
				1	49	15.48
				24	12	14.59
				50	0	14.51
	1880	18900		1	0	15.50
				1	49	15.50
				24	12	14.62
				50	0	14.55
	1905	19150		1	0	15.55
				1	49	15.55
				24	12	14.66
				50	0	14.62

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1857.5	18675	15	1	0	16.52
				1	74	16.52
				40	18	15.74
				75	0	15.63
	1880	18900		1	0	16.50
				1	74	16.50
				40	18	15.76
				75	0	15.67
	1902.5	19125		1	0	16.51
				1	74	16.51
				40	18	15.82
				75	0	15.74
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
16QAM	1857.5	18675	15	1	0	15.77
				1	74	15.77
				40	18	14.65
				75	0	14.57
	1880	18900		1	0	15.80
				1	74	15.80
				40	18	14.74
				75	0	14.60
	1902.5	19125		1	0	15.81
				1	74	15.81
				40	18	14.79
				75	0	14.73
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	1857.5	18675	15	1	0	15.52
				1	74	15.52
				40	18	14.63
				75	0	14.55
	1880	18900		1	0	15.54
				1	74	15.54
				40	18	14.66
				75	0	14.59
	1902.5	19125		1	0	15.59
				1	74	15.59
				40	18	14.70
				75	0	14.66

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1860	18700	20	1	0	16.54
				1	99	16.54
				50	25	15.76
				100	0	15.65
	1880	18900		1	0	16.52
				1	99	16.52
				50	25	15.78
				100	0	15.69
	1900	19100		1	0	16.53
				1	99	16.53
				50	25	15.84
				100	0	15.76
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
16QAM	1860	18700	20	1	0	15.79
				1	99	15.79
				50	25	14.67
				100	0	14.59
	1880	18900		1	0	15.82
				1	99	15.82
				50	25	14.76
				100	0	14.62
	1900	19100		1	0	15.84
				1	99	15.84
				50	25	14.81
				100	0	14.75
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	1860	18700	20	1	0	15.54
				1	99	15.54
				50	25	14.65
				100	0	14.57
	1880	18900		1	0	15.56
				1	99	15.56
				50	25	14.68
				100	0	14.61
	1900	19100		1	0	15.61
				1	99	15.61
				50	25	14.72
				100	0	14.68

LTE band4

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1710.7	19957	1.4	1	0	19.21
				1	5	19.21
				3	2	18.39
				6	0	18.30
	1732.5	20175		1	0	19.18
				1	5	19.18
				3	2	18.36
				6	0	18.25
	1754.3	20393		1	0	19.16
				1	5	19.16
				3	2	18.31
				6	0	18.22
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
16QAM	1710.7	19957	1.4	1	0	18.52
				1	5	18.52
				3	2	17.45
				6	0	17.37
	1732.5	20175		1	0	18.50
				1	5	18.50
				3	2	17.42
				6	0	17.33
	1754.3	20393		1	0	18.47
				1	5	18.47
				3	2	17.40
				6	0	17.29
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	1710.7	19957	1.4	1	0	18.23
				1	5	18.23
				3	2	17.39
				6	0	17.35
	1732.5	20175		1	0	18.22
				1	5	18.22
				3	2	17.37
				6	0	17.32
	1754.3	20393		1	0	18.20
				1	5	18.20
				3	2	17.36
				6	0	17.29

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1711.5	19965	3	1	0	19.19
				1	14	19.19
				8	4	18.37
				15	0	18.28
	1732.5	20175		1	0	19.16
				1	14	19.16
				8	4	18.34
				15	0	18.23
	1753.5	20385		1	0	19.14
				1	14	19.14
				8	4	18.29
				15	0	18.20
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
16QAM	1711.5	19965	3	1	0	18.50
				1	14	18.50
				8	4	17.42
				15	0	17.34
	1732.5	20175		1	0	18.45
				1	14	18.45
				8	4	17.37
				15	0	17.28
	1753.5	20385		1	0	18.42
				1	14	18.42
				8	4	17.35
				15	0	17.24
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	1711.5	19965	3	1	0	18.18
				1	14	18.18
				8	4	17.33
				15	0	17.29
	1732.5	20175		1	0	18.16
				1	14	18.16
				8	4	17.31
				15	0	17.26
	1753.5	20385		1	0	18.14
				1	14	18.14
				8	4	17.30
				15	0	17.23

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1712.5	19975	5	1	0	19.17
				1	24	19.17
				12	6	18.35
				25	0	18.26
	1732.5	20175		1	0	19.14
				1	24	19.14
				12	6	18.32
				25	0	18.21
	1752.5	20375		1	0	19.12
				1	24	19.12
				12	6	18.29
				25	0	18.20
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
16QAM	1712.5	19975	5	1	0	18.50
				1	24	18.50
				12	6	17.42
				25	0	17.34
	1732.5	20175		1	0	18.46
				1	24	18.46
				12	6	17.38
				25	0	17.29
	1752.5	20375		1	0	18.43
				1	24	18.43
				12	6	17.36
				25	0	17.25
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	1712.5	19975	5	1	0	18.19
				1	24	18.19
				12	6	17.34
				25	0	17.30
	1732.5	20175		1	0	18.17
				1	24	18.15
				12	6	17.30
				25	0	17.25
	1752.5	20375		1	0	18.13
				1	24	18.13
				12	6	17.29
				25	0	17.22

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1715	20000	10	1	0	19.21
				1	49	19.21
				24	12	18.39
				50	0	18.29
	1732.5	20175		1	0	19.17
				1	49	19.17
				24	12	18.35
				50	0	18.24
	1750	20350		1	0	19.15
				1	49	19.15
				24	12	18.30
				50	0	18.21
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
16QAM	1715	20000	10	1	0	18.51
				1	49	18.51
				24	12	17.43
				50	0	17.34
	1732.5	20175		1	0	18.47
				1	49	18.47
				24	12	17.39
				50	0	17.30
	1750	20350		1	0	18.44
				1	49	18.44
				24	12	17.37
				50	0	17.26
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	1715	20000	10	1	0	18.20
				1	49	18.20
				24	12	17.35
				50	0	17.31
	1732.5	20175		1	0	18.16
				1	49	18.16
				24	12	17.31
				50	0	17.26
	1750	20350		1	0	18.14
				1	49	18.14
				24	12	17.30
				50	0	17.23

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1717.5	20025	15	1	0	19.25
				1	74	19.25
				40	18	18.43
				75	0	18.34
	1732.5	20175		1	0	19.22
				1	74	19.22
				40	18	18.40
				75	0	18.29
	1747.5	20325		1	0	19.20
				1	74	19.20
				40	18	18.35
				75	0	18.26
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
16QAM	1717.5	20025	15	1	0	18.52
				1	74	18.52
				40	18	17.44
				75	0	17.36
	1732.5	20175		1	0	18.49
				1	74	18.49
				40	18	17.41
				75	0	17.32
	1747.5	20325		1	0	18.46
				1	74	18.46
				40	18	17.39
				75	0	17.28
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	1717.5	20025	15	1	0	18.22
				1	74	18.22
				40	18	17.37
				75	0	17.32
	1732.5	20175		1	0	18.19
				1	74	18.19
				40	18	17.34
				75	0	17.29
	1747.5	20325		1	0	18.17
				1	74	18.17
				40	18	17.33
				75	0	17.26

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1720	20050	20	1	0	19.28
				1	99	19.28
				50	25	18.46
				100	0	18.37
	1732.5	20175		1	0	19.25
				1	99	19.25
				50	25	18.43
				100	0	18.32
	1745	20300		1	0	19.23
				1	99	19.23
				50	25	18.38
				100	0	18.29
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
16QAM	1720	20050	20	1	0	18.59
				1	99	18.59
				50	25	17.51
				100	0	17.43
	1732.5	20175		1	0	18.56
				1	99	18.56
				50	25	17.48
				100	0	17.39
	1745	20300		1	0	18.53
				1	99	18.53
				50	25	17.46
				100	0	17.35
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	1720	20050	20	1	0	18.29
				1	99	18.29
				50	25	17.44
				100	0	17.40
	1732.5	20175		1	0	18.27
				1	99	18.27
				50	25	17.42
				100	0	17.37
	1745	20300		1	0	18.25
				1	99	18.25
				50	25	17.41
				100	0	17.34

LTE band5

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	824.7	20407	1.4	1	0	23.29
				1	5	23.29
				3	2	22.36
				6	0	22.22
	836.5	20525		1	0	23.26
				1	5	23.26
				3	2	22.32
				6	0	22.14
	848.3	20643		1	0	23.21
				1	5	23.21
				3	2	22.27
				6	0	22.15
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
16QAM	824.7	20407	1.4	1	0	22.64
				1	5	22.64
				3	2	21.30
				6	0	21.15
	836.5	20525		1	0	22.56
				1	5	22.56
				3	2	21.23
				6	0	21.11
	848.3	20643		1	0	22.55
				1	5	22.55
				3	2	21.24
				6	0	21.10
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	824.7	20407	1.4	1	0	22.57
				1	5	22.64
				3	2	21.24
				6	0	21.20
	836.5	20525		1	0	22.61
				1	5	22.61
				3	2	21.19
				6	0	21.17
	848.3	20643		1	0	22.60
				1	5	22.60
				3	2	21.17
				6	0	21.15

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	825.5	20415	3	1	0	23.21
				1	14	23.21
				8	4	22.28
				15	0	22.14
	836.5	20525		1	0	23.18
				1	14	23.18
				8	4	22.24
				15	0	22.12
	847.5	20635		1	0	23.19
				1	14	23.19
				8	4	22.25
				15	0	22.13
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
16QAM	825.5	20415	3	1	0	22.62
				1	14	22.62
				8	4	21.28
				15	0	21.17
	836.5	20525		1	0	22.58
				1	14	22.58
				8	4	21.28
				15	0	21.16
	847.5	20635		1	0	22.60
				1	14	22.60
				8	4	21.29
				15	0	21.15
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	825.5	20415	3	1	0	22.62
				1	14	22.57
				8	4	21.17
				15	0	21.13
	836.5	20525		1	0	22.54
				1	14	22.54
				8	4	21.12
				15	0	21.10
	847.5	20635		1	0	22.53
				1	14	22.53
				8	4	21.10
				15	0	21.08

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	826.5	20425	5	1	0	23.24
				1	24	23.24
				12	6	22.31
				25	0	22.17
	836.5	20525		1	0	23.21
				1	24	23.21
				12	6	22.27
				25	0	22.13
	846.5	20625		1	0	23.19
				1	24	23.19
				12	6	22.25
				25	0	22.13
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
16QAM	826.5	20425	5	1	0	22.62
				1	24	22.62
				12	6	21.28
				25	0	21.19
	836.5	20525		1	0	22.60
				1	24	22.60
				12	6	21.27
				25	0	21.15
	846.5	20625		1	0	22.59
				1	24	22.59
				12	6	21.28
				25	0	21.14
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	826.5	20425	5	1	0	22.61
				1	24	22.60
				12	6	21.20
				25	0	21.16
	836.5	20525		1	0	22.57
				1	24	22.57
				12	6	21.15
				25	0	21.13
	846.5	20625		1	0	22.56
				1	24	22.56
				12	6	21.13
				25	0	21.11

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	829	20450	10	1	0	23.32
				1	49	23.32
				24	12	22.39
				50	0	22.25
	836.5	20525		1	0	23.29
				1	49	23.29
				24	12	22.35
				50	0	22.21
	844	20600		1	0	23.28
				1	49	23.28
				24	12	22.34
				50	0	22.22
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
16QAM	829	20450	10	1	0	22.71
				1	49	22.71
				24	12	21.37
				50	0	21.26
	836.5	20525		1	0	22.67
				1	49	22.67
				24	12	21.34
				50	0	21.22
	844	20600		1	0	22.66
				1	49	22.66
				24	12	21.35
				50	0	21.21
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	829	20450	10	1	0	22.68
				1	49	22.68
				24	12	21.28
				50	0	21.24
	836.5	20525		1	0	22.65
				1	49	22.65
				24	12	21.23
				50	0	21.21
	844	20600		1	0	22.64
				1	49	22.64
				24	12	21.21
				50	0	21.19

LTE band7

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	2502.5	20775	5	1	0	15.43
				1	24	15.43
				12	6	14.64
				25	0	14.60
	2535	21100		1	0	15.37
				1	24	15.37
				12	6	14.56
				25	0	14.53
	2567.5	21425		1	0	15.22
				1	24	15.22
				12	6	14.51
				25	0	14.43
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
16QAM	2502.5	20775	5	1	0	14.77
				1	24	14.75
				12	6	13.59
				25	0	13.57
	2535	21100		1	0	14.65
				1	24	14.65
				12	6	13.49
				25	0	13.47
	2567.5	21425		1	0	14.57
				1	24	14.57
				12	6	13.42
				25	0	13.34
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	2502.5	20775	5	1	0	14.69
				1	24	14.67
				12	6	13.48
				25	0	13.39
	2535	21100		1	0	14.59
				1	24	14.59
				12	6	13.43
				25	0	13.40
	2567.5	21425		1	0	14.50
				1	24	14.52
				12	6	13.39
				25	0	13.31

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	2505	20800	10	1	0	15.41
				1	49	15.41
				24	12	14.62
				50	0	14.58
	2535	21100		1	0	15.35
				1	49	15.35
				24	12	14.55
				50	0	14.52
	2565	21400		1	0	15.21
				1	49	15.21
				24	12	14.50
				50	0	14.42
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
16QAM	2505	20800	10	1	0	14.76
				1	49	14.76
				24	12	13.58
				50	0	13.56
	2535	21100		1	0	14.64
				1	49	14.64
				24	12	13.48
				50	0	13.46
	2565	21400		1	0	14.56
				1	49	14.56
				24	12	13.41
				50	0	13.33
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	2505	20800	10	1	0	14.68
				1	49	14.68
				24	12	13.50
				50	0	13.41
	2535	21100		1	0	14.61
				1	49	14.61
				24	12	13.45
				50	0	13.42
	2565	21400		1	0	14.52
				1	49	14.52
				24	12	13.39
				50	0	13.31

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	2507.5	20825	15	1	0	15.45
				1	74	15.45
				40	18	14.66
				75	0	14.62
	2535	21100		1	0	15.39
				1	74	15.39
				40	18	14.58
				75	0	14.51
	2562.5	21375		1	0	15.20
				1	74	15.20
				40	18	14.49
				75	0	14.41
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
16QAM	2507.5	20825	15	1	0	14.75
				1	74	14.75
				40	18	13.59
				75	0	13.53
	2535	21100		1	0	14.61
				1	74	14.61
				40	18	13.45
				75	0	13.43
	2562.5	21375		1	0	14.53
				1	74	14.53
				40	18	13.38
				75	0	13.30
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	2507.5	20825	15	1	0	14.65
				1	74	14.72
				40	18	13.53
				75	0	13.44
	2535	21100		1	0	14.64
				1	74	14.64
				40	18	13.48
				75	0	13.45
	2562.5	21375		1	0	14.55
				1	74	14.55
				40	18	13.42
				75	0	13.34

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	2510	20850	20	1	0	15.48
				1	99	15.48
				50	25	14.69
				100	0	14.65
	2535	21100		1	0	15.42
				1	99	15.42
				50	25	14.61
				100	0	14.58
	2560	21350		1	0	15.27
				1	99	15.27
				50	25	14.56
				100	0	14.48
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
16QAM	2510	20850	20	1	0	14.82
				1	99	14.82
				50	25	13.66
				100	0	13.64
	2535	21100		1	0	14.72
				1	99	14.72
				50	25	13.56
				100	0	13.54
	2560	21350		1	0	14.64
				1	99	14.64
				50	25	13.49
				100	0	13.41
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	2510	20850	20	1	0	14.76
				1	99	14.76
				50	25	13.57
				100	0	13.48
	2535	21100		1	0	14.68
				1	99	14.68
				50	25	13.52
				100	0	13.49
	2560	21350		1	0	14.59
				1	99	14.59
				50	25	13.46
				100	0	13.38

LTE band12

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	699.7	23017	1.4	1	0	23.25
				1	5	23.25
				3	2	22.36
				6	0	22.23
	707.5	23095		1	0	23.22
				1	5	23.22
				3	2	22.34
				6	0	22.17
	715.3	23173		1	0	23.17
				1	5	23.17
				3	2	22.31
				6	0	22.16
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
16QAM	699.7	23017	1.4	1	0	22.32
				1	5	22.32
				3	2	21.31
				6	0	21.23
	707.5	23095		1	0	22.27
				1	5	22.27
				3	2	21.24
				6	0	21.16
	715.3	23173		1	0	22.26
				1	5	22.26
				3	2	21.23
				6	0	21.14
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	699.7	23017	1.4	1	0	22.17
				1	5	22.17
				3	2	21.25
				6	0	21.19
	707.5	23095		1	0	22.19
				1	5	22.19
				3	2	21.27
				6	0	21.16
	715.3	23173		1	0	22.18
				1	5	22.18
				3	2	21.26
				6	0	21.15

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	700.5	23025	3	1	0	23.24
				1	14	23.24
				8	4	22.35
				15	0	22.22
	707.5	23095		1	0	23.21
				1	14	23.21
				8	4	22.33
				15	0	22.16
	714.5	23165		1	0	23.16
				1	14	23.16
				8	4	22.30
				15	0	22.15
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
16QAM	700.5	23025	3	1	0	22.30
				1	14	22.30
				8	4	21.29
				15	0	21.21
	707.5	23095		1	0	22.29
				1	14	22.29
				8	4	21.26
				15	0	21.18
	714.5	23165		1	0	22.28
				1	14	22.28
				8	4	21.22
				15	0	21.13
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	700.5	23025	3	1	0	22.16
				1	14	22.16
				8	4	21.24
				15	0	21.15
	707.5	23095		1	0	22.15
				1	14	22.15
				8	4	21.23
				15	0	21.12
	714.5	23165		1	0	22.14
				1	14	22.14
				8	4	21.22
				15	0	21.11

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	701.5	23035	5	1	0	23.22
				1	24	23.22
				12	6	22.33
				25	0	22.20
	707.5	23095		1	0	23.19
				1	24	23.19
				12	6	22.31
				25	0	22.16
	713.5	23155		1	0	23.16
				1	24	23.16
				12	6	22.30
				25	0	22.15
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
16QAM	701.5	23035	5	1	0	22.31
				1	24	22.29
				12	6	21.28
				25	0	21.20
	707.5	23095		1	0	22.28
				1	24	22.28
				12	6	21.25
				25	0	21.17
	713.5	23155		1	0	22.27
				1	24	22.27
				12	6	21.24
				25	0	21.15
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	701.5	23035	5	1	0	22.18
				1	24	22.16
				12	6	21.24
				25	0	21.15
	707.5	23095		1	0	22.15
				1	24	22.15
				12	6	21.23
				25	0	21.12
	713.5	23155		1	0	22.14
				1	24	22.16
				12	6	21.24
				25	0	21.13

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	704	23060	10	1	0	23.27
				1	49	23.27
				24	12	22.38
				50	0	22.25
	707.5	23095		1	0	23.24
				1	49	23.24
				24	12	22.36
				50	0	22.21
	711	23130		1	0	23.21
				1	49	23.21
				24	12	22.35
				50	0	22.20
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
16QAM	704	23060	10	1	0	22.36
				1	49	22.36
				24	12	21.35
				50	0	21.27
	707.5	23095		1	0	22.35
				1	49	22.35
				24	12	21.32
				50	0	21.24
	711	23130		1	0	22.34
				1	49	22.34
				24	12	21.31
				50	0	21.22
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	704	23060	10	1	0	22.25
				1	49	22.25
				24	12	21.33
				50	0	21.24
	707.5	23095		1	0	22.24
				1	49	22.24
				24	12	21.32
				50	0	21.21
	711	23130		1	0	22.23
				1	49	22.23
				24	12	21.31
				50	0	21.20

LTE band66

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1710.7	131979	1.4	1	0	20.19
				1	5	20.19
				3	2	19.46
				6	0	19.35
	1745	132322		1	0	20.15
				1	5	20.15
				3	2	19.40
				6	0	19.30
	1779.3	132665		1	0	20.32
				1	5	20.32
				3	2	19.53
				6	0	19.44
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
16QAM	1710.7	131979	1.4	1	0	19.50
				1	5	19.50
				3	2	18.42
				6	0	18.29
	1745	132322		1	0	19.44
				1	5	19.43
				3	2	18.33
				6	0	18.22
	1779.3	132665		1	0	19.54
				1	5	19.45
				3	2	18.46
				6	0	18.40
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	1710.7	131979	1.4	1	0	19.39
				1	5	19.39
				3	2	18.31
				6	0	18.23
	1745	132322		1	0	19.39
				1	5	19.39
				3	2	18.27
				6	0	18.16
	1779.3	132665		1	0	19.53
				1	5	19.53
				3	2	18.42
				6	0	18.34

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1711.5	131987	3	1	0	20.16
				1	14	20.16
				8	4	19.43
				15	0	19.32
	1745	132322		1	0	20.12
				1	14	20.12
				8	4	19.37
				15	0	19.29
	1778.5	132657		1	0	20.31
				1	14	20.31
				8	4	19.52
				15	0	19.43
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
16QAM	1711.5	131987	3	1	0	19.49
				1	14	19.49
				8	4	18.41
				15	0	18.28
	1745	132322		1	0	19.46
				1	14	19.45
				8	4	18.35
				15	0	18.24
	1778.5	132657		1	0	19.56
				1	14	19.47
				8	4	18.48
				15	0	18.42
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	1711.5	131987	3	1	0	19.41
				1	14	19.41
				8	4	18.33
				15	0	18.21
	1745	132322		1	0	19.37
				1	14	19.37
				8	4	18.25
				15	0	18.14
	1778.5	132657		1	0	19.51
				1	14	19.51
				8	4	18.40
				15	0	18.32

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1712.5	131997	5	1	0	20.13
				1	24	20.13
				12	6	19.40
				25	0	19.29
	1745	132322		1	0	20.09
				1	24	20.09
				12	6	19.34
				25	0	19.26
	1777.5	132647		1	0	20.28
				1	24	20.28
				12	6	19.49
				25	0	19.40
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
16QAM	1712.5	131997	5	1	0	19.46
				1	24	19.46
				12	6	18.39
				25	0	18.26
	1745	132322		1	0	19.45
				1	24	19.44
				12	6	18.34
				25	0	18.23
	1777.5	132647		1	0	19.55
				1	24	19.46
				12	6	18.50
				25	0	18.44
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	1712.5	131997	5	1	0	19.43
				1	24	19.43
				12	6	18.35
				25	0	18.24
	1745	132322		1	0	19.40
				1	24	19.40
				12	6	18.28
				25	0	18.17
	1777.5	132647		1	0	19.54
				1	24	19.54
				12	6	18.43
				25	0	18.35

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1715	132022	10	1	0	20.12
				1	49	20.12
				24	12	19.39
				50	0	19.28
	1745	132322		1	0	20.08
				1	49	20.08
				24	12	19.33
				50	0	19.25
	1775	132622		1	0	20.27
				1	49	20.27
				24	12	19.48
				50	0	19.39
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
16QAM	1715	132022	10	1	0	19.45
				1	49	19.45
				24	12	18.37
				50	0	18.28
	1745	132322		1	0	19.47
				1	49	19.46
				24	12	18.36
				50	0	18.25
	1775	132622		1	0	19.57
				1	49	19.48
				24	12	18.49
				50	0	18.43
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	1715	132022	10	1	0	19.42
				1	49	19.42
				24	12	18.33
				50	0	18.22
	1745	132322		1	0	19.38
				1	49	19.38
				24	12	18.26
				50	0	18.15
	1775	132622		1	0	19.52
				1	49	19.52
				24	12	18.41
				50	0	18.33

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1717.5	132047	15	1	0	20.10
				1	74	20.10
				40	18	19.37
				75	0	19.26
	1745	132322		1	0	20.06
				1	74	20.06
				40	18	19.31
				75	0	19.23
	1772.5	132597		1	0	20.25
				1	74	20.25
				40	18	19.46
				75	0	19.37
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
16QAM	1717.5	132047	15	1	0	19.43
				1	74	19.43
				40	18	18.35
				75	0	18.28
	1745	132322		1	0	19.47
				1	74	19.46
				40	18	18.33
				75	0	18.22
	1772.5	132597		1	0	19.54
				1	74	19.45
				40	18	18.46
				75	0	18.40
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	1717.5	132047	15	1	0	19.39
				1	74	19.39
				40	18	18.31
				75	0	18.20
	1745	132322		1	0	19.36
				1	74	19.36
				40	18	18.23
				75	0	18.12
	1772.5	132597		1	0	19.49
				1	74	19.49
				40	18	18.38
				75	0	18.30

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1720	132072	20	1	0	20.21
				1	99	20.21
				50	25	19.48
				100	0	19.37
	1745	132322		1	0	20.17
				1	99	20.17
				50	25	19.42
				100	0	19.34
	1770	132572		1	0	20.36
				1	99	20.36
				50	25	19.57
				100	0	19.48
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
16QAM	1720	132072	20	1	0	19.54
				1	99	19.54
				50	25	18.46
				100	0	18.33
	1745	132322		1	0	19.52
				1	99	19.51
				50	25	18.41
				100	0	18.30
	1770	132572		1	0	19.62
				1	99	19.53
				50	25	18.54
				100	0	18.48
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	1720	132072	20	1	0	19.47
				1	99	19.47
				50	25	18.39
				100	0	18.28
	1745	132322		1	0	19.44
				1	99	19.44
				50	25	18.32
				100	0	18.21
	1770	132572		1	0	19.58
				1	99	19.58
				50	25	18.47
				100	0	18.39

Down Antenna

LTE band2

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1850.7	18607	1.4	1	0	23.46
				1	5	23.46
				3	2	22.68
				6	0	22.57
	1880	18900		1	0	23.44
				1	5	23.44
				3	2	22.70
				6	0	22.61
	1909.3	19193		1	0	23.45
				1	5	23.45
				3	2	22.76
				6	0	22.68
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
16QAM	1850.7	18607	1.4	1	0	22.71
				1	5	22.71
				3	2	21.59
				6	0	21.51
	1880	18900		1	0	22.74
				1	5	22.74
				3	2	21.68
				6	0	21.54
	1909.3	19193		1	0	22.76
				1	5	22.76
				3	2	21.73
				6	0	21.67
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	1850.7	18607	1.4	1	0	22.46
				1	5	22.46
				3	2	21.57
				6	0	21.49
	1880	18900		1	0	22.48
				1	5	22.48
				3	2	21.60
				6	0	21.53
	1909.3	19193		1	0	22.53
				1	5	22.53
				3	2	21.64
				6	0	21.60

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1851.5	18615	3	1	0	23.43
				1	14	23.43
				8	4	22.65
				15	0	22.54
	1880	18900		1	0	23.41
				1	14	23.41
				8	4	22.67
				15	0	22.58
	1908.5	19185		1	0	23.42
				1	14	23.42
				8	4	22.73
				15	0	22.65
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
16QAM	1851.5	18615	3	1	0	22.68
				1	14	22.68
				8	4	21.56
				15	0	21.48
	1880	18900		1	0	22.71
				1	14	22.71
				8	4	21.65
				15	0	21.51
	1908.5	19185		1	0	22.73
				1	14	22.73
				8	4	21.70
				15	0	21.64
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	1851.5	18615	3	1	0	22.43
				1	14	22.43
				8	4	21.54
				15	0	21.46
	1880	18900		1	0	22.45
				1	14	22.45
				8	4	21.57
				15	0	21.50
	1908.5	19185		1	0	22.50
				1	14	22.50
				8	4	21.61
				15	0	21.57

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1852.5	18625	5	1	0	23.42
				1	24	23.42
				12	6	22.64
				25	0	22.53
	1880	18900		1	0	23.40
				1	24	23.40
				12	6	22.66
				25	0	22.57
	1907.5	19175		1	0	23.41
				1	24	23.41
				12	6	22.72
				25	0	22.64
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
16QAM	1852.5	18625	5	1	0	22.67
				1	24	22.67
				12	6	21.55
				25	0	21.47
	1880	18900		1	0	22.70
				1	24	22.70
				12	6	21.64
				25	0	21.50
	1907.5	19175		1	0	22.72
				1	24	22.72
				12	6	21.69
				25	0	21.63
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	1852.5	18625	5	1	0	22.42
				1	24	22.42
				12	6	21.53
				25	0	21.45
	1880	18900		1	0	22.44
				1	24	22.44
				12	6	21.56
				25	0	21.49
	1907.5	19175		1	0	22.49
				1	24	22.49
				12	6	21.60
				25	0	21.56

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1855	18650	10	1	0	23.48
				1	49	23.48
				24	12	22.70
				50	0	22.59
	1880	18900		1	0	23.46
				1	49	23.46
				24	12	22.72
				50	0	22.63
	1905	19150		1	0	23.47
				1	49	23.47
				24	12	22.78
				50	0	22.70
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
16QAM	1855	18650	10	1	0	22.73
				1	49	22.73
				24	12	21.61
				50	0	21.53
	1880	18900		1	0	22.76
				1	49	22.76
				24	12	21.70
				50	0	21.56
	1905	19150		1	0	22.78
				1	49	22.78
				24	12	21.75
				50	0	21.69
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	1855	18650	10	1	0	22.48
				1	49	22.48
				24	12	21.59
				50	0	21.51
	1880	18900		1	0	22.50
				1	49	22.50
				24	12	21.62
				50	0	21.55
	1905	19150		1	0	22.55
				1	49	22.55
				24	12	21.66
				50	0	21.62

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1857.5	18675	15	1	0	23.52
				1	74	23.52
				40	18	22.74
				75	0	22.63
	1880	18900		1	0	23.50
				1	74	23.50
				40	18	22.76
				75	0	22.67
	1902.5	19125		1	0	23.51
				1	74	23.51
				40	18	22.82
				75	0	22.74
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
16QAM	1857.5	18675	15	1	0	22.77
				1	74	22.77
				40	18	21.65
				75	0	21.57
	1880	18900		1	0	22.80
				1	74	22.80
				40	18	21.74
				75	0	21.60
	1902.5	19125		1	0	22.81
				1	74	22.81
				40	18	21.79
				75	0	21.73
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	1857.5	18675	15	1	0	22.52
				1	74	22.52
				40	18	21.63
				75	0	21.55
	1880	18900		1	0	22.54
				1	74	22.54
				40	18	21.66
				75	0	21.59
	1902.5	19125		1	0	22.59
				1	74	22.59
				40	18	21.70
				75	0	21.66

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1860	18700	20	1	0	23.54
				1	99	23.54
				50	25	22.76
				100	0	22.65
	1880	18900		1	0	23.52
				1	99	23.52
				50	25	22.78
				100	0	22.69
	1900	19100		1	0	23.53
				1	99	23.53
				50	25	22.84
				100	0	22.76
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
16QAM	1860	18700	20	1	0	22.79
				1	99	22.79
				50	25	21.67
				100	0	21.59
	1880	18900		1	0	22.82
				1	99	22.82
				50	25	21.76
				100	0	21.62
	1900	19100		1	0	22.84
				1	99	22.84
				50	25	21.81
				100	0	21.75
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	1860	18700	20	1	0	22.54
				1	99	22.54
				50	25	21.65
				100	0	21.57
	1880	18900		1	0	22.56
				1	99	22.56
				50	25	21.68
				100	0	21.61
	1900	19100		1	0	22.61
				1	99	22.61
				50	25	21.72
				100	0	21.68

LTE band4

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1710.7	19957	1.4	1	0	23.21
				1	5	23.21
				3	2	22.39
				6	0	22.30
	1732.5	20175		1	0	23.18
				1	5	23.18
				3	2	22.36
				6	0	22.25
	1754.3	20393		1	0	23.16
				1	5	23.16
				3	2	22.31
				6	0	22.22
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
16QAM	1710.7	19957	1.4	1	0	22.52
				1	5	22.52
				3	2	21.45
				6	0	21.37
	1732.5	20175		1	0	22.50
				1	5	22.50
				3	2	21.42
				6	0	21.33
	1754.3	20393		1	0	22.47
				1	5	22.47
				3	2	21.40
				6	0	21.29
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	1710.7	19957	1.4	1	0	22.23
				1	5	22.23
				3	2	21.39
				6	0	21.35
	1732.5	20175		1	0	22.22
				1	5	22.22
				3	2	21.37
				6	0	21.32
	1754.3	20393		1	0	22.20
				1	5	22.20
				3	2	21.36
				6	0	21.29

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1711.5	19965	3	1	0	23.19
				1	14	23.19
				8	4	22.37
				15	0	22.28
	1732.5	20175		1	0	23.16
				1	14	23.16
				8	4	22.34
				15	0	22.23
	1753.5	20385		1	0	23.14
				1	14	23.14
				8	4	22.29
				15	0	22.20
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
16QAM	1711.5	19965	3	1	0	22.50
				1	14	22.50
				8	4	21.42
				15	0	21.34
	1732.5	20175		1	0	22.45
				1	14	22.45
				8	4	21.37
				15	0	21.28
	1753.5	20385		1	0	22.42
				1	14	22.42
				8	4	21.35
				15	0	21.24
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	1711.5	19965	3	1	0	22.18
				1	14	22.18
				8	4	21.33
				15	0	21.29
	1732.5	20175		1	0	22.16
				1	14	22.16
				8	4	21.31
				15	0	21.26
	1753.5	20385		1	0	22.14
				1	14	22.14
				8	4	21.30
				15	0	21.23

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1712.5	19975	5	1	0	23.17
				1	24	23.17
				12	6	22.35
				25	0	22.26
	1732.5	20175		1	0	23.14
				1	24	23.14
				12	6	22.32
				25	0	22.21
	1752.5	20375		1	0	23.12
				1	24	23.12
				12	6	22.29
				25	0	22.20
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
16QAM	1712.5	19975	5	1	0	22.50
				1	24	22.50
				12	6	21.42
				25	0	21.34
	1732.5	20175		1	0	22.46
				1	24	22.46
				12	6	21.38
				25	0	21.29
	1752.5	20375		1	0	22.43
				1	24	22.43
				12	6	21.36
				25	0	21.25
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	1712.5	19975	5	1	0	22.19
				1	24	22.19
				12	6	21.34
				25	0	21.30
	1732.5	20175		1	0	22.17
				1	24	22.15
				12	6	21.30
				25	0	21.25
	1752.5	20375		1	0	22.13
				1	24	22.13
				12	6	21.29
				25	0	21.22

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1715	20000	10	1	0	23.21
				1	49	23.21
				24	12	22.39
				50	0	22.29
	1732.5	20175		1	0	23.17
				1	49	23.17
				24	12	22.35
				50	0	22.24
	1750	20350		1	0	23.15
				1	49	23.15
				24	12	22.30
				50	0	22.21
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
16QAM	1715	20000	10	1	0	22.51
				1	49	22.51
				24	12	21.43
				50	0	21.34
	1732.5	20175		1	0	22.47
				1	49	22.47
				24	12	21.39
				50	0	21.30
	1750	20350		1	0	22.44
				1	49	22.44
				24	12	21.37
				50	0	21.26
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	1715	20000	10	1	0	22.20
				1	49	22.20
				24	12	21.35
				50	0	21.31
	1732.5	20175		1	0	22.16
				1	49	22.16
				24	12	21.31
				50	0	21.26
	1750	20350		1	0	22.14
				1	49	22.14
				24	12	21.30
				50	0	21.23

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1717.5	20025	15	1	0	23.25
				1	74	23.25
				40	18	22.43
				75	0	22.34
	1732.5	20175		1	0	23.22
				1	74	23.22
				40	18	22.40
				75	0	22.29
	1747.5	20325		1	0	23.20
				1	74	23.20
				40	18	22.35
				75	0	22.26
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
16QAM	1717.5	20025	15	1	0	22.52
				1	74	22.52
				40	18	21.44
				75	0	21.36
	1732.5	20175		1	0	22.49
				1	74	22.49
				40	18	21.41
				75	0	21.32
	1747.5	20325		1	0	22.46
				1	74	22.46
				40	18	21.39
				75	0	21.28
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	1717.5	20025	15	1	0	22.22
				1	74	22.22
				40	18	21.37
				75	0	21.32
	1732.5	20175		1	0	22.19
				1	74	22.19
				40	18	21.34
				75	0	21.29
	1747.5	20325		1	0	22.17
				1	74	22.17
				40	18	21.33
				75	0	21.26

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1720	20050	20	1	0	23.28
				1	99	23.28
				50	25	22.46
				100	0	22.37
	1732.5	20175		1	0	23.25
				1	99	23.25
				50	25	22.43
				100	0	22.32
	1745	20300		1	0	23.23
				1	99	23.23
				50	25	22.38
				100	0	22.29
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
16QAM	1720	20050	20	1	0	22.59
				1	99	22.59
				50	25	21.51
				100	0	21.43
	1732.5	20175		1	0	22.56
				1	99	22.56
				50	25	21.48
				100	0	21.39
	1745	20300		1	0	22.53
				1	99	22.53
				50	25	21.46
				100	0	21.35
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	1720	20050	20	1	0	22.29
				1	99	22.29
				50	25	21.44
				100	0	21.40
	1732.5	20175		1	0	22.27
				1	99	22.27
				50	25	21.42
				100	0	21.37
	1745	20300		1	0	22.25
				1	99	22.25
				50	25	21.41
				100	0	21.34

LTE band5

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	824.7	20407	1.4	1	0	23.29
				1	5	23.29
				3	2	22.36
				6	0	22.22
	836.5	20525		1	0	23.26
				1	5	23.26
				3	2	22.32
				6	0	22.14
	848.3	20643		1	0	23.21
				1	5	23.21
				3	2	22.27
				6	0	22.15
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
16QAM	824.7	20407	1.4	1	0	22.64
				1	5	22.64
				3	2	21.30
				6	0	21.15
	836.5	20525		1	0	22.56
				1	5	22.56
				3	2	21.23
				6	0	21.11
	848.3	20643		1	0	22.55
				1	5	22.55
				3	2	21.24
				6	0	21.10
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	824.7	20407	1.4	1	0	22.57
				1	5	22.64
				3	2	21.24
				6	0	21.20
	836.5	20525		1	0	22.61
				1	5	22.61
				3	2	21.19
				6	0	21.17
	848.3	20643		1	0	22.60
				1	5	22.60
				3	2	21.17
				6	0	21.15

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	825.5	20415	3	1	0	23.21
				1	14	23.21
				8	4	22.28
				15	0	22.14
	836.5	20525		1	0	23.18
				1	14	23.18
				8	4	22.24
				15	0	22.12
	847.5	20635		1	0	23.19
				1	14	23.19
				8	4	22.25
				15	0	22.13
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
16QAM	825.5	20415	3	1	0	22.62
				1	14	22.62
				8	4	21.28
				15	0	21.17
	836.5	20525		1	0	22.58
				1	14	22.58
				8	4	21.28
				15	0	21.16
	847.5	20635		1	0	22.60
				1	14	22.60
				8	4	21.29
				15	0	21.15
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	825.5	20415	3	1	0	22.62
				1	14	22.57
				8	4	21.17
				15	0	21.13
	836.5	20525		1	0	22.54
				1	14	22.54
				8	4	21.12
				15	0	21.10
	847.5	20635		1	0	22.53
				1	14	22.53
				8	4	21.10
				15	0	21.08

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	826.5	20425	5	1	0	23.24
				1	24	23.24
				12	6	22.31
				25	0	22.17
	836.5	20525		1	0	23.21
				1	24	23.21
				12	6	22.27
				25	0	22.13
	846.5	20625		1	0	23.19
				1	24	23.19
				12	6	22.25
				25	0	22.13
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
16QAM	826.5	20425	5	1	0	22.62
				1	24	22.62
				12	6	21.28
				25	0	21.19
	836.5	20525		1	0	22.60
				1	24	22.60
				12	6	21.27
				25	0	21.15
	846.5	20625		1	0	22.59
				1	24	22.59
				12	6	21.28
				25	0	21.14
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	826.5	20425	5	1	0	22.61
				1	24	22.60
				12	6	21.20
				25	0	21.16
	836.5	20525		1	0	22.57
				1	24	22.57
				12	6	21.15
				25	0	21.13
	846.5	20625		1	0	22.56
				1	24	22.56
				12	6	21.13
				25	0	21.11

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	829	20450	10	1	0	23.32
				1	49	23.32
				24	12	22.39
				50	0	22.25
	836.5	20525		1	0	23.29
				1	49	23.29
				24	12	22.35
				50	0	22.21
	844	20600		1	0	23.28
				1	49	23.28
				24	12	22.34
				50	0	22.22
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
16QAM	829	20450	10	1	0	22.71
				1	49	22.71
				24	12	21.37
				50	0	21.26
	836.5	20525		1	0	22.67
				1	49	22.67
				24	12	21.34
				50	0	21.22
	844	20600		1	0	22.66
				1	49	22.66
				24	12	21.35
				50	0	21.21
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	829	20450	10	1	0	22.68
				1	49	22.68
				24	12	21.28
				50	0	21.24
	836.5	20525		1	0	22.65
				1	49	22.65
				24	12	21.23
				50	0	21.21
	844	20600		1	0	22.64
				1	49	22.64
				24	12	21.21
				50	0	21.19

LTE band7

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	2502.5	20775	5	1	0	23.43
				1	24	23.43
				12	6	22.64
				25	0	22.60
	2535	21100		1	0	23.37
				1	24	23.37
				12	6	22.56
				25	0	22.53
	2567.5	21425		1	0	23.22
				1	24	23.22
				12	6	22.51
				25	0	22.43
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
16QAM	2502.5	20775	5	1	0	22.77
				1	24	22.75
				12	6	21.59
				25	0	21.57
	2535	21100		1	0	22.65
				1	24	22.65
				12	6	21.49
				25	0	21.47
	2567.5	21425		1	0	22.57
				1	24	22.57
				12	6	21.42
				25	0	21.34
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	2502.5	20775	5	1	0	22.69
				1	24	22.67
				12	6	21.48
				25	0	21.39
	2535	21100		1	0	22.59
				1	24	22.59
				12	6	21.43
				25	0	21.40
	2567.5	21425		1	0	22.50
				1	24	22.52
				12	6	21.39
				25	0	21.31

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	2505	20800	10	1	0	23.41
				1	49	23.41
				24	12	22.62
				50	0	22.58
	2535	21100		1	0	23.35
				1	49	23.35
				24	12	22.55
				50	0	22.52
	2565	21400		1	0	23.21
				1	49	23.21
				24	12	22.50
				50	0	22.42
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
16QAM	2505	20800	10	1	0	22.76
				1	49	22.76
				24	12	21.58
				50	0	21.56
	2535	21100		1	0	22.64
				1	49	22.64
				24	12	21.48
				50	0	21.46
	2565	21400		1	0	22.56
				1	49	22.56
				24	12	21.41
				50	0	21.33
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	2505	20800	10	1	0	22.68
				1	49	22.68
				24	12	21.50
				50	0	21.41
	2535	21100		1	0	22.61
				1	49	22.61
				24	12	21.45
				50	0	21.42
	2565	21400		1	0	22.52
				1	49	22.52
				24	12	21.39
				50	0	21.31

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	2507.5	20825	15	1	0	23.45
				1	74	23.45
				40	18	22.66
				75	0	22.62
	2535	21100		1	0	23.39
				1	74	23.39
				40	18	22.58
				75	0	22.51
	2562.5	21375		1	0	23.20
				1	74	23.20
				40	18	22.49
				75	0	22.41
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
16QAM	2507.5	20825	15	1	0	22.75
				1	74	22.75
				40	18	21.59
				75	0	21.53
	2535	21100		1	0	22.61
				1	74	22.61
				40	18	21.45
				75	0	21.43
	2562.5	21375		1	0	22.53
				1	74	22.53
				40	18	21.38
				75	0	21.30
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	2507.5	20825	15	1	0	22.65
				1	74	22.72
				40	18	21.53
				75	0	21.44
	2535	21100		1	0	22.64
				1	74	22.64
				40	18	21.48
				75	0	21.45
	2562.5	21375		1	0	22.55
				1	74	22.55
				40	18	21.42
				75	0	21.34

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	2510	20850	20	1	0	23.48
				1	99	23.48
				50	25	22.69
				100	0	22.65
	2535	21100		1	0	23.42
				1	99	23.42
				50	25	22.61
				100	0	22.58
	2560	21350		1	0	23.27
				1	99	23.27
				50	25	22.56
				100	0	22.48
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
16QAM	2510	20850	20	1	0	22.82
				1	99	22.82
				50	25	21.66
				100	0	21.64
	2535	21100		1	0	22.72
				1	99	22.72
				50	25	21.56
				100	0	21.54
	2560	21350		1	0	22.64
				1	99	22.64
				50	25	21.49
				100	0	21.41
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	2510	20850	20	1	0	22.76
				1	99	22.76
				50	25	21.57
				100	0	21.48
	2535	21100		1	0	22.68
				1	99	22.68
				50	25	21.52
				100	0	21.49
	2560	21350		1	0	22.59
				1	99	22.59
				50	25	21.46
				100	0	21.38

LTE band12

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	699.7	23017	1.4	1	0	23.25
				1	5	23.25
				3	2	22.36
				6	0	22.23
	707.5	23095		1	0	23.22
				1	5	23.22
				3	2	22.34
				6	0	22.17
	715.3	23173		1	0	23.17
				1	5	23.17
				3	2	22.31
				6	0	22.16
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
16QAM	699.7	23017	1.4	1	0	22.32
				1	5	22.32
				3	2	21.31
				6	0	21.23
	707.5	23095		1	0	22.27
				1	5	22.27
				3	2	21.24
				6	0	21.16
	715.3	23173		1	0	22.26
				1	5	22.26
				3	2	21.23
				6	0	21.14
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	699.7	23017	1.4	1	0	22.17
				1	5	22.17
				3	2	21.25
				6	0	21.19
	707.5	23095		1	0	22.19
				1	5	22.19
				3	2	21.27
				6	0	21.16
	715.3	23173		1	0	22.18
				1	5	22.18
				3	2	21.26
				6	0	21.15

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	700.5	23025	3	1	0	23.24
				1	14	23.24
				8	4	22.35
				15	0	22.22
	707.5	23095		1	0	23.21
				1	14	23.21
				8	4	22.33
				15	0	22.16
	714.5	23165		1	0	23.16
				1	14	23.16
				8	4	22.30
				15	0	22.15
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
16QAM	700.5	23025	3	1	0	22.30
				1	14	22.30
				8	4	21.29
				15	0	21.21
	707.5	23095		1	0	22.29
				1	14	22.29
				8	4	21.26
				15	0	21.18
	714.5	23165		1	0	22.28
				1	14	22.28
				8	4	21.22
				15	0	21.13
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	700.5	23025	3	1	0	22.16
				1	14	22.16
				8	4	21.24
				15	0	21.15
	707.5	23095		1	0	22.15
				1	14	22.15
				8	4	21.23
				15	0	21.12
	714.5	23165		1	0	22.14
				1	14	22.14
				8	4	21.22
				15	0	21.11

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	701.5	23035	5	1	0	23.22
				1	24	23.22
				12	6	22.33
				25	0	22.20
	707.5	23095		1	0	23.19
				1	24	23.19
				12	6	22.31
				25	0	22.16
	713.5	23155		1	0	23.16
				1	24	23.16
				12	6	22.30
				25	0	22.15
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
16QAM	701.5	23035	5	1	0	22.31
				1	24	22.29
				12	6	21.28
				25	0	21.20
	707.5	23095		1	0	22.28
				1	24	22.28
				12	6	21.25
				25	0	21.17
	713.5	23155		1	0	22.27
				1	24	22.27
				12	6	21.24
				25	0	21.15
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	701.5	23035	5	1	0	22.18
				1	24	22.16
				12	6	21.24
				25	0	21.15
	707.5	23095		1	0	22.15
				1	24	22.15
				12	6	21.23
				25	0	21.12
	713.5	23155		1	0	22.14
				1	24	22.16
				12	6	21.24
				25	0	21.13

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	704	23060	10	1	0	23.27
				1	49	23.27
				24	12	22.38
				50	0	22.25
	707.5	23095		1	0	23.24
				1	49	23.24
				24	12	22.36
				50	0	22.21
	711	23130		1	0	23.21
				1	49	23.21
				24	12	22.35
				50	0	22.20
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
16QAM	704	23060	10	1	0	22.36
				1	49	22.36
				24	12	21.35
				50	0	21.27
	707.5	23095		1	0	22.35
				1	49	22.35
				24	12	21.32
				50	0	21.24
	711	23130		1	0	22.34
				1	49	22.34
				24	12	21.31
				50	0	21.22
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	704	23060	10	1	0	22.25
				1	49	22.25
				24	12	21.33
				50	0	21.24
	707.5	23095		1	0	22.24
				1	49	22.24
				24	12	21.32
				50	0	21.21
	711	23130		1	0	22.23
				1	49	22.23
				24	12	21.31
				50	0	21.20

LTE band66

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1710.7	131979	1.4	1	0	23.19
				1	5	23.19
				3	2	22.46
				6	0	22.35
	1745	132322		1	0	23.15
				1	5	23.15
				3	2	22.40
				6	0	22.30
	1779.3	132665		1	0	23.32
				1	5	23.32
				3	2	22.53
				6	0	22.44
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
16QAM	1710.7	131979	1.4	1	0	22.50
				1	5	22.50
				3	2	21.42
				6	0	21.29
	1745	132322		1	0	22.44
				1	5	22.43
				3	2	21.33
				6	0	21.22
	1779.3	132665		1	0	22.54
				1	5	22.45
				3	2	21.46
				6	0	21.40
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	1710.7	131979	1.4	1	0	22.39
				1	5	22.39
				3	2	21.31
				6	0	21.23
	1745	132322		1	0	22.39
				1	5	22.39
				3	2	21.27
				6	0	21.16
	1779.3	132665		1	0	22.53
				1	5	22.53
				3	2	21.42
				6	0	21.34

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1711.5	131987	3	1	0	23.16
				1	14	23.16
				8	4	22.43
				15	0	22.32
	1745	132322		1	0	23.12
				1	14	23.12
				8	4	22.37
				15	0	22.29
	1778.5	132657		1	0	23.31
				1	14	23.31
				8	4	22.52
				15	0	22.43
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
16QAM	1711.5	131987	3	1	0	22.49
				1	14	22.49
				8	4	21.41
				15	0	21.28
	1745	132322		1	0	22.46
				1	14	22.45
				8	4	21.35
				15	0	21.24
	1778.5	132657		1	0	22.56
				1	14	22.47
				8	4	21.48
				15	0	21.42
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	1711.5	131987	3	1	0	22.41
				1	14	22.41
				8	4	21.33
				15	0	21.21
	1745	132322		1	0	22.37
				1	14	22.37
				8	4	21.25
				15	0	21.14
	1778.5	132657		1	0	22.51
				1	14	22.51
				8	4	21.40
				15	0	21.32

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1712.5	131997	5	1	0	23.13
				1	24	23.13
				12	6	22.40
				25	0	22.29
	1745	132322		1	0	23.09
				1	24	23.09
				12	6	22.34
				25	0	22.26
	1777.5	132647		1	0	23.28
				1	24	23.28
				12	6	22.49
				25	0	22.40
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
16QAM	1712.5	131997	5	1	0	22.46
				1	24	22.46
				12	6	21.39
				25	0	21.26
	1745	132322		1	0	22.45
				1	24	22.44
				12	6	21.34
				25	0	21.23
	1777.5	132647		1	0	22.55
				1	24	22.46
				12	6	21.50
				25	0	21.44
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	1712.5	131997	5	1	0	22.43
				1	24	22.43
				12	6	21.35
				25	0	21.24
	1745	132322		1	0	22.40
				1	24	22.40
				12	6	21.28
				25	0	21.17
	1777.5	132647		1	0	22.54
				1	24	22.54
				12	6	21.43
				25	0	21.35

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1715	132022	10	1	0	23.12
				1	49	23.12
				24	12	22.39
				50	0	22.28
	1745	132322		1	0	23.08
				1	49	23.08
				24	12	22.33
				50	0	22.25
	1775	132622		1	0	23.27
				1	49	23.27
				24	12	22.48
				50	0	22.39
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
16QAM	1715	132022	10	1	0	22.45
				1	49	22.45
				24	12	21.37
				50	0	21.28
	1745	132322		1	0	22.47
				1	49	22.46
				24	12	21.36
				50	0	21.25
	1775	132622		1	0	22.57
				1	49	22.48
				24	12	21.49
				50	0	21.43
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	1715	132022	10	1	0	22.42
				1	49	22.42
				24	12	21.33
				50	0	21.22
	1745	132322		1	0	22.38
				1	49	22.38
				24	12	21.26
				50	0	21.15
	1775	132622		1	0	22.52
				1	49	22.52
				24	12	21.41
				50	0	21.33

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1717.5	132047	15	1	0	23.10
				1	74	23.10
				40	18	22.37
				75	0	22.26
	1745	132322		1	0	23.06
				1	74	23.06
				40	18	22.31
				75	0	22.23
	1772.5	132597		1	0	23.25
				1	74	23.25
				40	18	22.46
				75	0	22.37
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
16QAM	1717.5	132047	15	1	0	22.43
				1	74	22.43
				40	18	21.35
				75	0	21.28
	1745	132322		1	0	22.47
				1	74	22.46
				40	18	21.33
				75	0	21.22
	1772.5	132597		1	0	22.54
				1	74	22.45
				40	18	21.46
				75	0	21.40
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	1717.5	132047	15	1	0	22.39
				1	74	22.39
				40	18	21.31
				75	0	21.20
	1745	132322		1	0	22.36
				1	74	22.36
				40	18	21.23
				75	0	21.12
	1772.5	132597		1	0	22.49
				1	74	22.49
				40	18	21.38
				75	0	21.30

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1720	132072	20	1	0	23.21
				1	99	23.21
				50	25	22.48
				100	0	22.37
	1745	132322		1	0	23.17
				1	99	23.17
				50	25	22.42
				100	0	22.34
	1770	132572		1	0	23.36
				1	99	23.36
				50	25	22.57
				100	0	22.48
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
16QAM	1720	132072	20	1	0	22.54
				1	99	22.54
				50	25	21.46
				100	0	21.33
	1745	132322		1	0	22.52
				1	99	22.51
				50	25	21.41
				100	0	21.30
	1770	132572		1	0	22.62
				1	99	22.53
				50	25	21.54
				100	0	21.48
Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	1720	132072	20	1	0	22.47
				1	99	22.47
				50	25	21.39
				100	0	21.28
	1745	132322		1	0	22.44
				1	99	22.44
				50	25	21.32
				100	0	21.21
	1770	132572		1	0	22.58
				1	99	22.58
				50	25	21.47
				100	0	21.39

6.5 Carrier Aggregation Power Measurement result

When carrier aggregation is limited to downlink only, uplink maximum output power (single carrier) is measured for the supported combinations of downlink carrier aggregation listed in the table below. In applying the power measurement procedures of KDB 941225 D05A for DL CA to qualify for UL SAR test exclusion, power measurement is required only for the subset in each row with the largest combination of frequency bands and CCs (far right most configuration highlighted in the table below).

DL Inter-Band (2 Bands, 2CC) Down Antenna

CA Configuration	Bands		DL						UL									
	PCC		PCC			SCC			PCC									
	1st	2nd	BW	Freq.	CH	BW	Freq.	CH	Modulation	RB	Offset	BW	Freq.	CH	Aggregated BW	CA Inactive	CA Active	Delta
CA_4A-5A	4A	5A	20	2132.5	2175	10	881.5	2525	QPSK	1	49	20	1732.5	20175	40	23.28	23.17	-0.11
	5A	4A	10	881.5	2525	20	2132.5	2175	QPSK	1	24	10	836.5	20525	30	23.32	23.28	-0.04
CA_4A-7A	4A	7A	20	2132.5	2175	20	2655	3100	QPSK	1	49	20	1732.5	20175	40	23.28	23.21	-0.07
	7A	4A	20	2655	3100	20	2132.5	2175	QPSK	1	49	20	2535	21100	40	23.48	23.45	-0.03

DL Inter-Band (2 Bands, 2CC) Upper Antenna

CA Configuration	Bands		DL						UL									
	PCC		PCC			SCC			PCC									
	1st	2nd	BW	Freq.	CH	BW	Freq.	CH	Modulation	RB	Offset	BW	Freq.	CH	Aggregated BW	CA Inactive	CA Active	Delta
CA_4A-5A	4A	5A	20	2132.5	2175	10	881.5	2525	QPSK	1	49	20	1732.5	20175	40	19.28	19.25	-0.03
	5A	4A	10	881.5	2525	20	2132.5	2175	QPSK	1	24	10	836.5	20525	30	23.32	23.27	-0.05
CA_4A-7A	4A	7A	20	2132.5	2175	20	2655	3100	QPSK	1	49	20	1732.5	20175	40	19.28	19.26	-0.02
	7A	4A	20	2655	3100	20	2132.5	2175	QPSK	1	49	20	2535	21100	40	15.48	15.52	0.03

Summary for SAR Test Exclusion for LTE Downlink CA

Per power confirmation results in above, the uplink maximum output power with downlink CA active remains within the specified tune-up tolerance and not more than 0.25dB higher than the maximum output power with downlink CA inactive. According to KDB 941225 D05A, the SAR test exclusion applies to LTE downlink CA operation.

6.6 Bluetooth Measurement result

Modulation type	Test Result (dBm)		
	2402MHz (Ch0)	2441MHz (Ch39)	2480MHz (Ch78)
GFSK	8.12	8.55	8.63
$\pi/4$ DQPSK	6.33	6.71	6.86
8DPSK	6.29	6.65	6.81
GFSK(BLE)	2402MHz (Ch0)	2440MHz (Ch19)	2480MHz (Ch39)
	4.29	5.43	4.86

6.7 Wi-Fi Measurement result

WIFI 2.4GHz

Modulation type	Average power output (dBm)		
	2412MHz	2437MHz	2462MHz
11b	14.23	14.42	14.01
11g	13.82	13.89	13.68
11n HT20	12.67	12.87	13.34

WIFI 5GHz

Band	Test Mode	Frequency (MHz)	Average Power (dBm)	Limit(dBm)
U-NII-1	802.11a	5180	11.34	24.0
	802.11a	5200	11.41	24.0
	802.11a	5240	11.42	24.0
	802.11n HT20	5180	11.25	24.0
	802.11n HT20	5200	11.21	24.0
	802.11n HT20	5240	11.26	24.0
	802.11n HT40	5190	10.53	24.0
	802.11n HT40	5230	10.55	24.0
	802.11ac VHT20	5180	11.21	24.0
	802.11ac VHT20	5200	11.13	24.0
	802.11ac VHT20	5240	11.22	24.0
	802.11ac VHT40	5190	10.18	24.0
	802.11ac VHT40	5230	10.38	24.0
	802.11ac VHT80	5210	9.38	24.0
U-NII-2A	802.11a	5260	11.67	24.0
	802.11a	5300	11.69	24.0
	802.11a	5320	11.73	24.0
	802.11n HT20	5260	11.55	24.0
	802.11n HT20	5300	11.59	24.0
	802.11n HT20	5320	11.67	24.0
	802.11n HT40	5270	11.89	24.0
	802.11n HT40	5310	11.92	24.0
	802.11ac VHT20	5260	11.12	24.0
	802.11ac VHT20	5300	11.17	24.0
	802.11ac VHT20	5320	11.15	24.0
	802.11ac VHT40	5270	10.32	24.0
	802.11ac VHT40	5310	10.25	24.0
	802.11ac VHT80	5290	9.94	24.0

Band	Test Mode	Frequency (MHz)	Average Power (dBm)	Limit(dBm)
U-NII-2C	802.11a	5500	11.43	24.0
	802.11a	5580	11.38	24.0
	802.11a	5700	11.42	24.0
	802.11n HT20	5500	11.33	24.0
	802.11n HT20	5580	11.37	24.0
	802.11n HT20	5700	11.34	24.0
	802.11n HT40	5510	10.88	24.0
	802.11n HT40	5670	10.84	24.0
	802.11ac VHT20	5500	10.82	24.0
	802.11ac VHT20	5580	11.11	24.0
	802.11ac VHT20	5720	11.10	24.0
	802.11ac VHT40	5510	10.67	24.0
	802.11ac VHT40	5590	10.63	24.0
	802.11ac VHT40	5710	10.63	24.0
	802.11ac VHT80	5530	10.09	24.0
	802.11ac VHT80	5610	10.12	24.0
	802.11ac VHT80	5690	10.14	24.0
U-NII-3	802.11a	5745	11.43	30.0
	802.11a	5785	11.38	30.0
	802.11a	5825	11.42	30.0
	802.11n HT20	5745	11.27	30.0
	802.11n HT20	5785	11.30	30.0
	802.11n HT20	5825	11.31	30.0
	802.11n HT40	5755	10.68	30.0
	802.11n HT40	5795	10.63	30.0
	802.11ac VHT20	5720	10.67	30.0
	802.11ac VHT20	5745	11.13	30.0
	802.11ac VHT20	5785	11.17	30.0
	802.11ac VHT20	5825	11.14	30.0
	802.11ac VHT40	5710	10.33	30.0
	802.11ac VHT40	5755	10.31	30.0
	802.11ac VHT40	5795	10.28	30.0
	802.11ac VHT80	5690	9.87	30.0
	802.11ac VHT80	5775	9.91	30.0

6.8 Standalone SAR Test Exclusion Considerations

Standalone 1-g head or body SAR evaluation by measurement or numerical simulation is not required when the corresponding SAR Exclusion Threshold condition, listed below, is satisfied.

SAR Test Exclusion Thresholds for 100 MHz – 6 GHz and ≤ 50 mm

Method1:

According to the KDB447498 4.3.1 (1)

For 100 MHz to 6 GHz and test separation distances ≤ 50 mm, the 1-g and 10-g SAR test exclusion thresholds are determined by the following:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f} \text{ (GHz)}] \leq 3.0$ for 1-g SAR, where

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm, and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

This is equivalent to $[(\text{max. power of channel, including tune-up tolerance, mW}) / (60 / \sqrt{f}(\text{GHz}) \text{ mW})] \cdot [20 \text{ mm} / (\text{min. test separation distance, mm})] \leq 1.0$ for 1-g SAR; also see Appendix A for approximate exclusion threshold values at selected frequencies and distances.

Method2:

According to the KDB447498 appendix A

Approximate SAR Test Exclusion Power Thresholds at Selected Frequencies and Test Separation Distances are illustrated in the following Table.

MHz	5	10	15	20	25	mm
150	39	77	116	155	194	SAR Test Exclusion Threshold (mW)
300	27	55	82	110	137	
450	22	45	67	89	112	
835	16	33	49	66	82	
900	16	32	47	63	79	
1500	12	24	37	49	61	
1900	11	22	33	44	54	
2450	10	19	29	38	48	
3600	8	16	24	32	40	
5200	7	13	20	26	33	
5400	6	13	19	26	32	
5800	6	12	19	25	31	

According to KDB 248227 D01 802 11 Wi-Fi SAR chapter 5.3.1 b)

For devices that operate in only one of the U-NII-1 and U-NII-2A bands, the normally required SAR procedures for OFDM configurations are applied. For devices that operate in both U-NII bands using the same transmitter and antenna(s), SAR test reduction is determined according to the following, with respect to the highest *reported* SAR and maximum output power specified for production units. The procedures are applied independently to each exposure configuration; for example, head, body, hotspot mode etc. When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest *reported* SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for the band with lower maximum output power in that test configuration; otherwise, each band is tested independently for SAR.

Power tolerance for WIFI-5GHz (U-NII 1)= 11.5dbm

Power tolerance for WIFI-5GHz (U-NII 2A)= 12.0dbm

Ratio of specified maximum output power = $12.0-11.5=-0.5\text{db}=0.89$

Highest Reported SAR for WIFI-5GHz (U-NII 2A)=0.343

Adjusted SAR= $0.306\text{w/kg}<1.2\text{w/kg}$

So in this test report, WIFI 5GHz U-NII-1 do not need to perform SAR test, because we already consider the worst case WIFI 5GHz U-NII 2A.

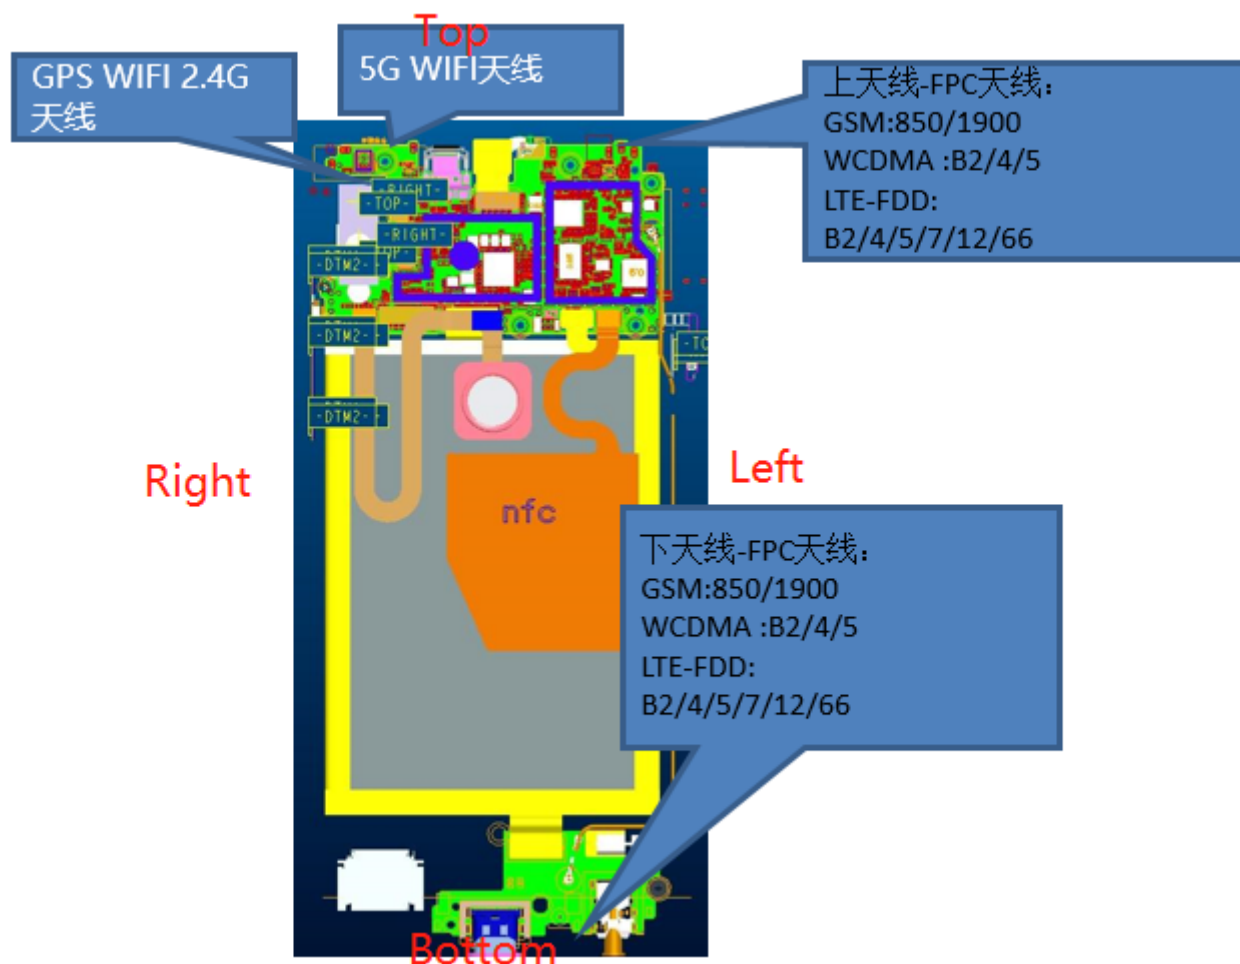
Summary of Transmitters

Band/Mode	Position	SAR test exclusion threshold (mW)	Max conducted power adjusted for tune-up tolerance(mW)	Standalone SAR Required
2.4GHz BT/BLE	Head	10	7.94	Yes
	Body	19	7.94	No*
2.4GHz Wi-Fi	Head	10	28.18	Yes
	Body	19	28.18	Yes
5GHz U-NII2A WI-FI (5300MHz)	Head	6	15.85	Yes
	Body	13	15.85	Yes
5GHz U-NII2C WI-FI (5580MHz)	Head	6	14.13	Yes
	Body	13	14.13	Yes
5GHz U-NII3 WI-FI (5785MHz)	Head	6	14.13	Yes
	Body	12	14.13	Yes

Note1)*: We notice that some conditions do not need to test body-worn & hotspot position , we consider that if we just test SAR value in head position but estimate SAR value in body position, the results are not reasonable and reliable, so we test all the mode describe above.

6.9 RF exposure conditions

Refer to the follow picture “Antenna Locations & Separation Distances” for the specific details of the antenna-to-antenna and antenna-to-edge(s) distances.



Up antenna support: GSM850/1900
WCDMA II/IV/V
LTE 2/4/5/7/12/66

Down antenna support: GSM850/1900
WCDMA II/IV/V
LTE 2/4/5/7/12/66

6.9.1 Head Exposure Conditions

Up Antenna

For WWAN

Test Configurations	SAR Required	Note
Left Touch	yes	/
Left Tilt (15°)	yes	/
Right Touch	yes	/
Right Tilt (15°)	yes	/

For WLAN&BT/BLE

Test Configurations	SAR Required	Note
Left Touch	yes	/
Left Tilt (15°)	yes	/
Right Touch	yes	/
Right Tilt (15°)	yes	/

Down Antenna

For WWAN

Test Configurations	SAR Required	Note
Left Touch	yes	/
Left Tilt (15°)	yes	/
Right Touch	yes	/
Right Tilt (15°)	yes	/

6.9.2 Body Exposure conditions

Up Antenna

For WWAN

Test Configurations	SAR Required	Note
Back	yes	/
Front	yes	/

For WLAN&BT/BLE

Test Configurations	SAR Required	Note
Back	yes	/
Front	yes	/

Down Antenna

For WWAN

Test Configurations	SAR Required	Note
Back	yes	/
Front	yes	/

6.9.3 Hotspot Exposure conditions

Up Antenna

For WWAN

Test Configurations	Antenna-to-edge/surface	SAR Required
Back	<25 mm	Yes
Front	<25 mm	Yes
Top	<25 mm	Yes
Bottom	>25 mm	No
Right	<25 mm	Yes
Left	<25 mm	Yes

For WLAN&BT/BLE

Test Configurations	Antenna-to-edge/surface	SAR Required
Back	<25 mm	Yes
Front	<25 mm	Yes
Top	<25 mm	Yes
Bottom	>25 mm	No
Left	>25 mm	No
Right	<25 mm	Yes

Down Antenna

For WWAN

Test Configurations	Antenna-to-edge/surface	SAR Required
Back	<25 mm	Yes
Front	<25 mm	Yes
Top	>25 mm	No
Bottom	<25 mm	Yes
Left	<25 mm	Yes
Right	<25 mm	Yes

Note: For hotspot mode, it's not necessary test Rear and Front position cause we already test the these position without hotspot mode in Body Exposure conditions, Normally if the hotspot mode opened, the technology "power reduction" used for mobile, so we consider the worst condition, and remain the data of body worn as hotspots mode.

6.10 System Checking

The manufacturer calibrates the probes annually. Dielectric parameters of the tissue simulants were measured every day using the dielectric probe kit and the network analyser. A system check measurement was made following the determination of the dielectric parameters of the simulant, using the dipole validation kit. A power level of 250 mW was supplied to the dipole antenna **except D5GHzV2 used 10mW**, which was placed under the flat section of the twin SAM phantom. The system checking results (dielectric parameters and SAR values) are given in the table below.

Date Tested	System dipole	T.S. Liquid	SAR measured (normalized to 1W)		Target (Ref. Value)	Delta (%)	Tolerance (%)
2019.04.01	D750V3	Head	1g	8.44	8.26	2.2	±10
2019.04.02	D750V3	Head	1g	8.72	8.26	5.6	±10
2019.04.03	D835V2	Head	1g	9.44	9.37	0.7	±10
2019.04.04	D835V2	Head	1g	9.4	9.37	0.3	±10
2019.04.08	D835V2	Head	1g	9.16	9.37	-2.2	±10
2019.04.09	D1800V2	Head	1g	38.28	38.9	-1.6	±10
2019.04.10	D1800V2	Head	1g	37.84	38.9	-2.7	±10
2019.04.11	D2000V2	Head	1g	38.6	40.3	-4.2	±10
2019.04.12	D2000V2	Head	1g	41.2	40.3	2.2	±10
2019.04.13	D2450V2	Head	1g	54.4	52.4	3.8	±10
2019.04.14	D2450V2	Head	1g	54.8	52.4	4.6	±10
2019.04.15	D2450V2	Head	1g	51.2	52.4	-2.3	±10
2019.04.16	D5GHzV2	Head	1g	78.7	81.3	-3.2	±10
2019.04.16	D5GHzV2	Head	1g	82.4	81.6	1.0	±10
2019.04.16	D5GHzV2	Head	1g	77.5	78.7	-1.5	±10

Date Tested	System dipole	T.S. Liquid	SAR measured (normalized to 1W)		Target (Ref. Value)	Delta (%)	Tolerance (%)
2019.04.01	D750V3	Body	1g	8.24	8.69	-5.2	±10
2019.04.02	D750V3	Body	1g	8.72	8.69	0.3	±10
2019.04.03	D835V2	Body	1g	9.48	9.47	0.1	±10
2019.04.04	D835V2	Body	1g	9.36	9.47	-1.2	±10
2019.04.08	D835V2	Body	1g	9.12	9.47	-3.7	±10
2019.04.09	D1800V2	Body	1g	38.2	39.7	-3.8	±10
2019.04.10	D1800V2	Body	1g	38.68	39.7	-2.6	±10
2019.04.11	D2000V2	Body	1g	37.96	40.3	-5.8	±10
2019.04.12	D2000V2	Body	1g	38.84	40.3	-3.6	±10
2019.04.13	D2450V2	Body	1g	52.8	52.3	1.0	±10
2019.04.14	D2450V2	Body	1g	52.0	52.3	-0.6	±10
2019.04.15	D2450V2	Body	1g	53.2	52.3	1.7	±10
2019.04.16	D5GHzV2	Body	1g	73.0	76.9	-5.1	±10
2019.04.16	D5GHzV2	Body	1g	81.0	80.7	0.4	±10
2019.04.16	D5GHzV2	Body	1g	75.0	77.5	-3.2	±10

Plots of the system checking scans are given in Appendix A.

Tissue Simulants used in the Measurements

For the measurement of the following parameters the SPEAG DAKS-3.5 dielectric parameter probe is used, representing the open-ended coaxial probe measurement procedure.

Date Tested	Freq. (MHz)	Liquid parameters	measured	Target	Delta (%)	Tolerance (%)
2019.04.01	Head 750	ϵ_r	42.068	41.90	0.4	± 5
		$\sigma[\text{S/m}]$	0.917	0.89	3.0	± 5
2019.04.02	Head 750	ϵ_r	42.153	41.90	0.6	± 5
		$\sigma[\text{S/m}]$	0.922	0.89	3.6	± 5
2019.04.03	Head 835	ϵ_r	42.529	41.50	2.5	± 5
		$\sigma[\text{S/m}]$	0.912	0.90	1.3	± 5
2019.04.04	Head 835	ϵ_r	40.217	41.50	-3.1	± 5
		$\sigma[\text{S/m}]$	0.908	0.90	0.9	± 5
2019.04.08	Head 835	ϵ_r	41.114	41.50	-0.9	± 5
		$\sigma[\text{S/m}]$	0.915	0.90	1.7	± 5
2019.04.09	Head 1800	ϵ_r	38.905	40.00	-2.7	± 5
		$\sigma[\text{S/m}]$	1.409	1.40	0.6	± 5
2019.04.10	Head 1800	ϵ_r	40.607	40.00	1.5	± 5
		$\sigma[\text{S/m}]$	1.411	1.40	0.8	± 5
2019.04.11	Head 2000	ϵ_r	39.815	40.00	-0.5	± 5
		$\sigma[\text{S/m}]$	1.435	1.40	2.5	± 5
2019.04.12	Head 2000	ϵ_r	40.245	40.00	0.6	± 5
		$\sigma[\text{S/m}]$	1.384	1.40	-1.1	± 5
2019.04.13	Head 2450	ϵ_r	38.145	39.20	-2.7	± 5
		$\sigma[\text{S/m}]$	1.873	1.80	4.1	± 5
2019.04.14	Head 2450	ϵ_r	39.517	39.20	0.8	± 5
		$\sigma[\text{S/m}]$	1.881	1.80	4.5	± 5
2019.04.15	Head 2450	ϵ_r	39.583	39.20	1.0	± 5
		$\sigma[\text{S/m}]$	1.833	1.80	1.8	± 5
2019.04.16	Head 5300	ϵ_r	36.853	35.9	2.7	± 5
		$\sigma[\text{S/m}]$	4.683	4.76	-1.6	± 5
2019.04.16	Head 5600	ϵ_r	36.847	35.5	3.8	± 5
		$\sigma[\text{S/m}]$	4.992	5.07	-1.5	± 5
2019.04.16	Head 5800	ϵ_r	36.334	35.3	2.9	± 5
		$\sigma[\text{S/m}]$	5.185	5.27	-1.6	± 5

Date Tested	Freq. (MHz)	Liquid parameters	measured	Target	Delta (%)	Tolerance (%)
2019.04.01	Body 750	ϵ_r	53.279	55.50	-4.0	± 5
		$\sigma[S/m]$	0.976	0.96	1.7	± 5
2019.04.02	Body 750	ϵ_r	54.321	55.50	-2.1	± 5
		$\sigma[S/m]$	0.954	0.96	-0.6	± 5
2019.04.03	Body 835	ϵ_r	54.541	55.20	-1.2	± 5
		$\sigma[S/m]$	0.975	0.97	0.5	± 5
2019.04.04	Body 835	ϵ_r	55.036	55.20	-0.3	± 5
		$\sigma[S/m]$	0.971	0.97	0.1	± 5
2019.04.08	Body 835	ϵ_r	56.196	55.20	1.8	± 5
		$\sigma[S/m]$	0.966	0.97	-0.4	± 5
2019.04.09	Body 1800	ϵ_r	52.879	53.30	-0.8	± 5
		$\sigma[S/m]$	1.523	1.52	0.2	± 5
2019.04.10	Body 1800	ϵ_r	51.717	53.30	-3.0	± 5
		$\sigma[S/m]$	1.542	1.52	1.4	± 5
2019.04.11	Body 2000	ϵ_r	52.557	53.30	-1.4	± 5
		$\sigma[S/m]$	1.546	1.52	1.7	± 5
2019.04.12	Body 2000	ϵ_r	52.596	53.30	-1.3	± 5
		$\sigma[S/m]$	1.586	1.52	4.3	± 5
2019.04.13	Body 2450	ϵ_r	50.795	52.70	-3.6	± 5
		$\sigma[S/m]$	1.926	1.95	-1.2	± 5
2019.04.14	Body 2450	ϵ_r	51.927	52.70	-1.5	± 5
		$\sigma[S/m]$	2.004	1.95	2.8	± 5
2019.04.15	Body 2450	ϵ_r	51.046	52.70	-3.1	± 5
		$\sigma[S/m]$	2.027	1.95	3.9	± 5
2019.04.16	Body 5300	ϵ_r	49.035	48.9	0.3	± 5
		$\sigma[S/m]$	5.355	5.42	-1.2	± 5
2019.04.16	Body 5600	ϵ_r	49.216	48.5	1.5	± 5
		$\sigma[S/m]$	5.627	5.77	-2.5	± 5
2019.04.16	Body 5800	ϵ_r	47.36	48.2	-1.7	± 5
		$\sigma[S/m]$	6.11	6.00	1.8	± 5

6.11 SAR TEST RESULT

In order to determine the largest value of the peak spatial-average SAR of a handset, all device positions, configurations, and operational modes should be tested for each frequency band according to Steps 1 to 3 below.

Step 1: The tests should be performed at the channel that is closest to the center of the transmit frequency band.

a) All device positions (cheek and tilt, for both left and right sides of the SAM phantom),
b) All configurations for each device position in a), e.g., antenna extended and retracted, and
c) All operational modes for each device position in item a) and configuration in item b) in each frequency band, e.g., analog and digital, If more than three frequencies need to be tested (i.e., $N_c > 3$), then all frequencies, configurations and modes shall be tested for all of the above test conditions.

Step 2: For the condition providing the highest peak spatial-average SAR determined in Step 1 for each frequency, perform all tests at all other test frequency channels, e.g., lowest and highest frequencies. In addition, for all other conditions (device position, configuration, and operational mode) where the peak spatial-average SAR value determined in Step 1 is within 3 dB of the applicable SAR limit, it is recommended that all other test frequencies should be tested as well.

Step 3: Examine all data to determine the largest value of the peak.

Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.

Scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.

Reported SAR (W/kg) = Measured SAR (W/kg) * Scaling Factor

2. Per KDB 447498 D01v06, for each exposure position, if the highest output channel reported SAR ≤ 0.8 W/kg, other channels SAR testing are not necessary.

3. The distance between the EUT and the phantom bottom is 10mm.

The measured and reported Head/body SAR values for the test device are tabulated below:

Up Antenna

Mode: GSM 850(GPRS)

fL(MHz)=824.2MHz

fM(MHz)=836.5MHz

fH(MHz)= 848.8MHz

SAR Values (850MHz Band)

Limit of SAR (W/kg): <1.6W/kg (1g Average)

Test Case		Ch	Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg)	Reported Results (W/kg)
position	mode					1g Average	1g Average
Left cheek	GPRS 4TX (head)	L	27.18	27.50	1.08	---	---
		M	27.12	27.50	1.09	0.659	0.718
		H	27.08	27.50	1.10	---	---
Left Tilted		L	27.18	27.50	1.08	---	---
		M	27.12	27.50	1.09	0.636	0.693
		H	27.08	27.50	1.10	---	---
Right cheek		L	27.18	27.50	1.08	---	---
		M	27.12	27.50	1.09	0.715	0.779
		H	27.08	27.50	1.10	---	---
Right Tilted		L	27.18	27.50	1.08	---	---
		M	27.12	27.50	1.09	0.709	0.773
		H	27.08	27.50	1.10	---	---
Back	GPRS 4TX (body-worn)	L	27.18	27.50	1.08	---	---
		M	27.12	27.50	1.09	0.514	0.560
		H	27.08	27.50	1.10	---	---
Front		L	27.18	27.50	1.08	---	---
		M	27.12	27.50	1.09	0.132	0.144
		H	27.08	27.50	1.10	---	---
Top	GPRS 4TX (hotspot)	L	27.18	27.50	1.08	---	---
		M	27.12	27.50	1.09	0.077	0.084
		H	27.08	27.50	1.10	---	---
Left		L	27.18	27.50	1.08	---	---
		M	27.12	27.50	1.09	0.122	0.133
		H	27.08	27.50	1.10	---	---
Right		L	27.18	27.50	1.08	---	---
		M	27.12	27.50	1.09	0.172	0.187
		H	27.08	27.50	1.10	---	---

Mode: GSM1900(GPRS)

fL (MHz)=1850.2MHz fM (MHz)=1880.0MHz fH (MHz)=1909.8MHz

SAR Values (1900MHz Band)

Limit of SAR (W/kg): <1.6W/kg (1g Average)

Test Case		Ch	Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg)	Reported Results (W/kg)
position	mode					1g Average	1g Average
Left cheek	GPRS 4TX (head)	L	19.37	19.50	1.03	---	---
		M	19.42	19.50	1.02	0.456	0.465
		H	19.43	19.50	1.02	---	---
Left Tilted		L	19.37	19.50	1.03	---	---
		M	19.42	19.50	1.02	0.581	0.593
		H	19.43	19.50	1.02	---	---
Right cheek		L	19.37	19.50	1.03	---	---
		M	19.42	19.50	1.02	0.564	0.575
		H	19.43	19.50	1.02	---	---
Right Tilted		L	19.37	19.50	1.03	---	---
		M	19.42	19.50	1.02	0.752	0.767
		H	19.43	19.50	1.02	---	---
Back	GPRS 4TX (body-worn)	L	19.37	19.50	1.03	---	---
		M	19.42	19.50	1.02	0.776	0.792
		H	19.43	19.50	1.02	---	---
Front		L	19.37	19.50	1.03	---	---
		M	19.42	19.50	1.02	0.094	0.096
		H	19.43	19.50	1.02	---	---
Top	GPRS 4TX (hotspot)	L	19.37	19.50	1.03	---	---
		M	19.42	19.50	1.02	0.194	0.198
		H	19.43	19.50	1.02	---	---
Left		L	19.37	19.50	1.03	---	---
		M	19.42	19.50	1.02	0.188	0.192
		H	19.43	19.50	1.02	---	---
Right		L	19.37	19.50	1.03	---	---
		M	19.42	19.50	1.02	0.119	0.121
		H	19.43	19.50	1.02	---	---

Mode: WCDMA BAND2

fL (MHz)= 1852.4MHz fM (MHz)= 1880.0MHz fH (MHz)= 1907.6MHz

SAR Values (WCDMA BAND2)

Limit of SAR (W/kg): <1.6W/kg (1g Average)

Test Case		Ch	Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg)	Reported Results (W/kg)
position	mode					1g Average	1g Average
Left cheek	12.2KRMC (head)	L	16.70	17.00	1.07	---	---
		M	16.77	17.00	1.05	0.542	0.569
		H	16.79	17.00	1.05	---	---
Left Tilted		L	16.70	17.00	1.07	---	---
		M	16.77	17.00	1.05	0.651	0.684
		H	16.79	17.00	1.05	---	---
Right cheek		L	16.70	17.00	1.07	---	---
		M	16.77	17.00	1.05	0.674	0.708
		H	16.79	17.00	1.05	---	---
Right Tilted		L	16.70	17.00	1.07	0.909	0.973
		M	16.77	17.00	1.05	0.940	0.987
		H	16.79	17.00	1.05	0.934	0.981
		L2	16.70	17.00	1.07	0.912	0.977
		M2	16.77	17.00	1.05	0.943	0.994
	H2	16.79	17.00	1.05	0.928	0.974	
Back	12.2KRMC (body-worn)	L	16.70	17.00	1.07	---	---
		M	16.77	17.00	1.05	0.697	0.732
Front		H	16.79	17.00	1.05	---	---
		L	16.70	17.00	1.07	---	---
		M	16.77	17.00	1.05	0.115	0.121
		H	16.79	17.00	1.05	---	---
Top	12.2KRMC (hotspot)	L	16.70	17.00	1.07	---	---
		M	16.77	17.00	1.05	0.240	0.252
		H	16.79	17.00	1.05	---	---
Left		L	16.70	17.00	1.07	---	---
		M	16.77	17.00	1.05	0.151	0.159
		H	16.79	17.00	1.05	---	---
Right		L	16.70	17.00	1.07	---	---
		M	16.77	17.00	1.05	0.104	0.109
		H	16.79	17.00	1.05	---	---

Mode: WCDMA BAND4

fL (MHz)= 1712.4MHz fM (MHz)= 1732.4MHz fH (MHz)= 1752.6MHz

SAR Values (WCDMA BAND4) **Limit of SAR (W/kg): <1.6W/kg (1g Average)**

Test Case		Ch	Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg)	Reported Results (W/kg)
position	mode					1g Average	1g Average
Left cheek	12.2KRMC (head)	L	19.39	19.50	1.03	0.902	0.929
		M	19.42	19.50	1.02	0.927	0.946
		H	19.47	19.50	1.01	0.967	0.977
		L2	19.39	19.50	1.03	0.903	0.926
		M2	19.42	19.50	1.02	0.916	0.933
		H2	19.47	19.50	1.01	0.954	0.961
Left Tilted		L	19.39	19.50	1.03	0.797	0.821
		M	19.42	19.50	1.02	0.843	0.860
		H	19.47	19.50	1.01	0.874	0.883
		L2	19.39	19.50	1.03	0.814	0.835
		M2	19.42	19.50	1.02	0.837	0.853
		H2	19.47	19.50	1.01	0.912	0.918
Right cheek		L	19.39	19.50	1.03	0.920	0.948
		M	19.42	19.50	1.02	1.010	1.030
		H	19.47	19.50	1.01	1.040	1.050
		L2	19.39	19.50	1.03	0.917	0.941
		M2	19.42	19.50	1.02	1.030	1.049
		H2	19.47	19.50	1.01	1.050	1.057
Right Tilted		L	19.39	19.50	1.03	0.896	0.923
		M	19.42	19.50	1.02	1.010	1.030
		H	19.47	19.50	1.01	1.170	1.182
	L2	19.39	19.50	1.03	0.887	0.910	
	M2	19.42	19.50	1.02	1.050	1.070	
	H2	19.47	19.50	1.01	1.080	1.087	
Back	12.2KRMC (body-worn)	L	19.39	19.50	1.03	---	---
		M	19.42	19.50	1.02	0.373	0.380
		H	19.47	19.50	1.01	---	---
Front		L	19.39	19.50	1.03	---	---
		M	19.42	19.50	1.02	0.219	0.223
		H	19.47	19.50	1.01	---	---
Top	12.2KRMC (hotspot)	L	19.39	19.50	1.03	---	---
		M	19.42	19.50	1.02	0.330	0.337
		H	19.47	19.50	1.01	---	---
Left		L	19.39	19.50	1.03	---	---
		M	19.42	19.50	1.02	0.293	0.299
		H	19.47	19.50	1.01	---	---
Right		L	19.39	19.50	1.03	---	---
		M	19.42	19.50	1.02	0.167	0.170
		H	19.47	19.50	1.01	---	---

Mode: WCDMA BAND5

fL (MHz)=826.4MHz

fM (MHz)=836.4MHz

fH (MHz)= 846.6MHz

SAR Values (WCDMA BAND5)

Limit of SAR (W/kg): <1.6W/kg (1g Average)

Test Case		Ch	Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg)	Reported Results (W/kg)
position	mode					1g Average	1g Average
Left cheek	12.2KRMC (head)	L	23.38	23.50	1.03	---	---
		M	23.37	23.50	1.03	0.771	0.794
		H	23.41	23.50	1.02	---	---
Left Tilted		L	23.38	23.50	1.03	---	---
		M	23.37	23.50	1.03	0.762	0.785
		H	23.41	23.50	1.02	---	---
Right cheek		L	23.38	23.50	1.03	---	---
		M	23.37	23.50	1.03	0.758	0.781
		H	23.41	23.50	1.02	---	---
Right Tilted		L	23.38	23.50	1.03	---	---
		M	23.37	23.50	1.03	0.776	0.799
		H	23.41	23.50	1.02	---	---
Back	12.2KRMC (body-worn)	L	23.38	23.50	1.03	---	---
		M	23.37	23.50	1.03	0.227	0.234
		H	23.41	23.50	1.02	---	---
Front		L	23.38	23.50	1.03	---	---
		M	23.37	23.50	1.03	0.168	0.173
		H	23.41	23.50	1.02	---	---
Top	12.2KRMC (hotspot)	L	23.38	23.50	1.03	---	---
		M	23.37	23.50	1.03	0.133	0.137
		H	23.41	23.50	1.02	---	---
Left		L	23.38	23.50	1.03	---	---
		M	23.37	23.50	1.03	0.091	0.094
		H	23.41	23.50	1.02	---	---
Right		L	23.38	23.50	1.03	---	---
		M	23.37	23.50	1.03	0.128	0.132
		H	23.41	23.50	1.02	---	---

Mode: LTE Band 2

fL (MHz)= 1860MHz

fM (MHz)= 1880MHz

fH (MHz)= 1900MHz

SAR Values (LTE BAND2)

Limit of SAR (W/kg): <1.6W/kg (1g Average)

Test Case		Ch	Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg)	Reported Results (W/kg)
position	mode					1g Average	1g Average
Left cheek	20BW 1RB (head)	L	16.54	17.00	1.11	---	---
		M	16.52	17.00	1.12	0.351	0.393
		H	16.53	17.00	1.11	---	---
Left Tilted		L	16.54	17.00	1.11	---	---
		M	16.52	17.00	1.12	0.591	0.662
		H	16.53	17.00	1.11	---	---
Right cheek		L	16.54	17.00	1.11	---	---
		M	16.52	17.00	1.12	0.436	0.488
		H	16.53	17.00	1.11	---	---
Right Tilted		L	16.54	17.00	1.11	---	---
		M	16.52	17.00	1.12	0.676	0.757
		H	16.53	17.00	1.11	---	---
Back	20BW 1RB (body-worn)	L	16.54	17.00	1.11	---	---
		M	16.52	17.00	1.12	0.690	0.773
		H	16.53	17.00	1.11	---	---
Front		L	16.54	17.00	1.11	---	---
		M	16.52	17.00	1.12	0.242	0.271
		H	16.53	17.00	1.11	---	---
Top	20BW 1RB (hotspot)	L	16.54	17.00	1.11	0.952	1.057
		M	16.52	17.00	1.12	1.020	1.142
		H	16.53	17.00	1.11	0.963	1.069
		L2	16.54	17.00	1.11	0.948	1.054
		M2	16.52	17.00	1.12	0.984	1.099
		H2	16.53	17.00	1.11	0.972	1.083
Left		L	16.54	17.00	1.11	---	---
		M	16.52	17.00	1.12	0.235	0.263
		H	16.53	17.00	1.11	---	---
Right		L	16.54	17.00	1.11	---	---
		M	16.52	17.00	1.12	0.154	0.172
		H	16.53	17.00	1.11	---	---

Left cheek	20BW 50%RB (head)	L	15.76	16.00	1.06	---	---
		M	15.78	16.00	1.05	0.374	0.393
		H	15.84	16.00	1.04	---	---
Left Tilted		L	15.76	16.00	1.06	---	---
		M	15.78	16.00	1.05	0.617	0.648
		H	15.84	16.00	1.04	---	---
Right cheek		L	15.76	16.00	1.06	---	---
		M	15.78	16.00	1.05	0.464	0.487
		H	15.84	16.00	1.04	---	---
Right Tilted		L	15.76	16.00	1.06	---	---
		M	15.78	16.00	1.05	0.638	0.670
		H	15.84	16.00	1.04	---	---
Back	20BW 50%RB (body- worn)	L	15.76	16.00	1.06	---	---
		M	15.78	16.00	1.05	0.578	0.607
		H	15.84	16.00	1.04	---	---
Front		L	15.76	16.00	1.06	---	---
		M	15.78	16.00	1.05	0.247	0.259
		H	15.84	16.00	1.04	---	---
Top	20BW 50%RB (hotspot)	L	15.76	16.00	1.06	---	---
		M	15.78	16.00	1.05	0.754	0.792
		L	15.84	16.00	1.04	---	---
Top	20BW 100%RB (hotspot)	L	15.65	16.00	1.08	---	---
		M	15.69	16.00	1.07	0.563	0.602
		L	15.76	16.00	1.06	---	---

Mode: LTE Band 4

fL (MHz)= 1710.7MHz fM (MHz)= 1732.5MHz fH (MHz)= 1754.3MHz

SAR Values (LTE BAND4) **Limit of SAR (W/kg): <1.6W/kg (1g Average)**

Test Case		Ch	Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg)	Reported Results (W/kg)
position	mode					1g Average	1g Average
Left cheek	20BW 1RB (head)	L	19.28	19.50	1.05	0.772	0.811
		M	19.25	19.50	1.06	0.876	0.929
		H	19.23	19.50	1.06	0.846	0.897
		L2	19.28	19.50	1.05	0.756	0.795
		M2	19.25	19.50	1.06	0.858	0.909
		H2	19.23	19.50	1.06	0.938	0.998
Left Tilted		L	19.28	19.50	1.05	0.828	0.869
		M	19.25	19.50	1.06	0.834	0.884
		H	19.23	19.50	1.06	0.852	0.903
		L2	19.28	19.50	1.05	0.826	0.869
		M2	19.25	19.50	1.06	0.928	0.983
		H2	19.23	19.50	1.06	0.948	1.009
Right cheek		L	19.28	19.50	1.05	0.853	0.896
		M	19.25	19.50	1.06	0.896	0.950
		H	19.23	19.50	1.06	0.848	0.899
		L2	19.28	19.50	1.05	0.921	0.969
		M2	19.25	19.50	1.06	1.020	1.080
		H2	19.23	19.50	1.06	0.946	1.007
Right Tilted		L	19.28	19.50	1.05	0.765	0.803
		M	19.25	19.50	1.06	0.770	0.816
		H	19.23	19.50	1.06	0.821	0.870
		L2	19.28	19.50	1.05	0.742	0.781
		M2	19.25	19.50	1.06	0.782	0.828
		H2	19.23	19.50	1.06	0.816	0.868
Back	20BW 1RB (body-worn)	L	19.28	19.50	1.05	---	---
		M	19.25	19.50	1.06	0.498	0.528
		H	19.23	19.50	1.06	---	---
Front		L	19.28	19.50	1.05	---	---
		M	19.25	19.50	1.06	0.205	0.217
		H	19.23	19.50	1.06	---	---
Top	20BW 1RB (hotspot)	L	19.28	19.50	1.05	---	---
		M	19.25	19.50	1.06	0.442	0.469
		H	19.23	19.50	1.06	---	---
Left		L	19.28	19.50	1.05	---	---
		M	19.25	19.50	1.06	0.287	0.304
		H	19.23	19.50	1.06	---	---
Right		L	19.28	19.50	1.05	---	---
		M	19.25	19.50	1.06	0.148	0.157
		H	19.23	19.50	1.06	---	---

Left cheek	20BW 50%RB (head)	L	18.46	18.50	1.01	0.734	0.741
		M	18.43	18.50	1.02	0.797	0.813
		H	18.38	18.50	1.03	0.825	0.850
		L2	18.46	18.50	1.01	0.742	0.749
		M2	18.43	18.50	1.02	0.786	0.799
		H2	18.38	18.50	1.03	0.816	0.839
Left Tilted		L	18.46	18.50	1.01	0.843	0.851
		M	18.43	18.50	1.02	0.875	0.893
		H	18.38	18.50	1.03	0.812	0.836
		L2	18.46	18.50	1.01	0.825	0.833
		M2	18.43	18.50	1.02	0.864	0.878
		H2	18.38	18.50	1.03	0.904	0.929
Right cheek		L	18.46	18.50	1.01	0.821	0.829
		M	18.43	18.50	1.02	0.852	0.869
		H	18.38	18.50	1.03	0.863	0.889
		L2	18.46	18.50	1.01	0.916	0.924
		M2	18.43	18.50	1.02	0.958	0.974
		H2	18.38	18.50	1.03	0.972	0.999
Right Tilted		L	18.46	18.50	1.01	0.816	0.824
		M	18.43	18.50	1.02	0.840	0.857
		H	18.38	18.50	1.03	0.832	0.857
		L2	18.46	18.50	1.01	0.821	0.829
		M2	18.43	18.50	1.02	0.836	0.850
		H2	18.38	18.50	1.03	0.875	0.900
Back	20BW 50%RB (body- worn)	L	18.46	18.50	1.01	---	---
		M	18.43	18.50	1.02	0.433	0.442
		H	18.38	18.50	1.03	---	---
Front		L	18.46	18.50	1.01	---	---
		M	18.43	18.50	1.02	0.233	0.238
		H	18.38	18.50	1.03	---	---
Left cheek	20BW 100%RB (head)	L	18.37	18.50	1.03	---	---
		M	18.32	18.50	1.04	0.761	0.791
		H	18.29	18.50	1.05	---	---
Left Tilted		L	18.37	18.50	1.03	---	---
		M	18.32	18.50	1.04	0.758	0.788
		H	18.29	18.50	1.05	---	---
Right cheek		L	18.37	18.50	1.03	---	---
		M	18.32	18.50	1.04	0.765	0.796
		H	18.29	18.50	1.05	---	---
Right Tilted		L	18.37	18.50	1.03	---	---
		M	18.32	18.50	1.04	0.764	0.795
		H	18.29	18.50	1.05	---	---

Mode: LTE Band 5

fL (MHz)=829 MHz fM (MHz)=836.5MHz fH (MHz)= 844MHz

SAR Values (LTE BAND5)

Limit of SAR (W/kg) : <1.6W/kg (1g Average)

Test Case		Ch	Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg)	Reported Results (W/kg)
position	mode					1g Average	1g Average
Left cheek	10BW 1RB (head)	L	23.32	23.50	1.04	---	---
		M	23.29	23.50	1.05	0.748	0.785
		H	23.28	23.50	1.05	---	---
Left Tilted		L	23.32	23.50	1.04	---	---
		M	23.29	23.50	1.05	0.751	0.789
		H	23.28	23.50	1.05	---	---
Right cheek		L	23.32	23.50	1.04	---	---
		M	23.29	23.50	1.05	0.739	0.776
		H	23.28	23.50	1.05	---	---
Right Tilted		L	23.32	23.50	1.04	---	---
		M	23.29	23.50	1.05	0.752	0.790
		H	23.28	23.50	1.05	---	---
Back	10BW 1RB (body-worn)	L	23.32	23.50	1.04	---	---
		M	23.29	23.50	1.05	0.324	0.340
		H	23.28	23.50	1.05	---	---
Front		L	23.32	23.50	1.04	---	---
		M	23.29	23.50	1.05	0.155	0.163
		H	23.28	23.50	1.05	---	---
Top	10BW 1RB (hotspot)	L	23.32	23.50	1.04	---	---
		M	23.29	23.50	1.05	0.133	0.140
		H	23.28	23.50	1.05	---	---
Left		L	23.32	23.50	1.04	---	---
		M	23.29	23.50	1.05	0.096	0.101
		H	23.28	23.50	1.05	---	---
Right		L	23.32	23.50	1.04	---	---
		M	23.29	23.50	1.05	0.109	0.114
		H	23.28	23.50	1.05	---	---

Left cheek	10BW 50%RB (head)	L	22.39	22.50	1.03	---	---
		M	22.35	22.50	1.04	0.688	0.716
		H	22.34	22.50	1.04	---	---
Left Tilted		L	22.39	22.50	1.03	---	---
		M	22.35	22.50	1.04	0.614	0.639
		H	22.34	22.50	1.04	---	---
Right cheek		L	22.39	22.50	1.03	---	---
		M	22.35	22.50	1.04	0.724	0.753
		H	22.34	22.50	1.04	---	---
Right Tilted		L	22.39	22.50	1.03	---	---
		M	22.35	22.50	1.04	0.611	0.635
		H	22.34	22.50	1.04	---	---
Back	10BW 50%RB (body- worn)	L	22.39	22.50	1.03	---	---
		M	22.35	22.50	1.04	0.267	0.278
		H	22.34	22.50	1.04	---	---
Front		L	22.39	22.50	1.03	---	---
		M	22.35	22.50	1.04	0.136	0.141
		H	22.34	22.50	1.04	---	---

Mode: LTE Band 7

fL (MHz)= 2510MHz

fM (MHz)= 2535MHz

fH (MHz)= 2560MHz

SAR Values (LTE BAND7)

Limit of SAR (W/kg): <1.6W/kg (1g Average)

Test Case		Ch	Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg)	Reported Results (W/kg)
position	mode					1g Average	1g Average
Left cheek	20BW 1RB (head)	L	15.48	15.50	1.00	---	---
		M	15.42	15.50	1.02	0.275	0.281
		H	15.27	15.50	1.05	---	---
Left Tilted		L	15.48	15.50	1.00	---	---
		M	15.42	15.50	1.02	0.437	0.446
		H	15.27	15.50	1.05	---	---
Right cheek		L	15.48	15.50	1.00	---	---
		M	15.42	15.50	1.02	0.406	0.414
		H	15.27	15.50	1.05	---	---
Right Tilted		L	15.48	15.50	1.00	---	---
		M	15.42	15.50	1.02	0.639	0.652
		H	15.27	15.50	1.05	---	---
Back	20BW 1RB (body-worn)	L	15.48	15.50	1.00	---	---
		M	15.42	15.50	1.02	1.090	1.112
		H	15.27	15.50	1.05	---	---
Front		L	15.48	15.50	1.00	---	---
		M	15.42	15.50	1.02	0.278	0.284
		H	15.27	15.50	1.05	---	---
Top	20BW 1RB (hotspot)	L	15.48	15.50	1.00	---	---
		M	15.42	15.50	1.02	0.427	0.436
		H	15.27	15.50	1.05	---	---
Left		L	15.48	15.50	1.00	---	---
		M	15.42	15.50	1.02	0.368	0.375
		H	15.27	15.50	1.05	---	---
Right		L	15.48	15.50	1.00	---	---
		M	15.42	15.50	1.02	0.258	0.263
		H	15.27	15.50	1.05	---	---

Left cheek	20BW 50%RB (head)	L	16.69	17.00	1.07	---	---
		M	16.61	17.00	1.09	0.293	0.319
		H	16.56	17.00	1.11	---	---
Left Tilted		L	16.69	17.00	1.07	---	---
		M	16.61	17.00	1.09	0.462	0.504
		H	16.56	17.00	1.11	---	---
Right cheek		L	16.69	17.00	1.07	---	---
		M	16.61	17.00	1.09	0.434	0.473
		H	16.56	17.00	1.11	---	---
Right Tilted		L	16.69	17.00	1.07	---	---
		M	16.61	17.00	1.09	0.576	0.628
		H	16.56	17.00	1.11	---	---
Back	20BW 50%RB (body- worn)	L	16.69	17.00	1.07	---	---
		M	16.61	17.00	1.09	0.728	0.794
		H	16.56	17.00	1.11	---	---
Front		L	16.69	17.00	1.07	---	---
		M	16.61	17.00	1.09	0.291	0.317
		H	16.56	17.00	1.11	---	---

Mode: LTE Band 12

fL (MHz)=704 MHz fM (MHz)=707.5MHz fH (MHz)= 711MHz

SAR Values (LTE BAND12)

Limit of SAR (W/kg): <1.6W/kg (1g Average)

Test Case		Ch	Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg)	Reported Results (W/kg)
position	position					1g Average	1g Average
Left cheek	10BW 1RB (head)	L	23.27	23.50	1.05	---	---
		M	23.24	23.50	1.06	0.424	0.449
		H	23.21	23.50	1.07	---	---
Left Tilted		L	23.27	23.50	1.05	---	---
		M	23.24	23.50	1.06	0.389	0.412
		H	23.21	23.50	1.07	---	---
Right cheek		L	23.27	23.50	1.05	---	---
		M	23.24	23.50	1.06	0.452	0.479
		H	23.21	23.50	1.07	---	---
Right Tilted		L	23.27	23.50	1.05	---	---
		M	23.24	23.50	1.06	0.429	0.455
		H	23.21	23.50	1.07	---	---
Back	10BW 1RB (body-worn)	L	23.27	23.50	1.05	---	---
		M	23.24	23.50	1.06	0.166	0.176
		H	23.21	23.50	1.07	---	---
Front		L	23.27	23.50	1.05	---	---
		M	23.24	23.50	1.06	0.097	0.103
		H	23.21	23.50	1.07	---	---
Top	10BW 1RB (hotspot)	L	23.27	23.50	1.05	---	---
		M	23.24	23.50	1.06	0.056	0.059
		H	23.21	23.50	1.07	---	---
Left		L	23.27	23.50	1.05	---	---
		M	23.24	23.50	1.06	0.096	0.102
		H	23.21	23.50	1.07	---	---
Right		L	23.27	23.50	1.05	---	---
		M	23.24	23.50	1.06	0.097	0.103
		H	23.21	23.50	1.07	---	---

Left cheek	10BW 50%RB (head)	L	22.38	22.50	1.03	---	---
		M	22.36	22.50	1.03	0.362	0.373
		H	22.35	22.50	1.04	---	---
Left Tilted		L	22.38	22.50	1.03	---	---
		M	22.36	22.50	1.03	0.330	0.340
		H	22.35	22.50	1.04	---	---
Right cheek		L	22.38	22.50	1.03	---	---
		M	22.36	22.50	1.03	0.446	0.459
		H	22.35	22.50	1.04	---	---
Right Tilted		L	22.38	22.50	1.03	---	---
		M	22.36	22.50	1.03	0.359	0.370
		H	22.35	22.50	1.04	---	---
Back	10BW 50%RB (body- worn)	L	22.38	22.50	1.03	---	---
		M	22.36	22.50	1.03	0.134	0.138
		H	22.35	22.50	1.04	---	---
Front		L	22.38	22.50	1.03	---	---
		M	22.36	22.50	1.03	0.082	0.084
		H	22.35	22.50	1.04	---	---

Mode: LTE Band 66

fL (MHz)=1720 MHz

fM (MHz)=1745MHz

fH (MHz)= 1770MHz

SAR Values (LTE BAND66)

Limit of SAR (W/kg): <1.6W/kg (1g Average)

Test Case		Ch	Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg)	Reported Results (W/kg)
position	position					1g Average	1g Average
Left cheek	20BW 1RB (head)	L	18.21	18.50	1.07	---	---
		M	18.17	18.50	1.08	0.739	0.798
		H	18.36	18.50	1.03	---	---
Left Tilted		L	18.21	18.50	1.07	---	---
		M	18.17	18.50	1.08	0.734	0.793
		H	18.36	18.50	1.03	---	---
Right cheek		L	18.21	18.50	1.07	---	---
		M	18.17	18.50	1.08	0.740	0.799
		H	18.36	18.50	1.03	---	---
Right Tilted		L	18.21	18.50	1.07	---	---
		M	18.17	18.50	1.08	0.735	0.794
		H	18.36	18.50	1.03	---	---
Back	20BW 1RB (body-worn)	L	18.21	18.50	1.07	---	---
		M	18.17	18.50	1.08	0.514	0.555
		H	18.36	18.50	1.03	---	---
Front		L	18.21	18.50	1.07	---	---
		M	18.17	18.50	1.08	0.225	0.243
		H	18.36	18.50	1.03	---	---
Top	20BW 1RB (hotspot)	L	18.21	18.50	1.07	---	---
		M	18.17	18.50	1.08	0.484	0.523
		H	18.36	18.50	1.03	---	---
Left		L	18.21	18.50	1.07	---	---
		M	18.17	18.50	1.08	0.277	0.299
		H	18.36	18.50	1.03	---	---
Right		L	18.21	18.50	1.07	---	---
		M	18.17	18.50	1.08	0.172	0.186
		H	18.36	18.50	1.03	---	---

Left cheek	20BW 50%RB (head)	L	17.48	17.50	1.00	---	---
		M	17.42	17.50	1.02	0.768	0.783
		H	17.47	17.50	1.01	---	---
Left Tilted		L	17.48	17.50	1.00	---	---
		M	17.42	17.50	1.02	0.771	0.786
		H	17.47	17.50	1.01	---	---
Right cheek		L	17.48	17.50	1.00	---	---
		M	17.42	17.50	1.02	0.774	0.789
		H	17.47	17.50	1.01	---	---
Right Tilted		L	17.48	17.50	1.00	---	---
		M	17.42	17.50	1.02	0.781	0.797
		H	17.47	17.50	1.01	---	---
Back	20BW 50%RB (body- worn)	L	17.48	17.50	1.00	---	---
		M	17.42	17.50	1.02	0.428	0.437
		H	17.47	17.50	1.01	---	---
Front		L	17.48	17.50	1.00	---	---
		M	17.42	17.50	1.02	0.230	0.235
		H	17.47	17.50	1.01	---	---

Mode: Bluetooth

fL (MHz)=2402MHz fM (MHz)=2441MHz fH (MHz)= 2480MHz

SAR Values (Wi-Fi 802.11b)

Limit of SAR (W/kg): <1.6W/kg (1g Average)

Test Case		Ch	Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg)	Reported Results (W/kg)
position	mode					1g Average	1g Average
Left cheek	802.11b (head)	L	8.12	9.00	1.22	---	---
		M	8.55	9.00	1.11	0.004	0.004
		H	8.63	9.00	1.09	---	---
Left Tilted		L	8.12	9.00	1.22	---	---
		M	8.55	9.00	1.11	0.005	0.006
		H	8.63	9.00	1.09	---	---
Right cheek		L	8.12	9.00	1.22	---	---
		M	8.55	9.00	1.11	0.004	0.004
		H	8.63	9.00	1.09	---	---
Right Tilted		L	8.12	9.00	1.22	---	---
		M	8.55	9.00	1.11	0.003	0.003
		H	8.63	9.00	1.09	---	---
Back	802.11b (body- worn)	L	8.12	9.00	1.22	---	---
		M	8.55	9.00	1.11	0.004	0.004
		H	8.63	9.00	1.09	---	---
Front		L	8.12	9.00	1.22	---	---
		M	8.55	9.00	1.11	0.003	0.003
		H	8.63	9.00	1.09	---	---

Mode: Wi-Fi 2.4GHz

fL (MHz)=2412MHz fM (MHz)=2437MHz

fH (MHz)= 2462MHz

SAR Values (Wi-Fi 802.11b)

Limit of SAR (W/kg): <1.6W/kg (1g Average)

Test Case		Ch	Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg)	Reported Results (W/kg)
position	mode					1g Average	1g Average
Left cheek	802.11b (head)	L	14.23	14.50	1.06	---	---
		M	14.42	14.50	1.02	0.237	0.242
		H	14.01	14.50	1.12	---	---
Left Tilted		L	14.23	14.50	1.06	---	---
		M	14.42	14.50	1.02	0.181	0.185
		H	14.01	14.50	1.12	---	---
Right cheek		L	14.23	14.50	1.06	---	---
		M	14.42	14.50	1.02	0.082	0.084
		H	14.01	14.50	1.12	---	---
Right Tilted		L	14.23	14.50	1.06	---	---
		M	14.42	14.50	1.02	0.085	0.087
		H	14.01	14.50	1.12	---	---
Back	802.11b (body- worn)	L	14.23	14.50	1.06	---	---
		M	14.42	14.50	1.02	0.034	0.035
		H	14.01	14.50	1.12	---	---
Front		L	14.23	14.50	1.06	---	---
		M	14.42	14.50	1.02	0.040	0.041
		H	14.01	14.50	1.12	---	---
Top	802.11b (hotspot)	L	14.23	14.50	1.06	---	---
		M	14.42	14.50	1.02	0.031	0.032
		H	14.01	14.50	1.12	---	---
Left		L	14.23	14.50	1.06	---	---
		M	14.42	14.50	1.02	0.004	0.004
		H	14.01	14.50	1.12	---	---

Mode: WIFI UNII-1&UNII-2A

fL (MHz)=5260MHz fM (MHz)=5300MHz

fH (MHz)= 5320MHz

SAR Values (Wi-Fi 802.11a)

Limit of SAR (W/kg): <1.6W/kg (1g Average)

Test Case		Ch	Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg)	Reported Results (W/kg)
position	mode					1g Average	1g Average
Left cheek	802.11a (head)	L	11.67	12.00	1.08	---	---
		M	11.69	12.00	1.07	0.284	0.304
		H	11.73	12.00	1.06	---	---
Left Tilted		L	11.67	12.00	1.08	---	---
		M	11.69	12.00	1.07	0.321	0.343
		H	11.73	12.00	1.06	---	---
Right cheek		L	11.67	12.00	1.08	---	---
		M	11.69	12.00	1.07	0.246	0.263
		H	11.73	12.00	1.06	---	---
Right Tilted		L	11.67	12.00	1.08	---	---
		M	11.69	12.00	1.07	0.243	0.260
		H	11.73	12.00	1.06	---	---
Back	802.11a (body- worn)	L	11.67	12.00	1.08	---	---
		M	11.69	12.00	1.07	0.027	0.029
		H	11.73	12.00	1.06	---	---
Front		L	11.67	12.00	1.08	---	---
		M	11.69	12.00	1.07	0.039	0.042
		H	11.73	12.00	1.06	---	---
Top	802.11a (hotspot)	L	11.67	12.00	1.08	---	---
		M	11.69	12.00	1.07	0.028	0.030
		H	11.73	12.00	1.06	---	---
Left		L	11.67	12.00	1.08	---	---
		M	11.69	12.00	1.07	0.018	0.019
		H	11.73	12.00	1.06	---	---

Mode: WIFI UNII-2C

fL (MHz)=5500MHz fM (MHz)=5580MHz

fH (MHz)= 5700MHz

SAR Values (Wi-Fi 802.11a)

Limit of SAR (W/kg): <1.6W/kg (1g Average)

Test Case		Ch	Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg)	Reported Results (W/kg)
position	mode					1g Average	1g Average
Left cheek	802.11a (head)	L	11.43	11.50	1.02	---	---
		M	11.38	11.50	1.03	0.321	0.331
		H	11.42	11.50	1.02	---	---
Left Tilted		L	11.43	11.50	1.02	---	---
		M	11.38	11.50	1.03	0.374	0.385
		H	11.42	11.50	1.02	---	---
Right cheek		L	11.43	11.50	1.02	---	---
		M	11.38	11.50	1.03	0.274	0.282
		H	11.42	11.50	1.02	---	---
Right Tilted		L	11.43	11.50	1.02	---	---
		M	11.38	11.50	1.03	0.243	0.250
		H	11.42	11.50	1.02	---	---
Back	802.11a (body- worn)	L	11.43	11.50	1.02	---	---
		M	11.38	11.50	1.03	0.029	0.030
		H	11.42	11.50	1.02	---	---
Front		L	11.43	11.50	1.02	---	---
		M	11.38	11.50	1.03	0.036	0.037
		H	11.42	11.50	1.02	---	---
Top	802.11a (hotspot)	L	11.43	11.50	1.02	---	---
		M	11.38	11.50	1.03	0.024	0.025
		H	11.42	11.50	1.02	---	---
Left		L	11.43	11.50	1.02	---	---
		M	11.38	11.50	1.03	0.019	0.020
		H	11.42	11.50	1.02	---	---

Mode: WIFI UNII-3

fL (MHz)=5745MHz fM (MHz)=5785MHz

fH (MHz)= 5825MHz

SAR Values (Wi-Fi 802.11a)

Limit of SAR (W/kg): <1.6W/kg (1g Average)

Test Case		Ch	Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg)	Reported Results (W/kg)
position	mode					1g Average	1g Average
Left cheek	802.11a (head)	L	11.43	11.50	1.02	---	---
		M	11.38	11.50	1.03	0.353	0.364
		H	11.42	11.50	1.02	---	---
Left Tilted		L	11.43	11.50	1.02	---	---
		M	11.38	11.50	1.03	0.393	0.405
		H	11.42	11.50	1.02	---	---
Right cheek		L	11.43	11.50	1.02	---	---
		M	11.38	11.50	1.03	0.275	0.283
		H	11.42	11.50	1.02	---	---
Right Tilted		L	11.43	11.50	1.02	---	---
		M	11.38	11.50	1.03	0.290	0.299
		H	11.42	11.50	1.02	---	---
Back	802.11a (body- worn)	L	11.43	11.50	1.02	---	---
		M	11.38	11.50	1.03	0.037	0.038
		H	11.42	11.50	1.02	---	---
Front		L	11.43	11.50	1.02	---	---
		M	11.38	11.50	1.03	0.048	0.049
		H	11.42	11.50	1.02	---	---
Top	802.11a (hotspot)	L	11.43	11.50	1.02	---	---
		M	11.38	11.50	1.03	0.026	0.027
		H	11.42	11.50	1.02	---	---
Left		L	11.43	11.50	1.02	---	---
		M	11.38	11.50	1.03	0.015	0.015
		H	11.42	11.50	1.02	---	---

Down Antenna

Mode: GSM 850(GPRS)

fL(MHz)=824.2MHz

fM(MHz)=836.5MHz

fH(MHz)= 848.8MHz

SAR Values (850MHz Band)

Limit of SAR (W/kg): <1.6W/kg (1g Average)

Test Case		Ch	Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg)	Reported Results (W/kg)
position	mode					1g Average	1g Average
Left cheek	GPRS 4TX (head)	L	29.18	29.50	1.08	---	---
		M	29.12	29.50	1.09	0.223	0.243
		H	29.08	29.50	1.10	---	---
Left Tilted		L	29.18	29.50	1.08	---	---
		M	29.12	29.50	1.09	0.137	0.149
		H	29.08	29.50	1.10	---	---
Right cheek		L	29.18	29.50	1.08	---	---
		M	29.12	29.50	1.09	0.248	0.270
		H	29.08	29.50	1.10	---	---
Right Tilted		L	29.18	29.50	1.08	---	---
		M	29.12	29.50	1.09	0.156	0.170
		H	29.08	29.50	1.10	---	---
Back	GPRS 4TX (body-worn)	L	29.18	29.50	1.08	---	---
		M	29.12	29.50	1.09	0.362	0.395
		H	29.08	29.50	1.10	---	---
Front		L	29.18	29.50	1.08	---	---
		M	29.12	29.50	1.09	0.342	0.373
		H	29.08	29.50	1.10	---	---
Bottom	GPRS 4TX (hotspot)	L	29.18	29.50	1.08	---	---
		M	29.12	29.50	1.09	0.223	0.243
		H	29.08	29.50	1.10	---	---
Left		L	29.18	29.50	1.08	---	---
		M	29.12	29.50	1.09	0.418	0.456
		H	29.08	29.50	1.10	---	---
Right		L	29.18	29.50	1.08	---	---
		M	29.12	29.50	1.09	0.271	0.295
		H	29.08	29.50	1.10	---	---

Mode: GSM1900(GPRS)

fL (MHz)=1850.2MHz fM (MHz)=1880.0MHz fH (MHz)=1909.8MHz

SAR Values (1900MHz Band)

Limit of SAR (W/kg): <1.6W/kg (1g Average)

Test Case		Ch	Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg)	Reported Results (W/kg)
position	mode					1g Average	1g Average
Left cheek	GPRS 4TX (head)	L	26.37	27.00	1.16	---	---
		M	26.42	27.00	1.14	0.040	0.046
		H	26.53	27.00	1.11	---	---
Left Tilted		L	26.37	27.00	1.16	---	---
		M	26.42	27.00	1.14	0.030	0.034
		H	26.53	27.00	1.11	---	---
Right cheek		L	26.37	27.00	1.16	---	---
		M	26.42	27.00	1.14	0.035	0.040
		H	26.53	27.00	1.11	---	---
Right Tilted		L	26.37	27.00	1.16	---	---
		M	26.42	27.00	1.14	0.039	0.044
		H	26.53	27.00	1.11	---	---
Back	GPRS 4TX (body- worn)	L	26.37	27.00	1.16	---	---
		M	26.42	27.00	1.14	0.487	0.555
		H	26.53	27.00	1.11	---	---
Front		L	26.37	27.00	1.16	---	---
		M	26.42	27.00	1.14	0.404	0.461
		H	26.53	27.00	1.11	---	---
Bottom	GPRS 4TX (hotspot)	L1	26.37	27.00	1.16	0.743	0.862
		M1	26.42	27.00	1.14	0.768	0.876
		H1	26.53	27.00	1.11	0.752	0.835
		L2	26.37	27.00	1.16	0.739	0.854
		M2	26.42	27.00	1.14	0.758	0.866
		H2	26.53	27.00	1.11	0.754	0.840
Left		L	26.37	27.00	1.16	---	---
		M	26.42	27.00	1.14	0.058	0.066
		H	26.53	27.00	1.11	---	---
Right		L	26.37	27.00	1.16	---	---
		M	26.42	27.00	1.14	0.024	0.027
		H	26.53	27.00	1.11	---	---

Mode: WCDMA BAND2

fL (MHz)=1852.4MHz fM (MHz)=1880MHz fH (MHz)= 1907.6MHz

SAR Values (WCDMA BAND2)

Limit of SAR (W/kg) :< 1.6W/kg (1g Average)

Test Case		Ch	Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg)	Reported Results (W/kg)
position	mode					1g Average	1g Average
Left cheek	12.2KRMC (head)	L	23.70	24.00	1.07	---	---
		M	23.77	24.00	1.05	0.057	0.060
		H	23.79	24.00	1.05	---	---
Left Tilted		L	23.70	24.00	1.07	---	---
		M	23.77	24.00	1.05	0.036	0.038
		H	23.79	24.00	1.05	---	---
Right cheek		L	23.70	24.00	1.07	---	---
		M	23.77	24.00	1.05	0.047	0.049
		H	23.79	24.00	1.05	---	---
Right Tilted		L	23.70	24.00	1.07	---	---
		M	23.77	24.00	1.05	0.050	0.053
		H	23.79	24.00	1.05	---	---
Back	12.2KRMC (body-worn)	L	23.70	24.00	1.07	---	---
		M	23.77	24.00	1.05	0.653	0.686
		H	23.79	24.00	1.05	---	---
Front		L	23.70	24.00	1.07	---	---
		M	23.77	24.00	1.05	0.489	0.513
		H	23.79	24.00	1.05	---	---
Bottom	12.2KRMC (hotspot)	L1	23.70	24.00	1.07	0.897	0.960
		M1	23.77	24.00	1.05	0.910	0.956
		H1	23.79	24.00	1.05	0.904	0.949
		L2	23.70	24.00	1.07	0.893	0.957
		M2	23.77	24.00	1.05	0.907	0.956
		H2	23.79	24.00	1.05	0.902	0.947
Left		L	23.70	24.00	1.07	---	---
		M	23.77	24.00	1.05	0.077	0.081
		H	23.79	24.00	1.05	---	---
Right		L	23.70	24.00	1.07	---	---
		M	23.77	24.00	1.05	0.033	0.035
		H	23.79	24.00	1.05	---	---

Mode: WCDMA BAND4

fL (MHz)= 1712.4MHz fM (MHz)= 1732.4MHz fH (MHz)= 1752.6MHz

SAR Values (WCDMA BAND4)

Limit of SAR (W/kg): <1.6W/kg (1g Average)

Test Case		Ch	Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg)	Reported Results (W/kg)
position	mode					1g Average	1g Average
Left cheek	12.2KRMC (head)	L	23.39	24.00	1.15	---	---
		M	23.42	24.00	1.14	0.007	0.008
		H	23.57	24.00	1.10	---	---
Left Tilted		L	23.39	24.00	1.15	---	---
		M	23.42	24.00	1.14	0.054	0.062
		H	23.57	24.00	1.10	---	---
Right cheek		L	23.39	24.00	1.15	---	---
		M	23.42	24.00	1.14	0.009	0.010
		H	23.57	24.00	1.10	---	---
Right Tilted		L	23.39	24.00	1.15	---	---
		M	23.42	24.00	1.14	0.011	0.013
		H	23.57	24.00	1.10	---	---
Back	12.2KRMC (body-worn)	L	23.39	24.00	1.15	---	---
		M	23.42	24.00	1.14	0.101	0.115
		H	23.57	24.00	1.10	---	---
Front		L	23.39	24.00	1.15	---	---
		M	23.42	24.00	1.14	0.076	0.087
		H	23.57	24.00	1.10	---	---
Bottom	12.2KRMC (hotspot)	L	23.39	24.00	1.15	---	---
		M	23.42	24.00	1.14	0.133	0.152
		H	23.57	24.00	1.10	---	---
Left		L	23.39	24.00	1.15	---	---
		M	23.42	24.00	1.14	0.005	0.006
		H	23.57	24.00	1.10	---	---
Right		L	23.39	24.00	1.15	---	---
		M	23.42	24.00	1.14	0.005	0.006
		H	23.57	24.00	1.10	---	---

Mode: WCDMA BAND5

fL (MHz)=826.4MHz

fM (MHz)=836.4MHz

fH (MHz)= 846.6MHz

SAR Values (WCDMA BAND5)

Limit of SAR (W/kg): <1.6W/kg (1g Average)

Test Case		Ch	Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg)	Reported Results (W/kg)
position	mode					1g Average	1g Average
Left cheek	12.2KRMC (head)	L	23.38	23.50	1.03	---	---
		M	23.37	23.50	1.03	0.134	0.138
		H	23.41	23.50	1.02	---	---
Left Tilted		L	23.38	23.50	1.03	---	---
		M	23.37	23.50	1.03	0.068	0.070
		H	23.41	23.50	1.02	---	---
Right cheek		L	23.38	23.50	1.03	---	---
		M	23.37	23.50	1.03	0.137	0.141
		H	23.41	23.50	1.02	---	---
Right Tilted		L	23.38	23.50	1.03	---	---
		M	23.37	23.50	1.03	0.070	0.072
		H	23.41	23.50	1.02	---	---
Back	12.2KRMC (body-worn)	L	23.38	23.50	1.03	---	---
		M	23.37	23.50	1.03	0.184	0.190
		H	23.41	23.50	1.02	---	---
Front		L	23.38	23.50	1.03	---	---
		M	23.37	23.50	1.03	0.155	0.160
		H	23.41	23.50	1.02	---	---
Bottom	12.2KRMC (hotspot)	L	23.38	23.50	1.03	---	---
		M	23.37	23.50	1.03	0.231	0.238
		H	23.41	23.50	1.02	---	---
Left		L	23.38	23.50	1.03	---	---
		M	23.37	23.50	1.03	0.133	0.137
		H	23.41	23.50	1.02	---	---
Right		L	23.38	23.50	1.03	---	---
		M	23.37	23.50	1.03	0.195	0.201
		H	23.41	23.50	1.02	---	---

Mode: LTE Band 2

fL (MHz)= 1860MHz

fM (MHz)= 1880MHz

fH (MHz)= 1900MHz

SAR Values (LTE BAND2)

Limit of SAR (W/kg): <1.6W/kg (1g Average)

Test Case		Ch	Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg)	Reported Results (W/kg)
position	mode					1g Average	1g Average
Left cheek	20BW 1RB (head)	L	23.54	24.00	1.11	---	---
		M	23.52	24.00	1.12	0.046	0.052
		H	23.53	24.00	1.11	---	---
Left Tilted		L	23.54	24.00	1.11	---	---
		M	23.52	24.00	1.12	0.037	0.041
		H	23.53	24.00	1.11	---	---
Right cheek		L	23.54	24.00	1.11	---	---
		M	23.52	24.00	1.12	0.044	0.049
		H	23.53	24.00	1.11	---	---
Right Tilted		L	23.54	24.00	1.11	---	---
		M	23.52	24.00	1.12	0.053	0.059
		H	23.53	24.00	1.11	---	---
Back	20BW 1RB (body-worn)	L	23.54	24.00	1.11	---	---
		M	23.52	24.00	1.12	0.379	0.424
		H	23.53	24.00	1.11	---	---
Front		L	23.54	24.00	1.11	---	---
		M	23.52	24.00	1.12	0.396	0.444
		H	23.53	24.00	1.11	---	---
Bottom	20BW 1RB (hotspot)	L1	23.54	24.00	1.11	---	---
		M1	23.52	24.00	1.12	0.706	0.791
		H1	23.53	24.00	1.11	---	---
Left		L	23.54	24.00	1.11	---	---
		M	23.52	24.00	1.12	0.245	0.274
		H	23.53	24.00	1.11	---	---
Right		L	23.54	24.00	1.11	---	---
		M	23.52	24.00	1.12	0.145	0.162
		H	23.53	24.00	1.11	---	---

Left cheek	20BW 50%RB (head)	L	22.76	23.00	1.06	---	---
		M	22.78	23.00	1.05	0.040	0.042
		H	22.84	23.00	1.04	---	---
Left Tilted		L	22.76	23.00	1.06	---	---
		M	22.78	23.00	1.05	0.031	0.033
		H	22.84	23.00	1.04	---	---
Right cheek		L	22.76	23.00	1.06	---	---
		M	22.78	23.00	1.05	0.040	0.042
		H	22.84	23.00	1.04	---	---
Right Tilted		L	22.76	23.00	1.06	---	---
		M	22.78	23.00	1.05	0.041	0.043
		H	22.84	23.00	1.04	---	---
Back	20BW 50%RB (body- worn)	L	22.76	23.00	1.06	---	---
		M	22.78	23.00	1.05	0.296	0.311
		H	22.84	23.00	1.04	---	---
Front		L	22.76	23.00	1.06	---	---
		M	22.78	23.00	1.05	0.331	0.348
		H	22.84	23.00	1.04	---	---

Mode: LTE Band 4

fL (MHz)= 1710.7MHz fM (MHz)= 1732.5MHz fH (MHz)= 1754.3MHz

SAR Values (LTE BAND4)

Limit of SAR (W/kg): <1.6W/kg (1g Average)

Test Case		Ch	Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg)	Reported Results (W/kg)
position	mode					1g Average	1g Average
Left cheek	20BW 1RB (head)	L	23.28	23.50	1.05	---	---
		M	23.25	23.50	1.06	0.010	0.011
		H	23.23	23.50	1.06	---	---
Left Tilted		L	23.28	23.50	1.05	---	---
		M	23.25	23.50	1.06	0.010	0.011
		H	23.23	23.50	1.06	---	---
Right cheek		L	23.28	23.50	1.05	---	---
		M	23.25	23.50	1.06	0.010	0.011
		H	23.23	23.50	1.06	---	---
Right Tilted		L	23.28	23.50	1.05	---	---
		M	23.25	23.50	1.06	0.012	0.013
		H	23.23	23.50	1.06	---	---
Back	20BW 1RB (body-worn)	L	23.28	23.50	1.05	---	---
		M	23.25	23.50	1.06	0.067	0.071
		H	23.23	23.50	1.06	---	---
Front		L	23.28	23.50	1.05	---	---
		M	23.25	23.50	1.06	0.068	0.072
		H	23.23	23.50	1.06	---	---
Bottom	20BW 1RB (hotspot)	L	23.28	23.50	1.05	---	---
		M	23.25	23.50	1.06	0.145	0.154
		H	23.23	23.50	1.06	---	---
Left		L	23.28	23.50	1.05	---	---
		M	23.25	23.50	1.06	0.134	0.142
		H	23.23	23.50	1.06	---	---
Right		L	23.28	23.50	1.05	---	---
		M	23.25	23.50	1.06	0.138	0.146
		H	23.23	23.50	1.06	---	---

Left cheek	20BW 50%RB (head)	L	22.46	22.50	1.01	---	---
		M	22.43	22.50	1.02	0.009	0.009
		H	22.38	22.50	1.03	---	---
Left Tilted		L	22.46	22.50	1.01	---	---
		M	22.43	22.50	1.02	0.007	0.007
		H	22.38	22.50	1.03	---	---
Right cheek		L	22.46	22.50	1.01	---	---
		M	22.43	22.50	1.02	0.009	0.009
		H	22.38	22.50	1.03	---	---
Right Tilted		L	22.46	22.50	1.01	---	---
		M	22.43	22.50	1.02	0.007	0.007
		H	22.38	22.50	1.03	---	---
Back	20BW 50%RB (body- worn)	L	22.46	22.50	1.01	---	---
		M	22.43	22.50	1.02	0.066	0.067
		H	22.38	22.50	1.03	---	---
Front		L	22.46	22.50	1.01	---	---
		M	22.43	22.50	1.02	0.061	0.062
		H	22.38	22.50	1.03	---	---

Mode: LTE Band 5

fL (MHz)=829 MHz fM (MHz)=836.5MHz fH (MHz)= 844MHz

SAR Values (LTE BAND5)

Limit of SAR (W/kg) : <1.6W/kg (1g Average)

Test Case		Ch	Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg)	Reported Results (W/kg)
position	mode					1g Average	1g Average
Left cheek	10BW 1RB (head)	L	23.32	23.50	1.04	---	---
		M	23.29	23.50	1.05	0.096	0.101
		H	23.28	23.50	1.05	---	---
Left Tilted		L	23.32	23.50	1.04	---	---
		M	23.29	23.50	1.05	0.062	0.065
		H	23.28	23.50	1.05	---	---
Right cheek		L	23.32	23.50	1.04	---	---
		M	23.29	23.50	1.05	0.119	0.125
		H	23.28	23.50	1.05	---	---
Right Tilted		L	23.32	23.50	1.04	---	---
		M	23.29	23.50	1.05	0.054	0.057
		H	23.28	23.50	1.05	---	---
Back	10BW 1RB (body-worn)	L	23.32	23.50	1.04	---	---
		M	23.29	23.50	1.05	0.187	0.196
		H	23.28	23.50	1.05	---	---
Front		L	23.32	23.50	1.04	---	---
		M	23.29	23.50	1.05	0.129	0.135
		H	23.28	23.50	1.05	---	---
Bottom	10BW 1RB (hotspot)	L	23.32	23.50	1.04	---	---
		M	23.29	23.50	1.05	0.096	0.101
		H	23.28	23.50	1.05	---	---
Left		L	23.32	23.50	1.04	---	---
		M	23.29	23.50	1.05	0.070	0.074
		H	23.28	23.50	1.05	---	---
Right		L	23.32	23.50	1.04	---	---
		M	23.29	23.50	1.05	0.126	0.132
		H	23.28	23.50	1.05	---	---

Left cheek	10BW 50%RB (head)	L	22.39	22.50	1.03	---	---
		M	22.35	22.50	1.04	0.080	0.083
		H	22.34	22.50	1.04	---	---
Left Tilted		L	22.39	22.50	1.03	---	---
		M	22.35	22.50	1.04	0.048	0.050
		H	22.34	22.50	1.04	---	---
Right cheek		L	22.39	22.50	1.03	---	---
		M	22.35	22.50	1.04	0.093	0.097
		H	22.34	22.50	1.04	---	---
Right Tilted		L	22.39	22.50	1.03	---	---
		M	22.35	22.50	1.04	0.043	0.045
		H	22.34	22.50	1.04	---	---
Back	10BW 50%RB (body- worn)	L	22.39	22.50	1.03	---	---
		M	22.35	22.50	1.04	0.142	0.148
		H	22.34	22.50	1.04	---	---
Front		L	22.39	22.50	1.03	---	---
		M	22.35	22.50	1.04	0.106	0.110
		H	22.34	22.50	1.04	---	---

Mode: LTE Band 7

fL (MHz)=2510 MHz

fM (MHz)=2535MHz

fH (MHz)= 2560MHz

SAR Values (LTE BAND7)

Limit of SAR (W/kg): <1.6W/kg (1g Average)

Test Case		Ch	Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg)	Reported Results (W/kg)
position	position					1g Average	1g Average
Left cheek	20BW 1RB (head)	L	23.48	23.50	1.00	---	---
		M	23.42	23.50	1.02	0.033	0.034
		H	23.27	23.50	1.05	---	---
Left Tilted		L	23.48	23.50	1.00	---	---
		M	23.42	23.50	1.02	0.065	0.066
		H	23.27	23.50	1.05	---	---
Right cheek		L	23.48	23.50	1.00	---	---
		M	23.42	23.50	1.02	0.075	0.077
		H	23.27	23.50	1.05	---	---
Right Tilted		L	23.48	23.50	1.00	---	---
		M	23.42	23.50	1.02	0.060	0.061
		H	23.27	23.50	1.05	---	---
Back	20BW 1RB (body-worn)	L	23.48	23.50	1.00	---	---
		M	23.42	23.50	1.02	0.179	0.183
		H	23.27	23.50	1.05	---	---
Front		L	23.48	23.50	1.00	---	---
		M	23.42	23.50	1.02	0.144	0.147
		H	23.27	23.50	1.05	---	---
Bottom	20BW 1RB (hotspot)	L	23.48	23.50	1.00	---	---
		M	23.42	23.50	1.02	0.300	0.306
		H	23.27	23.50	1.05	---	---
Left		L	23.48	23.50	1.00	---	---
		M	23.42	23.50	1.02	0.254	0.259
		H	23.27	23.50	1.05	---	---
Right		L	23.48	23.50	1.00	---	---
		M	23.42	23.50	1.02	0.024	0.024
		H	23.27	23.50	1.05	---	---

Left cheek	20BW 50%RB (head)	L	22.69	23.00	1.07	---	---
		M	22.61	23.00	1.09	0.028	0.031
		H	22.56	23.00	1.11	---	---
Left Tilted		L	22.69	23.00	1.07	---	---
		M	22.61	23.00	1.09	0.054	0.059
		H	22.56	23.00	1.11	---	---
Right cheek		L	22.69	23.00	1.07	---	---
		M	22.61	23.00	1.09	0.064	0.070
		H	22.56	23.00	1.11	---	---
Right Tilted		L	22.69	23.00	1.07	---	---
		M	22.61	23.00	1.09	0.042	0.046
		H	22.56	23.00	1.11	---	---
Back	20BW 50%RB (body- worn)	L	22.69	23.00	1.07	---	---
		M	22.61	23.00	1.09	0.152	0.166
		H	22.56	23.00	1.11	---	---
Front		L	22.69	23.00	1.07	---	---
		M	22.61	23.00	1.09	0.177	0.193
		H	22.56	23.00	1.11	---	---

Mode: LTE Band 12

fL (MHz)=704 MHz fM (MHz)=707.5MHz fH (MHz)= 711MHz

SAR Values (LTE BAND12)

Limit of SAR (W/kg): <1.6W/kg (1g Average)

Test Case		Ch	Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg)	Reported Results (W/kg)
position	position					1g Average	1g Average
Left cheek	10BW 1RB (head)	L	23.27	23.50	1.05	---	---
		M	23.24	23.50	1.06	0.058	0.061
		H	23.21	23.50	1.07	---	---
Left Tilted		L	23.27	23.50	1.05	---	---
		M	23.24	23.50	1.06	0.030	0.032
		H	23.21	23.50	1.07	---	---
Right cheek		L	23.27	23.50	1.05	---	---
		M	23.24	23.50	1.06	0.053	0.056
		H	23.21	23.50	1.07	---	---
Right Tilted		L	23.27	23.50	1.05	---	---
		M	23.24	23.50	1.06	0.260	0.276
		H	23.21	23.50	1.07	---	---
Back	10BW 1RB (body-worn)	L	23.27	23.50	1.05	---	---
		M	23.24	23.50	1.06	0.121	0.128
		H	23.21	23.50	1.07	---	---
Front		L	23.27	23.50	1.05	---	---
		M	23.24	23.50	1.06	0.088	0.093
		H	23.21	23.50	1.07	---	---
Bottom	10BW 1RB (hotspot)	L	23.27	23.50	1.05	---	---
		M	23.24	23.50	1.06	0.032	0.034
		H	23.21	23.50	1.07	---	---
Left		L	23.27	23.50	1.05	---	---
		M	23.24	23.50	1.06	0.100	0.106
		H	23.21	23.50	1.07	---	---
Right		L	23.27	23.50	1.05	---	---
		M	23.24	23.50	1.06	0.109	0.116
		H	23.21	23.50	1.07	---	---

Left cheek	10BW 50%RB (head)	L	22.38	22.50	1.03	---	---
		M	22.36	22.50	1.03	0.047	0.048
		H	22.35	22.50	1.04	---	---
Left Tilted		L	22.38	22.50	1.03	---	---
		M	22.36	22.50	1.03	0.025	0.026
		H	22.35	22.50	1.04	---	---
Right cheek		L	22.38	22.50	1.03	---	---
		M	22.36	22.50	1.03	0.043	0.044
		H	22.35	22.50	1.04	---	---
Right Tilted		L	22.38	22.50	1.03	---	---
		M	22.36	22.50	1.03	0.019	0.020
		H	22.35	22.50	1.04	---	---
Back	10BW 50%RB (body- worn)	L	22.38	22.50	1.03	---	---
		M	22.36	22.50	1.03	0.095	0.098
		H	22.35	22.50	1.04	---	---
Front		L	22.38	22.50	1.03	---	---
		M	22.36	22.50	1.03	0.070	0.072
		H	22.35	22.50	1.04	---	---

Mode: LTE Band 66

fL (MHz)=1720MHz fM (MHz)=1745MHz fH (MHz)= 1770MHz

SAR Values (LTE BAND66)

Limit of SAR (W/kg): <1.6W/kg (1g Average)

Test Case		Ch	Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg)	Reported Results (W/kg)
position	position					1g Average	1g Average
Left cheek	20BW 1RB (head)	L	23.21	23.50	1.07	---	---
		M	23.17	23.50	1.08	0.010	0.011
		H	23.36	23.50	1.03	---	---
Left Tilted		L	23.21	23.50	1.07	---	---
		M	23.17	23.50	1.08	0.012	0.013
		H	23.36	23.50	1.03	---	---
Right cheek		L	23.21	23.50	1.07	---	---
		M	23.17	23.50	1.08	0.014	0.015
		H	23.36	23.50	1.03	---	---
Right Tilted		L	23.21	23.50	1.07	---	---
		M	23.17	23.50	1.08	0.013	0.014
		H	23.36	23.50	1.03	---	---
Back	20BW 1RB (body- worn)	L	23.21	23.50	1.07	---	---
		M	23.17	23.50	1.08	0.075	0.081
		H	23.36	23.50	1.03	---	---
Front		L	23.21	23.50	1.07	---	---
		M	23.17	23.50	1.08	0.077	0.083
		H	23.36	23.50	1.03	---	---
Bottom	20BW 1RB (hotspot)	L	23.21	23.50	1.07	---	---
		M	23.17	23.50	1.08	0.294	0.318
		H	23.36	23.50	1.03	---	---
Left		L	23.21	23.50	1.07	---	---
		M	23.17	23.50	1.08	0.187	0.202
		H	23.36	23.50	1.03	---	---
Right		L	23.21	23.50	1.07	---	---
		M	23.17	23.50	1.08	0.157	0.170
		H	23.36	23.50	1.03	---	---

Left cheek	20BW 50%RB (head)	L	22.48	23.00	1.13	---	---
		M	22.42	23.00	1.14	0.010	0.011
		H	22.57	23.00	1.10	---	---
Left Tilted		L	22.48	23.00	1.13	---	---
		M	22.42	23.00	1.14	0.011	0.013
		H	22.57	23.00	1.10	---	---
Right cheek		L	22.48	23.00	1.13	---	---
		M	22.42	23.00	1.14	0.013	0.015
		H	22.57	23.00	1.10	---	---
Right Tilted		L	22.48	23.00	1.13	---	---
		M	22.42	23.00	1.14	0.011	0.013
		H	22.57	23.00	1.10	---	---
Back	20BW 50%RB (body- worn)	L	22.48	23.00	1.13	---	---
		M	22.42	23.00	1.14	0.069	0.079
		H	22.57	23.00	1.10	---	---
Front		L	22.48	23.00	1.13	---	---
		M	22.42	23.00	1.14	0.063	0.072
		H	22.57	23.00	1.10	---	---

6.11 SAR Measurement Variability

SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium.

The following procedures are applied to determine if repeated measurements are required.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

The Highest Reported SAR configuration in Each Frequency Band

Frequency band	Air interface	Head(w/kg)	Body(w/kg)
750 MHz	LTE BAND12	<0.8	<0.8
835 MHz	GSM850 WCDMA BAND5 LTE BAND5	<0.8	<0.8
1800/2000 MHz	GSM1900 WCDMA BAND2 WCDMA BAND4 LTE BAND2 LTE BAND4 LTE BAND66	>0.8	>0.8
2.4 GHz	BT/BLE WIFI 2.4G LTE BAND7	<0.8	<0.8
5 GHz	WIFI UNII-1 WIFI UNII-2A WIFI UNII-2C WIFI UNII-3	<0.8	<0.8

6.12 Simultaneous Transmission SAR Analysis

Up Antenna

The sum of SAR values for GSM & Wi-Fi 2.4G/ Wi-Fi 5G

	MAXIMUM SAR VALUE FOR HEAD	MAXIMUM SAR VALUE FOR BODY WORN	MAXIMUM SAR VALUE FOR HOTSPOT
GSM	0.693	0.792	0.198
Wi-Fi	0.405	0.038	0.032
Sum	1.098	0.830	0.230
Note	Left tilt: GSM850+WIFI5G	Back: GSM1900+WIFI5G	Top: GSM1900+WIFI2.4G

According to the above tables, the sum of SAR values for GSM and Wi-Fi < 1.6W/kg. So simultaneous transmission SAR are not required for Wi-Fi transmitter.

The sum of SAR values for WCDMA & Wi-Fi 2.4G/ Wi-Fi 5G

	MAXIMUM SAR VALUE FOR HEAD	MAXIMUM SAR VALUE FOR BODY	MAXIMUM SAR VALUE FOR HOTSPOT
WCDMA	1.182	0.732	0.337
Wi-Fi	0.299	0.038	0.032
Sum	1.481	0.770	0.369
Note	Right tilt: WCDMA4+WIFI5G	Back: WCDMA2+ WIFI 5G	Back: WCDMA4+ WIFI 2.4G

According to the above tables, the sum of SAR values for WCDMA and Wi-Fi < 1.6W/kg. So simultaneous transmission SAR are not required for Wi-Fi transmitter.5

The sum of SAR values for LTE& Wi-Fi 2.4G/ Wi-Fi 5G

	MAXIMUM SAR VALUE FOR HEAD	MAXIMUM SAR VALUE FOR BODY	MAXIMUM SAR VALUE FOR HOTSPOT
LTE	1.009	1.112	1.142
Wi-Fi	0.405	0.038	0.032
Sum	1.414	1.150	1.174
Note	Left Tilt: LTE4 +WIFI 5G	Back: LTE7 +WIFI 5G	Top: LTE2 +WIFI 2.4G

According to the above tables, the sum of SAR values for LTE and Wi-Fi < 1.6W/kg. So simultaneous transmission SAR are not required for Wi-Fi transmitter.

The sum of SAR values for GSM & Bluetooth & Wi-Fi5G

	MAXIMUM SAR VALUE FOR HEAD	MAXIMUM SAR VALUE FOR BODY WORN
GSM	0.693	0.792
Bluetooth	0.006	0.004
Wi-Fi 5G	0.405	0.038
Sum	1.104	0.834
Note	Left tilt: GSM850+BT+ Wi-Fi5G	Back: GSM1900+BT+ Wi-Fi5G

According to the above tables, the sum of SAR values for GSM, Bluetooth and Wi-Fi 5G < 1.6W/kg. So simultaneous transmission SAR are not required for Bluetooth transmitter.

The sum of SAR values for WCDMA & Bluetooth & Wi-Fi5G

	MAXIMUM SAR VALUE FOR HEAD	MAXIMUM SAR VALUE FOR BODY WORN
WCDMA	1.182	0.732
Bluetooth	0.003	0.004
Wi-Fi 5G	0.299	0.038
Sum	1.484	0.774
Note	Right Tilt: WCDMA4+BT+ Wi-Fi5G	Back: WCDMA2+BT+ Wi-Fi5G

According to the above tables, the sum of SAR values for WCDMA, Bluetooth and Wi-Fi 5G < 1.6W/kg. So simultaneous transmission SAR are not required for Bluetooth transmitter.

The sum of SAR values for LTE& Bluetooth & Wi-Fi5G

	MAXIMUM SAR VALUE FOR HEAD	MAXIMUM SAR VALUE FOR BODY
LTE	1.009	1.112
Bluetooth	0.006	0.004
Wi-Fi 5G	0.405	0.038
Sum	1.419	1.154
Note	Left tilt: LTE4+BT+ Wi-Fi5G	Back: LTE7 +BT+ Wi-Fi5G

According to the above tables, the sum of SAR values for LTE, Bluetooth and Wi-Fi 5G < 1.6W/kg. So simultaneous transmission SAR are not required for Wi-Fi transmitter.

Down Antenna

The sum of SAR values for GSM & Wi-Fi 2.4G/ Wi-Fi 5G

	MAXIMUM SAR VALUE FOR HEAD	MAXIMUM SAR VALUE FOR BODY WORN	MAXIMUM SAR VALUE FOR HOTSPOT
GSM	0.243	0.555	0.876
Wi-Fi	0.364	0.038	NA
Sum	0.607	0.593	0.876
Note	Left cheek: GSM850+WIFI5G	Back: GSM1900+WIFI5G	Bottom GSM1900

According to the above tables, the sum of SAR values for GSM and Wi-Fi < 1.6W/kg. So simultaneous transmission SAR are not required for Wi-Fi transmitter.

The sum of SAR values for WCDMA & Wi-Fi 2.4G/ Wi-Fi 5G

	MAXIMUM SAR VALUE FOR HEAD	MAXIMUM SAR VALUE FOR BODY	MAXIMUM SAR VALUE FOR HOTSPOT
WCDMA	0.138	0.689	0.960
Wi-Fi	0.364	0.038	NA
Sum	0.502	0.727	0.960
Note	Left cheek: WCDMA2 +WIFI5G	Back: WCDMA2+ WIFI5G	Bottom WCDMA2

According to the above tables, the sum of SAR values for WCDMA and Wi-Fi < 1.6W/kg. So simultaneous transmission SAR are not required for Wi-Fi transmitter.

The sum of SAR values for LTE & Wi-Fi 2.4G/ Wi-Fi 5G

	MAXIMUM SAR VALUE FOR HEAD	MAXIMUM SAR VALUE FOR BODY	MAXIMUM SAR VALUE FOR HOTSPOT
LTE	0.276	0.444	0.791
Wi-Fi	0.299	0.049	NA
Sum	0.575	0.493	0.791
Note	Right tilt: LTE12 +WIFI5G	Front: LTE2 +WIFI5G	Bottom LTE2

According to the above tables, the sum of SAR values for LTE and Wi-Fi < 1.6W/kg. So simultaneous transmission SAR are not required for Wi-Fi transmitter.

The sum of SAR values for GSM & Bluetooth & Wi-Fi5G

	MAXIMUM SAR VALUE FOR HEAD	MAXIMUM SAR VALUE FOR BODY WORN
GSM	0.243	0.555
Bluetooth	0.004	0.004
Wi-Fi 5G	0.364	0.038
Sum	0.610	0.597
Note	Left cheek: GSM850+BT+ Wi-Fi 5G	Back: GSM1900+BT+ Wi-Fi 5G

According to the above tables, the sum of SAR values for GSM and Bluetooth < 1.6W/kg. So simultaneous transmission SAR are not required for Bluetooth transmitter.

The sum of SAR values for WCDMA & Bluetooth & Wi-Fi5G

	MAXIMUM SAR VALUE FOR HEAD	MAXIMUM SAR VALUE FOR BODY WORN
WCDMA	0.138	0.686
Bluetooth	0.004	0.004
Wi-Fi 5G	0.364	0.038
Sum	0.506	0.728
Note	Left cheek: WCDMA5+BT+ Wi-Fi 5G	Back: WCDMA2+BT+ Wi-Fi 5G

According to the above tables, the sum of SAR values for WCDMA and Bluetooth < 1.6W/kg. So simultaneous transmission SAR are not required for Bluetooth transmitter.

The sum of SAR values for LTE& Bluetooth & Wi-Fi5G

	MAXIMUM SAR VALUE FOR HEAD	MAXIMUM SAR VALUE FOR BODY
LTE	0.276	0.444
Bluetooth	0.003	0.003
Wi-Fi 5G	0.283	0.049
Sum	0.572	0.496
Note	Right tilt: LTE2+BT+ Wi-Fi 5G	Front: LTE2+BT+ Wi-Fi 5G

According to the above tables, the sum of SAR values for LTE and Bluetooth < 1.6W/kg. So simultaneous transmission SAR are not required for Bluetooth transmitter.

7 MEASUREMENT UNCERTAINTY

(0.3 - 3 GHz range)								
Error Description	Uncert. value	Prob. Dist.	Div.	(c_i) 1g	(c_i) 10g	Std. Unc. (1g)	Std. Unc. (10g)	(v_i) v_{eff}
Measurement System								
Probe Calibration	±6.0 %	N	1	1	1	±6.0 %	±6.0 %	∞
Axial Isotropy	±4.7 %	R	√3	0.7	0.7	±1.9 %	±1.9 %	∞
Hemispherical Isotropy	±9.6 %	R	√3	0.7	0.7	±3.9 %	±3.9 %	∞
Boundary Effects	±1.0 %	R	√3	1	1	±0.6 %	±0.6 %	∞
Linearity	±4.7 %	R	√3	1	1	±2.7 %	±2.7 %	∞
System Detection Limits	±1.0 %	R	√3	1	1	±0.6 %	±0.6 %	∞
Modulation Response ^m	±2.4 %	R	√3	1	1	±1.4 %	±1.4 %	∞
Readout Electronics	±0.3 %	N	1	1	1	±0.3 %	±0.3 %	∞
Response Time	±0.8 %	R	√3	1	1	±0.5 %	±0.5 %	∞
Integration Time	±2.6 %	R	√3	1	1	±1.5 %	±1.5 %	∞
RF Ambient Noise	±3.0 %	R	√3	1	1	±1.7 %	±1.7 %	∞
RF Ambient Reflections	±3.0 %	R	√3	1	1	±1.7 %	±1.7 %	∞
Probe Positioner	±0.4 %	R	√3	1	1	±0.2 %	±0.2 %	∞
Probe Positioning	±2.9 %	R	√3	1	1	±1.7 %	±1.7 %	∞
Max. SAR Eval.	±2.0 %	R	√3	1	1	±1.2 %	±1.2 %	∞
Test Sample Related								
Device Positioning	±2.9 %	N	1	1	1	±2.9 %	±2.9 %	145
Device Holder	±3.6 %	N	1	1	1	±3.6 %	±3.6 %	5
Power Drift	±5.0 %	R	√3	1	1	±2.9 %	±2.9 %	∞
Power Scaling ^p	±0 %	R	√3	1	1	±0.0 %	±0.0 %	∞
Phantom and Setup								
Phantom Uncertainty	±6.1 %	R	√3	1	1	±3.5 %	±3.5 %	∞
SAR correction	±1.9 %	R	√3	1	0.84	±1.1 %	±0.9 %	∞
Liquid Conductivity (mea.) ^{DAK}	±2.5 %	R	√3	0.78	0.71	±1.1 %	±1.0 %	∞
Liquid Permittivity (mea.) ^{DAK}	±2.5 %	R	√3	0.26	0.26	±0.3 %	±0.4 %	∞
Temp. unc. - Conductivity ^{BB}	±3.4 %	R	√3	0.78	0.71	±1.5 %	±1.4 %	∞
Temp. unc. - Permittivity ^{BB}	±0.4 %	R	√3	0.23	0.26	±0.1 %	±0.1 %	∞
Combined Std. Uncertainty						±11.2 %	±11.1 %	361
Expanded STD Uncertainty						±22.3 %	±22.2 %	

(3 - 6 GHz range)								
Error Description	Uncert. value	Prob. Dist.	Div.	(c_i) 1g	(c_i) 10g	Std. Unc. (1g)	Std. Unc. (10g)	(v_i) v_{eff}
Measurement System								
Probe Calibration	±6.55 %	N	1	1	1	±6.55 %	±6.55 %	∞
Axial Isotropy	±4.7 %	R	$\sqrt{3}$	0.7	0.7	±1.9 %	±1.9 %	∞
Hemispherical Isotropy	±9.6 %	R	$\sqrt{3}$	0.7	0.7	±3.9 %	±3.9 %	∞
Boundary Effects	±2.0 %	R	$\sqrt{3}$	1	1	±1.2 %	±1.2 %	∞
Linearity	±4.7 %	R	$\sqrt{3}$	1	1	±2.7 %	±2.7 %	∞
System Detection Limits	±1.0 %	R	$\sqrt{3}$	1	1	±0.6 %	±0.6 %	∞
Modulation Response ^m	±2.4 %	R	$\sqrt{3}$	1	1	±1.4 %	±1.4 %	∞
Readout Electronics	±0.3 %	N	1	1	1	±0.3 %	±0.3 %	∞
Response Time	±0.8 %	R	$\sqrt{3}$	1	1	±0.5 %	±0.5 %	∞
Integration Time	±2.6 %	R	$\sqrt{3}$	1	1	±1.5 %	±1.5 %	∞
RF Ambient Noise	±3.0 %	R	$\sqrt{3}$	1	1	±1.7 %	±1.7 %	∞
RF Ambient Reflections	±3.0 %	R	$\sqrt{3}$	1	1	±1.7 %	±1.7 %	∞
Probe Positioner	±0.8 %	R	$\sqrt{3}$	1	1	±0.5 %	±0.5 %	∞
Probe Positioning	±6.7 %	R	$\sqrt{3}$	1	1	±3.9 %	±3.9 %	∞
Max. SAR Eval.	±4.0 %	R	$\sqrt{3}$	1	1	±2.3 %	±2.3 %	∞
Test Sample Related								
Device Positioning	±2.9 %	N	1	1	1	±2.9 %	±2.9 %	145
Device Holder	±3.6 %	N	1	1	1	±3.6 %	±3.6 %	5
Power Drift	±5.0 %	R	$\sqrt{3}$	1	1	±2.9 %	±2.9 %	∞
Power Scaling ^p	±0 %	R	$\sqrt{3}$	1	1	±0.0 %	±0.0 %	∞
Phantom and Setup								
Phantom Uncertainty	±6.6 %	R	$\sqrt{3}$	1	1	±3.8 %	±3.8 %	∞
SAR correction	±1.9 %	R	$\sqrt{3}$	1	0.84	±1.1 %	±0.9 %	∞
Liquid Conductivity (mea.) ^{DAK}	±2.5 %	R	$\sqrt{3}$	0.78	0.71	±1.1 %	±1.0 %	∞
Liquid Permittivity (mea.) ^{DAK}	±2.5 %	R	$\sqrt{3}$	0.26	0.26	±0.3 %	±0.4 %	∞
Temp. unc. - Conductivity ^{BB}	±3.4 %	R	$\sqrt{3}$	0.78	0.71	±1.5 %	±1.4 %	∞
Temp. unc. - Permittivity ^{BB}	±0.4 %	R	$\sqrt{3}$	0.23	0.26	±0.1 %	±0.1 %	∞
Combined Std. Uncertainty						±12.3 %	±12.2 %	748
Expanded STD Uncertainty						±24.6 %	±24.5 %	

8 TEST EQUIPMENTS

The measurements were performed using an automated near-field scanning system, DASY5, manufactured by Schmid & Partner Engineering AG (SPEAG) in Switzerland. The SAR extrapolation algorithm used in all measurements was the ‘advanced extrapolation’ algorithm.

The following table lists calibration dates of SPEAG components:

Test Equipment	Model	Serial Number	Calibration date	Calibration Due data
DAE	DAE4	720	2018.10.15	2019.10.14
Dosimetric E-field Probe	EX4DV3	3708	2018.10.22	2019.10.21
Dipole Validation Kit	D750V3	1101	2017.09.13	2020.09.12
Dipole Validation Kit	D835V2	4d023	2017.09.13	2020.09.12
Dipole Validation Kit	D1800V2	2d084	2017.09.15	2020.09.14
Dipole Validation Kit	D2000V2	1009	2018.02.01	2021.01.31
Dipole Validation Kit	D2450V2	738	2017.09.18	2020.09.17
Dipole Validation Kit	D5GHzV2	1079	2017.09.25	2020.09.24

Additional test equipment used in testing:

Test Equipment	Model	Serial Number	Calibration date	Calibration Due data
Signal Generator	E4428C	MY45280865	2018.08.20	2019.08.19
Signal Generator	SML 03	103514	2018.08.20	2019.08.19
Power meter	E4417A	MY45101182	2018.08.20	2019.08.19
Power Sensor	E4412A	MY41502214	2018.08.20	2019.08.19
Power Sensor	E4412A	MY41502130	2018.08.20	2019.08.19
Power meter	E4417A	MY45101004	2018.08.20	2019.08.19
Power Sensor	E9300B	MY41496001	2018.08.20	2019.08.19
Power Sensor	E9300B	MY41496003	2018.08.20	2019.08.19
Communication Tester	E5515C	MY48367401	2018.08.20	2019.08.19
Communication Tester	CMU200	114666	2018.08.20	2019.08.19
Communication Tester	MT8820C	6201300660	2018.08.20	2019.08.19
Communication Tester	MT8821C	6201547819	2018.08.20	2019.08.19
Vector Network Analyzer	E5072A	MY51100334	2018.03.01	2019.02.28
Vector Network Analyzer	VNA R140	0011213	2018.10.17	2019.10.16
Dielectric Parameter Probe	DAKS-3.5	1042	2018.10.17	2019.10.16

Detailed information of Isotropic E-field Probe Type ES3DV3

Construction	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	Calibration certificate in Appendix C
Frequency	10 MHz to 4 GHz; Linearity: ± 0.2 dB (30 MHz to 4 GHz)
Optical Surface Detection	± 0.2 mm repeatability in air and clear liquids over diffuse reflecting surfaces
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 3.9 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.0 mm
Dynamic Range	5 μ W/g to > 100 W/kg; Linearity: ± 0.2 dB
Application	General dosimetry up to 4 GHz Dosimetry in strong gradient fields Compliance tests of mobile phones

Detailed information of Isotropic E-field Probe Type EX3DV4

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	Calibration certificate in Appendix C
Frequency	10 MHz to > 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Optical Surface Detection	± 0.3 mm repeatability in air and clear liquids over diffuse reflecting surfaces
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
Dynamic Range	10 μ W/g to > 100 W/kg Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields); the only probe that enables compliance testing for frequencies up to 6 GHz with precision of better 30%.

According to KDB 865664 D01 section 3.2.2, instead of the typical annual calibration recommended by measurement standards, longer calibration intervals of up to three years may be considered when it is demonstrated that the **SAR target, impedance and return loss** of a dipole have remain stable according to the following requirements.

- 1) The test laboratory must ensure that the required supporting information and documentation are included in the SAR report to qualify for the three-year extended calibration interval; otherwise, the IEEE Std 1528-2013 recommended annual calibration applies.
- 2) Immediate re-calibration is required for the following conditions.
 - a) After a dipole is damaged and properly repaired to meet required specifications.
 - b) When the measured SAR deviates from the calibrated SAR value by more than 10% due to changes in physical, mechanical, electrical or other relevant dipole conditions; i.e., the error is not introduced by incorrect measurement procedures or other issues relating to the SAR measurement system.
 - c) When the most recent return-loss result, measured at least annually, deviates by more than 20% from the previous measurement (i.e. value in dB $\times 0.2$) or not meeting the required 20 dB minimum return-loss requirement.
 - d) When the most recent measurement of the real or imaginary parts of the impedance, measured at least annually, deviates by more than 5 Ω from the previous measurement.

Dipole 750

SAR target

Refers to system check, measured SAR (1g and 10g) deviates from the Target SAR value of calibration report within 10%.

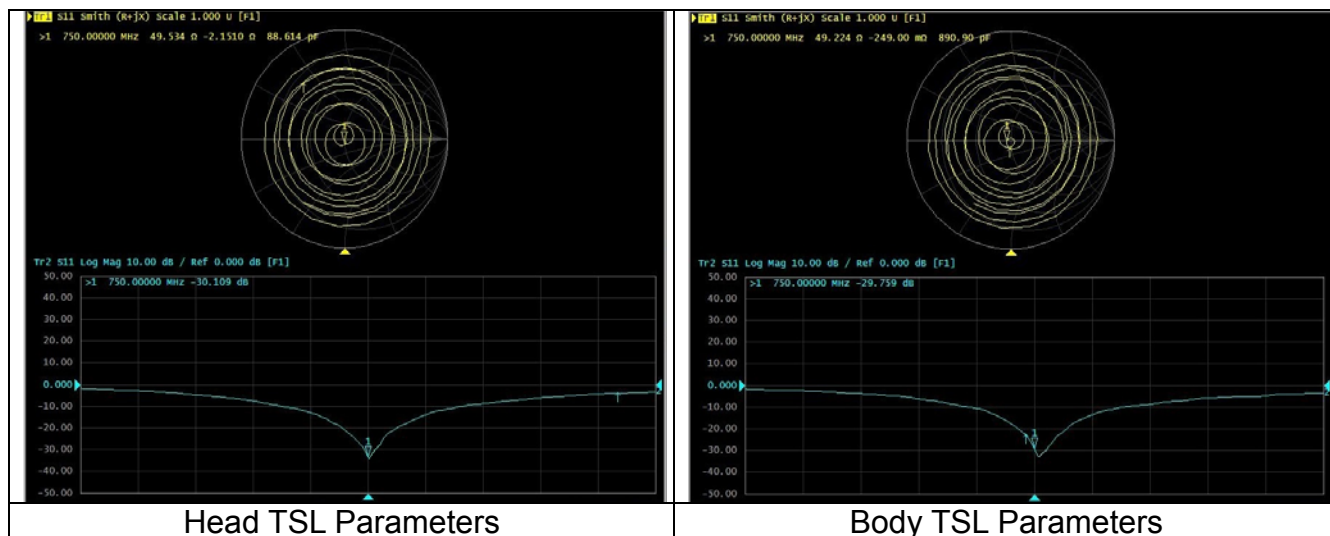
Impedance and Return loss measured by Network analyzer

The most recent measurement of the real or imaginary parts of the impedance (measured on 2018.8.20), deviates within 5 Ω from the previous measurement. (Data from the last calibration report)

The most recent return-loss result (measured on 2018.8.20) deviates within 20% from the previous measurement. (Data from the last calibration report)

Head TSL Parameters			
Parameters	Target (Ref. Value)	Measured data	Deviation
Impedance	53.9 Ω +0.24j Ω	49.5 Ω -2.15j Ω	<5 Ω
Return loss	-28.4dB	-29.8dB	<20%

Body TSL Parameters			
Parameters	Target (Ref. Value)	Measured data	Deviation
Impedance	52.0 Ω -2.22j Ω	49.2 Ω -0.25j Ω	<5 Ω
Return loss	-30.6dB	-30.1dB	<20%



Dipole 835

SAR target

Refers to system check, measured SAR (1g and 10g) deviates from the Target SAR value of calibration report within 10%.

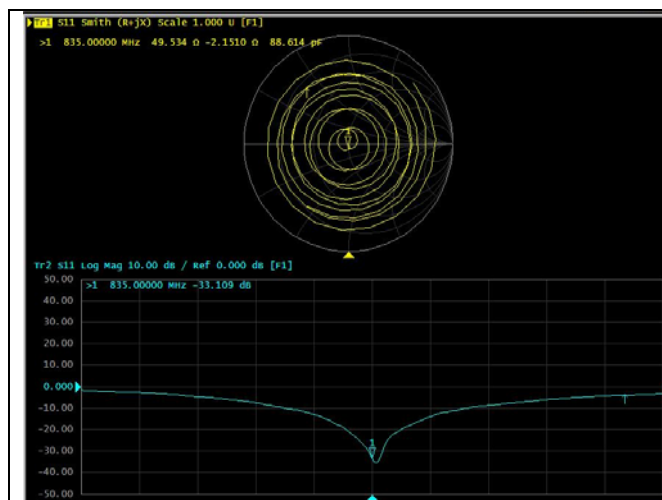
Impedance and Return loss measured by Network analyzer

The most recent measurement of the real or imaginary parts of the impedance (measured on 2018.8.20), deviates within 5 Ω from the previous measurement. (Data from the last calibration report)

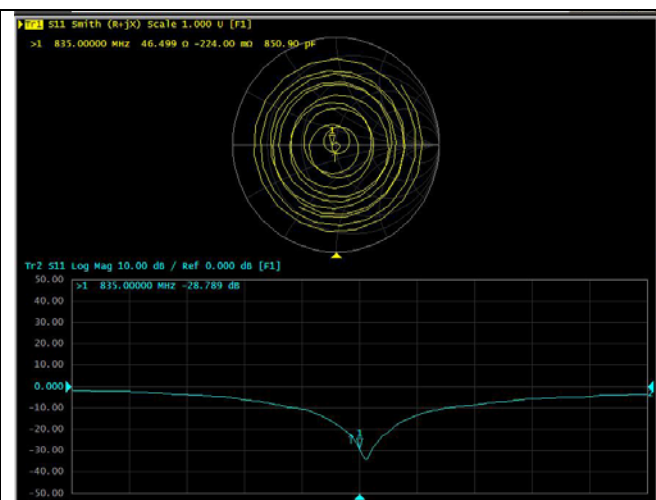
The most recent return-loss result (measured on 2018.8.20) deviates within 20% from the previous measurement. (Data from the last calibration report)

Head TSL Parameters			
Parameters	Target (Ref. Value)	Measured data	Deviation
Impedance	51.0 Ω -2.79j Ω	49.5 Ω -2.15j Ω	<5 Ω
Return loss	-30.7 dB	-33.1 dB	<20%

Body TSL Parameters			
Parameters	Target (Ref. Value)	Measured data	Deviation
Impedance	46.6 Ω -3.61j Ω	49.5 Ω -0.22j Ω	<5 Ω
Return loss	-25.8dB	-28.8dB	<20%



Head TSL Parameters



Body TSL Parameters

Dipole1800

SAR target

Refers to system check, measured SAR (1g and 10g) deviates from the Target SAR value of calibration report within 10%.

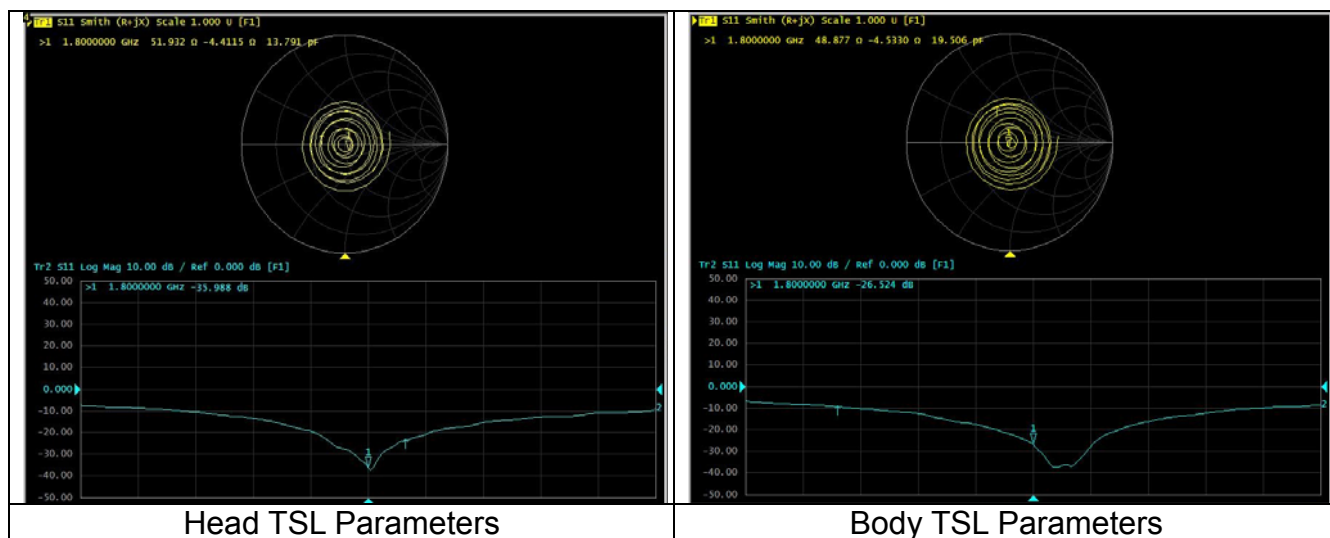
Impedance and Return loss measured by Network analyzer

The most recent measurement of the real or imaginary parts of the impedance (measured on 2018.8.20), deviates within 5 Ω from the previous measurement. (Data from the last calibration report)

The most recent return-loss result (measured on 2018.8.20) deviates within 20% from the previous measurement. (Data from the last calibration report)

Head TSL Parameters			
Parameters	Target (Ref. Value)	Measured data	Deviation
Impedance	49.3 Ω -1.55j Ω	51.9 Ω -4.41j Ω	<5 Ω
Return loss	-35.4 dB	-36.0dB	<20%

Body TSL Parameters			
Parameters	Target (Ref. Value)	Measured data	Deviation
Impedance	46.0 Ω -1.32j Ω	48.9 Ω -4.53j Ω	<5 Ω
Return loss	-27.1dB	-26.5dB	<20%



Dipole2000

SAR target

Refers to system check, measured SAR (1g and 10g) deviates from the Target SAR value of calibration report within 10%.

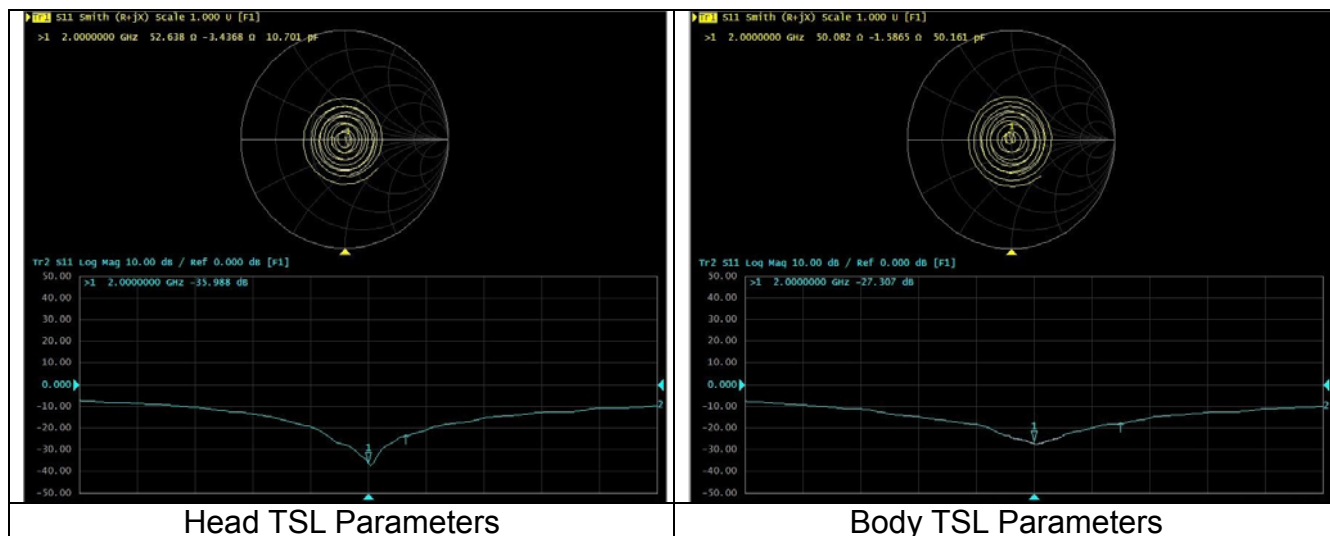
Impedance and Return loss measured by Network analyzer

The most recent measurement of the real or imaginary parts of the impedance (measured on 2018.8.20), deviates within 5 Ω from the previous measurement. (Data from the last calibration report)

The most recent return-loss result (measured on 2018.8.20) deviates within 20% from the previous measurement. (Data from the last calibration report)

Head TSL Parameters			
Parameters	Target (Ref. Value)	Measured data	Deviation
Impedance	49.8 Ω -2.08j Ω	52.6 Ω -3.44j Ω	<5 Ω
Return loss	-33.6dB	-36.0dB	<20%

Body TSL Parameters			
Parameters	Target (Ref. Value)	Measured data	Deviation
Impedance	46.3 Ω -1.63j Ω	50.1 Ω -1.59j Ω	<5 Ω
Return loss	-27.6dB	-27.3dB	<20%



Dipole2450

SAR target

Refers to system check, measured SAR (1g and 10g) deviates from the Target SAR value of calibration report within 10%.

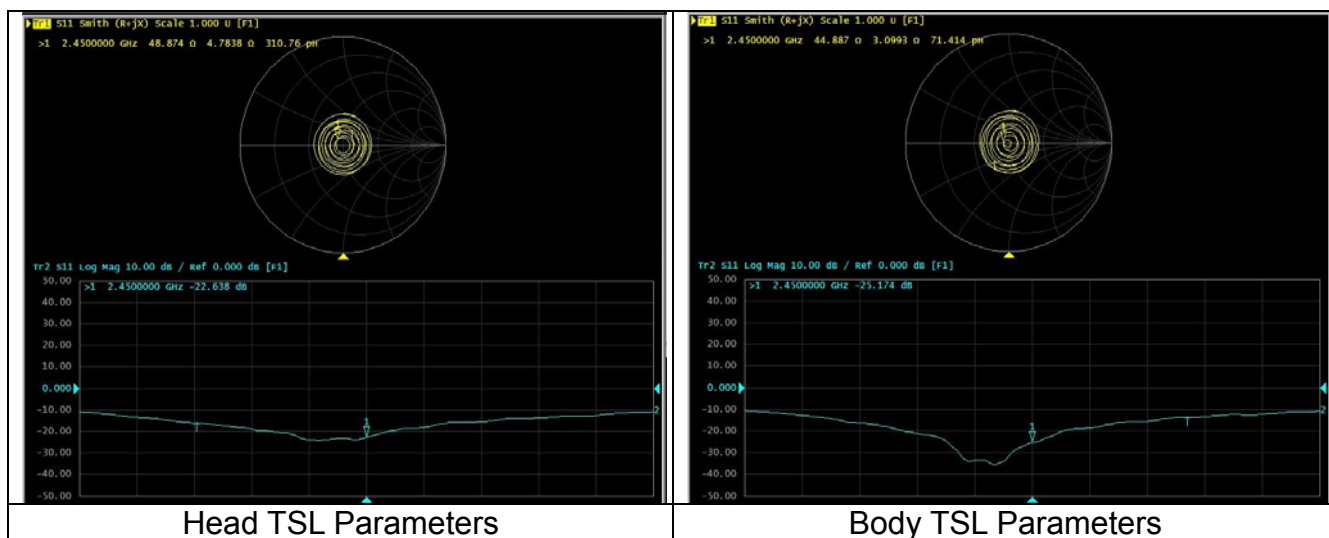
Impedance and Return loss measured by Network analyzer

The most recent measurement of the real or imaginary parts of the impedance (measured on 2018.8.20), deviates within 5 Ω from the previous measurement. (Data from the last calibration report)

The most recent return-loss result (measured on 2018.8.20) deviates within 20% from the previous measurement. (Data from the last calibration report)

Head TSL Parameters			
Parameters	Target (Ref. Value)	Measured data	Deviation
Impedance	51.3 Ω +5.92j Ω	48.9 Ω +4.78j Ω	<5 Ω
Return loss	-24.5 dB	-22.6dB	<20%

Body TSL Parameters			
Parameters	Target (Ref. Value)	Measured data	Deviation
Impedance	47.6 Ω +6.39j Ω	44.9 Ω +3.10j Ω	<5 Ω
Return loss	-23.1dB	-25.2dB	<20%



Dipole5GHz

SAR target

Refers to system check, measured SAR (1g and 10g) deviates from the Target SAR value of calibration report within 10%.

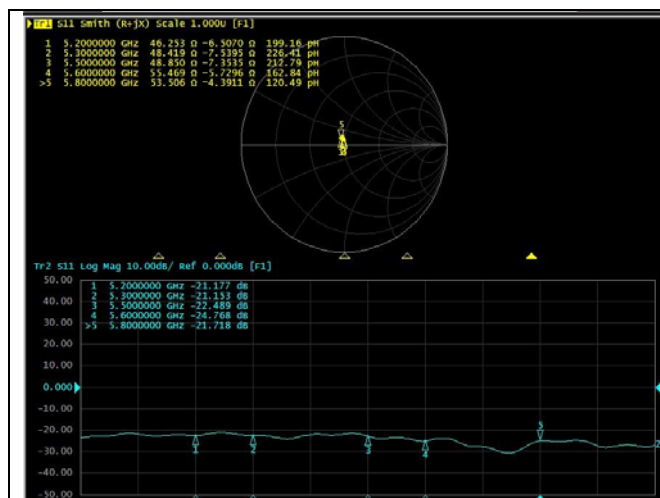
Impedance and Return loss measured by Network analyzer

The most recent measurement of the real or imaginary parts of the impedance (measured on 2018.8.20), deviates within 5 Ω from the previous measurement. (Data from the last calibration report)

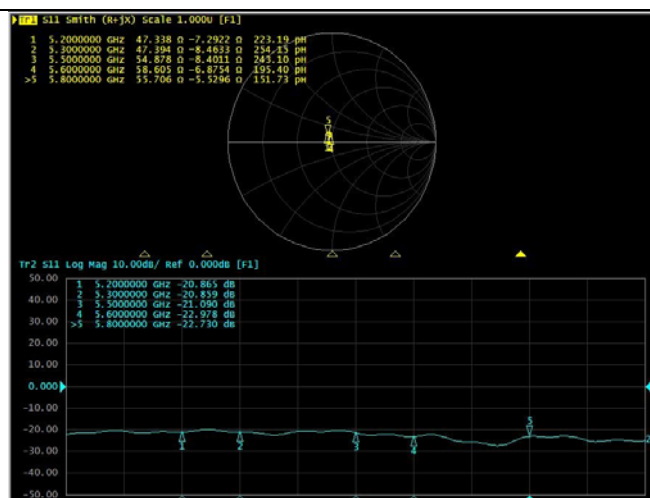
The most recent return-loss result (measured on 2018.8.20) deviates within 20% from the previous measurement. (Data from the last calibration report)

Head TSL Parameters				
Parameters	Target (Ref. Value)	Measured data	Deviation	Frequency (MHz)
Impedance	47.6 Ω -8.77j Ω	46.3 Ω -6.51j Ω	<5 Ω	5200
Return loss	-20.7dB	-20.9dB	<20%	5200
Impedance	45.5 Ω -6.82j Ω	48.4 Ω -7.54j Ω	<5 Ω	5300
Return loss	-21.4dB	-20.9dB	<20%	5300
Impedance	50.7 Ω -7.14j Ω	48.9 Ω -7.35j Ω	<5 Ω	5500
Return loss	-23.0dB	-20.9dB	<20%	5500
Impedance	55.2 Ω -4.00j Ω	55.5 Ω -5.73j Ω	<5 Ω	5600
Return loss	-24.1dB	-20.9dB	<20%	5600
Impedance	52.2 Ω -8.20j Ω	53.5 Ω -4.39j Ω	<5 Ω	5800
Return loss	-21.6dB	-20.9dB	<20%	5800

Body TSL Parameters				
Parameters	Target (Ref. Value)	Measured data	Deviation	Frequency (MHz)
Impedance	50.8 Ω -10.10j Ω	47.3 Ω -7.29j Ω	<5 Ω	5200
Return loss	-20.0dB	-20.9dB	<20%	5200
Impedance	48.5 Ω -8.56j Ω	47.4 Ω -8.46j Ω	<5 Ω	5300
Return loss	-21.1dB	-20.9dB	<20%	5300
Impedance	54.9 Ω -6.85j Ω	54.9 Ω -8.40j Ω	<5 Ω	5500
Return loss	-21.9dB	-21.1dB	<20%	5500
Impedance	56.6 Ω -2.29j Ω	58.6 Ω -6.88j Ω	<5 Ω	5600
Return loss	-23.7dB	-23.0dB	<20%	5600
Impedance	56.7 Ω -8.10j Ω	55.7 Ω -5.53j Ω	<5 Ω	5800
Return loss	-20.2dB	-22.7dB	<20%	5800



Head TSL Parameters



Body TSL Parameters

ANNEX A – TEST PLOTS

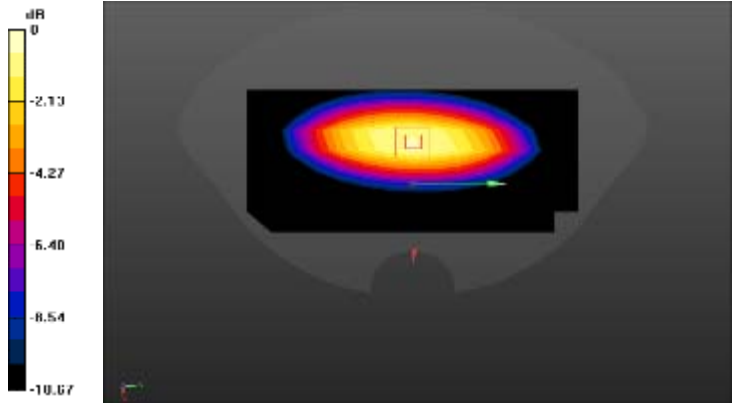
Please refer to the attachment.

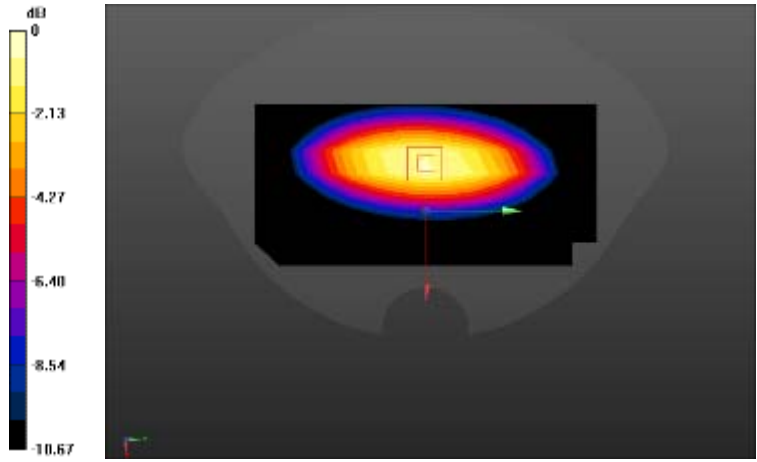
ANNEX B – RELEVANT PAGES FROM CALIBRATION REPORTS

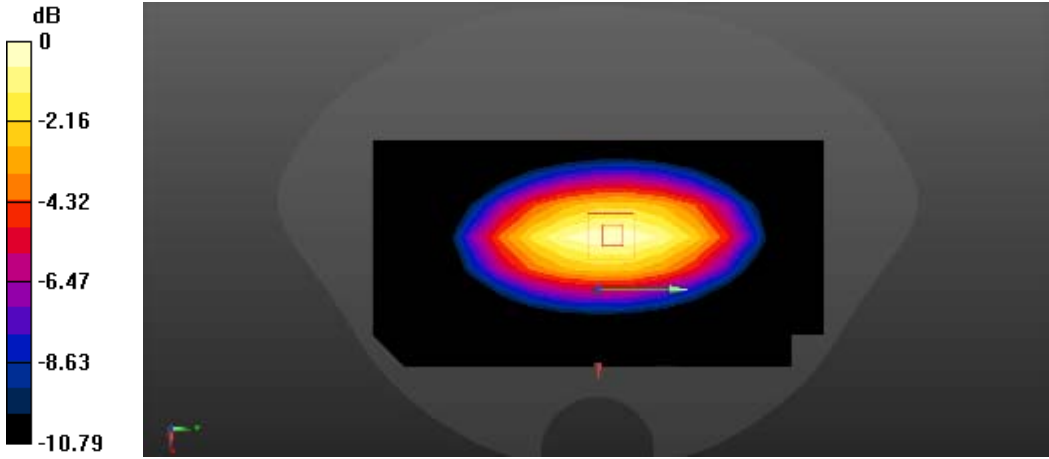
Please refer to the attachment.

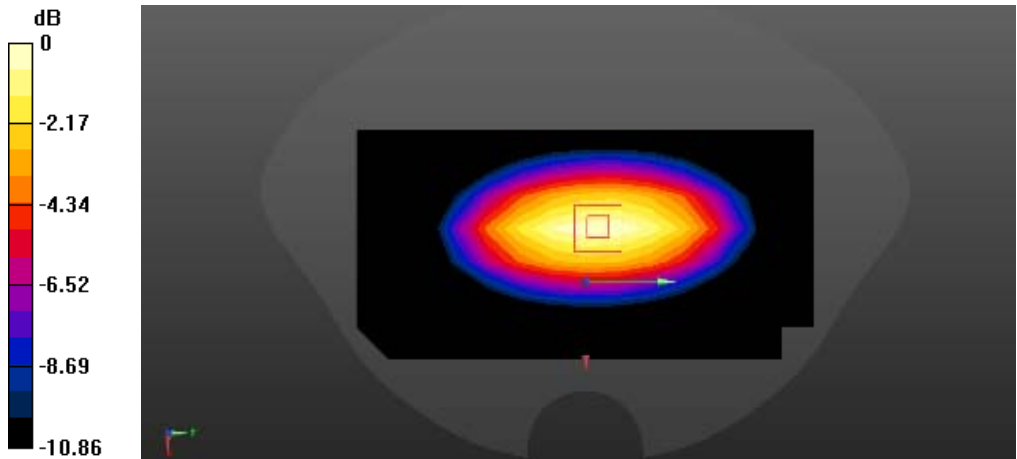
ANNEX A – TEST PLOTS

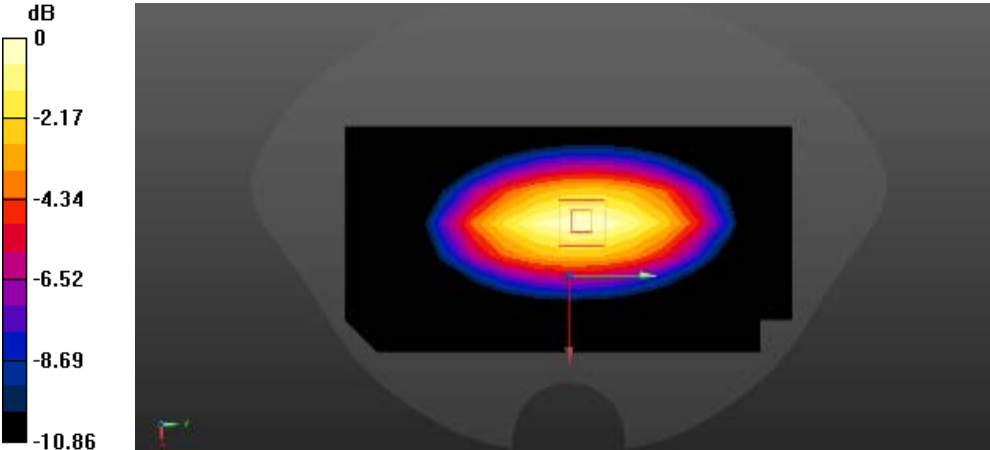
Head liquid

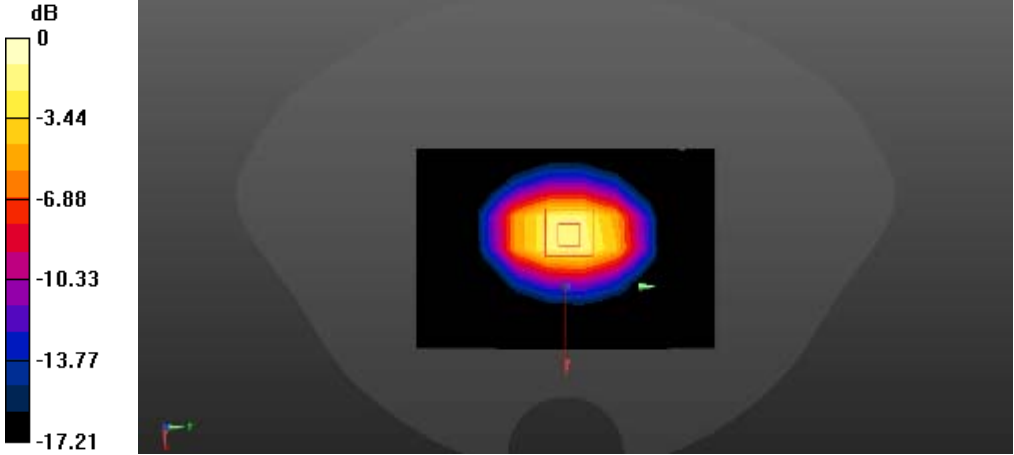
System check	750MHz
Communication System: UID 0, CW (0); Communication System Band: D750 (750.0 MHz); Frequency: 750 MHz; Communication System PAR: 0 dB Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.917 \text{ S/m}$; $\epsilon_r = 42.068$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.89, 7.89, 7.89); Calibrated: 10/22/2018, ConvF(7.89, 7.89, 7.89); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) System Performance Check at Frequencies 750MHz/d=15mm, Pin=250 mW, dist=3.0mm (ES-Probe)/Area Scan (8x15x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 2.16 W/kg System Performance Check at Frequencies 750MHz/d=15mm, Pin=250 mW, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 41.00 V/m; Power Drift = 0.13 dB Peak SAR (extrapolated) = 3.26 W/kg SAR(1 g) = 2.11 W/kg; SAR(10 g) = 1.37 W/kg Maximum value of SAR (measured) = 2.49 W/kg  0 dB = 2.49 W/kg = 3.96 dBW/kg	

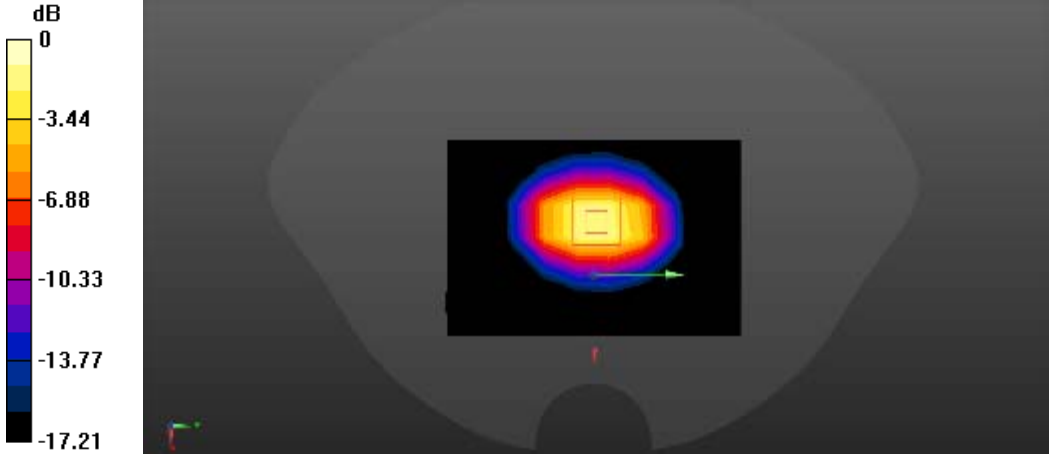
System check	750MHz
Communication System: UID 0, CW (0); Communication System Band: D750 (750.0 MHz); Frequency: 750 MHz; Communication System PAR: 0 dB Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.922 \text{ S/m}$; $\epsilon_r = 42.153$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.89, 7.89, 7.89); Calibrated: 10/22/2018, ConvF(7.89, 7.89, 7.89); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) System Performance Check at Frequencies 750MHz/d=15mm, Pin=250 mW, dist=3.0mm (ES-Probe)/Area Scan (8x15x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 2.27 W/kg System Performance Check at Frequencies 750MHz/d=15mm, Pin=250 mW, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 44.32 V/m; Power Drift = -0.05 dB Peak SAR (extrapolated) = 4.11 W/kg SAR(1 g) = 2.18 W/kg; SAR(10 g) = 1.43 W/kg Maximum value of SAR (measured) = 2.55 W/kg  0 dB = 2.55 W/kg = 4.07 dBW/kg	

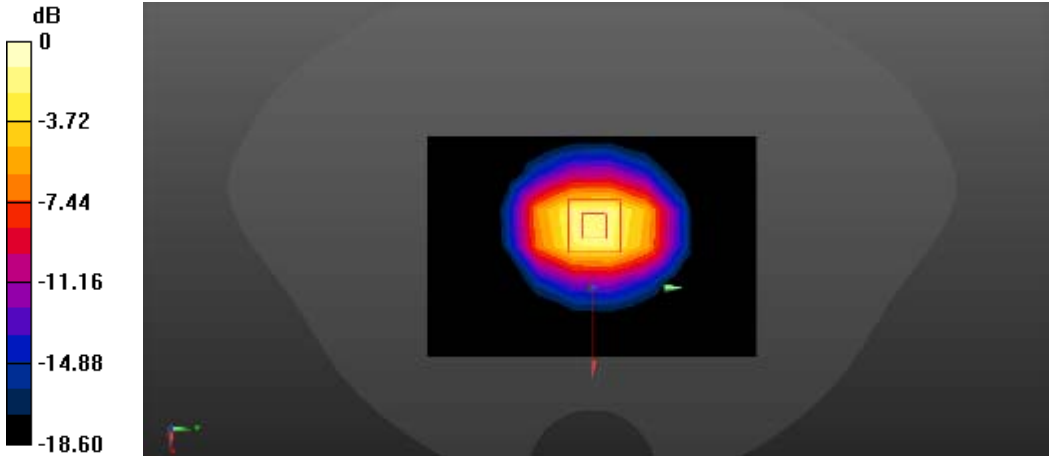
System check	835MHz
Communication System: UID 0, CW (0); Frequency: 835 MHz Medium parameters used (interpolated): $f = 835 \text{ MHz}$; $\sigma = 0.912 \text{ S/m}$; $\epsilon_r = 42.529$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.89, 7.89, 7.89); Calibrated: 10/22/2018, ConvF(7.89, 7.89, 7.89); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) Configuration 835/835/Area Scan (8x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 2.75 W/kg Configuration 835/835/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 51.68 V/m; Power Drift = -0.05 dB Peak SAR (extrapolated) = 3.58 W/kg SAR(1 g) = 2.36 W/kg; SAR(10 g) = 1.53 W/kg Maximum value of SAR (measured) = 2.78 W/kg  0 dB = 2.78 W/kg = 4.44 dBW/kg	

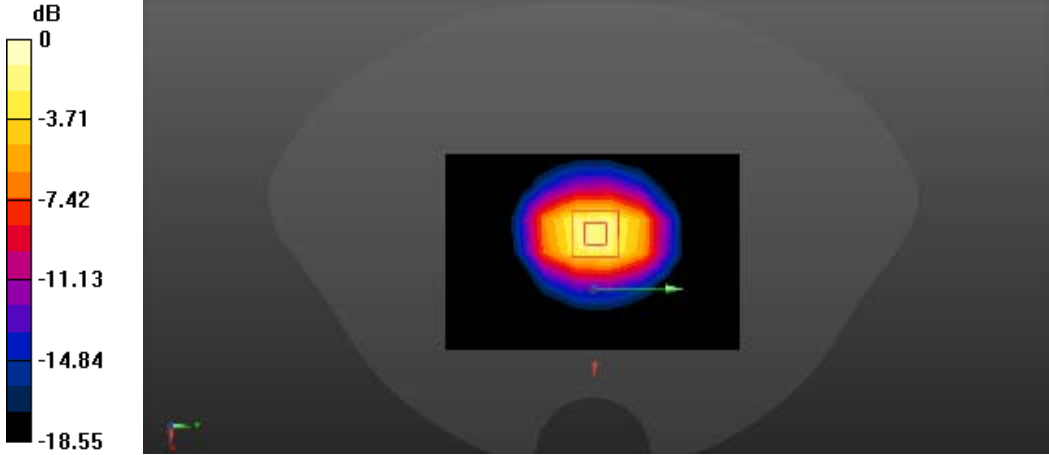
System check	835MHz
Communication System: UID 0, CW (0); Frequency: 835 MHz Medium parameters used (interpolated): $f = 835 \text{ MHz}$; $\sigma = 0.908 \text{ S/m}$; $\epsilon_r = 40.217$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.89, 7.89, 7.89); Calibrated: 10/22/2018, ConvF(7.89, 7.89, 7.89); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) Configuration 835/835/Area Scan (8x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 2.72 W/kg Configuration 835/835/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 50.67 V/m; Power Drift = 0.14 dB Peak SAR (extrapolated) = 3.58 W/kg SAR(1 g) = 2.35 W/kg; SAR(10 g) = 1.52 W/kg Maximum value of SAR (measured) = 2.74 W/kg  0 dB = 2.74 W/kg = 4.41 dBW/kg	

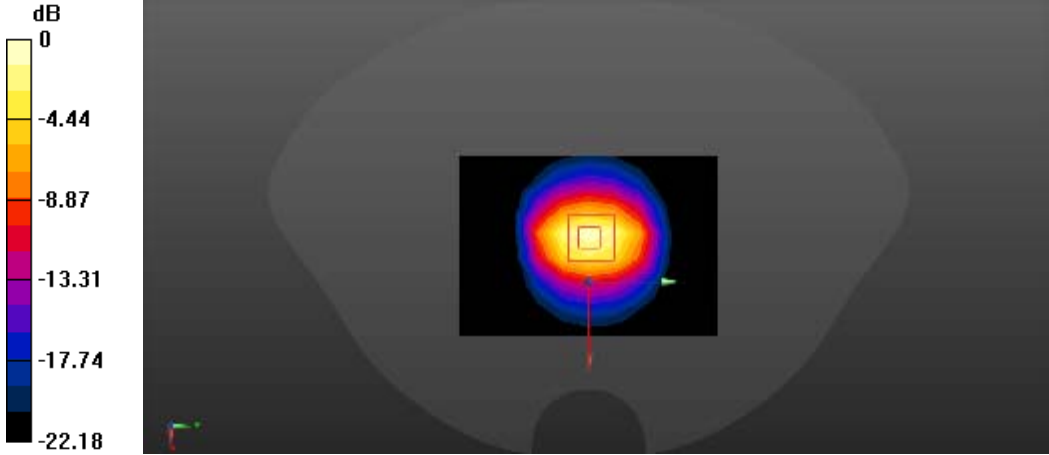
System check	835MHz
Communication System: UID 0, CW (0); Frequency: 835 MHz Medium parameters used (interpolated): $f = 835 \text{ MHz}$; $\sigma = 0.915 \text{ S/m}$; $\epsilon_r = 41.114$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.89, 7.89, 7.89); Calibrated: 10/22/2018, ConvF(7.89, 7.89, 7.89); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) Configuration 835/835/Area Scan (8x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 2.87 W/kg Configuration 835/835/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 52.13 V/m; Power Drift = 0.02 dB Peak SAR (extrapolated) = 3.66 W/kg SAR(1 g) = 2.29 W/kg; SAR(10 g) = 1.55 W/kg Maximum value of SAR (measured) = 2.67 W/kg  0 dB = 2.67 W/kg = 4.27 dBW/kg	

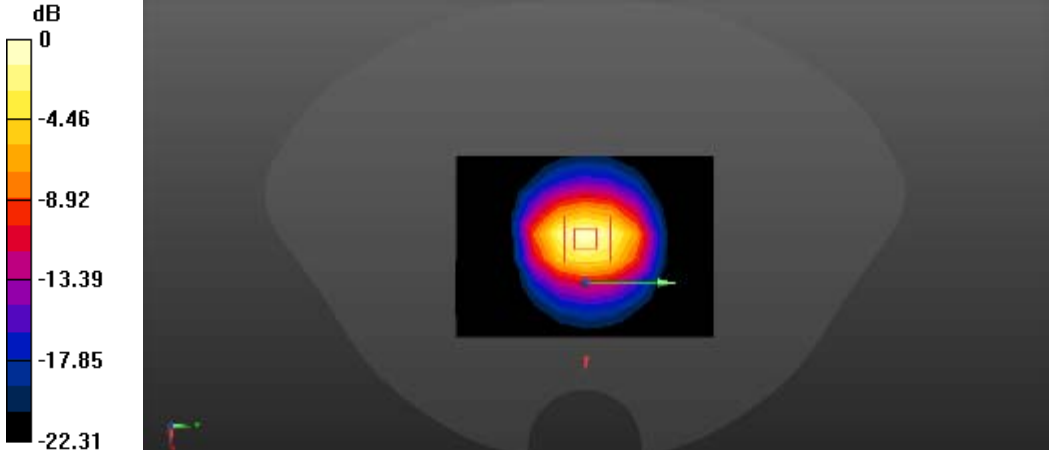
System check	1800MHz
Communication System: UID 0, CW (0); Frequency: 1800 MHz Medium parameters used: $f = 1800 \text{ MHz}$; $\sigma = 1.409 \text{ S/m}$; $\epsilon_r = 38.905$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.89, 7.89, 7.89); Calibrated: 10/22/2018, ConvF(7.89, 7.89, 7.89); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) Configuration 1800/1800/Area Scan (7x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 8.57 W/kg Configuration 1800/1800/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 80.04 V/m; Power Drift = 0.11 dB Peak SAR (extrapolated) = 17.7 W/kg SAR(1 g) = 9.57 W/kg; SAR(10 g) = 5.02 W/kg Maximum value of SAR (measured) = 12.2 W/kg  0 dB = $12.2 \text{ W/kg} = 10.86 \text{ dBW/kg}$	

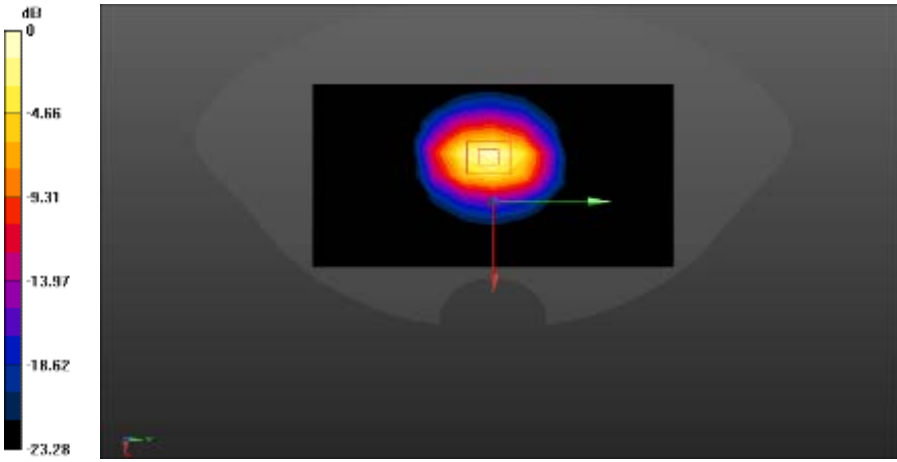
System check	1800MHz
Communication System: UID 0, CW (0); Frequency: 1800 MHz Medium parameters used: $f = 1800 \text{ MHz}$; $\sigma = 1.411 \text{ S/m}$; $\epsilon_r = 40.607$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.89, 7.89, 7.89); Calibrated: 10/22/2018, ConvF(7.89, 7.89, 7.89); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) Configuration 1800/1800/Area Scan (7x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 8.31 W/kg Configuration 1800/1800/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 76.60 V/m; Power Drift = 0.01 dB Peak SAR (extrapolated) = 17.5 W/kg SAR(1 g) = 9.46 W/kg; SAR(10 g) = 4.96 W/kg Maximum value of SAR (measured) = 12.1 W/kg  0 dB = 12.1 W/kg = 10.83 dBW/kg	

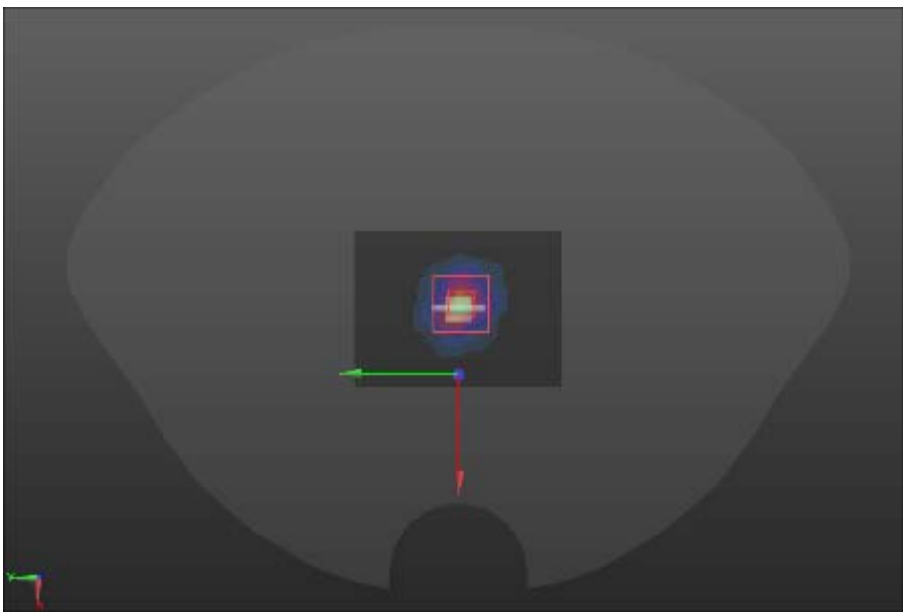
System check	2000MHz
Communication System: UID 0, CW (0); Frequency: 2000 MHz Medium parameters used: $f = 2000 \text{ MHz}$; $\sigma = 1.435 \text{ S/m}$; $\epsilon_r = 39.815$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.89, 7.89, 7.89); Calibrated: 10/22/2018, ConvF(7.89, 7.89, 7.89); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) Configuration 2000/2000/Area Scan (7x10x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ Maximum value of SAR (measured) = 8.40 W/kg Configuration 2000/2000/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 76.73 V/m; Power Drift = 0.02 dB Peak SAR (extrapolated) = 18.7 W/kg SAR(1 g) = 9.65 W/kg; SAR(10 g) = 4.86 W/kg Maximum value of SAR (measured) = 12.5 W/kg  0 dB = 12.5 W/kg = 10.97 dBW/kg	

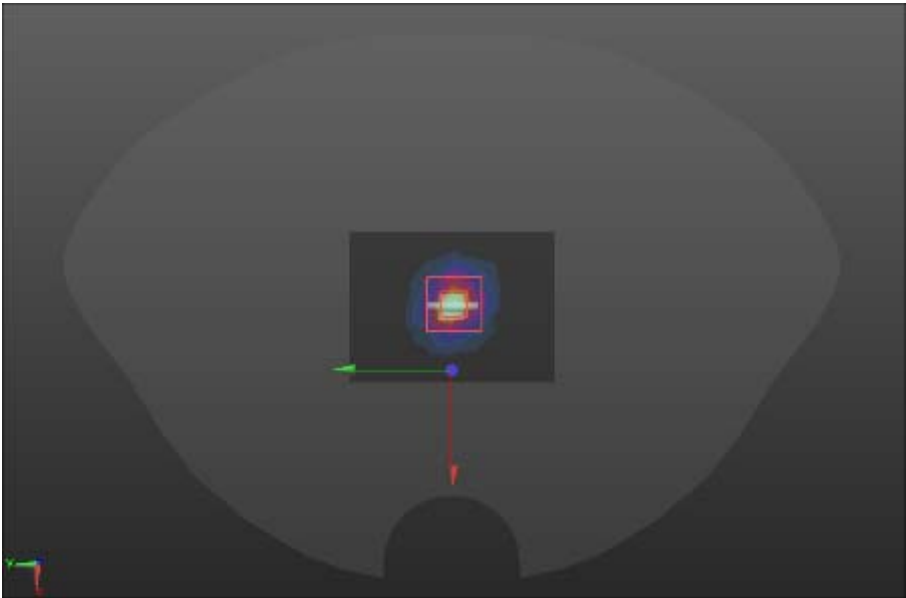
System check	2000MHz
Communication System: UID 0, CW (0); Frequency: 2000 MHz Medium parameters used: $f = 2000 \text{ MHz}$; $\sigma = 1.384 \text{ S/m}$; $\epsilon_r = 40.245$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.89, 7.89, 7.89); Calibrated: 10/22/2018, ConvF(7.89, 7.89, 7.89); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) Configuration 2000/2000/Area Scan (7x10x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ Maximum value of SAR (measured) = 8.96 W/kg Configuration 2000/2000/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 74.32 V/m; Power Drift = 0.14 dB Peak SAR (extrapolated) = 19.9 W/kg SAR(1 g) = 10.3 W/kg; SAR(10 g) = 5.21 W/kg Maximum value of SAR (measured) = 13.3 W/kg  0 dB = 13.3 W/kg = 11.24 dBW/kg	

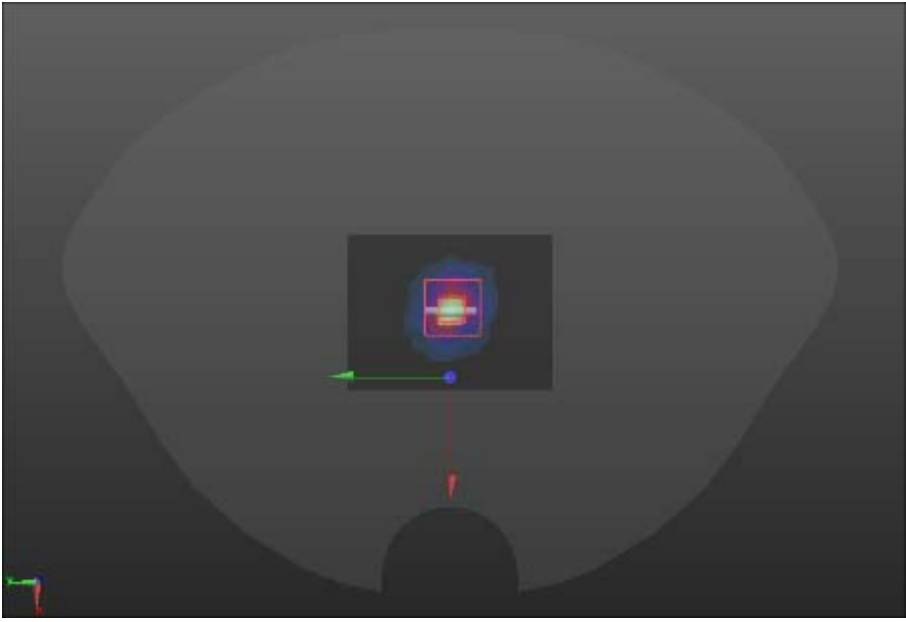
System check	2450MHz
Communication System: UID 0, CW (0); Frequency: 2450 MHz Medium parameters used: $f = 2450 \text{ MHz}$; $\sigma = 1.873 \text{ S/m}$; $\epsilon_r = 38.145$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.89, 7.89, 7.89); Calibrated: 10/22/2018, ConvF(7.89, 7.89, 7.89); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) System Performance Check at Frequencies 2450 MHz/2450/Area Scan (8x11x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$ Maximum value of SAR (measured) = 21.2 W/kg System Performance Check at Frequencies 2450 MHz/2450/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 109.3 V/m; Power Drift = 0.14 dB Peak SAR (extrapolated) = 28.2 W/kg SAR(1 g) = 13.6 W/kg; SAR(10 g) = 6.34 W/kg Maximum value of SAR (measured) = 23.0 W/kg  0 dB = 23.0 W/kg = 13.62 dBW/kg	

System check	2450MHz
Communication System: UID 0, CW (0); Frequency: 2450 MHz Medium parameters used: $f = 2450 \text{ MHz}$; $\sigma = 1.881 \text{ S/m}$; $\epsilon_r = 39.517$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.89, 7.89, 7.89); Calibrated: 10/22/2018, ConvF(7.89, 7.89, 7.89); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) System Performance Check at Frequencies 2450 MHz/2450/Area Scan (8x11x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$ Maximum value of SAR (measured) = 21.8 W/kg System Performance Check at Frequencies 2450 MHz/2450/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 108.8 V/m; Power Drift = 0.12 dB Peak SAR (extrapolated) = 28.8 W/kg SAR(1 g) = 13.7 W/kg; SAR(10 g) = 6.33 W/kg Maximum value of SAR (measured) = 23.3 W/kg  0 dB = 23.3 W/kg = 13.67 dBW/kg	

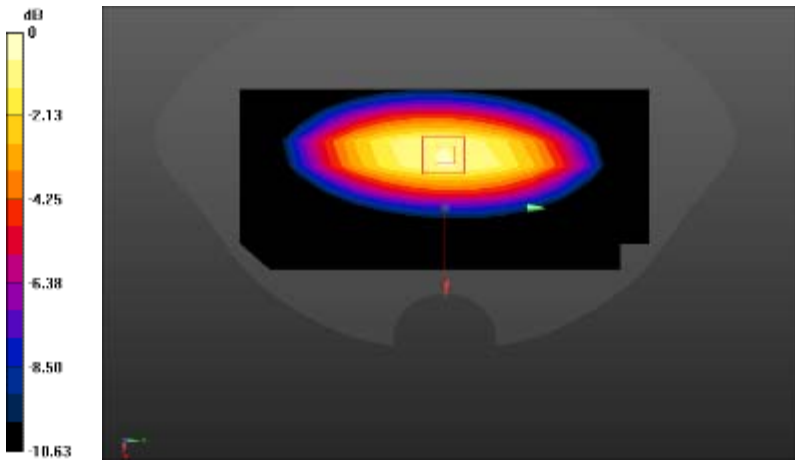
System check	2450MHz
Communication System: UID 0, CW (0); Communication System Band: D2450 (2450.0 MHz); Frequency: 2450 MHz; Communication System PAR: 0 dB Medium parameters used: $f = 2450 \text{ MHz}$; $\sigma = 1.833 \text{ S/m}$; $\epsilon_r = 39.583$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.89, 7.89, 7.89); Calibrated: 10/22/2018, ConvF(7.89, 7.89, 7.89); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) System Performance Check at Frequencies 2450MHz Head/d=10mm, Pin=250 mW, dist=4.0mm (EX-Probe)/Area Scan (9x13x1): Measurement grid: dx=10mm, dy=10mm Maximum value of SAR (measured) = 21.87 W/kg System Performance Check at Frequencies 2450MHz Head/d=10mm, Pin=250 mW, dist=4.0mm (EX-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 98.95 V/m; Power Drift = 0.14 dB Peak SAR (extrapolated) = 27.9 W/kg SAR(1 g) = 12.8 W/kg; SAR(10 g) = 5.96 W/kg Maximum value of SAR (measured) = 12.56 W/kg  0 dB = 12.56 W/kg = 10.99 dBW/kg	

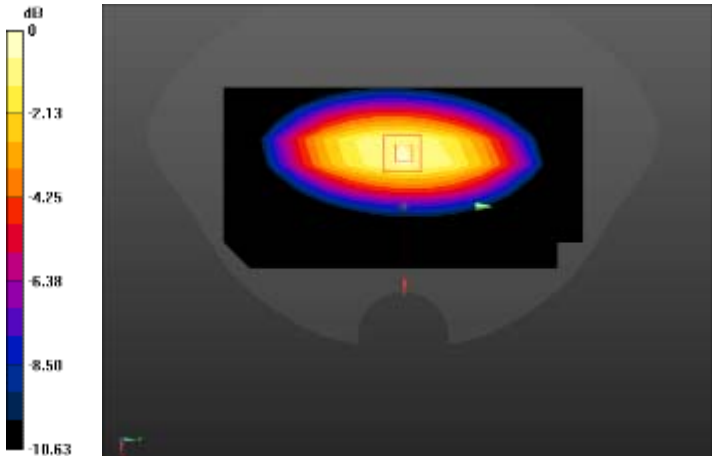
System check	5300MHz
Communication System: UID 0, CW (0); Frequency: 5300 MHz Medium parameters used: $f = 5300 \text{ MHz}$; $\sigma = 4.683 \text{ S/m}$; $\epsilon_r = 36.853$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.89, 7.89, 7.89); Calibrated: 10/22/2018, ConvF(7.89, 7.89, 7.89); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) Configuration/5300/Area Scan (7x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ Maximum value of SAR (measured) = 1.55 W/kg Configuration/5300/Zoom Scan (6x6x12)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=2\text{mm}$ Reference Value = 19.30 V/m; Power Drift = 0.18 dB Peak SAR (extrapolated) = 3.21 W/kg SAR(1 g) = 0.787 W/kg; SAR(10 g) = 0.234 W/kg Maximum value of SAR (measured) = 1.97 W/kg 	

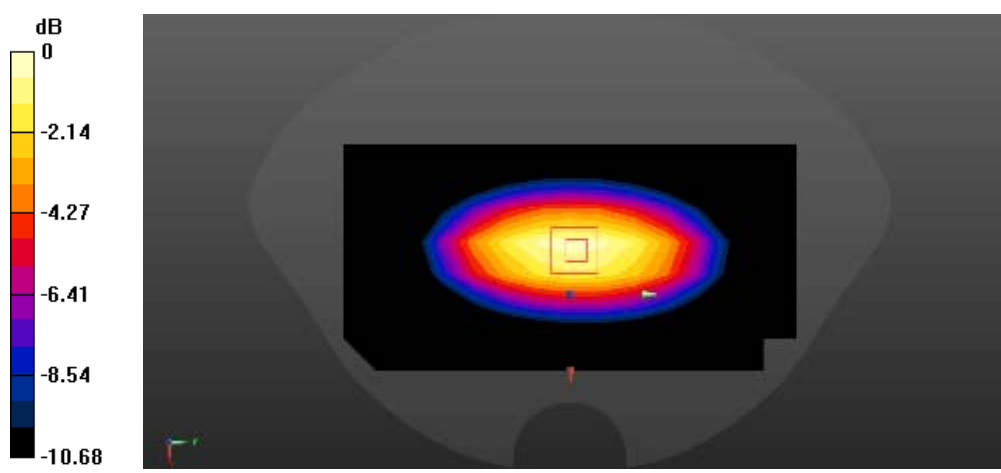
System check	5600MHz
Communication System: UID 0, CW (0); Frequency: 5600 MHz Medium parameters used: $f = 5600 \text{ MHz}$; $\sigma = 4.992 \text{ S/m}$; $\epsilon_r = 36.847$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.89, 7.89, 7.89); Calibrated: 10/22/2018, ConvF(7.89, 7.89, 7.89); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) Configuration/5600/Area Scan (7x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ Maximum value of SAR (measured) = 1.62 W/kg Configuration/5600/Zoom Scan (6x6x12)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=2\text{mm}$ Reference Value = 19.42 V/m; Power Drift = 0.04 dB Peak SAR (extrapolated) = 3.35 W/kg SAR(1 g) = 0.824 W/kg; SAR(10 g) = 0.245 W/kg Maximum value of SAR (measured) = 1.87 W/kg	
	

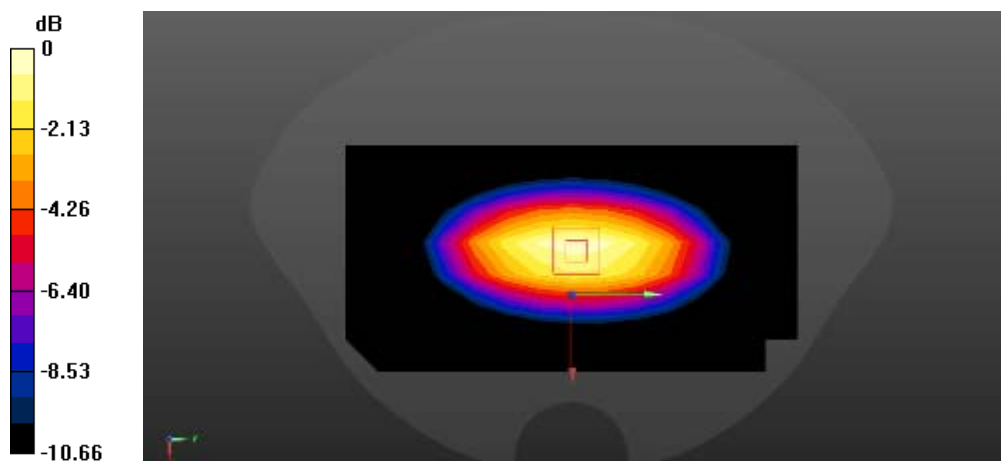
System check	5800MHz
Communication System: UID 0, CW (0); Frequency: 5800 MHz Medium parameters used: $f = 5800 \text{ MHz}$; $\sigma = 5.185 \text{ S/m}$; $\epsilon_r = 36.334$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.89, 7.89, 7.89); Calibrated: 10/22/2018, ConvF(7.89, 7.89, 7.89); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) Configuration/5800/Area Scan (7x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ Maximum value of SAR (measured) = 1.97 W/kg Configuration/5800/Zoom Scan (6x6x12)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=2\text{mm}$ Reference Value = 13.10 V/m; Power Drift = 0.02 dB Peak SAR (extrapolated) = 3.51 W/kg SAR(1 g) = 0.775 W/kg; SAR(10 g) = 0.226 W/kg Maximum value of SAR (measured) = 2.01 W/kg	
	

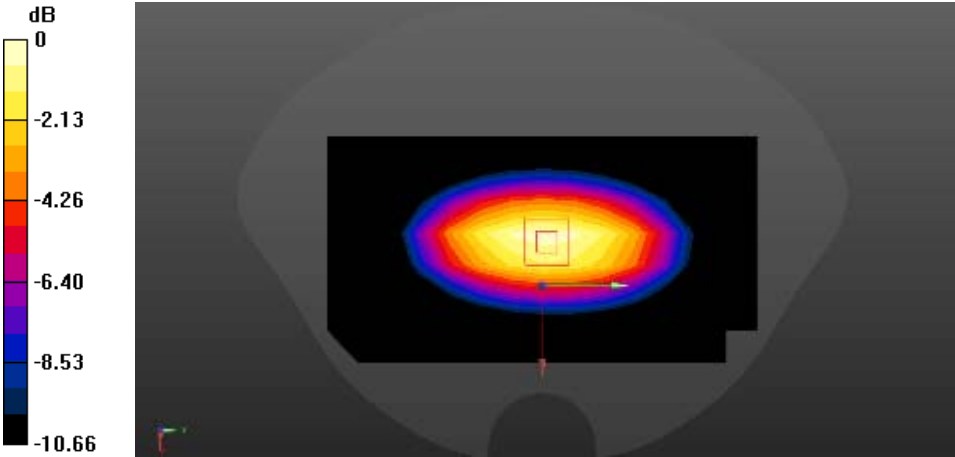
Body liquid

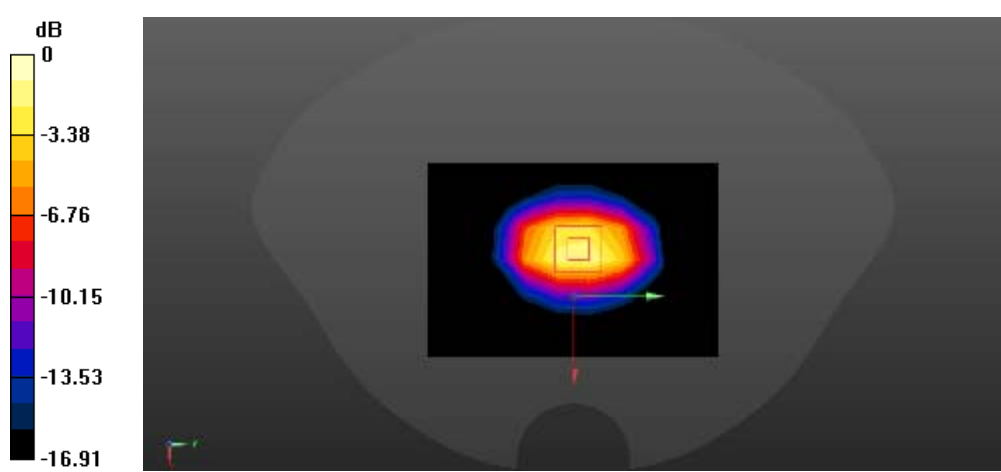
System check	750MHz
Communication System: UID 0, CW (0); Communication System Band: D750 (750.0 MHz); Frequency: 750 MHz; Communication System PAR: 0 dB Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.976 \text{ S/m}$; $\epsilon_r = 53.279$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.56, 7.56, 7.56); Calibrated: 10/22/2018, ConvF(7.56, 7.56, 7.56); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) System Performance Check at Frequencies 750MHz/d=15mm, Pin=250 mW, dist=3.0mm (ES-Probe)/Area Scan (8x15x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 2.31 W/kg System Performance Check at Frequencies 750MHz/d=15mm, Pin=250 mW, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 41.26 V/m; Power Drift = 0.13 dB Peak SAR (extrapolated) = 3.45 W/kg SAR(1 g) = 2.06 W/kg; SAR(10 g) = 1.47 W/kg Maximum value of SAR (measured) = 2.66 W/kg	
 0 dB = 2.66 W/kg = 4.25 dBW/kg	

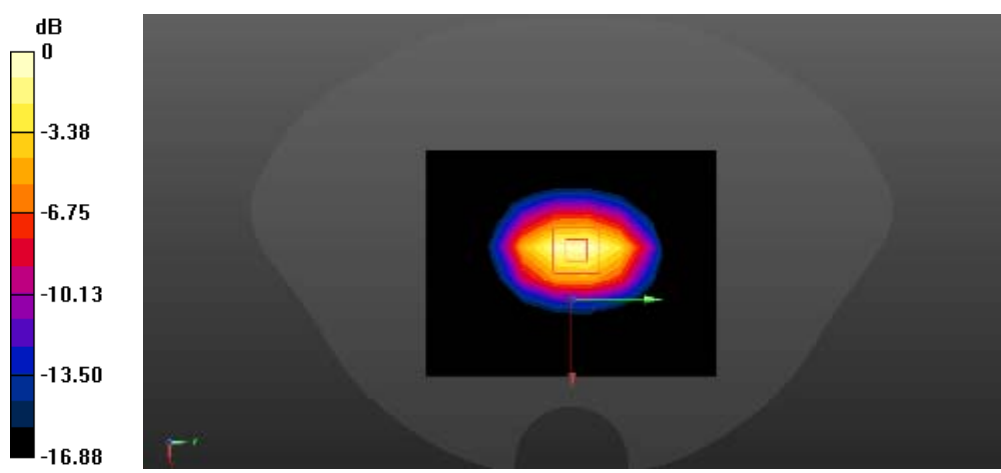
System check	750MHz
Communication System: UID 0, CW (0); Communication System Band: D750 (750.0 MHz); Frequency: 750 MHz; Communication System PAR: 0 dB Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.954 \text{ S/m}$; $\epsilon_r = 54.321$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.56, 7.56, 7.56); Calibrated: 10/22/2018, ConvF(7.56, 7.56, 7.56); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) System Performance Check at Frequencies 750MHz/d=15mm, Pin=250 mW, dist=3.0mm (ES-Probe)/Area Scan (8x15x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 2.12 W/kg System Performance Check at Frequencies 750MHz/d=15mm, Pin=250 mW, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 39.88 V/m; Power Drift = 0.13 dB Peak SAR (extrapolated) = 3.24 W/kg SAR(1 g) = 2.18 W/kg; SAR(10 g) = 1.35 W/kg Maximum value of SAR (measured) = 2.51 W/kg  0 dB = 2.51 W/kg = 4.00 dBW/kg	

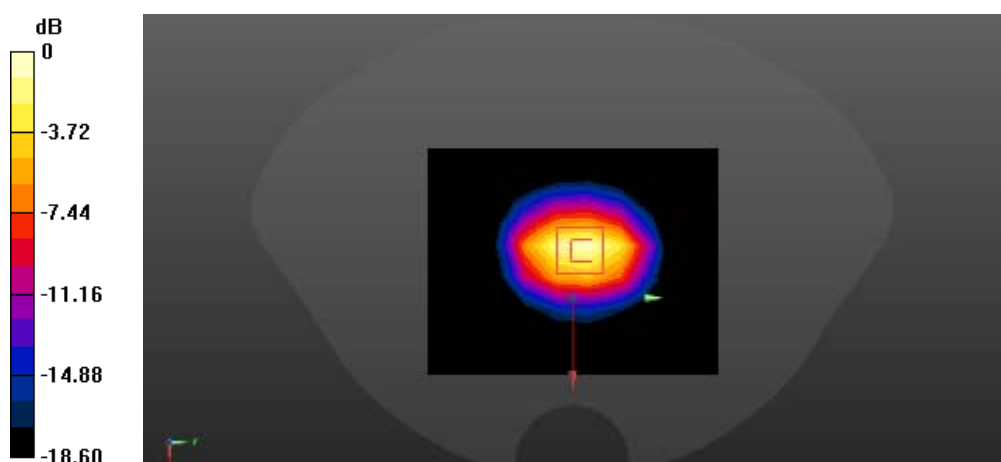
System check	835MHz
Communication System: UID 0, CW (0); Frequency: 835 MHz Medium parameters used (interpolated): $f = 835 \text{ MHz}$; $\sigma = 0.975 \text{ S/m}$; $\epsilon_r = 54.541$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.56, 7.56, 7.56); Calibrated: 10/22/2018, ConvF(7.56, 7.56, 7.56); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) Configuration 835/835/Area Scan (8x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 2.63 W/kg Configuration 835/835/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 52.70 V/m; Power Drift = 0.06 dB Peak SAR (extrapolated) = 3.54 W/kg SAR(1 g) = 2.37 W/kg; SAR(10 g) = 1.54 W/kg Maximum value of SAR (measured) = 2.77 W/kg	
 0 dB = 2.77 W/kg = 4.42 dBW/kg	

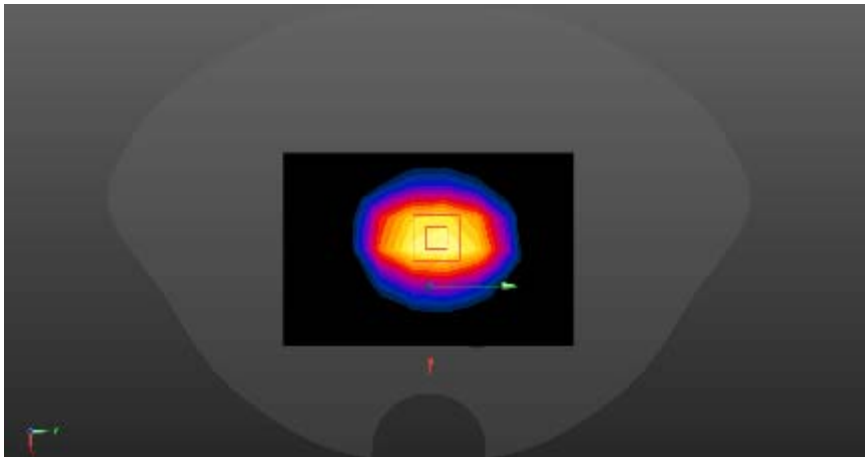
System check	835MHz
Communication System: UID 0, CW (0); Frequency: 835 MHz Medium parameters used (interpolated): $f = 835 \text{ MHz}$; $\sigma = 0.971 \text{ S/m}$; $\epsilon_r = 55.036$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.56, 7.56, 7.56); Calibrated: 10/22/2018, ConvF(7.56, 7.56, 7.56); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) Configuration 835/835/Area Scan (8x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 2.63 W/kg Configuration 835/835/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 53.21 V/m; Power Drift = -0.07 dB Peak SAR (extrapolated) = 3.50 W/kg SAR(1 g) = 2.34 W/kg; SAR(10 g) = 1.52 W/kg Maximum value of SAR (measured) = 2.74 W/kg	
 0 dB = 2.74 W/kg = 4.38 dBW/kg	

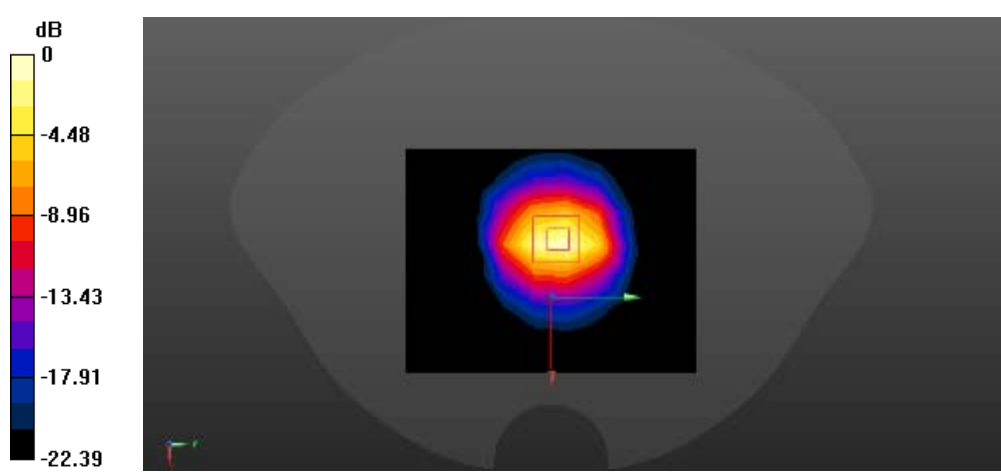
System check	835MHz
Communication System: UID 0, CW (0); Frequency: 835 MHz Medium parameters used (interpolated): $f = 835 \text{ MHz}$; $\sigma = 0.966 \text{ S/m}$; $\epsilon_r = 56.196$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.56, 7.56, 7.56); Calibrated: 10/22/2018, ConvF(7.56, 7.56, 7.56); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) Configuration 835/835/Area Scan (8x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 2.57 W/kg Configuration 835/835/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 51.34 V/m; Power Drift = 0.12 dB Peak SAR (extrapolated) = 3.26 W/kg SAR(1 g) = 2.28 W/kg; SAR(10 g) = 1.49 W/kg Maximum value of SAR (measured) = 2.58 W/kg	
 0 dB = 2.58 W/kg = 4.11 dBW/kg	

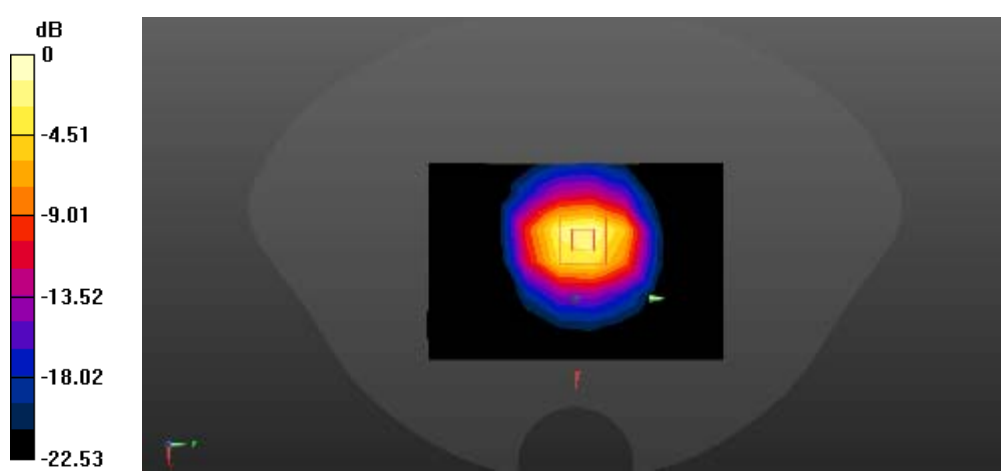
System check	1800MHz
Communication System: UID 0, CW (0); Frequency: 1800 MHz Medium parameters used: $f = 1800 \text{ MHz}$; $\sigma = 1.523 \text{ S/m}$; $\epsilon_r = 52.879$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.56, 7.56, 7.56); Calibrated: 10/22/2018, ConvF(7.56, 7.56, 7.56); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) Configuration 1800/1800/Area Scan (7x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 9.43 W/kg Configuration 1800/1800/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 80.19 V/m; Power Drift = 0.19 dB Peak SAR (extrapolated) = 17.5 W/kg SAR(1 g) = 9.55 W/kg; SAR(10 g) = 4.98 W/kg Maximum value of SAR (measured) = 12.2 W/kg  0 dB = $12.2 \text{ W/kg} = 10.86 \text{ dBW/kg}$	

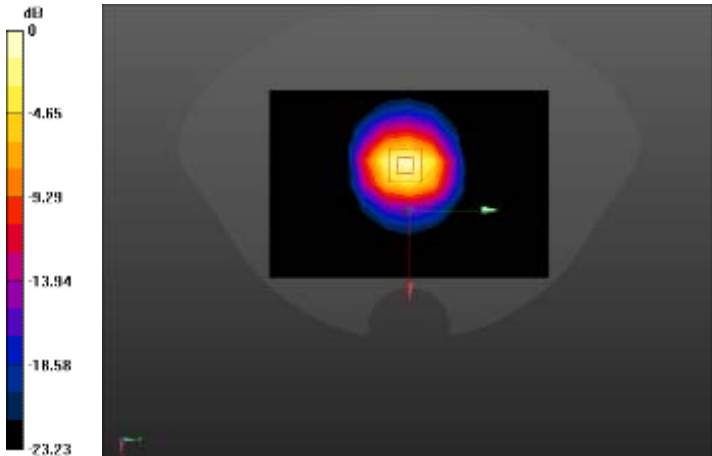
System check	1800MHz
Communication System: UID 0, CW (0); Frequency: 1800 MHz Medium parameters used: $f = 1800 \text{ MHz}$; $\sigma = 1.542 \text{ S/m}$; $\epsilon_r = 51.717$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.56, 7.56, 7.56); Calibrated: 10/22/2018, ConvF(7.56, 7.56, 7.56); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) Configuration 1800/1800/Area Scan (8x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 11.5 W/kg Configuration 1800/1800/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 80.17 V/m; Power Drift = 0.15 dB Peak SAR (extrapolated) = 17.8 W/kg SAR(1 g) = 9.67 W/kg; SAR(10 g) = 5.03 W/kg Maximum value of SAR (measured) = 12.4 W/kg  0 dB = 12.4 W/kg = 10.93 dBW/kg	

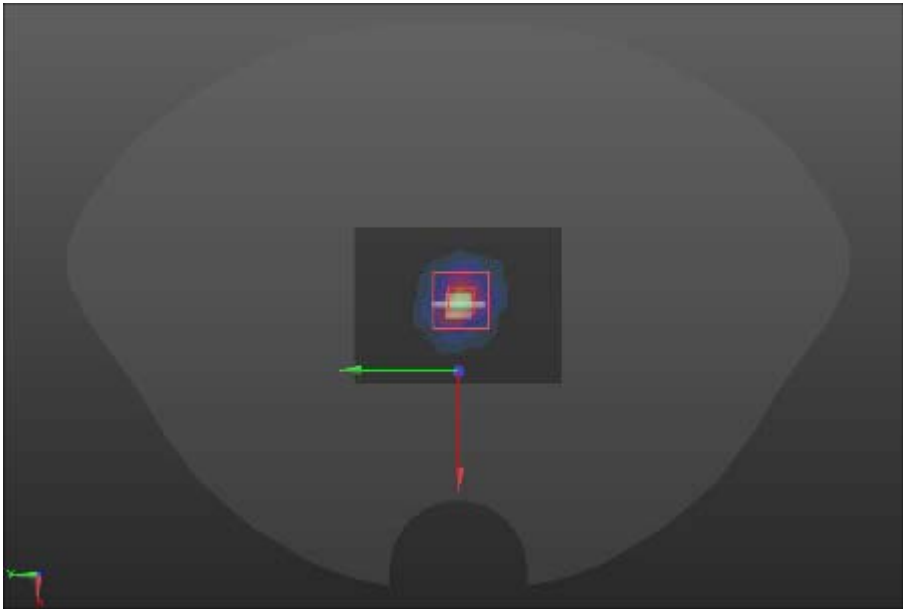
System check	2000MHz
Communication System: UID 0, CW (0); Frequency: 2000 MHz Medium parameters used: $f = 2000 \text{ MHz}$; $\sigma = 1.546 \text{ S/m}$; $\epsilon_r = 52.557$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.56, 7.56, 7.56); Calibrated: 10/22/2018, ConvF(7.56, 7.56, 7.56); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) Configuration 2000/2000/Area Scan (8x10x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$ Maximum value of SAR (measured) = 11.1 W/kg Configuration 2000/2000/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 78.14 V/m; Power Drift = 0.05 dB Peak SAR (extrapolated) = 17.8 W/kg SAR(1 g) = 9.49 W/kg; SAR(10 g) = 4.78 W/kg Maximum value of SAR (measured) = 12.1 W/kg  0 dB = 12.1 W/kg = 10.83 dBW/kg	

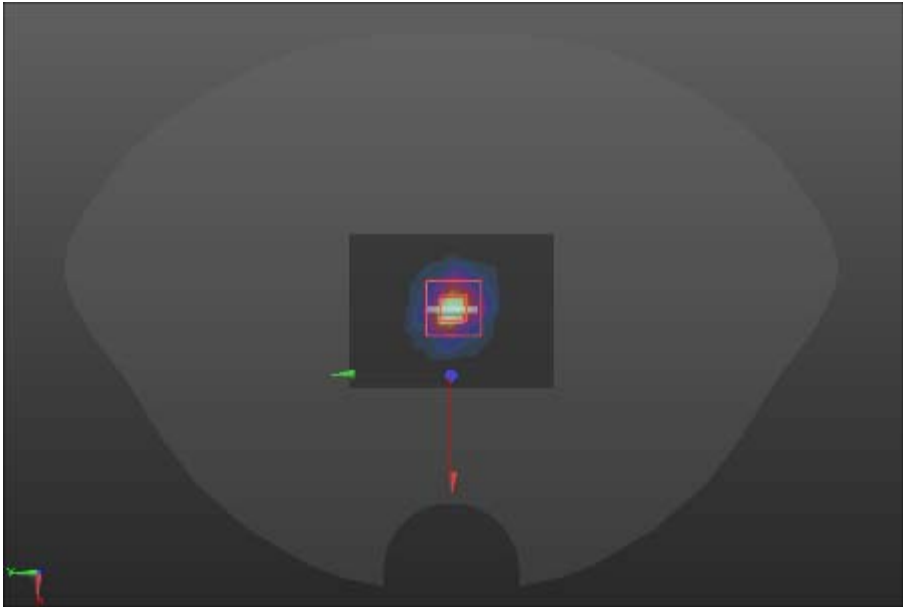
System check	2000MHz
Communication System: UID 0, CW (0); Frequency: 2000 MHz Medium parameters used: $f = 2000 \text{ MHz}$; $\sigma = 1.586 \text{ S/m}$; $\epsilon_r = 52.596$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.56, 7.56, 7.56); Calibrated: 10/22/2018, ConvF(7.56, 7.56, 7.56); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) Configuration 2000/2000/Area Scan (7x10x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$ Maximum value of SAR (measured) = 10.0 W/kg Configuration 2000/2000/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 79.83 V/m; Power Drift = 0.16 dB Peak SAR (extrapolated) = 18.3 W/kg SAR(1 g) = 9.71 W/kg; SAR(10 g) = 4.87 W/kg Maximum value of SAR (measured) = 12.4 W/kg dB 0 -3.77 -7.54 -11.32 -15.09 -18.86  0 dB = 12.4 W/kg = 10.93 dBW/kg	

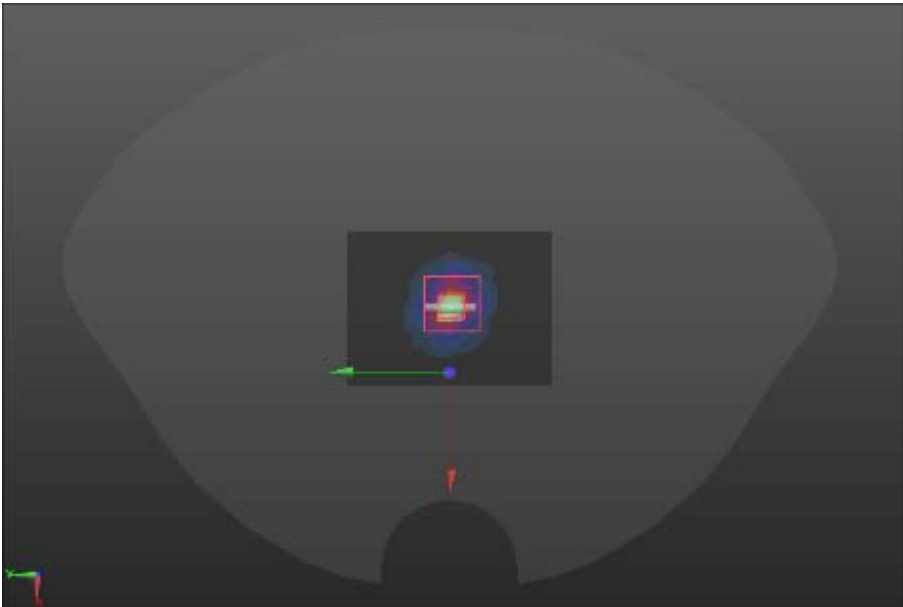
System check	2450MHz
Communication System: UID 0, CW (0); Frequency: 2450 MHz Medium parameters used: $f = 2450 \text{ MHz}$; $\sigma = 1.926 \text{ S/m}$; $\epsilon_r = 50.795$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.56, 7.56, 7.56); Calibrated: 10/22/2018, ConvF(7.56, 7.56, 7.56); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) System Performance Check at Frequencies 2450 MHz/2450/Area Scan (8x10x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$ Maximum value of SAR (measured) = 15.9 W/kg System Performance Check at Frequencies 2450 MHz/2450/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 62.46 V/m; Power Drift = 0.12 dB Peak SAR (extrapolated) = 27.5 W/kg SAR(1 g) = 13.2 W/kg; SAR(10 g) = 6.09 W/kg Maximum value of SAR (measured) = 17.3 W/kg  0 dB = 17.3 W/kg = 12.38 dBW/kg	

System check	2450MHz
Communication System: UID 0, CW (0); Frequency: 2450 MHz Medium parameters used: $f = 2450 \text{ MHz}$; $\sigma = 2.004 \text{ S/m}$; $\epsilon_r = 51.927$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.56, 7.56, 7.56); Calibrated: 10/22/2018, ConvF(7.56, 7.56, 7.56); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) System Performance Check at Frequencies 2450 MHz/2450/Area Scan (7x10x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$ Maximum value of SAR (measured) = 12.9 W/kg System Performance Check at Frequencies 2450 MHz/2450/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 60.67 V/m; Power Drift = 0.16 dB Peak SAR (extrapolated) = 27.1 W/kg SAR(1 g) = 13 W/kg; SAR(10 g) = 5.94 W/kg Maximum value of SAR (measured) = 17.2 W/kg  0 dB = 17.2 W/kg = 12.36 dBW/kg	

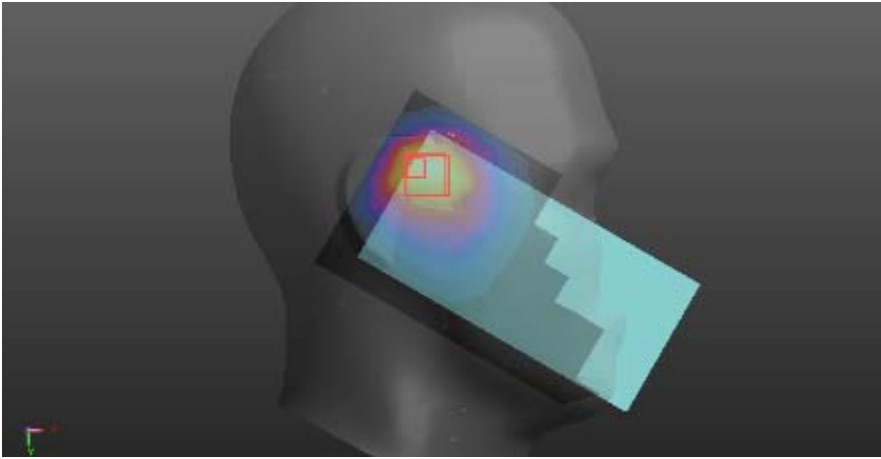
System check	2450MHz
Communication System: UID 0, CW (0); Communication System Band: D2450 (2450.0 MHz); Frequency: 2450 MHz; Communication System PAR: 0 dB Medium parameters used: $f = 2450$ MHz; $\sigma = 2.027$ S/m; $\epsilon_r = 51.046$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.56, 7.56, 7.56); Calibrated: 10/22/2018, ConvF(7.56, 7.56, 7.56); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) System Performance Check at Frequencies 2450MHz Head/d=10mm, Pin=250 mW, dist=4.0mm (EX-Probe)/Area Scan (9x13x1): Measurement grid: dx=12mm, dy=12mm Maximum value of SAR (measured) = 13.4 W/kg System Performance Check at Frequencies 2450MHz Head/d=10mm, Pin=250 mW, dist=4.0mm (EX-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 62.29 V/m; Power Drift = 0.04 dB Peak SAR (extrapolated) = 29.3 W/kg SAR(1 g) = 13.3 W/kg; SAR(10 g) = 6.13 W/kg Maximum value of SAR (measured) = 18.9 W/kg  0 dB = 18.9 W/kg = 12.76 dBW/kg	

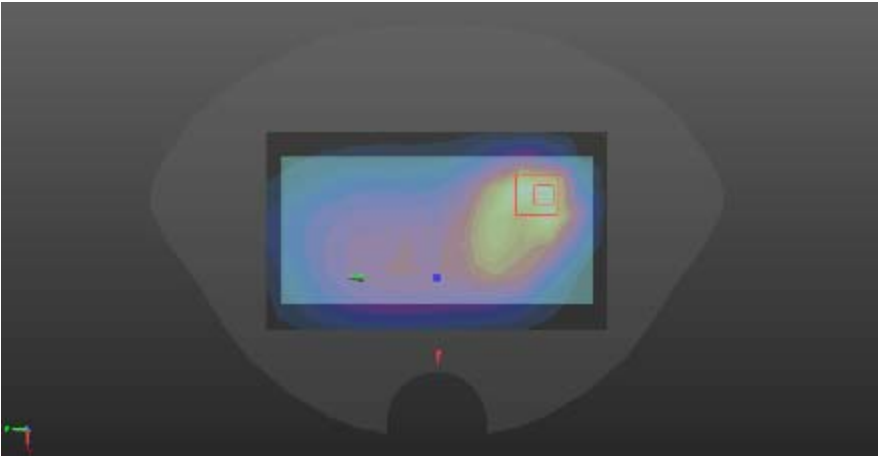
System check	5300MHz
Communication System: UID 0, CW (0); Frequency: 5300 MHz Medium parameters used: $f = 5200$ MHz; $\sigma = 5.355$ S/m; $\epsilon_r = 49.035$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.56, 7.56, 7.56); Calibrated: 10/22/2018, ConvF(7.56, 7.56, 7.56); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) Configuration/5300/Area Scan (7x11x1): Measurement grid: dx=10mm, dy=10mm Maximum value of SAR (measured) = 1.47 W/kg Configuration/5300/Zoom Scan (6x6x12)/Cube 0: Measurement grid: dx=5mm, dy=5mm, d5=2mm Reference Value = 11.12 V/m; Power Drift = 0.08 dB Peak SAR (extrapolated) = 3.29 W/kg SAR(1 g) = 0.73 W/kg; SAR(10 g) = 0.206 W/kg Maximum value of SAR (measured) = 2.11 W/kg	
	

System check	5600MHz
Communication System: UID 0, CW (0); Frequency: 5600 MHz Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = 5.627 \text{ S/m}$; $\epsilon_r = 49.216$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.56, 7.56, 7.56); Calibrated: 10/22/2018, ConvF(7.56, 7.56, 7.56); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) Configuration/5600/Area Scan (7x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ Maximum value of SAR (measured) = 1.53 W/kg Configuration/5600/Zoom Scan (6x6x12)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $d5=2\text{mm}$ Reference Value = 11.24 V/m; Power Drift = 0.13 dB Peak SAR (extrapolated) = 3.42 W/kg SAR(1 g) = 0.81 W/kg; SAR(10 g) = 0.414 W/kg Maximum value of SAR (measured) = 2.26 W/kg 	

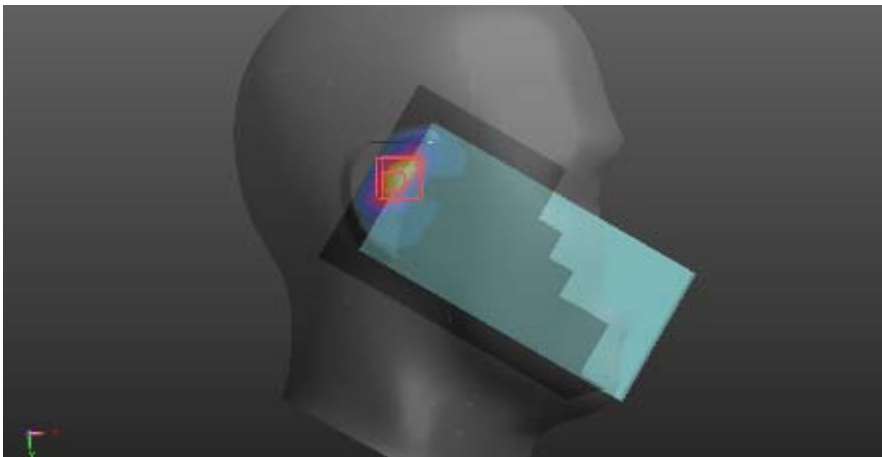
System check	5800MHz
Communication System: UID 0, CW (0); Frequency: 5800 MHz Medium parameters used: $f = 5800 \text{ MHz}$; $\sigma = 6.11 \text{ S/m}$; $\epsilon_r = 47.36$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.56, 7.56, 7.56); Calibrated: 10/22/2018, ConvF(7.56, 7.56, 7.56); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) Configuration/5800/Area Scan (7x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ Maximum value of SAR (measured) = 2.12 W/kg Configuration/5800/Zoom Scan (6x6x12)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=2\text{mm}$ Reference Value = 11.35 V/m; Power Drift = 0.02 dB Peak SAR (extrapolated) = 3.39 W/kg SAR(1 g) = 0.75 W/kg; SAR(10 g) = 0.226 W/kg Maximum value of SAR (measured) = 2.46 W/kg	
	

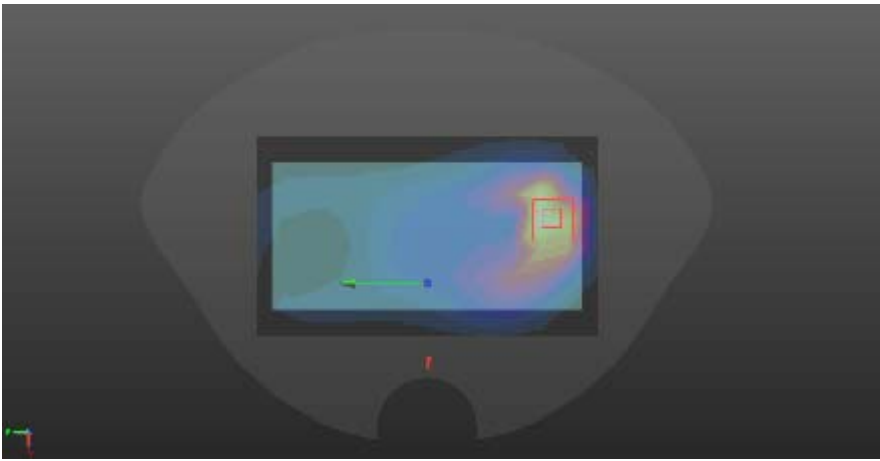
GSM (850MHz)

Up Antenna	Right Side	Cheek
Communication System: UID 0, Generic GSM (0); Frequency: 836.6 MHz; Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.905$ S/m; $\epsilon_r = 41.528$; $\rho = 1000$ kg/m³ Phantom section: Right Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.16, 9.16, 9.16); Calibrated: 10/22/2018, ConvF(9.16, 9.16, 9.16); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) Right/GPRS850 RC/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 1.12 W/kg Right/GPRS850 RC/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 36.96 V/m; Power Drift = -0.14 dB Peak SAR (extrapolated) = 1.62 W/kg SAR(1 g) = 0.715 W/kg; SAR(10 g) = 0.444 W/kg Maximum value of SAR (measured) = 1.16 W/kg 		

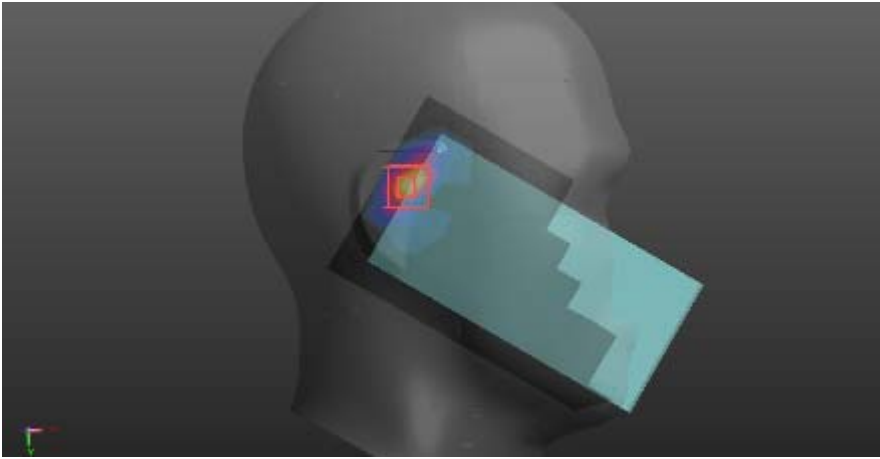
Up Antenna	Body-worn	Back
Communication System: UID 0, Generic GSM (0); Frequency: 836.6 MHz; Medium parameters used (interpolated): $f = 836.6 \text{ MHz}$; $\sigma = 0.976 \text{ S/m}$; $\epsilon_r = 55.195$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.33, 9.33, 9.33); Calibrated: 10/22/2018, ConvF(9.33, 9.33, 9.33); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) BACK&FRONT/BACK GPRS850/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.727 W/kg BACK&FRONT/BACK GPRS850/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 18.61 V/m; Power Drift = -0.12 dB Peak SAR (extrapolated) = 0.978 W/kg SAR(1 g) = 0.514 W/kg; SAR(10 g) = 0.294 W/kg Maximum value of SAR (measured) = 0.793 W/kg 		

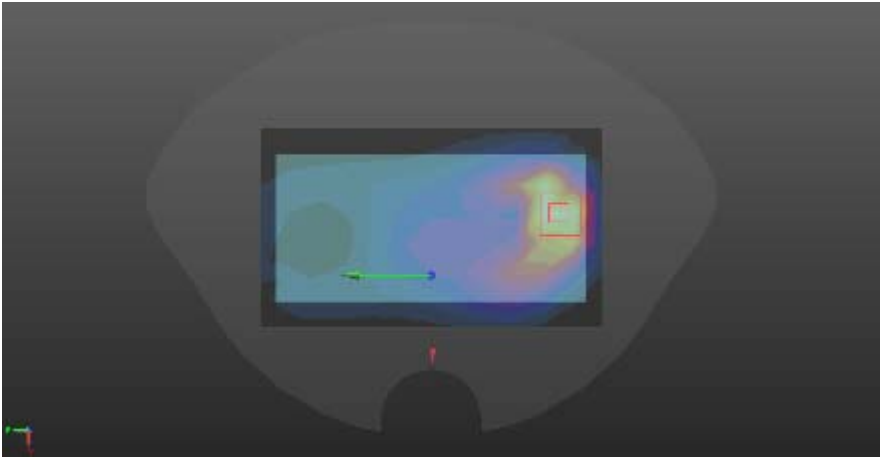
GSM (1900MHz)

Up Antenna	Right side	Tilt
Communication System: UID 0, Generic GSM (0); Frequency: 1880 MHz Medium parameters used (interpolated): $f = 1880 \text{ MHz}$; $\sigma = 1.4 \text{ S/m}$; $\epsilon_r = 40$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Right Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.89, 7.89, 7.89); Calibrated: 10/22/2018, ConvF(7.89, 7.89, 7.89); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) Right/GPRS1900 RT/Area Scan (8x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 1.08 W/kg Right/GPRS1900 RT/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 24.33 V/m; Power Drift = -0.05 dB Peak SAR (extrapolated) = 1.70 W/kg SAR(1 g) = 0.752 W/kg; SAR(10 g) = 0.287 W/kg Maximum value of SAR (measured) = 1.10 W/kg		
		

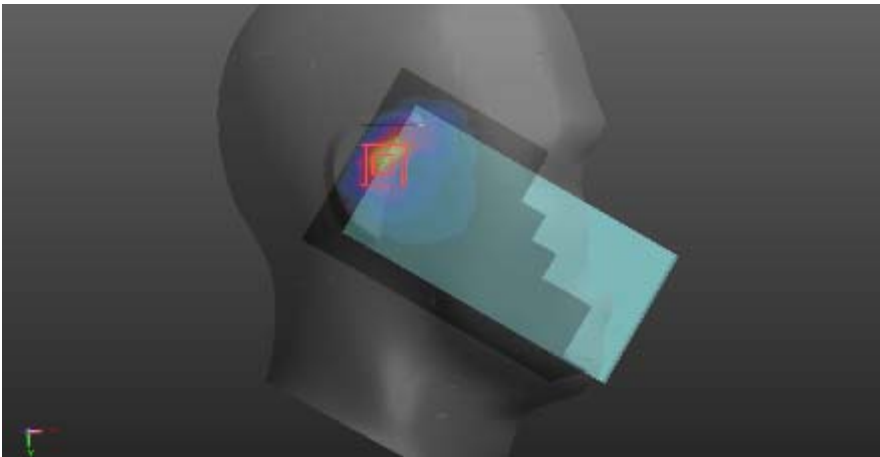
Up Antenna	Body-worn	Back
Communication System: UID 0, Generic GSM (0); Frequency: 1880 MHz; Medium parameters used (interpolated): $f = 1880 \text{ MHz}$; $\sigma = 1.526 \text{ S/m}$; $\epsilon_r = 53.291$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.56, 7.56, 7.56); Calibrated: 10/22/2018, ConvF(7.56, 7.56, 7.56); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) BACK&FRONT/BACK GPRS1900/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.987 W/kg BACK&FRONT/BACK GPRS1900/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 13.59 V/m; Power Drift = -0.02 dB Peak SAR (extrapolated) = 1.57 W/kg SAR(1 g) = 0.776 W/kg; SAR(10 g) = 0.457 W/kg Maximum value of SAR (measured) = 1.31 W/kg 		

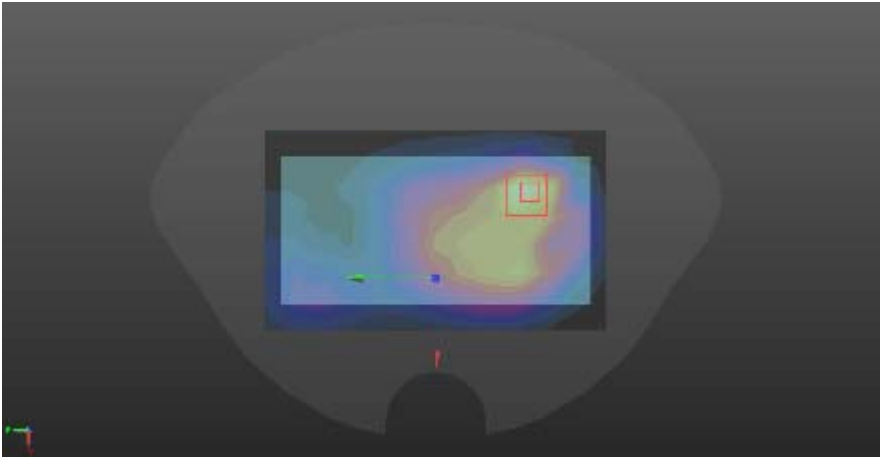
WCDMA B2

Up Antenna	Right side	Tilt
Communication System: UID 0, wcdma BANDII (0); Frequency: 1880 MHz Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.4$ S/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³ Phantom section: Right Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.89, 7.89, 7.89); Calibrated: 10/22/2018, ConvF(7.89, 7.89, 7.89); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) Right/WCDMA B2 RT/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 1.48 W/kg Right/WCDMA B2 RT/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 28.10 V/m; Power Drift = 0.06 dB Peak SAR (extrapolated) = 1.76 W/kg SAR(1 g) = 0.943 W/kg; SAR(10 g) = 0.364 W/kg Maximum value of SAR (measured) = 1.42 W/kg 		

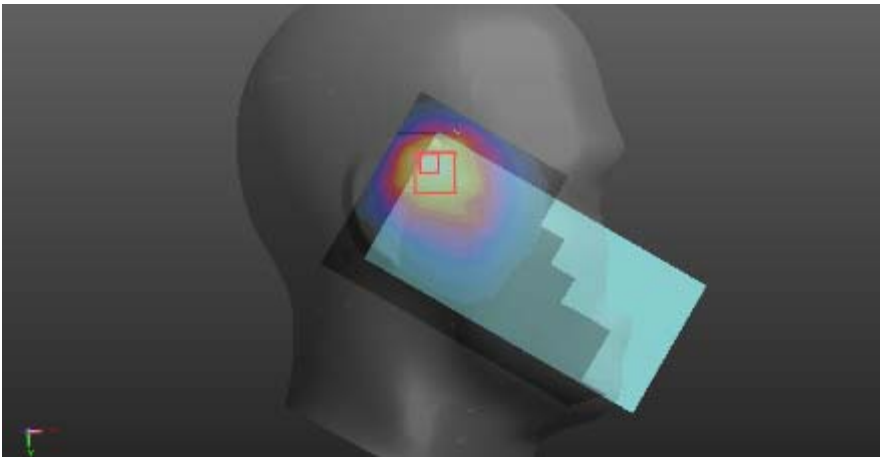
Up Antenna	Body-worn	Back
Communication System: UID 0, wcdma BANDII (0); Frequency: 1880 MHz Medium parameters used (interpolated): $f = 1880 \text{ MHz}$; $\sigma = 1.526 \text{ S/m}$; $\epsilon_r = 53.291$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.56, 7.56, 7.56); Calibrated: 10/22/2018, ConvF(7.56, 7.56, 7.56); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) BACK&FRONT/BACK WCDMA B2/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.726 W/kg BACK&FRONT/BACK WCDMA B2/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 13.15 V/m; Power Drift = -0.16 dB Peak SAR (extrapolated) = 1.23 W/kg SAR(1 g) = 0.697 W/kg; SAR(10 g) = 0.367 W/kg Maximum value of SAR (measured) = 1.01 W/kg 		

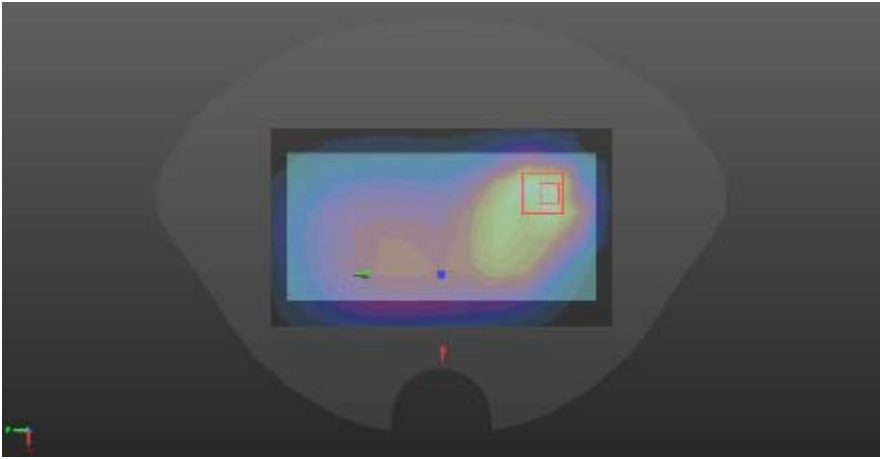
WCDMA B4

Up Antenna	Right side	Tilt
Communication System: UID 0, wcdma bandIV (0); Frequency: 1752.6 MHz Medium parameters used (interpolated): $f = 1752.6$ MHz; $\sigma = 1.387$ S/m; $\epsilon_r = 40.036$; $\rho = 1000$ kg/m³ Phantom section: Right Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(8.2, 8.2, 8.2); Calibrated: 10/22/2018, ConvF(8.2, 8.2, 8.2); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) Right/WCDMA B4 RT/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 1.93 W/kg Right/WCDMA B4 RT/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 38.17 V/m; Power Drift = 0.03 dB Peak SAR (extrapolated) = 2.38 W/kg SAR(1 g) = 1.17 W/kg; SAR(10 g) = 0.544 W/kg Maximum value of SAR (measured) = 2.01 W/kg 		

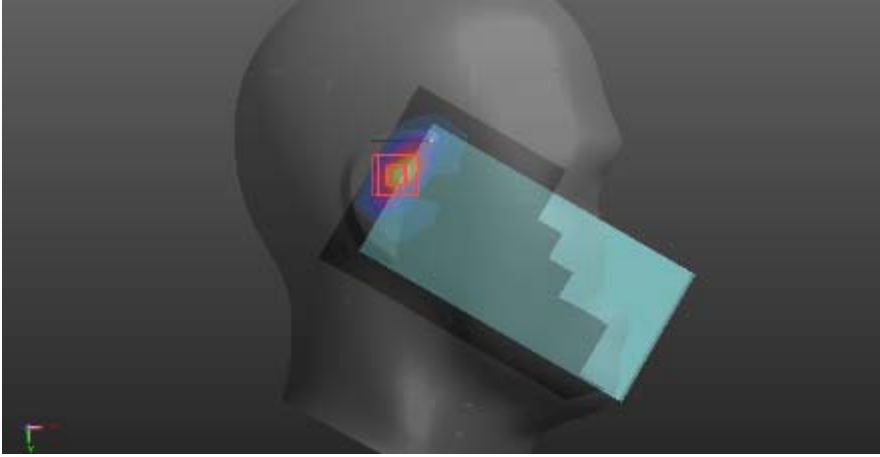
Up Antenna	Body-worn	Back
Communication System: UID 0, wcdma bandIV (0); Frequency: 1732.4 MHz Medium parameters used (interpolated): $f = 1732.4$ MHz; $\sigma = 1.477$ S/m; $\epsilon_r = 53.461$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.69, 7.69, 7.69); Calibrated: 10/22/2018, ConvF(7.69, 7.69, 7.69); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) BACK&FRONT/BACK WCDMA B4/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.502 W/kg BACK&FRONT/BACK WCDMA B4/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 15.68 V/m; Power Drift = -0.04 dB Peak SAR (extrapolated) = 0.692 W/kg SAR(1 g) = 0.373 W/kg; SAR(10 g) = 0.210 W/kg Maximum value of SAR (measured) = 0.568 W/kg 		

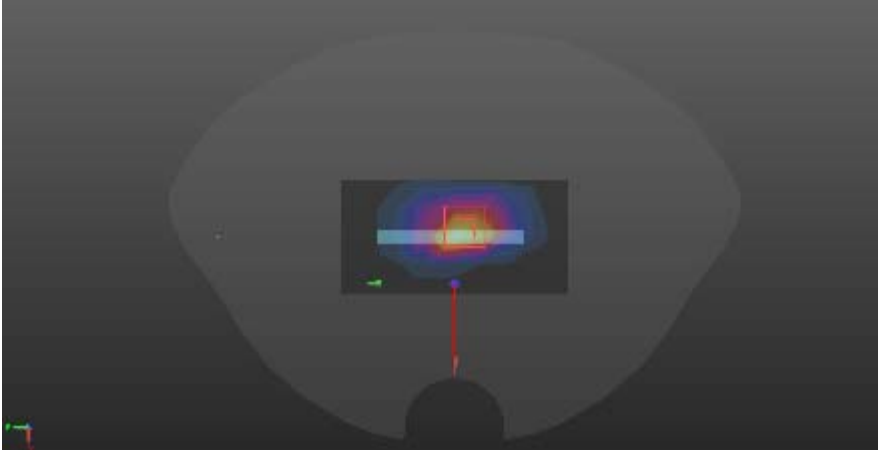
WCDMA B5

Up Antenna	Right side	Cheek
Communication System: UID 0, WCDMA 5 (0); Frequency: 836.6 MHz Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.905$ S/m; $\epsilon_r = 41.528$; $\rho = 1000$ kg/m³ Phantom section: Right Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.16, 9.16, 9.16); Calibrated: 10/22/2018, ConvF(9.16, 9.16, 9.16); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) Right/WCDMA B5 RC/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 1.11 W/kg Right/WCDMA B5 RC/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 38.27 V/m; Power Drift = 0.03 dB Peak SAR (extrapolated) = 1.69 W/kg SAR(1 g) = 0.758 W/kg; SAR(10 g) = 0.506 W/kg Maximum value of SAR (measured) = 1.33 W/kg		
		

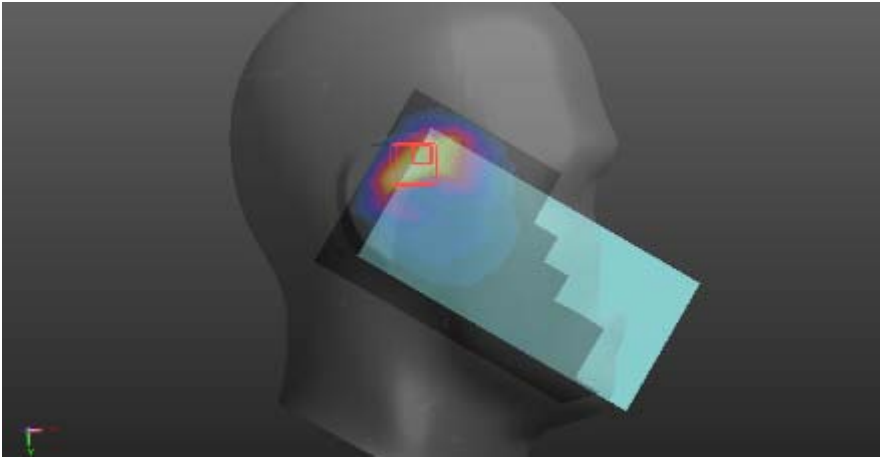
Up Antenna	Body-worn	Back
Communication System: UID 0, WCDMA 5 (0); Frequency: 836.6 MHz Medium parameters used (interpolated): $f = 836.6 \text{ MHz}$; $\sigma = 0.976 \text{ S/m}$; $\epsilon_r = 55.195$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.33, 9.33, 9.33); Calibrated: 10/22/2018, ConvF(9.33, 9.33, 9.33); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) BACK&FRONT/BACK WCDMA B5/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.303 W/kg BACK&FRONT/BACK WCDMA B5/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 12.79 V/m; Power Drift = 0.07 dB Peak SAR (extrapolated) = 0.421 W/kg SAR(1 g) = 0.227 W/kg; SAR(10 g) = 0.134 W/kg Maximum value of SAR (measured) = 0.349 W/kg 		

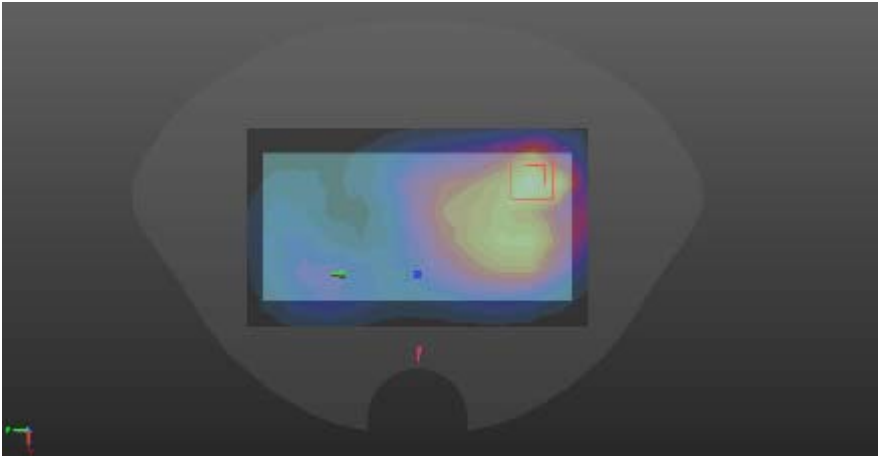
LTE B2

Up Antenna	Right side	Tilt
Communication System: UID 0, LTE band 02 (0); Frequency: 1880 MHz Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.4$ S/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³ Phantom section: Right Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.89, 7.89, 7.89); Calibrated: 10/22/2018, ConvF(7.89, 7.89, 7.89); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) Right/LTE2 RT 1RB/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 1.22 W/kg Right/LTE2 RT 1RB/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 22.07 V/m; Power Drift = 0.13 dB Peak SAR (extrapolated) = 1.43 W/kg SAR(1 g) = 0.676 W/kg; SAR(10 g) = 0.294 W/kg Maximum value of SAR (measured) = 1.19 W/kg 		

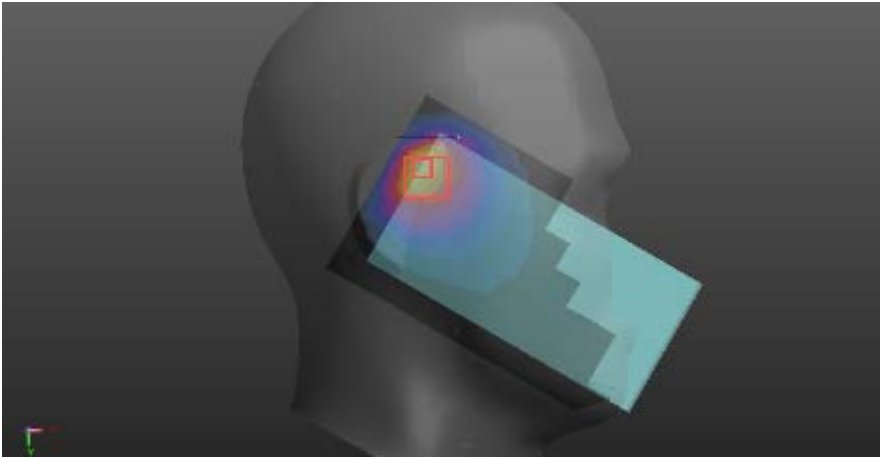
Up Antenna	Hotspot	Top
Communication System: UID 0, LTE band 02 (0); Frequency: 1880 MHz Medium parameters used (interpolated): $f = 1880 \text{ MHz}$; $\sigma = 1.526 \text{ S/m}$; $\epsilon_r = 53.291$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.56, 7.56, 7.56); Calibrated: 10/22/2018, ConvF(7.56, 7.56, 7.56); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) TOP/TOP LTE2/Area Scan (5x9x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 1.22 W/kg TOP/TOP LTE2/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 29.54 V/m; Power Drift = 0.04 dB Peak SAR (extrapolated) = 1.82 W/kg SAR(1 g) = 1.02 W/kg; SAR(10 g) = 0.511 W/kg Maximum value of SAR (measured) = 1.56 W/kg 		

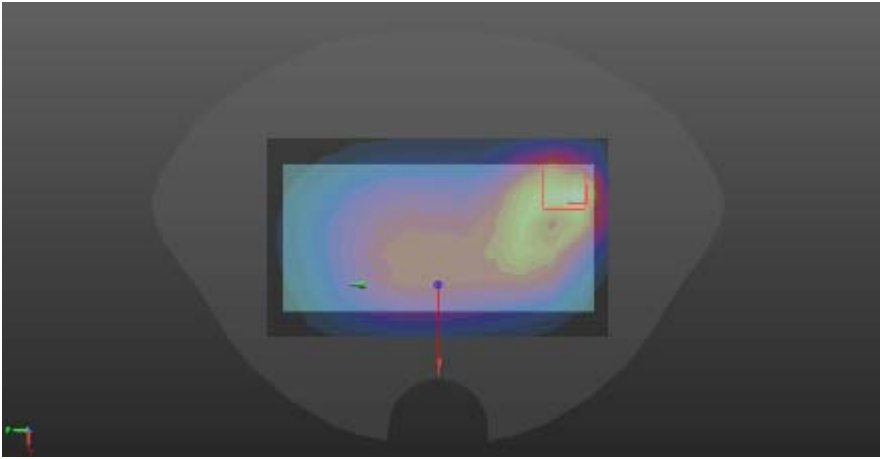
LTE B4

Up Antenna	Right side	Cheek
Communication System: UID 0, LTE band 4 (0); Frequency: 1732.5 MHz Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.375$ S/m; $\epsilon_r = 40.07$; $\rho = 1000$ kg/m³ Phantom section: Right Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(8.2, 8.2, 8.2); Calibrated: 10/22/2018, ConvF(8.2, 8.2, 8.2); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) Right/LTE4 RC 1RB/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 1.45 W/kg Right/LTE4 RC 1RB/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 28.15 V/m; Power Drift = -0.01 dB Peak SAR (extrapolated) = 1.86 W/kg SAR(1 g) = 1.02 W/kg; SAR(10 g) = 0.430 W/kg Maximum value of SAR (measured) = 1.40 W/kg 		

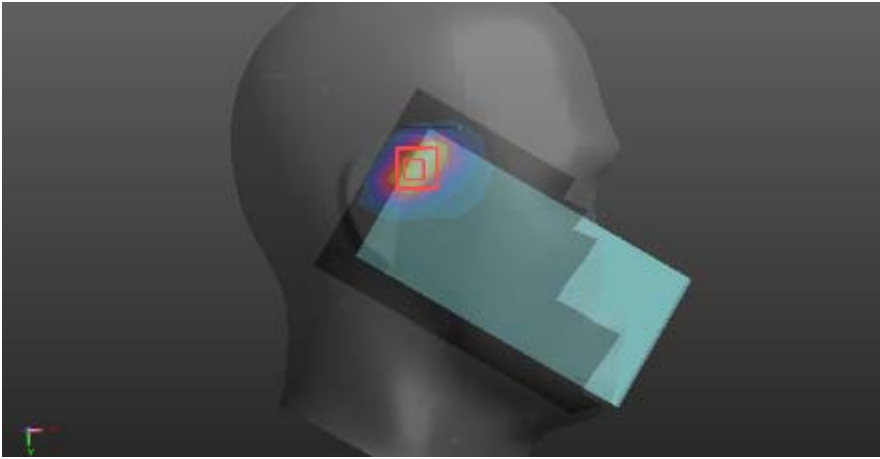
Up Antenna	Body-worn	Back
Communication System: UID 0, LTE band 4 (0); Frequency: 1732.5 MHz Medium parameters used (interpolated): $f = 1732.5 \text{ MHz}$; $\sigma = 1.477 \text{ S/m}$; $\epsilon_r = 53.46$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.69, 7.69, 7.69); Calibrated: 10/22/2018, ConvF(7.69, 7.69, 7.69); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) BACK&FRONT/BACK LTE4 1RB/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.541 W/kg BACK&FRONT/BACK LTE4 1RB/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 12.44 V/m; Power Drift = -0.18 dB Peak SAR (extrapolated) = 0.726 W/kg SAR(1 g) = 0.498 W/kg; SAR(10 g) = 0.223 W/kg Maximum value of SAR (measured) = 0.597 W/kg 		

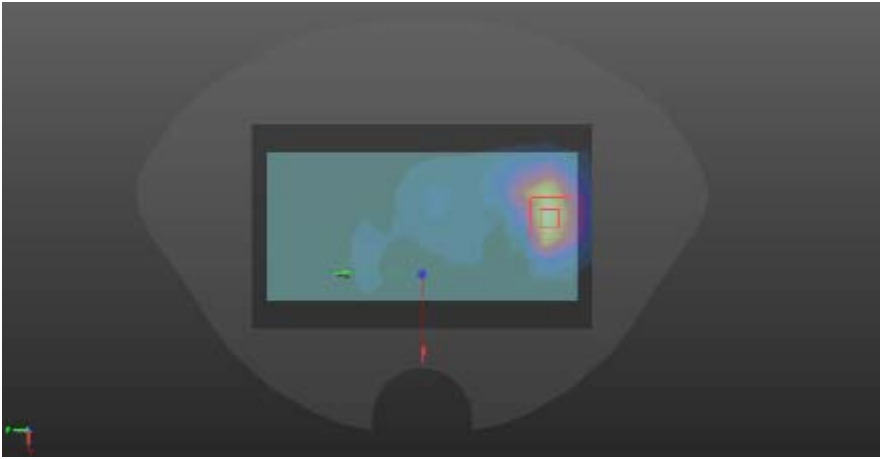
LTE B5

Up Antenna	Right side	Tilt
Communication System: UID 0, LTE Band 5 (0); Frequency: 836.5 MHz Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.905$ S/m; $\epsilon_r = 41.528$; $\rho = 1000$ kg/m³ Phantom section: Right Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.16, 9.16, 9.16); Calibrated: 10/22/2018, ConvF(9.16, 9.16, 9.16); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) Right/LTE5 RT 1RB/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 1.01 W/kg Right/LTE5 RT 1RB/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 33.66 V/m; Power Drift = -0.06 dB Peak SAR (extrapolated) = 1.38 W/kg SAR(1 g) = 0.752 W/kg; SAR(10 g) = 0.367 W/kg Maximum value of SAR (measured) = 1.01 W/kg 		

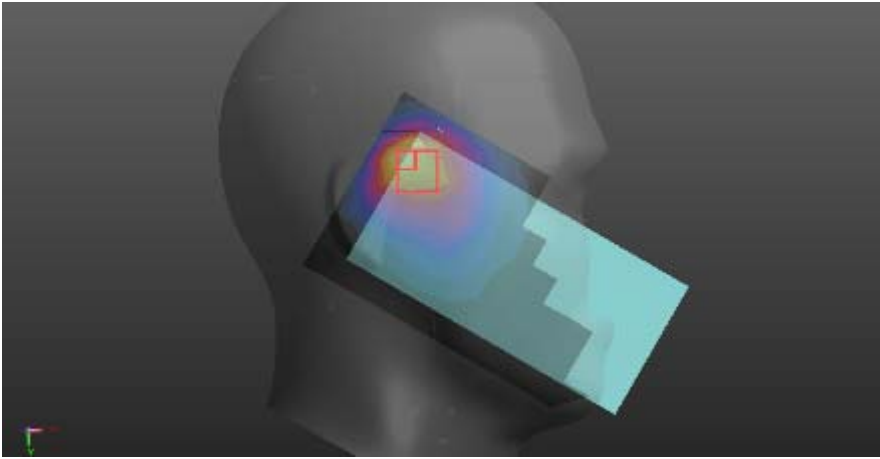
Up Antenna	Body-worn	Back
Communication System: UID 0, LTE Band 5 (0); Frequency: 836.5 MHz Medium parameters used (interpolated): $f = 836.5 \text{ MHz}$; $\sigma = 0.976 \text{ S/m}$; $\epsilon_r = 55.195$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.33, 9.33, 9.33); Calibrated: 10/22/2018, ConvF(9.33, 9.33, 9.33); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) BACK&FRONT/BACK LTE5 1RB/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.292 W/kg BACK&FRONT/BACK LTE5 1RB/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 13.38 V/m; Power Drift = -0.02 dB Peak SAR (extrapolated) = 0.352 W/kg SAR(1 g) = 0.324 W/kg; SAR(10 g) = 0.212 W/kg Maximum value of SAR (measured) = 0.283 W/kg 		

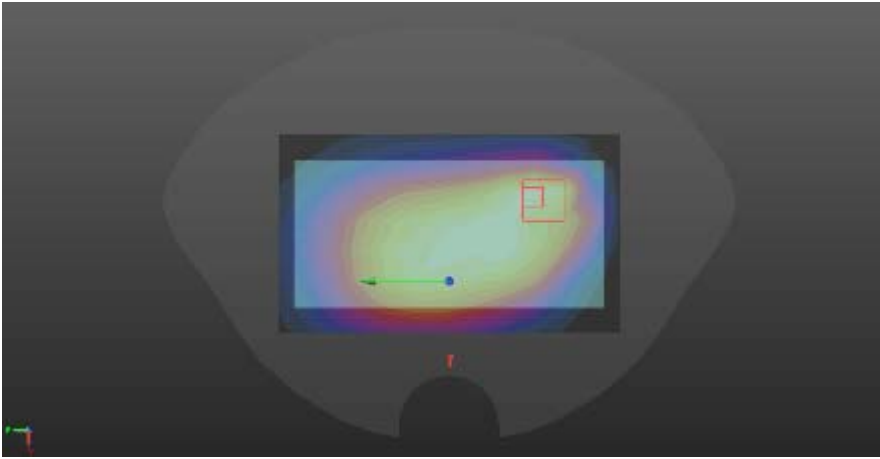
LTE B7

Up Antenna	Right side	Tilt
Communication System: UID 0, LTE Band 7 (0); Frequency: 2535 MHz Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 1.888$ S/m; $\epsilon_r = 39.084$; $\rho = 1000$ kg/m³ Phantom section: Right Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.01, 7.01, 7.01); Calibrated: 10/22/2018, ConvF(7.01, 7.01, 7.01); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) RIGHT LTE7/LTE7 RT 1RB/Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm Maximum value of SAR (measured) = 0.894 W/kg RIGHT LTE7/LTE7 RT 1RB/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 20.76 V/m; Power Drift = -0.11 dB Peak SAR (extrapolated) = 1.45 W/kg SAR(1 g) = 0.639 W/kg; SAR(10 g) = 0.301 W/kg Maximum value of SAR (measured) = 1.08 W/kg 		

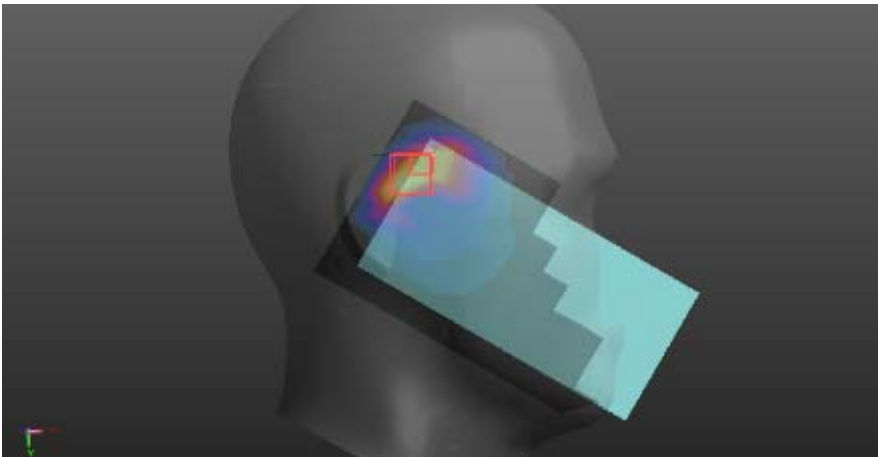
Up Antenna	Body-worn	Back
Communication System: UID 0, LTE Band 7 (0); Frequency: 2535 MHz Medium parameters used (interpolated): $f = 2535 \text{ MHz}$; $\sigma = 2.067 \text{ S/m}$; $\epsilon_r = 52.592$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.14, 7.14, 7.14); Calibrated: 10/22/2018, ConvF(7.14, 7.14, 7.14); Calibrated: 10/22/2018; - Sensor-Surface: 3mm (Mechanical Surface Detection), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) above 2GHz/BACK LTE7 1RB/Area Scan (10x16x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$ Maximum value of SAR (measured) = 1.915 W/kg above 2GHz/BACK LTE7 1RB/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 7.669 V/m; Power Drift = -0.15 dB Peak SAR (extrapolated) = 2.46 W/kg SAR(1 g) = 1.09 W/kg; SAR(10 g) = 0.667 W/kg Maximum value of SAR (measured) = 2.13 W/kg 		

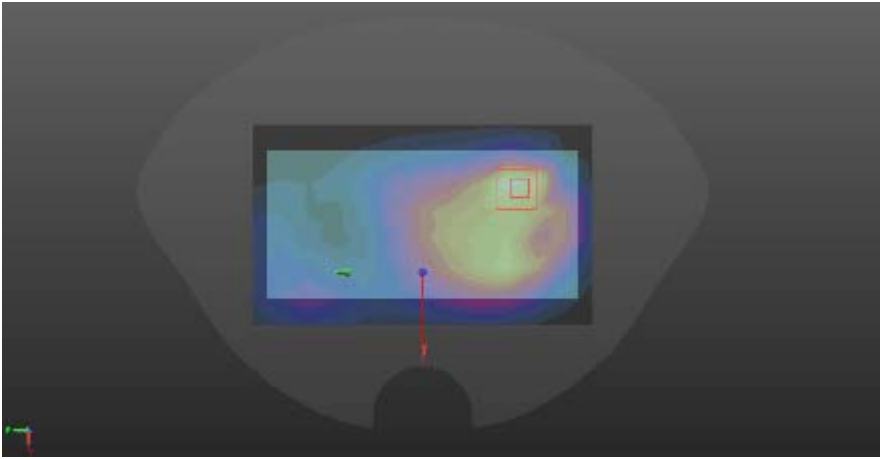
LTE B12

Up Antenna	Right side	Cheek
Communication System: UID 0, LTE Band 12 (0); Frequency: 707.5 MHz Medium parameters used (interpolated): $f = 707.5 \text{ MHz}$; $\sigma = 0.887 \text{ S/m}$; $\epsilon_r = 42.115$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Right Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.59, 9.59, 9.59); Calibrated: 10/22/2018, ConvF(9.59, 9.59, 9.59); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) Right/LTE12 RC 1RB/Area Scan (8x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.780 W/kg Right/LTE12 RC 1RB/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 27.83 V/m; Power Drift = -0.02 dB Peak SAR (extrapolated) = 1.03 W/kg SAR(1 g) = 0.452 W/kg; SAR(10 g) = 0.275 W/kg Maximum value of SAR (measured) = 0.725 W/kg 		

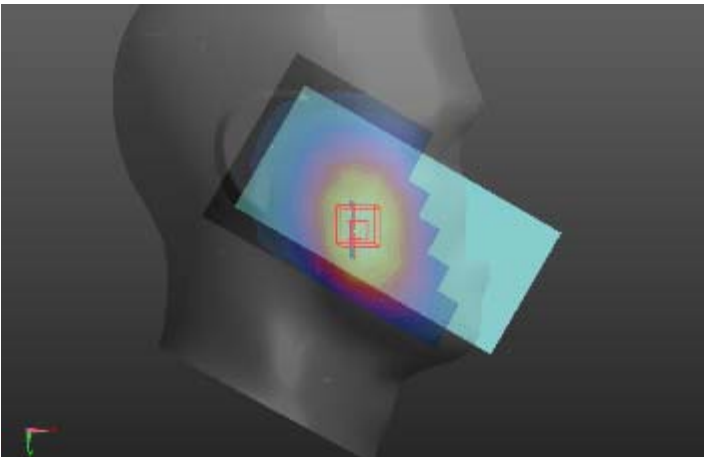
Up Antenna	Body-worn	Back
Communication System: UID 0, LTE Band 12 (0); Frequency: 707.5 MHz Medium parameters used (interpolated): $f = 707.5 \text{ MHz}$; $\sigma = 0.955 \text{ S/m}$; $\epsilon_r = 55.657$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.51, 9.51, 9.51); Calibrated: 10/22/2018, ConvF(9.51, 9.51, 9.51); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) BACK&FRONT/BACK LTE12 1RB/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.173 W/kg BACK&FRONT/BACK LTE12 1RB/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 14.25 V/m; Power Drift = -0.04 dB Peak SAR (extrapolated) = 0.212 W/kg SAR(1 g) = 0.166 W/kg; SAR(10 g) = 0.070 W/kg Maximum value of SAR (measured) = 0.175 W/kg 		

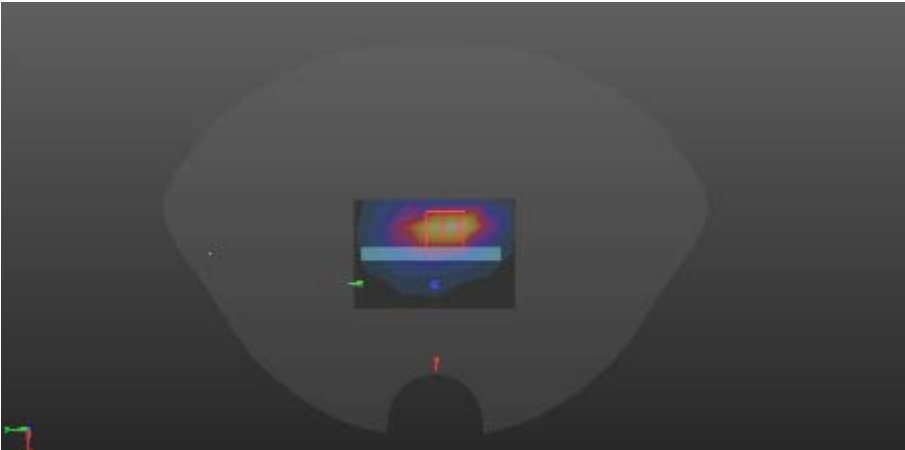
LTE B66

Up Antenna	Right side	Cheek
Communication System: UID 0, LTE band 66 (0); Frequency: 1745 MHz Medium parameters used (interpolated): $f = 1745$ MHz; $\sigma = 1.383$ S/m; $\epsilon_r = 40.047$; $\rho = 1000$ kg/m³ Phantom section: Right Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(8.2, 8.2, 8.2); Calibrated: 10/22/2018, ConvF(8.2, 8.2, 8.2); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) Right/LTE66 RC 1RB/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 1.60 W/kg Right/LTE66 RC 1RB/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 28.99 V/m; Power Drift = 0.09 dB Peak SAR (extrapolated) = 1.88 W/kg SAR(1 g) = 0.74 W/kg; SAR(10 g) = 0.347 W/kg Maximum value of SAR (measured) = 1.41 W/kg 		

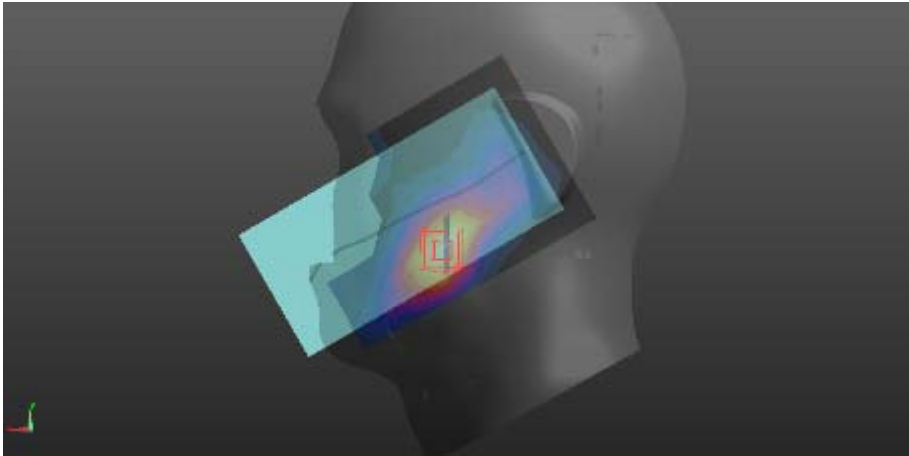
Up Antenna	Body-worn	Back
Communication System: UID 0, LTE band 66 (0); Frequency: 1745 MHz Medium parameters used (interpolated): $f = 1745 \text{ MHz}$; $\sigma = 1.485 \text{ S/m}$; $\epsilon_r = 53.422$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.69, 7.69, 7.69); Calibrated: 10/22/2018, ConvF(7.69, 7.69, 7.69); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) BACK&FRONT/BACK LTE66 1RB/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.549 W/kg BACK&FRONT/BACK LTE66 1RB/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 15.44 V/m; Power Drift = 0.01 dB Peak SAR (extrapolated) = 0.773 W/kg SAR(1 g) = 0.514 W/kg; SAR(10 g) = 0.235 W/kg Maximum value of SAR (measured) = 0.636 W/kg 		

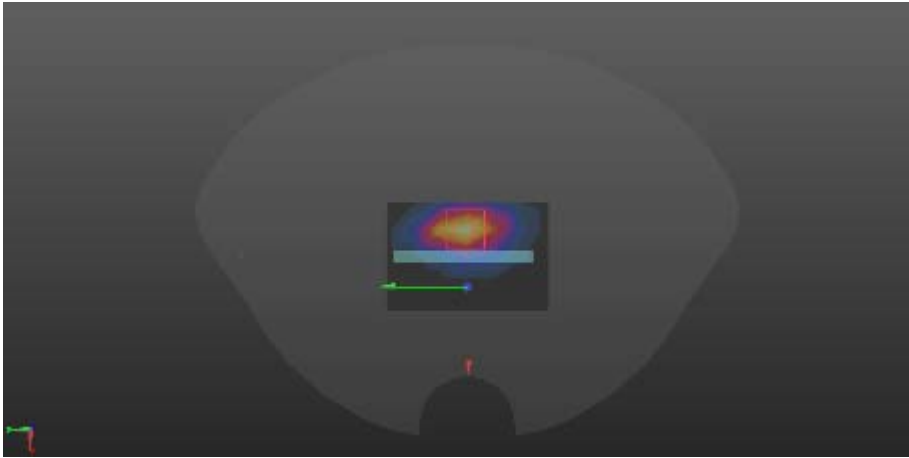
GSM (850MHz)

Down Antenna	Right Side	Cheek
Communication System: UID 0, Generic GSM (0); Frequency: 836.6 MHz; Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.905$ S/m; $\epsilon_r = 41.528$; $\rho = 1000$ kg/m³ Phantom section: Right Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.16, 9.16, 9.16); Calibrated: 10/22/2018, ConvF(9.16, 9.16, 9.16); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) Right/GSM850 RC/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.267 W/kg Right/GSM850 RC/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 6.236 V/m; Power Drift = 0.02 dB Peak SAR (extrapolated) = 0.343 W/kg SAR(1 g) = 0.248 W/kg; SAR(10 g) = 0.178 W/kg Maximum value of SAR (measured) = 0.279 W/kg 		

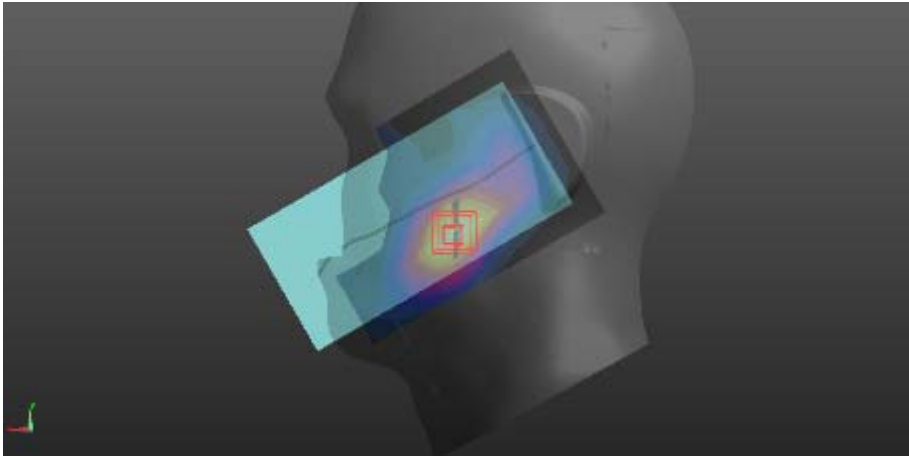
Down Antenna	Hotspot	Bottom
Communication System: UID 0, Generic GSM (0); Frequency: 836.6 MHz Medium parameters used (interpolated): $f = 836.6 \text{ MHz}$; $\sigma = 0.976 \text{ S/m}$; $\epsilon_r = 55.195$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.16, 9.16, 9.16); Calibrated: 10/22/2018, ConvF(9.16, 9.16, 9.16); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) Bottom/GSM850/Area Scan (5x7x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.293 W/kg Bottom/GSM850/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 10.55 V/m; Power Drift = 0.16 dB Peak SAR (extrapolated) = 0.541 W/kg SAR(1 g) = 0.223 W/kg; SAR(10 g) = 0.122 W/kg Maximum value of SAR (measured) = 0.328 W/kg 		

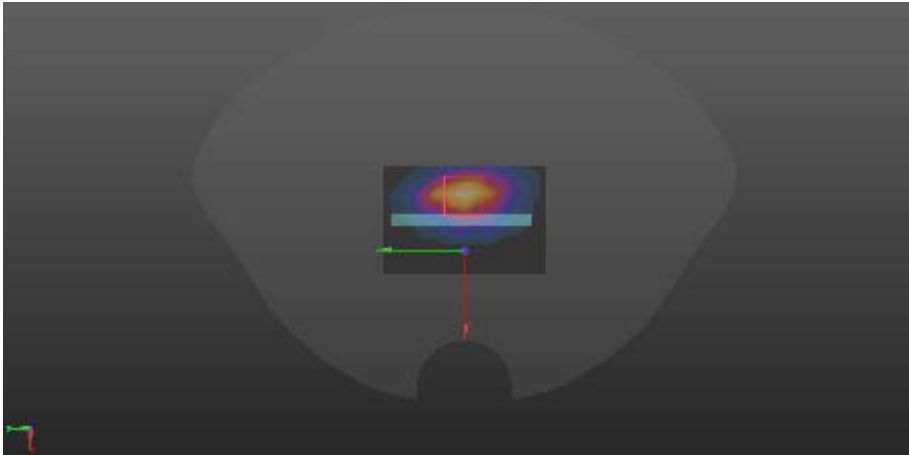
GSM (1900MHz)

Down Antenna	Left side	Cheek
Communication System: UID 0, Generic GSM (0); Frequency: 1880 MHz Medium parameters used (interpolated): $f = 1880 \text{ MHz}$; $\sigma = 1.4 \text{ S/m}$; $\epsilon_r = 40$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Left Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.16, 9.16, 9.16); Calibrated: 10/22/2018, ConvF(9.16, 9.16, 9.16); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) Left/GSM1900 LC/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.0464 W/kg Left/GSM1900 LC/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 1.889 V/m; Power Drift = 0.07 dB Peak SAR (extrapolated) = 0.0690 W/kg SAR(1 g) = 0.040 W/kg; SAR(10 g) = 0.024 W/kg Maximum value of SAR (measured) = 0.0486 W/kg 		

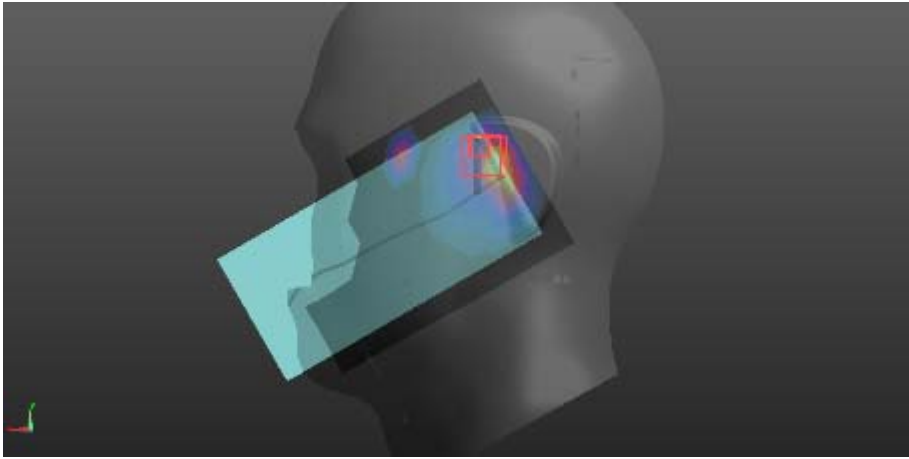
Down Antenna	Hotspot	Bottom
Communication System: UID 0, Generic GSM (0); Frequency: 1880 MHz Medium parameters used (interpolated): $f = 1880 \text{ MHz}$; $\sigma = 1.526 \text{ S/m}$; $\epsilon_r = 53.291$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.16, 9.16, 9.16); Calibrated: 10/22/2018, ConvF(9.16, 9.16, 9.16); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) Bottom/GSM1900/Area Scan (5x7x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.947 W/kg Bottom/GSM1900/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 13.65 V/m; Power Drift = 0.05 dB Peak SAR (extrapolated) = 1.44 W/kg SAR(1 g) = 0.768 W/kg; SAR(10 g) = 0.393 W/kg Maximum value of SAR (measured) = 0.968 W/kg 		

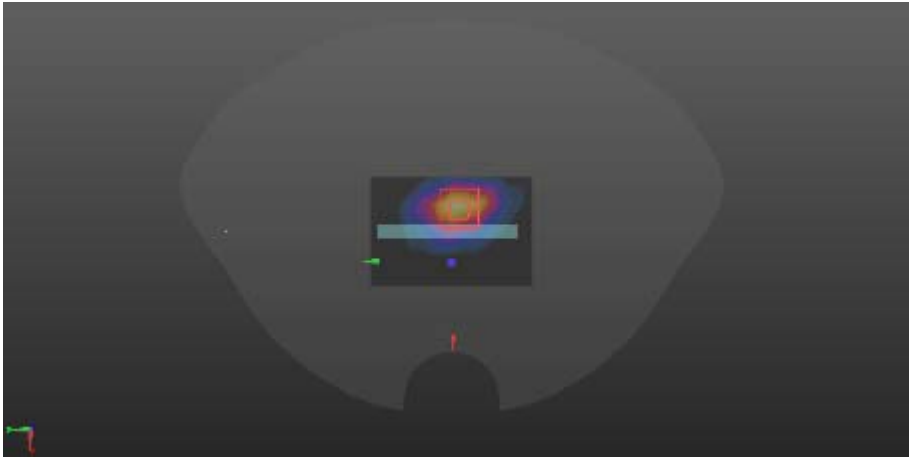
WCDMA B2

Down Antenna	Left side	Cheek
Communication System: UID 0, WCDMA BAND2 (0); Frequency: 1880 MHz Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.4$ S/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³ Phantom section: Left Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.16, 9.16, 9.16); Calibrated: 10/22/2018, ConvF(9.16, 9.16, 9.16); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) Left/WCDMA B2 LC/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.0685 W/kg Left/WCDMA B2 LC/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 2.881 V/m; Power Drift = -0.17 dB Peak SAR (extrapolated) = 0.0950 W/kg SAR(1 g) = 0.057 W/kg; SAR(10 g) = 0.034 W/kg Maximum value of SAR (measured) = 0.0667 W/kg 		

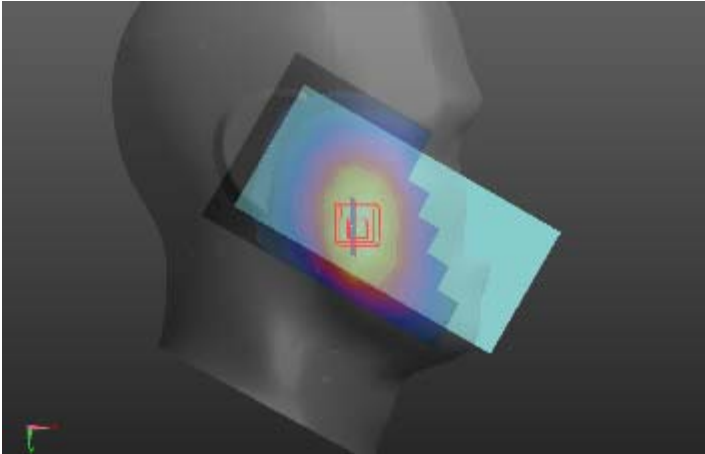
Down Antenna	Hotspot	Bottom
Communication System: UID 0, WCDMA BAND2 (0); Frequency: 1880 MHz Medium parameters used (interpolated): $f = 1880 \text{ MHz}$; $\sigma = 1.526 \text{ S/m}$; $\epsilon_r = 53.291$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.16, 9.16, 9.16); Calibrated: 10/22/2018, ConvF(9.16, 9.16, 9.16); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) Bottom/W2/Area Scan (5x7x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 1.12 W/kg Bottom/W2/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 17.09 V/m; Power Drift = 0.17 dB Peak SAR (extrapolated) = 1.62 W/kg SAR(1 g) = 0.910 W/kg; SAR(10 g) = 0.478 W/kg		
		

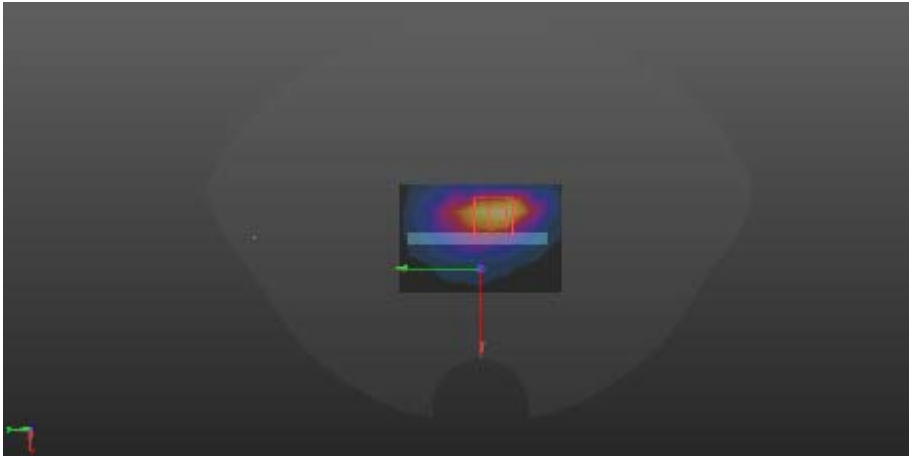
WCDMA B4

Down Antenna	Left side	Tilt
Communication System: UID 0, WCDMA BAND4 (0); Frequency: 1732.4 MHz Medium parameters used (interpolated): $f = 1732.4$ MHz; $\sigma = 1.375$ S/m; $\epsilon_r = 40.07$; $\rho = 1000$ kg/m³ Phantom section: Left Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.16, 9.16, 9.16); Calibrated: 10/22/2018, ConvF(9.16, 9.16, 9.16); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) Left/WCDMA B4 LT/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.0425 W/kg Left/WCDMA B4 LT/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 5.606 V/m; Power Drift = -0.09 dB Peak SAR (extrapolated) = 0.515 W/kg SAR(1 g) = 0.054 W/kg; SAR(10 g) = 0.018 W/kg Maximum value of SAR (measured) = 0.294 W/kg 		

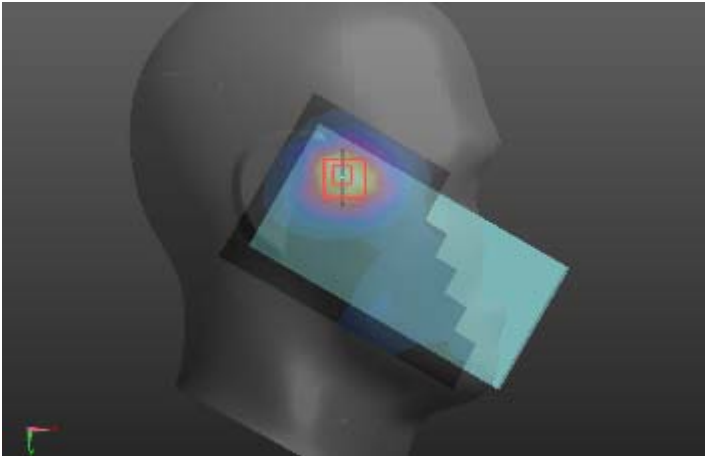
Down Antenna	Hotspot	Bottom
Communication System: UID 0, WCDMA BAND4 (0); Frequency: 1732.4 MHz Medium parameters used (interpolated): $f = 1732.4 \text{ MHz}$; $\sigma = 1.477 \text{ S/m}$; $\epsilon_r = 53.461$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.16, 9.16, 9.16); Calibrated: 10/22/2018, ConvF(9.16, 9.16, 9.16); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) Bottom/W4/Area Scan (5x7x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.147 W/kg Bottom/W4/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 6.541 V/m; Power Drift = 0.05 dB Peak SAR (extrapolated) = 0.250 W/kg SAR(1 g) = 0.133 W/kg; SAR(10 g) = 0.066 W/kg Maximum value of SAR (measured) = 0.170 W/kg 		

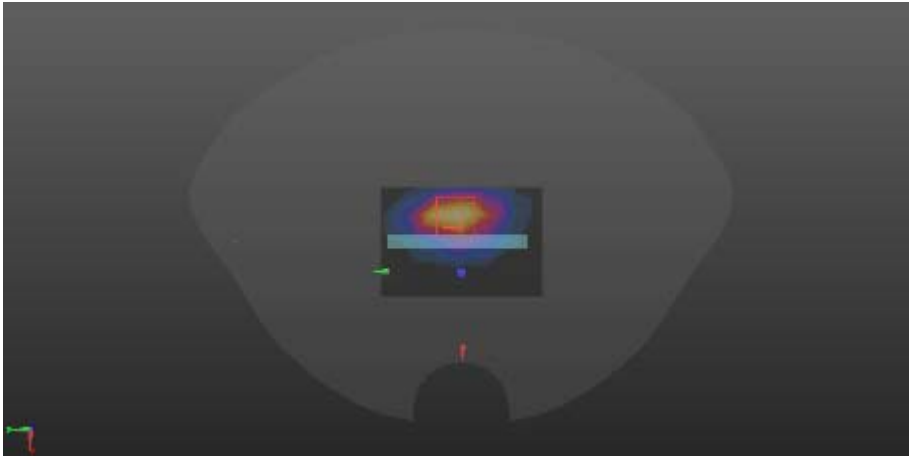
WCDMA B5

Down Antenna	Right side	Cheek
Communication System: UID 0, WCDMA BAND 5 (0); Frequency: 836.6 MHz Medium parameters used (interpolated): $f = 836.6 \text{ MHz}$; $\sigma = 0.905 \text{ S/m}$; $\epsilon_r = 41.528$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Right Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.16, 9.16, 9.16); Calibrated: 10/22/2018, ConvF(9.16, 9.16, 9.16); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) Right/WCDMA B5 RC/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.148 W/kg Right/WCDMA B5 RC/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 3.823 V/m; Power Drift = 0.06 dB Peak SAR (extrapolated) = 0.181 W/kg SAR(1 g) = 0.137 W/kg; SAR(10 g) = 0.097 W/kg Maximum value of SAR (measured) = 0.151 W/kg 		

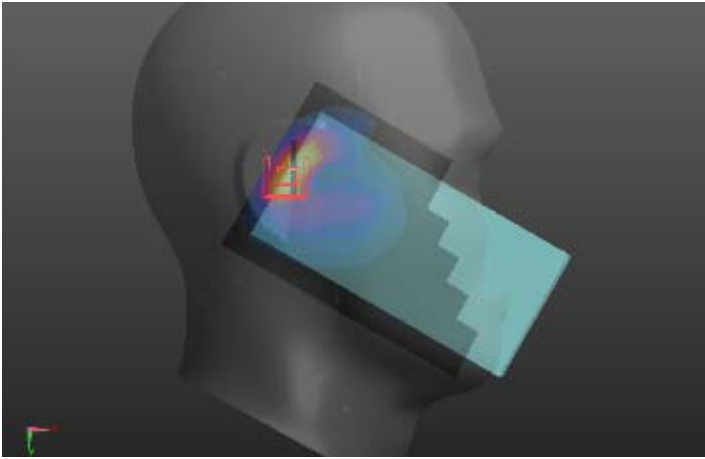
Down Antenna	Hotspot	Bottom
Communication System: UID 0, WCDMA BAND 5 (0); Frequency: 836.6 MHz Medium parameters used (interpolated): $f = 836.6 \text{ MHz}$; $\sigma = 0.976 \text{ S/m}$; $\epsilon_r = 55.195$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.16, 9.16, 9.16); Calibrated: 10/22/2018, ConvF(9.16, 9.16, 9.16); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) Bottom/W5/Area Scan (5x7x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.143 W/kg Bottom/W5/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 8.240 V/m; Power Drift = 0.09 dB Peak SAR (extrapolated) = 0.254 W/kg SAR(1 g) = 0.231 W/kg; SAR(10 g) = 0.061 W/kg Maximum value of SAR (measured) = 0.156 W/kg 		

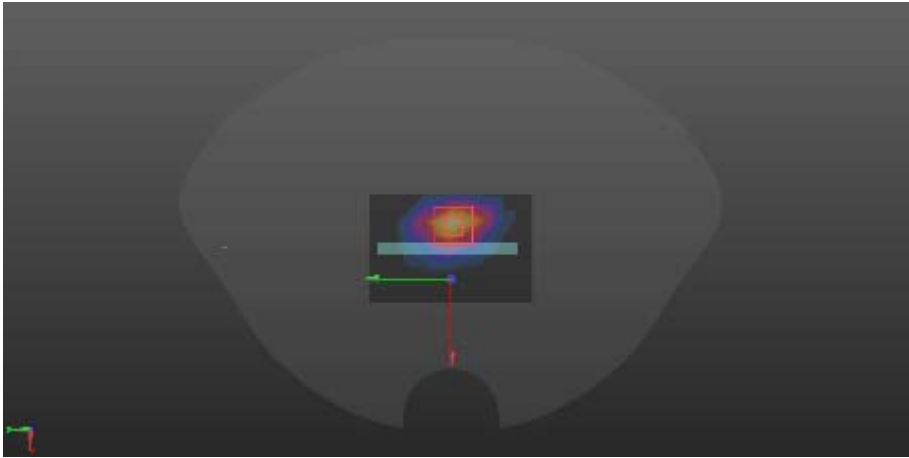
LTE B2

Down Antenna	Right side	Tilt
Communication System: UID 0, LTE band 02 (0); Frequency: 1880 MHz Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.4$ S/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³ Phantom section: Right Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.16, 9.16, 9.16); Calibrated: 10/22/2018, ConvF(9.16, 9.16, 9.16); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) Right/LTE2 RT/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.0489 W/kg Right/LTE2 RT/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 2.446 V/m; Power Drift = 0.07 dB Peak SAR (extrapolated) = 0.0680 W/kg SAR(1 g) = 0.053 W/kg; SAR(10 g) = 0.025 W/kg Maximum value of SAR (measured) = 0.0511 W/kg 		

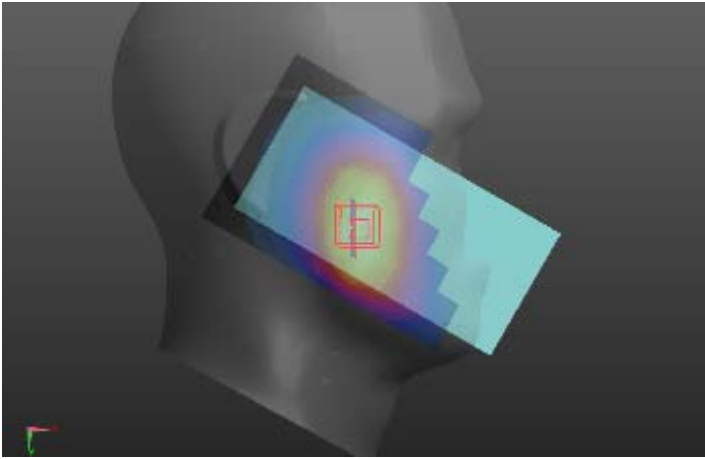
Down Antenna	Hotspot	Bottom
Communication System: UID 0, LTE band 02 (0); Frequency: 1880 MHz Medium parameters used (interpolated): $f = 1880 \text{ MHz}$; $\sigma = 1.526 \text{ S/m}$; $\epsilon_r = 53.291$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.16, 9.16, 9.16); Calibrated: 10/22/2018, ConvF(9.16, 9.16, 9.16); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) Bottom/LTE2/Area Scan (5x7x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 1.00 W/kg Bottom/LTE2/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 16.59 V/m; Power Drift = 0.04 dB Peak SAR (extrapolated) = 1.56 W/kg SAR(1 g) = 0.706 W/kg; SAR(10 g) = 0.449 W/kg Maximum value of SAR (measured) = 1.09 W/kg 		

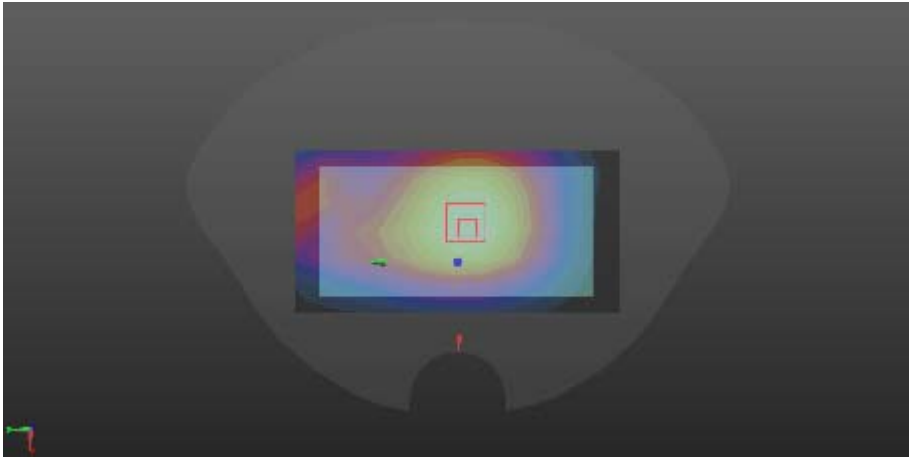
LTE B4

Down Antenna	Right side	Tilt
Communication System: UID 0, LTE band 4 (0); Frequency: 1732.5 MHz Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.375$ S/m; $\epsilon_r = 40.07$; $\rho = 1000$ kg/m³ Phantom section: Right Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.16, 9.16, 9.16); Calibrated: 10/22/2018, ConvF(9.16, 9.16, 9.16); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) Right/LTE4 RT/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.00984 W/kg Right/LTE4 RT/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 2.743 V/m; Power Drift = 0.09 dB Peak SAR (extrapolated) = 0.0160 W/kg SAR(1 g) = 0.012 W/kg; SAR(10 g) = 0.026 W/kg Maximum value of SAR (measured) = 0.0989 W/kg 		

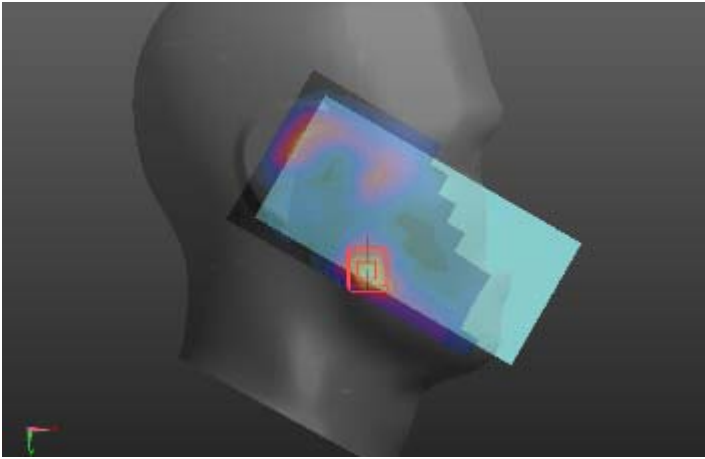
Down Antenna	Hotspot	Bottom
Communication System: UID 0, LTE band 4 (0); Frequency: 1732.5 MHz Medium parameters used (interpolated): $f = 1732.5 \text{ MHz}$; $\sigma = 1.477 \text{ S/m}$; $\epsilon_r = 53.46$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.16, 9.16, 9.16); Calibrated: 10/22/2018, ConvF(9.16, 9.16, 9.16); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) Bottom/LTE4/Area Scan (5x7x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.155 W/kg Bottom/LTE4/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 6.619 V/m; Power Drift = 0.09 dB Peak SAR (extrapolated) = 0.258 W/kg SAR(1 g) = 0.145 W/kg; SAR(10 g) = 0.067 W/kg Maximum value of SAR (measured) = 0.171 W/kg 		

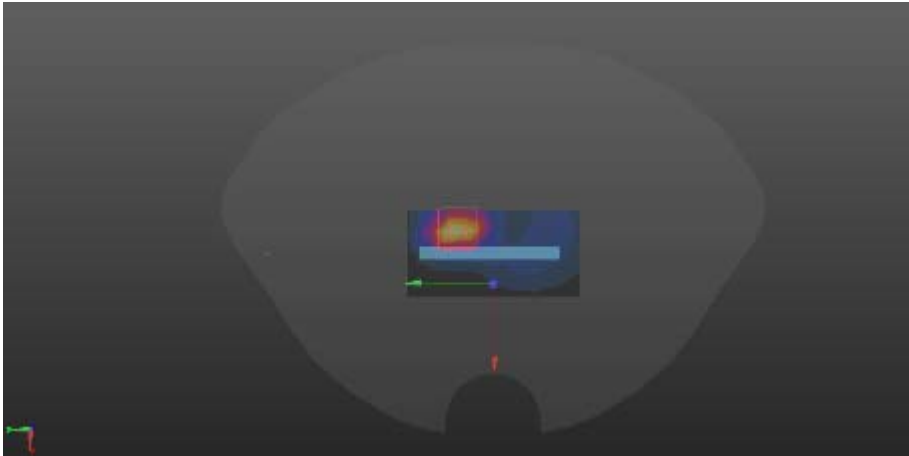
LTE B5

Down Antenna	Right side	Cheek
Communication System: UID 0, LTE Band 5 (0); Frequency: 836.5 MHz Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.905$ S/m; $\epsilon_r = 41.528$; $\rho = 1000$ kg/m³ Phantom section: Right Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.16, 9.16, 9.16); Calibrated: 10/22/2018, ConvF(9.16, 9.16, 9.16); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) Right/LTE5 RC/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.130 W/kg Right/LTE5 RC/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 3.789 V/m; Power Drift = -0.16 dB Peak SAR (extrapolated) = 0.156 W/kg SAR(1 g) = 0.119 W/kg; SAR(10 g) = 0.087 W/kg Maximum value of SAR (measured) = 0.133 W/kg 		

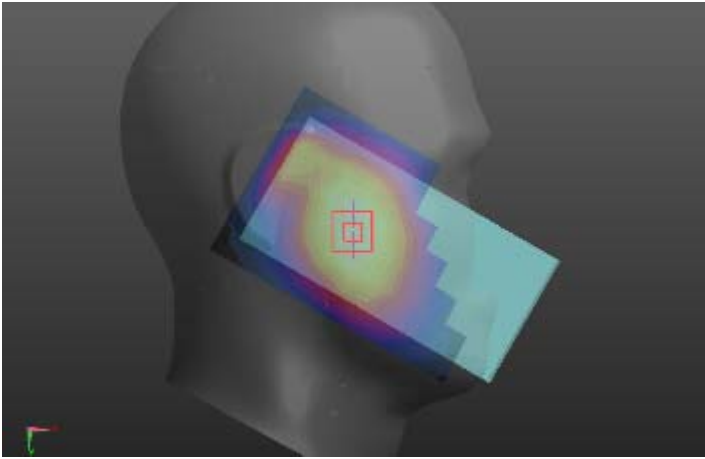
Down Antenna	Body-worn	Back
Communication System: UID 0, LTE Band 5 (0); Frequency: 836.5 MHz Medium parameters used (interpolated): $f = 836.5 \text{ MHz}$; $\sigma = 0.976 \text{ S/m}$; $\epsilon_r = 55.195$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.16, 9.16, 9.16); Calibrated: 10/22/2018, ConvF(9.16, 9.16, 9.16); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) Back/LTE5/Area Scan (7x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.207 W/kg Back/LTE5/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 15.00 V/m; Power Drift = 0.01 dB Peak SAR (extrapolated) = 0.247 W/kg SAR(1 g) = 0.187 W/kg; SAR(10 g) = 0.137 W/kg Maximum value of SAR (measured) = 0.208 W/kg 		

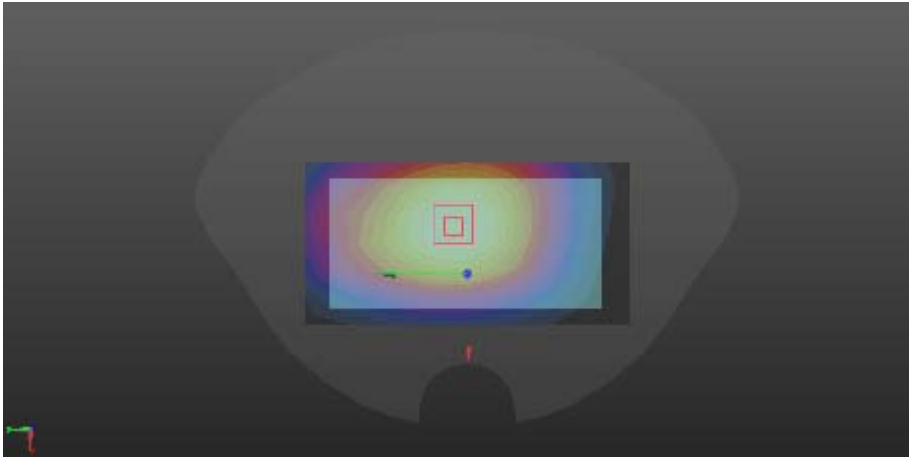
LTE B7

Down Antenna	Right side	Cheek
Communication System: UID 0, LTE Band 7 (0); Frequency: 2535 MHz Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 1.888$ S/m; $\epsilon_r = 39.084$; $\rho = 1000$ kg/m³ Phantom section: Right Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.16, 9.16, 9.16); Calibrated: 10/22/2018, ConvF(9.16, 9.16, 9.16); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) Right/LTE7RC/Area Scan (9x16x1): Measurement grid: dx=12mm, dy=12mm Maximum value of SAR (measured) = 0.0756 W/kg Right/LTE7RC/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 5.177 V/m; Power Drift = 0.17 dB Peak SAR (extrapolated) = 0.107 W/kg SAR(1 g) = 0.075 W/kg; SAR(10 g) = 0.031 W/kg Maximum value of SAR (measured) = 0.0761 W/kg 		

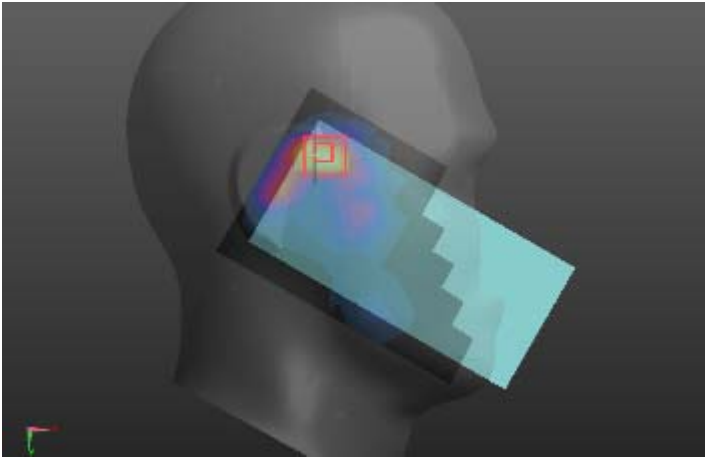
Down Antenna	Hotspot	Bottom
Communication System: UID 0, LTE Band 7 (0); Frequency: 2535 MHz Medium parameters used (interpolated): $f = 2535 \text{ MHz}$; $\sigma = 2.067 \text{ S/m}$; $\epsilon_r = 52.592$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.16, 9.16, 9.16); Calibrated: 10/22/2018, ConvF(9.16, 9.16, 9.16); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) Bottom/LTE7/Area Scan (5x9x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$ Maximum value of SAR (measured) = 0.376 W/kg Bottom/LTE7/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 6.706 V/m; Power Drift = 0.15 dB Peak SAR (extrapolated) = 0.645 W/kg SAR(1 g) = 0.300 W/kg; SAR(10 g) = 0.132 W/kg Maximum value of SAR (measured) = 0.406 W/kg 		

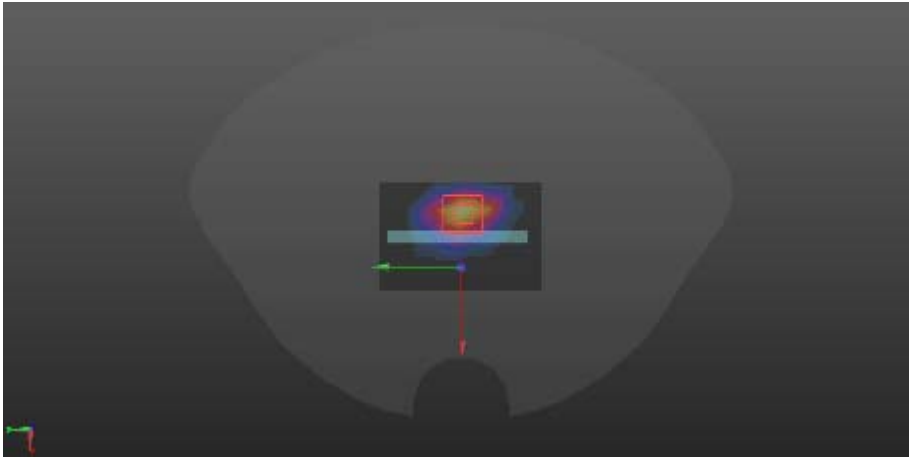
LTE B12

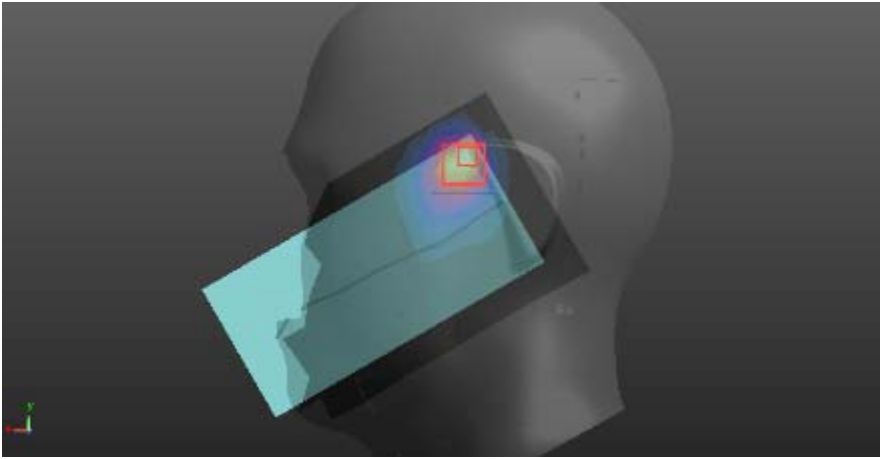
Down Antenna	Right side	Tilt
Communication System: UID 0, LTE Band 12 (0); Frequency: 707.5 MHz Medium parameters used (interpolated): $f = 707.5$ MHz; $\sigma = 0.887$ S/m; $\epsilon_r = 42.115$; $\rho = 1000$ kg/m³ Phantom section: Right Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.16, 9.16, 9.16); Calibrated: 10/22/2018, ConvF(9.16, 9.16, 9.16); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) Right/LTE12 RT/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.0394 W/kg Right/LTE12 RT/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 5.117 V/m; Power Drift = 0.08 dB Peak SAR (extrapolated) = 0.0460 W/kg SAR(1 g) = 0.26 W/kg; SAR(10 g) = 0.428 W/kg. Maximum value of SAR (measured) = 0.496 W/kg 		

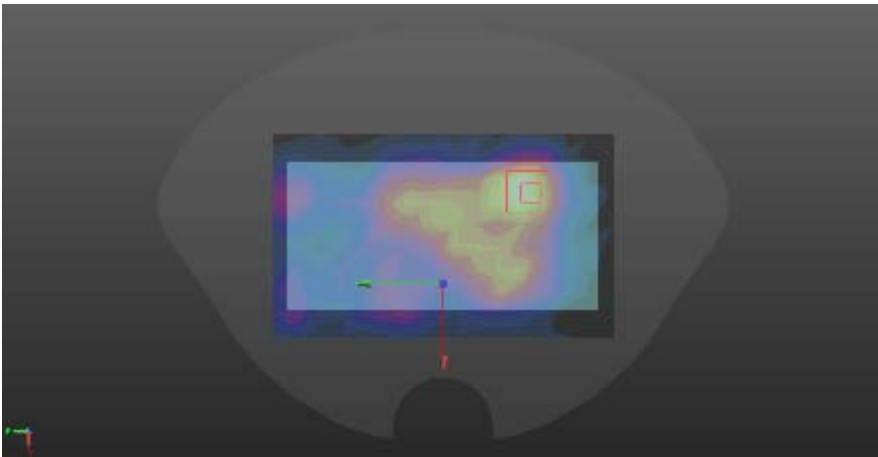
Down Antenna	Body-worn	Back
Communication System: UID 0, LTE Band 12 (0); Frequency: 707.5 MHz Medium parameters used (interpolated): $f = 707.5 \text{ MHz}$; $\sigma = 0.955 \text{ S/m}$; $\epsilon_r = 55.657$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.16, 9.16, 9.16); Calibrated: 10/22/2018, ConvF(9.16, 9.16, 9.16); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) Back/LTE12/Area Scan (7x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.132 W/kg Back/LTE12/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 11.91 V/m; Power Drift = 0.06 dB Peak SAR (extrapolated) = 0.159 W/kg SAR(1 g) = 0.121 W/kg; SAR(10 g) = 0.090 W/kg Maximum value of SAR (measured) = 0.134 W/kg 		

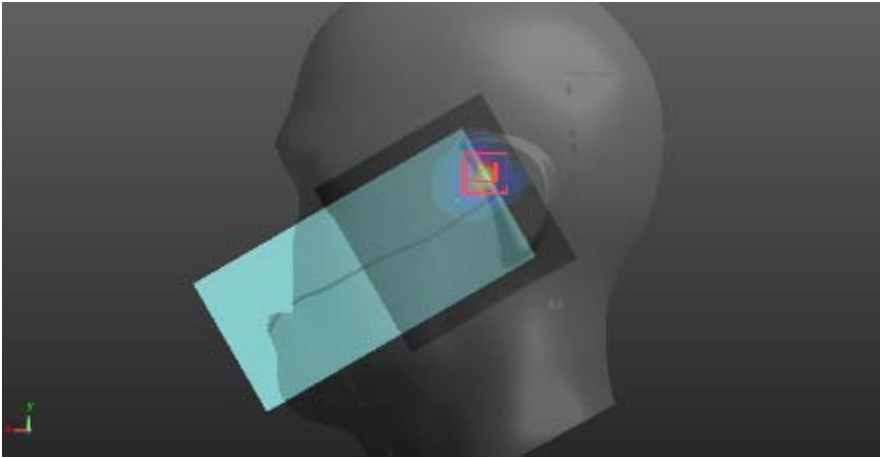
LTE B66

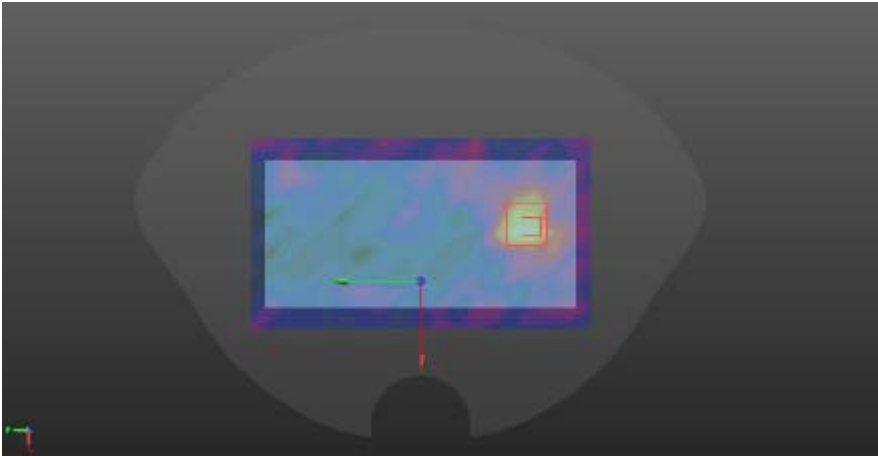
Down Antenna	Right side	Cheek
Communication System: UID 0, LTE band 66 (0); Frequency: 1745 MHz Medium parameters used (interpolated): $f = 1745 \text{ MHz}$; $\sigma = 1.383 \text{ S/m}$; $\epsilon_r = 40.047$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Right Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.16, 9.16, 9.16); Calibrated: 10/22/2018, ConvF(9.16, 9.16, 9.16); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) Right/LTE66 RC/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.237 W/kg Right/LTE66 RC/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 2.380 V/m; Power Drift = 0.02 dB Peak SAR (extrapolated) = 0.0550 W/kg SAR(1 g) = 0.014 W/kg; SAR(10 g) = 0.026 W/kg Maximum value of SAR (measured) = 0.036 W/kg 		

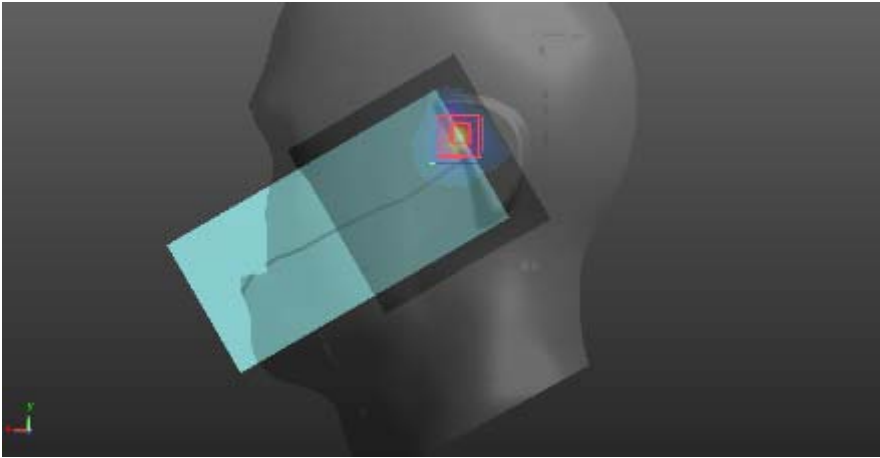
Down Antenna	Hotspot	Bottom
Communication System: UID 0, LTE band 66 (0); Frequency: 1745 MHz Medium parameters used (interpolated): $f = 1745 \text{ MHz}$; $\sigma = 1.485 \text{ S/m}$; $\epsilon_r = 53.422$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.16, 9.16, 9.16); Calibrated: 10/22/2018, ConvF(9.16, 9.16, 9.16); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) Bottom/LTE66/Area Scan (5x7x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.363 W/kg Bottom/LTE66/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 6.878 V/m; Power Drift = 0.16 dB Peak SAR (extrapolated) = 0.272 W/kg SAR(1 g) = 0.294 W/kg; SAR(10 g) = 0.471 W/kg Maximum value of SAR (measured) = 0.378 W/kg 		

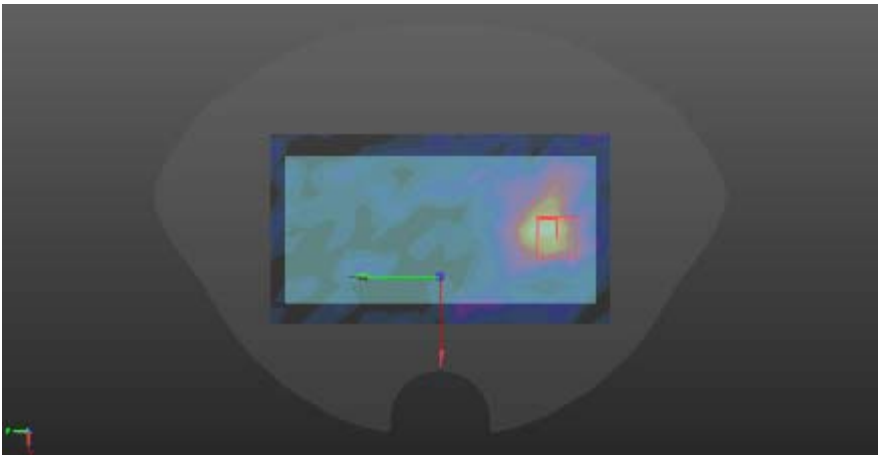
WIFI 2.4G	Left side	Cheek
Communication System: UID 10012 - CAB, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps); Frequency: 2437 MHz Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.788$ S/m; $\epsilon_r = 39.219$; $\rho = 1000$ kg/m³ Phantom section: Left Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.13, 7.13, 7.13); Calibrated: 10/22/2018, ConvF(7.13, 7.13, 7.13); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) WIFI/WIFI2.4G 11B LC/Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm Maximum value of SAR (measured) = 0.367 W/kg WIFI/WIFI2.4G 11B LC/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 3.610 V/m; Power Drift = 0.02 dB Peak SAR (extrapolated) = 0.558 W/kg SAR(1 g) = 0.237 W/kg; SAR(10 g) = 0.112 W/kg Maximum value of SAR (measured) = 0.358 W/kg 		

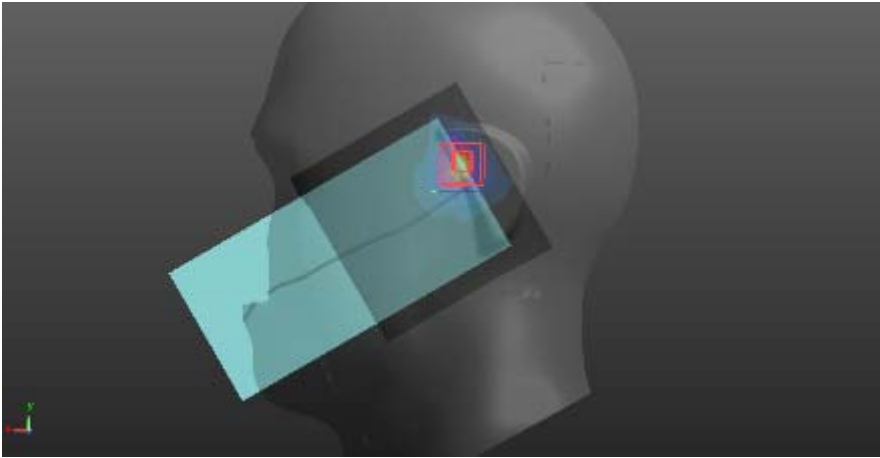
WIFI 2.4G	Body worn	Front
Communication System: UID 10012 - CAB, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps); Frequency: 2437 MHz Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.933$ S/m; $\epsilon_r = 52.717$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.19, 7.19, 7.19); Calibrated: 10/22/2018, ConvF(7.19, 7.19, 7.19); Calibrated: 10/22/2018; - Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) WIFI2.4GHz/FRONT WIFI2.4G 11B/Area Scan (10x16x1): Measurement grid: dx=12mm, dy=12mm Maximum value of SAR (measured) = 0.0334 W/kg WIFI2.4GHz/FRONT WIFI2.4G 11B/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 3.549 V/m; Power Drift = -0.09 dB Peak SAR (extrapolated) = 0.0720 W/kg SAR(1 g) = 0.040 W/kg; SAR(10 g) = 0.020 W/kg Maximum value of SAR (measured) = 0.0591 W/kg 		

WIFI 5.3G	Left side	Tilt
Communication System: UID 10062 - CAB, IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps); Frequency: 5300 MHz Medium parameters used: $f = 5300 \text{ MHz}$; $\sigma = 4.683 \text{ S/m}$; $\epsilon_r = 36.853$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Left Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(5.25, 5.25, 5.25); Calibrated: 10/22/2018, ConvF(5.25, 5.25, 5.25); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) WIFI5G/WIFI5G 5300 LT/Area Scan (11x19x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ Maximum value of SAR (measured) = 0.752 W/kg WIFI5G/WIFI5G 5300 LT/Zoom Scan (6x6x12)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=2\text{mm}$ Reference Value = 6.315 V/m; Power Drift = -0.12 dB Peak SAR (extrapolated) = 1.37 W/kg SAR(1 g) = 0.321 W/kg; SAR(10 g) = 0.096 W/kg Maximum value of SAR (measured) = 0.808 W/kg 		

WIFI 5.3G	Body worn	Front
Communication System: UID 10062 - CAB, IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps); Frequency: 5300 MHz Medium parameters used: $f = 5300 \text{ MHz}$; $\sigma = 5.355 \text{ S/m}$; $\epsilon_r = 49.035$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(4.41, 4.41, 4.41); Calibrated: 10/22/2018, ConvF(4.41, 4.41, 4.41); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) WIFI5G/FRONT WIFI5G 5300/Area Scan (11x19x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ Maximum value of SAR (measured) = 0.0667 W/kg WIFI5G/FRONT WIFI5G 5300/Zoom Scan (6x6x12)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=2\text{mm}$ Reference Value = 1.200 V/m; Power Drift = 0.13 dB Peak SAR (extrapolated) = 0.141 W/kg SAR(1 g) = 0.039 W/kg; SAR(10 g) = 0.017 W/kg Maximum value of SAR (measured) = 0.0783 W/kg 		

WIFI 5.5G	Left side	Tilt
Communication System: UID 10062 - CAB, IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps); Frequency: 5580 MHz Medium parameters used (interpolated): $f = 5580 \text{ MHz}$; $\sigma = 5.049 \text{ S/m}$; $\epsilon_r = 35.526$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Left Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(4.84, 4.84, 4.84); Calibrated: 10/22/2018, ConvF(4.84, 4.84, 4.84); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) WIFI5G/WIFI5G 5580 LT/Area Scan (11x19x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ Maximum value of SAR (measured) = 0.951 W/kg WIFI5G/WIFI5G 5580 LT/Zoom Scan (6x6x12)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=2\text{mm}$ Reference Value = 7.802 V/m; Power Drift = 0.07 dB Peak SAR (extrapolated) = 1.70 W/kg SAR(1 g) = 0.374 W/kg; SAR(10 g) = 0.112 W/kg Maximum value of SAR (measured) = 0.961 W/kg 		

WIFI 5.5G	Body worn	Front
Communication System: UID 10062 - CAB, IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps); Frequency: 5580 MHz Medium parameters used (interpolated): $f = 5580$ MHz; $\sigma = 5.768$ S/m; $\epsilon_r = 48.507$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(3.99, 3.99, 3.99); Calibrated: 10/22/2018, ConvF(3.99, 3.99, 3.99); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) WIFI5G/FRONT WIFI5G 5580/Area Scan (11x19x1): Measurement grid: dx=10mm, dy=10mm Maximum value of SAR (measured) = 0.0727 W/kg WIFI5G/FRONT WIFI5G 5580/Zoom Scan (6x6x12)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm Reference Value = 1.861 V/m; Power Drift = -0.06 dB Peak SAR (extrapolated) = 0.228 W/kg SAR(1 g) = 0.036 W/kg; SAR(10 g) = 0.016 W/kg Maximum value of SAR (measured) = 0.107 W/kg 		

WIFI 5.8G	Left side	Tilt
Communication System: UID 10062 - CAB, IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps); Frequency: 5785 MHz Medium parameters used (interpolated): $f = 5785 \text{ MHz}$; $\sigma = 5.255 \text{ S/m}$; $\epsilon_r = 35.315$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Left Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(5.04, 5.04, 5.04); Calibrated: 10/22/2018, ConvF(5.04, 5.04, 5.04); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) WIFI5G/WIFI5G 5785 LT/Area Scan (11x19x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ Maximum value of SAR (measured) = 1.01 W/kg WIFI5G/WIFI5G 5785 LT/Zoom Scan (6x6x12)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=2\text{mm}$ Reference Value = 8.233 V/m; Power Drift = -0.10 dB Peak SAR (extrapolated) = 1.83 W/kg SAR(1 g) = 0.393 W/kg; SAR(10 g) = 0.115 W/kg Maximum value of SAR (measured) = 1.01 W/kg 		

WIFI 5.8G	Body worn	Front
Communication System: UID 10062 - CAB, IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps); Frequency: 5785 MHz Medium parameters used (interpolated): $f = 5785 \text{ MHz}$; $\sigma = 5.984 \text{ S/m}$; $\epsilon_r = 48.221$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(4.21, 4.21, 4.21); Calibrated: 10/22/2018, ConvF(4.21, 4.21, 4.21); Calibrated: 10/22/2018; - Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/15/2018 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437) WIFI5G/FRONT WIFI5G 5785/Area Scan (11x19x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ Maximum value of SAR (measured) = 0.0922 W/kg WIFI5G/FRONT WIFI5G 5785/Zoom Scan (6x6x12)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=2\text{mm}$ Reference Value = 1.919 V/m; Power Drift = -0.41 dB Peak SAR (extrapolated) = 0.176 W/kg SAR(1 g) = 0.048 W/kg; SAR(10 g) = 0.021 W/kg Maximum value of SAR (measured) = 0.109 W/kg 