



Shenzhen Global Test Service Co.,Ltd.

No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong

TEST REPORT

FCC PART 15 SUBPART C 15.249

Report Reference No.....: **GTS20210311007-1-1**


FCC ID.....: **2AYZG-HP001**

Compiled by
(position+printed name+signature)...: File administrators Jimmy Wang

Supervised by
(position+printed name+signature)...: Test Engineer Aaron Tan

Approved by
(position+printed name+signature)...: Manager Jason Hu

Jimmy Wang
Aaron Tan
Jason Hu

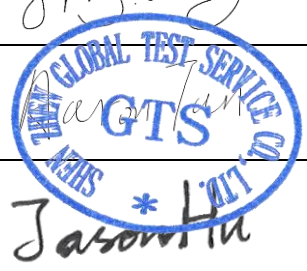

Date of issue.....: Mar. 11, 2021

Representative Laboratory Name.: **Shenzhen Global Test Service Co., Ltd.**

Address.....: No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong

Applicant's name.....: **ShenZhen litian technology Co.,Ltd**

Address: Rm209, #2 Zonghe Bldg, Bao yun da center, Xixiang St, Bao an District, Shenzhen, China

Test specification

Standard: **47 CFR FCC Part 15 Subpart C 15.249**

TRF Originator: Shenzhen Global Test Service Co.,Ltd.

Master TRF: Dated 2014-12

Shenzhen Global Test Service Co.,Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Global Test Service Co.,Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Global Test Service Co.,Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description 2.4GHz Wireless Tv Headphones

Trade Mark: N/A

Manufacturer: ShenZhen litian technology Co.,Ltd

Model/Type reference.....: W-HP001

List Model: N/A

Ratings: 5V---500mA

Result.....: **PASS**

TEST REPORT

Test Report No. : GTS20210311007-1-1	Mar. 11, 2021 Date of issue
--	--------------------------------

Equipment under Test : 2.4GHz Wireless Tv Headphones

Model /Type : W-HP001

Listed Models : N/A

Applicant : **ShenZhen litian technology Co.,Ltd**

Address : Rm209, #2 Zonghe Bldg, Bao yun da center, Xixiang St,
Bao an District, Shenzhen, China

Manufacturer : **ShenZhen litian technology Co.,Ltd**

Address : Rm209, #2 Zonghe Bldg, Bao yun da center, Xixiang St,
Bao an District, Shenzhen, China

Test Result:	PASS
---------------------	-------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

<u>1</u>	<u>TEST STANDARDS</u>	<u>4</u>
<u>2</u>	<u>SUMMARY</u>	<u>5</u>
2.1	General Remarks	5
2.2	Product Description	5
2.3	Equipment Under Test	5
2.4	Short description of the Equipment under Test (EUT)	5
2.5	EUT operation mode	6
2.6	Block Diagram of Test Setup	6
2.7	Special Accessories	6
2.8	Related Submittal(s) / Grant (s)	6
2.9	Modifications	6
<u>3</u>	<u>TEST ENVIRONMENT</u>	<u>7</u>
3.1	Address of the test laboratory	7
3.2	Test Facility	7
3.3	Environmental conditions	7
3.4	Summary of measurement results	8
3.5	Statement of the measurement uncertainty	8
3.6	Equipments Used during the Test	8
<u>4</u>	<u>TEST CONDITIONS AND RESULTS.....</u>	<u>10</u>
4.1	Conducted Emissions Test	10
4.2	Radiated Emissions and Band Edge	13
4.3	Occupied Bandwidth Measurement	19
4.4	Antenna Requirement	21
<u>5</u>	<u>TEST SETUP PHOTOS OF THE EUT</u>	<u>22</u>
<u>6</u>	<u>PHOTOS OF THE EUT</u>	<u>23</u>

1 TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15.249](#): Operation within the bands 902 - 928 MHz, 2400 - 2483.5 MHz, 5725 - 5875 MHz, and 24.0 - 24.25 GHz.

[ANSI C63.10: 2013](#): American National Standard for Testing Unlicensed Wireless Devices

2 SUMMARY

2.1 General Remarks

Date of receipt of test sample	:	Mar. 03, 2021
Testing commenced on	:	Mar. 04, 2021
Testing concluded on	:	Mar. 10, 2021

2.2 Product Description

Product Name:	2.4GHz Wireless Tv Headphones
Model/Type reference:	W-HP001
Power supply:	DC 5V from adapter
Adapter information:	Model:XSC-0500500S Input:100-240V~ 50/60Hz 0.4A Output:5V --- 500mA
Hardware Version:	AW8810TX_CY_S0101_V0.4
Software Version:	V1.0
Test samples ID:	GTS20210311007-1-1#
2.4GHz wireless	
Modulation:	GFSK
Operation frequency:	2403MHz to 2478MHz
Channel number:	76
Channel separation:	1 MHz
Antenna type:	PIFA antenna
Antenna gain:	1.0dBi

2.3 Equipment Under Test

Power supply system utilised

Power supply voltage	:	<input type="radio"/> 230V / 50 Hz	<input type="radio"/> 120V / 60Hz
		<input type="radio"/> 12 V DC	<input type="radio"/> 24 V DC
		<input checked="" type="radio"/> Other (specified in blank below)	

DC 5V from adapter

2.4 Short description of the Equipment under Test (EUT)

This is a 2.4GHz Wireless Tv Headphones.

For more details, refer to the user's manual of the EUT.


2.5 EUT operation mode

The applicant provided engineering samples staying in continuous transmitting (Duty Cycle more than 98%) and receiving mode for testing. There are 76 channels provided to the EUT and Channel 01/37/76 were selected to test.

Operation Frequency:

Channel	Frequency (MHz)
01	2403
02	2404
03	2405
⋮	⋮
37	2439
⋮	⋮
74	2476
75	2477
76	2478

2.6 Block Diagram of Test Setup

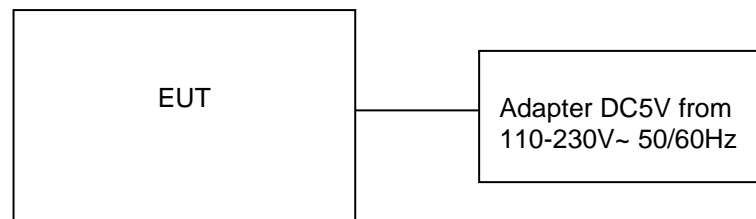

2.7 Special Accessories

Follow auxiliary equipment(s) test with EUT that provided by the manufacturer or laboratory is listed as follow:

Description	Manufacturer	Model	Technical Parameters	Certificate	Provided by
/	/	/	/	/	/
/	/	/	/	/	/
/	/	/	/	/	/
/	/	/	/	/	/

2.8 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for the device filing to comply with Section 15.249 of the FCC Part 15, Subpart C Rules.

2.9 Modifications

No modifications were implemented to meet testing criteria.

3 TEST ENVIRONMENT

3.1 Address of the test laboratory

Shenzhen Global Test Service Co.,Ltd.

No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.4:2014 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 165725

Shenzhen Global Test Service Co.,Ltd EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

A2LA-Lab Cert. No.: 4758.01

Shenzhen Global Test Service Co.,Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

CNAS-Lab Code: L8169

Shenzhen Global Test Service Co.,Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories. Date of Registration: Dec. 11, 2015. Valid time is until Dec. 10, 2024.

3.3 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15-35 ° C
Humidity:	30-60 %
Atmospheric pressure:	950-1050mbar

3.4 Summary of measurement results

FCC PART 15.249		
FCC Part 15.249(a)	Field Strength of Fundamental	PASS
FCC Part 15.209	Spurious Emission	PASS
FCC Part 15.209	Band edge	PASS
FCC Part 15.215(c)	20dB bandwidth	PASS
FCC Part 15.207	Conducted Emission	PASS
FCC Part 15.203	Antenna Requirement	PASS

Remark:

1. The measurement uncertainty is not included in the test result.
2. NA = Not Applicable; NP = Not Performed

3.5 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen Global Test Service Co.,Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen GTS laboratory is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10 dB	(1)
Radiated Emission	1~18GHz	4.32 dB	(1)
Radiated Emission	18-40GHz	5.54 dB	(1)
Conducted Disturbance	0.15~30MHz	3.12 dB	(1)

- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3.6 Equipments Used during the Test

Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
LISN	R&S	ENV216	3560.6550.08	2020/09/19	2021/09/18
LISN	R&S	ESH2-Z5	893606/008	2020/09/19	2021/09/18
EMI Test Receiver	R&S	ESPI3	101841-cd	2020/09/19	2021/09/18
EMI Test Receiver	R&S	ESCI7	101102	2020/09/19	2021/09/18
Spectrum Analyzer	Agilent	N9020A	MY48010425	2020/09/19	2021/09/18
Spectrum Analyzer	R&S	FSV40	100019	2020/09/19	2021/09/18
Vector Signal generator	Agilent	N5181A	MY49060502	2020/09/19	2021/09/18
Signal generator	Agilent	E4421B	3610AO1069	2020/09/19	2021/09/18
Climate Chamber	ESPEC	EL-10KA	A20120523	2020/09/19	2021/09/18
Controller	EM Electronics	Controller EM 1000	N/A	N/A	N/A
Horn Antenna	Schwarzbeck	BBHA 9120D	01622	2020/09/19	2021/09/18
Active Loop Antenna	Beijing Da Ze Technology Co.,Ltd.	ZN30900C	15006	2020/10/11	2021/10/10
Bilog Antenna	Schwarzbeck	VULB9163	000976	2020/05/26	2021/05/25

Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	791	2020/09/19	2021/09/18
Amplifier	Schwarzbeck	BBV 9743	#202	2020/09/19	2021/09/18
Amplifier	Schwarzbeck	BBV9179	9719-025	2020/09/19	2021/09/18
Amplifier	EMCI	EMC051845B	980355	2020/09/19	2021/09/18
Temperature/Humidity Meter	Gangxing	CTH-608	02	2020/09/19	2021/09/18
High-Pass Filter	K&L	9SH10-2700/X12750-O/O	KL142031	2020/09/19	2021/09/18
High-Pass Filter	K&L	41H10-1375/U12750-O/O	KL142032	2020/09/19	2021/09/18
RF Cable(below 1GHz)	HUBER+SUHNER	RG214	RE01	2020/09/19	2021/09/18
RF Cable(above 1GHz)	HUBER+SUHNER	RG214	RE02	2020/09/19	2021/09/18
Data acquisition card	Agilent	U2531A	TW53323507	2020/09/19	2021/09/18
Power Sensor	Agilent	U2021XA	MY5365004	2020/09/19	2021/09/18
Test Control Unit	Tonscend	JS0806-1	178060067	2020/06/19	2021/06/18
Automated filter bank	Tonscend	JS0806-F	19F8060177	2020/06/19	2021/06/18
EMI Test Software	Tonscend	JS1120-1	Ver 2.6.8.0518	/	/
EMI Test Software	Tonscend	JS1120-3	Ver 2.5.77.0418	/	/
EMI Test Software	Tonscend	JS32-CE	Ver 2.5	/	/
EMI Test Software	Tonscend	JS32-RE	Ver 2.5.1.8	/	/

Note: The Cal.Interval was one year.

4 TEST CONDITIONS AND RESULTS

4.1 Conducted Emissions Test


LIMIT

According to FCC CFR Title 47 Part 15 Subpart C Section 15.207, AC Power Line Conducted Emissions Limits for Licence-Exempt Radio Apparatus as below:

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION

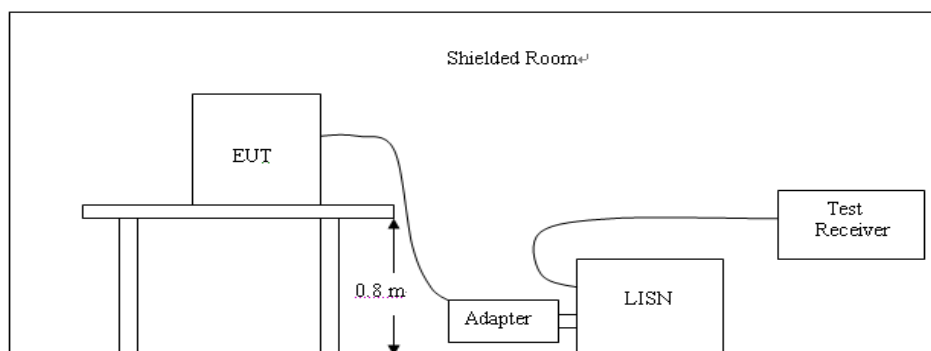

TEST PROCEDURE

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system; a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10:2013.
2. Support equipment, if needed, was placed as per ANSI C63.10:2013.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10:2013.
4. If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.


TEST RESULTS

Temperature	22.8°C	Humidity	56%
Test Engineer	Moon Tan	Configurations	2.4GHz

Remark:

- Both 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz power supply(charge from adapter)have been tested, only the worst result of 120 VAC, 60 Hz was reported as below:

Power supply:	DC 5V from Adapter AC 120V/60Hz	Polarization	L
---------------	------------------------------------	--------------	---

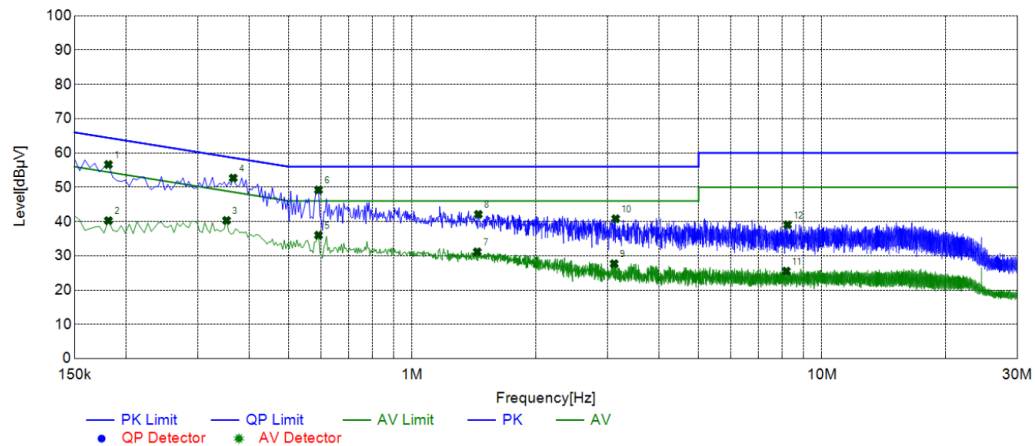Test Graph**Suspected List**

NO.	Frequency [MHz]	Reading [dBμV]	Factor [dB]	Result [dBμV]	Limit [dBμV]	Margin [dB]	Detector	Line	Remark
1	0.1815	46.57	10.06	56.63	64.42	7.79	PK	L1	PASS
2	0.1815	30.19	10.06	40.25	54.42	14.17	AV	L1	PASS
3	0.3525	30.31	10.00	40.31	48.90	8.59	AV	L1	PASS
4	0.3660	42.67	10.01	52.68	58.59	5.91	PK	L1	PASS
5	0.5910	25.94	10.06	36.00	46.00	10.00	AV	L1	PASS
6	0.5910	39.15	10.06	49.21	56.00	6.79	PK	L1	PASS
7	1.4415	21.06	10.10	31.16	46.00	14.84	AV	L1	PASS
8	1.4505	31.97	10.11	42.08	56.00	13.92	PK	L1	PASS
9	3.1110	17.39	10.30	27.69	46.00	18.31	AV	L1	PASS
10	3.1380	30.50	10.30	40.80	56.00	15.20	PK	L1	PASS
11	8.1870	14.88	10.64	25.52	50.00	24.48	AV	L1	PASS
12	8.2410	28.41	10.64	39.05	60.00	20.95	PK	L1	PASS

Note:1. Result (dBμV) = Reading (dBμV) + Factor (dB).

2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).


Power supply:

DC 5V from Adapter
AC 120V/60Hz

Polarization

N

Test Graph

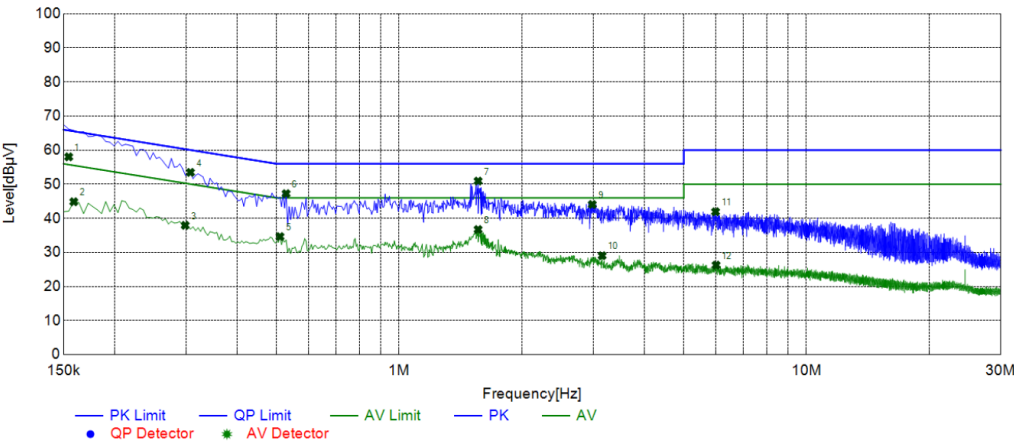

Suspected List									
NO.	Frequency [MHz]	Reading [dBμV]	Factor [dB]	Result [dBμV]	Limit [dBμV]	Margin [dB]	Detector	Line	Remark
1	0.1545	51.95	10.05	58.03	65.75	7.72	PK	N	PASS
2	0.1590	36.91	10.05	44.85	55.52	10.67	AV	N	PASS
3	0.2985	27.96	9.97	37.93	50.28	12.35	AV	N	PASS
4	0.3075	43.18	9.98	53.47	60.04	6.57	PK	N	PASS
5	0.5100	24.58	10.06	34.64	46.00	11.36	AV	N	PASS
6	0.5280	37.18	10.06	47.24	56.00	8.76	PK	N	PASS
7	1.5630	40.80	10.12	50.92	56.00	5.08	PK	N	PASS
8	1.5630	26.59	10.12	36.71	46.00	9.29	AV	N	PASS
9	2.9805	33.77	10.29	44.06	56.00	11.94	PK	N	PASS
10	3.1515	18.73	10.30	29.03	46.00	16.97	AV	N	PASS
11	5.9820	31.38	10.54	41.92	60.00	18.08	PK	N	PASS
12	6.0000	15.72	10.54	26.26	50.00	23.74	AV	N	PASS

Note:1. Result (dBμV) = Reading (dBμV) + Factor (dB).
2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

4.2 Radiated Emissions and Band Edge

Limit

According 15.249, the field strength of emissions from intentional radiators operated within 2400MHz-2483.5 MHz shall not exceed 94dB μ V/m (50mV/m):

FCC PART 15.249(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits list as below, whichever is the lesser attenuation.


In addition, radiated emissions which fall in the restricted bands, must also comply with the radiated emission limits specified list as below.

Radiated emission limits


Frequency (MHz)	Distance (Meters)	Radiated (dB μ V/m)	Radiated (μ V/m)
0.009-0.49	3	$20\log(2400/F(\text{KHz}))+40\log(300/3)$	$2400/F(\text{KHz})$
0.49-1.705	3	$20\log(24000/F(\text{KHz}))+40\log(30/3)$	$24000/F(\text{KHz})$
1.705-30	3	$20\log(30)+40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

TEST CONFIGURATION


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

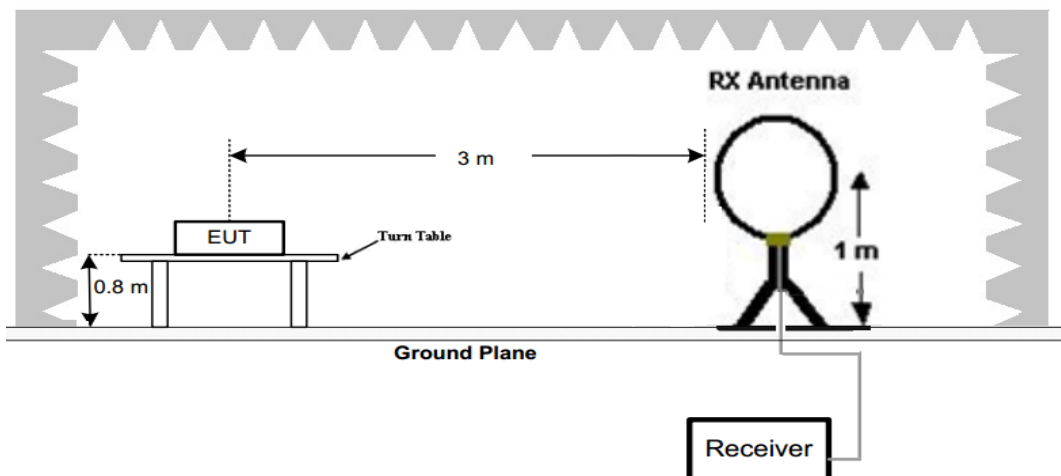

(B) Radiated Emission Test Set-Up, Frequency below 1000MHz

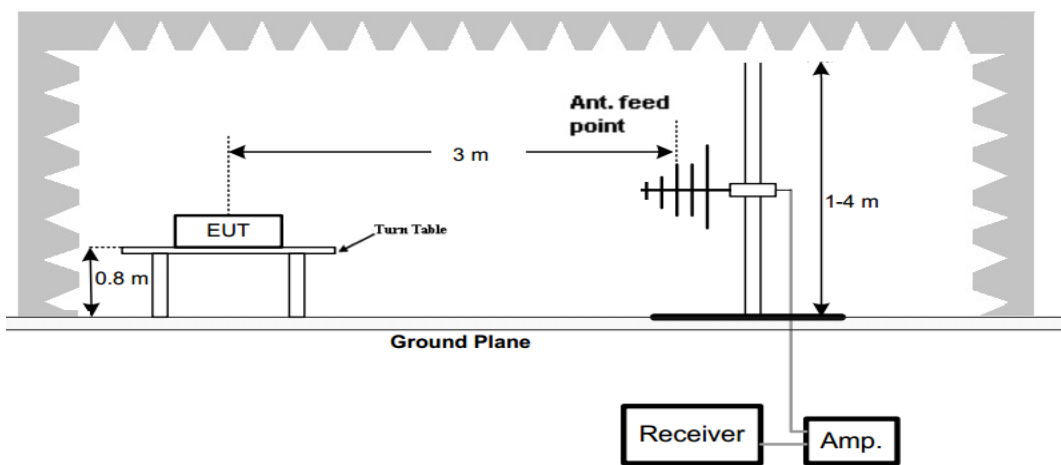

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

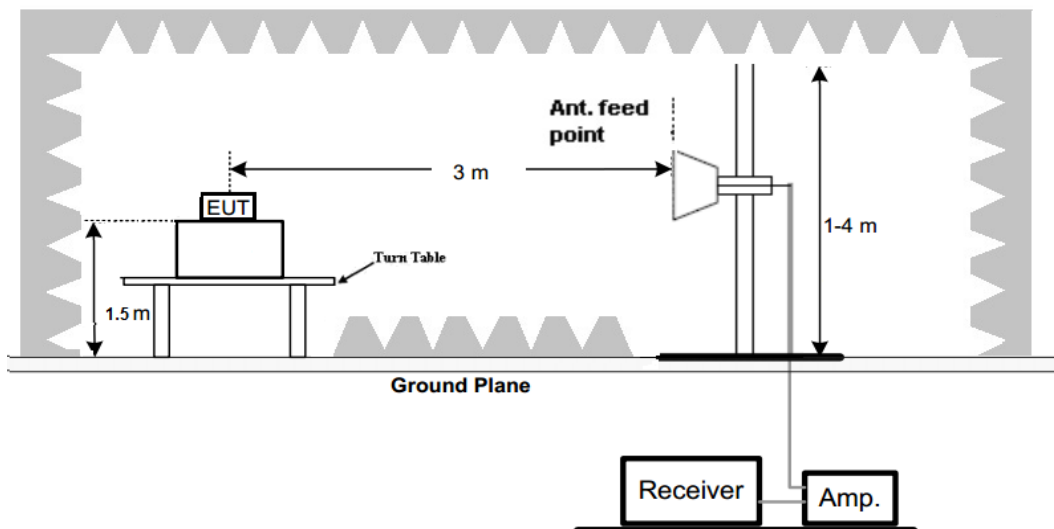

Test Procedure

- Below 1GHz measurement the EUT is placed on a turntable which is 0.8m above ground plane, and above 1GHz measurement EUT was placed on a low permittivity and low loss tangent turn table which is 1.5m above ground plane.
- Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT
- And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- Repeat above procedures until all frequency measurements have been completed.
- Radiated emission test frequency band from 9KHz to 25GHz.
- The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
9KHz-30MHz	Active Loop Antenna	3
30MHz-1GHz	Bilog Antenna	3
1GHz-18GHz	Horn Antenna	3
18GHz-25GHz	Horn Antenna	1

- Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
9KHz-150KHz	RBW=200Hz/VBW=3KHz, Sweep time=Auto	QP
150KHz-30MHz	RBW=9KHz/VBW=100KHz, Sweep time=Auto	QP
30MHz-1GHz	RBW=120KHz/VBW=1000KHz, Sweep time=Auto	QP
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak

TEST RESULTS

Temperature	22.8°C	Humidity	56%
Test Engineer	Moon Tan	Configurations	2.4GHz


Remark:

- We measured Radiated Emission at GFSK mode from 9 KHz to 25GHz and recorded worst case.
- For below 1GHz testing recorded worst at GFSK low channel.
- Radiated emission test from 9 KHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9 KHz to 30MHz and not recorded in this report.

For 30MHz-1GHz

Horizontal

Test Graph

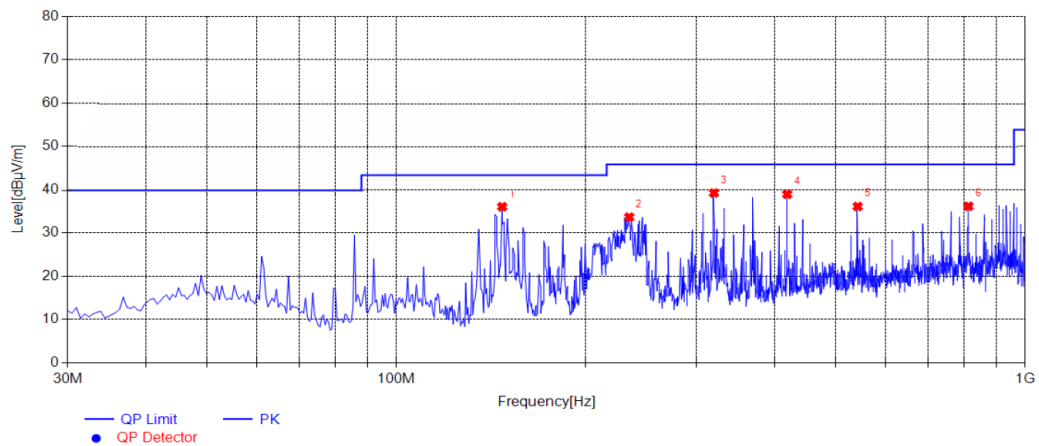


Suspected List

NO.	Frequency [MHz]	Reading [dBμV/m]	Factor [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	147.3700	48.66	-12.63	36.03	43.50	7.47	100	10	PK	Horizontal	PASS
2	234.6700	42.30	-8.67	33.63	46.00	12.37	100	10	PK	Horizontal	PASS
3	320.0300	45.74	-6.53	39.21	46.00	6.79	100	20	PK	Horizontal	PASS
4	418.4850	43.23	-4.32	38.91	46.00	7.09	100	10	PK	Horizontal	PASS
5	541.6750	38.33	-2.24	36.09	46.00	9.91	100	10	PK	Horizontal	PASS
6	812.7900	34.07	2.06	36.13	46.00	9.87	100	20	PK	Horizontal	PASS

Vertical

Test Graph

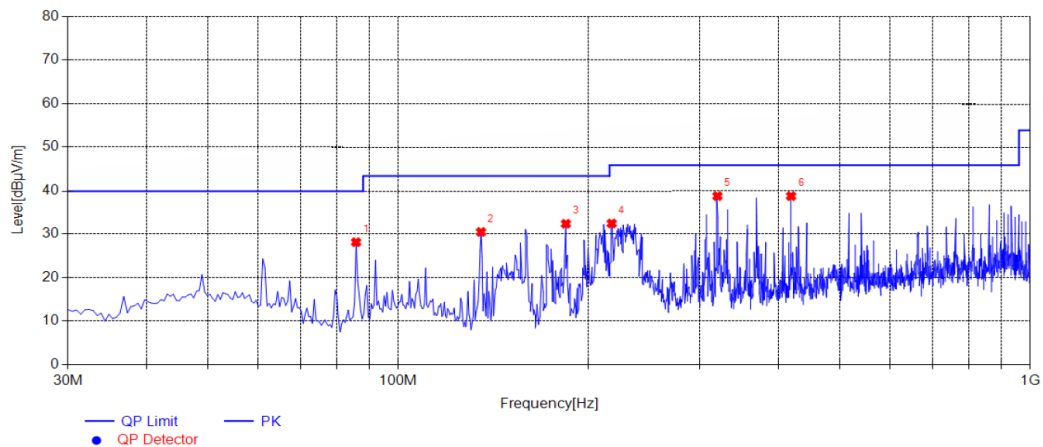

Suspected List

NO.	Frequency [MHz]	Reading [dBμV/m]	Factor [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	85.7750	39.30	-11.18	28.12	40.00	11.88	100	20	PK	Vertical	PASS
2	135.2450	42.67	-12.20	30.47	43.40	13.03	100	10	PK	Vertical	PASS
3	184.2300	42.76	-10.41	32.35	43.50	11.15	100	10	PK	Vertical	PASS
4	217.6950	41.63	-9.21	32.42	46.00	13.58	100	10	PK	Vertical	PASS
5	320.0300	45.23	-6.53	38.70	46.00	7.30	100	10	PK	Vertical	PASS
6	418.4850	43.02	-4.32	38.70	46.00	7.30	100	20	PK	Vertical	PASS

Note:1. Result (dBμV/m) = Reading (dBμV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

For 1GHz to 25GHz

GFSK Mode (above 1GHz)

Frequency(MHz):				2403		Polarity:			HORIZONTAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	2403.00	89.98	PK	114	24.02	56.36	28.92	4.70	0.00	33.62
1	2403.00	80.41	AV	94	13.59	46.79	28.92	4.70	0.00	33.62
2	2390.00	48.65	PK	74	25.35	15.02	28.93	4.70	0.00	33.63
2	2390.00	--	AV	54	--	--	--	--	--	--
3	2400.00	50.11	PK	74	23.89	16.43	28.96	4.72	0.00	33.68
3	2400.00	--	AV	54	--	--	--	--	--	--
4	4806.00	60.33	PK	74	13.67	55.82	33.49	6.91	35.89	4.51
4	4806.00	49.57	AV	54	4.43	45.06	33.49	6.91	35.89	4.51
5	5762.50	46.25	PK	74	27.75	38.50	34.80	7.46	34.50	7.75
5	5762.50	--	AV	54	--	--	--	--	--	--
6	7209.00	50.12	PK	74	23.88	39.00	36.96	9.18	35.03	11.12
6	7209.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):				2403		Polarity:			VERTICAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	2403.00	90.65	PK	114	23.35	57.25	28.79	4.61	0.00	33.40
1	2403.00	81.57	AV	94	12.43	48.17	28.79	4.61	0.00	33.40
2	2390.00	49.22	PK	74	24.78	15.90	28.72	4.60	0.00	33.32
2	2390.00	--	AV	54	--	--	--	--	--	--
3	2400.00	51.14	PK	74	22.86	17.75	28.78	4.61	0.00	33.39
3	2400.00	--	AV	54	--	--	--	--	--	--
4	4806.00	61.25	PK	74	12.75	56.74	33.49	6.91	35.89	4.51
4	4806.00	50.36	AV	54	3.64	45.85	33.49	6.91	35.89	4.51
5	5762.50	47.25	PK	74	26.75	39.50	34.80	7.46	34.50	7.75
5	5762.50	--	AV	54	--	--	--	--	--	--
6	7209.00	50.84	PK	74	23.16	39.72	36.96	9.18	35.03	11.12
6	7209.00	--	AV	54	--	--	--	--	--	--

REMARKS:

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.
6. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.
7. For fundamental frequency, RBW 3MHz VBW 3MHz Peak detector is for PK Value ; RMS detector is for AV value.

Frequency(MHz):				2439		Polarity:			HORIZONTAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	2439.00	88.65	PK	114	25.35	55.15	28.85	4.65	0.00	33.50
1	2439.00	80.71	AV	94	13.29	47.21	28.85	4.65	0.00	33.50
2	4878.00	59.61	PK	74	14.39	54.97	33.60	6.95	35.90	4.64
2	4878.00	48.24	AV	54	5.76	43.60	33.60	6.95	35.90	4.64
3	5205.75	49.05	PK	74	24.95	41.66	34.55	7.14	34.30	7.39
3	5205.75	--	AV	54	--	--	--	--	--	--
4	7317.00	50.23	PK	74	23.77	38.55	37.45	9.23	35.00	11.68
4	7317.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):				2439		Polarity:			VERTICAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	2439.00	89.98	PK	114	24.02	56.48	28.85	4.65	0.00	33.50
1	2439.00	81.58	AV	94	12.42	48.08	28.85	4.65	0.00	33.50
2	4878.00	60.23	PK	74	13.77	55.59	33.60	6.95	35.90	4.64
2	4878.00	50.87	AV	54	3.13	46.23	33.60	6.95	35.90	4.64
3	5205.75	49.93	PK	74	24.07	42.54	34.55	7.14	34.30	7.39
3	5205.75	--	AV	54	--	--	--	--	--	--
4	7317.00	51.07	PK	74	22.93	39.39	37.45	9.23	35.00	11.68
4	7317.00	--	AV	54	--	--	--	--	--	--

REMARKS:

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.
6. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.
7. For fundamental frequency, RBW 3MHz VBW 3MHz Peak detector is for PK Value; RMS detector is for AV value.

Frequency(MHz):				2478		Polarity:			HORIZONTAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	2478.00	90.32	PK	114	23.68	56.70	28.92	4.70	0.00	33.62
1	2478.00	80.42	AV	94	13.58	46.80	28.92	4.70	0.00	33.62
2	2483.50	49.25	PK	74	24.75	15.62	28.93	4.70	0.00	33.63
2	2483.50	--	AV	54	--	--	--	--	--	--
3	2500.00	47.52	PK	74	26.48	13.84	28.96	4.72	0.00	33.68
3	2500.00	--	AV	54	--	--	--	--	--	--
4	4956.00	60.25	PK	74	13.75	55.35	33.83	7.00	35.92	4.90
4	4956.00	49.22	AV	54	4.78	44.32	33.83	7.00	35.92	4.90
5	5077.25	48.35	PK	74	25.65	41.28	34.25	7.08	34.26	7.07
5	5077.25	--	AV	54	--	--	--	--	--	--
6	7434.00	49.92	PK	74	24.08	37.97	37.64	9.27	34.97	11.95
6	7434.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):				2478		Polarity:			VERTICAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	2478.00	90.52	PK	114	23.48	56.90	28.92	4.70	0.00	33.62
1	2478.00	81.14	AV	94	12.86	47.52	28.92	4.70	0.00	33.62
2	2483.50	50.22	PK	74	23.78	16.59	28.93	4.70	0.00	33.63
2	2483.50	--	AV	54	--	--	--	--	--	--
3	2500.00	49.88	PK	74	24.12	16.20	28.96	4.72	0.00	33.68
3	2500.00	--	AV	54	--	--	--	--	--	--
4	4956.00	60.21	PK	74	13.79	55.31	33.83	7.00	35.92	4.90
4	4956.00	51.51	AV	54	2.49	46.61	33.83	7.00	35.92	4.90
5	5077.25	49.66	PK	74	24.34	42.59	34.25	7.08	34.26	7.07
5	5077.25	--	AV	54	--	--	--	--	--	--
6	7434.00	51.21	PK	74	22.79	39.26	37.64	9.27	34.97	11.95
6	7434.00	--	AV	54	--	--	--	--	--	--

REMARKS:


1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.
6. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.
7. For fundamental frequency, RBW 3MHz VBW 3MHz Peak detector is for PK Value; RMS detector is for AV value.

4.3 Occupied Bandwidth Measurement

Limit

N/A

Test Configuration

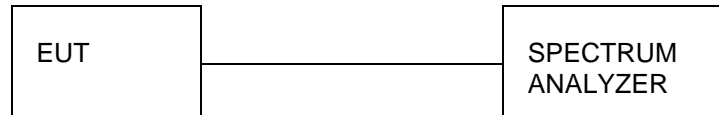

Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 KHz RBW and 300 KHz VBW.


The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

Test Results

Temperature	22.8°C	Humidity	56%
Test Engineer	Moon Tan	Test mode	2.4GHz

Modulation	Channel	99% OBW (MHz)	20dB bandwidth (MHz)	Result
GFSK	CH01	2.5277	2.017	Pass
	CH37	2.5220	1.903	
	CH76	2.4812	2.100	

Test plot as follows:

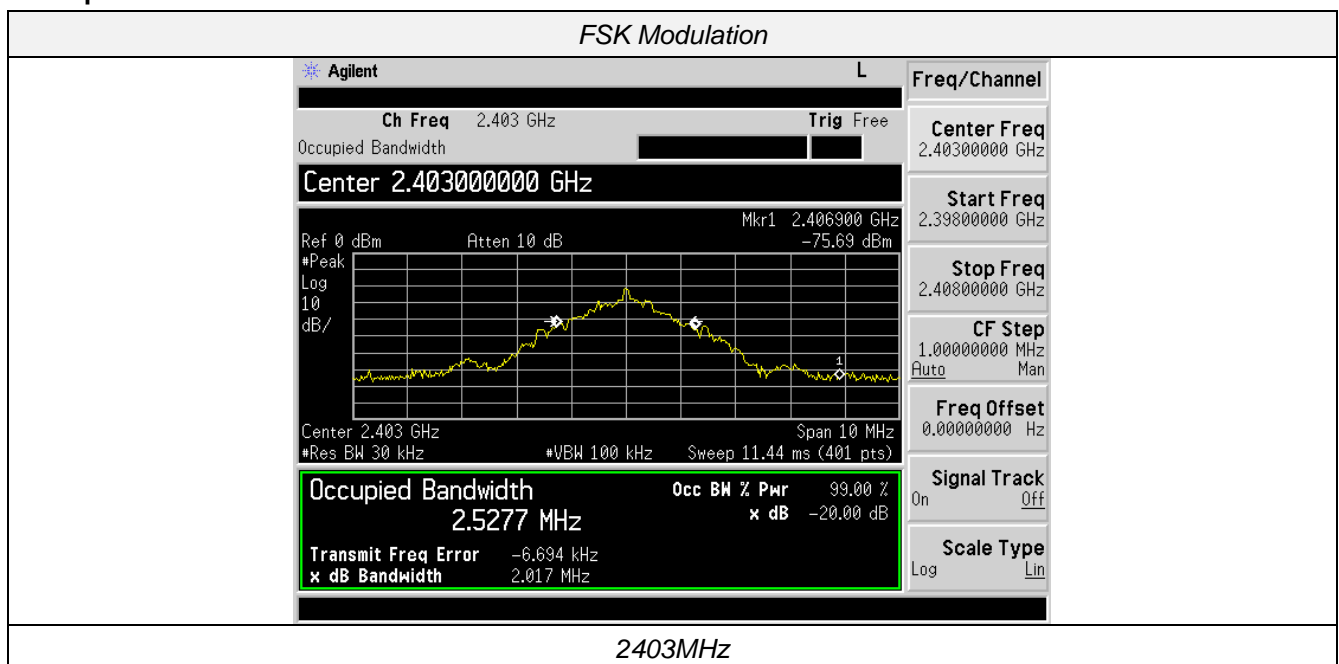

<div><div><div>Agilent</div><div>L</div></div><div><div>Ch Freq 2.439 GHz</div><div>Trig Free</div></div><div>Occupied Bandwidth</div><div>Center 2.439000000 GHz</div><div><div>Ref 0 dBm</div><div>Atten 10 dB</div><div>Mkr1 2.437925 GHz</div><div>-39.28 dBm</div></div><div><div>#Peak</div><div>Log</div><div>10</div><div>dB/</div></div><div><div>Center 2.439 GHz</div><div>Span 10 MHz</div><div>#Res BW 30 kHz</div><div>#VBW 100 kHz</div><div>Sweep 11.44 ms (401 pts)</div></div><div><div>Occupied Bandwidth</div><div>2.5220 MHz</div><div>Transmit Freq Error 6.339 kHz</div><div>x dB Bandwidth 1.903 MHz</div><div>Occ BW % Pwr 99.00 %</div><div>x dB -20.00 dB</div></div></div> <div><div>Freq/Channel</div><div>Center Freq 2.439000000 GHz</div><div>Start Freq 2.434000000 GHz</div><div>Stop Freq 2.444000000 GHz</div><div>CF Step 1.000000000 MHz</div><div>Auto Man</div><div>Freq Offset 0.000000000 Hz</div><div>Signal Track On Off</div><div>Scale Type Log Lin</div></div>	<p>2439MHz</p>
<div><div><div>Agilent</div><div>L</div></div><div><div>Ch Freq 2.478 GHz</div><div>Trig Free</div></div><div>Occupied Bandwidth</div><div>Center 2.478000000 GHz</div><div><div>Ref 0 dBm</div><div>Atten 10 dB</div><div>Mkr1 2.481900 GHz</div><div>-72.92 dBm</div></div><div><div>#Peak</div><div>Log</div><div>10</div><div>dB/</div></div><div><div>Center 2.478 GHz</div><div>Span 10 MHz</div><div>#Res BW 30 kHz</div><div>#VBW 100 kHz</div><div>Sweep 11.44 ms (401 pts)</div></div><div><div>Occupied Bandwidth</div><div>2.4812 MHz</div><div>Transmit Freq Error -9.115 kHz</div><div>x dB Bandwidth 2.100 MHz</div><div>Occ BW % Pwr 99.00 %</div><div>x dB -20.00 dB</div></div></div> <div><div>Freq/Channel</div><div>Center Freq 2.478000000 GHz</div><div>Start Freq 2.473000000 GHz</div><div>Stop Freq 2.483000000 GHz</div><div>CF Step 1.000000000 MHz</div><div>Auto Man</div><div>Freq Offset 0.000000000 Hz</div><div>Signal Track On Off</div><div>Scale Type Log Lin</div></div>	<p>2478MHz</p>

4.4 Antenna Requirement

Standard Applicable


For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Refer to statement below for compliance.


The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

Antenna Connected Construction

The antenna used in this product is an integral Antenna, The directional gains of antenna used for transmitting is 1.0dBi.

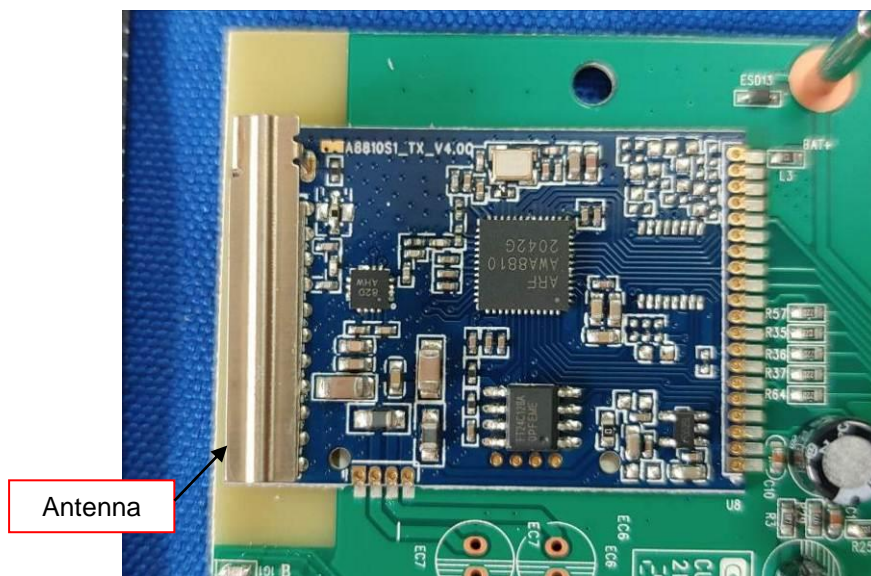


5 Test Setup Photos of the EUT

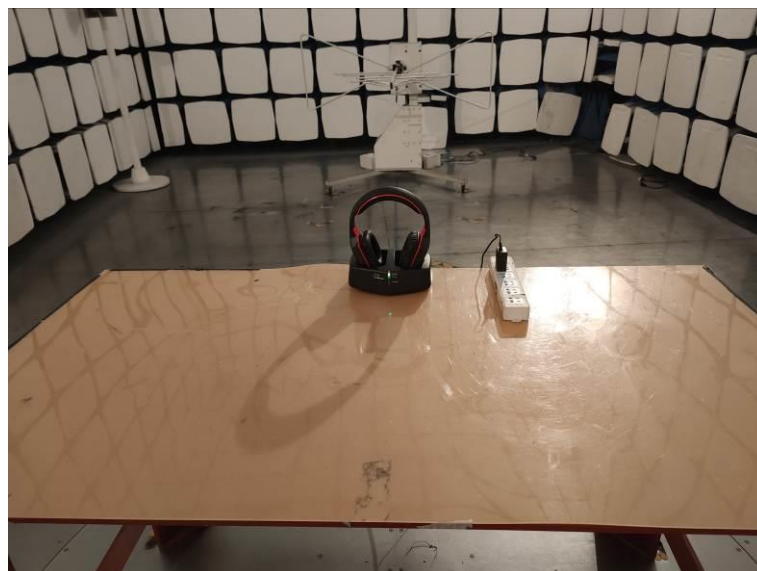


6 Photos of the EUT




External photos






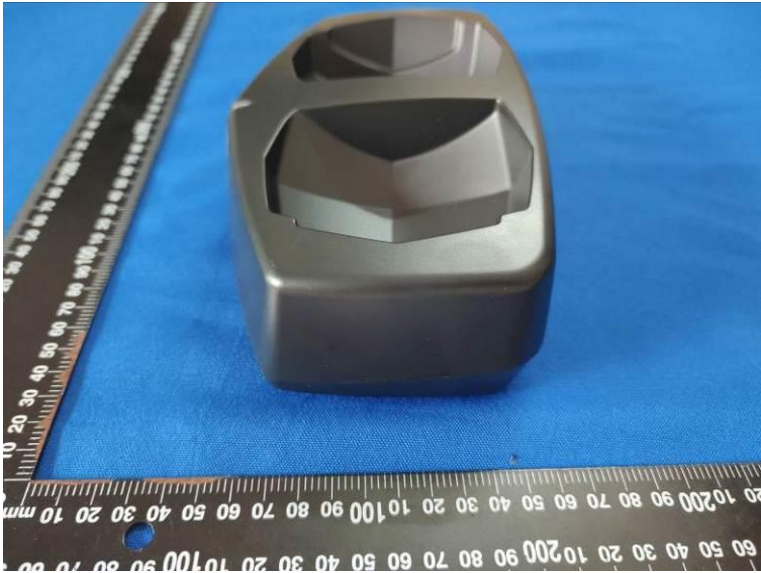


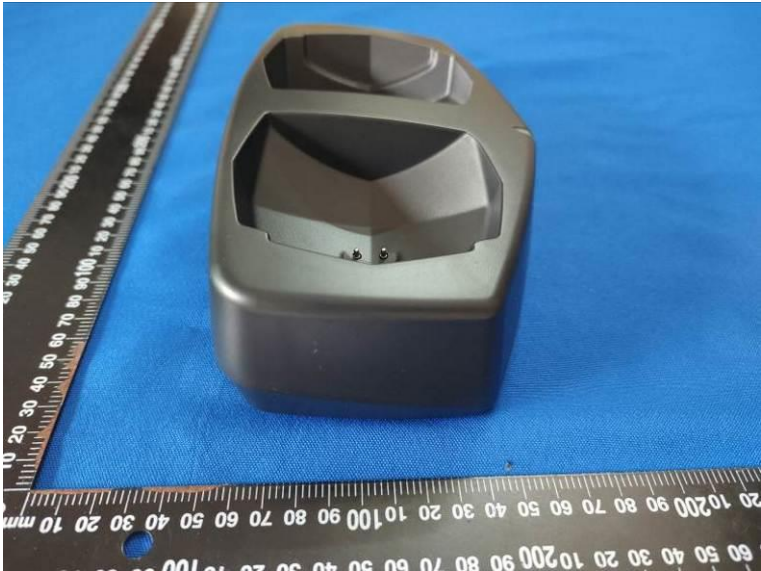

Internal Photos

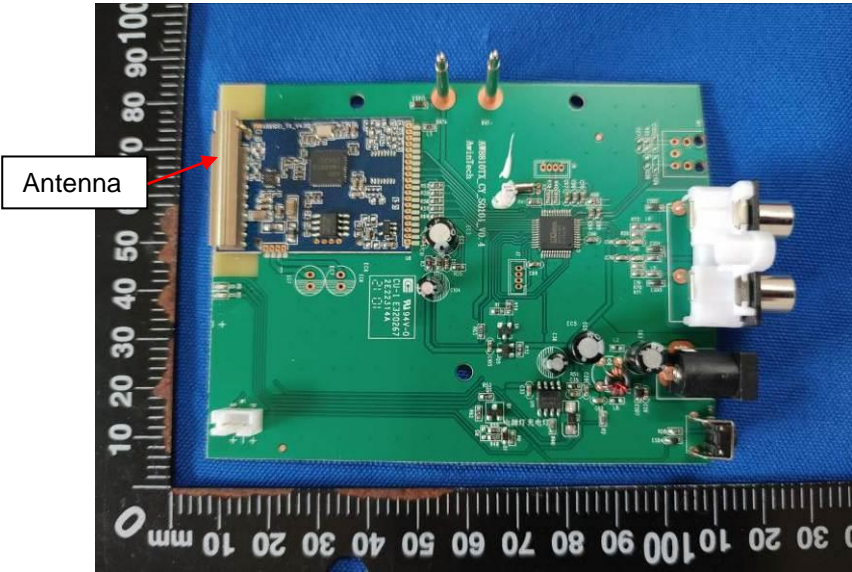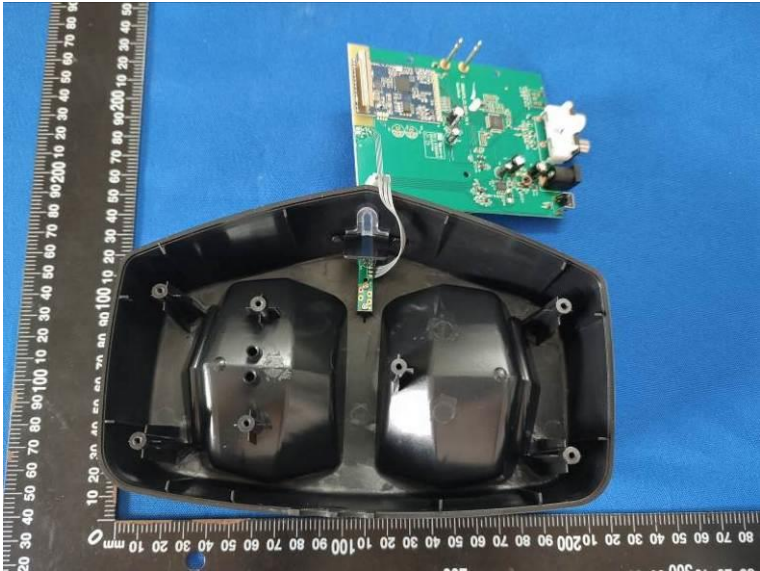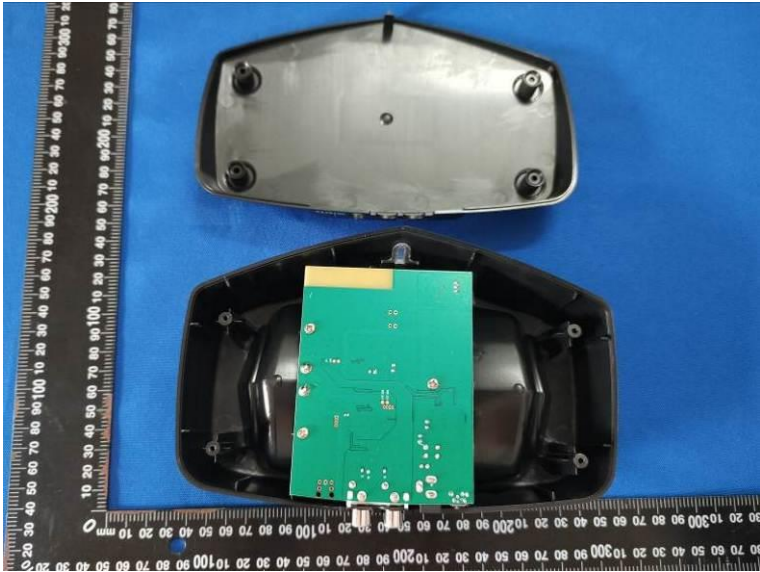

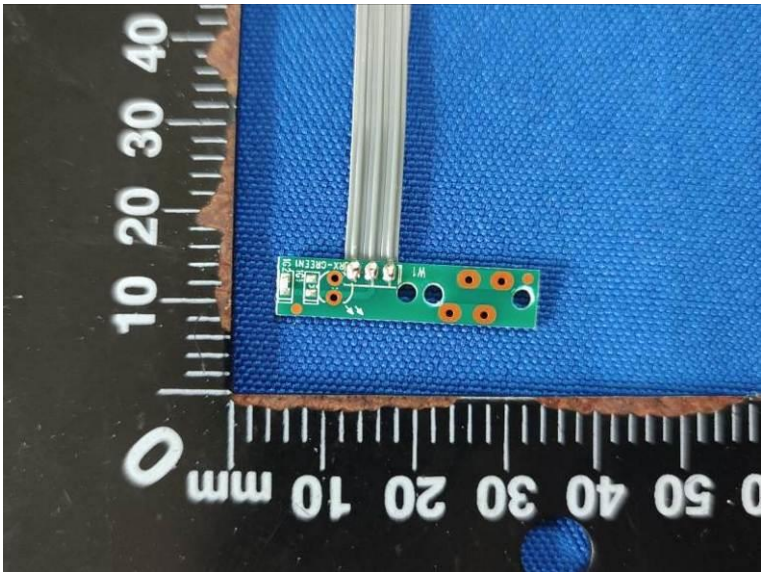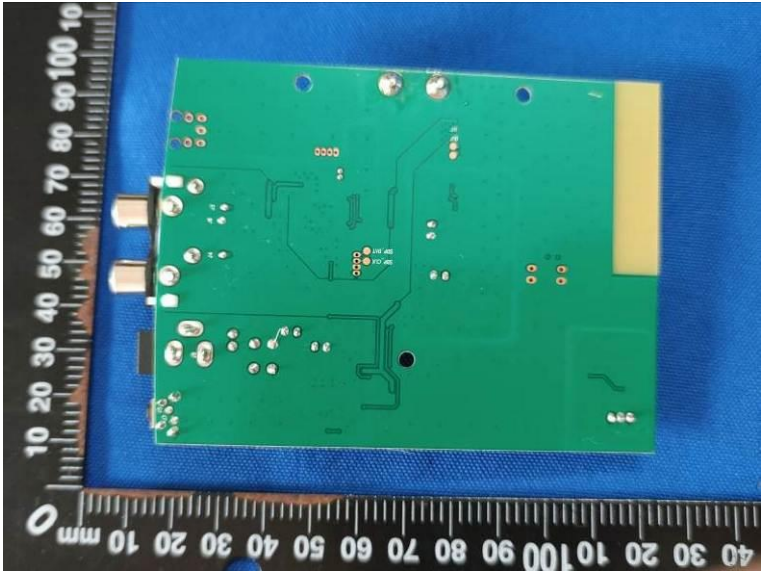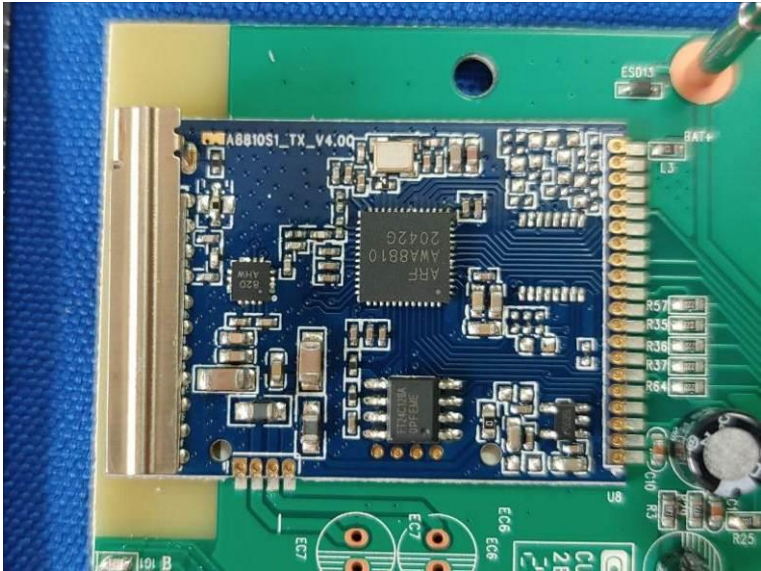

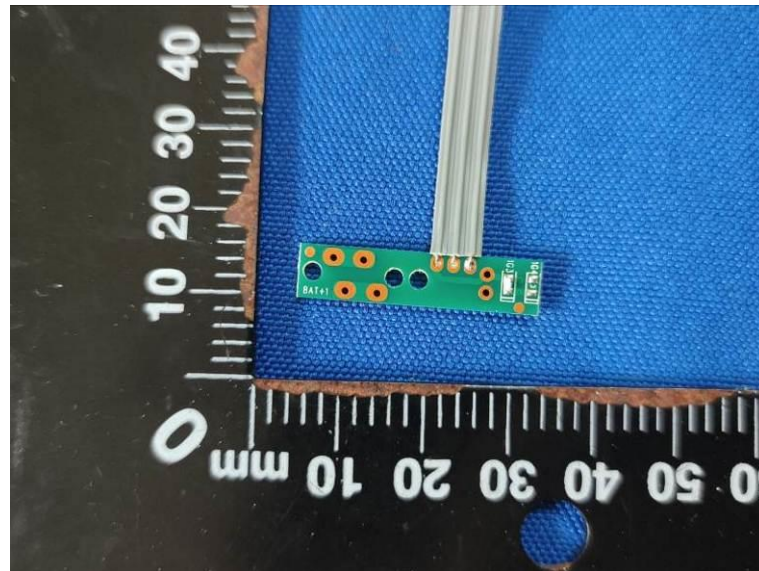

***** End of Report *****