



A Tyco International Company

Digital Security Controls

3301 Langstaff Road

Concord, Ontario Canada L4K 4L2

Tele: 905 760 3000

Toll Free: 888 888 7838

Fax: 905-760-3020

18008904R001

TL2803G V4.0 Multi-listing Label (FCC/IC/UL/ULC)

March 12, 2013

Colour: Pantone Process Black

Material: **WHITE** UL approved self-adhesive Mylar type material - on a roll

e.g. 2M POLY WH TC/LP50/50# (2F8), or equivalent

Lamination: Top **Gloss** finish lamination

e.g. 1M CL POLY NTC/P1212/50# (1F1), or equivalent

Adhesive: Permanent adhesive backed with protective liner

Cutting: Tolerance +/- 0.010"

Dashed line indicates cutting - will not print

Square label corners are acceptable.

NOTES:


1. All items must be RoHS compliant.
2. Markings on label must be PERMANENT.
3. Indelible Ink.
4. Conductive inks may not be used.
5. Non-conductive label adhesive shall be used ONLY.

NOTES:

1. All UL and ULC Labels shall be printed on UL approved material. The first time the label is ordered, the artwork must be sent to UL Label Center [email: LabelCenter.USA@us.ul.com, fax: (847)509-6201] for approval.
2. All UL and ULC Labels shall be printed by a UL Listed printing facility.



Label shown 150% of actual size

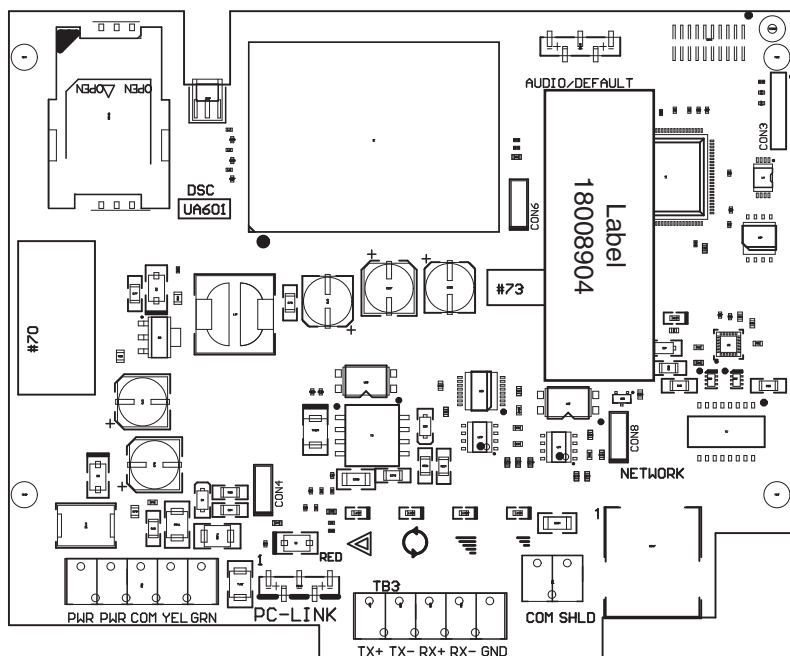

Top of the PCB showing the label location
(80% of actual size)



A Tyco International Company

Digital Security Controls

3301 Langstaff Road

Concord, Ontario Canada L4K 4L2

Tele: 905 760 3000

Toll Free: 888 888 7838

Fax: 905-760-3020

18008875R001

TL2803GR V4.0 Multi-listing Label (FCC/IC/UL/ULC)

March 12, 2013

Colour: Pantone Process Black

Material: **WHITE** UL approved self-adhesive Mylar type material - on a roll

e.g. 2M POLY WH TC/LP50/50# (2F8), or equivalent

Lamination: Top **Gloss** finish lamination

e.g. 1M CL POLY NTC/P1212/50# (1F1), or equivalent

Adhesive: Permanent adhesive backed with protective liner

Cutting: Tolerance +/- 0.010"

Dashed line indicates cutting - will not print

Square label corners are acceptable.

NOTES:


1. All items must be RoHS compliant.
2. Markings on label must be PERMANENT.
3. Indelible Ink.
4. Conductive inks may not be used.
5. Non-conductive label adhesive shall be used ONLY.

NOTES:

1. All UL and ULC Labels shall be printed on UL approved material. The first time the label is ordered, the artwork must be sent to UL Label Center [email: LabelCenter.USA@us.ul.com, fax: (847)509-6201] for approval.
2. All UL and ULC Labels shall be printed by a UL Listed printing facility.



Label shown 150% of actual size

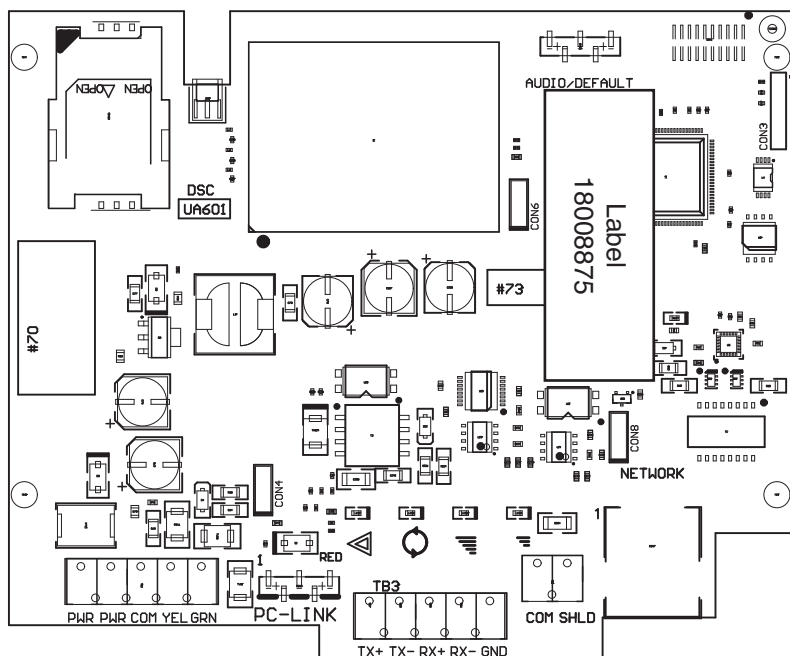

Top of the PCB showing the label location
(80% of actual size)



A Tyco International Company

Digital Security Controls

3301 Langstaff Road

Concord, Ontario Canada L4K 4L2

Tele: 905 760 3000

Toll Free: 888 888 7838

Fax: 905-760-3020

18008905R001
TL2803G(R) Module Label for
HS2 Control Panel Enclosure
(FCC/IC)

March 12, 2013

Colour: Pantone Process Black

Material:

WHITE Durable Semi-gloss Self-adhesive Material
(e.g. PL 38 Q, or equivalent)

Lamination: Top lamination (e.g. 1F9, or equivalent)

Adhesive: Permanent adhesive backed with
protective liner (e.g. 60# Semigloss Tire-III / 40#
Liner Code: B37, or equivalent)


Cutting: Tolerance +/- 0.010"

Dashed line indicates cutting - will not print


Delivered in single label only, 100 labels per bundle.

NOTES:

1. All items must be RoHS compliant.
2. Markings on label must be PERMANENT.
3. Indelible Ink.

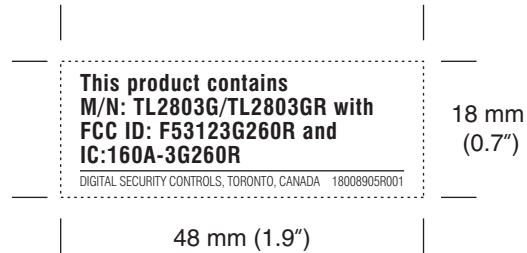

Label shown 150% of actual size

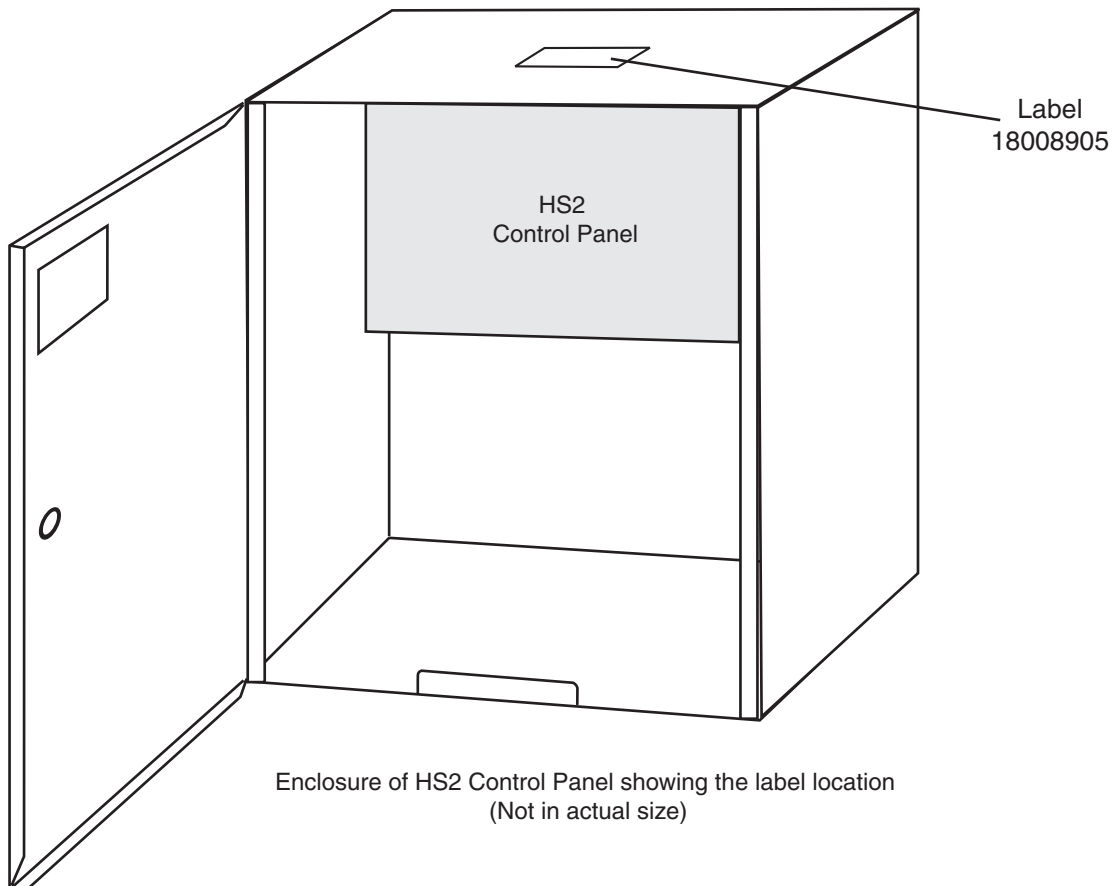



A Tyco International Company

Digital Security Controls

3301 Langstaff Road

Concord, Ontario Canada L4K 4L2

Tele: 905 760 3000

Toll Free: 888 888 7838

Fax: 905-760-3020

18008903R001 3G2080 V4.0 Multi-listing Label (FCC/IC/UL/ULC)

March 12, 2013

Colour: Pantone Process Black

Material: **WHITE** UL approved self-adhesive Mylar type material - on a roll

e.g. 2M POLY WH TC/LP50/50# (2F8), or equivalent

Lamination: Top **Gloss** finish lamination

e.g. 1M CL POLY NTC/P1212/50# (1F1), or equivalent

Adhesive: Permanent adhesive backed with protective liner

Cutting: Tolerance +/- 0.010"

Dashed line indicates cutting - will not print

Square label corners are acceptable.

NOTES:


1. All items must be RoHS compliant.
2. Markings on label must be PERMANENT.
3. Indelible Ink.
4. Conductive inks may not be used.
5. Non-conductive label adhesive shall be used ONLY.

NOTES:

1. All UL and ULC Labels shall be printed on UL approved material. The first time the label is ordered, the artwork must be sent to UL Label Center [email: LabelCenter.USA@us.ul.com, fax: (847)509-6201] for approval.
2. All UL and ULC Labels shall be printed by a UL Listed printing facility.



Label shown 150% of actual size

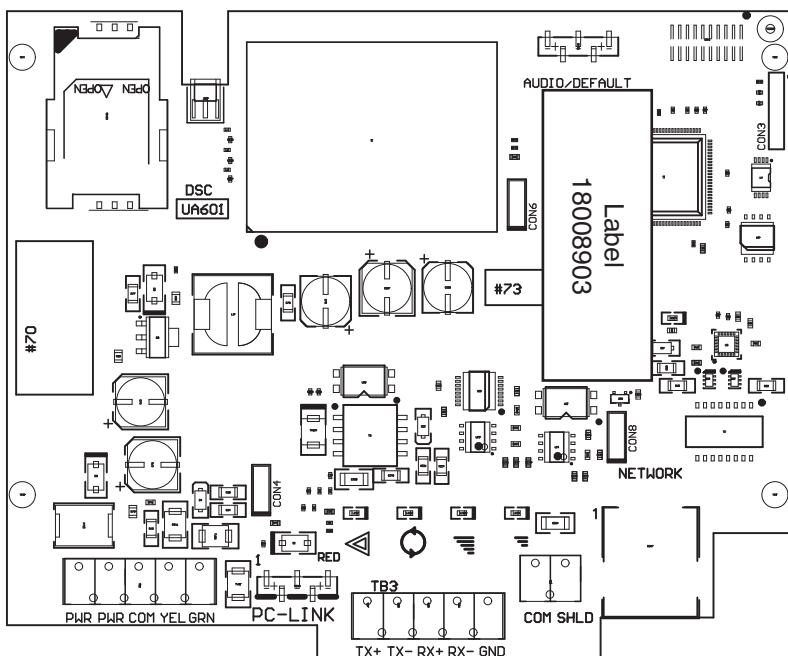

Top of the PCB showing the label location
(80% of actual size)



A Tyco International Company

Digital Security Controls

3301 Langstaff Road

Concord, Ontario Canada L4K 4L2

Tele: 905 760 3000

Toll Free: 888 888 7838

Fax: 905-760-3020

18008876R001

3G2080R V4.0 Multi-listing Label (FCC/IC/UL/ULC)

March 12, 2013

Colour: Pantone Process Black

Material: **WHITE** UL approved self-adhesive Mylar type material - on a roll

e.g. 2M POLY WH TC/LP50/50# (2F8), or equivalent

Lamination: Top **Gloss** finish lamination

e.g. 1M CL POLY NTC/P1212/50# (1F1), or equivalent

Adhesive: Permanent adhesive backed with protective liner

Cutting: Tolerance +/- 0.010"

Dashed line indicates cutting - will not print

Square label corners are acceptable.

NOTES:


1. All items must be RoHS compliant.
2. Markings on label must be PERMANENT.
3. Indelible Ink.
4. Conductive inks may not be used.
5. Non-conductive label adhesive shall be used ONLY.

NOTES:

1. All UL and ULC Labels shall be printed on UL approved material. The first time the label is ordered, the artwork must be sent to UL Label Center [email: LabelCenter.USA@us.ul.com, fax: (847)509-6201] for approval.
2. All UL and ULC Labels shall be printed by a UL Listed printing facility.



Label shown 150% of actual size

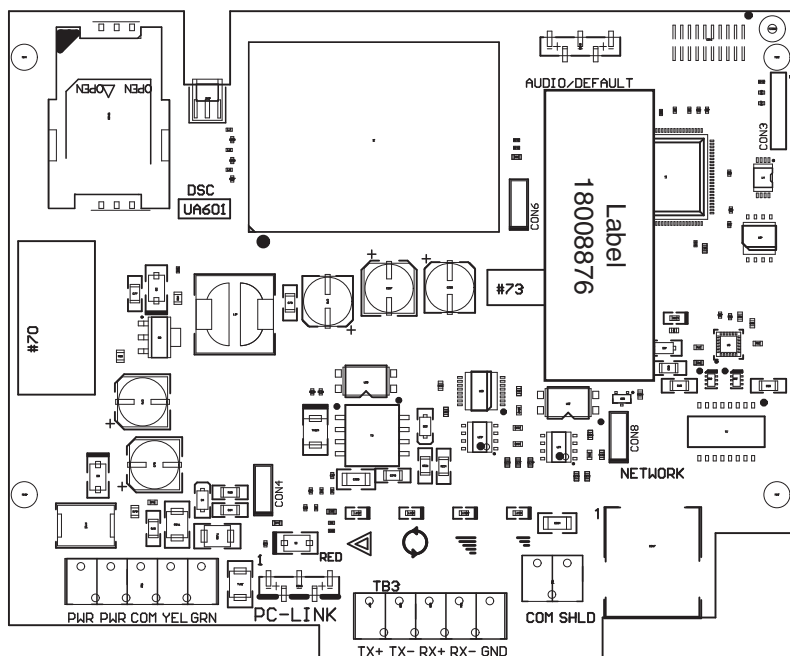

Top of the PCB showing the label location
(80% of actual size)



A Tyco International Company

Digital Security Controls

3301 Langstaff Road

Concord, Ontario Canada L4K 4L2

Tele: 905 760 3000

Toll Free: 888 888 7838

Fax: 905-760-3020

18008906R001
3G2080(R) Module Label for
HS2 Control Panel Enclosure
(FCC/IC)

March 12, 2013

Colour: Pantone Process Black

Material:

WHITE Durable Semi-gloss Self-adhesive Material
(e.g. PL 38 Q, or equivalent)

Lamination: Top lamination (e.g. 1F9, or equivalent)

Adhesive: Permanent adhesive backed with
protective liner (e.g. 60# Semigloss Tire-III / 40#
Liner Code: B37, or equivalent)

Cutting: Tolerance +/- 0.010"

Dashed line indicates cutting - will not print

Delivered in single label only, 100 labels per bundle.

NOTES:

1. All items must be RoHS compliant.
2. Markings on label must be PERMANENT.
3. Indelible Ink.



Label shown 150% of actual size

