

PCTEST ENGINEERING LABORATORY, INC.

7185 Oakland Mills Road, Columbia, MD 21046 USA Tel. 410.290.6652 / Fax 410.290.6654 http://www.pctest.com



HEARING AID COMPATIBILITY

Applicant Name:

LG Electronics MobileComm U.S.A. Inc. 1000 Sylvan Avenue Englewood Cliffs, NJ 07632 United States Date of Testing: 06/02/2018 - 06/06/2018 Test Site/Location: PCTEST Lab, Columbia, MD, USA Test Report Serial No.: 1M1805100104-09-R1.ZNF

FCC ID:

ZNFX510WM

APPLICANT:

LG ELECTRONICS MOBILECOMM U.S.A. INC.

Scope of Test: Application Type: FCC Rule Part(s): HAC Standard:

DUT Type: Model: Additional Model(s): Test Device Serial No.: Audio Band Magnetic Testing (T-Coil) Certification CFR §20.19(b) ANSI C63.19-2011 285076 D01 HAC Guidance v05 285076 D02 T-Coil testing for CMRS IP v03 Portable Handset LM-X510WM LMX510WM, X510WM *Pre-Production Sample* [S/N: 04711]

C63.19-2011 HAC Category: T3 (SIGNAL TO NOISE CATEGORY)

Note: This revised Test Report (S/N: 1M1805100104-09-R1.ZNF) supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

This wireless portable device has been shown to be hearing-aid compatible under the above rated category, specified in ANSI/IEEE Std. C63.19-2011 and has been tested in accordance with the specified measurement procedures. Test results reported herein relate only to the item(s) tested. Hearing-Aid Compatibility is based on the assumption that all production units will be designed electrically identical to the device tested in this report. North American Bands only.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Randy Ortanez President



04/17/2018

FCC ID: ZNFX510WM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Degra 1 of 67
1M1805100104-09-R1.ZNF	06/02/2018 - 06/06/2018	Portable Handset		Page 1 of 67
© 2018 PCTEST Engineering Laboratory, Inc. REV			REV 3.2.M	

1.	INTRODUCTION	3
2.	DUT DESCRIPTION	4
3.	ANSI C63.19-2011 PERFORMANCE CATEGORIES	5
4.	METHOD OF MEASUREMENT	7
5.	VOLTE TEST SYSTEM SETUP AND DUT CONFIGURATION	. 17
6.	VOWIFI TEST SYSTEM SETUP AND DUT CONFIGURATION	. 19
7.	OTT VOIP TEST SYSTEM AND DUT CONFIGURATION	. 22
8.	FCC 3G MEASUREMENTS	. 25
9.	T-COIL TEST SUMMARY	. 26
10.	MEASUREMENT UNCERTAINTY	. 34
11.	EQUIPMENT LIST	. 35
12.	TEST DATA	. 36
13.	CALIBRATION CERTIFICATES	. 55
14.	CONCLUSION	. 62
15.	REFERENCES	. 63
16.	TEST SETUP PHOTOGRAPHS	. 65

FCC ID: ZNFX510WM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 2 of 67
1M1805100104-09-R1.ZNF	06/02/2018 - 06/06/2018	Portable Handset		Page 2 of 67
© 2018 PCTEST Engineering Laboratory, Inc. REV			REV 3.2.M	
				04/17/2018

1. INTRODUCTION

On July 10, 2003, the Federal Communications Commission (FCC) adopted new rules requiring wireless manufacturers and service providers to provide digital wireless phones that are compatible with hearing aids. The FCC has modified the exemption for wireless phones under the Hearing Aid Compatibility Act of 1998 (HAC Act) in WT Docket 01-309 RM-8658¹ to extend the benefits of wireless telecommunications to individuals with hearing disabilities. These benefits encompass business, social and emergency communications, which increase the value of the wireless network for everyone. An estimated more than 10% of the population in the United States show signs of hearing impairment and of that fraction, almost 80% use hearing aids. Approximately 500 million people worldwide and 30 million people in the United States suffer from hearing loss.

Compatibility Tests Involved:

The standard calls for wireless communications devices to be measured for:

- RF Electric-field emissions
- T-coil mode, magnetic-signal strength in the audio band
- T-coil mode, magnetic-signal frequency response through the audio band
- T-coil mode, magnetic-signal and noise articulation index

The hearing aid must be measured for:

- RF immunity in microphone mode
- RF immunity in T-coil mode

In the following tests and results, this report includes the evaluation for a wireless communications device.



Figure 1-1 Hearing Aid in-vitu

¹ FCC Rule & Order, WT Docket 01-309 RM-8658

FCC ID: ZNFX510WM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 2 of 67
1M1805100104-09-R1.ZNF	06/02/2018 - 06/06/2018	Portable Handset		Page 3 of 67
© 2018 PCTEST Engineering Laboratory, Inc. RE			REV 3.2.M	

2. DUT DESCRIPTION



FCC ID:	ZNFX510WM
Applicant:	LG Electronics MobileComm U.S.A. Inc.
	1000 Sylvan Avenue
	Englewood Cliffs, NJ 07632
	United States
Model:	LM-X510WM
Additional Model(s):	LMX510WM, X510WM
Serial Number:	04711
HW Version:	Rev.1.0
SW Version:	X510WM09c
Antenna:	Internal Antenna
DUT Type:	Portable Handset

I. LTE Band Selection

This device supports the following pairs of LTE bands with similar frequencies: LTE B12 & B17 and LTE B66 & B4. These pairs of LTE bands have the same target power and shares the same transmission paths. Since the supported frequency span for the smaller LTE band is completely covered by the larger LTE band, only the larger LTE band (LTE B12 & B66) was evaluated for hearing-aid compliance.

Air-Interface	Band (MHz)	Type Transport	HAC Tested	Simultaneous But Not Tested	Name of Voice Service
	850	VO	Yes	Yes: WIFI or BT	CMRS Voice*
GSM	1900	VO	res	res. WIFI OF BT	CIVINS VOICE
	GPRS/EDGE	VD	Yes	Yes: WIFI or BT	Google Duo**
	850				
UMTS	1700	VD	Yes	Yes: WIFI or BT	CMRS Voice*
01113	1900				
	HSPA	VD	Yes	Yes: WIFI or BT	Google Duo**
	700 (B12)			Yes Yes: WIFI or BT	VoLTE*, Google Duo**
	700 (B17)				
	780 (B13)				
LTE (FDD)	850 (B5)	VD	Yes		
	1700 (B4)	VD			
	1700 (B66)				
	1900 (B2)				
	2500 (B7)				
WIFI	2450	VD	Yes	Yes: GSM, UMTS, or LTE	VoWIFI**, Google Duo**
BT	2450	DT	No	Yes: GSM, UMTS, or LTE	N/A
0	a - Not intended for IP Voice over Data		Interpretation.	vel in accordance with 7.4.2.1 of ANSI C63.19-2 evel is -20dBm0 in accordance with FCC KDB 2	

Table 2-1 ZNFX510WM HAC Air Interfaces

FCC ID: ZNFX510WM	PCTEST	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 4 of 67
1M1805100104-09-R1.ZNF	06/02/2018 - 06/06/2018	Portable Handset		Page 4 of 67
© 2019 DOTEST Engineering	Laboraton, Inc.			DEV/2.2 M

© 2018 PCTEST Engineering Laboratory, Inc.

REV 3.2.M 04/17/2018

3. ANSI C63.19-2011 PERFORMANCE CATEGORIES

I. MAGNETIC COUPLING

Axial and Radial Field Intensity

All orientations of the magnetic field, in the axial and radial position along the measurement plane shall be \geq -18 dB(A/m) at 1 kHz in a 1/3 octave band filter per §8.3.1.

Frequency Response

The frequency response of the axial component of the magnetic field shall follow the response curve specified in EIA RS-504-1983, over the frequency range 300 Hz – 3000 Hz per §8.3.2.

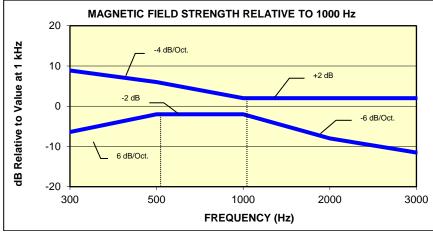



Figure 3-1



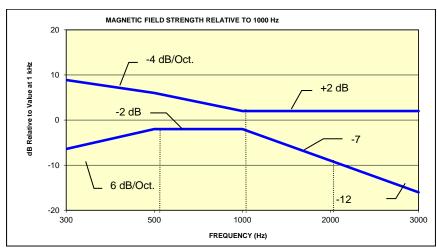


Figure 3-2

Magnetic Field frequency response for wireless devices with an axial field that exceeds -15 dB(A/m) at 1 kHz

FCC ID: ZNFX510WM	POTEST	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dege E of 67
1M1805100104-09-R1.ZNF	06/02/2018 - 06/06/2018	Portable Handset		Page 5 of 67
© 2018 PCTEST Engineering	Laboratory, Inc.	·		REV 3.2.M

Signal Quality

The table below provides the signal quality requirement for the intended audio magnetic signal from a wireless device. Only the RF immunity of the hearing aid is measured in T-coil mode. It is assumed that a hearing aid can have no immunity to an interference signal in the audio band, which is the intended reception band for this mode. The only criterion that can be measured is the RF immunity in T-coil mode. This is measured using the same procedure as the audio coupling mode at the same levels.

The signal quality of the axial and radial components of the magnetic field was used to determine the T-coil mode category.

Category	Telephone RF Parameters	
	Wireless Device Signal Quality [(Signal + Noise)-to-noise ratio in dB]	
T1	0 to 10 dB	
T2	10 to 20 dB	
Т3	20 to 30 dB	
T4	> 30 dB	
Table 3-1 Magnetic Coupling Parameters		


Note: The FCC limit for SNNR is 20dB and the test data margins will indicate a margin from the FCC limit for compliance.

FCC ID: ZNFX510WM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 6 of 67
1M1805100104-09-R1.ZNF	06/02/2018 - 06/06/2018	Portable Handset		Fage 0 01 07
© 2018 PCTEST Engineering	J Laboratory, Inc.			REV 3.2.M
				04/17/2018

4. METHOD OF MEASUREMENT

I. Test Setup

The equipment was connected as shown in an acoustic/RF hemi-anechoic chamber:

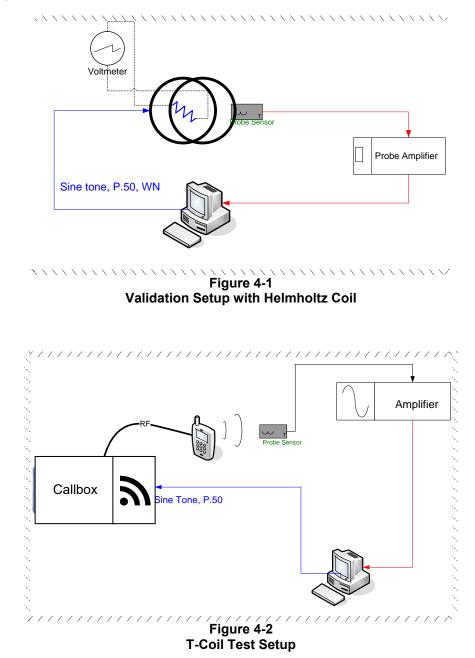

FCC ID: ZNFX510WM	PCTEST	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 7 of 67
1M1805100104-09-R1.ZNF	06/02/2018 - 06/06/2018	Portable Handset		Fage / 0107
© 2018 PCTEST Engineering	g Laboratory, Inc.			REV 3.2.M

II. Scanning Mechanism

Manufacturer:	TEM
Accuracy:	± 0.83 cm/meter
Minimum Step Size:	0.1 mm
Maximum speed	6.1 cm/sec
Line Voltage:	115 VAC
Line Frequency:	60 Hz
Material Composite:	Delrin (Acetal)
Data Control:	Parallel Port
Dynamic Range (X-Y-Z):	45 x 31.75 x 47 cm
Dimensions:	36" x 25" x 38"
Operating Area:	36" x 49" x 55"
Reflections:	< -20 dB (in anechoic chamber)




Figure 4-3 RF Near-Field Scanner

III. ITU-T P.50 Artificial Voice

Manufacturer:	ITU-T
Active Frequency Range:	100 Hz – 8 kHz
Stimulus Type:	Male and Female, no spaces
Single Sample Duration: Activity Level:	20.96 seconds 100%




Figure 4-4 Spectral Characteristic of full P.50





Figure 4-5 Temporal Characteristic of full P.50

FCC ID: ZNFX510WM	PCTEST	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 9 of 67
1M1805100104-09-R1.ZNF	06/02/2018 - 06/06/2018	Portable Handset		Page 8 of 67
© 2018 PCTEST Engineering	Laboratory, Inc.			REV 3.2.M 04/17/2018

© 2018 PCTEST Engineering Laboratory, Inc. All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, and increase of the produced or utilized in any part, form or by any means, form or by any means, and any part, form or by any means, form or by any means, and any part, form or by any means, an

ABM1 Measurement Block Diagram:

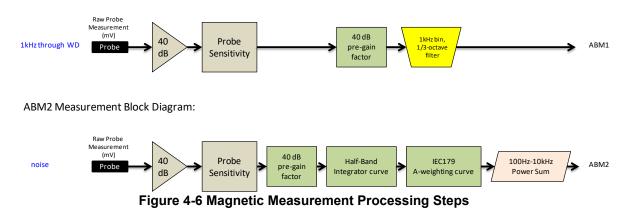

IV. Test Procedure

- 1. Ambient Noise Check per C63.19 §7.3.1
 - a. Ambient interference was monitored using a Real-Time Analyzer between 100-10,000 Hz with 1/3 octave filtering.
 - b. "A-weighting" and Half-Band Integration was applied to the measurements.
 - c. Since this measurement was measured in the same method as ABM2 measurements, this level was verified to be more than 10 dB below the lowest measurement signal (which is the highest ABM2 measurement for a T4 WD). Therefore the maximum noise level for a T4 WD with an ABM1 = -18 dBA/m is: -18 - 30 - 10= -58 dBA/m
- 2. Measurement System Validation(See Figure 4-1)
 - a. The measurement system including the probe, pre-amplifier and acquisition system were validated as an entire system to ensure the reliability of test measurements.
 - ABM1 Validation The magnetic field at the center of the Helmholtz coil is given by the equation (per C63.19 Annex D.10.1):

$$H_{c} = \frac{NI}{r\sqrt{1.25^{3}}} = \frac{N(\frac{V}{R})}{r\sqrt{1.25^{3}}}$$

Where H_c = magnetic field strength in amperes per meter

For the Helmholtz Coil, N=20; r=0.08m; R=10.2Ω and using V=18mV:

$$H_{c} = \frac{20 \cdot (\frac{0.018}{10.2})}{0.08 \cdot \sqrt{1.25^{3}}} = 0.316A/m \approx -10dB(A/m)$$

Therefore a pure tone of 1kHz was applied into the coils such that 18mV was observed across the resistor. The voltmeter used for measurement was verified to be capable of measurements in the audio band range. This theoretically generates an expected field of -10 dB(A/m) in the center of the Helmholtz coil which was used to validate the probe measurement at -10dB(A/m). This was verified to be within \pm 0.5 dB of the -10dB(A/m) value (see Page 32).

FCC ID: ZNFX510WM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 0 of 67
1M1805100104-09-R1.ZNF	06/02/2018 - 06/06/2018	Portable Handset		Page 9 of 67
© 2018 PCTEST Engineering Laboratory, Inc.				REV 3.2.M




Figure 4-7 Frequency Response Validation

d. ABM2 Measurement Validation


WD noise measurements are filtered with A-weighting and Half-Band Integration over a frequency range of 100Hz – 10kHz to process ABM2 measurements. Below is the verification of the system processing A-weighting and Half-Band integration between system input to output within 0.5 dB of the theoretical result:

ABM2 Frequency Response Validation			
	HBI, A -	HBI, A -	
f (Hz)	Measured	Theoretical	dB Var.
	(dB re 1kHz)	(dB re 1kHz)	
100	-16.180	-16.170	-0.010
125	-13.257	-13.250	-0.007
160	-10.347	-10.340	-0.007
200	-8.017	-8.010	-0.007
250	-5.925	-5.920	-0.005
315	-4.045	-4.040	-0.005
400	-2.405	-2.400	-0.005
500	-1.212	-1.210	-0.002
630	-0.349	-0.350	0.001
800	0.071	0.070	0.001
1000	0.000	0.000	0.000
1250	-0.503	-0.500	-0.003
1600	-1.513	-1.510	-0.003
2000	-2.778	-2.780	0.002
2500	-4.316	-4.320	0.004
3150	-6.166	-6.170	0.004
4000	-8.322	-8.330	0.008
5000	-10.573	-10.590	0.017
6300	-13.178	-13.200	0.022
8000	-16.241	-16.270	0.029
10000	-19.495	-19.520	0.025

Table 4-1BM2 Frequency Response Validation


FCC ID: ZNFX510WM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 10 of 67
1M1805100104-09-R1.ZNF	06/02/2018 - 06/06/2018	Portable Handset		Tage TO OF OF
© 2018 PCTEST Engineering Laboratory, Inc.			REV 3.2.M	
				04/17/2018

ABM2 Frequency Response Validation (LISTEN)

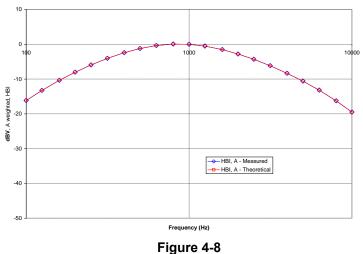

ABM2 Frequency Response Validation


The ABM2 result is a power sum from 100Hz to 10kHz with half-band integration and Aweighting. To verify the power sum measurement, a power sum over the full band was measured and verified to track with the source level (See Figure 4-9). Therefore the setup in this step was used to verify the power sum post-processing for ABM2 measurements. See below block diagram:



The power summed output results for a known input were compared to the multi-meter results to verify any deviation in the post-processing implemented with the power-sum.

Table 4-2 ABM2 Power Sum Validation					
WN Input (dBV)	Power Sum (dBV)	Multimeter-Full (dBV)	Dev (dB)		
-60	-60.36	-60.2	0.16		
-50	-50.19	-50.13	0.06		
-40	-40.14	-40.03	0.11		
-30	-30.13	-30.01	0.12		
-20	-20.12	-20	0.12		
-10	-10.14	-10	0.14		

FCC ID: ZNFX510WM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 11 of 67
1M1805100104-09-R1.ZNF	06/02/2018 - 06/06/2018	Portable Handset		Page 11 of 67
© 2018 PCTEST Engineering Laboratory, Inc.				REV 3.2.M




ABM2 Power Sum Validation (LISTEN)

ABM2 Power Sum Validation

3. Measurement Test Setup

- a. Fine scan above the WD (TEM)
 - i. A multitone signal was applied to the handset such that the phone acoustic output was stable within 1dB over the probe settling time and with the acoustic output level at the C63.19 specified levels (below). The measurement step size was in 2 mm increments at a distance of 10 mm between the surface of the wireless device as shown below (note that in Figure 4-12, the grid is not to scale but merely a graphical representation of the coordinate system in use):

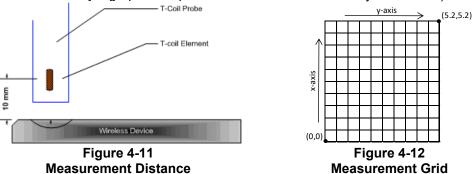

- ii. After scanning, the planar field maximum point was determined. The position of the probe was moved to this location to setup the test using the SoundCheck system.
- iii. These steps were repeated for all T-coil orientations (axial and radial) per Figure 4-15 after a T-coil orientation was fully measured with the SoundCheck system.
- b. Speech Signal Setup to Base Station Simulator
 - i. C63.19 Table 7-1 states audio reference input levels for various technologies:

Standard	Technology	Input Level (dBm0)
TIA/EIA/IS-2000	CDMA	-18
J-STD-007	GSM (217)	-16
T1/T1P1/3GPP	UMTS (WCDMA)	-16
iDEN™	TDMA (22 and 11 Hz)	-18

04/17/2018

FCC ID: ZNFX510WM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 10 of 67
1M1805100104-09-R1.ZNF	06/02/2018 - 06/06/2018	Portable Handset		Page 12 of 67
© 2018 PCTEST Engineering Laboratory, Inc.				REV 3.2.M

- ii. See Section 5 and 6 for more information regarding CMW500 audio level settings for Voice Over LTE (VoLTE), and Voice Over WIFI (VoWIFI) testing.
- See Section 7 for more information regarding audio level settings for Over-The-Top (OTT) Voice Over IP (VoIP) Testing.
- c. Real-Time Analyzer (RTA)
 - i. The Real-Time Analyzer was configured to analyze measurements using 1/3 Octave band weighted filtering.
- d. WD Radio Configuration Selection
 - The device was chosen to be tested in the worst-case ABM2 condition (see below for GSM, see Section 8 for more information regarding worst-case configurations for UMTS. LTE configuration information can be found in Section 5. WIFI configuration information can be found in Section 6 and 7.):

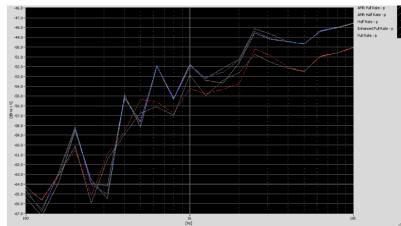



Figure 4-13 Vocoder Analysis for ABM Noise for GSM

- 4. Signal Quality Data Analysis
 - a. Narrow-band Magnetic Intensity
 - i. The standard specifies a 1kHz 1/3 octave band minimum field intensity for a sine tone. The ABM1 measurements were evaluated at 1kHz with 1/3 octave band filtering over an averaged period of 10 seconds.
 - b. Frequency Response
 - i. The appropriate frequency response curve was measured to curves in Figure 3-1 or Figure 3-2 between 300 3000 Hz using digital linear averaging (limit lines chosen according to measurement found in step 4a). A linear average over 3x the length of the artificial voice signal (3x sampling) was performed. A 10 second delay was configured in the measurement process of the stimulus to ensure handset vocoder latency effects and echo cancellation devices (if any) were appropriately stabilized during measurements.
 - ii. The appropriate post-processing was applied according to the system processing chain illustrated in Figure 4-7. All R10 frequencies were plotted with respect to 0dB at 1kHz value and aligned with respect to the EIA-504 mask.
 - iii. The margin is represented by the closest measured data point on the curve to the EIA-504 limit lines, in dB.

FCC ID: ZNFX510WM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 13 of 67
1M1805100104-09-R1.ZNF	06/02/2018 - 06/06/2018	Portable Handset		Fage 15 01 07
© 2018 PCTEST Engineering Laboratory, Inc.			REV 3.2.M	
				04/17/2018

- c. Signal Quality Index
 - i. Ensuring the WD was at maximum RF power, maximum volume, backlight off, display on, maximum contrast setting, keypad lights on (when possible) with no audio signal through the vocoder, the WD was measured over at least 100 Hz 10,000 Hz, maximized over 5 seconds with a 50ms sample time for the ABM2 measurement (5 second time period is used in noise measurements under standards such as IEEE 269, etc.).
 - ii. After applying half-band integration and A-weighting to the result, a power sum was applied over each 1/3 octave bandwidth frequency for an ABM2 value.
 - iii. This result was subtracted from the ABM1 result in step a, to obtain the Signal Quality.

V. Test Setup



Audio Magnetic Field Test Setup

VI. Deviation from C63.19 Test Procedure

Non-conducted RF connection due to inaccessible RF ports.

VII. Air Interface Technologies Tested

All air interfaces which support voice capabilities over a managed CMRS or pre-installed OTT VoIP applications were tested for T-coil unless otherwise noted. See Table 2-1 for more details regarding which modes were tested.

FCC ID: ZNFX510WM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 14 of 67
1M1805100104-09-R1.ZNF	06/02/2018 - 06/06/2018	Portable Handset		Fage 14 01 07
© 2018 PCTEST Engineering Laboratory, Inc.				REV 3.2.M
				04/17/2018

VIII. Wireless Device Channels and Frequencies

1. 2G/3G Modes

The frequencies listed in the table below are those that lie in the center of the bands used for cellular telephony. Low, middle and high channels were tested in each band for FCC compliance evaluation to ensure the maximum emission is captured across the entire band. Only middle channels were evaluated for data modes since circuit-switched voice modes were worst-case.

Center Channels and Frequencies					
Test frequencies & associated c	hannels				
Channel Frequency (MHz)					
Cellular 850	Cellular 850				
190 (GSM)	836.60				
4183 (UMTS) 836.60					
AWS 1750					
1412 (UMTS)	1730.40				
PCS 1900					
661 (GSM)	1880				
9400 (UMTS)	1880				

Table 4-3

2. 4G (LTE) Modes

The middle channel for every band and bandwidth combination was tested for each probe orientation. The band and bandwidth combination from each probe orientation resulting in the worst-case SNNR was additionally tested using low and high channels for that band and bandwidth combination. The middle channel and supported bandwidths from the worst-case band according to Table 7-5 was additionally evaluated with OTT VoIP for each probe orientation. See Tables 9-4 to 9-9 and Table 9-13 for LTE bandwidths and channels.

3. WIFI

The middle channel for each 802.11 standard was tested for each probe orientation. The 2.4GHz 802.11 standard from each probe orientation resulting in the worst-case SNNR was additionally tested using low and high channels. See Tables 9-10 and 9-14 for WIFI standards and channels.

FCC ID: ZNFX510WM	PCTEST	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager	
Filename:	Test Dates:	DUT Type:		Page 15 of 67	
1M1805100104-09-R1.ZNF	06/02/2018 - 06/06/2018	Portable Handset		Fage 15 01 07	
© 2018 PCTEST Engineering Laboratory, Inc.					
				04/17/2018	

IX. Test Flow

The flow diagram below was followed (From C63.19):

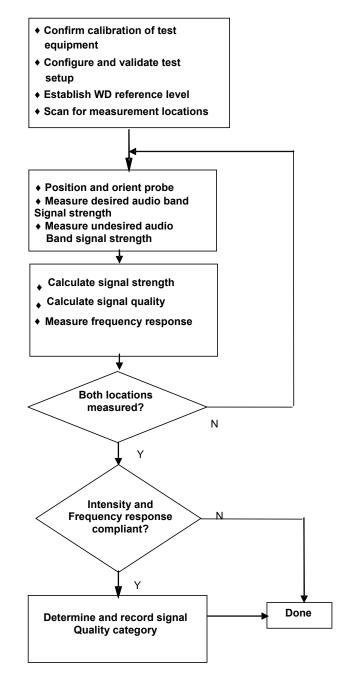


Figure 4-15 C63.19 T-Coil Signal Test Process

FCC ID: ZNFX510WM	PCTEST	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager	
Filename:	Test Dates:	DUT Type:		Dega 16 of 67	
1M1805100104-09-R1.ZNF	06/02/2018 - 06/06/2018	Portable Handset		Page 16 of 67	
© 2018 PCTEST Engineering Laboratory, Inc.					

5. VOLTE TEST SYSTEM SETUP AND DUT CONFIGURATION

I. Test System Setup for VoLTE over IMS T-coil Testing

1. Equipment Setup

The general test setup used for VoLTE over IMS is shown below. The callbox used when performing VoLTE over IMS T-coil measurements is a CMW500. The Data Application Unit (DAU) of the CMW500 was used to simulate the IP Multimedia Subsystem (IMS) server.

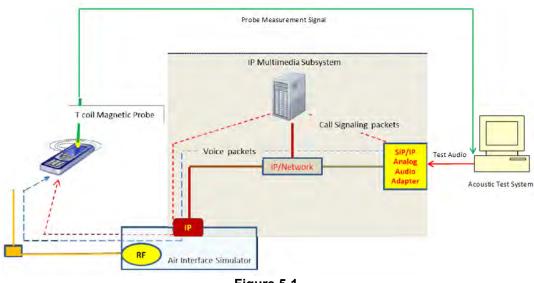


Figure 5-1 Test Setup for VoLTE over IMS T-Coil Measurements

2. Audio Level Settings

According to the July 2012 interpretations by the C63 Committee regarding the appropriate audio levels to be used for VoLTE over IMS T-coil testing, -16dBm0 shall be used for the normal speech input level^{*}. The CMW500 base station simulator was manually configured to ensure that the settings for speech input and full scale levels resulted in the -16dBm0 speech input level to the DUT for the VoLTE over IMS connection.

* http://c63.org/documents/misc/posting/new_interpretations.htm

FCC ID: ZNFX510WM	PCTEST	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager	
Filename:	Test Dates:	DUT Type:		Page 17 of 67	
1M1805100104-09-R1.ZNF	06/02/2018 - 06/06/2018	Portable Handset		Fage 17 01 07	
© 2018 PCTEST Engineering Laboratory, Inc.					
				04/17/2018	

П. **DUT Configuration for VoLTE over IMS T-coil Testing**

1. Radio Configuration

An investigation was performed to determine the modulation and RB configuration to be used for testing. 16QAM, 1RB, 0RB offset was used for the testing as the worst-case configuration for the handset. See below table for SNNR comparison between different radio configurations:

	VoLTE over IMS SNNR by Radio Configuration								
Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]	
707.5	23095	10	QPSK	1	0	-1.52	-50.13	48.61	
707.5	23095	10	QPSK	1	25	-1.55	-50.10	48.55	
707.5	23095	10	QPSK	1	49	-1.29	-52.76	51.47	
707.5	23095	10	QPSK	25	0	-1.63	-52.72	51.09	
707.5	23095	10	QPSK	25	12	-1.27	-50.27	49.00	
707.5	23095	10	QPSK	25	25	-1.55	-50.28	48.73	
707.5	23095	10	QPSK	50	0	-1.21	-52.91	51.70	
707.5	23095	10	16QAM	1	0	-1.50	-48.58	47.08	
707.5	23095	10	16QAM	1	25	-1.52	-52.62	51.10	
707.5	23095	10	16QAM	1	49	-1.44	-52.49	51.05	
707.5	23095	10	16QAM	25	0	-1.26	-50.26	49.00	
707.5	23095	10	16QAM	25	12	-1.28	-50.75	49.47	
707.5	23095	10	16QAM	25	25	-1.25	-52.66	51.41	
707.5	23095	10	16QAM	50	0	-1.56	-52.65	51.09	

Table 5-1


2. Codec Configuration

An investigation was performed to determine the audio codec configuration to be used for testing. The WB AMR 6.60kbps setting was used for the audio codec on the CMW500 for VoLTE over IMS T-coil testing. See below table for comparisons between different codecs and codec data rates:

AMR Codec Investigation – VoLTE over IMS								
Codec Setting:	WB AMR 23.85kbps	WB AMR 6.60kbps	NB AMR 12.2kbps	NB AMR 4.75kbps	Orientation	Band / BW	Channel	
ABM1 (dBA/m)	-0.31	-1.52	0.40	-0.30		Axial LTE Band 12 10MHz	23095	
ABM2 (dBA/m)	-49.20	-49.15	-50.00	-51.61	Avial			
Frequency Response	Pass	Pass	Pass	Pass	Axia			
S+N/N (dB)	48.89	47.63	50.40	51.31				

Table 5-2

- Mute on; Backlight off; Max Volume; Max Contrast
- TPC = "Max Power" .



Audio Band Magnetic Curve Measurement Block Diagram

FCC ID: ZNFX510WM	PCTEST	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dega 19 of 67
1M1805100104-09-R1.ZNF	06/02/2018 - 06/06/2018	Portable Handset		Page 18 of 67
© 2018 PCTEST Engineering Laboratory, Inc.				

04/17/2018 © 2018 PCTEST Engineering Laboratory, Inc. All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, mechanical, including photocopying and microfilm, without permission in writing from PCTEST Engineering Laboratory, Inc. enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM. c. If you have any questions about this international copyright or have an

6. VOWIFI TEST SYSTEM SETUP AND DUT CONFIGURATION

I. Test System Setup for VoWIFI over IMS T-coil Testing

1. Equipment Setup

The general test setup used for VoWIFI over IMS, or CMRS WIFI Calling, is shown below. The callbox used when performing VoWIFI over IMS T-coil measurements is a CMW500. The Data Application Unit (DAU) of the CMW500 was used to simulate the IP Multimedia Subsystem (IMS) server.

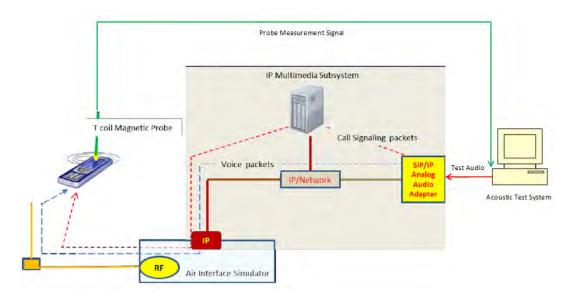


Figure 6-1 Test Setup for VoWIFI over IMS T-Coil Measurements

2. Audio Level Settings

According to KDB 285076 D02 released by the FCC OET regarding the appropriate audio levels to be used for VoWIFI over IMS T-Coil testing, -20dBm0 shall be used for the normal speech input level². The CMW500 base station simulator was manually configured to ensure that the settings for speech input and full scale levels resulted in the -20dBm0 speech input level to the DUT for the VoWIFI over IMS connection.

FCC ID: ZNFX510WM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename: 1M1805100104-09-R1.ZNF	Test Dates: 06/02/2018 - 06/06/2018	DUT Type: Portable Handset		Page 19 of 67
© 2018 PCTEST Engineering				REV 3.2.M 04/17/2018

DUT Configuration for VoWIFI over IMS T-coil Testing Ш.

16-QAM

64-QAM

64-QAM

1. Radio Configuration

802.11g

802.11g

802.11g

6

6

6

An investigation was performed on all applicable data rates and modulations to determine the radio configuration to be used for testing. See tables below for SNNR comparison between radio configurations in each 802.11 standard:

802.11b SNNR by Radio Configuration								
Mode	Channel	Modulation	Data Rate [Mbps]	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]		
802.11b	6	DSSS	1	-5.14	-28.41	23.27		
802.11b	6	DSSS	2	-4.77	-28.91	24.14		
802.11b	6	CCK	5.5	-4.69	-27.58	22.89		
802.11b	6	CCK	11	-4.69	-28.06	23.37		

Table 6-1

802.11g SNNR by Radio Configuration								
Mode	Channel	Modulation	Data Rate [Mbps]	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]		
802.11g	6	BPSK	6	-4.70	-34.53	29.83		
802.11g	6	BPSK	9	-4.68	-34.16	29.48		
802.11g	6	QPSK	12	-4.79	-32.34	27.55		
802.11g	6	QPSK	18	-4.75	-32.73	27.98		
802.11g	6	16-QAM	24	-4.71	-37.47	32.76		

Table 6-2

Table 6-3 802 11n SNNR by Radio Configuration

36

48

54

-4.77

-5.08

-4.97

-37.91

-39.13

-37.19

33.14

34.05

32.22

Mode	Channel	Modulation	Data Rate [Mbps]	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
802.11n	6	BPSK	6.5	-4.74	-26.67	21.93
802.11n	6	QPSK	13	-4.86	-27.36	22.50
802.11n	6	QPSK	19.5	-4.82	-26.99	22.17
802.11n	6	16-QAM	26	-4.76	-28.53	23.77
802.11n	6	16-QAM	39	-4.69	-26.84	22.15
802.11n	6	64-QAM	52	-4.69	-27.37	22.68
802.11n	6	64-QAM	58.5	-4.97	-27.19	22.22
802.11n	6	64-QAM	65	-4.83	-28.23	23.40

FCC ID: ZNFX510WM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager	
Filename:	Test Dates:	DUT Type:		Dage 20 of 67	
1M1805100104-09-R1.ZNF	06/02/2018 - 06/06/2018	Portable Handset		Page 20 of 67	
© 2018 PCTEST Engineering Laboratory, Inc.					


2. Codec Configuration

An investigation was performed to determine the audio codec configuration to be used for testing. The WB AMR 23.85kbps setting was used for the audio codec on the CMW500 for VoWIFI over IMS T-coil testing. See below table for comparisons between different codecs and codec data rates:

AMR Codec Investigation – vowiFi over 103								
Codec Setting:	WB AMR 23.85kbps	WB AMR 6.60kbps	NB AMR 12.2kbps	NB AMR 4.75kbps	Orientation	Band	Standard	Channel
ABM1 (dBA/m)	-6.10	-6.21	-3.83	-4.03				
ABM2 (dBA/m)	-28.58	-28.79	-29.13	-28.46	Axial	2.4GHz		c
Frequency Response	Pass	Pass	Pass	Pass	Axiai	2.4GHZ	IEEE 802.11b	6
S+N/N (dB)	22.48	22.58	25.30	24.43				

Table 6-4 AMR Codec Investigation – VoWIFI over IMS

• Mute on; Backlight off; Max Volume; Max Contrast



FCC ID: ZNFX510WM	PCTEST	HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 21 of 67
1M1805100104-09-R1.ZNF	06/02/2018 - 06/06/2018	Portable Handset		Fage 21 01 07
© 2018 PCTEST Engineering Laboratory, Inc.				
				04/17/2018

7. OTT VOIP TEST SYSTEM AND DUT CONFIGURATION

I. Test System Setup for OTT VoIP T-Coil Testing

1. OTT VoIP Application

Google Duo is a pre-installed application on the DUT which allows for VoIP calls in a held-to-ear scenario. Duo uses the OPUS audio codec and supports a bitrate range of 6kb/s to 64kb/s. All air interfaces capable of a data connection were evaluated with Google Duo.

2. Equipment Setup

A CMW500 callbox was used to perform OTT VoIP T-coil measurements. The Data Application Unit (DAU) of the CMW500 was connected to the internet and allowed for an IP data connection on the DUT. An auxiliary VoIP unit was used to initiate an OTT VoIP call to the DUT. The auxiliary VoIP unit allowed for the configuration and monitoring of the OTT VoIP codec bitrate during a call. Both high and low bitrate settings were evaluated in to determine the worst-case configuration.

3. Audio Level Settings

According to KDB 285076 D02, the average speech level of -20dBm0 shall be used for protocols not specifically listed in Table 7.1 of ANSI C63.19-2011 or the ANSI C63.19-2011 VoLTE interpretation³. The auxiliary VoIP unit allowed for monitoring the signal input level to ensure that the settings for speech input and full scale levels resulted in the -20dBm0 speech input level to the DUT for the OTT VoIP call.

II. DUT Configuration for OTT VoIP T-Coil Testing

1. Codec Configuration

An investigation was performed for each applicable data mode to determine the audio codec configuration to be used for testing. The 6kbps codec setting was used for the audio codec on the auxiliary VoIP unit for OTT VoIP T-Coil testing. See below tables for comparisons between codec data rates on all applicable data modes:

Codec Investigation – OTT VoIP (EDGE)									
Codec Setting:	64kbps	6kbps	Orientation	Channel					
ABM1 (dBA/m)	13.86	12.86							
ABM2 (dBA/m)	-43.78	-44.48	Avial	661					
Frequency Response	Pass	Pass	- Axial						
S+N/N (dB)	57.64	57.34							

Table 7 4

³ FCC Office of Engineering and Technology KDB, "285076 D02 T-Coil Testing for CMRS IP v03," September 13, 2017

FCC ID: ZNFX510WM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 22 of 67
1M1805100104-09-R1.ZNF	06/02/2018 - 06/06/2018	Portable Handset		Fage 22 01 07
© 2018 PCTEST Engineering	g Laboratory, Inc.			REV 3.2.M

Codec Investigation – OTT VoIP (HSPA)								
Codec Setting:	64kbps	6kbps	Orientation	Channel				
ABM1 (dBA/m)	14.17	13.77		9400				
ABM2 (dBA/m)	-50.16	-49.51	Avial					
Frequency Response	Pass	Pass	– Axial					
S+N/N (dB)	64.33	63.28						

Table 7-2 Codec Investigation – OTT VoIP (HSPA)

Table 7-3 Codec Investigation – OTT VoIP (LTE)

		<u> </u>			
Codec Setting:	64kbps	6kbps	Orientation	Band / BW	Channel
ABM1 (dBA/m)	14.22	14.24		LTE Band 2 20MHz	
ABM2 (dBA/m)	-49.60	-48.84	Axial		18900
Frequency Response	Pass	Pass	AXIAI		
S+N/N (dB)	63.82	63.08			


 Table 7-4

 Codec Investigation – OTT VolP (WIFI)

Codec Setting:	64kbps	6kbps	Orientation	Band	Standard	Channel
ABM1 (dBA/m)	13.59	13.18				6
ABM2 (dBA/m)	-25.76	-25.06	Axial	2.4GHz	IEEE 802.11b	
Frequency Response	Pass	Pass	Axiai	2.4GHZ		
S+N/N (dB)	39.35	38.24				

• Mute on; Backlight off; Max Volume; Max Contrast

· Radio Configurations can be found in Section 9.II.F



Audio Band Magnetic Curve Measurement Block Diagram

FCC ID: ZNFX510WM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager	
Filename:	Test Dates:	DUT Type:		Demo 02 of 67	
1M1805100104-09-R1.ZNF	06/02/2018 - 06/06/2018	Portable Handset		Page 23 of 67	
© 2018 PCTEST Engineering	© 2018 PCTEST Engineering Laboratory, Inc.				

2. Radio Configuration for OTT VoIP (LTE)

An investigation was performed to determine the worst-case LTE band to be used for OTT VoIP testing. LTE Band 7 was used for the testing as the worst-case configuration for the handset. See below table for SNNR comparison between different LTE bands:

	Frequency		Bandwidth		-		ABM1	ABM2	SNNR
Band	[MHz]	Channel	[MHz]	Modulation	RB Size	RB Offset	[dB(A/m)]	[dB(A/m)]	[dB]
2	1880.0	18900	20	16QAM	1	0	14.50	-48.27	62.77
5	836.5	20525	10	16QAM	1	0	14.08	-49.27	63.35
7	2535.0	21100	20	16QAM	1	0	14.18	-47.23	61.41
12	707.5	23095	10	16QAM	1	0	14.32	-49.68	64.00
13	782.0	23230	10	16QAM	1	0	14.27	-49.08	63.35
66	1745.0	132322	20	16QAM	1	0	14.30	-48.03	62.33

Table 7-5 OTT VoIP (LTE) SNNR by LTE Band

FCC ID: ZNFX510WM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 24 of 67
1M1805100104-09-R1.ZNF	06/02/2018 - 06/06/2018	Portable Handset		Fage 24 01 07
© 2018 PCTEST Engineering	g Laboratory, Inc.			REV 3.2.M

8. FCC 3G MEASUREMENTS

I. UMTS Test Configurations

AMR at 12.2kbps, 13.6kbps SRB was used for the testing as the worst-case configuration for the handset. See below plot for ABM noise comparison between vocoder rates:




Figure 8-1 UMTS Audio Band Magnetic Noise

Table 8-1 Codec Investigation - UMTS

Codec Setting:	AMR 12.2kbps	AMR 7.95kbps	AMR 4.75kbps	Orientation	Channel			
ABM1 (dBA/m)	0.79	0.84	0.73					
ABM2 (dBA/m)	-57.04	-57.62	-57.23	Axial	9262			
Frequency Response	Pass	Pass	Pass	Axia				
S+N/N (dB)	57.83	58.46	57.96					

• Mute on; Backlight off; Max Volume; Max Contrast

TPC="All 1s"



Audio Band Magnetic Curve Measurement Block Diagram

FCC ID: ZNFX510WM	PCTEST	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 25 of 67
1M1805100104-09-R1.ZNF	06/02/2018 - 06/06/2018	Portable Handset	Portable Handset	
© 2018 PCTEST Engineering	Laboratory, Inc.	·		REV 3.2.M

9. T-COIL TEST SUMMARY

Consolidated Tabled Results												
		-	esponse rgin	-	netic / Verdict		SNNR dict	Margin from FCC Limit	C63.19-2011			
000.40	Castion	8.3	3.2	8.	3.1	8.3	3.4	(dB)	Rating			
063.15	9 Section	Axial	Radial	Axial	Radial	Axial	Radial					
GSM	Cellular	PASS	NA	PASS	PASS	PASS	PASS	-17.74	Τ4			
GSIM	PCS	PASS	NA	PASS	PASS	PASS	PASS	-17.74	14			
EDGE	Cellular	PASS	NA	PASS	PASS	PASS	PASS	-34.63	Τ4			
(OTT VoIP)	PCS	PASS	NA	PASS	PASS	PASS	PASS	-34.03	14			
	Cellular	PASS	NA	PASS	PASS	PASS	PASS					
UMTS	AWS	PASS	NA	PASS	PASS	PASS	PASS	-32.95	Τ4			
	PCS	PASS	NA	PASS	PASS	PASS	PASS					
	Cellular	PASS	NA	PASS	PASS	PASS	PASS					
HSPA (OTT VoIP)	AWS	PASS	NA	PASS	PASS	PASS	PASS	-43.25	Τ4			
	PCS	PASS	NA	PASS	PASS	PASS	PASS					
	B12	PASS	NA	PASS	PASS	PASS	PASS					
	B13	PASS	NA	PASS	PASS	PASS	PASS					
LTE FDD	B5	PASS	NA	PASS	PASS	PASS	PASS	-26.04	Τ4			
LIEFDD	B66	PASS	NA	PASS	PASS	PASS	PASS	-20.04	14			
	B2	PASS	NA	PASS	PASS	PASS	PASS					
	B7	PASS	NA	PASS	PASS	PASS	PASS					
LTE FDD (OTT VoIP)	B7	PASS	NA	PASS	PASS	PASS	PASS	-41.33	Τ4			
	802.11b	PASS	NA	PASS	PASS	PASS	PASS					
WLAN	802.11g	PASS	NA	PASS	PASS	PASS	PASS	-1.94	Т3			
	802.11n	PASS	NA	PASS	PASS	PASS	PASS					
	802.11b	PASS	NA	PASS	PASS	PASS	PASS	s				
WLAN (OTT VoIP)	802.11g	PASS	NA	PASS	PASS	PASS	PASS	-12.25	Τ4			
(,	802.11n	PASS	NA	PASS	PASS	PASS	PASS					

Table 9-1	
Consolidated Tabled Res	ults

FCC ID: ZNFX510WM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 26 of 67
1M1805100104-09-R1.ZNF	06/02/2018 - 06/06/2018	Portable Handset		Fage 20 01 07
© 2018 PCTEST Engineerin	g Laboratory, Inc.			REV 3.2.M

© 2018 PCTEST Engineering Laboratory, Inc. All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST Engineering Laboratory, Inc. If you have any questions about this International copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

04/17/2018

I. Raw Handset Data

Table 9-2 Raw Data Results for GSM

Mode	Orientation	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates	
		128	0.93	-37.59		2.00	38.52	20.00	-18.52	T4		
	Axial	190	0.96	-36.83	-64.18	2.00	37.79	20.00	-17.79	T4	2.8, 2.8	
GSM850		251	0.93	-36.81		2.00	37.74	20.00	-17.74	T4		
GSINIOSU		128	-7.05	-45.11			38.06	20.00	-18.06	T4		
	Radial	190	-6.80	-45.32	-64.25	N/A	38.52	20.00	-18.52	T4	2.8, 2.1	
		251	-6.71	-46.58			39.87	20.00	-19.87	T4		
		512	1.05	-41.88		2.00	42.93	20.00	-22.93	T4		
	Axial	661	1.14	-41.73	-64.18	2.00	42.87	20.00	-22.87	T4	2.8, 2.8	
GSM1900		810	0.95	-41.68		2.00	42.63	20.00	-22.63	T4		
G3W1900		512	-7.30	-52.09			44.79	20.00	-24.79	T4		
	Radial	661	-6.72	-51.96	-64.25	N/A	45.24	20.00	-25.24	T4	2.8, 2.1	
		810	-6.57	-52.18			45.61	20.00	-25.61	T4		

Table 9-3 Raw Data Results for UMTS

Mode	Orientation	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates	
		4132	0.52	-53.56		2.00	54.08	20.00	-34.08	T4		
	Axial	4183	0.55	-53.78	-64.18	2.00	54.33	20.00	-34.33	T4	2.8, 2.8	
UMTS V		4233	0.54	-54.10		2.00	54.64	20.00	-34.64	T4		
UNITS V		4132	-7.02	-62.11			55.09	20.00	-35.09	T4		
	Radial	4183	-7.02	-62.16	-64.25	N/A	55.14	20.00	-35.14	T4	2.8, 2.1	
		4233	-6.99	-62.02			55.03	20.00	-35.03	T4		
		1312	0.49	-53.04		2.00	53.53	20.00	-33.53	T4		
	Axial	1412	0.50	-54.29	-64.18	2.00	54.79	20.00	-34.79	T4	2.8, 2.8	
UMTSIV		1513	0.48	-53.11		2.00	53.59	20.00	-33.59	T4		
UNITSIV		1312	-7.02	-62.06			55.04	20.00	-35.04	T4		
	Radial	1412	-7.04	-61.98	-64.25	N/A	54.94	20.00	-34.94	T4	2.8, 2.1	
		1513	-7.05	-62.04			54.99	20.00	-34.99	T4		
		9262	0.44	-54.02		2.00	54.46	20.00	-34.46	T4		
	Axial	9400	0.43	-52.52	-64.18	2.00	52.95	20.00	-32.95	T4	2.8, 2.8	
UMTS II		9538	0.45	-53.91	04.10	2.00	54.36	20.00	-34.36	T4		
UWISI		9262	-7.04	-62.00			54.96	20.00	-34.96	T4		
	Radial	9400	-7.02	-61.96	-64.25	N/A	54.94	20.00	-34.94	T4	2.8, 2.1	
		9538	-7.02	-61.85			54.83	20.00	-34.83	T4		

Table 9-4 Raw Data Results for LTE B12

Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		10MHz	23095	-1.50	-48.94		2.00	47.44	20.00	-27.44	T4	
	Axial	5MHz	23095	-1.54	-48.93	-64.18	2.00	47.39	20.00	-27.39	T4	2.8, 2.8
	Axiai	3MHz	23095	-1.02	-49.28	-04.10	2.00	48.26	20.00	-28.26	T4	2.0, 2.0
LTE Band		1.4MHz	23095	-1.21	-47.82		2.00	46.61	20.00	-26.61	T4	
12		10MHz	23095	-9.08	-62.21			53.13	20.00	-33.13	T4	
Radial	5MHz	23095	-9.19	-62.24	-64.25 N/A	53.05	20.00	-33.05	T4	2.8.2.1		
	3MHz	23095	-8.80	-61.99		IWA	53.19	20.00	-33.19	T4	2.0, 2.1	
	1.4MHz	23095	-8.75	-62.05			53.30	20.00	-33.30	T4		

Table 9-5 Raw Data Results for LTE B13

Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011	Test Coordinates		
	Axial	10MHz	23230	-1.49	-51.75	-64.18	2.00	50.26	20.00	-30.26	T4	2.8. 2.8		
LTE Band	Axiai	5MHz	23230	-1.26	-51.23	-64.18	2.00	49.97	20.00	-29.97	T4	2.8, 2.8		
13 Radial	10MHz	23230	-8.78	-62.19	-64.25		53.41	20.00	-33.41	T4	2.8. 2.1			
	Radiai	5MHz	23230	-9.15	-62 27	-64.25	N/A	53 12	20.00	-33.12	T4	2.8, 2.1		

FCC ID: ZNFX510WM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 07 of 67
1M1805100104-09-R1.ZNF	06/02/2018 - 06/06/2018	Portable Handset		Page 27 of 67
© 2018 PCTEST Engineering	g Laboratory, Inc.			REV 3.2.M

Table 9-6 Raw Data Results for LTE B5

Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011	Test Coordinates
		10MHz	20600	-1.30	-48.31		2.00	47.01	20.00	-27.01	T4	
		10MHz	20525	-1.15	-47.19		2.00	46.04	20.00	-26.04	T4	
Axial	10MHz	20450	-1.14	-50.03	-64.18	2.00	48.89	20.00	-28.89	T4	2.8. 2.8	
	Axidi	5MHz	20525	-1.16	-47.57	-04.10	2.00	46.41	20.00	-26.41	T4	2.0, 2.0
LTE Band 5		3MHz	20525	-1.42	-47.59		2.00	46.17	20.00	-26.17	T4	
LTE Banu J		1.4MHz	20525	-1.78	-48.07		2.00	46.29	20.00	-26.29	T4	
		10MHz	20525	-9.07	-61.86			52.79	20.00	-32.79	T4	
	Dadial	5MHz	20525	-8.75	-61.60		N/A	52.85	20.00	-32.85	T4	2.8, 2.1
Radial	3MHz	20525	-8.83	-62.27	-64.25	IN/A	53.44	20.00	-33.44	T4	2.0, 2.1	
		1.4MHz	20525	-8.76	-62.03			53.27	20.00	-33.27	T4	

Table 9-7 Raw Data Results for LTE B66

					~~~							
Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		20MHz	132322	-1.42	-49.07		2.00	47.65	20.00	-27.65	T4	
		15MHz	132322	-1.53	-48.27		2.00	46.74	20.00	-26.74	T4	
	Axial	10MHz	132322	-1.31	-50.14	-64.18	2.00	48.83	20.00	-28.83	T4	2.8, 2.8
	Anai	5MHz	132322	-1.19	-50.46	-04.10	2.00	49.27	20.00	-29.27	T4	2.0, 2.0
		3MHz	132322	-1.01	-48.62		2.00	47.61	20.00	-27.61	T4	
		1.4MHz	132322	-1.08	-50.94		2.00	49.86	20.00	-29.86	T4	
LTE Band	20MHz	132322	-9.09	-61.83			52.74	20.00	-32.74	T4		
66		15MHz	132597	-8.84	-61.46			52.62	20.00	-32.62	T4	
		15MHz	132322	-9.00	-61.50			52.50	20.00	-32.50	T4	
	Radial	15MHz	132047	-9.04	-61.71	-64.25	N/A	52.67	20.00	-32.67	T4	2.8, 2.1
	Naulai	10MHz	132322	-8.79	-62.23	-04.25	IN A	53.44	20.00	-33.44	T4	2.0, 2.1
	5MHz	132322	-9.06	-62.15			53.09	20.00	-33.09	T4		
	3MHz	132322	-8.76	-62.01			53.25	20.00	-33.25	T4		
		1.4MHz	132322	-9.08	-62.36			53.28	20.00	-33.28	T4	

Table 9-8Raw Data Results for LTE B2

-					Jata It		<u> </u>					
Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		20MHz	18900	-1.16	-48.72		2.00	47.56	20.00	-27.56	T4	
		15MHz	18900	-1.09	-48.26		2.00	47.17	20.00	-27.17	T4	
Axial	10MHz	18900	-1.47	-50.15	-64.18	2.00	48.68	20.00	-28.68	T4	2.8, 2.8	
	Axiai	5MHz	18900	-1.16	-50.73	-04.10	2.00	49.57	20.00	-29.57	T4	2.0, 2.0
		3MHz	18900	-1.19	-49.23		2.00	48.04	20.00	-28.04	T4	
LTE Band 2		1.4MHz	18900	-1.54	-50.56		2.00	49.02	20.00	-29.02	T4	
LIE Banu Z		20MHz	18900	-9.07	-62.01			52.94	20.00	-32.94	T4	
		15MHz	18900	-8.79	-62.06			53.27	20.00	-33.27	T4	
	Dedial	10MHz	18900	-9.05	-61.77	64.05	NI/A	52.72	20.00	-32.72	T4	2.8. 2.1
	Radial	5MHz	18900	-8.81	-62.15	-64.25 N/A	IWA	53.34	20.00	-33.34	T4	2.0, 2.1
	3MHz	18900	-8.87	-62.05	1 !		53.18	20.00	-33.18	T4		
		1.4MHz	18900	-8.74	-61.57			52.83	20.00	-32.83	T4	

Table 9-9 Raw Data Results for LTE B7

Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011	Test Coordinates
		20MHz	21100	-1.45	-48.42		2.00	46.97	20.00	-26.97	T4	
	Axial	15MHz	21100	-1.54	-47.62	-64.18	2.00	46.08	20.00	-26.08	T4	2.8.2.8
	Axiai	10MHz	21100	-1.44	-49.38	-04.10	2.00	47.94	20.00	-27.94	T4	2.0, 2.0
LTE Band 7		5MHz	21100	-1.05	-50.93		2.00	49.88	20.00	-29.88	T4	
		20MHz	21100	-8.78	-61.91			53.13	20.00	-33.13	T4	
	Radial	15MHz	21100	-8.70	-62.13	-64.25	N/A	53.43	20.00	-33.43	T4	2.8.2.1
	Raulai	10MHz	21100	-9.06	-62.26	-04.25	INVA	53.20	20.00	-33.20	T4	2.0, 2.1
		5MHz	21100	-8.76	-62.31			53.55	20.00	-33.55	T4	

FCC ID: ZNFX510WM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Demo 29 of 67
1M1805100104-09-R1.ZNF	06/02/2018 - 06/06/2018	Portable Handset		Page 28 of 67
© 2018 PCTEST Engineering	g Laboratory, Inc.			REV 3.2.M

### Table 9-10 Raw Data Results for 2.4GHz WIFI

Mode	Orientation	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
WLAN	Axial	6	-4.73	-28.38	-64.18	2.00	23.65	20.00	-3.65	Т3	2.8, 2.8
802.11b	Radial	6	-12.58	-40.16	-64.25	N/A	27.58	20.00	-7.58	Т3	2.8, 2.1
WLAN	Axial	6	-4.67	-33.89	-64.18	2.00	29.22	20.00	-9.22	T3	2.8, 2.8
802.11g	Radial	6	-12.60	-48.35	-64.25	N/A	35.75	20.00	-15.75	T4	2.8, 2.1
		1	-4.77	-26.71		2.00	21.94	20.00	-1.94	T3	
	Axial	6	-4.86	-27.35	-64.18	2.00	22.49	20.00	-2.49	Т3	2.8, 2.8
WLAN		11	-4.70	-26.83	1	2.00	22.13	20.00	-2.13	Т3	
802.11n		1	-12.91	-37.22			24.31	20.00	-4.31	T3	
	Radial	6	-12.68	-40.01	-64.25	N/A	27.33	20.00	-7.33	Т3	2.8, 2.1
		11	-12.62	-38.24	1		25.62	20.00	-5.62	Т3	

Table 9-11 Raw Data Results for EDGE (OTT VoIP)

Mode	Orientation	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
EDGE85	Axial	190	12.59	-42.04	-64.18	1.54	54.63	20.00	-34.63	T4	2.8, 2.8
EDGE05	Radial	190	6.40	-51.16	-64.25	N/A	57.56	20.00	-37.56	T4	2.8, 2.1
EDGE190	Axial	661	12.67	-45.14	-64.18	1.51	57.81	20.00	-37.81	T4	2.8, 2.8
EDGE190	Radial	661	6.36	-53.73	-64.25	N/A	60.09	20.00	-40.09	T4	2.8, 2.1

Table 9-12 Raw Data Results for HSPA (OTT VoIP)

Mode	Orientation	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
HSPA V	Axial	4183	13.75	-49.50	-64.18	1.50	63.25	20.00	-43.25	Т4	2.8, 2.8
NJFA V	Radial	4183	7.10	-60.86	-64.25	N/A	67.96	20.00	-47.96	T4	2.8, 2.1
HSPA IV	Axial	1412	13.92	-49.70	-64.18	1.52	63.62	20.00	-43.62	T4	2.8, 2.8
HOPAN	Radial	1412	7.01	-60.80	-64.25	N/A	67.81	20.00	-47.81	T4	2.8, 2.1
HSPA II	Axial	9400	15.16	-50.06	-64.18	1.70	65.22	20.00	-45.22	T4	2.8, 2.8
IISP A II	Radial	9400	6.81	-60.91	-64.25	N/A	67.72	20.00	-47.72	T4	2.8, 2.1

Table 9-13 Raw Data Results for LTE B7 (OTT VoIP)

Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		20MHz	21350	13.80	-47.53		1.45	61.33	20.00	-41.33	T4	2.8, 2.8
		20MHz	21100	14.30	-47.23		1.58	61.53	20.00	-41.53	T4	
	Axial	20MHz	20850	13.93	-48.44	-64.18	1.58	62.37	20.00	-42.37	T4	
	Axiai	15MHz	21100	14.31	-47.68	-64.18	1.45	61.99	20.00	-41.99	T4	
		10MHz	21100	14.24	-49.59		1.53	63.83	20.00	-43.83	T4	
LTE Band 7		5MHz	21100	13.79	-49.10		1.52	62.89	20.00	-42.89	T4	
LIE Banu /		20MHz	21100	6.51	-58.80			65.31	20.00	-45.31	T4	
		15MHz	21100	6.25	-58.84			65.09	20.00	-45.09	T4	
	Dedial	10MHz	21400	6.15	-58.72	64.05	N/A	64.87	20.00	-44.87	T4	2.8. 2.1
	Radial	10MHz	21100	6.22	-58.59	-64.25	INVA	64.81	20.00	-44.81	T4	2.0, 2.1
		10MHz	20800	6.53	-58.87			65.40	20.00	-45.40	T4	
		5MHz	21100	6.37	-59.12			65.49	20.00	-45.49	T4	1

FCC ID: ZNFX510WM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 29 of 67
1M1805100104-09-R1.ZNF	06/02/2018 - 06/06/2018	Portable Handset		Page 29 01 67
© 2018 PCTEST Engineering	g Laboratory, Inc.			REV 3.2.M

Mode	Orientation	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
WLAN	Axial	6	13.23	-25.23	-64.18	1.26	38.46	20.00	-18.46	T4	2.8, 2.8
802.11b	Radial	6	5.68	-35.53	-64.25	N/A	41.21	20.00	-21.21	T4	2.8, 2.1
WLAN	Axial	6	13.25	-30.04	-64.18	1.72	43.29	20.00	-23.29	T4	2.8, 2.8
802.11g	Radial	6	5.65	-41.78	-64.25	N/A	47.43	20.00	-27.43	T4	2.8, 2.1
		1	13.30	-19.11		1.33	32.41	20.00	-12.41	T4	
	Axial	6	13.43	-19.98	-64.18	1.32	33.41	20.00	-13.41	T4	2.8, 2.8
WLAN		11	13.28	-18.97		1.44	32.25	20.00	-12.25	T4	
802.11n		1	5.79	-30.07			35.86	20.00	-15.86	T4	
	Radial	6	5.71	-30.09	-64.25	N/A	35.80	20.00	-15.80	T4	2.8, 2.1
		11	5.53	-30.70			36.23	20.00	-16.23	T4	

### Table 9-14 Raw Data Results for 2.4GHz WIFI (OTT VoIP)

### II. Test Notes

### A. General

- 1. Phone Condition: Mute on; Backlight off; Max Volume; Max Contrast
- 2. 'Radial' orientation refers to radial transverse.
- 3. Hearing Aid Mode (Phone→Call Settings→Additional Settings→Hearing aids) was set to ON for Frequency Response compliance
- 4. Speech Signal: ITU-T P.50 Artificial Voice
- 5. Bluetooth and WIFI were disabled for 2G/3G/4G modes while testing.
- 6. Licensed data modes and Bluetooth were disabled for WIFI modes while testing.
- 7. The Margin from FCC limit column indicates a margin from the FCC limit for compliance (T3).

### B. GSM


- 1. Power Configuration: GSM850: PCL=5, GSM1900: PCL=0;
- 2. Vocoder Configuration: EFR (GSM);
- C. UMTS
  - 1. Power Configuration: TPC= "All 1s";
  - 2. Vocoder Configuration: AMR 12.2 kbps (UMTS);
- D. LTE FDD
  - 1. Power Configuration: TPC = "Max Power"
  - 2. Radio Configuration: 16QAM, 1RB, 0RB offset
  - 3. Vocoder Configuration: WB AMR 6.60kbps
  - 4. The worst-case band and bandwidth combination for each probe orientation is additionally tested on the low and high channels for those combinations. LTE Band 5 at 10MHz is the worst-case for the Axial probe orientation. LTE Band 66 at 15MHz bandwidth is the worst-case for the Radial probe orientation.

FCC ID: ZNFX510WM	PCTEST	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Demo 20 of 67
1M1805100104-09-R1.ZNF	06/02/2018 - 06/06/2018	Portable Handset		Page 30 of 67
© 2018 PCTEST Engineering	Laboratory, Inc.			REV 3.2.M
				04/17/2018


- E. WIFI
  - 1. Radio Configuration
    - a. 802.11b: CCK, 5.5Mbps
    - b. 802.11g: QPSK, 12Mbps
    - c. 802.11n: BPSK, 6.5Mbps
  - 2. Vocoder Configuration: WB AMR 23.85kbps
  - 3. The worst-case standard for 2.4GHz WIFI in each probe orientation is additionally tested on the low and high channels. 802.11n is the worst-case for both the Axial and Radial probe orientations.
- F. OTT VolP
  - 1. Vocoder Configuration: 6kbps
  - 2. EDGE Configuration
    - a. MCS Index: 7
    - b. Number of TX slots: 2
  - 3. HSPA Configuration:
    - a. Release: 6
    - b. 3GPP 34.121 Subtest 1
  - 4. LTE FDD Configuration:
    - a. Power Configuration: TPC = "Max Power"
    - b. Radio Configuration: 16QAM, 1RB, 0RB offset
    - c. LTE Band 7 was the worst-case band from Table 7-5 and was used to test both Axial and Radial probe orientations.
    - d. The worst-case band and bandwidth combination for each probe orientation is additionally tested on the low and high channels for those combinations. LTE Band 7 at 20MHz is the worst-case for the Axial probe orientation. LTE Band 7 at 10MHz bandwidth is the worst-case for the Radial probe orientation.
  - 5. WIFI Configuration:
    - a. Radio Configuration
      - i. 802.11b: CCK, 5.5Mbps
      - ii. 802.11g: QPSK, 12Mbps
      - iii. 802.11n: BPSK, 6.5Mbps
    - b. The worst-case standard for 2.4GHz WIFI in each probe orientation is additionally tested on the low and high channels. 802.11n is the worst-case for both the Axial and Radial probe orientation.

FCC ID: ZNFX510WM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 31 of 67
1M1805100104-09-R1.ZNF	06/02/2018 - 06/06/2018	Portable Handset		Fage ST 01 07
© 2018 PCTEST Engineering	g Laboratory, Inc.	·		REV 3.2.M
				04/17/2018

# III. 1 kHz Vocoder Application Check

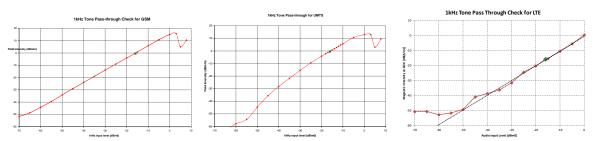

This model was verified to be within the linear region for ABM1 measurements at -16 dBm0 for GSM, UMTS, and VoLTE over IMS. This measurement was taken in the axial configuration above the maximum location.



This model was verified to be within the linear region for ABM1 measurements at -20 dBm0 for VoWIFI over IMS and OTT VoIP. This measurement was taken in the axial configuration above the maximum location.

# **IV. T-Coil Validation Test Results**

Item	Target	Result	Verdict
Axial			-
Magnetic Intensity, -10 dBA/m	-10 ± 0.5 dB	-10.170	PASS
Environmental Noise	< -58 dBA/m	-64.18	PASS
Frequency Response, from limits	> 0 dB	0.80	PASS
Radial			
Magnetic Intensity, -10 dBA/m	-10 ± 0.5 dB	-10.289	PASS
Environmental Noise	< -58 dBA/m	-64.25	PASS
Frequency Response, from limits	> 0 dB	0.80	PASS

Table 9-15 Helmholtz Coil Validation Table of Results

FCC ID: ZNFX510WM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 32 of 67
1M1805100104-09-R1.ZNF	06/02/2018 - 06/06/2018	Portable Handset		Fage 52 01 07
© 2018 PCTEST Engineering	g Laboratory, Inc.			REV 3.2.M
				04/17/2018

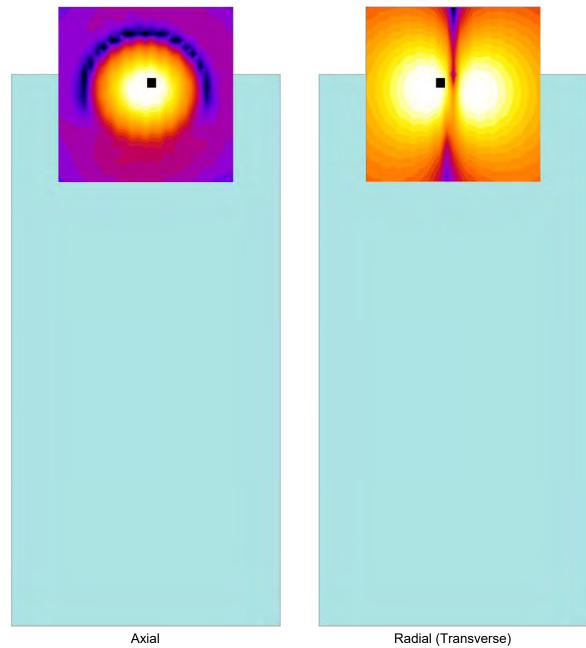


Figure 9-1 T-Coil Scan Overlay Magnetic Field Distributions

Notes:

- 1. Final measurement locations are indicated by a cursor on the contour plots.
- 2. See Test Setup Photographs for actual WD overlay.

FCC ID: ZNFX510WM	INCINENTEST	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Demo 22 of 67
1M1805100104-09-R1.ZNF	06/02/2018 - 06/06/2018	Portable Handset		Page 33 of 67
© 2018 PCTEST Engineering	Laboratory, Inc.			REV 3.2.M 04/17/2018

© 2018 PCTEST Engineering Laboratory, Inc. All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST Engineering Laboratory, Inc. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

# V. ABM1 Magnetic Field Distribution Scan Overlays

# **10. MEASUREMENT UNCERTAINTY**

Contribution	Data +/- %	Data +/- dB	Data Type	Probability distribution	Divisor	Standard uncertainty	Standard Uncertainty (dB)
ABM Noise	7.0%	0.29	Std. Dev.	Normal k=1	1.00	7.0%	
RF Reflections	4.7%	0.20	Specification	Rectangular	1.73	2.7%	
Reference Signal Level	12.2%	0.50	Specification	Rectangular	1.73	7.0%	
Positioning Accuracy	10.0%	0.41	Uncertainty	Rectangular	1.73	5.8%	
Probe Coil Sensitivity	12.2%	0.50	Specification	Rectangular	1.73	7.0%	
Probe Linearity	2.4%	0.10	Std. Dev.	Normal k=1	1.00	2.4%	
Cable Loss	2.8%	0.12	Specification	Rectangular	1.73	1.6%	
Frequency Analyzer	5.0%	0.21	Specification	Rectangular	1.73	2.9%	
System Repeatability	5.0%	0.21	Std. Dev.	Normal k=1	1.00	5.0%	
WD Repeatability	9.0%	0.37	Std. Dev.	Normal k=1	1.00	9.0%	
Positioner Accuracy	1.0%	0.04	Specification	Rectangular	1.73	0.6%	
Combined standard uncertainty, uc (k=1)					17.7%	0.71	
Expanded uncertainty (k=2), 95% confidence level				35.3%	1.31		

#### Table 10-1 Uncertainty Estimation Table

Notes:

1. Test equipments are calibrated according to techniques outlined in NIS81, NIS3003 and NIST Tech Note 1297.

2. All equipments have traceability according to NIST. Measurement Uncertainties are defined in further detail in NIS 81 and NIST Tech Note 1297 and UKAS M3003.

Measurement uncertainty reflects the quality and accuracy of a measured result as compared to the true value. Such statements are generally required when stating results of measurements so that it is clear to the intended audience that the results may differ when reproduced by different facilities. Measurement results vary due to the measurement uncertainty of the instrumentation, measurement technique, and test engineer. Most uncertainties are calculated using the tolerances of the instrumentation used in the measurement setup variability, and the technique used in performing the test. While not generally included, the variability of the equipment uncertainty is based on the variability of repeated measurements (so-called Type A uncertainty). This may mean that the Hearing Aid

compatibility tests may have to be repeated by taking down the test setup and resetting it up so that there are a statistically significant number of repeat measurements to identify the measurement uncertainty. By combining the repeat measurement results with that of the instrumentation chain using the technique contained in NIS 81 and NIS 3003, the overall measurement uncertainty was estimated.

FCC ID: ZNFX510WM	PCTEST	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager	
Filename:	Test Dates:	DUT Type:		Page 34 of 67	
1M1805100104-09-R1.ZNF	06/02/2018 - 06/06/2018	Portable Handset			
© 2018 PCTEST Engineering Laboratory, Inc.					
				04/17/2018	

# 11. EQUIPMENT LIST

#### Table 11-1 Equipment List

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Dell	Latitude E6540	SoundCheck Acoustic Analyzer Laptop	4/11/2017	Biennial	4/11/2019	7BFNM32
Listen	SoundConnect	Microphone Power Supply	N/A		N/A	0899-PS150
Listen	SoundConnect	Microphone Power Supply	12/2/2016	Biennial	12/2/2018	PS2612
RME	Fireface UC	Soundcheck Acoustic Analyzer External Audio Interface	4/11/2017	Biennial	4/11/2019	23528889
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	1/19/2018	Annual	1/19/2019	162125
Rohde & Schwarz	CMW500	Radio Communication tester	7/14/2017	Annual	7/14/2018	140144
Seekonk	NC-100	Torque Wrench (8" lb)	9/1/2016	Biennial	9/1/2018	21053
TEM	C63.19	Helmholtz Coil	12/7/2016	Biennial	12/7/2018	925
TEM	Radial T-Coil Probe	Radial T-Coil Probe	12/7/2016	Biennial	12/7/2018	TEM-1130
TEM	Axial T-Coil Probe	Axial T-Coil Probe	12/7/2016	Biennial	12/7/2018	TEM-1124
TEM		HAC System Controller with Software	N/A		N/A	N/A
TEM		HAC Positioner	N/A		N/A	N/A

FCC ID: ZNFX510WM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename: 1M1805100104-09-R1.ZNF	Test Dates: 06/02/2018 - 06/06/2018	<b>DUT Type:</b> Portable Handset		Page 35 of 67
© 2018 PCTEST Engineering	J Laboratory, Inc.	·		REV 3.2.M 04/17/2018

# 12. TEST DATA

FCC ID: ZNFX510WM	PCTEST	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dega 26 of 67
1M1805100104-09-R1.ZNF	06/02/2018 - 06/06/2018	Portable Handset		Page 36 of 67
© 2018 PCTEST Engineering Laboratory, Inc.			REV 3.2.M	

© 2018 PCTEST Engineering Laboratory, Inc. All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST Engineering Laboratory, Inc. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

04/17/2018

6/2/2018



### DUT: HH Coil – SN: 925 Type: HH Coil

Serial: 925


Measurement Standard: ANSI C63.19-2011

#### Equipment:

Probe: Axial T-Coil Probe - SN: TEM-1124; Calibrated: 12/07/2016

Helmholtz Coil – SN: 925; Calibrated: 12/07/2016

Noise Spectrum

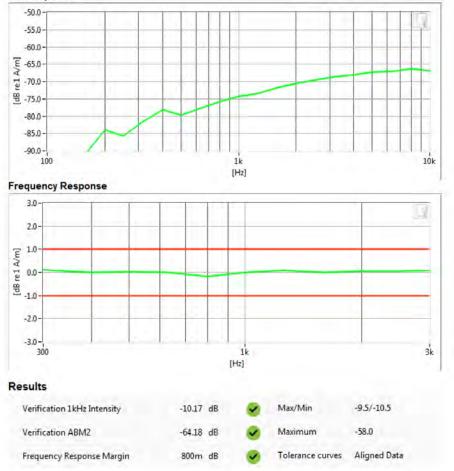

#### PCTEST 2018

FCC ID: ZNFX510WM	PCTEST	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Demo 27 of 67
1M1805100104-09-R1.ZNF	06/02/2018 - 06/06/2018	Portable Handset		Page 37 of 67
© 2018 PCTEST Engineering Laboratory, Inc.				

6/2/2018



### DUT: HH Coil – SN: 925 Type: HH Coil

Serial: 925


Measurement Standard: ANSI C63.19-2011

#### Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1130; Calibrated: 12/07/2016

Helmholtz Coil – SN: 925; Calibrated: 12/07/2016

**Noise Spectrum** 

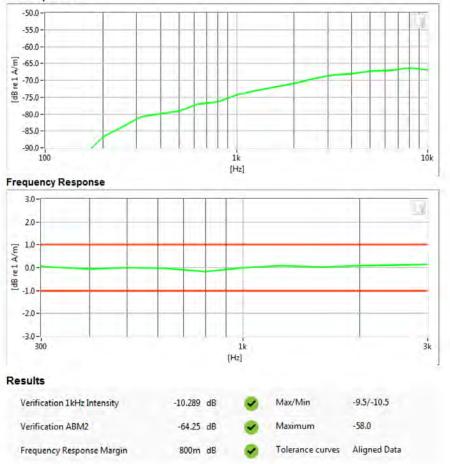

#### PCTEST 2018

FCC ID: ZNFX510WM	PCTEST	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dega 20 of 67
1M1805100104-09-R1.ZNF	06/02/2018 - 06/06/2018	Portable Handset		Page 38 of 67
© 2018 PCTEST Engineering Laboratory, Inc.				



# PCTEST Hearing-Aid Compatibility Facility

### DUT: ZNFX510WM

Type: Portable Handset Serial: 04711

Measurement Standard: ANSI C63.19-2011


#### Equipment:

Probe: Axial T-Coil Probe - SN: TEM-1124; Calibrated: 12/07/2016

#### **Test Configuration:**

- Mode: GSM 850
- Channel: 251
- Speech Signal: ITU-T P.50 Artificial Voice

# Noise Spectrum

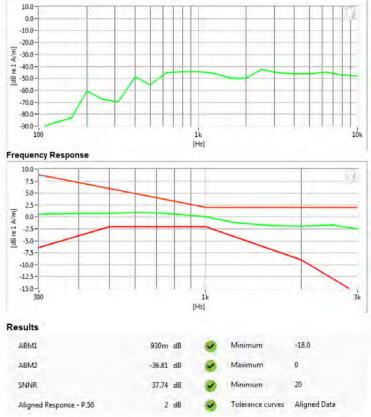

#### PCTEST 2018

FCC ID: ZNFX510WM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dega 20 of 67
1M1805100104-09-R1.ZNF	06/02/2018 - 06/06/2018	Portable Handset		Page 39 of 67
© 2018 PCTEST Engineering Laboratory, Inc.				



# PCTEST Hearing-Aid Compatibility Facility

# DUT: ZNFX510WM

Type: Portable Handset Serial: 04711


Measurement Standard: ANSI C63.19-2011

#### Equipment:

Probe: Axial T-Coil Probe - SN: TEM-1124; Calibrated: 12/07/2016

#### **Test Configuration:**

- Mode: GSM 1900
- Channel: 810
- Speech Signal: ITU-T P.50 Artificial Voice

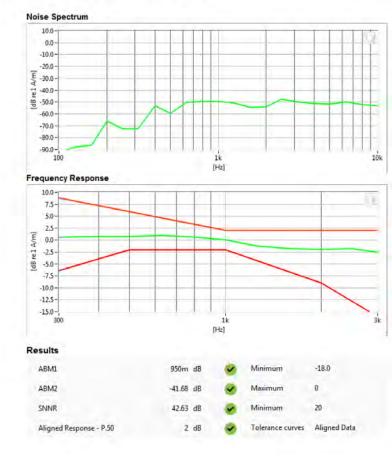

#### PCTEST 2018

FCC ID: ZNFX510WM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 40 of 67
1M1805100104-09-R1.ZNF	06/02/2018 - 06/06/2018	Portable Handset		Page 40 of 67
© 2018 PCTEST Engineering Laboratory, Inc.				



# **PCTEST Hearing-Aid Compatibility Facility**

# DUT: ZNFX510WM

Type: Portable Handset Serial: 04711

Measurement Standard: ANSI C63.19-2011

#### Equipment:


Probe: Axial T-Coil Probe - SN: TEM-1124; Calibrated: 12/07/2016

#### **Test Configuration:**

- Mode: UMTS Band V
- Channel: 4132 .

Aligned Response - P.50

Speech Signal: ITU-T P.50 Artificial Voice

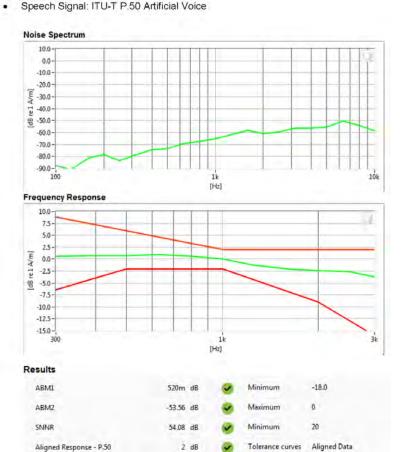

#### PCTEST 2018

FCC ID: ZNFX510WM	PCTEST	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dege 41 of 67
1M1805100104-09-R1.ZNF	06/02/2018 - 06/06/2018	Portable Handset		Page 41 of 67
© 2018 PCTEST Engineering Laboratory, Inc.				

2 d8

Tolerance curves



# **PCTEST Hearing-Aid Compatibility Facility**

# DUT: ZNFX510WM

Type: Portable Handset Serial: 04711


Measurement Standard: ANSI C63.19-2011

#### Equipment:

Probe: Axial T-Coil Probe - SN: TEM-1124; Calibrated: 12/07/2016

#### **Test Configuration:**

- · Mode: UMTS Band IV
- Channel: 1312 .
- Speech Signal: ITU-T P.50 Artificial Voice .

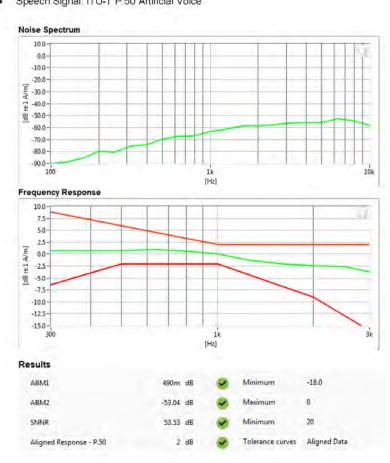

#### PCTEST 2018

FCC ID: ZNFX510WM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 42 of 67
1M1805100104-09-R1.ZNF	06/02/2018 - 06/06/2018	Portable Handset		Page 42 of 67
© 2018 PCTEST Engineering Laboratory, Inc.				



# **PCTEST Hearing-Aid Compatibility Facility**

# DUT: ZNFX510WM

Type: Portable Handset Serial: 04711

Measurement Standard: ANSI C63.19-2011

#### Equipment:

Probe: Axial T-Coil Probe - SN: TEM-1124; Calibrated: 12/07/2016


#### **Test Configuration:**

- · Mode: UMTS Band II
- Channel: 9400 .

SNNR

Aligned Response - P.50

Speech Signal: ITU-T P.50 Artificial Voice

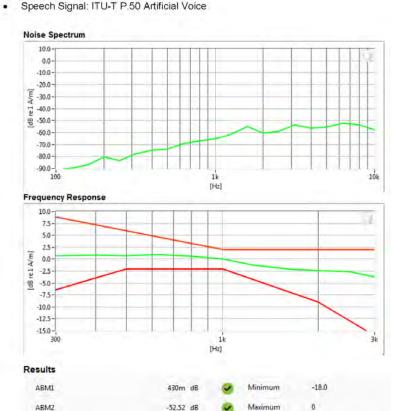

52.95 dB

2 d8

Minimum

Tolerance curves

20 Aligned Data

#### PCTEST 2018

FCC ID: ZNFX510WM	PCTEST	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 42 of 67
1M1805100104-09-R1.ZNF	06/02/2018 - 06/06/2018	Portable Handset		Page 43 of 67
© 2018 PCTEST Engineering Laboratory, Inc.				

© 2018 PCTEST Engineering Laboratory, Inc. All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST Engineering Laboratory, Inc. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

#### 04/17/2018



# **PCTEST Hearing-Aid Compatibility Facility**

# DUT: ZNFX510WM

Type: Portable Handset Serial: 04711

Measurement Standard: ANSI C63.19-2011


#### Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1124; Calibrated: 12/07/2016

#### **Test Configuration:**

- Mode: LTE Band 5
- Bandwidth: 10MHz
- Channel: 20525
- Speech Signal: ITU-T P.50 Artificial Voice

#### Noise Spectrum

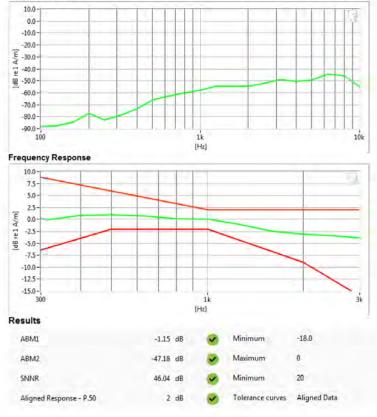

#### PCTEST 2018

FCC ID: ZNFX510WM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 44 of 67
1M1805100104-09-R1.ZNF	06/02/2018 - 06/06/2018	Portable Handset		Page 44 01 67
© 2018 PCTEST Engineering Laboratory, Inc.				



# **PCTEST Hearing-Aid Compatibility Facility**

# DUT: ZNFX510WM

Type: Portable Handset Serial: 04711

Measurement Standard: ANSI C63.19-2011


#### Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1124; Calibrated: 12/07/2016

#### **Test Configuration:**

- Mode: 2.4GHz WIFI
- Standard: IEEE 802.11n
- Channel: 1
- Speech Signal: ITU-T P.50 Artificial Voice

#### Noise Spectrum

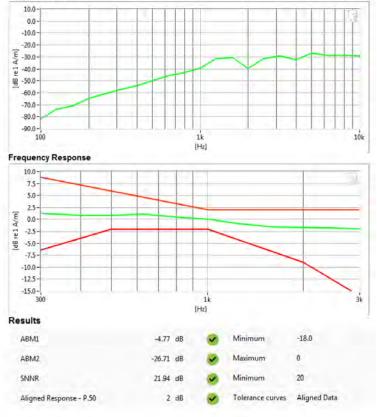

#### PCTEST 2018

FCC ID: ZNFX510WM	POTEST	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 45 of 67
1M1805100104-09-R1.ZNF	06/02/2018 - 06/06/2018	Portable Handset		Page 45 of 67
© 2018 PCTEST Engineering Laboratory, Inc.				



# **PCTEST Hearing-Aid Compatibility Facility**

## DUT: ZNFX510WM

Type: Portable Handset Serial: 04711


Measurement Standard: ANSI C63.19-2011

#### Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1124; Calibrated: 12/07/2016

#### **Test Configuration:**

- VoIP Application: Google Duo
- Mode: 2.4GHz WIFI
- Standard: IEEE 802.11n
- Channel: 11
- Speech Signal: ITU-T P.50 Artificial Voice

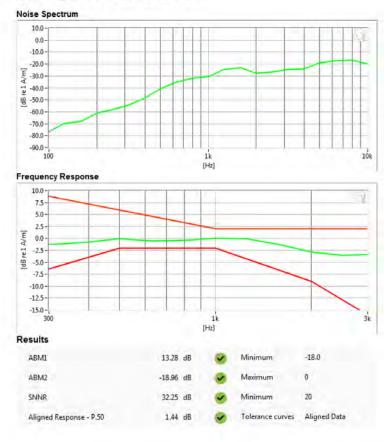

#### PCTEST 2018

FCC ID: ZNFX510WM	PCTEST	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dega 46 of 67
1M1805100104-09-R1.ZNF	06/02/2018 - 06/06/2018	Portable Handset		Page 46 of 67
© 2018 PCTEST Engineering Laboratory, Inc.				



## DUT: ZNFX510WM

Type: Portable Handset Serial: 04711


Measurement Standard: ANSI C63, 19-2011

#### Equipment:

Probe: Radial T-Coil Probe - SN: TEM-1130; Calibrated: 12/07/2016

#### **Test Configuration:**

- Mode: GSM 850
- Channel: 128

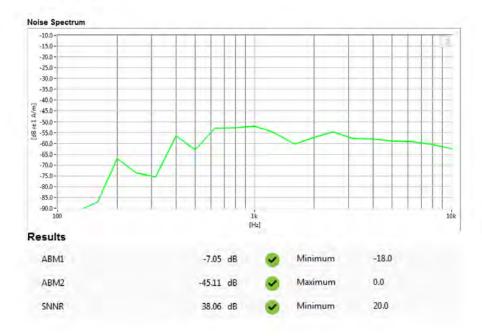

#### PCTEST 2018

FCC ID: ZNFX510WM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 47 of 67
1M1805100104-09-R1.ZNF	06/02/2018 - 06/06/2018	Portable Handset		Page 47 of 67
© 2018 PCTEST Engineering Laboratory, Inc.				



#### Lot ficaling file companying fac

# DUT: ZNFX510WM

Type: Portable Handset Serial: 04711


Measurement Standard: ANSI C63, 19-2011

#### Equipment:

Probe: Radial T-Coil Probe - SN: TEM-1130; Calibrated: 12/07/2016

#### **Test Configuration:**

- Mode: GSM 1900
- Channel: 512

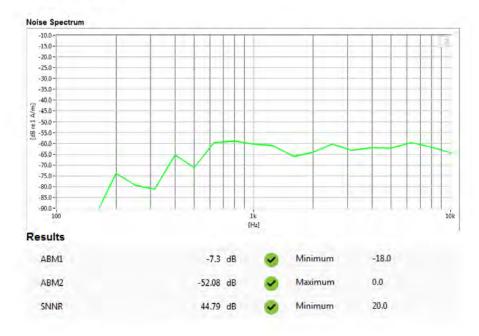

#### PCTEST 2018

FCC ID: ZNFX510WM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 49 of 67
1M1805100104-09-R1.ZNF	06/02/2018 - 06/06/2018	Portable Handset		Page 48 of 67
© 2018 PCTEST Engineering Laboratory, Inc.				



# DUT: ZNFX510WM

Type: Portable Handset Serial: 04711


Measurement Standard: ANSI C63.19-2011

### Equipment:

Probe: Radial T-Coil Probe - SN: TEM-1130; Calibrated: 12/07/2016

#### **Test Configuration:**

- Mode: UMTS Band V
- Channel: 4233

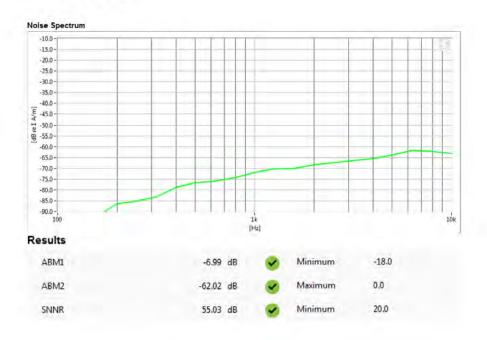

#### PCTEST 2018

FCC ID: ZNFX510WM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager	
Filename:	Test Dates:	DUT Type:		Dama 40 af 67	
1M1805100104-09-R1.ZNF	06/02/2018 - 06/06/2018	Portable Handset		Page 49 of 67	
© 2018 PCTEST Engineering Laboratory, Inc.					



#### Lot hearing-Aid compatibility raci

# DUT: ZNFX510WM

Type: Portable Handset Serial: 04711


Measurement Standard: ANSI C63.19-2011

### Equipment:

Probe: Radial T-Coil Probe - SN: TEM-1130; Calibrated: 12/07/2016

#### **Test Configuration:**

- Mode: UMTS Band IV
- Channel: 1412

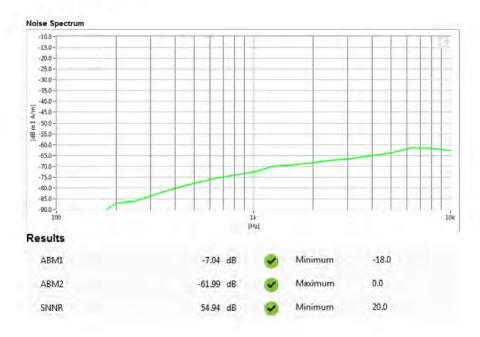

#### PCTEST 2018

FCC ID: ZNFX510WM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dege 50 of 67
1M1805100104-09-R1.ZNF	06/02/2018 - 06/06/2018	Portable Handset		Page 50 of 67
© 2018 PCTEST Engineering Laboratory, Inc.				



# PCTEST Hearing-Aid Compatibility Facility

# DUT: ZNFX510WM

Type: Portable Handset Serial: 04711


Measurement Standard: ANSI C63.19-2011

### Equipment:

Probe: Radial T-Coil Probe - SN: TEM-1130; Calibrated: 12/07/2016

#### **Test Configuration:**

- Mode: UMTS Band II
- Channel: 9538

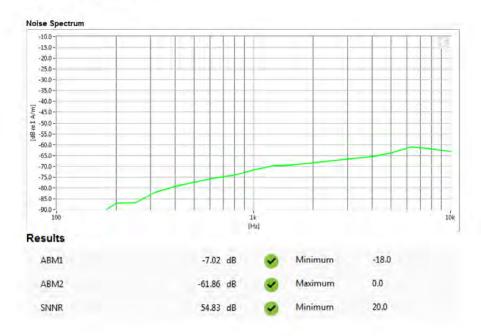

#### PCTEST 2018

FCC ID: ZNFX510WM	PCTEST	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager		
Filename:	Test Dates:	DUT Type:		Dege 51 of 67		
1M1805100104-09-R1.ZNF	06/02/2018 - 06/06/2018	Portable Handset		Page 51 of 67		
© 2018 PCTEST Engineering	© 2018 PCTEST Engineering Laboratory, Inc.					



# PCTEST Hearing-Aid Compatibility Facility

# DUT: ZNFX510WM

Type: Portable Handset Serial: 04711

Measurement Standard: ANSI C63.19-2011

### Equipment:

Probe: Radial T-Coil Probe - SN: TEM-1130; Calibrated: 12/07/2016

#### Test Configuration:

- Mode: LTE Band 66
- Bandwidth: 15MHz
- Channel: 132322

#### Noise Spectrum



PCTEST 2018

FCC ID: ZNFX510WM	PCTEST	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 52 of 67
1M1805100104-09-R1.ZNF	06/02/2018 - 06/06/2018	Portable Handset		Fage 52 01 07
© 2018 PCTEST Engineering	Laboratory, Inc.	·		REV 3.2.M
				04/17/2018



#### •

# DUT: ZNFX510WM

Type: Portable Handset Serial: 04711

Measurement Standard: ANSI C63.19-2011


#### Equipment:

Probe: Radial T-Coil Probe - SN: TEM-1130; Calibrated: 12/07/2016

#### **Test Configuration:**

- Mode: 2.4GHz WIFI
- Standard: IEEE 802.11n
- Channel: 1

#### Noise Spectrum

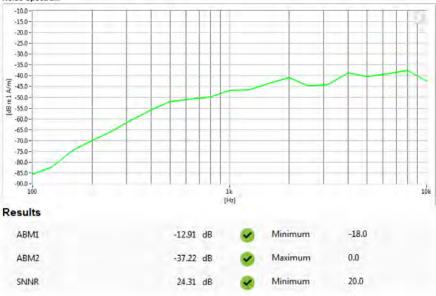

#### PCTEST 2018

FCC ID: ZNFX510WM	PCTEST	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager	
Filename:	Test Dates:	DUT Type:		Dega 52 of 67	
1M1805100104-09-R1.ZNF	06/02/2018 - 06/06/2018	Portable Handset		Page 53 of 67	
© 2018 PCTEST Engineering	© 2018 PCTEST Engineering Laboratory, Inc.				



# PCTEST Hearing-Aid Compatibility Facility

# DUT: ZNFX510WM

Type: Portable Handset Serial: 04711

Measurement Standard: ANSI C63.19-2011

#### Equipment:

Probe: Radial T-Coil Probe - SN: TEM-1130; Calibrated: 12/07/2016

#### **Test Configuration:**

- VoIP Application: Google Duo
- Mode: 2.4GHz WIFI
- Standard: IEEE 802.11n
- Channel: 6

#### Noise Spectrum



PCTEST 2018

FCC ID: ZNFX510WM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 54 of 67
1M1805100104-09-R1.ZNF	06/02/2018 - 06/06/2018	Portable Handset		Fage 54 01 07
© 2018 PCTEST Engineering	g Laboratory, Inc.			REV 3.2.M 04/17/2018

# 13. CALIBRATION CERTIFICATES

FCC ID: ZNFX510WM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 55 of 67
1M1805100104-09-R1.ZNF	06/02/2018 - 06/06/2018	Portable Handset		Fage 55 01 07
© 2018 PCTEST Engineering	© 2018 PCTEST Engineering Laboratory, Inc.			

© 2018 PCTEST Engineering Laboratory, Inc. All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST Engineering Laboratory, Inc. If you have any questions about this International copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

04/17/2018

	aiuwen Canbi au	on Laboratories Inc.
Certi	ficate of	Calibration
	AXIAL T COIL	BDADF
	AXIAL T COIL Manufactured by: Model No: Serial No: Calibration Recall No:	TEM CONSULTING AXIAL T COIL PROBE TEM-1124 27068
	Submitted	
		REW HARWELL
	Company: PCTE Address: 6660-I	ST ENGINEERING LAB B DOBBIN ROAD JMBIA MD 21045
National Institute of St This document certifie submitter.	tandards and Technology or to	d specification using standards traceable to the accepted values of natural physical constants. Solowing specification upon its return to the
	pration, the instrument was four	1/1 461
Within		12/29/246
tolerance of the indica	ated specification. See attached	Report of Calibration.
West Caldwell Calibra requirements, ISO 100 and ISO 17025	ation Laboratories' calibration ( 112-1 MIL STD 45662A, ANSI/	control system meets the following NCSL Z540-1, IEC Guide 25, ISO 9001:2008
Note: With this Certificate,	Report of Calibration is Included.	Approved by:
Calibration Date:	07-Dec-16	FC_
Certificate No:	27068 - 3	Felix Christopher (QA Mgr.)
QA Doc. #1051 Rev. 2.0 10/1/01	Certificate Page	1 of 1 ISO/IEC 17025:2005
	/est Caldwell Calibration	

FCC ID: ZNFX510WM	PCTEST	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dega E6 of 67
1M1805100104-09-R1.ZNF	06/02/2018 - 06/06/2018	Portable Handset		Page 56 of 67
© 2018 PCTEST Engineering	Laboratory, Inc.			REV 3.2.M


HCATEMC_TEM 1124_Dec-07-2016





1575 Store Rours 96, Vieter NY 14564

# Calibration Lab. Cort. #1533.01

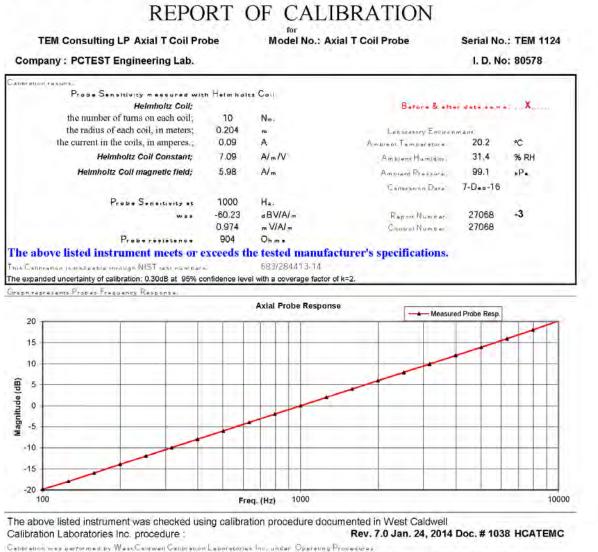

Intereed to Implement the requirements of ISO10012-1, IEC Guida 25, ANSI/NCSL 2540-1, (MIL-STD-45662A) and ISO 9001 2008, ISO 17025

Call Data: 7-Dac-2016 Measurements performed by: FC Califorated on WCCL system type 9700 Felix Cl

Tota a sad more shall not be rearranged, and so in full, without the written as a result from Were Calewood Cal Lake for

# Felix Christopher

R+v 70 Jan 24, 2014 Dav # 1038 HCATEMC

#### Page 1 of 2

FCC ID: ZNFX510WM	PCTEST	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager	
Filename:	Test Dates:	DUT Type:		Dama 67 of 67	
1M1805100104-09-R1.ZNF	06/02/2018 - 06/06/2018	Portable Handset		Page 57 of 67	
© 2018 PCTEST Engineering	© 2018 PCTEST Engineering Laboratory, Inc.				

### HCATEMC_TEM 1124_Dec-07-2016

## West Caldwell Calibration Laboratories Inc.

1575 Stote Raute 96, Victor NY 14564 Tel. (585) 586-3900 FAX (585) 586-4327

# **Calibration Data Record**

TEM Consulting LP Axial T Coil Probe

Model No.: Axial T Coil Probe

Serial No.: TEM 1124

Company : PCTEST Engineering Lab.

Test	Function	Tolera	nce	Measured values		
			Batara	Out	Romarks	
T. O	Probe Sensizivizy es	1000 Hz.	a BV/A/m	-60.23		
	- 0.10251 mail		₽B			3
2.0	Probe Level Linearity		6	6.03		
		R.r. (0 = B)	0	0.00		
			-6	-6.03		
			-12	-12.05		
			H.	1		
3 0	Proba Frequency Response		100	-19.8		
			126	-18.0		
			158	-16.0		
			200	-13.9		
		251	-12.0			
			316	-9,9		
			398	-8.0		
			501	-6.0		
			631	-4.0		
			794	-2.0		
		Rer. (0 . B)	1000	0.0		
			1259	2.0		
		1585	4.0			
		1995	6.0			
			2512	7.9		
			3162	9,9		
			3981	11.9		
			5012	13.9		
			6310	15.9		
			7943	18.0		
			10000	20.2		

natrumants used for calibrat	tiani			Date of Cal	Tracadality No.	Due Date
HP	34401A	S/N	36064102	1-Qat-2016	,287708	1-Oet-2017
HP	34401A	S/N	36102471	1-Oct-2016	.287708	1-Oct-2017
HP	33120A	5/N	36043716	1 Oct 2015	.287708	1 Oct 2017
B&K	2133	S/N	1583254	1-Oet-2016	683/284413-14	1-Oot-2017

Cut. Data: 7-Dac-2016

Cellbreted on WCGL system type 9700

Tate another shall not be tracedured accests for whereas the writer spaces at them West Common Ser Land be

Tauted by! Falls Christopher

R.+. 7.0 Jan 24. 2014 Dav # 1038 HCATEMC

#### Page 2 of 2

FCC ID: ZNFX510WM	PCTEST	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dega 59 of 67
1M1805100104-09-R1.ZNF	06/02/2018 - 06/06/2018	Portable Handset		Page 58 of 67
© 2018 PCTEST Engineering	REV 3.2.M			

West (	Caldwell Calibrat	ion Laboı	ratories Inc.	
Certi	ificate of	Cali	bration	
	RADIAL T COI	L PROBE		
	Manufactured by: Model No: Serial No:	TEM-1130	ULTING COIL PROBE	
	Calibration Recall No:	27068		
	Submitte Customer: AND	a by: REW HARWELI	ſ.	
		EST ENGINEER		
	Address: 6660-	B DOBBIN ROA UMBIA	D MD 21045	
submitter.	es that the instrument met the f ation Laboratories Procedure ?		TEMC	
Upon receipt for Cali	bration, the instrument was fou	nd to be:	12/29/2016	
Within	1 (X)		12/29/2016	
tolerance of the indic	ated specification. See attached	Report of Calibi	ation.	
West Caldwell Calibr requirements, ISO 10 and ISO 17025	ation Laboratories' calibration 012-1 MIL STD 45662A, ANSL	control system m 'NCSL Z540-1, II	eets the following SC Guide 25, ISO 9001:2008	
Note: With this Certificate	, Report of Calibration is included.	Арг	proved by:	
Calibration Date:	07-Dec-16		FC	
Certificate No:	27068 - 2	Feli	x Christopher (QA Mgr.)	
QA Doc. #1051 Rev. 2.0 10/1/01	Certificate Page	91 of 1	ISO/IEC 17025:2005	
Δ- Δ-	Vest Caldwell			·
	Calibration			

FCC ID: ZNFX510WM	PCTEST	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager	
Filename:	Test Dates:	DUT Type:		Dega 50 of 67	
1M1805100104-09-R1.ZNF	06/02/2018 - 06/06/2018	Portable Handset		Page 59 of 67	
© 2018 PCTEST Engineering	© 2018 PCTEST Engineering Laboratory, Inc.				

.


HCRTEMC_TEM-1130_Dec-07-2016





1575 Store Roure 96, Vieter NY 14564

# REPORT OF CALIBRATION

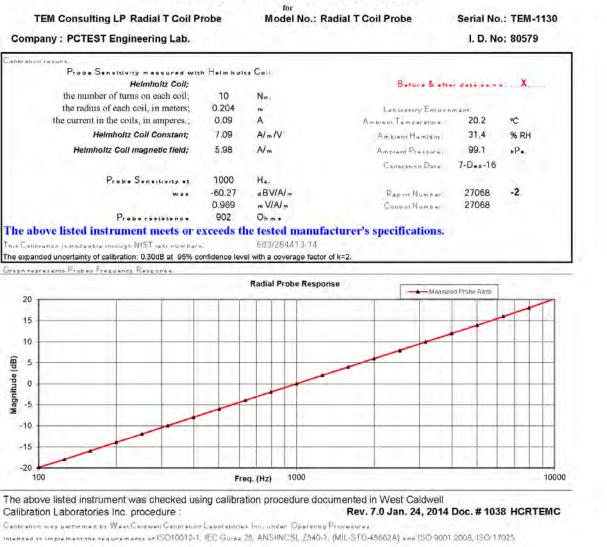

Cal. Data: 7-Dac-2016	Measurements performed by	FC
Calibrates on WCCL system type 9700		Felix Christopher
This bearmone shall not an example answer in full, without the written as an wat from West Calevier Car Land	Rev 70Ja	24. 2014 D # 1038 HCRTEMC

### Page 1 of 2

FCC ID: ZNFX510WM	PCTEST	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dega 60 of 67
1M1805100104-09-R1.ZNF	06/02/2018 - 06/06/2018	Portable Handset		Page 60 of 67
© 2018 PCTEST Engineering Laboratory, Inc.				

## HCRTEMC_TEM-1130_Dec-07-2016

## West Caldwell Calibration Laboratories Inc.

1575 State Raute 96, Vietar NY 14564 Tel. (585) 586-3900 FAX (585) 586-4327

# **Calibration Data Record**

TEM Consulting LP Radial T Coil Probe

Model No.: Radial T Coil Probe

Serial No.: TEM-1130

Company : PCTEST Engineering Lab.

Test	Function	Tolera	ice	Measured values			
				Batora	Out	Romarks	
0	Probe Sensitivity es	1000 Hz.	a BV/A/m	-60.27			
2.0	Prope Level Lingerity		≠B ô	6.03		2	
e) M	Frome Level Lineerity	R.r. (0 = B)	Ö	0.00			
	Ner. (U 2 D)	-6	-6.03				
		-12	-12.06				
			Ĥ.			-	
3.0	0 Praba Frequency Response		100	-19.9			
			126	-18.0			
			158	-16.0			
			200	-13.9			
			251	-12.0			
			316	-10.0			
			398 501	-8.0 -6.0			
			631	-6.0			
			794	-2.0			
		R. (0 . B)	1000	0.0			
		Nen (0 ab)	1259	2.0			
			1585	4.0			
			1995	6.0			
			2512	7.9			
			3162	9,9			
			3981	11.9			
			5012	13.9			
			6310	15.9			
			7943	18.0			
			10000	20.2			

natrumants used for calibration	1 All and a second			Date of Cal	Tracadality No.	Due Date
HP	34401A	S/N	36064102	1-Qas-2016	,287708	1-Oer-2017
HP	34401A	S/N	36102471	1-Oct-2015	.287708	1-Oct-2017
HP	33120A	5/N	36043716	1 Oct 2015	,287708	1 Oct 2017
B&K	2133	S/N	1583254	1-Oce-2016	683/284413-14	1-Oot-2017

Cut. Data: 7-Dac-2016

Cellbreted on WCGL system type 9700

Tate another shall not be trainformed around to further as the women sparshed from Wess Common Sort Land Inc.

Tauted by: Falls Christopher

R... 7.0 Jan 24. 2014 Dav # 1038 HORTEMC

#### Page 2 of 2

FCC ID: ZNFX510WM	PCTEST	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager	
Filename:	Test Dates:	DUT Type:		Page 61 of 67	
1M1805100104-09-R1.ZNF	06/02/2018 - 06/06/2018	Portable Handset		Page 61 01 67	
© 2018 PCTEST Engineering	© 2018 PCTEST Engineering Laboratory. Inc.				

# 14. CONCLUSION

The measurements indicate that the wireless communications device complies with the HAC limits specified in accordance with the ANSI C63.19 Standard and FCC WT Docket No. 01-309 RM-8658. Precise laboratory measures were taken to assure repeatability of the tests. The tested device complies with the requirements in respect to all parameters specific to the test. The test results and statements relate only to the item(s) tested.

The measurement system and techniques presented in this evaluation are proposed in the ANSI standard as a means of best approximating wireless device compatibility with a hearing-aid. The literature is under continual re-construction.

FCC ID: ZNFX510WM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 62 of 67
1M1805100104-09-R1.ZNF	06/02/2018 - 06/06/2018	Portable Handset		Ŭ
© 2018 PCTEST Engineering	g Laboratory, Inc.			REV 3.2.M
				04/17/2018

# 15. **REFERENCES**

- 1. ANSI C63.19-2011, American National Standard for Methods of Measurement of Compatibility between Wireless communication devices and Hearing Aids.", New York, NY, IEEE, May 2011
- FCC Office of Engineering and Technology KDB, "285076 D01 HAC Guidance v05," September 13, 2017
- FCC Office of Engineering and Technology KDB, "285076 D02 T-Coil Testing for CMRS IP v03," September 13, 2017
- 4. FCC Public Notice DA 06-1215, Wireless Telecommunications Bureau and Office of Engineering and Technology Clarify Use of Revised Wireless Phone Hearing Aid Compatibility Standard, June 6, 2006
- 5. FCC 3G Review Guidance, Laboratory Division OET FCC, May/June 2006
- 6. Berger, H. S., "Compatibility Between Hearing Aids and Wireless Devices," Electronic Industries Forum, Boston, MA, May, 1997
- Berger, H. S., "Hearing Aid and Cellular Phone Compatibility: Working Toward Solutions," Wireless Telephones and Hearing Aids: New Challenges for Audiology, Gallaudet University, Washington, D.C., May, 1997 (To be reprinted in the American Journal of Audiology).
- 8. Berger, H. S., "Hearing Aid Compatibility with Wireless Communications Devices, " IEEE International Symposium on Electromagnetic Compatibility, Austin, TX, August, 1997.
- Bronaugh, E. L., "Simplifying EMI Immunity (Susceptibility) Tests in TEM Cells," in the 1990 IEEE International Symposium on Electromagnetic Compatibility Symposium Record, Washington, D.C., August 1990, pp. 488-491
- 10. Byme, D. and Dillon, H., The National Acoustics Laboratory (NAL) New Procedure for Selecting the Gain and Frequency Response of a Hearing Aid, Ear and Hearing 7:257-265, 1986.
- Crawford, M. L., "Measurement of Electromagnetic Radiation from Electronic Equipment using TEM Transmission Cells, "U.S. Department of Commerce, National Bureau of Standards, NBSIR 73-306, Feb. 1973.
- Crawford, M. L., and Workman, J. L., "Using a TEM Cell for EMC Measurements of Electronic Equipment," U.S. Department of Commerce, National Bureau of Standards. Technical Note 1013, July 1981.
- 13. EHIMA GSM Project, Development phase, Project Report (1st part) Revision A. Technical-Audiological Laboratory and Telecom Denmark, October 1993.
- 14. EHIMA GSM Project, Development phase, Part II Project Report. Technical-Audiological Laboratory and Telecom Denmark, June 1994.
- EHIMA GSM Project Final Report, Hearing Aids and GSM Mobile Telephones: Interference Problems, Methods of Measurement and Levels of Immunity. Technical-Audiological Laboratory and Telecom Denmark, 1995.
- 16. HAMPIS Report, Comparison of Mobile phone electromagnetic near field with an upscaled electromagnetic far field, using hearing aid as reference, 21 October 1999.

FCC ID: ZNFX510WM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 63 of 67
1M1805100104-09-R1.ZNF	06/02/2018 - 06/06/2018	Portable Handset		Fage 03 01 07
© 2018 PCTEST Engineering	Laboratory, Inc.			REV 3.2.M
				04/17/2018

- 17. Hearing Aids/GSM, Report from OTWIDAM, Technical-Audiological Laboratory and Telecom Denmark, April 1993.
- 18. IEEE 100, The Authoritative Dictionary of IEEE Standards Terms, Seventh Edition.
- Joyner, K. H, et. al., Interference to Hearing Aids by the New Digital Mobile Telephone System, Global System for Mobile (GSM) Communication Standard, National Acoustic Laboratory, Australian Hearing Series, Sydney 1993.
- Joyner, K. H., et. al., Interference to Hearing Aids by the Digital Mobile Telephone System, Global System for Mobile Communications (GSM), NAL Report #131, National Acoustic Laboratory, Australian Hearing Series, Sydney, 1995.
- 21. Kecker, W. T., Crawford, M. L., and Wilson, W. A., "Contruction of a Transverse Electromagnetic Cell", U.S. Department of Commerce, National Bureau of Standards, Technical Note 1011, Nov. 1978.
- 22. Konigstein, D., and Hansen, D., "A New Family of TEM Cells with enlarged bandwidth and Optimized working Volume," in the Proceedings of the 7th International Symposium on EMC, Zurich, Switzerland, March 1987; 50:9, pp. 127-132.
- 23. Kuk, F., and Hjorstgaard, N. K., "Factors affecting interference from digital cellular telephones," Hearing Journal, 1997; 50:9, pp 32-34.
- Ma, M. A., and Kanda, M., "Electromagnetic Compatibility and Interference Metrology," U.S. Department of Commerce, National Bureau of Standards, Technical Note 1099, July 1986, pp. 17-43.
- Ma, M. A., Sreenivashiah, I., and Chang, D. C., "A Method of Determining the Emission and Susceptibility Levels of Electrically Small Objects Using a TEM Cell," U.S. Department of Commerce, National Bureau of Standards, Technial Note 1040, July 1981.
- McCandless, G. A., and Lyregaard, P. E., Prescription of Gain/Output (POGO) for Hearing Aids, Hearing Instruments 1:16-21, 1983
- 27. Skopec, M., "Hearing Aid Electromagnetic Interference from Digital Wireless Telephones, "IEEE Transactions on Rehabilitation Engineering, vol. 6, no. 2, pp. 235-239, June 1998.
- 28. Technical Report, GSM 05.90, GSM EMC Considerations, European Telecommunications Standards Institute, January 1993.
- 29. Victorian, T. A., "Digital Cellular Telephone Interference and Hearing Aid Compatibility—an Update," Hearing Journal 1998; 51:10, pp. 53-60
- 30. Wong, G. S. K., and Embleton, T. F. W., eds., AIP Handbook of Condenser Microphones: Theory, Calibration and Measurements, AIP Press.

FCC ID: ZNFX510WM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 64 of 67
1M1805100104-09-R1.ZNF	06/02/2018 - 06/06/2018	Portable Handset		Fage 04 01 07
© 2018 PCTEST Engineering	J Laboratory, Inc.			REV 3.2.M
				04/17/2018

^{© 2018} PCTEST Engineering Laboratory, Inc. All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST Engineering Laboratory, Inc. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.