



No. I21Z60746-SEM03

For

TCL Communication Ltd.

5G NR/ LTE/WCDMA/GSM Mobile Phone

Model Name: T601DL,T768S

with

Hardware Version: PIO

Software Version: vA3A

FCC ID: 2ACCJH137

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Test Laboratory:

CTTL, Telecommunication Technology Labs, CAICT

No. 51, Xueyuan Road, Haidian District, Beijing, P. R. China 100191.


Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: cttl_terminals@caict.ac.cn, website: www.caict.ac.cn


©Copyright. All rights reserved by CTTL.




Picture 1: Constituents of the sample

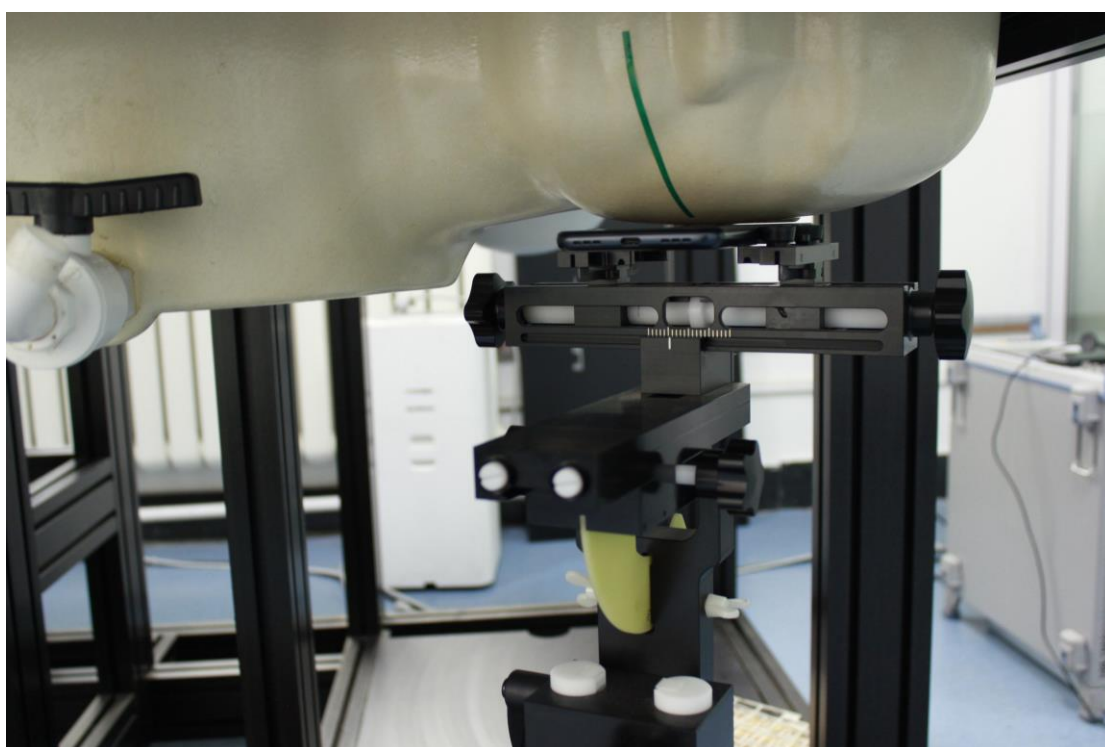


Picture 2: Left Head Touch Cheek Position

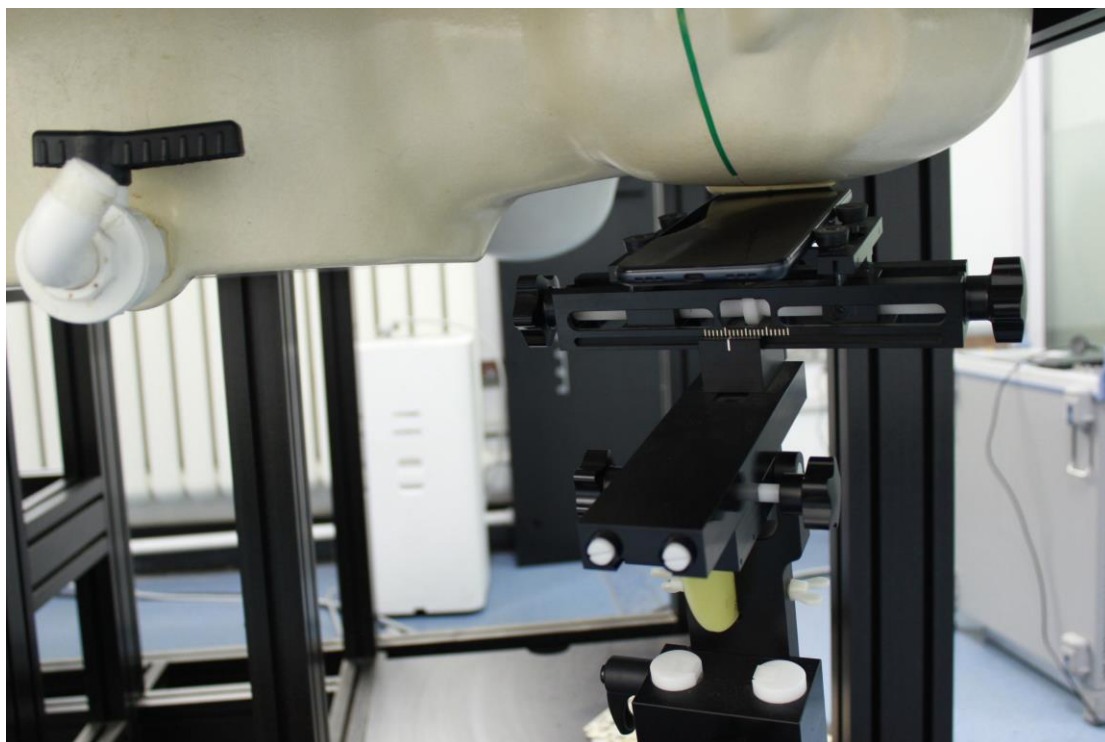

Picture 3: Left Head Tilt 15° Position

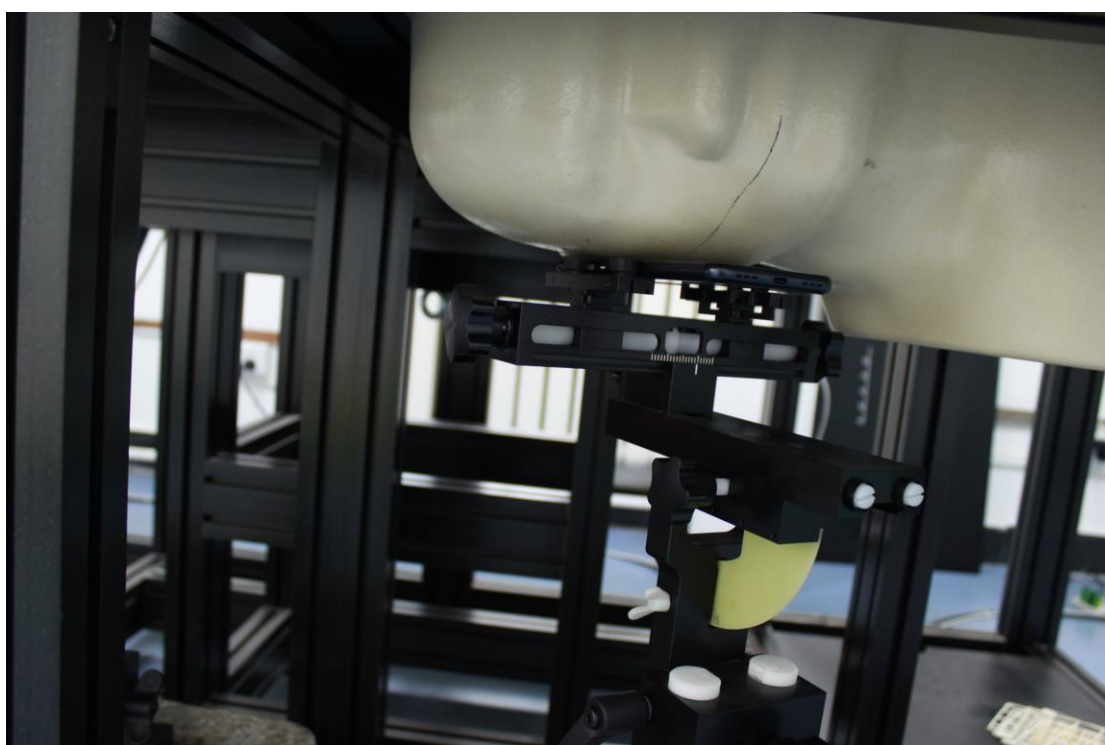


Picture 4: Right Head Touch Cheek Position

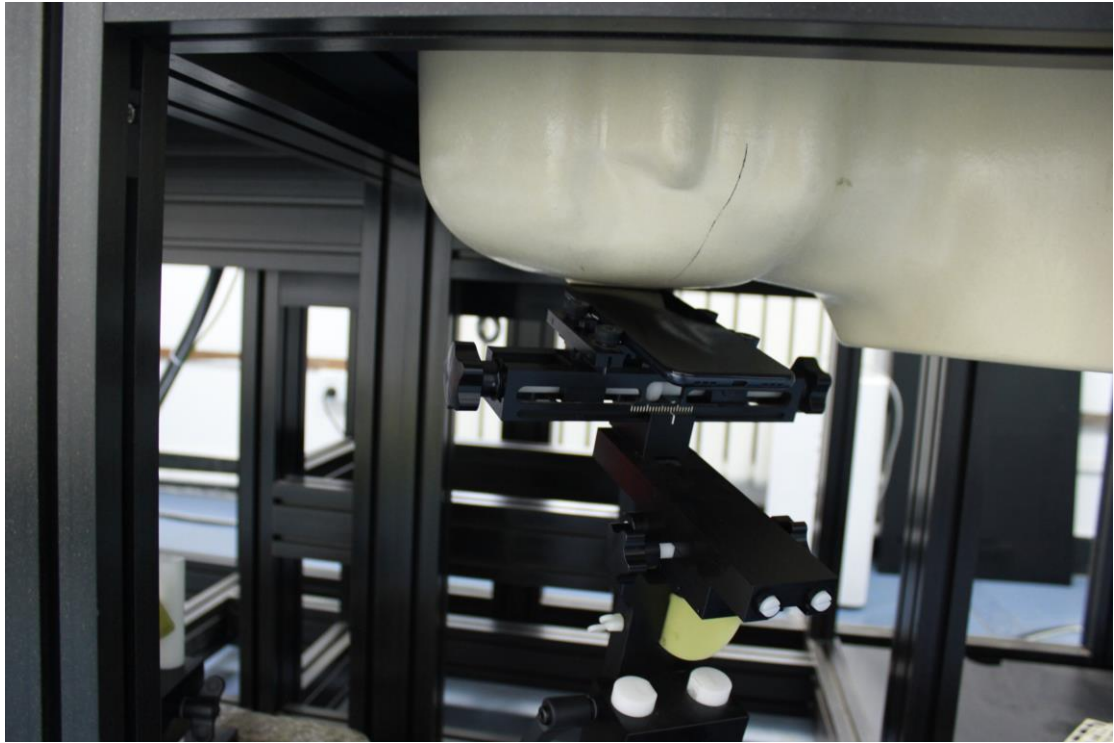


Picture 5: Right Head Tilt 15° Position

Test positions for body:

The Body SAR is tested at the following 11 test positions all with the distance =0/10/15mm between the EUT and the phantom bottom:

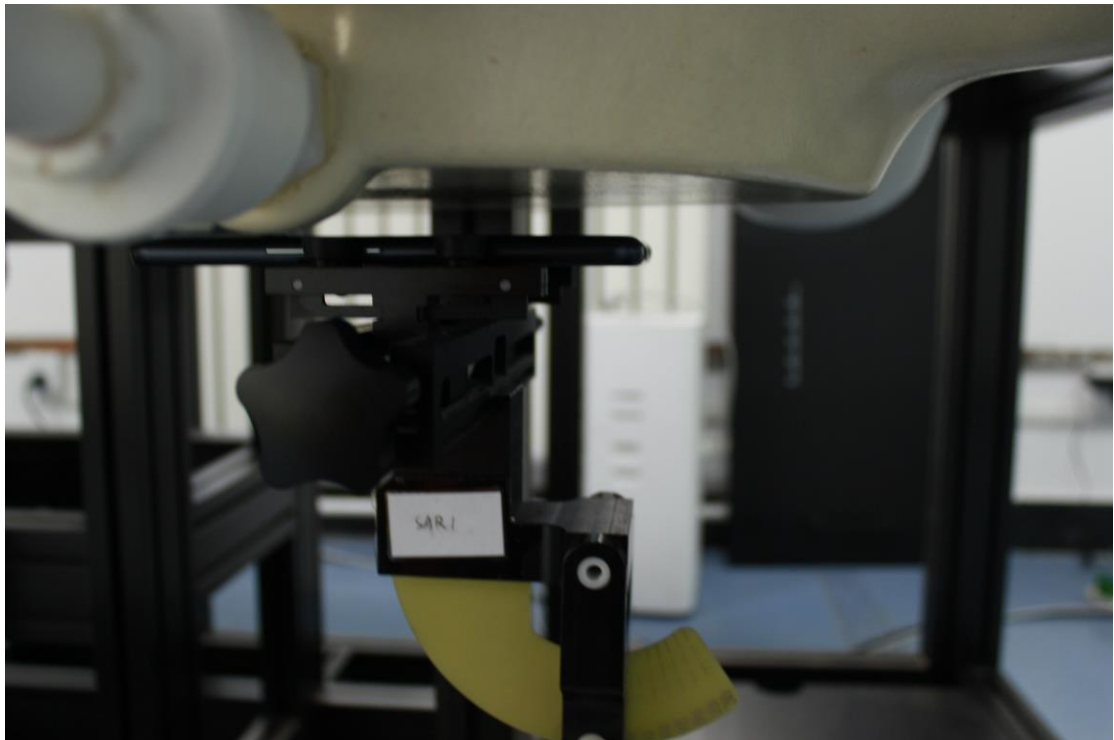

Picture 6: Front 10mm

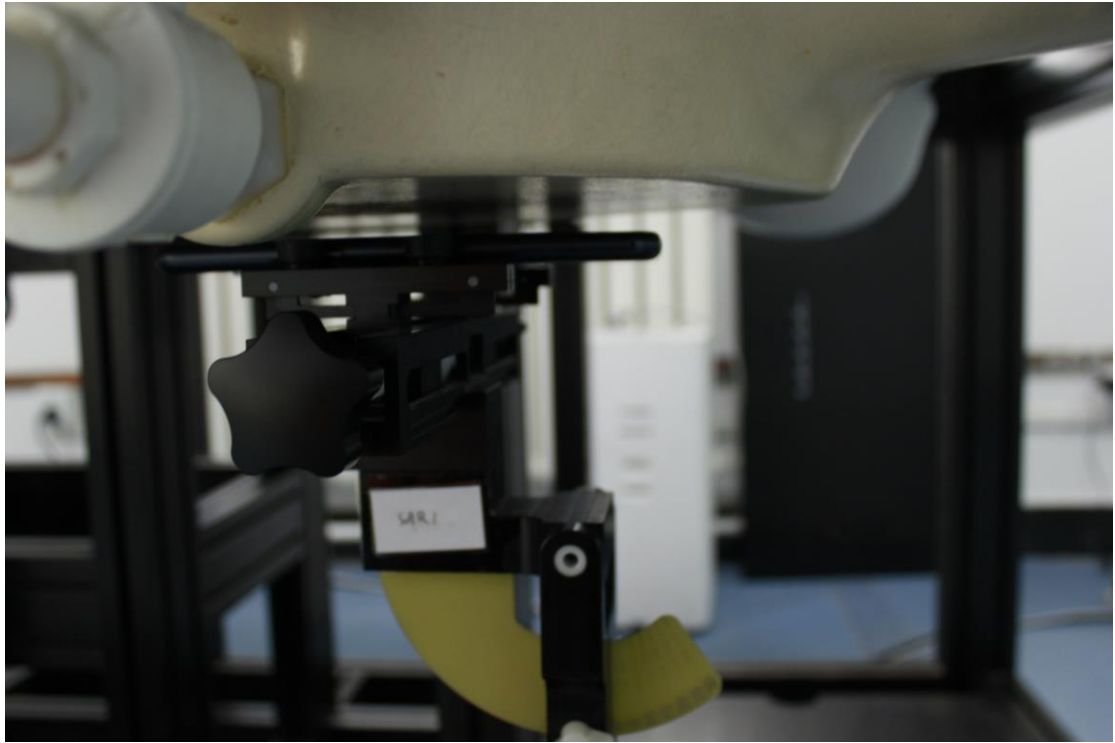


Picture 7: Rear 10mm




Picture 8: Left 10mm




Picture 9: Right 10mm

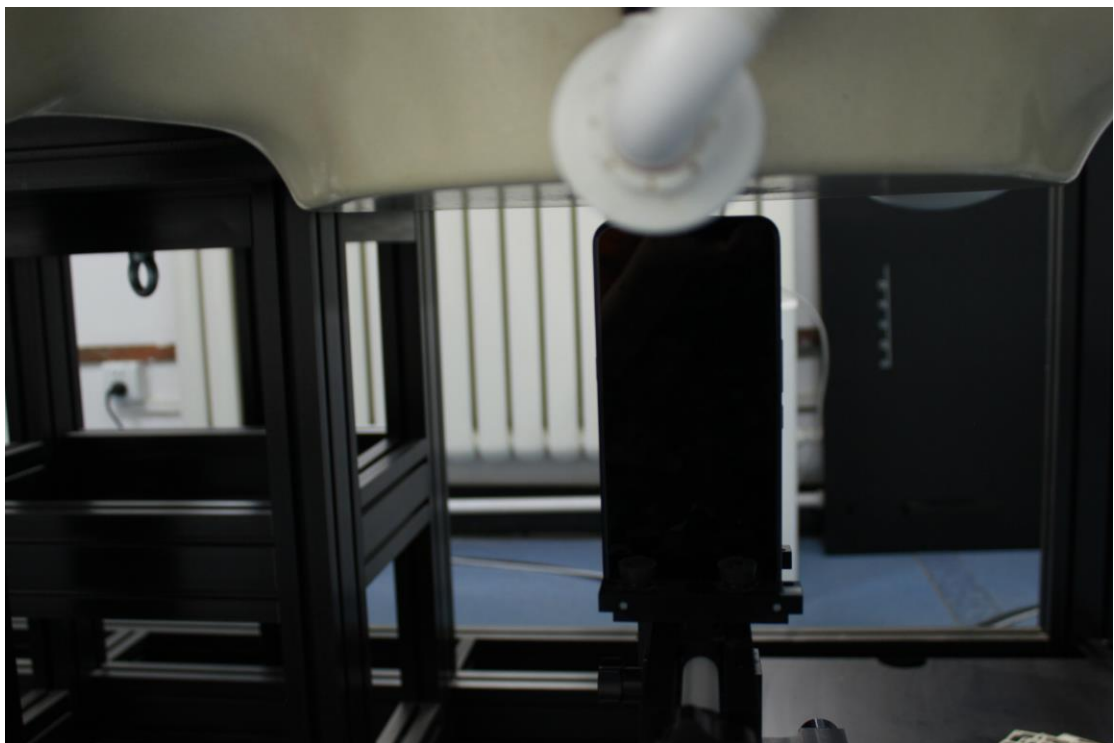

Picture 10: Top 10mm

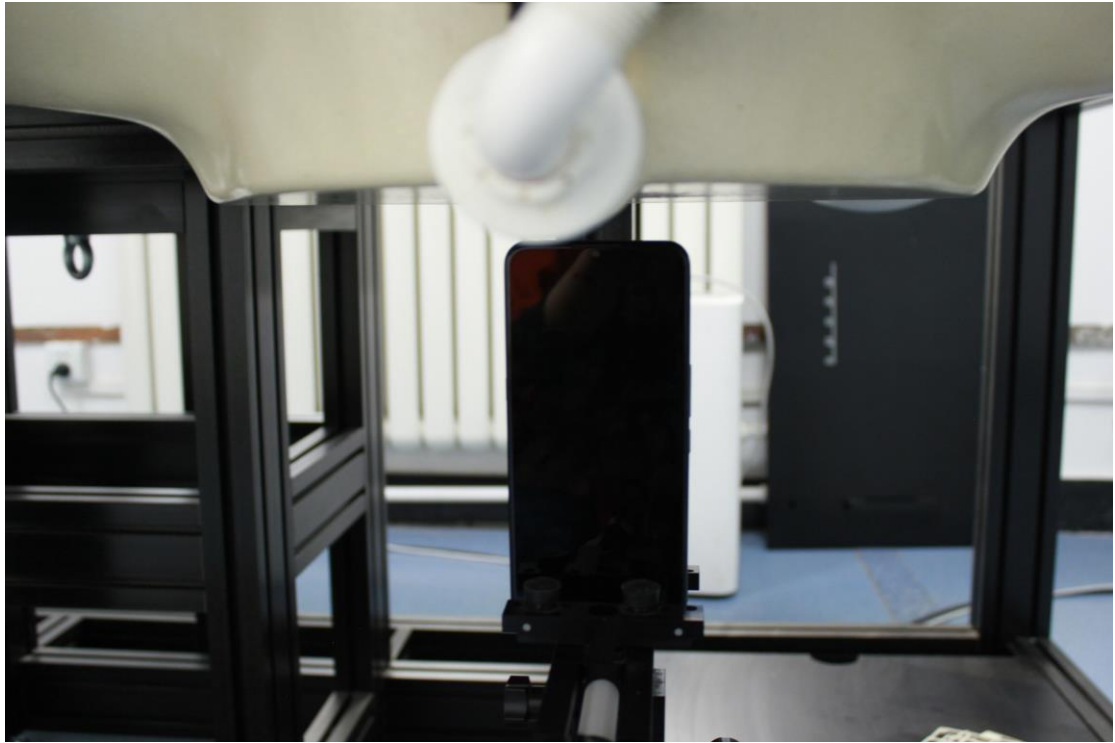

Picture 11: Bottom 10mm

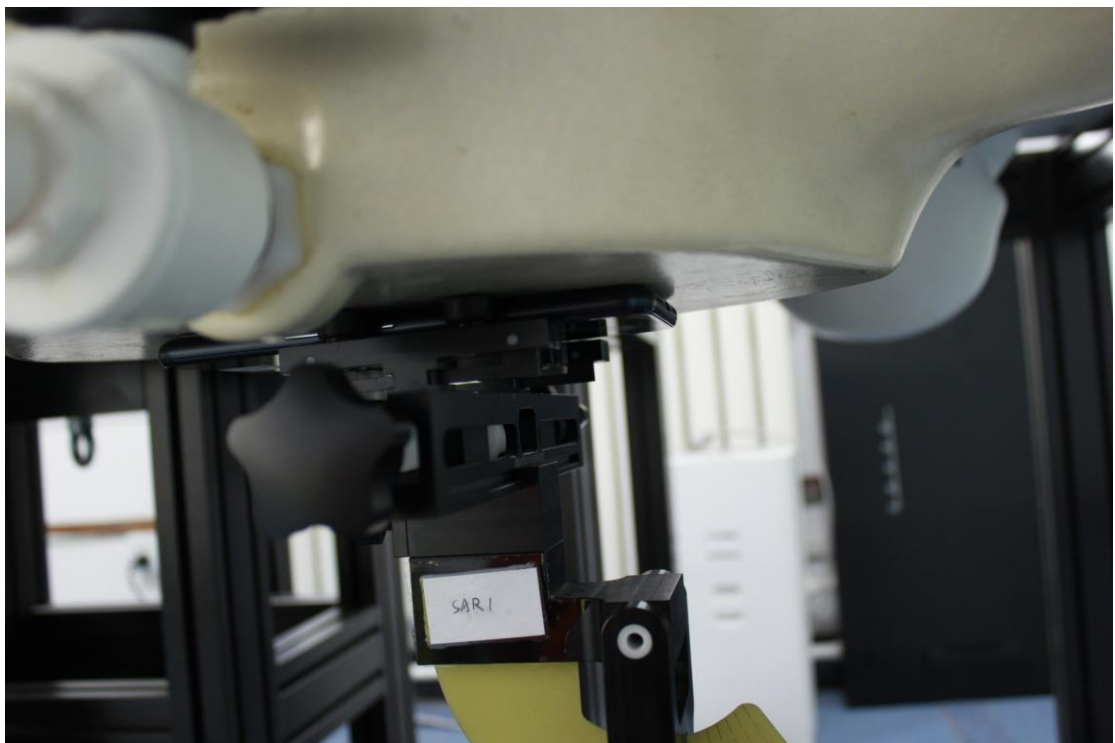


Picture 12: Rear 0mm




Picture 13: Left 0mm



Picture 14: Right 0mm

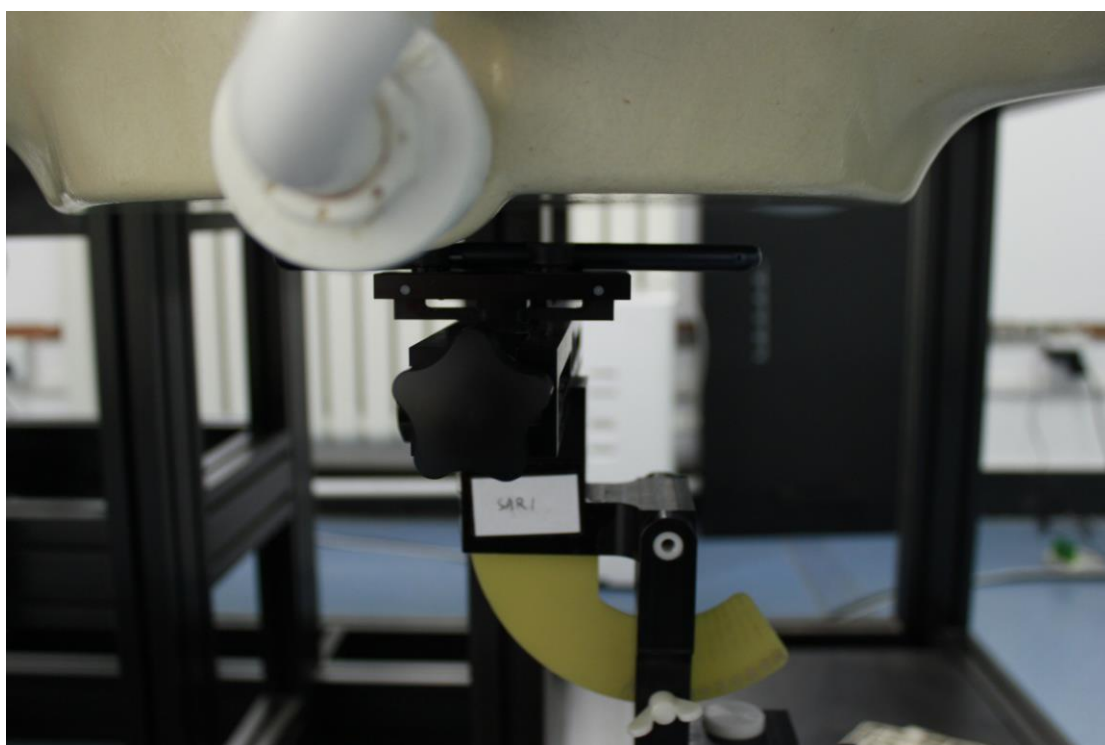

Picture 15: Front 15mm

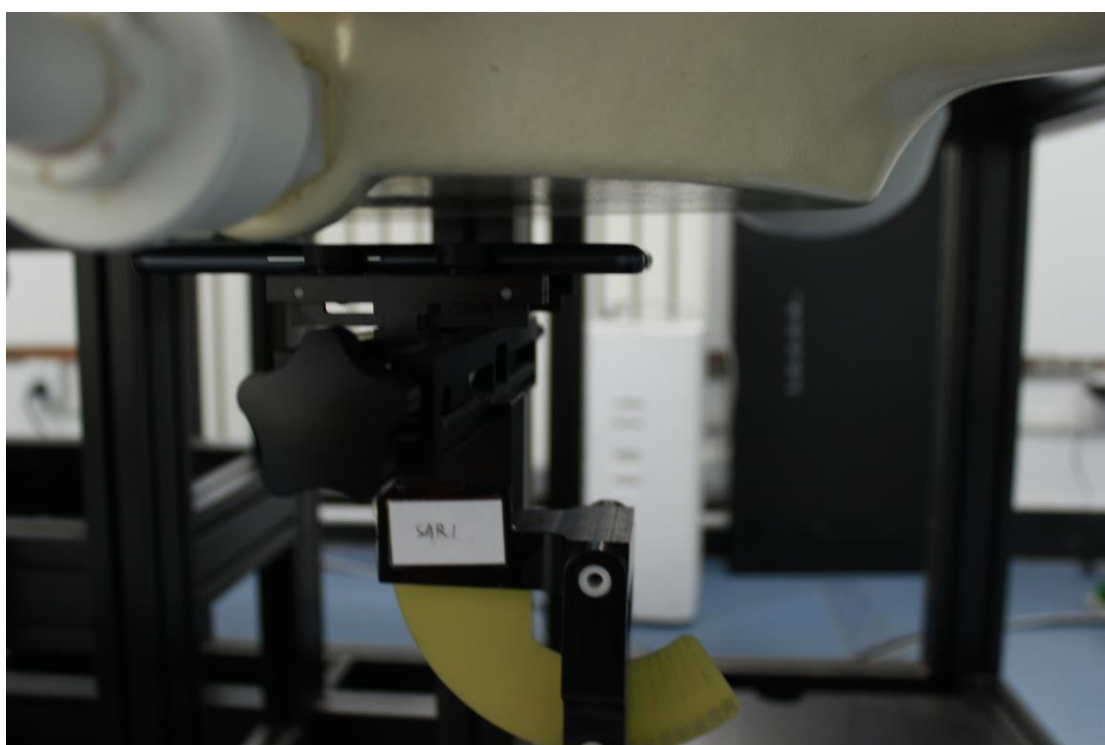

Picture 16: Rear 15mm