



CO-LOCATION TEST REPORT

For

WiFi Module

MODEL NUMBER: SI07

FCC ID: 2AFG6-SI07

IC: 22166- SI07

REPORT NUMBER: 4789708215-10

ISSUE DATE: November 30, 2020

Prepared for

**Guangzhou Shirui Electronics Co Ltd
192 Kezhu Road, Sciencetech Park, Guangzhou Economic Technology Development
District Guangzhou China**

Prepared by

**UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch
Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-
Tech Development Zone Dongguan, 523808, People's Republic of China**

Tel: +86 769 22038881

Fax: +86 769 33244054

Website: www.ul.com



Revision History

Rev.	Issue Date	Revisions	Revised By
V0	11/30/2020	Initial Issue	



TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	4
2. FACILITIES AND ACCREDITATION	5
3. MEASUREMENT UNCERTAINTY.....	6
4. EQUIPMENT UNDER TEST	7
4.1. DESCRIPTION OF EUT	7
4.2. THE TEST CASE CONFIGURATIONS.....	7
5. MEASURING INSTRUMENT AND SOFTWARE USED	8
6. RADIATED TEST RESULTS.....	9
6.1. WORST-CASE CO-LOCATION.....	11
6.1.1. Condition 3	11
6.1.2. Condition 8	19



1. ATTESTATION OF TEST RESULTS

Applicant Information

Company Name: Guangzhou Shirui Electronics Co Ltd
Address: 192 Kezhu Road, Sciencetech Park, Guangzhou Economic
Technology Development District Guangzhou China

Manufacturer Information

Company Name: Guangzhou Shirui Electronics Co Ltd
Address: 192 Kezhu Road, Sciencetech Park, Guangzhou Economic
Technology Development District Guangzhou China

EUT Information

EUT Name: WiFi Module
Model: SI07
Sample Received Date: October 29, 2020
Sample Status: Normal
Sample ID: 3437335
Date of Tested: October 29, 2020~ November 28, 2020

Prepared By:

Mick Zhang
Project Engineer

Checked By:

Shawn Wen
Laboratory Leader

Approved By:

Stephen Guo
Laboratory Manager



2. FACILITIES AND ACCREDITATION

Accreditation Certificate	A2LA (Certificate No.: 4102.01) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA. FCC (FCC Designation No.: CN1187) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules ISED (Company No.: 21320) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320. VCCI (Registration No.: G-20019, R-20004, C-20012 and T-20011) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793. Facility Name: Chamber D, the VCCI registration No. is G-20019 and R-20004 Shielding Room B, the VCCI registration No. is C-20012 and T-20011
---------------------------	---

Note 1: All tests measurement facilities use to collect the measurement data are located at Building 10, Innovation Technology Park, Song Shan Lake Hi tech Development Zone, Dongguan, 523808, China

Note 2: The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

Note 3: For below 30MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30MHz had been correlated to measurements performed on an OFS.



3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction Emission	3.62dB
Radiated Emission (Included Fundamental Emission) (9kHz ~ 30MHz)	2.2dB
Radiated Emission (Included Fundamental Emission) (30MHz ~ 1GHz)	4.00dB
Radiated Emission (Included Fundamental Emission) (1GHz to 40GHz)	5.78dB (1GHz ~ 18GHz)
	5.23dB (18GHz ~ 26GHz)
	5.64dB (26GHz-40GHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	



4. EQUIPMENT UNDER TEST

4.1. DESCRIPTION OF EUT

EUT Name	WiFi Module
Model	SI07

4.2. THE TEST CASE CONFIGURATIONS

Note: The EUT have two wireless modules, one is called module SKI.WB7668CU.1 and the other one called module SKI.WB8822CU.1.

Simultaneously transmission condition.

Condition	Technology				Support (YES/NO)
1 (Module SKI.WB7668CU.1)	WLAN(2.4G)		WLAN(5G)		NO
2 (Module SKI.WB8822CU.1)	BT	BLE	WLAN(2.4G)	WLAN(5G)	NO

Co-Location condition.

Condition	Technology (Module SKI.WB7668CU.1)	Technology (Module SKI.WB8822CU.1)	Support (YES/NO)
1	WLAN(2.4G)	BT	YES
2	WLAN(2.4G)	BLE	YES
3	WLAN(2.4G)	WLAN (2.4G)	YES
4	WLAN(2.4G)	WLAN (5G)	YES
5	WLAN (5G)	BT	YES
6	WLAN (5G)	BLE	YES
7	WLAN (5G)	WLAN (2.4G)	YES
8	WLAN (5G)	WLAN (5G)	YES

Note: All the Conditions have been tested, only the worst data for Condition 3 and Condition 8 was recorded in the report.

For the detailed test description, please refer to the below report number.

Wireless Module	Technology	Report Number
Module SKI.WB7668CU.1	WLAN (2.4G)	4789708215-7
	WLAN (5G)	4789708215-9
Module SKI.WB8822CU.1	BT	4789708215-4
	BLE	4789708215-5
	WLANc (2.4G)	4789708215-6
	WLAN (5G)	4789708215-8



5. MEASURING INSTRUMENT AND SOFTWARE USED

Radiated Emissions						
Instrument						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
☒	MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Dec.06,2019	Dec.06,2020
☒	Hybrid Log Periodic Antenna	TDK	HLP-3003C	130960	Sep.17, 2018	Sep.17, 2021
☒	Preamplifier	HP	8447D	2944A09099	Dec.05,2019	Dec.05,2020
☒	EMI Measurement Receiver	R&S	ESR26	101377	Dec.05,2019	Dec.05,2020
☒	Horn Antenna	TDK	HRN-0118	130939	Sep.17, 2018	Sep.17, 2021
☒	High Gain Horn Antenna	Schwarzbeck	BBHA-9170	691	Aug.11, 2018	Aug.11, 2021
☒	Preamplifier	TDK	PA-02-0118	TRS-305-00066	Dec.05,2019	Dec.05,2020
☒	Preamplifier	TDK	PA-02-2	TRS-307-00003	Dec.05,2019	Dec.05,2020
☒	Preamplifier	TDK	PA-02-3	TRS-308-00002	Dec.05,2019	Dec.05,2020
☒	Band Reject Filter	Wainwright	WRCJV12-5695-5725-5850-5880-40SS	4	Dec.05,2019	Dec.05,2020
☒	Band Reject Filter	Wainwright	WRCJV20-5120-5150-5350-5380-60SS	2	Dec.05,2019	Dec.05,2020
☒	High Pass Filter	Wainwright	WHKX10-5850-6500-1800-40SS	4	Dec.05,2019	Dec.05,2020
☒	Band Reject Filter	Wainwright	WRCJV8-2350-2400-2483.5-2533.5-40SS	4	Dec.05,2019	Dec.05,2020
☒	High Pass Filter	Wi	WHKX10-2700-3000-18000-40SS	23	Dec.05,2019	Dec.05,2020

Software				
Used	Description	Manufacturer	Name	Version
☒	Test Software for Radiated disturbance	Farad	EZ-EMC	Ver. UL-3A1

6. RADIATED TEST RESULTS

LIMITS

Refer to CFR 47 FCC §15.205, §15.209 and §15.407 (b).

Refer to ISSED RSS-GEN Clause 8.9, Clause 8.10 and ISSED RSS-247 6.2.

Emissions radiated outside of the specified frequency bands above 30MHz			
Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m	
		Quasi-Peak	
30 - 88	100	40	
88 - 216	150	43.5	
216 - 960	200	46	
Above 960	500	54	
Above 1000	500	Peak	Average
		74	54

Limits of unwanted/undesirable emission out of the restricted bands refer to CFR 47 FCC §15.407 (b) and ISSED RSS-247 6.2.

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1GHz)		
Frequency Range (MHz)	EIRP Limit	Field Strength Limit (dBuV/m) at 3 m
5150~5250 MHz	PK: -27 (dBm/MHz)	PK:68.2(dBμV/m)
5250~5350 MHz		
5470~5725 MHz		
5725~5850 MHz	PK: -27 (dBm/MHz) *1 PK: 10 (dBm/MHz) *2 PK: 15.6 (dBm/MHz) *3 PK: 27 (dBm/MHz) *4	PK: 68.2(dBμV/m) *1 PK: 105.2 (dBμV/m) *2 PK: 110.8(dBμV/m) *3 PK: 122.2 (dBμV/m) *4

Note:

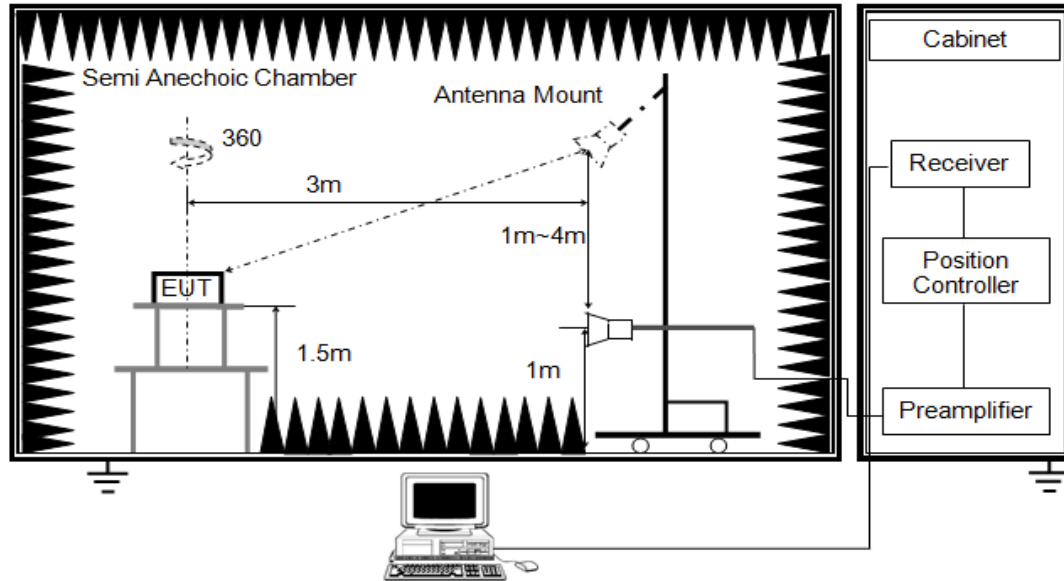
*1 beyond 75 MHz or more above of the band edge.

*2 below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above.

*3 below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above.

*4 from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Above 1GHz



The setting of the spectrum analyser

RBW	1MHz
VBW	PEAK: 3MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 11.11 and 11.12.
2. The testing follows the guidelines in KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 section II.G.3 ~ II.G.6.
2. The EUT was arranged to its worst case and then tune the antenna tower (1.5 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements.

TEST ENVIRONMENT

Temperature	24.9 °C	Relative Humidity	57 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 5 V

RESULTS

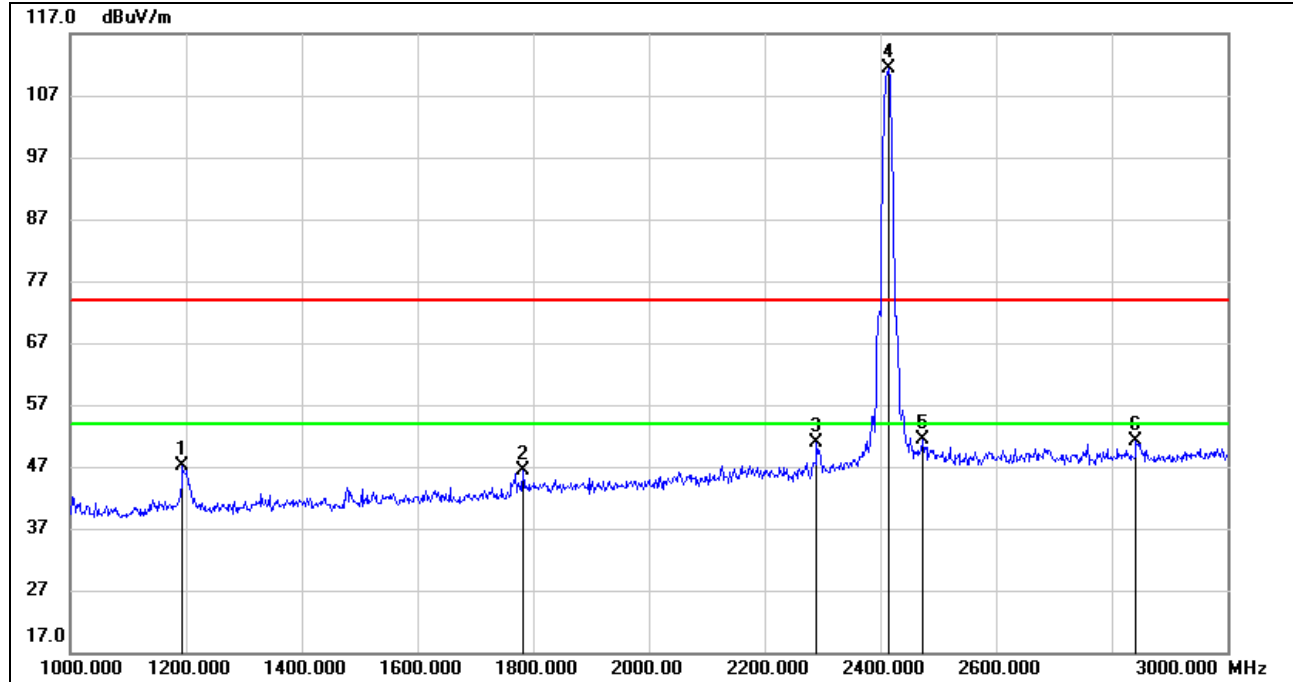
6.1. WORST-CASE CO-LOCATION

6.1.1. Condition 3

Module SKI.WB7668CU.1 802.11b SISO MODE & Module SKI.WB8822CU.1 802.11b SISO MODE

SPURIOUS EMISSIONS (LOW CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)

1-3GHz



No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1194.000	40.72	6.34	47.06	74.00	-26.94	peak
2	1782.000	36.94	9.50	46.44	74.00	-27.56	peak
3	2290.000	39.55	11.32	50.87	74.00	-23.13	peak
4	2414.000	99.19	12.08	111.27	/	/	fundamental
5	2472.000	38.95	12.33	51.28	74.00	-22.72	peak
6	2842.000	37.33	13.87	51.20	74.00	-22.80	peak

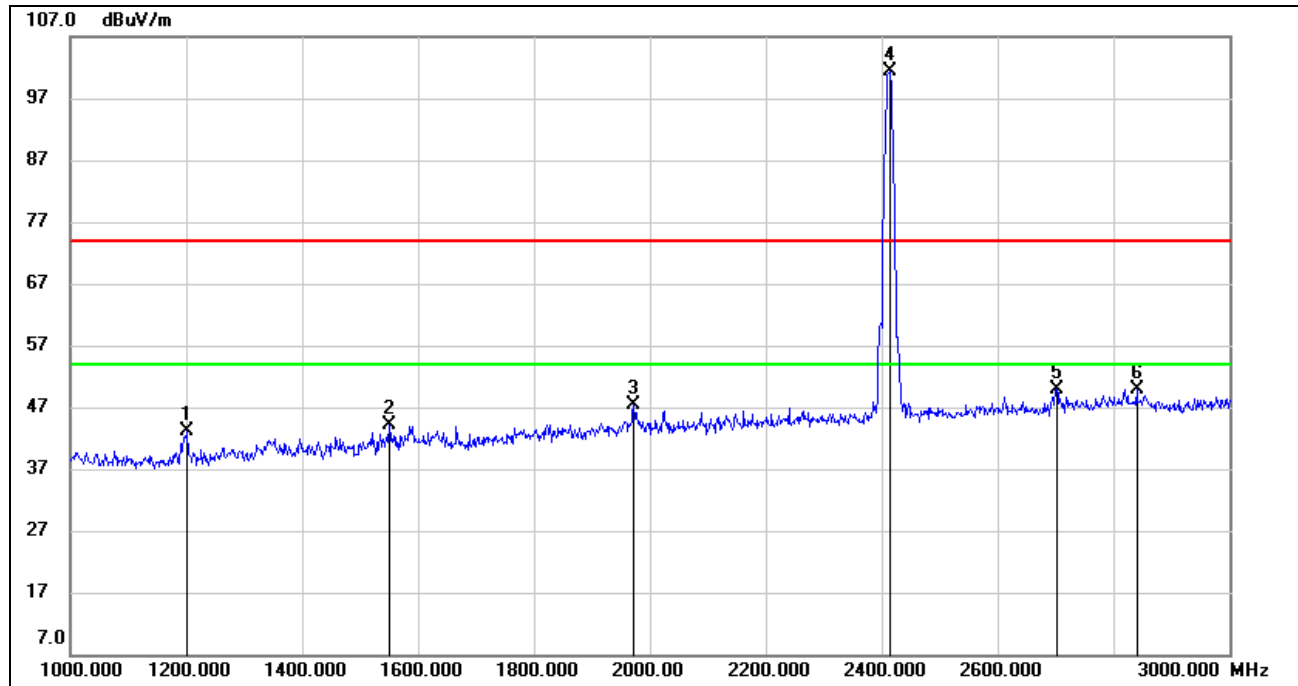
Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

**SPURIOUS EMISSIONS (LOW CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)****1-3GHz**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1202.000	36.74	6.41	43.15	74.00	-30.85	peak
2	1550.000	36.69	7.47	44.16	74.00	-29.84	peak
3	1972.000	37.21	10.17	47.38	74.00	-26.62	peak
4	2414.000	89.40	12.08	101.48	/	/	fundamental
5	2702.000	36.78	13.02	49.80	74.00	-24.20	peak
6	2840.000	36.06	13.86	49.92	74.00	-24.08	peak

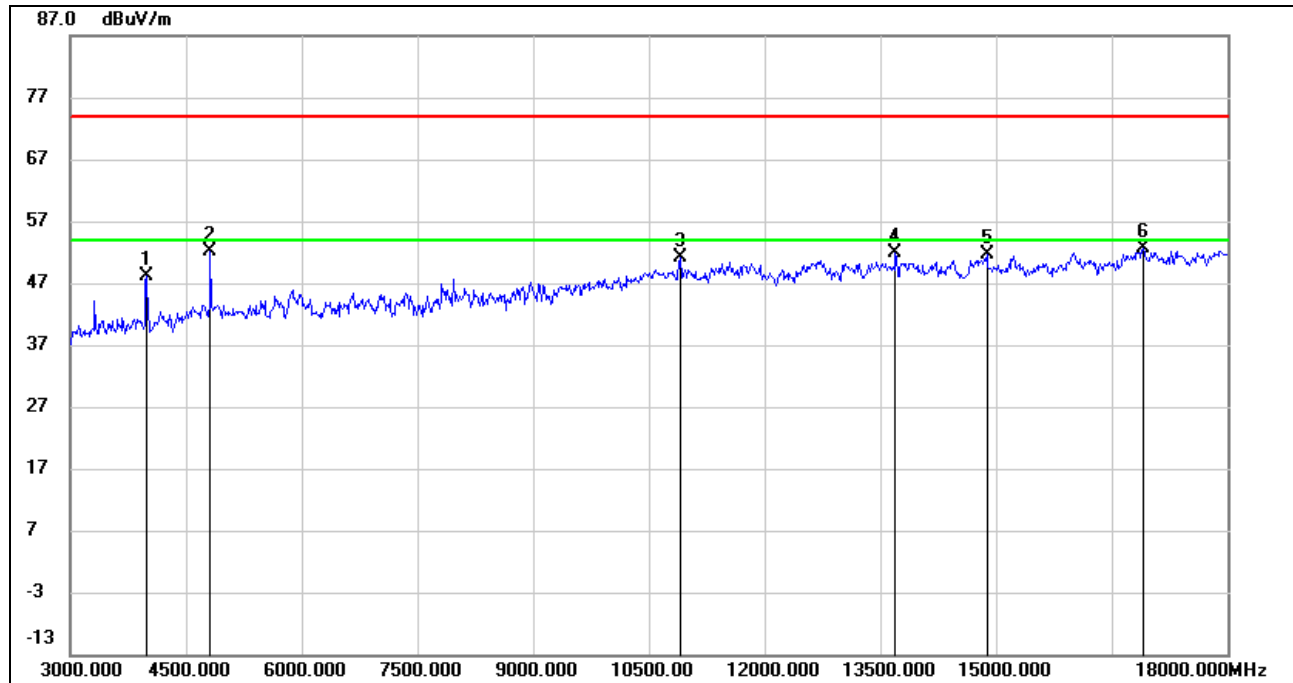
Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

**SPURIOUS EMISSIONS (LOW CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)****3-18GHz**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3990.000	51.07	-2.89	48.18	74.00	-25.82	peak
2	4815.000	51.54	0.51	52.05	74.00	-21.95	peak
3	10905.000	39.42	11.76	51.18	74.00	-22.82	peak
4	13695.000	36.00	15.87	51.87	74.00	-22.13	peak
5	14880.000	35.68	16.00	51.68	74.00	-22.32	peak
6	16905.000	32.62	19.99	52.61	74.00	-21.39	peak

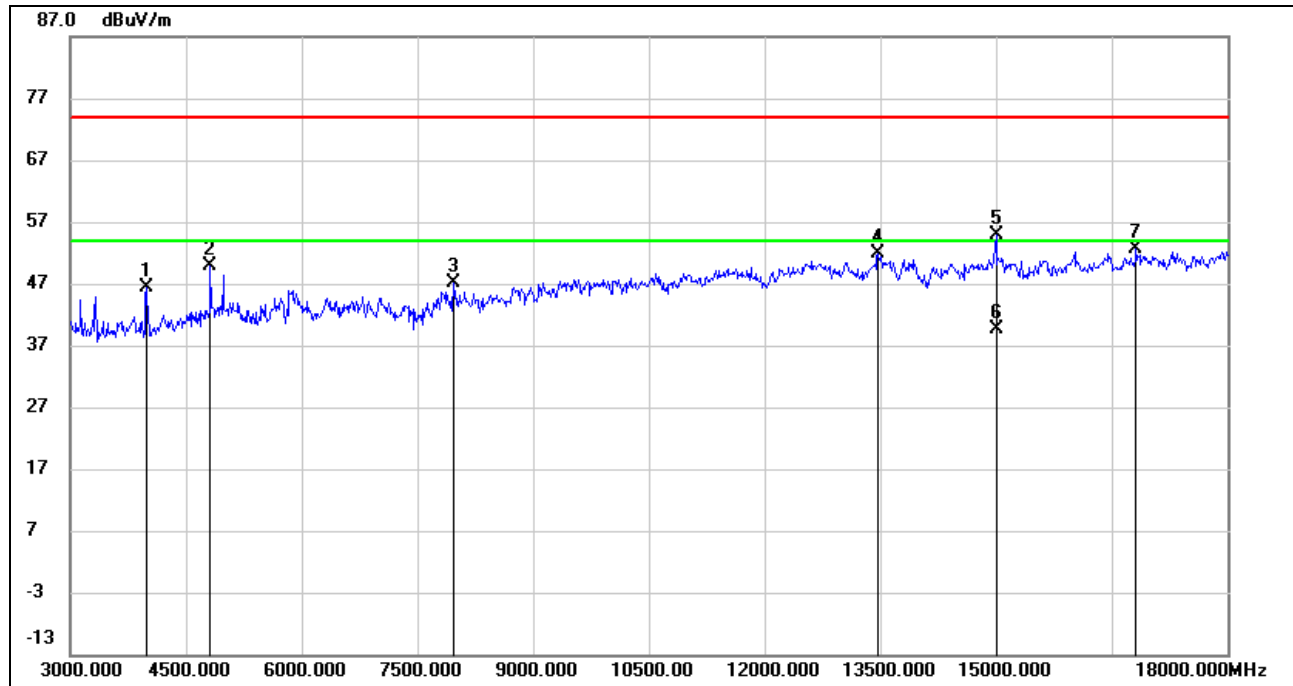
Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

**SPURIOUS EMISSIONS (LOW CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)****3-18GHz**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3990.000	49.31	-2.89	46.42	74.00	-27.58	peak
2	4815.000	49.48	0.51	49.99	74.00	-24.01	peak
3	7965.000	40.11	7.00	47.11	74.00	-26.89	peak
4	13470.000	35.91	15.87	51.78	74.00	-22.22	peak
5	15000.000	38.84	15.97	54.81	74.00	-19.19	peak
6	15000.000	23.70	15.97	39.67	54.00	-14.33	AVG
7	16815.000	32.73	19.96	52.69	74.00	-21.31	peak

Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.

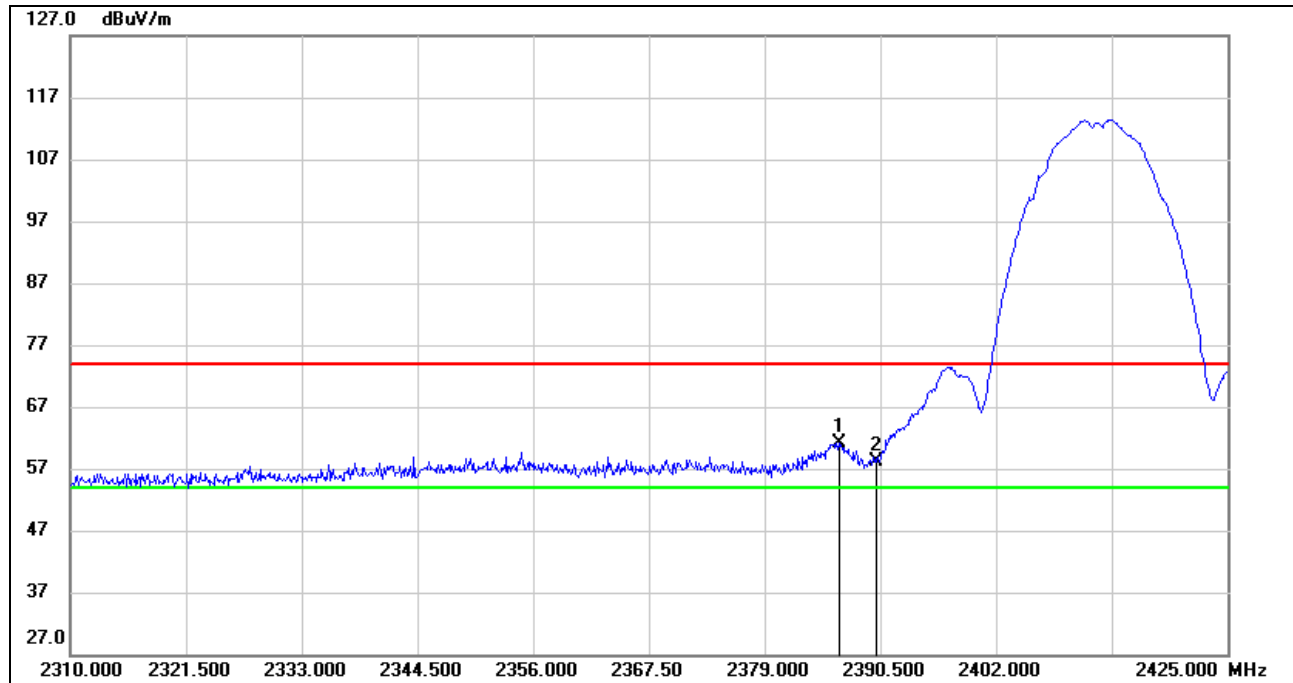
5. For the transmitting duration, please refer to clause 7.1 of the main report.

6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

7. Proper operation of the transmitter prior to adding the filter to the measurement chain.

RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

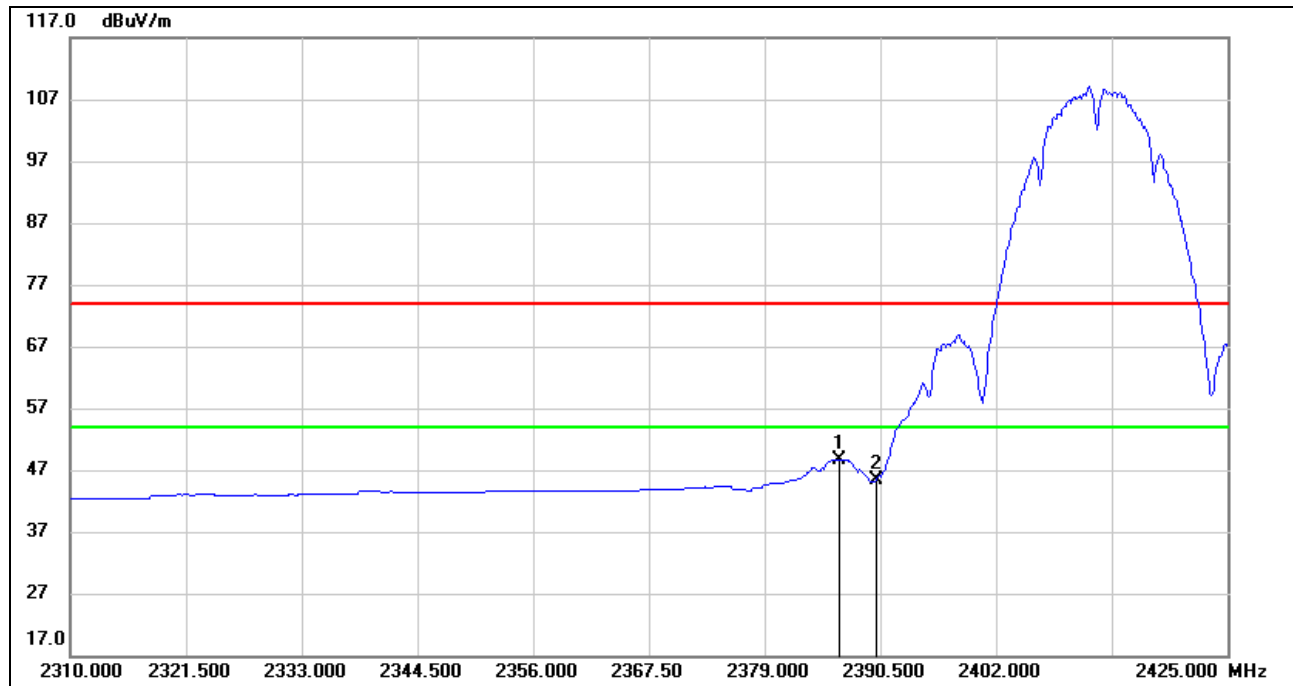
PEAK



No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2386.360	49.16	11.94	61.10	74.00	-12.90	peak
2	2390.000	46.29	11.96	58.25	74.00	-15.75	peak

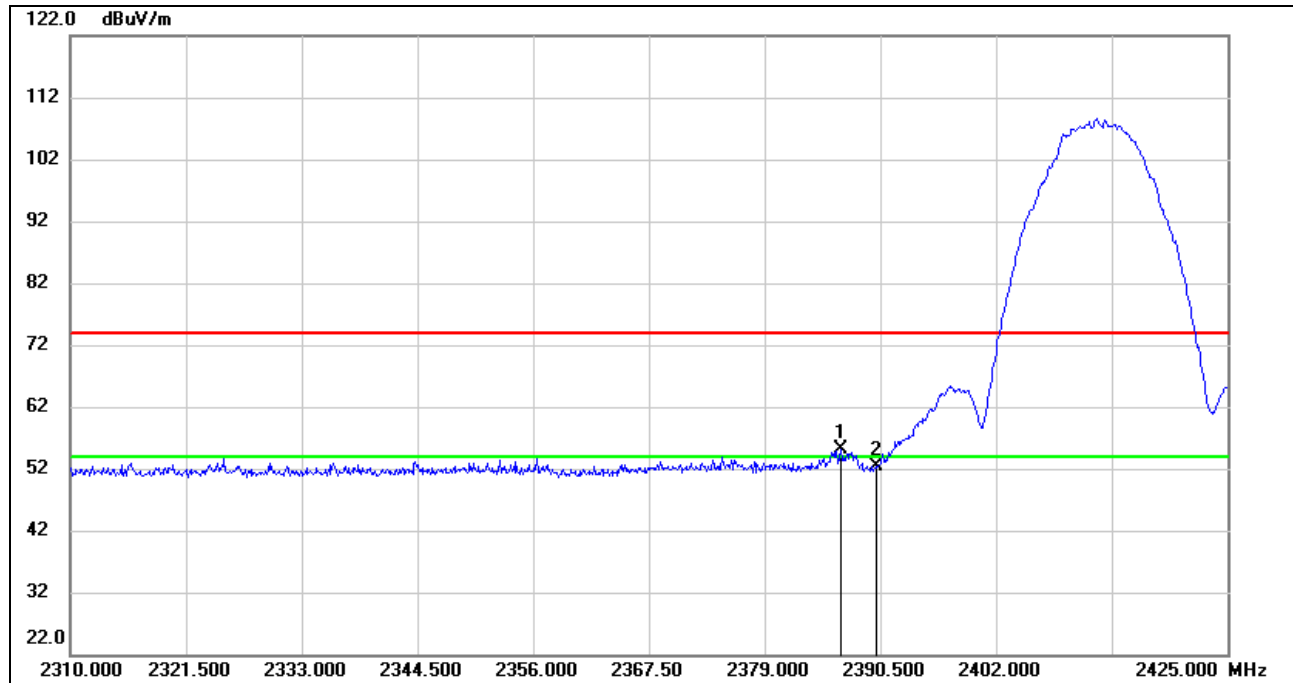
Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

AVG



No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2386.360	36.79	11.93	48.72	54.00	-5.28	AVG
2	2390.000	33.38	11.96	45.34	54.00	-8.66	AVG

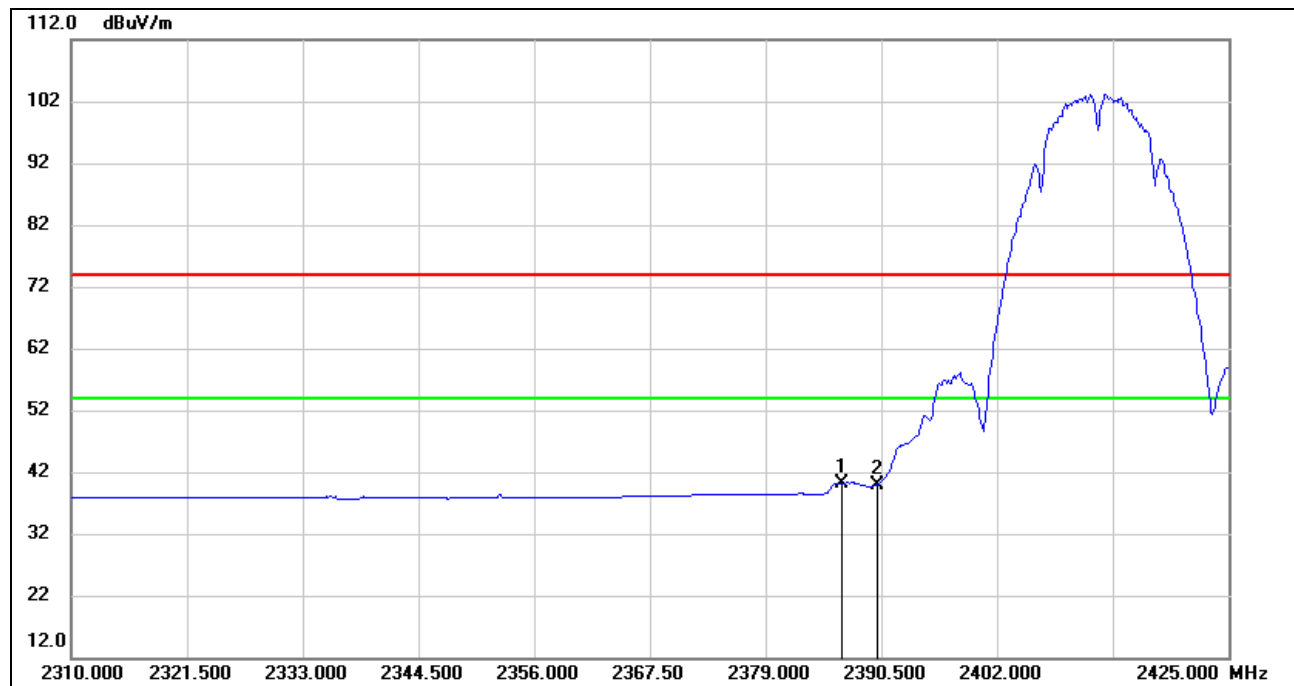
- Note:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 4. For the transmitting duration, please refer to clause 7.1.
 5. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

**RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)****PEAK**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2386.590	43.30	11.94	55.24	74.00	-18.76	peak
2	2390.000	40.32	11.96	52.28	74.00	-21.72	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

AVG



No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2386.590	28.27	11.94	40.21	54.00	-13.79	AVG
2	2390.000	27.98	11.96	39.94	54.00	-14.06	AVG

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
4. For the transmitting duration, please refer to clause 7.1.
5. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

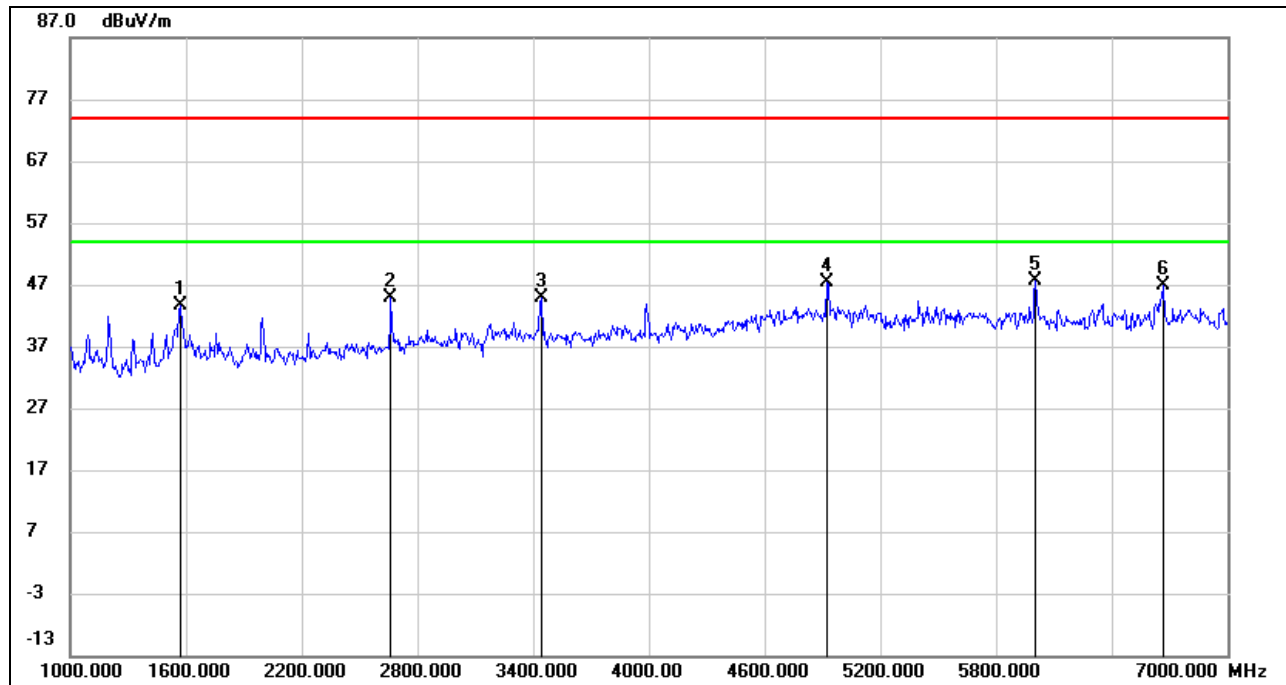
Note: All the test modes and combination have been considered. Only the worst data record in the report.

6.1.2. Condition 8

Module SKI.WB7668CU.1 802.11a SISO MODE & Module SKI.WB8822CU.1 802.11a SISO MODE

SPURIOUS EMISSIONS (UNII-1 LOW CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)

1-7GHz



No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1570.000	55.56	-11.81	43.75	74.00	-30.25	peak
2	2662.000	52.58	-7.80	44.78	74.00	-29.22	peak
3	3442.000	50.14	-5.27	44.87	74.00	-29.13	peak
4	4924.000	46.56	0.72	47.28	74.00	-26.72	peak
5	6004.000	44.96	2.61	47.57	74.00	-26.43	peak
6	6670.000	42.34	4.47	46.81	74.00	-27.19	peak

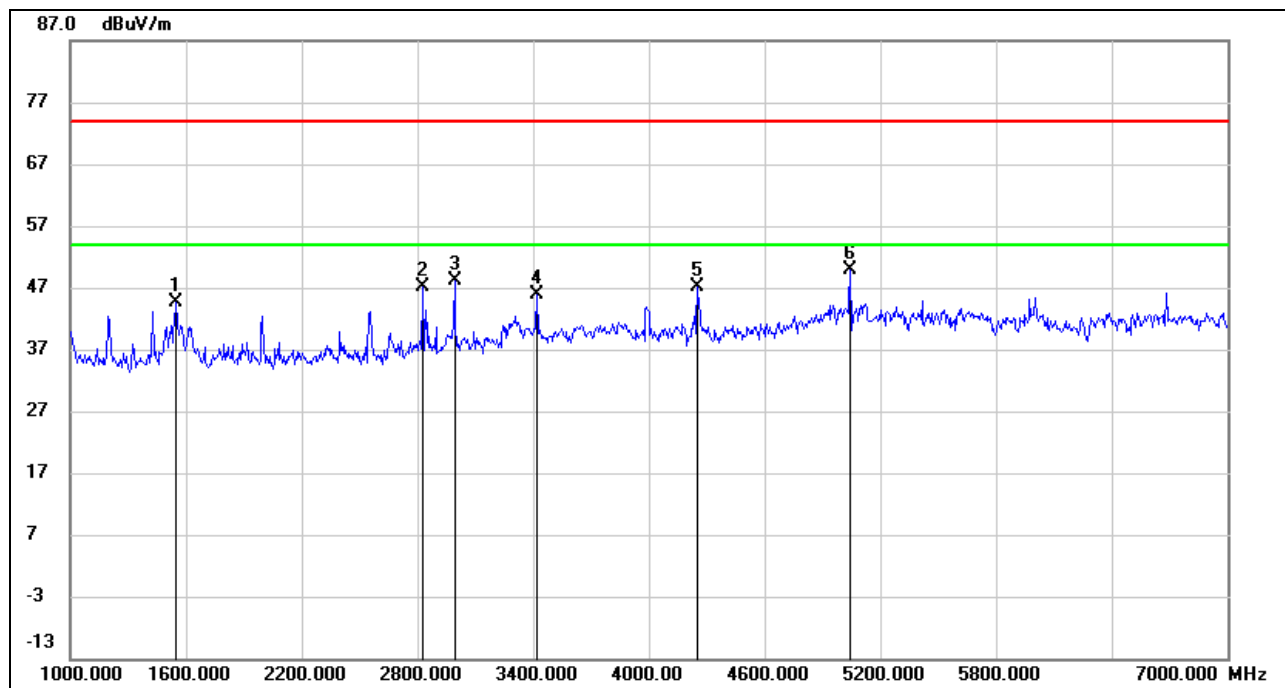
Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

**SPURIOUS EMISSIONS (UNII-1 LOW CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)****1-7GHz**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1546.000	56.69	-11.99	44.70	74.00	-29.30	peak
2	2830.000	53.98	-6.81	47.17	74.00	-26.83	peak
3	2992.000	54.22	-6.10	48.12	74.00	-25.88	peak
4	3418.000	51.26	-5.37	45.89	74.00	-28.11	peak
5	4252.000	49.01	-1.84	47.17	74.00	-26.83	peak
6	5044.000	48.68	1.09	49.77	74.00	-24.23	peak

Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

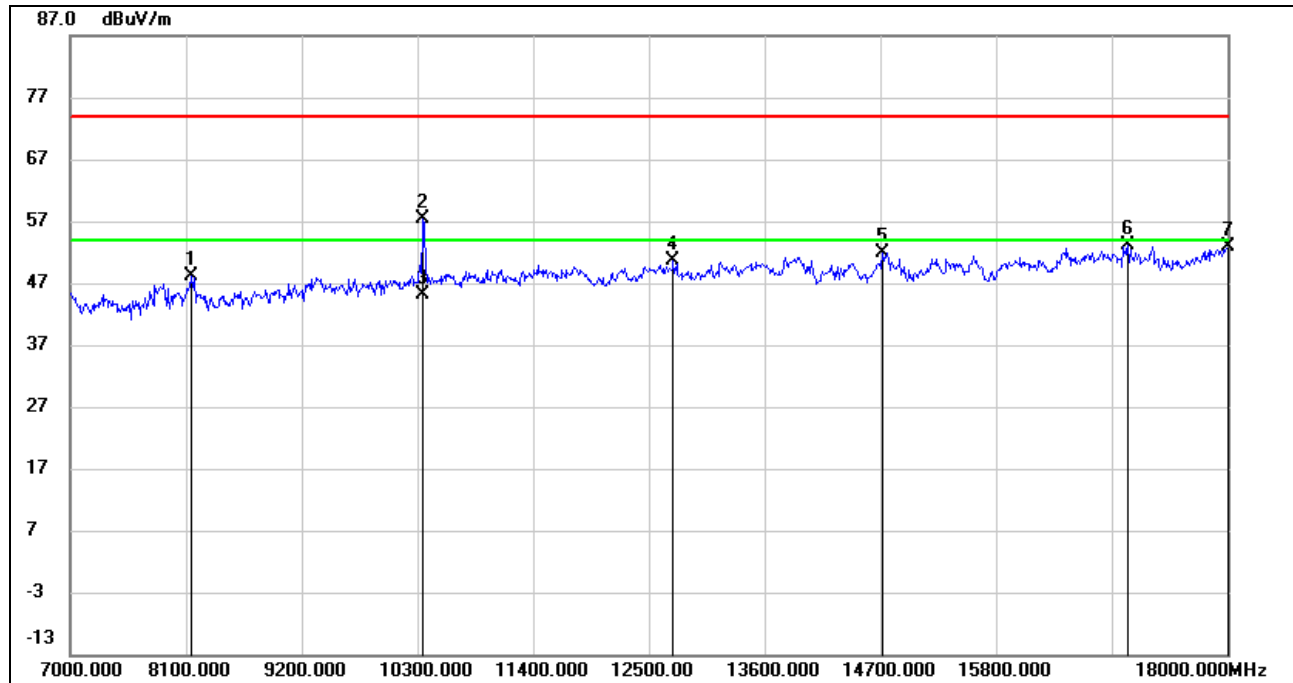
3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

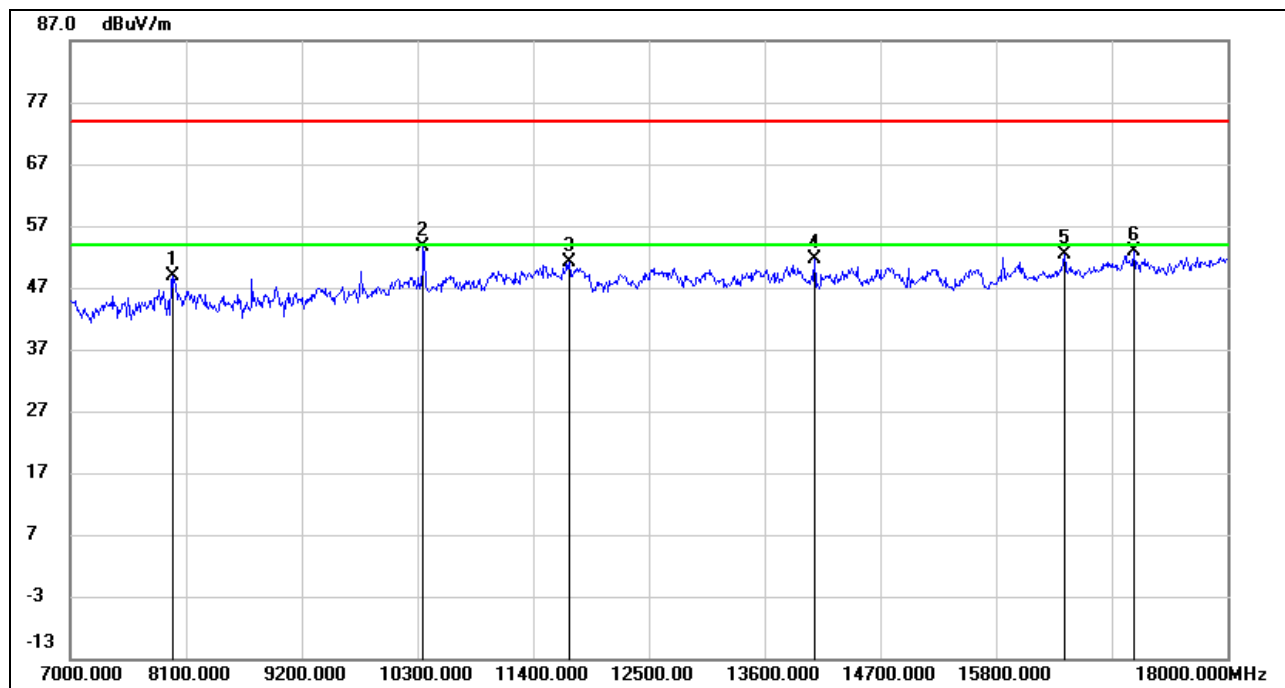
SPURIOUS EMISSIONS (UNII-1 LOW CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)

7-18GHz



No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8144.000	39.70	8.44	48.14	74.00	-25.86	peak
2	10355.000	46.09	11.23	57.32	74.00	-16.68	peak
3	10355.000	33.86	11.23	45.09	54.00	-8.91	AVG
4	12731.000	35.54	14.97	50.51	74.00	-23.49	peak
5	14722.000	35.76	16.19	51.95	74.00	-22.05	peak
6	17054.000	32.28	20.76	53.04	74.00	-20.96	peak
7	18000.000	29.34	23.54	52.88	74.00	-21.12	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.1 of the main report.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.

**SPURIOUS EMISSIONS (UNII-1 LOW CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)****7-18GHz**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7968.000	41.43	7.49	48.92	74.00	-25.08	peak
2	10355.000	42.32	11.23	53.55	74.00	-20.45	peak
3	11741.000	37.97	13.13	51.10	74.00	-22.90	peak
4	14073.000	35.41	16.21	51.62	74.00	-22.38	peak
5	16449.000	32.82	19.45	52.27	74.00	-21.73	peak
6	17109.000	31.88	20.91	52.79	74.00	-21.21	peak

Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

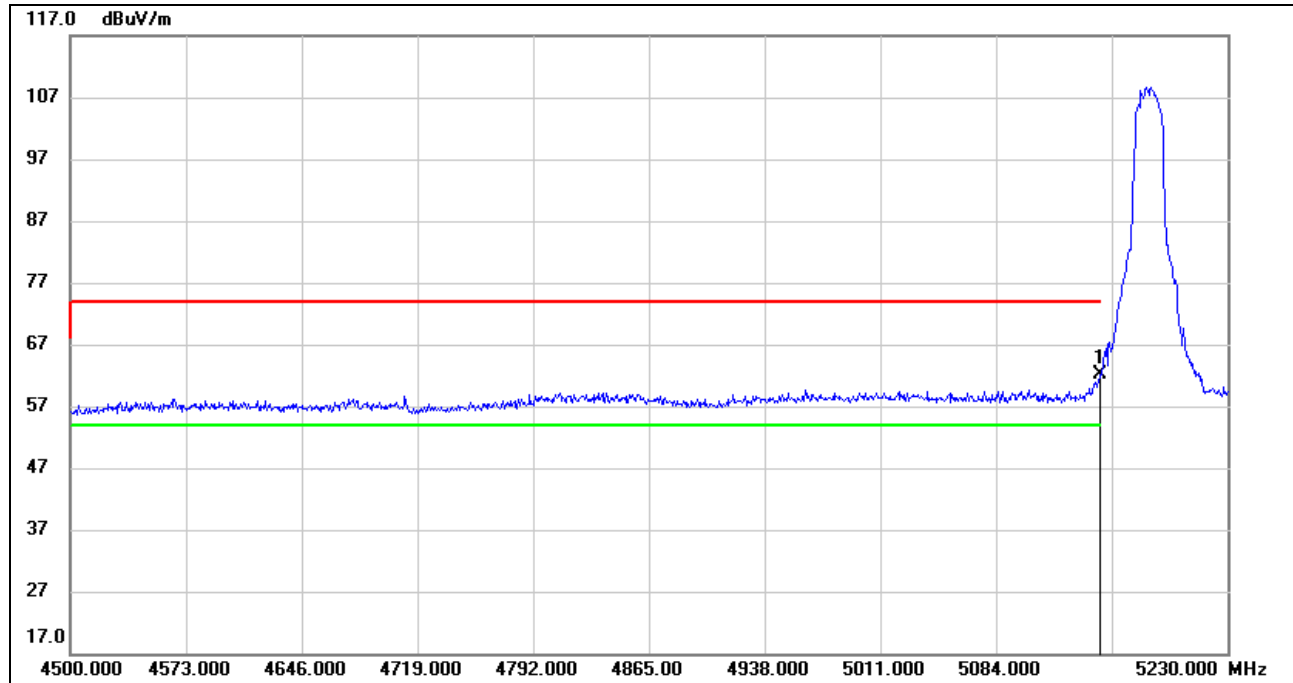
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



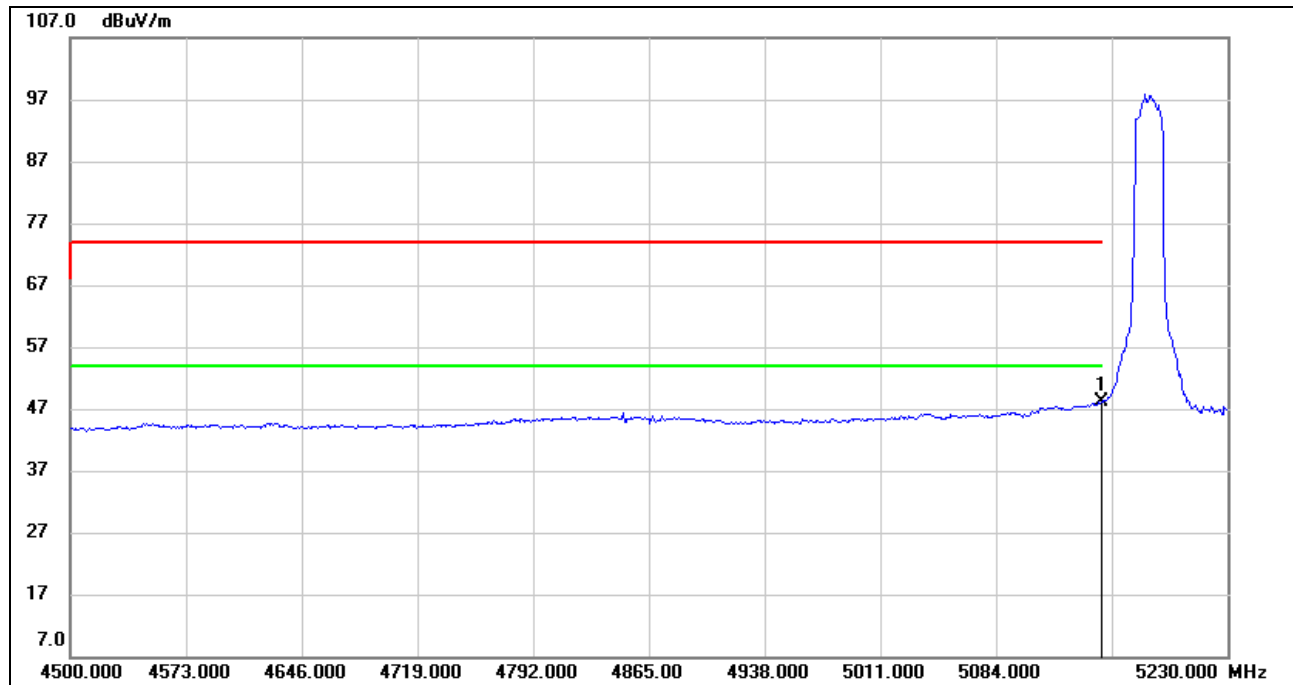
**RESTRICTED BANDEDGE (UNII-1 LOW CHANNEL, WORST-CASE CONFIGURATION,
HORIZONTAL)**

PEAK



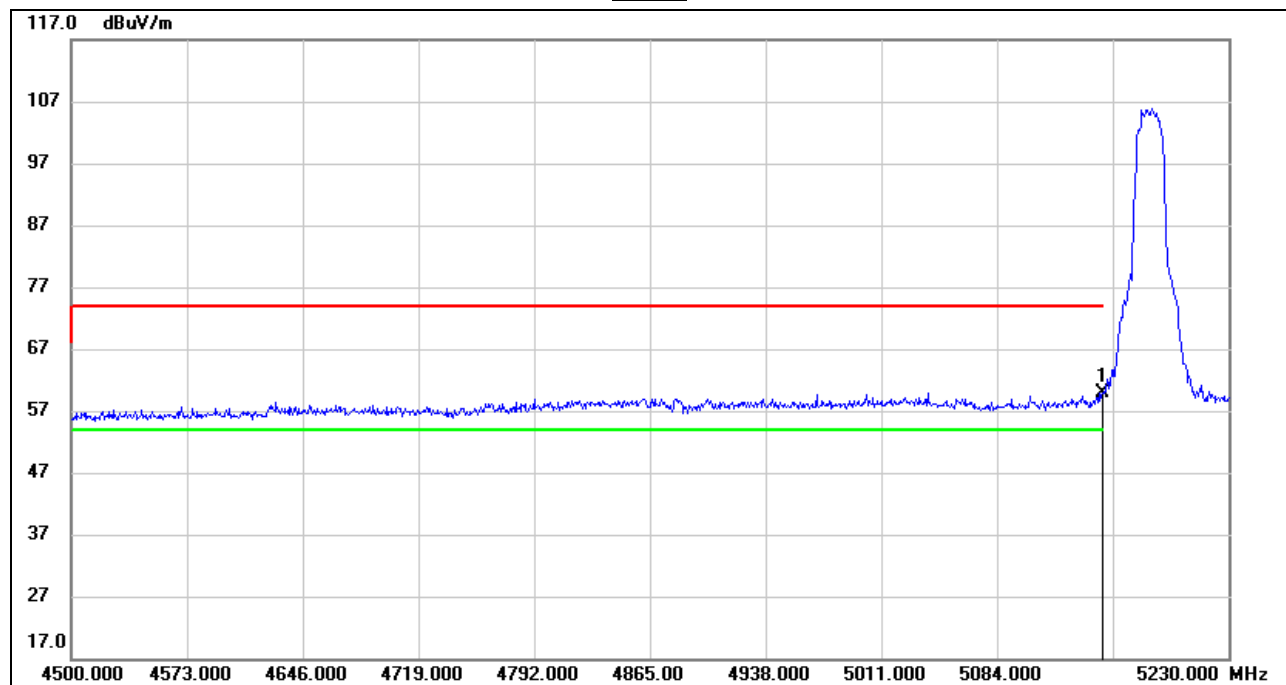
No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	40.63	21.39	62.02	74.00	-11.98	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

AVG

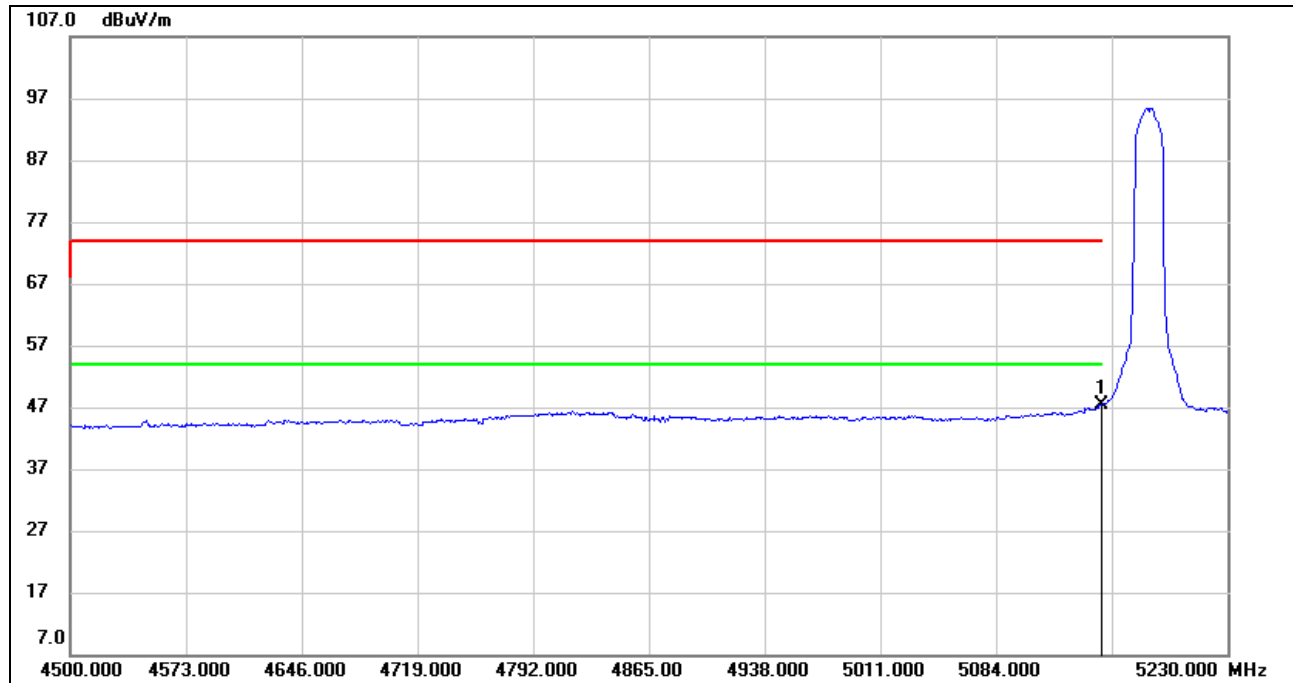
No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	26.82	21.39	48.21	54.00	-5.79	AVG

- Note:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. AVG: $VBW=1/Ton$ where: ton is transmit duration.
 4. For transmit duration, please refer to clause 7.1 of the main report.
 5. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

**RESTRICTED BANDEDGE (UNII-1 LOW CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)****PEAK**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	38.40	21.39	59.79	74.00	-14.21	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

**AVG**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	26.06	21.39	47.45	54.00	-6.55	AVG

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. AVG: VBW=1/Ton where: ton is transmit duration.
4. For transmit duration, please refer to clause 7.1 of the main report.
5. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Note: All the test modes and combination have been considered. Only the worst data record in the report.

END OF REPORT