


Test Data

Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2404	Ant1	5.359	30	Pass
NVNT	BLE	2442	Ant1	4.985	30	Pass
NVNT	BLE	2478	Ant1	4.467	30	Pass



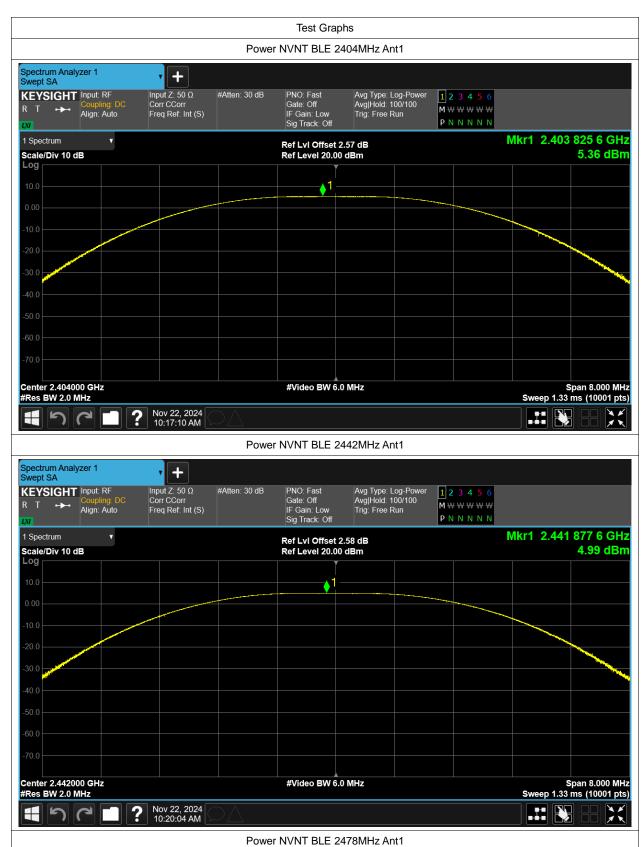










-6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	limit	Verdic
NVNT	BLE	2404	Ant1	1.155	0.5	Pass
NVNT	BLE	2442	Ant1	1.156	0.5	Pass
NVNT	BLE	2478	Ant1	1.137	0.5	Pass







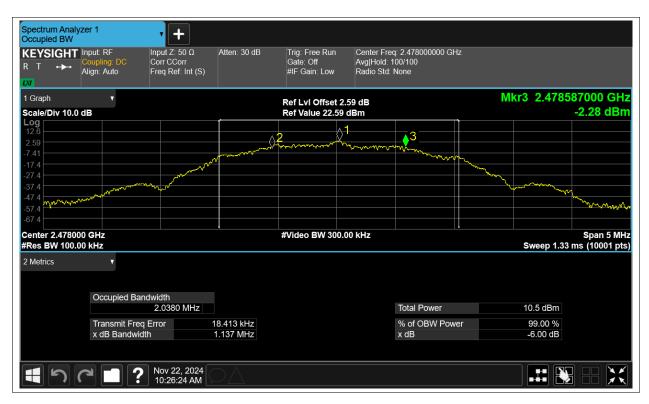





Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	
NVNT	BLE	2404	Ant1	2.025	
NVNT	BLE	2442	Ant1	2.03	
NVNT	BLE	2478	Ant1	2.03	















Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2404	Ant1	-13.131	8	Pass
NVNT	BLE	2442	Ant1	-13.498	8	Pass
NVNT	BLE	2478	Ant1	-13.966	8	Pass



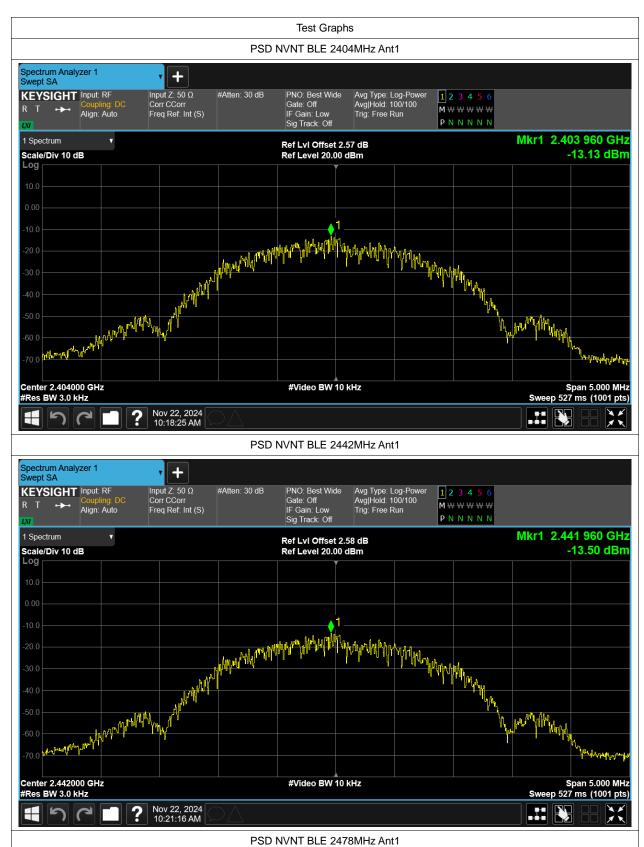



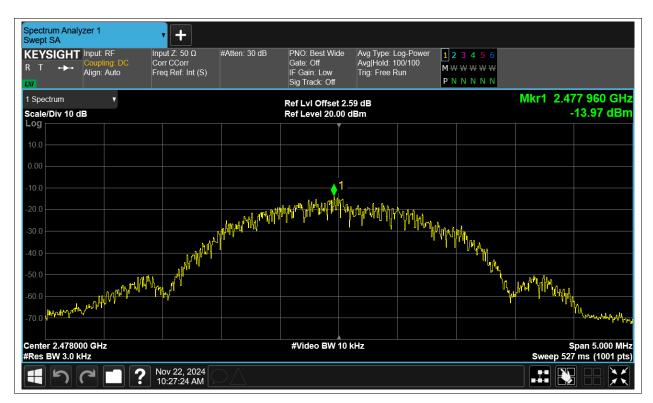







Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2404	Ant1	-61.24	-20	Pass
NVNT	BLE	2478	Ant1	-60.67	-20	Pass



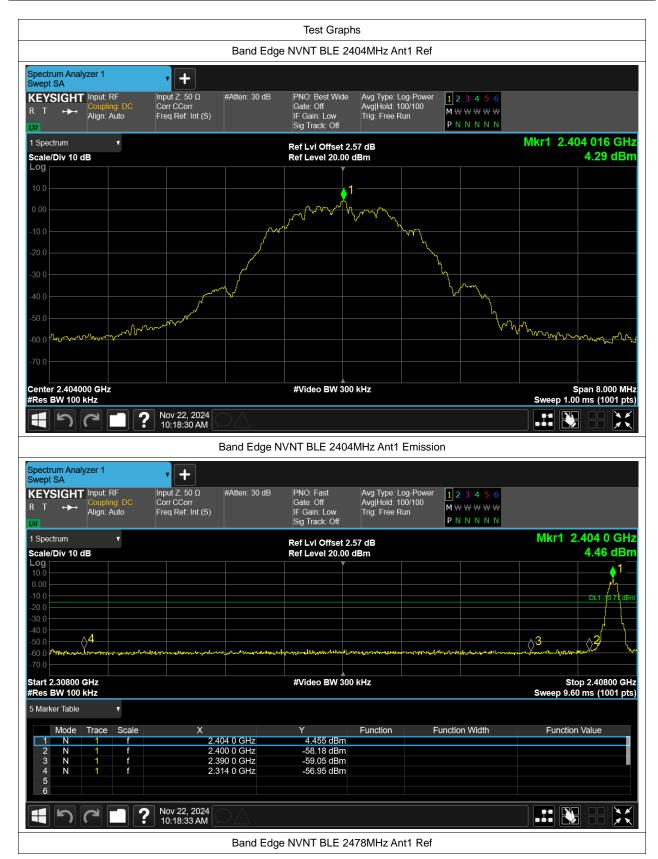



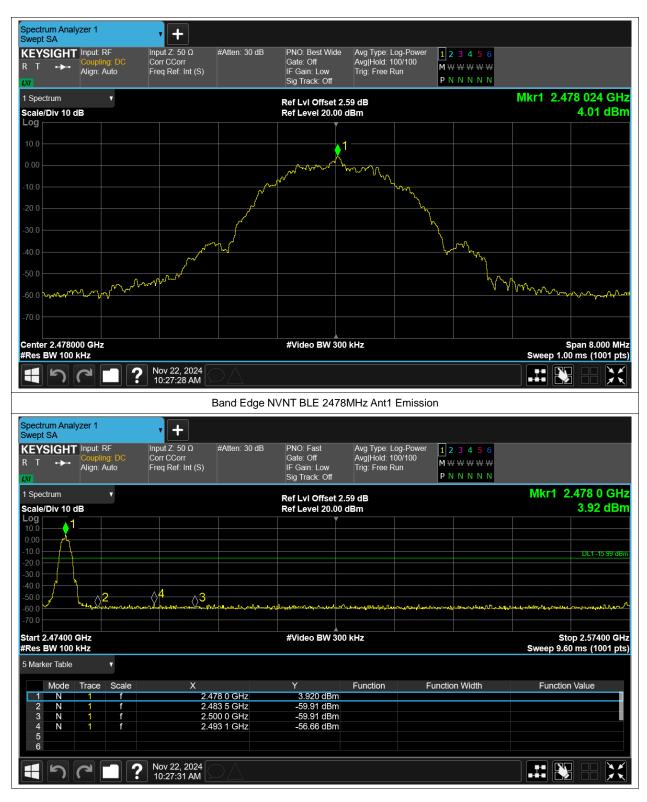





Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2404	Ant1	-53.11	-20	Pass
NVNT	BLE	2442	Ant1	-53.08	-20	Pass
NVNT	BLE	2478	Ant1	-52.01	-20	Pass











