



FCC TEST REPORT

Test report
On Behalf of
Shenzhen hutianmei Technology Co.,Ltd
For
Bluetooth speaker
Model No.: V7 Pro, V7

FCC ID: 2AKRC-V7PRO

Prepared for : **Shenzhen hutianmei Technology Co.,Ltd**
32 Building,The third Industrial Park,Houting Shajing,Baoan District Shenzhen,
518000 China

Prepared By : **Shenzhen HUAKE Testing Technology Co., Ltd.**
1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street,
Bao'an District, Shenzhen City, China

Date of Test: **Dec. 21, 2020 ~ Jan. 04, 2021**

Date of Report: **Jan. 04, 2021**

Report Number: **HK2012214049-E**



TEST RESULT CERTIFICATION

Applicant's name : Shenzhen hutianmei Technology Co.,Ltd
Address : 32 Building,The third Industrial Park,Houting Shajing,Baoan District Shenzhen, 518000 China
Manufacture's Name..... : Shenzhen hutianmei Technology Co.,Ltd
Address : 32 Building,The third Industrial Park,Houting Shajing,Baoan District Shenzhen, 518000 China
Product description
Trade Mark: N/A
Product name : Bluetooth speaker
Model and/or type reference : V7 Pro, V7
Standards : FCC Rules and Regulations Part 15 Subpart C Section 15.249
ANSI C63.10: 2013

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAKE Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAKE Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Date of Test :
Date (s) of performance of tests : Dec. 21, 2020 ~ Jan. 04, 2021
Date of Issue..... : Jan. 04, 2021
Test Result..... : **Pass**

Testing Engineer :

Gary Qian

(Gary Qian)

Technical Manager :

Eden Hu

(Eden Hu)

Authorized Signatory :

Jason Zhou

(Jason Zhou)



Table of Contents	Page
1 . Test Summary	5
1.1. Test Procedures And Results	5
1.2. Test Facility	5
1.3. Measurement Uncertainty	5
2 . General Information	6
2.1 . General Description Of Eut	6
2.2 . Operation of EUT during testing	7
2.3 . Description Of Test Setup	8
2.4 . Measurement Instruments List	9
3 . Conducted Emissions Test	10
3.1. Conducted Power Line Emission Limit	10
3.2. Test Setup	10
3.3. Test Procedure	10
3.4. Test Result	10
4. Radiated Emission Test	13
4.1. Radiation Limit	13
4.2. Test Setup	13
4.3. Test Procedure	14
4.4. Test Result	14
5. Band Edge	20
5.1. Limits	20
5.2. Test Procedure	20
5.3. Test Result	20
6. Occupied Bandwidth Measurement	23
6.1. Test Setup	23
6.2. Test Procedure	23
6.3. Measurement Equipment Used	23
6.4. Test Result	23
7. Antenna Requirement	27
8. Photograph Of Test	28
8.1. Radiated Emission	28
8.2. Conducted Emission	29
9. Photos Of The Eut	30

**** Modified History ****

Revision	Description	Issued Data	Remark
Revision 1.0	Initial Test Report Release	Jan. 04, 2021	Jason Zhou



1. Test Summary

1.1. Test Procedures And Results

DESCRIPTION OF TEST	RESULT
CONDUCTED EMISSIONS TEST	COMPLIANT
RADIATED EMISSION TEST	COMPLIANT
BAND EDGE	COMPLIANT
OCCUPIED BANDWIDTH MEASUREMENT	COMPLIANT
ANTENNA REQUIREMENT	COMPLIANT

1.2. Test Facility

Test Firm : Shenzhen HUAKE Testing Technology Co., Ltd.

Address 1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street, Bao'an District, Shenzhen City, China

1.3. Measurement Uncertainty

Measurement Uncertainty	
Conducted Emission Expanded Uncertainty	= 2.71dB, k=2
Radiated emission expanded uncertainty(9kHz-30MHz)	= 4.26dB, k=2
Radiated emission expanded uncertainty(30MHz-1000MHz)	= 3.90dB, k=2
Radiated emission expanded uncertainty(Above 1GHz)	= 4.28dB, k=2



2. General Information

2.1. General Description Of Eut

Equipment	Bluetooth speaker
Model Name	V7 Pro
Serial Model	V7
Model Difference	All model's the function, software and electric circuit are the same, only with a product model named different. Test sample model: V7 Pro
FCC ID	2AKRC-V7PRO
Antenna Type	PCB Antenna
Antenna Gain	0dBi
BT Operation frequency	2402-2480MHz
Number of Channels	79CH
Modulation Type	GFSK, $\pi/4$ DQPSK , 8DPSK
Power Source	DC 5V from USB or DC 7.4V from battery
Power Rating	DC 5V from USB or DC 7.4V from battery



2.1.1. Carrier Frequency of Channels

Channel List					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	27	2429	54	2456
01	2403	28	2430	55	2457
02	2404	29	2431	56	2458
03	2405	30	2432	57	2459
04	2406	31	2433	58	2460
05	2407	32	2434	59	2461
06	2408	33	2435	60	2462
07	2409	34	2436	61	2463
08	2410	35	2437	62	2464
09	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		

2.2. Operation of EUT during testing

Operating Mode

The mode is used: **Transmitting mode**

Low Channel: 2402MHz


Middle Channel: 2441MHz

High Channel: 2480MHz



2.3. Description Of Test Setup

Operation of EUT during conducted testing and radiation below 1GHz testing:



Operation of EUT during radiation above 1GHz testing:



Adapter information

Model: HW-059200CHQ

Input: 100-240V, 50-60Hz, 0.5A

Output: 5VDC, 2A

The sample was placed (0.8m below 1GHz, 1.5m above 1GHz) above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages. The worst case is X position.



2.4. Measurement Instruments List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	R&S	ENV216	HKE-002	Jun. 18, 2020	1 Year
2.	Receiver	R&S	ESCI 7	HKE-010	Jun. 18, 2020	1 Year
3.	RF automatic control unit	Tonscend	JS0806-2	HKE-060	Jun. 18, 2020	1 Year
4.	Spectrum analyzer	R&S	FSP40	HKE-025	Jun. 18, 2020	1 Year
5.	Spectrum analyzer	Agilent	N9020A	HKE-048	Jun. 18, 2020	1 Year
6.	Preamplifier	Schwarzbeck	BBV 9743	HKE-006	Jun. 18, 2020	1 Year
7.	EMI Test Receiver	Rohde & Schwarz	ESCI 7	HKE-010	Jun. 18, 2020	1 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	HKE-012	Jun. 18, 2020	1 Year
9.	Loop Antenna	Schwarzbeck	FMZB 1519 B	HKE-014	Jun. 18, 2020	1 Year
10.	Horn Antenna	Schwarzbeck	9120D	HKE-013	Jun. 18, 2020	1 Year
11.	Pre-amplifier	EMCI	EMC051845 SE	HKE-015	Jun. 18, 2020	1 Year
12.	Pre-amplifier	Agilent	83051A	HKE-016	Jun. 18, 2020	1 Year
13.	EMI Test Software EZ-EMC	Tonscend	JS1120-B Version	HKE-083	Jun. 18, 2020	N/A
14.	Power Sensor	Agilent	E9300A	HKE-086	Jun. 18, 2020	1 Year
15.	Spectrum analyzer	Agilent	N9020A	HKE-048	Jun. 18, 2020	1 Year
16.	Signal generator	Agilent	N5182A	HKE-029	Jun. 18, 2020	1 Year
17.	Signal Generator	Agilent	83630A	HKE-028	Jun. 18, 2020	1 Year
18.	Shielded room	Shiel Hong	4*3*3	HKE-039	Jun. 18, 2020	3 Year



3. Conducted Emissions Test

3.1. Conducted Power Line Emission Limit


For unintentional device, according to § 15.107(a) Line Conducted Emission Limits is as following

Frequency (MHz)	Maximum RF Line Voltage (dBμV)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15 - 0.50	79	66	66-56*	56-46*
0.50 - 5.00	73	60	56	46
5.00 - 30.0	73	60	60	50

* Decreasing linearly with the logarithm of the frequency

For intentional device, according to §15.207(a) Line Conducted Emission Limit is same as above table.

3.2. Test Setup

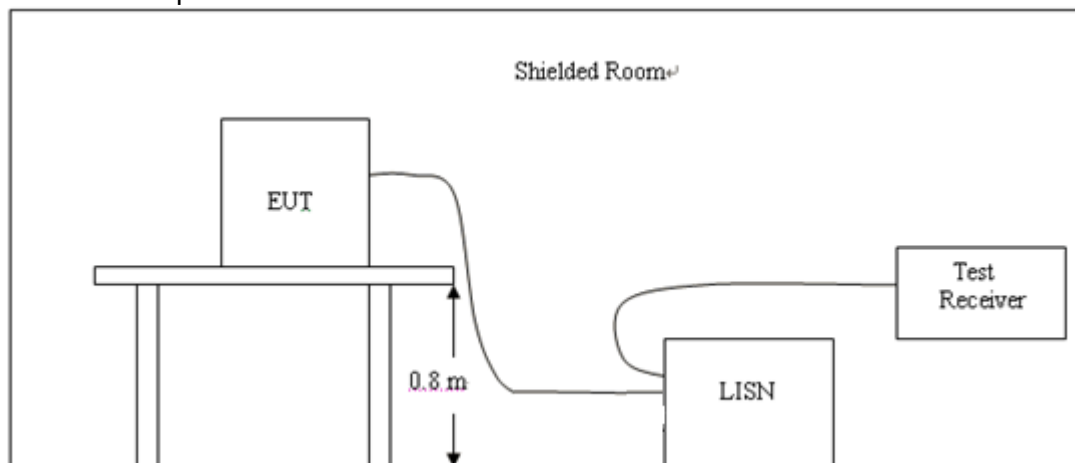

3.3. Test Procedure

- 1, The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10.
- 2, Support equipment, if needed, was placed as per ANSI C63.10.
- 3, All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4, If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5, All support equipments received AC power from a second LISN, if any.
- 6, The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7, Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.


3.4. Test Result

PASS

All the test modes completed for test. only the worst result of (GFSK High Channel) was reported as below:



Test Specification: Line

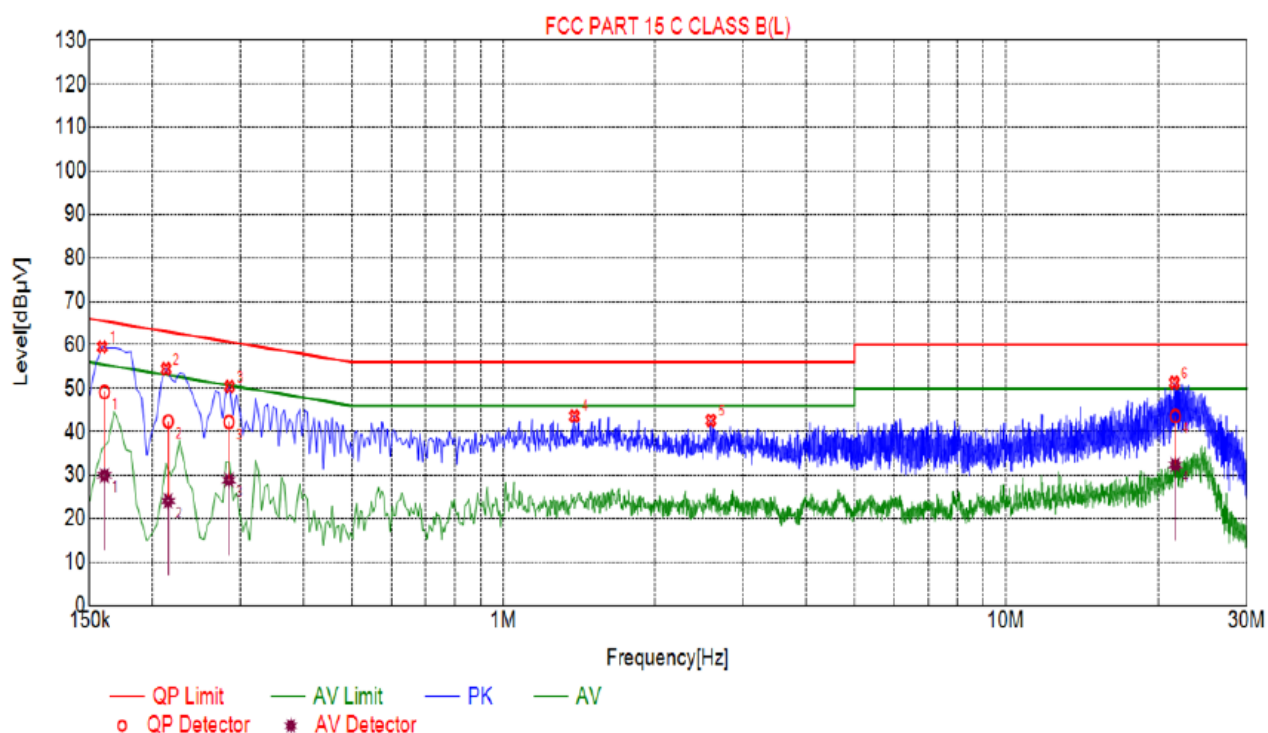

Suspected List

NO.	Freq. [MHz]	Level [dBμV]	Factor [dB]	Limit [dBμV]	Margin [dB]	Reading [dBμV]	Detector	Type
1	0.1590	59.50	20.01	65.52	6.02	39.49	PK	L
2	0.2130	54.45	20.05	63.09	8.64	34.40	PK	L
3	0.2850	50.40	20.04	60.67	10.27	30.36	PK	L
4	1.3830	43.60	20.11	56.00	12.40	23.49	PK	L
5	2.5890	42.61	20.20	56.00	13.39	22.41	PK	L
6	21.4980	51.30	20.14	60.00	8.70	31.16	PK	L

Final Data List

NO.	Freq. [MHz]	Correction factor[dB]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	QP Reading [dBμV]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	AV Reading [dBμV]	Type
1	0.1606	20.00	49.13	65.43	16.30	29.13	29.96	55.43	25.47	9.96	L
2	0.2151	20.05	42.37	63.00	20.63	22.32	24.10	53.00	28.90	4.05	L
3	0.2841	20.04	42.25	60.70	18.45	22.21	28.89	50.70	21.81	8.85	L
4	21.5876	20.14	43.62	60.00	16.38	23.48	32.41	50.00	17.59	12.27	L


Remark: Margin = Limit – Level

Correction factor = Cable lose + LISN insertion loss

Level=Test receiver reading + correction factor



Test Specification: Neutral

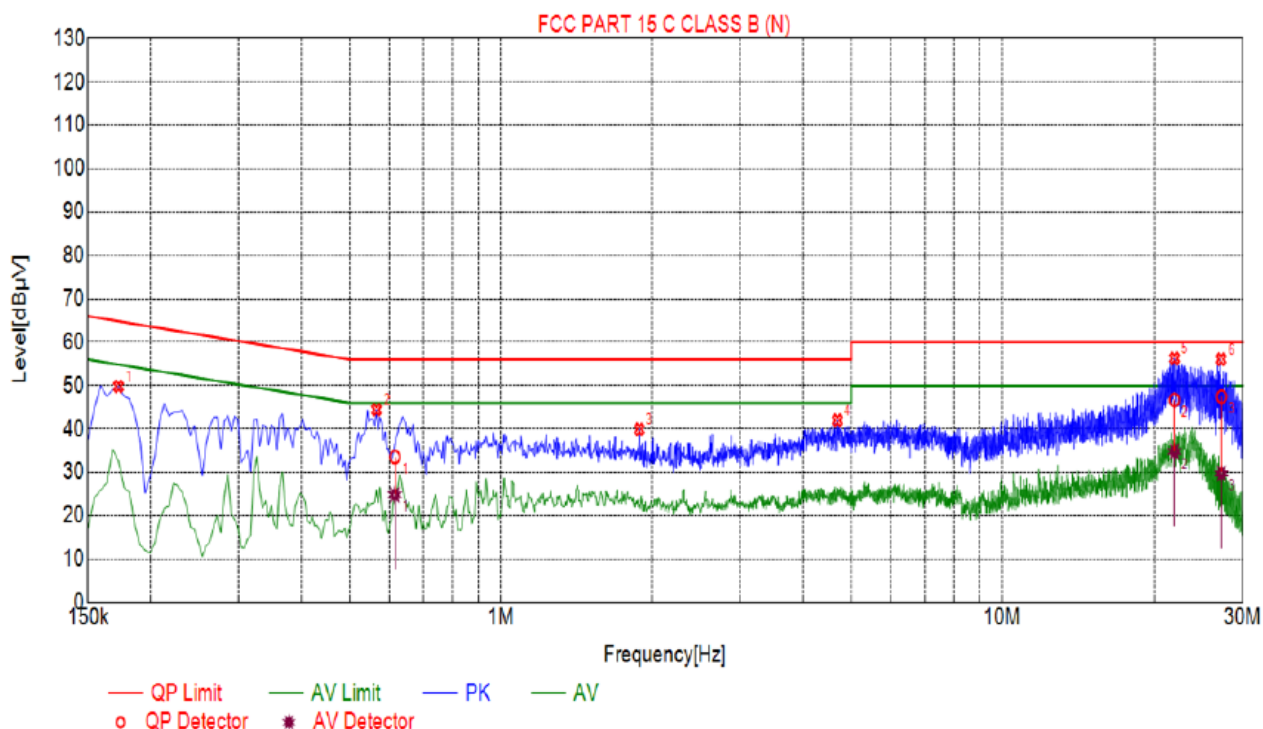

Suspected List

NO.	Freq. [MHz]	Level [dBμV]	Factor [dB]	Limit [dBμV]	Margin [dB]	Reading [dBμV]	Detector	Type
1	0.1725	49.80	20.04	64.84	15.04	29.76	PK	N
2	0.5640	44.46	20.06	56.00	11.54	24.40	PK	N
3	1.8870	39.92	20.14	56.00	16.08	19.78	PK	N
4	4.6905	41.99	20.26	56.00	14.01	21.73	PK	N
5	21.9075	56.28	20.15	60.00	3.72	36.13	PK	N
6	27.1275	56.08	20.26	60.00	3.92	35.82	PK	N

Final Data List

NO.	Freq. [MHz]	Correction factor [dB]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	QP Reading [dBμV]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	AV Reading [dBμV]	Type
1	0.6136	20.05	33.54	56.00	22.46	13.49	24.83	46.00	21.17	4.78	N
2	21.8965	20.15	46.70	60.00	13.30	26.55	34.79	50.00	15.21	14.64	N
3	27.1774	20.26	47.45	60.00	12.55	27.19	29.76	50.00	20.24	9.50	N

Remark: Margin = Limit – Level

Correction factor = Cable lose + LISN insertion loss

Level=Test receiver reading + correction factor

4. Radiated Emission Test

4.1. Radiation Limit


For unintentional device, according to § 15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency (MHz)	Distance (Meters)	Radiated (dBμV/m)	Radiated (μV/m)
0.009-0.49	3	$20\log(2400/F(\text{KHz}))+40\log(300/3)$	$2400/F(\text{KHz})$
0.49-1.705	3	$20\log(24000/F(\text{KHz}))+40\log(30/3)$	$24000/F(\text{KHz})$
1.705-30	3	$20\log(30)+40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500


For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.

4.2. Test Setup


(1) Radiated Emission Test-Up Frequency Below 30MHz

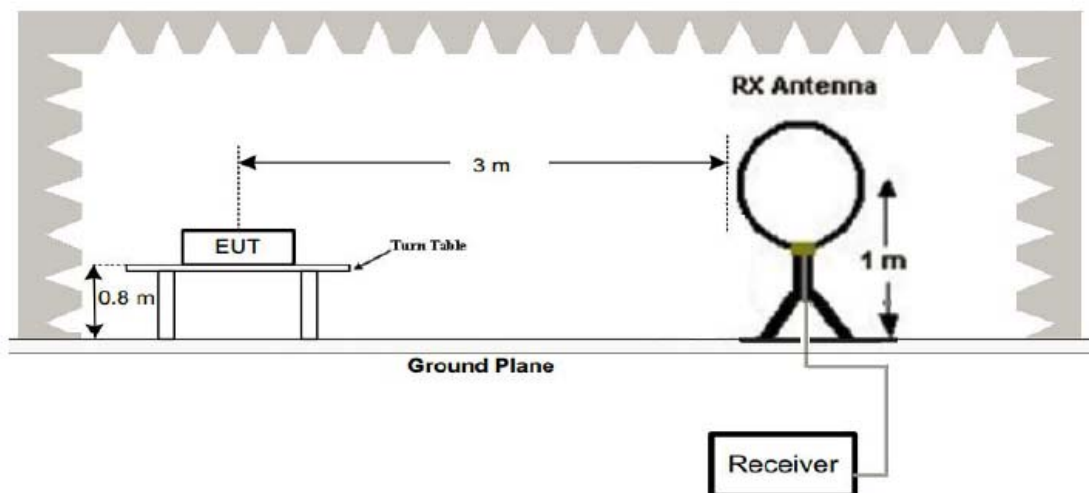

(2) Radiated Emission Test-Up Frequency 30MHz~1GHz

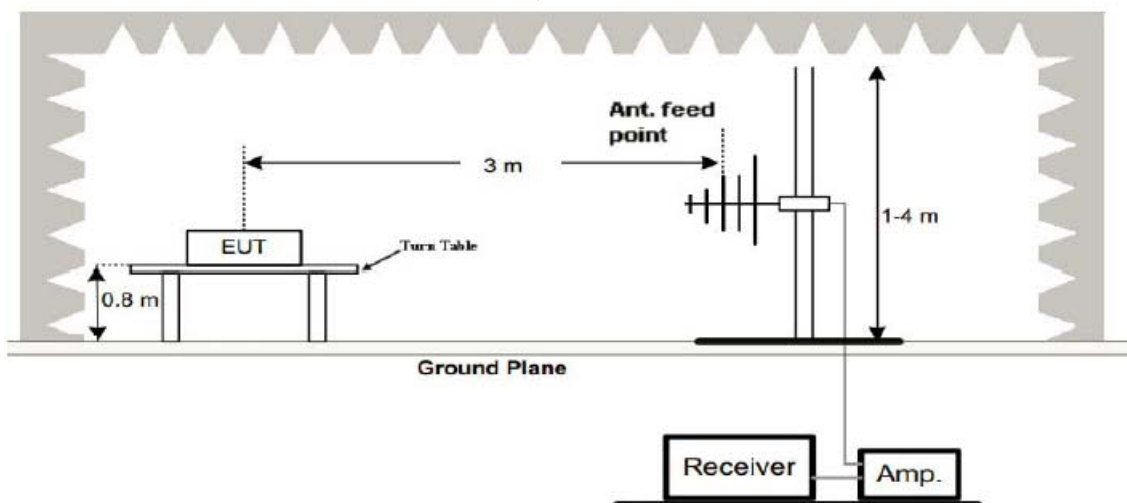

(3) Radiated Emission Test-Up Frequency Above 1GHz

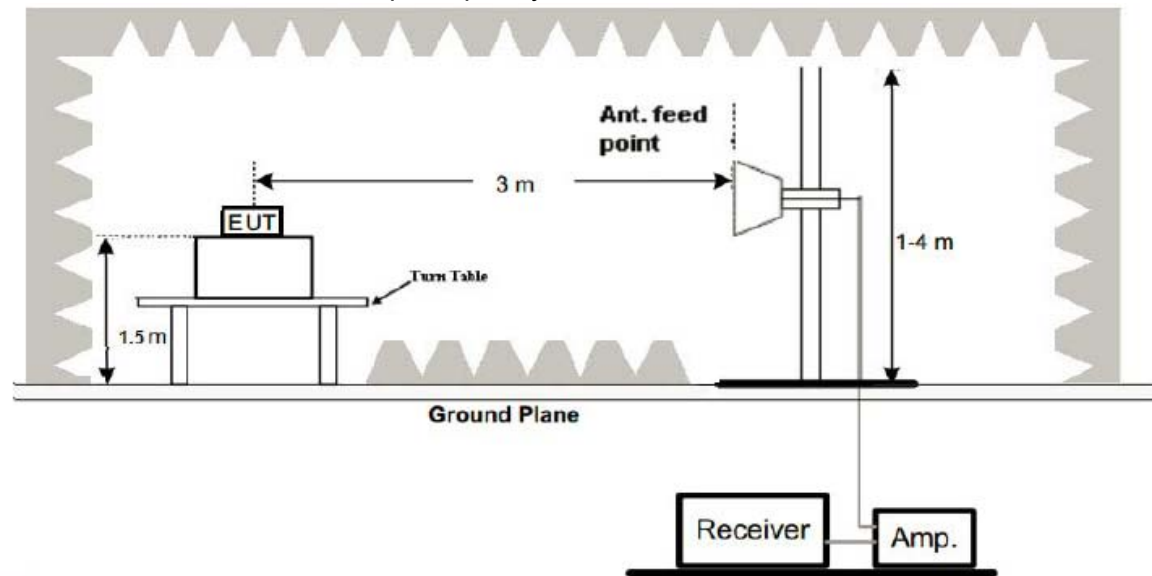

4.3. Test Procedure

1. Below 1GHz measurement the EUT is placed on turntable which is 0.8m above ground plane. And above 1GHz measurement EUT was placed on low permittivity and low tangent turn table which is 1.5m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The test frequency range from 9KHz to 25GHz per FCC PART 15.33(a).

Note:

For battery operated equipment, the equipment tests shall be performed using a new battery.


4.4. Test Result

PASS

All the test modes completed for test. only the worst result of GFSK Low Channel was reported as below:



Below 1GHz Test Results:
Antenna polarity: H

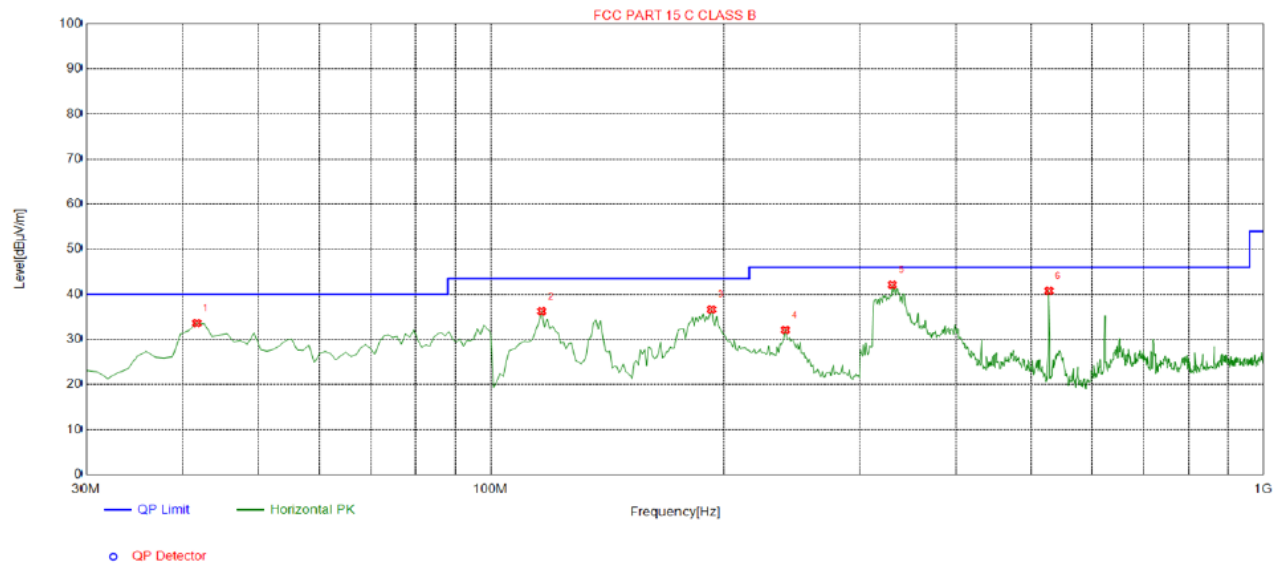


Suspected List									
NO.	Freq. [MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	41.6517	-14.25	47.86	33.61	40.00	6.39	100	358	Horizontal
2	116.4164	-16.50	52.74	36.24	43.50	7.26	100	173	Horizontal
3	193.1231	-15.71	52.36	36.65	43.50	6.85	100	173	Horizontal
4	240.7007	-13.82	45.91	32.09	46.00	13.91	100	141	Horizontal
5	331.0010	-11.60	53.70	42.10	46.00	3.90	100	282	Horizontal
6	528.1081	-7.50	48.28	40.78	46.00	5.22	100	12	Horizontal

Remark: Factor = Cable loss + Antenna factor – Preamplifier; Level = Reading + Factor; Margin = Limit – Level



Antenna polarity: V

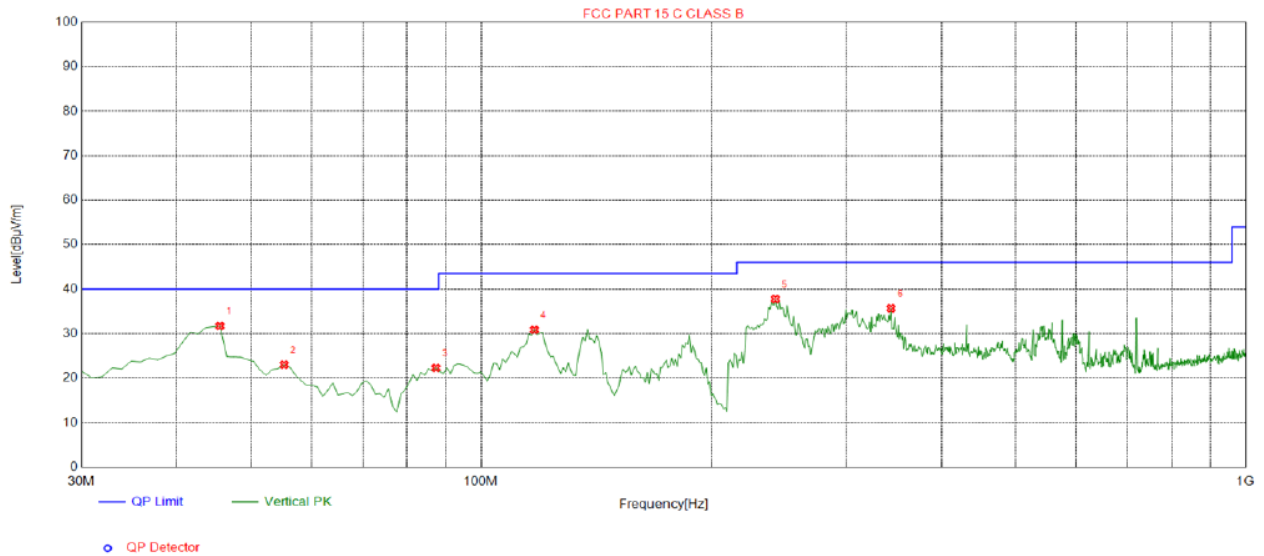

Suspected List									
NO.	Freq. [MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	45.5355	-13.65	45.37	31.72	40.00	8.28	100	249	Vertical
2	55.2452	-14.44	37.47	23.03	40.00	16.97	100	40	Vertical
3	87.2873	-17.72	40.02	22.30	40.00	17.70	100	297	Vertical
4	117.3874	-16.66	47.52	30.86	43.50	12.64	100	236	Vertical
5	242.6426	-13.73	51.52	37.79	46.00	8.21	100	255	Vertical
6	343.6236	-11.66	47.35	35.69	46.00	10.31	100	297	Vertical

Remark: Factor = Cable loss + Antenna factor – Preamplifier; Level = Reading + Factor; Margin = Limit – Level

Remark:

- (1) Measuring frequencies from 9 KHz to the 1 GHz, Radiated emission test from 9KHz to 30MHz was verified, and no any emission was found except system noise floor.
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.

Above 1 GHz Test Results:

CH Low (2402MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2402	112.87	-5.81	107.06	114.00	-6.94	peak
2402	83.88	-5.81	78.07	94.00	-15.93	AVG
4804	55.00	-3.65	51.35	74.00	-22.65	peak
4804	46.34	-3.65	42.69	54.00	-11.31	AVG
7206	53.29	-0.95	52.34	74.00	-21.66	peak
7206	39.66	-0.95	38.71	54.00	-15.29	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2402	109.93	-5.81	104.12	114.00	-9.88	peak
2402	81.02	-5.81	75.21	94.00	-18.79	AVG
4804	51.26	-3.65	47.61	74.00	-26.39	peak
4804	44.30	-3.65	40.65	54.00	-13.35	AVG
7206	53.07	-0.95	52.12	74.00	-21.88	peak
7206	41.01	-0.95	40.06	54.00	-13.94	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

CH Middle (2441MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2441.00	106.86	-5.73	101.13	114.00	-12.87	peak
2441.00	82.42	-5.73	76.69	94.00	-17.31	AVG
4882.00	57.03	-3.54	53.49	74.00	-20.51	peak
4882.00	42.04	-3.54	38.50	54.00	-15.50	AVG
7323.00	53.89	-0.81	53.08	74.00	-20.92	peak
7323.00	34.91	-0.81	34.10	54.00	-19.90	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2441.00	105.66	-5.73	99.93	114.00	-14.07	peak
2441.00	83.75	-5.73	78.02	94.00	-15.98	AVG
4882.00	55.08	-3.54	51.54	74.00	-22.46	peak
4882.00	42.93	-3.54	39.39	54.00	-14.61	AVG
7323.00	54.07	-0.81	53.26	74.00	-20.74	peak
7323.00	36.63	-0.81	35.82	54.00	-18.18	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



CH High (2480MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2480	100.17	-5.63	94.54	114.00	-19.46	peak
2480	80.22	-5.63	74.59	94.00	-19.41	AVG
4960	53.66	-3.43	50.23	74.00	-23.77	peak
4960	43.53	-3.44	40.09	54.00	-13.91	AVG
7440	51.43	-0.77	50.66	74.00	-23.34	peak
7440	37.54	-0.77	36.77	54.00	-17.23	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2480	100.6	-5.63	94.97	114.00	-19.03	peak
2480	81.26	-5.63	75.63	94.00	-18.37	AVG
4960	53.48	-3.43	50.05	74.00	-23.95	peak
4960	40.43	-3.44	36.99	54.00	-17.01	AVG
7440	52.24	-0.77	51.47	74.00	-22.53	peak
7440	36.24	-0.77	35.47	54.00	-18.53	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Remark :

- (1) Measuring frequencies from 1 GHz to the 25 GHz °
- (2) “F” denotes fundamental frequency; “H” denotes spurious frequency. “E” denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) The emissions are attenuated more than 20dB below the permissible limits are not recorded in the report.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for peak measurement with peak detector at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average measurement with peak detection at frequency above 1GHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.
- (7) All modes of operation were investigated and the worst-case emissions are reported.



5. Band Edge

5.1. Limits

FCC PART 15.249(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

5.2. Test Procedure

The band edge compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW to 100KHz and VBM to 300KHz to measure the peak field strength and set RBW to 1MHz and VBW to 10Hz to measure the average radiated field strength. The conducted RF band edge was measured by using a spectrum analyzer. Set span wide enough to capture the highest in-band emission and the emission at the band edge. Set RBW to 100 KHz and VBW to 300 KHz, to measure the conducted peak band edge.

5.3. Test Result

PASS

All the test modes completed for test. The worst case of Band Edge is GFSK; the test data of this mode was reported.

Radiated Band Edge Test:

Operation Mode: TX CH Low (2402MHz)

Horizontal (Worst case):

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	56.21	-5.81	50.4	74	-23.6	peak
2310.00	/	-5.81	/	54	/	AVG
2390.00	54.35	-5.84	48.51	74	-25.49	peak
2390.00	/	-5.84	/	54	/	AVG
2400.00	50.93	-5.84	45.09	74	-28.91	peak
2400.00	/	-5.84	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	56.37	-5.81	50.56	74	-23.44	peak
2310.00	/	-5.81	/	54	/	AVG
2390.00	52.23	-5.84	46.39	74	-27.61	peak
2390.00	/	-5.84	/	54	/	AVG
2400.00	50.66	-5.84	44.82	74	-29.18	peak
2400.00	/	-5.84	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: TX CH High (2480MHz)

Horizontal (Worst case):

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	54.86	-5.81	49.05	74	-24.95	peak
2483.50	/	-5.81	/	54	/	AVG
2500.00	53.06	-6.06	47	74	-27	peak
2500.00	/	-6.06	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	55.89	-5.81	50.08	74	-23.92	peak
2483.50	/	-5.81	/	54	/	AVG
2500.00	53.57	-6.06	47.51	74	-26.49	peak
2500.00	/	-6.06	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						



6. Occupied Bandwidth Measurement

6.1. Test Setup

Same as Radiated Emission Measurement

6.2. Test Procedure

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Set EUT as normal operation.
3. Based on ANSI C63.10 section 6.9.2: RBW= 30KHz. VBW= 100 KHz, Span=2MHz.
4. The useful radiated emission from the EUT was detected by the spectrum analyser with peak detector.

6.3. Measurement Equipment Used

Same as Radiated Emission Measurement

6.4. Test Result


PASS

Test Mode	Frequency	20dB Bandwidth (MHz)	Result
GFSK	2402 MHz	0.9335	PASS
	2441 MHz	0.9292	PASS
	2480 MHz	0.9329	PASS
$\pi/4$ DQPSK	2402 MHz	1.280	PASS
	2441 MHz	1.279	PASS
	2480 MHz	1.278	PASS
8DPSK	2402 MHz	1.288	PASS
	2441 MHz	1.280	PASS
	2480 MHz	1.292	PASS




Test Mode: GFSK


CH: 2402MHz

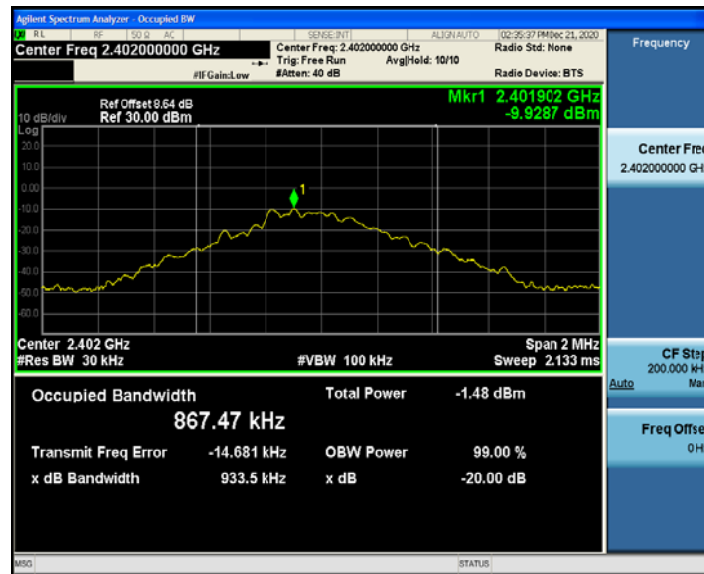

CH: 2441MHz

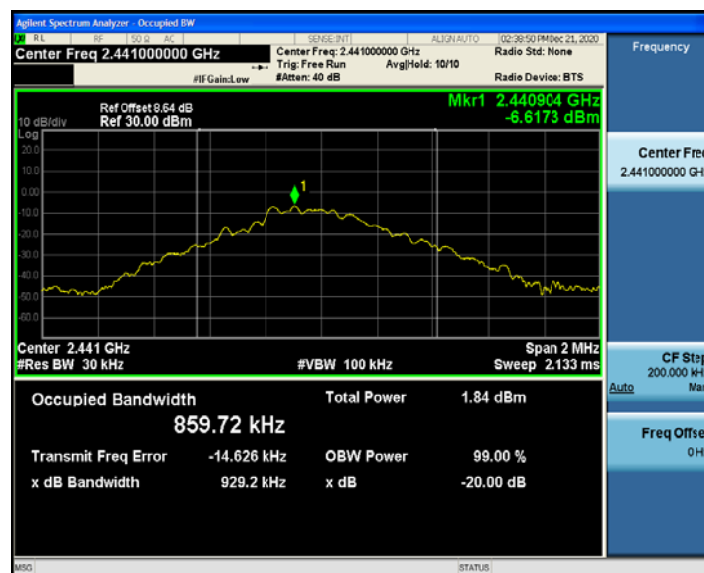


CH: 2480MHz

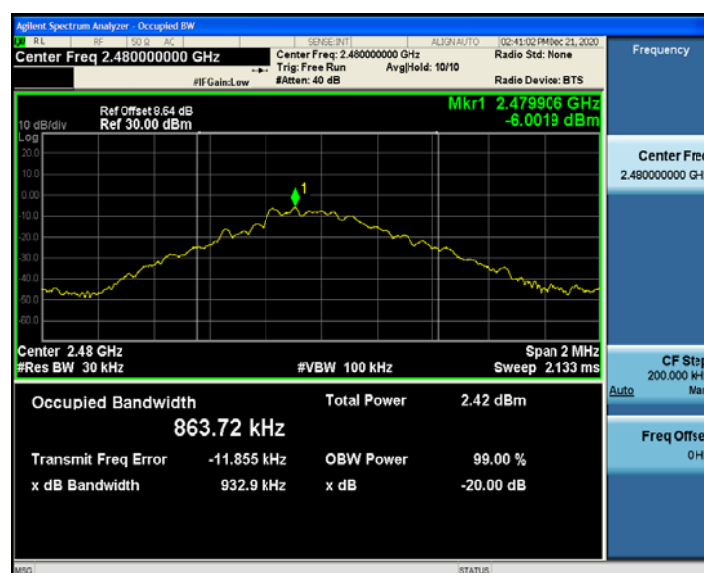


Test Mode: π /4DQPSK


CH: 2402MHz

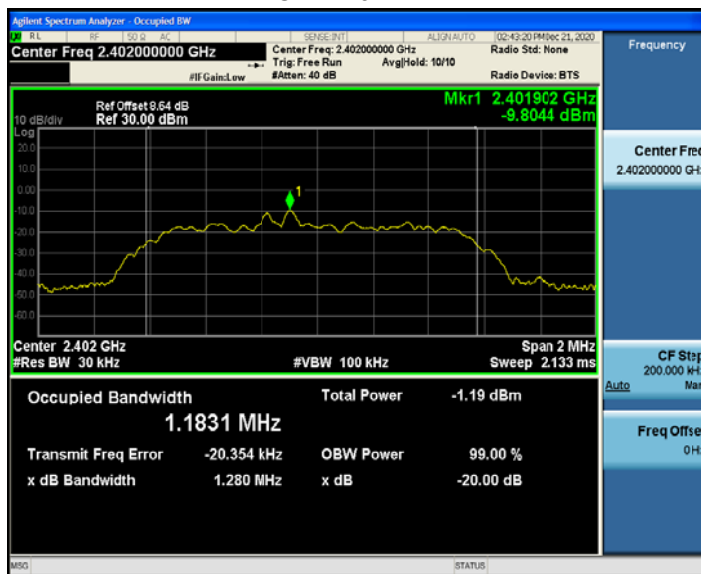

CH: 2441MHz

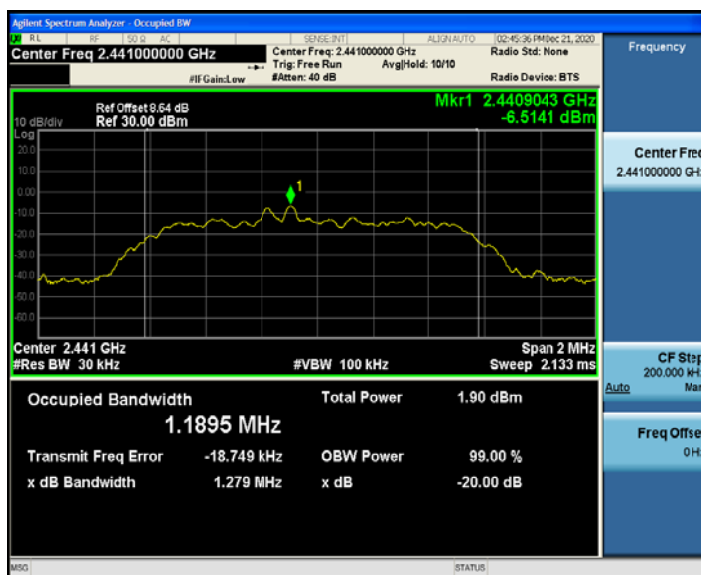


CH: 2480MHz

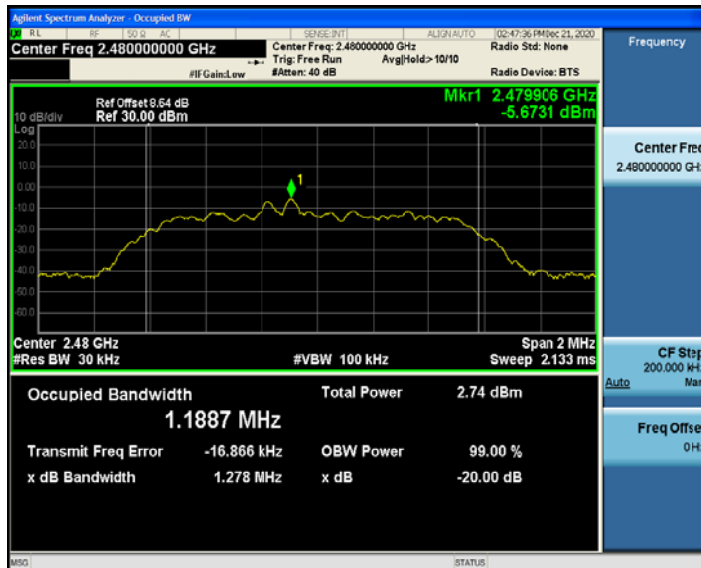




Test Mode: 8DPSK


CH: 2402MHz

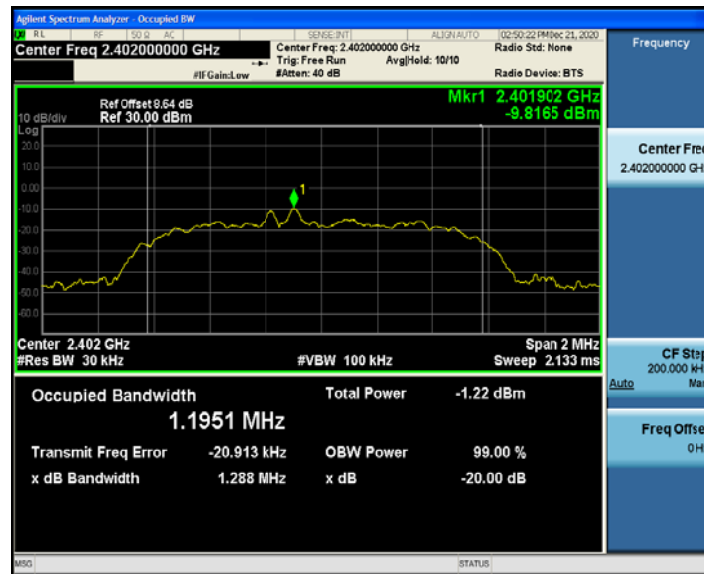

CH: 2441MHz

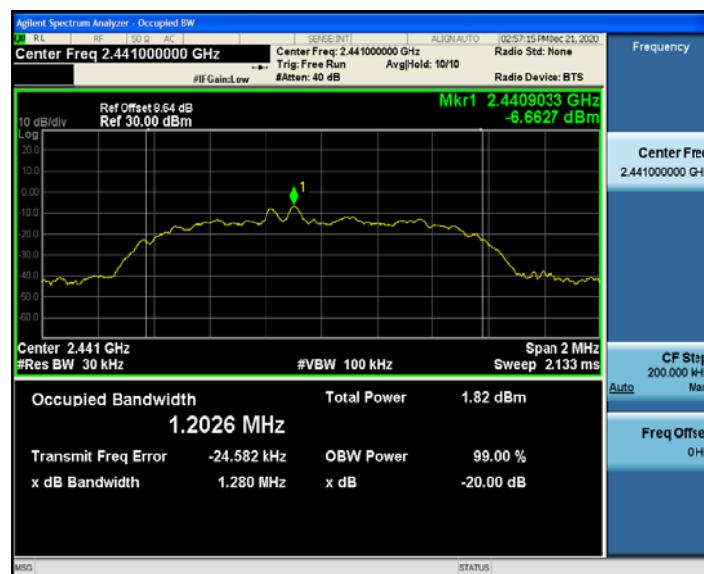

CH: 2480MHz

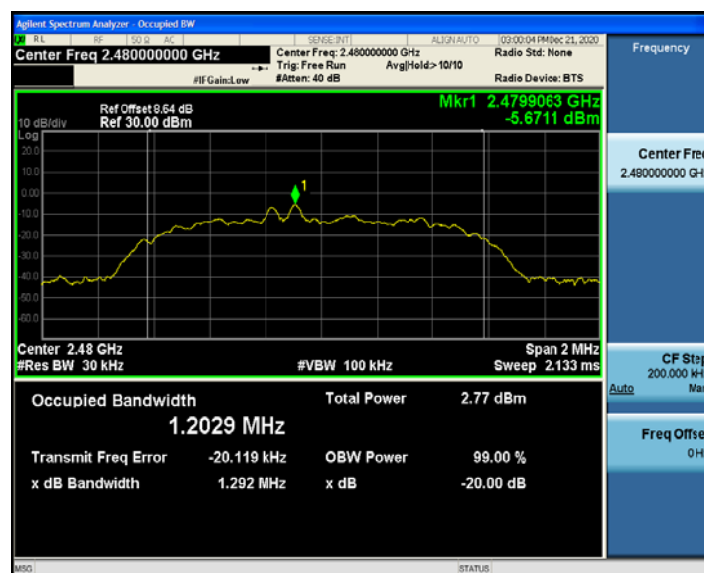



7. Antenna Requirement


Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Connected Construction

The antenna used in this product is a PCB Antenna which permanently attached. It conforms to the standard requirements. The directional gains of antenna used for transmitting is 0dBi.



ANTENNA

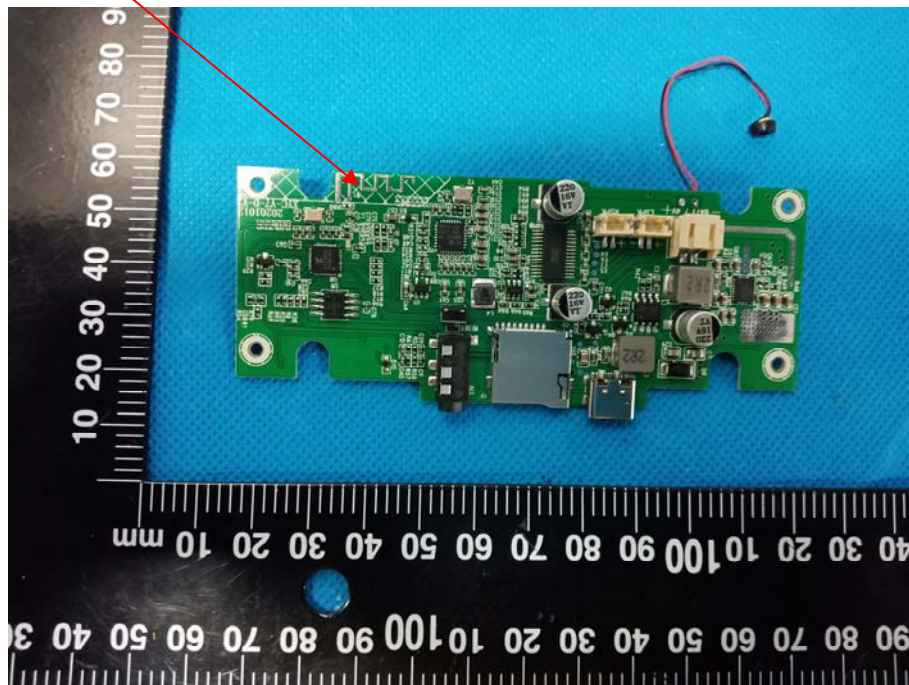



8. Photograph Of Test

8.1. Radiated Emission

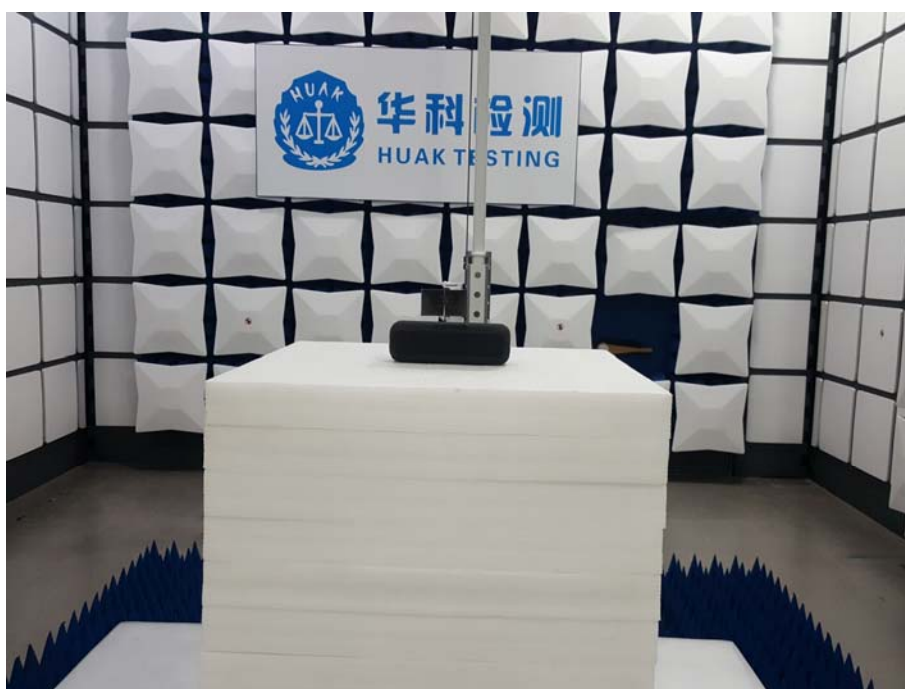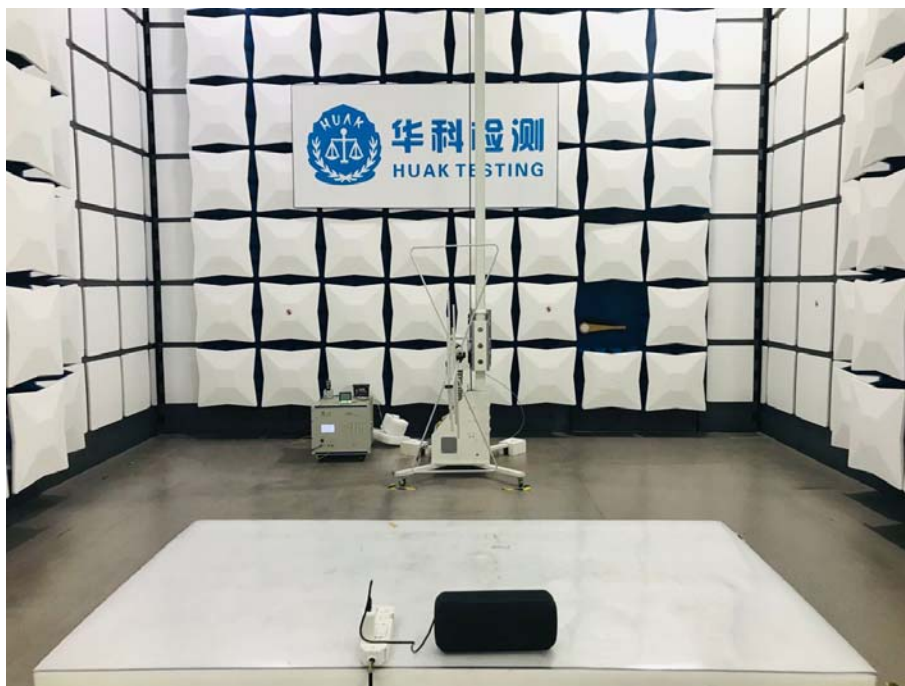



8.2. Conducted Emission





9. Photos Of The Eut

Reference to the report: ANNEX A of external photos and ANNEX B of internal photos

-----End of test report-----