



Appendix B

Detailed Test Results

1. GSM
GSM850 for Body
GSM1900 for Body
2. WCDMA
WCDMA Band II for Body
WCDMA Band V for Body
3. LTE
LTE Band 2 for Body
LTE Band 4 for Body
LTE Band 5 for Body
LTE Band 7 for Body
LTE Band 38 for Body
4. WiFi
WiFi 2.4G for Body
WiFi 5G for Body
5. BT
BT for Body

Test Laboratory: SGS-SAR Lab

Lenovo TB-X306X GSM850 GPRS 4TS 128CH Back side 0mm

DUT: Lenovo TB-X306X; Type: Portable Tablet Computer; Serial: HA14ANKD

Communication System: UID 0, GPRS/EGPRS Mode(4up) Communication System (0); Frequency: 824.2 MHz; Duty Cycle: 1:2.075

Medium: HSL835; Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.908$ S/m; $\epsilon_r = 43.282$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(9.05, 9.05, 9.05); Calibrated: 2020-05-09
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2019-09-18
- Phantom: SAM 3; Type: SAM; Serial: 1912
- DASY52 52.8.8(1222); SEMCAD X 14.6.13(7474)

Configuration/Body/Area Scan (12x7x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.06 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.31 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 4.21 W/kg

SAR(1 g) = 1.04 W/kg; SAR(10 g) = 0.400 W/kg

Maximum value of SAR (measured) = 1.80 W/kg

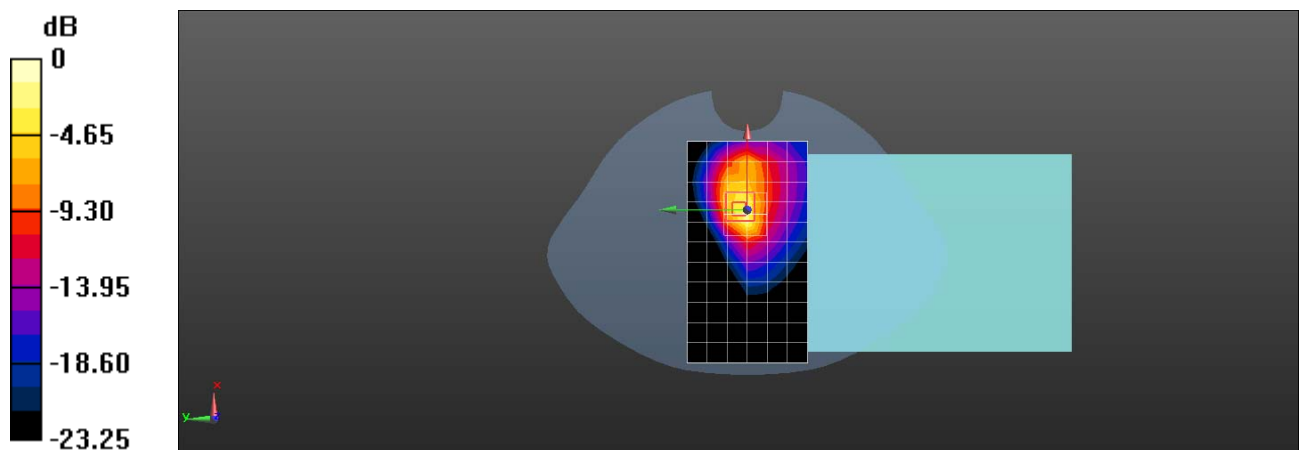

0 dB = 1.80 W/kg = 2.55 dBW/kg

Test Laboratory: SGS-SAR Lab

Lenovo TB-X306X GSM 1900 GPRS 4TS 661CH Back side 0mm

DUT: Lenovo TB-X306X; Type: Portable Tablet Computer; Serial: HA14BMTZ

Communication System: UID 0, GSM 1900 4TS; Frequency: 1880 MHz; Duty Cycle: 1:2.075

Medium: HSL1900; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.394$ S/m; $\epsilon_r = 41.856$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(7.61, 7.61, 7.61); Calibrated: 2020-05-09
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2019-12-17
- Phantom: SAM 8; Type: SAM; Serial: 1063
- DASY52 52.8.8(1222); SEMCAD X 14.6.13(7474)

Configuration/Body/Area Scan (8x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.921 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.96 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.53 W/kg

SAR(1 g) = 0.554 W/kg; SAR(10 g) = 0.233 W/kg

Maximum value of SAR (measured) = 0.907 W/kg

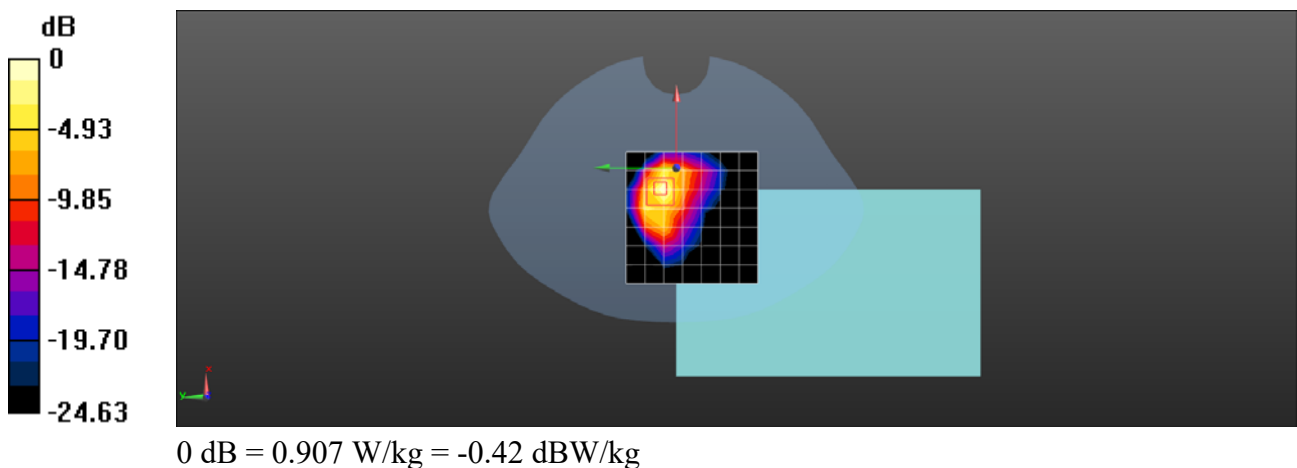

Test Laboratory: SGS-SAR Lab

Lenovo TB-X306X WCDMA Band II 9538CH Left side 5mm

DUT: Lenovo TB-X306X; Type: Portable Tablet Computer; Serial: HA14BMTZ

Communication System: UID 0, WCDMA Band II; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: HSL1900; Medium parameters used: $f = 1908$ MHz; $\sigma = 1.421$ S/m; $\epsilon_r = 41.757$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(7.61, 7.61, 7.61); Calibrated: 2020-05-09
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2019-12-17
- Phantom: SAM 8; Type: SAM; Serial: 1063
- DASY52 52.8.8(1222); SEMCAD X 14.6.13(7474)

Configuration/Body/Area Scan (7x8x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.02 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 23.40 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 1.51 W/kg

SAR(1 g) = 0.814 W/kg; SAR(10 g) = 0.433 W/kg

Maximum value of SAR (measured) = 1.18 W/kg

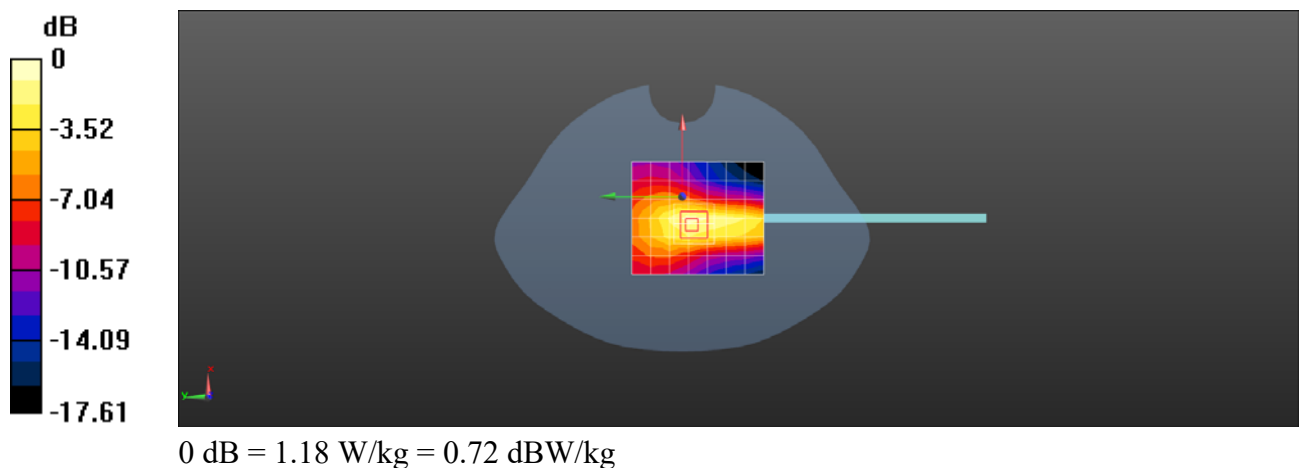

Test Laboratory: SGS-SAR Lab

Lenovo TB-X306X WCDMA Band V 4182CH Back side 0mm

DUT: Lenovo TB-X306X; Type: Portable Tablet Computer; Serial: HA14ANKD

Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.932$ S/m; $\epsilon_r = 42.471$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(9.05, 9.05, 9.05); Calibrated: 2020-05-09
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2019-09-18
- Phantom: SAM 3; Type: SAM; Serial: 1912
- DASY52 52.8.8(1222); SEMCAD X 14.6.13(7474)

Configuration/Body/Area Scan (7x8x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.626 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.546 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 1.19 W/kg

SAR(1 g) = 0.284 W/kg; SAR(10 g) = 0.104 W/kg

Maximum value of SAR (measured) = 0.710 W/kg

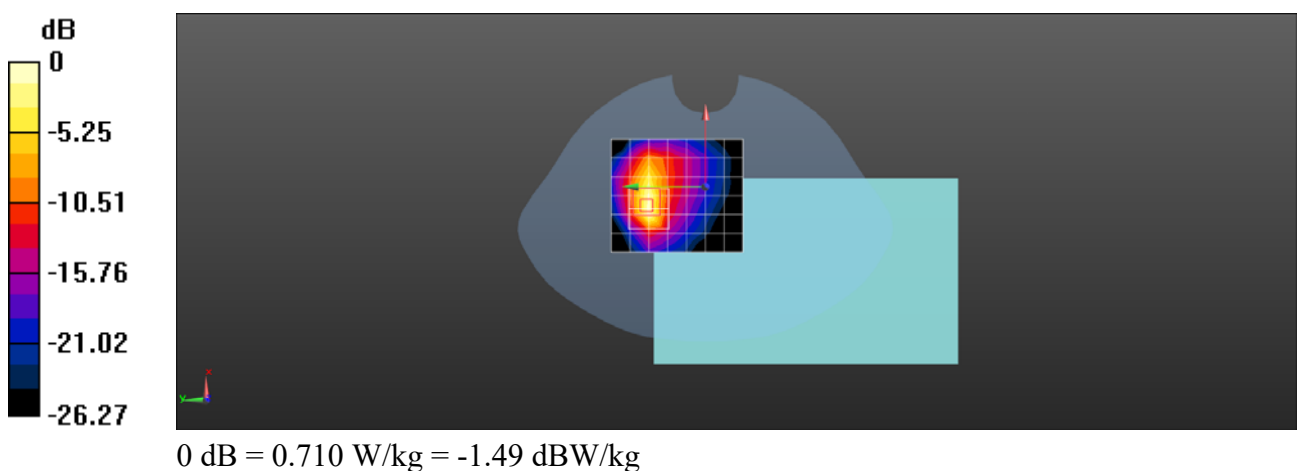

Test Laboratory: SGS-SAR Lab

Lenovo TB-X306X LTE Band 2 20M QPSK 1RB50 18900CH Left side 5mm

DUT: Lenovo TB-X306X; Type: Portable Tablet Computer; Serial: HA14BMTZ

Communication System: UID 0, LTE Band 2; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL1900; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.394$ S/m; $\epsilon_r = 41.856$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(7.61, 7.61, 7.61); Calibrated: 2020-05-09
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2019-12-17
- Phantom: SAM 8; Type: SAM; Serial: 1063
- DASY52 52.8.8(1222); SEMCAD X 14.6.13(7474)

Configuration/Body/Area Scan (7x8x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.863 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 21.40 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 1.45 W/kg

SAR(1 g) = 0.794 W/kg; SAR(10 g) = 0.428 W/kg

Maximum value of SAR (measured) = 1.14 W/kg

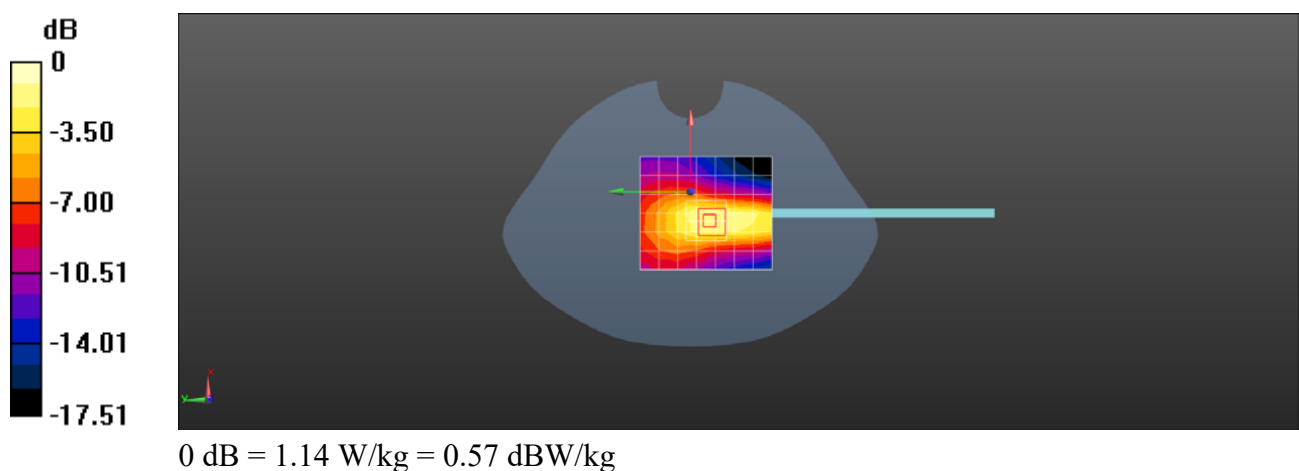

Test Laboratory: SGS-SAR Lab

Lenovo TB-X306X LTE Band 4 20M QPSK 1RB50 20175CH Left side 5mm

DUT: Lenovo TB-X306X; Type: Portable Tablet Computer; Serial: HA14BMTZ

Communication System: UID 0, LTE Band 4; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.349$ S/m; $\epsilon_r = 41.367$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(7.81, 7.81, 7.81); Calibrated: 2020-05-09
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2019-12-17
- Phantom: SAM 8; Type: SAM; Serial: 1063
- DASY52 52.8.8(1222); SEMCAD X 14.6.13(7474)

Configuration/Body/Area Scan (7x8x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 1.12 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 24.06 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 1.79 W/kg

SAR(1 g) = 1.02 W/kg; SAR(10 g) = 0.558 W/kg

Maximum value of SAR (measured) = 1.44 W/kg

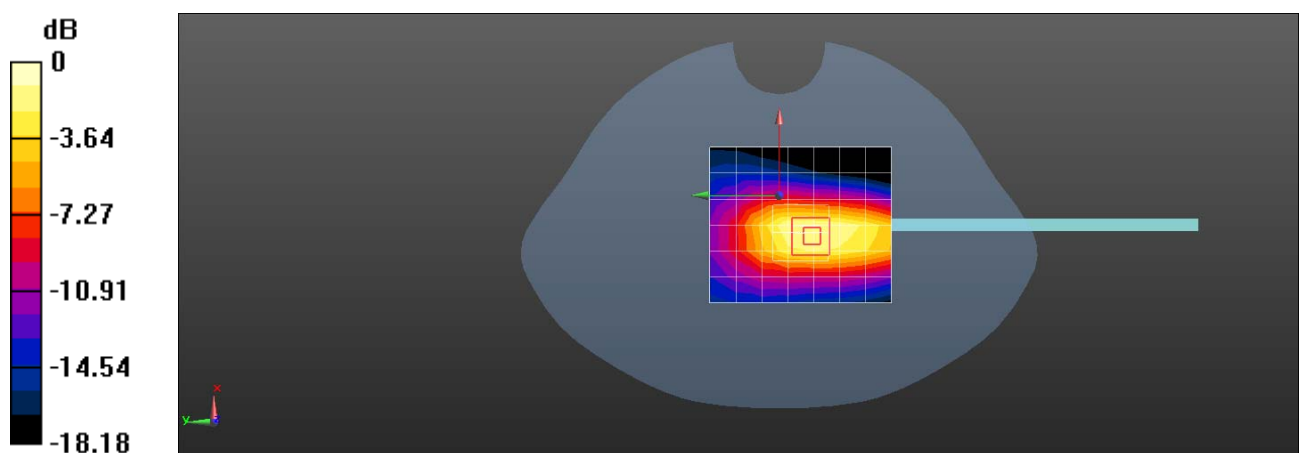

Test Laboratory: SGS-SAR Lab

Lenovo TB-X306X LTE Band 5 10M QPSK 25RB13 20525CH Back side 0mm

DUT: Lenovo TB-X306X; Type: Portable Tablet Computer; Serial: HA14ANKD

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.932$ S/m; $\epsilon_r = 42.467$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(9.05, 9.05, 9.05); Calibrated: 2020-05-09
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2019-09-18
- Phantom: SAM 3; Type: SAM; Serial: 1912
- DASY52 52.8.8(1222); SEMCAD X 14.6.13(7474)

Configuration/Body/Area Scan (7x8x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.409 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 1.929 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.764 W/kg

SAR(1 g) = 0.189 W/kg; SAR(10 g) = 0.070 W/kg

Maximum value of SAR (measured) = 0.469 W/kg

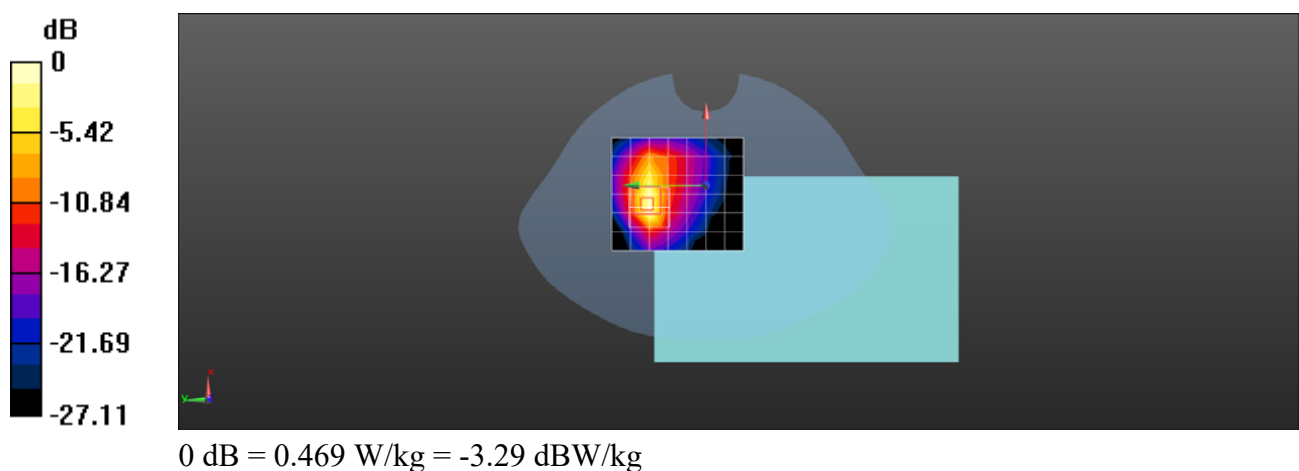

Test Laboratory: SGS-SAR Lab

Lenovo TB-X306X LTE Band 7 20M QPSK 1RB50 20850CH Back side 0mm

DUT: Lenovo TB-X306X; Type: Portable Tablet Computer; Serial: HA14ANKD

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 2510 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2510$ MHz; $\sigma = 1.934$ S/m; $\epsilon_r = 38.717$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(7.74, 7.74, 7.74); Calibrated: 2019-10-22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2019-09-18
- Phantom: SAM 2; Type: SAM; Serial: 1913
- DASY52 52.8.8(1222); SEMCAD X 14.6.13(7474)

Configuration/Body/Area Scan (15x8x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.14 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.7680 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 2.03 W/kg

SAR(1 g) = 0.555 W/kg; SAR(10 g) = 0.202 W/kg

Maximum value of SAR (measured) = 1.32 W/kg

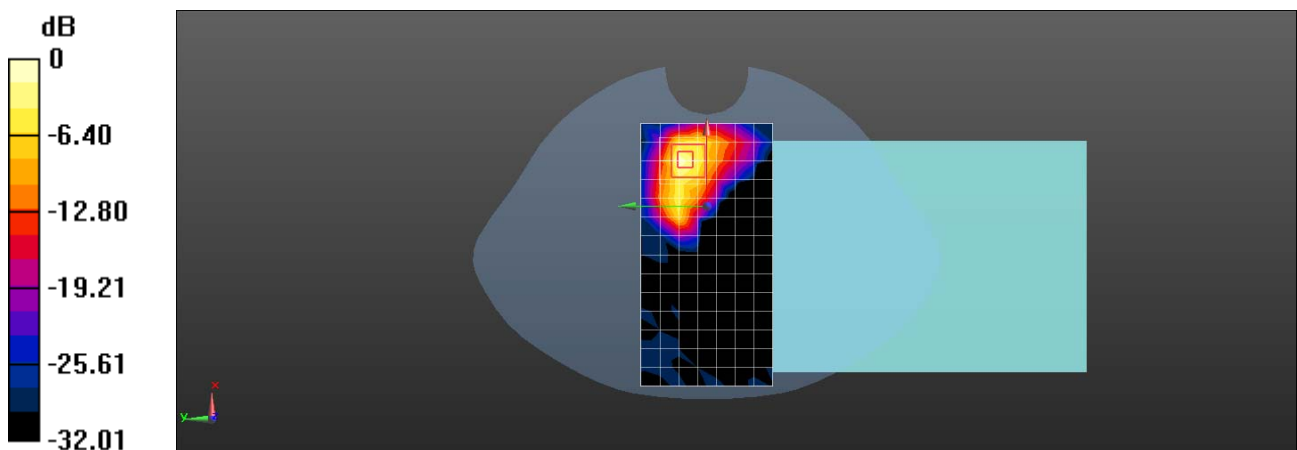

0 dB = 1.32 W/kg = 1.21 dBW/kg

Test Laboratory: SGS-SAR Lab

Lenovo TB-X306X LTE Band 38 20M QPSK 1RB50 38150CH Left side 5mm

DUT: Lenovo TB-X306X; Type: Portable Tablet Computer; Serial: HA14ANKD

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 2610 MHz; Duty Cycle: 1:1.579

Medium: HSL2600; Medium parameters used: $f = 2610$ MHz; $\sigma = 2.012$ S/m; $\epsilon_r = 40.022$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(7.74, 7.74, 7.74); Calibrated: 2019-10-22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2019-09-18
- Phantom: SAM 2; Type: SAM; Serial: 1913
- DASY52 52.8.8(1222); SEMCAD X 14.6.13(7474)

Configuration/Body/Area Scan (6x16x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 1.07 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.49 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 1.02 W/kg

SAR(1 g) = 0.345 W/kg; SAR(10 g) = 0.135 W/kg

Maximum value of SAR (measured) = 0.802 W/kg

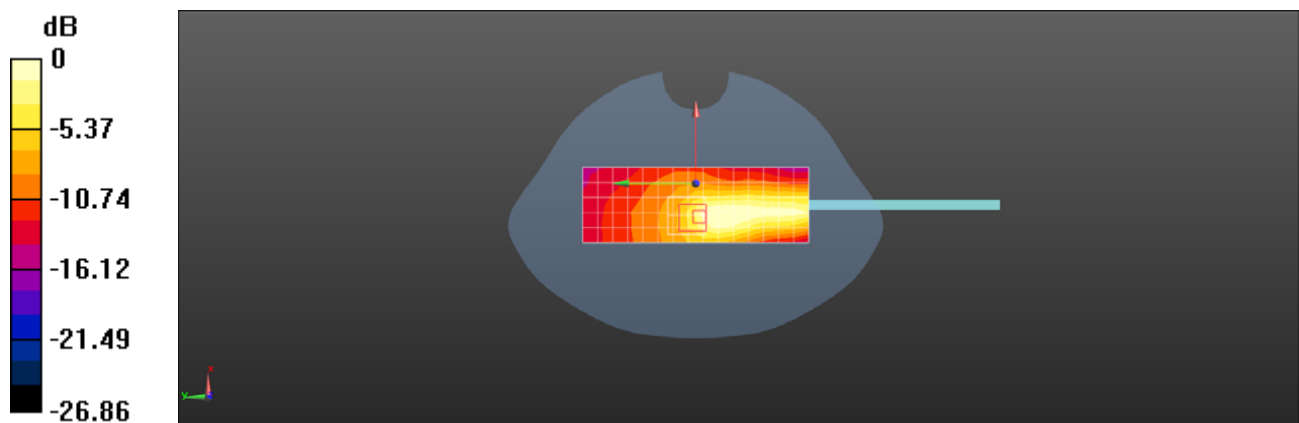

0 dB = 0.802 W/kg = -0.96 dBW/kg

Test Laboratory: SGS-SAR Lab

Lenovo TB-X306X WIFI 2.4G 802.11b 11CH Back side 0mm

DUT: Lenovo TB-X306X; Type: Portable Tablet Computer; Serial: HA14ANKD

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2462 MHz; Duty Cycle: 1:1.004

Medium: HSL2450; Medium parameters used: $f = 2462$ MHz; $\sigma = 1.846$ S/m; $\epsilon_r = 40.626$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(7.74, 7.74, 7.74); Calibrated: 2019-10-22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2019-09-18
- Phantom: SAM 2; Type: SAM; Serial: 1913
- DASY52 52.8.8(1222); SEMCAD X 14.6.13(7474)

Configuration/Body/Area Scan (9x10x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.17 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.5640 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.83 W/kg

SAR(1 g) = 0.658 W/kg; SAR(10 g) = 0.262 W/kg

Maximum value of SAR (measured) = 1.25 W/kg

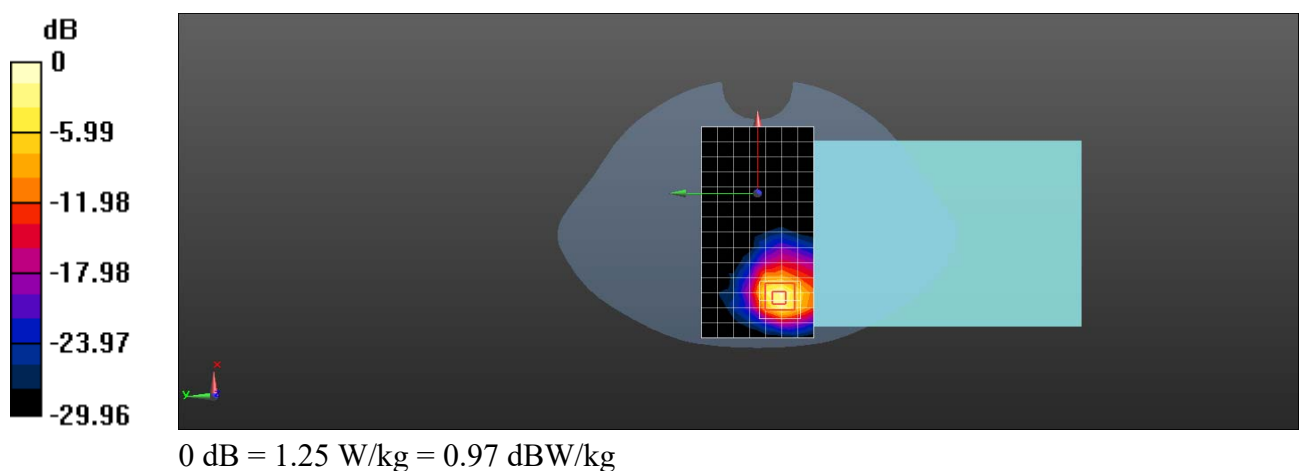

Test Laboratory: SGS-SAR Lab

Lenovo TB-X306X WIFI 5G 802.11a 52CH Top side 0mm

DUT: Lenovo TB-X306X; Type: Portable Tablet Computer; Serial: HA14ANKD

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5260 MHz; Duty Cycle: 1:1.051

Medium: HSL5G; Medium parameters used: $f = 5260$ MHz; $\sigma = 4.797$ S/m; $\epsilon_r = 36.186$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(5.34, 5.34, 5.34); Calibrated: 2019-10-22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2019-09-18
- Phantom: SAM 1; Type: SAM; Serial: 1640
- DASY52 52.8.8(1222); SEMCAD X 14.6.13(7474)

Configuration/Head/Area Scan (6x18x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.692 W/kg


Configuration/Head/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.6930 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 3.16 W/kg

SAR(1 g) = 0.623 W/kg; SAR(10 g) = 0.123 W/kg

Maximum value of SAR (measured) = 1.58 W/kg

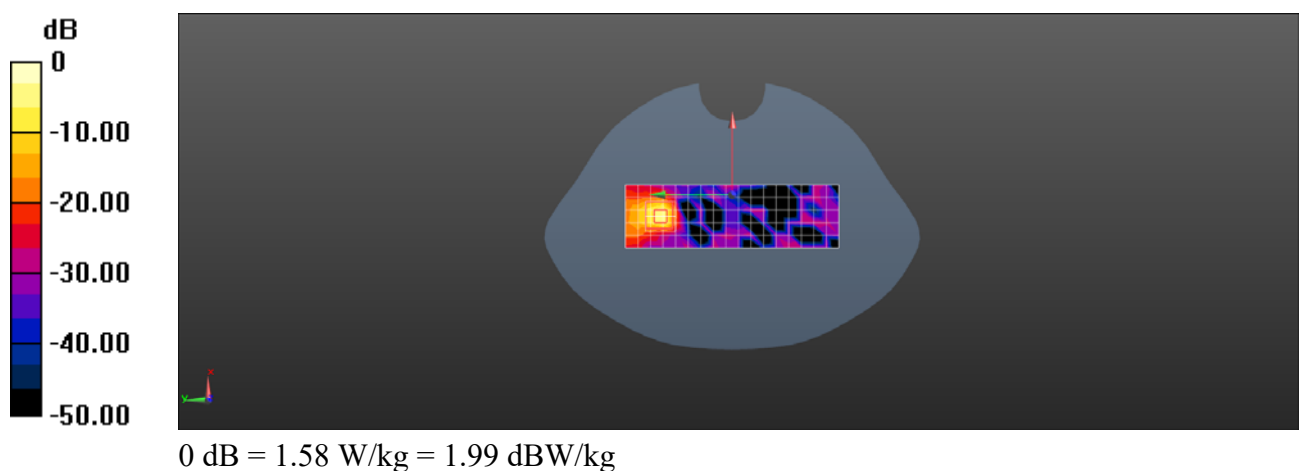

Test Laboratory: SGS-SAR Lab

Lenovo TB-X306X Bluetooth DH5 39CH Back side 0mm

DUT: Lenovo TB-X306X; Type: Portable Tablet Computer; Serial: HA14ANKD

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1.304

Medium: HSL2450; Medium parameters used: $f = 2441$ MHz; $\sigma = 1.868$ S/m; $\epsilon_r = 37.908$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(7.74, 7.74, 7.74); Calibrated: 2019-10-22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2019-09-18
- Phantom: SAM 2; Type: SAM; Serial: 1913
- DASY52 52.8.8(1222); SEMCAD X 14.6.13(7474)

Configuration/Body/Area Scan (15x8x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.401 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.398 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.804 W/kg

SAR(1 g) = 0.290 W/kg; SAR(10 g) = 0.115 W/kg

Maximum value of SAR (measured) = 0.567 W/kg

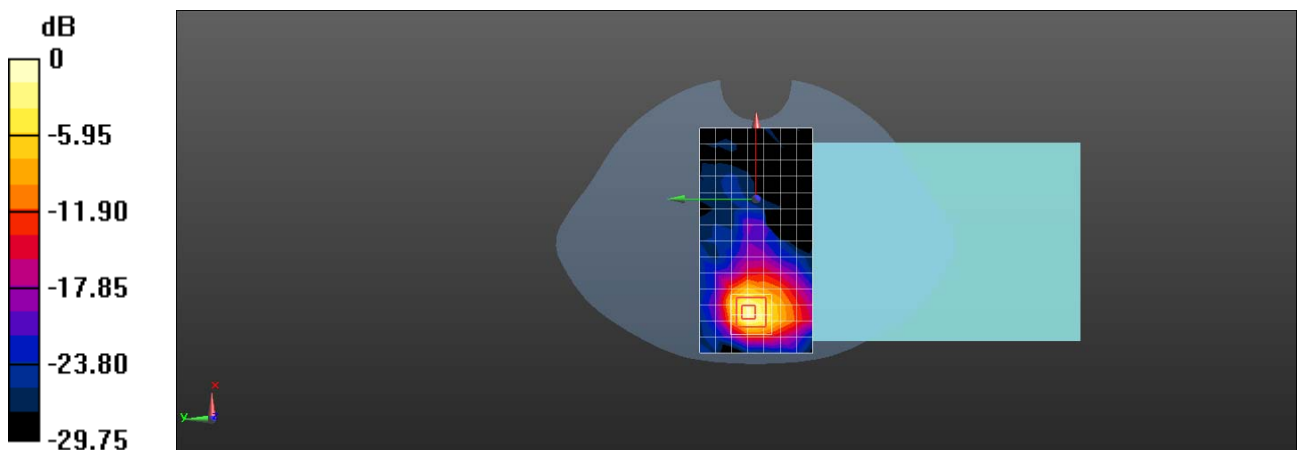

0 dB = 0.567 W/kg = -2.46 dBW/kg