



**FCC CFR47 PART 15 SUBPART C
CLASS II PERMISSIVE CHANGE
TEST REPORT**

FOR

PCI Express 802.11 b/g Transceiver

MODEL NUMBER: PA3501U-1MPC

FCC ID: CJ6UPA3501WL

REPORT NUMBER: 05U3821-1B

ISSUE DATE: JANUARY 30, 2006

Prepared for
**TOSHIBA CORPORATION
DIGITAL MEDIA NETWORK COMPANY
2-9 SUEHIRO-CHO, OME
TOKYO, 198-8710, JAPAN**

Prepared by
**COMPLIANCE CERTIFICATION SERVICES
561F MONTEREY ROAD
MORGAN HILL, CA 95037, USA
TEL: (408) 463-0885
FAX: (408) 463-0888**

NVLAP[®]
LAB CODE:200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
A	1/10/06	Initial Issue	DG
B	1/30/2006	Added g Turbo mode radiated data, add new Average and maximum PK power measurements, added Class II Permissive Change description.	DG

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS.....	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	5
4. CALIBRATION AND UNCERTAINTY.....	5
4.1. MEASURING INSTRUMENT CALIBRATION	5
4.2. MEASUREMENT UNCERTAINTY.....	5
5. EQUIPMENT UNDER TEST.....	6
5.1. DESCRIPTION OF EUT	6
5.2. MAXIMUM OUTPUT POWER	6
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	6
5.4. SOFTWARE AND FIRMWARE	6
5.5. WORST-CASE CONFIGURATION AND MODE.....	7
5.6. DESCRIPTION OF CLASS II PERMISSIVE CHANGE	7
5.7. DESCRIPTION OF TEST SETUP	8
6. TEST AND MEASUREMENT EQUIPMENT	10
7. LIMITS AND RESULTS	11
7.1. AVERAGE POWER.....	11
7.2. RADIATED EMISSIONS.....	12
7.2.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS	12
7.2.2. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz	31
7.3. POWERLINE CONDUCTED EMISSIONS	35
8. SETUP PHOTOS	38

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: TOSHIBA CORPORATION
DIGITAL MEDIA NETWORK COMPANY
2-9 SUEHIRO-CHO, OME
TOKYO, 198-8710, JAPAN

EUT DESCRIPTION: PCI Express 802.11 b/g Transceiver

MODEL: PA3501U-1MPC

SERIAL NUMBER: 1159N000048

DATE TESTED: DECEMBER 16, 2005 – JANUARY 29, 2006

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 15 SUBPART C	NO NON-COMPLIANCE NOTED

Compliance Certification Services, Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document. No part of this report may be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any government agency.

Approved & Released For CCS By:

Tested By:



DAVID GARCIA
EMC SUPERVISOR
COMPLIANCE CERTIFICATION SERVICES



FRANK IBRAHIM
EMC ENGINEER
COMPLIANCE CERTIFICATION SERVICES

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2003, FCC CFR 47 Part 2 and FCC CFR 47 Part 15.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 561F Monterey Road, Morgan Hill, California, USA. The sites are constructed in conformance with the requirements of ANSI C63.4, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Radiated Emission, 30 to 200 MHz	+/- 3.3 dB
Radiated Emission, 200 to 1000 MHz	+4.5 / -2.9 dB
Radiated Emission, 1000 to 2000 MHz	+4.5 / -2.9 dB
Power Line Conducted Emission	+/- 2.9 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is an 802.11b/g transceiver.

The radio module is manufactured by Atheros Communications, Inc.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

2400 to 2483.5 MHz Authorized Band

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2412 - 2462	802.11b	23.46	221.82
2412 - 2462	802.11g	26.45	441.57
2412 - 2462	802.11g turbo	25.21	331.89

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes two integrated omni-directional PIFA type antennas for diversity; model WNC001 antenna has a maximum gain of 1.8 dBi. Additional antennas of same type and lower gain are used with this radio and listed in the FCC submission.

5.4. SOFTWARE AND FIRMWARE

The EUT driver software installed in the host support equipment during testing was Atheros Radio Test, Revision 5.3 Build #11.

The test utility software used during testing was ART-V53_build 13.

5.5. WORST-CASE CONFIGURATION AND MODE

The worst-case channel is determined as the channel with the highest output power. The highest measured output power was at 2437 MHz in 11b mode.

The worst-case data rate for this channel is determined to be 1 Mb/s, based on previous experience with Atheros based WLAN product design architectures.

Thus radiated and power line conducted emissions tests were made at 2437 MHz in the 802.11b mode, at 1 Mb/s.

5.6. DESCRIPTION OF CLASS II PERMISSIVE CHANGE

1. The radio module has a limited module approval and is installed in a portable condition.

2. Add new antenna models:

Hitachi: HTL017 , Gain = -1.3 dBi
HFT40, Gain = -0.2 dBi

Tyco: TIAN01, Gain = -0.3 dBi
TBN001, Gain = +1.1 dBi

WNC: WNC001 Gain = +1.8 dBi

The WNC antenna, model WNC001, was tested due to it having the highest antenna gain. All the antennas are similar in design.

Full antenna details are included in separate exhibit.

5.7. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop	Toshiba	PA3503U-1MPC	05B-011	DoC
AC/DC Adapter	Toshiba	PA3283U-1ACA	02X19214	DoC


I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC	1	AC	Unshielded	2m	N/A
2	DC	1	DC	Unshielded	2m	N/A

TEST SETUP

The EUT is installed in a host laptop computer. Test software exercised the radio card.

SETUP DIAGRAM FOR TESTS

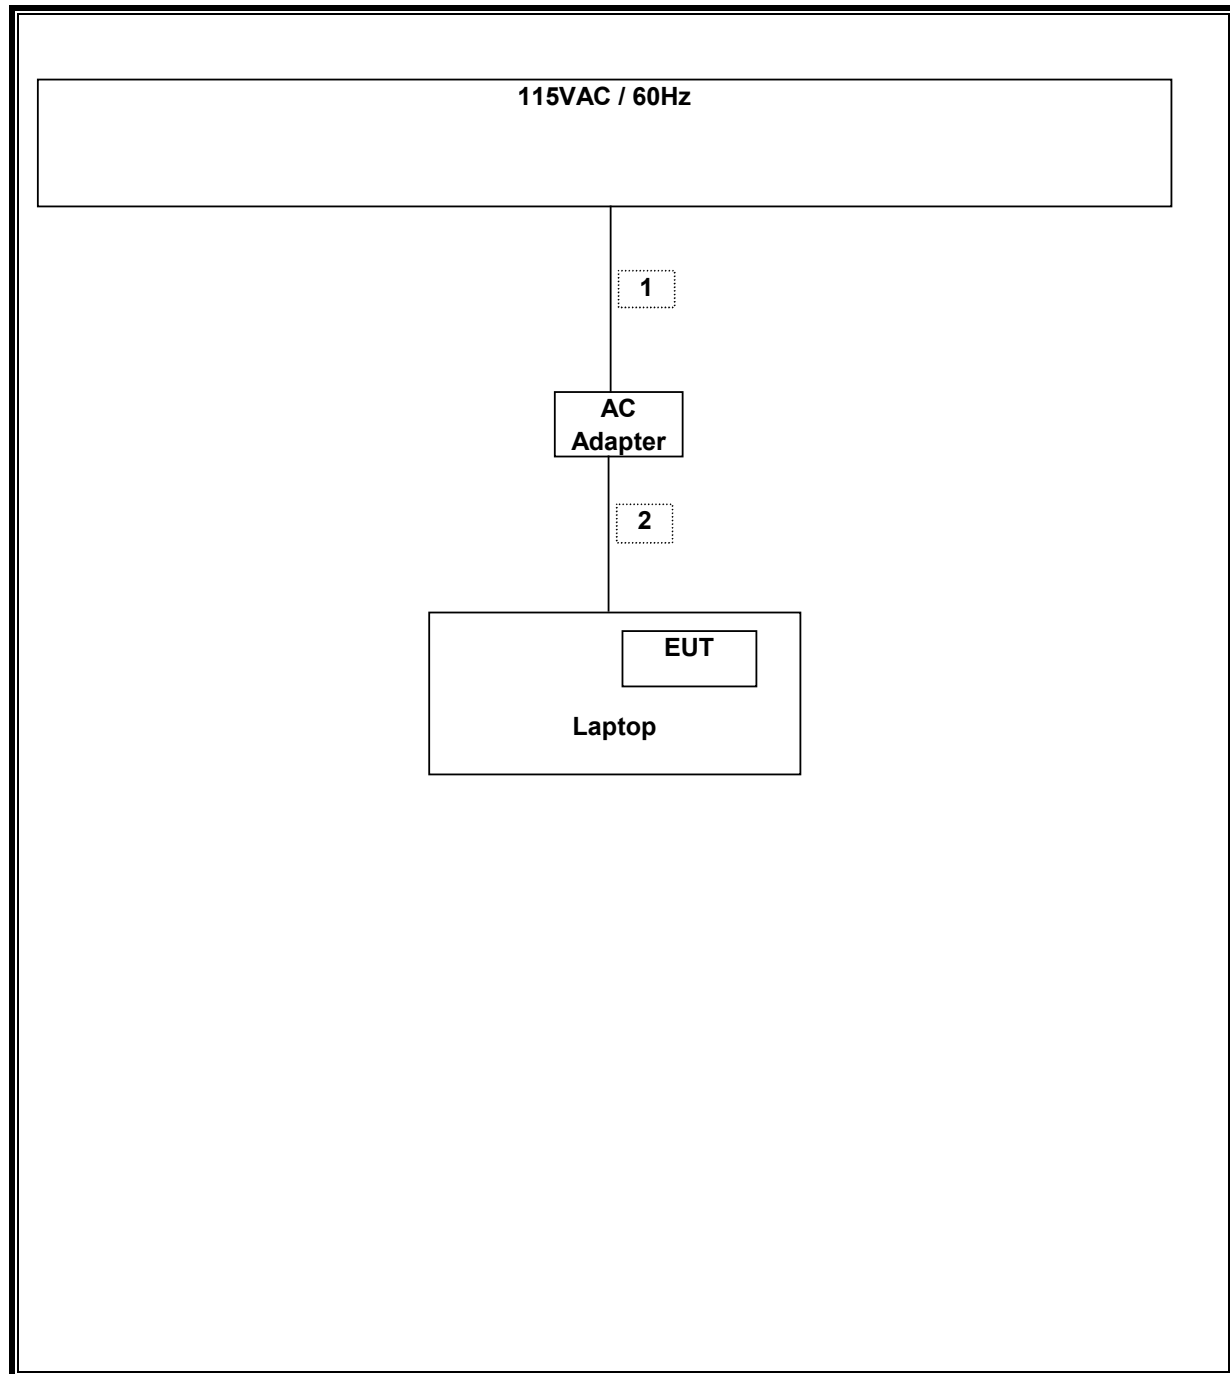

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	Cal Due
Spectrum Analyzer 3 Hz ~ 44 GHz	Agilent	E4446A	MY43360112	3/28/2006
EMI Test Receiver	R & S	ESHS 20	827129/006	6/3/2006
LISN, 10 kHz ~ 30 MHz	FCC	LISN-50/250-25-2	2023	8/30/2006
LISN, 10 kHz ~ 30 MHz	Solar	8012-50-R-24-BNC	8379443	8/30/2006
Antenna, Horn 1 ~ 18 GHz	ETS	3117	29301	4/22/2006
Antenna, Horn 18 ~ 26 GHz	ARA	MWH-1826/B	1049	9/12/2006
Preamplifier, 1 ~ 26 GHz	HP	8449B	3008A00931	6/24/2006
Peak Power Meter	Agilent	E4416A	GB41291160	2/9/2006
Peak / Average Power Sensor	Agilent	E9327A	US40440755	2/10/2006
2.4-2.5 GHz Reject Filter	Micro-Tronics	BRM50702	002	C.N.R.
4.0 GHz High Pass Filter	Micro-Tronics	HPM13351	002	C.N.R.
Spectrum Analyzer, 26.5 GHz	HP	8593EM	3710A00205	1/6/2006
Antenna, Bilog 30 MHz ~ 2 GHz	Sunol Sciences	JB1	A121003	3/3/2006
Preamplifier, 1300 MHz	HP	8447D	1937A02062	1/7/2006

7. LIMITS AND RESULTS

7.1. AVERAGE POWER

AVERAGE POWER LIMIT

None: for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

No non-compliance noted:

The cable assembly insertion loss of 11.6 dB (including 10 dB pad and 1.6 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

802.11b Mode

Channel	Frequency (MHz)	Power (dBm)
Low	2412	20.50
Middle	2437	19.93
High	2462	20.31

802.11g Mode

Channel	Frequency (MHz)	Power (dBm)
Low	2412	19.50
Middle	2437	19.20
High	2462	18.30

802.11g Turbo Mode

Channel	Frequency (MHz)	Power (dBm)
Middle	2437	19.20

7.2. RADIATED EMISSIONS

7.2.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS

LIMITS

§15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

§15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.


For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.


The spectrum from 30 MHz to 25 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.


TRANSMITTER ABOVE 1 GHz FOR 2400 TO 2483.5 MHz BAND


RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, HORIZONTAL)

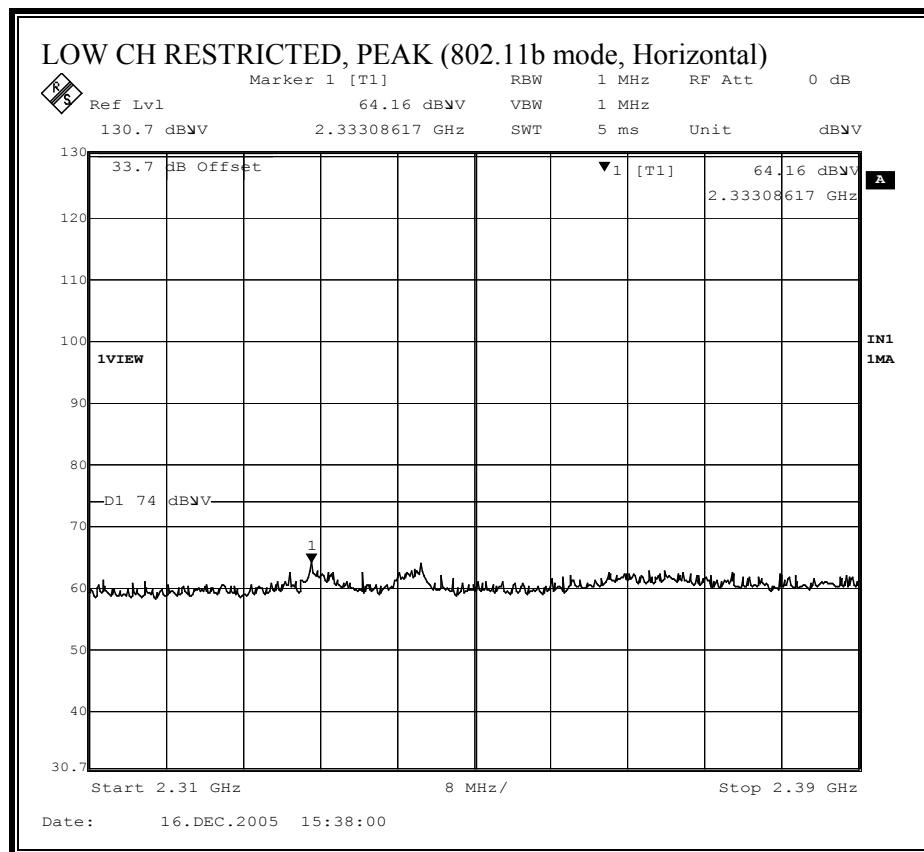

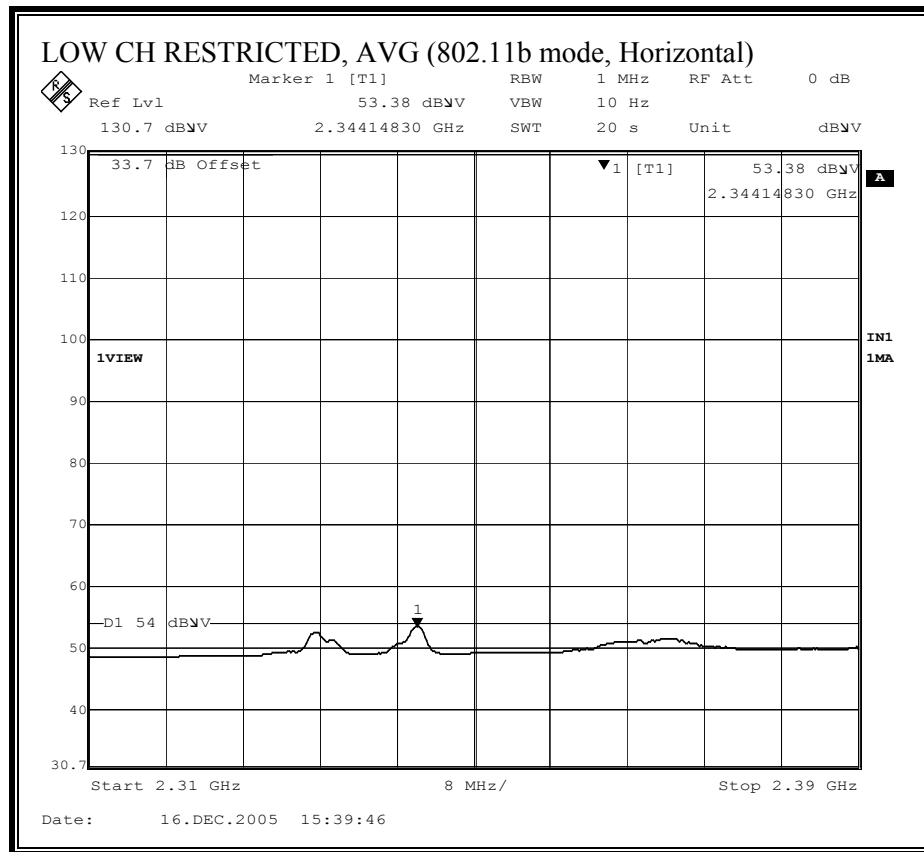



RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, VERTICAL)

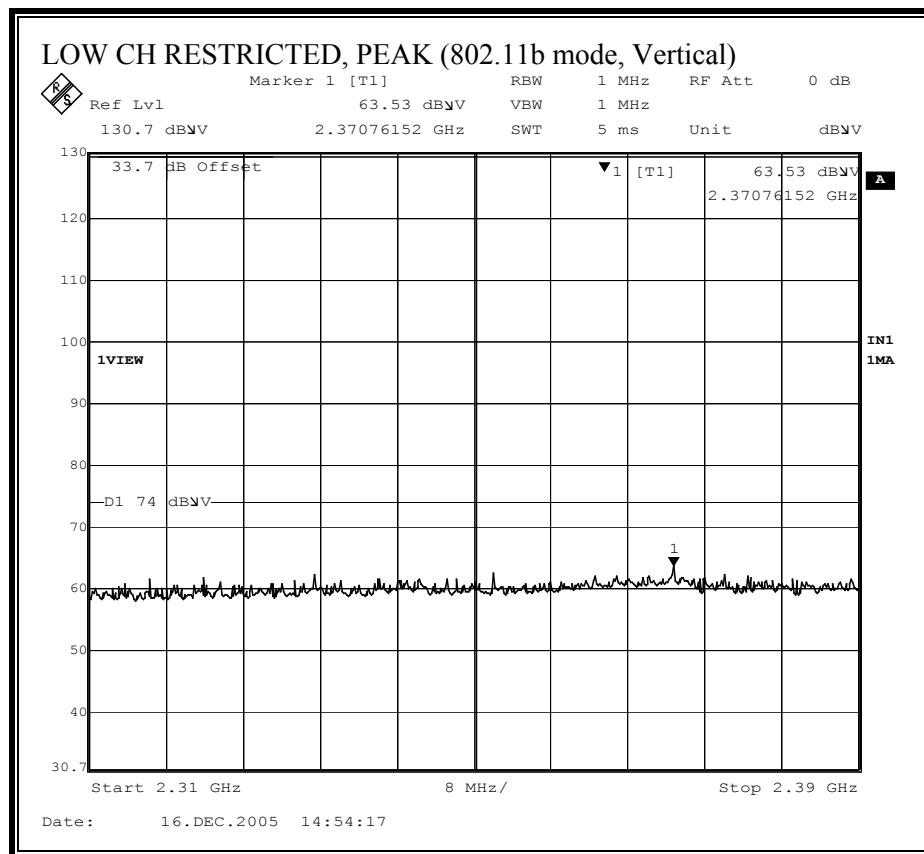

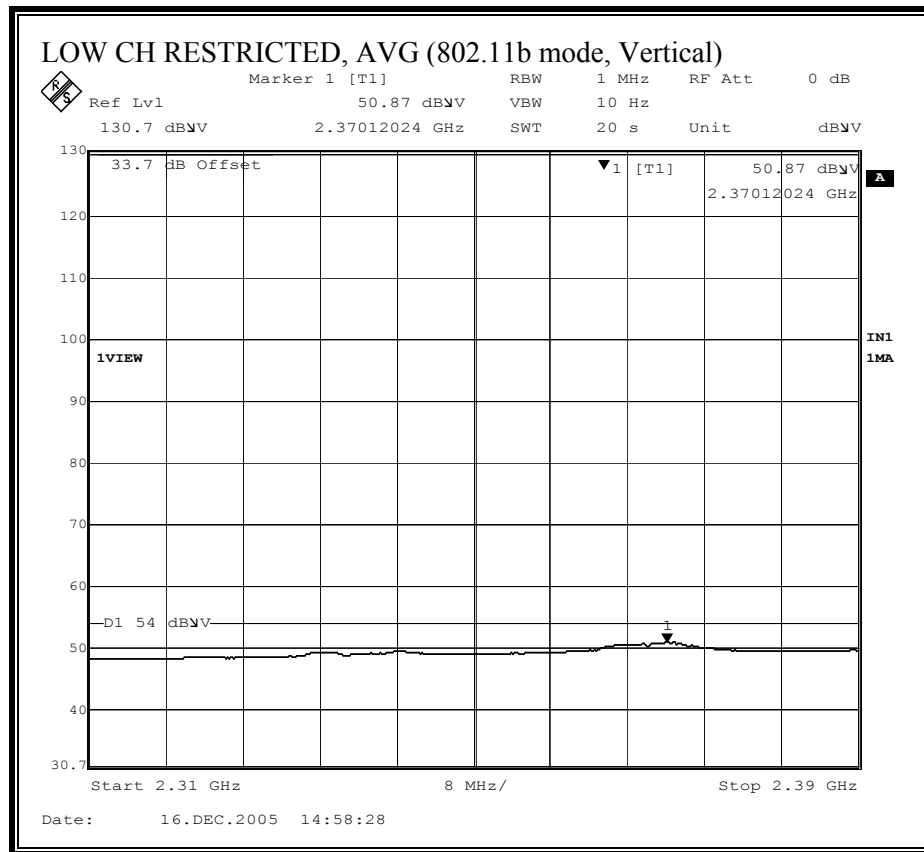



RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, HORIZONTAL)

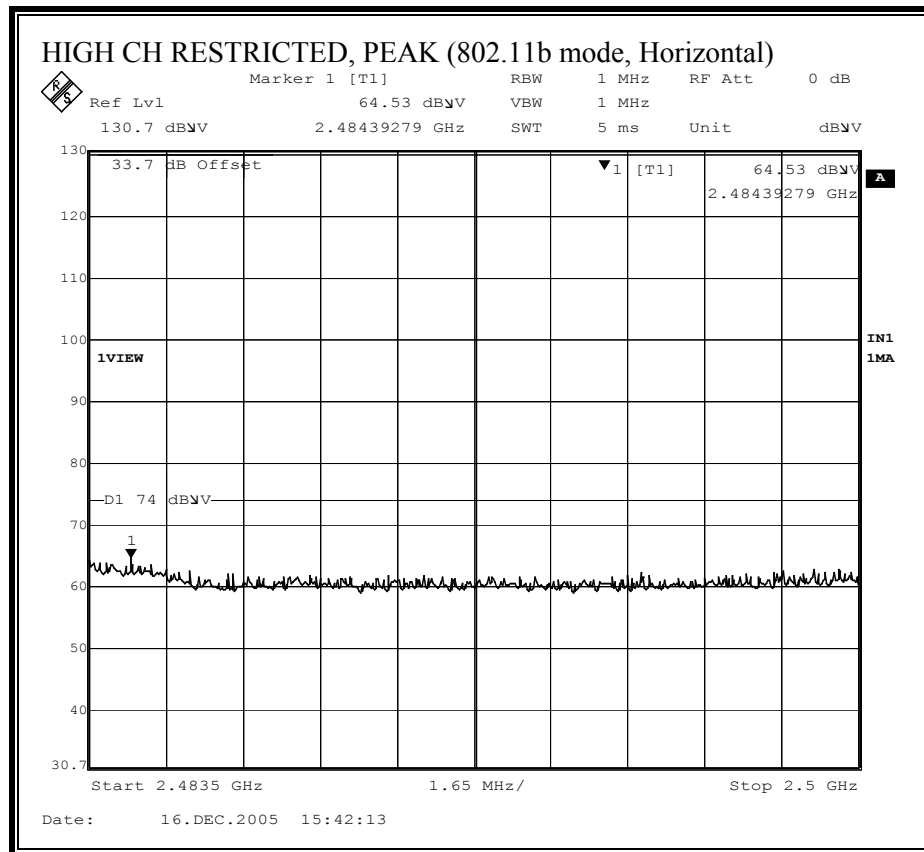

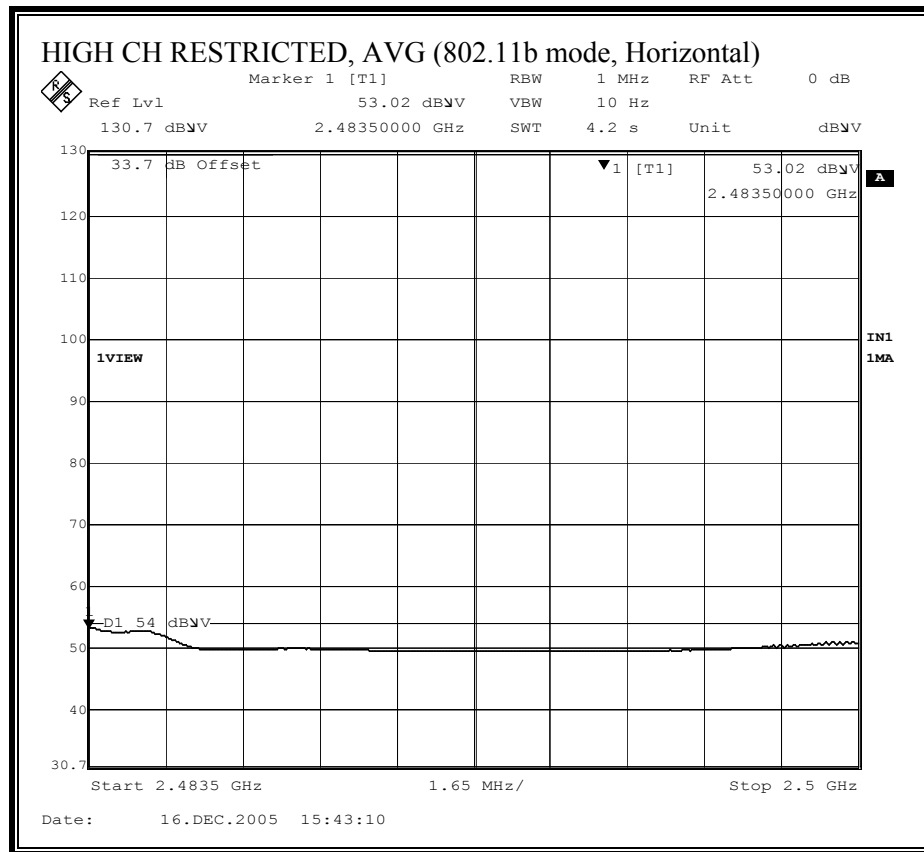

RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, VERTICAL)

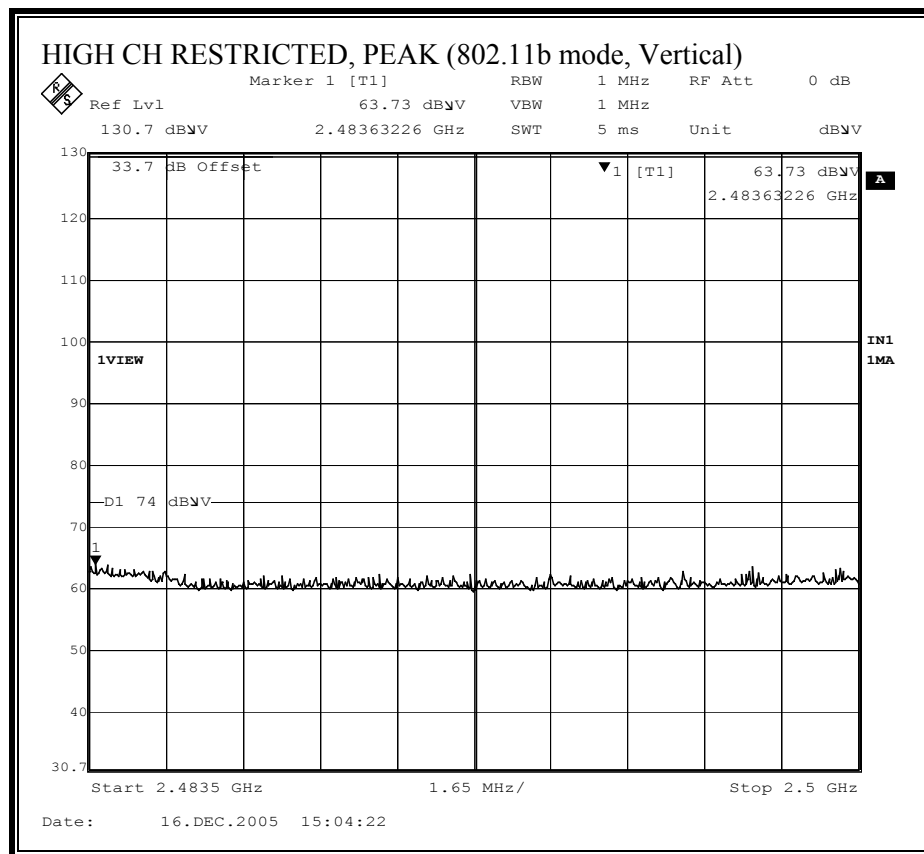

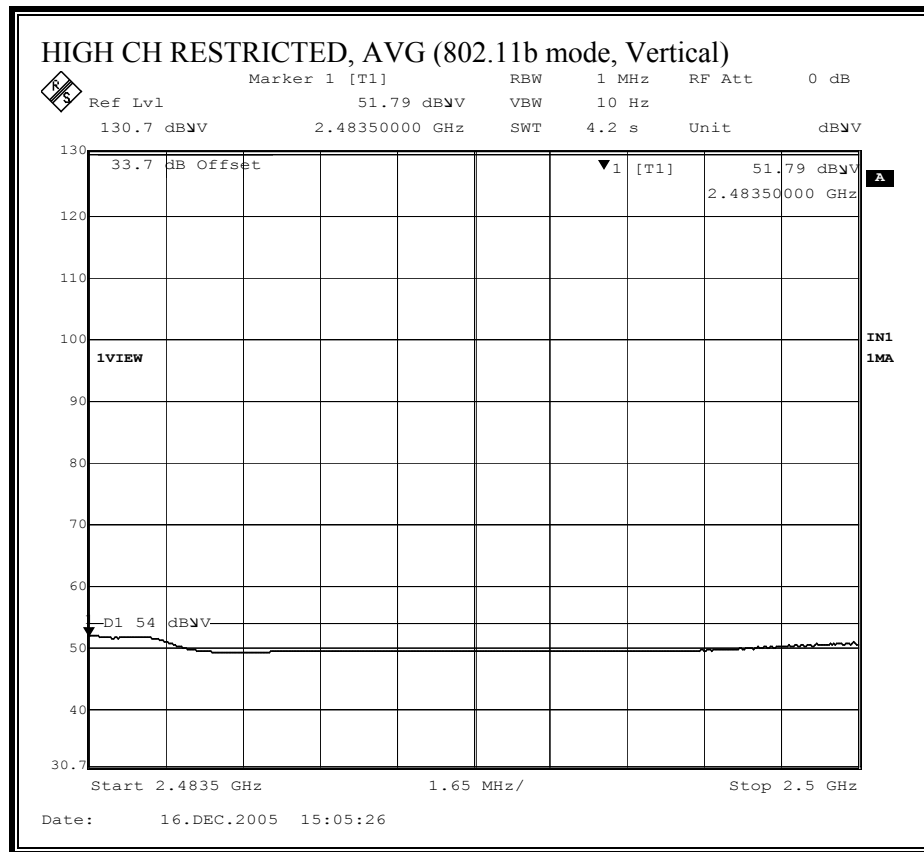

HARMONICS AND SPURIOUS EMISSIONS (b MODE)

12/19/05 High Frequency Measurement

Compliance Certification Services, Morgan Hill 5m chamber

Test Engr: Frak Ibrahim
Project #: 05U3821
Company: Toshiba
EUT Descr.: MiniPCIexpress 802.11 b/g transceiver
EUT M/N: AR5BXB61
Test Target: FCC 15.247
Configuration: Stand Alone EUT
Mode Oper: TX ON in 11b mode

Test Equipment:

Horn 1-18GHz	Pre-amplifier 1-26GHz	Pre-amplifier 26-40GHz	Horn > 18GHz
T119; S/N: 29301 @3m	T144 Miteq 3008A00931		T125; ARA 18-26GHz; S/N:1007
Hi Frequency Cables			
2 foot cable	3 foot cable	12 foot cable	HPF
	Frank 177080001	Frank 187209001	Reject Filter
			R_001


Peak Measurements
RBW=VBW=1MHz
Average Measurements
RBW=1MHz; VBW=10Hz


f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fldr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
Low Channel															
4.824	3.0	52.3	48.0	34.0	4.0	-36.5	0.0	0.0	53.8	49.5	74	54	-20.2	-4.5	V
4.824	3.0	48.4	42.8	34.0	4.0	-36.5	0.0	0.0	49.9	44.3	74	54	-24.1	-9.7	H
Mid Channel															
4.874	3.0	54.9	52.3	34.1	4.0	-36.5	0.0	0.0	56.5	53.9	74	54	-17.5	-0.1	V
4.874	3.0	51.4	46.5	34.1	4.0	-36.5	0.0	0.0	53.0	48.1	74	54	-21.0	-5.9	H
7.311	3.0	49.2	40.7	35.6	4.6	-36.2	0.0	0.0	53.2	44.8	74	54	-20.8	-9.2	H
High Channel															
4.924	3.0	54.9	51.7	34.1	4.0	-36.5	0.0	0.0	56.5	53.3	74	54	-17.5	-0.7	V
7.386	3.0	53.2	49.1	35.7	4.6	-36.2	0.0	0.0	57.2	53.1	74	54	-16.8	-0.9	V
4.924	3.0	48.6	42.8	34.1	4.0	-36.5	0.0	0.0	50.2	44.5	74	54	-23.8	-9.5	H
7.386	3.0	48.1	39.8	35.7	4.6	-36.2	0.0	0.0	52.2	43.9	74	54	-21.8	-10.1	H

f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		


EUT scanned from 1 GHz to 25 GHz, no other signals above noise floor were found


RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, HORIZONTAL)

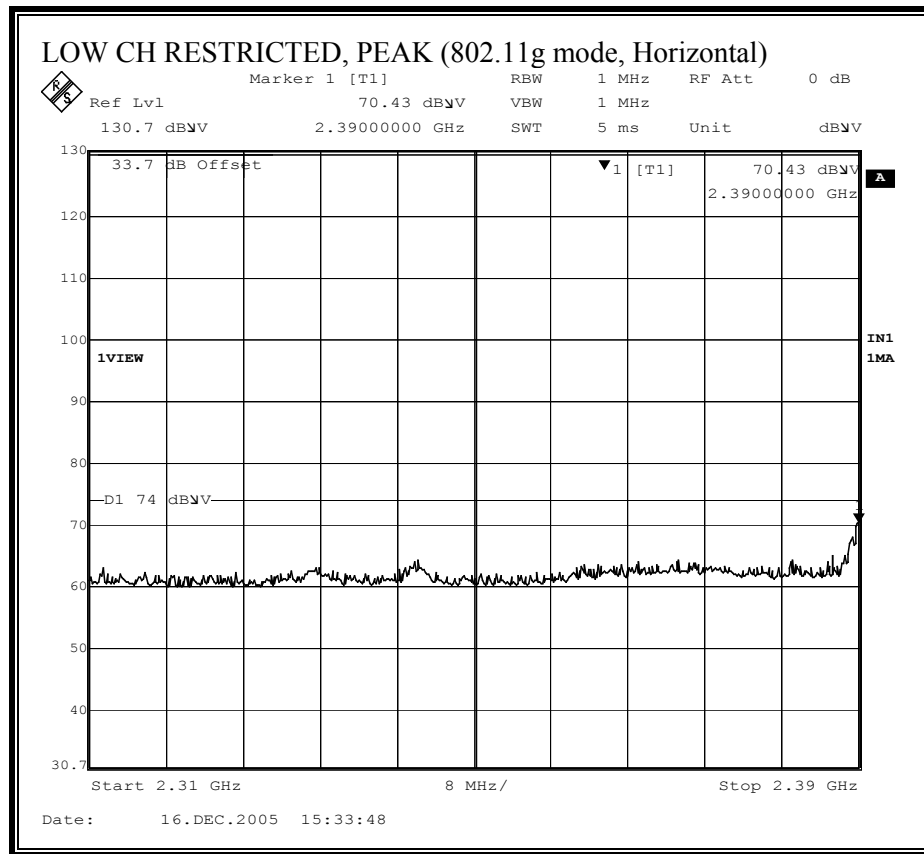

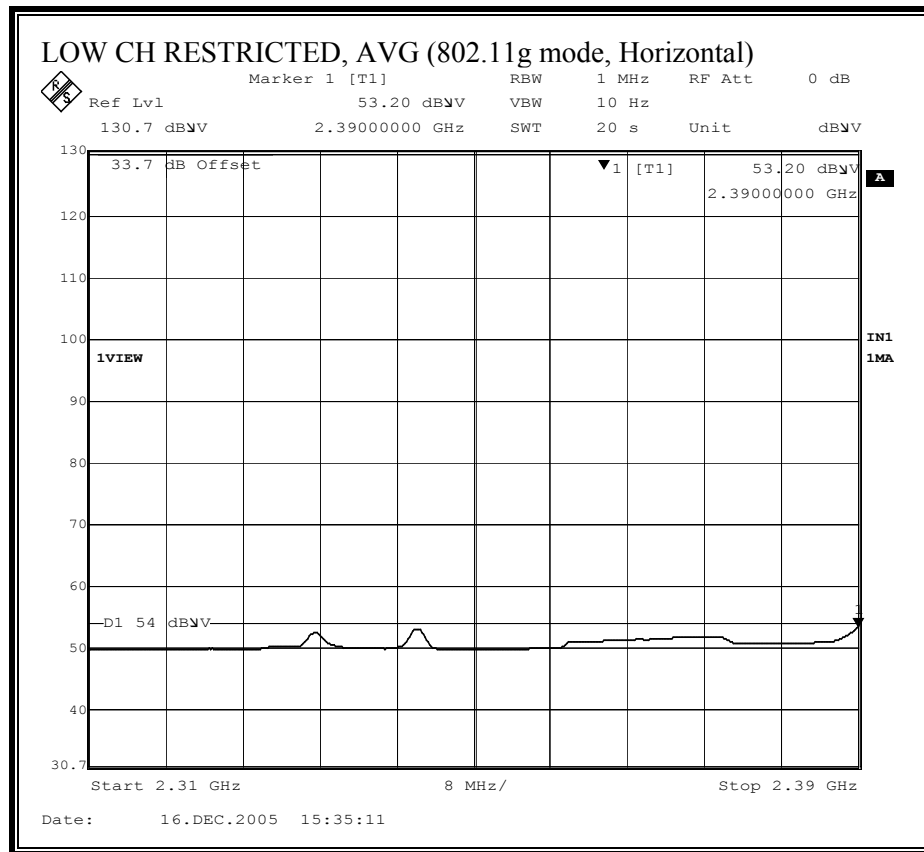


RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, VERTICAL)

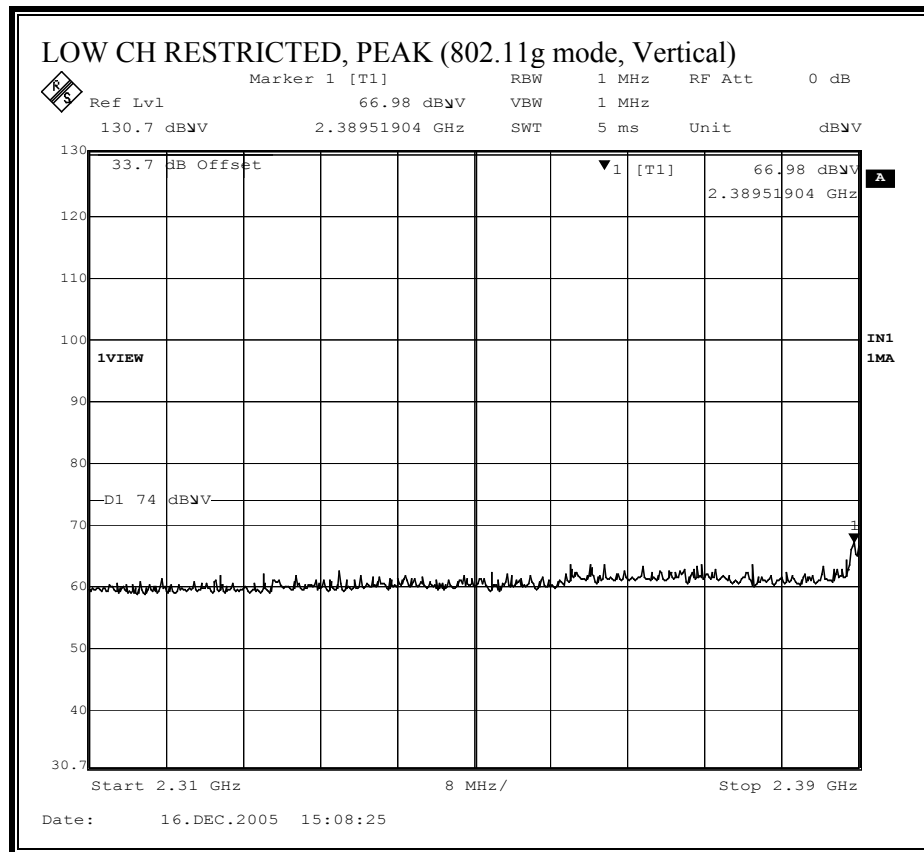

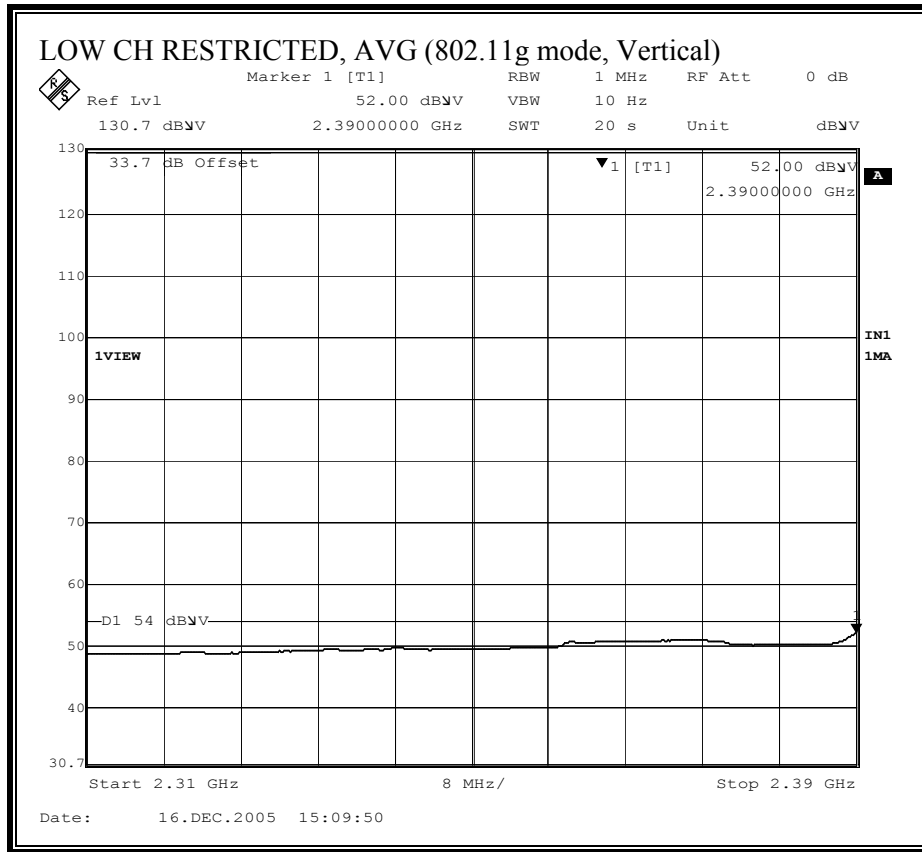

RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL – MARKER-DELTA PLOT)

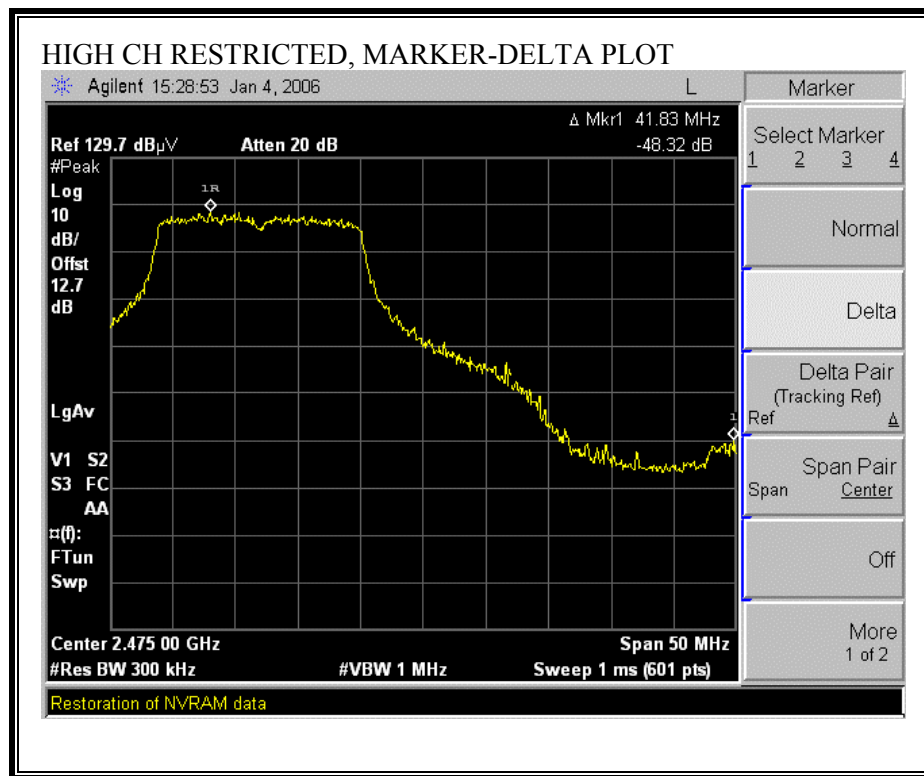

RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL – DATA)

01/06/06 High Frequency Measurement Compliance Certification Services, Morgan Hill Open Field Site															
Test Engr:		Frank Ibrahim													
Project #:		05U3821													
Company:		Toshiba													
EUT Descrip.:		MiniPClexpress 802.11 b/g transceiver													
EUT M/N:		AR5BXB61													
Test Target:		FCC 15.247													
Configuration:		Stand Alone EUT													
Mode Oper:		TX ON in 11g mode													
Test Equipment:															
Horn 1-18GHz				Pre-amplifier 1-26GHz				Pre-amplifier 26-40GHz				Horn > 18GHz			
T60; S/N: 2238 @3m															
Hi Frequency Cables															
2 foot cable				3 foot cable				12 foot cable				HPF			
								Frank 187209001				Reject Filter			
<div> <div>Peak Measurements</div> <div>RBW=VBW=1MHz</div> <div>Average Measurements</div> <div>RBW=1MHz ; VBW=10Hz</div> </div>															
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
2.462	3.0	78.2	67.5												V, Fundamental Measurement
2.484	3.0	29.9	19.2	28.6	1.9	0.0	0.0	0.0	60.3	49.6	74	54	-13.7	-4.4	V, Reading with applied delta
2.462	3.0	80.7	71.4												H, Fundamental Measurement
2.484	3.0	32.3	23.1	28.6	1.9	0.0	0.0	0.0	62.8	53.5	74	54	-11.2	-0.5	H, Reading with applied delta
f	Measurement Frequency					Amp	Preamp Gain					Avg Lim	Average Field Strength Limit		
Dist	Distance to Antenna					D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit		
Read	Analyzer Reading					Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit		
AF	Antenna Factor					Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit		
CL	Cable Loss					HPF	High Pass Filter								

HARMONICS AND SPURIOUS EMISSIONS (g MODE)

12/19/05 High Frequency Measurement Compliance Certification Services, Morgan Hill 5m chamber																
Test Engr:		Frank Ibrahim														
Project #:		05U3821														
Company:		Toshiba														
EUT Descrip.:		MiniPClexpress 802.11 b/g transceiver														
EUT M/N:		AR5BXB61														
Test Target:		FCC 15.247														
Configuration:		Stand Alone EUT														
Mode Oper:		TX ON in 11g mode														
Test Equipment:																
Horn 1-18GHz				Pre-amplifier 1-26GHz				Pre-amplifier 26-40GHz				Horn > 18GHz				
T119; S/N: 29301 @3m				T144 Miteq 3008A00931								T125; ARA 18-26GHz; S/N:1007				
Hi Frequency Cables																
2 foot cable				3 foot cable				12 foot cable				HPF		Reject Filter		Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz ; VBW=10Hz
				Frank 177080001				Frank 187209001						R_001		
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)	
Low Channel																
4.824	3.0	46.7	35.8	34.0	4.0	-36.5	0.0	0.0	48.2	37.3	74	54	-25.8	-16.7	V	
Mid Channel																
4.874	3.0	50.2	38.5	34.1	4.0	-36.5	0.0	0.0	51.8	40.1	74	54	-22.2	-13.9	V	
7.311	3.0	52.3	37.4	35.6	4.6	-36.2	0.0	0.0	56.3	41.4	74	54	-17.7	-12.6	V	
High Channel																
4.924	3.0	47.5	36.7	34.1	4.0	-36.5	0.0	0.0	49.2	38.4	74	54	-24.8	-15.6	V	
7.386	3.0	58.6	41.6	35.7	4.6	-36.2	0.0	0.0	62.7	45.7	74	54	-11.3	-8.3	V	
f Measurement Frequency Amp Preamp Gain Avg Lim Average Field Strength Limit																
Dist Distance to Antenna D Corr Distance Correct to 3 meters Pk Lim Peak Field Strength Limit																
Read Analyzer Reading Avg Average Field Strength @ 3 m Avg Mar Margin vs. Average Limit																
AF Antenna Factor Peak Calculated Peak Field Strength Pk Mar Margin vs. Peak Limit																
CL Cable Loss HPF High Pass Filter																
EUT scanned from 1 GHz to 25 GHz, no other signals above noise floor were found																

HARMONICS AND SPURIOUS EMISSIONS (g TURBO MODE)

01/29/06 High Frequency Measurement
Compliance Certification Services, Morgan Hill Open Field Site

Test Engr: David Garcia
Project #: 05U3821
Company: Toshiba
EUT Descrip.: 802.11 b/g transceiver
EUT M/N: PA3501U-1MPC
Test Target: FCC 15.247/1C RSS 210
Mode Oper: g Turbo

Test Equipment:

Horn 1-18GHz T60; S/N: 2238 @3m	Pre-amplifier 1-26GHz T34 HP 8449B	Pre-amplifier 26-40GHz	Horn > 18GHz
Hi Frequency Cables			
2 foot cable Frank 177079007	3 foot cable	12 foot cable Frank 187209001	HPF
			Reject Filter

Peak Measurements
RBW=VBW=1MHz
Average Measurements
RBW=1MHz ; VBW=10Hz

f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
2437 CHANNEL															
4.874	3.0	52.3	38.5	33.7	3.5	-34.8	0.0	0.0	54.7	40.9	74	54	-19.3	-13.1	V
7.311	3.0	61.0	43.3	36.2	4.3	-34.1	0.0	0.0	67.3	49.6	74	54	-6.7	-4.4	V
12.185	3.0	49.9	38.5	38.4	5.2	-32.5	0.0	0.0	61.0	49.6	74	54	-13.0	-4.4	V
4.874	3.0	53.3	39.0	33.7	3.5	-34.8	0.0	0.0	55.7	41.4	74	54	-18.3	-12.6	H
7.311	3.0	59.6	41.2	36.2	4.3	-34.1	0.0	0.0	65.9	47.5	74	54	-8.1	-6.5	H
12.185	3.0	54.5	37.5	38.4	5.2	-32.5	0.0	0.0	65.6	48.6	74	54	-8.4	-5.4	H
Note: No further noise was detected above the system noise floor.															

f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		

7.2.2. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz


SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

HORIZONTAL PLOT



561F Monterey Road
Morgan Hill, CA 95037
Tel: (408) 463-0888
Fax: (408) 463-0885

Data#: 2 File#: RAD1219.EMI Date: 12-19-2005 Time: 17:43:22

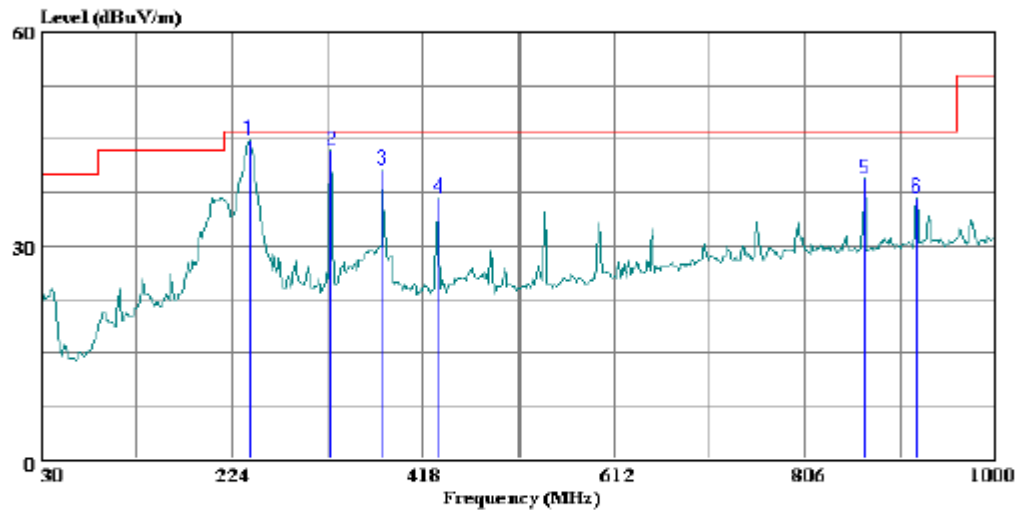

(Auxiliary ATC)

Trace: 1

Ref Trace:

Condition: FCC CLASS-B HORIZONTAL
Test Operator: : Frank Ibrahim
Project #: : 05u3821
Company: : Toshiba
EUT: : Mini PCIexpress 802.11 b/g transceiver
Model No.: : AR58XB61
Configuration: : Stand-Alone
Mode of operation: TX ON at Mid Channel in 11b mode
Target of Test : FCC B

HORIZONTAL DATA

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	242.430	58.84	-13.99	44.85	46.00	-1.15	Peak
2	324.880	54.58	-11.18	43.40	46.00	-2.60	Peak
3	378.230	50.74	-10.00	40.74	46.00	-5.26	Peak
4	434.490	45.37	-8.67	36.70	46.00	-9.30	Peak
5	866.140	40.79	-1.25	39.54	46.00	-6.46	Peak
6	919.490	37.52	-0.83	36.69	46.00	-9.31	Peak


SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)

VERTICAL PLOT



561F Monterey Road
Morgan Hill, CA 95037
Tel: (408) 463-0888
Fax: (408) 463-0885

Data#: 6 File#: RAD1219.EMI Date: 12-19-2005 Time: 18:18:57

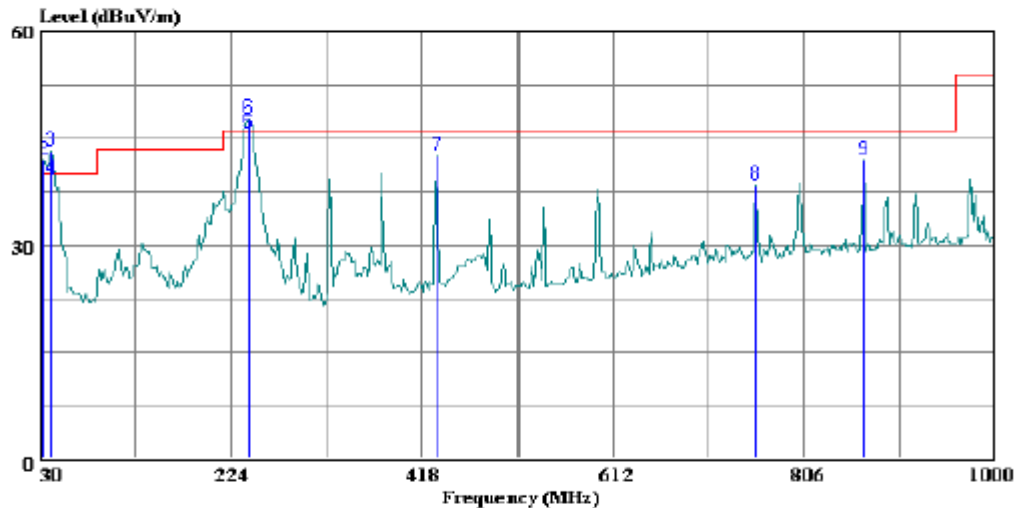

(Auxiliary ATC)

Trace: 3

Ref Trace:

Condition: FCC CLASS-B VERTICAL
Test Operator: : Frank Ibrahim
Project #: : 05u3821
Company: : Toshiba
EUT: : Mini PCIexpress 802.11 b/g transceiver
Model No.: : AR5BXB61
Configuration: : Stand-Alone
Mode of operation: TX ON at Mid Channel in 11b mode
Target of Test : FCC B

VERTICAL DATA

		Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1		33.880	47.20	-8.87	38.33	40.00	-1.67	QP
2	*	33.880	50.76	-8.87	41.89	40.00	1.89	Peak
3	*	41.640	56.26	-13.02	43.24	40.00	3.24	Peak
4		41.640	53.00	-13.67	39.33	40.00	-0.67	QP
5		242.430	59.70	-13.99	45.71	46.00	-0.29	QP
6	*	242.430	61.78	-13.99	47.79	46.00	1.79	Peak
7		434.490	51.20	-8.67	42.53	46.00	-3.47	Peak
8		756.530	40.96	-2.47	38.49	46.00	-7.51	Peak
9		866.140	43.12	-1.25	41.87	46.00	-4.13	Peak

7.3. POWERLINE CONDUCTED EMISSIONS

LIMIT

§15.207 (a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

The lower limit applies at the boundary between the frequency ranges.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The resolution bandwidth is set to 9 kHz for both peak detection and quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

Line conducted data is recorded for both NEUTRAL and HOT lines.


RESULTS

No non-compliance noted:

6 WORST EMISSIONS


CONDUCTED EMISSIONS DATA (115VAC 60Hz)									
Freq.	Reading			Closs	Limit	EN_B	Margin		Remark
(MHz)	PK (dBuV)	QP (dBuV)	AV (dBuV)	(dB)	QP	AV	QP (dB)	AV (dB)	L1 / L2
0.15	48.74	--	--	0.00	66.00	56.00	-17.26	-7.26	L1
0.21	50.76	--	--	0.00	63.13	53.13	-12.37	-2.37	L1
0.32	43.05	--	--	0.00	59.76	49.76	-16.71	-6.71	L1
0.15	48.76	--	--	0.00	66.00	56.00	-17.24	-7.24	L2
0.22	50.16	--	--	0.00	62.93	52.93	-12.77	-2.77	L2
0.23	49.96	--	--	0.00	62.49	52.49	-12.53	-2.53	L2
6 Worst Data									

LINE 1 AND LINE 2 RESULTS

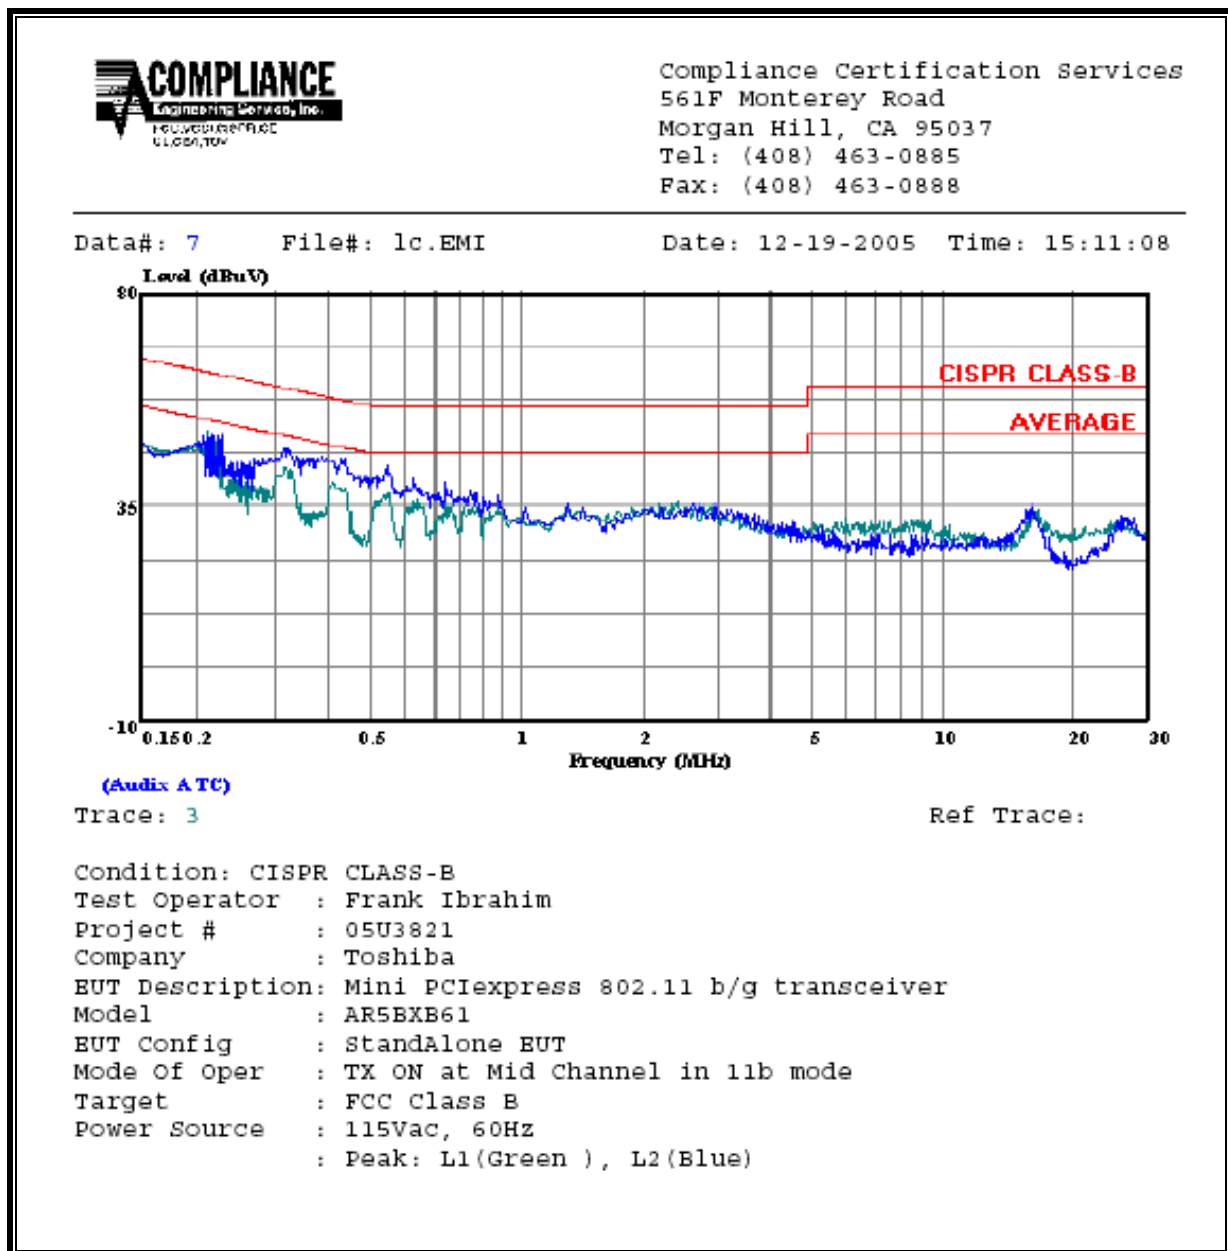

8. SETUP PHOTOS


ANTENNA PORT CONDUCTED POWR MEASUREMENT SETUP

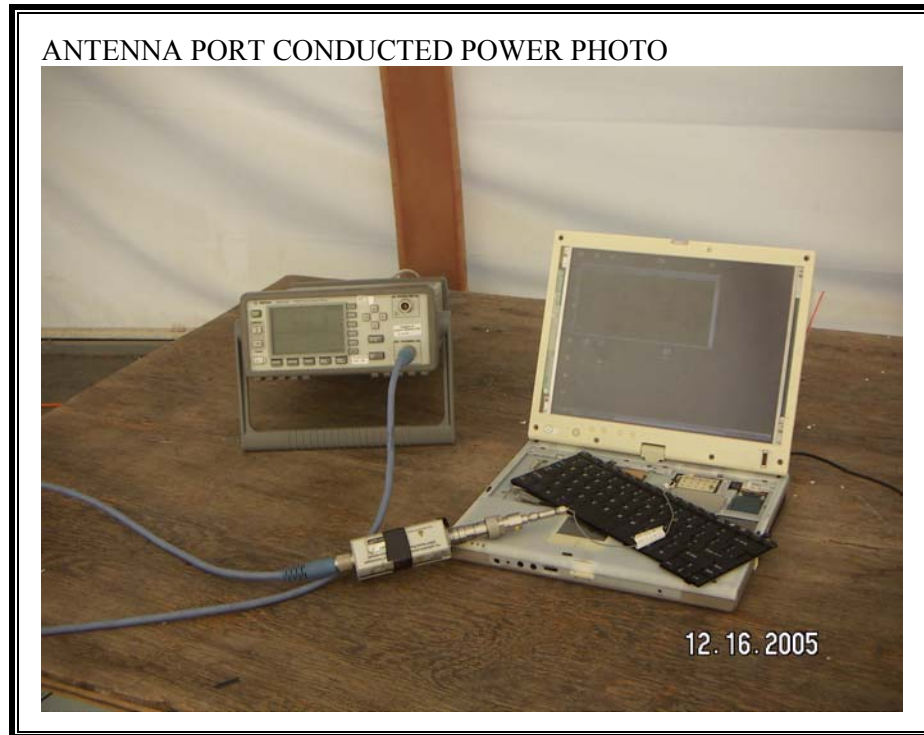


RADIATED RF MEASUREMENT SETUP



BACK PHOTO

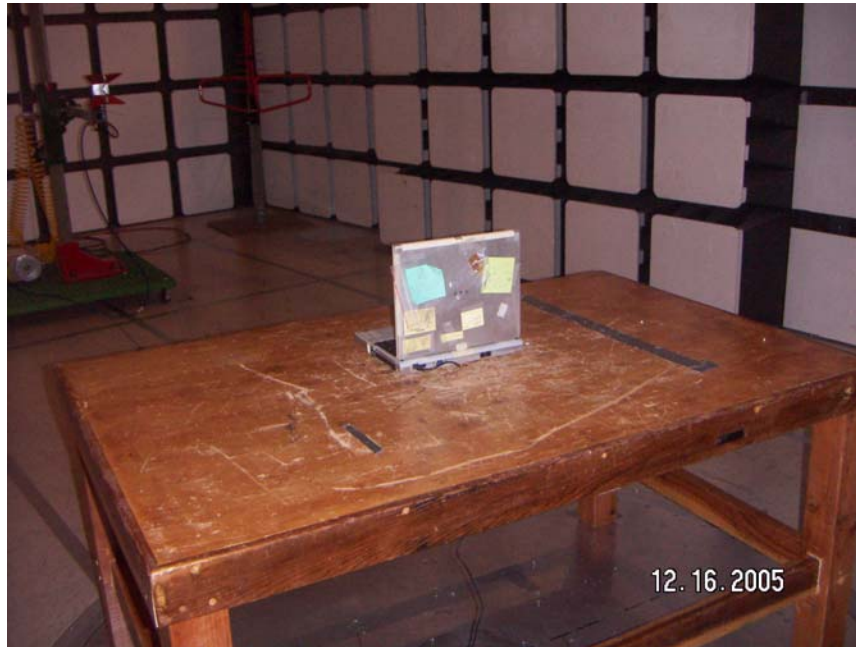

POWERLINE CONDUCTED EMISSIONS MEASUREMENT SETUP

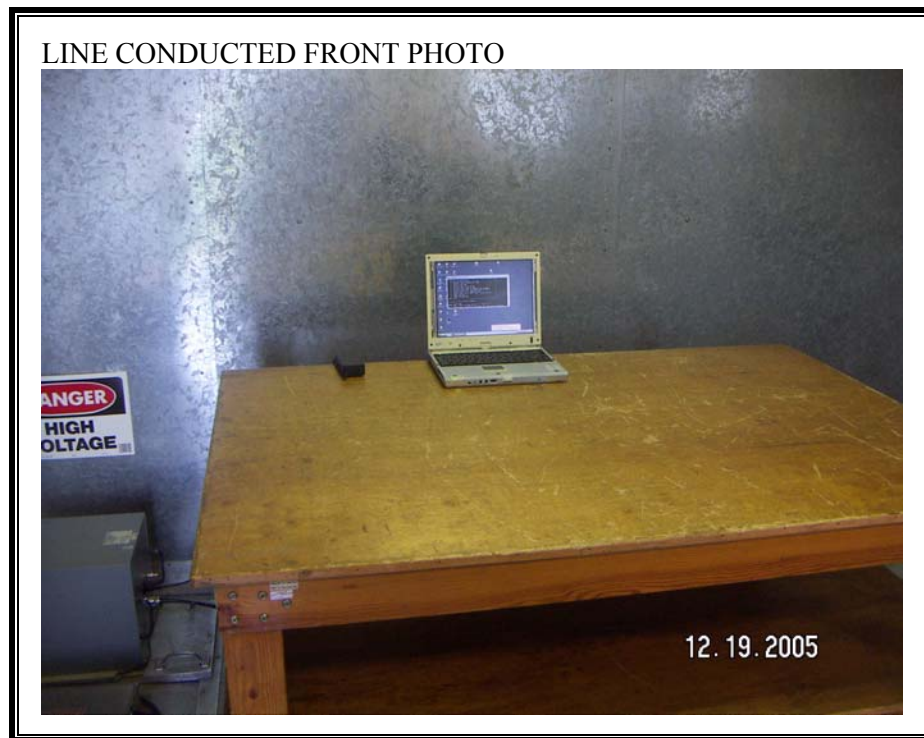

LINE CONDUCTED BACK PHOTO



END OF REPORT