

Report No.: SEWA2205000015RG02

Rev.: 01

Page: 1 of 44

TEST REPORT

Application No: SEWA2205000015RG

Applicant: Quectel Wireless Solutions Co., Ltd.

Address of Applicant:

Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin

Road, Minhang District, Shanghai, China 200233

Manufacturer: Quectel Wireless Solutions Co., Ltd.

Address of Manufacturer:

Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin

Road, Minhang District, Shanghai, China 200233

EUT Description: 5G Module **Model No.**: AG550Q-NA

Trade Mark: Quectel

FCC ID: XMR2022AG550QNA

Standards: 47 CFR Part 2

47 CFR Part 22 47 CFR Part 24 47 CFR Part 27

Date of Receipt: 2022/06/10

Date of Test: 2022/06/10 to 2022/07/11

Date of Issue: 2022/07/18

Test Result: PASS *

Authorized Signature:

Panta Sun Wireless Laboratory Manager



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic Documents subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced acceptance of this out print of the company and the company and the print of the company and the company

 South of Na. C Plant, No. 1, Runsheng Road, Suchou Industrial Part, Suchou Area, Chine (Jaingsu) Plant Free Trade Zone
 215000
 t (86–512) 62992980
 wwww.sgsgroup.com.

 中国 - 苏州 中国(江苏)自由贸易试验区苏州片区苏州工业园区园胜路(号给6号厂房商部
 邮编: 215000
 t (86–512) 62992980
 sgs.china@sgs.com

^{*} In the configuration tested, the EUT detailed in this report complied with the standards specified above.



Report No.: SEWA2205000015RG02

Rev.:

2 of 44 Page:

1 Version

Revision Record					
Version Chapter Date Modifier Remark					
01		2022/07/18		Original	

Prepared By	weller lin	
	(Weller Liu) / Test Engineer	
Checked By	well wei'	
	(Well Wei) / Reviewer	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms-en/Conditions/Terms



Report No.: SEWA2205000015RG02

Rev.:

Page: 3 of 44

Content

1	Ver	sion	2
2	Tes	et Summary	5
	2.1	NR Band n5(ENDC DC_2A-n5A/ DC_66A-n5A)	5
	2.2	NR Band n41	
	2.3	NR Band n2(ENDC DC_13A-n2A/ DC_66A-n2A)/ NR Band n25	
	2.4	NR Band n66(ENDC DC_2A-n66A/ DC_5A-n66A/ DC_12A-n66A/ DC_13A-n66	
		······································	•
	2.5	NR Band n71	9
	2.6	NR Band n77 (ENDC DC_2A-n77A/ DC_5A-n77A/ DC_7A-n77A/ DC_12A-n77	' A/
	DC_6	6A-n77A)/ NR Band n78 (ENDC DC_2A-n78A/ DC_5A-n78A/ DC_7A-n78A/	
	DC_1	2A-n78A/ DC_66A-n78A)	.10
3	Ge	neral Information	.12
	3.1	Client Information	.12
	3.2	Test Location	
	3.3	Test Facility	
	3.4	General Description of EUT	
	3.5	Test Mode	
	3.6	Test Environment	.14
	3.7	Description of Support Units	.14
	3.8	Technical Specification	.15
	3.9	Test Frequencies	.19
	3.9	.1 Reference test frequencies for NR operating band n2	.19
	3.9	2 Reference test frequencies for NR operating band n5	.20
	3.9	3 Reference test frequencies for NR operating band n25	.21
	3.9	4 Reference test frequencies for NR operating band n41	.22
	3.9	5 Reference test frequencies for NR operating band n66	.23
	3.9	.6 Reference test frequencies for NR operating band n71	.24
	3.9	3	
	3.9	8 Reference test frequencies for NR operating band n78	.27
4	Des	scription of Tests	.29



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Ferms-and-Conditions/Ferms-en/Conditions/Ferms

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980 www.sgsgroup.com.cn t (86-512) 62992980

sgs.china@sgs.com



Donart No.	CEMA220E00004EDC02
Report No.:	SEWA2205000015RG02

1161	O I
Dago:	1 of 1

	4.1	Conducted Output Power	29
	4.2	Effective (Isotropic) Radiated Power of Transmitter	30
	4.3	Occupied Bandwidth	31
	4.4	Band Edge at Antenna Terminals	32
	4.5	Spurious And Harmonic Emissions at Antenna Terminal	33
	4.6	Peak-Average Ratio	34
	4.7	Field Strength of Spurious Radiation	35
	4.8	Frequency Stability / Temperature Variation	36
	4.9	Test Setups	37
		.1 Test Setup 1	
	4.9	.2 Test Setup 2	37
	4.9	.3 Test Setup 3	38
	4.10	Test Conditions	39
5	Mai	in Test Instruments	41
6	Mea	asurement Uncertainty	43
7	Apr	pendixes	44



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx.and, for electronic format documents, subject to Terms and Conditions for Electronic Documents after the transparent of the Imitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

South of No. 6 Plant, No. 1, Runsheng Risad, Suzhou Industrial Park, Suzhou Area, Chima (Jiangsu) Pilot Fiee Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜裔(号的6号)房南部 邮编: 215000



Report No.: SEWA2205000015RG02

Rev.: 01

Page: 5 of 44

2 Test Summary

2.1 NR Band n5(ENDC DC_2A-n5A/ DC_66A-n5A)

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §22.913(a)(5)	FCC: ERP ≤ 7 W	Section 1 of Appendix B.18	Pass
Peak-Average Ratio	§22.913(d)	Limit≤13 dB	Section 2 of Appendix B.18	Pass
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B.18	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B.18	Pass
Band Edges Compliance	§2.1051, §22.917(a)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B.18	Pass
Spurious Emission at Antenna Terminals	§2.1051, §22.917(a)	FCC: ≤ -13 dBm/100 kHz, from 9 kHz to 10th harmonics but outside authorized operating frequency ranges.	Section 6 of Appendix B.18	Pass
Field Strength of Spurious Radiation	§2.1053, §22.917(a)	FCC: ≤ -13 dBm/100 kHz.	Section 7 of Appendix B.18	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §22.355	≤ ±2.5ppm.	Section 8 of Appendix B.18	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printe overleaf, available on request or accessible at http://www.sps.com/en/Terms-and-Conditions.app.and, for electronic Documents as this:

Author of the Conditions for Electronic Documents at http://www.sps.com/en/Terms-and-Conditions/Terms-en-Document.asp.

Author of Italians of Italians and Italians

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suzhou Area, China (liangsu) Plot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜鹿1号的6号厂房南部 邮编: 215000 t (86-512) 62992980 t (86-512) 62992980

www.sgsgroup.com.cn sgs.china@sgs.com



Report No.: SEWA2205000015RG02

Rev.: 6 of 44 Page:

2.2 NR Band n41

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(h)(2)	EIRP ≤ 2W	Section 1 of Appendix B.20	Pass
Peak-Average Ratio		≤13 dB	Section 2 of Appendix B.20	Pass
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B.20	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B.20	Pass
Band Edges Compliance	§2.1051, §27.53(m4)	For mobile digital stations, the attenuation factor shall be not less than 40 + 10 log (P) dB on all frequencies between the channel edge and 5 megahertz from the channel edge, 43 + 10 log (P) dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and 55 + 10 log (P) dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as de ned in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that 43 + 10 log (P) dB on all frequencies between 2490.5 MHz and 2496 MHz and 55 + 10 log (P) dB at or below 2490.5 MHz.	Section 5 of Appendix B.20	Pass
Spurious Emission at Antenna Terminals	§2.1051, §27.53(m)	Channel Edge -25dBm/ 1 MHz 1 MHz 1 MHz 9 kHz 95 MHz XMHz 10 th harmonics X=Max {6MHz, EBW}	Section 6 of Appendix B.20	Pass
Field Strength of Spurious Radiation	§2.1053, §27.53(m)	Channel Edge -25 dBm/ 1 MHz 1 MHz 1 MHz 9 kHz 9.5 MHz XMHz 10 th harmonics X=Max {6MHz, EBW}	Section 7 of Appendix B.20	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §27.54	Within authorized bands of operation/frequency block.	Section 8 of Appendix B.20	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx.
Attention is drawn to the limitation of liability, indemnification and jury/saldction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faisification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest settent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

The procedure of the sample of the set of the set of the sample of the set of the s

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980 www.sgsgroup.com.cn t (86-512) 62992980

sgs.china@sgs.com



Report No.: SEWA2205000015RG02

Rev.: 01 Page: 7 of 44

2.3 NR Band n2(ENDC DC_13A-n2A/ DC_66A-n2A)/ NR Band n25

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §24.232(c)	EIRP ≤ 2 W	Section 1 of Appendix B.17&19	Pass
Peak-Average Ratio	§24.232(d)	Limit≤13 dB	Section 2 of Appendix B.17&19	Pass
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B.17&19	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B.17&19	Pass
Band Edges Compliance	§2.1051, §24.238(a)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B.17&19	Pass
Spurious Emission at Antenna Terminals	§2.1051, §24.238(a)	≤ -13 dBm/1 MHz, from 9 kHz to 10 th harmonics but outside authorized operating frequency ranges.	Section 6 of Appendix B.17&19	Pass
Field Strength of Spurious Radiation	§2.1053, §24.238(a)	≤ -13 dBm/1 MHz.	Section 7 of Appendix B.17&19	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §24.235	Within authorized bands of operation/frequency block.	Section 8 of Appendix B.17&19	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx.and, for electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions-And-Conditions-and-Conditions-And-Conditions-and-Conditions-And

South of No. 6 Plant, No. 1, Runsheng Risad, Suzhou Industrial Park, Suzhou Area, Chine (Jiangsu) Plot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区河胜路(号的6号厂房南部 邮编: 215000 t (86–512) 62992980 w t (86–512) 62992980 s

www.sgsgroup.com.cn sgs.china@sgs.com



Report No.: SEWA2205000015RG02

Rev.: 01 Page: 8 of 44

2.4 NR Band n66(ENDC DC_2A-n66A/ DC_5A-n66A/ DC_12A-n66A/ DC_13A-n66A)

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(d)(4)	EIRP ≤ 1 W	Section 1 of Appendix B.21	Pass
Peak-Average Ratio	§27.50(d)(5)	Limit≤13 dB	Section 2 of Appendix B.21	Pass
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B.21	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B.21	Pass
Band Edges Compliance	§2.1051, §27.53(h)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B.21	Pass
Spurious Emission at Antenna Terminals	§2.1051, §27.53(h)	≤ -13 dBm/1 MHz, from 9 kHz to 10 th harmonics but outside authorized operating frequency ranges.	Section 6 of Appendix B.21	Pass
Field Strength of Spurious Radiation	§2.1053, §27.53(h)	≤ -13 dBm/1 MHz.	Section 7 of Appendix B.21	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §27.54	Within authorized bands of operation/frequency block.	Section 8 of Appendix B.21	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.apx and, for electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.apx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extend of the law Luless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 83071443, **Attention:** To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 83071443, ***

Southur Ma. 6 Plars, Mo. 1, Runshang Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Plot Free Trade Zone 215000 t (中国 - 苏州 - 中国(江苏)自由贸易试验区苏州上区苏州工业园区海胜路(号龄6号/房南部 邮编: 215000 t (



Report No.: SEWA2205000015RG02

Rev.:

Page: 9 of 44

2.5 NR Band n71

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046 §27.50(c)(10)	ERP≤3W	Section 1 of Appendix B.22	Pass
Peak-Average Ratio		Limit≤13 dB	Section 2 of Appendix B.22	Pass
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B.22	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B.22	Pass
Band Edges Compliance	§2.1051, §27.53(g)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B.22	Pass
Spurious Emission at Antenna Terminals	§2.1051, §27.53(g)	≤ -13 dBm/1 MHz, from 9 kHz to 10 th harmonics but outside authorized operating frequency ranges.	Section 6 of Appendix B.22	Pass
Field Strength of Spurious Radiation	§2.1053, §27.53(g)	≤ -13 dBm/1 MHz.	Section 7 of Appendix B.22	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §27.54	within the authorized bands of operation.	Section 8 of Appendix B.22	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CAI. Doccheck@ass.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980

t (86-512) 62992980 www.sgsgroup.com.cn sgs.china@sgs.com



Report No.: SEWA2205000015RG02

Rev.: 01

Page: 10 of 44

2.6 NR Band n77 (ENDC DC_2A-n77A/ DC_5A-n77A/ DC_7A-n77A/ DC_12A-n77A/ DC_66A-n77A)/ NR Band n78 (ENDC DC_2A-n78A/ DC_5A-n78A/ DC_7A-n78A/ DC_12A-n78A/ DC_66A-n78A)

3700-3980MHz:

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(j)(3)	EIRP ≤ 1W	Section 1 of Appendix B.24&26	Pass
Peak-Average Ratio		≤13 dB	Section 2 of Appendix B.24&26	Pass
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B.24&26	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B.24&26	Pass
Band Edges Compliance	§2.1051, §27.53(I)(2)	(2) For mobile operations in the 3700-3980 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz. Compliance with this paragraph (I)(2) is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be either one percent of the emission bandwidth of the fundamental emission of the transmitter or 350 kHz. In the bands between 1 and 5 MHz removed from the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be 500 kHz.	Section 5 of Appendix B.24&26	Pass
Spurious Emission at Antenna Terminals	§2.1051, §27.53(I)(2)	not exceed -13 dBm/MHz.	Section 6 of Appendix B.24&26	Pass
Field Strength of Spurious Radiation	§2.1053, §27.53(I)(2)	not exceed -13 dBm/MHz	Section 7 of Appendix B.24&26	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §27.54	Within authorized bands of operation/frequency block.	Section 8 of Appendix B.24&26	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.apxx.and.for electronic format documents.subject to Terms and Conditions after lectronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions-and-Conditions-and-Cond

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜裔(号的6号厂房南部 邮编: 215000 t (86-512) 62992980 t (86-512) 62992980

sgs.china@sgs.com



Report No.: SEWA2205000015RG02

Rev.:

11 of 44 Page:

3450-3550MHz:

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output	§2.1046, §27.50(k)(3)	EIRP ≤ 30dBm	Section 1 of Appendix B.23&25	Pass
Data				
Peak-Average Ratio	§27.50(k)(4)	FCC: Limit≤13 dB	Section 2 of Appendix B.23&25	Pass
			Section 4 of	
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Appendix	Pass
			B.23&25	
Band Edges Compliance	§2.1051, §27.50(n)(2)	For mobile operations in the 3450-3550 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz.	Section 5 of Appendix B.23&25	Pass
Spurious Emission at Antenna Terminals	§2.1051, §27.50(n)(2)	For mobile operations in the 3450-3550 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz.	Section 6 of Appendix B.23&25	Pass
Field Strength of Spurious Radiation	§2.1053, §27.50(n)(2)	For mobile operations in the 3450-3550 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz.	Section 7 of Appendix B.23&25	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §27.54	Within authorized bands of operation/ frequency block.	Section 8 of Appendix B.23&25	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms-en/Conditions/Terms

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980

t (86-512) 62992980 www.sgsgroup.com.cn sgs.china@sgs.com



Report No.: SEWA2205000015RG02

Rev.: 01

Page: 12 of 44

3 General Information

3.1 Client Information

Applicant:	Quectel Wireless Solutions Co., Ltd.				
Address of Applicant: Building 5, Shanghai Business Park Phase III (Area B), No.1016 Road, Minhang District, Shanghai, China 200233					
Manufacturer: Quectel Wireless Solutions Co., Ltd.					
Address of Manufacturer:	Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, China 200233				

3.2 Test Location

Company:	SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Address:	South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone
Post code:	215000
Test engineer:	Weller Liu, Tizzy Song

3.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• A2LA (Certificate No. 6336.01)

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 6336.01.

• Innovation, Science and Economic Development Canada

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0120.

IC#: 27594.

• FCC -Designation Number: CN1312

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized as an

accredited testing laboratory. Designation Number: CN1312.

Test Firm Registration Number: 717327



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms-en/C

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Phot Free Trade Zone 215000 t (中国 - 苏州 - 中国 (江苏) 自由贸易试验区苏州 | 上级国区河胜路(号的6号厂房南部 邮编: 215000 t (



Report No.: SEWA2205000015RG02

Rev.: 01

Page: 13 of 44

3.4 General Description of EUT

EUT Description:	5G Module					
Model No.:	AG5500	AG550Q-NA				
Trade Mark:	Quectel					
Hardware Version:	R1.0					
Software Version:	AG5500	QNAABR03A03M8	G_OCPU			
IMEI:	8602790	050015857				
Antenna Type:	Externa	l Antenna				
Support HUPE Band:	Power C	Class2: n41; n77; r	78			
	⊠Provided by client					
	n2:	0dBi(ANT0)	0dBi(ANT2)			
	n5:	-0.42dBi(ANT0)				
	n25:	0.36dBi(ANT0)	0.36dBi(ANT2)			
Antenna Gain*:	n41:	1.58dBi(ANT2)				
	n66:	0.39dBi(ANT0)	0.39dBi(ANT2)			
	n71:	0.24dBi(ANT0)				
	n77:	-3.65dBi(ANT2)				
	n78:	-3.65dBi(ANT2)				
DE Cable:	0.2dB(B	elow 1GHz)	0.4dB(1.0~2.0GHz)	0.6dB(2.0~3.0GHz)		
RF Cable:	0.8dB(3	.0~4.0GHz)				

Note: *Since the above data and/or information is provided by the client relevant results or conclusions of this report are only made for these data and/or information, SGS is not responsible for the authenticity, integrity and results of the data and information and/or the validity of the conclusion. Remark:

As above information is provided and confirmed by the applicant. SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.appx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-en-Document.appx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention:To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, **Total Content or appearance of the company is a company in the company is a content or appearance of the company is a content or appearance or a

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000 t (86-512) 62992980 t (86-512) 62992980

www.sgsgroup.com.cn sgs.china@sgs.com



Report No.: SEWA2205000015RG02

Rev.: 01

Page: 14 of 44

3.5 Test Mode

Test Mode	Test Modes Description				
NR/TM1	NR system, DFT-s-Pi/2-BPSK modulation				
NR/TM2	NR system, DFT-s-QPSK modulation				
NR/TM3	NR system, DFT-s-16QAM modulation				
NR/TM4	NR system, DFT-s-64QAM modulation				
NR/TM5	NR system, DFT-s-256QAM modulation				
NR/TM6	NR system, CP-QPSK modulation				
NR/TM7 NR system, CP-16QAM modulation					
NR/TM8	M8 NR system, CP-64QAM modulation				
NR/TM9 NR system, CP-256QAM modulation					
Remark: The test mode(s)	Remark: The test mode(s) are selected according to relevant radio technology specifications.				

3.6 Test Environment

Environment Parameter		101.0 kPa Selected Values During Tests			
Relative Humidity		44-60 % RH Ambient			
Value		Temperature(°C)	Voltage(V)		
NTNV		22~23	3.8		
LTLV		-30	3.3		
LTHV		-30	4.3		
HTLV		50	3.3		
HTHV		50	4.3		
Remark: NV: Normal Voltage NT: Normal Temperature		Extreme Test Voltage Extreme Test Temperature	HV: High Extreme Test Voltage HT: High Extreme Test Temperature		

3.7 Description of Support Units

Description	Manufacturer	Model No.			
Mother board	Quectel	V2X&5G-EVB			
Remark: all above the information of table are provided by client.					



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Ferms-and-Conditions.aspx and, for electronic Documents at <a href="http://www.sgs.com/en/Ferms-and-Conditions-and-Conditions-and-Conditions-And-Ferms-and-Conditions-and-Conditions-and-Conditions-and-Ferms-and-Conditions-and-Conditions-and-Ferms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-And-Conditions-and-

 South of No. 1 Plant No. 1, Runsteng Road, Suthou Industrial Park, Suthou Area, China (Jangsu) Plot Free Trade Zone
 215000
 t (86–512) 62992980
 www.sgsgroup.com.

 中国 - 苏州 - 中国 (江苏) 自由贸易试验区苏州上区苏州工业园区周胜路(号龄6号/广房南部
 邮编: 215000
 t (86–512) 62992980
 sgs.china@sgs.com



Report No.: SEWA2205000015RG02

Rev.: 01

Page: 15 of 44

3.8 Technical Specification

Characteristics	Description					
Radio System Type	⊠ SA ⊠ NSA					
	Band	TX		RX		
	NR Band n2	1850 to 1910 MHz		1930 to 1990 MHz		
	NR Band n5	824 to 849 l	ИНz	869 to 894 M	1Hz	
	NR Band n25	1850 to 1915	5MHz	1930 to 1995	5 MHz	
0	NR Band n41	2496 to 2690) MHz	2496 to 2690) MHz	
Supported Frequency Range	NR Band n66	1710 to 1780) MHz	2110 to 2180) MHz	
1	NR Band n71	663 to 698 M	1Hz	617 to 652 M	1Hz	
	NR Band n77	3700 to 3980) MHz	3700 to 3980) MHz	
	INK Ballu III I	3450 to 3550) MHz	3450 to 3550) MHz	
	NR Band n78	3700 to 3800) MHz	3700 to 3800) MHz	
	NIX Band 1170	3450 to 3550) MHz	3450 to 3550) MHz	
	NR Band n2	SCS 15kHz:				
	TVIX Darid 112	⊠5 MHz	⊠10 MHz	⊠15 MHz	⊠20 MHz	
	NR Band n5	SCS 15kHz:				
		⊠5 MHz	⊠10 MHz	⊠15 MHz	⊠20 MHz	
	NR Band n25	SCS 15kHz:				
		⊠5 MHz	⊠10 MHz	⊠15 MHz	⊠20 MHz	
		⊠25 MHz	⊠30 MHz	⊠40 MHz		
	NR Band n41	SCS 30kHz:				
		⊠20 MHz	⊠30 MHz	⊠40 MHz	⊠50 MHz	
Supported Channel		⊠60 MHz	⊠80 MHz	⊠90 MHz	⊠100 MHz	
Bandwidth		SCS 15kHz:				
	NR Band n66	⊠5 MHz	⊠10 MHz	⊠15 MHz	⊠20 MHz	
		⊠30 MHz	⊠40 MHz			
	NR Band n71	SCS 15kHz:				
	Tur Bana III I	⊠5 MHz	⊠10 MHz	⊠15 MHz	⊠20 MHz	
		SCS 30kHz				
	NR Band n77	⊠20 MHz	⊠30 MHz	⊠40 MHz	⊠50 MHz	
		⊠60 MHz	⊠80 MHz	⊠90 MHz	⊠100 MHz	
	NR Band n78	SCS 30kHz				
		⊠20 MHz	⊠30 MHz	⊠40 MHz	⊠50 MHz	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx.and, for electronic Documents at http://www.sgs.com/en/Terms-en/Conditions/Terms-e

South of No. 1 Plant. No. 1, Runsheng Road, Sudrou Industrial Park, Sudrou Area, Chira (Jiangsu) Plat Free Trade Zone 215000 t (86-512 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区测胜路(号か6月厂房南部 邮编: 215000 t (86-512



Report No.: SEWA2205000015RG02

Rev.: 01

Page: 16 of 44

□ □ □ □ □ □ □ □ □ □				Page.	10 01 44	
NR Band n2 SCS 15kHz:			⊠60 MHz	⊠70 MHz	⊠80 MHz	⊠90 MHz
NR Band n2 NR Band n2 AM47G7D			⊠100 MHz			
NR Band n2 8M93G7D 9M28W7D 13M4G7D 14M1W7D 17M9G7D 18M9W7D SCS 15kHz:			SCS 15kHz:			
13M4G7D			4M47G7D	4M48W7D		
17M9G7D 18M9W7D		NR Band n2	8M93G7D	9M28W7D		
NR Band n5 SCS 15kHz: 4M47G7D			13M4G7D	14M1W7D		
NR Band n5 AM47G7D			17M9G7D	18M9W7D		
NR Band n5 8M94G7D 9M28W7D			SCS 15kHz:			
13M4G7D			4M47G7D	4M48W7D		
17M9G7D 18M9W7D		NR Band n5	8M94G7D	9M28W7D		
Designation of Emissions NR Band n25 SCS 15kHz:			13M4G7D	14M1W7D		
Designation of Emissions (Remark: the necessary bandwidth of which is the worst value from the measured occupied bandwidths for each type of channel bandwidth configuration.) NR Band n41 NR Band n41 AM47G7D 4M47W7D 8M93G7D 9M28W7D 13M4G7D 14M1W7D 17M9G7D 18M9W7D 28M6G7D 28M6W7D 38M5G7D 38M5W7D 5CS 30kHz: 17M8G7D 18M2W7D 26M8G7D 27M8W7D 35M8G7D 37M8W7D NR Band n41 45M7G7D 47M4W7D 57M8G7D 57M8W7D 76M9G7D 77M5W7D 85M6G7D 87M2W7D 96M3G7D 97M2W7D 96M3G7D 97M2W7D SCS 15kHz: 4M48G7D 4M46W7D NR Band n66 NR Band n66 8M93G7D 9M29W7D 13M5G7D 14M1W7D			17M9G7D	18M9W7D		
Designation of Emissions			SCS 15kHz:			
Emissions (Remark: the necessary bandwidth of which is the worst value from the measured occupied bandwidths for each type of channel bandwidth configuration.) NR Band n41 NR Band n41 13M4G7D 14M1W7D 17M9G7D 18M9W7D 28M6G7D 28M6W7D 38M5G7D 38M5W7D 5CS 30kHz: 17M8G7D 18M2W7D 26M8G7D 27M8W7D 35M8G7D 37M8W7D 45M7G7D 47M4W7D 57M8G7D 57M8W7D 76M9G7D 77M5W7D 85M6G7D 87M2W7D 96M3G7D 97M2W7D 96M3G7D 97M2W7D SCS 15kHz: 4M48G7D 4M46W7D NR Band n66 NR Band n66 8M93G7D 9M29W7D 13M5G7D 14M1W7D			4M47G7D	4M47W7D		
NR Band n25 13M497D 18M9W7D 18M9W7D 22M9G7D 23M8W7D 28M6G7D 28M6W7D 28M6G7D 28M6W7D 38M5G7D 38M5W7D 38M5G7D 38M5W7D 26M8G7D 27M8W7D 26M8G7D 27M8W7D 26M8G7D 27M8W7D 26M8G7D 37M8W7D 26M8G7D 37M8W7D 35M8G7D 37M8W7D 37M8W7D	Designation of		8M93G7D	9M28W7D		
bandwidth of which is the worst value from the measured occupied bandwidths for each type of channel bandwidth configuration.) NR Band n41 NR Band n66 17M9G7D 18M9W7D 22M9G7D 23M8W7D 28M6G7D 28M6W7D 38M5G7D 38M5W7D 26M8G7D 18M2W7D 26M8G7D 27M8W7D 35M8G7D 37M8W7D 76M9G7D 77M5W7D 85M6G7D 87M2W7D 96M3G7D 97M2W7D SCS 15kHz: 4M48G7D 4M46W7D NR Band n66 8M93G7D 9M29W7D 13M5G7D 14M1W7D		NR Band n25	13M4G7D	14M1W7D		
the worst value from the measured occupied bandwidths for each type of channel bandwidth configuration.) NR Band n41 NR Band n41 NR Band n66 22M9G7D 23M8W7D 28M6W7D 28M6W7D 38M5G7D 38M5W7D SCS 30kHz: 17M8G7D 18M2W7D 26M8G7D 27M8W7D 35M8G7D 37M8W7D 45M7G7D 47M4W7D 57M8G7D 57M8W7D 76M9G7D 77M5W7D 85M6G7D 87M2W7D 96M3G7D 97M2W7D SCS 15kHz: 4M48G7D 4M46W7D NR Band n66 8M93G7D 9M29W7D 13M5G7D 14M1W7D			17M9G7D	18M9W7D		
bandwidths for each type of channel bandwidth configuration.) SCS 30kHz:			22M9G7D	23M8W7D		
type of channel bandwidth configuration.) NR Band n41 NR Band n41 NR Band n41 NR Band n66 NR Band n66 SCS 30kHz: 17M8G7D 18M2W7D 26M8G7D 27M8W7D 35M8G7D 37M8W7D 45M7G7D 47M4W7D 57M8G7D 57M8W7D 76M9G7D 77M5W7D 85M6G7D 87M2W7D 96M3G7D 97M2W7D SCS 15kHz: 4M48G7D 4M46W7D NR Band n66 8M93G7D 9M29W7D 13M5G7D 14M1W7D	•		28M6G7D	28M6W7D		
bandwidth configuration.) SCS 30kHz:			38M5G7D	38M5W7D		
26M8G7D 27M8W7D 35M8G7D 37M8W7D 45M7G7D 47M4W7D 57M8G7D 57M8W7D 76M9G7D 77M5W7D 85M6G7D 87M2W7D 96M3G7D 97M2W7D SCS 15kHz: 4M48G7D 4M46W7D NR Band n66 8M93G7D 9M29W7D 13M5G7D 14M1W7D			SCS 30kHz:			
NR Band n41 35M8G7D	configuration.)		17M8G7D	18M2W7D		
NR Band n41 45M7G7D 47M4W7D 57M8G7D 57M8W7D 76M9G7D 77M5W7D 85M6G7D 87M2W7D 96M3G7D 97M2W7D SCS 15kHz: 4M48G7D 4M46W7D NR Band n66 8M93G7D 9M29W7D 13M5G7D 14M1W7D			26M8G7D	27M8W7D		
57M8G7D 57M8W7D 76M9G7D 77M5W7D 85M6G7D 87M2W7D 96M3G7D 97M2W7D SCS 15kHz: 4M48G7D 4M46W7D NR Band n66 8M93G7D 9M29W7D 13M5G7D 14M1W7D			35M8G7D	37M8W7D		
76M9G7D 77M5W7D 85M6G7D 87M2W7D 96M3G7D 97M2W7D SCS 15kHz: 4M48G7D 4M46W7D NR Band n66 8M93G7D 9M29W7D 13M5G7D 14M1W7D		NR Band n41	45M7G7D	47M4W7D		
85M6G7D 87M2W7D 96M3G7D 97M2W7D SCS 15kHz: 4M48G7D 4M46W7D NR Band n66 8M93G7D 9M29W7D 13M5G7D 14M1W7D			57M8G7D	57M8W7D		
96M3G7D 97M2W7D SCS 15kHz: 4M48G7D 4M46W7D NR Band n66 8M93G7D 9M29W7D 13M5G7D 14M1W7D			76M9G7D	77M5W7D		
SCS 15kHz: 4M48G7D 4M46W7D NR Band n66 8M93G7D 9M29W7D 13M5G7D 14M1W7D			85M6G7D	87M2W7D		
AM48G7D 4M46W7D NR Band n66 8M93G7D 9M29W7D 13M5G7D 14M1W7D			96M3G7D	97M2W7D		
NR Band n66 8M93G7D 9M29W7D 13M5G7D 14M1W7D			SCS 15kHz:			
13M5G7D 14M1W7D			4M48G7D	4M46W7D		
		NR Band n66	8M93G7D	9M29W7D		
17M9G7D 19M0W7D			13M5G7D	14M1W7D		
			17M9G7D	19M0W7D		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falisfication of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, **Certificate, Please contact us at telephone: (86-755) 8307 1443, **Certificate, Please contact us at telephone: (86-755) 8307 1443, **Certificate, Please contact us at telephone: (86-755) 8307 1443, **Certificate, Please contact us at telephone: (86-755) 8307 1443, **Certificate, Please contact us at telephone: (86-755) 8307 1443, **Certificate, Please contact us at telephone: (86-755) 8307 1443, **Certificate, Please contact us at telephone: (86-755)

South of No. 6 Plant, No. 1, Runshang Road, Suchou Industrial Park, Suchou Area, Chira (Jiangsu) Plot Free Trade Zone
中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区测胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWA2205000015RG02

Rev.:

Page: 17 of 44

	Page. 17 01 44
	28M6G7D 28M5W7D
	38M5G7D 38M6W7D
	SCS 15kHz:
	4M47G7D 4M48W7D
NR Band n71	8M94G7D 9M28W7D
	13M5G7D 14M1W7D
	17M9G7D 18M9W7D
	SCS 30kHz:
	17M8G7D 18M2W7D
	26M8G7D 27M8W7D
	35M8G7D 37M9W7D
NR Band n77 (3700-3980)	45M7G7D 47M5W7D
(3700-3980)	57M8G7D 57M9W7D
	77M1G7D 77M5W7D
	85M7G7D 87M3W7D
	96M3G7D 97M6W7D
	SCS 30kHz:
	17M8G7D 18M3W7D
	26M9G7D 27M9W7D
	35M8G7D 37M9W7D
NR Band n78	45M7G7D 47M4W7D
(3450-3550)	57M9G7D 57M9W7D
	64M4G7D 67M6W7D
	77M1G7D 77M5W7D
	85M5G7D 87M3W7D
	96M4G7D 97M5W7D
	SCS 30kHz:
	17M8G7D 18M2W7D
	26M8G7D 27M8W7D
NR Band n78	35M9G7D 37M9W7D
(3700-3800)	45M7G7D 47M4W7D
	57M8G7D 57M8W7D
	64M3G7D 67M4W7D
	77M1G7D 77M4W7D



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms-en/Conditions/Terms

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980

t (86-512) 62992980 www.sgsgroup.com.cn sgs.china@sgs.com



Report No.: SEWA2205000015RG02

Rev.: 01

Page: 18 of 44

	85M6G7D	87M5W7D
	96M2G7D	97M4W7D



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Ferms-and-Conditions/Ferms-en/Conditions/Ferms

South of No. 1 Plant, No. 1, Rursheng Road, Sudrou Industrial Park, Sudrou Area, Chira (Jiangsu) Plat Free Trade Zone 215000 t (86 中国 - 苏州 - 中国 (江苏) 自由贸易试验区苏州 F 区苏州工业园区测胜器 (号於6月) 房南部 邮编: 215000 t (86



Report No.: SEWA2205000015RG02

Rev.: 01

Page: 19 of 44

3.9 Test Frequencies

3.9.1 Reference test frequencies for NR operating band n2

3.9.1.1 Test frequencies for NR operating band n2 and SCS 15 kHz

CBW [MHz]	Range		Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]
		Low	1932.5	386500	
	Downlink	Mid	1960	392000	15
5		High	1987.5	397500	
3		Low	1852.5	370500	
	Uplink	Mid	1880	376000	-
		High	1907.5	381500	
		Low	1935	387000	
	Downlink	Mid	1960	392000	15
10		High	1985	397000	
10		Low	1855	371000	
	Uplink	Mid	1880	376000	-
		High	1905	381000	
		Low	1937.5	387500	
	Downlink	Mid	1960	392000	15
15		High	1982.5	396500	
13		Low	1857.5	371500	
	Uplink	Mid	1880	376000	-
		High	1902.5	380500	
		Low	1940	388000	
20	Downlink	Mid	1960	392000	15
		High	1980	396000	
		Low	1860	372000	
	Uplink	Mid	1880	376000	-
	-	High	1900	380000	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx.and, for electronic Documents at http://www.sgs.com/en/Terms-en/Conditions/Terms-en/Comments. Subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-en/Conditions/Terms-en/Comments/Terms-en/Com

South of No. F Plant, No. 1, Runshering Read, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Plot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区河胜商(号的6号厂房南部 邮编: 215000



Report No.: SEWA2205000015RG02

Rev.: 01

Page: 20 of 44

3.9.2 Reference test frequencies for NR operating band n5

3.9.2.1 Test frequencies for NR operating band n5 and SCS 15 kHz

CBW [MHz]	Range		Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]
		Low	871.5	174300	
	Downlink	Mid	881.5	176300	15
5		High	891.5	178300	
3		Low	826.5	165300	
	Uplink	Mid	836.5	167300	-
		High	846.5	169300	
		Low	874	174800	
	Downlink	Mid	881.5	176300	15
10		High	889	177800	
10		Low	829	165800	
	Uplink	Mid	836.5	167300	-
		High	844	168800	
	Downlink	Low	876.5	175300	
		Mid	881.5	176300	15
45		High	886.5	177300	
15		Low	831.5	166300	
	Uplink	Mid	836.5	167300	-
		High	841.5	168300	
		Low	879	175800	
20 –	Downlink	Mid	881.5	176300	15
		High	884	176800	
		Low	834	166800	
	Uplink	Mid	836.5	167300	-
	·	High	839	167800	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx.and, for electronic Documents at http://www.sgs.com/en/Terms-en/Conditions/Terms-e

South of No. 6 Plant, No. 1, Runsheng Risad, Suzhou Industrial Park, Suzhou Area, Chine (Jiangsu) Plot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区河胜路(号的6号厂房南部 邮编: 215000



Report No.: SEWA2205000015RG02

21 of 44

Rev.: 01

Page:

Reference test frequencies for NR operating band n25

3.9.3.1 Test frequencies for NR operating band n25 and SCS 15 kHz

CBW	Range		Carrier centre	Carrier centre	SS block SCS
[MHz]			[MHz]	[ARFCN]	[kHz]
		Low	1932.5	386500	
	Downlink	Mid	1962.5	392500	15
5		High	1992.5	398500	
3		Low	1852.5	370500	
	Uplink	Mid	1882.5	376500	-
		High	1912.5	382500	
		Low	1935	387000	
	Downlink	Mid	1962.5	392500	15
10		High	1990	398000	
10		Low	1855	371000	
	Uplink	Mid	1882.5	376500	-
		High	1910	382000	
		Low	1937.5	387500	
	Downlink	Mid	1962.5	392500	15
15		High	1987.5	397500	
15		Low	1857.5	371500	
	Uplink	Mid	1882.5	376500	-
		High	1907.5	381500	
	Downlink	Low	1940	388000	
		Mid	1962.5	392500	15
20		High	1985	397000	
20	Uplink	Low	1860	372000	
		Mid	1882.5	376500	-
	•	High	1905	381000	
		Low	1942.5	388500	
	Downlink	Mid	1962.5	392500	15
25		High	1982.5	396500	
25		Low	1862.5	372500	
	Uplink	Mid	1882.5	376500	-
		High	1902.5	380500	
		Low	1945	389000	
	Downlink	Mid	1962.5	392500	15
30		High	1980	396000	
30		Low	1865	373000	
	Uplink	Mid	1882.5	376500	-
		High	1900	380000	
40	<u> </u>	Low	1950	390000	
	Downlink	Mid	1962.5	392500	15
		High	1975	395000]
40		Low	1870	374000	
	Uplink	Mid	1882.5	376500	-
	- r	High	1895	379000	1



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are tested for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 83071443, or email: CN.Doccheck@ass.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000 t (86-512) 62992980 www.sgsgroup.com.cn t (86-512) 62992980

sgs.china@sgs.com



Report No.: SEWA2205000015RG02

Rev.: 01

Page: 22 of 44

Reference test frequencies for NR operating band n41

3.9.4.1 Test frequencies for NR operating band n41 and SCS 30 kHz

CBW [MHz]	Range		Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]
	Downlink	Low	2506.02	501204	
20	&	Mid	2592.99	518598	30
	Uplink	High	2670	534000	
	Downlink	Low	2511	502200	
30	&	Mid	2592.99	518598	30
	Uplink	High	2675	535000	
	Downlink	Low	2516.01	503202	
40	&	Mid	2592.99	518598	30
	Uplink	High	2670	534000	
	Downlink	Low	2521.02	504204	
50	&	Mid	2592.99	518598	30
	Uplink	High	2664.99	532998	
	Downlink	Low	2526	505200	
60	&	Mid	2592.99	518598	30
	Uplink	High	2659.98	531996	
	Downlink	Low	2536.02	507204	
80	&	Mid	2592.99	518598	30
	Uplink	High	2649.99	529998	
	Downlink	Low	2541	508200	
90	&	Mid	2592.99	518598	30
	Uplink	High	2644.98	528996	
	Downlink	Low	2546.01	509202	
100	&	Mid	2592.99	518598	30
	Uplink	High	2640	528000	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CAI. Doccheck@ass.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980

t (86-512) 62992980 www.sgsgroup.com.cn sgs.china@sgs.com



Report No.: SEWA2205000015RG02

Rev.: 01

Page: 23 of 44

3.9.5 Reference test frequencies for NR operating band n66

3.9.5.1 Test frequencies for NR operating band n66 and SCS 15 kHz

CBW	Range	- ороланы д	Carrier centre	Carrier centre	SS block SCS
[MHz]	Range		[MHz]	[ARFCN]	[kHz]
(Low	2112.5	422500	
	Downlink	Mid	2145	429000	15
_		High	2177.5	435500	
5		Low	1712.5	342500	
	Uplink	Mid	1745	349000	- 1
	·	High	1777.5	355500	
		Low	2115	423000	
	Downlink	Mid	2145	429000	15
40		High	2175	435000]
10		Low	1715	343000	
	Uplink	Mid	1745	349000	-
	•	High	1775	355000]
		Low	2117.5	423500	
	Downlink	Mid	2145	429000	15
15		High	2172.5	434500	
15		Low	1717.5	343500	
	Uplink	Mid	1745	349000	-
		High	1772.5	354500]
		Low	2120	424000	
	Downlink	Mid	2145	429000	15
20		High	2170	434000	
20		Low	1720	344000	
	Uplink	Mid	1745	349000	-
		High	1770	354000	
		Low	2125	425000	
	Downlink	Mid	2145	429000	15
30		High	2165	433000	
30		Low	1725	345000	
	Uplink	Mid	1745	349000	-
		High	1765	353000	
40		Low	2130	426000	
	Downlink	Mid	2145	429000	15
		High	2160	432000	
40		Low	1730	346000	
	Uplink	Mid	1745	349000	-
		High	1760	352000	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms-en/Conditions/Terms

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000 t (86-512) 62992980 www.sgsgroup.com.cn t (86-512) 62992980

sgs.china@sgs.com



20

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SEWA2205000015RG02

128400

134600

136100

137600

Rev.: 01

Page: 24 of 44

3.9.6 Reference test frequencies for NR operating band n71 B.9.6.1 Test frequencies for NR operating band n71 and SCS 15 kHz

CBW Range Carrier centre Carrier centre SS block SCS [MHz] [MHz] [ARFCN] [kHz] Low 619.5 123900 Downlink 634.5 126900 Mid 15 High 649.5 129900 5 665.5 133100 Low Uplink 680.5 136100 Mid High 695.5 139100 Low 622 124400 Downlink Mid 634.5 126900 15 High 647 129400 10 668 133600 Low Uplink Mid 680.5 136100 693 138600 High 624.5 124900 Low Downlink 634.5 126900 Mid 15 644.5 128900 High 15 Low 670.5 134100 Uplink Mid 680.5 136100 High 690.5 138100 Low 627 125400 Mid Downlink 126900 634.5 15

642

673

680.5

688

High

Low

Mid

High

Uplink



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx.and, for electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions-And-Conditions-And

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Plot Free Trade Zone
中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区测胜路(号的6号厂房南部 邮编: 215000

t (86–512) 62992980 www t (86–512) 62992980 sgs.

www.sgsgroup.com.cn sgs.china@sgs.com



Report No.: SEWA2205000015RG02

Rev.: 01

Page: 25 of 44

3.9.7 Reference test frequencies for NR operating band n77 3.9.7.1 Test frequencies for NR operating band n77 and SCS 30 kHz

3700-3980:

CBW [MHz]	Range)	Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]
	Downlink	Low	3705	647000	
10	&	Mid	3840	656000	30
	Uplink	High	3975	665000	
	Downlink	Low	3707.52	647168	
15	&	Mid	3840	656000	30
	Uplink	High	3972.48	664832	
	Downlink	Low	3710.01	647334	
20	&	Mid	3840	656000	30
	Uplink	High	3969.99	664666	
	Downlink	Low	3714.99	647666	
30	&	Mid	3840	656000	30
	Uplink	High	3965.01	664334	
	Downlink	Low	3720	648000	
40	&	Mid	3840	656000	30
	Uplink	High	3960	664000	
	Downlink	Low	3725.01	648334	
50	&	Mid	3840	656000	30
	Uplink	High	3954.99	663666	
	Downlink	Low	3730.02	648668	
60	&	Mid	3840	656000	30
	Uplink	High	3949.98	663332	
	Downlink	Low	3740.01	649334	
80	&	Mid	3840	656000	30
	Uplink	High	3939.99	662666	
	Downlink	Low	3745.02	649668	
90	&	Mid	3840	656000	30
	Uplink	High	3934.98	662332	
	Downlink	Low	3750	650000	
100	&	Mid	3840	656000	30
	Uplink	High	3930	662000	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CAI. Doccheck@ass.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980

t (86-512) 62992980 www.sgsgroup.com.cn sgs.china@sgs.com



Report No.: SEWA2205000015RG02

Rev.:

Page: 26 of 44

3450-3550:

CBW [MHz]	Range		Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]
	Downlink	Low	3455.01	630334	
10	&	Mid	3500.01	633334	30
	Uplink	High	3545.01	636334	
	Downlink	Low	3457.5	630500	
15	&	Mid	3500.01	633334	30
	Uplink	High	3542.49	636166	
	Downlink	Low	3460.02	630668	
20	&	Mid	3500.01	633334	30
	Uplink	High	3540	636000	
	Downlink	Low	3465	631000	
30	&	Mid	3500.01	633334	30
	Uplink	High	3534.99	635666	
	Downlink	Low	3470.01	631334	
40	&	Mid	3500.01	633334	30
	Uplink	High	3530.01	635334	
	Downlink	Low	3475.02	631668	
50	&	Mid	3500.01	633334	30
	Uplink	High	3525	635000	
	Downlink	Low	3480	632000	
60	&	Mid	3500.01	633334	30
	Uplink	High	3519.99	634666	
	Downlink	Low	3490.02	632668	
80	&	Mid	3500.01	633334	30
	Uplink	High	3510	634000	
	Downlink	Low	3495	633000	
90	&	Mid	3500.01	633334	30
	Uplink	High	3504.99	633666	
	Downlink	Low	\	\	
100	&	Mid	3500.01	633334	30
	Uplink	High	\	\	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms-en/Conditions/Terms

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980 www.sgsgroup.com.cn t (86-512) 62992980

sgs.china@sgs.com



Report No.: SEWA2205000015RG02

Rev.: 01

Page: 27 of 44

3.9.8 Reference test frequencies for NR operating band n78 3.9.8.1 Test frequencies for NR operating band n78 and SCS 30 kHz

3700-3800:

CBW [MHz]	Range	!	Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]
	Downlink	Low	3710.01	647334	
20	&	Mid	3750	650000	30
	Uplink	High	3789.99	652666	
	Downlink	Low	3715.02	647668	
30	&	Mid	3750	650000	30
	Uplink	High	3785.01	652334	
	Downlink	Low	3720	648000	
40	&	Mid	3750	650000	30
	Uplink	High	3780	652000	
	Downlink	Low	3725.01	648334	
50	&	Mid	3750	650000	30
	Uplink	High	3774.99	651666	
	Downlink	Low	3730.02	648668	
60	&	Mid	3750	650000	30
	Uplink	High	3769.98	651332	
	Downlink	Low	3735	649000	
70	&	Mid	3750	650000	30
	Uplink	High	3765	651000	
	Downlink	Low	3740.01	649334	
80	&	Mid	3750	650000	30
	Uplink	High	3759.99	650666	
	Downlink	Low	3745.02	649668	
90	&	Mid	3750	650000	30
	Uplink	High	3754.98	650332	
	Downlink	Low	/	/	
100	&	Mid	3750	650000	30
	Uplink	High	/	/	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CAI. Doccheck@ass.com



Report No.: SEWA2205000015RG02

Rev.:

Page: 28 of 44

3450-3550:

CBW [MHz]	Range		Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]
	Downlink	Low	3460.02	630668	
20	&	Mid	3500.01	633334	30
	Uplink	High	3540	636000	
	Downlink	Low	3465	631000	
30	&	Mid	3500.01	633334	30
	Uplink	High	3534.99	635666	
	Downlink	Low	3470.01	631334	
40	&	Mid	3500.01	633334	30
	Uplink	High	3530.01	635334	
	Downlink	Low	3475.02	631668	
50	&	Mid	3500.01	633334	30
	Uplink	High	3525	635000	
	Downlink	Low	3480	632000	
60	&	Mid	3500.01	633334	30
	Uplink	High	3519.99	634666	
	Downlink	Low	3485.01	632334	
70	&	Mid	3500.01	633334	30
	Uplink	High	3515.01	634334	
	Downlink	Low	3490.02	632668	
80	&	Mid	3500.01	633334	30
	Uplink	High	3510	634000	
	Downlink	Low	3495	633000	
90	&	Mid	3500.01	633334	30
	Uplink	High	3504.99	633666	
	Downlink	Low	\	\	
100	&	Mid	3500.01	633334	30
	Uplink	High	\	\	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms-en/Conditions/Terms

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980 www.sgsgroup.com.cn t (86-512) 62992980

sgs.china@sgs.com



Report No.: SEWA2205000015RG02

Rev.: 01

Page: 29 of 44

4 Description of Tests

4.1 Conducted Output Power

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.2.1

The transmitter output was connected to a calibrated coaxial cable, attenuator and power meter, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The power output at the transmitter antenna port was determined by adding the value of the cable insertion loss to the power reading. The tests were performed at three frequencies (low channel, middle channel and high channel) and on the highest power levels, which can be setup on the transmitters.

Remark: Reference test setup 1



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printe overleaf, available on request or accessible at http://www.sps.com/en/Terms-and-Conditions.app.and, or electronic format documents subject to Terms and Conditions for Electronic Documents at <a href="http://www.sps.com/en/Terms-and-Conditions/Terms-and-Condi

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区河胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWA2205000015RG02

Rev.: 01

30 of 44 Page:

4.2 Effective (Isotropic) Radiated Power of Transmitter

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.8.4

Calculate power in dBm by the following formula:

ERP (dBm) = Conducted Power (dBm) + antenna gain (dBd)

EIRP(dBm) = Conducted Power (dBm) + antenna gain (dBi)

EIRP=ERP+2.15dB



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service prin overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.for lectronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions.ferms-and-Conditions

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000 t (86-512) 62992980 www.sgsgroup.com.cn t (86-512) 62992980 sgs.china@sgs.com

Member of the SGS Group (SGS SA)



Report No.: SEWA2205000015RG02

Rev.: 01

Page: 31 of 44

4.3 Occupied Bandwidth

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 4.2 & 4.3

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel, middle channel and high channel). The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1 percent of the selected span as is possible without being below 1 percent. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual. The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 percent of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded. The span between the two recorded frequencies is the occupied bandwidth.

Remark: Reference test setup 1

Test Settings

- The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
- 2. RBW = 1 5% of the expected OBW
- 3. VBW ≥ 3 x RBW
- 4. Detector = Peak
- 5. Trace mode = max hold
- 6. Sweep = auto couple
- 7. The trace was allowed to stabilize
- 8. If necessary, steps 2 7 were repeated after changing the RBW such that it would be within
 - 1 5% of the 99% occupied bandwidth observed in Step 7



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.apx and, for electronic Focuments at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.apx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

**Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, **Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, **Terms and the contact us at telephone: (86-755) 8307 1443, **Terms and the contact us at telephone: (86-755) 8307 1443, **Terms and the contact us at telephone: (86-755) 8307 1443, **Terms and contact us at telephone: (86-755) 8307 1443, **Terms and contact us at telephone: (86-755) 8307 1443, **Terms and contact us at telephone: (86-755) 8307 1443, **Terms and contact us at telephon

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000 t (86-512) 62992980 t (86-512) 62992980

www.sgsgroup.com.cn sgs.china@sgs.com



Report No.: SEWA2205000015RG02

Rev.: 01

Page: 32 of 44

4.4 Band Edge at Antenna Terminals

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 6.0

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at two frequencies (low channel and high channel).in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of 100kHz or 1% of the emission bandwidth of the fundamental emission of the transmitter may be employed. The EUT emission bandwidth is measured as the width of the signal between two points, outside of which all emission are attenuated at least 26dB below the transmitter power. The video bandwidth of the spectrum analyzer was set at thrice the resolution bandwidth. Detector Mode was set to peak or peak hold power.

Remark: Reference test setup 1

Test Settings

- 1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
- 2. Span was set large enough so as to capture all out of band emissions near the band edge
- 3. RBW > 1% of the emission bandwidth
- VBW ≥ 3 x RBW
- Detector = RMS
- Number of sweep points ≥ 2 x Span/RBW
- 7. Trace mode = trace average for continuous emissions, max hold for pulse emissions
- Sweep time = auto couple
- 9. The trace was allowed to stabilize



Inless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed worleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.appx and, for electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.appx tuttention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is divised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a ransaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or pipearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the seuts shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区河胜路1号的6号厂房南部 邮编: 215000

5000 t (86–512) 62992980

www.sgsgroup.com.cn sgs.china@sgs.com

t (86-512) 62992980



Report No.: SEWA2205000015RG02

Rev.: 01

Page: 33 of 44

4.5 Spurious And Harmonic Emissions at Antenna Terminal

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 6.0

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyzer, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel and high channel). The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least 43 + 10 log(P) dB. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

Remark: Reference test setup 1

Test Settings

- 1. Start frequency was set to 9kHz and stop frequency was set to at least 10* the fundamental frequency(Separated into at least two plots per channel)
- 2. Detector = RMS
- 3. Trace mode = trace average for continuous emissinos, max hold for pulse emissions
- 4. Sweep time = auto couple
- 5. The trace was allowed to stabilize
- 6. Please see test notes below for RBW and VBW settings



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printe overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx.and, for electronic format documents subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduce except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content cappearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

**Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 144

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区海胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWA2205000015RG02

Rev.: 01

Page: 34 of 44

4.6 Peak-Average Ratio

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.7.2

A peak to average ratio measurement is performed at the conducted port of the EUT. For WCDMA signals, the spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level. For GSM signals, an average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a bandwidth greater than the emission bandwidth. The traces are generated with the spectrum analyzer set to zero span mode.

Remark: Reference test setup 1

Test Settings

- 1. The signal analyzer's CCDF measurement profile is enabled
- 2. Frequency = carrier center frequency
- 3. Measurement BW > Emission bandwidth of signal
- 4. The signal analyzer was set to collect one million samples to generate the CCDF curve
- 5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printe overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx.and, for electronic format documents subject to Terms and Conditions [Terms-and-Conditions] For Decument agreements of the state of the state



Report No.: SEWA2205000015RG02

Rev.: 01

Page: 35 of 44

4.7 Field Strength of Spurious Radiation

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.8

Below 1GHz test procedure as below:

- 1). The EUT was powered ON and placed on a 80cm high table in the chamber. The antenna of the transmitter was extended to its maximum length.
- 2). The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made.
- 3). Steps 1) and 2) were performed with the EUT and the receive antenna in both vertical and horizontal polarization.
- 4). Test the EUT in the lowest channel, the middle channel ,the Highest channel.
- 5). The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
- 6). Repeat above procedures until all frequencies measured was complete.

E (dB μ V/m) = Measured amplitude level (μ V/m) + (Cable Loss (dB) + Antenna Factor (dB/m) – AMP(dB)) EIRP (dBm) = E (dB μ V/m) + 20 log D – 104.8; where D is the measurement distance in meters

Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber
- 2) Calculate power in dBm by the following formula:

E (dB μ V/m) = Measured amplitude level (dB μ V) + (Cable Loss (dB) + Antenna Factor (dB/m) – AMP(dB)) EIRP (dBm) = E (dB μ V/m) + 20 log D – 104.8; where D is the measurement distance in meters

- 3). Test the EUT in the lowest channel, the middle channel the Highest channel
- 4). The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
- 5). Repeat above procedures until all frequencies measured was complete

Remark1: Reference test setup 2

Remark2: The emission below 18G were measured at a 3m test distance, while emissions above 18GHz were measured at a 1m test distance. At a measurement distance of 1 meter the limit line was increased by 20*LOG(3/1) = 9.54 dB.

Remark: Reference test setup 2

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Level = Reading Level($dB\mu V$) + Factor(dB):

Factor = AF(dB/m) + Cable Factor(dB) - Preamplifier gain(dB)

AF = Antenna Factor(dB/m)

Margin = Limit(dBm) - Level(dBm)

- 2) Scan from 9kHz to 40GHz, The disturbance between 9KHz to 30MHz and 18GHz to 40GHz was very low, and the harmonics were the highest point could be found when testing, so only the harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 3) All modes have been tested, but only the worst case data displayed in this report.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx.and. for electronic format documents, subject to Terms and Conditions [Felectronic Documents at http://www.sgs.com/en/Termd-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国 (丁苏) 自由贸易试验区苏州片区苏州丁业园区湿路路1号的6号厂房亩额 邮编。215000



Report No.: SEWA2205000015RG02

Rev.: 01

Page: 36 of 44

4.8 Frequency Stability / Temperature Variation

Measurement Procedure:

Frequency stability testing is performed in accordance with the guidelines of FCC KDB 971168 D01 V03r01 Section 9

The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Specification – The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5 ppm) of the center frequency.

Time Period and Procedure:

- 1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
- 2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
- 3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Remark: Reference test setup 3



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service prints overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.apx.and, for electronic bocuments st http://www.sgs.com/en/Terms-and-Conditions/Ter




Report No.: SEWA2205000015RG02

Rev.: 01


Page: 37 of 44

4.9 Test Setups

4.9.1 Test Setup 1

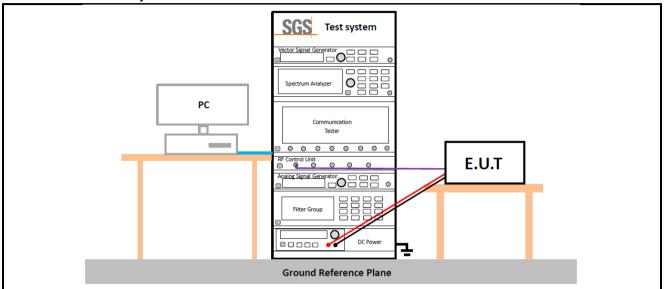

4.9.2 Test Setup 2

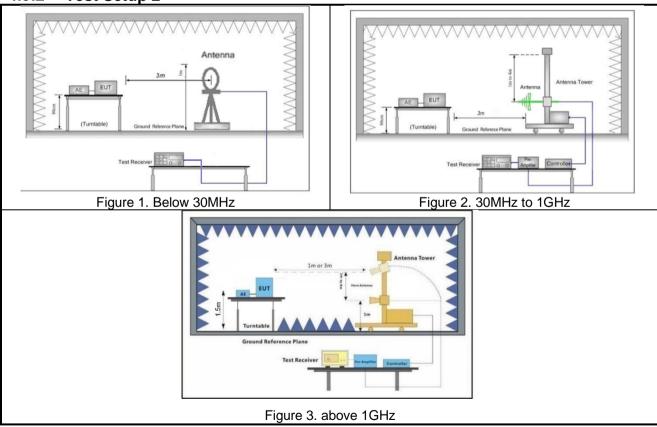



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic Documents at http://www.sgs.com/en/Terms-en/Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: Or check the authenticity of testing inspection records exertificate please contact us at telephone; (86-755) \$30.71443.

or email: CN_Doccheck@egs.com South of No. Fiver No. (Runshery Read, Subtou Indashie Park, Suzhou Area, Chine (Mangsu) Phol Free Trade Zone 中国・苏州・中国(江苏)自由贸易は強区苏州片区苏州工业园区园胜路1号約6号厂房南部 単編: 215000




Report No.: SEWA2205000015RG02

Rev.: 01

Page: 38 of 44

4.9.3 Test Setup 3

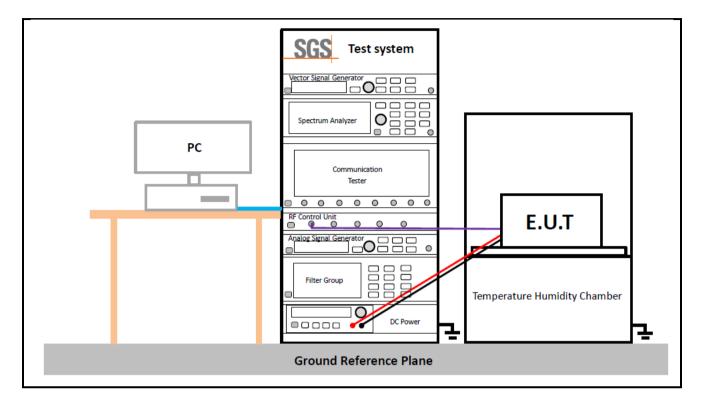



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction for or frozery or falsification of the company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing finspection report & certificate, please contact us at telephone: (86-755) \$3071443,

CML-DIOCCHECK(図:5g.s.Com South of No. Fiver No. 1, Tunsheng nost, Suturbu Instalfar Park, Suzhou Area, China (Airqsis) Phot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区河胜路1号からF/店南部 邮第: 215000



Report No.: SEWA2205000015RG02

Rev.: 01

Page: 39 of 44

4.10 Test Conditions

	Transmit Output Power Data - Average Power, Total
Test Case	Test Conditions
Test Environment	Ambient Climate & Rated Voltage
Test Setup	Test Setup 1
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)
Test Mode	NR/TM1; NR/TM2; NR/TM3; NR/TM4; NR/TM5; NR/TM6; NR/TM7; NR/TM8; NR/TM9
	Peak-to-Average Ratio
Test Case	Test Conditions
Test Environment	Ambient Climate & Rated Voltage
Test Setup	Test Setup 1
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)
Test Mode	NR/TM1; NR/TM6
	Modulation Characteristics
Test Case	Test Conditions
Test Environment	Ambient Climate & Rated Voltage
Test Setup	Test Setup 1
RF Channels (TX)	M (M= middle channel)
Test Mode	NR/TM1; NR/TM2; NR/TM3; NR/TM4; NR/TM5; NR/TM6; NR/TM7; NR/TM8; NR/TM9
	Bandwidth - Occupied Bandwidth
Test Case	Test Conditions
Test Environment	Ambient Climate & Rated Voltage
Test Setup	Test Setup 1
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)
Test Mode	NR/TM1; NR/TM2; NR/TM3; NR/TM4; NR/TM5; NR/TM6; NR/TM7; NR/TM8; NR/TM9
	Bandwidth - Emission Bandwidth
Test Case	Test Conditions
Test Environment	Ambient Climate & Rated Voltage
Test Setup	Test Setup 1
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)
Test Mode	NR/TM1; NR/TM2; NR/TM3; NR/TM4; NR/TM5; NR/TM6; NR/TM7; NR/TM8; NR/TM9



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CND Doccheck@ass.com.

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Phot Free Trate Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区海胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWA2205000015RG02

Rev.: 01

Page: 40 of 44

	Page: 40 of 44					
	Band Edges Compliance					
Test Case	Test Conditions					
Test Environment	Ambient Climate & Rated Voltage					
Test Setup	Test Setup 1					
RF Channels (TX)	L, H (L= low channel, H= high channel)					
Test Mode	NR/TM1; NR/TM6					
	Spurious Emission at Antenna Terminals					
Test Case	Test Conditions					
Test Environment	Ambient Climate & Rated Voltage					
Test Setup	Test Setup 1					
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)					
Test Mode	NR/TM1					
	Field Strength of Spurious Radiation					
Test Case	Test Conditions					
Test Environment	Ambient Climate & Rated Voltage					
Test Setup	Test Setup 2					
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)					
Test Mode	NR/TM1 Remark: If applicable, the EUT conf. that has maximum power density (based on the equivalent power level) is selected.					
	Frequency Stability					
Test Case	Test Conditions					
Test Environment	(1) -30 °C to +50 °C with step 10 °C at Rated Voltage					
Test Eliviloriment	(2) VL, VN and VH of Rated Voltage at Ambient Climate.					
Test Setup	Test Setup 3					
RF Channels (TX)	M (M= middle channel)					



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CND Doccheck@ass.com



Report No.: SEWA2205000015RG02

Rev.:

41 of 44 Page:

5 **Main Test Instruments**

RF Test Equipment						
Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (yyyy/mm/dd)	Cal.Due date (yyyy/mm/dd)	
Shielding Room	Brilliant-emc	N/A	SUWI-04-01-06	2021/05/08	2024/05/08	
Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-07	2022/02/16	2023/02/15	
Signal Analyzer	ROHDE&SCHWARZ	FSV3030	SUWI-01-02-02	2022/05/17	2023/05/16	
Measurement Software	Tonscend	JS1120-3 Test System V 2.6.88.0336	SUWI-02-09-09	NCR	NCR	
Radio Communication Analyzer	StarPoint	SP9500E	SUWI-01-28-01	2021/08/11	2022/08/10	
DC Power Supply	HYELEC	HY3005B	SUWI-01-18-01	2022/02/15	2023/02/14	
Temperature Chamber	ESPEC	SU-242	SUWI-01-13-01	2022/02/15	2023/02/14	
Signal Analyzer	ROHDE&SCHWARZ	FSW43	SUWI-01-02-04	2022/05/28	2023/05/27	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms-en/Conditions/Terms

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980 www.sgsgroup.com.cn t (86-512) 62992980

sgs.china@sgs.com



Report No.: SEWA2205000015RG02

Rev.:

Page: 42 of 44

RSE Test Equipment							
Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (yyyy/mm/dd)	Cal.Due date (yyyy/mm/dd)		
Semi-Anechoic Chamber	Brilliant-emc	N/A	SUWI-04-02-01	2021/05/08	2024/05/07		
Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-05	2022/02/16	2023/02/15		
Signal Analyzer	ROHDE&SCHWARZ	FSW43	SUWI-01-02-04	2022/05/28	2023/05/27		
Signal Analyzer	KEYSIGHT	N9020A	SUWI-01-02-05	2021/12/04	2022/12/03		
Test receiver	ROHDE&SCHWARZ	ESR7	SUWI-01-10-01	2022/02/19	2023/02/18		
Receiving antenna	SCHWRZBECK MESS-ELEKTRONIK	VULB 9163	SUWI-01-11-01	2021/05/16	2023/05/15		
Receiving antenna	SCHWRZBECK MESS-ELEKTRONIK	BBHA 9120D	SUWI-01-11-02	2021/05/16	2023/05/15		
Receiving antenna	SCHWRZBECK MESS-ELEKTRONIK	BBHA 9170	SUWI-01-11-03	2021/05/14	2023/05/13		
Active Loop Antenna	SCHWRZBECK MESS-ELEKTRONIK	FMZB 1519B	SUWI-01-21-01	2021/06/10	2023/06/09		
Amplifier	Tonscend	TAP9K3G40	SUWI-01-14-01	2022/02/14	2023/02/13		
Amplifier	Tonscend	TAP01018050	SUWI-01-14-02	2022/02/14	2023/02/13		
Amplifier	Tonscend	TAP18040048	SUWI-01-14-03	2022/02/19	2023/02/18		
UXM 5G Wireless Test Platform	KEYSIGHT	E7515B	SUWI-01-04-01	2022/02/14	2023/02/13		
Measurement Software	Tonscend	JS32-RSE 4.0.0.1	SUWI-02-09-06	NCR	NCR		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Ferms-and-Conditions/Ferms-en/Conditions/Ferms

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980

t (86-512) 62992980 www.sgsgroup.com.cn sgs.china@sgs.com



Report No.: SEWA2205000015RG02

Rev.: 01

Page: 43 of 44

6 Measurement Uncertainty

For a 95% confidence level (k = 2), the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 as following:

No.	Item	Measurement Uncertainty
1	Total RF power, conducted	±0.54dB
2	RF power density, conducted	±1.03dB
3	Spurious emissions, conducted	±0.54dB
4	Radio Frequency	±1.0%
5	Duty Cycle	±0.37%
6	Occupied Bandwidth	±1.0%
7	Radiated Emission	± 3.13dB (9kHz - 30MHz)
		± 4.8dB (30MHz - 1GHz)
		± 4.8dB (1GHz to 18GHz)
		± 4.8dB (Above 18GHz)

Remark:

The Ulab Uncertainty) is less than Ucispr/ETSI Uncertainty), so the test results

compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;

- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions-and-Terms-and-Conditions-and-Conditions-and-Terms-and-Conditions-and-Cond

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Plot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000 t (86-512) 62992980 t (86-512) 62992980

www.sgsgroup.com.cn sgs.china@sgs.com



Report No.: SEWA2205000015RG02

Rev.: 01

Page: 44 of 44

7 Appendixes

Appendix A.2	WWAN Setup Photos
Appendix B.17	NR Band n2
Appendix B.18	NR Band n5
Appendix B.19	NR Band n25
Appendix B.20	NR Band n41
Appendix B.21	NR Band n66
Appendix B.22	NR Band n71
Appendix B.23	NR Band n77(3450-3550)
Appendix B.24	NR Band n77(3700-3980)
Appendix B.25	NR Band n78(3450-3550)
Appendix B.26	NR Band n78(3700-3800)

---End of Report---



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions-and-Conditions-and-Condit

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州上区苏州工业园区园胜路1号的6号厂房南部 邮编: 215000 t (86–512) 62992980 www.s t (86–512) 62992980 sgs.cl

www.sgsgroup.com.cn sgs.china@sgs.com