

KC.IA.00474

Antenna Specification

1. Application:

This application shall apply for antenna unit which shall be used such as automotive, conventional communications, smart home, etc..

2. Electrical Specification:

Those specifications were specially defined for customer's model, and all characteristics were measured under the model's handset testing jig .

2-1. Frequency Band:

Frequency Band	MHz
WiFi	2400-2500/5150-5850MHz

2-2. Impedance


50 ohm nominal

2-3. VSWR

2-3-1. Measurement frequency points and VSWR value

Frequency Band(MHz)	2400	2500	5150	5850
Typical Value: (VSWR)	1.1	1.4	1.5	1.1

UNLESS OTHER SPECIFIED TOLERANCES ON : X=± X.X=± X.XX=± ANGLES=± HOLEDIA=±		 同 讯 技 术	TOXU TECHNOLOGY CO., LTD.	
SCALE :	UNIT : mm		THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF TOXU TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION	
DRAWN BY: LI	CHECKED BY: YS			
DESIGNED BY: De wen	APPROVED BY: YS			
TITLE : KC.IA.00474 Antenna Specification			SPEC REV.	
			P0	

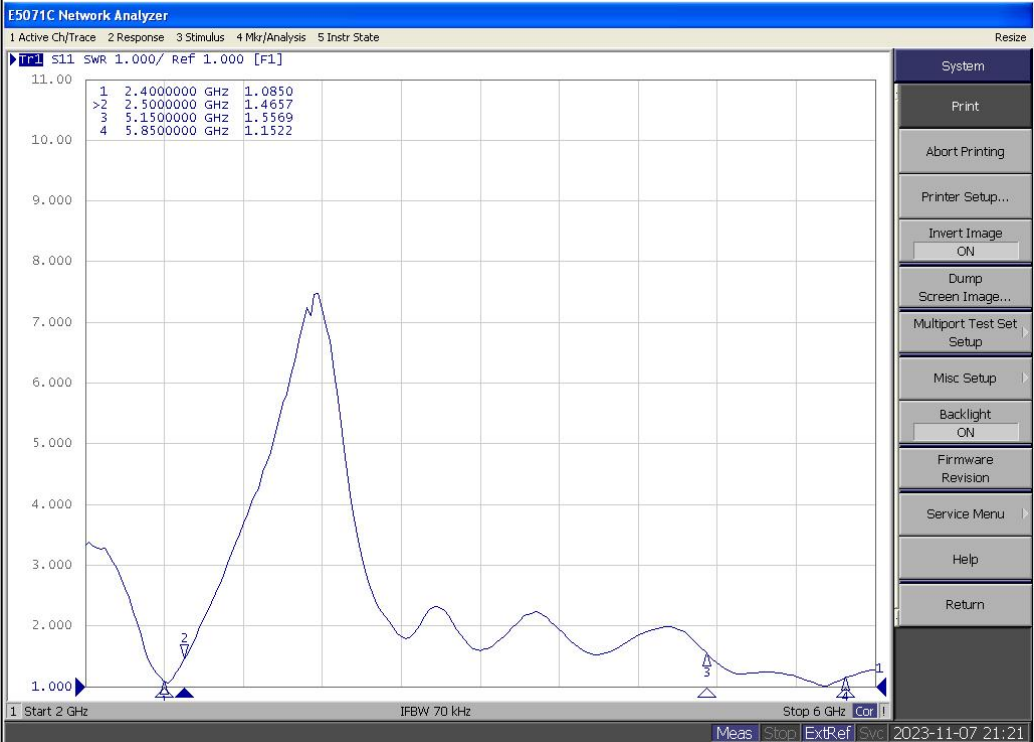2-3-4 Measuring Method	1. A 50Ω coaxial cable is connected to the antenna. Then this cable is connected to a network analyzer to measure the VSWR. 2. Keeping this jig away from metal at least 20 cm										
2-3-5 Picture	 The screenshot shows the E5071C Network Analyzer interface. The main display is a VSWR plot with a sharp resonance peak at 2.5 GHz. The plot area includes a data table with the following values: <table border="1"> <thead> <tr> <th>Frequency (GHz)</th> <th>VSWR</th> </tr> </thead> <tbody> <tr> <td>2.400000</td> <td>1.0850</td> </tr> <tr> <td>2.500000</td> <td>1.4657</td> </tr> <tr> <td>5.150000</td> <td>1.5569</td> </tr> <tr> <td>5.850000</td> <td>1.1522</td> </tr> </tbody> </table> The right-hand menu contains various system and measurement options like System, Print, Abort Printing, Printer Setup, Invert Image, Dump Screen Image, Multipoint Test Set Setup, Misc Setup, Backlight, Firmware Revision, Service Menu, Help, and Return.	Frequency (GHz)	VSWR	2.400000	1.0850	2.500000	1.4657	5.150000	1.5569	5.850000	1.1522
Frequency (GHz)	VSWR										
2.400000	1.0850										
2.500000	1.4657										
5.150000	1.5569										
5.850000	1.1522										


UNLESS OTHER SPECIFIED TOLERANCES ON : X=± X.X=± X.XX=± ANGLES=± HOLEDIA=±		TOXU 同讯技术 TOXU TECHNOLOGY CO., LTD.
SCALE :	UNIT : mm	
DRAWN BY: LI	CHECKED BY: YS	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF TOXU TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION
DESIGNED BY: De wen	APPROVED BY: YS	
TITLE : KC.IA.00474 Antenna Specification		SPEC REV. P0

2-4. Efficiency and Gain

4-5.1 Measure method

1. Using a low loss coaxial cable to link a standard handset jig
2. Fixed this handset jig on chamber's rotator plane
3. Linking jig into network analyzer port and using a probing horn antenna to collect data.
4. Using another standard gain horn antenna to calibrated those data

4-5.2 Chamber definition

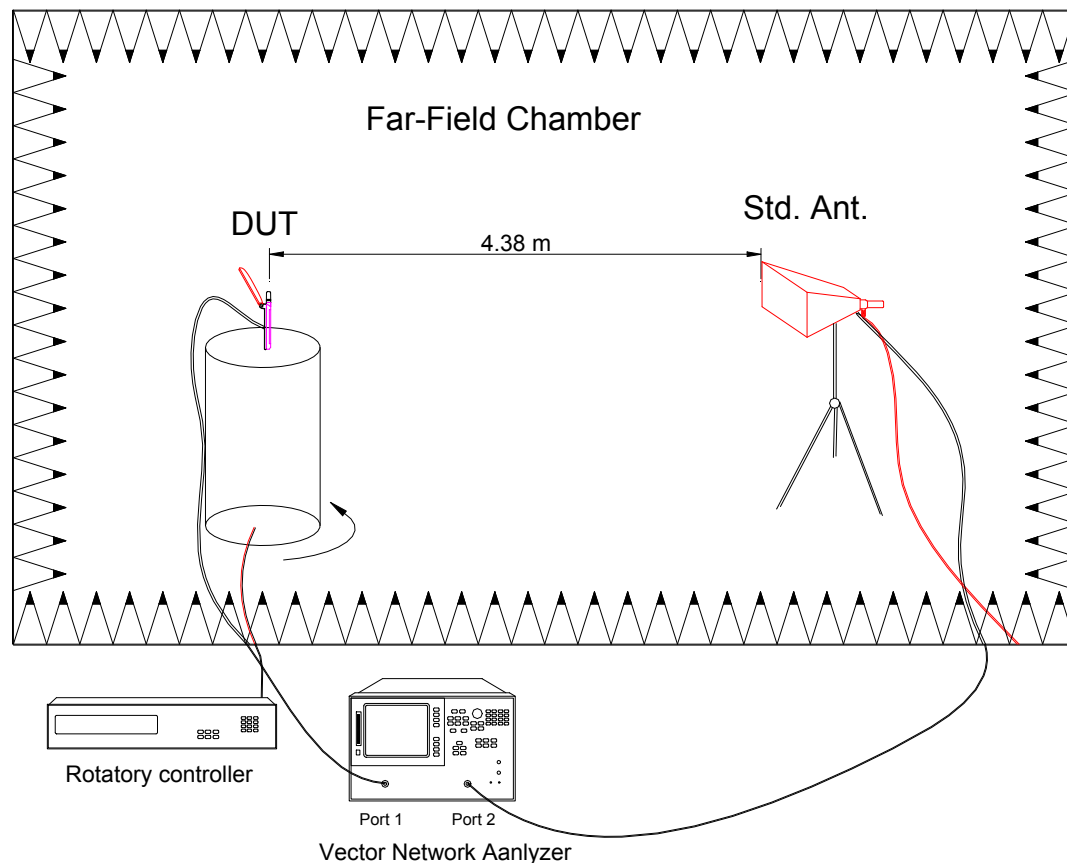









1. An anechoic chamber (7mx4mx3m) which satisfied far-field condition was applied to avoid multi-path effect
2. The quite room region is 40cmx40cmx40cm at the center of rotator
3. The distance between DUT and standard antenna is 4.38 m
4. Probing antenna (9120D horn antenna) and standard gain horn antenna (BBHA9120 LPF 700MHz ~6GHz)

UNLESS OTHER SPECIFIED TOLERANCES ON : X=± X.X=± X.XX=± ANGLES=± HOLEDIA=±		TOXU 同讯技术	TOXU TECHNOLOGY CO., LTD.
SCALE :	UNIT : mm		
DRAWN BY: LI	CHECKED BY: YS	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF TOXU TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION	
DESIGNED BY: De wen	APPROVED BY: YS		
TITLE : KC.IA.00474 Antenna Specification			SPEC REV. P0

2-4-1 Efficiency and Gain and 3D Date

Frequency/Mhz	MaxGain/dBi	Efficiency / %
2400	2.9	47.42
2410	3.57	49.32
2420	3.21	50.47
2430	3.46	48.31
2440	2.76	45.71
2450	3.2	55.72
2460	2.95	55.72
2470	2.7	54.45
2480	3.22	58.75
2490	2.55	57.81
2500	2.72	56.89
5150	1.89	46.24
5190	1.8	49.66
5230	1.83	49.77

Frequency/Mhz	MaxGain/dBi	Efficiency / %
5270	1.57	49.66
5310	2.27	53.7
5350	2.49	56.1
5390	2.75	53.33
5430	2.66	50.82
5470	2.86	50.82
5510	2.71	49.77
5550	3.07	50.7
5590	2.79	48.87
5630	2.97	48.08
5670	3.5	47.1
5710	3.46	46.99
5750	3.53	46.56
5790	3.06	44.77
5830	3.38	50.35
5850	3.27	50.23

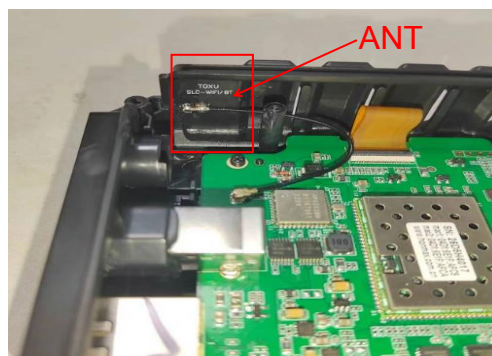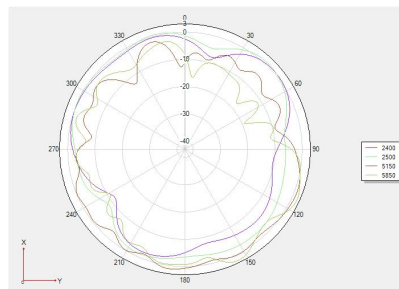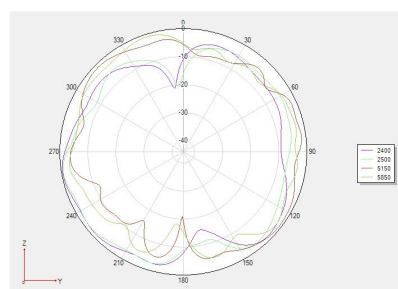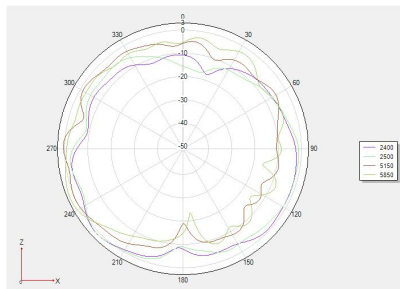

UNLESS OTHER SPECIFIED TOLERANCES ON :

X=± X.X=± X.XX=±

ANGLES=± HOLEDIA=±

SCALE :

UNIT : mm

DRAWN BY: LI

CHECKED BY: YS

DESIGNED BY: De wen

APPROVED BY: YS

TOXU
同讯技术

TOXU TECHNOLOGY CO., LTD.

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF TOXU TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE : KC.IA.00474 Antenna Specification



SPEC REV.

P0

3. Mechanical Specification:

3-1. Mechanical Configuration (Unit: mm)

The appearance of the antenna is according to drawing

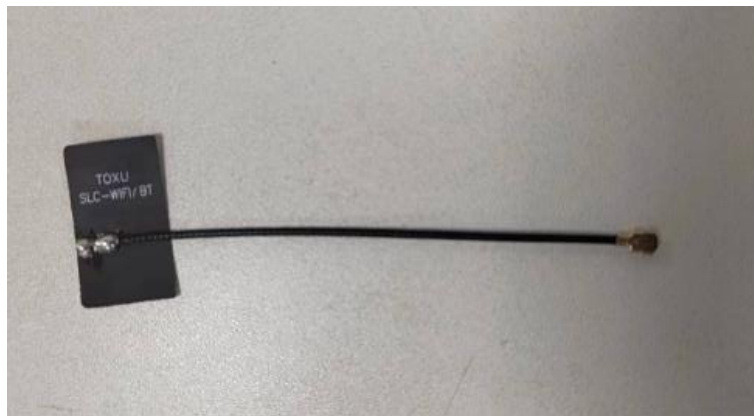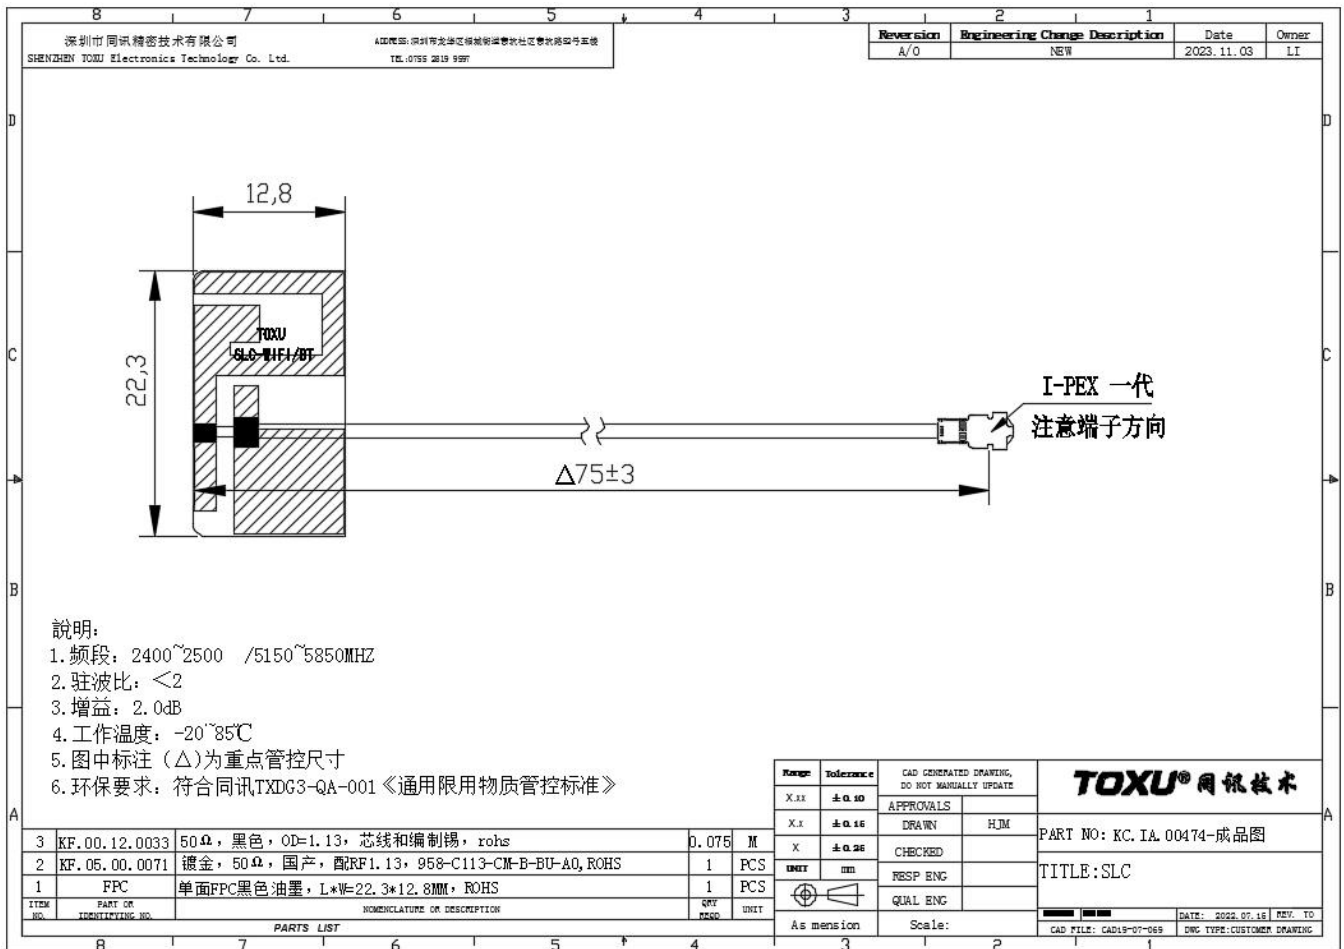

UNLESS OTHER SPECIFIED TOLERANCES ON :		 同讯技术	TOXU TECHNOLOGY CO., LTD.
X=±	X.X=±		
ANGLES=±		HOLEDIA=±	
SCALE :	UNIT : mm	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF TOXU TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION	
DRAWN BY: LI	CHECKED BY: YS		
DESIGNED BY: De wen	APPROVED BY: YS		
TITLE : KC.IA.00474 Antenna Specification			SPEC REV.
			P0

4 .Packaging specification:


Product number: xxxxx			
Product model: xxxxx			
一、 Label requirements:			
Customer	xxx		
supplier	xxxxxx		
Material coding	xx		
Product model	xx		
Number	XXX PCS	Factory date	X X X
Remarks			

二、 Boxing:

Job description:

1. Inner packaging:

XXpcs A bag




2. External packaging:

Xx PCS ;

3. Matters needing attention:

- Whether to add partition and pearl cotton;
- Label attachments, such as ROHS, etc.;



UNLESS OTHER SPECIFIED TOLERANCES ON :		 TOXU TECHNOLOGY CO., LTD.
$X=\pm$ $X.X=\pm$ $X.XX=\pm$ ANGLES $=\pm$ HOLEDIA $=\pm$		
SCALE :	UNIT : mm	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF TOXU TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION
DRAWN BY: LI	CHECKED BY: YS	
DESIGNED BY: De wen	APPROVED BY: YS	
TITLE : KC.IA.00474 Antenna Specification		SPEC REV. P0