

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR241200481505

Page: 1 of 532

TEST REPORT

Application No.: SZCR2412004815AT
Applicant: SZ DJI TECHNOLOGY CO., LTD.
Address of Applicant: Lobby of T2, DJI Sky City, No. 53 Xianyuan Road, Xili Community, Xili Street, Nanshan District, 518055, Shenzhen, China.
Manufacturer: SZ DJI TECHNOLOGY CO., LTD.
Address of Manufacturer: Lobby of T2, DJI Sky City, No. 53 Xianyuan Road, Xili Community, Xili Street, Nanshan District, 518055, Shenzhen, China.
Equipment Under Test (EUT):
EUT Name: Matrice 400A
Model No.: M400A
Trade Mark: DJI
FCC ID: SS3-M400A2412
Standard(s) : 47 CFR Part 15, Subpart E 15.407
Date of Receipt: 2024-12-20
Date of Test: 2024-12-20 to 2024-12-23
Date of Issue: 2024-12-24

Test Result:	Pass*
---------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.



Keny Xu
EMC Laboratory Manager



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch (EMC Laboratory)

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR241200481505

Page: 2 of 532

Revision Record				
Version	Chapter	Date	Modifier	Remark
01		2024-12-24		Original

Authorized for issue by:				
		Darren Yuan		
		Darren Yuan/Project Engineer		
		Eric Fu		
		Eric Fu/Reviewer		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch / 深圳分公司 / 检验检测专用章

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

2 Test Summary

Radio Spectrum Technical Requirement				
Item	Standard	Method	Requirement	Result
Antenna Requirement	47 CFR Part 15, Subpart E 15.407	N/A	47 CFR Part 15, Subpart C 15.203	Pass
Transmission in the Absence of Data		N/A	47 CFR Part 15, Subpart E 15.407 (c)	Pass

Radio Spectrum Matter Part				
Item	Standard	Method	Requirement	Result
Maximum Conducted output power	47 CFR Part 15, Subpart E 15.407	ANSI C63.10 (2013) Section 12.3	47 CFR Part 15, Subpart E 15.407 (a)	Pass
Radiated Emissions (Below 1GHz)		ANSI C63.10 (2013) Section 6.4,6.5	47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)	Pass
Radiated Emissions (Above 1GHz)		ANSI C63.10 (2013) Section 6.6	47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)	Pass
Radiated Emissions which fall in the restricted bands		ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)	Pass
Duty Cycle		ANSI C63.10 (2013) Section 12.2	ANSI C63.10 (2013) Section 12.2	Pass
99% Bandwidth		ANSI C63.10 (2013) Section 12.4.2	ANSI C63.10 (2013) Section 12.4.2	Pass
26dB Emission bandwidth		ANSI C63.10 (2013) Section 12.4.1	47 CFR Part 15, Subpart E 15.407 (a)	Pass
Minimum 6 dB bandwidth (5.725-5.85 GHz band)		ANSI C63.10 (2013) Section 6.9.2	47 CFR Part 15, Subpart E 15.407 (e)	Pass
Peak Power spectrum density		ANSI C63.10 (2013) Section 12.5	47 CFR Part 15, Subpart E 15.407 (a)	Pass
Frequency Stability		ANSI C63.10 (2013) Section 6.8	47 CFR Part 15, Subpart E 15.407 (g)	Pass

Remark: KDB 789033 D02 is not accredited by A2LA



3 Contents

	Page
1 Cover Page	1
2 Test Summary	3
3 Contents	4
4 General Information	6
4.1 Details of E.U.T.	6
4.2 Description of Support Units	10
4.3 Measurement Uncertainty	10
4.4 Test Location	11
4.5 Test Facility	11
4.6 Deviation from Standards	11
4.7 Abnormalities from Standard Conditions	11
5 Equipment List	12
6 Radio Spectrum Technical Requirement	14
6.1 Antenna Requirement	14
6.1.1 Test Requirement:	14
6.1.2 Conclusion	14
6.2 Transmission in the Absence of Data	15
6.2.1 Test Requirement:	15
6.2.2 Conclusion	15
7 Radio Spectrum Matter Test Results	16
7.1 Maximum Conducted output power	16
7.1.1 E.U.T. Operation	16
7.1.2 Test Mode Description	16
7.1.3 Test Setup Diagram	17
7.1.4 Measurement Procedure and Data	17
7.2 Radiated Emissions (Below 1GHz)	18
7.2.1 E.U.T. Operation	18
7.2.2 Test Mode Description	18
7.2.3 Test Setup Diagram	19
7.2.4 Measurement Procedure and Data	20
7.3 Radiated Emissions (Above 1GHz)	23
7.3.1 E.U.T. Operation	23
7.3.2 Test Mode Description	24
7.3.3 Test Setup Diagram	24
7.3.4 Measurement Procedure and Data	25
7.4 Radiated Emissions which fall in the restricted bands	32
7.4.1 E.U.T. Operation	32
7.4.2 Test Mode Description	33
7.4.3 Test Setup Diagram	33



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR241200481505

Page: 5 of 532

7.4.4	Measurement Procedure and Data.....	34
7.5	Duty Cycle	131
7.5.1	E.U.T. Operation	131
7.5.2	Test Mode Description	131
7.5.3	Test Setup Diagram	132
7.5.4	Measurement Procedure and Data.....	132
7.6	99% Bandwidth	133
7.6.1	E.U.T. Operation	133
7.6.2	Test Mode Description	133
7.6.3	Test Setup Diagram	134
7.6.4	Measurement Procedure and Data.....	134
7.7	26dB Emission bandwidth	135
7.7.1	E.U.T. Operation	135
7.7.2	Test Mode Description	135
7.7.3	Test Setup Diagram	135
7.7.4	Measurement Procedure and Data.....	135
7.8	Minimum 6 dB bandwidth (5.725-5.85 GHz band)	136
7.8.1	E.U.T. Operation	136
7.8.2	Test Mode Description	136
7.8.3	Test Setup Diagram	137
7.8.4	Measurement Procedure and Data.....	137
7.9	Peak Power spectrum density	138
7.9.1	E.U.T. Operation	138
7.9.2	Test Mode Description	138
7.9.3	Test Setup Diagram	139
7.9.4	Measurement Procedure and Data.....	139
7.10	Frequency Stability.....	140
7.10.1	E.U.T. Operation.....	140
7.10.2	Test Mode Description	140
7.10.3	Test Setup Diagram	141
7.10.4	Measurement Procedure and Data.....	141
8	Test Setup Photo	142
9	EUT Constructional Details (EUT Photos).....	142
10	Appendix.....	143



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Services Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

4 General Information

4.1 Details of E.U.T.

Power supply:	Powered by Lithium Ion Rechargeable Battery Battery Information Model: TB100-20254-48.23 Nominal Voltage: 48.23VDC Rated Capacity: 20254mAh
Operation Frequency:	5.1G SDR 1.4MHz mode A: 5154MHz-5248MHz 1.4MHz mode C: 5156.19MHz-5246.19MHz 1.4MHz mode D: 5157.81MHz-5247.81MHz 3MHz mode A: 5154MHz-5247MHz 3MHz mode C: 5158.38MHz-5243.38MHz 3MHz mode D: 5161.62MHz-5246.62MHz 5MHz mode A: 5155MHz-5245MHz 5MHz mode C: 5155.76MHz-5239.76MHz 5MHz mode D: 5162.24MHz-5246.24MHz 10MHz mode A: 5157MHz-5245MHz 10MHz mode C: 5162MHz-5240MHz 10MHz mode D: 5162MHz-5240MHz 20MHz mode A: 5161MHz-5240MHz 20MHz mode C: 5170MHz-5230MHz 20MHz mode D: 5170MHz-5230MHz 40MHz mode A: 5170MHz-5230MHz 40MHz mode C: 5190MHz-5210MHz 40MHz mode D: 5190MHz-5210MHz 60MHz: 5180MHz-5220MHz 80MHz: 5190MHz-5210MHz 5.8G SDR 1.4MHz mode A: 5728.5MHz-5844.5MHz 1.4MHz mode B: 5730.12MHz-5846.12MHz 1.4MHz mode C: 5729.69MHz-5840.69MHz 1.4MHz mode D: 5731.31MHz-5842.31MHz 3MHz mode A: 5727.5MHz-5844.5MHz 3MHz mode B: 5730.2MHz-5847.2MHz 3MHz mode C: 5730.88MHz-5840.88MHz 3MHz mode D: 5734.12MHz-5844.12MHz 5MHz mode A: 5732.5MHz-5842.5MHz 5MHz mode C: 5733.26MHz-5835.26MHz



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR241200481505

Page: 7 of 532

	5MHz mode D: 5739.74MHz-5841.74MHz 10MHz mode A: 5730.5MHz-5844.5MHz 10MHz mode C: 5730.75MHz-5830.75MHz 10MHz mode D: 5744.25MHz-5844.25MHz 20MHz mode A: 5735.5MHz-5839.5MHz 20MHz mode C: 5736MHz-5812MHz 20MHz mode D: 5763MHz-5839MHz 40MHz mode A: 5745.5MHz-5829.5MHz 40MHz mode C: 5745.5MHz-5775.5MHz 40MHz mode D: 5799.5MHz-5829.5MHz 60MHz: 5755.5MHz-5819.5MHz 80MHz: 5765.5MHz-5809.5MHz
Modulation Type:	OFDM
Channel Spacing:	5.1G SDR 1.4MHz mode A: 2MHz 1.4MHz mode C: 3MHz 1.4MHz mode D: 3MHz 3MHz mode A: 3MHz 3MHz mode C: 5MHz 3MHz mode D: 5MHz 5MHz mode A: 5MHz 5MHz mode C: 1MHz 5MHz mode D: 1MHz 10MHz mode A: 1MHz 10MHz mode C: 1MHz 10MHz mode D: 1MHz 20MHz mode A: 1MHz 20MHz mode C: 1MHz 20MHz mode D: 1MHz 40MHz mode A: 1MHz 40MHz mode C: 1MHz 40MHz mode D: 1MHz 60MHz: 1MHz 80MHz: 1MHz 5.8G SDR 1.4MHz mode A: 2MHz 1.4MHz mode B: 2MHz 1.4MHz mode C: 3MHz 1.4MHz mode D: 3MHz 3MHz mode A: 3MHz



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch / 深圳分公司 / 检验检测专用章
Shenzhen Branch / 深圳分公司 / 检验检测专用章

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR241200481505

Page: 8 of 532

	3MHz mode B: 3MHz 3MHz mode C: 5MHz 3MHz mode D: 5MHz 5MHz mode A: 5MHz 5MHz mode C: 1MHz 5MHz mode D: 1MHz 10MHz mode A: 1MHz 10MHz mode C: 1MHz 10MHz mode D: 1MHz 20MHz mode A: 1MHz 20MHz mode C: 1MHz 20MHz mode D: 1MHz 40MHz mode A: 1MHz 40MHz mode C: 1MHz 40MHz mode D: 1MHz 60MHz: 1MHz 80MHz: 1MHz
Number of Channels:	5.1G SDR 1.4MHz mode A: 48 1.4MHz mode C: 31 1.4MHz mode D: 31 3MHz mode A: 32 3MHz mode C: 18 3MHz mode D: 18 5MHz mode A: 19 5MHz mode C: 85 5MHz mode D: 85 10MHz mode A: 89 10MHz mode C: 79 10MHz mode D: 79 20MHz mode A: 80 20MHz mode C: 61 20MHz mode D: 61 40MHz mode A: 61 40MHz mode C: 21 40MHz mode D: 21 60MHz: 41 80MHz: 21



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch (SZEMC) Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR241200481505

Page: 9 of 532

	5.8G SDR 1.4MHz mode A: 59 1.4MHz mode B: 59 1.4MHz mode C: 38 1.4MHz mode D: 38 3MHz mode A: 40 3MHz mode B: 40 3MHz mode C: 23 3MHz mode D: 23 5MHz mode A: 23 5MHz mode C: 103 5MHz mode D: 103 10MHz mode A: 115 10MHz mode C: 101 10MHz mode D: 101 20MHz mode A: 105 20MHz mode C: 77 20MHz mode D: 77 40MHz mode A: 85 40MHz mode C: 31 40MHz mode D: 31 60MHz: 65 80MHz: 45							
Antenna Type:	Dipole Antenna							
Antenna Gain (5.1G):	ANT0	ANT1	ANT2	ANT3	ANT4	ANT5	ANT6	ANT7
	1dBi	1dBi	2dBi	2dBi	2dBi	2dBi	2dBi	3dBi
Antenna Gain (5.8G):	ANT0	ANT1	ANT2	ANT3	ANT4	ANT5	ANT6	ANT7
	2dBi	2dBi	2.5dBi	2.5dBi	3dBi	2.5dBi	2.5dBi	3.5dBi
Cable Loss (for RF conducted test):	5.1G: 2.2dB							
	5.8G: 2.6dB							

Remark: The information in this section is provided by the applicant or manufacturer, SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing & Calibration Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR241200481505

Page: 10 of 532

4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
--	--	--	--
The EUT has been tested as an independent unit.			

4.3 Measurement Uncertainty

Test Item	Measurement Uncertainty
Maximum Conducted output power	$\pm 0.75\text{dB}$
Radiated Emissions (Below 1GHz)	$\pm 6.0\text{dB}$ for 3m; $\pm 5.0\text{dB}$ for 10m
Radiated Emissions (Above 1GHz)	$\pm 4.6\text{dB}$ (1-18GHz); $\pm 4.8\text{dB}$ (18-40GHz)
Radiated Emissions which fall in the restricted bands	$\pm 6.0\text{dB}$ (below 1GHz); $\pm 4.6\text{dB}$ (above 1GHz);
Duty Cycle	$\pm 0.37\%$
99% Bandwidth	$\pm 3\%$
26dB Emission bandwidth	$\pm 3\%$
Minimum 6 dB bandwidth (5.725-5.85 GHz band)	$\pm 3\%$
Peak Power spectrum density	$\pm 2.84\text{dB}$
Frequency Stability	$\pm 7.25 \times 10^{-8}$

Remark:

The U_{lab} (lab Uncertainty) is less than $U_{\text{CISPR/ETSI}}$ (CISPR/ETSI Uncertainty), so the test results

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR241200481505

Page: 11 of 532

4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• A2LA (Certificate No. 3816.01)

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

• VCCI (Member No. 1937)

The 3m Fully-anechoic chamber for above 1GHz, 10m Semi-anechoic chamber for below 1GHz, Shielded Room for Mains Port Conducted Interference Measurement and Telecommunication Port Conducted Interference Measurement of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen EMC laboratory have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-20026, R-14188, C-12383 and T-11153 respectively.

• FCC –Designation Number: CN1336

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1336. Test Firm Registration Number: 787754.

• Innovation, Science and Economic Development Canada

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0006.

IC#: 4620C.

4.6 Deviation from Standards

None

4.7 Abnormalities from Standard Conditions

None



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch EMC Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.ssgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

5 Equipment List

Maximum Conducted output power					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Power Sensor	TST PASS	TSPS2023R	SEM009-26	2024-03-27	2025-03-26
Power Sensor	KEYSIGHT	U2021XA	SEM009-16	2024-03-14	2025-03-13
DC Power Supply	Chroma	62012P-80-60	SEM011-11	2024-08-14	2025-08-13
MXA Signal Analyzer	KEYSIGHT	N9020A	SEM004-19	2024-03-14	2025-03-13
Signal Generator	KEYSIGHT	N5173B	SEM006-05	2024-09-14	2025-09-13
Measurement Software	TST PASS	TST PASS V2.0	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM031-01	2024-07-06	2025-07-05
Attenuator	Huber+Suhner	6620_SMA-50-1	SEM021-09	2024-03-27	2025-03-26
Programmable Temperature & Humidity Chamber	Votsch Industrietechnik GmbH	VT 4002	SEM002-15	2024-03-19	2025-03-18

Radiated Emissions (Below 1GHz)					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Loop Antenna	ETS-Lindgren	6502	SEM003-08	2023-11-20	2025-11-19
3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEM001-01	2023-06-19	2026-06-18
MXE EMI Receiver	Agilent Technologies	N9038A	SEM004-15	2024-08-14	2025-08-13
BiConiLog Antenna	ETS-LINDGREN	3142C	SEM003-01	2023-09-16	2025-09-15
Pre-Amplifier	Agilent Technologies	8447D	SEM005-01	2024-03-14	2025-03-13
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM025-01	2024-07-06	2025-07-05

Radiated Emissions (Above 1GHz)					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
3m Fully-Anechoic Chamber	AUDIX	N/A	SEM001-02	2024-05-11	2027-05-10
Signal Analyzer	Rohde & Schwarz	FSV40	SEM008-04	2024-03-15	2025-03-14
Horn Antenna	Rohde&Schwarz	HF907	SEM003-07	2023-07-23	2025-07-22
Microwave system amplifier	Agilent	83017A	SEM005-25	2024-09-14	2025-09-13
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM026-01	2024-07-06	2025-07-05



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR241200481505

Page: 13 of 532

Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	SEM003-15	2024-08-10	2025-08-09
Pre-Amplifier	Compliance Directions Systems Inc.	PAP-2640-50	SEM005-08	2024-03-15	2025-03-14

Radiated Emissions which fall in the restricted bands

Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
3m Fully-Anechoic Chamber	AUDIX	N/A	SEM001-02	2024-05-11	2027-05-10
Signal Analyzer	Rohde & Schwarz	FSV40	SEM008-04	2024-03-15	2025-03-14
Horn Antenna	Rohde&Schwarz	HF907	SEM003-07	2023-07-23	2025-07-22
Microwave system amplifier	Agilent	83017A	SEM005-25	2024-09-14	2025-09-13
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM026-01	2024-07-06	2025-07-05

RF Conducted Test

Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
DC Power Supply	Chroma	62012P-80-60	SEM011-11	2024-08-14	2025-08-13
MXA Signal Analyzer	KEYSIGHT	N9020A	SEM004-19	2024-03-14	2025-03-13
Signal Generator	KEYSIGHT	N5173B	SEM006-05	2024-09-14	2025-09-13
Measurement Software	TST PASS	TST PASS V2.0	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM031-01	2024-07-06	2025-07-05
Attenuator	Huber+Suhner	6620_SMA-50-1	SEM021-09	2024-03-27	2025-03-26
Programmable Temperature & Humidity Chamber	Votsch Industrietechnik GmbH	VT 4002	SEM002-15	2024-03-19	2025-03-18

General used equipment

Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Humidity/ Temperature Indicator	deli	8838	SEM002-32	2024-07-24	2025-07-23
Humidity/ Temperature Indicator	deli	8838	SEM002-33	2024-07-24	2025-07-23
Barometer	Changchun Meteorological Industry Factory	DYM3	SEM002-01	2024-03-18	2025-03-17



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203

6.1.2 Conclusion

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is no consideration of replacement. The best case gain of the antennas are listed following:

Antenna Gain (5.1G):	ANT0	ANT1	ANT2	ANT3	ANT4	ANT5	ANT6	ANT7
	1dBi	1dBi	2dBi	2dBi	2dBi	2dBi	2dBi	3dBi
Antenna Gain (5.8G):	ANT0	ANT1	ANT2	ANT3	ANT4	ANT5	ANT6	ANT7
	2dBi	2dBi	2.5dBi	2.5dBi	3dBi	2.5dBi	2.5dBi	3.5dBi

Directional gain (5.1G)

ANT01	ANT03	ANT05	ANT07	ANT21	ANT23	ANT25	ANT27
4.01dBi	5.01dBi	5.51dBi	6.01dBi	5.01dBi	5.01dBi	5.01dBi	6.01dBi
ANT41	ANT43	ANT45	ANT47	ANT61	ANT63	ANT65	ANT67
5.01dBi	5.01dBi	5.01dBi	6.01dBi	5.01dBi	5.01dBi	5.01dBi	6.01dBi

Directional gain (5.8G)

ANT01	ANT03	ANT05	ANT07	ANT21	ANT23	ANT25	ANT27
5.01dBi	5.51dBi	5.51dBi	6.51dBi	5.51dBi	5.51dBi	5.51dBi	6.51dBi
ANT41	ANT43	ANT45	ANT47	ANT61	ANT63	ANT65	ANT67
6.01dBi	6.01dBi	6.01dBi	6.51dBi	5.51dBi	5.51dBi	5.51dBi	6.51dBi

Antenna location: Refer to internal photo.

6.2 Transmission in the Absence of Data

6.2.1 Test Requirement:

47 CFR Part 15, Subpart E 15.407 (c)

6.2.2 Conclusion

Standard Requirement:

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signalling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals.

Applicants shall include in their application for equipment authorization a description of how this requirement is met.

EUT Details: SDR chip support automatically discontinue transmission in case of either absence of information to transmit or operational failure, if the chip detect absence of information to transmit or operational failure, it will be automatically shut off.



7 Radio Spectrum Matter Test Results

7.1 Maximum Conducted output power

Test Requirement 47 CFR Part 15, Subpart E 15.407 (a)

Test Method: ANSI C63.10 (2013) Section 12.3

Limit:

Frequency band(MHz)	Limit
5150-5250	≤1W(30dBm) for master device
	≤250mW(24dBm) for client device
5250-5350	≤250mW(24dBm) or 11dBm+10logB*
5470-5725	≤250mW(24dBm) or 11dBm+10logB*
5725-5850	≤1W(30dBm)
Remark:	<p>* Where B is the 26dB emission bandwidth in MHz.</p> <p>The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.</p>

7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 24.4 °C Humidity: 35.4 % RH Atmospheric Pressure: 1020 mbar

7.1.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	13	TX mode (5.1G SDR_1.4MHz)_Keep the EUT in transmitting mode.
Final test	14	TX mode (5.1G SDR_3MHz)_Keep the EUT in transmitting mode.
Final test	15	TX mode (5.1G SDR_5MHz)_Keep the EUT in transmitting mode.
Final test	16	TX mode (5.1G SDR_10MHz)_Keep the EUT in transmitting mode.
Final test	17	TX mode (5.1G SDR_20MHz)_Keep the EUT in transmitting mode.
Final test	18	TX mode (5.1G SDR_40MHz)_Keep the EUT in transmitting mode.
Final test	19	TX mode (5.1G SDR_60MHz)_Keep the EUT in transmitting mode.
Final test	20	TX mode (5.1G SDR_80MHz)_Keep the EUT in transmitting mode.
Final test	21	TX mode (5.8G SDR_1.4MHz)_Keep the EUT in transmitting mode.
Final test	22	TX mode (5.8G SDR_3MHz)_Keep the EUT in transmitting mode.
Final test	23	TX mode (5.8G SDR_5MHz)_Keep the EUT in transmitting mode.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch (SZEMC) EMC Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch


SZEMC-TRF-01 Rev. A/1

Report No.: SZCR241200481505

Page: 17 of 532

Final test	24	TX mode (5.8G SDR_10MHz)_Keep the EUT in transmitting mode.
Final test	25	TX mode (5.8G SDR_20MHz)_Keep the EUT in transmitting mode.
Final test	26	TX mode (5.8G SDR_40MHz)_Keep the EUT in transmitting mode.
Final test	27	TX mode (5.8G SDR_60MHz)_Keep the EUT in transmitting mode.
Final test	28	TX mode (5.8G SDR_80MHz)_Keep the EUT in transmitting mode.

7.1.3 Test Setup Diagram

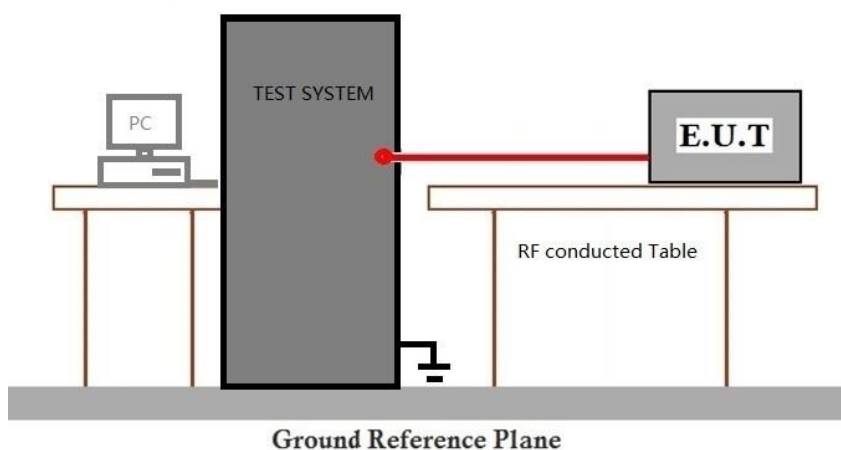

7.1.4 Measurement Procedure and Data

Note: Since the verify power the same operating range bandwidth and smaller power can be covered by the higher power.

Please Refer to Appendix for Details



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch, Inspection & Testing Services

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

7.2 Radiated Emissions (Below 1GHz)

Test Requirement 47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)

Test Method: ANSI C63.10 (2013) Section 6.4,6.5

Measurement Distance: 3m

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
960-1000	500	3

7.2.1 E.U.T. Operation

Operating Environment:

Temperature: 20.2 °C

Humidity: 45.2 % RH

Atmospheric Pressure: 1020 mbar

7.2.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	13	TX mode (5.1G SDR_1.4MHz)_Keep the EUT in transmitting mode.
Pre-scan	14	TX mode (5.1G SDR_3MHz)_Keep the EUT in transmitting mode.
Pre-scan	15	TX mode (5.1G SDR_5MHz)_Keep the EUT in transmitting mode.
Pre-scan	16	TX mode (5.1G SDR_10MHz)_Keep the EUT in transmitting mode.
Pre-scan	17	TX mode (5.1G SDR_20MHz)_Keep the EUT in transmitting mode.
Pre-scan	18	TX mode (5.1G SDR_40MHz)_Keep the EUT in transmitting mode.
Pre-scan	19	TX mode (5.1G SDR_60MHz)_Keep the EUT in transmitting mode.
Pre-scan	20	TX mode (5.1G SDR_80MHz)_Keep the EUT in transmitting mode.
Pre-scan	21	TX mode (5.8G SDR_1.4MHz)_Keep the EUT in transmitting mode.
Pre-scan	22	TX mode (5.8G SDR_3MHz)_Keep the EUT in transmitting mode.
Pre-scan	23	TX mode (5.8G SDR_5MHz)_Keep the EUT in transmitting mode.
Pre-scan	24	TX mode (5.8G SDR_10MHz)_Keep the EUT in transmitting mode.
Pre-scan	25	TX mode (5.8G SDR_20MHz)_Keep the EUT in transmitting mode.
Pre-scan	26	TX mode (5.8G SDR_40MHz)_Keep the EUT in transmitting mode.
Pre-scan	27	TX mode (5.8G SDR_60MHz)_Keep the EUT in transmitting mode.
Pre-scan	28	TX mode (5.8G SDR_80MHz)_Keep the EUT in transmitting mode.




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch (SZEMC) Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

7.2.3 Test Setup Diagram

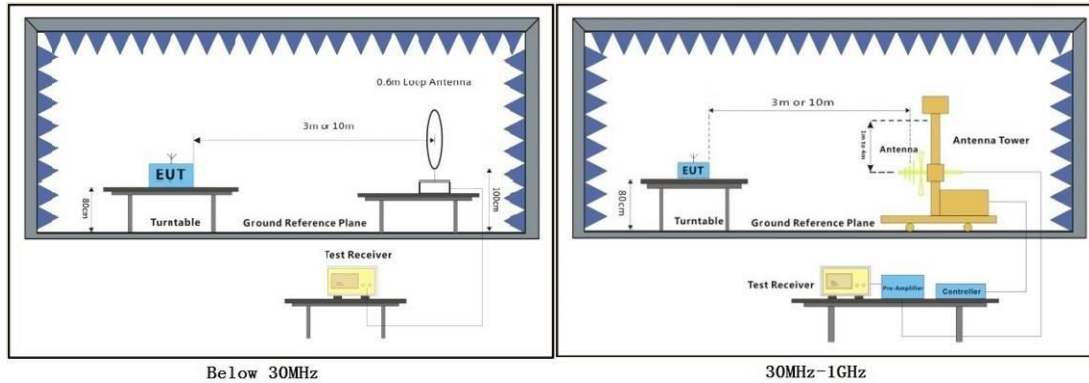

7.2.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using quasi-peak method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
2. For emission below 1GHz, through the pre-scan found the worst case is the lowest channel of 802.11a. Only the worst case is recorded in the report.
3. Scan from 9kHz to 30MHz, the disturbance below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
4. The disturbance below 1GHz was very low and the harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR241200481505

Page: 21 of 532

Test Mode: 13; Polarity: Horizontal; Modulation: OFDM; Channel: Middle

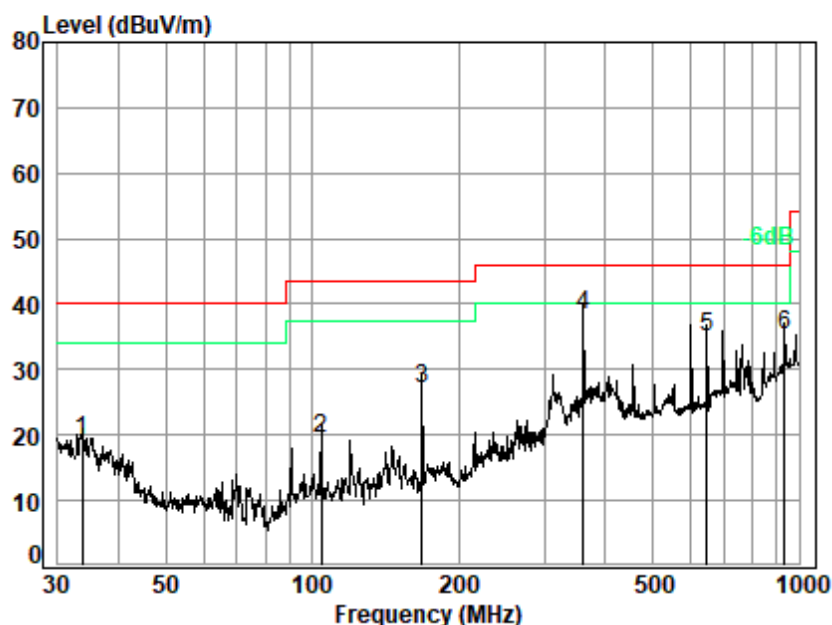

Site : chamber
Condition: 3m HORIZONTAL
Job No. : 04815AT
Test Mode: 13

	Ant	Cable	Preamp	Read		Limit	Over	
	Freq	Factor	Loss	Factor	Level	Level	Line	Limit Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB
1	33.680	19.57	0.71	27.78	26.52	19.02	40.00	-20.98 QP
2	104.170	12.22	1.25	27.57	33.69	19.59	43.50	-23.91 QP
3	167.824	13.17	1.62	27.31	39.74	27.22	43.50	-16.28 QP
4 q	360.448	20.23	2.44	27.00	42.59	38.26	46.00	-7.74 QP
5	647.386	24.68	3.39	27.85	34.66	34.88	46.00	-11.12 QP
6	935.546	28.18	4.22	26.51	29.36	35.25	46.00	-10.75 QP




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 13; Polarity: Vertical; Modulation: OFDM; Channel: Middle

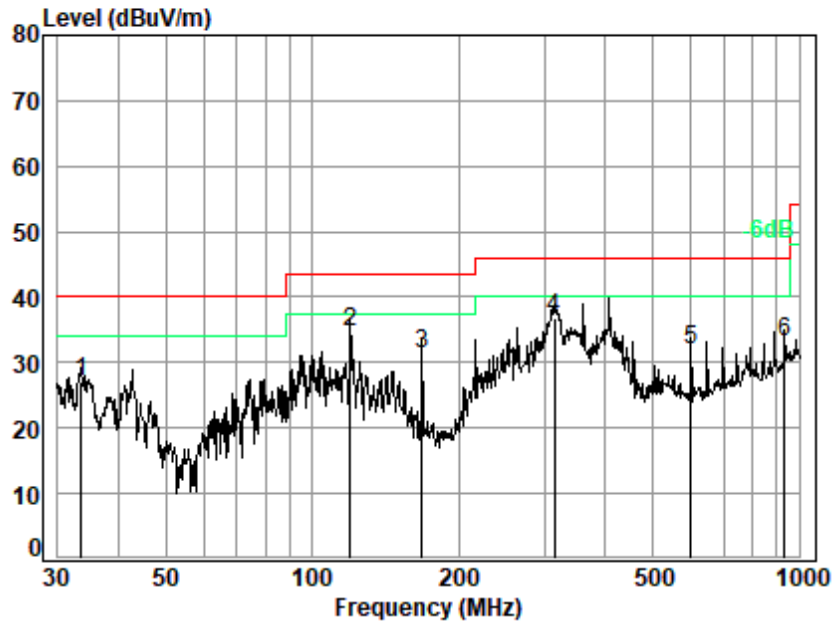

Site : chamber
Condition: 3m VERTICAL
Job No. : 04815AT
Test Mode: 13

		Ant	Cable	Preamp	Read		Limit	Over	
	Freq	Factor	Loss	Factor	Level	Level	Line	Limit	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1	33.562	19.63	0.71	27.78	34.50	27.06	40.00	-12.94	QP
2	119.856	11.11	1.36	27.51	49.63	34.59	43.50	-8.91	QP
3	167.824	13.17	1.62	27.31	43.85	31.33	43.50	-12.17	QP
4	314.377	18.40	2.26	26.81	43.09	36.94	46.00	-9.06	QP
5	599.321	24.42	3.24	27.97	32.21	31.90	46.00	-14.10	QP
6	935.546	28.18	4.22	26.51	27.21	33.10	46.00	-12.90	QP



7.3 Radiated Emissions (Above 1GHz)

Test Requirement 47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)

Test Method: ANSI C63.10 (2013) Section 6.6

Measurement Distance: 3m

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

*(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band:

(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.3.1 E.U.T. Operation

Operating Environment:

Temperature: 20.5 °C

Humidity: 36.3 % RH

Atmospheric Pressure: 1020 mbar




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

7.3.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Pre-scan	13	TX mode (5.1G SDR_1.4MHz)_Keep the EUT in transmitting mode.
Pre-scan	14	TX mode (5.1G SDR_3MHz)_Keep the EUT in transmitting mode.
Pre-scan	15	TX mode (5.1G SDR_5MHz)_Keep the EUT in transmitting mode.
Pre-scan	16	TX mode (5.1G SDR_10MHz)_Keep the EUT in transmitting mode.
Pre-scan	17	TX mode (5.1G SDR_20MHz)_Keep the EUT in transmitting mode.
Pre-scan	18	TX mode (5.1G SDR_40MHz)_Keep the EUT in transmitting mode.
Pre-scan	19	TX mode (5.1G SDR_60MHz)_Keep the EUT in transmitting mode.
Pre-scan	20	TX mode (5.1G SDR_80MHz)_Keep the EUT in transmitting mode.
Pre-scan	21	TX mode (5.8G SDR_1.4MHz)_Keep the EUT in transmitting mode.
Pre-scan	22	TX mode (5.8G SDR_3MHz)_Keep the EUT in transmitting mode.
Pre-scan	23	TX mode (5.8G SDR_5MHz)_Keep the EUT in transmitting mode.
Pre-scan	24	TX mode (5.8G SDR_10MHz)_Keep the EUT in transmitting mode.
Final test	25	TX mode (5.8G SDR_20MHz)_Keep the EUT in transmitting mode.
Pre-scan	26	TX mode (5.8G SDR_40MHz)_Keep the EUT in transmitting mode.
Pre-scan	27	TX mode (5.8G SDR_60MHz)_Keep the EUT in transmitting mode.
Pre-scan	28	TX mode (5.8G SDR_80MHz)_Keep the EUT in transmitting mode.

7.3.3 Test Setup Diagram

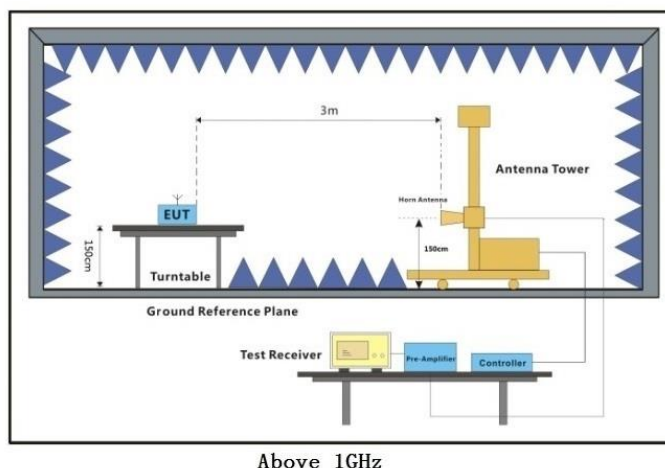

7.3.4 Measurement Procedure and Data

- a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
2. Scan from 18GHz to 40GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
3. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.
4. The disturbance above 18GHz were very low and the harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.
5. For devices with multiple operating modes, measurements on the middle channel is used to determine the worst-case mode(s). Only the worst case mode with the highest output power and the mode with the highest output power spectral density for each modulation family (e.g., OFDM and direct sequence spread spectrum) is recorded in the test report.
6. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for Peak detection (PK) and Average detection (AV) at frequency above 1GHz.
7. For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR241200481505

Page: 26 of 532

Test Mode: 25; Polarity: Horizontal; Modulation: OFDM; Channel: Low

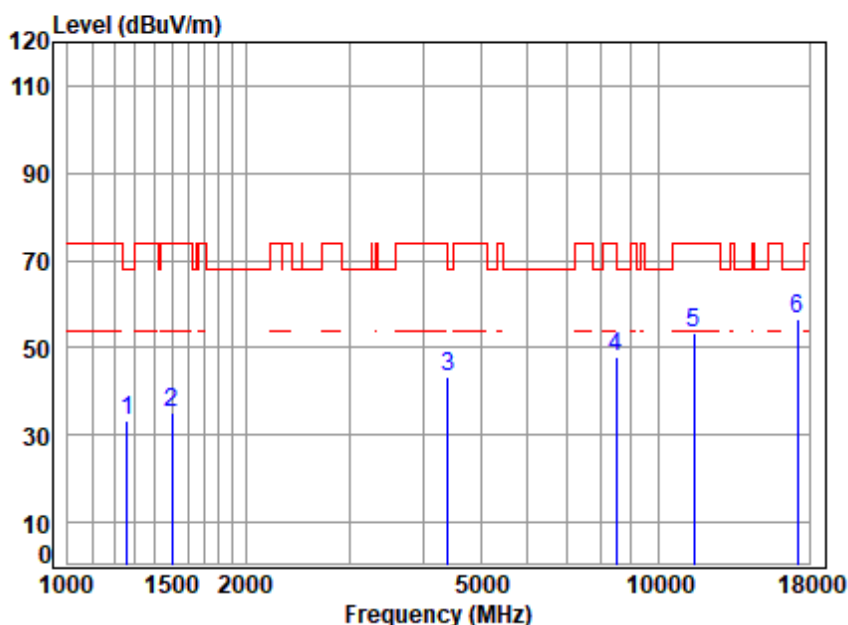

Site : chamber
Condition: 3m HORIZONTAL
Job No : 04815AT
Mode : 5735.5 RSE TX
Note : 5.8G SDR 20M

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1260.149	3.76	25.04	61.41	65.83	33.22	68.20	-34.98	peak
2	1503.119	4.04	26.81	61.49	65.93	35.29	74.00	-38.71	peak
3	4405.090	7.14	34.74	61.20	62.75	43.43	68.20	-24.77	peak
4	8489.882	9.52	36.68	60.59	62.07	47.68	74.00	-26.32	peak
5	11471.000	11.93	37.77	61.39	65.12	53.43	74.00	-20.57	peak
6	p17206.500	14.56	43.01	60.50	59.29	56.36	68.20	-11.84	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 25; Polarity: Vertical; Modulation: OFDM; Channel: Low

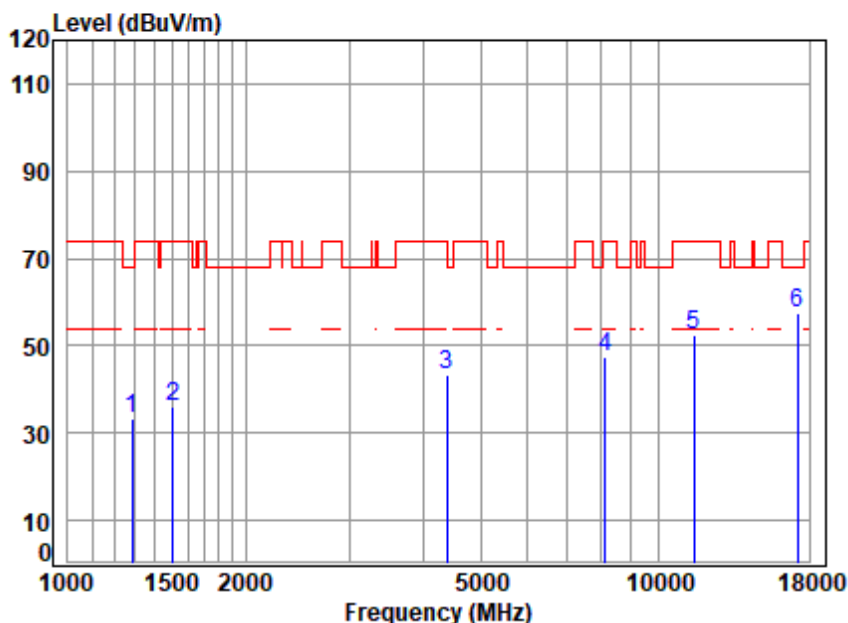

Site : chamber
Condition: 3m VERTICAL
Job No : 04815AT
Mode : 5735.5 RSE TX
Note : 5.8G SDR 20M


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1285.904	3.79	24.88	61.42	65.94	33.19	68.20	-35.01	peak
2	1507.470	4.05	26.83	61.49	66.46	35.85	74.00	-38.15	peak
3	4379.699	7.11	34.64	61.21	63.01	43.55	74.00	-30.45	peak
4	8129.664	9.16	36.50	60.36	62.02	47.32	74.00	-26.68	peak
5	11471.000	11.93	37.77	61.39	64.22	52.53	74.00	-21.47	peak
6	p17206.500	14.56	43.01	60.50	60.60	57.67	68.20	-10.53	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 25; Polarity: Horizontal; Modulation: OFDM; Channel: Middle

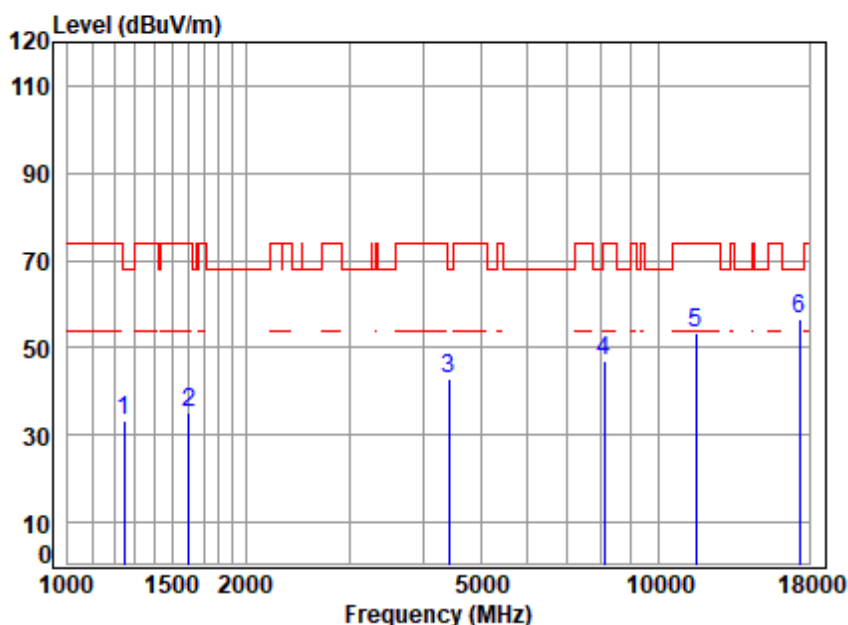

Site : chamber
Condition: 3m HORIZONTAL
Job No : 04815AT
Mode : 5787.5 RSE TX
Note : 5.8G SDR 20M

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1245.663	3.74	25.04	61.40	65.78	33.16	68.20	-35.04	peak
2	1601.804	4.19	26.78	61.52	65.58	35.03	74.00	-38.97	peak
3	4417.841	7.16	34.59	61.19	62.25	42.81	68.20	-25.39	peak
4	8106.200	9.14	36.50	60.34	61.79	47.09	74.00	-26.91	peak
5	11575.000	11.95	37.72	61.39	65.08	53.36	74.00	-20.64	peak
6	p17362.500	14.73	43.29	60.42	58.80	56.40	68.20	-11.80	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR241200481505

Page: 29 of 532

Test Mode: 25; Polarity: Vertical; Modulation: OFDM; Channel: Middle

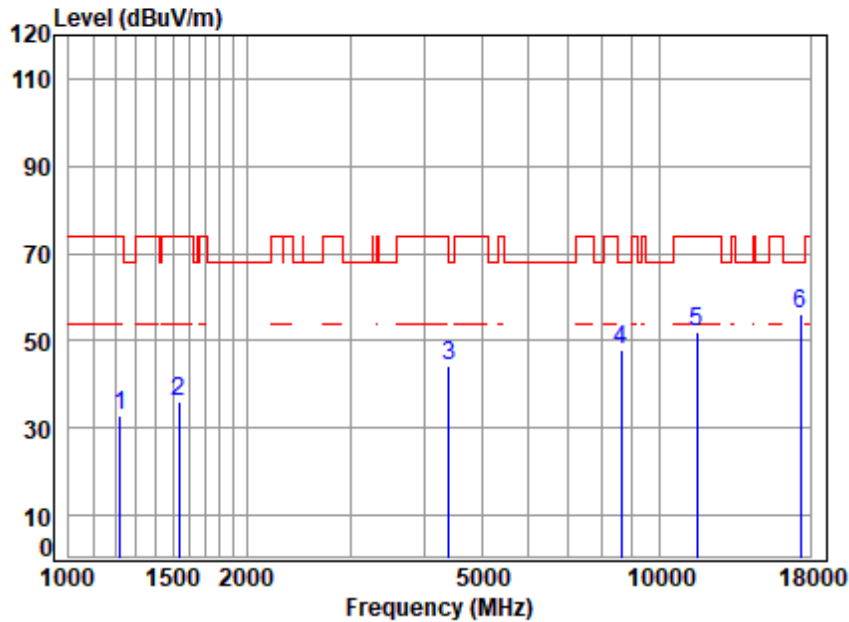

Site : chamber
Condition: 3m VERTICAL
Job No : 04815AT
Mode : 5787.5 RSE TX
Note : 5.8G SDR 20M

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1220.714	3.71	24.69	61.39	65.89	32.90	74.00	-41.10	peak
2	1538.281	4.10	26.95	61.50	66.39	35.94	74.00	-38.06	peak
3	4405.090	7.14	34.74	61.20	63.45	44.13	68.20	-24.07	peak
4	8613.468	9.62	36.90	60.66	62.26	48.12	68.20	-20.08	peak
5	11575.000	11.95	37.72	61.39	63.92	52.20	74.00	-21.80	peak
6	p17362.500	14.73	43.29	60.42	58.44	56.04	68.20	-12.16	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Services Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 25; Polarity: Horizontal; Modulation: OFDM; Channel: High

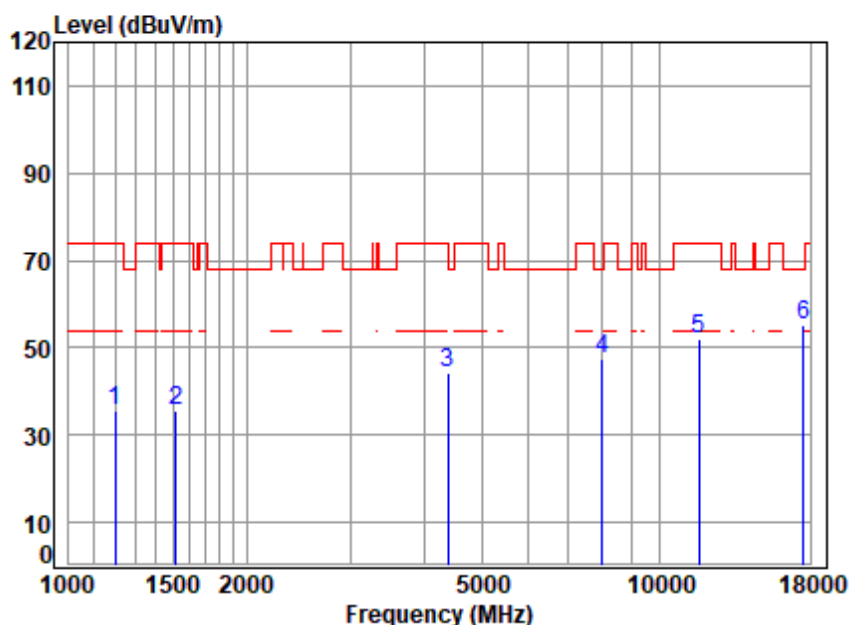


Site : chamber
Condition: 3m HORIZONTAL
Job No : 04815AT
Mode : 5839.5 RSE TX
Note : 5.8G SDR 20M

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1196.264	3.68	24.36	61.38	69.13	35.79	74.00	-38.21	peak
2	1520.598	4.07	26.88	61.49	65.93	35.39	74.00	-38.61	peak
3	4379.699	7.11	34.64	61.21	63.75	44.29	74.00	-29.71	peak
4	8013.020	9.04	36.40	60.28	62.19	47.35	68.20	-20.85	peak
5	11679.000	11.95	37.86	61.38	63.42	51.85	74.00	-22.15	peak
6	p17518.500	14.91	43.44	60.33	57.05	55.07	68.20	-13.13	peak



Test Mode: 25; Polarity: Vertical; Modulation: OFDM; Channel: High

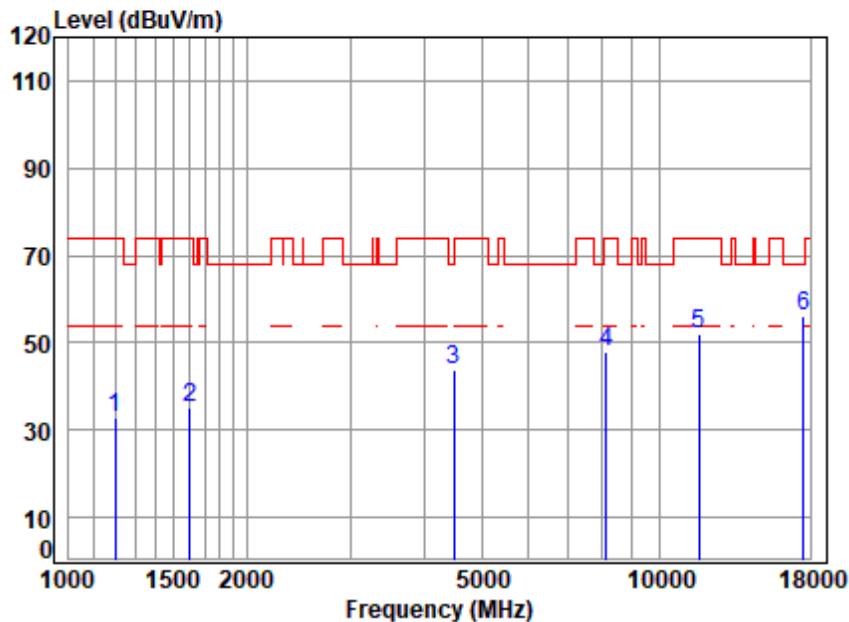

Site : chamber
Condition: 3m VERTICAL
Job No : 04815AT
Mode : 5839.5 RSE TX
Note : 5.8G SDR 20M

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1196.264	3.68	24.36	61.38	66.28	32.94	74.00	-41.06	peak
2	1601.804	4.19	26.78	61.52	65.88	35.33	74.00	-38.67	peak
3	4482.150	7.23	33.81	61.16	63.81	43.69	68.20	-24.51	peak
4	8129.664	9.16	36.50	60.36	62.61	47.91	74.00	-26.09	peak
5	11679.000	11.95	37.86	61.38	63.38	51.81	74.00	-22.19	peak
6	p17518.500	14.91	43.44	60.33	58.18	56.20	68.20	-12.00	peak



7.4 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)

Test Method: ANSI C63.10 (2013) Section 6.10.5

Measurement Distance: 3m

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

*(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band:

(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.4.1 E.U.T. Operation

Operating Environment:

Temperature: 20.5 °C

Humidity: 36.0 % RH

Atmospheric Pressure: 1020 mbar




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

7.4.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	13	TX mode (5.1G SDR_1.4MHz)_Keep the EUT in transmitting mode.
Final test	14	TX mode (5.1G SDR_3MHz)_Keep the EUT in transmitting mode.
Final test	15	TX mode (5.1G SDR_5MHz)_Keep the EUT in transmitting mode.
Final test	16	TX mode (5.1G SDR_10MHz)_Keep the EUT in transmitting mode.
Final test	17	TX mode (5.1G SDR_20MHz)_Keep the EUT in transmitting mode.
Final test	18	TX mode (5.1G SDR_40MHz)_Keep the EUT in transmitting mode.
Final test	19	TX mode (5.1G SDR_60MHz)_Keep the EUT in transmitting mode.
Final test	20	TX mode (5.1G SDR_80MHz)_Keep the EUT in transmitting mode.
Final test	21	TX mode (5.8G SDR_1.4MHz)_Keep the EUT in transmitting mode.
Final test	22	TX mode (5.8G SDR_3MHz)_Keep the EUT in transmitting mode.
Final test	23	TX mode (5.8G SDR_5MHz)_Keep the EUT in transmitting mode.
Final test	24	TX mode (5.8G SDR_10MHz)_Keep the EUT in transmitting mode.
Final test	25	TX mode (5.8G SDR_20MHz)_Keep the EUT in transmitting mode.
Final test	26	TX mode (5.8G SDR_40MHz)_Keep the EUT in transmitting mode.
Final test	27	TX mode (5.8G SDR_60MHz)_Keep the EUT in transmitting mode.
Final test	28	TX mode (5.8G SDR_80MHz)_Keep the EUT in transmitting mode.

7.4.3 Test Setup Diagram

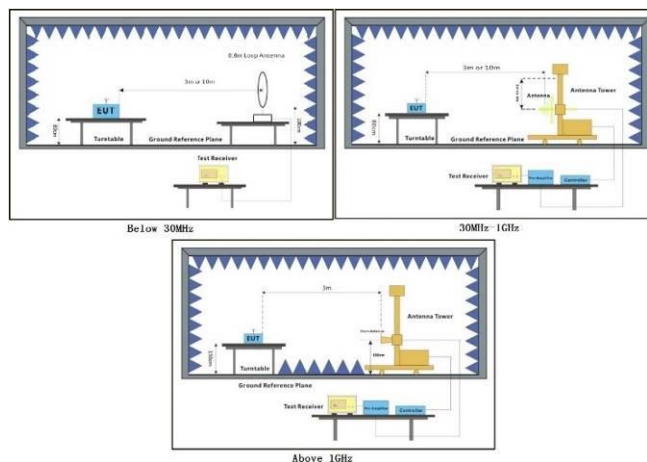

7.4.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.


Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Remark 2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for Peak detection (PK) and Average detection (AV) at frequency above 1GHz.

Remark 3. For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.



Test Mode: 13; Polarity: Horizontal; Modulation: OFDM; Channel: Low

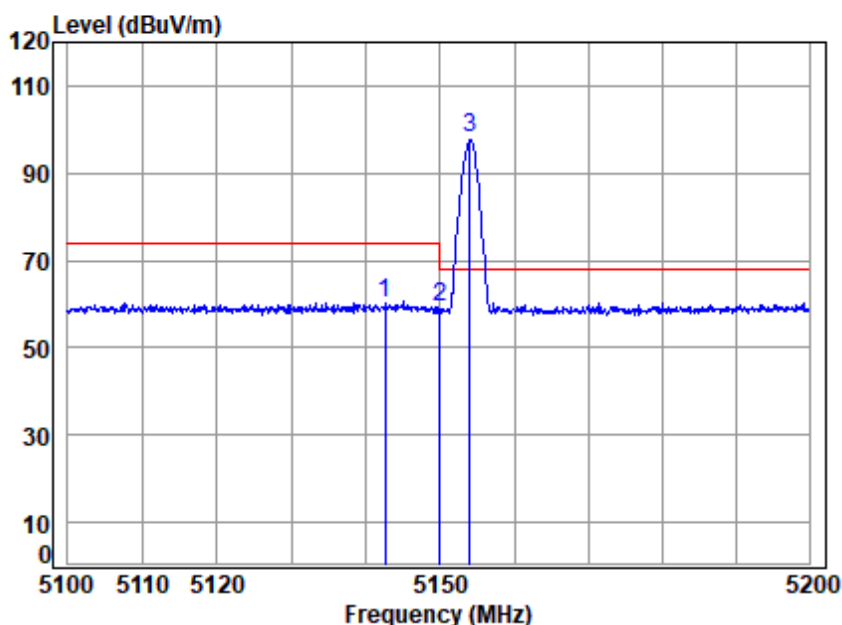


Site : chamber
Condition: 3m HORIZONTAL
Job No : 04815AT
Mode : 5154 Band edge
: 5.1G SDR 1.4M

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5142.563	18.82	33.91	31.28	38.69	60.14	74.00	-13.86	Peak
2	5149.980	18.83	33.90	31.28	37.66	59.11	74.00	-14.89	peak
3 p	5154.000	18.84	33.91	31.28	76.58	98.05	68.20	29.85	peak



Test Mode: 13; Polarity: Horizontal; Modulation: OFDM; Channel: Low

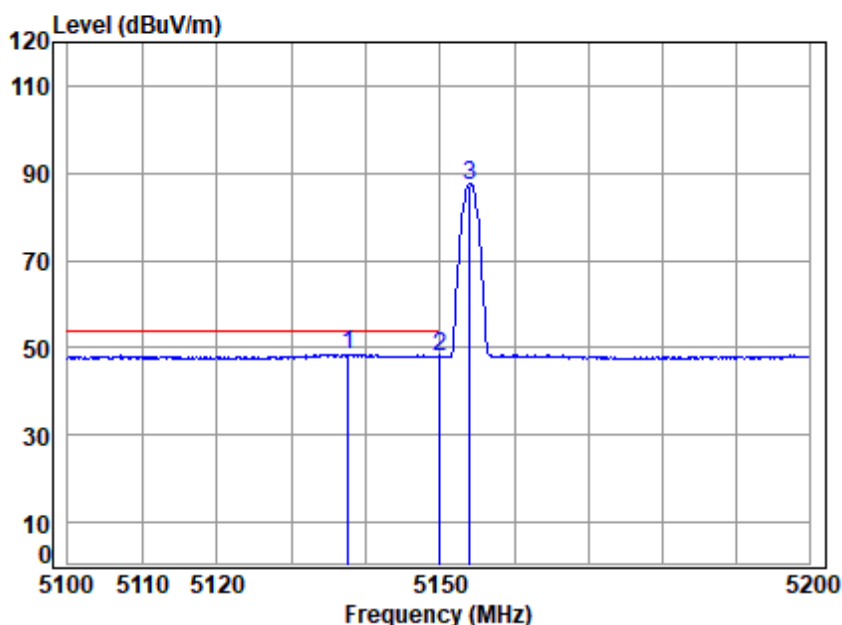

Site : chamber
Condition: 3m HORIZONTAL
Job No : 04815AT
Mode : 5154 Band edge
: 5.1G SDR 1.4M

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 q	5137.672	18.82	33.92	31.27	26.99	48.46	54.00	-5.54	Average
2	5149.980	18.83	33.90	31.28	26.42	47.87	54.00	-6.13	Average
3	5154.000	18.84	33.91	31.28	65.89	87.36	-----	-----	Average




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 13; Polarity: Vertical; Modulation: OFDM; Channel: Low

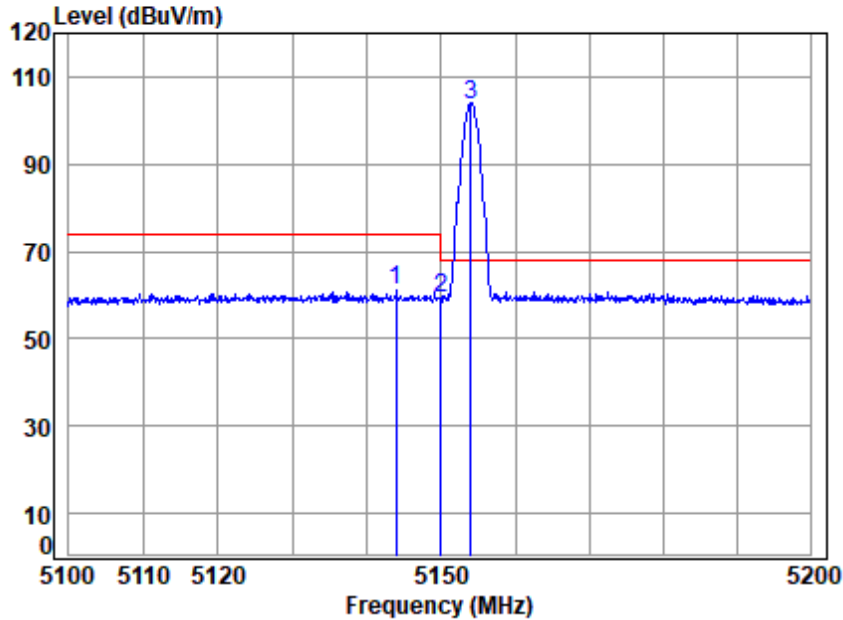


Site : chamber
Condition: 3m VERTICAL
Job No : 04815AT
Mode : 5154 Band edge
: 5.1G SDR 1.4M

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5143.960	18.83	33.91	31.28	39.53	60.99	74.00	-13.01	Peak
2	5149.980	18.83	33.90	31.28	37.73	59.18	74.00	-14.82	Peak
3 p	5154.000	18.84	33.91	31.28	82.21	103.68	68.20	35.48	Peak



Test Mode: 13; Polarity: Vertical; Modulation: OFDM; Channel: Low

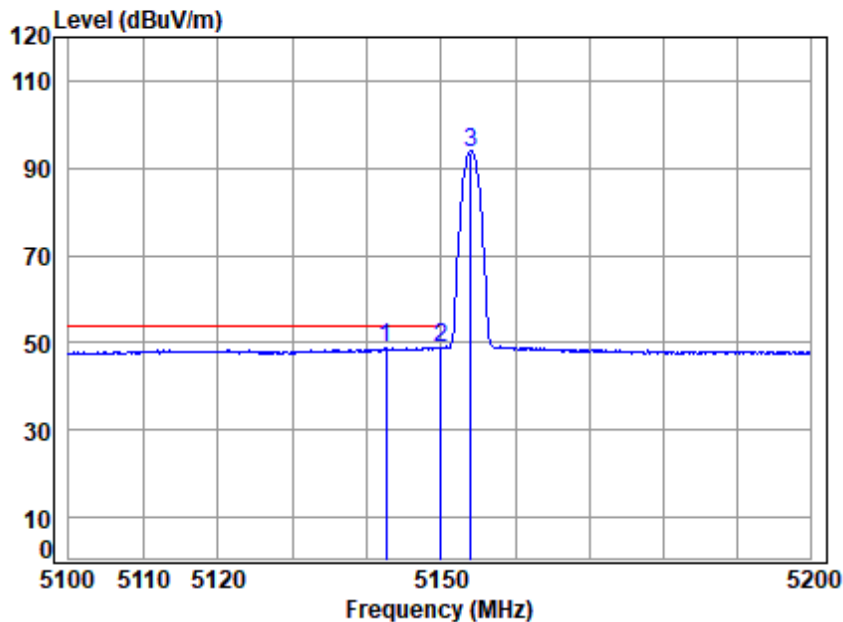


Site : chamber
Condition: 3m VERTICAL
Job No : 04815AT
Mode : 5154 Band edge
: 5.1G SDR 1.4M

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5142.563	18.82	33.91	31.28	27.41	48.86	54.00	-5.14	Average
2 q	5149.980	18.83	33.90	31.28	27.42	48.87	54.00	-5.13	Average
3	5154.000	18.84	33.91	31.28	71.87	93.34	-----	-----	Average



Test Mode: 13; Polarity: Horizontal; Modulation: OFDM; Channel: High

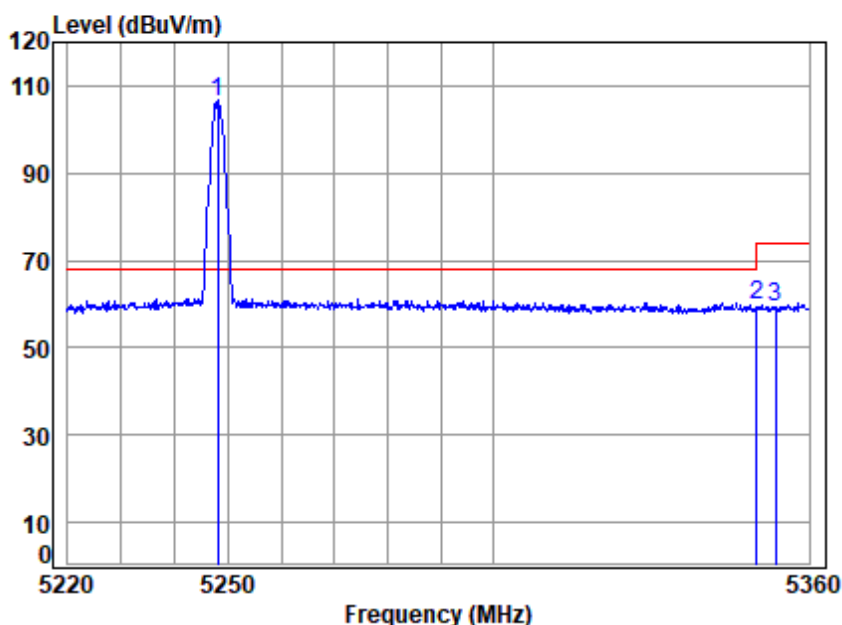

Site : chamber
Condition: 3m HORIZONTAL
Job No : 04815AT
Mode : 5248 Band edge
: 5.1G SDR 1.4M

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 p	5248.000	18.97	34.10	31.33	84.55	106.29	68.20	38.09	peak
2	5350.020	19.11	34.40	31.39	37.42	59.54	74.00	-14.46	peak
3	5353.620	19.11	34.41	31.39	37.17	59.30	74.00	-14.70	Peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR241200481505

Page: 40 of 532

Test Mode: 13; Polarity: Horizontal; Modulation: OFDM; Channel: High

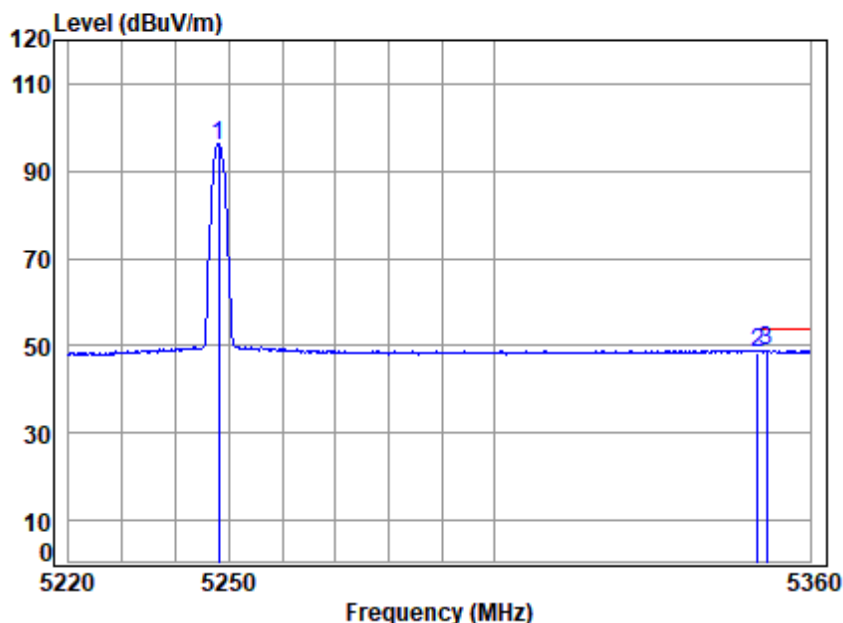

Site : chamber
Condition: 3m HORIZONTAL
Job No : 04815AT
Mode : 5248 Band edge
: 5.1G SDR 1.4M

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 5248.000	18.97	34.10	31.33	74.15	95.89	-----	-----	Average
2 5350.020	19.11	34.40	31.39	26.34	48.46	54.00	-5.54	Average
3 q 5351.637	19.11	34.41	31.39	26.67	48.80	54.00	-5.20	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 13; Polarity: Vertical; Modulation: OFDM; Channel: High

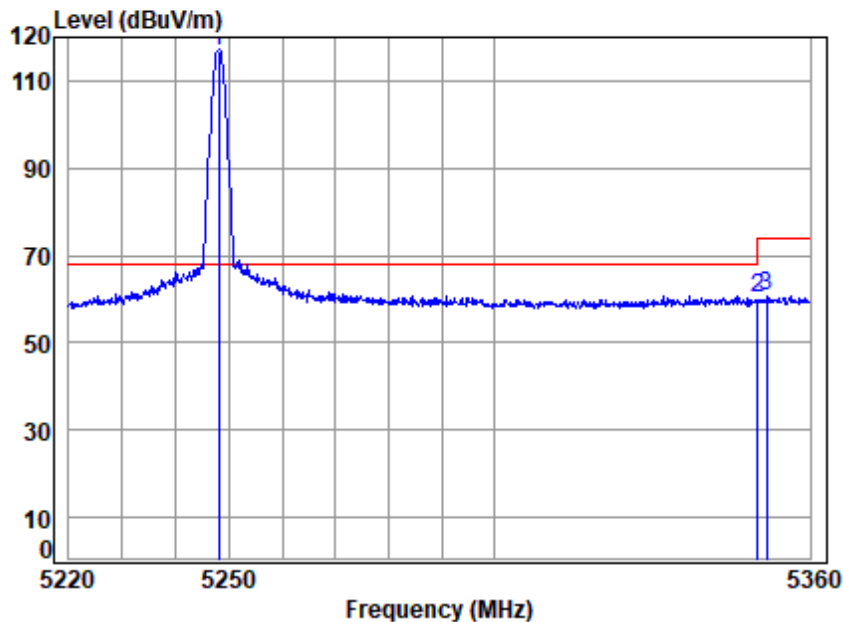

Site : chamber
Condition: 3m VERTICAL
Job No : 04815AT
Mode : 5248 Band edge
: 5.1G SDR 1.4M

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 p	5248.000	18.97	34.10	31.33	95.25	116.99	68.20	48.79	Peak
2	5350.020	19.11	34.40	31.39	38.33	60.45	74.00	-13.55	Peak
3	5351.637	19.11	34.41	31.39	38.63	60.76	74.00	-13.24	Peak




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 13; Polarity: Vertical; Modulation: OFDM; Channel: High

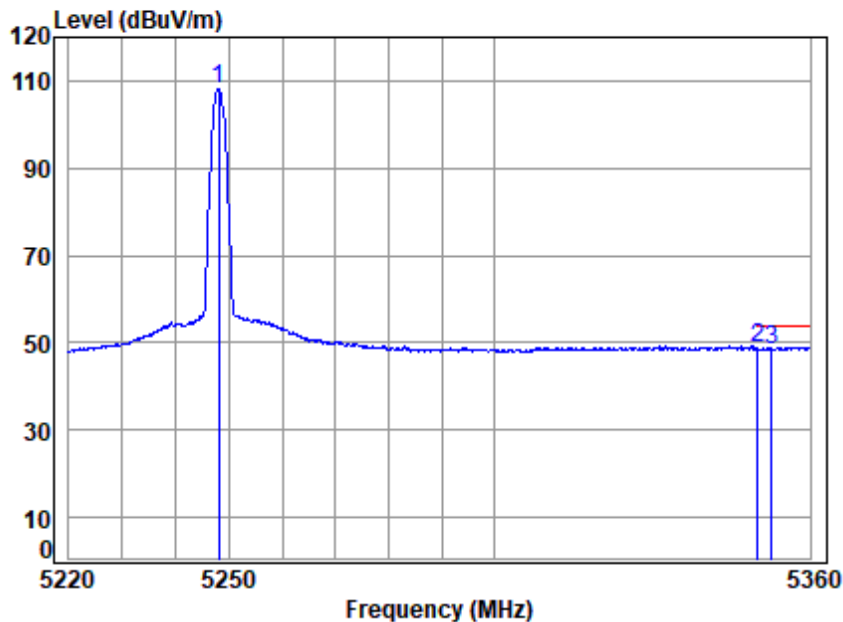


Site : chamber
Condition: 3m VERTICAL
Job No : 04815AT
Mode : 5248 Band edge
: 5.1G SDR 1.4M

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 5248.000	18.97	34.10	31.33	86.38	108.12	-----	-----	Average
2 q 5350.020	19.11	34.40	31.39	26.80	48.92	54.00	-5.08	Average
3 5352.628	19.11	34.41	31.39	26.45	48.58	54.00	-5.42	Average



Test Mode: 14; Polarity: Horizontal; Modulation: OFDM; Channel: Low

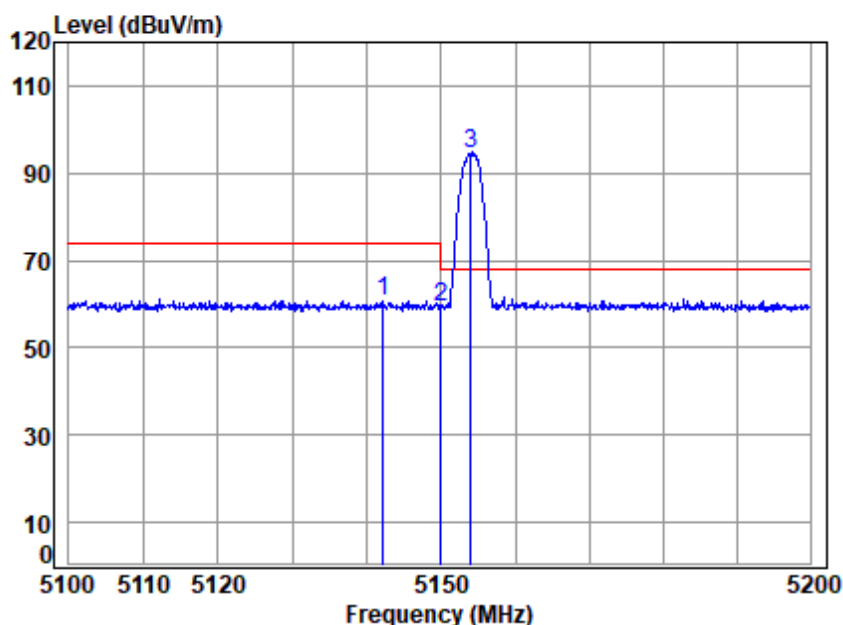

Site : chamber
Condition: 3m HORIZONTAL
Job No : 04815AT
Mode : 5154 Band edge
: 5.1G SDR 3M


		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5142.163	18.82	33.92	31.28	39.35	60.81	74.00	-13.19	Peak
2	5149.980	18.83	33.90	31.28	37.68	59.13	74.00	-14.87	peak
3 p	5154.000	18.84	33.91	31.28	72.76	94.23	68.20	26.03	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 14; Polarity: Horizontal; Modulation: OFDM; Channel: Low

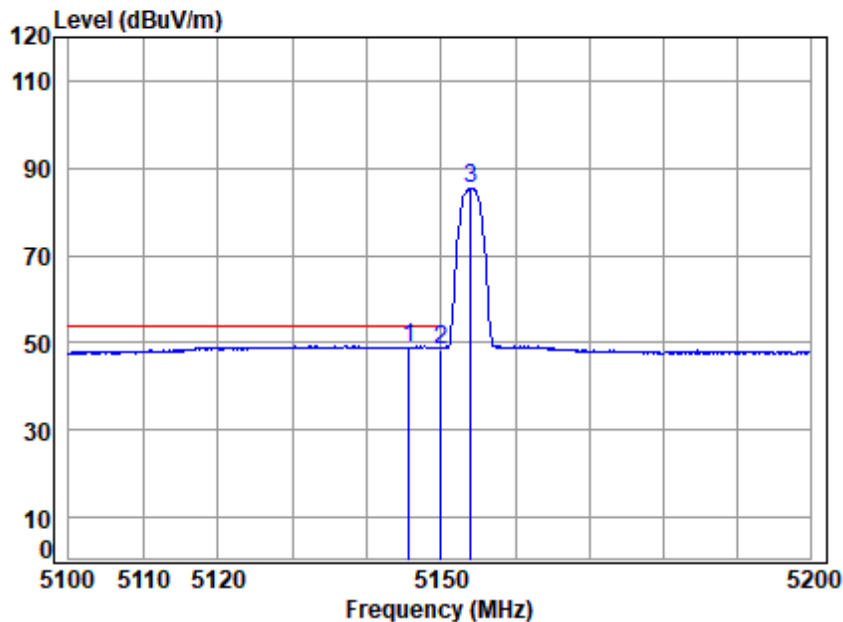


Site : chamber
Condition: 3m HORIZONTAL
Job No : 04815AT
Mode : 5154 Band edge
: 5.1G SDR 3M

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 q 5145.659	18.83	33.91	31.28	27.55	49.01	54.00	-4.99	Average
2 5149.980	18.83	33.90	31.28	26.97	48.42	54.00	-5.58	Average
3 5154.000	18.84	33.91	31.28	63.72	85.19	-----	-----	Average



Test Mode: 14; Polarity: Vertical; Modulation: OFDM; Channel: Low

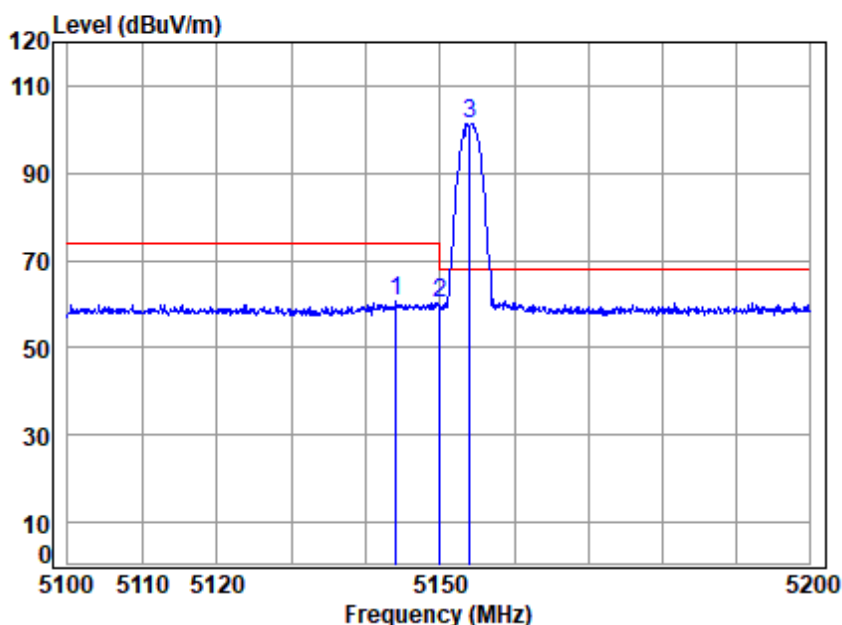


Site : chamber
Condition: 3m VERTICAL
Job No : 04815AT
Mode : 5154 Band edge
: 5.1G SDR 3M

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5144.061	18.83	33.91	31.28	39.00	60.46	74.00	-13.54	Peak
2	5149.980	18.83	33.90	31.28	38.62	60.07	74.00	-13.93	Peak
3 p	5154.000	18.84	33.91	31.28	79.90	101.37	68.20	33.17	Peak



Test Mode: 14; Polarity: Vertical; Modulation: OFDM; Channel: Low

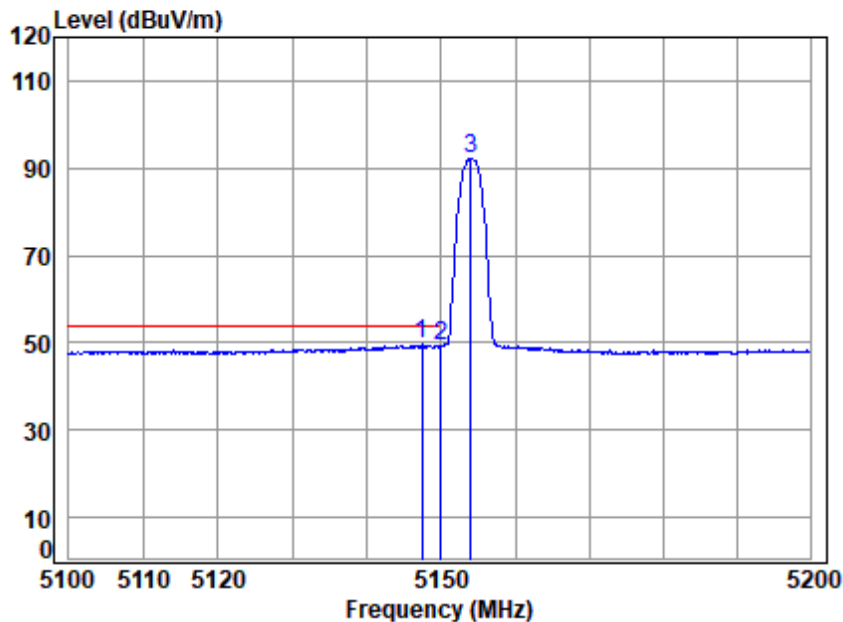


Site : chamber
Condition: 3m VERTICAL
Job No : 04815AT
Mode : 5154 Band edge
: 5.1G SDR 3M

		Cable	Ant	Preamp	Read		Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 q 5147.358		18.83	33.91	31.28	28.08	49.54	54.00	-4.46	Average
2 5149.980		18.83	33.90	31.28	27.68	49.13	54.00	-4.87	Average
3 5154.000		18.84	33.91	31.28	70.58	92.05	-----	-----	Average



Test Mode: 14; Polarity: Horizontal; Modulation: OFDM; Channel: High

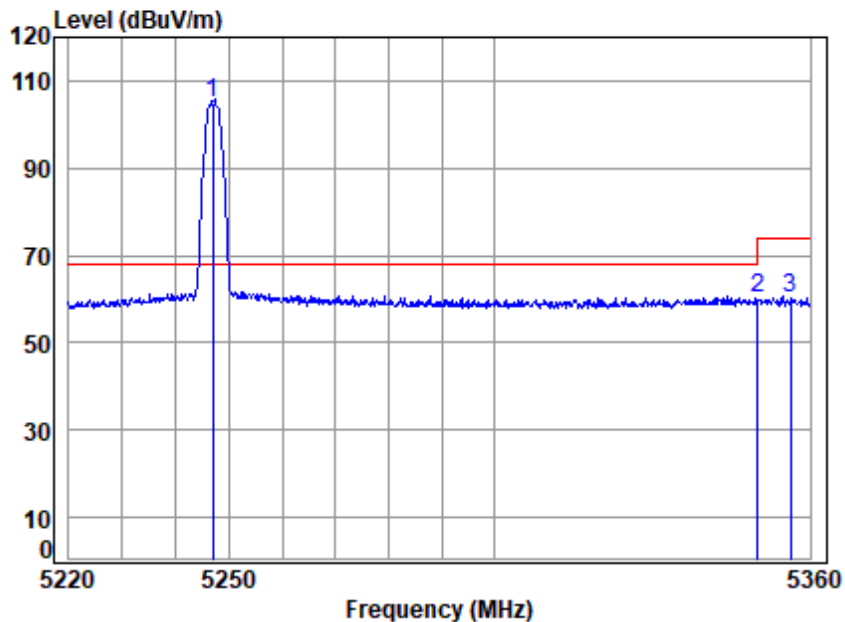

Site : chamber
Condition: 3m HORIZONTAL
Job No : 04815AT
Mode : 5247 Band edge
: 5.1G SDR 3M


		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 p	5247.000	18.97	34.09	31.33	83.32	105.05	68.20	36.85	peak
2	5350.020	19.11	34.40	31.39	37.96	60.08	74.00	-13.92	peak
3	5356.313	19.12	34.43	31.39	38.14	60.30	74.00	-13.70	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 14; Polarity: Horizontal; Modulation: OFDM; Channel: High

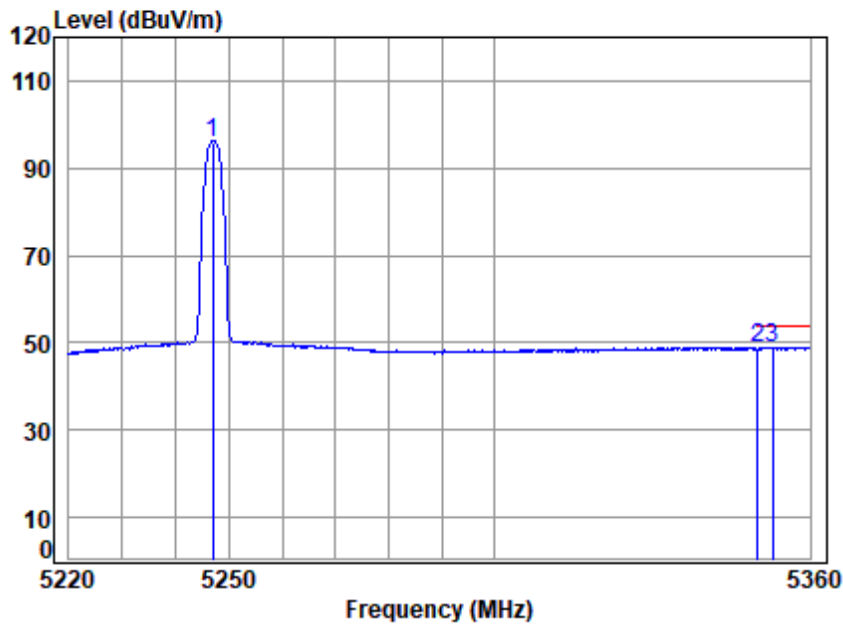


Site : chamber
Condition: 3m HORIZONTAL
Job No : 04815AT
Mode : 5247 Band edge
: 5.1G SDR 3M

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 5247.000	18.97	34.09	31.33	73.91	95.64	-----	-----	Average
2 5350.020	19.11	34.40	31.39	26.54	48.66	54.00	-5.34	Average
3 q 5352.912	19.11	34.41	31.39	26.83	48.96	54.00	-5.04	Average



Test Mode: 14; Polarity: Vertical; Modulation: OFDM; Channel: High

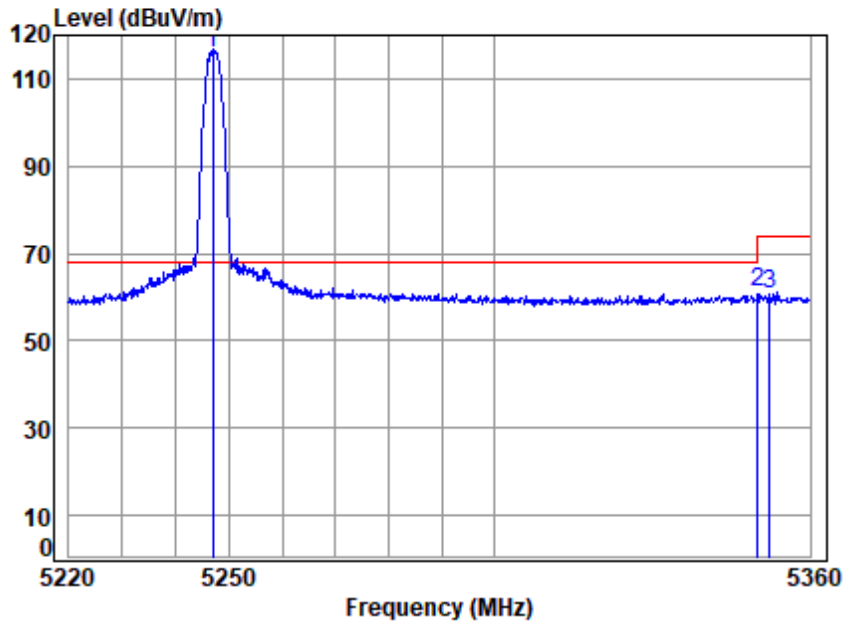

Site : chamber
Condition: 3m VERTICAL
Job No : 04815AT
Mode : 5247 Band edge
: 5.1G SDR 3M


		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 p 5247.000	18.97	34.09	31.33	94.21	115.94	68.20	47.74	Peak
2 5350.020	19.11	34.40	31.39	38.94	61.06	74.00	-12.94	Peak
3 5352.203	19.11	34.41	31.39	38.44	60.57	74.00	-13.43	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 14; Polarity: Vertical; Modulation: OFDM; Channel: High

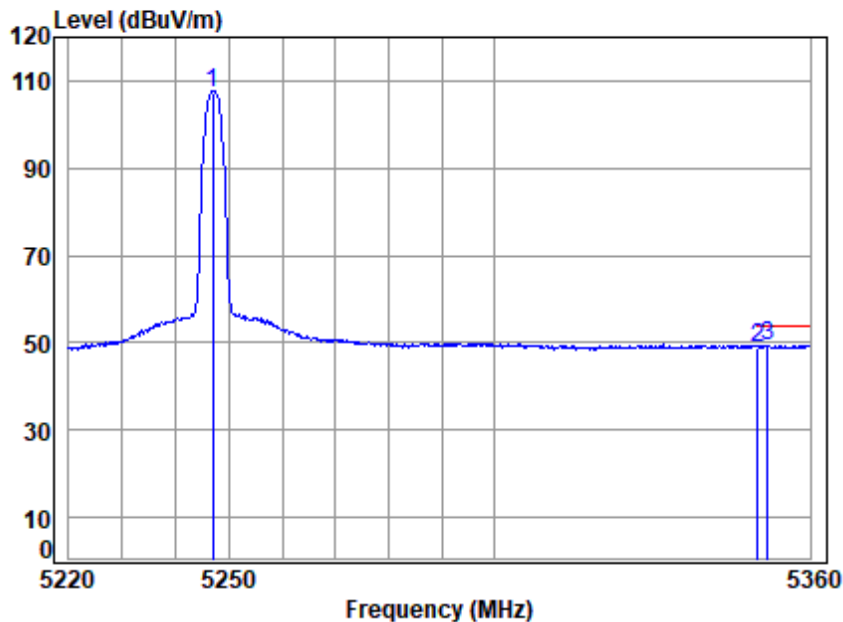


Site : chamber
Condition: 3m VERTICAL
Job No : 04815AT
Mode : 5247 Band edge
: 5.1G SDR 3M

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 5247.000	18.97	34.09	31.33	85.62	107.35	-----	-----	Average
2 5350.020	19.11	34.40	31.39	26.81	48.93	54.00	-5.07	Average
3 q 5351.920	19.11	34.41	31.39	27.04	49.17	54.00	-4.83	Average



Test Mode: 15; Polarity: Horizontal; Modulation: OFDM; Channel: Low

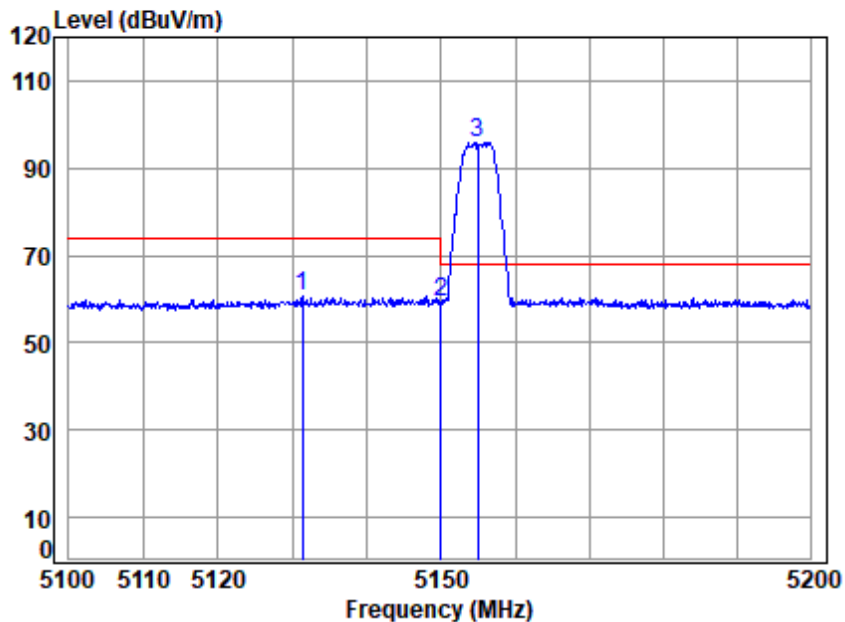


Site : chamber
Condition: 3m HORIZONTAL
Job No : 04815AT
Mode : 5155 Band edge
: 5.1G SDR 5M

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5131.291	18.81	33.94	31.27	39.28	60.76	74.00	-13.24	Peak
2	5149.980	18.83	33.90	31.28	37.87	59.32	74.00	-14.68	peak
3 p	5155.000	18.84	33.91	31.28	74.13	95.60	68.20	27.40	peak



Test Mode: 15; Polarity: Horizontal; Modulation: OFDM; Channel: Low

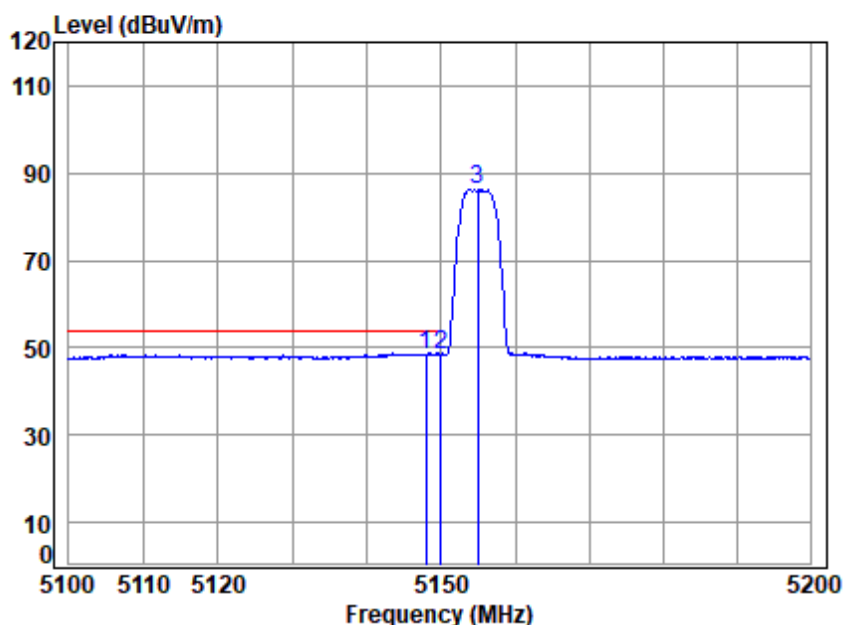


Site : chamber
Condition: 3m HORIZONTAL
Job No : 04815AT
Mode : 5155 Band edge
: 5.1G SDR 5M

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 q 5147.958	18.83	33.90	31.28	27.02	48.47	54.00	-5.53	Average
2 5149.980	18.83	33.90	31.28	26.89	48.34	54.00	-5.66	Average
3 5155.000	18.84	33.91	31.28	64.57	86.04	-----	-----	Average



Test Mode: 15; Polarity: Vertical; Modulation: OFDM; Channel: Low

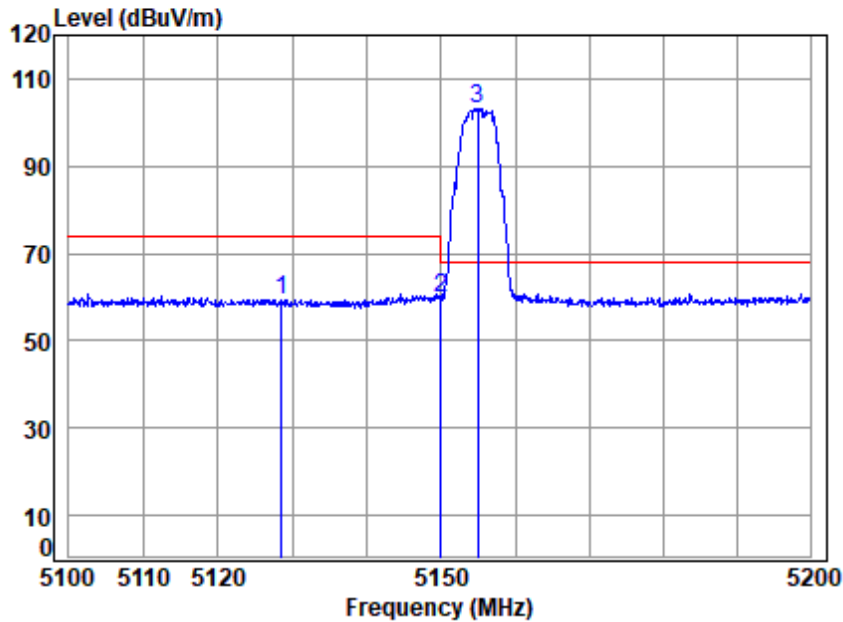


Site : chamber
Condition: 3m VERTICAL
Job No : 04815AT
Mode : 5155 Band edge
: 5.1G SDR 5M

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5128.501	18.80	33.94	31.27	38.04	59.51	74.00	-14.49	Peak
2	5149.980	18.83	33.90	31.28	38.40	59.85	74.00	-14.15	Peak
3 p	5155.000	18.84	33.91	31.28	81.54	103.01	68.20	34.81	Peak



Test Mode: 15; Polarity: Vertical; Modulation: OFDM; Channel: Low

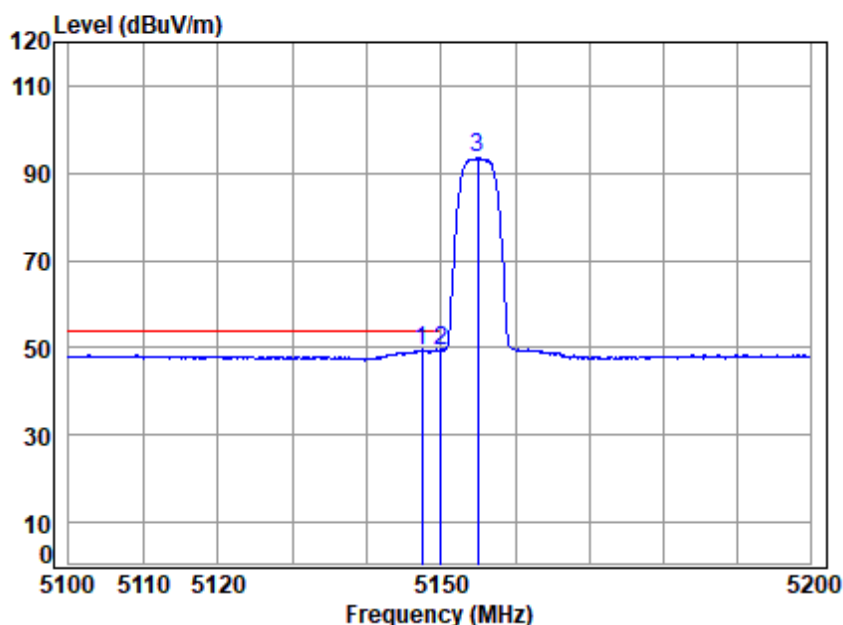


Site : chamber
Condition: 3m VERTICAL
Job No : 04815AT
Mode : 5155 Band edge
: 5.1G SDR 5M

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 5147.458	18.83	33.91	31.28	27.85	49.31	54.00	-4.69	Average
2 q 5149.980	18.83	33.90	31.28	27.93	49.38	54.00	-4.62	Average
3 5155.000	18.84	33.91	31.28	72.00	93.47	-----	-----	Average



Test Mode: 15; Polarity: Horizontal; Modulation: OFDM; Channel: High

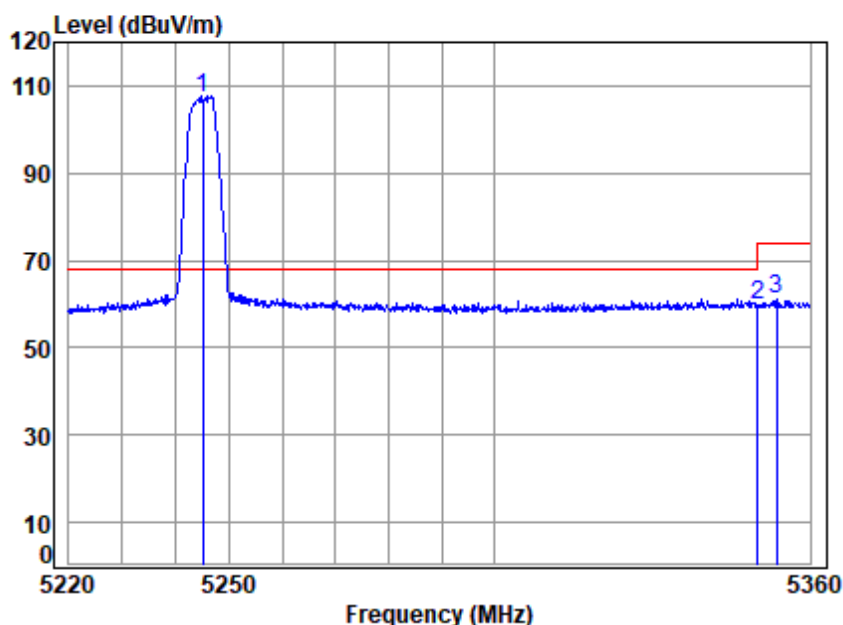


Site : chamber
Condition: 3m HORIZONTAL
Job No : 04815AT
Mode : 5245 Band edge
: 5.1G SDR 5M

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 p 5245.000	18.97	34.09	31.33	85.52	107.25	68.20	39.05	peak
2 5350.020	19.11	34.40	31.39	37.83	59.95	74.00	-14.05	peak
3 5353.620	19.11	34.41	31.39	39.01	61.14	74.00	-12.86	Peak



Test Mode: 15; Polarity: Horizontal; Modulation: OFDM; Channel: High

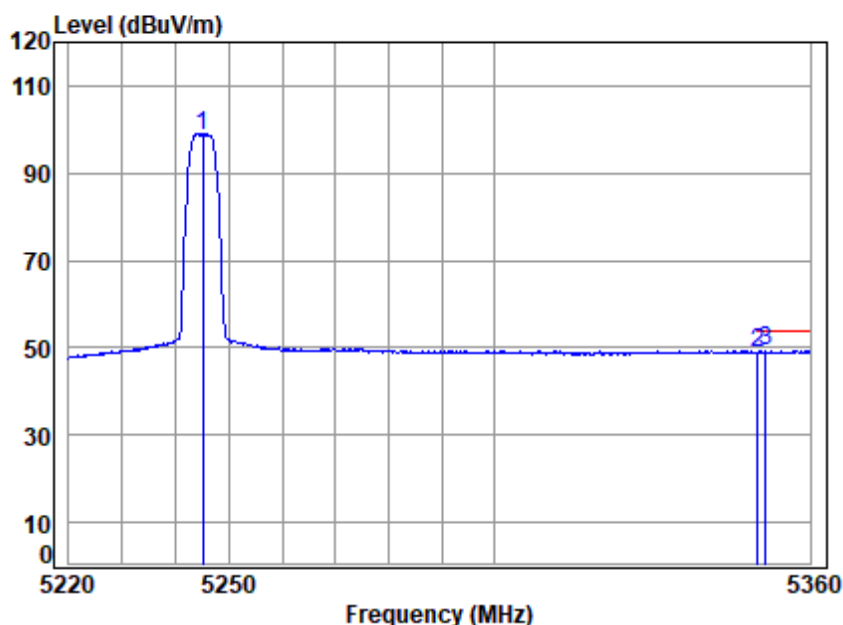

Site : chamber
Condition: 3m HORIZONTAL
Job No : 04815AT
Mode : 5245 Band edge
: 5.1G SDR 5M


		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5245.000	18.97	34.09	31.33	76.74	98.47	-----	----- Average
2	5350.020	19.11	34.40	31.39	26.67	48.79	54.00	-5.21 Average
3 q	5351.495	19.11	34.41	31.39	27.25	49.38	54.00	-4.62 Average



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 15; Polarity: Vertical; Modulation: OFDM; Channel: High

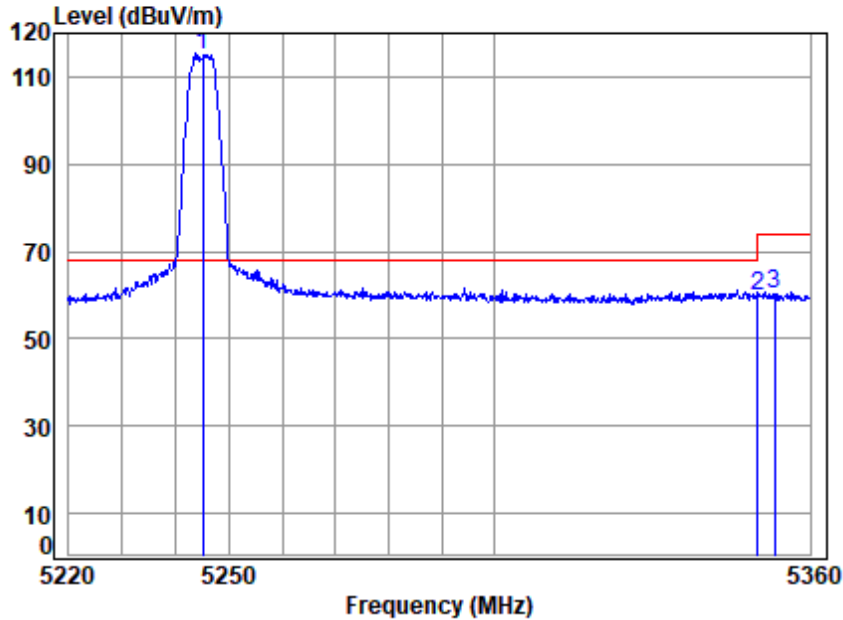


Site : chamber
Condition: 3m VERTICAL
Job No : 04815AT
Mode : 5245 Band edge
: 5.1G SDR 5M

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 p 5245.000	18.97	34.09	31.33	93.47	115.20	68.20	47.00	Peak
2 5350.020	19.11	34.40	31.39	37.86	59.98	74.00	-14.02	Peak
3 5353.195	19.11	34.41	31.39	38.23	60.36	74.00	-13.64	Peak



Test Mode: 15; Polarity: Vertical; Modulation: OFDM; Channel: High

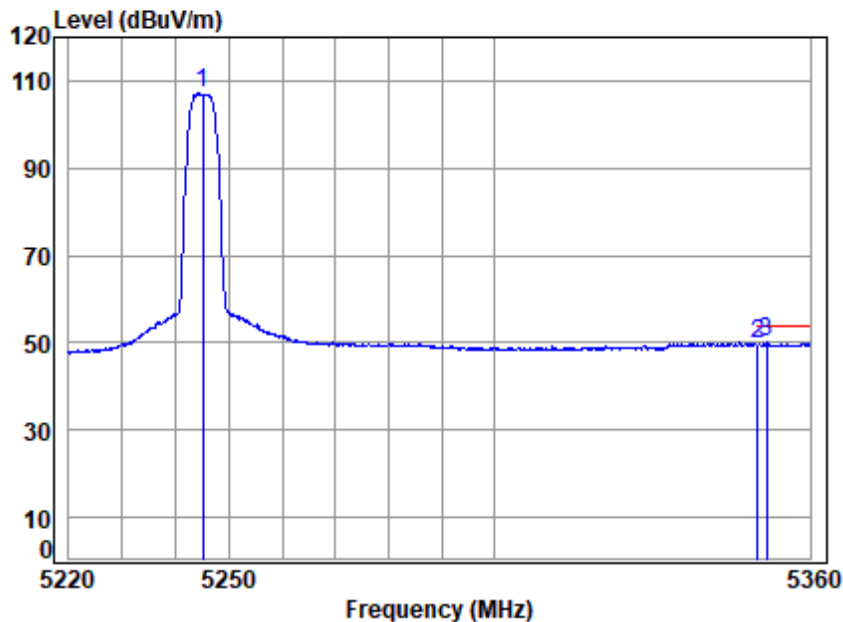

Site : chamber
Condition: 3m VERTICAL
Job No : 04815AT
Mode : 5245 Band edge
: 5.1G SDR 5M


		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5245.000	18.97	34.09	31.33	85.41	107.14	-----	Average
2	5350.020	19.11	34.40	31.39	27.54	49.66	54.00	-4.34 Average
3 q	5351.778	19.11	34.41	31.39	27.93	50.06	54.00	-3.94 Average



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 16; Polarity: Horizontal; Modulation: OFDM; Channel: Low

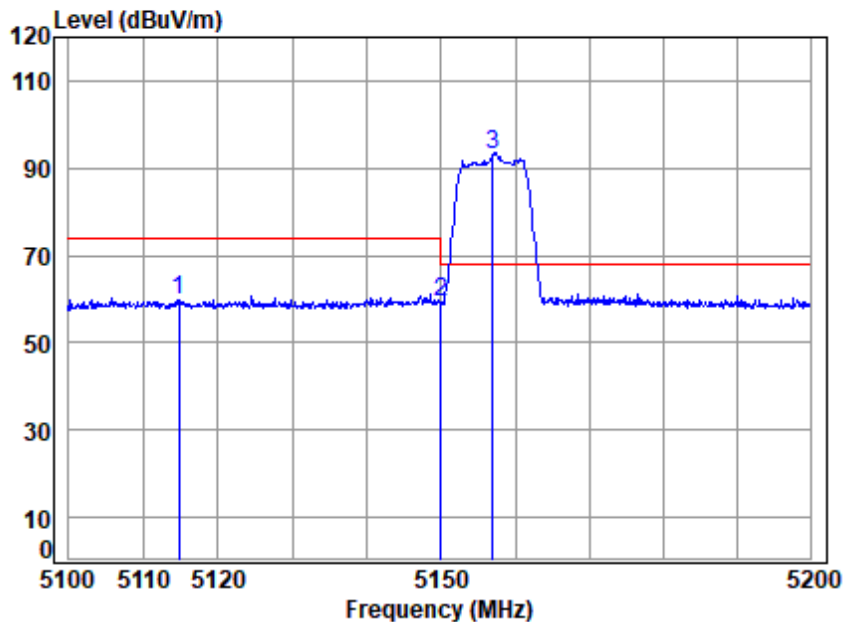


Site : chamber
Condition: 3m HORIZONTAL
Job No : 04815AT
Mode : 5157 Band edge
: 5.1G SDR 10M

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5114.678	18.78	33.97	31.26	38.20	59.69	74.00	-14.31	Peak
2	5149.980	18.83	33.90	31.28	37.88	59.33	74.00	-14.67	peak
3 p	5157.000	18.84	33.91	31.28	71.60	93.07	68.20	24.87	peak



Test Mode: 16; Polarity: Horizontal; Modulation: OFDM; Channel: Low

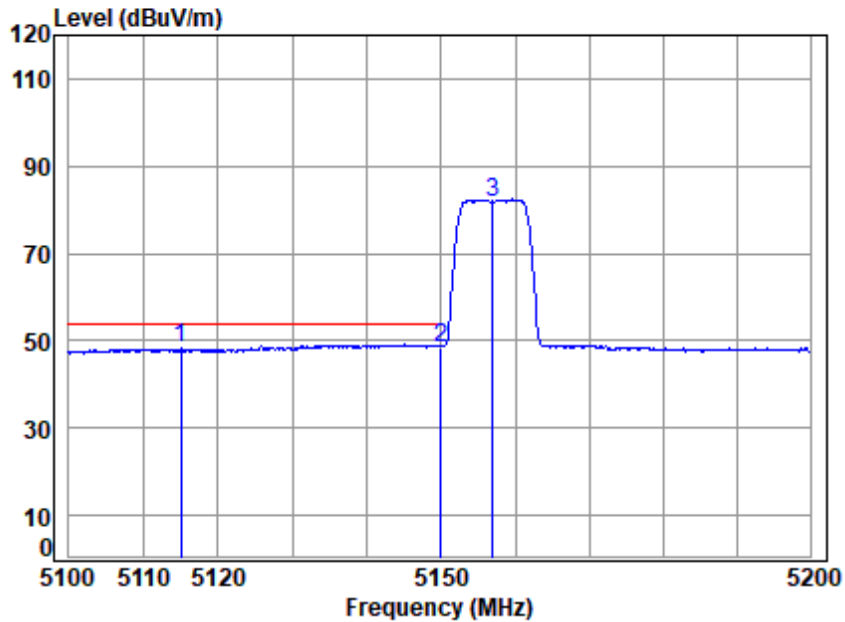


Site : chamber
Condition: 3m HORIZONTAL
Job No : 04815AT
Mode : 5157 Band edge
: 5.1G SDR 10M

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5114.976	18.78	33.97	31.26	26.67	48.16	54.00	-5.84	Average
2 q	5149.980	18.83	33.90	31.28	27.05	48.50	54.00	-5.50	Average
3	5157.000	18.84	33.91	31.28	60.37	81.84	-----	-----	Average



Test Mode: 16; Polarity: Vertical; Modulation: OFDM; Channel: Low

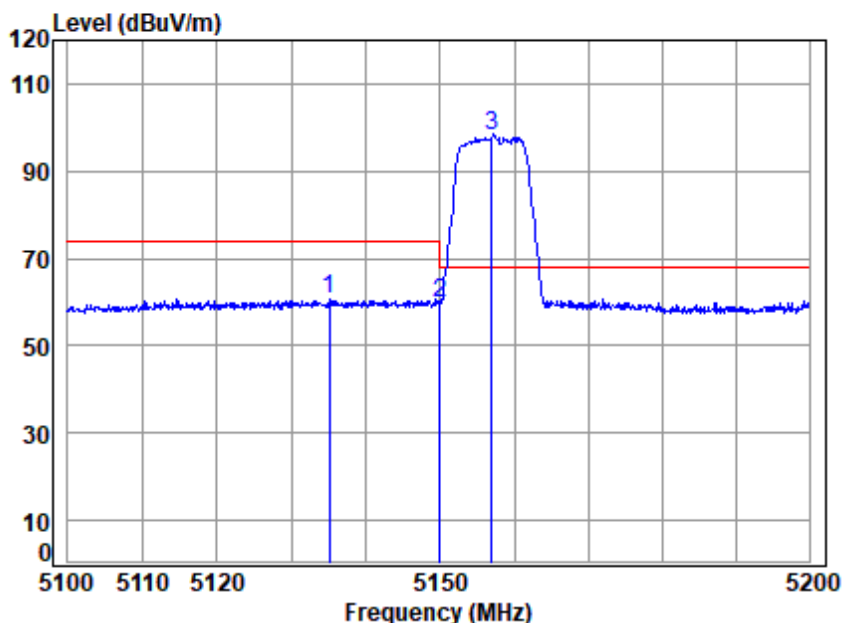


Site : chamber
Condition: 3m VERTICAL
Job No : 04815AT
Mode : 5157 Band edge
: 5.1G SDR 10M

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5135.079	18.81	33.93	31.27	39.43	60.90	74.00	-13.10	Peak
2	5149.980	18.83	33.90	31.28	38.44	59.89	74.00	-14.11	Peak
3 p	5157.000	18.84	33.91	31.28	76.55	98.02	68.20	29.82	Peak



Test Mode: 16; Polarity: Vertical; Modulation: OFDM; Channel: Low

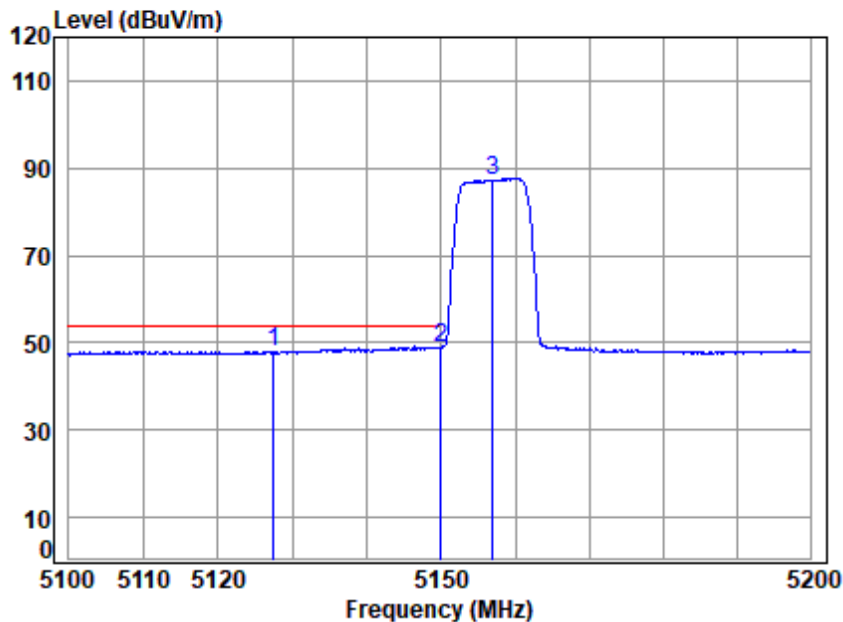


Site : chamber
Condition: 3m VERTICAL
Job No : 04815AT
Mode : 5157 Band edge
: 5.1G SDR 10M

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5127.406	18.80	33.95	31.27	26.33	47.81	54.00	-6.19	Average
2 q	5149.980	18.83	33.90	31.28	27.33	48.78	54.00	-5.22	Average
3	5157.000	18.84	33.91	31.28	65.57	87.04	-----	-----	Average



Test Mode: 16; Polarity: Horizontal; Modulation: OFDM; Channel: High

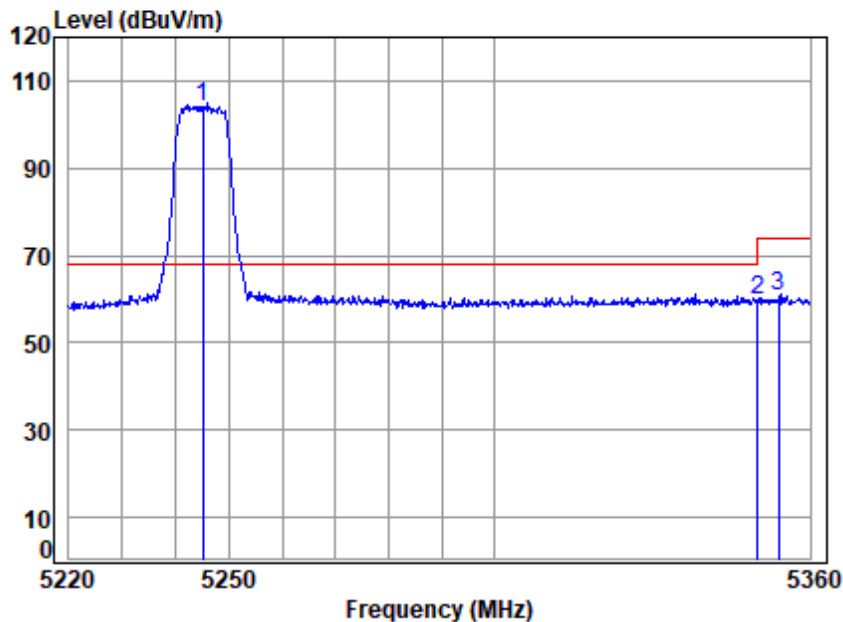

Site : chamber
Condition: 3m HORIZONTAL
Job No : 04815AT
Mode : 5245 Band edge
: 5.1G SDR 10M


		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 p	5245.000	18.97	34.09	31.33	82.39	104.12	68.20	35.92	peak
2	5350.020	19.11	34.40	31.39	37.85	59.97	74.00	-14.03	peak
3	5354.045	19.12	34.42	31.39	38.51	60.66	74.00	-13.34	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 16; Polarity: Horizontal; Modulation: OFDM; Channel: High

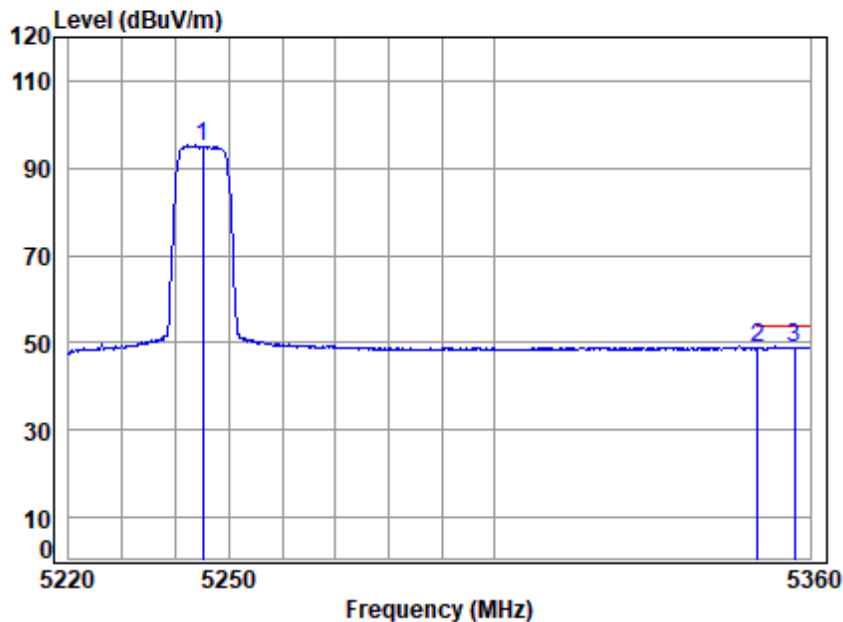

Site : chamber
Condition: 3m HORIZONTAL
Job No : 04815AT
Mode : 5245 Band edge
: 5.1G SDR 10M


		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5245.000	18.97	34.09	31.33	73.16	94.89	-----	----- Average
2 q	5350.020	19.11	34.40	31.39	26.61	48.73	54.00	-5.27 Average
3	5357.022	19.12	34.43	31.39	26.50	48.66	54.00	-5.34 Average



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 16; Polarity: Vertical; Modulation: OFDM; Channel: High

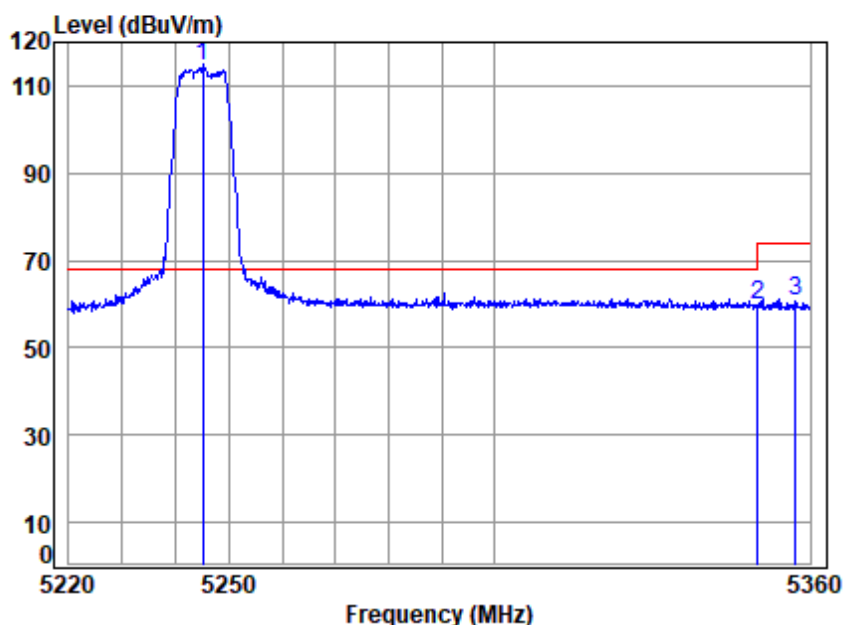

Site : chamber
Condition: 3m VERTICAL
Job No : 04815AT
Mode : 5245 Band edge
: 5.1G SDR 10M


		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 p	5245.000	18.97	34.09	31.33	92.85	114.58	68.20	46.38 Peak
2	5350.020	19.11	34.40	31.39	37.77	59.89	74.00	-14.11 Peak
3	5357.305	19.12	34.43	31.39	38.61	60.77	74.00	-13.23 Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 16; Polarity: Vertical; Modulation: OFDM; Channel: High

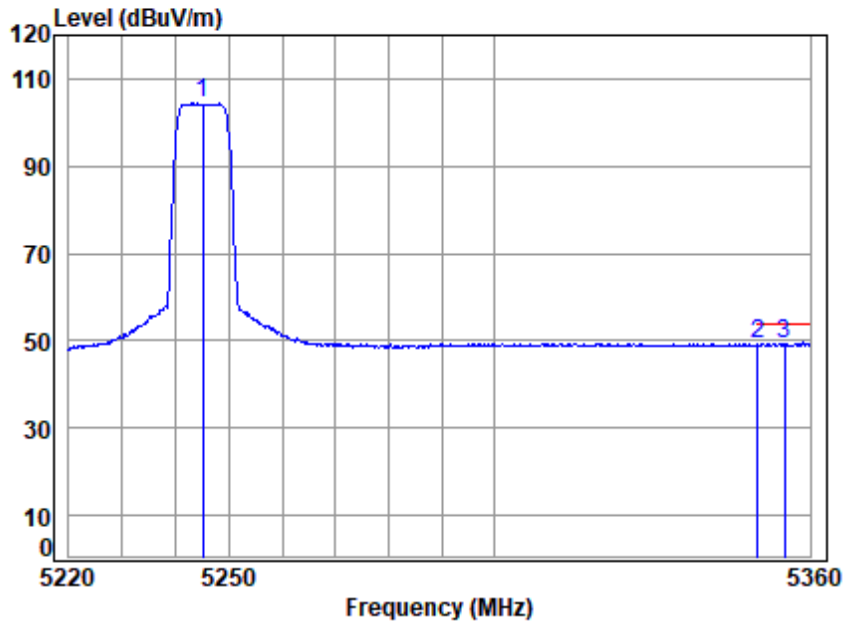


Site : chamber
Condition: 3m VERTICAL
Job No : 04815AT
Mode : 5245 Band edge
: 5.1G SDR 10M

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 5245.000	18.97	34.09	31.33	82.71	104.44	-----	-----	Average
2 5350.020	19.11	34.40	31.39	27.02	49.14	54.00	-4.86	Average
3 q 5355.179	19.12	34.42	31.39	27.08	49.23	54.00	-4.77	Average



Test Mode: 17; Polarity: Horizontal; Modulation: OFDM; Channel: Low

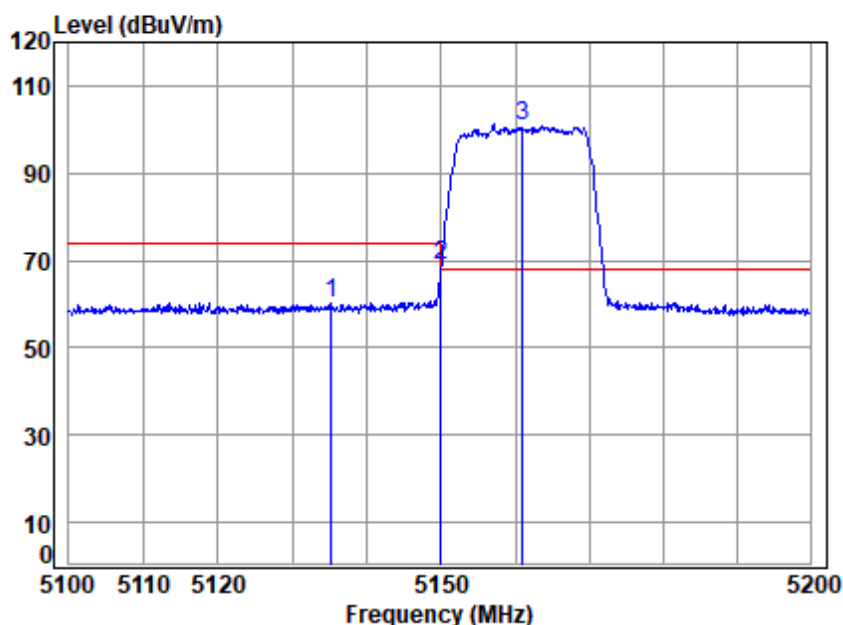

Site : chamber
Condition: 3m HORIZONTAL
Job No : 04815AT
Mode : 5161 Band edge
: 5.1G SDR 20M

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5135.178	18.81	33.93	31.27	38.87	60.34	74.00	-13.66	Peak
2	5149.980	18.83	33.90	31.28	47.45	68.90	74.00	-5.10	peak
3 p	5161.000	18.85	33.92	31.29	79.30	100.78	68.20	32.58	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR241200481505

Page: 68 of 532

Test Mode: 17; Polarity: Horizontal; Modulation: OFDM; Channel: Low

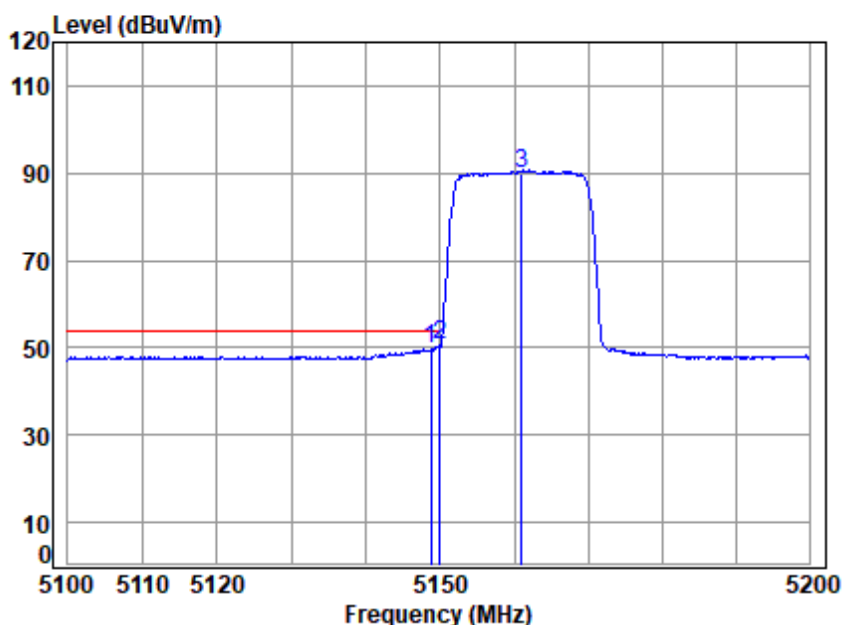

Site : chamber
Condition: 3m HORIZONTAL
Job No : 04815AT
Mode : 5161 Band edge
: 5.1G SDR 20M

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5148.757	18.83	33.90	31.28	28.30	49.75	54.00	-4.25 Average
2 q	5149.980	18.83	33.90	31.28	29.11	50.56	54.00	-3.44 Average
3	5161.000	18.85	33.92	31.29	68.62	90.10	-----	----- Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 17; Polarity: Vertical; Modulation: OFDM; Channel: Low

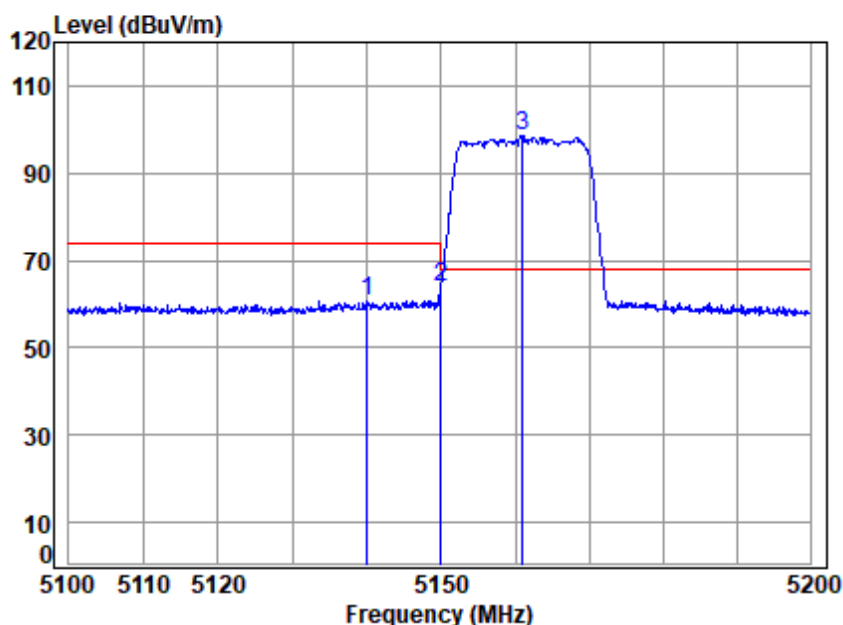

Site : chamber
Condition: 3m VERTICAL
Job No : 04815AT
Mode : 5161 Band edge
: 5.1G SDR 20M


		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5139.967	18.82	33.92	31.28	39.36	60.82	74.00	-13.18 Peak
2	5149.980	18.83	33.90	31.28	42.30	63.75	74.00	-10.25 Peak
3 p	5161.000	18.85	33.92	31.29	77.02	98.50	68.20	30.30 Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 17; Polarity: Vertical; Modulation: OFDM; Channel: Low

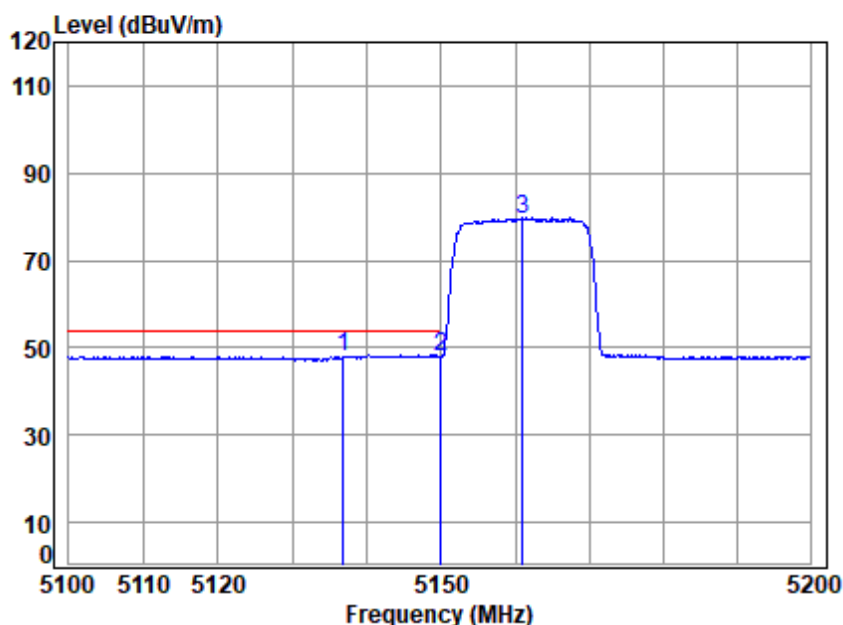


Site : chamber
Condition: 3m VERTICAL
Job No : 04815AT
Mode : 5161 Band edge
: 5.1G SDR 20M

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 q 5136.874	18.82	33.93	31.27	26.62	48.10	54.00	-5.90	Average
2 5149.980	18.83	33.90	31.28	26.53	47.98	54.00	-6.02	Average
3 5161.000	18.85	33.92	31.29	58.12	79.60	-----	-----	Average



Test Mode: 17; Polarity: Horizontal; Modulation: OFDM; Channel: High

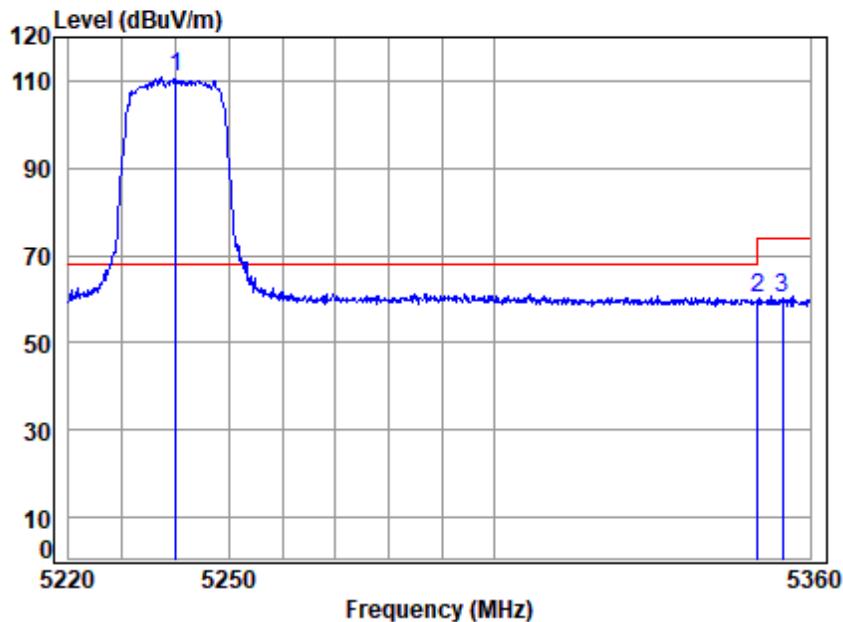

Site : chamber
Condition: 3m HORIZONTAL
Job No : 04815AT
Mode : 5240 Band edge
: 5.1G SDR 20M

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 p	5240.000	18.96	34.08	31.33	89.14	110.85	68.20	42.65	peak
2	5350.020	19.11	34.40	31.39	38.15	60.27	74.00	-13.73	peak
3	5354.754	19.12	34.42	31.39	38.21	60.36	74.00	-13.64	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR241200481505

Page: 72 of 532

Test Mode: 17; Polarity: Horizontal; Modulation: OFDM; Channel: High

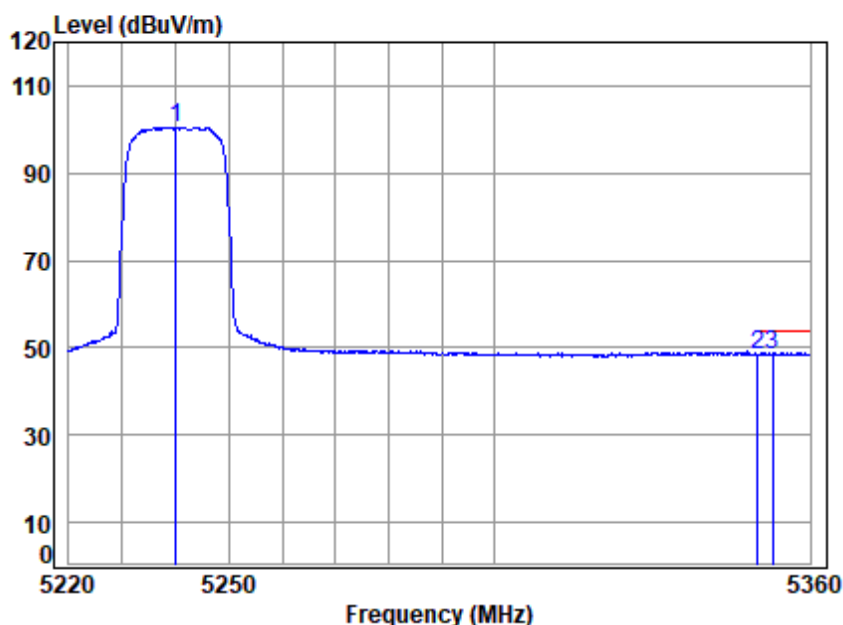

Site : chamber
Condition: 3m HORIZONTAL
Job No : 04815AT
Mode : 5240 Band edge
: 5.1G SDR 20M

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5240.000	18.96	34.08	31.33	78.61	100.32	-----	Average
2 q	5350.020	19.11	34.40	31.39	26.45	48.57	54.00	-5.43 Average
3	5352.770	19.11	34.41	31.39	26.25	48.38	54.00	-5.62 Average




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 17; Polarity: Vertical; Modulation: OFDM; Channel: High

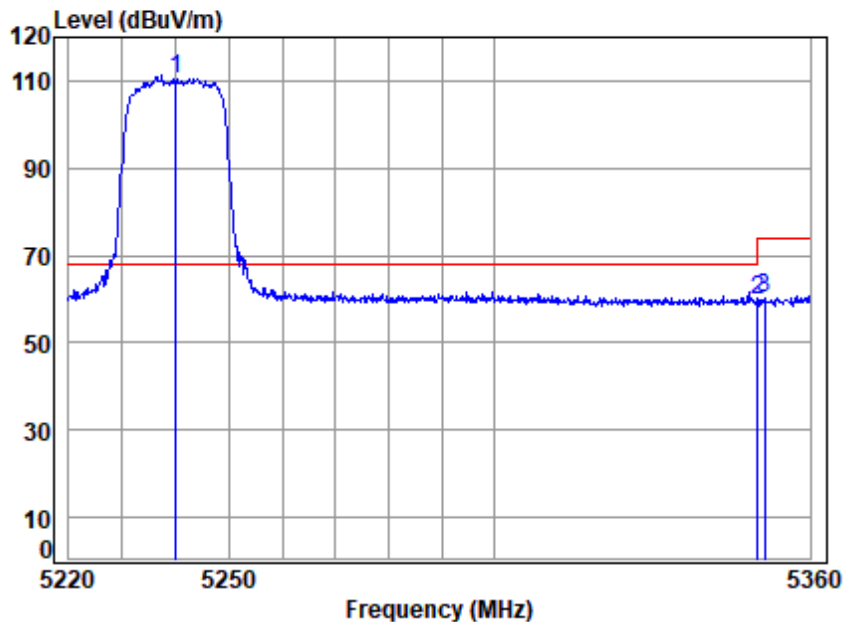

Site : chamber
Condition: 3m VERTICAL
Job No : 04815AT
Mode : 5240 Band edge
: 5.1G SDR 20M

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 p	5240.000	18.96	34.08	31.33	88.75	110.46	68.20	42.26 Peak
2	5350.020	19.11	34.40	31.39	37.86	59.98	74.00	-14.02 Peak
3	5351.354	19.11	34.41	31.39	38.06	60.19	74.00	-13.81 Peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR241200481505

Page: 74 of 532

Test Mode: 17; Polarity: Vertical; Modulation: OFDM; Channel: High

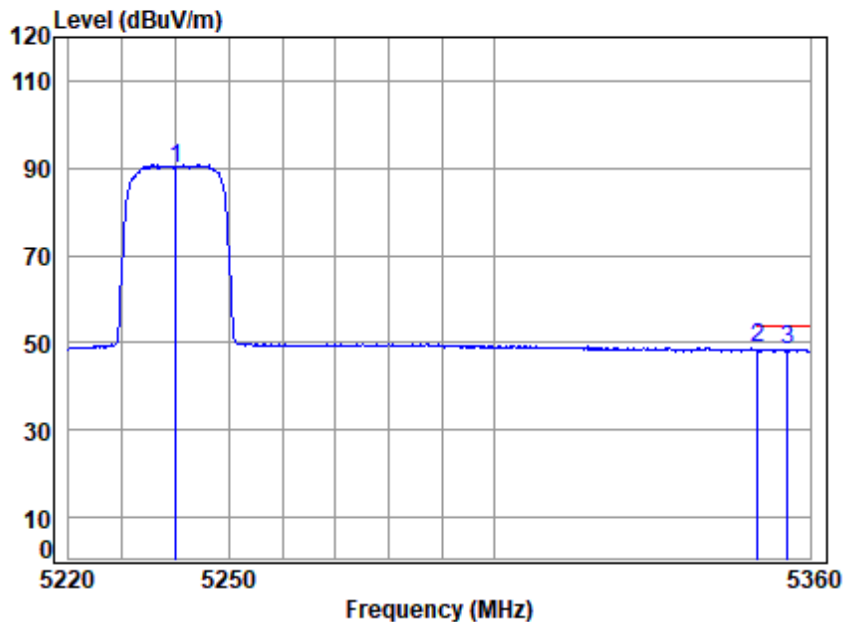

Site : chamber
Condition: 3m VERTICAL
Job No : 04815AT
Mode : 5240 Band edge
: 5.1G SDR 20M

		Cable	Ant	Preamp	Read	Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5240.000	18.96	34.08	31.33	68.25	89.96	-----	----- Average
2 q	5350.020	19.11	34.40	31.39	26.59	48.71	54.00	-5.29 Average
3	5355.746	19.12	34.42	31.39	26.43	48.58	54.00	-5.42 Average



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR241200481505

Page: 75 of 532

Test Mode: 18; Polarity: Horizontal; Modulation: OFDM; Channel: Low

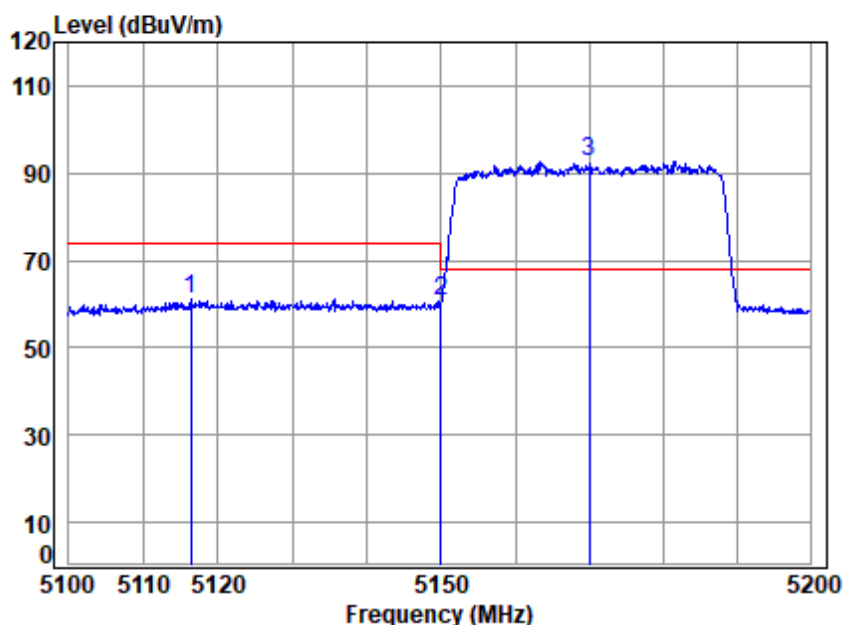

Site : chamber
Condition: 3m HORIZONTAL
Job No : 04815AT
Mode : 5170 Band edge
: 5.1G SDR 40M

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5116.367	18.79	33.97	31.26	39.65	61.15	74.00	-12.85 Peak
2	5149.980	18.83	33.90	31.28	39.30	60.75	74.00	-13.25 peak
3 p	5170.000	18.86	33.94	31.29	71.18	92.69	68.20	24.49 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 18; Polarity: Horizontal; Modulation: OFDM; Channel: Low

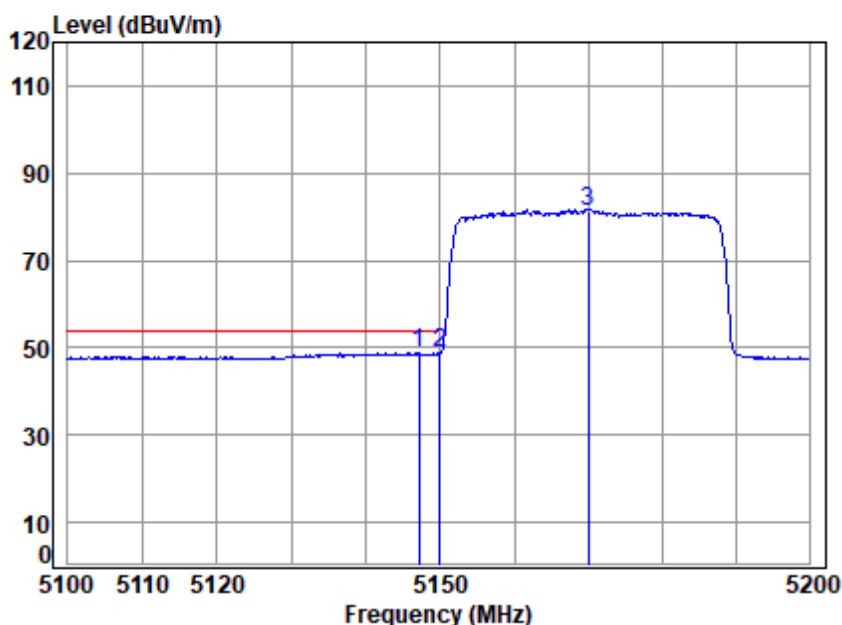


Site : chamber
Condition: 3m HORIZONTAL
Job No : 04815AT
Mode : 5170 Band edge
: 5.1G SDR 40M

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 q 5147.158	18.83	33.91	31.28	27.36	48.82	54.00	-5.18	Average
2 5149.980	18.83	33.90	31.28	27.25	48.70	54.00	-5.30	Average
3 5170.000	18.86	33.94	31.29	59.86	81.37	-----	-----	Average



Test Mode: 18; Polarity: Vertical; Modulation: OFDM; Channel: Low

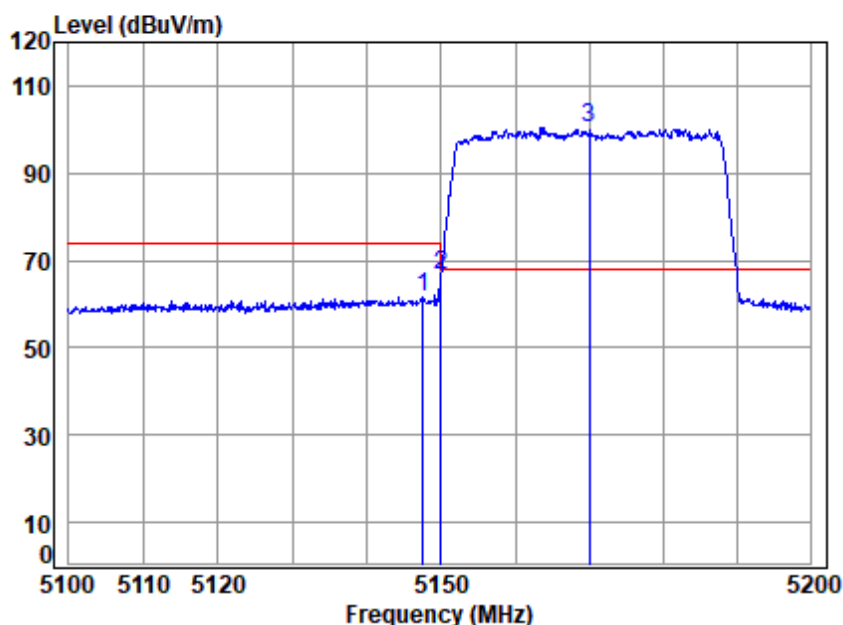

Site : chamber
Condition: 3m VERTICAL
Job No : 04815AT
Mode : 5170 Band edge
: 5.1G SDR 40M


		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5147.558	18.83	33.90	31.28	40.15	61.60	74.00	-12.40 Peak
2	5149.980	18.83	33.90	31.28	45.12	66.57	74.00	-7.43 Peak
3 p	5170.000	18.86	33.94	31.29	78.87	100.38	68.20	32.18 Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 18; Polarity: Vertical; Modulation: OFDM; Channel: Low

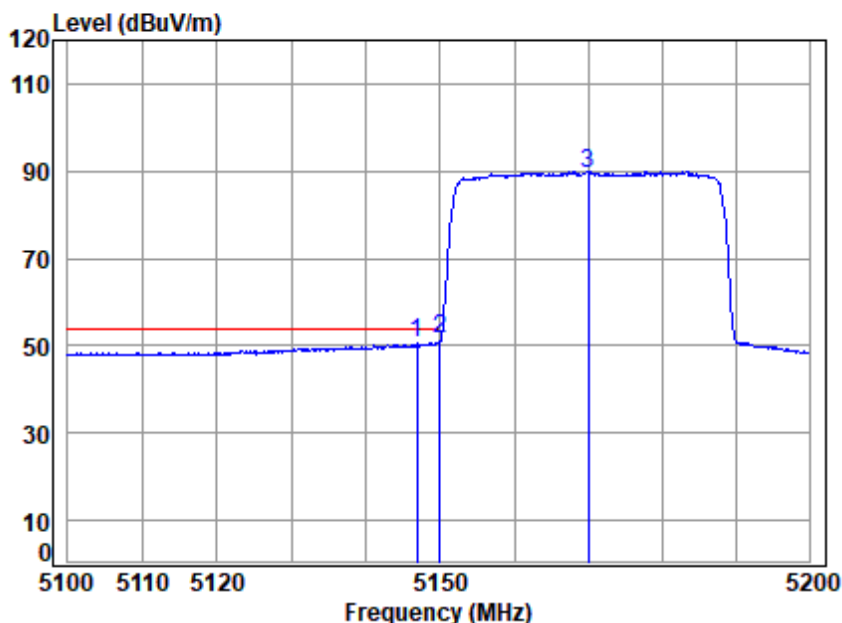


Site : chamber
Condition: 3m VERTICAL
Job No : 04815AT
Mode : 5170 Band edge
: 5.1G SDR 40M

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5146.858	18.83	33.91	31.28	29.10	50.56	54.00	-3.44 Average
2 q	5149.980	18.83	33.90	31.28	29.90	51.35	54.00	-2.65 Average
3	5170.000	18.86	33.94	31.29	67.98	89.49	-----	----- Average



Test Mode: 18; Polarity: Horizontal; Modulation: OFDM; Channel: High

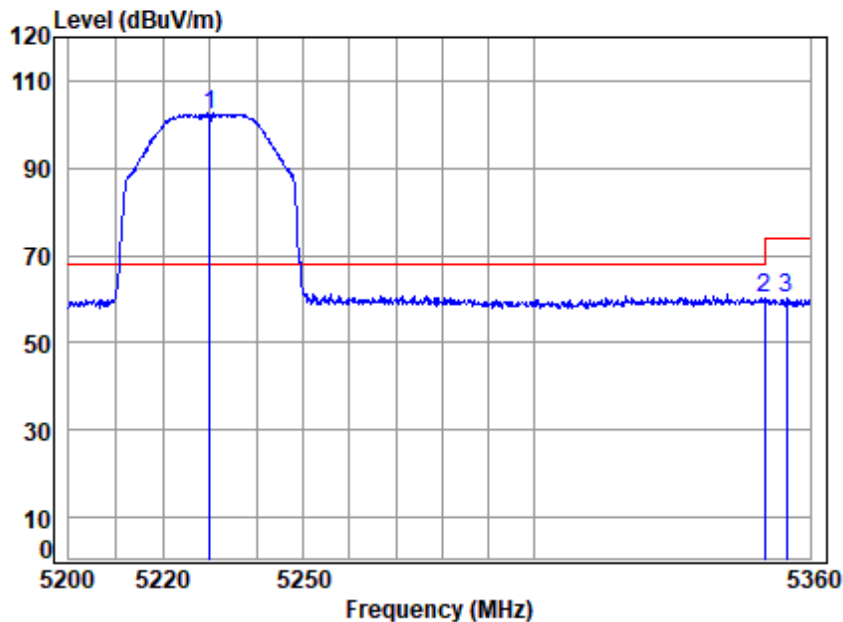

Site : chamber
Condition: 3m HORIZONTAL
Job No : 04815AT
Mode : 5230 Band edge
: 5.1G SDR 40M


		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 p 5230.000	18.95	34.06	31.32	80.51	102.20	68.20	34.00	peak
2 5350.020	19.11	34.40	31.39	37.97	60.09	74.00	-13.91	peak
3 5354.805	19.12	34.42	31.39	37.89	60.04	74.00	-13.96	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 18; Polarity: Horizontal; Modulation: OFDM; Channel: High

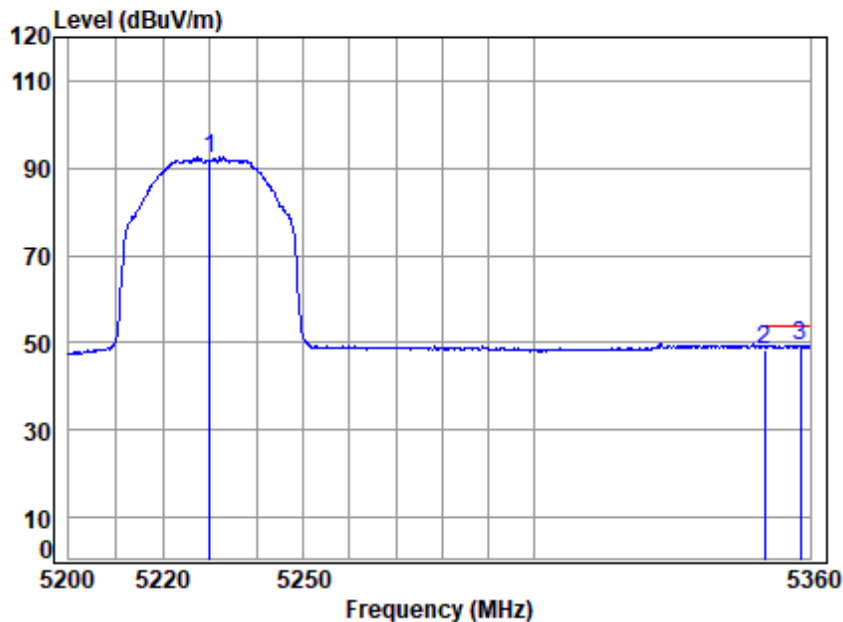

Site : chamber
Condition: 3m HORIZONTAL
Job No : 04815AT
Mode : 5230 Band edge
: 5.1G SDR 40M


		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5230.000	18.95	34.06	31.32	70.45	92.14	-----	----- Average
2	5350.020	19.11	34.40	31.39	26.46	48.58	54.00	-5.42 Average
3 q	5357.889	19.12	34.43	31.39	27.12	49.28	54.00	-4.72 Average



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 18; Polarity: Vertical; Modulation: OFDM; Channel: High

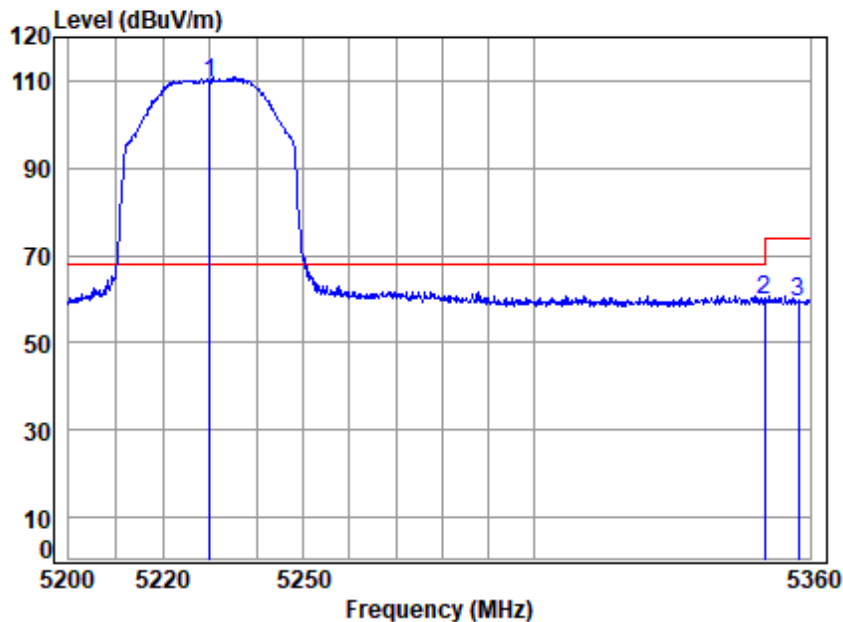

Site : chamber
Condition: 3m VERTICAL
Job No : 04815AT
Mode : 5230 Band edge
: 5.1G SDR 40M


		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 p 5230.000	18.95	34.06	31.32	87.78	109.47	68.20	41.27	Peak
2 5350.020	19.11	34.40	31.39	37.70	59.82	74.00	-14.18	Peak
3 5357.402	19.12	34.43	31.39	36.95	59.11	74.00	-14.89	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 18; Polarity: Vertical; Modulation: OFDM; Channel: High

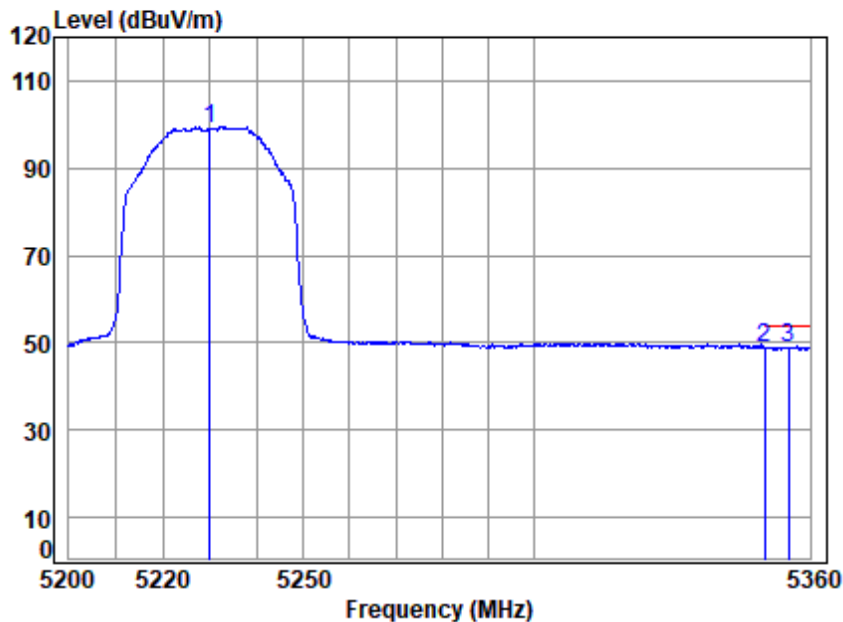


Site : chamber
Condition: 3m VERTICAL
Job No : 04815AT
Mode : 5230 Band edge
: 5.1G SDR 40M

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5230.000	18.95	34.06	31.32	77.36	99.05	-----	----- Average
2 q	5350.020	19.11	34.40	31.39	26.85	48.97	54.00	-5.03 Average
3	5355.292	19.12	34.42	31.39	26.79	48.94	54.00	-5.06 Average



Test Mode: 19; Polarity: Horizontal; Modulation: OFDM; Channel: Low

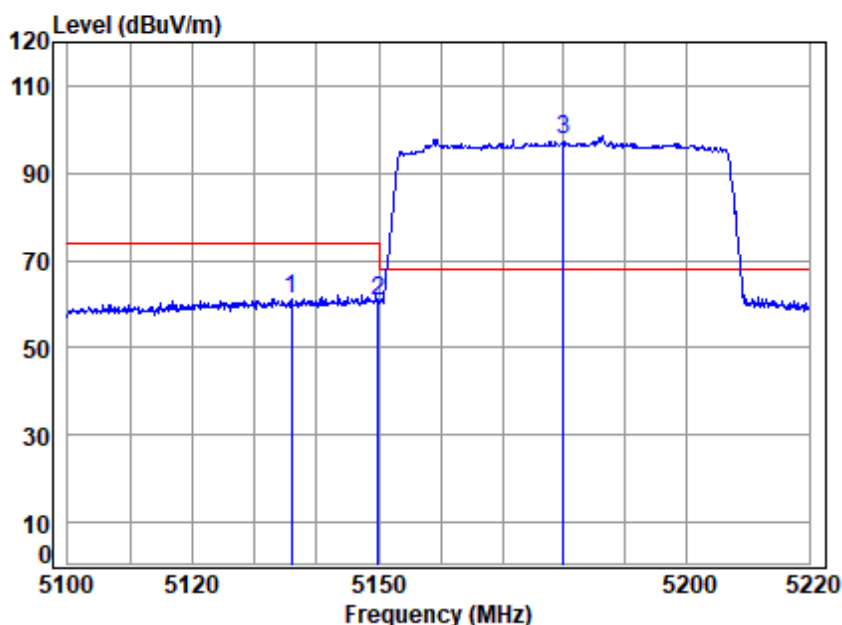

Site : chamber
Condition: 3m HORIZONTAL
Job No : 04815AT
Mode : 5180 Band edge
: 5.1G SDR 60M

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5135.946	18.81	33.93	31.27	39.70	61.17	74.00	-12.83 Peak
2	5149.980	18.83	33.90	31.28	39.34	60.79	74.00	-13.21 peak
3 p	5180.000	18.88	33.96	31.30	75.89	97.43	68.20	29.23 peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR241200481505

Page: 84 of 532

Test Mode: 19; Polarity: Horizontal; Modulation: OFDM; Channel: Low

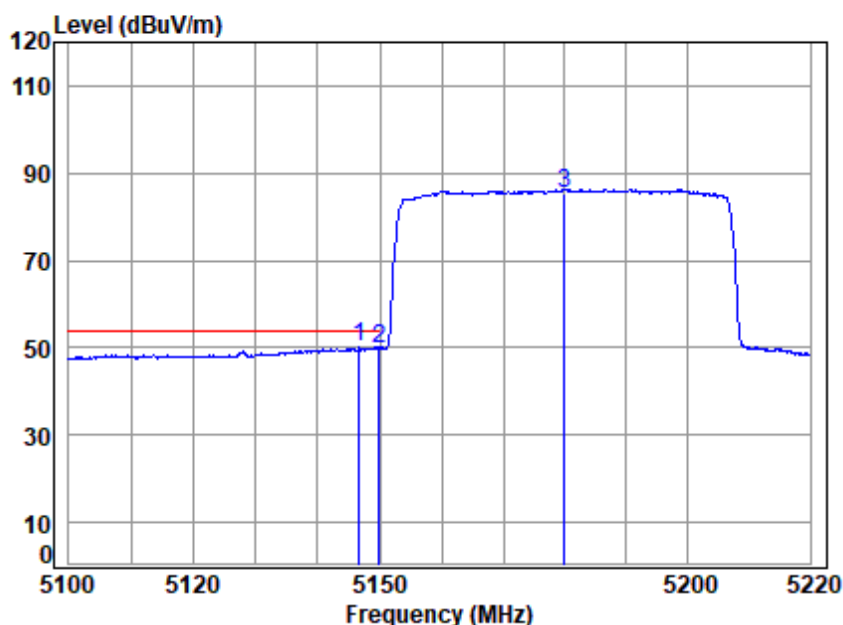

Site : chamber
Condition: 3m HORIZONTAL
Job No : 04815AT
Mode : 5180 Band edge
: 5.1G SDR 60M

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 q 5146.708	18.83	33.91	31.28	28.55	50.01	54.00	-3.99	Average
2 5149.980	18.83	33.90	31.28	28.06	49.51	54.00	-4.49	Average
3 5180.000	18.88	33.96	31.30	63.98	85.52	-----	-----	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 19; Polarity: Vertical; Modulation: OFDM; Channel: Low

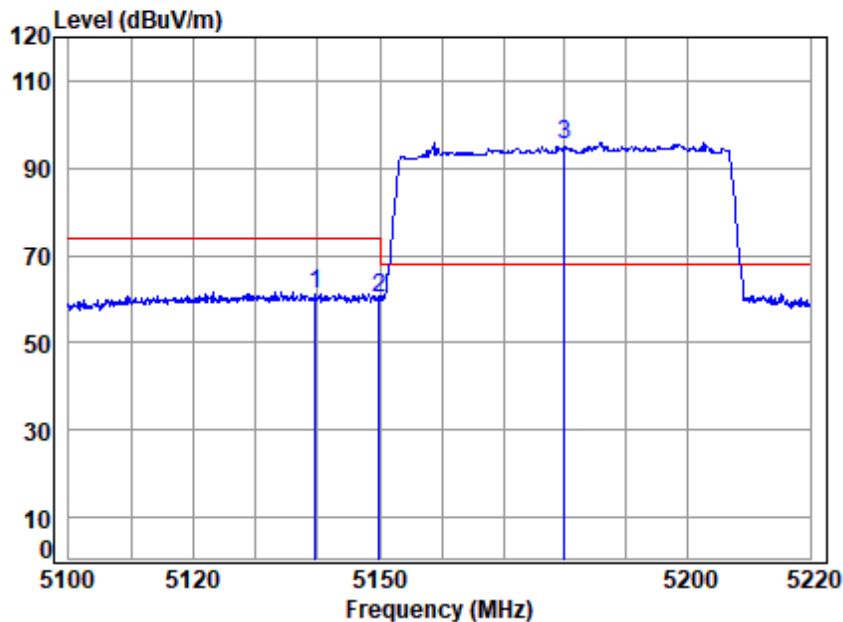

Site : chamber
Condition: 3m VERTICAL
Job No : 04815AT
Mode : 5180 Band edge
: 5.1G SDR 60M

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 5139.650	18.82	33.92	31.28	39.87	61.33	74.00	-12.67	Peak
2 5149.980	18.83	33.90	31.28	38.93	60.38	74.00	-13.62	Peak
3 p 5180.000	18.88	33.96	31.30	73.93	95.47	68.20	27.27	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR241200481505

Page: 86 of 532

Test Mode: 19; Polarity: Vertical; Modulation: OFDM; Channel: Low

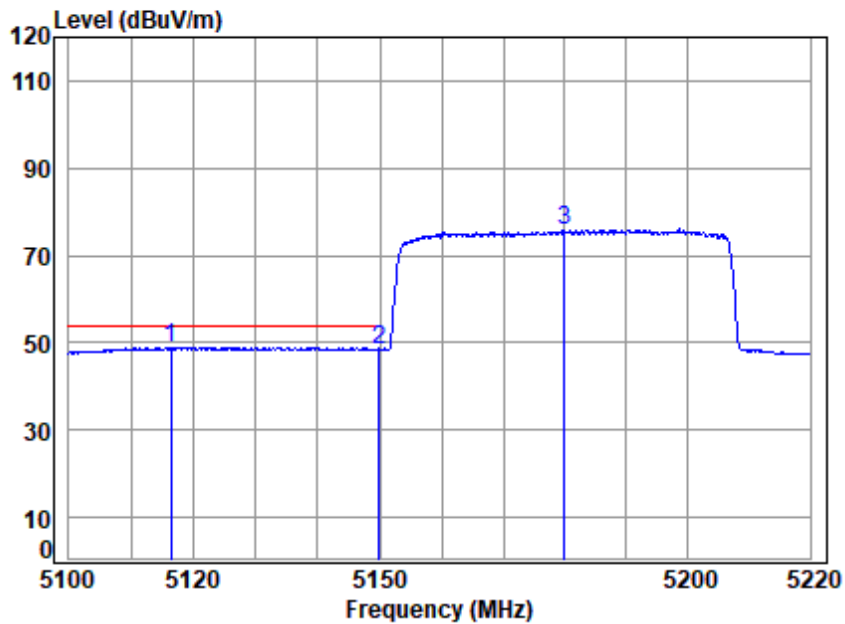

Site : chamber
Condition: 3m VERTICAL
Job No : 04815AT
Mode : 5180 Band edge
: 5.1G SDR 60M

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 q 5116.395	18.79	33.97	31.26	27.51	49.01	54.00	-4.99	Average
2 5149.980	18.83	33.90	31.28	26.94	48.39	54.00	-5.61	Average
3 5180.000	18.88	33.96	31.30	54.04	75.58	-----	-----	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 19; Polarity: Horizontal; Modulation: OFDM; Channel: High

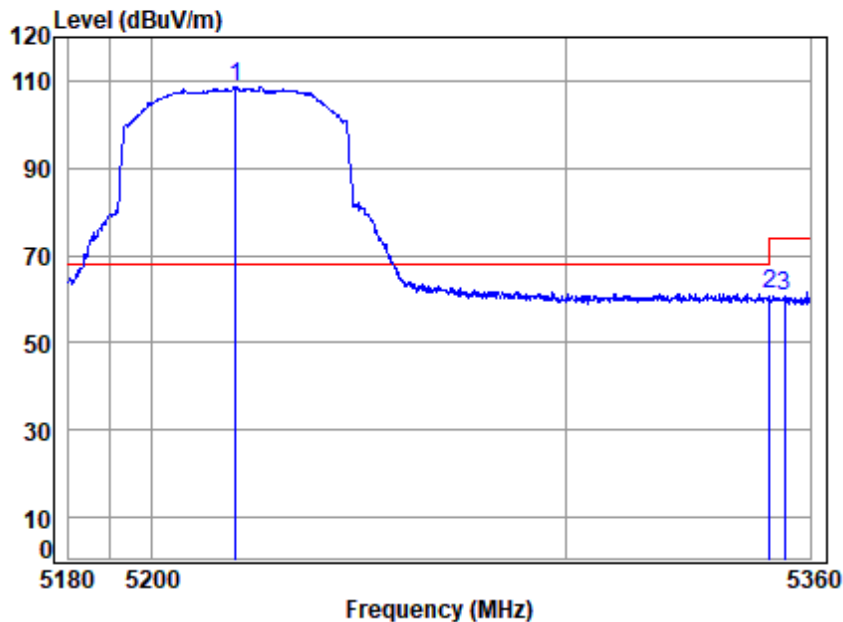


Site : chamber
Condition: 3m HORIZONTAL
Job No : 04815AT
Mode : 5220 Band edge
: 5.1G SDR 60M

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 p 5220.000	18.93	34.04	31.32	86.80	108.45	68.20	40.25	peak
2 5350.020	19.11	34.40	31.39	39.04	61.16	74.00	-12.84	peak
3 5353.778	19.11	34.42	31.39	38.54	60.68	74.00	-13.32	Peak



Test Mode: 19; Polarity: Horizontal; Modulation: OFDM; Channel: High

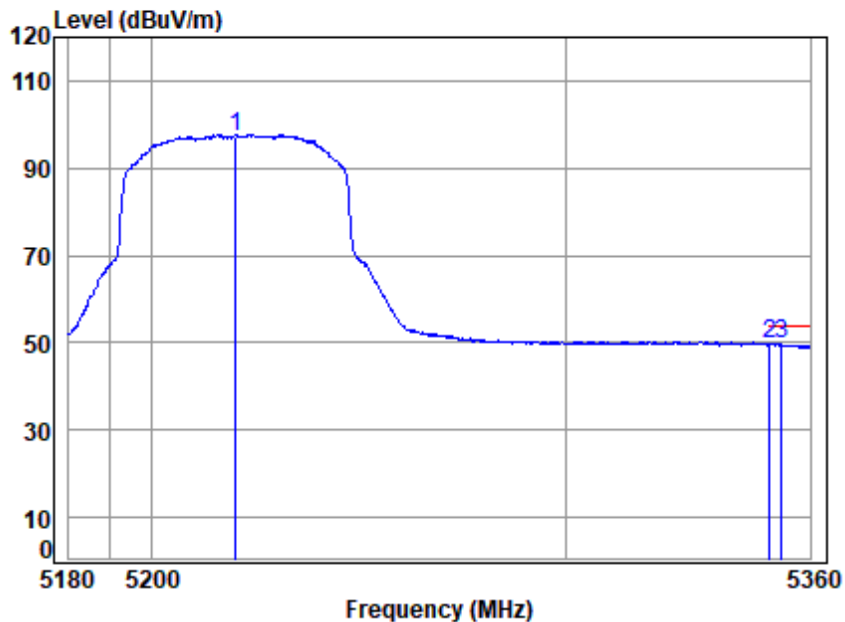


Site : chamber
Condition: 3m HORIZONTAL
Job No : 04815AT
Mode : 5220 Band edge
: 5.1G SDR 60M

		Cable	Ant	Preamp	Read	Limit	Over	
Freq		Loss	Factor	Factor	Level	Line	Limit	Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5220.000	18.93	34.04	31.32	75.64	97.29	-----	Average
2 q	5350.020	19.11	34.40	31.39	27.58	49.70	54.00	-4.30 Average
3	5352.864	19.11	34.41	31.39	27.40	49.53	54.00	-4.47 Average



Test Mode: 19; Polarity: Vertical; Modulation: OFDM; Channel: High

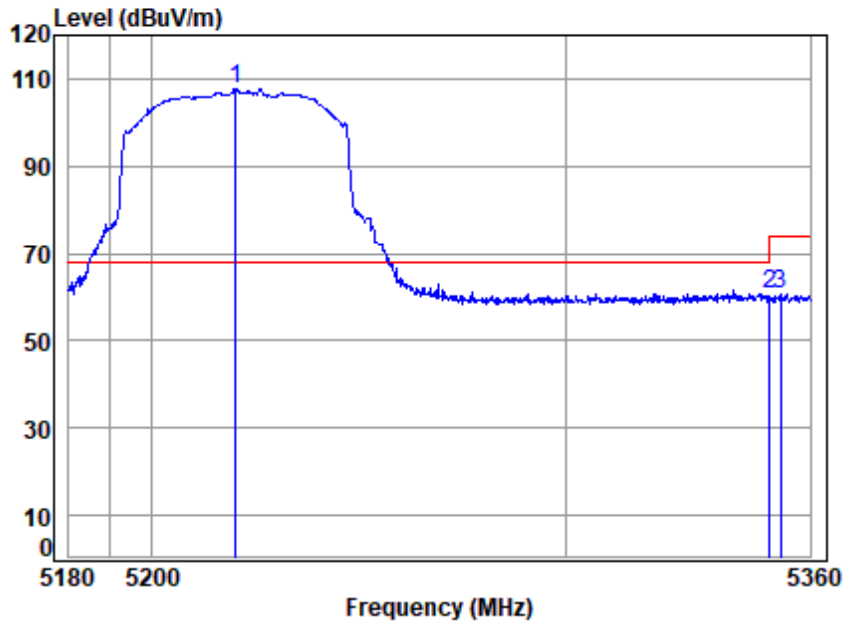


Site : chamber
Condition: 3m VERTICAL
Job No : 04815AT
Mode : 5220 Band edge
: 5.1G SDR 60M

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 p 5220.000	18.93	34.04	31.32	85.93	107.58	68.20	39.38	Peak
2 5350.020	19.11	34.40	31.39	38.37	60.49	74.00	-13.51	Peak
3 5352.681	19.11	34.41	31.39	38.61	60.74	74.00	-13.26	Peak



Test Mode: 19; Polarity: Vertical; Modulation: OFDM; Channel: High

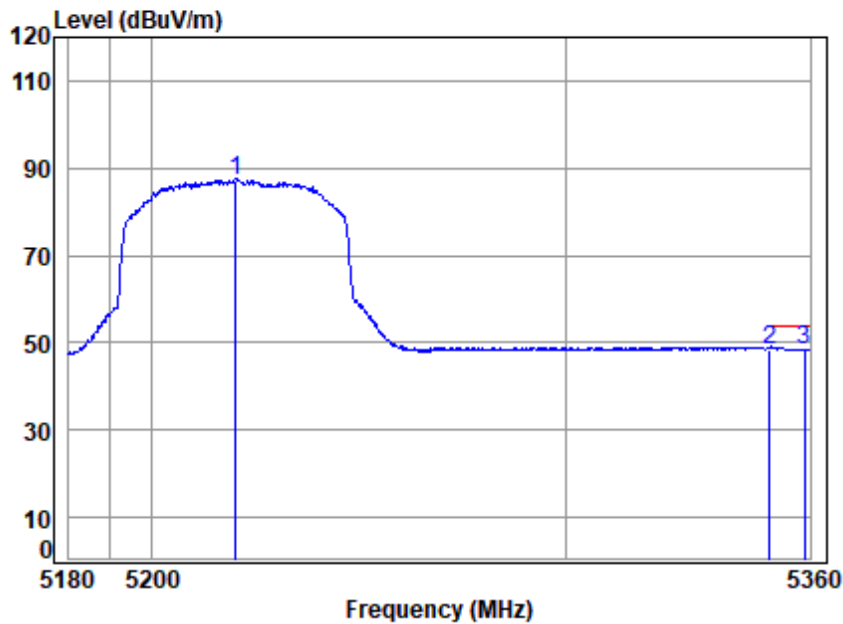


Site : chamber
Condition: 3m VERTICAL
Job No : 04815AT
Mode : 5220 Band edge
: 5.1G SDR 60M

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5220.000	18.93	34.04	31.32	65.47	87.12	-----	----- Average
2	5350.020	19.11	34.40	31.39	26.31	48.43	54.00	-5.57 Average
3 q	5358.536	19.12	34.43	31.39	26.40	48.56	54.00	-5.44 Average



Test Mode: 20; Polarity: Horizontal; Modulation: OFDM; Channel: Low

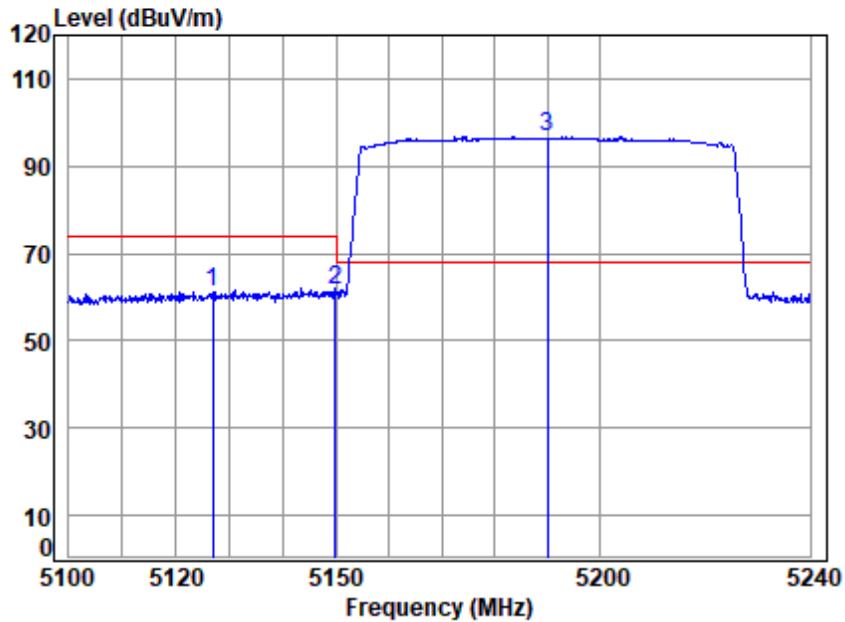

Site : chamber
Condition: 3m HORIZONTAL
Job No : 04815AT
Mode : 5190 Band edge
: 5.1G SDR 80M


		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5126.864	18.80	33.95	31.27	39.73	61.21	74.00	-12.79 Peak
2	5149.980	18.83	33.90	31.28	39.99	61.44	74.00	-12.56 peak
3 p	5190.000	18.89	33.98	31.30	75.01	96.58	68.20	28.38 peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 20; Polarity: Horizontal; Modulation: OFDM; Channel: Low

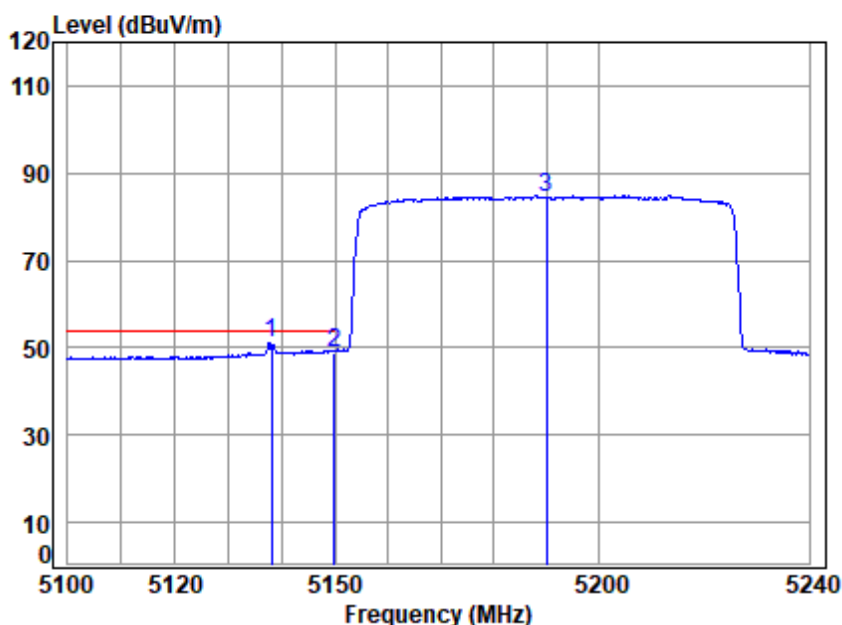

Site : chamber
Condition: 3m HORIZONTAL
Job No : 04815AT
Mode : 5190 Band edge
: 5.1G SDR 80M

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 q 5138.123	18.82	33.92	31.27	29.47	50.94	54.00	-3.06	Average
2 5149.980	18.83	33.90	31.28	27.39	48.84	54.00	-5.16	Average
3 5190.000	18.89	33.98	31.30	62.90	84.47	-----	-----	Average




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR241200481505

Page: 93 of 532

Test Mode: 20; Polarity: Vertical; Modulation: OFDM; Channel: Low

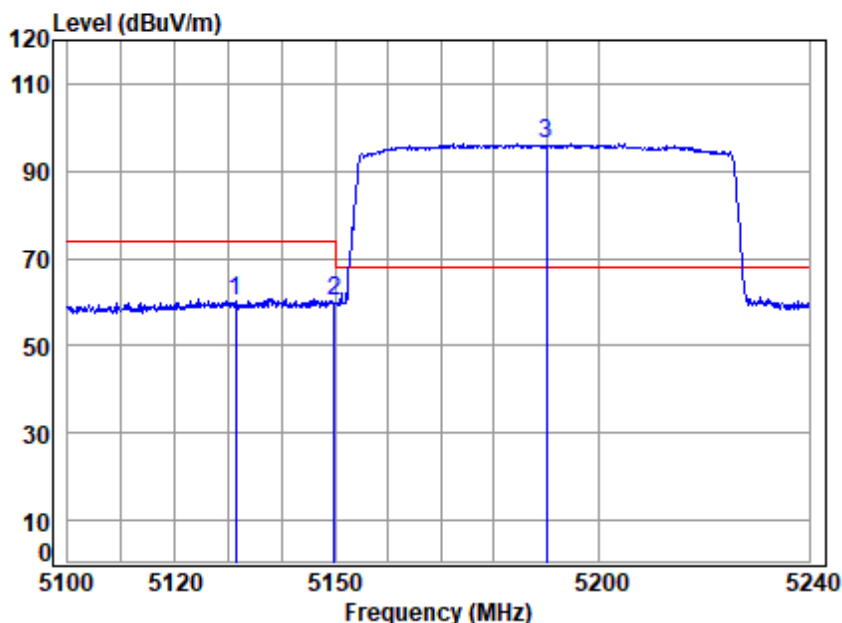

Site : chamber
Condition: 3m VERTICAL
Job No : 04815AT
Mode : 5190 Band edge
: 5.1G SDR 80M

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5131.448	18.81	33.94	31.27	38.91	60.39	74.00	-13.61 Peak
2	5149.980	18.83	33.90	31.28	38.71	60.16	74.00	-13.84 Peak
3 p	5190.000	18.89	33.98	31.30	74.70	96.27	68.20	28.07 Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 20; Polarity: Vertical; Modulation: OFDM; Channel: Low

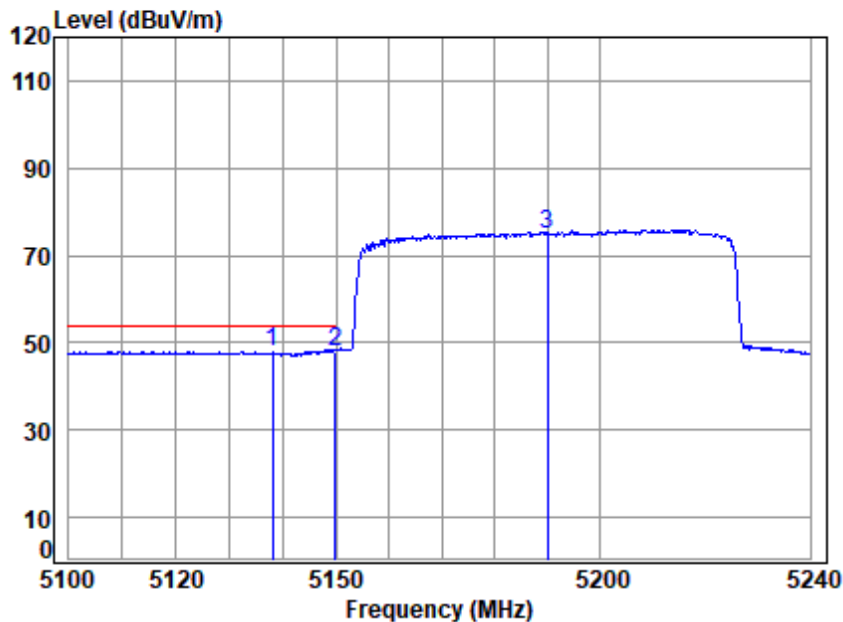

Site : chamber
Condition: 3m VERTICAL
Job No : 04815AT
Mode : 5190 Band edge
: 5.1G SDR 80M


		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 5138.123	18.82	33.92	31.27	26.32	47.79	54.00	-6.21	Average
2 q 5149.980	18.83	33.90	31.28	26.55	48.00	54.00	-6.00	Average
3 5190.000	18.89	33.98	31.30	53.17	74.74	-----	-----	Average



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 20; Polarity: Horizontal; Modulation: OFDM; Channel: High

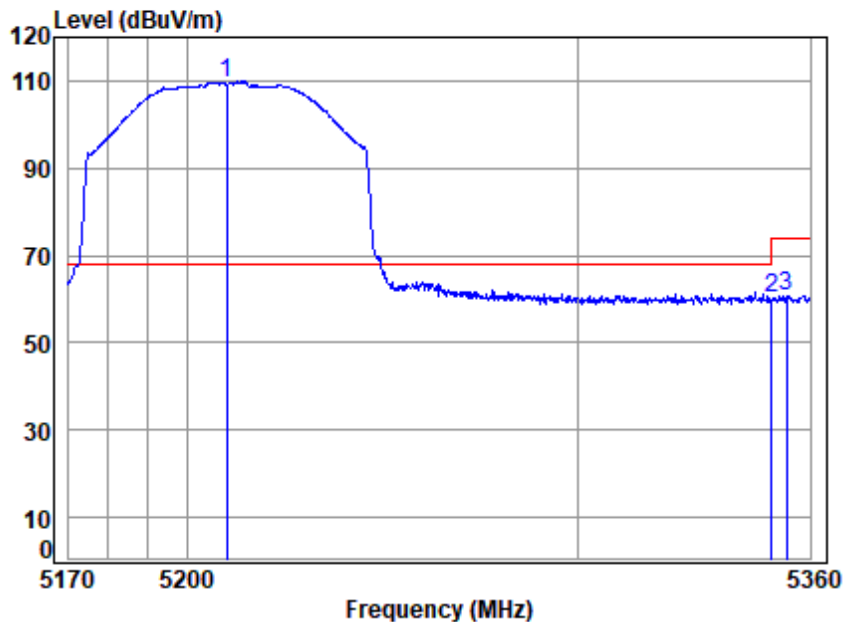

Site : chamber
Condition: 3m HORIZONTAL
Job No : 04815AT
Mode : 5210 Band edge
: 5.1G SDR 80M

		Cable	Ant	Preamp	Read		Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 p	5210.000	18.92	34.02	31.31	88.01	109.64	68.20	41.44	peak
2	5350.020	19.11	34.40	31.39	37.90	60.02	74.00	-13.98	peak
3	5353.813	19.11	34.42	31.39	38.57	60.71	74.00	-13.29	Peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR241200481505

Page: 96 of 532

Test Mode: 20; Polarity: Horizontal; Modulation: OFDM; Channel: High

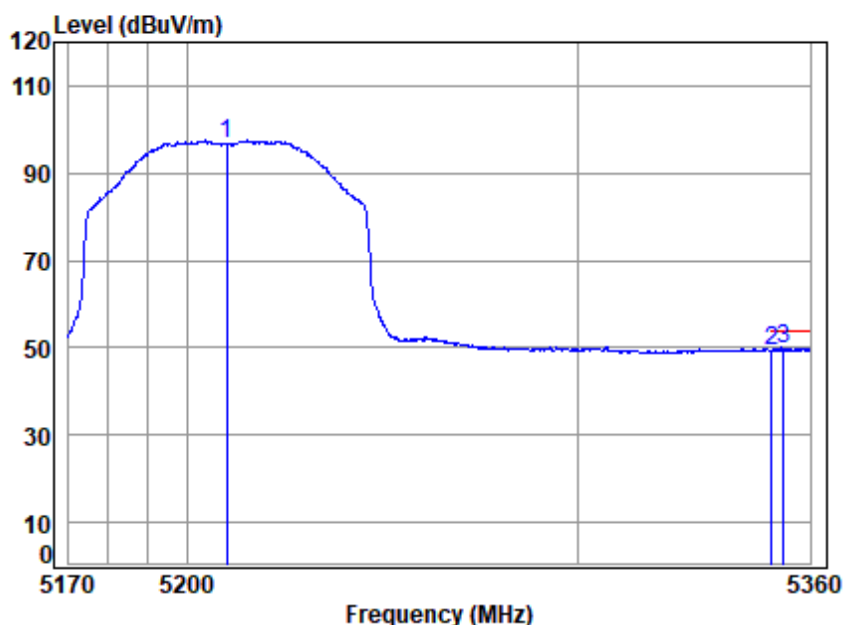

Site : chamber
Condition: 3m HORIZONTAL
Job No : 04815AT
Mode : 5210 Band edge
: 5.1G SDR 80M

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5210.000	18.92	34.02	31.31	75.27	96.90	-----	Average
2	5350.020	19.11	34.40	31.39	27.26	49.38	54.00	-4.62 Average
3 q	5353.041	19.11	34.41	31.39	27.45	49.58	54.00	-4.42 Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing and Calibration Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 20; Polarity: Vertical; Modulation: OFDM; Channel: High

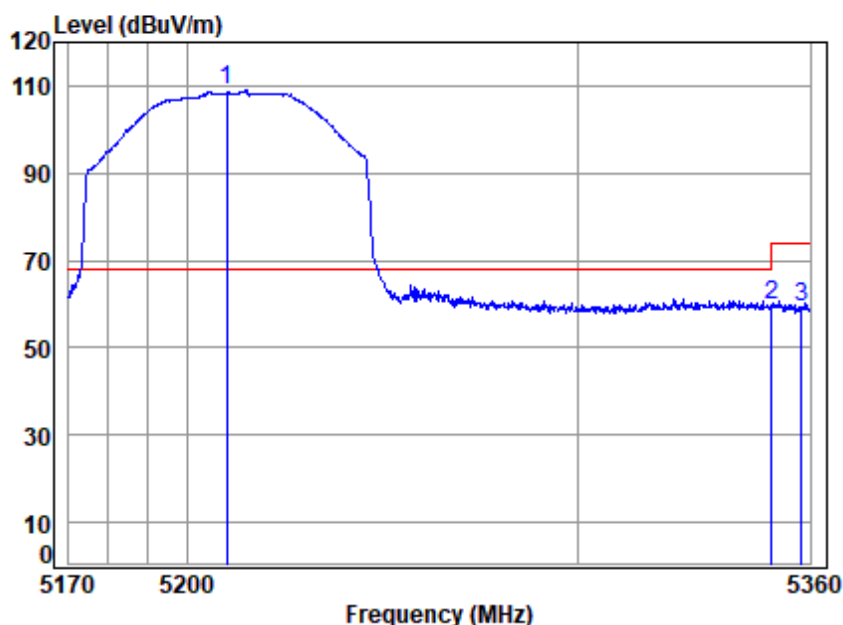

Site : chamber
Condition: 3m VERTICAL
Job No : 04815AT
Mode : 5210 Band edge
: 5.1G SDR 80M


		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 p 5210.000	18.92	34.02	31.31	87.28	108.91	68.20	40.71	Peak
2 5350.020	19.11	34.40	31.39	37.76	59.88	74.00	-14.12	Peak
3 5357.873	19.12	34.43	31.39	37.14	59.30	74.00	-14.70	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 20; Polarity: Vertical; Modulation: OFDM; Channel: High

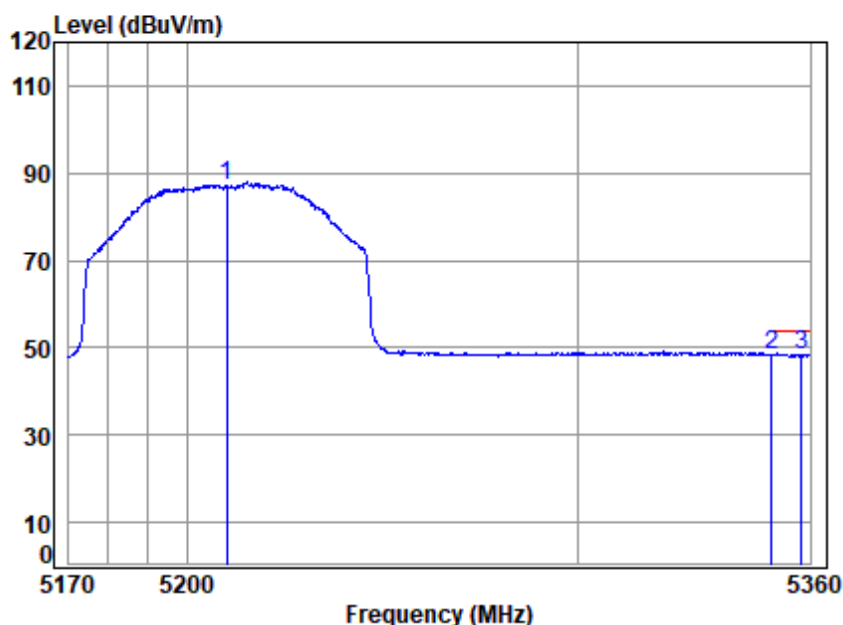

Site : chamber
Condition: 3m VERTICAL
Job No : 04815AT
Mode : 5210 Band edge
: 5.1G SDR 80M


		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5210.000	18.92	34.02	31.31	65.59	87.22	-----	----- Average
2 q	5350.020	19.11	34.40	31.39	26.33	48.45	54.00	-5.55 Average
3	5357.873	19.12	34.43	31.39	26.26	48.42	54.00	-5.58 Average



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 21; Polarity: Horizontal; Modulation: OFDM; Channel: Low

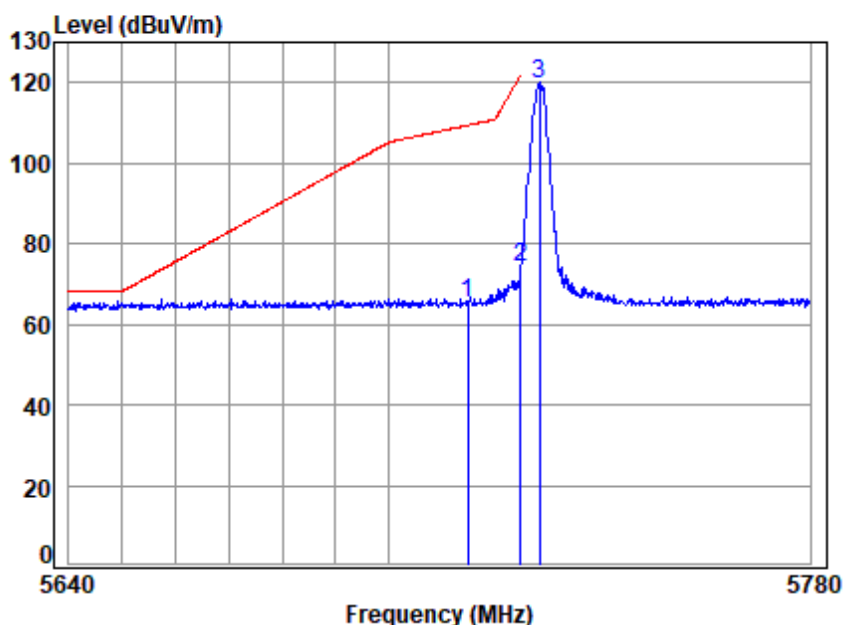


Site : chamber
Condition: 3m HORIZONTAL
Job No : 04815AT
Mode : 5728.5 Band edge
: 5G SDR 1.4M

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 p 5715.000	19.45	34.27	31.57	43.03	65.18	109.40	-44.22	peak
2 5725.000	19.46	34.25	31.57	51.76	73.90	122.20	-48.30	peak
3 5728.500	19.46	34.24	31.57	97.67	119.80	-----	-----	peak



Test Mode: 21; Polarity: Vertical; Modulation: OFDM; Channel: Low

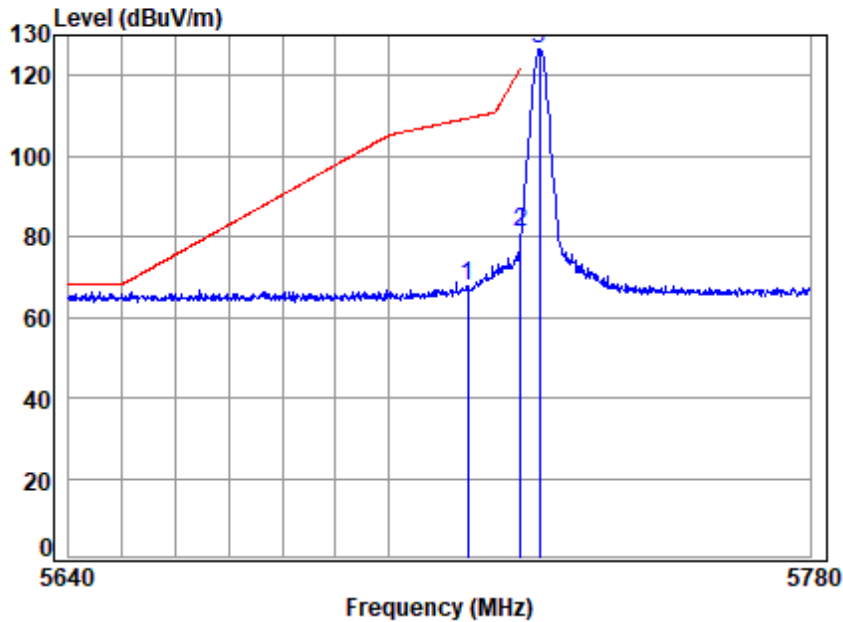


Site : chamber
Condition: 3m VERTICAL
Job No : 04815AT
Mode : 5728.5 Band edge
: 5G SDR 1.4M

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5715.000	19.45	34.27	31.57	45.47	67.62	109.40	-41.78 peak
2 p	5725.000	19.46	34.25	31.57	58.89	81.03	122.20	-41.17 peak
3	5728.500	19.46	34.24	31.57	104.25	126.38	-----	----- peak



Test Mode: 21; Polarity: Horizontal; Modulation: OFDM; Channel: High

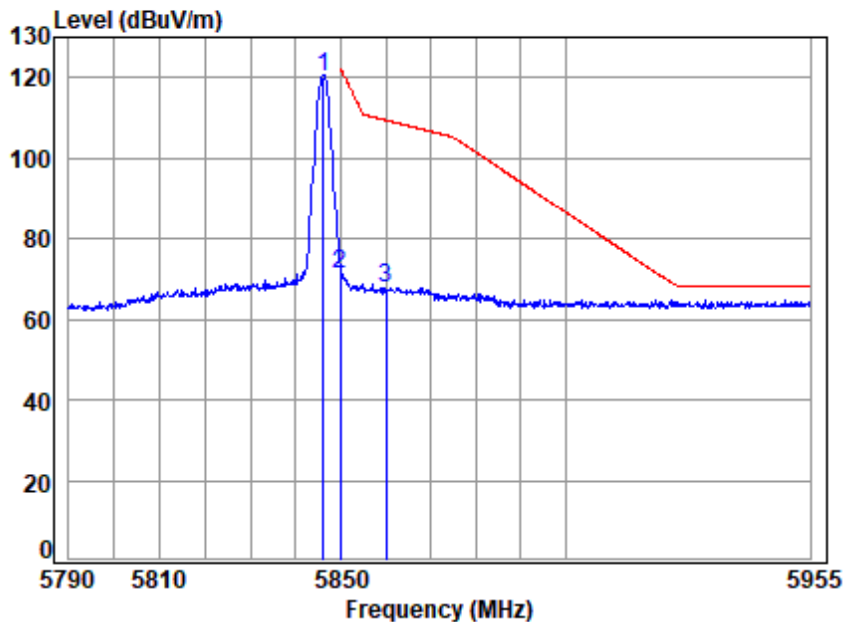

Site : chamber
Condition: 3m HORIZONTAL
Job No : 04815AT
Mode : 5846.12 Band edge
: 5G SDR 1.4M


		Cable	Ant	Preamp	Read	Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5846.120	19.53	34.39	31.63	97.80	120.09	-----	----- peak
2	5850.000	19.54	34.40	31.63	48.95	71.26	122.20	-50.94 peak
3 p	5860.000	19.54	34.44	31.64	45.44	67.78	109.40	-41.62 peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 21; Polarity: Vertical; Modulation: OFDM; Channel: High

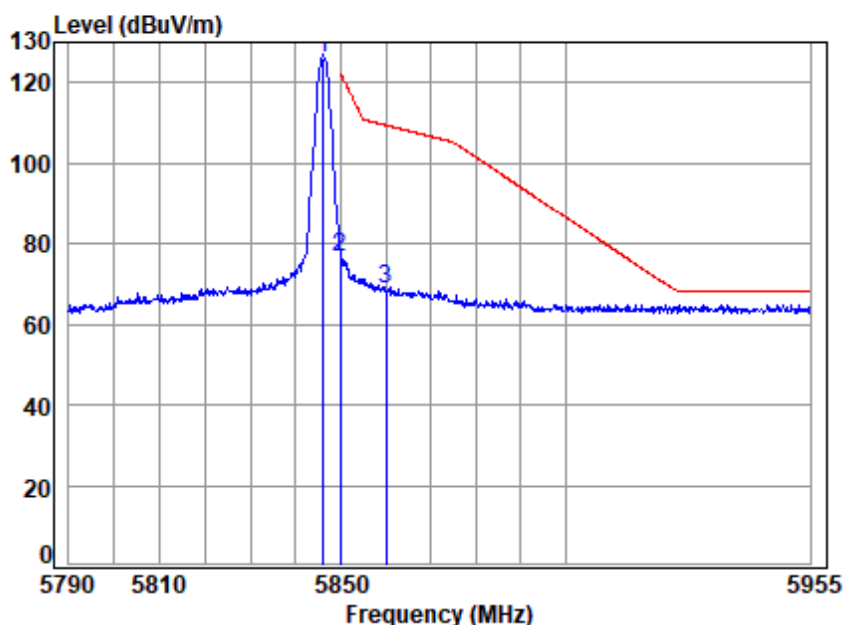

Site : chamber
Condition: 3m VERTICAL
Job No : 04815AT
Mode : 5846.12 Band edge
: 5G SDR 1.4M

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5846.120	19.53	34.39	31.63	103.62	125.91	-----	-----	peak
2	5850.000	19.54	34.40	31.63	54.24	76.55	122.20	-45.65	peak
3 p	5860.000	19.54	34.44	31.64	46.15	68.49	109.40	-40.91	peak




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 22; Polarity: Horizontal; Modulation: OFDM; Channel: Low

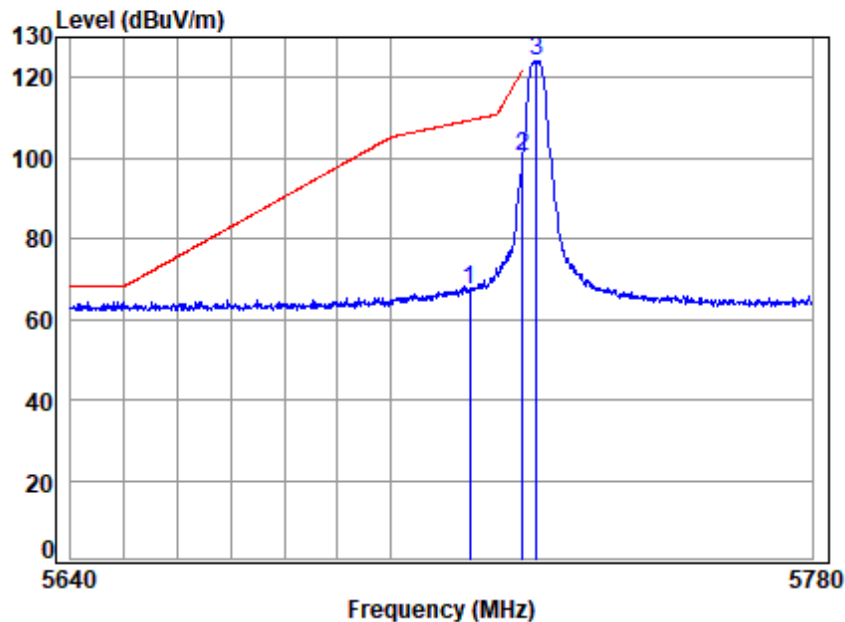


Site : chamber
Condition: 3m HORIZONTAL
Job No : 04815AT
Mode : 5727.5 Band edge
: 5G SDR 3M

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 5715.000	19.45	34.27	31.57	45.26	67.41	109.40	-41.99	peak
2 p 5725.000	19.46	34.25	31.57	78.17	100.31	122.20	-21.89	peak
3 5727.500	19.46	34.24	31.57	101.91	124.04	-----	-----	peak



Test Mode: 22; Polarity: Vertical; Modulation: OFDM; Channel: Low

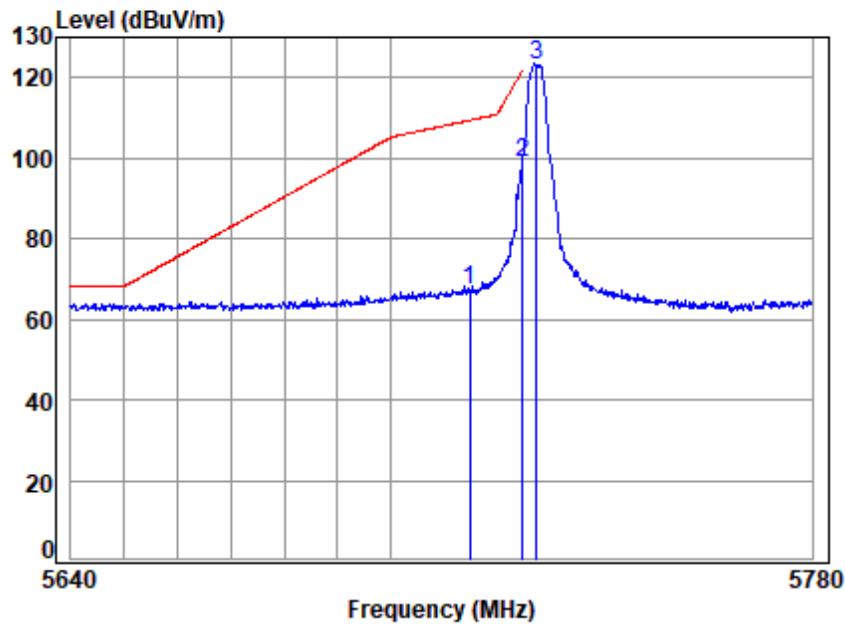


Site : chamber
Condition: 3m VERTICAL
Job No : 04815AT
Mode : 5727.5 Band edge
: 5G SDR 3M

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5715.000	19.45	34.27	31.57	45.01	67.16	109.40	-42.24 peak
2 p	5725.000	19.46	34.25	31.57	76.85	98.99	122.20	-23.21 peak
3	5727.500	19.46	34.24	31.57	100.99	123.12	-----	----- peak



Test Mode: 22; Polarity: Horizontal; Modulation: OFDM; Channel: High

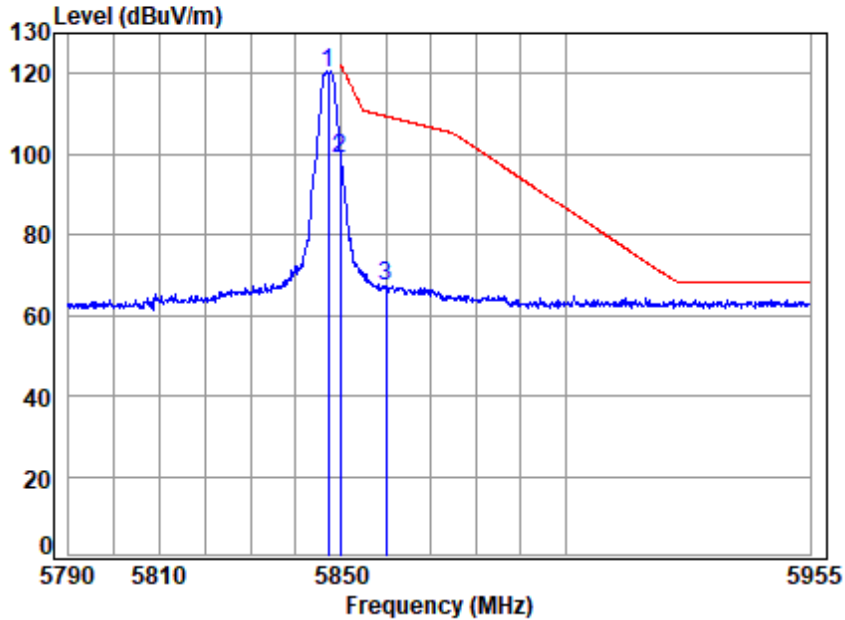


Site : chamber
Condition: 3m HORIZONTAL
Job No : 04815AT
Mode : 5847.2 Band edge
: 5G SDR 3M

		Cable	Ant	Preamp	Read		Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5847.200	19.54	34.39	31.63	97.68	119.98	-----	-----	peak
2 p	5850.000	19.54	34.40	31.63	76.41	98.72	122.20	-23.48	peak
3	5860.000	19.54	34.44	31.64	44.64	66.98	109.40	-42.42	peak



Test Mode: 22; Polarity: Vertical; Modulation: OFDM; Channel: High

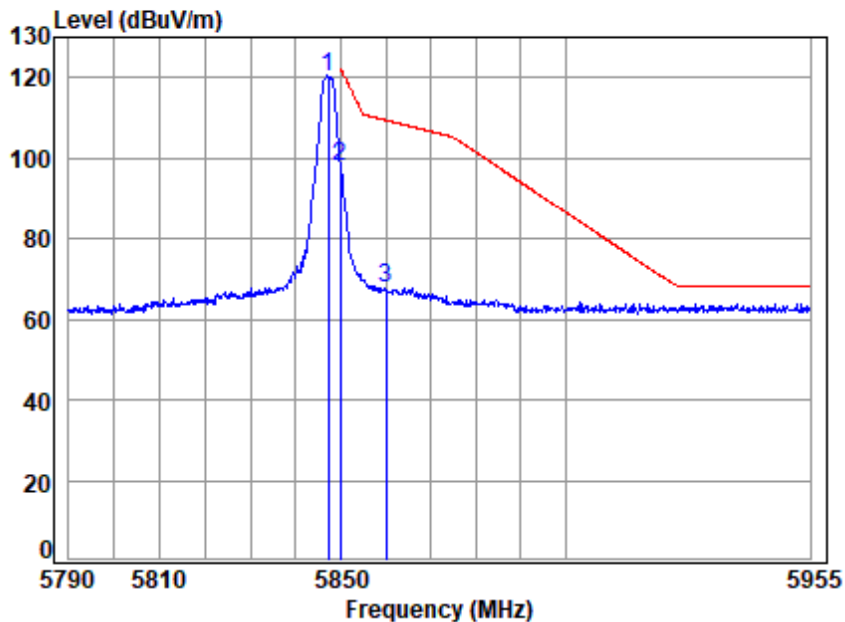


Site : chamber
Condition: 3m VERTICAL
Job No : 04815AT
Mode : 5847.2 Band edge
: 5G SDR 3M

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 5847.200	19.54	34.39	31.63	98.04	120.34	-----	-----	peak
2 p 5850.000	19.54	34.40	31.63	75.70	98.01	122.20	-24.19	peak
3 5860.000	19.54	34.44	31.64	45.23	67.57	109.40	-41.83	peak



Test Mode: 23; Polarity: Horizontal; Modulation: OFDM; Channel: Low

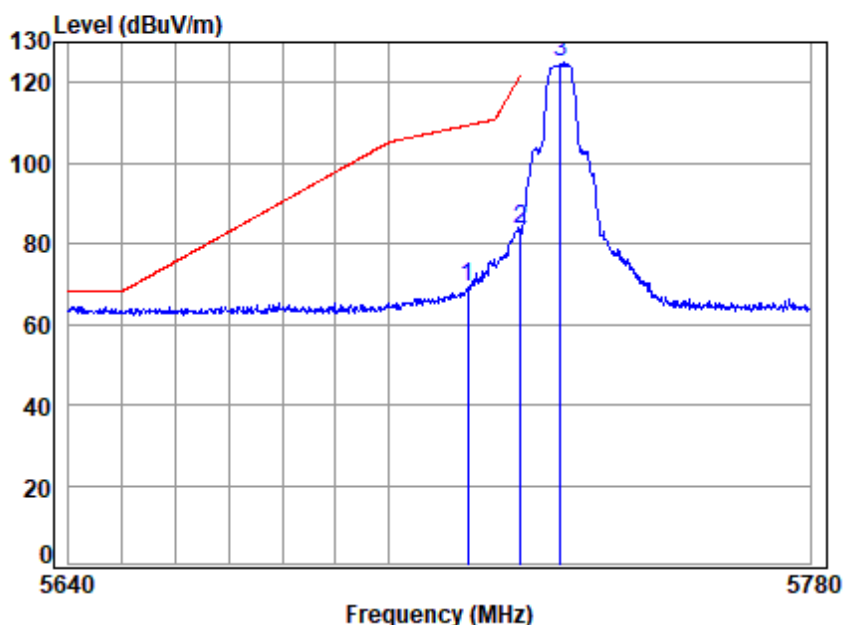

Site : chamber
Condition: 3m HORIZONTAL
Job No : 04815AT
Mode : 5732.5 Band edge
: 5G SDR 5M


		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 5715.000	19.45	34.27	31.57	47.22	69.37	109.40	-40.03	peak
2 p 5725.000	19.46	34.25	31.57	61.62	83.76	122.20	-38.44	peak
3 5732.500	19.46	34.24	31.57	102.93	125.06	-----	-----	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 23; Polarity: Vertical; Modulation: OFDM; Channel: Low

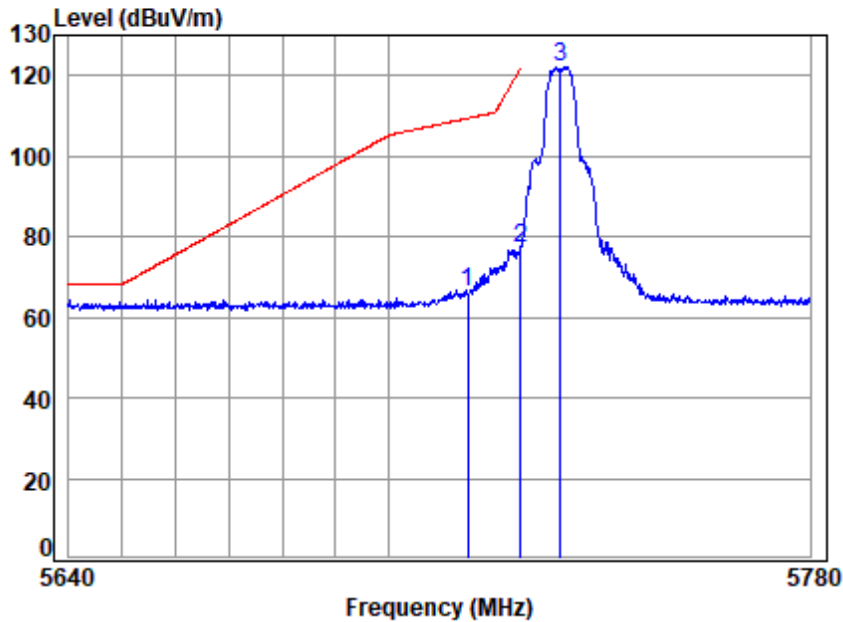


Site : chamber
Condition: 3m VERTICAL
Job No : 04815AT
Mode : 5732.5 Band edge
: 5G SDR 5M

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 p 5715.000	19.45	34.27	31.57	44.07	66.22	109.40	-43.18	peak
2 5725.000	19.46	34.25	31.57	55.07	77.21	122.20	-44.99	peak
3 5732.500	19.46	34.24	31.57	100.09	122.22	-----	-----	peak



Test Mode: 23; Polarity: Horizontal; Modulation: OFDM; Channel: High

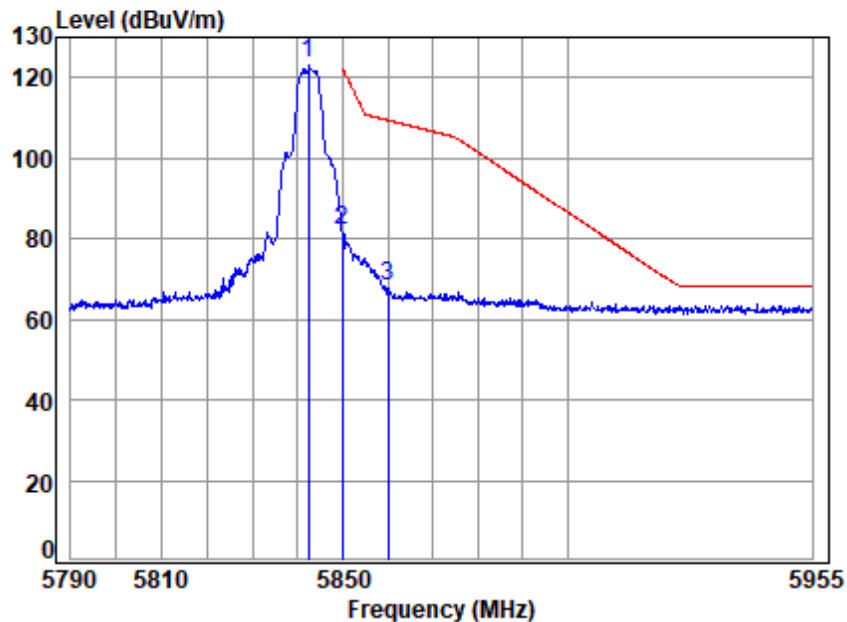


Site : chamber
Condition: 3m HORIZONTAL
Job No : 04815AT
Mode : 5842.5 Band edge
: 5G SDR 5M

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 5842.500	19.53	34.39	31.63	101.17	123.46	-----	-----	peak
2 p 5850.000	19.54	34.40	31.63	59.70	82.01	122.20	-40.19	peak
3 5860.000	19.54	34.44	31.64	46.01	68.35	109.40	-41.05	peak



Test Mode: 23; Polarity: Vertical; Modulation: OFDM; Channel: High

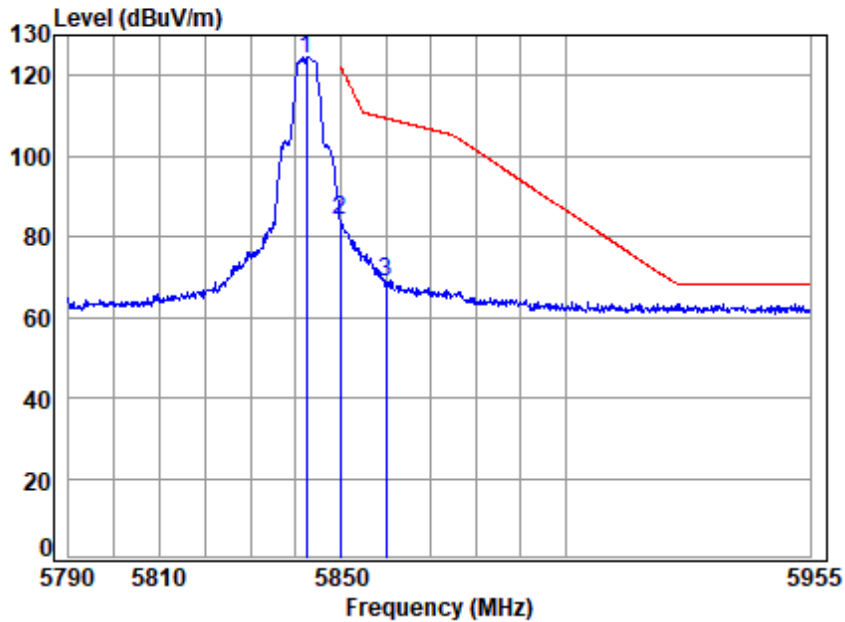


Site : chamber
Condition: 3m VERTICAL
Job No : 04815AT
Mode : 5842.5 Band edge
: 5G SDR 5M

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5842.500	19.53	34.39	31.63	101.85	124.14	-----	-----	peak
2 p	5850.000	19.54	34.40	31.63	61.61	83.92	122.20	-38.28	peak
3	5860.000	19.54	34.44	31.64	46.57	68.91	109.40	-40.49	peak



Test Mode: 24; Polarity: Horizontal; Modulation: OFDM; Channel: Low

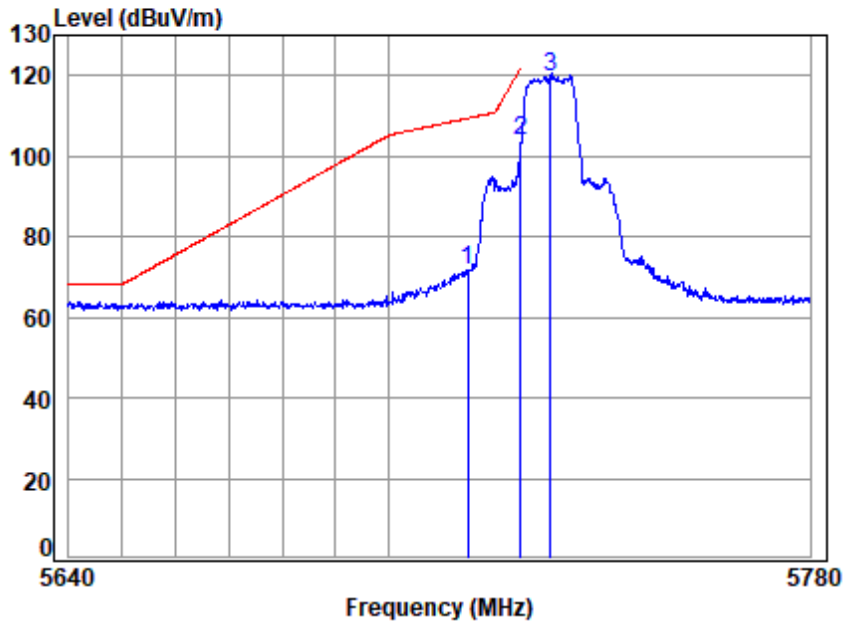


Site : chamber
Condition: 3m HORIZONTAL
Job No : 04815AT
Mode : 5730.5 Band edge
: 5G SDR 10M

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5715.000	19.45	34.27	31.57	49.36	71.51	109.40	-37.89 peak
2 p	5725.000	19.46	34.25	31.57	81.44	103.58	122.20	-18.62 peak
3	5730.500	19.46	34.24	31.57	97.66	119.79	-----	----- peak



Test Mode: 24; Polarity: Vertical; Modulation: OFDM; Channel: Low

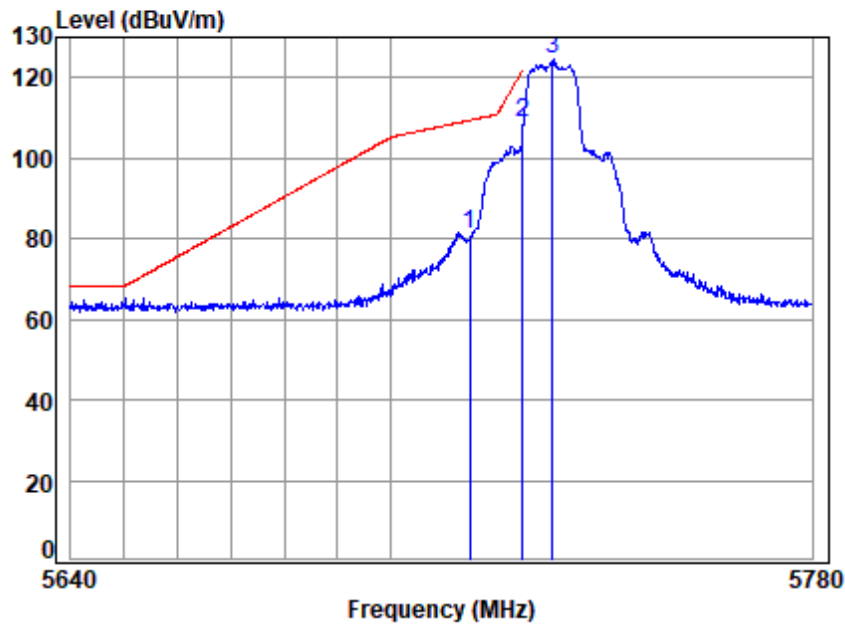


Site : chamber
Condition: 3m VERTICAL
Job No : 04815AT
Mode : 5730.5 Band edge
: 5G SDR 10M

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5715.000	19.45	34.27	31.57	58.73	80.88	109.40	-28.52 peak
2 p	5725.000	19.46	34.25	31.57	86.47	108.61	122.20	-13.59 peak
3	5730.500	19.46	34.24	31.57	102.50	124.63	-----	----- peak



Test Mode: 24; Polarity: Horizontal; Modulation: OFDM; Channel: High

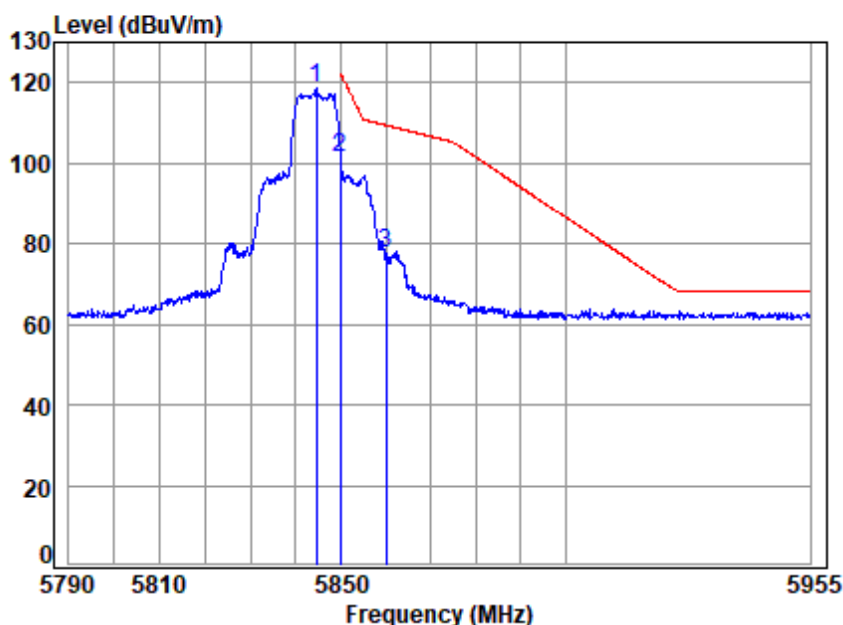


Site : chamber
Condition: 3m HORIZONTAL
Job No : 04815AT
Mode : 5844.5 Band edge
: 5G SDR 10M

		Cable	Ant	Preamp	Read		Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5844.500	19.53	34.39	31.63	96.19	118.48	-----	-----	peak
2 p	5850.000	19.54	34.40	31.63	78.90	101.21	122.20	-20.99	peak
3	5860.000	19.54	34.44	31.64	55.25	77.59	109.40	-31.81	peak



Test Mode: 24; Polarity: Vertical; Modulation: OFDM; Channel: High

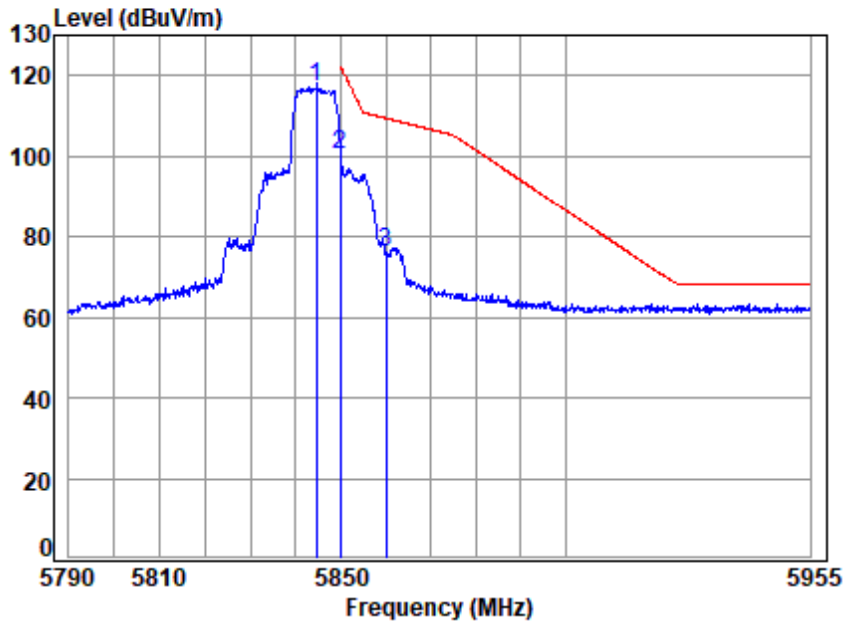


Site : chamber
Condition: 3m VERTICAL
Job No : 04815AT
Mode : 5844.5 Band edge
: 5G SDR 10M

		Cable	Ant	Preamp	Read		Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5844.500	19.53	34.39	31.63	94.89	117.18	-----	-----	peak
2 p	5850.000	19.54	34.40	31.63	78.09	100.40	122.20	-21.80	peak
3	5860.000	19.54	34.44	31.64	53.63	75.97	109.40	-33.43	peak



Test Mode: 25; Polarity: Horizontal; Modulation: OFDM; Channel: Low

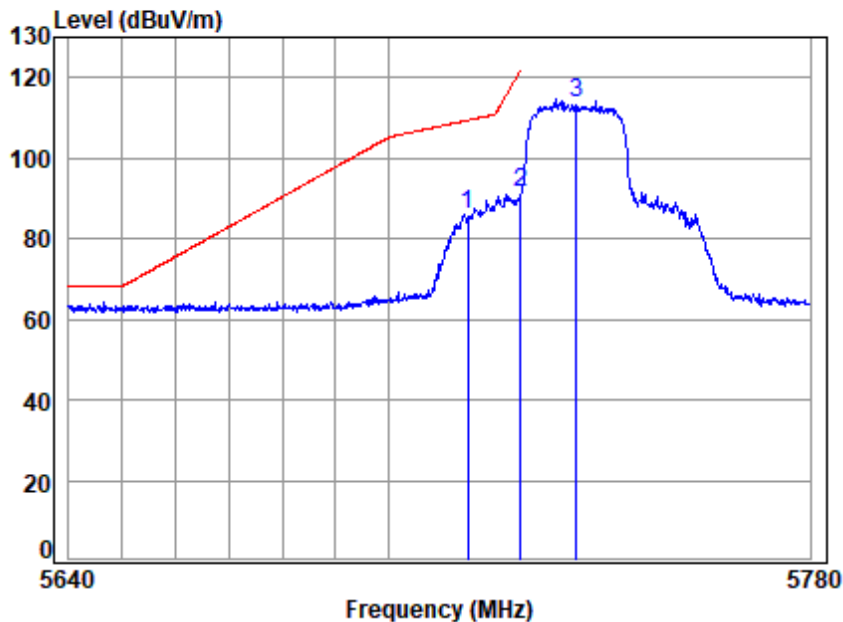


Site : chamber
Condition: 3m HORIZONTAL
Job No : 04815AT
Mode : 5735.5 Band edge
: 5G SDR 20M

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 p 5715.000	19.45	34.27	31.57	63.98	86.13	109.40	-23.27	peak
2 5725.000	19.46	34.25	31.57	69.45	91.59	122.20	-30.61	peak
3 5735.500	19.46	34.23	31.58	91.68	113.79	-----	-----	peak



Test Mode: 25; Polarity: Vertical; Modulation: OFDM; Channel: Low

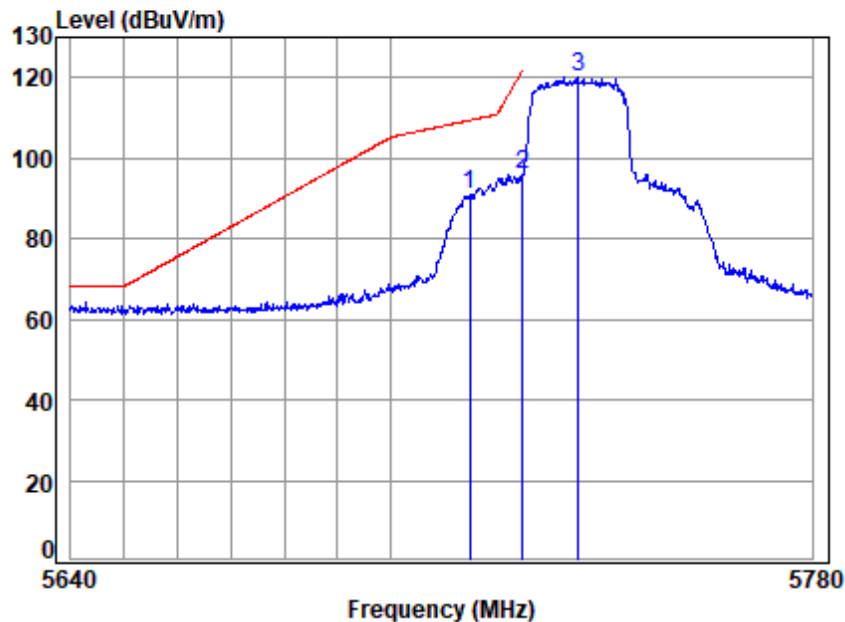

Site : chamber
Condition: 3m VERTICAL
Job No : 04815AT
Mode : 5735.5 Band edge
: 5G SDR 20M


		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 p 5715.000	19.45	34.27	31.57	68.68	90.83	109.40	-18.57	peak
2 5725.000	19.46	34.25	31.57	73.99	96.13	122.20	-26.07	peak
3 5735.500	19.46	34.23	31.58	97.90	120.01	-----	-----	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 25; Polarity: Horizontal; Modulation: OFDM; Channel: High

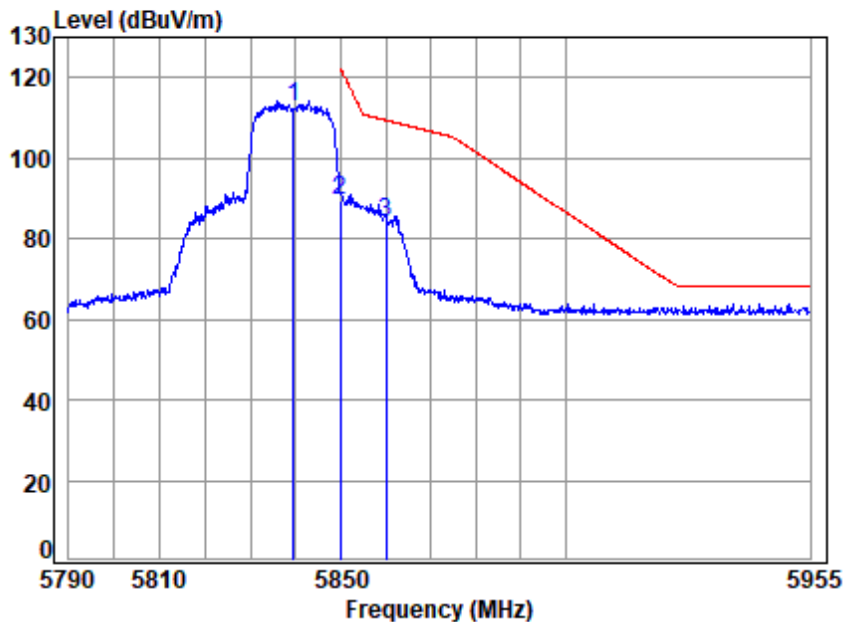


Site : chamber
Condition: 3m HORIZONTAL
Job No : 04815AT
Mode : 5839.5 Band edge
: 5G SDR 20M

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 5839.500	19.53	34.38	31.63	90.51	112.79	-----	-----	peak
2 5850.000	19.54	34.40	31.63	67.03	89.34	122.20	-32.86	peak
3 p 5860.000	19.54	34.44	31.64	61.66	84.00	109.40	-25.40	peak



Test Mode: 25; Polarity: Vertical; Modulation: OFDM; Channel: High

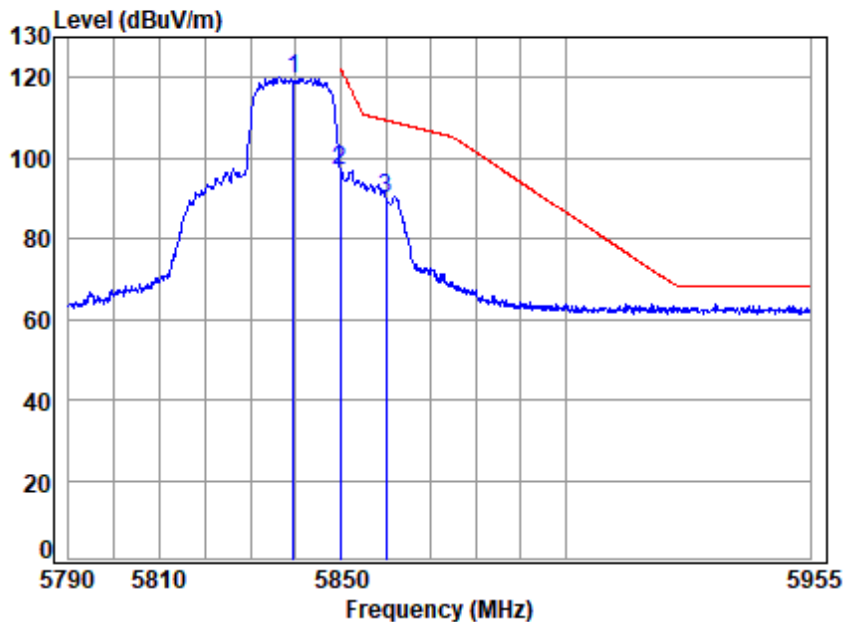


Site : chamber
Condition: 3m VERTICAL
Job No : 04815AT
Mode : 5839.5 Band edge
: 5G SDR 20M

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5839.500	19.53	34.38	31.63	97.27	119.55	-----	-----	peak
2	5850.000	19.54	34.40	31.63	74.40	96.71	122.20	-25.49	peak
3 p	5860.000	19.54	34.44	31.64	67.76	90.10	109.40	-19.30	peak



Test Mode: 26; Polarity: Horizontal; Modulation: OFDM; Channel: Low

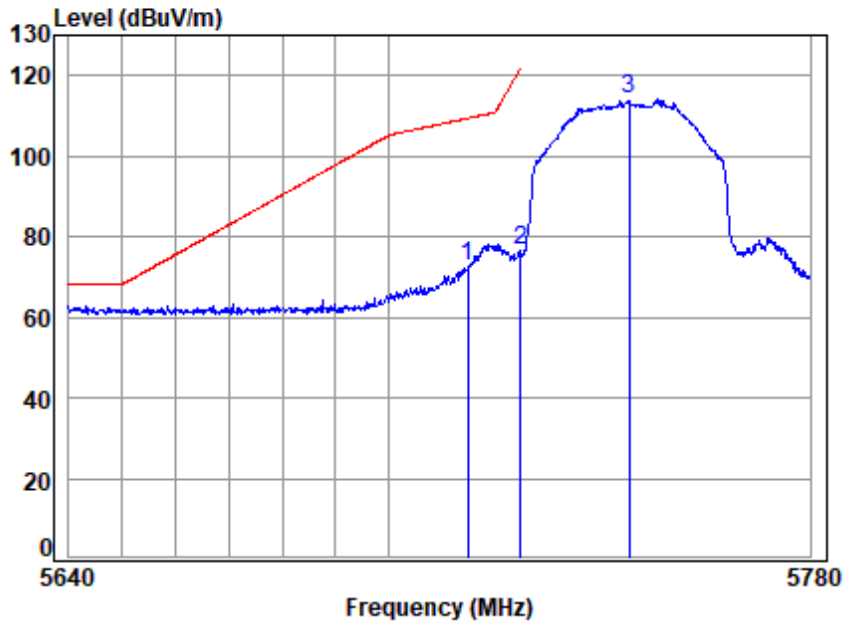


Site : chamber
Condition: 3m HORIZONTAL
Job No : 04815AT
Mode : 5745.5 Band edge
: 5G SDR 40M

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 p 5715.000	19.45	34.27	31.57	50.53	72.68	109.40	-36.72	peak
2 5725.000	19.46	34.25	31.57	54.32	76.46	122.20	-45.74	peak
3 5745.500	19.47	34.21	31.58	91.86	113.96	-----	-----	peak



Test Mode: 26; Polarity: Vertical; Modulation: OFDM; Channel: Low

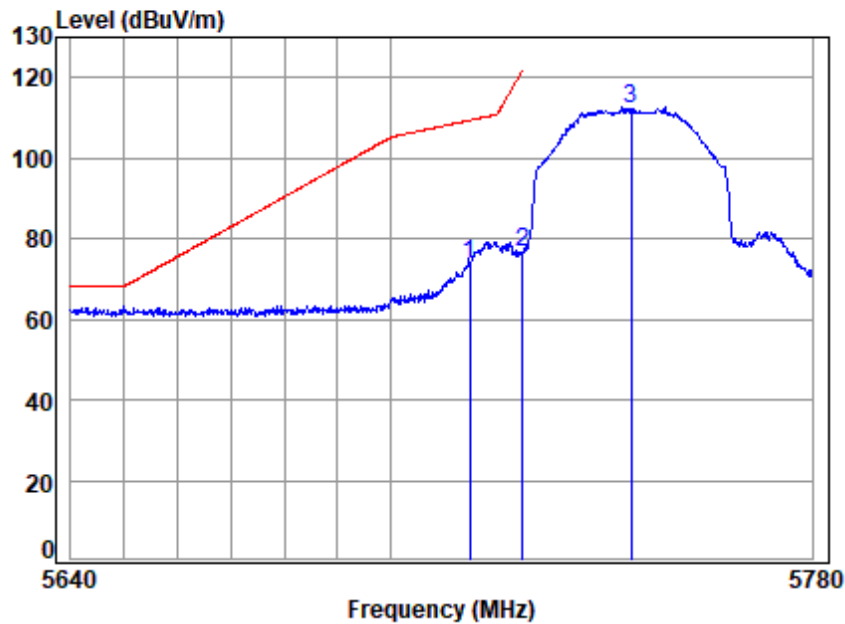

Site : chamber
Condition: 3m VERTICAL
Job No : 04815AT
Mode : 5745.5 Band edge
: 5G SDR 40M


		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 p 5715.000	19.45	34.27	31.57	51.63	73.78	109.40	-35.62	peak
2 5725.000	19.46	34.25	31.57	54.24	76.38	122.20	-45.82	peak
3 5745.500	19.47	34.21	31.58	89.93	112.03	-----	-----	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 26; Polarity: Horizontal; Modulation: OFDM; Channel: High

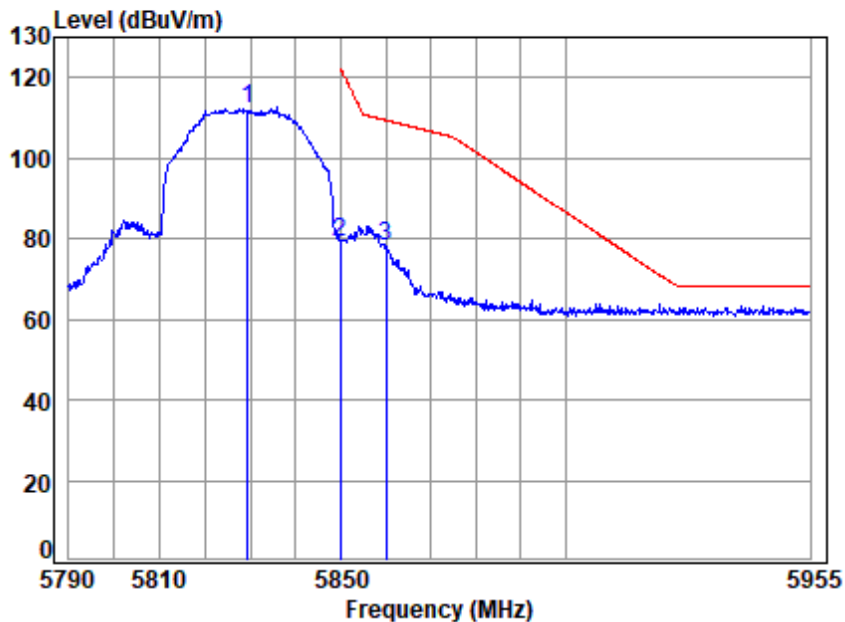


Site : chamber
Condition: 3m HORIZONTAL
Job No : 04815AT
Mode : 5829.5 Band edge
: 5G SDR 40M

		Cable	Ant	Preamp	Read	Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5829.500	19.52	34.36	31.62	89.72	111.98	-----	----- peak
2	5850.000	19.54	34.40	31.63	57.02	79.33	122.20	-42.87 peak
3 p	5860.000	19.54	34.44	31.64	55.70	78.04	109.40	-31.36 peak



Test Mode: 26; Polarity: Vertical; Modulation: OFDM; Channel: High

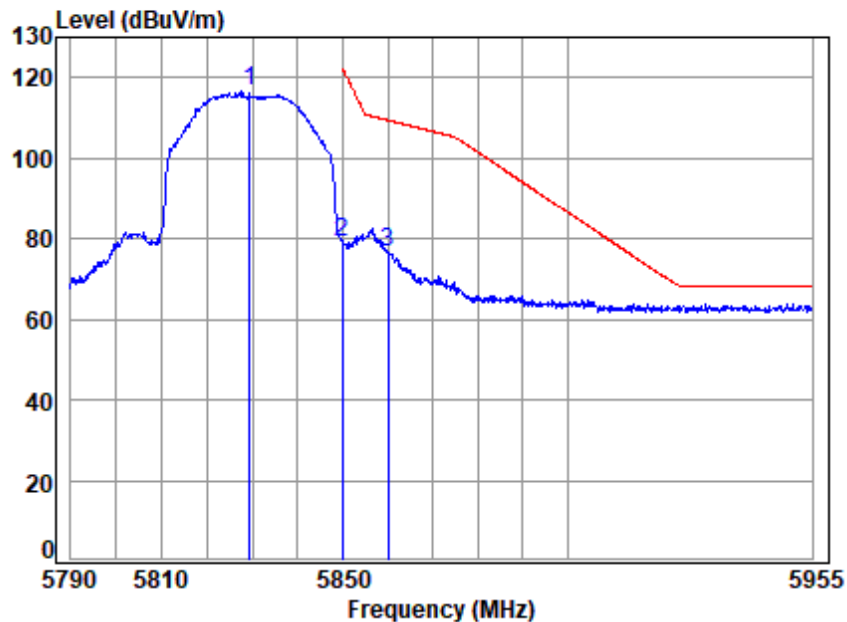

Site : chamber
Condition: 3m VERTICAL
Job No : 04815AT
Mode : 5829.5 Band edge
: 5G SDR 40M


		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 5829.500	19.52	34.36	31.62	94.29	116.55	-----	-----	peak
2 5850.000	19.54	34.40	31.63	56.99	79.30	122.20	-42.90	peak
3 p 5860.000	19.54	34.44	31.64	54.20	76.54	109.40	-32.86	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 27; Polarity: Horizontal; Modulation: OFDM; Channel: Low

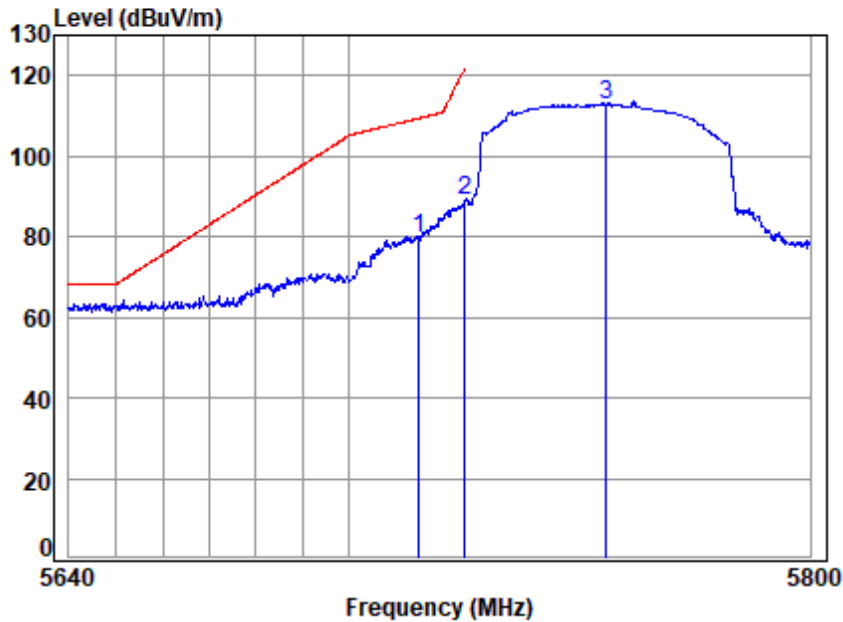


Site : chamber
Condition: 3m HORIZONTAL
Job No : 04815AT
Mode : 5755.5 Band edge
: 5G SDR 60M

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 p	5715.000	19.45	34.27	31.57	57.51	79.66	109.40	-29.74 peak
2	5725.000	19.46	34.25	31.57	66.70	88.84	122.20	-33.36 peak
3	5755.500	19.48	34.21	31.59	90.79	112.89	-----	----- peak



Test Mode: 27; Polarity: Vertical; Modulation: OFDM; Channel: Low

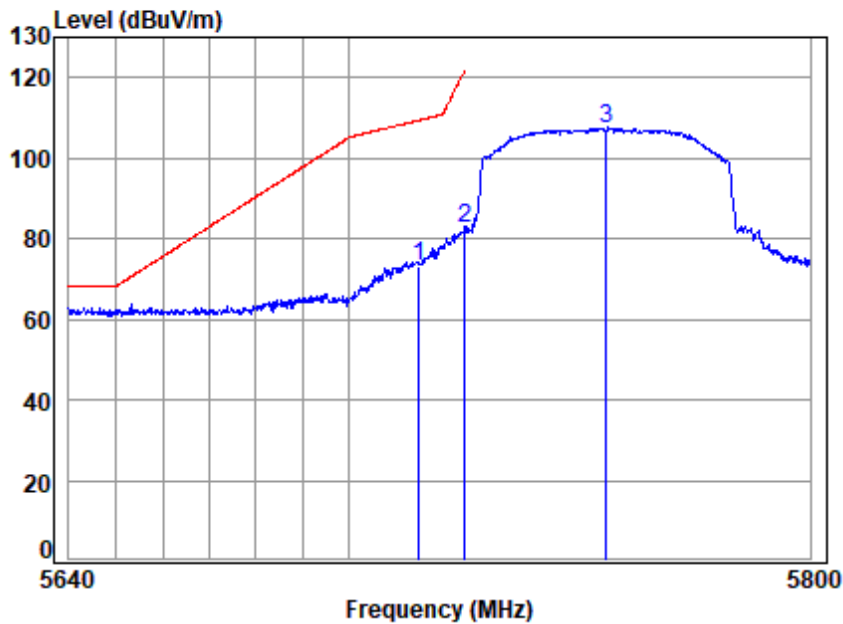


Site : chamber
Condition: 3m VERTICAL
Job No : 04815AT
Mode : 5755.5 Band edge
: 5G SDR 60M

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 p 5715.000	19.45	34.27	31.57	51.01	73.16	109.40	-36.24	peak
2 5725.000	19.46	34.25	31.57	60.21	82.35	122.20	-39.85	peak
3 5755.500	19.48	34.21	31.59	85.23	107.33	-----	-----	peak



Test Mode: 27; Polarity: Horizontal; Modulation: OFDM; Channel: High

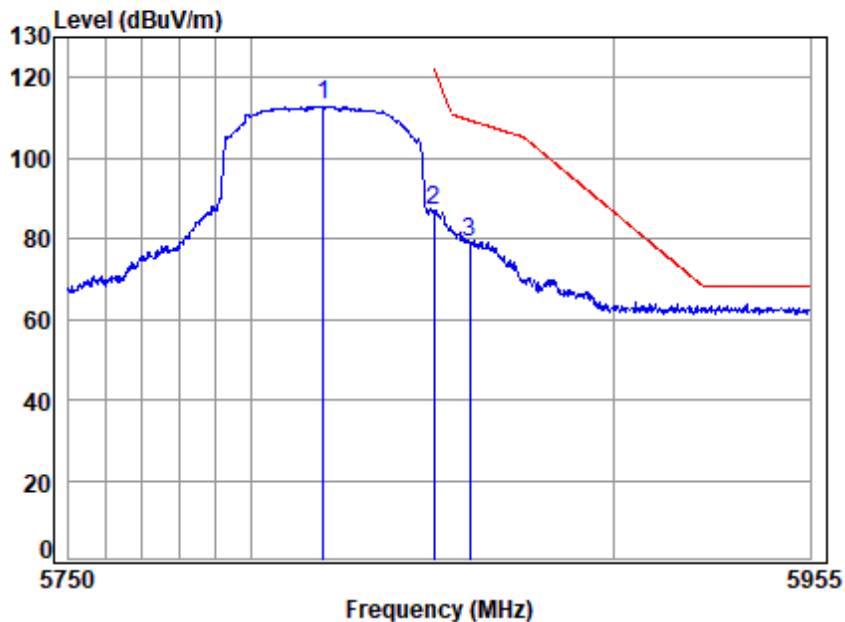


Site : chamber
Condition: 3m HORIZONTAL
Job No : 04815AT
Mode : 5819.5 Band edge
: 5G SDR 60M

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 5819.500	19.52	34.34	31.62	90.76	113.00	-----	-----	peak
2 5850.000	19.54	34.40	31.63	64.63	86.94	122.20	-35.26	peak
3 p 5860.000	19.54	34.44	31.64	56.81	79.15	109.40	-30.25	peak



Test Mode: 27; Polarity: Vertical; Modulation: OFDM; Channel: High

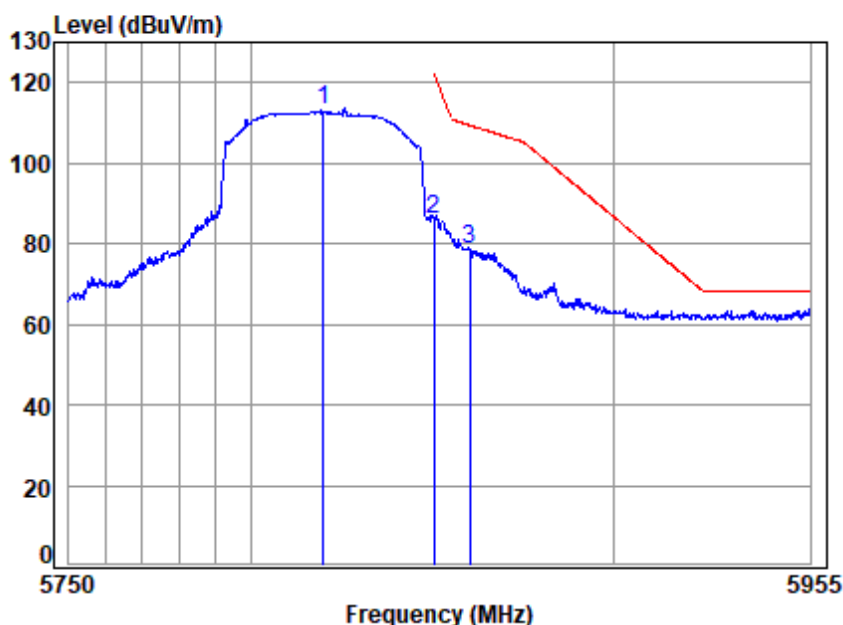

Site : chamber
Condition: 3m VERTICAL
Job No : 04815AT
Mode : 5819.5 Band edge
: 5G SDR 60M

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 5819.500	19.52	34.34	31.62	90.99	113.23	-----	-----	peak
2 5850.000	19.54	34.40	31.63	63.62	85.93	122.20	-36.27	peak
3 p 5860.000	19.54	34.44	31.64	56.06	78.40	109.40	-31.00	peak




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 28; Polarity: Horizontal; Modulation: OFDM; Channel: Low

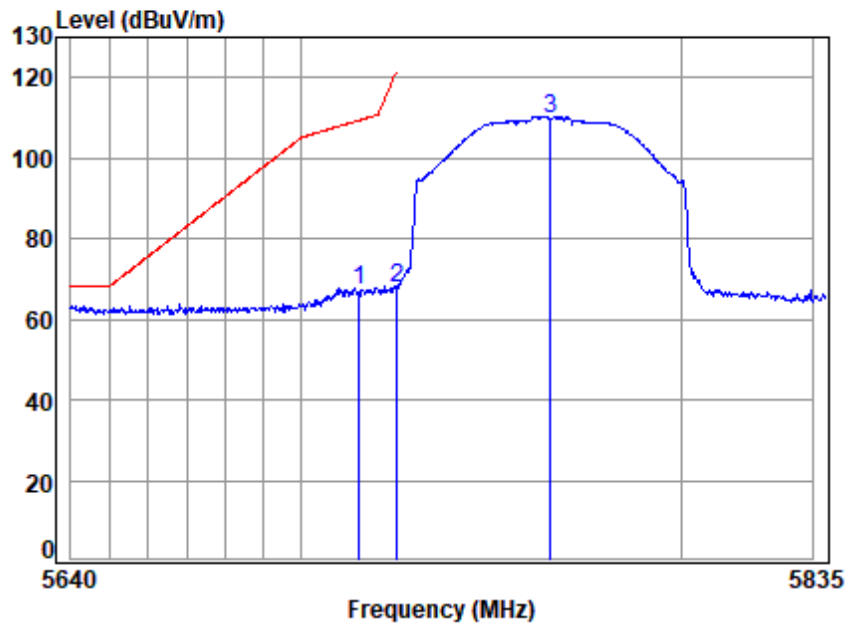


Site : chamber
Condition: 3m HORIZONTAL
Job No : 04815AT
Mode : 5765.5 Band edge
: 5G SDR 80M

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 p 5715.000	19.45	34.27	31.57	44.94	67.09	109.40	-42.31	peak
2 5725.000	19.46	34.25	31.57	45.63	67.77	122.20	-54.43	peak
3 5765.500	19.48	34.23	31.59	87.61	109.73	-----	-----	peak



Test Mode: 28; Polarity: Vertical; Modulation: OFDM; Channel: Low

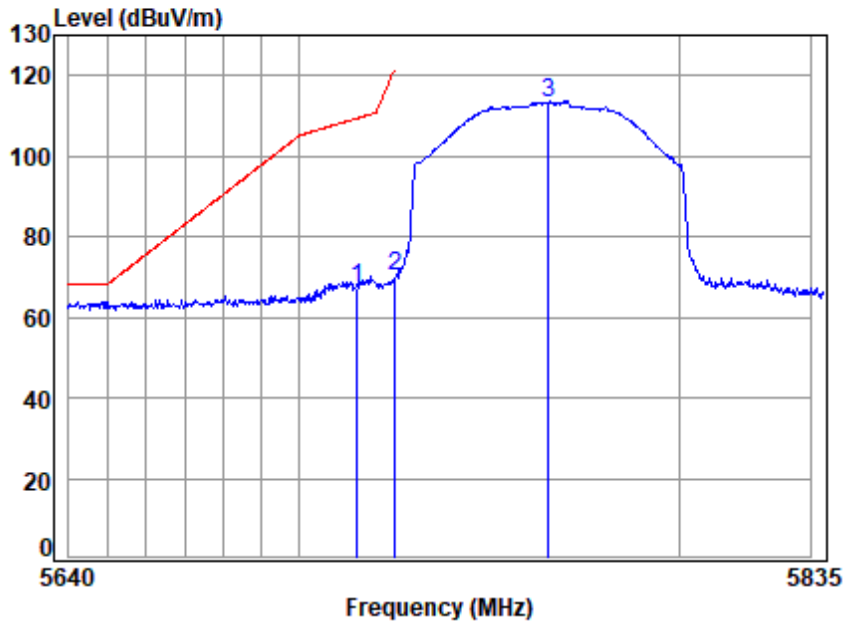


Site : chamber
Condition: 3m VERTICAL
Job No : 04815AT
Mode : 5765.5 Band edge
: 5G SDR 80M

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 p 5715.000	19.45	34.27	31.57	45.20	67.35	109.40	-42.05	peak
2 5725.000	19.46	34.25	31.57	47.81	69.95	122.20	-52.25	peak
3 5765.500	19.48	34.23	31.59	91.21	113.33	-----	-----	peak



Test Mode: 28; Polarity: Horizontal; Modulation: OFDM; Channel: High

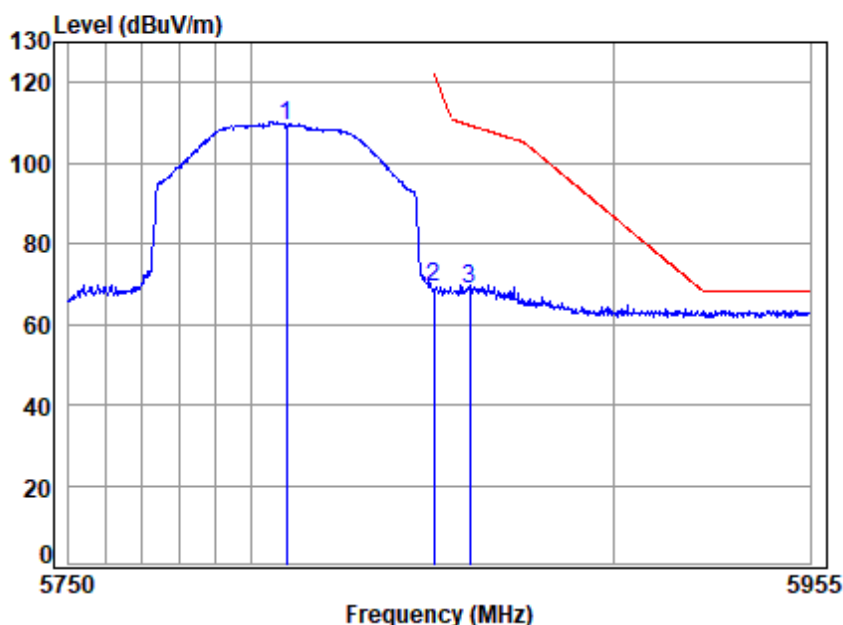


Site : chamber
Condition: 3m HORIZONTAL
Job No : 04815AT
Mode : 5809.5 Band edge
: 5G SDR 80M

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 5809.500	19.51	34.32	31.61	86.78	109.00	-----	-----	peak
2 5850.000	19.54	34.40	31.63	46.98	69.29	122.20	-52.91	peak
3 p 5860.000	19.54	34.44	31.64	46.38	68.72	109.40	-40.68	peak



Test Mode: 28; Polarity: Vertical; Modulation: OFDM; Channel: High

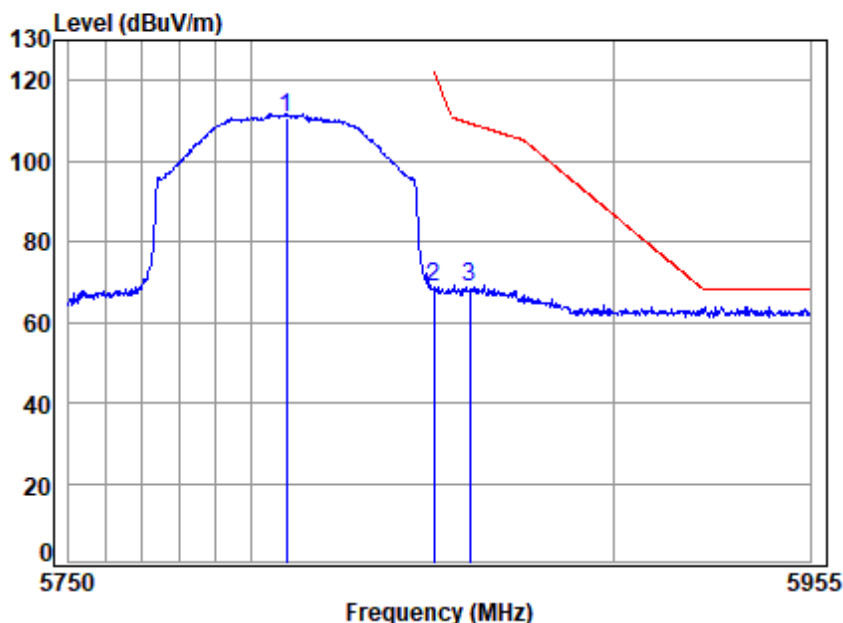

Site : chamber
Condition: 3m VERTICAL
Job No : 04815AT
Mode : 5809.5 Band edge
: 5G SDR 80M

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 5809.500	19.51	34.32	31.61	88.71	110.93	-----	-----	peak
2 5850.000	19.54	34.40	31.63	46.30	68.61	122.20	-53.59	peak
3 p 5860.000	19.54	34.44	31.64	46.14	68.48	109.40	-40.92	peak



7.5 Duty Cycle

Test Requirement ANSI C63.10 (2013) Section 12.2
Test Method: ANSI C63.10 (2013) Section 12.2

7.5.1 E.U.T. Operation

Operating Environment:


Temperature: 24.4 °C Humidity: 35.4 % RH Atmospheric Pressure: 1020 mbar

7.5.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	13	TX mode (5.1G SDR_1.4MHz)_Keep the EUT in transmitting mode.
Final test	14	TX mode (5.1G SDR_3MHz)_Keep the EUT in transmitting mode.
Final test	15	TX mode (5.1G SDR_5MHz)_Keep the EUT in transmitting mode.
Final test	16	TX mode (5.1G SDR_10MHz)_Keep the EUT in transmitting mode.
Final test	17	TX mode (5.1G SDR_20MHz)_Keep the EUT in transmitting mode.
Final test	18	TX mode (5.1G SDR_40MHz)_Keep the EUT in transmitting mode.
Final test	19	TX mode (5.1G SDR_60MHz)_Keep the EUT in transmitting mode.
Final test	20	TX mode (5.1G SDR_80MHz)_Keep the EUT in transmitting mode.
Final test	21	TX mode (5.8G SDR_1.4MHz)_Keep the EUT in transmitting mode.
Final test	22	TX mode (5.8G SDR_3MHz)_Keep the EUT in transmitting mode.
Final test	23	TX mode (5.8G SDR_5MHz)_Keep the EUT in transmitting mode.
Final test	24	TX mode (5.8G SDR_10MHz)_Keep the EUT in transmitting mode.
Final test	25	TX mode (5.8G SDR_20MHz)_Keep the EUT in transmitting mode.
Final test	26	TX mode (5.8G SDR_40MHz)_Keep the EUT in transmitting mode.
Final test	27	TX mode (5.8G SDR_60MHz)_Keep the EUT in transmitting mode.
Final test	28	TX mode (5.8G SDR_80MHz)_Keep the EUT in transmitting mode.



7.5.3 Test Setup Diagram

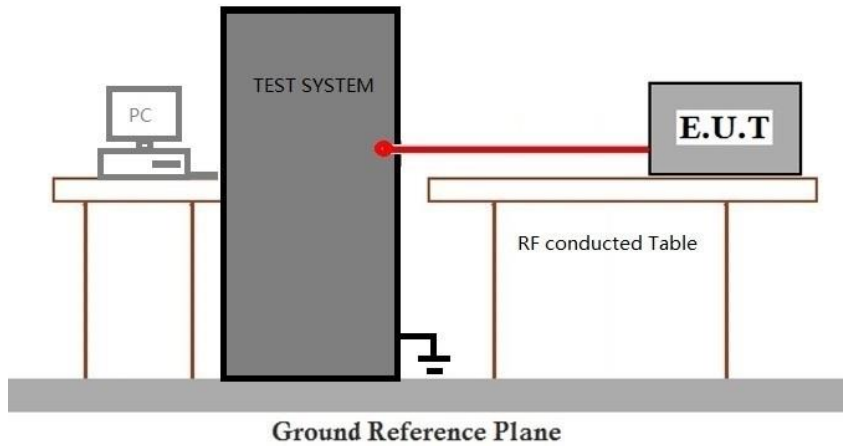

7.5.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.6 99% Bandwidth

Test Requirement ANSI C63.10 (2013) Section 12.4.2

Test Method: ANSI C63.10 (2013) Section 12.4.2

7.6.1 E.U.T. Operation

Operating Environment:


Temperature: 24.4 °C Humidity: 35.4 % RH Atmospheric Pressure: 1020 mbar

7.6.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	13	TX mode (5.1G SDR_1.4MHz)_Keep the EUT in transmitting mode.
Final test	14	TX mode (5.1G SDR_3MHz)_Keep the EUT in transmitting mode.
Final test	15	TX mode (5.1G SDR_5MHz)_Keep the EUT in transmitting mode.
Final test	16	TX mode (5.1G SDR_10MHz)_Keep the EUT in transmitting mode.
Final test	17	TX mode (5.1G SDR_20MHz)_Keep the EUT in transmitting mode.
Final test	18	TX mode (5.1G SDR_40MHz)_Keep the EUT in transmitting mode.
Final test	19	TX mode (5.1G SDR_60MHz)_Keep the EUT in transmitting mode.
Final test	20	TX mode (5.1G SDR_80MHz)_Keep the EUT in transmitting mode.
Final test	21	TX mode (5.8G SDR_1.4MHz)_Keep the EUT in transmitting mode.
Final test	22	TX mode (5.8G SDR_3MHz)_Keep the EUT in transmitting mode.
Final test	23	TX mode (5.8G SDR_5MHz)_Keep the EUT in transmitting mode.
Final test	24	TX mode (5.8G SDR_10MHz)_Keep the EUT in transmitting mode.
Final test	25	TX mode (5.8G SDR_20MHz)_Keep the EUT in transmitting mode.
Final test	26	TX mode (5.8G SDR_40MHz)_Keep the EUT in transmitting mode.
Final test	27	TX mode (5.8G SDR_60MHz)_Keep the EUT in transmitting mode.
Final test	28	TX mode (5.8G SDR_80MHz)_Keep the EUT in transmitting mode.



7.6.3 Test Setup Diagram

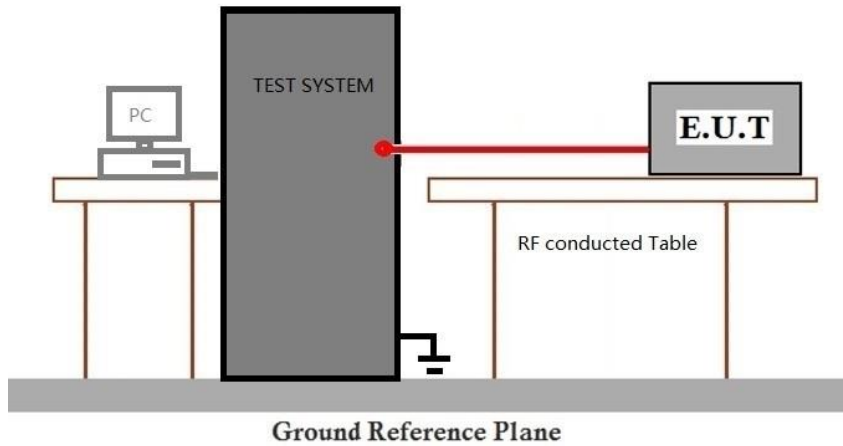

7.6.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.7 26dB Emission bandwidth

Test Requirement 47 CFR Part 15, Subpart E 15.407 (a)

Test Method: ANSI C63.10 (2013) Section 12.4.1

7.7.1 E.U.T. Operation

Operating Environment:

Temperature: 24.4 °C


Humidity: 35.4 % RH

Atmospheric Pressure: 1020 mbar

7.7.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	13	TX mode (5.1G SDR_1.4MHz)_Keep the EUT in transmitting mode.
Final test	14	TX mode (5.1G SDR_3MHz)_Keep the EUT in transmitting mode.
Final test	15	TX mode (5.1G SDR_5MHz)_Keep the EUT in transmitting mode.
Final test	16	TX mode (5.1G SDR_10MHz)_Keep the EUT in transmitting mode.
Final test	17	TX mode (5.1G SDR_20MHz)_Keep the EUT in transmitting mode.
Final test	18	TX mode (5.1G SDR_40MHz)_Keep the EUT in transmitting mode.
Final test	19	TX mode (5.1G SDR_60MHz)_Keep the EUT in transmitting mode.
Final test	20	TX mode (5.1G SDR_80MHz)_Keep the EUT in transmitting mode.

7.7.3 Test Setup Diagram

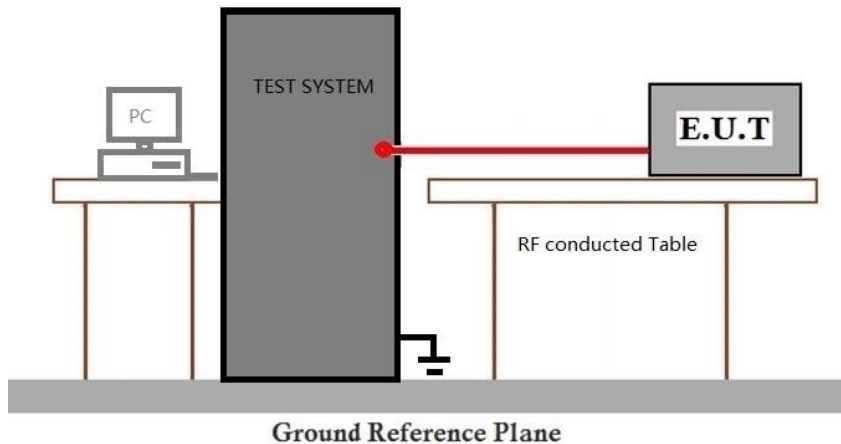

7.7.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.8 Minimum 6 dB bandwidth (5.725-5.85 GHz band)

Test Requirement 47 CFR Part 15, Subpart E 15.407 (e)

Test Method: ANSI C63.10 (2013) Section 6.9.2

Limit:

Frequency band(MHz)	Limit
5725-5850	≥500 kHz

7.8.1 E.U.T. Operation

Operating Environment:

Temperature: 24.4 °C

Humidity: 35.4 % RH


Atmospheric Pressure: 1020 mbar

7.8.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	21	TX mode (5.8G SDR_1.4MHz)_Keep the EUT in transmitting mode.
Final test	22	TX mode (5.8G SDR_3MHz)_Keep the EUT in transmitting mode.
Final test	23	TX mode (5.8G SDR_5MHz)_Keep the EUT in transmitting mode.
Final test	24	TX mode (5.8G SDR_10MHz)_Keep the EUT in transmitting mode.
Final test	25	TX mode (5.8G SDR_20MHz)_Keep the EUT in transmitting mode.
Final test	26	TX mode (5.8G SDR_40MHz)_Keep the EUT in transmitting mode.
Final test	27	TX mode (5.8G SDR_60MHz)_Keep the EUT in transmitting mode.
Final test	28	TX mode (5.8G SDR_80MHz)_Keep the EUT in transmitting mode.



7.8.3 Test Setup Diagram

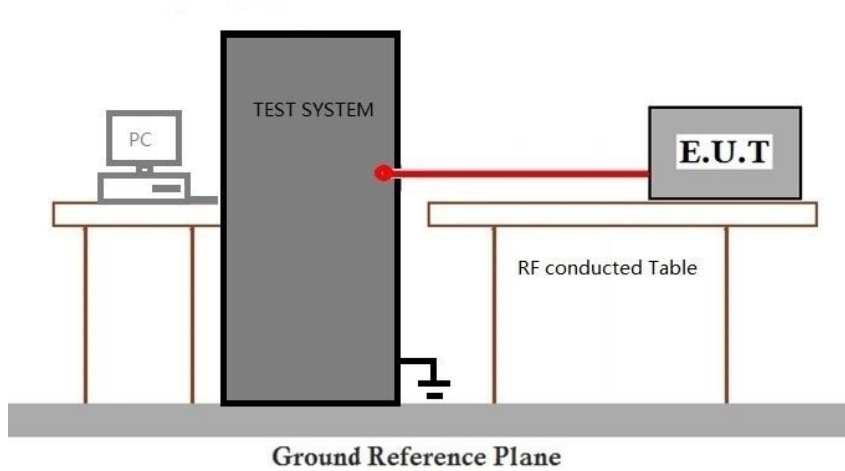

7.8.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.9 Peak Power spectrum density

Test Requirement 47 CFR Part 15, Subpart E 15.407 (a)

Test Method: ANSI C63.10 (2013) Section 12.5

Limit:

Frequency band(MHz)	Limit
5150-5250	≤17dBm in 1MHz for master device
	≤11dBm in 1MHz for client device
5250-5350	≤11dBm in 1MHz for client device
5470-5725	≤11dBm in 1MHz for client device
5725-5850	≤30dBm in 500 kHz
Remark:	The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test.

7.9.1 E.U.T. Operation

Operating Environment:

Temperature: 24.4 °C

Humidity: 35.4 % RH

Atmospheric Pressure: 1020 mbar

7.9.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	13	TX mode (5.1G SDR_1.4MHz)_Keep the EUT in transmitting mode.
Final test	14	TX mode (5.1G SDR_3MHz)_Keep the EUT in transmitting mode.
Final test	15	TX mode (5.1G SDR_5MHz)_Keep the EUT in transmitting mode.
Final test	16	TX mode (5.1G SDR_10MHz)_Keep the EUT in transmitting mode.
Final test	17	TX mode (5.1G SDR_20MHz)_Keep the EUT in transmitting mode.
Final test	18	TX mode (5.1G SDR_40MHz)_Keep the EUT in transmitting mode.
Final test	19	TX mode (5.1G SDR_60MHz)_Keep the EUT in transmitting mode.
Final test	20	TX mode (5.1G SDR_80MHz)_Keep the EUT in transmitting mode.
Final test	21	TX mode (5.8G SDR_1.4MHz)_Keep the EUT in transmitting mode.
Final test	22	TX mode (5.8G SDR_3MHz)_Keep the EUT in transmitting mode.
Final test	23	TX mode (5.8G SDR_5MHz)_Keep the EUT in transmitting mode.
Final test	24	TX mode (5.8G SDR_10MHz)_Keep the EUT in transmitting mode.
Final test	25	TX mode (5.8G SDR_20MHz)_Keep the EUT in transmitting mode.
Final test	26	TX mode (5.8G SDR_40MHz)_Keep the EUT in transmitting mode.
Final test	27	TX mode (5.8G SDR_60MHz)_Keep the EUT in transmitting mode.
Final test	28	TX mode (5.8G SDR_80MHz)_Keep the EUT in transmitting mode.




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

7.9.3 Test Setup Diagram

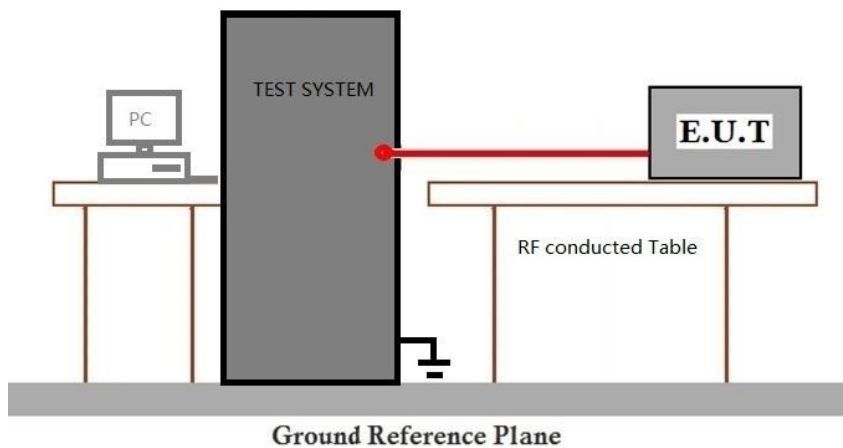

7.9.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.10 Frequency Stability

Test Requirement 47 CFR Part 15, Subpart E 15.407 (g)

Test Method: ANSI C63.10 (2013) Section 6.8

7.10.1 E.U.T. Operation

Operating Environment:

Temperature: 24.4 °C

Humidity: 35.4 % RH


Atmospheric Pressure: 1020 mbar

7.10.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	13	TX mode (5.1G SDR_1.4MHz)_Keep the EUT in transmitting mode.
Final test	14	TX mode (5.1G SDR_3MHz)_Keep the EUT in transmitting mode.
Final test	15	TX mode (5.1G SDR_5MHz)_Keep the EUT in transmitting mode.
Final test	16	TX mode (5.1G SDR_10MHz)_Keep the EUT in transmitting mode.
Final test	17	TX mode (5.1G SDR_20MHz)_Keep the EUT in transmitting mode.
Final test	18	TX mode (5.1G SDR_40MHz)_Keep the EUT in transmitting mode.
Final test	19	TX mode (5.1G SDR_60MHz)_Keep the EUT in transmitting mode.
Final test	20	TX mode (5.1G SDR_80MHz)_Keep the EUT in transmitting mode.
Final test	21	TX mode (5.8G SDR_1.4MHz)_Keep the EUT in transmitting mode.
Final test	22	TX mode (5.8G SDR_3MHz)_Keep the EUT in transmitting mode.
Final test	23	TX mode (5.8G SDR_5MHz)_Keep the EUT in transmitting mode.
Final test	24	TX mode (5.8G SDR_10MHz)_Keep the EUT in transmitting mode.
Final test	25	TX mode (5.8G SDR_20MHz)_Keep the EUT in transmitting mode.
Final test	26	TX mode (5.8G SDR_40MHz)_Keep the EUT in transmitting mode.
Final test	27	TX mode (5.8G SDR_60MHz)_Keep the EUT in transmitting mode.
Final test	28	TX mode (5.8G SDR_80MHz)_Keep the EUT in transmitting mode.



7.10.3 Test Setup Diagram

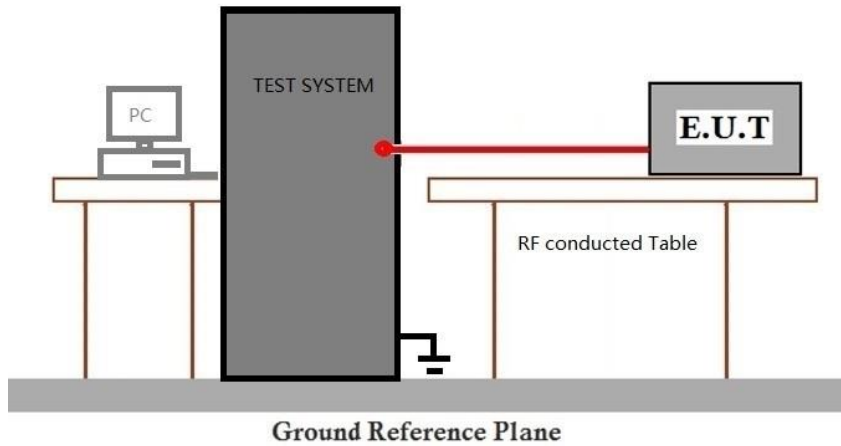

7.10.4 Measurement Procedure and Data

Please Refer to Appendix for Details

8 Test Setup Photo

Refer to Setup Photo for SZCR2412004815AT

9 EUT Constructional Details (EUT Photos)

Refer to External and Internal Photos for SZCR2412004815AT



10 Appendix

Note for 5.1G

Note1: 1.4MHz, 3MHz, 5MHz, 10MHz, 20MHz and 40MHz supports mode A, mode C, mode D; only the lowest and highest frequency were selected to test, among these modes, only the operation frequency is different, modulation type and target power are the same.

Note2: This EUT support SISO and MIMO mode, but the conducted output power is the same, so only MIMO mode select to test.

Note3: MIMO mode support ANT01, ANT03, ANT05, ANT07, ANT21, ANT23, ANT25, ANT27, ANT41, ANT43, ANT45, ANT47, ANT61, ANT63, ANT65, ANT67, the worse cases are ANT01, ANT23, ANT45, ANT67, only the worse cases test data were recorded in this report.

Note4: ANT01 is the worst case, all test items are performed on ANT01, other antennas only test power and PSD.

Note for 5.8G

Note1: Both 1.4MHz and 3MHz supports mode A, mode B, mode C and mode D, 5MHz, 10MHz, 20MHz and 40MHz supports mode A, mode C, mode D; only the lowest and highest frequency were selected to test, among these modes, only the operation frequency is different, modulation type and target power are the same.

Note2: This EUT support SISO and MIMO mode, but the conducted output power is the same, so only MIMO mode select to test.

Note3: MIMO mode support ANT01, ANT03, ANT05, ANT07, ANT21, ANT23, ANT25, ANT27, ANT41, ANT43, ANT45, ANT47, ANT61, ANT63, ANT65, ANT67, the worse cases are ANT01, ANT23, ANT47, ANT65, only the worse cases test data were recorded in this report.

Note4: ANT01 is the worst case, all test items are performed on ANT01, other antennas only test power and PSD.

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR241200481505

Page: 144 of 532

For 5.1G ANT 0 & ANT 1:

1. Duty Cycle


1.1 Test Result

1.1.1 Ant0


Ant0							
Mode	TX Type	Frequency (MHz)	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
10M	MIMO	5157	100.000	100.000	100.00	0.00	0.00
		5200	100.000	100.000	100.00	0.00	0.00
		5245	100.000	100.000	100.00	0.00	0.00
20M	MIMO	5161	100.000	100.000	100.00	0.00	0.00
		5200	100.000	100.000	100.00	0.00	0.00
		5240	100.000	100.000	100.00	0.00	0.00
40M	MIMO	5170	100.000	100.000	100.00	0.00	0.00
		5200	100.000	100.000	100.00	0.00	0.00
		5230	100.000	100.000	100.00	0.00	0.00
60M	MIMO	5180	100.000	100.000	100.00	0.00	0.00
		5200	100.000	100.000	100.00	0.00	0.00
		5220	100.000	100.000	100.00	0.00	0.00
80M	MIMO	5190	100.000	100.000	100.00	0.00	0.00
		5200	100.000	100.000	100.00	0.00	0.00
		5210	100.000	100.000	100.00	0.00	0.00
5M	MIMO	5155	100.000	100.000	100.00	0.00	0.00
		5200	100.000	100.000	100.00	0.00	0.00
		5245	100.000	100.000	100.00	0.00	0.00
3M	MIMO	5154	100.000	100.000	100.00	0.00	0.00
		5199	100.000	100.000	100.00	0.00	0.00
		5247	100.000	100.000	100.00	0.00	0.00
1.4M	MIMO	5154	100.000	100.000	100.00	0.00	0.00
		5200	100.000	100.000	100.00	0.00	0.00
		5248	100.000	100.000	100.00	0.00	0.00

1.2 Test Graph


1.2.1 Ant0

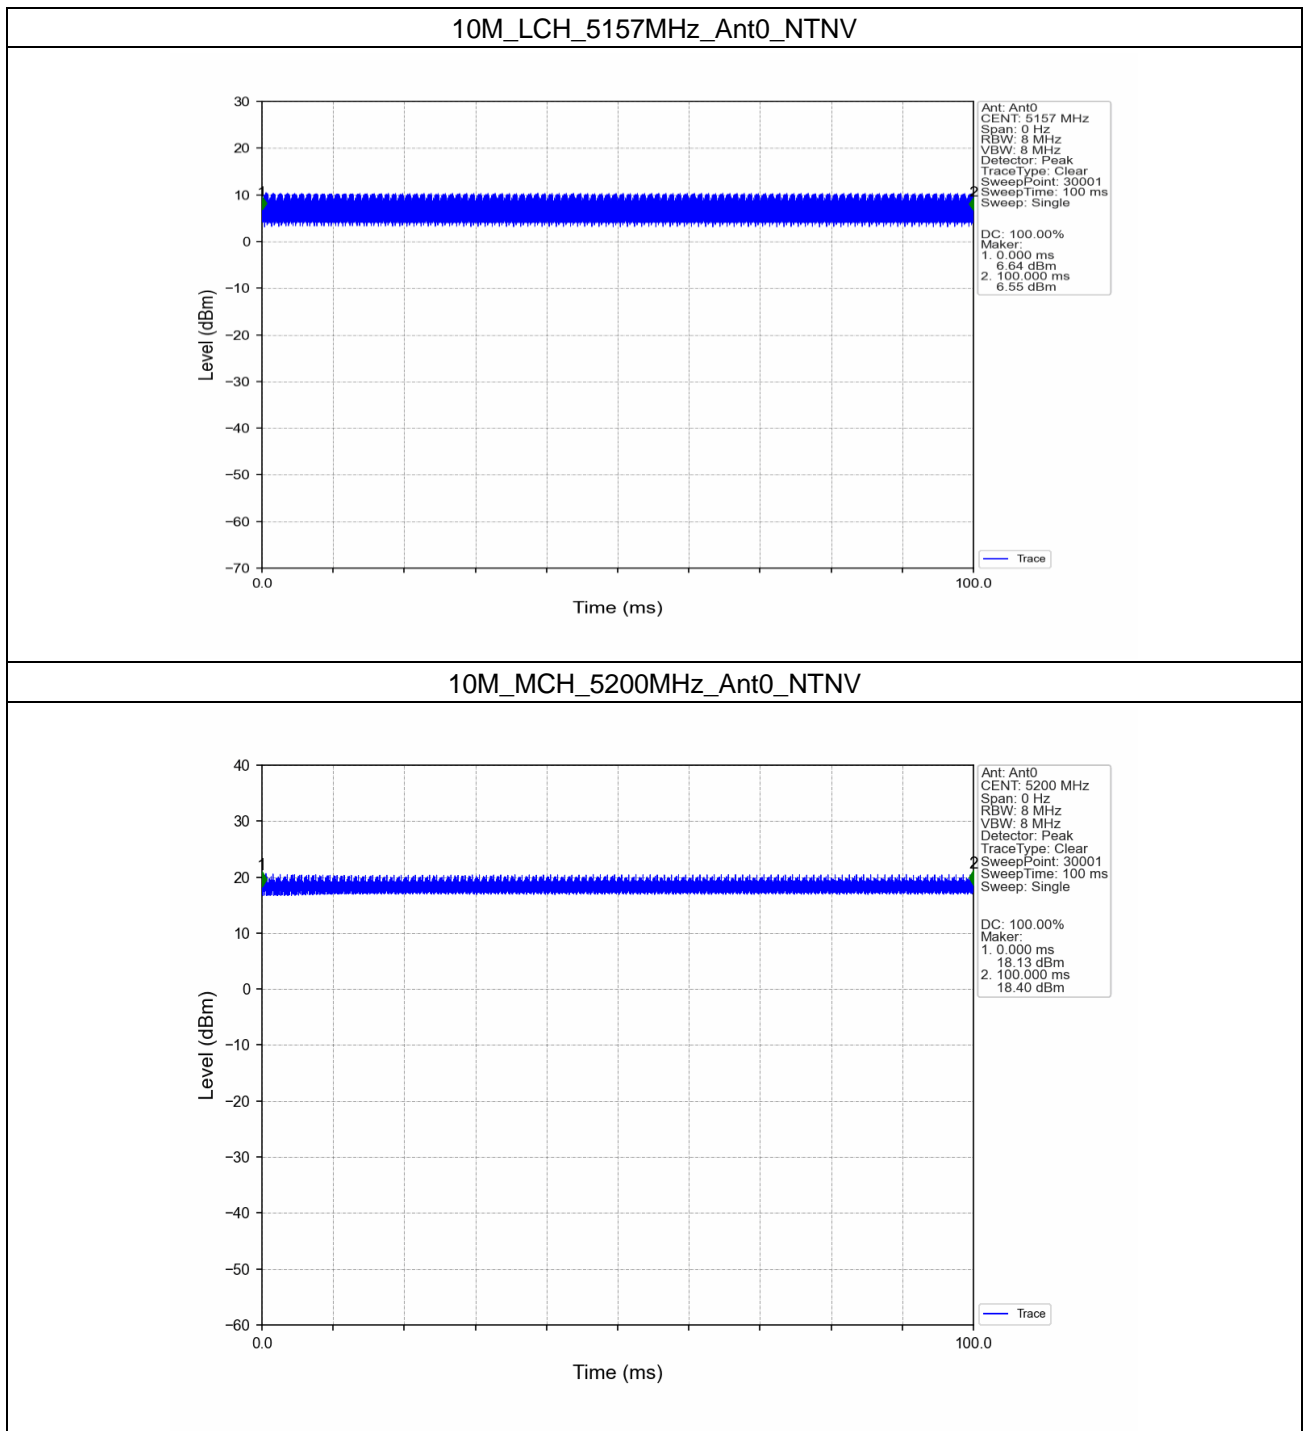

10M_HCH_5245MHz_Ant0_NTNV

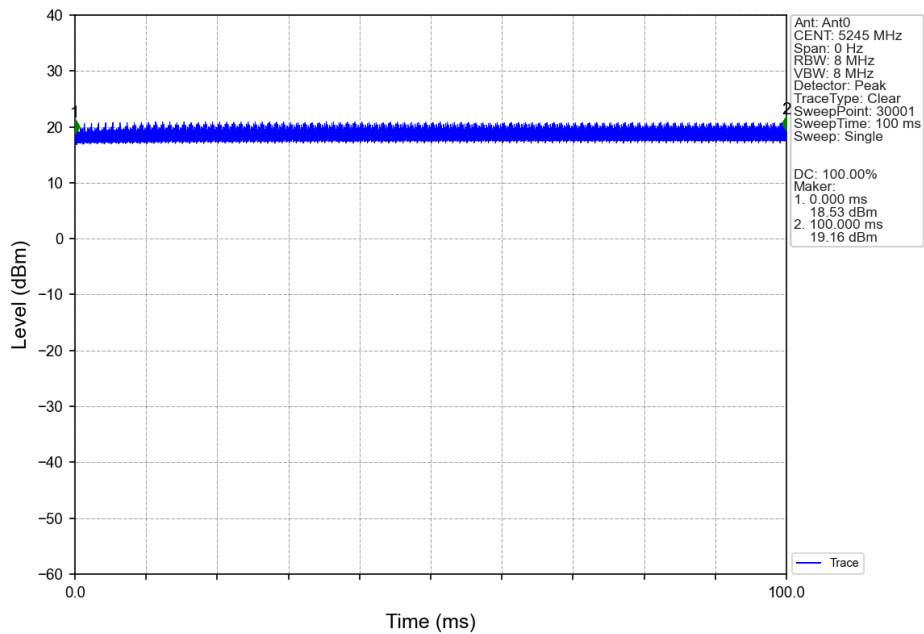


20M_LCH_5161MHz_Ant0_NTNV

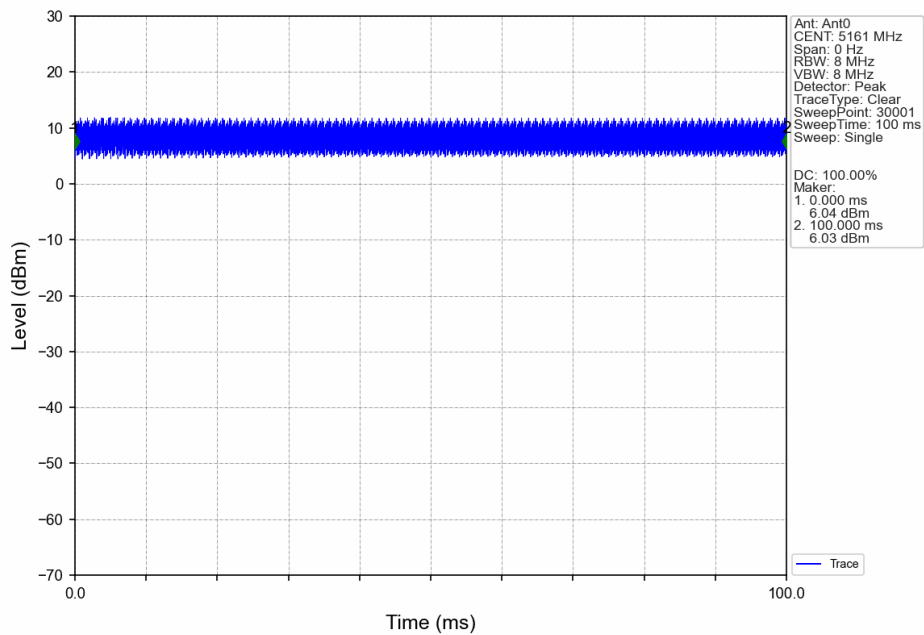


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


20M_MCH_5200MHz_Ant0_NTNV

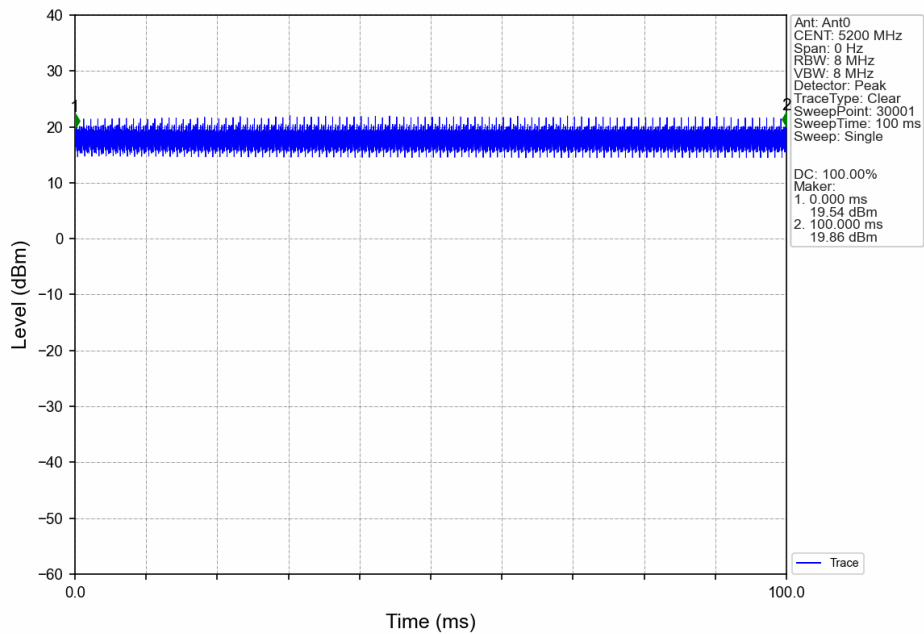


20M_HCH_5240MHz_Ant0_NTNV

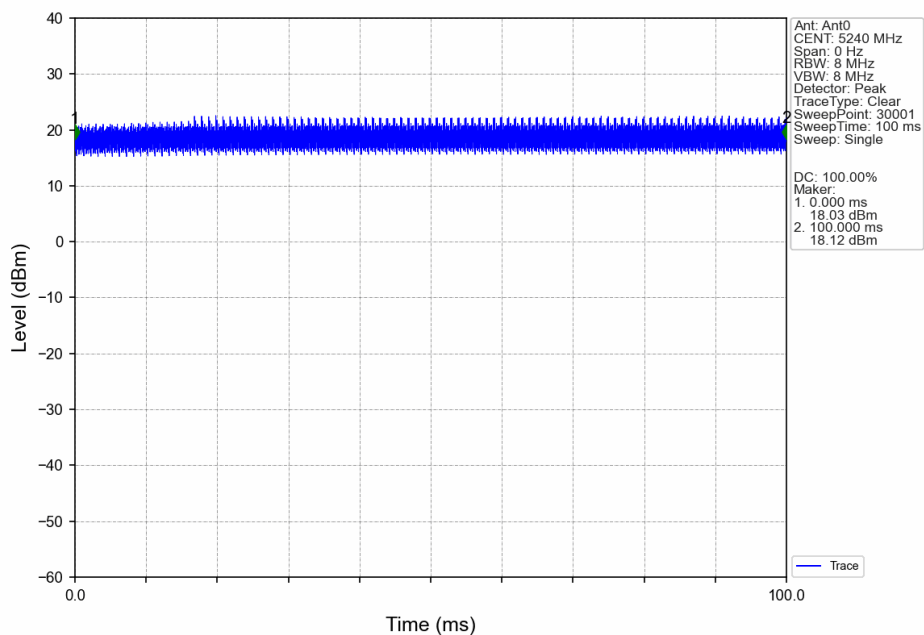

40M_LCH_5170MHz_Ant0_NTNV

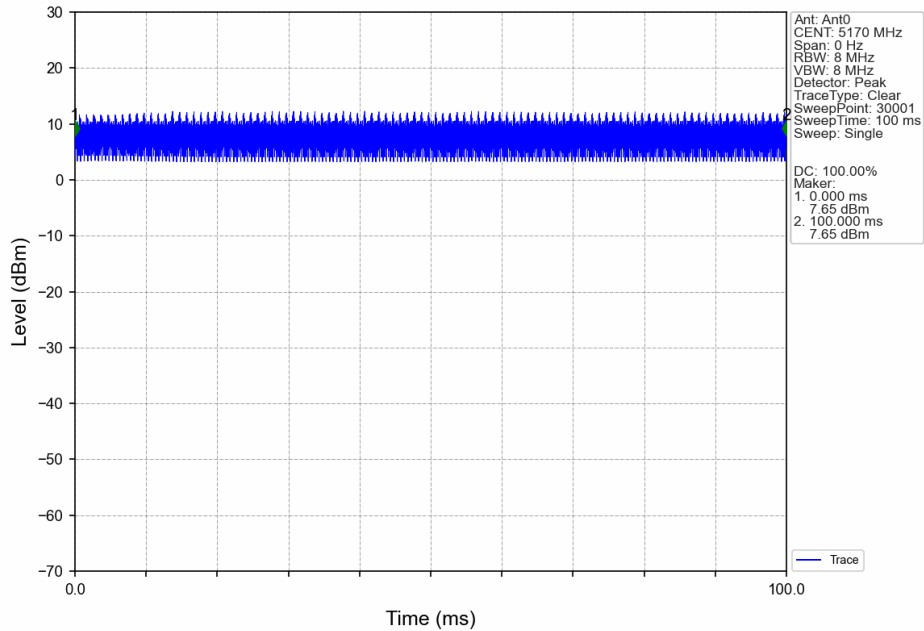


40M_MCH_5200MHz_Ant0_NTNV

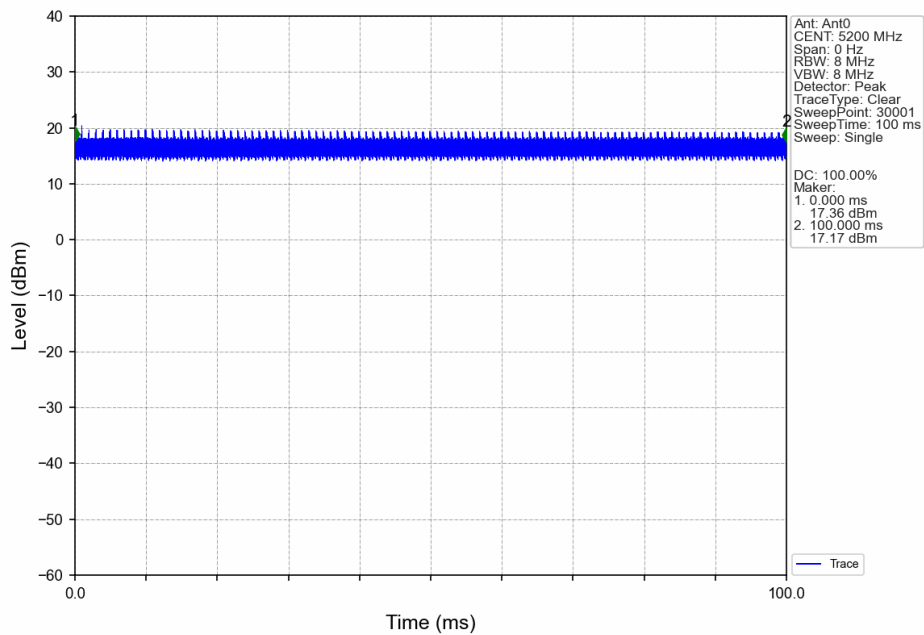


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

40M_HCH_5230MHz_Ant0_NTNV

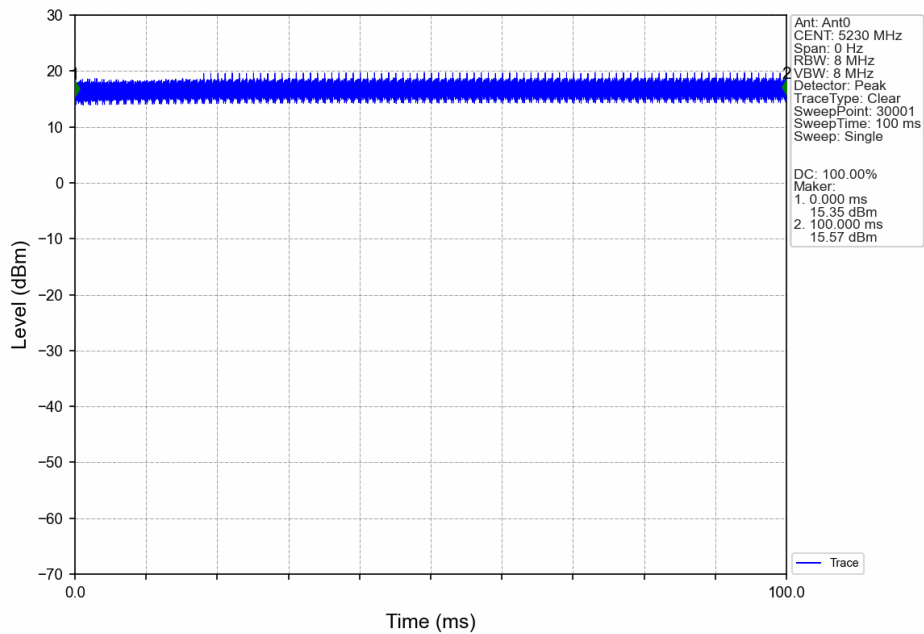


60M_LCH_5180MHz_Ant0_NTNV

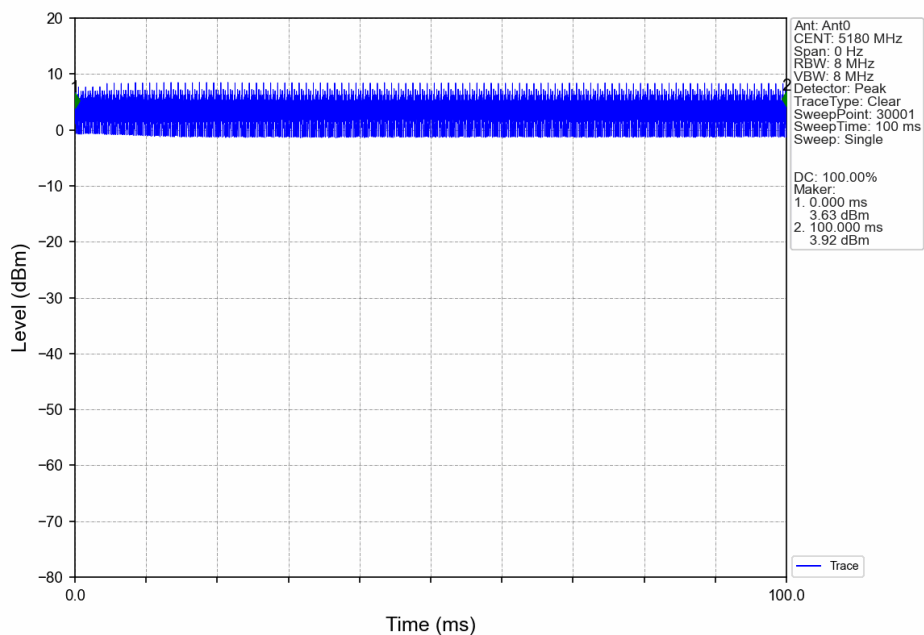


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

60M_MCH_5200MHz_Ant0_NTNV

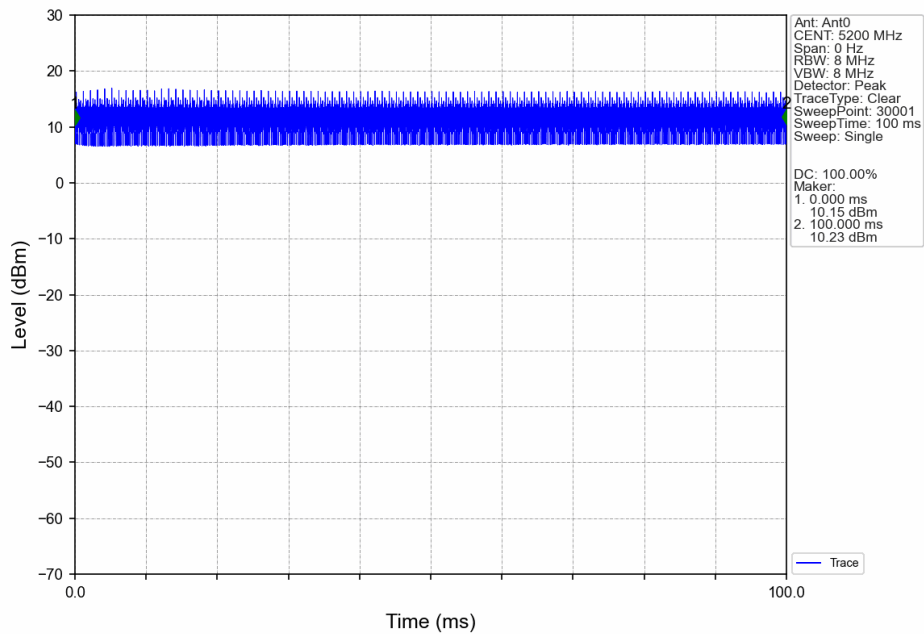


60M_HCH_5220MHz_Ant0_NTNV

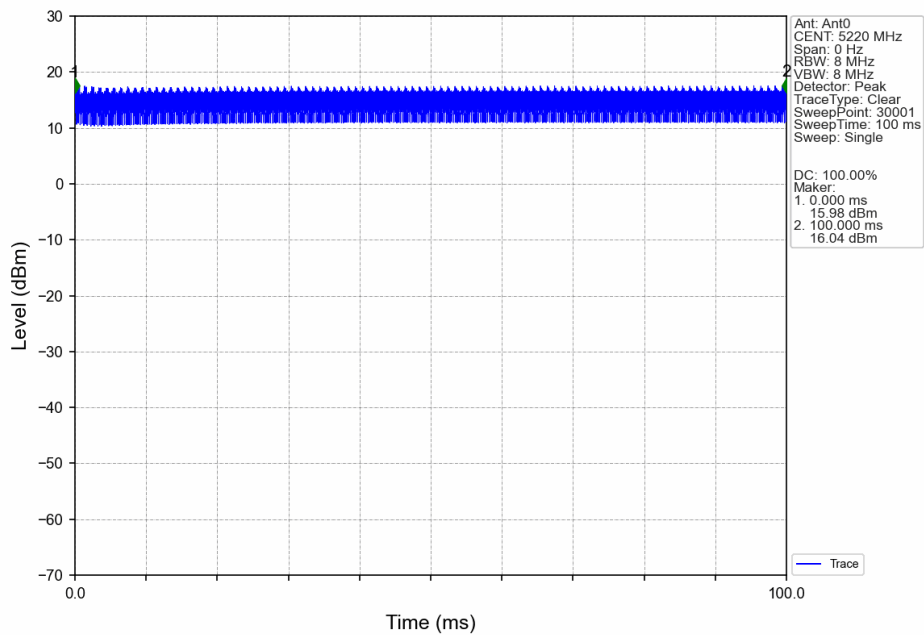


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

80M_LCH_5190MHz_Ant0_NTNV

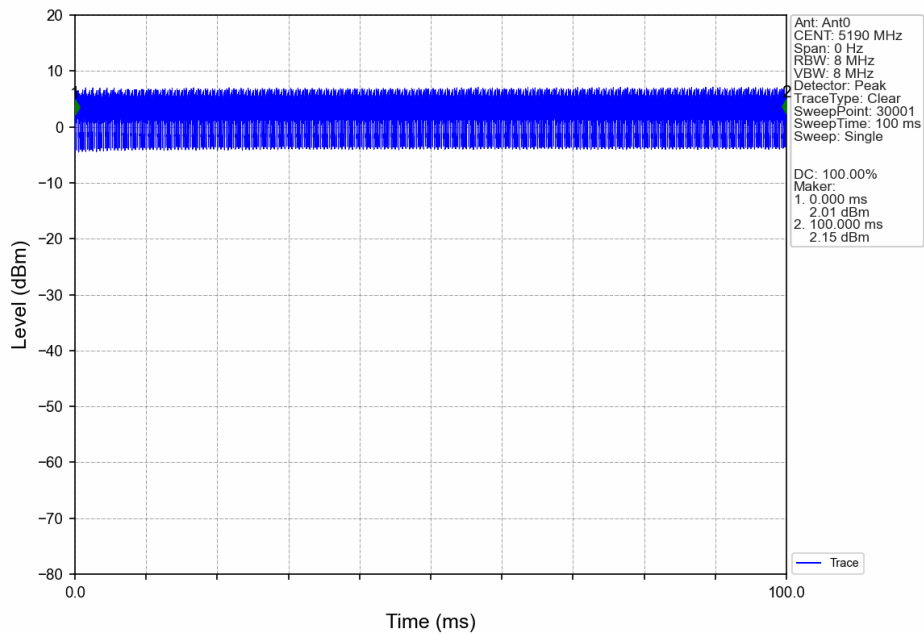

80M_MCH_5200MHz_Ant0_NTNV

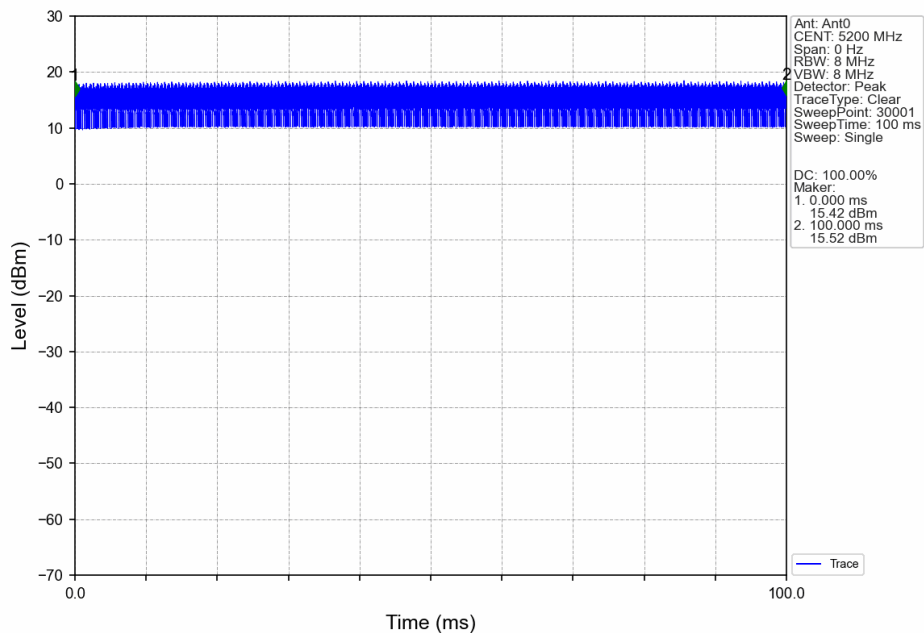


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch, Shenzhen, China

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

80M_HCH_5210MHz_Ant0_NTNV

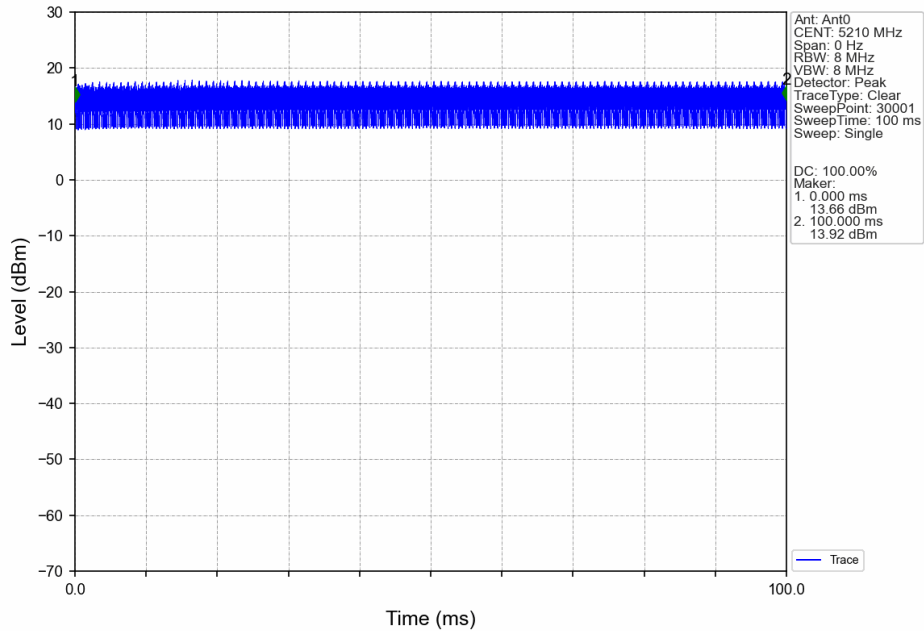


5M_LCH_5155MHz_Ant0_NTNV

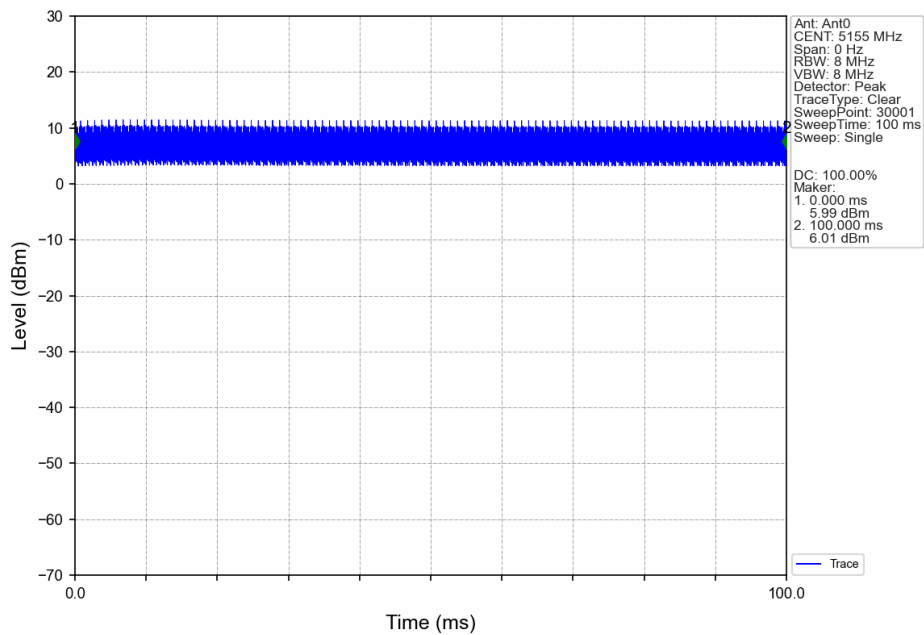


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


5M_MCH_5200MHz_Ant0_NTNV

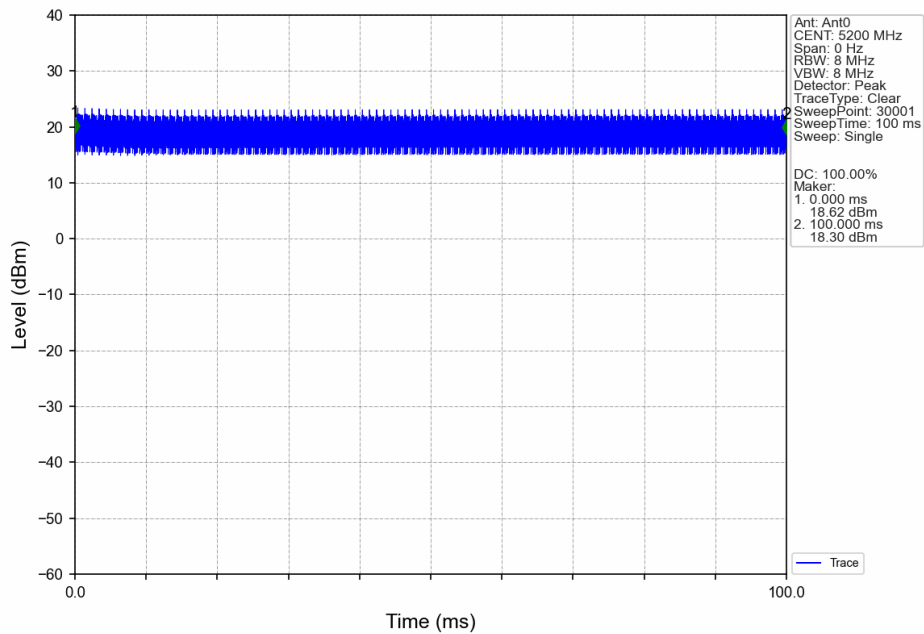


5M_HCH_5245MHz_Ant0_NTNV

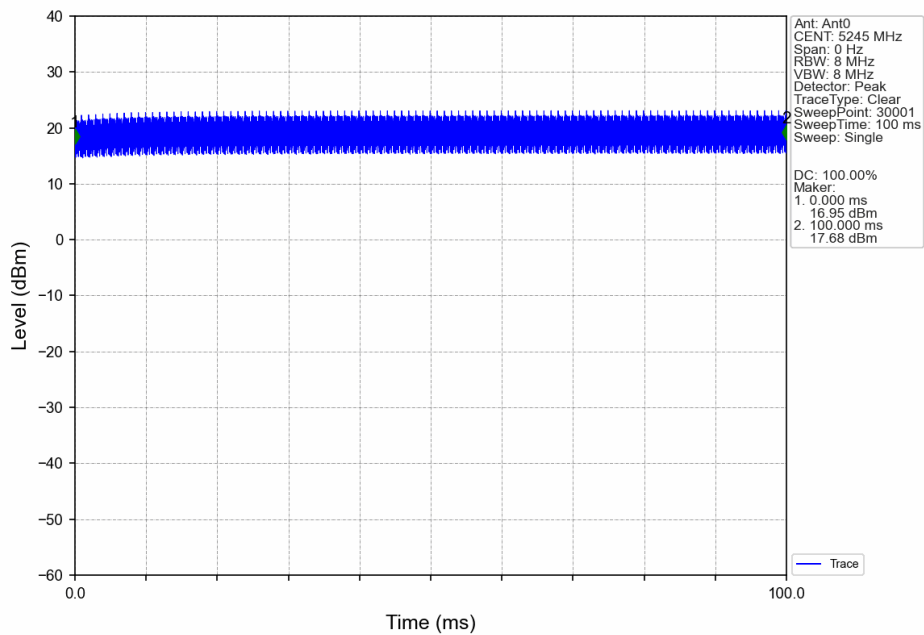


3M_LCH_5154MHz_Ant0_NTNV

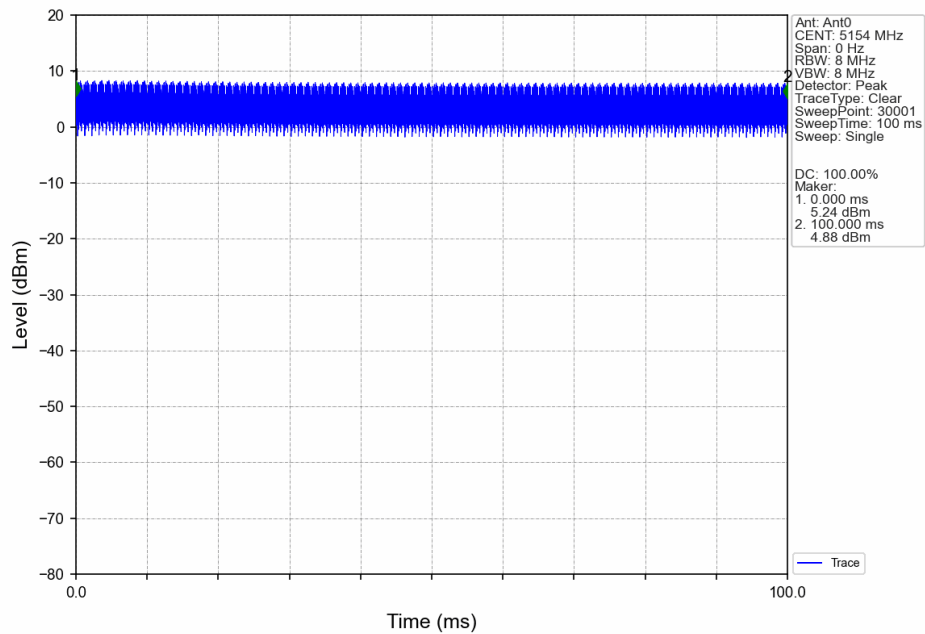


3M_MCH_5199MHz_Ant0_NTNV

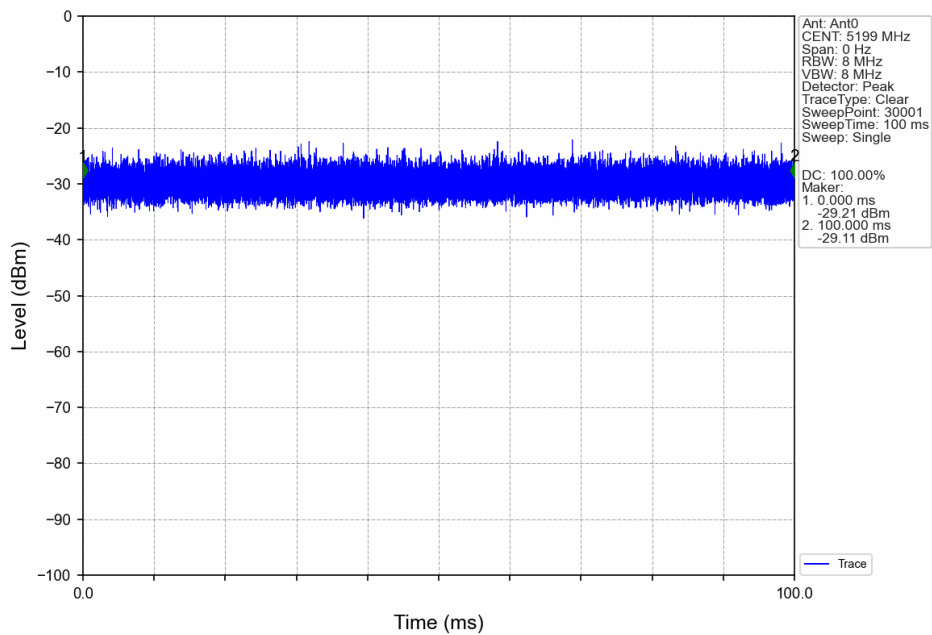


3M_HCH_5247MHz_Ant0_NTNV

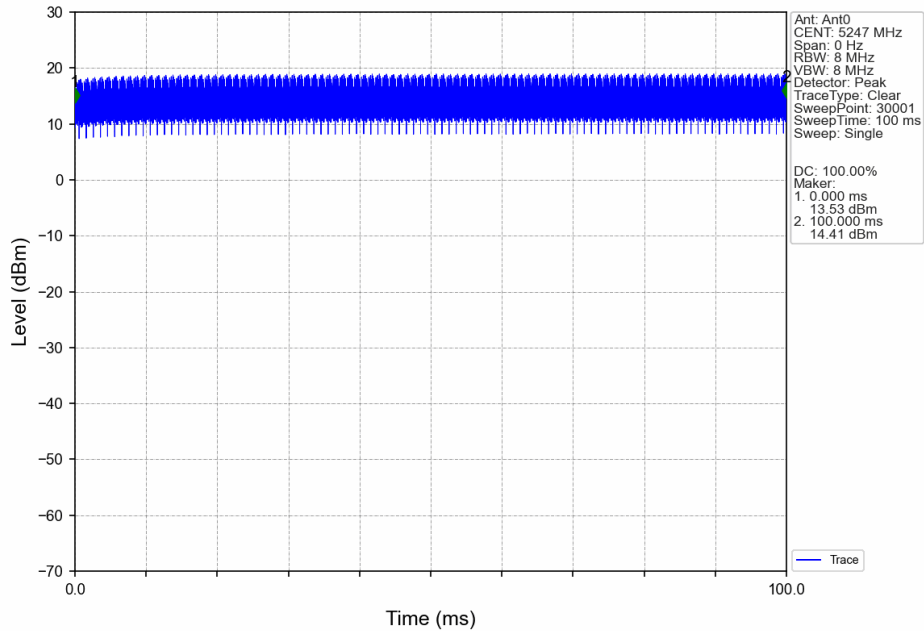


1.4M_LCH_5154MHz_Ant0_NTNV

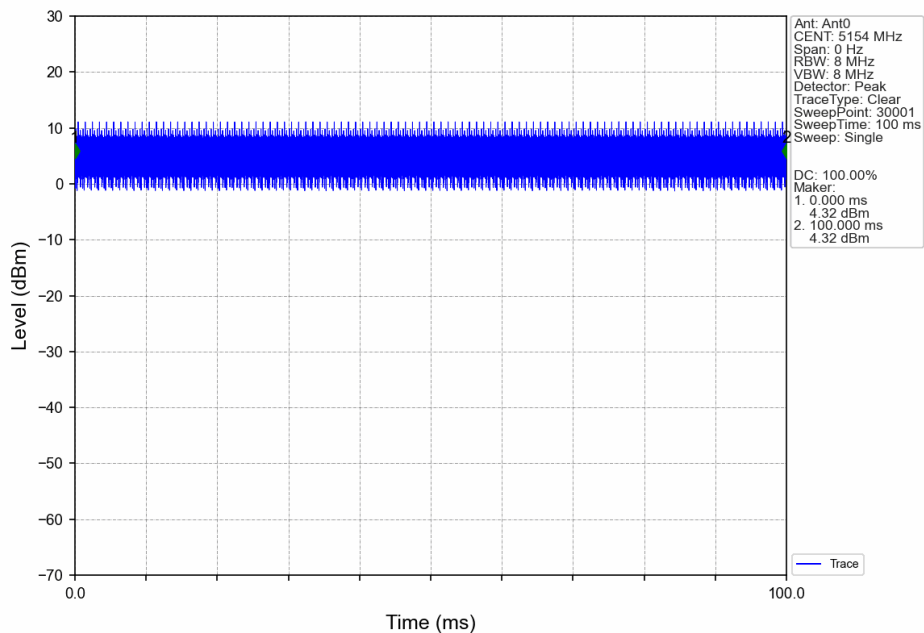

1.4M_MCH_5200MHz_Ant0_NTNV

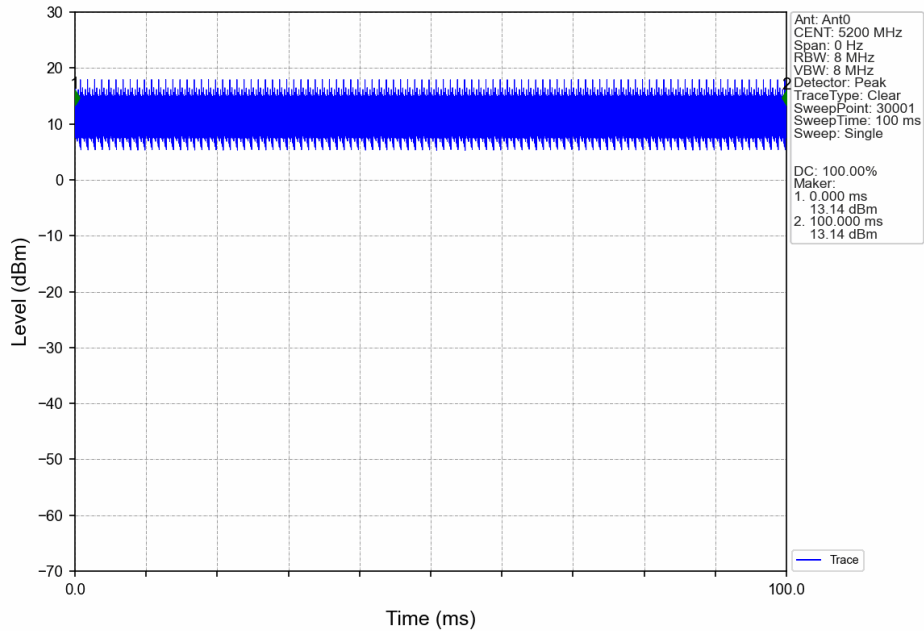

1.4M_HCH_5248MHz_Ant0_NTNV

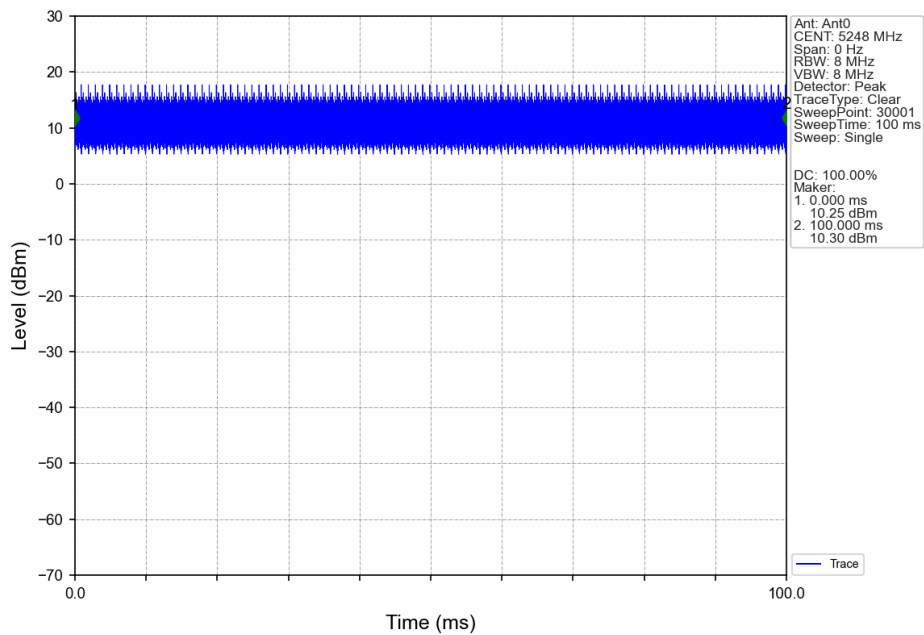

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

2. Bandwidth

2.1 Test Result

2.1.1 OBW

Mode	TX Type	Frequency (MHz)	ANT	99% Occupied Bandwidth (MHz)		Verdict
				Result	Limit	
10M	MIMO	5157	0	9.077	/	Pass
		5200	0	9.097	/	Pass
		5245	0	9.103	/	Pass
20M	MIMO	5161	0	18.075	/	Pass
		5200	0	17.934	/	Pass
		5240	0	17.935	/	Pass
40M	MIMO	5170	0	36.008	/	Pass
		5200	0	31.707	/	Pass
		5230	0	31.667	/	Pass
60M	MIMO	5180	0	53.790	/	Pass
		5200	0	53.878	/	Pass
		5220	0	51.987	/	Pass
80M	MIMO	5190	0	71.304	/	Pass
		5200	0	61.811	/	Pass
		5210	0	61.790	/	Pass
5M	MIMO	5155	0	4.457	/	Pass
		5200	0	4.462	/	Pass
		5245	0	4.462	/	Pass
3M	MIMO	5154	0	2.305	/	Pass
		5199	0	2.297	/	Pass
		5247	0	2.299	/	Pass
1.4M	MIMO	5154	0	1.273	/	Pass
		5200	0	1.278	/	Pass
		5248	0	1.275	/	Pass

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR241200481505


Page: 158 of 532

2.1.2 26dB BW


Mode	TX Type	Frequency (MHz)	ANT	26dB Bandwidth (MHz)		Verdict
				Result	Limit	
10M	MIMO	5157	0	10.201	/	Pass
		5200	0	10.247	/	Pass
		5245	0	10.242	/	Pass
20M	MIMO	5161	0	19.651	/	Pass
		5200	0	19.425	/	Pass
		5240	0	19.461	/	Pass
40M	MIMO	5170	0	37.949	/	Pass
		5200	0	36.597	/	Pass
		5230	0	36.568	/	Pass
60M	MIMO	5180	0	56.334	/	Pass
		5200	0	56.390	/	Pass
		5220	0	55.470	/	Pass
80M	MIMO	5190	0	73.508	/	Pass
		5200	0	72.113	/	Pass
		5210	0	72.145	/	Pass
5M	MIMO	5155	0	5.264	/	Pass
		5200	0	5.289	/	Pass
		5245	0	5.273	/	Pass
3M	MIMO	5154	0	2.795	/	Pass
		5199	0	2.809	/	Pass
		5247	0	2.835	/	Pass
1.4M	MIMO	5154	0	1.719	/	Pass
		5200	0	1.699	/	Pass
		5248	0	1.635	/	Pass

2.2 Test Graph


2.2.1 OBW

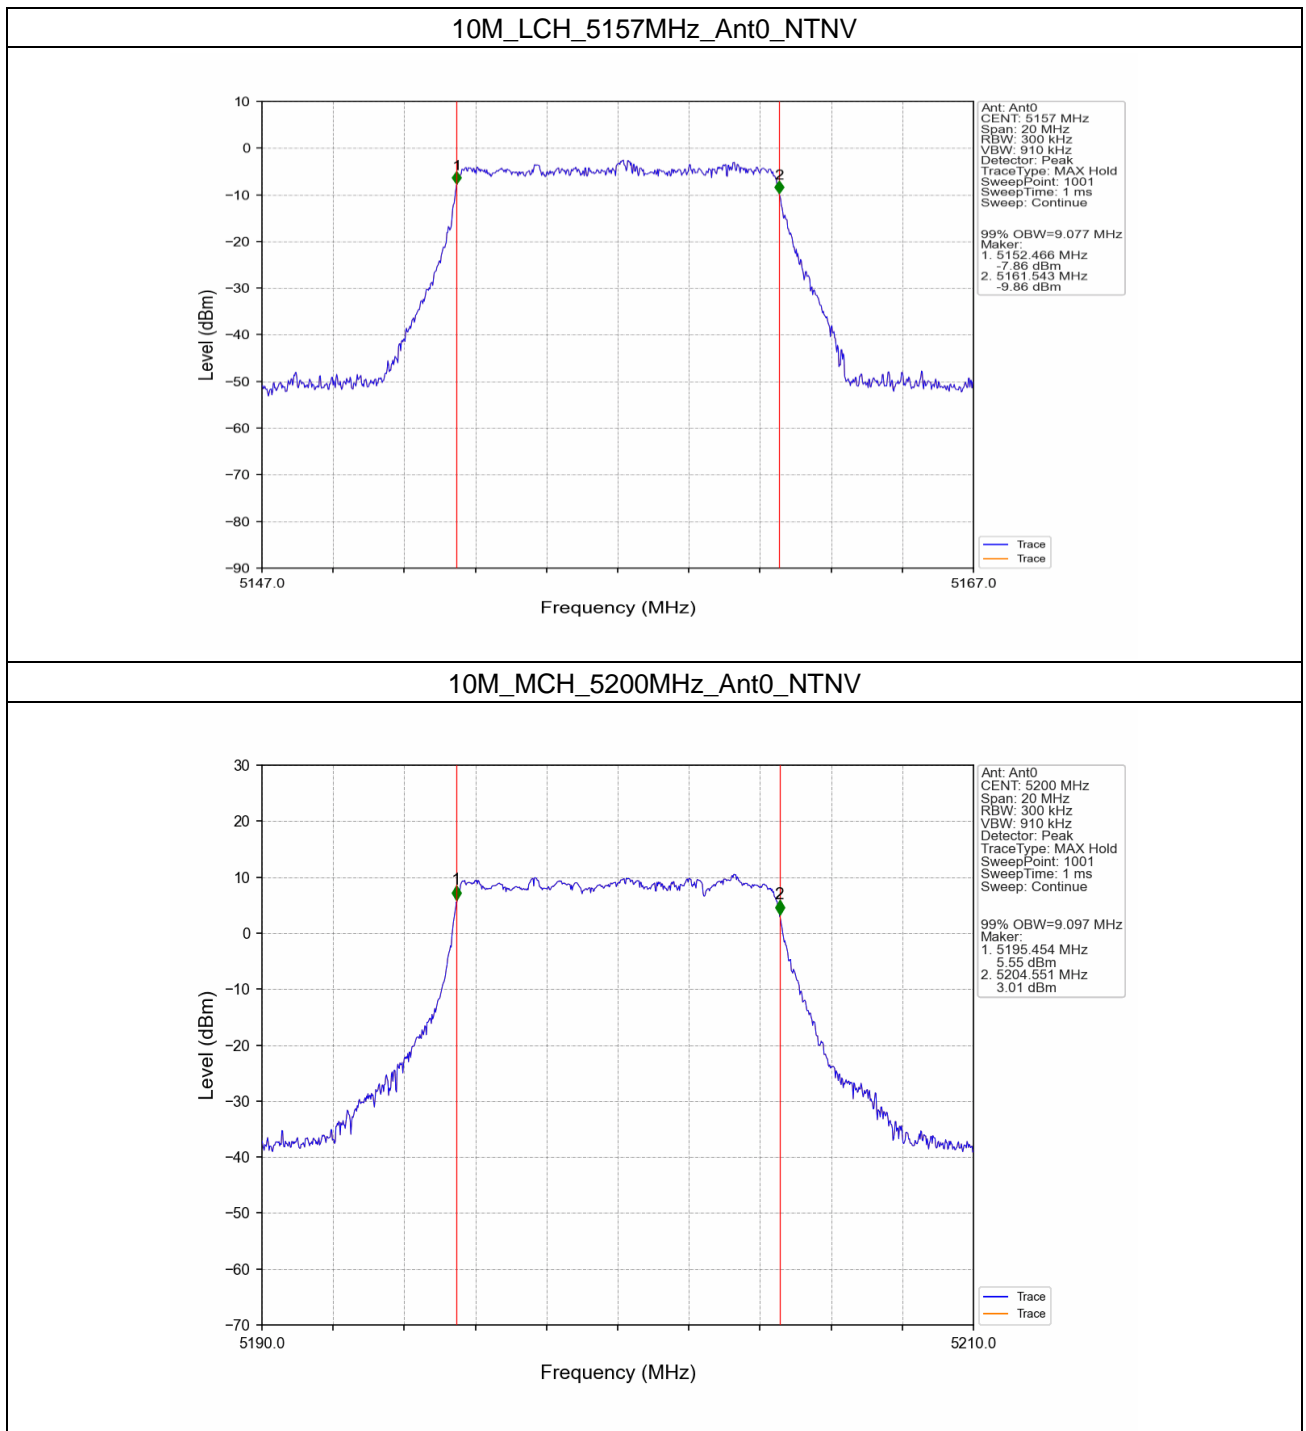

10M_HCH_5245MHz_Ant0_NTNV

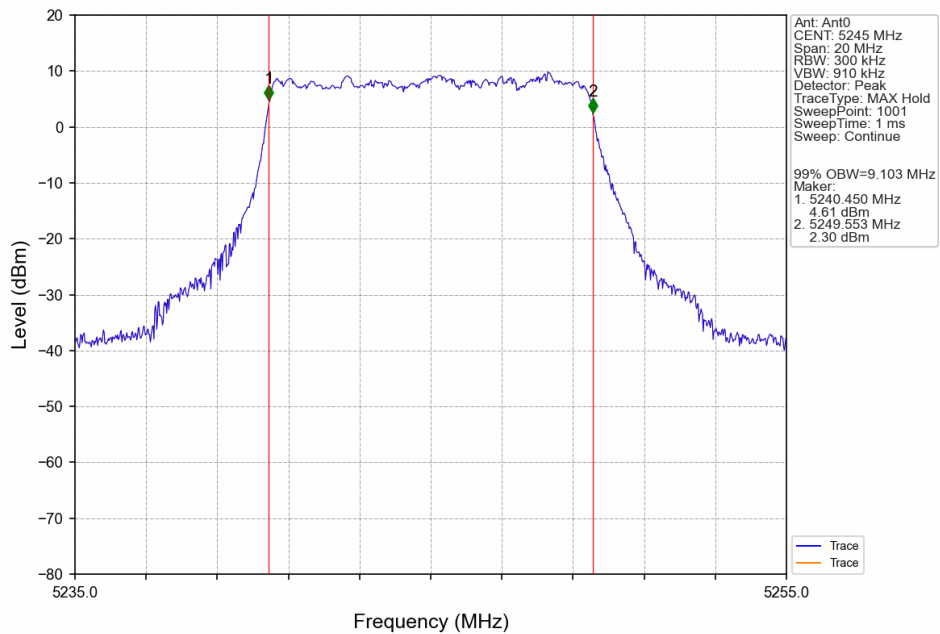

20M_LCH_5161MHz_Ant0_NTNV

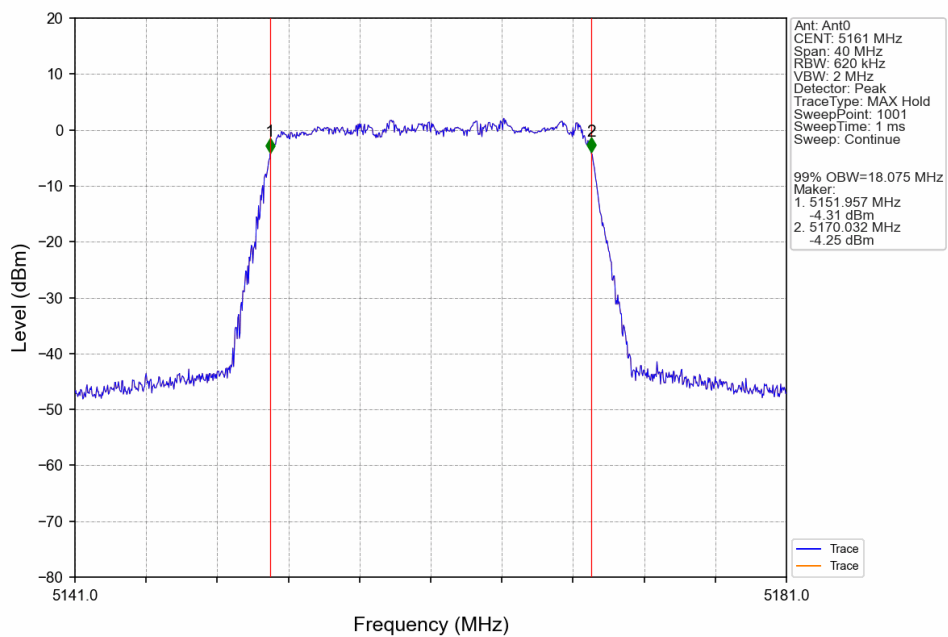


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing & Calibration Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


20M_MCH_5200MHz_Ant0_NTNV

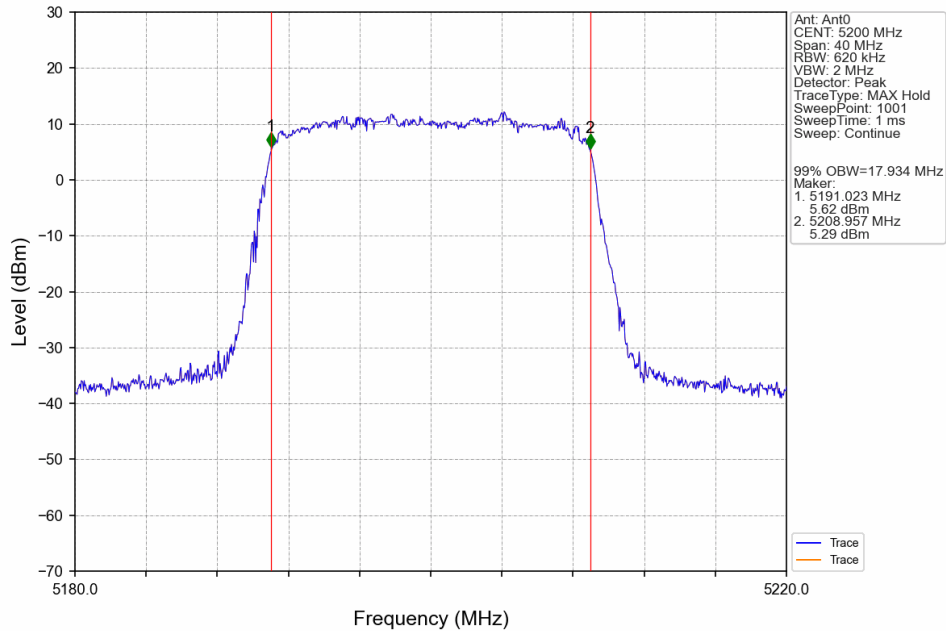


20M_HCH_5240MHz_Ant0_NTNV

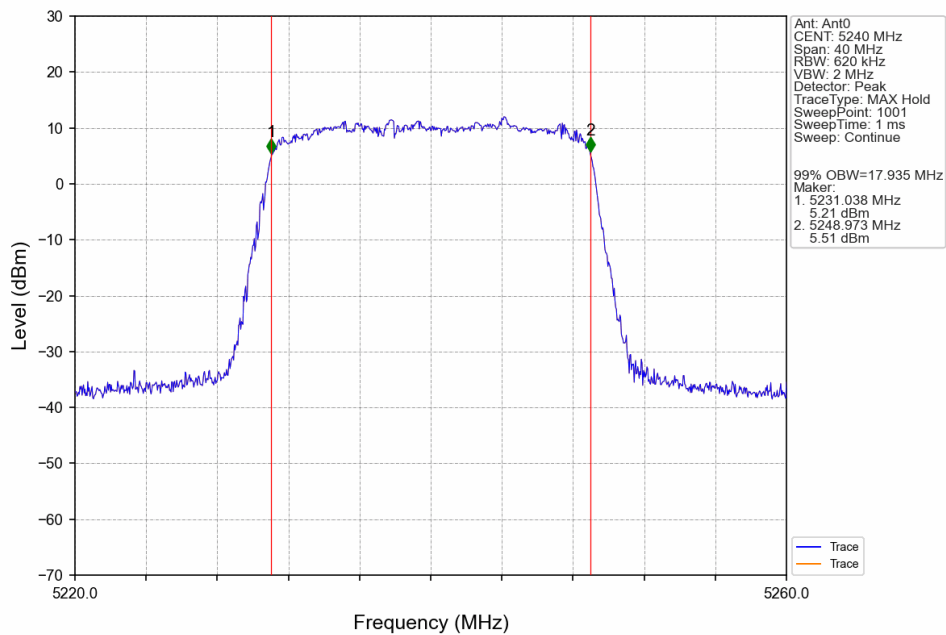

40M_LCH_5170MHz_Ant0_NTNV

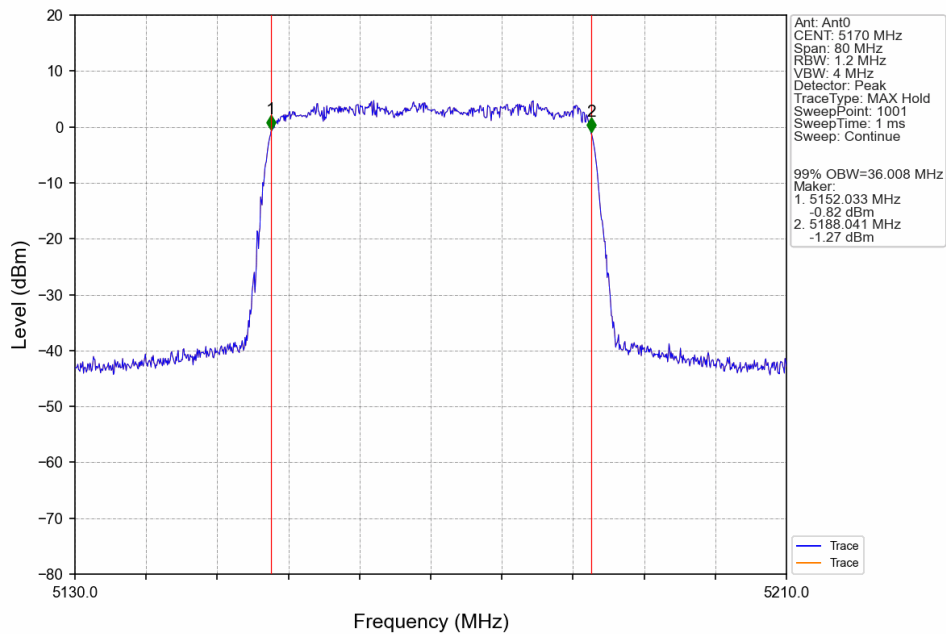

40M_MCH_5200MHz_Ant0_NTNV

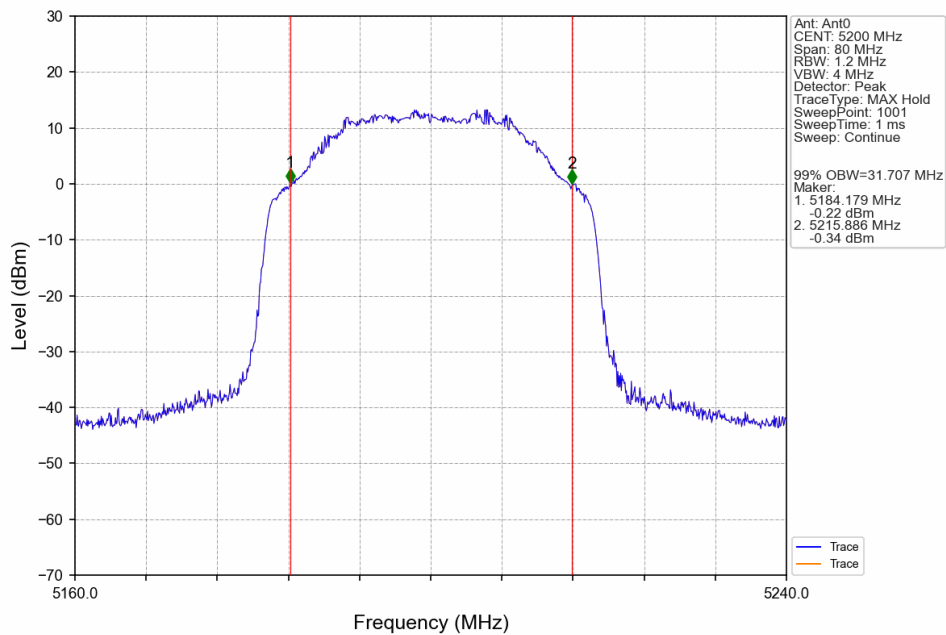


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


40M_HCH_5230MHz_Ant0_NTNV

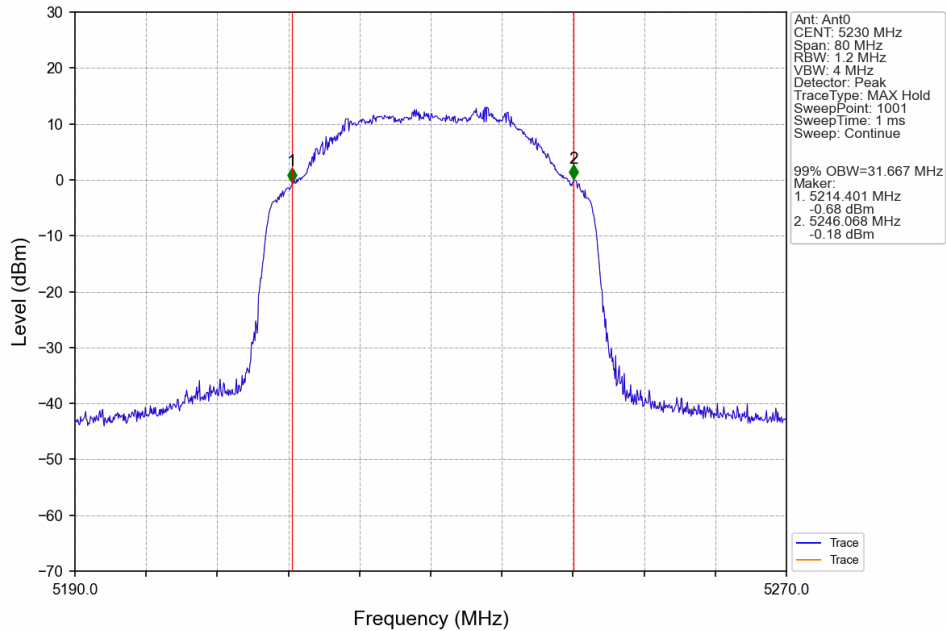


60M_LCH_5180MHz_Ant0_NTNV

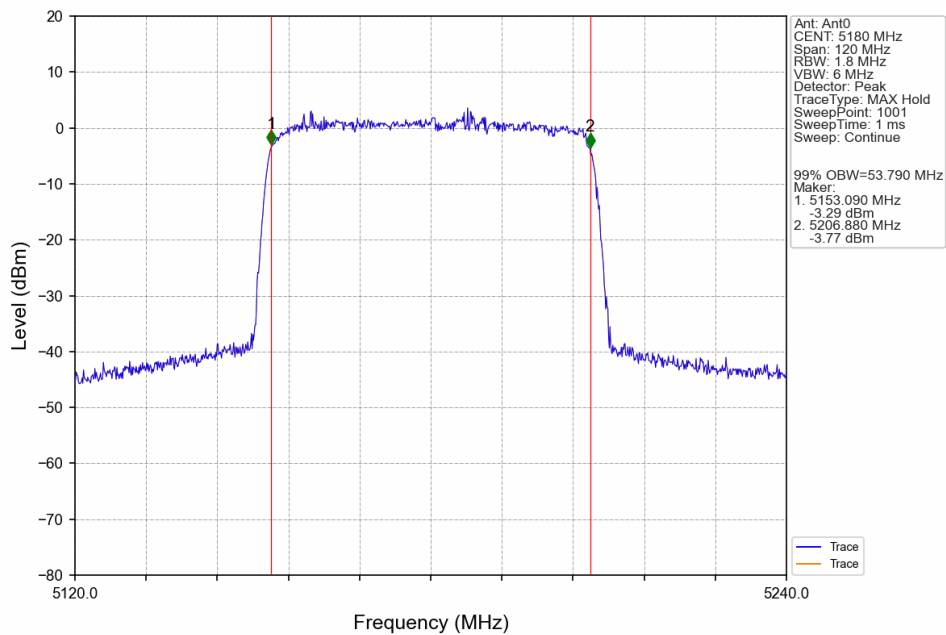

60M_MCH_5200MHz_Ant0_NTNV

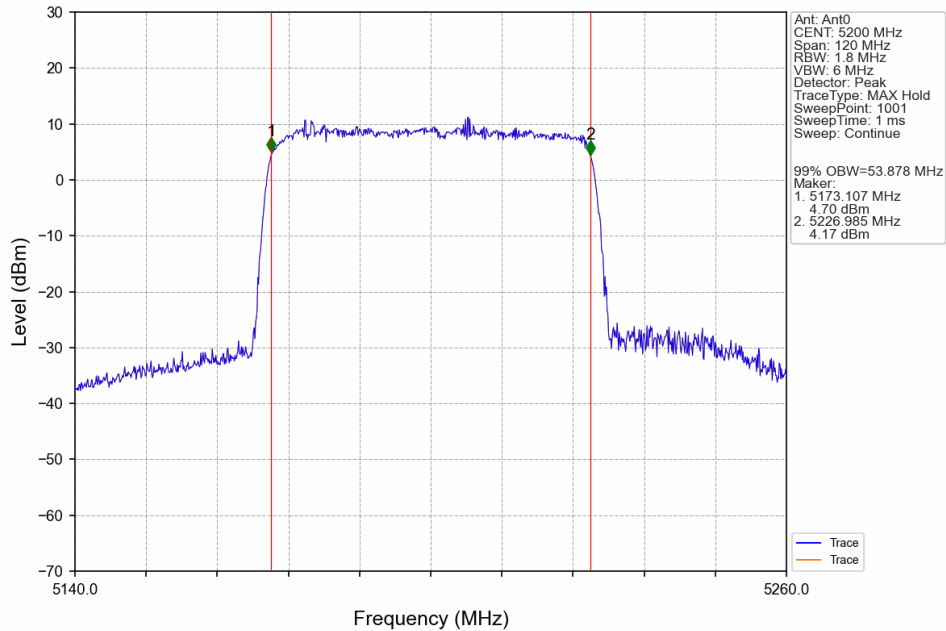

60M_HCH_5220MHz_Ant0_NTNV

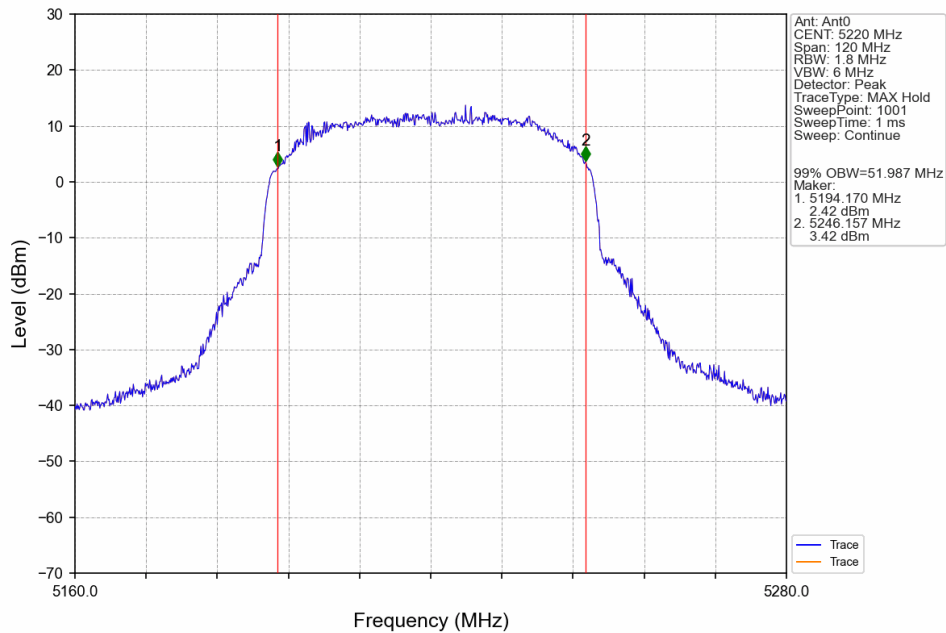


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


80M_LCH_5190MHz_Ant0_NTNV

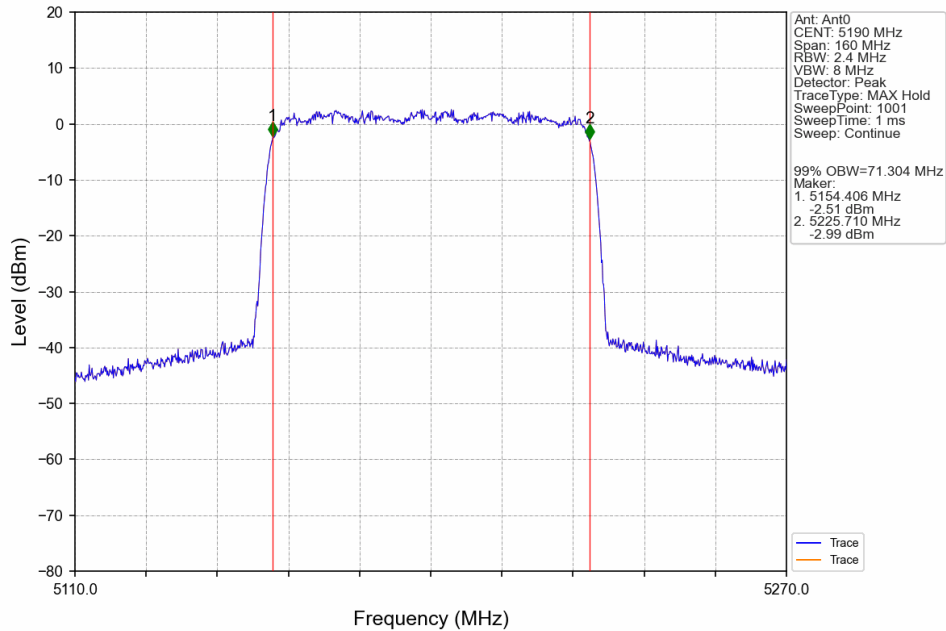


80M_MCH_5200MHz_Ant0_NTNV

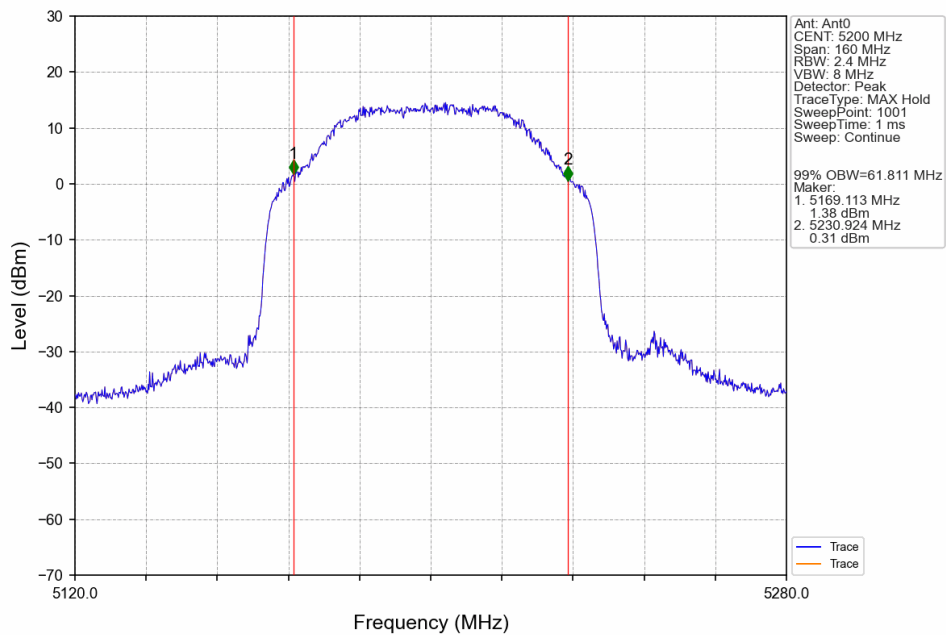

80M_HCH_5210MHz_Ant0_NTNV

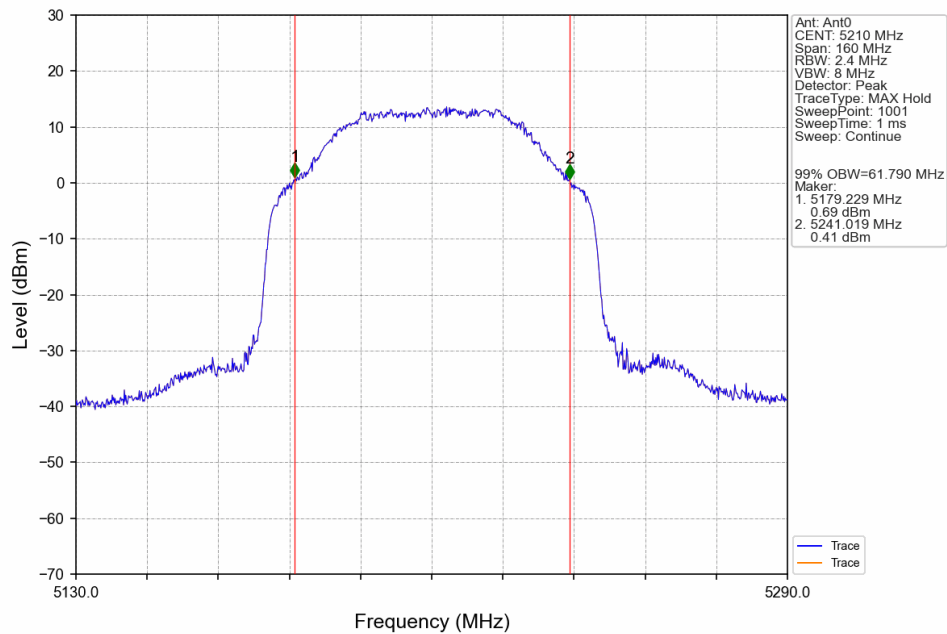

5M_LCH_5155MHz_Ant0_NTNV

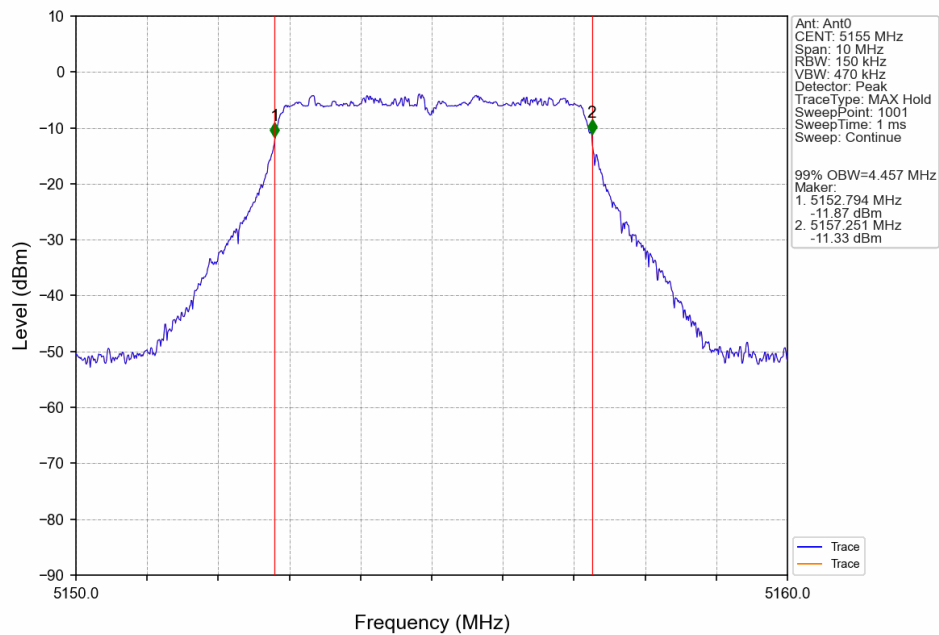


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing & Calibration Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

5M_MCH_5200MHz_Ant0_NTNV

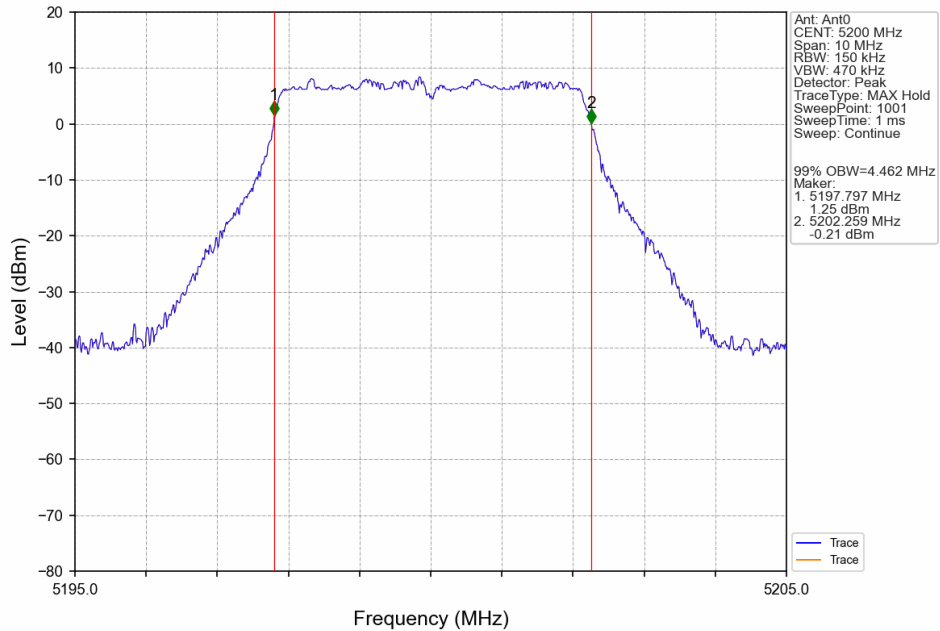

5M_HCH_5245MHz_Ant0_NTNV

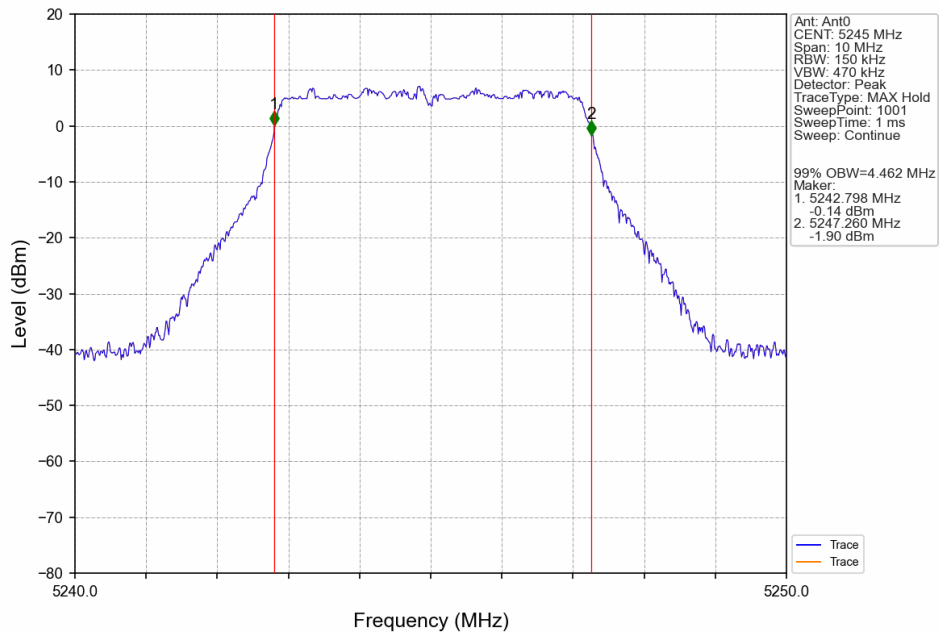


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

3M_LCH_5154MHz_Ant0_NTNV

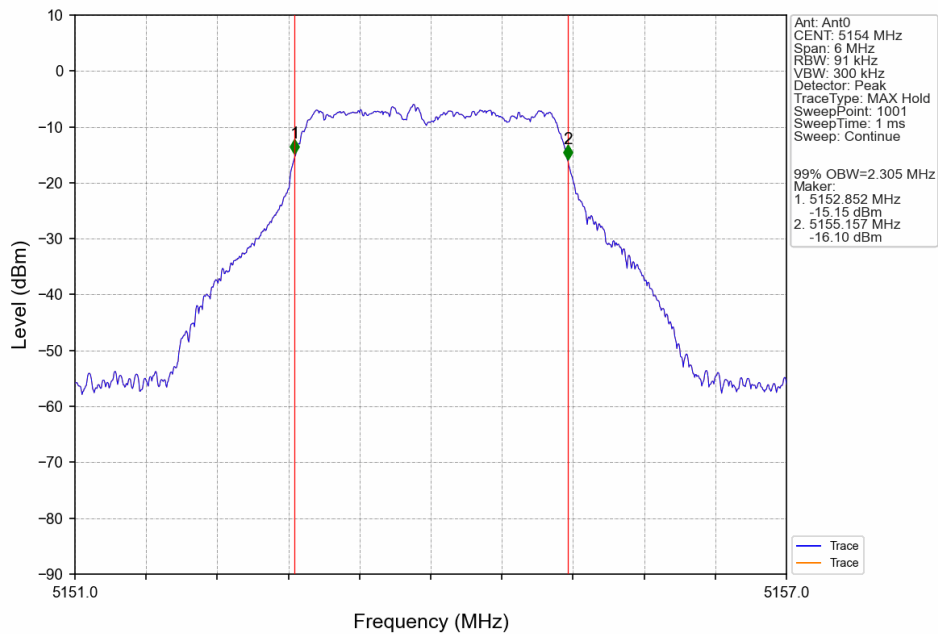

3M_MCH_5199MHz_Ant0_NTNV

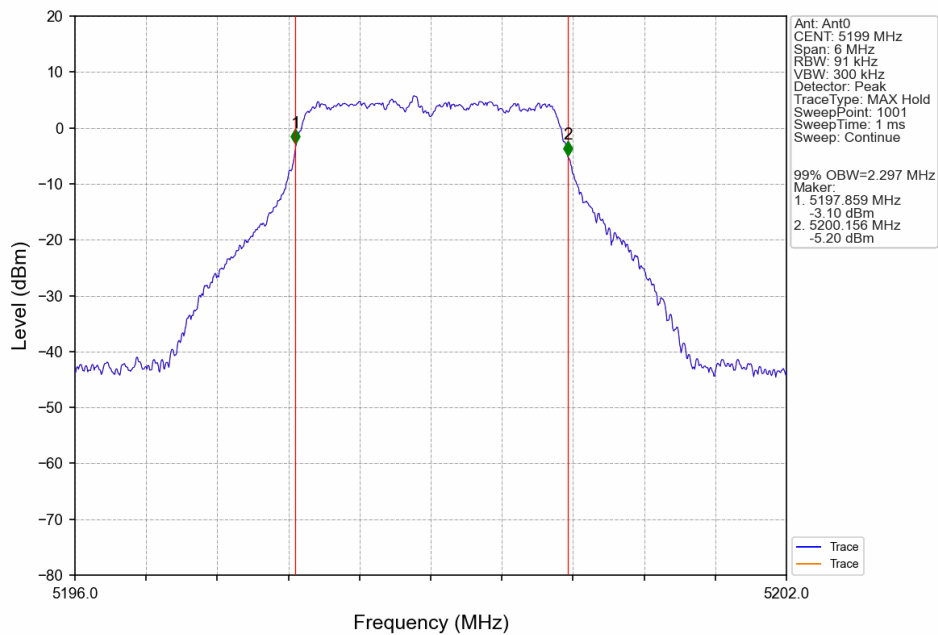


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing & Calibration Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

3M_HCH_5247MHz_Ant0_NTNV

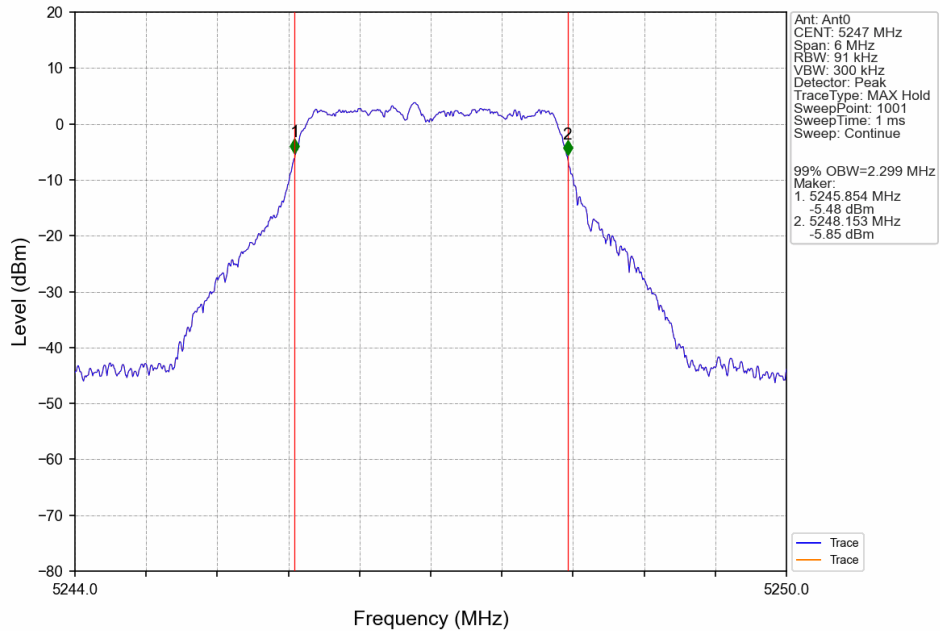

1.4M_LCH_5154MHz_Ant0_NTNV

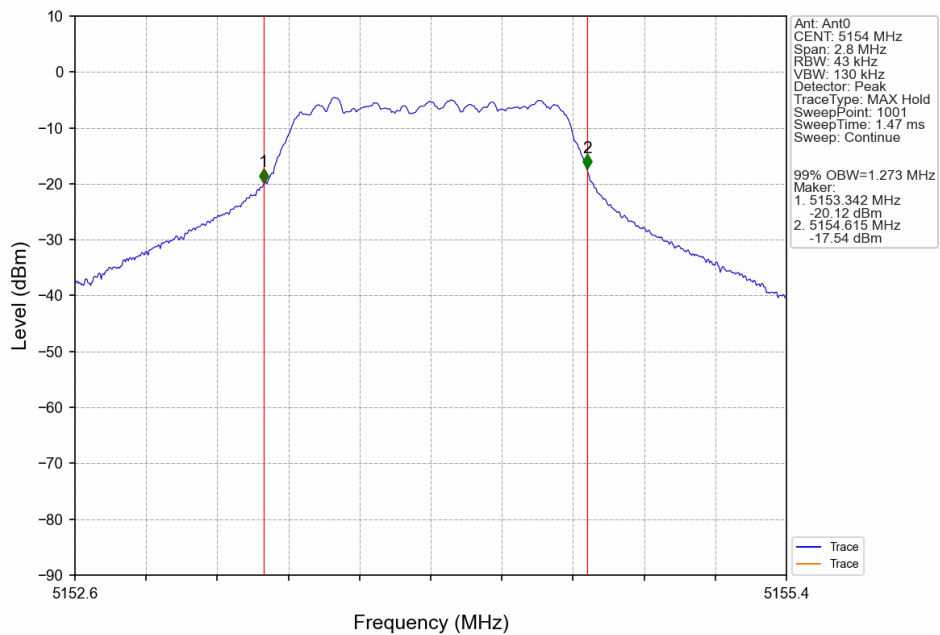

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com