

FCC Radio Test Report

FCC ID: XMF-MID713

Original Grant

Report No. : TB-FCC141397
Applicant : Lightcomm Technology Co., Ltd.
Equipment Under Test (EUT)
EUT Name : MID
Model No. : MID713-L
Series Model No. : MID721-L, DL701Q, DL701Q(B)
Brand Name : N/A
Receipt Date : 2014-07-25
Test Date : 2014-07-28 to 2014-08-05
Issue Date : 2014-08-13
Standards : FCC Part 15, Subpart C (15.247:2012)
Test Method : ANSI C63.4:2003
Conclusions : **PASS**

In the configuration tested, the EUT complied with the standards specified above,


The EUT technically complies with the FCC and IC requirements

Test/Witness Engineer :

IVAN SU

Approved& Authorized :

Ray Li



This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in the report.

Contents

CONTENTS.....	2
1. GENERAL INFORMATION ABOUT EUT	4
1.1 Client Information.....	4
1.2 General Description of EUT (Equipment Under Test)	4
1.3 Block Diagram Showing the Configuration of System Tested.....	5
1.4 Description of Support Units	5
1.5 Description of Test Mode.....	6
1.6 Description of Test Software Setting	6
1.7 Test Facility.....	7
2. TEST SUMMARY	8
3. CONDUCTED EMISSION TEST	9
3.1 Test Standard and Limit.....	9
3.2 Test Setup.....	9
3.3 Test Procedure.....	9
3.4 Test Equipment Used.....	10
3.5 EUT Operating Mode	10
3.6 Test Data.....	10
4. RADIATED EMISSION TEST	13
4.1 Test Standard and Limit.....	13
4.2 Test Setup.....	14
4.3 Test Procedure.....	15
4.4 EUT Operating Condition	15
4.5 Test Equipment	16
4.6 Test Data.....	16
5. RESTRICTED BANDS REQUIREMENT	43
5.1 Test Standard and Limit.....	43
5.2 Test Setup.....	43
5.3 Test Procedure.....	43
5.4 EUT Operating Condition	44
5.5 Test Equipment	44
5.6 Test Data.....	44
6. BANDWIDTH TEST	65
6.1 Test Standard and Limit.....	65
6.2 Test Setup.....	65
6.3 Test Procedure.....	65
6.4 EUT Operating Condition	65
6.5 Test Equipment	65
6.6 Test Data.....	66
7. PEAK OUTPUT POWER TEST.....	74

7.1 Test Standard and Limit.....	74
7.2 Test Setup.....	74
7.3 Test Procedure.....	74
7.4 EUT Operating Condition	74
7.5 Test Equipment	74
7.6 Test Data.....	74
8. POWER SPECTRAL DENSITY TEST	76
8.1 Test Standard and Limit.....	76
8.2 Test Setup.....	76
8.3 Test Procedure.....	76
8.4 EUT Operating Condition	76
8.5 Test Equipment	77
8.6 Test Data.....	77
9. ANTENNA REQUIREMENT.....	85
9.1 Standard Requirement.....	85
9.2 Antenna Connected Construction	85
9.3 Result.....	85

1. General Information about EUT

1.1 Client Information

Applicant : Lightcomm Technology Co., Ltd.
Address : RM 1708-10, 17/F, PROSPERITY CENTRE, 25 CHONG YIP STREET, KWUN TONG, KOWLOON, HONG KONG
Manufacturer : Huizhou Hengdu Electronics Co., Ltd.
Address : DIP South Area, Huiao Highway, Huizhou, Guangdong, China

1.2 General Description of EUT (Equipment Under Test)

EUT Name	:	MID
Models No.	:	MID713-L, MID721-L, DL701Q, DL701Q(B)
Model Difference	:	MID721-L with different shells of the same material, the other models are identical in the same PCB layout, interior structure and electrical circuits, The only difference is model name for commercial purpose.
Product Description	:	Operation Frequency: 802.11b/g/n(HT20): 2412MHz~2462MHz 802.11b/g/n(HT40): 2422MHz~2452MHz
	:	Number of Channel: 802.11b/g/n(HT20):11 channels see note(3) 802.11b/g/n(HT40): 7 channels see note(3)
	:	RF Output Power: 802.11b: 9.49 dBm 802.11g: 9.43 dBm 802.11n (HT20): 9.23 dBm 802.11n (HT40): 9.30 dBm
	:	Antenna Gain: 0 dBi (FPC Antenna)
	:	Modulation Type: 802.11b: DSSS (CCK, QPSK, BPSK) 802.11g: OFDM 802.11n: OFDM
	:	Bit Rate of Transmitter: 802.11b:11/5.5/2/1 Mbps 802.11g:54/48/36/24/18/12/9/6 Mbps 802.11n:up to 150Mbps
Power Supply	:	DC power supplied by AC/DC Adapter DC Voltage supplied from Li-Polymer battery.
Power Rating	:	USB DC 5V form PC. AC/DC Adapter(TEKA006-0501500UKU): Input: AC 100~240V 50/60Hz 0.35A Max. Output: DC 5V 1.5A DC 3.7V 2100mAh from Li-Polymer battery
Connecting I/O Port(S)	:	The equipent have USB port for link with PC, so the equipment is considered as a Computing Device Peripheral.


	Please refer to the User's Manual
Note: The equipment with Bluetooth and Wifi(802.11b/g/n) function, Bluetooth have test comply with FCC Part 15C Rules. More detailed features description, please refer to the manufacturer's specifications or the User's Manual.	

Note:

- (1) This Test Report is FCC Part 15.247 for 802.11b/g/n, the test procedure follows the FCC KDB 558074 D01 DTS Meas Guidance v03r02.
- (2) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
- (3) Antenna information provided by the applicant.
- (4) Channel List:
CH 01~CH 11 for 802.11b/g/n(HT20)
CH 03~CH 09 for 802.11b/g/n(HT40)

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	05	2432	09	2452
02	2417	06	2437	10	2457
03	2422	07	2442	11	2462
04	2427	08	2447		

1.3 Block Diagram Showing the Configuration of System Tested

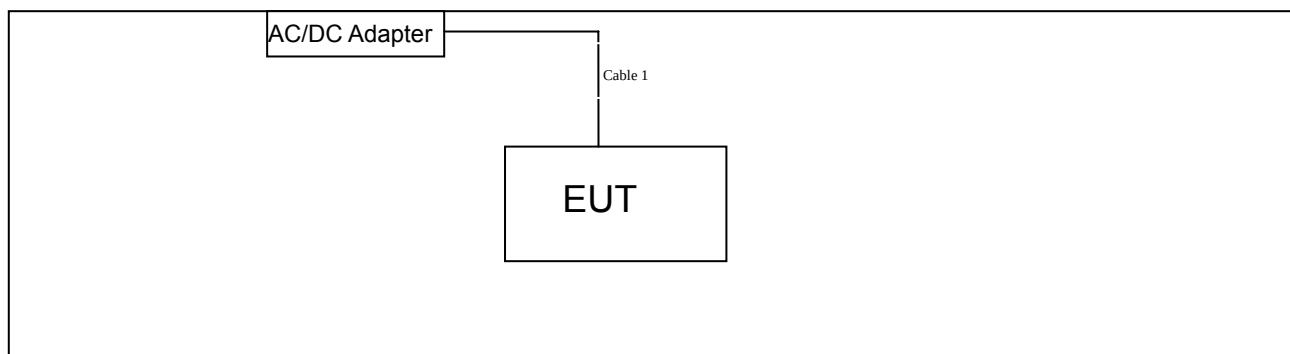TX Mode


1.4 Description of Support Units

Equipment Information				
Name	Model	S/N	Manufacturer	Used “√”
/	/	/	/	/
Cable Information				
Number	Shielded Type	Ferrite Core	Length	Note

Cable 1	NO	NO	1.0M	Accessories

1.5 Description of Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned follow was evaluated respectively.

For Conducted Test	
Final Test Mode	Description
Mode 1	AC Charging with TX B Mode

For Radiated Test	
Final Test Mode	Description
Mode 3	TX Mode B Mode Channel 01/06/11
Mode 4	TX Mode G Mode Channel 01/06/11
Mode 5	TX Mode N(HT20) Mode Channel 01/06/11
Mode 6	TX Mode N(HT40) Mode Channel 01/06/11

Note:

- (1) For all test, we have verified the construction and function in typical operation. And all the test modes were carried out with the EUT in transmitting operation in maximum power with all kinds of data rate.

According to ANSI C63.4 standards, the measurements are performed at the highest, middle, lowest available channels, and the worst case data rate as follows:

- 802.11b Mode: CCK (1 Mbps)
- 802.11g Mode: OFDM (6 Mbps)
- 802.11n (HT20) Mode: MCS 0 (6.5 Mbps)
- 802.11n (HT40) Mode: MCS 0 (13 Mbps)

- (2) During the testing procedure, the continuously transmitting with the maximum power mode was programmed by the customer.
- (3) The EUT is considered a mobile unit; in normal use it was positioned on X-plane. The worst case was found positioned on X-plane. Therefore only the test data of this X-plane was used for radiated emission measurement test.

1.6 Description of Test Software Setting

During testing channel& Power controlling software provided by the customer was used to

control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of WLAN.

Test Software Version	Test Program: Mediatek Connectivity Combo Tool. apk		
Channel	CH 01	CH 06	CH 11
IEEE 802.11b DSSS	DEF	DEF	DEF
IEEE 802.11g OFDM	DEF	DEF	DEF
IEEE 802.11n (HT20)	DEF	DEF	DEF
Channel	CH 03	CH 06	CH 09
IEEE 802.11n (HT40)	DEF	DEF	DEF

1.7 Test Facility

The testing was performed by the Shenzhen Toby Technology Co., Ltd., in their facilities located at:

1A/F., Bldg.6, Yusheng Industrial Zone, The National Road No.107 Xixiang Section 467, Xixiang, Bao'an, Shenzhen, Guangdong, China.

At the time of testing, the following bodies accredited the Laboratory:

CNAS (L5813)

The Laboratory has been accredited by CNAS to ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories for the competence in the field of testing. And the Registration No.: CNAS L5813.

FCC List No.: (811562)

The Laboratory is listed in the United States of American Federal Communications Commission (FCC), and the registration number is 811562.

IC Registration No.: (11950A-1)

The Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing. The site registration: Site# 11950A-1.

2. Test Summary

FCC Part 15 Subpart C(15.247)/RSS-210: 2010				
Standard Section		Test Item	Judgment	Remark
FCC	IC			
15.203	/	Antenna Requirement	PASS	N/A
15.207	RSS-GEN 7.2.4	Conducted Emission	PASS	N/A
15.205	RSS-GEN 7.2.2	Restricted Bands	PASS	N/A
15.247(a)(2)	RSS-210 A.8.2(a)	6dB Bandwidth	PASS	N/A
15.247(b)	RSS-210 A.8.4(4)	Peak Output Power	PASS	N/A
15.247(e)	RSS-210 A.8.2(b)	Power Spectral Density	PASS	N/A
15.247(d)	RSS-210 Annex 8 (A8.5)	Transmitter Radiated Spurious Emission	PASS	N/A
15.247(d)	RSS-210 Annex 8 (A8.5)	Antenna Conducted Spurious Emission	PASS	N/A
Note: "/" for no requirement for this test item. N/A is an abbreviation for Not Applicable.				

3. Conducted Emission Test

3.1 Test Standard and Limit

3.1.1 Test Standard

FCC Part 15.207

3.1.2 Test Limit

Conducted Emission Test Limit

Frequency	Maximum RF Line Voltage (dB μ V)	
	Quasi-peak Level	Average Level
150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
500kHz~5MHz	56	46
5MHz~30MHz	60	50


Notes:

(1) *Decreasing linearly with logarithm of the frequency.

(2) The lower limit shall apply at the transition frequencies.

(3) The limit decrease in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

3.2 Test Setup

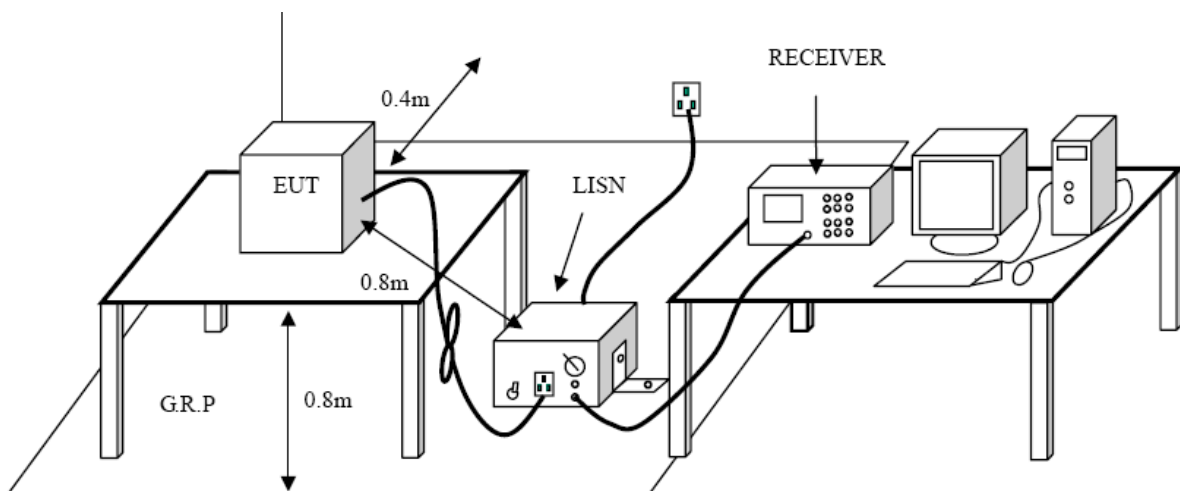

3.3 Test Procedure

The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.

Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.

I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.

LISN at least 80 cm from nearest part of EUT chassis.

The bandwidth of EMI test receiver is set at 9kHz, and the test frequency band is from 0.15MHz to 30MHz.

3.4 Test Equipment Used

Description	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due Date
EMI Test Receiver	ROHDE& SCHWARZ	ESCI	100321	2013-08-10	2014-08-09
50ΩCoaxial Switch	Anritsu	MP59B	X10321	2013-08-10	2014-08-09
L.I.S.N	Rohde & Schwarz	ENV216	101131	2013-08-10	2014-08-09
L.I.S.N	SCHWARZBECK	NNBL 8226-2	8226-2/164	2013-08-10	2014-08-09


3.5 EUT Operating Mode

Please refer to the description of test mode.

3.6 Test Data

Please see the next page.


EUT:	MID	Model Name :	MID713-L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Terminal:	Line		
Test Mode:	AC Charging with TX B Mode		
Remark:	Only worse case is reported		

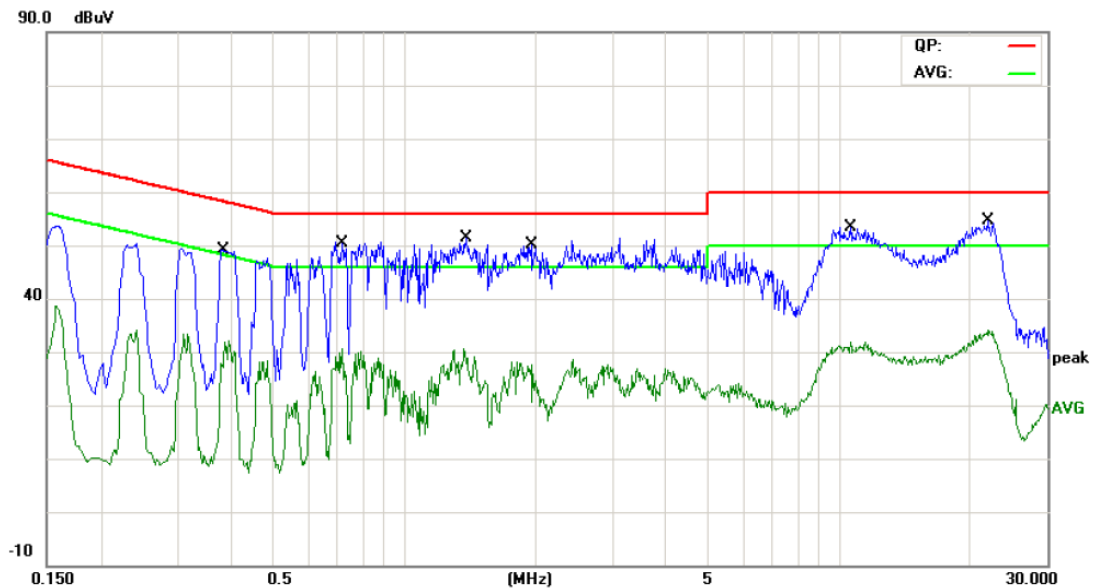

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.3820	36.34	10.06	46.40	58.23	-11.83	QP	
2		0.3820	18.97	10.06	29.03	48.23	-19.20	AVG	
3		0.7180	33.65	10.03	43.68	56.00	-12.32	QP	
4		0.7180	17.82	10.03	27.85	46.00	-18.15	AVG	
5	*	1.3820	35.56	10.12	45.68	56.00	-10.32	QP	
6		1.3820	18.73	10.12	28.85	46.00	-17.15	AVG	
7		1.9540	33.24	10.06	43.30	56.00	-12.70	QP	
8		1.9540	13.92	10.06	23.98	46.00	-22.02	AVG	
9		10.5860	35.32	10.15	45.47	60.00	-14.53	QP	
10		10.5860	18.40	10.15	28.55	50.00	-21.45	AVG	
11		21.8380	37.55	10.06	47.61	60.00	-12.39	QP	
12		21.8380	21.05	10.06	31.11	50.00	-18.89	AVG	

Emission Level= Read Level+ Correct Factor

EUT:	MID	Model Name :	MID713-L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Terminal:	Neutral		
Test Mode:	AC Charging with TX B Mode		
Remark:	Only worse case is reported		

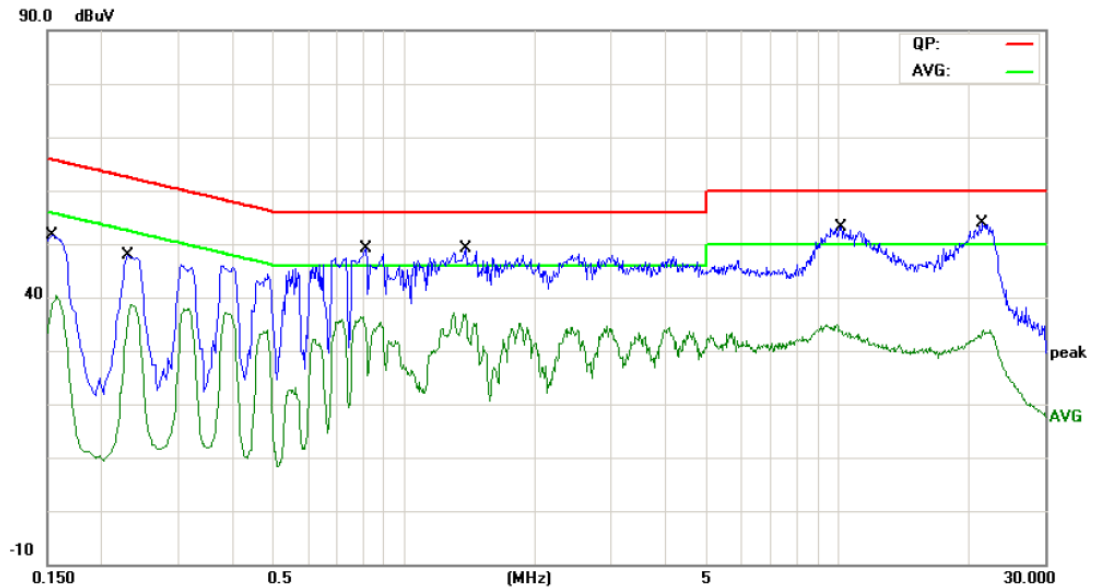

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1539	37.30	10.12	47.42	65.78	-18.36	QP	
2		0.1539	27.57	10.12	37.69	55.78	-18.09	AVG	
3		0.2300	33.73	10.11	43.84	62.45	-18.61	QP	
4		0.2300	25.72	10.11	35.83	52.45	-16.62	AVG	
5	*	0.8139	37.31	10.07	47.38	56.00	-8.62	QP	
6		0.8139	23.05	10.07	33.12	46.00	-12.88	AVG	
7		1.3820	36.01	10.12	46.13	56.00	-9.87	QP	
8		1.3820	26.17	10.12	36.29	46.00	-9.71	AVG	
9		10.1580	34.37	10.16	44.53	60.00	-15.47	QP	
10		10.1580	21.67	10.16	31.83	50.00	-18.17	AVG	
11		21.4980	36.28	10.06	46.34	60.00	-13.66	QP	
12		21.4980	20.61	10.06	30.67	50.00	-19.33	AVG	

Emission Level= Read Level+ Correct Factor

4. Radiated Emission Test

4.1 Test Standard and Limit

4.1.1 Test Standard

FCC Part 15.209

4.1.2 Test Limit

Radiated Emission Limits (9kHz~1000MHz)

Frequency (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3


Radiated Emission Limit (Above 1000MHz)

Frequency (MHz)	Class A (dBuV/m)(at 3 M)		Class B (dBuV/m)(at 3 M)	
	Peak	Average	Peak	Average
Above 1000	80	60	74	54


Note:

- (1) The tighter limit applies at the band edges.
- (2) Emission Level(dBuV/m)=20log Emission Level(uV/m)


4.2 Test Setup

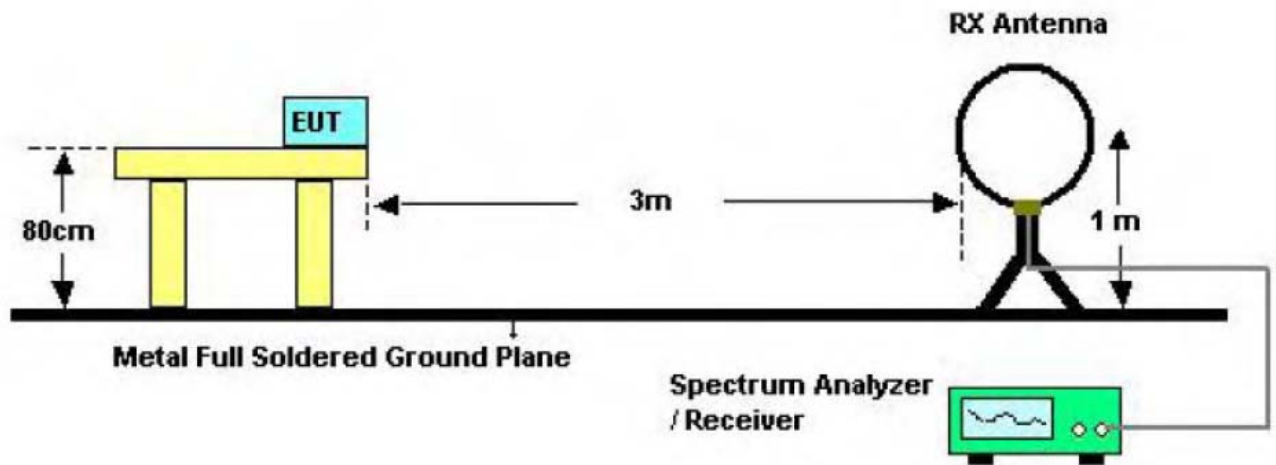

Below 30MHz Test Setup

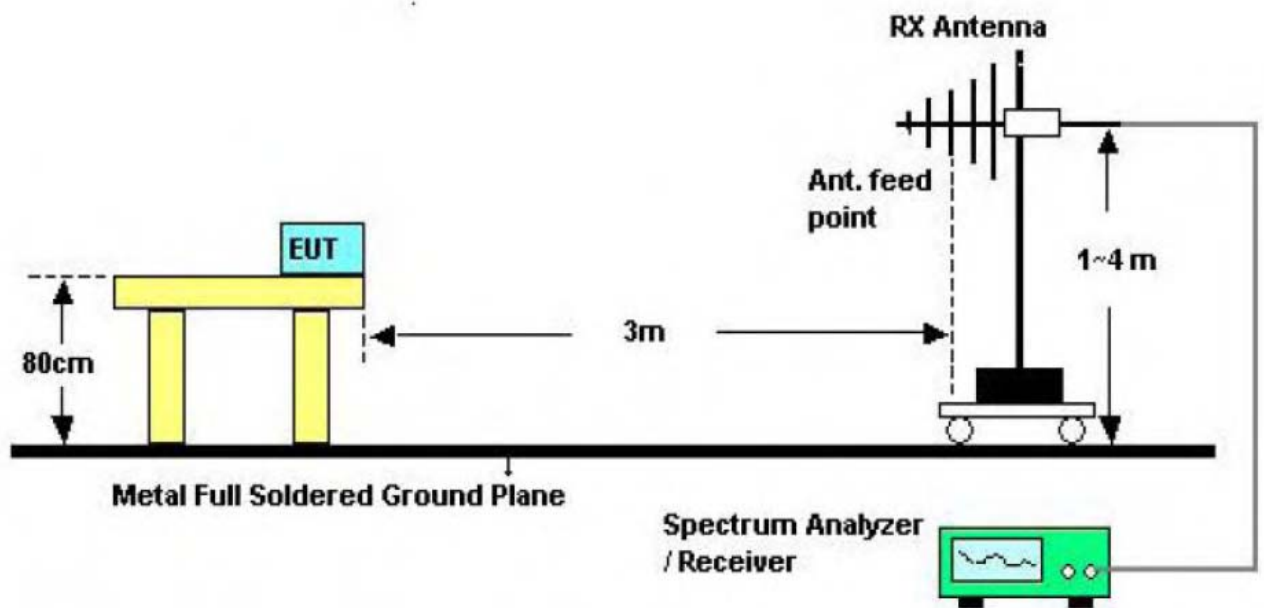

Below 1000MHz Test Setup

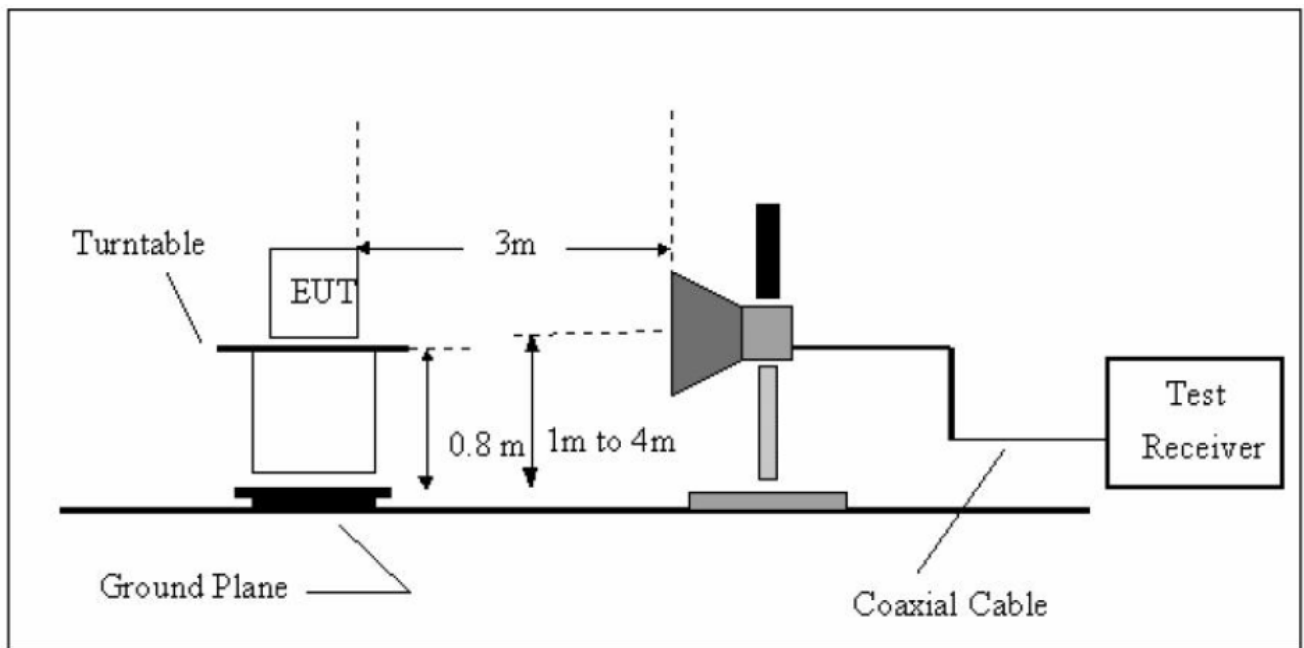

Above 1GHz Test Setup

4.3 Test Procedure

- (1) The measuring distance of 3m shall be used for measurements at frequency up to 1GHz and above 1 GHz. The EUT was placed on a rotating 0.8m high above the ground, the table was rotated 360 degrees to determine the position of the highest radiation.
- (2) The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set to make measurement.
- (3) The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- (4) If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit Bellow 1 GHz, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed. But the Peak Value and average value both need to comply with applicable limit above 1 GHz.
- (5) Testing frequency range below 1GHz the measuring instrument use VBW=120 kHz with Quasi-peak detection.
- (6) Testing frequency range above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.
- (7) For the actual test configuration, please see the test setup photo.

4.4 EUT Operating Condition

The Equipment Under Test was set to Continual Transmitting in maximum power.

4.5 Test Equipment


Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
Spectrum Analyzer	Agilent	E4407B	MY45106456	Mar. 20, 2014	Mar. 19, 2015
Spectrum Analyzer	Rohde & Schwarz	FSP30	DE25181	Aug. 10, 2013	Aug.09, 2014
EMI Test Receiver	Rohde & Schwarz	ESCI	101165	Aug. 10, 2013	Aug.09, 2014
Bilog Antenna	ETS-LINDGREN	3142E	00117537	Mar. 07, 2014	Mar.06, 2015
Bilog Antenna	ETS-LINDGREN	3142E	00117542	Mar. 07, 2014	Mar.06, 2015
Horn Antenna	ETS-LINDGREN	3117	00143207	Mar. 07, 2014	Mar.06, 2015
Horn Antenna	ETS-LINDGREN	3117	00143209	Mar. 07, 2014	Mar.06, 2015
Pre-amplifier	HP	11909A	185903	Mar. 07, 2014	Mar.06, 2015
Pre-amplifier	HP	8447B	3008A00849	Mar. 07, 2014	Mar.06, 2015
Cable	HUBER+SUHNER	100	SUCOFLEX	Mar. 07, 2014	Mar.06, 2015
Signal Generator	Rohde & Schwarz	SML03	IKW682-054	Feb. 11, 2014	Feb.10, 2015
Positioning Controller	ETS-LINDGREN	2090	N/A	N/A	N/A

4.6 Test Data

Remark: During testing above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.

Test data please refer the following pages.


EUT:	MID	Model:	MID713-L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX B Mode 2412MHz		
Remark:	Only worse case is reported		

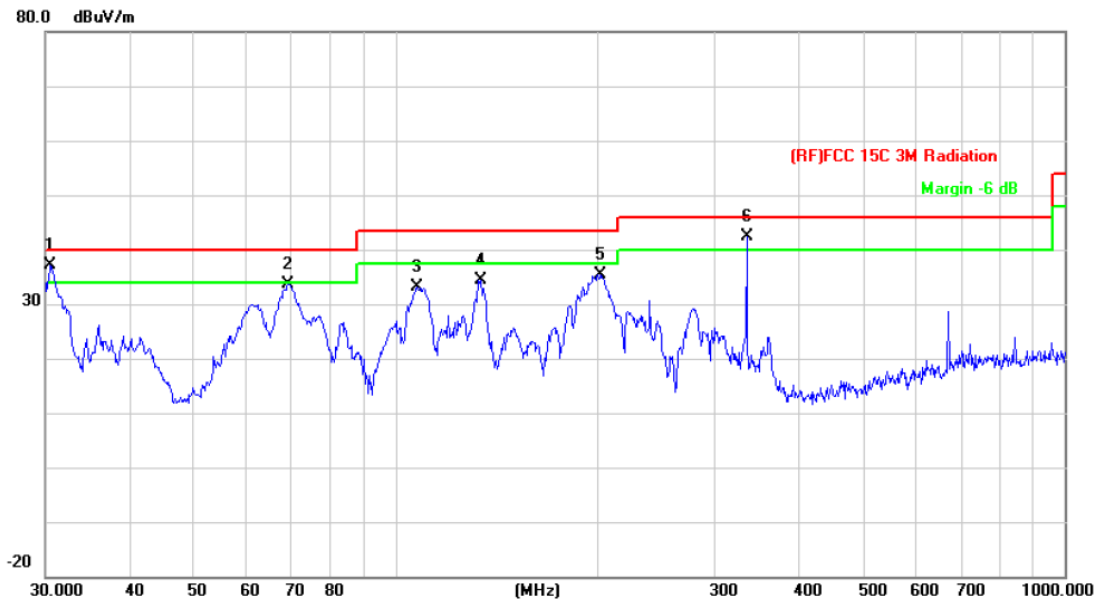

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	30.5305	51.39	-14.28	37.11	40.00	-2.89	peak
2		69.1140	57.31	-23.69	33.62	40.00	-6.38	peak
3		107.5100	54.93	-21.86	33.07	43.50	-10.43	peak
4		134.0882	56.48	-22.09	34.39	43.50	-9.11	peak
5		202.8103	55.62	-20.27	35.35	43.50	-8.15	peak
6	!	334.8589	57.87	-15.54	42.33	46.00	-3.67	peak

Emission Level= Read Level+ Correct Factor


EUT:	MID	Model:	MID713-L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Vertical		
Test Mode:	TX B Mode 2412MHz		
Remark:	Only worse case is reported		

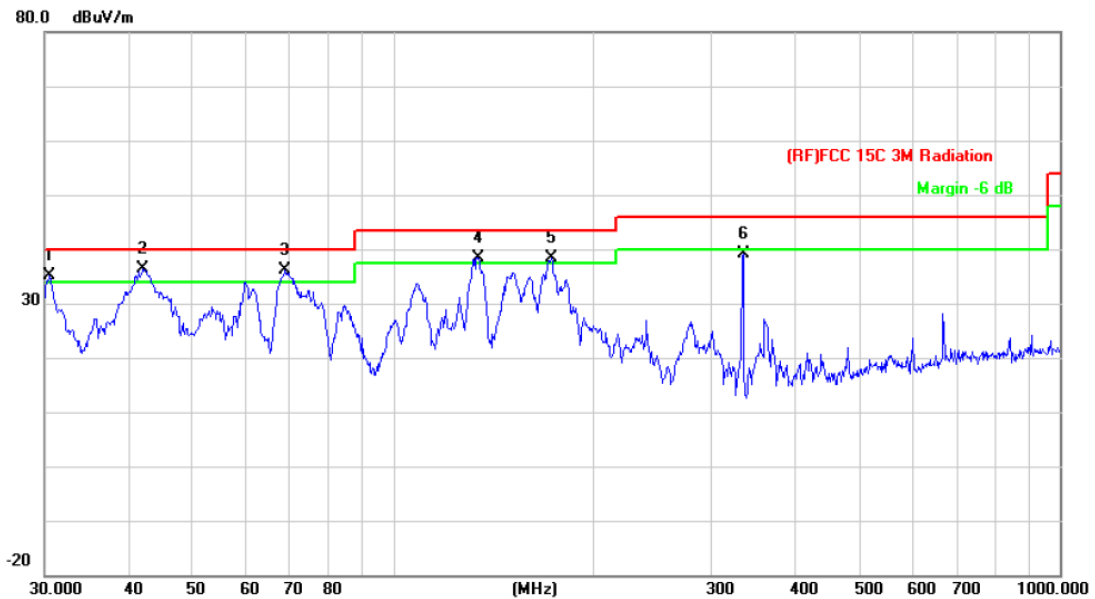

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	!	30.5304	49.32	-14.28	35.04	40.00	-4.96	peak
2	*	42.1542	57.51	-21.07	36.44	40.00	-3.56	peak
3	!	68.8721	59.74	-23.71	36.03	40.00	-3.97	peak
4	!	134.0882	60.51	-22.09	38.42	43.50	-5.08	peak
5	!	172.5988	59.48	-21.02	38.46	43.50	-5.04	peak
6		334.8589	54.55	-15.54	39.01	46.00	-6.99	peak

Emission Level= Read Level+ Correct Factor


EUT:	MID	Model:	MID713-L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX B Mode 2412MHz		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

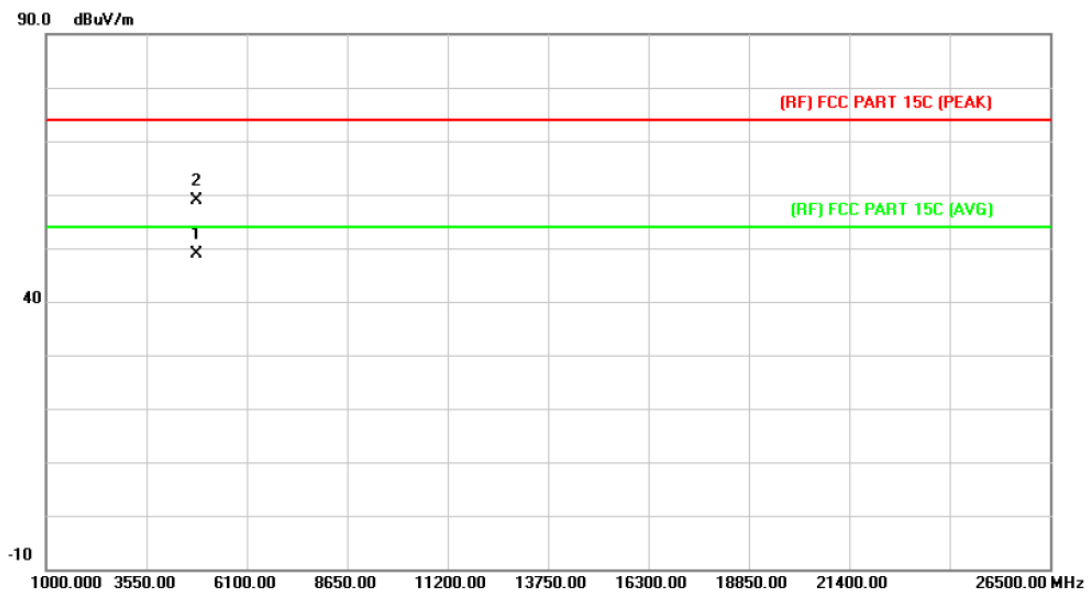

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	4824.030	35.25	13.56	48.81	54.00	-5.19	AVG
2		4824.070	45.39	13.56	58.95	74.00	-15.05	peak

Emission Level= Read Level+ Correct Factor


EUT:	MID	Model:	MID713-L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Vertical		
Test Mode:	TX B Mode 2412MHz		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

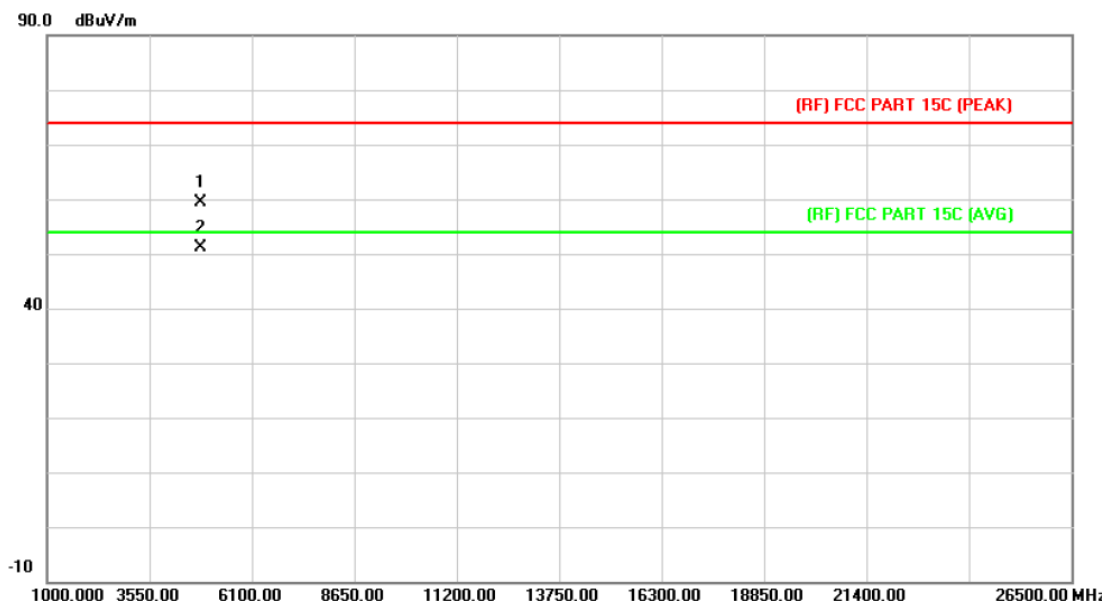

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		4823.826	45.92	13.56	59.48	74.00	-14.52	peak
2	*	4823.969	37.67	13.56	51.23	54.00	-2.77	AVG

Emission Level= Read Level+ Correct Factor


EUT:	MID	Model:	MID713-L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX B Mode 2437MHz		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

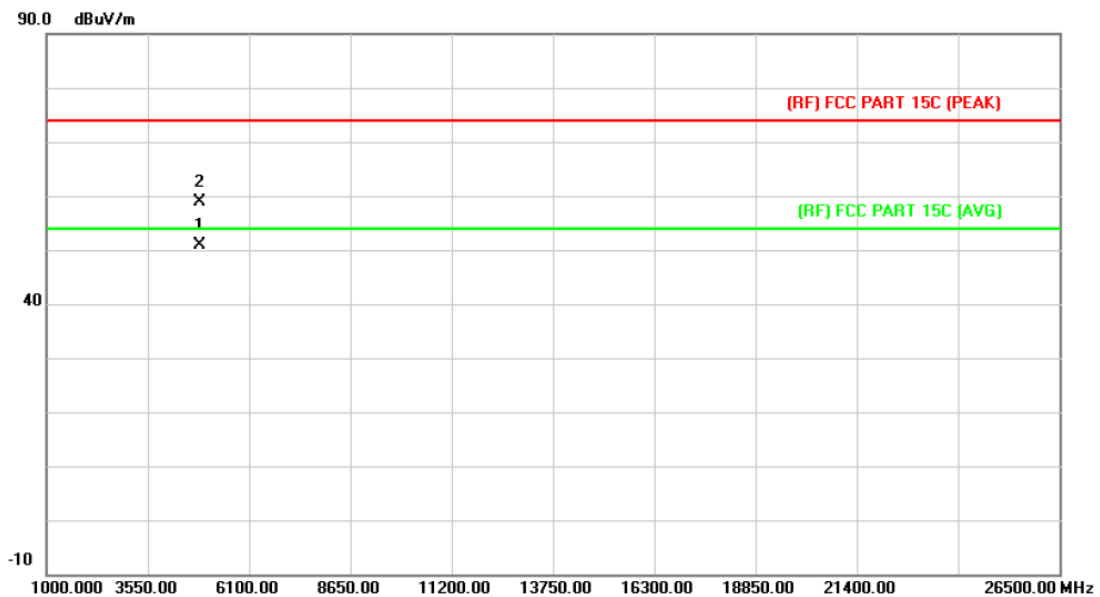

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	4873.990	36.90	13.86	50.76	54.00	-3.24	AVG
2		4874.011	45.01	13.86	58.87	74.00	-15.13	peak

Emission Level= Read Level+ Correct Factor


EUT:	MID	Model:	MID713-L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Vertical		
Test Mode:	TX B Mode 2437MHz		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

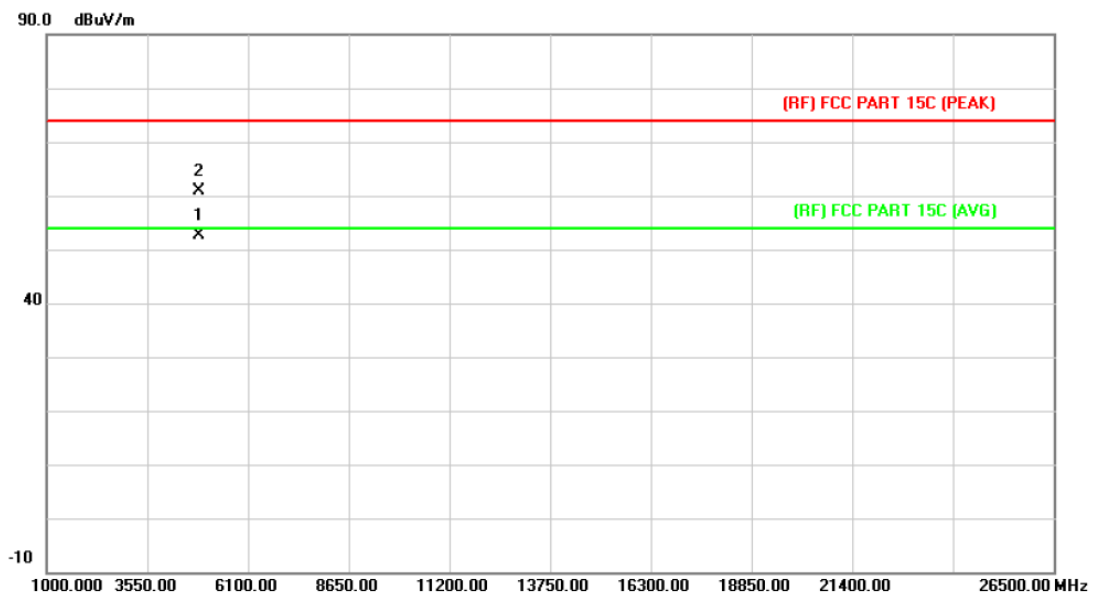

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	4874.011	38.75	13.86	52.61	54.00	-1.39	AVG
2		4874.099	47.13	13.86	60.99	74.00	-13.01	peak

Emission Level= Read Level+ Correct Factor


EUT:	MID	Model:	MID713-L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX B Mode 2462MHz		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

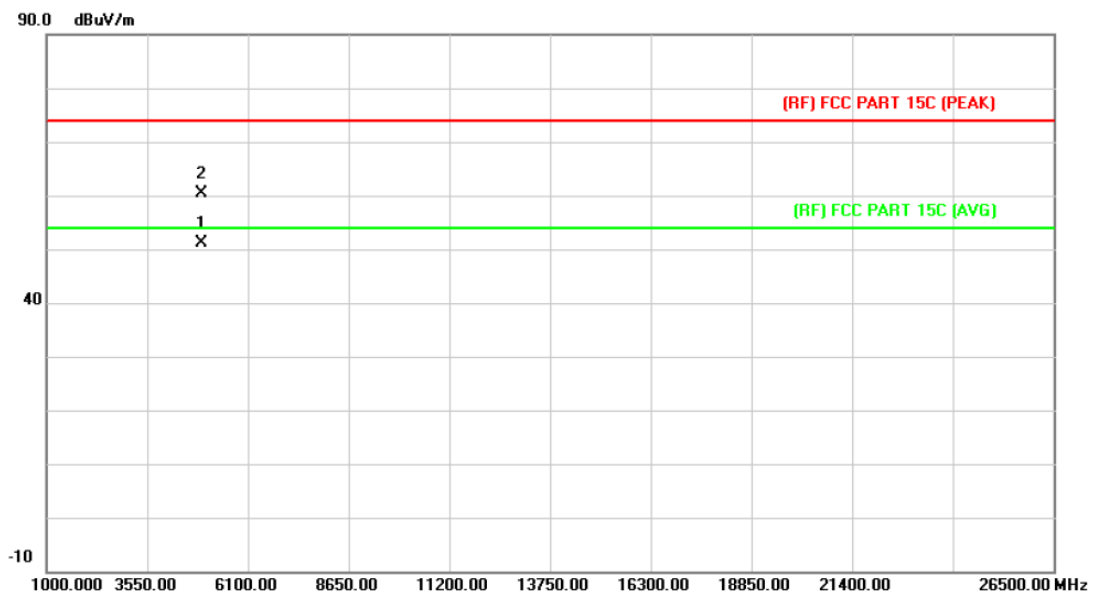

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	4924.030	36.91	14.15	51.06	54.00	-2.94	AVG
2		4924.034	46.19	14.15	60.34	74.00	-13.66	peak

Emission Level= Read Level+ Correct Factor


EUT:	MID	Model:	MID713-L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Vertical		
Test Mode:	TX B Mode 2462MHz		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

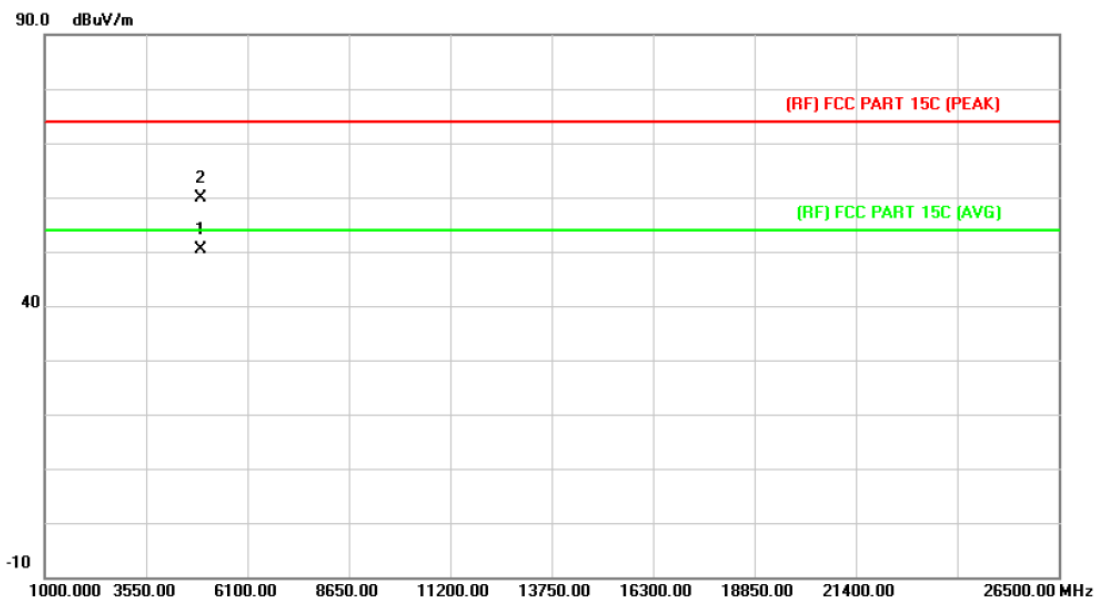

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	4923.990	36.13	14.15	50.28	54.00	-3.72	AVG
2		4924.030	45.69	14.15	59.84	74.00	-14.16	peak

Emission Level= Read Level+ Correct Factor


EUT:	MID	Model:	MID713-L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX G Mode 2412MHz		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

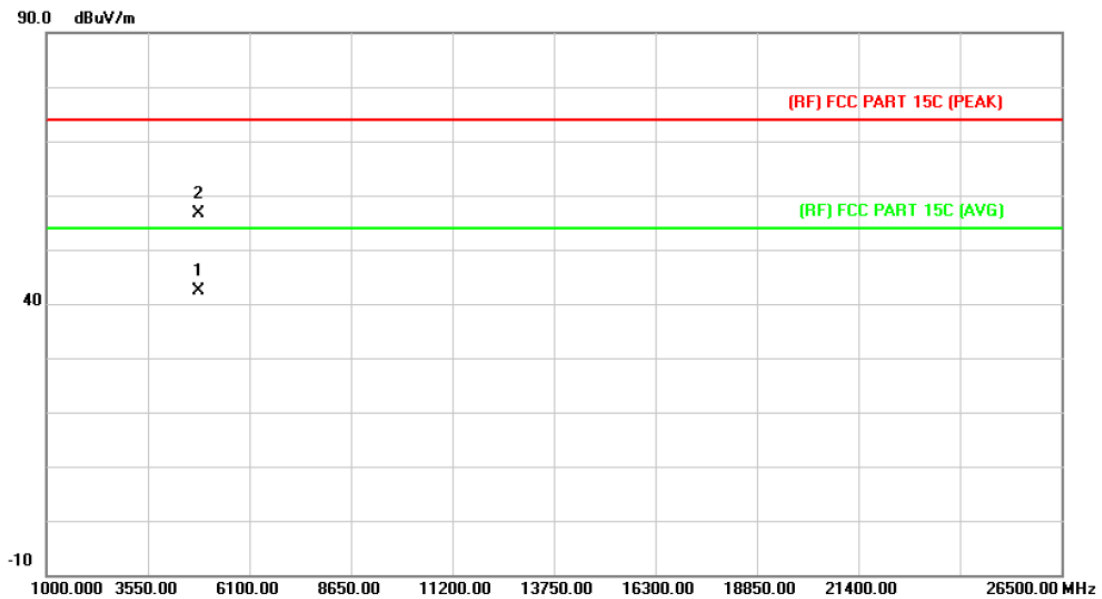

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	4823.500	28.70	13.56	42.26	54.00	-11.74	AVG
2		4824.420	42.99	13.56	56.55	74.00	-17.45	peak

Emission Level= Read Level+ Correct Factor


EUT:	MID	Model:	MID713-L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Vertical		
Test Mode:	TX G Mode 2412MHz		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

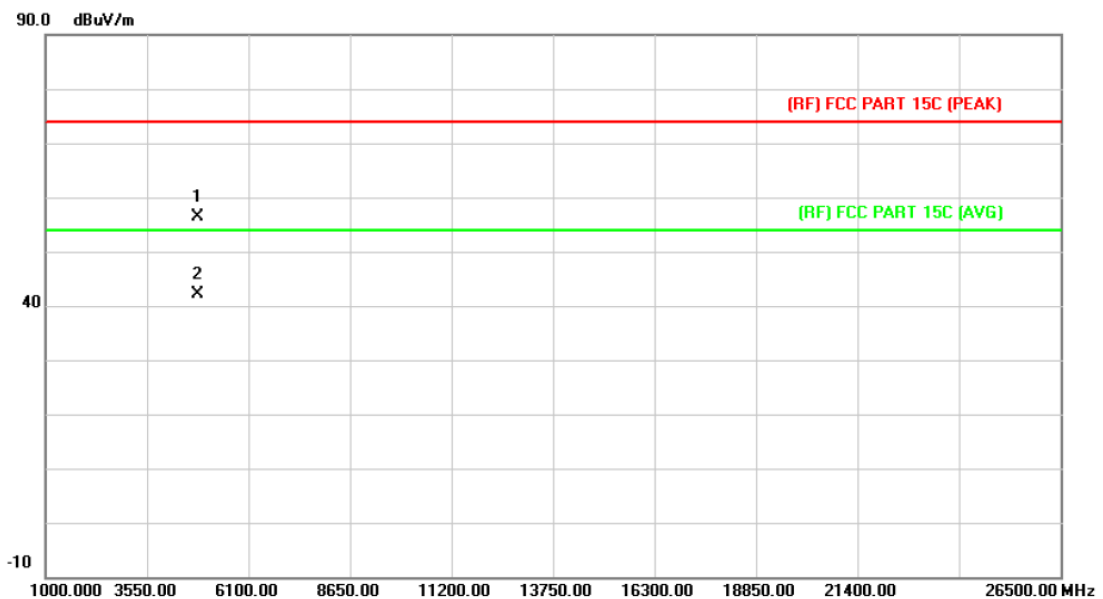

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		4823.962	42.84	13.56	56.40	74.00	-17.60	peak
2	*	4823.962	28.61	13.56	42.17	54.00	-11.83	AVG

Emission Level= Read Level+ Correct Factor


EUT:	MID	Model:	MID713-L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX G Mode 2437MHz		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

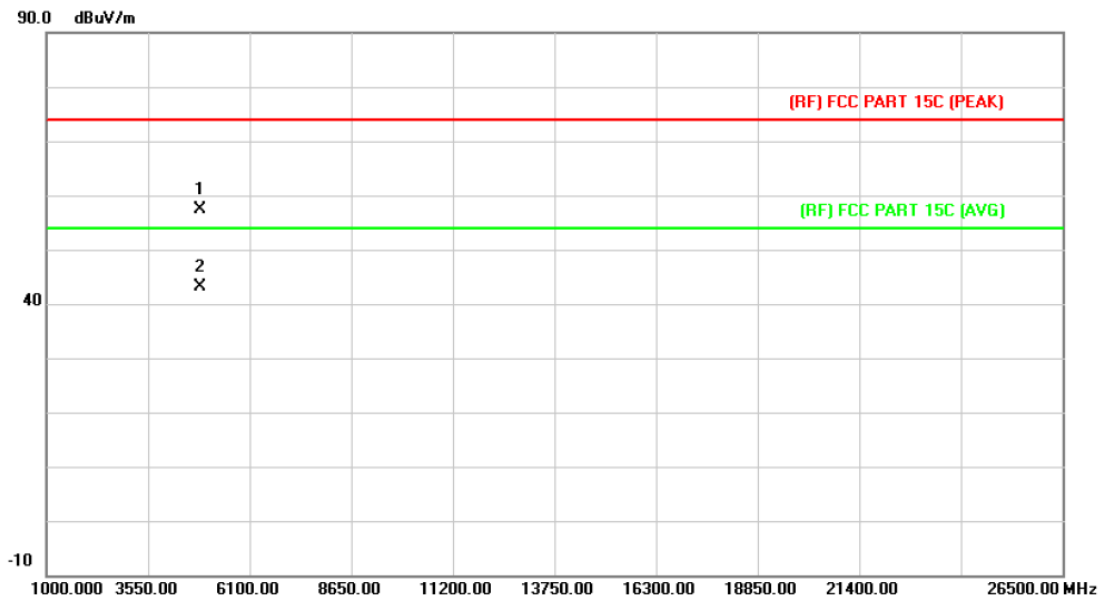

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		4873.975	43.61	13.86	57.47	74.00	-16.53	peak
2	*	4874.092	29.26	13.86	43.12	54.00	-10.88	AVG

Emission Level= Read Level+ Correct Factor


EUT:	MID	Model:	MID713-L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Vertical		
Test Mode:	TX G Mode 2437MHz		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

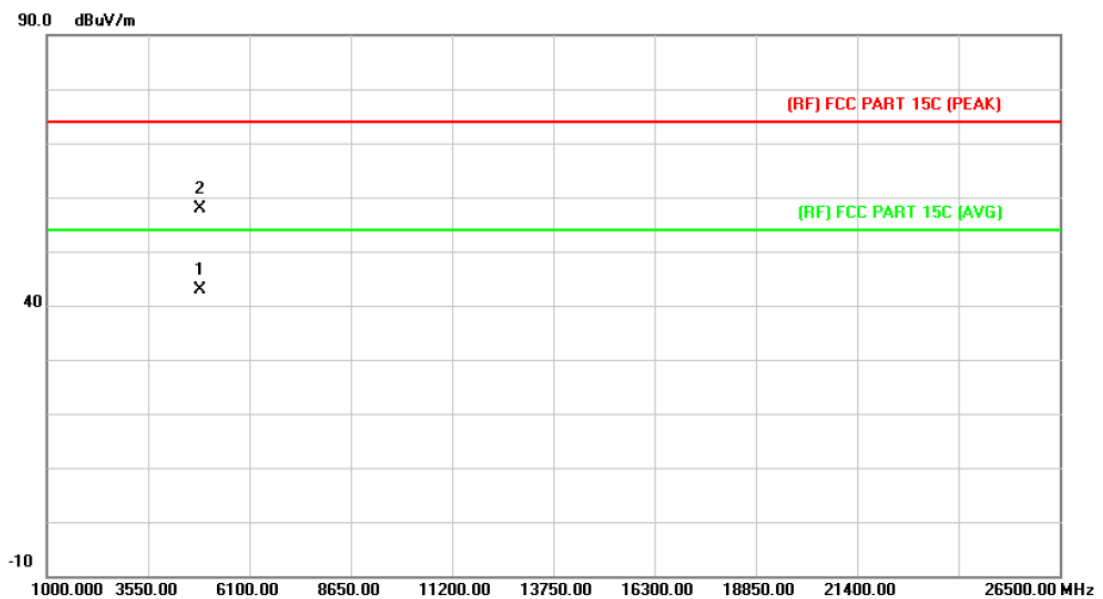

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	4873.541	29.02	13.86	42.88	54.00	-11.12	AVG
2		4873.803	44.03	13.86	57.89	74.00	-16.11	peak

Emission Level= Read Level+ Correct Factor


EUT:	MID	Model:	MID713-L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX G Mode 2462MHz		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

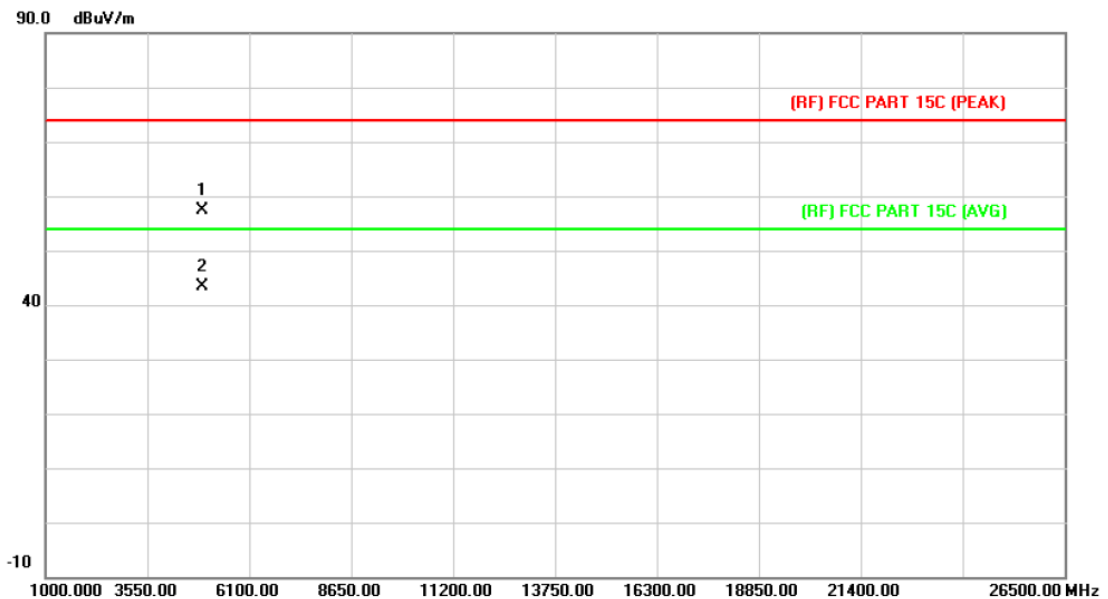

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		4923.933	43.20	14.15	57.35	74.00	-16.65	peak
2	*	4924.092	29.15	14.15	43.30	54.00	-10.70	AVG

Emission Level= Read Level+ Correct Factor


EUT:	MID	Model:	MID713-L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Vertical		
Test Mode:	TX G Mode 2462MHz		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

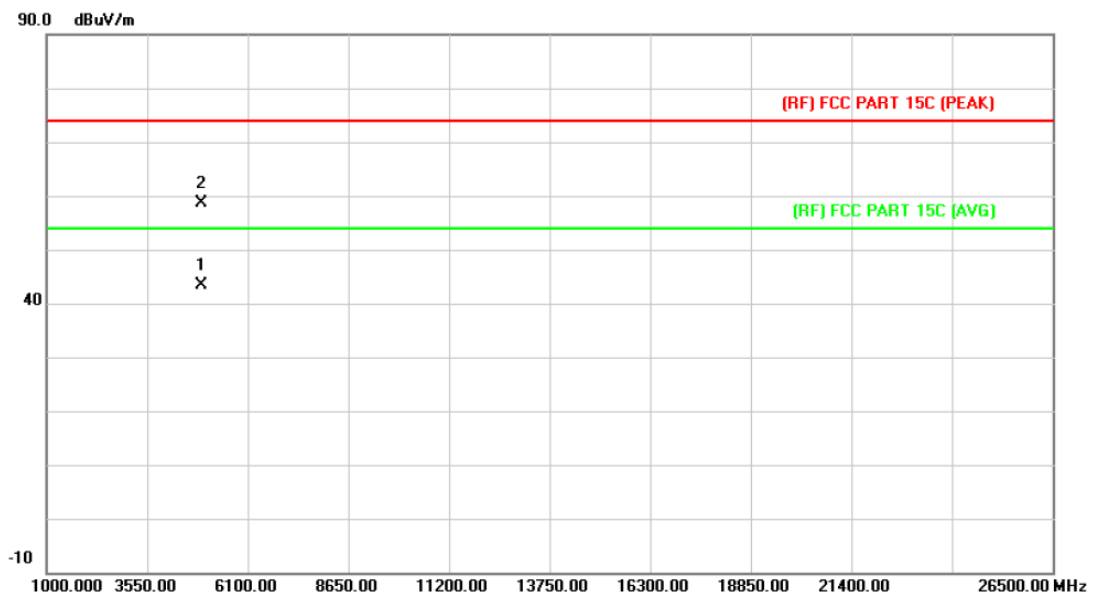

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	4924.235	29.16	14.15	43.31	54.00	-10.69	AVG
2		4924.338	44.54	14.15	58.69	74.00	-15.31	peak

Emission Level= Read Level+ Correct Factor


EUT:	MID	Model:	MID713-L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX N(HT20) Mode 2412MHz		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

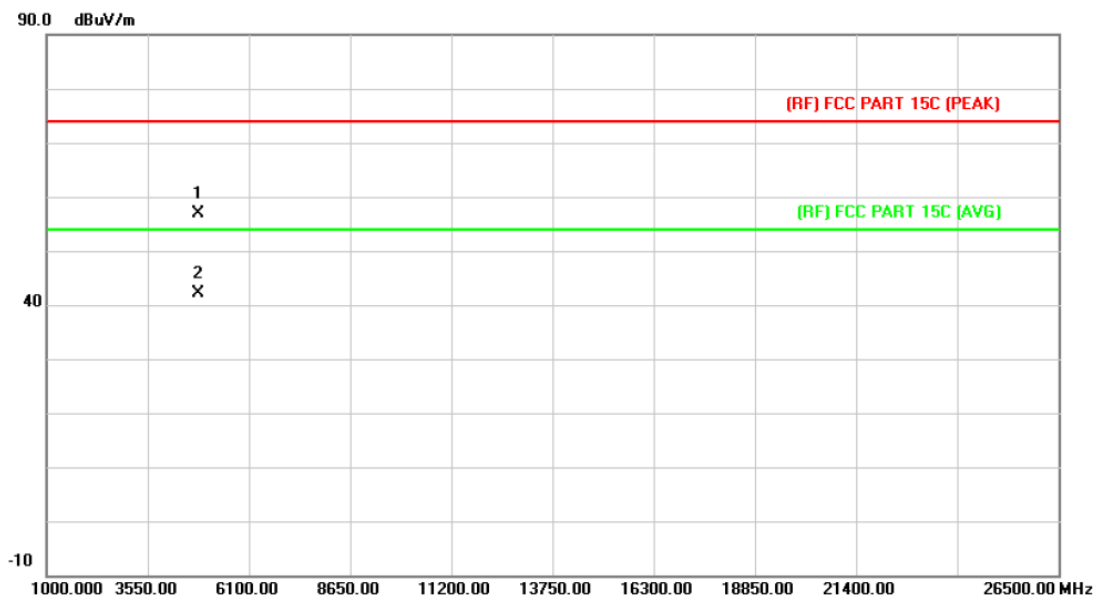

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		4823.817	43.43	13.56	56.99	74.00	-17.01	peak
2	*	4824.459	28.67	13.56	42.23	54.00	-11.77	AVG

Emission Level= Read Level+ Correct Factor


EUT:	MID	Model:	MID713-L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Vertical		
Test Mode:	TX N(HT20) Mode 2412MHz		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

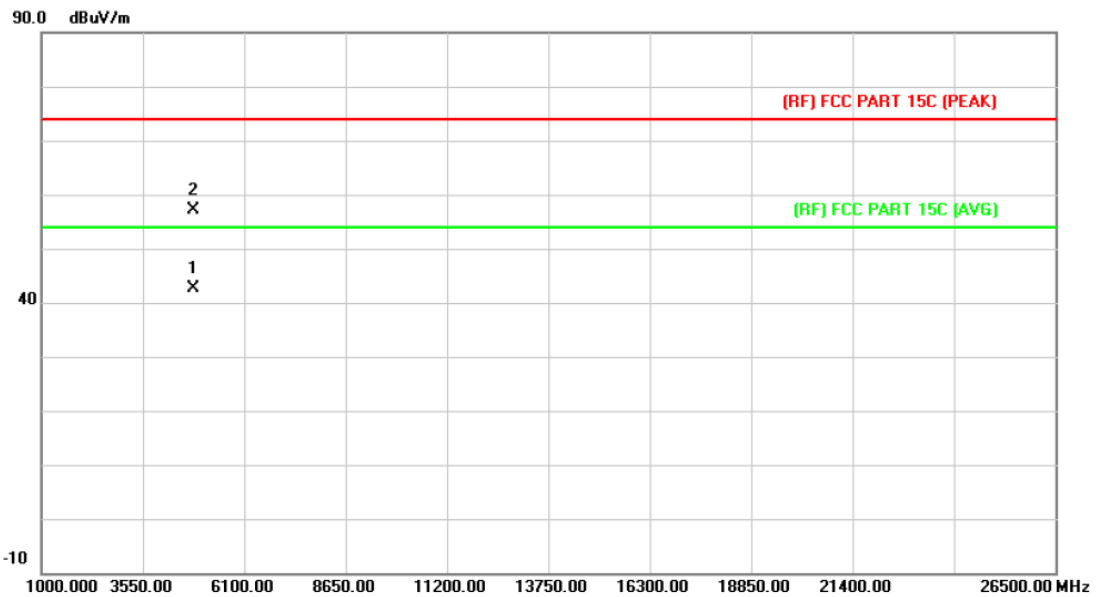

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	4823.602	29.01	13.56	42.57	54.00	-11.43	AVG
2		4824.361	43.50	13.56	57.06	74.00	-16.94	peak

Emission Level= Read Level+ Correct Factor


EUT:	MID	Model:	MID713-L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX N(HT20) Mode 2437MHz		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

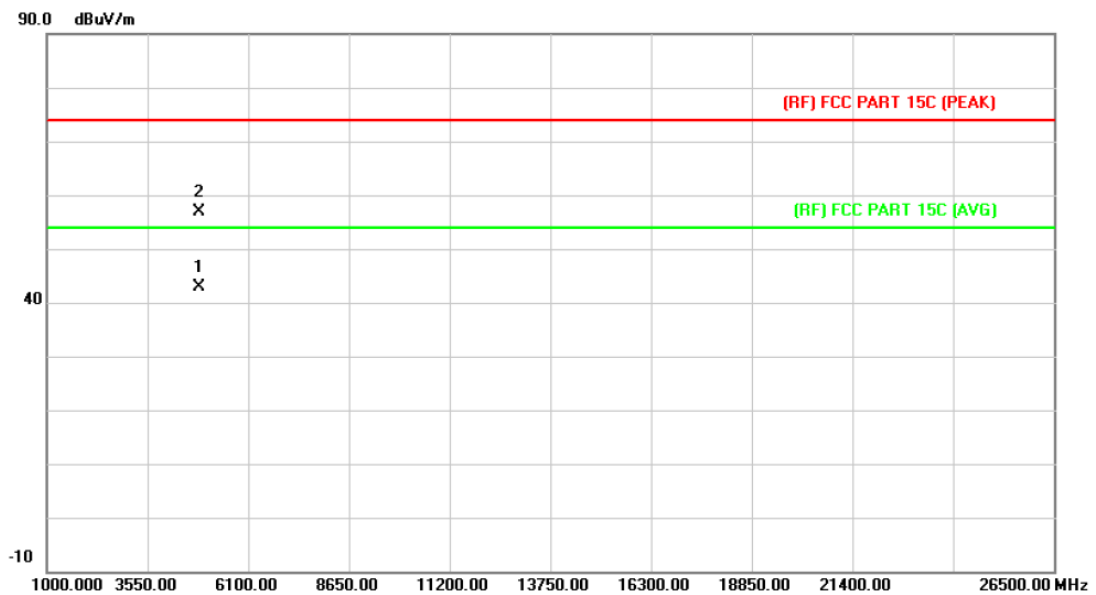

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	4873.663	29.01	13.86	42.87	54.00	-11.13	AVG
2		4874.082	42.98	13.86	56.84	74.00	-17.16	peak

Emission Level= Read Level+ Correct Factor


EUT:	MID	Model:	MID713-L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Vertical		
Test Mode:	TX N(HT20) Mode 2437MHz		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

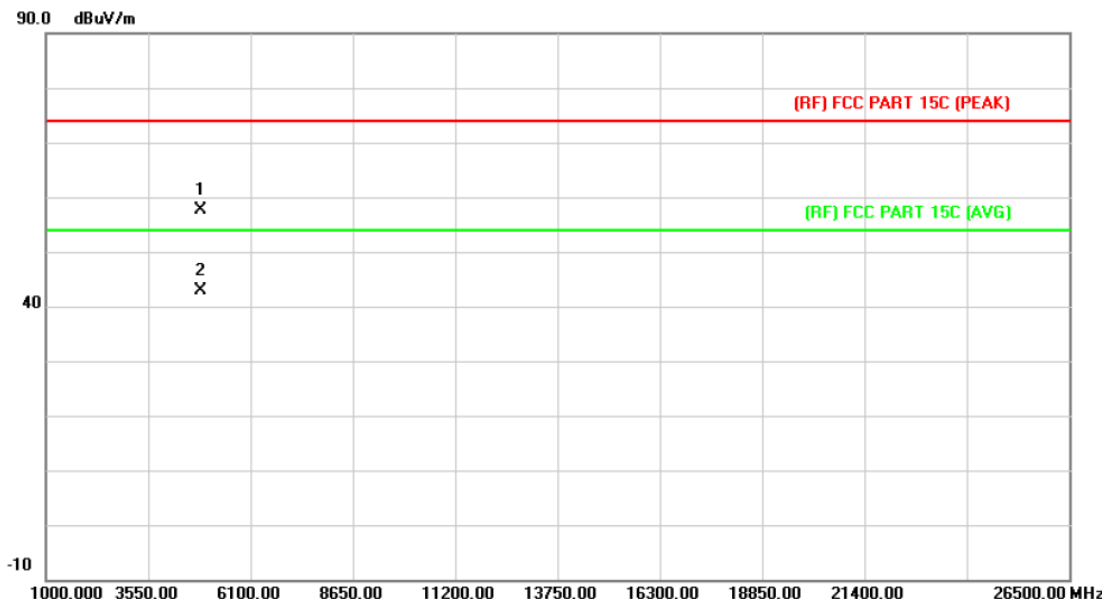

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		4873.697	43.65	13.86	57.51	74.00	-16.49	peak
2	*	4873.908	29.00	13.86	42.86	54.00	-11.14	AVG

Emission Level= Read Level+ Correct Factor


EUT:	MID	Model:	MID713-L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX N(HT20) Mode 2462MHz		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

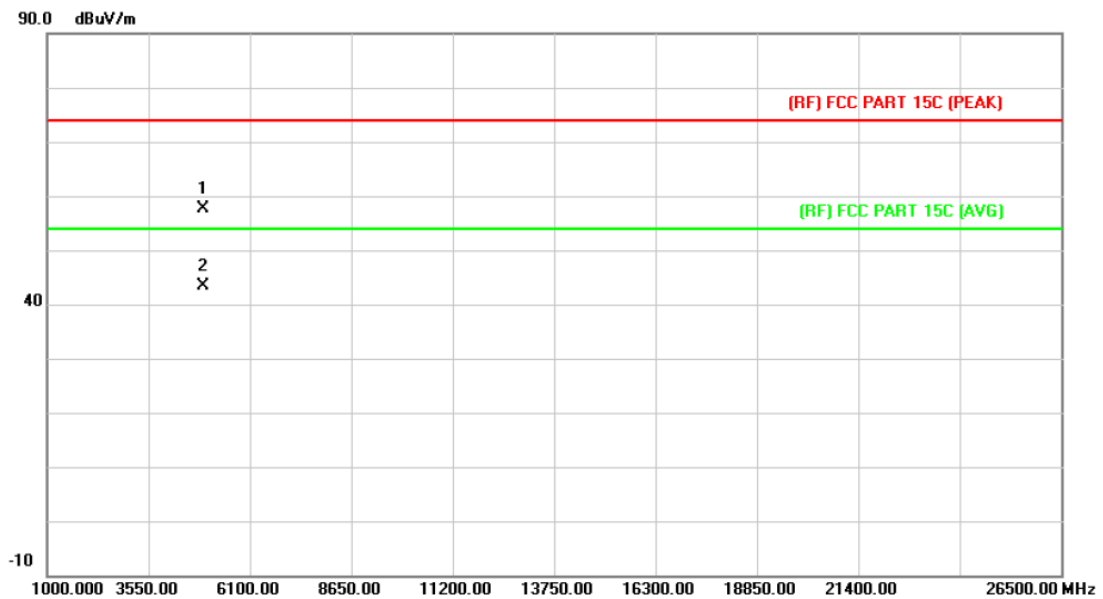

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		4923.565	43.58	14.15	57.73	74.00	-16.27	peak
2	*	4923.745	29.11	14.15	43.26	54.00	-10.74	AVG

Emission Level= Read Level+ Correct Factor


EUT:	MID	Model:	MID713-L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Vertical		
Test Mode:	TX N(HT20) Mode 2462MHz		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

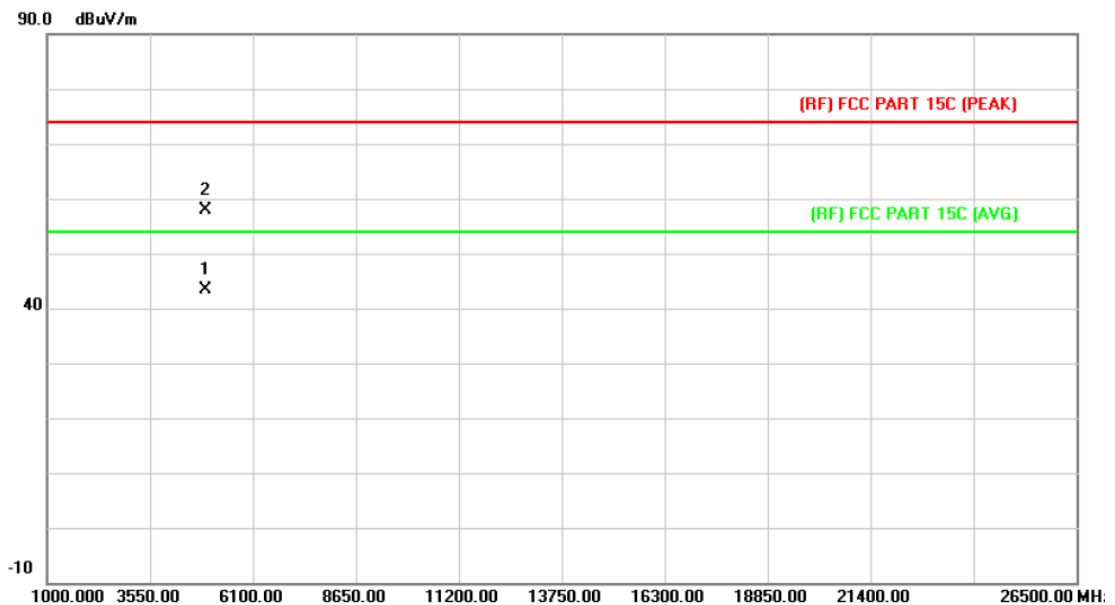

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	4923.724	29.12	14.15	43.27	54.00	-10.73	AVG
2		4923.922	43.66	14.15	57.81	74.00	-16.19	peak

Emission Level= Read Level+ Correct Factor


EUT:	MID	Model:	MID713-L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX N(HT40) Mode 2422MHz		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

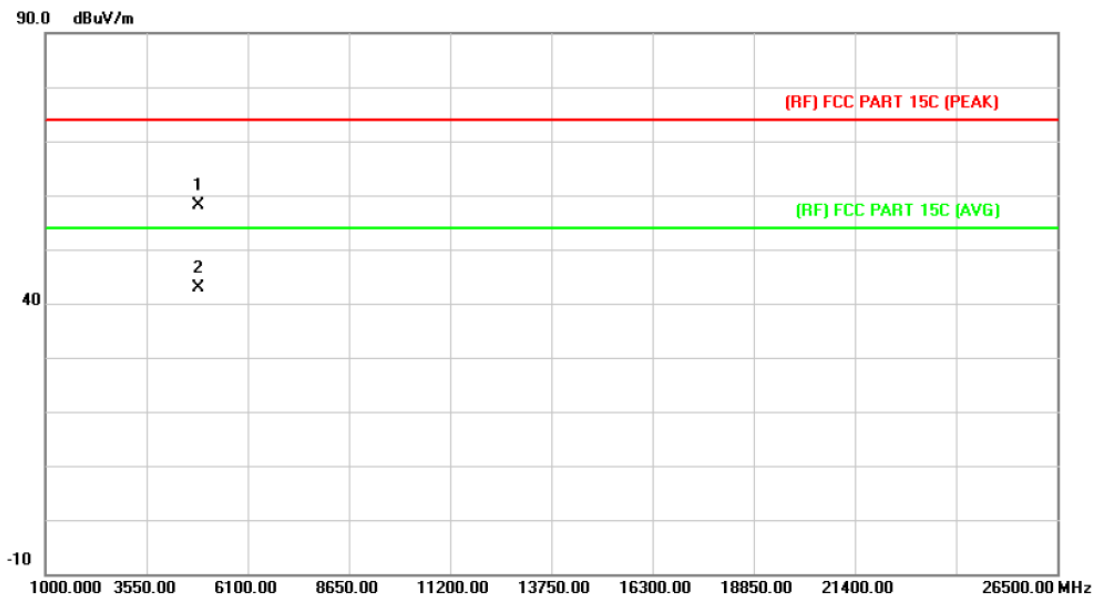

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		4843.897	44.37	13.68	58.05	74.00	-15.95	peak
2	*	4844.398	29.29	13.68	42.97	54.00	-11.03	AVG

Emission Level= Read Level+ Correct Factor


EUT:	MID	Model:	MID713-L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Vertical		
Test Mode:	TX N(HT40) Mode 2422MHz		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

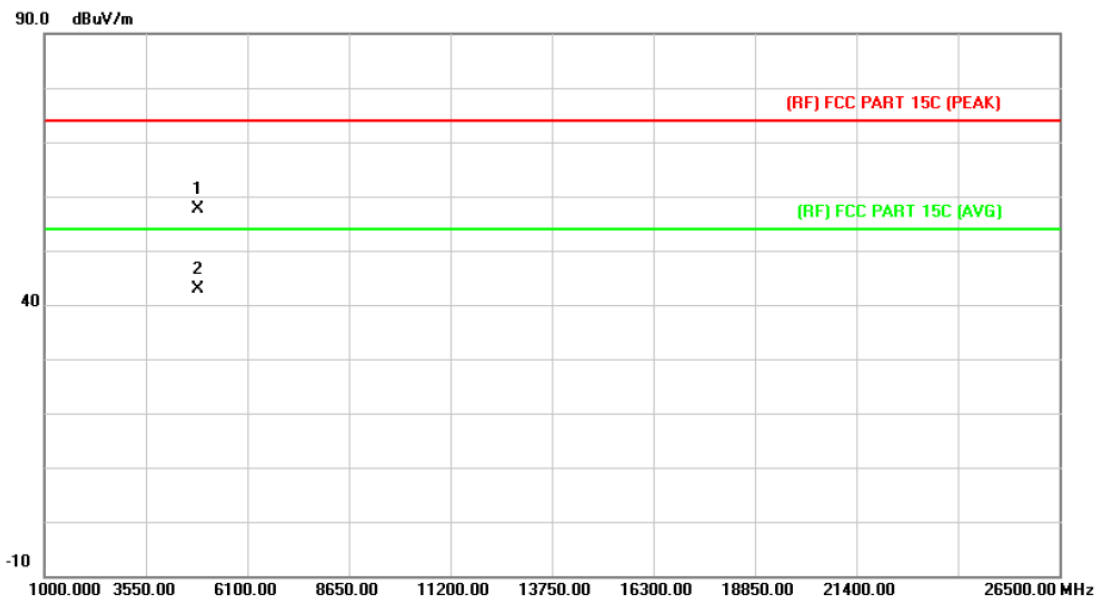

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		4843.798	44.03	13.68	57.71	74.00	-16.29	peak
2	*	4843.827	29.25	13.68	42.93	54.00	-11.07	AVG

Emission Level= Read Level+ Correct Factor


EUT:	MID	Model:	MID713-L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX N(HT40) Mode 2437MHz		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

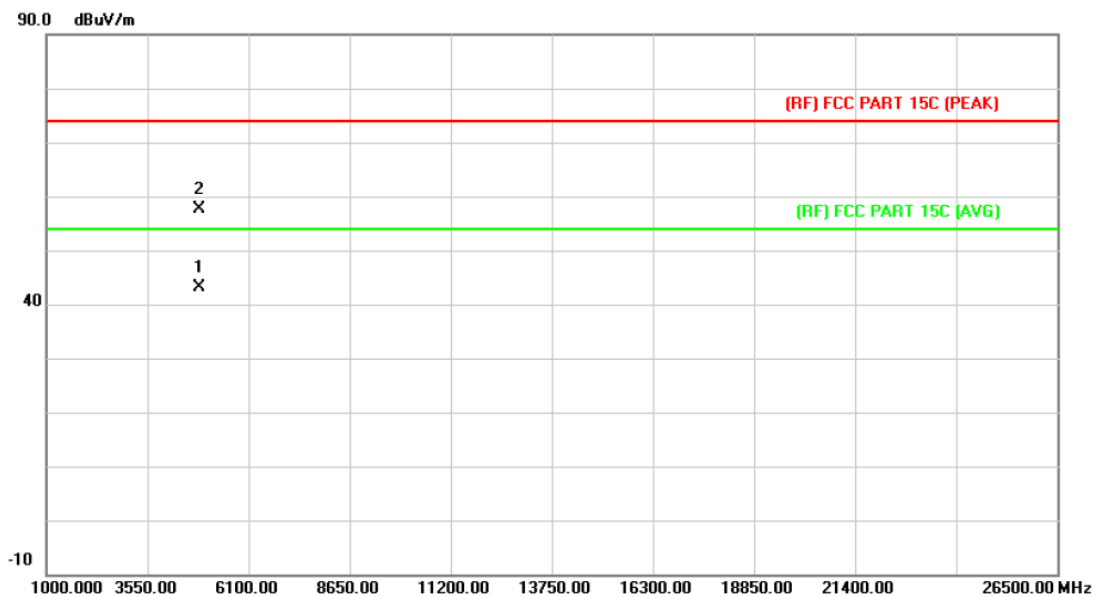

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	4873.966	29.32	13.86	43.18	54.00	-10.82	AVG
2		4874.425	43.87	13.86	57.73	74.00	-16.27	peak

Emission Level= Read Level+ Correct Factor


EUT:	MID	Model:	MID713-L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Vertical		
Test Mode:	TX N(HT40) Mode 2437MHz		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

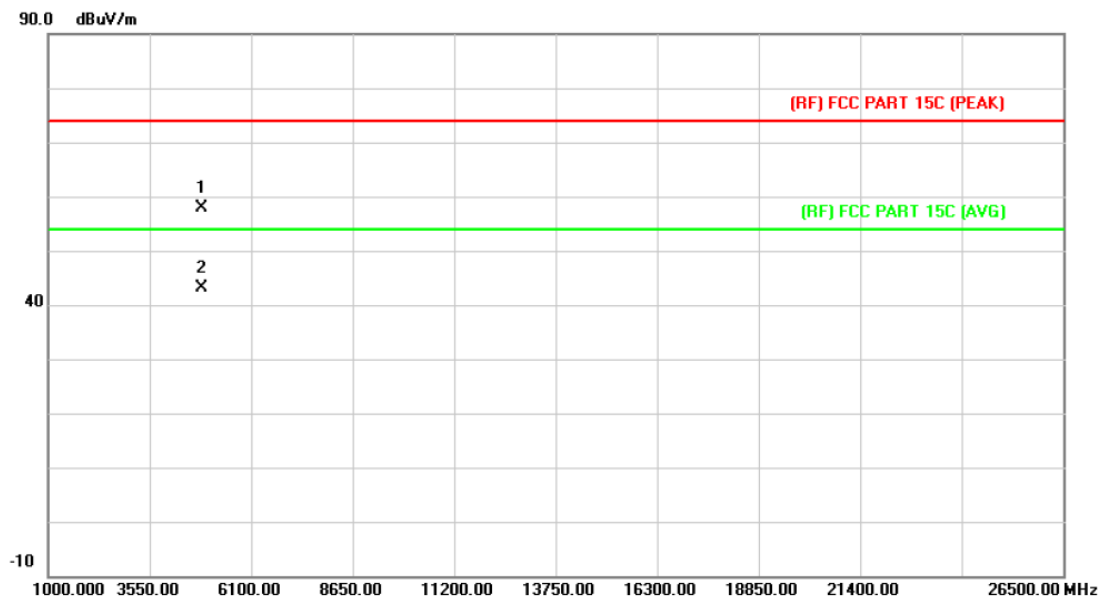

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		4873.615	44.05	13.86	57.91	74.00	-16.09	peak
2	*	4873.887	29.33	13.86	43.19	54.00	-10.81	AVG

Emission Level= Read Level+ Correct Factor


EUT:	MID	Model:	MID713-L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX N(HT40) Mode 2452MHz		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

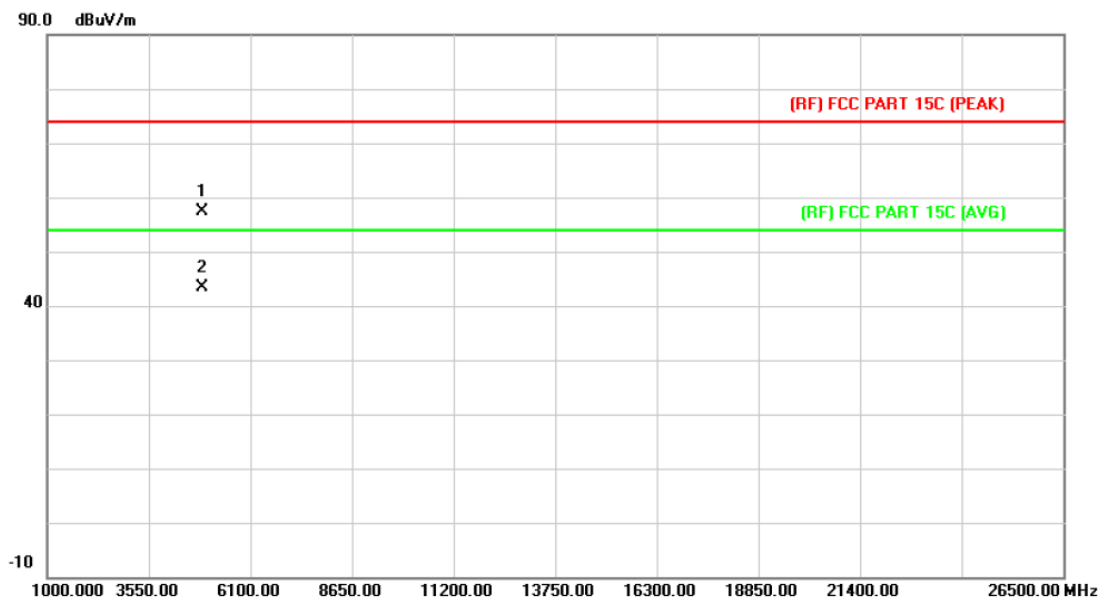

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		4903.759	43.43	14.03	57.46	74.00	-16.54	peak
2	*	4903.949	29.30	14.03	43.33	54.00	-10.67	AVG

Emission Level= Read Level+ Correct Factor

EUT:	MID	Model:	MID713-L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Vertical		
Test Mode:	TX N(HT40) Mode 2452MHz		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

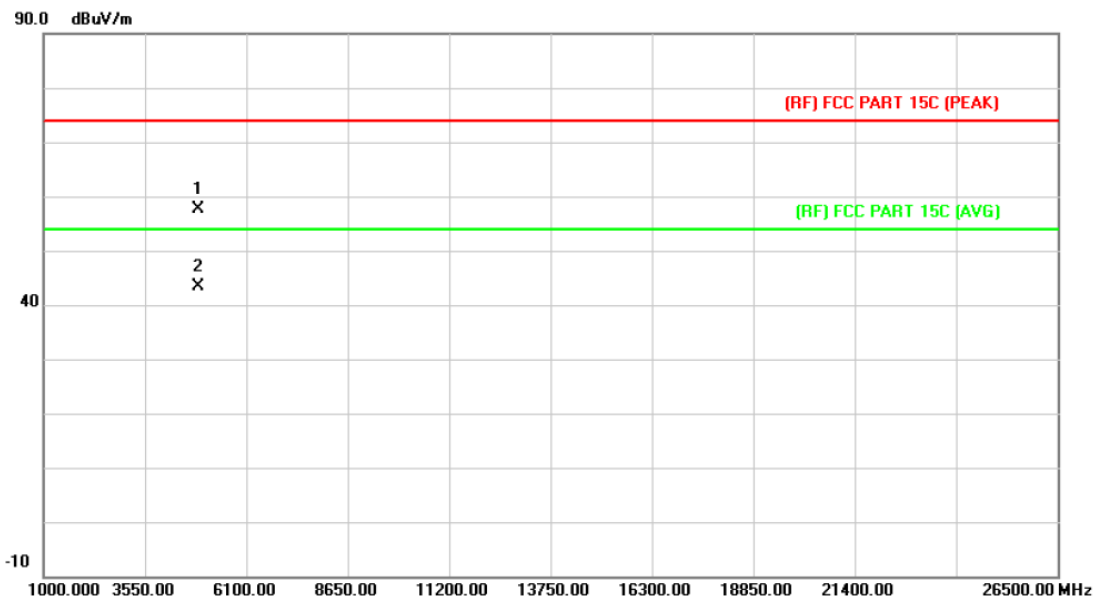

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		4904.217	43.72	14.03	57.75	74.00	-16.25	peak
2	*	4904.398	29.31	14.03	43.34	54.00	-10.66	AVG

Emission Level= Read Level+ Correct Factor

5. Restricted Bands Requirement

5.1 Test Standard and Limit


5.1.1 Test Standard

FCC Part 15.209 FCC Part 15.205

5.1.2 Test Limit

Restricted Frequency Band (MHz)	Class B (dBuV/m)(at 3 M)	
	Peak	Average
2310 ~2390	74	54
2483.5 ~2500	74	54

5.2 Test Setup

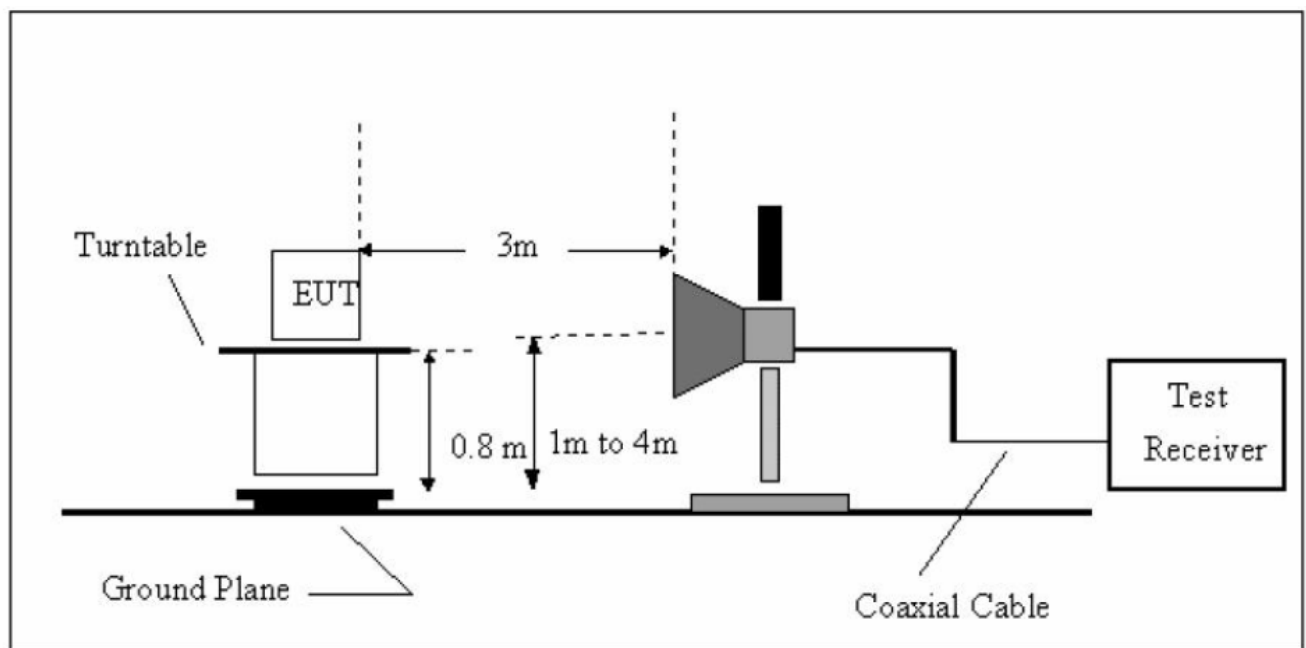

5.3 Test Procedure

- (1) The measuring distance of 3m shall be used for measurements at frequency up to 1GHz and above 1 GHz. The EUT was placed on a rotating 0.8m high above ground, the table was rotated 360 degrees to determine the position of the highest radiation.
- (2) The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set to make measurement.
- (3) The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- (4) If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit

Bellow 1 GHz, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed. But the Peak Value and average value both need to comply with applicable limit above 1 GHz.

- (5) (5) Testing frequency range below 1GHz the measuring instrument use VBW=120 kHz with Quasi-peak detection.
- (6) Testing frequency range above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.
- (7) For the actual test configuration, please see the test setup photo.

5.4 EUT Operating Condition

The Equipment Under Test was set to Continual Transmitting in maximum power.


5.5 Test Equipment

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
Spectrum Analyzer	Agilent	E4407B	MY45106456	Mar. 20, 2014	Mar. 19, 2015
Spectrum Analyzer	Rohde & Schwarz	FSP30	DE25181	Aug. 10, 2013	Aug.09, 2014
EMI Test Receiver	Rohde & Schwarz	ESCI	101165	Aug. 10, 2013	Aug.09, 2014
Bilog Antenna	ETS-LINDGREN	3142E	00117537	Mar. 07, 2014	Mar.06, 2015
Bilog Antenna	ETS-LINDGREN	3142E	00117542	Mar. 07, 2014	Mar.06, 2015
Horn Antenna	ETS-LINDGREN	3117	00143207	Mar. 07, 2014	Mar.06, 2015
Horn Antenna	ETS-LINDGREN	3117	00143209	Mar. 07, 2014	Mar.06, 2015
Pre-amplifier	HP	11909A	185903	Mar. 07, 2014	Mar.06, 2015
Pre-amplifier	HP	8447B	3008A00849	Mar. 07, 2014	Mar.06, 2015
Cable	HUBER+SUHNER	100	SUCOFLEX	Mar. 07, 2014	Mar.06, 2015
Signal Generator	Rohde & Schwarz	SML03	IKW682-054	Feb. 11, 2014	Feb.10, 2015
Positioning Controller	ETS-LINDGREN	2090	N/A	N/A	N/A


5.6 Test Data

Please see the next page.

(1) Radiation Test

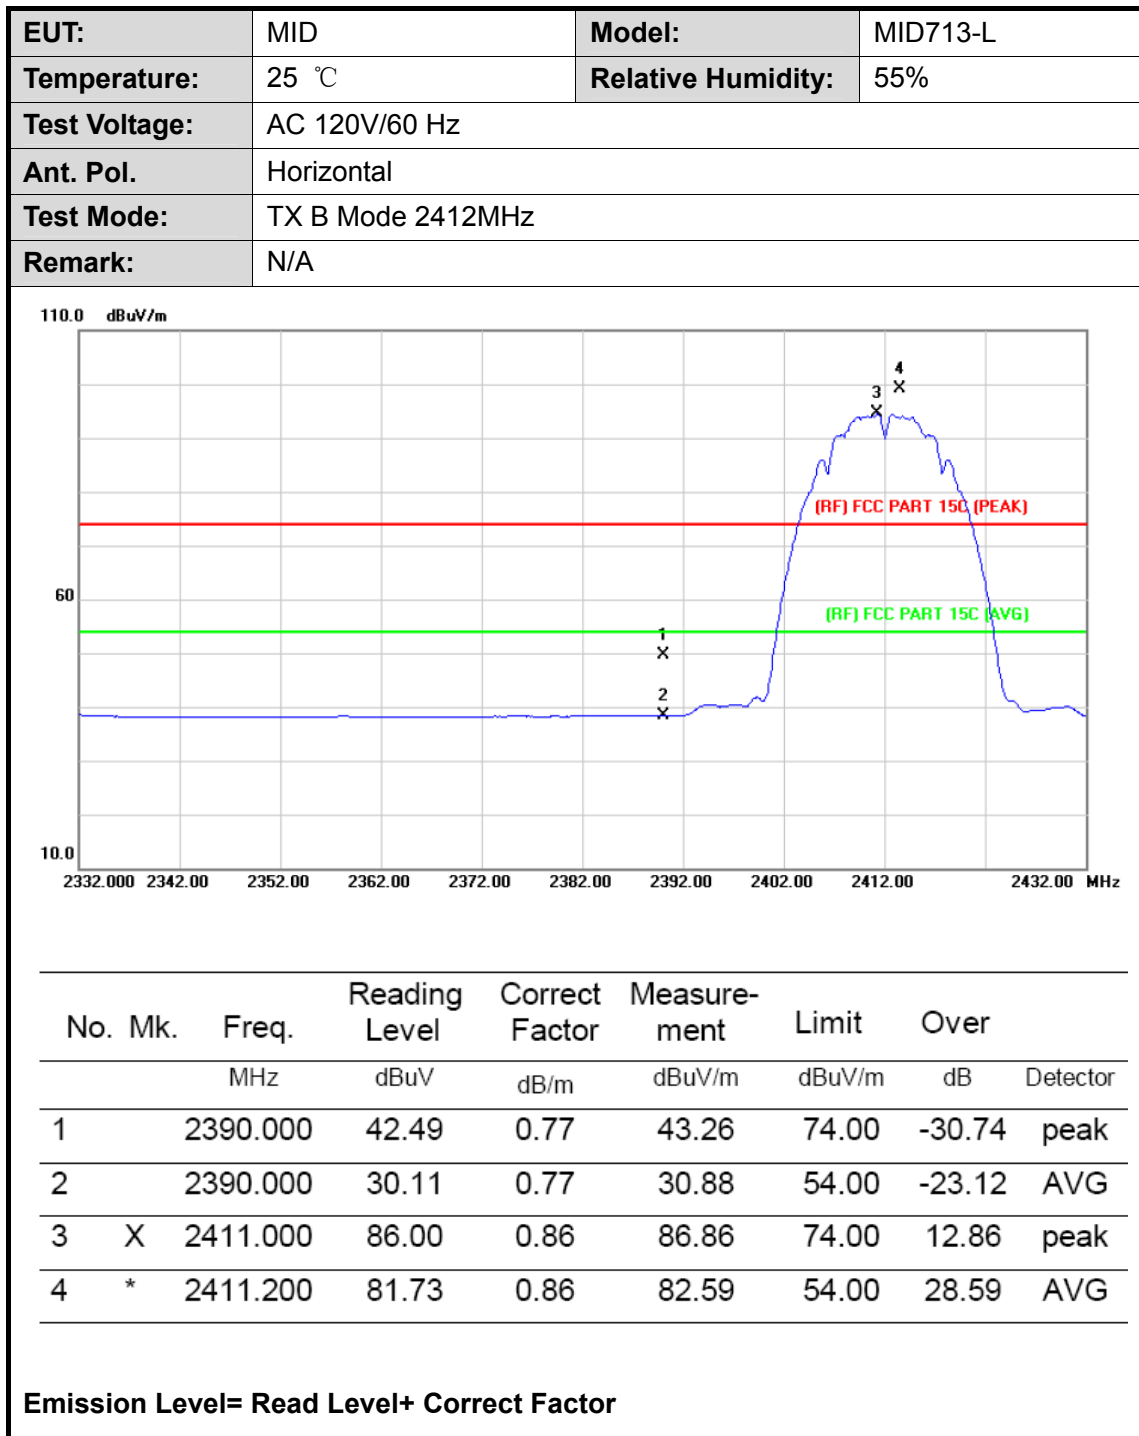


EUT:	MID	Model:	MID713-L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Vertical		
Test Mode:	TX B Mode 2412MHz		
Remark:	N/A		

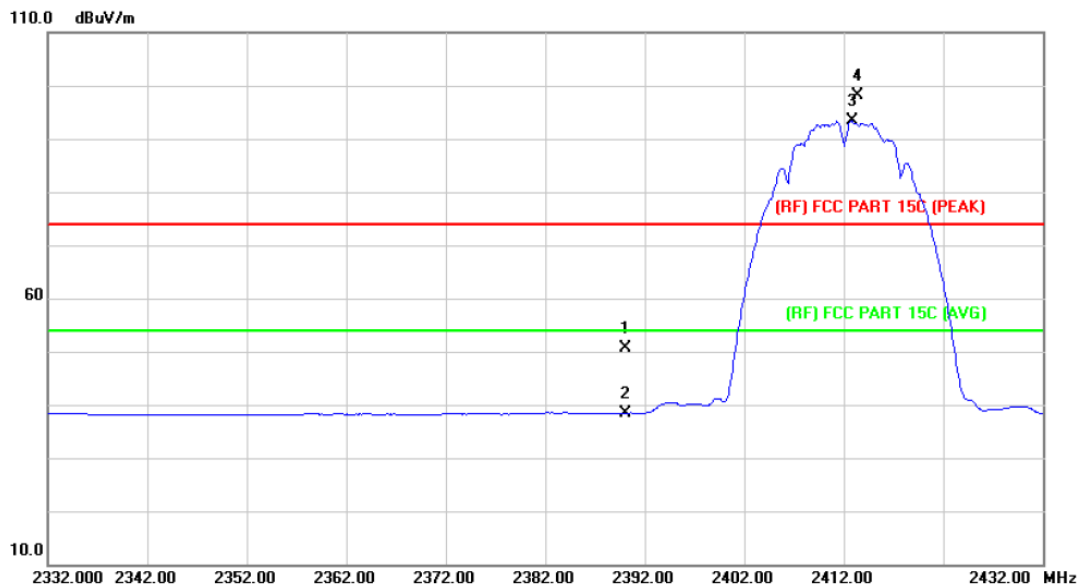

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		2390.000	49.85	0.77	50.62	74.00	-23.38	peak
2		2390.000	37.70	0.77	38.47	54.00	-15.53	AVG
3	*	2412.800	92.46	0.86	93.32	54.00	39.32	AVG
4	X	2413.400	97.24	0.86	98.10	74.00	24.10	peak

Emission Level= Read Level+ Correct Factor


EUT:	MID	Model:	MID713-L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX B Mode 2462MHz		
Remark:	N/A		

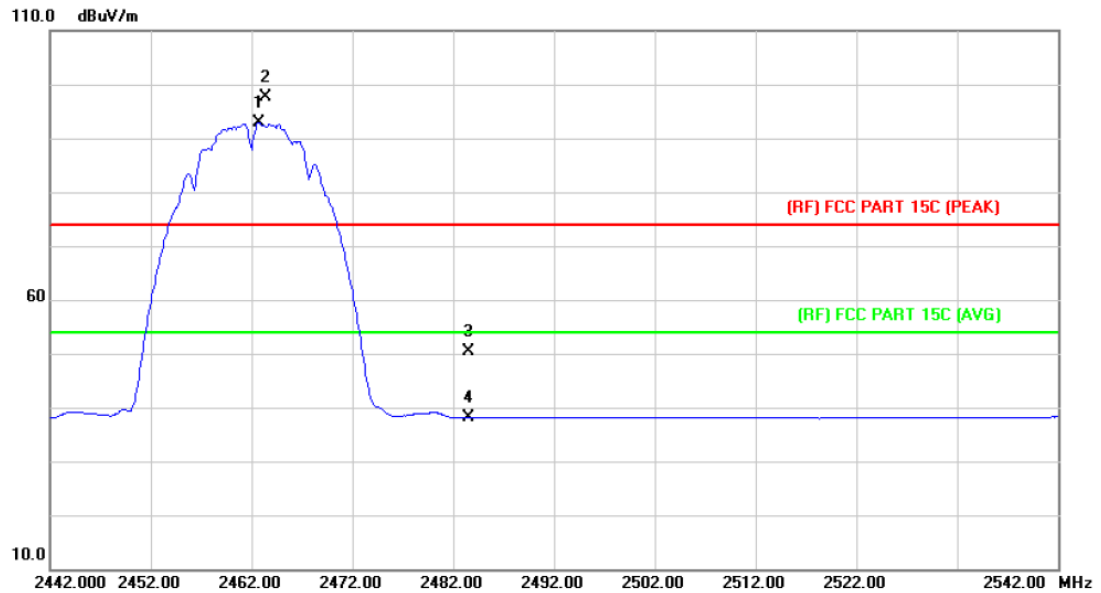

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	2462.700	91.84	1.08	92.92	54.00	38.92	AVG
2	X	2463.400	96.65	1.08	97.73	74.00	23.73	peak
3		2483.500	49.33	1.17	50.50	74.00	-23.50	peak
4		2483.500	36.91	1.17	38.08	54.00	-15.92	AVG

Emission Level= Read Level+ Correct Factor


EUT:	MID	Model:	MID713-L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Vertical		
Test Mode:	TX B Mode 2462MHz		
Remark:	N/A		

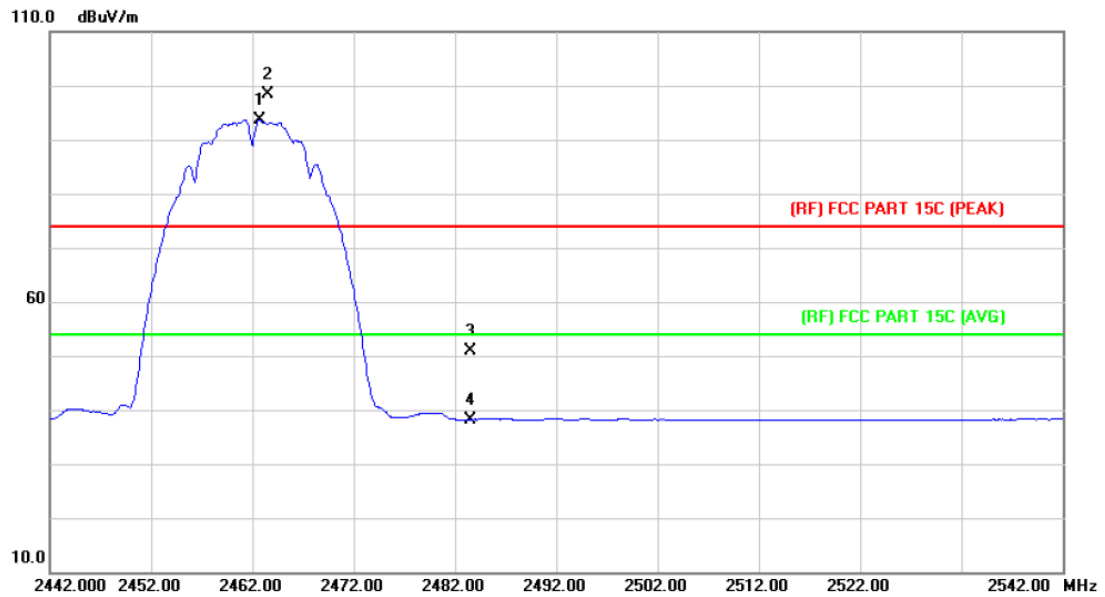

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	2462.700	92.62	1.08	93.70	54.00	39.70	AVG
2	X	2463.500	97.35	1.08	98.43	74.00	24.43	peak
3		2483.500	49.75	1.17	50.92	74.00	-23.08	peak
4		2483.500	37.07	1.17	38.24	54.00	-15.76	AVG

Emission Level= Read Level+ Correct Factor


EUT:	MID	Model:	MID713-L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX G Mode 2412MHz		
Remark:	N/A		

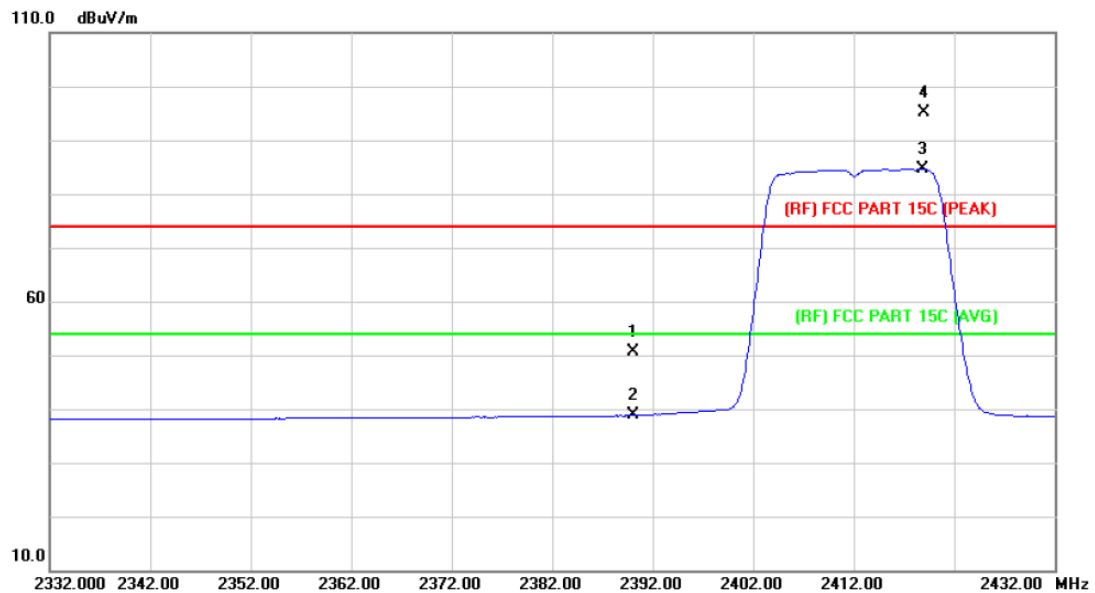

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		2390.000	49.86	0.77	50.63	74.00	-23.37	peak
2		2390.000	38.06	0.77	38.83	54.00	-15.17	AVG
3	*	2418.900	83.77	0.89	84.66	54.00	30.66	AVG
4	X	2419.000	94.21	0.89	95.10	74.00	21.10	peak

Emission Level= Read Level+ Correct Factor


EUT:	MID	Model:	MID713-L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Vertical		
Test Mode:	TX G Mode 2412MHz		
Remark:	N/A		

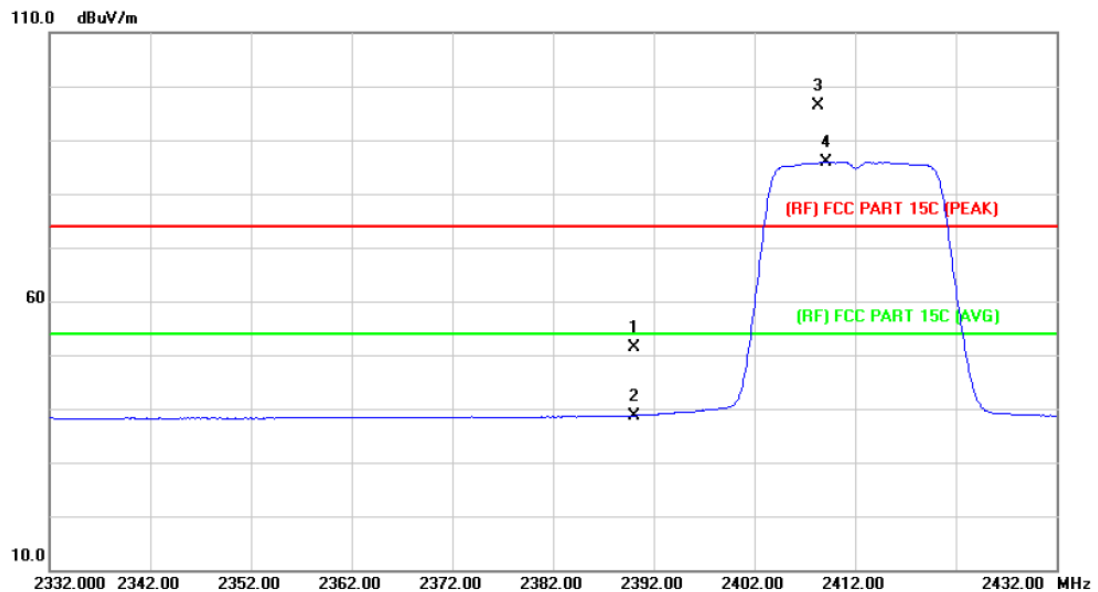

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		2390.000	50.51	0.77	51.28	74.00	-22.72	peak
2		2390.000	37.96	0.77	38.73	54.00	-15.27	AVG
3	X	2408.300	95.46	0.85	96.31	74.00	22.31	peak
4	*	2409.100	85.10	0.85	85.95	54.00	31.95	AVG

Emission Level= Read Level+ Correct Factor


EUT:	MID	Model:	MID713-L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX G Mode 2462MHz		
Remark:	N/A		

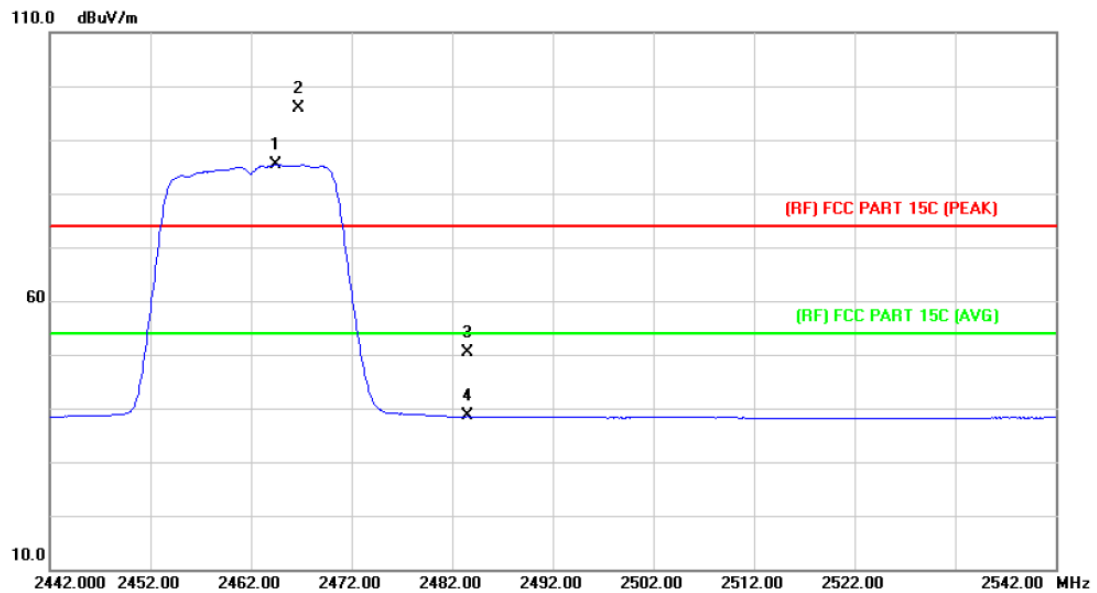

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	2464.500	84.21	1.08	85.29	54.00	31.29	AVG
2	X	2466.700	94.71	1.10	95.81	74.00	21.81	peak
3		2483.500	49.10	1.17	50.27	74.00	-23.73	peak
4		2483.500	37.35	1.17	38.52	54.00	-15.48	AVG

Emission Level= Read Level+ Correct Factor


EUT:	MID	Model:	MID713-L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Vertical		
Test Mode:	TX G Mode 2462MHz		
Remark:	N/A		

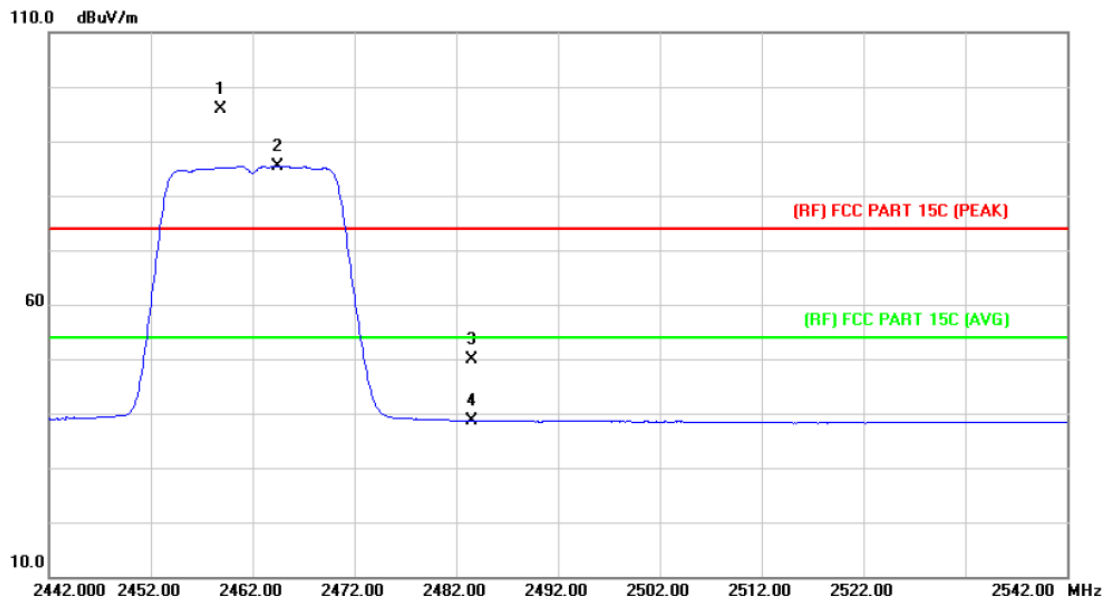

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	X	2458.800	94.86	1.06	95.92	74.00	21.92	peak
2	*	2464.500	84.37	1.08	85.45	54.00	31.45	AVG
3		2483.500	48.83	1.17	50.00	74.00	-24.00	peak
4		2483.500	37.52	1.17	38.69	54.00	-15.31	AVG

Emission Level= Read Level+ Correct Factor


EUT:	MID	Model:	MID713-L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX N(HT20) Mode 2412MHz		
Remark:	N/A		

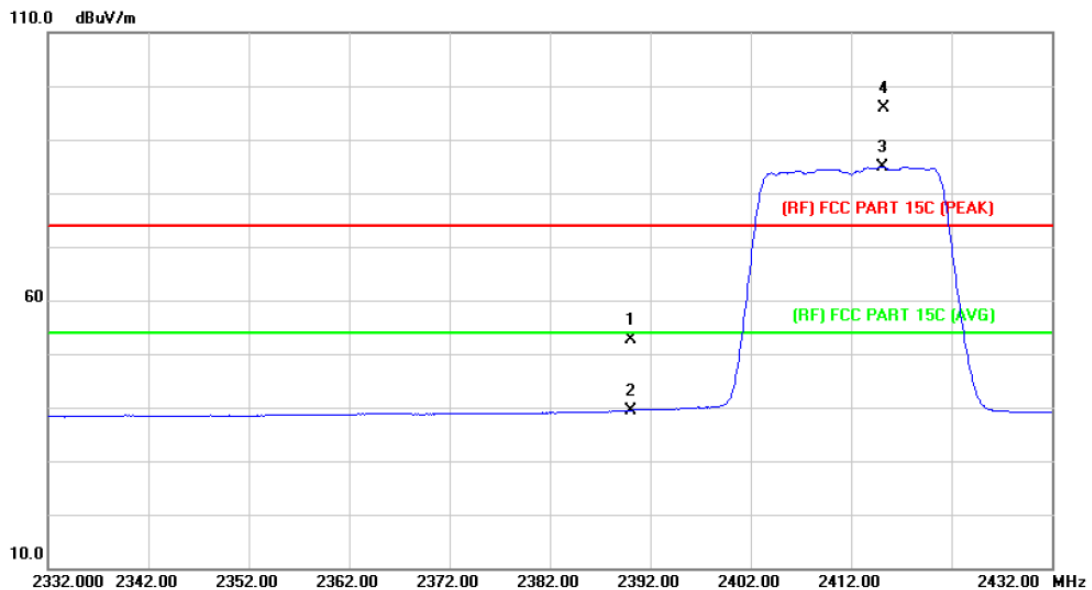

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		2390.000	51.75	0.77	52.52	74.00	-21.48	peak
2		2390.000	38.72	0.77	39.49	54.00	-14.51	AVG
3	*	2415.200	84.03	0.88	84.91	54.00	30.91	AVG
4	X	2415.300	95.04	0.88	95.92	74.00	21.92	peak

Emission Level= Read Level+ Correct Factor


EUT:	MID	Model:	MID713-L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Vertical		
Test Mode:	TX N(HT20) Mode 2412MHz		
Remark:	N/A		

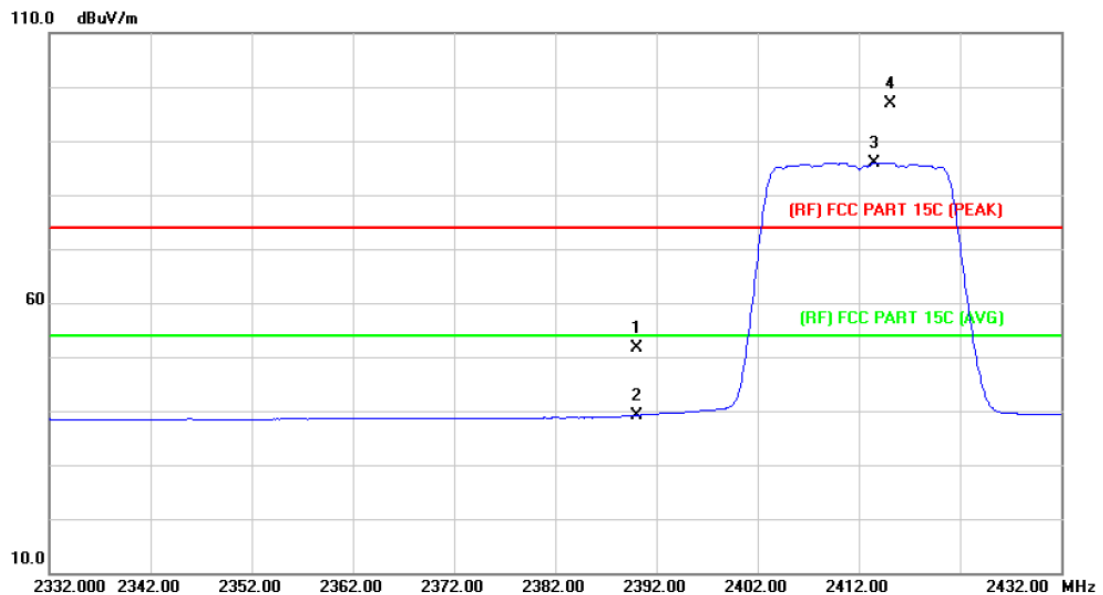

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		2390.000	50.92	0.77	51.69	74.00	-22.31	peak
2		2390.000	38.45	0.77	39.22	54.00	-14.78	AVG
3	*	2413.600	85.14	0.86	86.00	54.00	32.00	AVG
4	X	2415.200	96.11	0.88	96.99	74.00	22.99	peak

Emission Level= Read Level+ Correct Factor


EUT:	MID	Model:	MID713-L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX N(HT20) Mode 2462MHz		
Remark:	N/A		

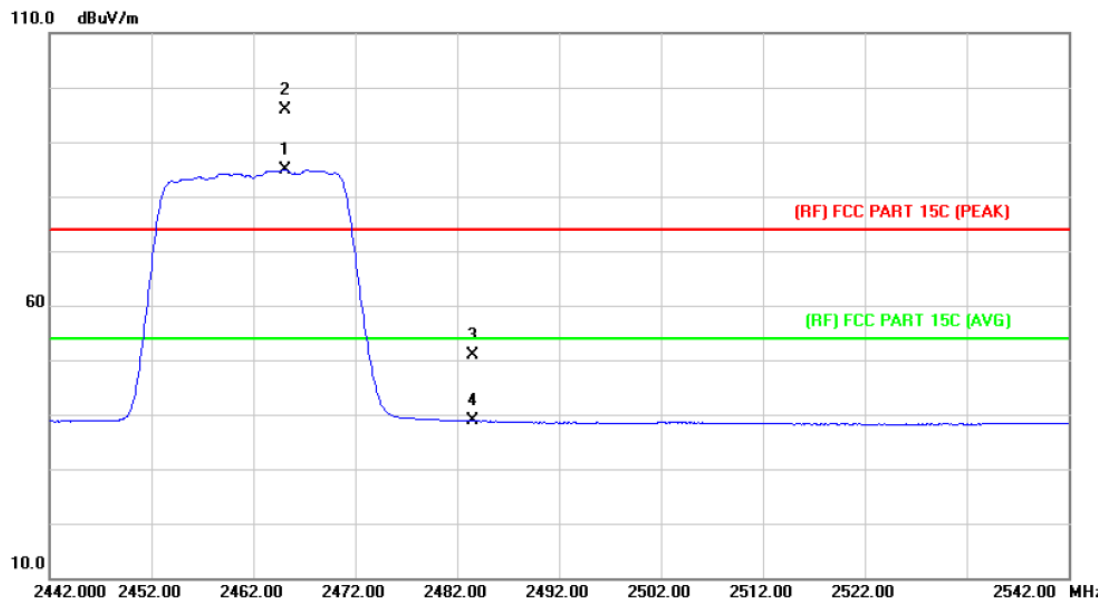

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	2465.100	83.74	1.09	84.83	54.00	30.83	AVG
2	X	2465.200	94.75	1.09	95.84	74.00	21.84	peak
3		2483.500	49.67	1.17	50.84	74.00	-23.16	peak
4		2483.500	37.61	1.17	38.78	54.00	-15.22	AVG

Emission Level= Read Level+ Correct Factor


EUT:	MID	Model:	MID713-L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Vertical		
Test Mode:	TX N(HT20) Mode 2462MHz		
Remark:	N/A		

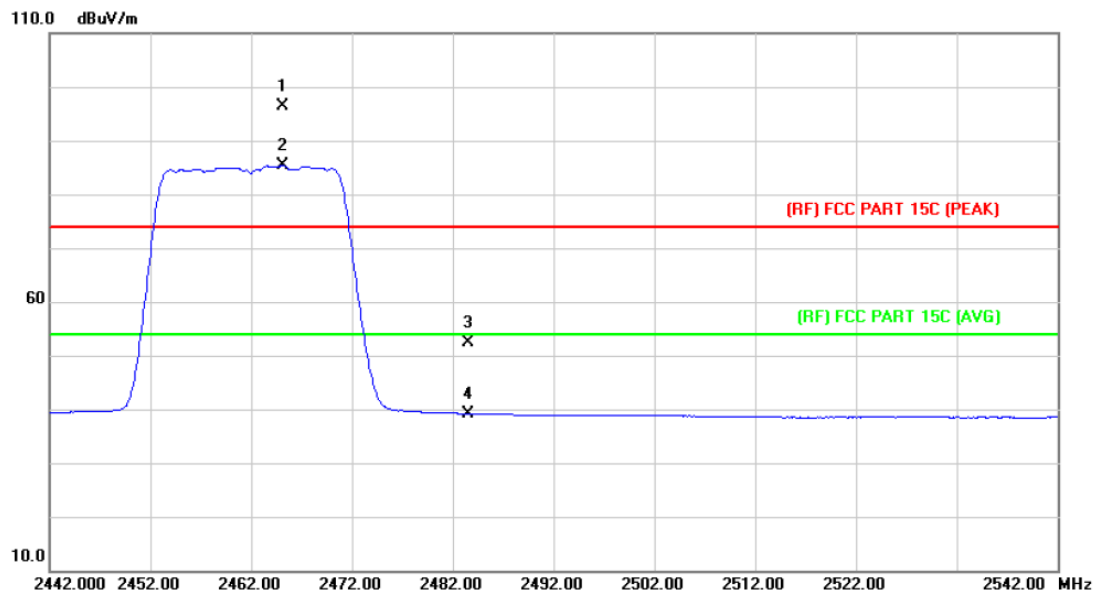

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	X	2465.200	95.24	1.09	96.33	74.00	22.33	peak
2	*	2465.200	84.19	1.09	85.28	54.00	31.28	AVG
3		2483.500	51.09	1.17	52.26	74.00	-21.74	peak
4		2483.500	38.03	1.17	39.20	54.00	-14.80	AVG

Emission Level= Read Level+ Correct Factor


EUT:	MID	Model:	MID713-L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX N(HT40) Mode 2422MHz		
Remark:	N/A		

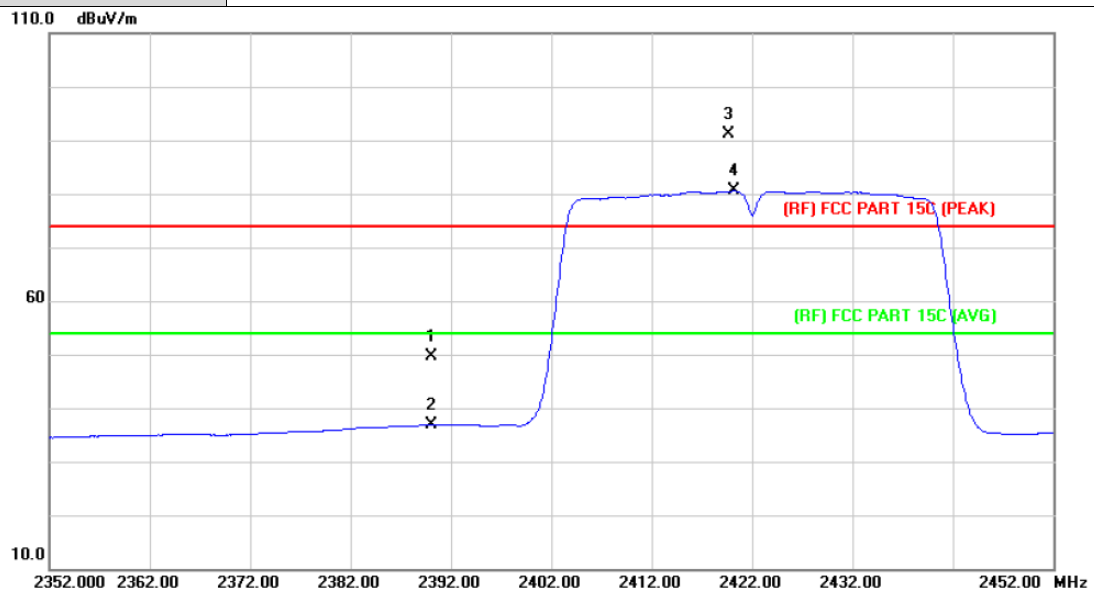

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		2390.000	48.77	0.77	49.54	74.00	-24.46	peak
2		2390.000	36.08	0.77	36.85	54.00	-17.15	AVG
3	X	2419.700	90.35	0.89	91.24	74.00	17.24	peak
4	*	2420.200	79.64	0.89	80.53	54.00	26.53	AVG

Emission Level= Read Level+ Correct Factor


EUT:	MID	Model:	MID713-L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Vertical		
Test Mode:	TX N(HT40) Mode 2422MHz		
Remark:	N/A		

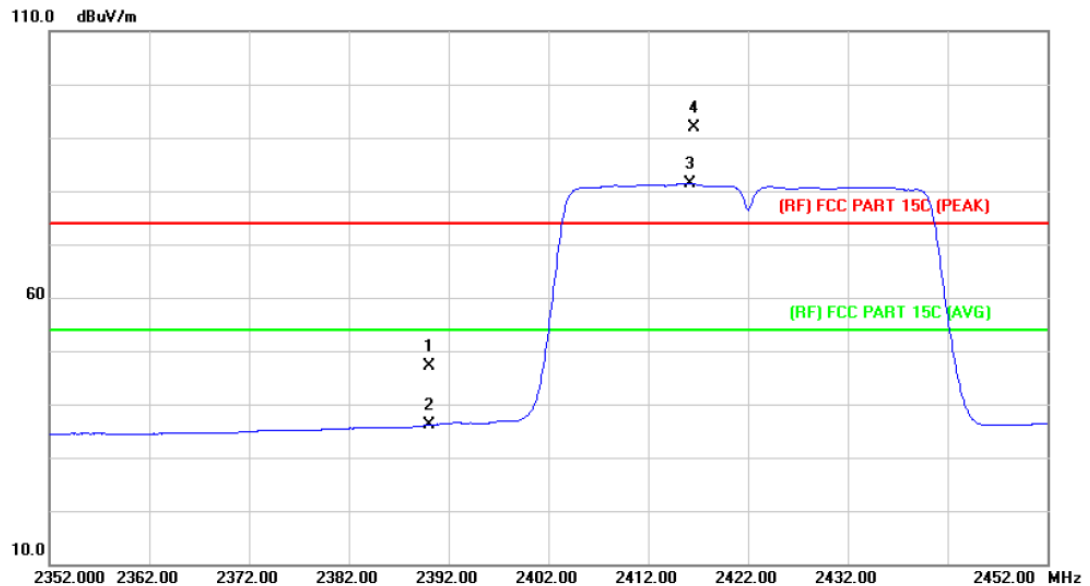

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		2390.000	46.37	0.77	47.14	74.00	-26.86	peak
2		2390.000	35.36	0.77	36.13	54.00	-17.87	AVG
3	*	2416.200	80.50	0.88	81.38	54.00	27.38	AVG
4	X	2416.600	91.09	0.88	91.97	74.00	17.97	peak

Emission Level= Read Level+ Correct Factor


EUT:	MID	Model:	MID713-L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX N(HT40) Mode 2452MHz		
Remark:	N/A		

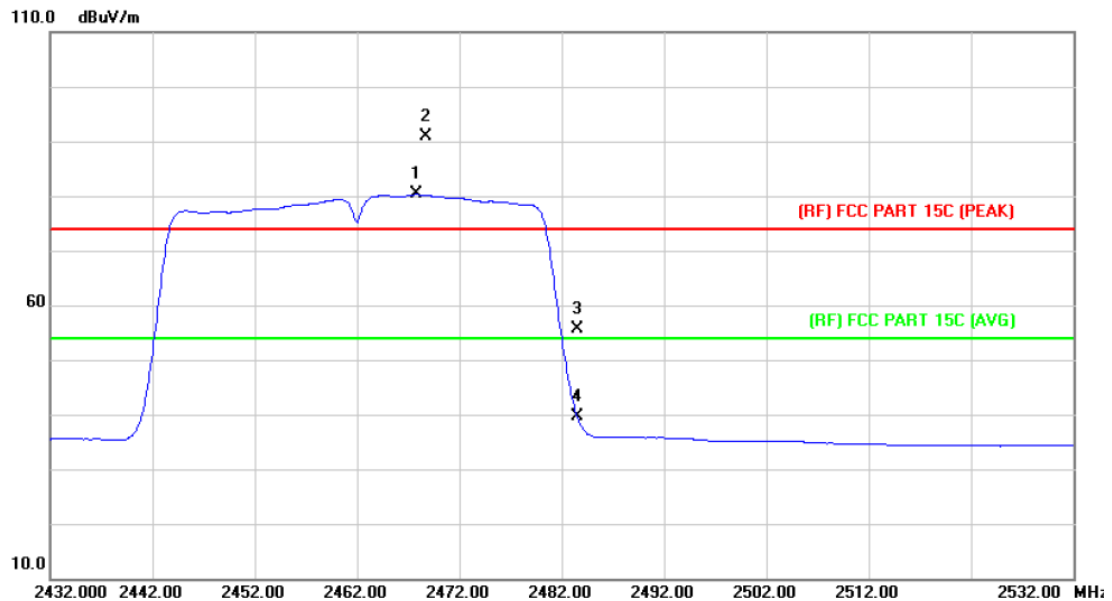

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	2467.800	79.16	1.10	80.26	54.00	26.26	AVG
2	X	2468.700	89.88	1.11	90.99	74.00	16.99	peak
3		2483.500	54.58	1.17	55.75	74.00	-18.25	peak
4		2483.500	38.47	1.17	39.64	54.00	-14.36	AVG

Emission Level= Read Level+ Correct Factor

EUT:	MID	Model:	MID713-L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Vertical		
Test Mode:	TX N(HT40) Mode 2452MHz		
Remark:	N/A		


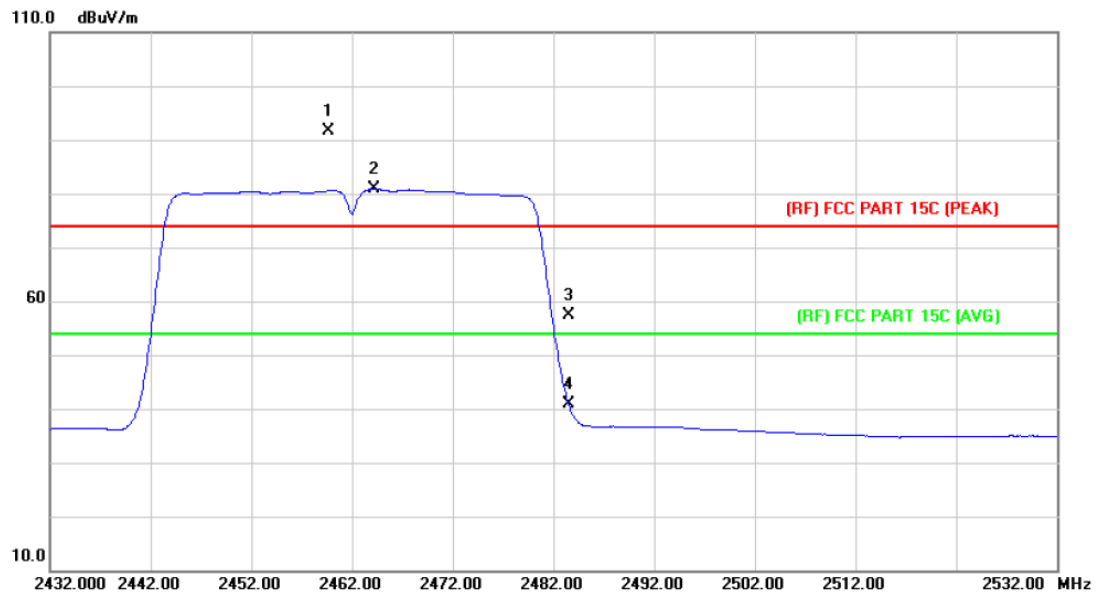


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	2459.700	90.58	1.06	91.64	74.00	17.64	peak
2	*	2464.200	79.71	1.08	80.79	54.00	26.79	AVG
3		2483.500	56.09	1.17	57.26	74.00	-16.74	peak
4		2483.500	39.64	1.17	40.81	54.00	-13.19	AVG



Emission Level= Read Level+ Correct Factor

(2) Conducted Test



EUT:	MID	Model:	MID713-L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Test Mode:	TX B Mode 2412MHz / TX B Mode 2462MHz		
Remark:	The EUT is programed in continuously transmitting mode		

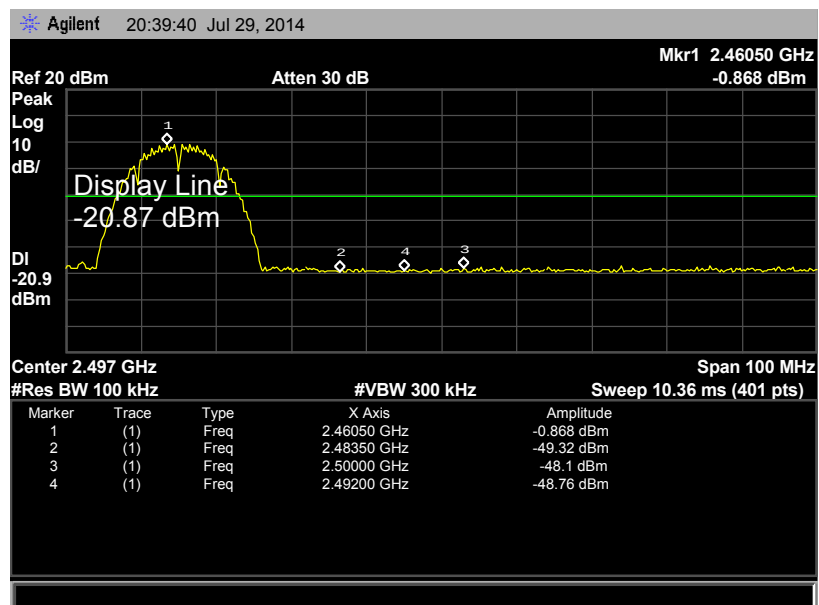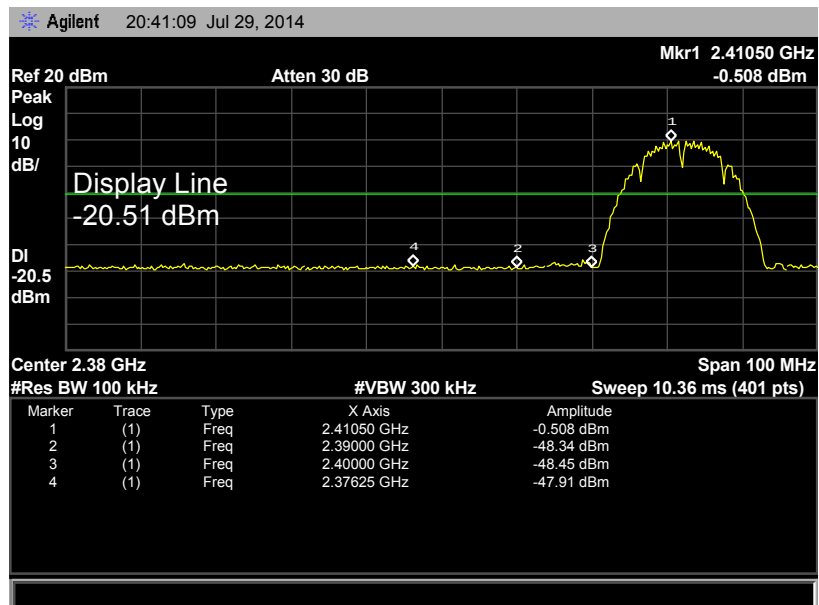



EUT:	MID	Model:	MID713-L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Test Mode:	TX G Mode 2412MHz / TX G Mode 2462MHz		
Remark:	The EUT is programed in continuously transmitting mode		

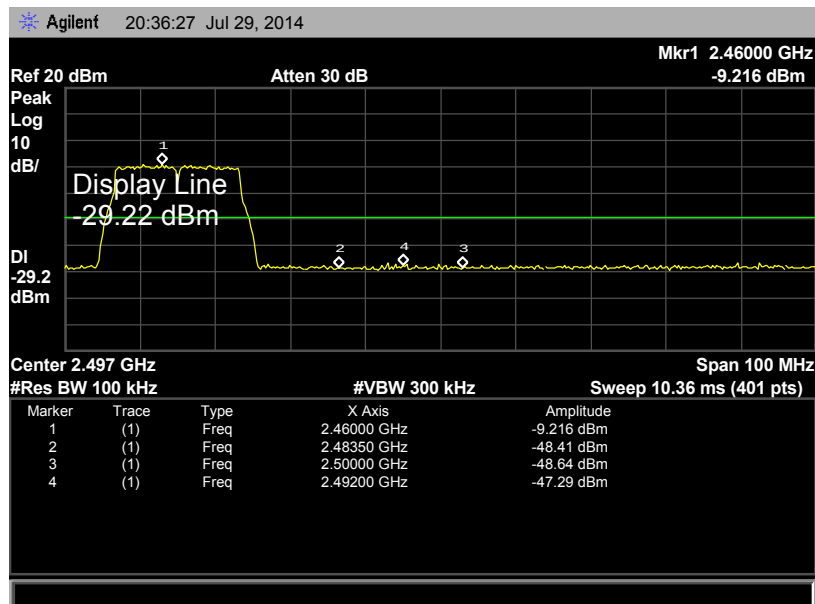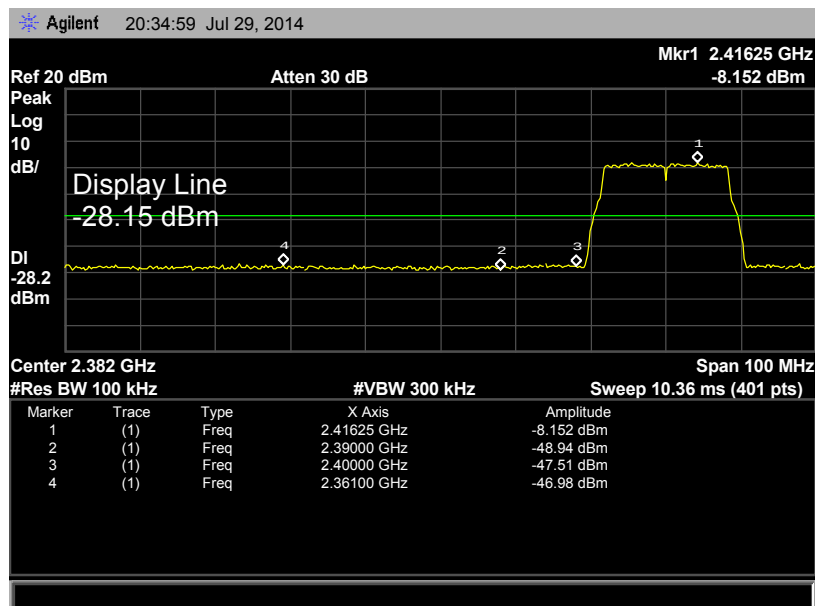

EUT:	MID	Model:	MID713-L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Test Mode:	TX N(HT20) Mode 2412MHz / TX N(HT20) Mode 2462MHz		
Remark:	The EUT is programed in continuously transmitting mode		

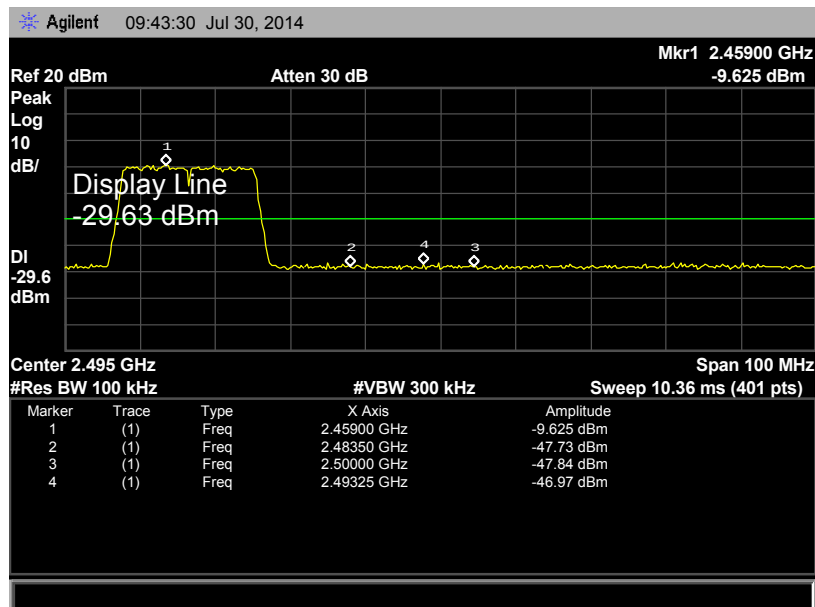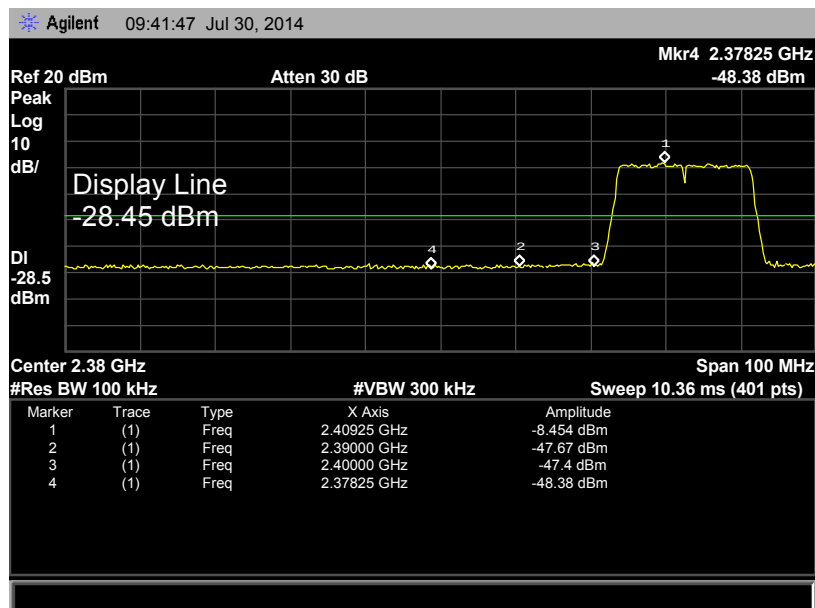

EUT:	MID	Model:	MID713-L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Test Mode:	TX N(HT40) Mode 2422MHz / TX N(HT40) Mode 2452MHz		
Remark:	The EUT is programed in continuously transmitting mode		

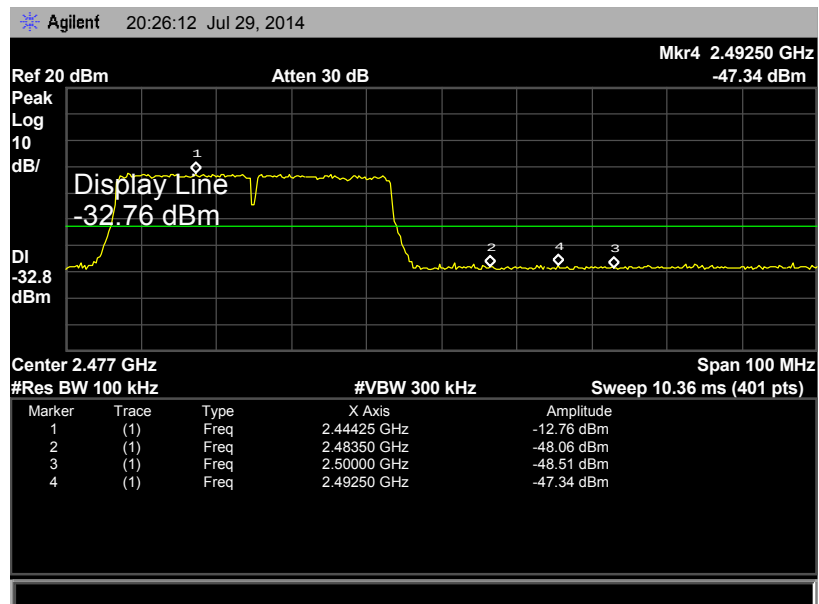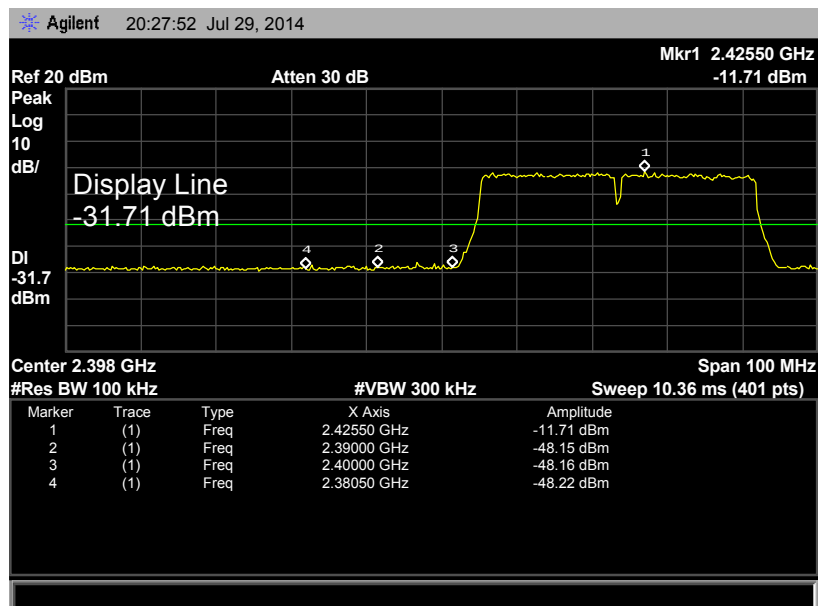

6. Bandwidth Test

6.1 Test Standard and Limit


6.1.1 Test Standard

FCC Part 15.247 (a)(2)

6.1.2 Test Limit

FCC Part 15 Subpart C(15.247)/RSS-210		
Test Item	Limit	Frequency Range(MHz)
Bandwidth	≥ 500 KHz (6dB bandwidth)	2400~2483.5

6.2 Test Setup



6.3 Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) The bandwidth is measured at an amplitude level reduced 6dB from the reference level. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst –case (i.e the widest) bandwidth.
- (3) Measure the channel separation the spectrum analyzer was set to Resolution Bandwidth:100 kHz, and Video Bandwidth:300 kHz, Detector: Peak, Sweep Time set auto.

6.4 EUT Operating Condition

The EUT was set to continuously transmitting in each mode and low, middle and high channel for the test.

6.5 Test Equipment


Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
Spectrum Analyzer	Rohde & Schwarz	FSP30	DE25181	Aug. 10, 2013	Aug.09, 2014


6.6 Test Data

EUT:	MID	Model:	MID713-L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Test Mode:	TX 802.11B Mode		
Channel frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Limit (MHz)
2412	10.019	14.2886	>=0.5
2437	9.997	14.2857	
2462	10.022	14.2931	

802.11B Mode

2412 MHz

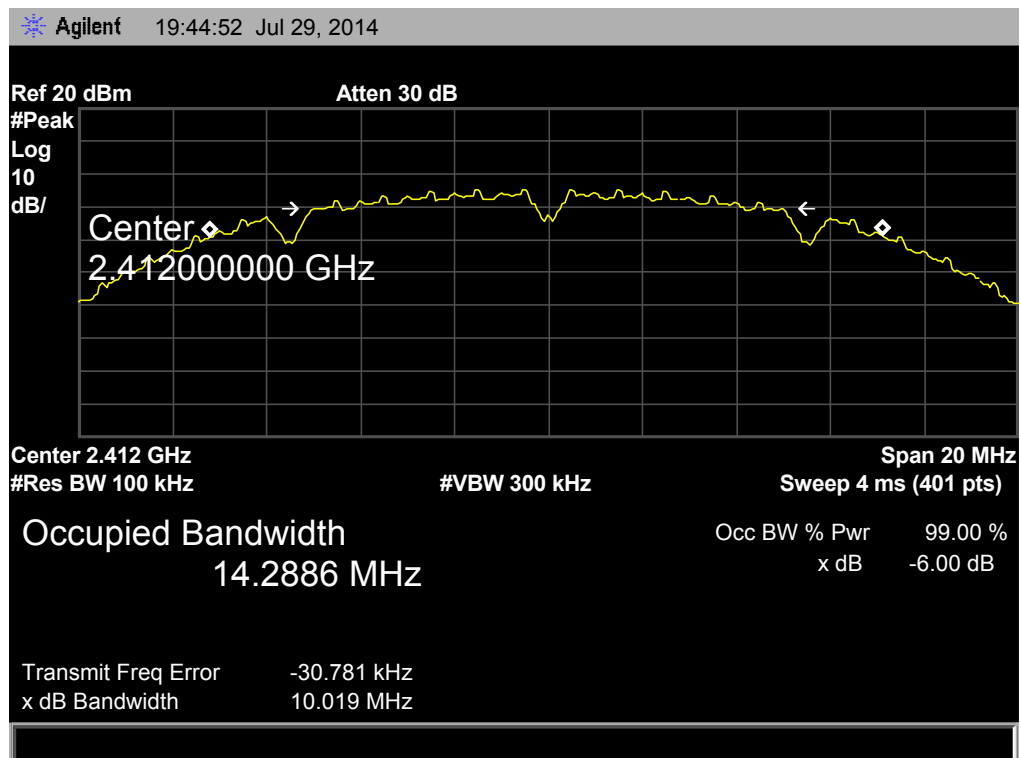

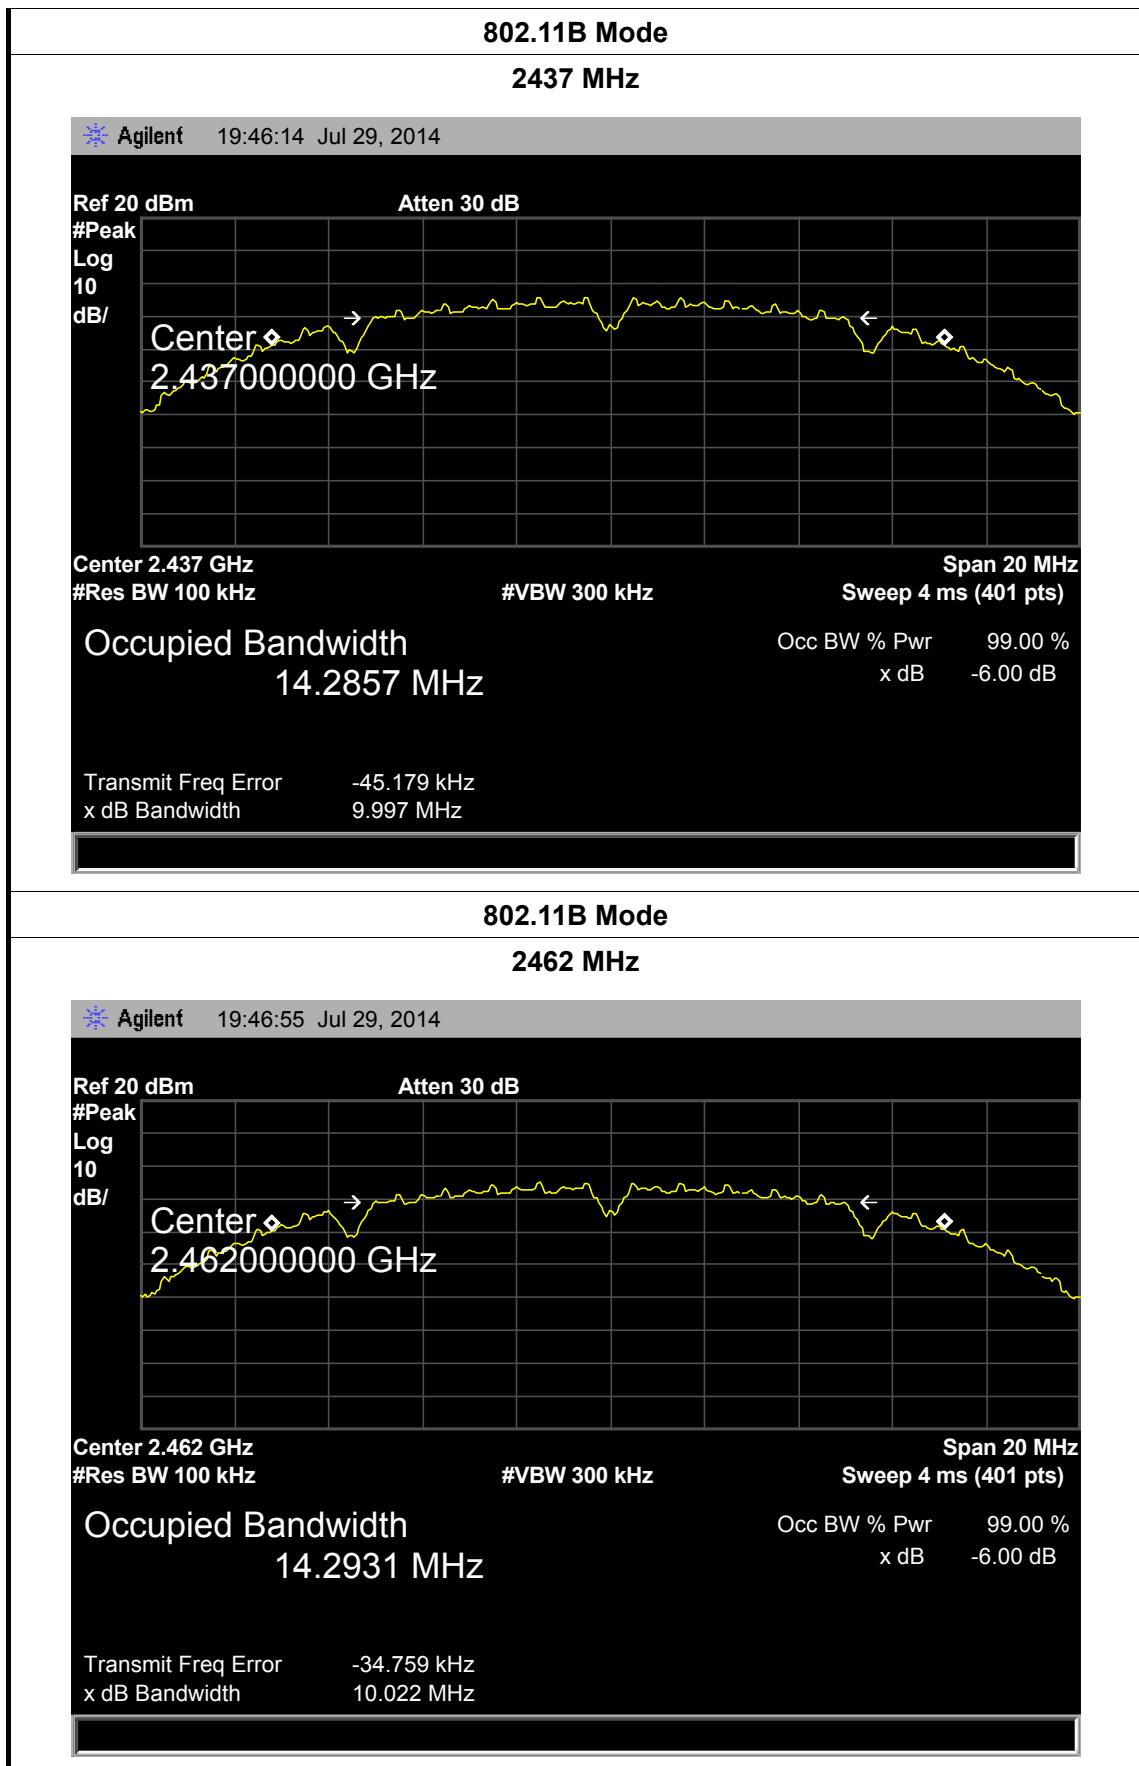

EUT:	MID	Model:	MID713-L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Test Mode:	TX 802.11G Mode		
Channel frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Limit (MHz)
2412	16.584	16.5175	>=0.5
2437	16.597	16.5352	
2462	16.569	16.4700	

802.11G Mode

2412 MHz

Agilent19:47:43 Jul 29, 2014

Ref 20 dBm

Atten 30 dB

#Peak

Log

10

dB/

Center

2.412000000 GHz

Center 2.412 GHz

#Res BW 100 kHz

#VBW 300 kHz

Span 20 MHz

Sweep 4 ms (401 pts)

Occupied Bandwidth

16.5175 MHz

Occ BW % Pwr

99.00 %

x dB


-6.00 dB

Transmit Freq Error

-30.444 kHz

x dB Bandwidth

16.584 MHz

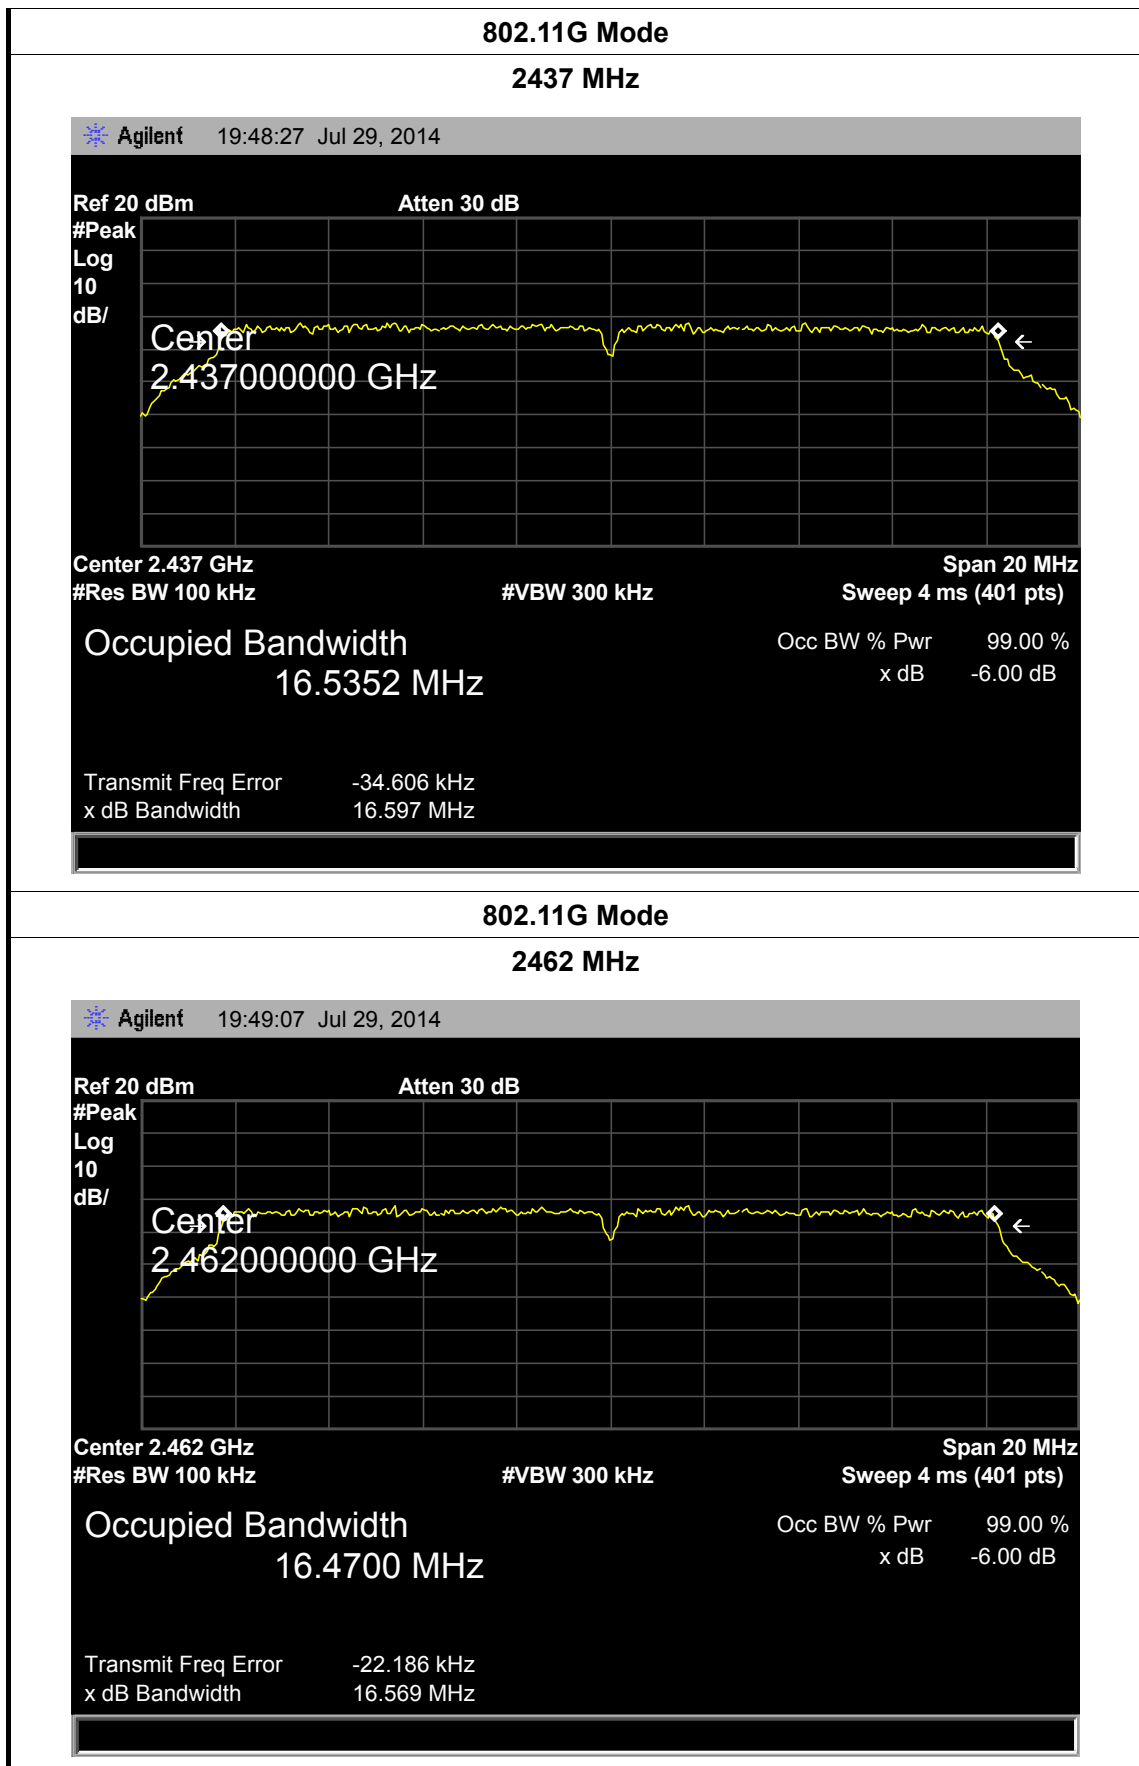

EUT:	MID	Model:	MID713-L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Test Mode:	TX 802.11N(HT20) Mode		
Channel frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Limit (MHz)
2412	17.819	17.6274	>=0.5
2437	17.825	17.6344	
2462	17.828	17.6288	

802.11N(HT20) Mode

2412 MHz

Agilent19:49:50 Jul 29, 2014

Ref 20 dBm

Atten 30 dB

#Peak

Log

10

dB/

Center

2.412000000 GHz

Center 2.412 GHz

#Res BW 100 kHz

#VBW 300 kHz

Span 20 MHz

Sweep 4 ms (401 pts)

Occupied Bandwidth

17.6274 MHz

Occ BW % Pwr

99.00 %

x dB

-6.00 dB

Transmit Freq Error


-4.294 kHz

x dB Bandwidth

17.819 MHz


802.11N(HT20) Mode

2437 MHz

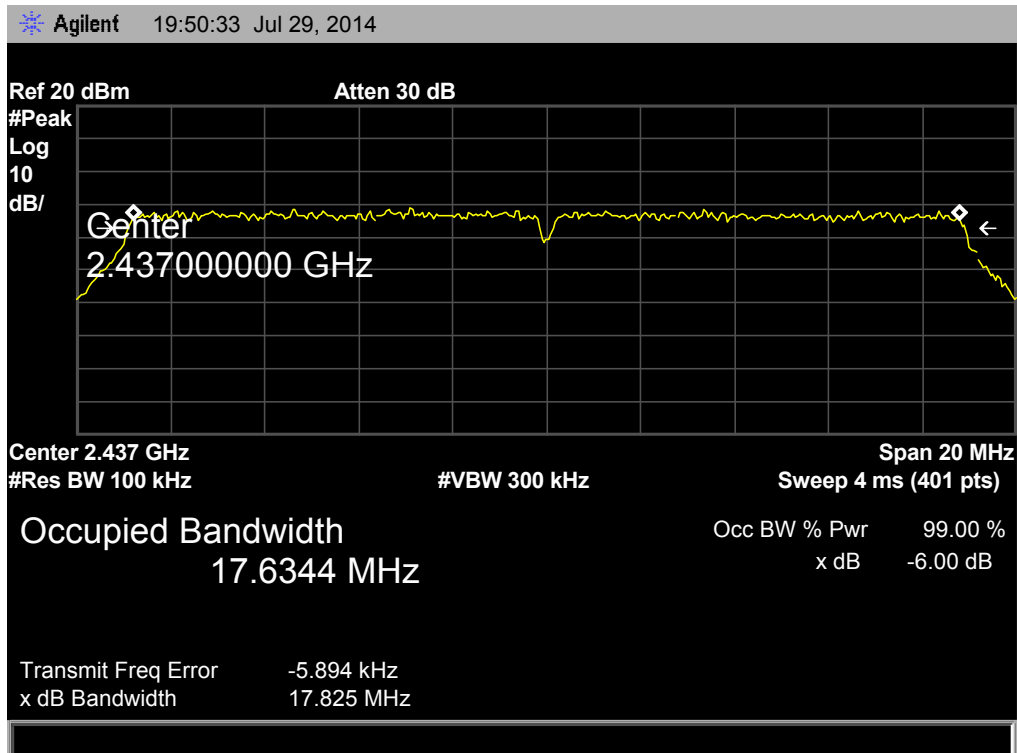

802.11N(HT20) Mode

2462 MHz

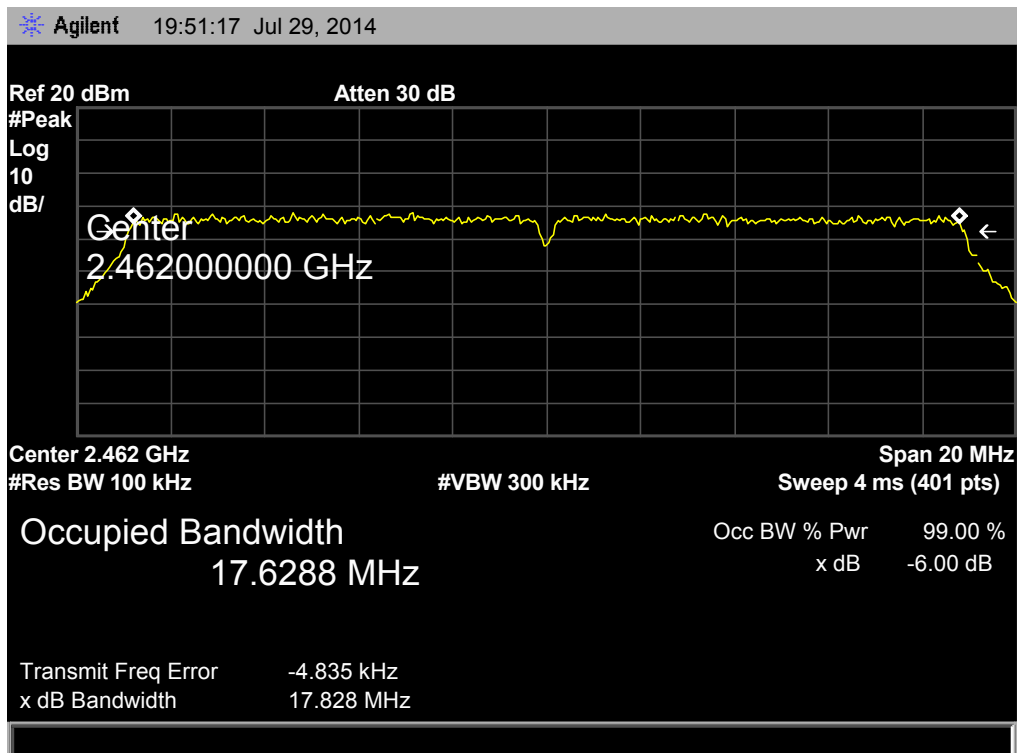

EUT:	MID	Model:	MID713-L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Test Mode:	TX 802.11N(HT40) Mode		
Channel frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Limit (MHz)
2422	36.525	36.0001	>=0.5
2437	36.239	35.7733	
2452	36.542	36.0047	
802.11N(HT40) Mode			
2422 MHz			

Agilentf 19:56:34 Jul 29, 2014

Ref 20 dBm

Atten 30 dB

#Peak

Log

10

dB/

Center 2.422000000 GHz

Center 2.422 GHz

#Res BW 100 kHz

#VBW 300 kHz

Span 40 MHz

Sweep 4.144 ms (401 pts)

Occupied Bandwidth

36.0001 MHz

Occ BW % Pwr 99.00 %


x dB -6.00 dB

Transmit Freq Error -16.424 kHz

x dB Bandwidth 36.525 MHz


802.11N(HT40) Mode

2437 MHz

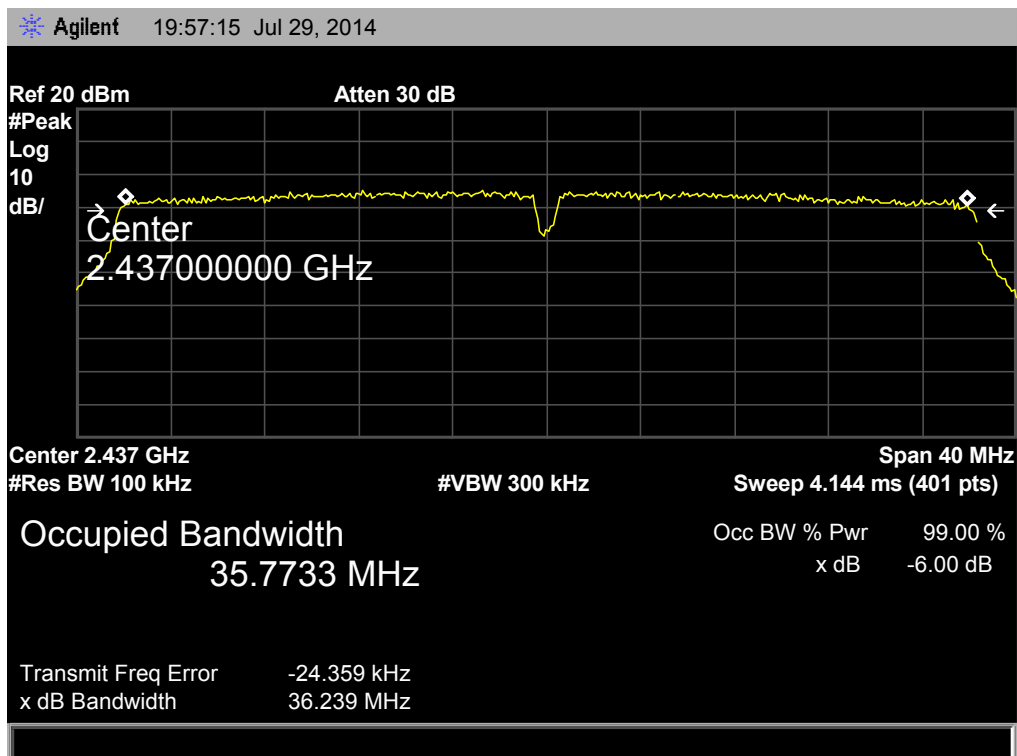

802.11N(HT40) Mode

2452 MHz

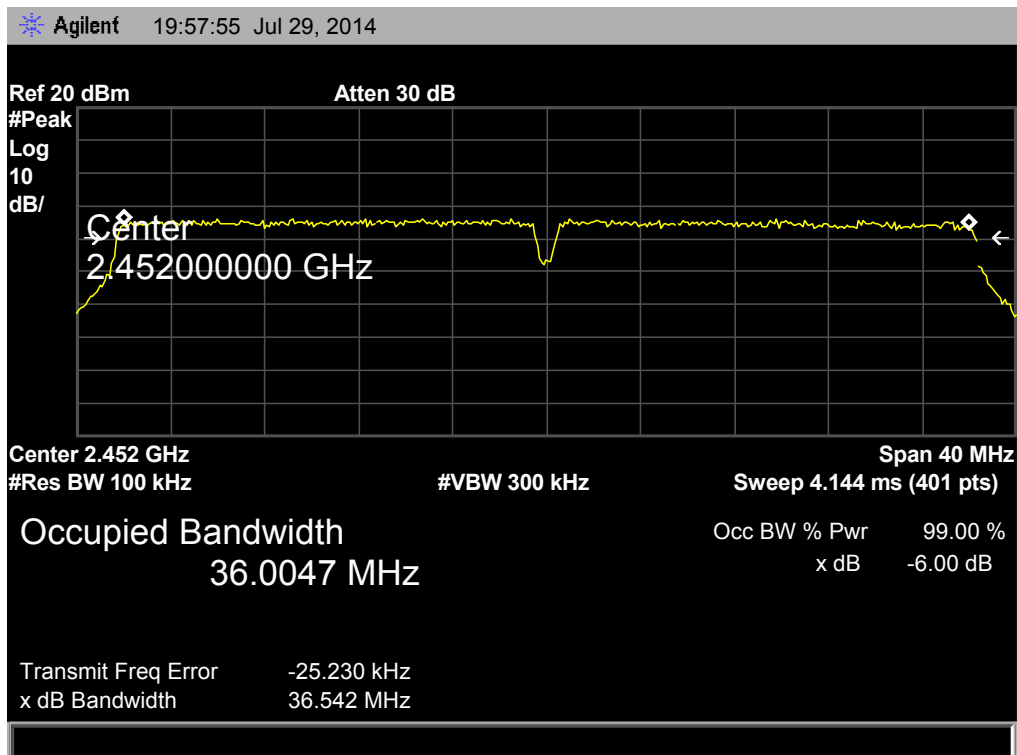

7. Peak Output Power Test

7.1 Test Standard and Limit


7.1.1 Test Standard

FCC Part 15.247 (b)

7.1.2 Test Limit

FCC Part 15 Subpart C(15.247)/RSS-210		
Test Item	Limit	Frequency Range(MHz)
Peak Output Power	1 Watt or 30 dBm	2400~2483.5

7.2 Test Setup

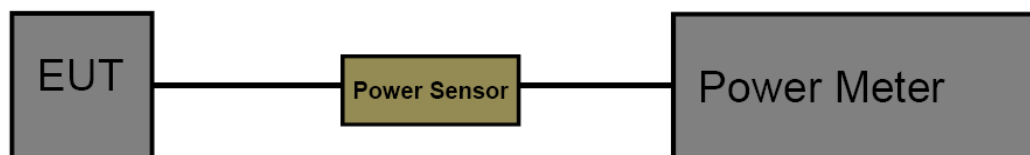

7.3 Test Procedure

The measurement is according to section 9.1.2 of KDB 558074 D01 DTS Meas Guidance v03r02.

The EUT was connected to RF power meter via a broadband power sensor as show the block above. The power sensor video bandwidth is greater than or equal to the DTS bandwidth of the equipment.

7.4 EUT Operating Condition

The EUT was set to continuously transmitting in the max power during the test.

7.5 Test Equipment

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
Power Meter	Anritsu	ML2495A	25406005	Dec. 20, 2013	Dec. 19, 2014
Power Sensor	Anritsu	ML2411B	25406005	Dec. 20, 2013	Dec. 19, 2014

7.6 Test Data

EUT:	MID	Model:	MID713-L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 HZ		
Mode	Channel frequency (MHz)	Test Result (dBm)	Limit (dBm)
802.11b	2412	9.40	30
	2437	9.49	
	2462	9.20	
802.11g	2412	9.43	
	2437	9.08	
	2462	8.91	
802.11n (HT20)	2412	9.23	
	2437	9.01	
	2462	8.79	
802.11n (HT40)	2422	9.30	
	2437	9.11	
	2452	9.02	

8. Power Spectral Density Test

8.1 Test Standard and Limit


8.1.1 Test Standard

FCC Part 15.247 (e)

8.1.2 Test Limit

FCC Part 15 Subpart C(15.247)		
Test Item	Limit	Frequency Range(MHz)
Power Spectral Density	8dBm(in any 3 kHz)	2400~2483.5

8.2 Test Setup



8.3 Test Procedure

The EUT was directly connected to the Spectrum Analyzer and antenna output port as show in the block diagram above. The measurement according to section 10.2 of KDB 558074 D01 DTS Meas Guidance v03r02.

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Set analyser center frequency to DTS channel center frequency.
- (3) Set the span to 1.5 times the DTS bandwidth.
- (4) Set the RBW to: 3 kHz
- (5) Set the VBW to: 10 kHz
- (6) Detector: peak
- (7) Sweep time: auto
- (8) Allow trace to fully stabilize. Then use the peak marker function to determine the maximum amplitude level.

8.4 EUT Operating Condition

The EUT was set to continuously transmitting in each mode and low, middle and high channel for the test.

8.5 Test Equipment

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
Spectrum Analyzer	Rohde & Schwarz	FSP30	DE25181	Aug. 10, 2013	Aug.09, 2014

8.6 Test Data

EUT:	MID	Model:	MID713-L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 HZ		
Test Mode:	TX 802.11B Mode		
Channel Frequency (MHz)	Power Density (3 kHz/dBm)	Limit (dBm)	
2412	-22.51	8	
2437	-22.26		
2462	-22.51		
802.11B Mode			
2412 MHz			

Agilent20:06:20 Jul 29, 2014

Ref 20 dBm

Atten 30 dB

Mkr1 2.4127500 GHz
-22.51 dBm

Peak

Log

10

dB/

Marker

2.412750000 GHz

-22.51 dBm

1

M1 S2

S3 FC

AA


Center 2.412 GHz


#Res BW 3 kHz


#VBW 10 kHz


Span 15 MHz

Sweep 1.715 s (401 pts)

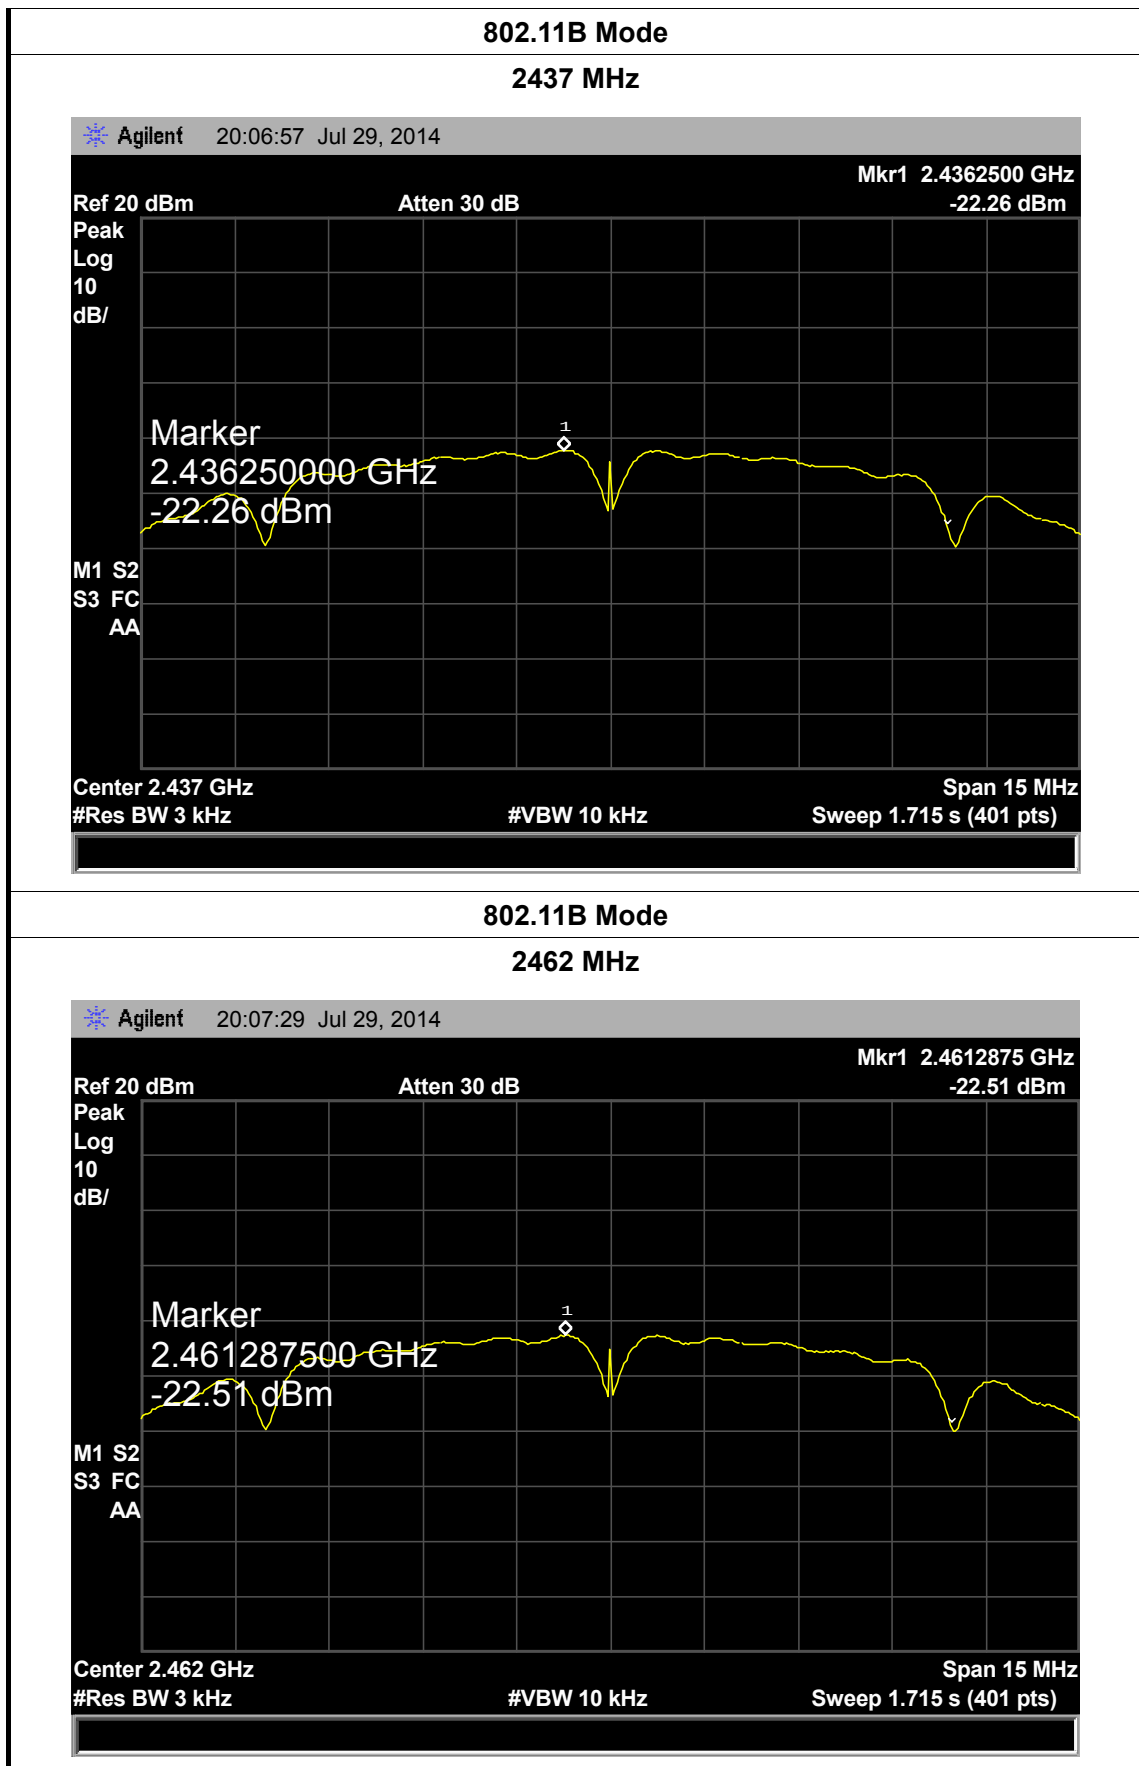

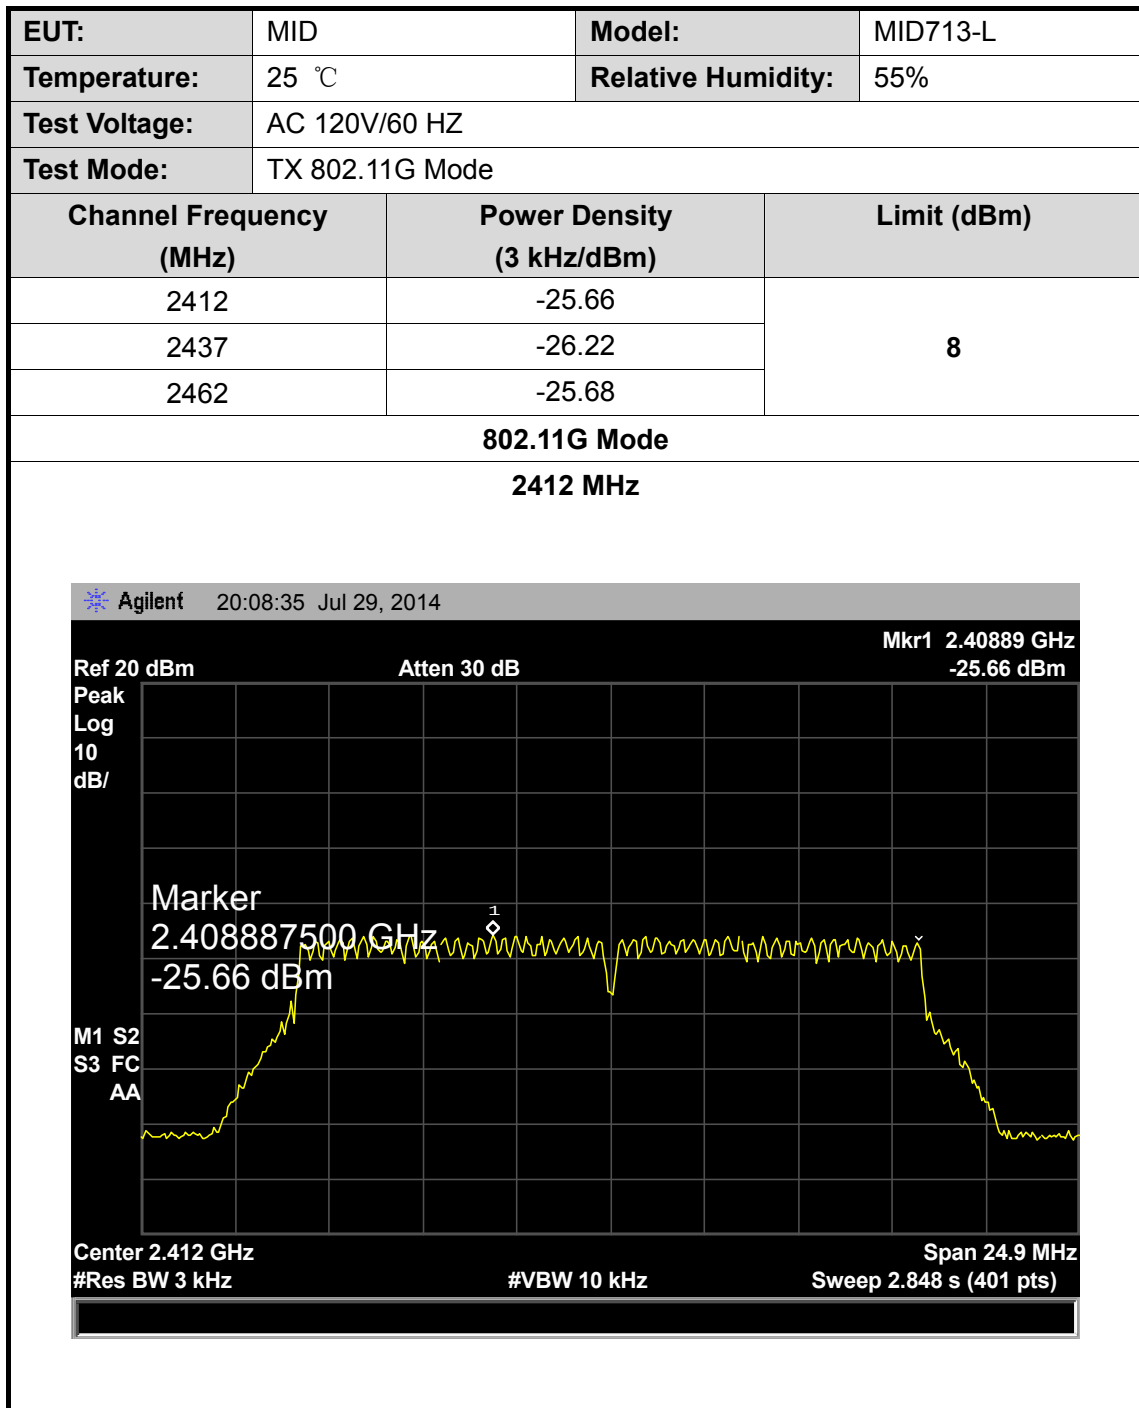


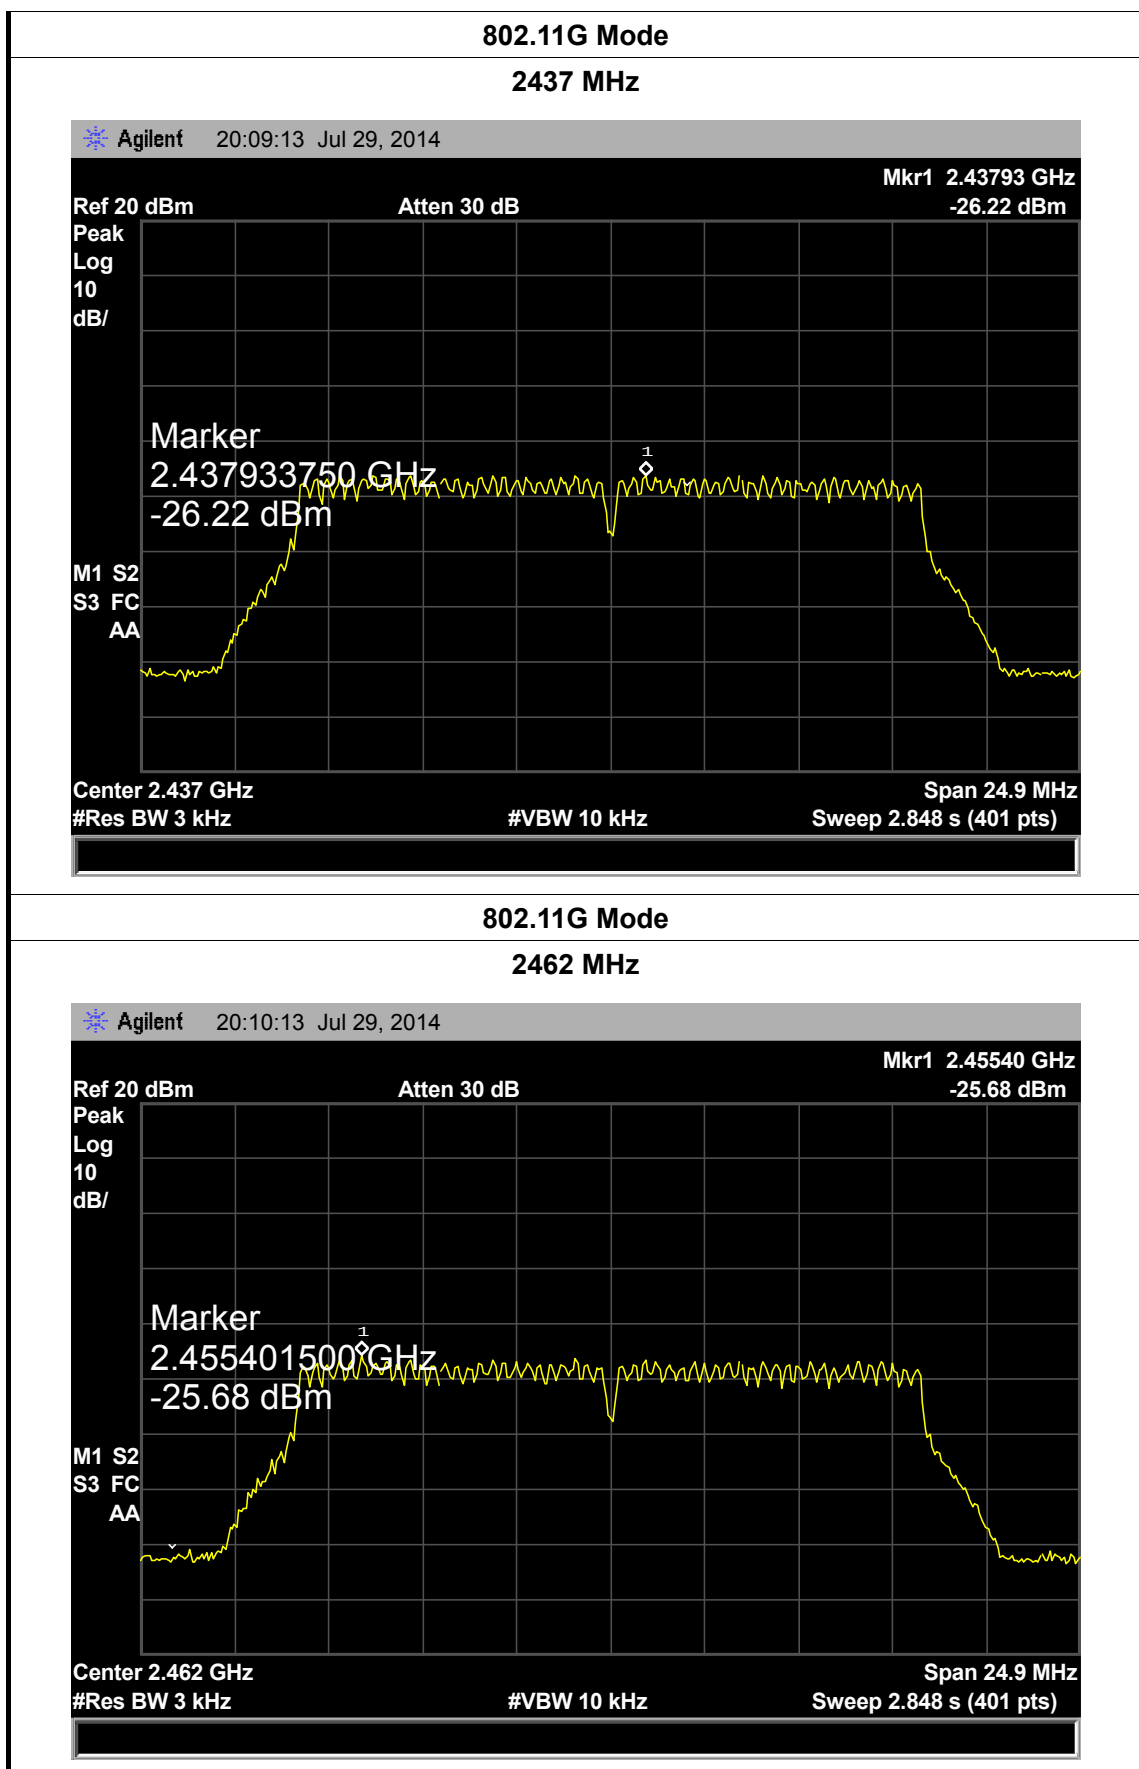

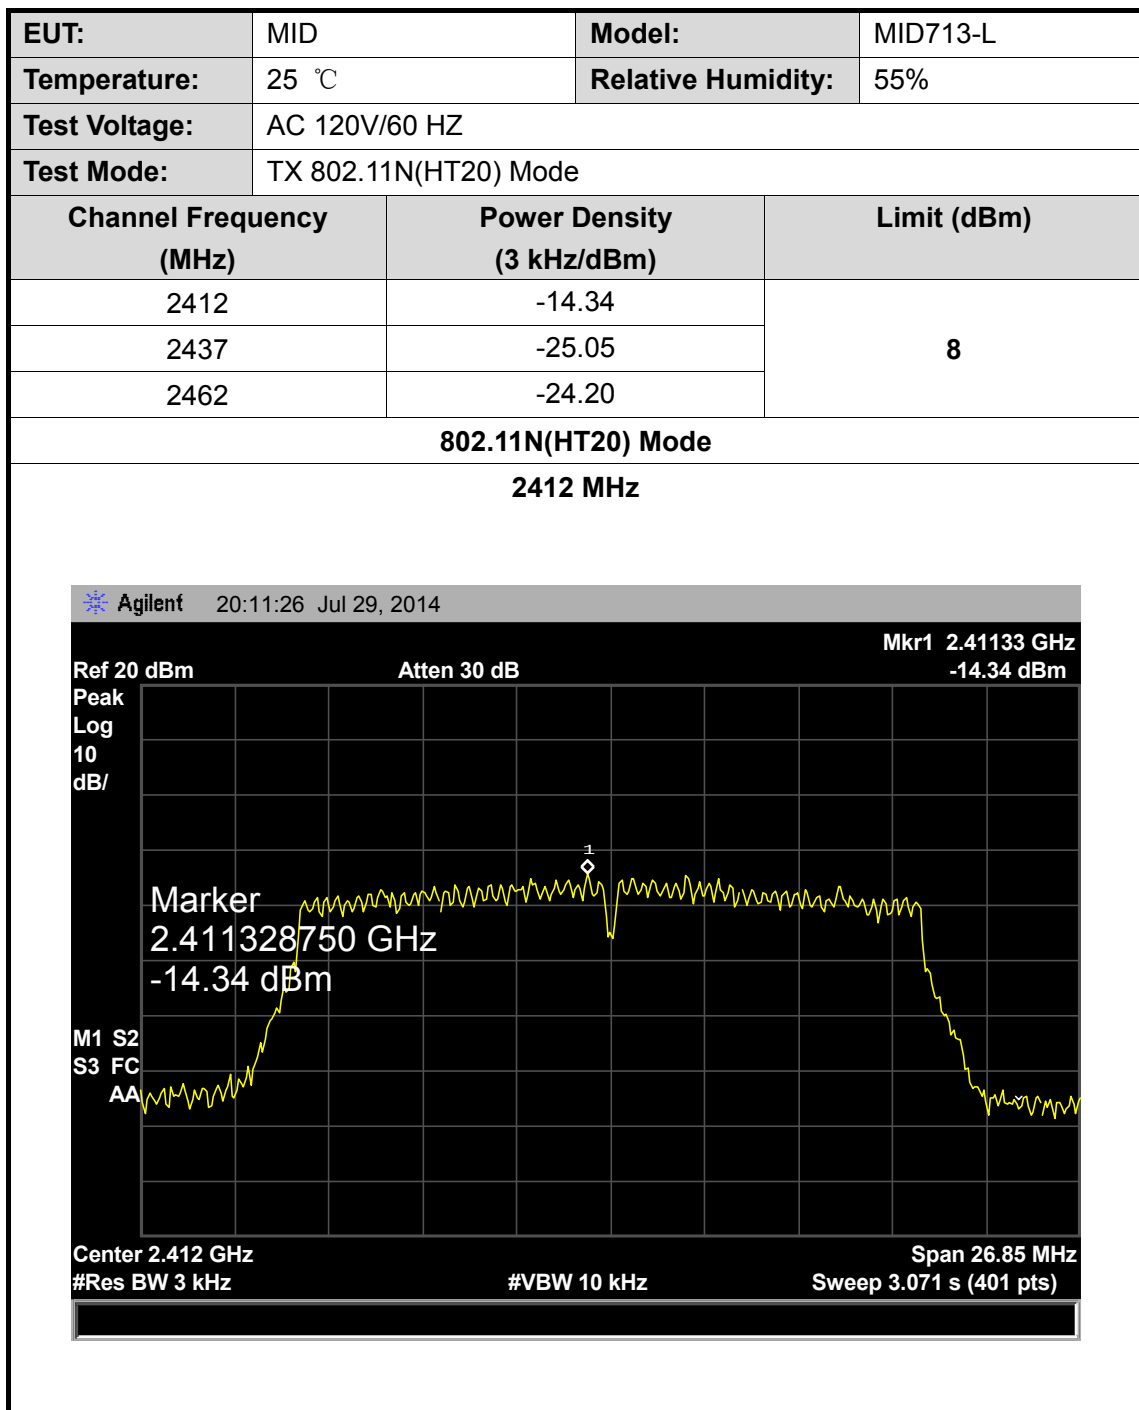


802.11N(HT20) Mode


2437 MHz

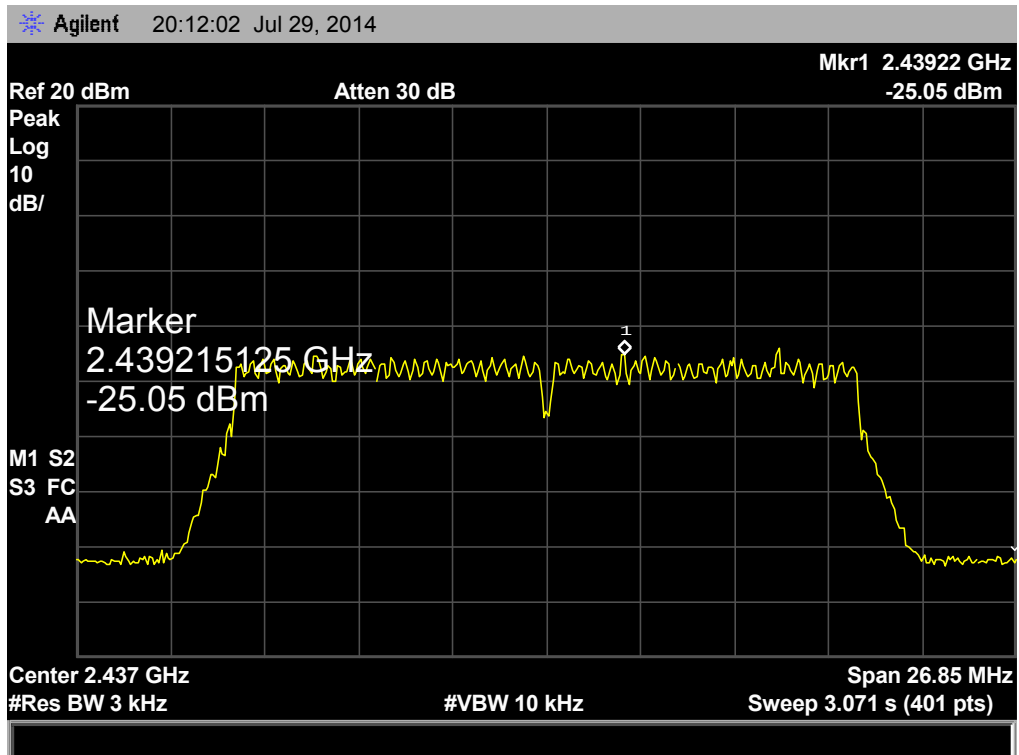

802.11N(HT20) Mode


2462 MHz

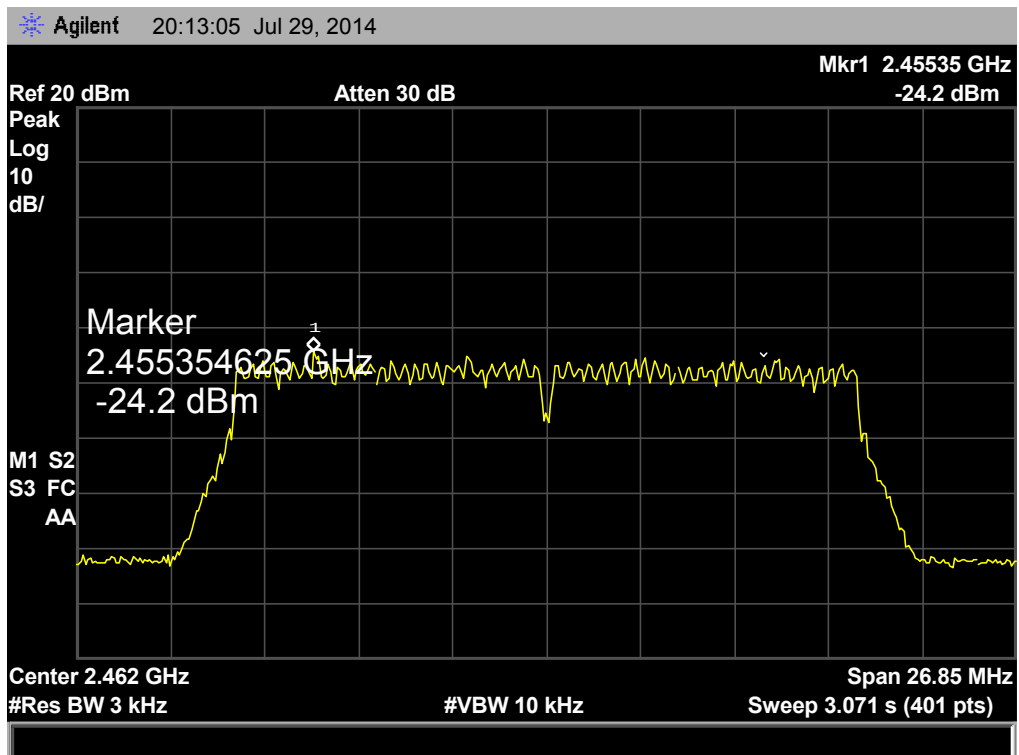

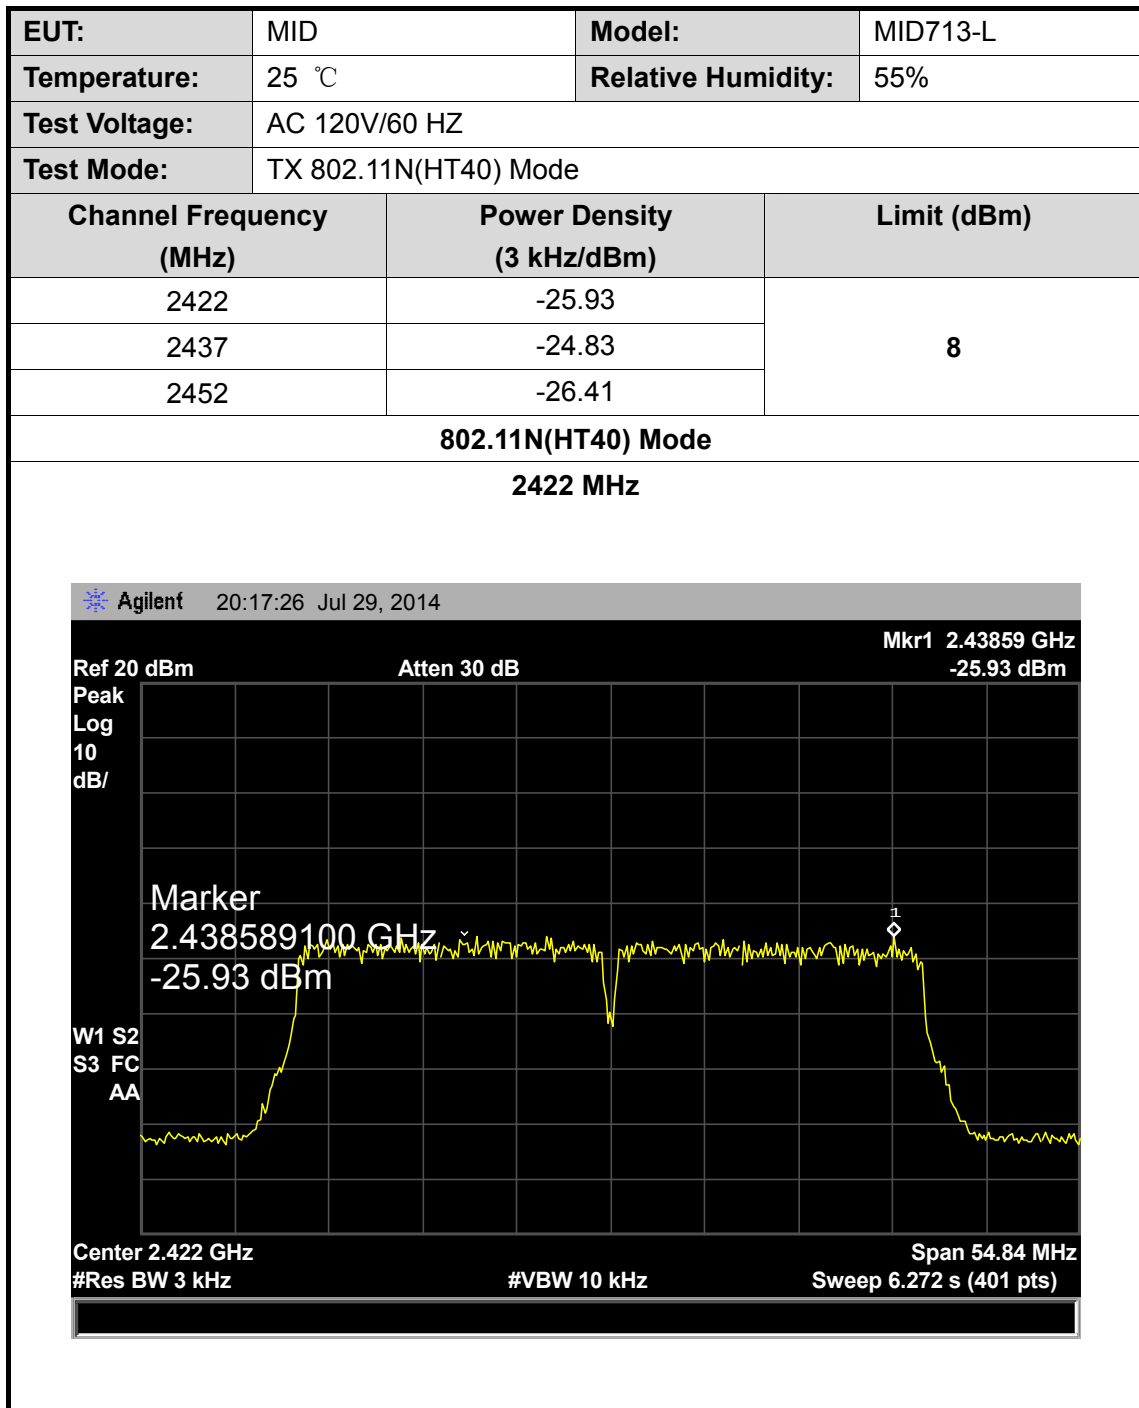


802.11N(HT40) Mode

2437 MHz

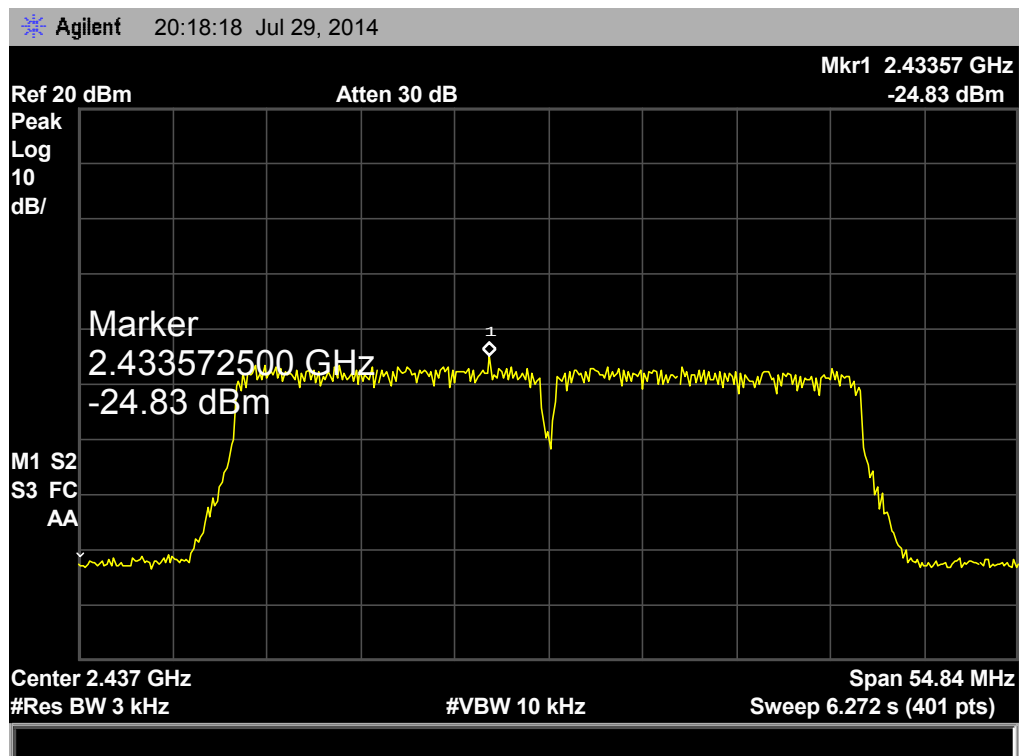

802.11N(HT40) Mode

2452 MHz

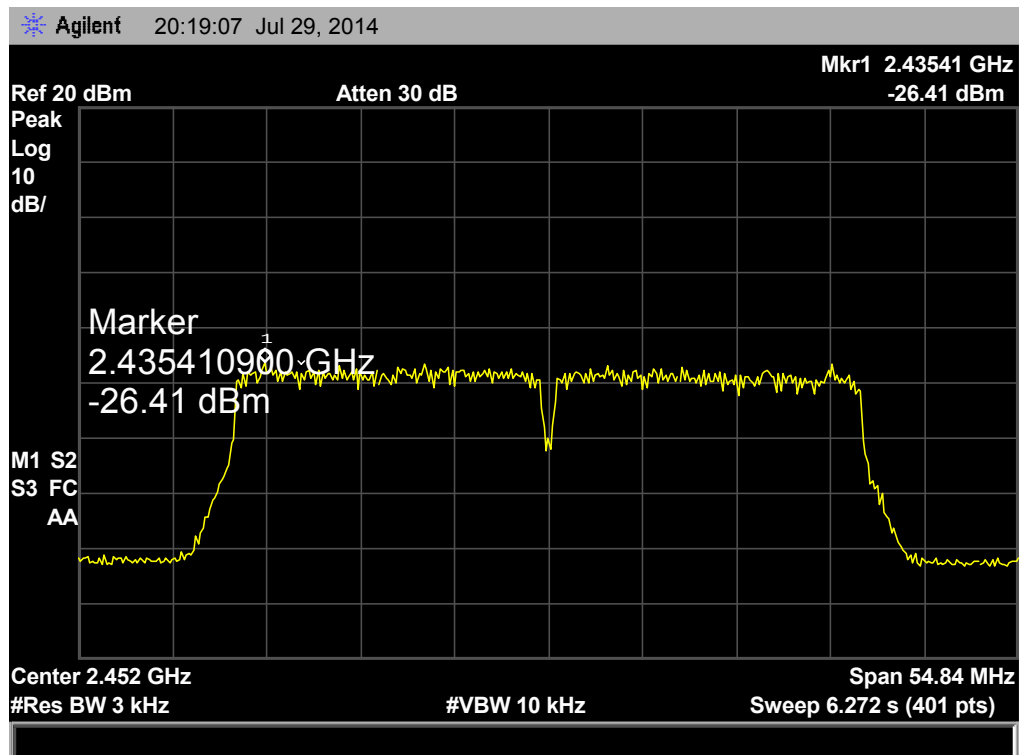

9. Antenna Requirement

9.1 Standard Requirement

9.1.1 Standard

FCC Part 15.203

9.1.2 Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

9.2 Antenna Connected Construction

The directional gains of the antenna used for transmitting is 0dBi, and the antenna de-signed with permanent attachment and no consideration of replacement. Please see the EUT photo for details.

9.3 Result

The EUT antenna is a FPC Antenna. It complies with the standard requirement.