



中认信通
CHINA CERTIFICATION ICT CO., LTD (DONGGUAN)



TEST REPORT

Applicant: Tait International Limited

Address: 245 Wooldridge Road, Harewood, P.O. Box 1645 Christchurch 8051 New Zealand

FCC ID: CASTWXNFA

Product Name: TWX500 series LTE Wearable Data device

Model Number: TWXNFA

**Standard(s): 47 CFR Part 15 Subpart B
ICES-003, ISSUE 7, OCTOBER 2020
ANSI C63.4-2014**

The above equipment has been tested and found compliant with the requirement of the relative standards by China Certification ICT Co., Ltd (Dongguan)

Report Number: CR21110026-00D

Date Of Issue: 2021-12-24

Reviewed By: Sun Zhong

Sun Zhong

Title: Manager

Test Laboratory: China Certification ICT Co., Ltd (Dongguan)
No. 113, Pingkang Road, Dalang Town, Dongguan,
Guangdong, China
Tel: +86-769-82016888

Test Facility

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0123.

Declarations

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

CONTENTS

TEST FACILITY2
DECLARATIONS.....2

1. GENERAL INFORMATION4

1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)4
1.2 DESCRIPTION OF TEST CONFIGURATION4
 1.2.4 Block Diagram of Test Setup.....5
1.3 MEASUREMENT UNCERTAINTY6

2. SUMMARY OF TEST RESULTS7

3. REQUIREMENTS AND TEST PROCEDURES8

3.1 AC LINE CONDUCTED EMISSIONS8
 3.1.1 EUT Setup.....8
 3.1.2 EMI Test Receiver Setup8
 3.1.3 Test Procedure9
 3.1.4 Corrected Amplitude & Margin Calculation.....9
3.2 RADIATION SPURIOUS EMISSIONS10
 3.2.1 EUT Setup.....10
 3.2.2 EMI Test Receiver Setup11
 3.2.3 Test Procedure11
 3.2.4 Corrected Amplitude & Margin Calculation.....11

4. TEST DATA AND RESULTS12

4.1 AC LINE CONDUCTED EMISSIONS12
4.2 RADIATION SPURIOUS EMISSIONS15

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

EUT Name:	TWX500 series LTE Wearable Data device
EUT Model:	TWXNFA
Highest Operation Frequency:	5825 MHz
Rated Input Voltage:	DC 3.85V from battery or DC 5V from USB port
Serial Number:	CR21110026-RF-S1
EUT Received Date:	2021.11.25
EUT Received Status:	Good

Accessory Information:

Accessory Description	Manufacturer	Model
Curly Cord	Tait International Limited	TWX55000-TCTP9
USB Cable		TWX55000-USB

1.2 Description of Test Configuration

1.2.1 EUT Operation Condition:

EUT Operation Mode:	The system was configured for testing in Typical Use Mode, which was provided by the manufacturer. Test Mode:Downloading
Equipment Modifications:	No
EUT Exercise Software:	Winthrax.exe

1.2.2 Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Lenovo	Laptop	E480	PF-1QQYYP 19/06
Unknown	Earphone	Unknown	Earphone 01
PHILIPS	Keyboard	SPK6234	K234210510742
PHILIPS	Mouse	SPK7214	M214BQ210411113
ZIONCOM	Router	MB-R210-00	MB-R210-00

1.2.3 Support Cable List and Details


Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
Keyboard Cable	No	No	1.8	Keyboard	Laptop
Mouse Cable	No	No	2	Mouse	Laptop
Earphone Cable	No	No	2	EUT	Earphone
RJ45 Cable	No	No	1.2	Router	Laptop
USB Cable	No	No	1.2	Laptop	EUT

1.2.4 Block Diagram of Test Setup

Conducted emissions:

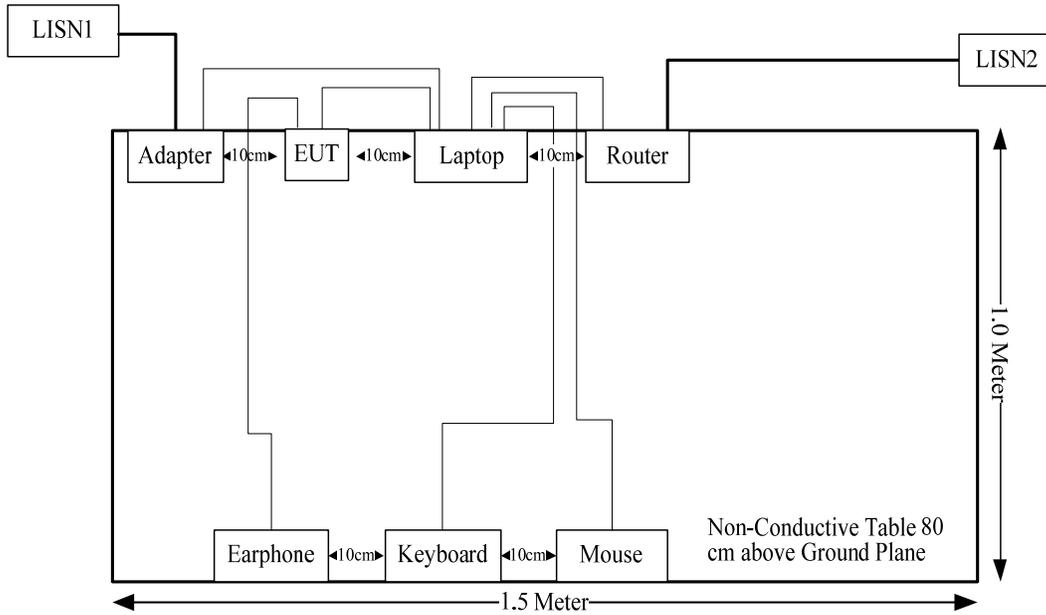

Radiated emissions:

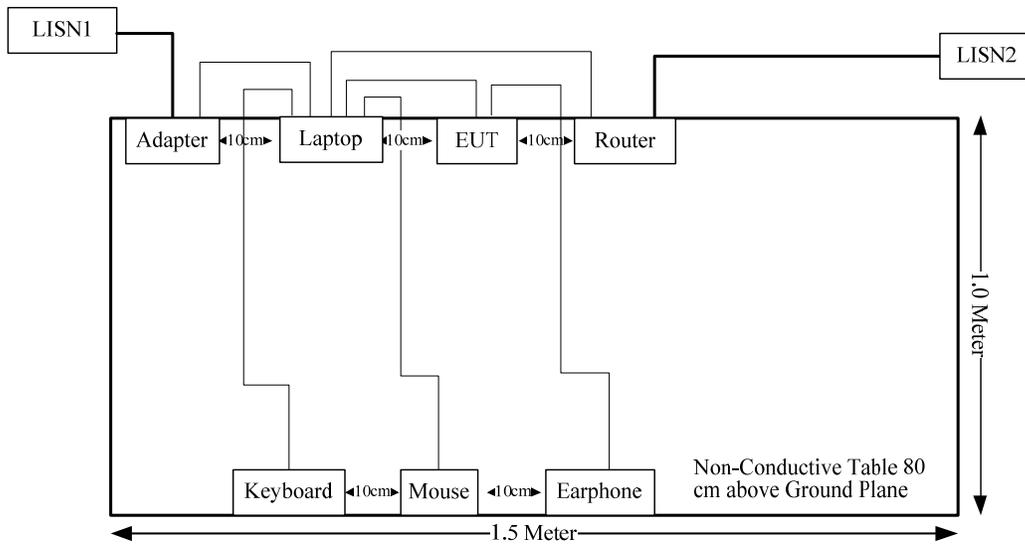

1.3 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Unwanted Emissions, radiated	30M~200MHz: 4.15 dB, 200M~1GHz: 5.61 dB, 1G~6GHz: 5.14 dB, 6G~18GHz: 5.93 dB, 18G~26.5G: 5.47 dB, 26.5G~40G: 5.63 dB
Temperature	$\pm 1^{\circ}\text{C}$
Humidity	$\pm 5\%$
AC Power Lines Conducted Emission	2.8 dB (150 kHz to 30 MHz)


2. SUMMARY OF TEST RESULTS

Standard Clause	Description of Test	Test Result
FCC§15.107 ICES-003§3.2.1	Conducted emissions	Compliant
FCC§15.109 ICES-003§3.2.2	Radiated emissions	Compliant

3. REQUIREMENTS AND TEST PROCEDURES

3.1 AC Line Conducted Emissions

3.1.1 EUT Setup

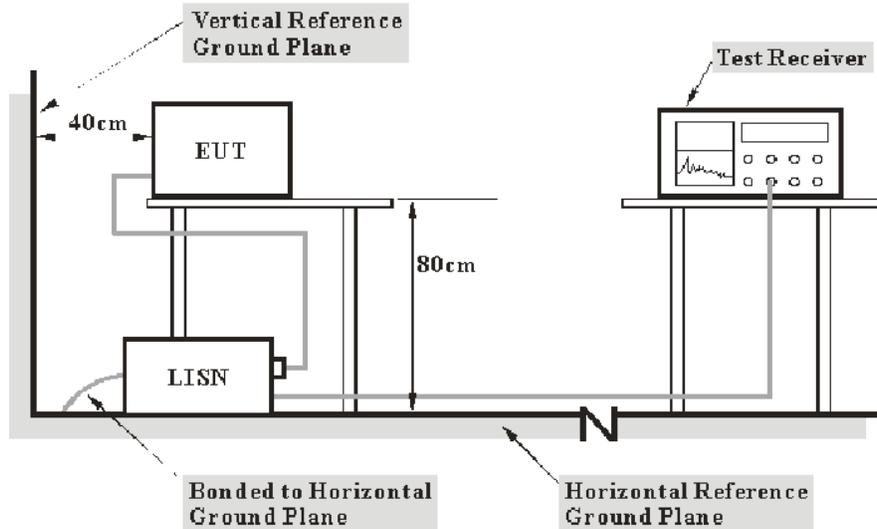

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15 B and Innovation, Science and Economic Development Canada ICES-003 Class B limits..

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The adapter was connected to the main LISN with a 120 V/60 Hz AC power source.

3.1.2 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

3.1.3 Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the first LISN and the other support equipments were connected to the outlet of the second LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT, the report shall list the six emissions with the smallest margin relative to the limit, unless the margin is greater than 20 dB.

All data was recorded in the Quasi-peak and average detection mode.

The report shall list the six emissions with the smallest margin relative to the limit, unless the margin is greater than 20 dB.

3.1.4 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = attenuation caused by cable loss + voltage division factor of AMN


The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result


3.2 Radiation Spurious Emissions

3.2.1 EUT Setup

Below 1GHz:

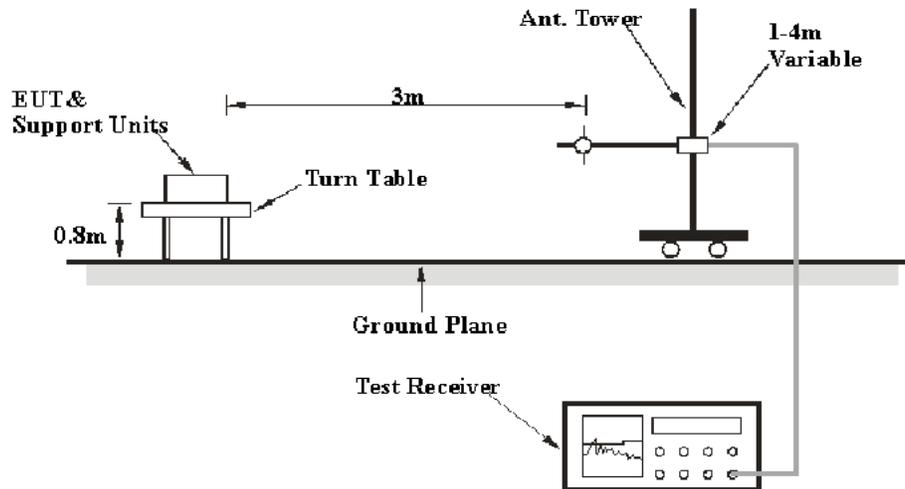

Above 1GHz:

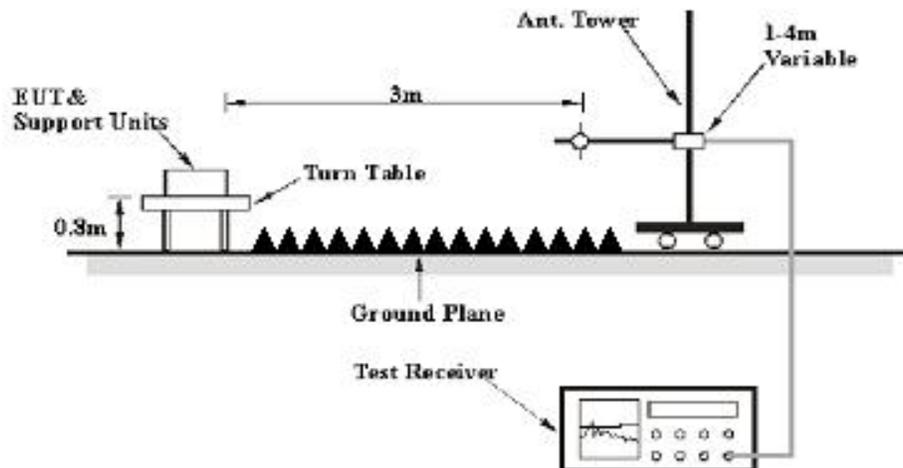

The radiated emission were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.4-2014. The specification used was the FCC Part 15.109 and ICES-003 Class B limits.

3.2.2 EMI Test Receiver Setup

The system was investigated from 30 MHz to 30 GHz.

During the radiated emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	Peak
	1 MHz	Reduced video bandwidth	/	AVG

If the maximized peak measured value complies with under the limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

3.2.3 Test Procedure

During the radiated emissions, the adapter was connected to the first AC floor outlet and the other support equipments were connected to the second AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The data was recorded in the Quasi-peak detection mode for below 1 GHz, peak and average detection mode above 1 GHz.

All emissions under the average limit and under the noise floor have not recorded in the report.

3.2.4 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$\text{Result} = \text{Reading} + \text{Factor}$$

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Result}$$

4. TEST DATA AND RESULTS

4.1 AC Line Conducted Emissions

Serial Number:	CR21110026-RF-S1	Test Date:	2021-11-29
Test Site:	CE	Test Mode:	Downloading
Tester:	Nick Tang	Test Result:	Pass

Environmental Conditions:


Temperature: (°C)	21.4	Relative Humidity: (%)	65	ATM Pressure: (kPa)	101.4
----------------------	------	------------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	LISN	ENV216	101132	2021-04-25	2022-04-24
R&S	LISN	ENV216	101134	2021-04-25	2022-04-24
R&S	EMI Test Receiver	ESR3	102726	2021-07-22	2022-07-21
MICRO-COAX	Coaxial Cable	UTIFLEX	C-0200-01	2021-08-08	2022-08-07
Audix	Test Software	E3	190306 (V9)	N/A	N/A


* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Line:

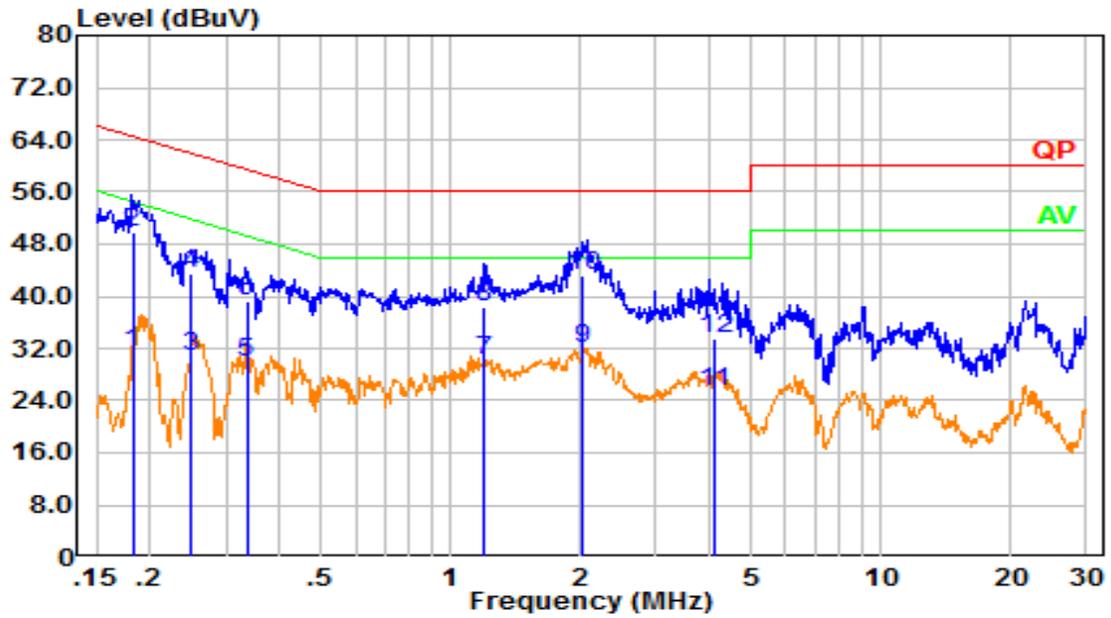

No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB)	Result (dB μ V)	Limit (dB μ V)	Margin (dB)	Detector
1	0.182	21.81	9.61	31.42	54.40	22.98	Average
2	0.182	40.06	9.61	49.67	64.40	14.73	QP
3	0.247	21.03	9.61	30.64	51.85	21.20	Average
4	0.247	33.73	9.61	43.34	61.85	18.51	QP
5	0.335	20.24	9.61	29.85	49.33	19.48	Average
6	0.335	29.53	9.61	39.14	59.33	20.19	QP
7	1.191	20.61	9.62	30.23	46.00	15.77	Average
8	1.191	28.73	9.62	38.35	56.00	17.65	QP
9	2.017	22.28	9.63	31.91	46.00	14.09	Average
10	2.017	33.66	9.63	43.29	56.00	12.71	QP
11	4.083	15.60	9.65	25.26	46.00	20.74	Average
12	4.083	23.88	9.65	33.53	56.00	22.47	QP

Neutral:

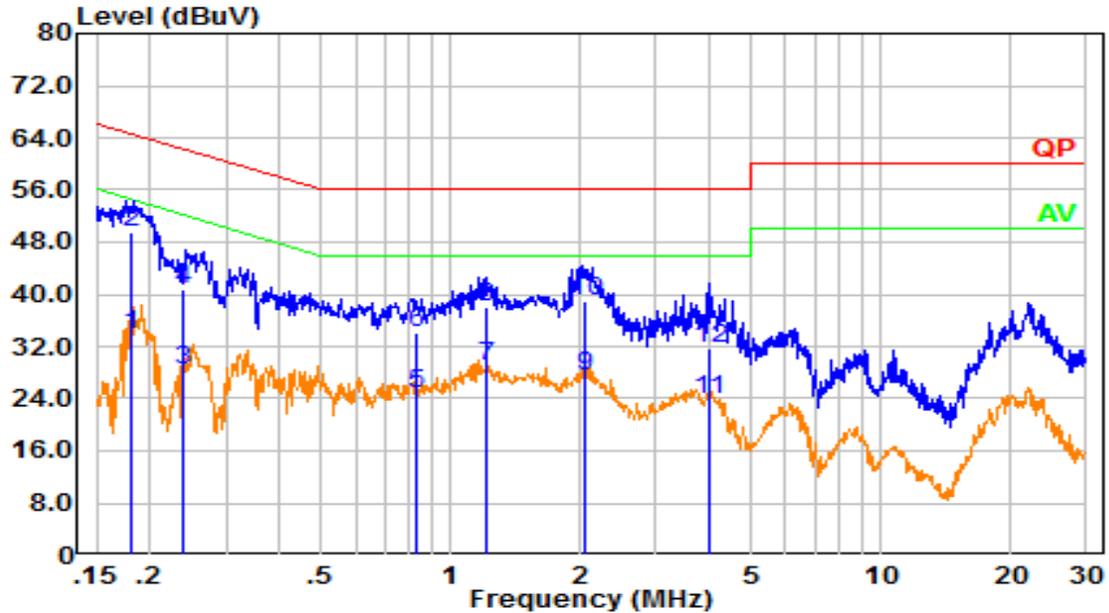

No.	Frequency (MHz)	Reading (dBUV)	Factor (dB)	Result (dBUV)	Limit (dBUV)	Margin (dB)	Detector
1	0.179	24.23	9.61	33.84	54.51	20.67	Average
2	0.179	40.03	9.61	49.64	64.51	14.87	QP
3	0.239	18.64	9.61	28.25	52.14	23.89	Average
4	0.239	31.20	9.61	40.81	62.14	21.33	QP
5	0.832	15.23	9.62	24.85	46.00	21.15	Average
6	0.832	24.62	9.62	34.24	56.00	21.76	QP
7	1.204	19.45	9.62	29.07	46.00	16.93	Average
8	1.204	28.28	9.62	37.90	56.00	18.10	QP
9	2.059	17.95	9.63	27.58	46.00	18.42	Average
10	2.059	29.36	9.63	38.99	56.00	17.01	QP
11	3.986	14.21	9.65	23.86	46.00	22.14	Average
12	3.986	22.02	9.65	31.67	56.00	24.33	QP

4.2 Radiation Spurious Emissions

Serial Number:	CR21110026-RF-S1	Test Date:	2021-11-29
Test Site:	966-1, 966-2	Test Mode:	Downloading
Tester:	Great Qiao, Tommy Luo	Test Result:	Pass

Environmental Conditions:


Temperature: (°C)	21.6~23.5	Relative Humidity: (%)	55~63	ATM Pressure: (kPa)	101.4
----------------------	-----------	------------------------------	-------	------------------------	-------

Test Equipment List and Details:


Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sunol Sciences	Antenna	JB6	A082520-5	2020-10-19	2023-10-18
R&S	EMI Test Receiver	ESR3	102724	2021-07-22	2022-07-21
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0470-02	2021-07-18	2022-07-17
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0780-01	2021-07-18	2022-07-17
Sonoma	Amplifier	310N	186165	2021-07-18	2022-07-17
ETS-Lindgren	Horn Antenna	3115	9912-5985	2020-10-13	2023-10-12
PASTERNAK	Horn Antenna	PE9852/2F-20	112002	2021-02-05	2023-02-04
PASTERNAK	Horn Antenna	PE9850/2F-20	072001	2021-02-05	2023-02-04
R&S	Spectrum Analyzer	FSV40	101591	2021-07-22	2022-07-21
MICRO-COAX	Coaxial Cable	UFA210A-1-1200-70U300	217423-008	2021-08-08	2022-08-07
MICRO-COAX	Coaxial Cable	UFA210A-1-2362-300300	235780-001	2021-08-08	2022-08-07
MICRO-COAX	Coaxial Cable	UFB142A-1-2362-200200	235772-001	2021-08-08	2022-08-07
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2021-11-10	2022-11-09
AH	Preamplifier	PAM-1840VH	190	2021-11-20	2022-11-19
Audix	Test Software	E3	201021 (V9)	N/A	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


1) 30MHz-1GHz:

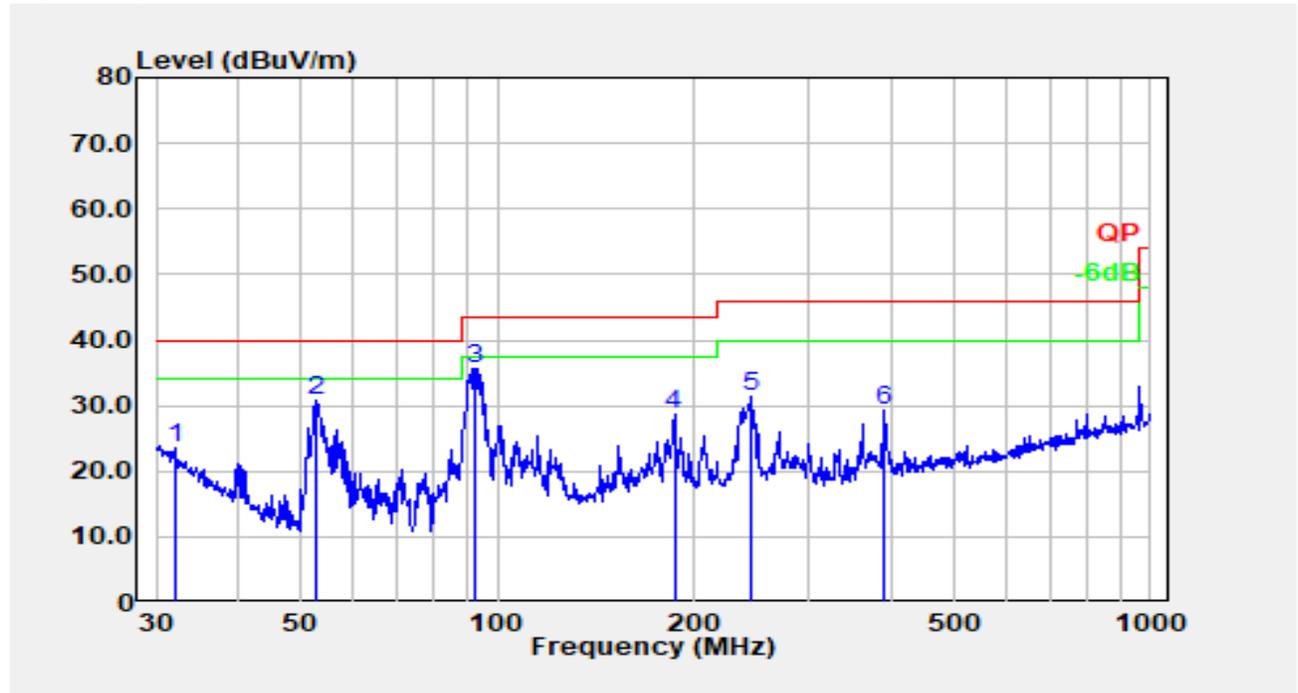Horizontal:


No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
1	32.067	28.83	-5.37	23.45	40.00	16.55	Peak
2	52.945	48.32	-17.45	30.87	40.00	9.13	Peak
3	92.462	52.30	-16.56	35.73	43.50	7.77	Peak
4	186.441	42.29	-13.71	28.57	43.50	14.93	Peak
5	245.090	44.46	-13.12	31.34	46.00	14.66	Peak
6	392.095	38.47	-9.11	29.36	46.00	16.64	Peak

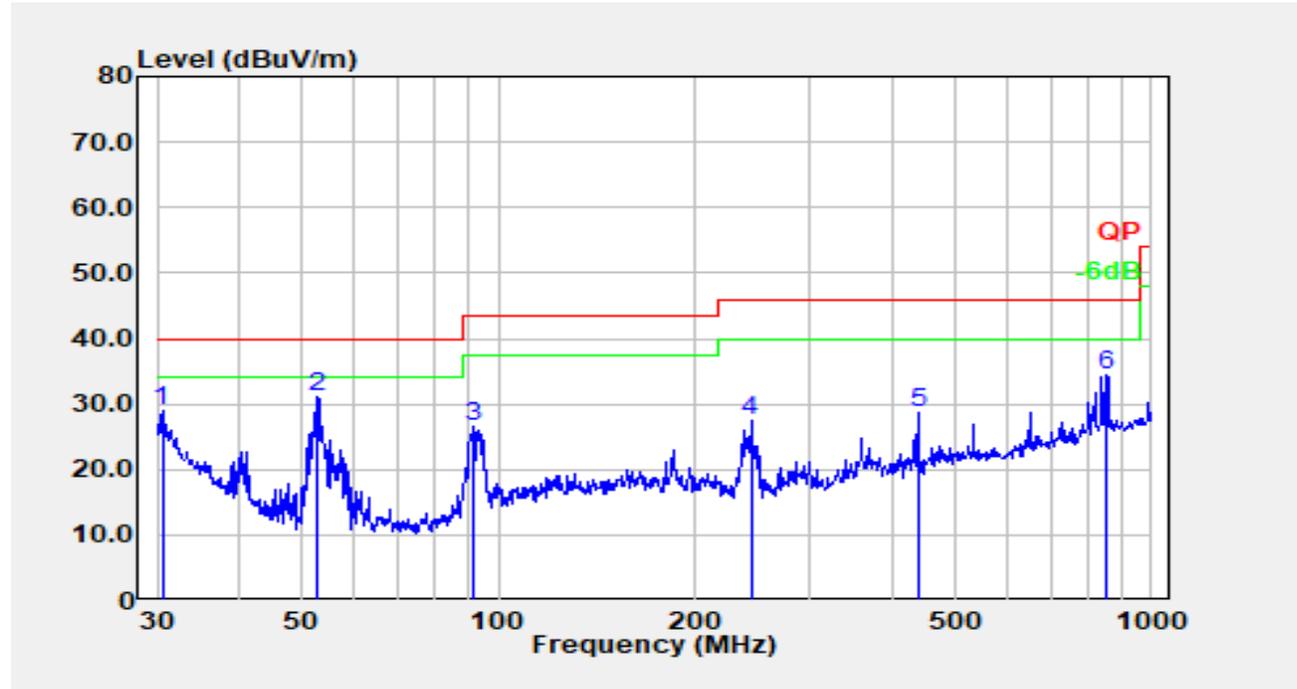Vertical:

No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
1	30.531	33.18	-4.20	28.98	40.00	11.02	Peak
2	52.945	48.57	-17.45	31.12	40.00	8.88	Peak
3	91.816	43.17	-16.74	26.43	43.50	17.07	Peak
4	243.377	40.60	-13.14	27.46	46.00	18.54	Peak
5	440.196	36.28	-7.49	28.78	46.00	17.22	Peak
6	851.035	36.25	-1.73	34.52	46.00	11.48	Peak

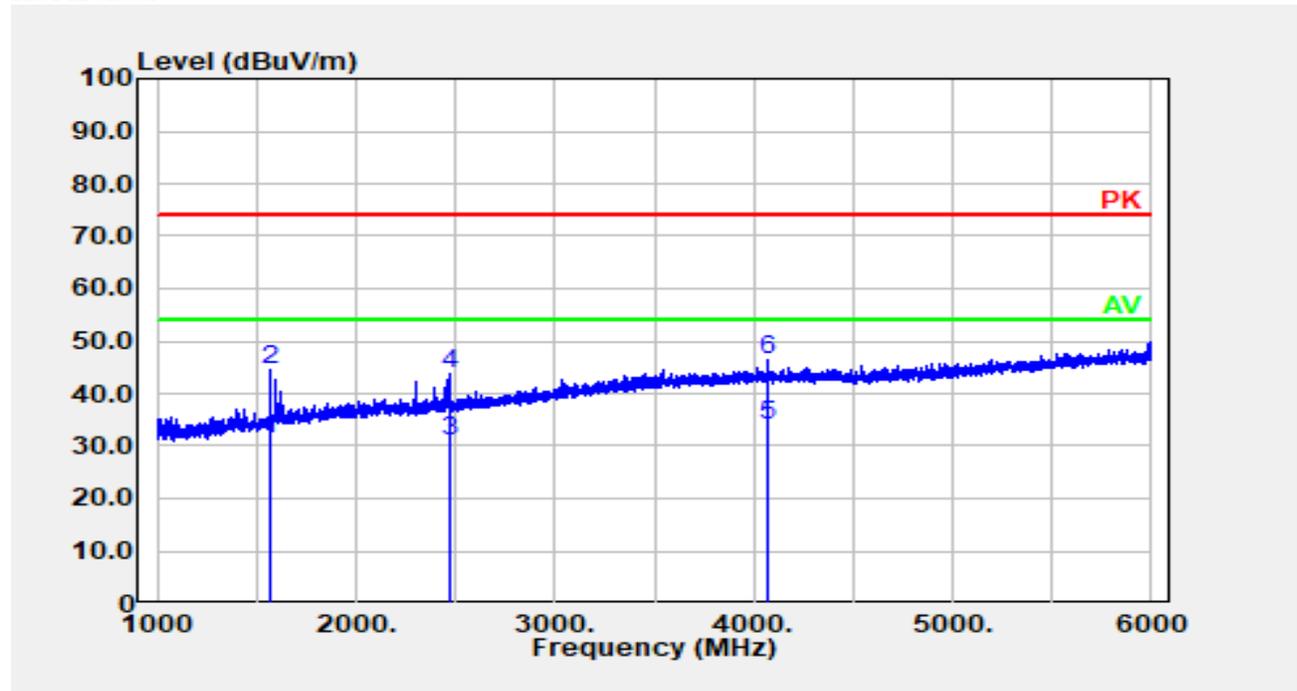
Horizontal:

No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
1	1569.114	31.24	0.02	31.26	54.00	22.74	Average
2	1569.114	44.68	0.02	44.70	74.00	29.30	Peak
3	2468.294	27.41	3.69	31.10	54.00	22.90	Average
4	2468.294	40.04	3.69	43.73	74.00	30.27	Peak
5	4073.615	24.34	9.81	34.15	54.00	19.85	Average
6	4073.615	36.44	9.81	46.25	74.00	27.75	Peak

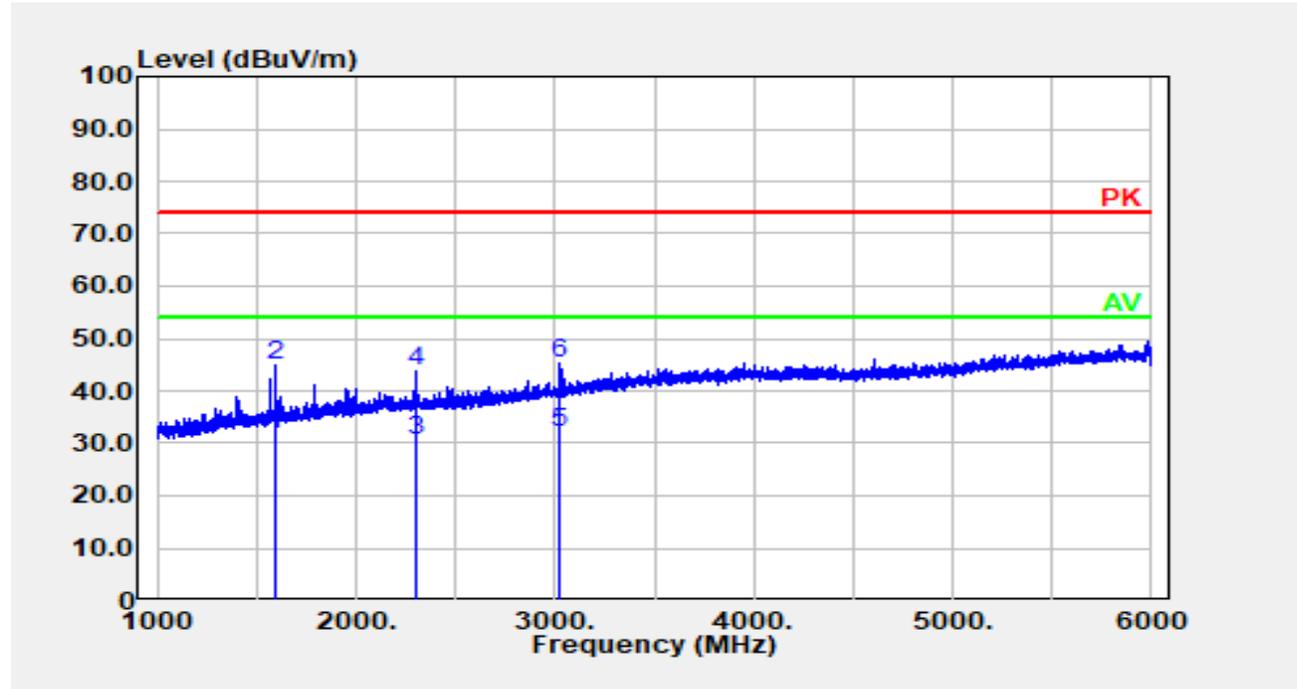Vertical:


No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
1	1597.119	31.46	0.30	31.76	54.00	22.24	Average
2	1597.119	44.48	0.30	44.78	74.00	29.22	Peak
3	2298.260	27.24	3.15	30.39	54.00	23.61	Average
4	2298.260	40.44	3.15	43.59	74.00	30.41	Peak
5	3023.405	25.68	6.41	32.09	54.00	21.91	Average
6	3023.405	38.69	6.41	45.10	74.00	28.90	Peak

Horizontal:

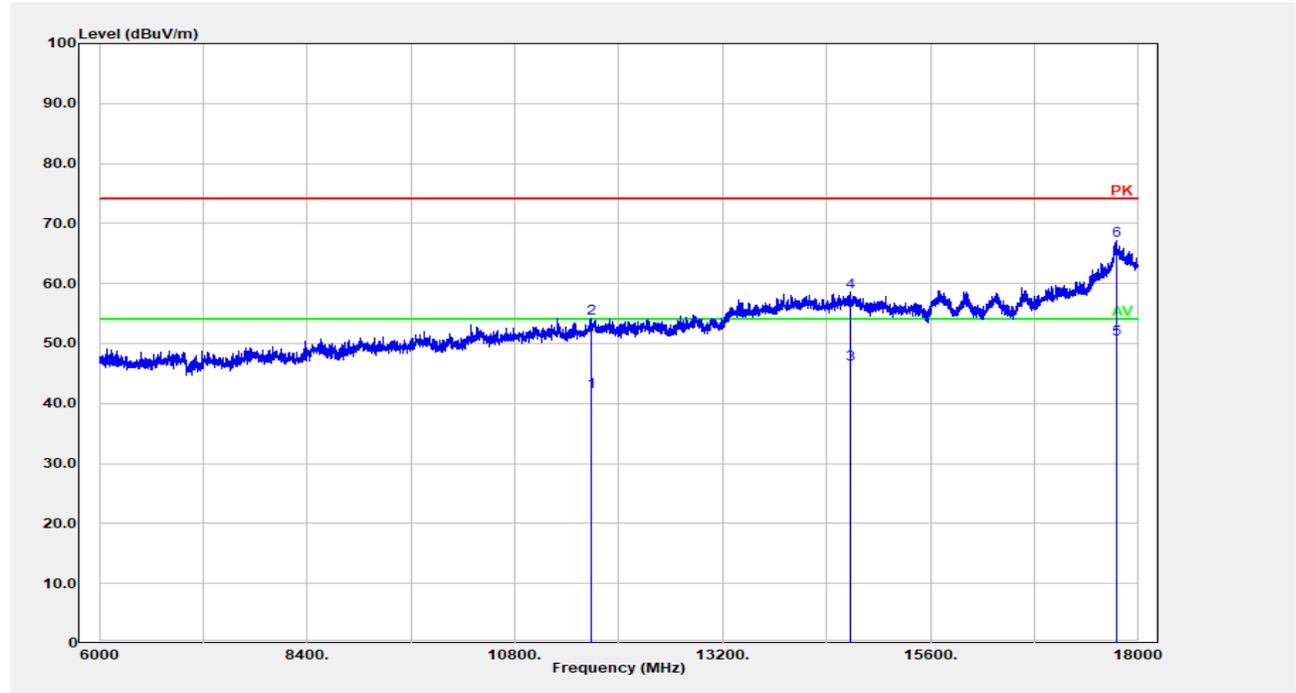


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	11681.940	21.52	20.39	41.91	54.00	12.09	Average
2	11681.940	33.83	20.39	54.22	74.00	19.78	Peak
3	14668.130	22.49	24.10	46.59	54.00	7.41	Average
4	14668.130	34.43	24.10	58.53	74.00	15.47	Peak
5	17743.150	21.17	29.58	50.75	54.00	3.25	Average
6	17743.150	37.56	29.58	67.14	74.00	6.86	Peak


Vertical:

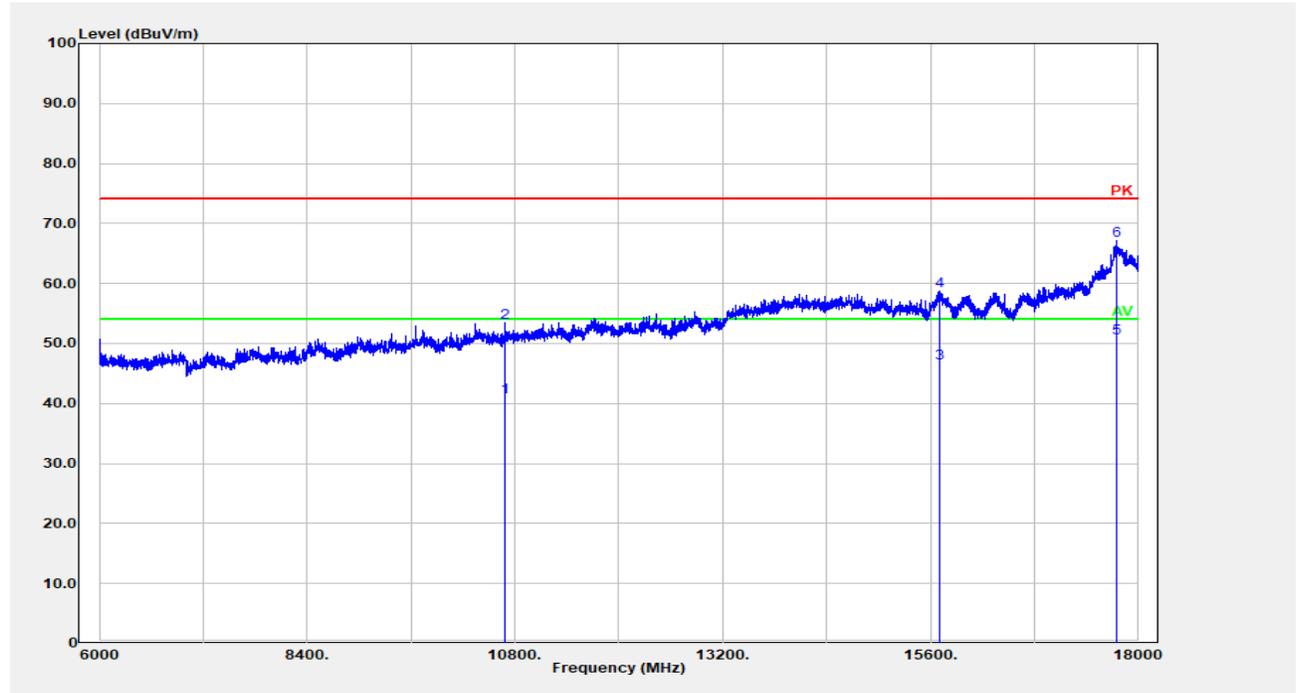


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	10688.140	22.37	18.71	41.08	54.00	12.92	Average
2	10688.140	34.70	18.71	53.41	74.00	20.59	Peak
3	15697.940	25.43	21.23	46.66	54.00	7.34	Average
4	15697.940	37.54	21.23	58.77	74.00	15.23	Peak
5	17750.350	21.25	29.58	50.83	54.00	3.17	Average
6	17750.350	37.54	29.58	67.12	74.00	6.88	Peak

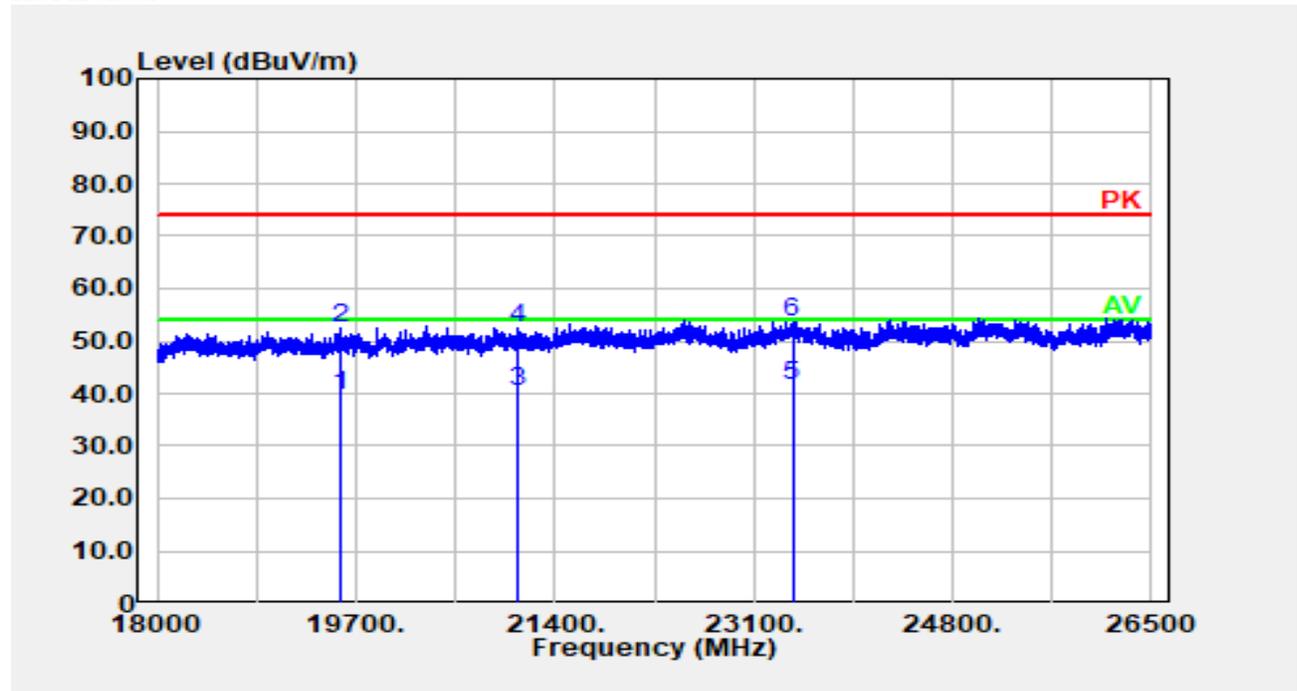Horizontal:


No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
1	19559.210	34.25	5.48	39.72	54.00	14.28	Average
2	19559.210	46.92	5.48	52.39	74.00	21.61	Peak
3	21079.320	32.75	7.47	40.22	54.00	13.78	Average
4	21079.320	45.02	7.47	52.49	74.00	21.51	Peak
5	23430.890	30.17	11.19	41.36	54.00	12.64	Average
6	23430.890	42.57	11.19	53.76	74.00	20.24	Peak

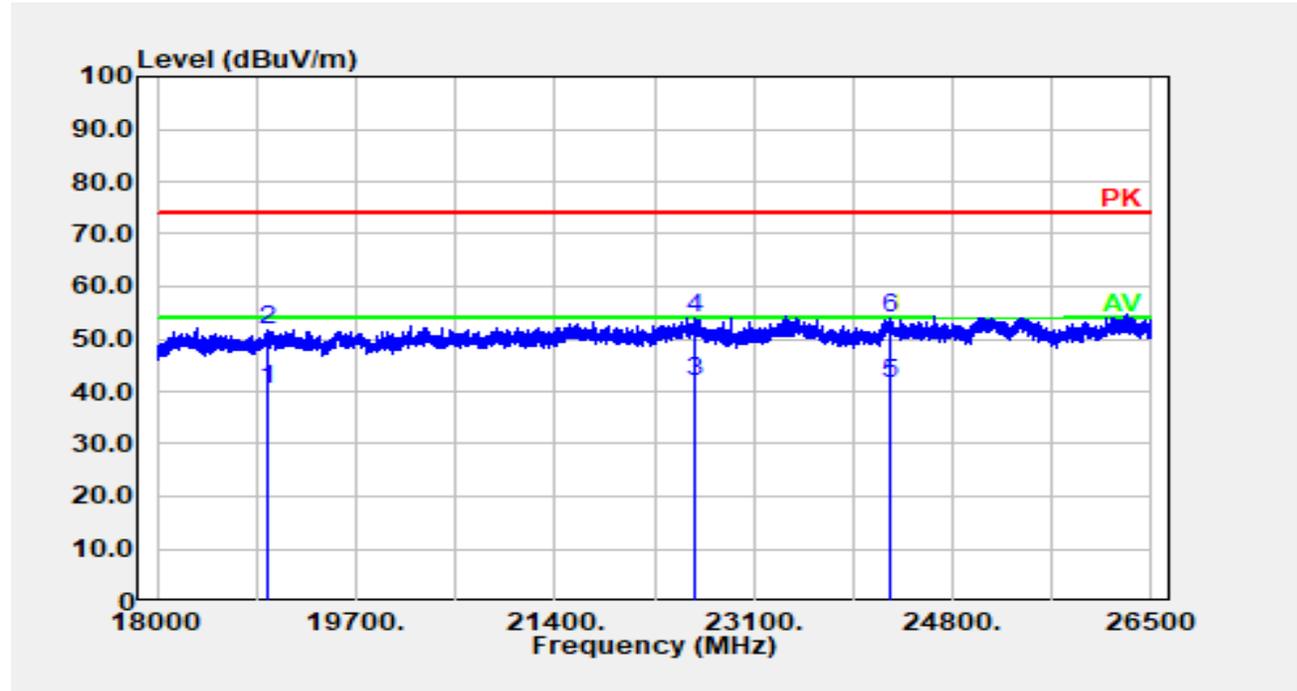Vertical:

No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
1	18940.290	34.58	5.61	40.19	54.00	13.81	Average
2	18940.290	46.15	5.61	51.76	74.00	22.24	Peak
3	22599.420	31.27	10.51	41.78	54.00	12.22	Average
4	22599.420	43.30	10.51	53.81	74.00	20.19	Peak
5	24275.960	30.06	11.41	41.47	54.00	12.53	Average
6	24275.960	42.48	11.41	53.89	74.00	20.11	Peak

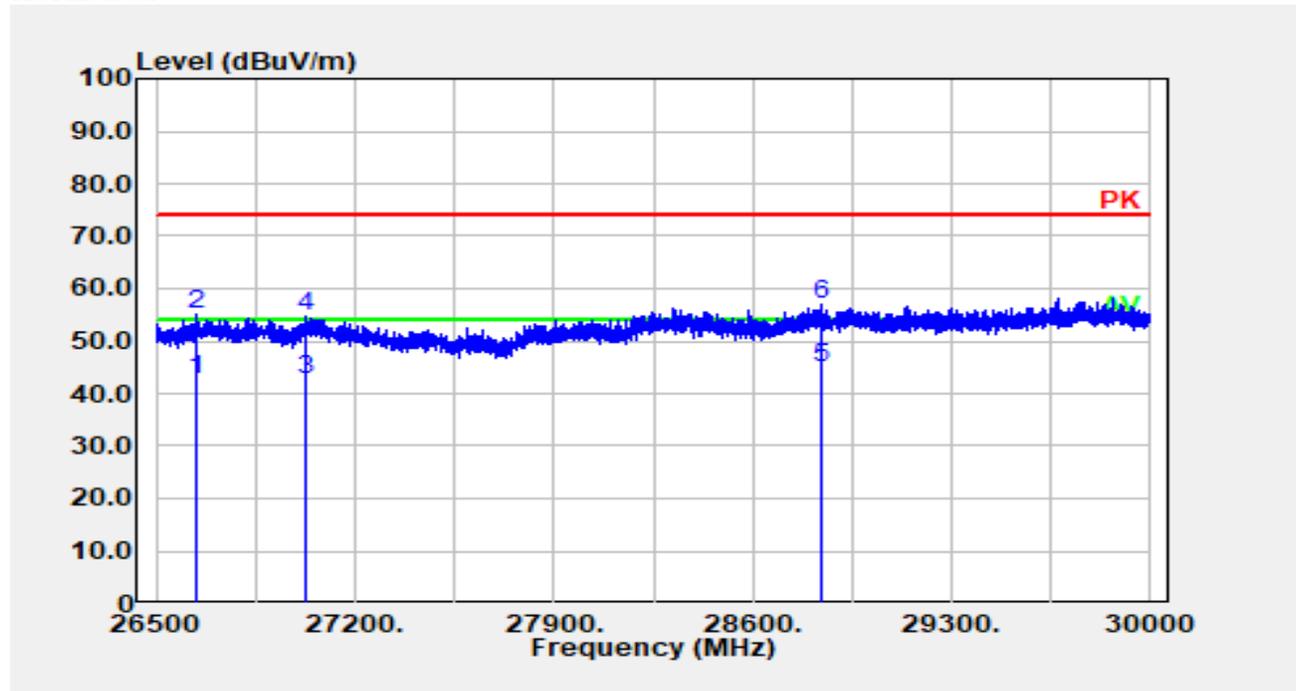Horizontal:

No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
1	26641.430	29.65	13.14	42.79	54.00	11.21	Average
2	26641.430	41.86	13.14	55.00	74.00	19.00	Peak
3	27025.800	28.35	14.14	42.49	54.00	11.51	Average
4	27025.800	40.69	14.14	54.83	74.00	19.17	Peak
5	28845.470	29.87	14.91	44.78	54.00	9.22	Average
6	28845.470	42.08	14.91	56.99	74.00	17.01	Peak

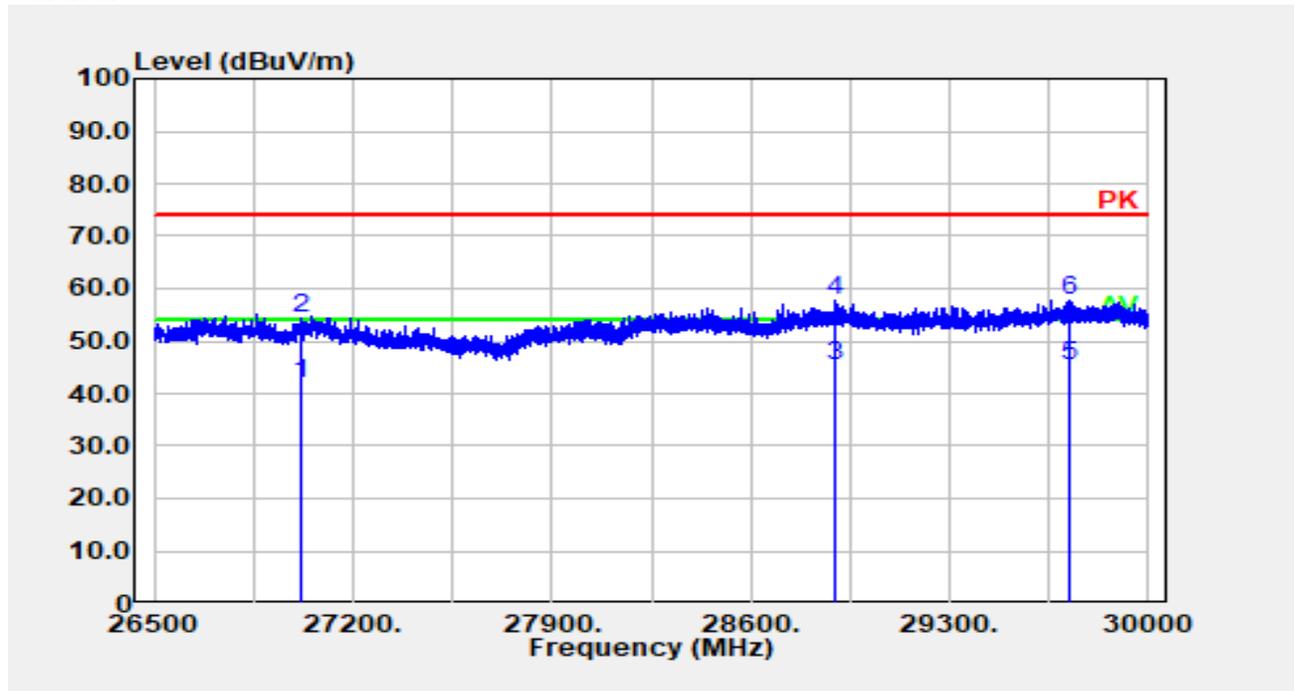Vertical:

No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
1	27019.500	27.86	14.15	42.01	54.00	11.99	Average
2	27019.500	40.32	14.15	54.47	74.00	19.53	Peak
3	28896.580	30.54	14.81	45.35	54.00	8.65	Average
4	28896.580	42.91	14.81	57.72	74.00	16.28	Peak
5	29721.340	30.36	15.03	45.39	54.00	8.61	Average
6	29721.340	42.72	15.03	57.75	74.00	16.25	Peak

*****END OF REPORT*****