



RF TEST REPORT

Applicant	ZTE Corporation
FCC ID	SRQ-MU5001
Product	UFI
Model	MU5001
Marketing	Vodafone Giga To Go
Report No.	R2106A0528-R1
Issue Date	July 12, 2021

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 2 (2020)/ FCC CFR47 Part 27C (2020)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Prepared by: Peng Tao

Approved by: Kai Xu

TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000



TABLE OF CONTENT

1	Test Laboratory	4
1.1	Notes of the Test Report	4
1.2.	Test facility	4
1.3	Testing Location	4
2	General Description of Equipment under Test	5
2.1	Applicant and Manufacturer Information.....	5
2.2	General information.....	5
3	Applied Standards.....	7
4	Test Configuration.....	8
5	Test Case Results.....	9
5.1	RF Power Output and Effective Isotropic Radiated Power	9
5.2	Occupied Bandwidth	16
5.3	Band Edge Compliance	31
5.4	Peak-to-Average Power Ratio (PAPR)	49
5.5	Frequency Stability.....	53
5.6	Spurious Emissions at Antenna Terminals	58
5.7	Radiates Spurious Emission	64
6	Main Test Instruments.....	69
ANNEX A: The EUT Appearance		70
ANNEX B: Test Setup Photos		71



Summary of Measurement Results

Number	Test Case	Clause in FCC rules	Verdict
1	RF Power Output and Effective Isotropic Radiated Power	2.1046 27.50(h)(2)	PASS
2	Occupied Bandwidth	2.1049	PASS
3	Band Edge Compliance	27.53(m)	PASS
4	Peak-to-Average Power Ratio	27.50(d)/KDB971168 D01(5.7)	PASS
5	Frequency Stability	2.1055 / 27.54	PASS
6	Spurious Emissions at Antenna Terminals	2.1051 27.53(m)	PASS
7	Radiates Spurious Emission	2.1053 27.53(m)	PASS
Date of Testing: July 1, 2021 and July 12, 2021			
Date of Sample Received: June 22, 2021			
Note: PASS: The EUT complies with the essential requirements in the standard. FAIL: The EUT does not comply with the essential requirements in the standard. All indications of Pass/Fail in this report are opinions expressed by TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.			



1 Test Laboratory

1.1 Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2. Test facility

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform measurements.

A2LA (Certificate Number: 3857.01)

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform measurement.

1.3 Testing Location

Company: TA Technology (Shanghai) Co., Ltd.
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: xukai@ta-shanghai.com

2 General Description of Equipment under Test

2.1 Applicant and Manufacturer Information

Applicant	ZTE Corporation
Applicant address	ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China
Manufacturer	Vodafone S.à r.l.
Manufacturer address	15 rue Edward Steichen, L-2540, Luxembourg, Grand-Duché de Luxembourg

2.2 General information

EUT Description			
Model	MU5001		
IMEI	869926050009519		
Hardware Version	Ver.A(T1)		
Software Version	BD_VDFMU5001V1.0.0B01		
Power Supply	Battery / AC adapter		
Antenna Type	Internal Antenna		
Antenna Gain	LTE Band 7:	2.0 dBi	
	LTE Band 38:	1.8 dBi	
Test Mode(s)	LTE Band 7/38		
Test Modulation	(LTE)QPSK 16QAM 64QAM;		
LTE Category	13		
Maximum E.I.R.P.	LTE Band 7:	24.39dBm	
	LTE Band 38:	23.84dBm	
Rated Power Supply Voltage	3.8V		
Operating Voltage	Minimum: 3.6V	Maximum: 4.4V	
Operating Temperature	Lowest: -10°C	Highest: +55°C	
Extreme Temperature	Lowest: -30°C	Highest: +55°C	
Operating Frequency Range(s)	Mode	Tx (MHz)	Rx (MHz)
	LTE Band 7	2500 ~ 2570	2620 ~ 2690
	LTE Band 38	2570 ~ 2620	2570 ~ 2620
EUT Accessory			
Adapter1	Manufacturer: SHENZHEN RUIJING INDUSTRIAL CO LTD Model: STC-A5930A1-A		
Adapter2	Manufacturer: Jiangsu Chenyang Electron Co., Ltd. Model: STC-A5930A1-A		
Adapter3	Manufacturer: SHENZHEN RUIJING INDUSTRIAL CO LTD		



	Model: STC-A5930A1-B
Adapter4	Manufacturer: Jiangsu Chenyang Electron Co., Ltd. Model: STC-A5930A1-B
Battery	Manufacturer: Zhuhai CosMX Battery Co., Ltd. Model : Li3945T44P4h815174
USB Cable1	Manufacturer: Luxshare-ICT Co., Ltd Model: USB-TC30-W-100-M
USB Cable2	Manufacturer: King Power Electronics Co.,Ltd Model: USB-TC30-W-100-M
Note: 1. The EUT is sent from the applicant to TA and the information of the EUT is declared by the applicant. 2. There are more than one Adapter, and USB Cable, each one should be applied throughout the compliance test respectively, however, only the worst case (Adapter 1/ USB Cable 1) will be recorded in this report.	



3 Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards:

FCC CFR47 Part 27C (2020)

ANSI C63.26 (2015)

Reference standard:

FCC CFR47 Part 2 (2020)

KDB 971168 D01 Power Meas License Digital Systems v03r01

4 Test Configuration

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes. EUT stand-up position (Z axis), lie-down position (X, Y axis). Receiver antenna polarization (horizontal and vertical), the worst emission was found in position (Z axis, horizontal polarization) and the worst case was recorded.

All mode and data rates and positions and RB size and modulations were investigated.

Subsequently, only the worst case emissions are reported.

The following testing in LTE is set based on the maximum RF Output Power.

The following testing in different Bandwidth is set to detail in the following table:

Test modes are chosen to be reported as the worst case configuration below for LTE Band 7/38:

Test items	Modes	Bandwidth (MHz)				Modulation			RB			Test Channel		
		5	10	15	20	QPSK	16 QAM	64 QAM	1	50%	100%	L	M	H
RF Power Output and Effective Isotropic Radiated Power	LTE 7	O	O	O	O	O	O	O	O	O	O	O	O	O
	LTE 38	O	O	O	O	O	O	O	O	O	O	O	O	O
Occupied Bandwidth	LTE 7	O	O	O	O	O	O	O	-	-	O	O	O	O
	LTE 38	O	O	O	O	O	O	O	-	-	O	O	O	O
Band Edge Compliance	LTE 7	O	O	O	O	O	O	O	O	-	O	O	-	O
	LTE 38	O	O	O	O	O	O	O	O	-	O	O	-	O
Peak-to-Average Power Ratio	LTE 7	O	O	O	O	O	O	O	-	-	O	O	O	O
	LTE 38	O	O	O	O	O	O	O	-	-	O	O	O	O
Frequency Stability	LTE 7	O	O	O	O	O	O	O	O	-	-	-	O	-
	LTE 38	O	O	O	O	O	O	O	O	-	-	-	O	-
Spurious Emissions at Antenna Terminals	LTE 7	O	O	O	O	O	-	-	O	-	-	O	O	O
	LTE 38	O	O	O	O	O	-	-	O	-	-	O	O	O
Radiates Spurious Emission	LTE 7	O	-	-	O	O	-	-	O	-	-	-	O	-
	LTE 38	O	-	-	O	O	-	-	O	-	-	-	O	-
Note	1. The mark "O" means that this configuration is chosen for testing. 2. The mark "-" means that this configuration is not testing.													

5 Test Case Results

5.1 RF Power Output and Effective Isotropic Radiated Power

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

During the process of the testing, The EUT was connected to the Base Station Simulator with a known loss. The EUT is controlled by the Base Station Simulator test set to ensure max power transmission with proper modulation.


ERP can then be calculated as follows:

$$\text{EIRP (dBm)} = \text{Output Power (dBm)} - \text{Losses (dB)} + \text{Antenna Gain (dBi)}$$

where: dBd refers to gain relative to an ideal dipole.

$$\text{EIRP (dBm)} = \text{ERP (dBm)} + 2.15 \text{ (dB.)}$$

Test Setup

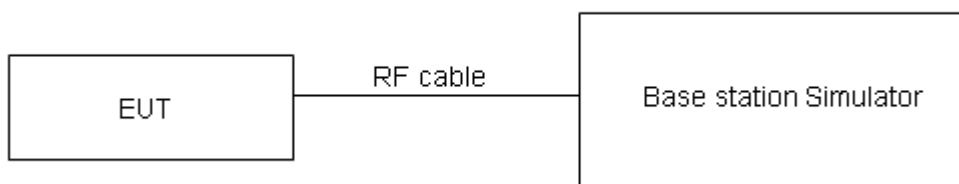

Limits

No specific RF power output requirements in part 2.1046.

Rule Part 27.50(h) (2) specifies that “Mobile and other user stations. Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.”

Part 27.50(h)(2) Limit	$\leq 2 \text{ W}$ (33 dBm)
------------------------	-----------------------------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U=0.4 \text{ dB}$ for RF power output, $k = 2$, $U= 1.19 \text{ dB}$ for ERP/EIRP.



Test Results

LTE Band 7				Maximum Output Power(dBm)			EIRP (dBm)		
BW	Modulation	RB size	RB offset	Channel/Frequency(MHz)					
				20775/ 2502.5	21100/ 2535	21425/ 2567.5	20775/ 2502.5	21100/ 2535	21425/ 2567.5
5MHz	QPSK	1	0	22.37	22.24	22.25	24.37	24.24	24.25
		1	13	22.29	22.28	22.20	24.29	24.28	24.20
		1	24	22.33	22.25	22.26	24.33	24.25	24.26
		12	0	21.29	21.37	21.31	23.29	23.37	23.31
		12	6	21.37	21.39	21.33	23.37	23.39	23.33
		12	13	21.40	21.47	21.31	23.40	23.47	23.31
		25	0	21.31	21.43	21.34	23.31	23.43	23.34
	16QAM	1	0	21.69	21.42	21.74	23.69	23.42	23.74
		1	13	21.67	21.59	21.70	23.67	23.59	23.70
		1	24	21.52	21.50	21.54	23.52	23.50	23.54
		12	0	20.61	20.53	20.63	22.61	22.53	22.63
		12	6	20.59	20.52	20.63	22.59	22.52	22.63
		12	13	20.69	20.66	20.72	22.69	22.66	22.72
		25	0	20.61	20.58	20.64	22.61	22.58	22.64
	64QAM	1	0	21.61	21.56	21.66	23.61	23.56	23.66
		1	13	21.37	21.33	21.40	23.37	23.33	23.40
		1	24	21.51	21.45	21.53	23.51	23.45	23.53
		12	0	20.65	20.57	20.71	22.65	22.57	22.71
		12	6	20.71	20.64	20.75	22.71	22.64	22.75
		12	13	20.66	20.63	20.69	22.66	22.63	22.69
		25	0	20.52	20.49	20.55	22.52	22.49	22.55
BW	Modulation	RB size	RB offset	Channel/Frequency(MHz)					
				20800/ 2505	21100/ 2535	21400/ 2565	20800/ 2505	21100/ 2535	21400/ 2565
10MHz	QPSK	1	0	22.39	22.25	22.28	24.39	24.25	24.28
		1	25	22.32	22.33	22.24	24.32	24.33	24.24
		1	49	22.35	22.29	22.29	24.35	24.29	24.29
		25	0	21.32	21.42	21.35	23.32	23.42	23.35
		25	13	21.40	21.44	21.37	23.40	23.44	23.37
		25	25	21.42	21.51	21.36	23.42	23.51	23.36
		50	0	21.35	21.45	21.38	23.35	23.45	23.38



	16QAM	1	0	21.71	21.45	21.76	23.71	23.45	23.76
		1	25	21.70	21.63	21.73	23.70	23.63	23.73
		1	49	21.55	21.52	21.57	23.55	23.52	23.57
		25	0	20.64	20.58	20.67	22.64	22.58	22.67
		25	13	20.61	20.56	20.66	22.61	22.56	22.66
		25	25	20.72	20.71	20.76	22.72	22.71	22.76
		50	0	20.64	20.63	20.68	22.64	22.63	22.68
	64QAM	1	0	21.63	21.55	21.68	23.63	23.55	23.68
		1	25	21.40	21.33	21.43	23.40	23.33	23.43
		1	49	21.50	21.47	21.56	23.50	23.47	23.56
		25	0	20.68	20.62	20.71	22.68	22.62	22.71
		25	13	20.73	20.68	20.78	22.73	22.68	22.78
		25	25	20.69	20.68	20.73	22.69	22.68	22.73
		50	0	20.55	20.54	20.59	22.55	22.54	22.59
BW	Modulation	RB size	RB offset	Channel/Frequency(MHz)					
				20825/ 2507.5	21100/ 2535	21375/ 2562.5	20825/ 2507.5	21100/ 2535	21375/ 2562.5
15MHz	QPSK	1	0	22.38	22.21	22.26	24.38	24.21	24.26
		1	38	22.30	22.32	22.21	24.30	24.32	24.21
		1	74	22.32	22.24	22.25	24.32	24.24	24.25
		36	0	21.30	21.38	21.32	23.30	23.38	23.32
		36	18	21.37	21.39	21.33	23.37	23.39	23.33
		36	39	21.39	21.48	21.32	23.39	23.48	23.32
		75	0	21.33	21.41	21.33	23.33	23.41	23.33
	16QAM	1	0	21.66	21.43	21.74	23.66	23.43	23.74
		1	38	21.68	21.60	21.71	23.68	23.60	23.71
		1	74	21.52	21.48	21.54	23.52	23.48	23.54
		36	0	20.61	20.56	20.64	22.61	22.56	22.64
		36	18	20.58	20.51	20.62	22.58	22.51	22.62
		36	39	20.70	20.67	20.73	22.70	22.67	22.73
		75	0	20.61	20.58	20.64	22.61	22.58	22.64
	64QAM	1	0	21.58	21.53	21.66	23.58	23.53	23.66
		1	38	21.38	21.30	21.41	23.38	23.30	23.41
		1	74	21.51	21.46	21.57	23.51	23.46	23.57
		36	0	20.67	20.64	20.72	22.67	22.64	22.72
		36	18	20.71	20.65	20.77	22.71	22.65	22.77
		36	39	20.67	20.64	20.70	22.67	22.64	22.70
		36	39	20.67	20.64	20.70	22.67	22.64	22.70



		75	0	20.52	20.49	20.55	22.52	22.49	22.55
BW	Modulation	RB size	RB offset	Channel/Frequency(MHz)					
				20850/ 2510	21100/ 2535	21350/ 2560	20850/ 2510	21100/ 2535	21350/ 2560
20MHz	QPSK	1	0	22.35	22.17	22.23	24.35	24.17	24.23
		1	50	22.29	22.28	22.19	24.29	24.28	24.19
		1	99	22.30	22.23	22.22	24.30	24.23	24.22
		50	0	21.27	21.33	21.28	23.27	23.33	23.28
		50	25	21.35	21.35	21.30	23.35	23.35	23.30
		50	50	21.36	21.43	21.28	23.36	23.43	23.28
		100	0	21.30	21.36	21.29	23.30	23.36	23.29
	16QAM	1	0	21.65	21.39	21.69	23.65	23.39	23.69
		1	50	21.64	21.58	21.67	23.64	23.58	23.67
		1	99	21.50	21.45	21.52	23.50	23.45	23.52
		50	0	20.58	20.52	20.61	22.58	22.52	22.61
		50	25	20.55	20.49	20.59	22.55	22.49	22.59
		50	50	20.67	20.62	20.69	22.67	22.62	22.69
		100	0	20.59	20.54	20.61	22.59	22.54	22.61
	64QAM	1	0	21.56	21.49	21.61	23.56	23.49	23.61
		1	50	21.34	21.28	21.37	23.34	23.28	23.37
		1	99	21.45	21.40	21.51	23.45	23.40	23.51
		50	0	20.62	20.56	20.65	22.62	22.56	22.65
		50	25	20.67	20.61	20.71	22.67	22.61	22.71
		50	50	20.64	20.59	20.66	22.64	22.59	22.66
		100	0	20.50	20.45	20.52	22.50	22.45	22.52

LTE Band 38				Maximum Output Power(dBm)			EIRP (dBm)		
BW	Modulation	RB size	RB offset	Channel/Frequency(MHz)					
				37775/ 2572.5	38000/ 2595	38225/ 2617.5	37775/ 2572.5	38000/ 2595	38225/ 2617.5
5MHz	QPSK	1	0	21.89	21.91	21.95	23.69	23.71	23.75
		1	13	22.01	21.88	21.88	23.81	23.68	23.68
		1	24	21.93	21.93	21.96	23.73	23.73	23.76
		12	0	21.08	20.85	21.13	22.88	22.65	22.93
		12	6	21.17	21.05	21.06	22.97	22.85	22.86
		12	13	21.15	21.12	21.20	22.95	22.92	23.00



	16QAM	25	0	21.19	21.17	21.11	22.99	22.97	22.91
		1	0	21.25	21.03	21.12	23.05	22.83	22.92
		1	13	21.23	21.15	21.21	23.03	22.95	23.01
		1	24	21.21	21.08	21.12	23.01	22.88	22.92
		12	0	20.65	20.48	20.57	22.45	22.28	22.37
		12	6	20.68	20.54	20.62	22.48	22.34	22.42
		12	13	20.78	20.61	20.69	22.58	22.41	22.49
		25	0	20.58	20.50	20.57	22.38	22.30	22.37
	64QAM	1	0	21.28	21.06	21.18	23.08	22.86	22.98
		1	13	21.24	21.07	21.15	23.04	22.87	22.95
		1	24	21.23	21.08	21.12	23.03	22.88	22.92
		12	0	20.65	20.46	20.60	22.45	22.26	22.40
		12	6	20.79	20.58	20.68	22.59	22.38	22.48
		12	13	20.63	20.50	20.57	22.43	22.30	22.37
		25	0	20.78	20.67	20.73	22.58	22.47	22.53
BW	Modulation	RB size	RB offset	Channel/Frequency(MHz)					
				37800/ 2575	38000/ 2595	38200/ 2615	37800/ 2575	38000/ 2595	38200/ 2615
10MHz	QPSK	1	0	21.91	21.92	21.98	23.71	23.72	23.78
		1	25	22.04	21.93	21.92	23.84	23.73	23.72
		1	49	21.95	21.97	21.99	23.75	23.77	23.79
		25	0	21.11	20.90	21.17	22.91	22.70	22.97
		25	13	21.20	21.10	21.10	23.00	22.90	22.90
		25	25	21.17	21.16	21.25	22.97	22.96	23.05
		50	0	21.23	21.19	21.15	23.03	22.99	22.95
	16QAM	1	0	21.27	21.06	21.14	23.07	22.86	22.94
		1	25	21.26	21.19	21.24	23.06	22.99	23.04
		1	49	21.24	21.10	21.15	23.04	22.90	22.95
		25	0	20.68	20.53	20.61	22.48	22.33	22.41
		25	13	20.70	20.58	20.65	22.50	22.38	22.45
		25	25	20.81	20.66	20.73	22.61	22.46	22.53
		50	0	20.61	20.55	20.61	22.41	22.35	22.41
	64QAM	1	0	21.30	21.05	21.20	23.10	22.85	23.00
		1	25	21.27	21.07	21.18	23.07	22.87	22.98
		1	49	21.22	21.10	21.15	23.02	22.90	22.95
		25	0	20.68	20.51	20.60	22.48	22.31	22.40
		25	13	20.81	20.62	20.71	22.61	22.42	22.51



		25	25	20.66	20.55	20.61	22.46	22.35	22.41
		50	0	20.81	20.72	20.77	22.61	22.52	22.57
BW	Modulation	RB size	RB offset	Channel/Frequency(MHz)					
				37825/ 2577.5	38000/ 2595	38175/ 2612.5	37825/ 2577.5	38000/ 2595	38175/ 2612.5
15MHz	QPSK	1	0	21.90	21.88	21.96	23.70	23.68	23.76
		1	38	22.02	21.92	21.89	23.82	23.72	23.69
		1	74	21.92	21.92	21.95	23.72	23.72	23.75
		36	0	21.09	20.86	21.14	22.89	22.66	22.94
		36	18	21.17	21.05	21.06	22.97	22.85	22.86
		36	39	21.14	21.13	21.21	22.94	22.93	23.01
		75	0	21.21	21.15	21.10	23.01	22.95	22.90
	16QAM	1	0	21.22	21.04	21.12	23.02	22.84	22.92
		1	38	21.24	21.16	21.22	23.04	22.96	23.02
		1	74	21.21	21.06	21.12	23.01	22.86	22.92
		36	0	20.65	20.51	20.58	22.45	22.31	22.38
		36	18	20.67	20.53	20.61	22.47	22.33	22.41
		36	39	20.79	20.62	20.70	22.59	22.42	22.50
		75	0	20.58	20.50	20.57	22.38	22.30	22.37
	64QAM	1	0	21.25	21.03	21.18	23.05	22.83	22.98
		1	38	21.25	21.04	21.16	23.05	22.84	22.96
		1	74	21.23	21.09	21.16	23.03	22.89	22.96
		36	0	20.67	20.53	20.61	22.47	22.33	22.41
		36	18	20.79	20.59	20.70	22.59	22.39	22.50
		36	39	20.64	20.51	20.58	22.44	22.31	22.38
		75	0	20.78	20.67	20.73	22.58	22.47	22.53
BW	Modulation	RB size	RB offset	Channel/Frequency(MHz)					
				37850/ 2580	38000/ 2595	38150/ 2610	37850/ 2580	38000/ 2595	38150/ 2610
20MHz	QPSK	1	0	21.87	21.84	21.93	23.67	23.64	23.73
		1	50	22.01	21.88	21.87	23.81	23.68	23.67
		1	99	21.90	21.91	21.92	23.70	23.71	23.72
		50	0	21.06	20.81	21.10	22.86	22.61	22.90
		50	25	21.15	21.01	21.03	22.95	22.81	22.83
		50	50	21.11	21.08	21.17	22.91	22.88	22.97
		100	0	21.18	21.10	21.06	22.98	22.90	22.86
	16QAM	1	0	21.14	21.00	21.07	22.94	22.80	22.87



		1	50	21.20	21.14	21.18	23.00	22.94	22.98
		1	99	21.19	21.03	21.10	22.99	22.83	22.90
		50	0	20.62	20.47	20.55	22.42	22.27	22.35
		50	25	20.64	20.51	20.58	22.44	22.31	22.38
		50	50	20.76	20.57	20.66	22.56	22.37	22.46
		100	0	20.56	20.46	20.54	22.36	22.26	22.34
	64QAM	1	0	21.23	20.99	21.13	23.03	22.79	22.93
		1	50	21.21	21.02	21.12	23.01	22.82	22.92
		1	99	21.17	21.03	21.10	22.97	22.83	22.90
		50	0	20.62	20.45	20.54	22.42	22.25	22.34
		50	25	20.75	20.55	20.64	22.55	22.35	22.44
		50	50	20.61	20.46	20.54	22.41	22.26	22.34
		100	0	20.76	20.63	20.70	22.56	22.43	22.50

5.2 Occupied Bandwidth

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The occupied bandwidth is measured using spectrum analyzer.

RBW is set to 100 kHz, VBW is set to 300 kHz for LTE Band 7/38 (5MHz).


RBW is set to 200 kHz, VBW is set to 620 kHz for LTE Band 7/38 (10MHz).

RBW is set to 300 kHz, VBW is set to 910 kHz for LTE Band 7/38(15MHz).

RBW is set to 430 kHz, VBW is set to 1.2MHz for LTE Band 7/38 (20MHz).

99% power and -26dBc occupied bandwidths are recorded. Spectrum analyzer plots are included on the following pages.

Test Setup

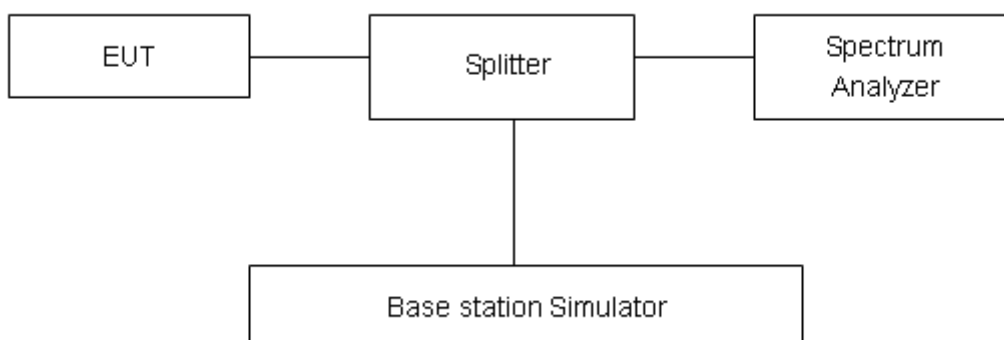

Limits

No specific occupied bandwidth requirements in part 2.1049.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U=624\text{Hz}$.




Test Result

LTE Band 7						
RB	Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	99% Power Bandwidth(MHz)	-26dBc Bandwidth(MHz)
100%	QPSK	5	20775	2502.5	4.506	4.951
			21100	2535	4.516	4.968
			21425	2567.5	4.515	4.964
		10	20800	2505	8.970	9.663
			21100	2535	8.980	9.712
			21400	2565	8.955	9.667
		15	20825	2507.5	13.491	14.630
			21100	2535	13.472	14.610
			21375	2562.5	13.447	14.560
		20	20850	2510	17.943	19.550
			21100	2535	17.913	19.210
			21350	2560	17.948	19.390
	16QAM	5	20775	2502.5	4.509	4.976
			21100	2535	4.510	4.971
			21425	2567.5	4.506	4.966
		10	20800	2505	8.975	9.756
			21100	2535	8.964	9.693
			21400	2565	8.970	9.751
		15	20825	2507.5	13.503	14.500
			21100	2535	13.487	14.450
			21375	2562.5	13.433	14.470
		20	20850	2510	17.892	19.410
			21100	2535	17.924	19.300
			21350	2560	17.884	19.440
	64QAM	5	20775	2502.5	4.514	4.942
			21100	2535	4.494	4.934
			21425	2567.5	4.514	4.972
		10	20800	2505	8.971	9.701
			21100	2535	8.994	9.731
			21400	2565	8.957	9.691
		15	20825	2507.5	13.458	14.530
			21100	2535	13.439	14.600
			21375	2562.5	13.470	14.640
		20	20850	2510	17.968	19.510
			21100	2535	17.883	19.290
			21350	2560	17.943	19.390




LTE Band 38						
RB	Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	99% Power Bandwidth(MHz)	-26dBc Bandwidth(MHz)
100%	QPSK	5	37775	2572.5	4.511	4.932
			38000	2595	4.502	4.982
			38225	2617.5	4.494	4.882
		10	37800	2575	8.974	9.812
			38000	2595	8.979	9.678
			38200	2615	9.026	9.654
		15	37825	2577.5	13.483	14.460
			38000	2595	13.417	14.510
			38175	2612.5	13.411	14.600
		20	37850	2580	17.945	19.140
			38000	2595	17.928	19.010
			38150	2610	17.938	19.280
	16QAM	5	37775	2572.5	4.513	4.854
			38000	2595	4.501	4.924
			38225	2617.5	4.500	4.912
		10	37800	2575	8.987	9.518
			38000	2595	8.972	9.740
			38200	2615	8.974	9.587
		15	37825	2577.5	13.472	14.580
			38000	2595	13.488	14.580
			38175	2612.5	13.465	14.610
		20	37850	2580	17.985	19.300
			38000	2595	17.896	19.010
			38150	2610	17.921	19.330
	64QAM	5	37775	2572.5	4.512	4.934
			38000	2595	4.502	4.910
			38225	2617.5	4.511	4.910
		10	37800	2575	8.996	9.687
			38000	2595	8.984	9.676
			38200	2615	8.972	9.632
		15	37825	2577.5	13.459	14.350
			38000	2595	13.437	14.580
			38175	2612.5	13.473	14.470
		20	37850	2580	17.931	19.240
			38000	2595	17.867	19.030
			38150	2610	17.908	19.240


LTE Band 7 QPSK 5MHz CH-Low

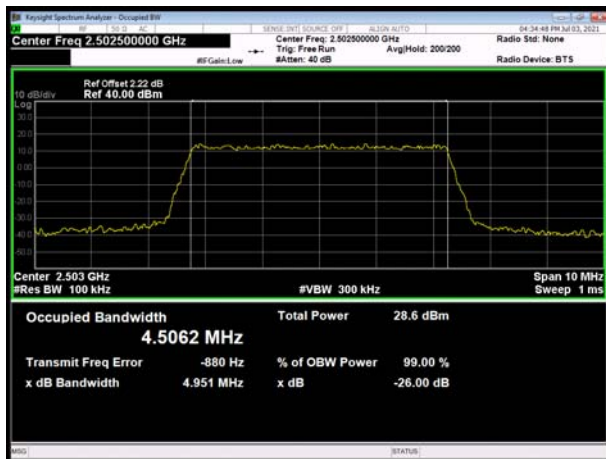


LTE Band 7 QPSK 10MHz CH-Low

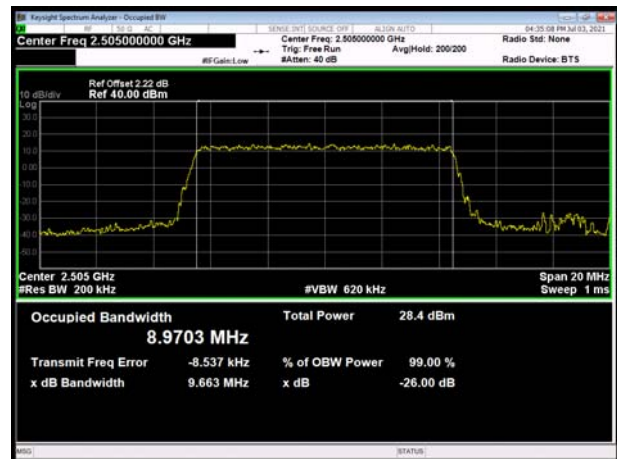


LTE Band 7 QPSK 5MHz CH-Middle

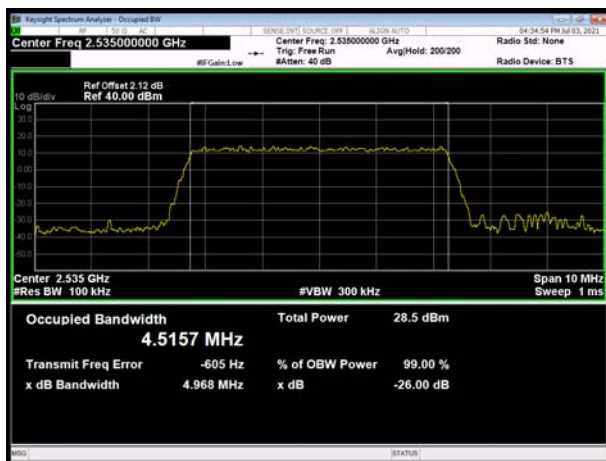


LTE Band 7 QPSK 10MHz CH-Middle

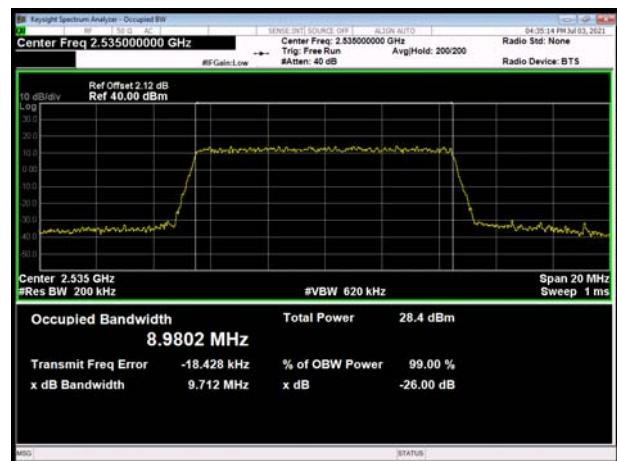

LTE Band 7 QPSK 5MHz CH-High

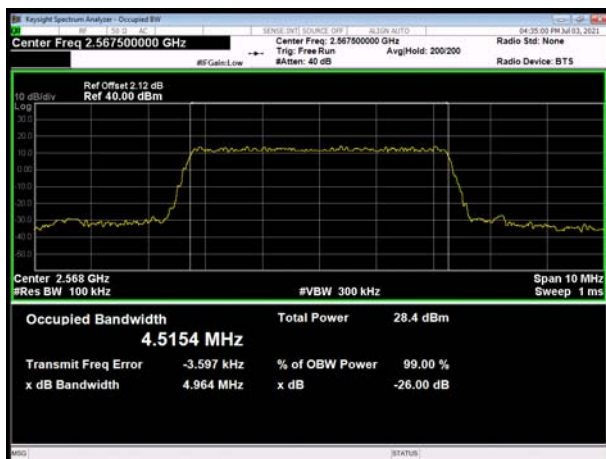


LTE Band 7 QPSK 10MHz CH-High

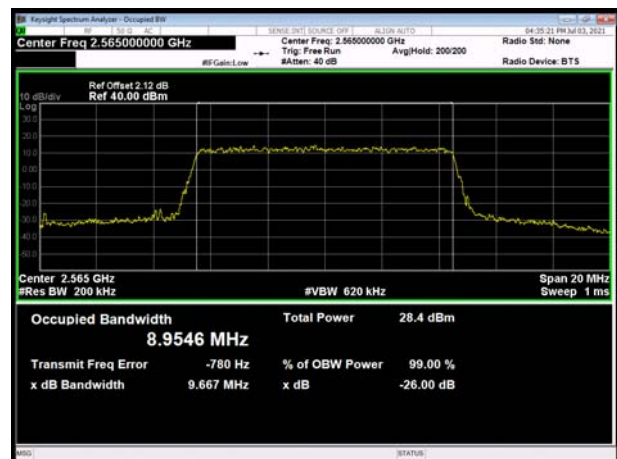




LTE Band 7 QPSK 15MHz CH-Low

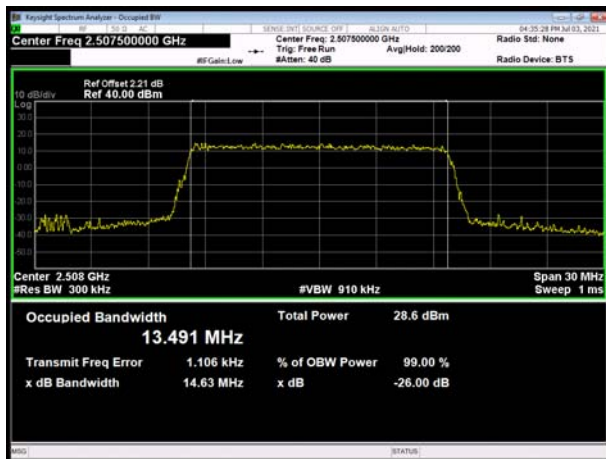


LTE Band 7 QPSK 20MHz CH-Low




LTE Band 7 QPSK 15MHz CH-Middle

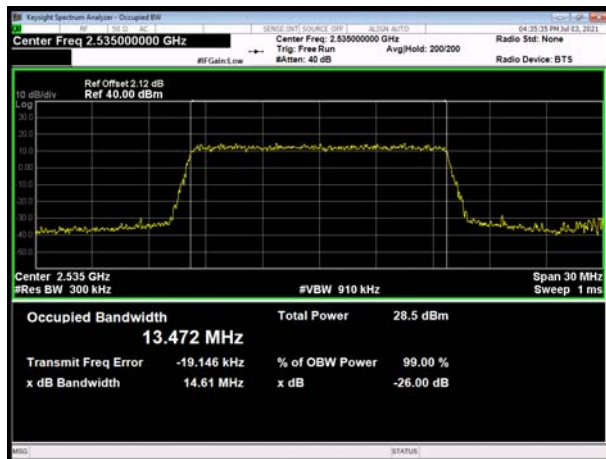


LTE Band 7 QPSK 20MHz CH-Middle

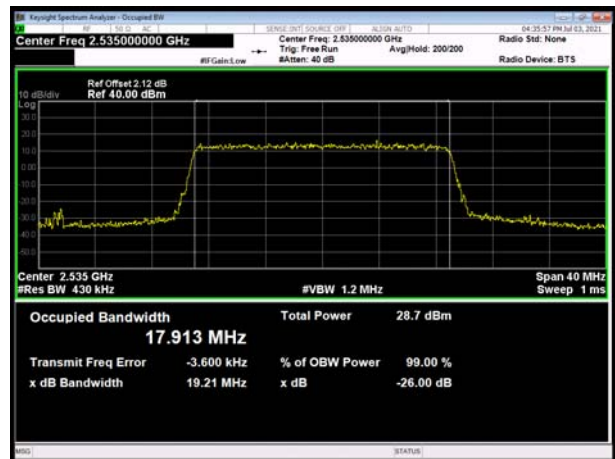


LTE Band 7 QPSK 15MHz CH-High

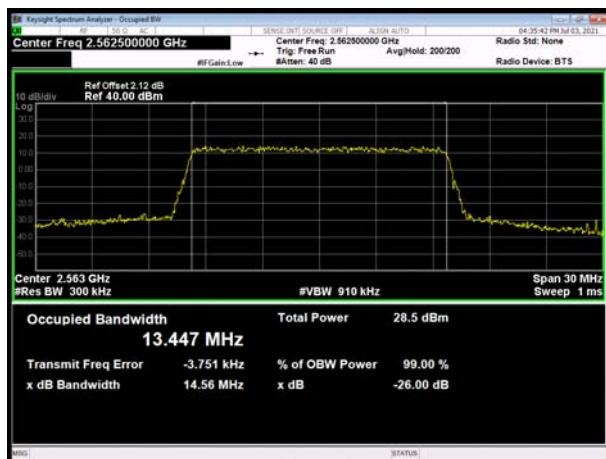


LTE Band 7 QPSK 20MHz CH-High

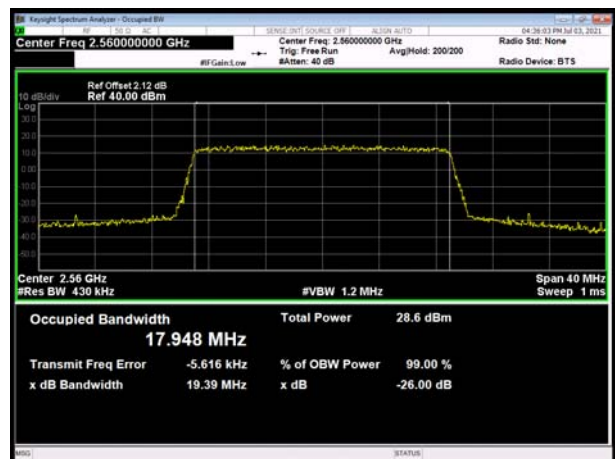

LTE Band 7 16QAM 5MHz CH-Low

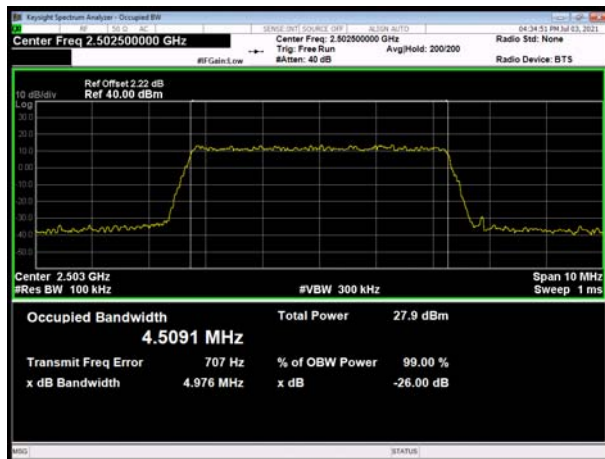


LTE Band 7 16QAM 10MHz CH-Low

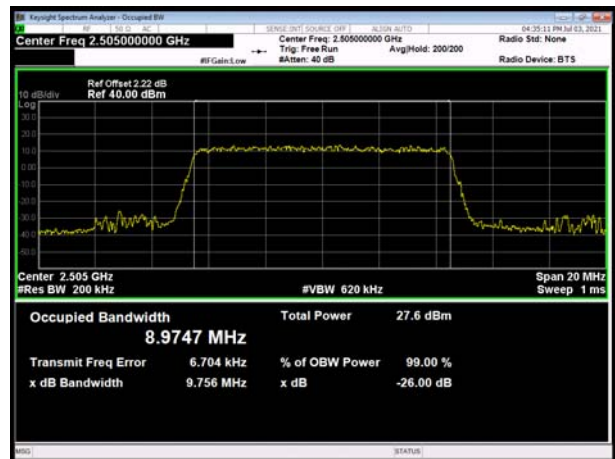


LTE Band 7 16QAM 5MHz CH-Middle




LTE Band 7 16QAM 10MHz CH-Middle

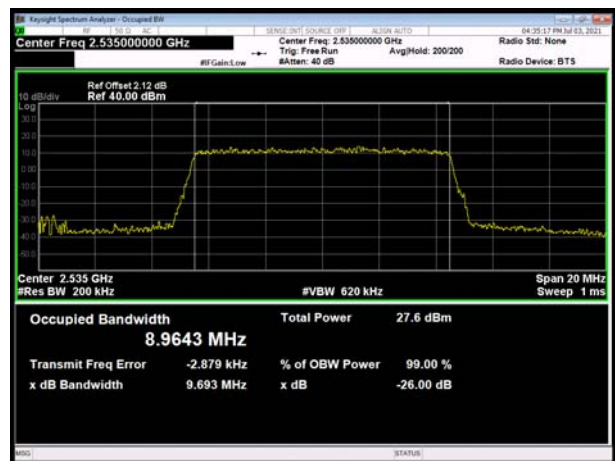

LTE Band 7 16QAM 5MHz CH-High

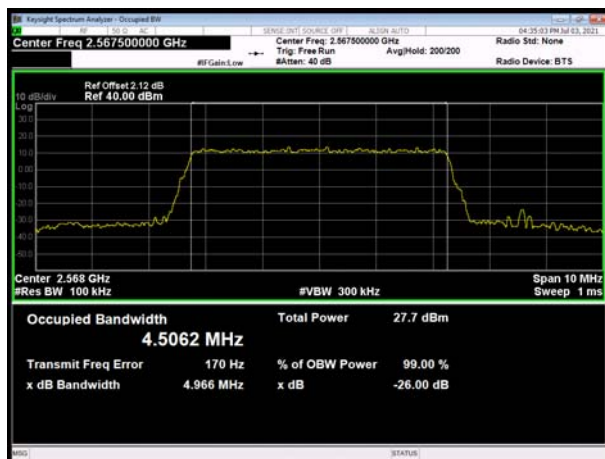


LTE Band 7 16QAM 10MHz CH-High

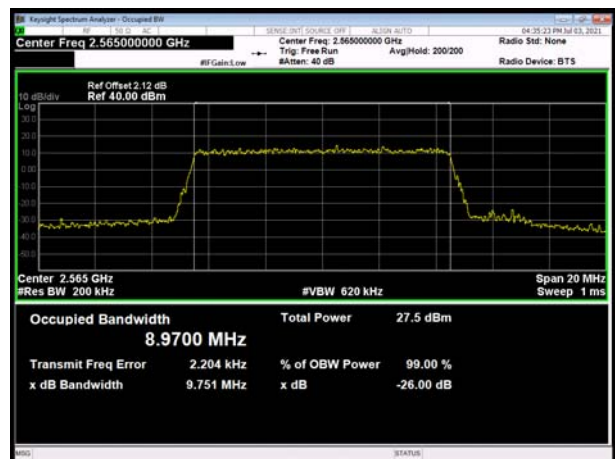




LTE Band 7 16QAM 15MHz CH-Low

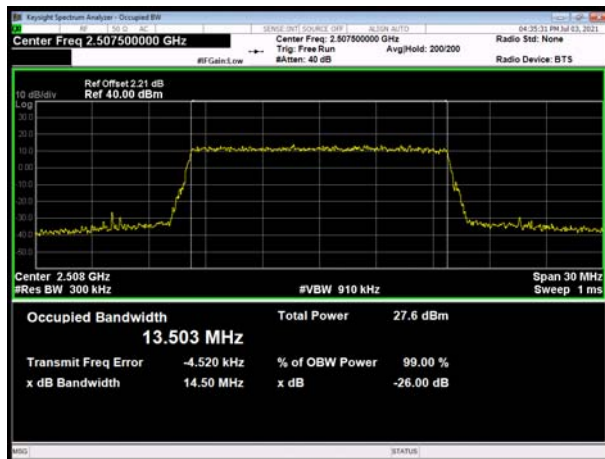


LTE Band 7 16QAM 20MHz CH-Low

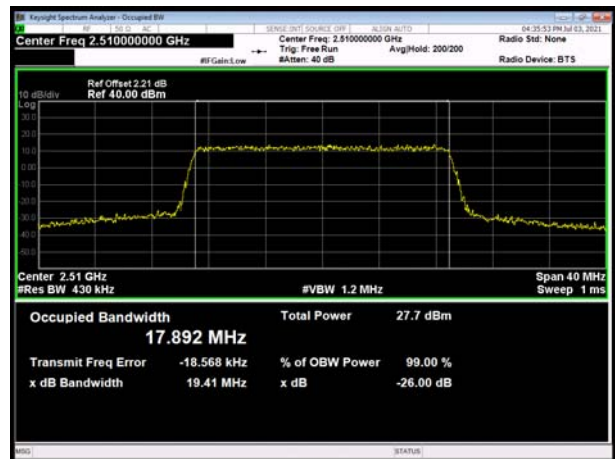


LTE Band 7 16QAM 15MHz CH-Middle




LTE Band 7 16QAM 20MHz CH-Middle

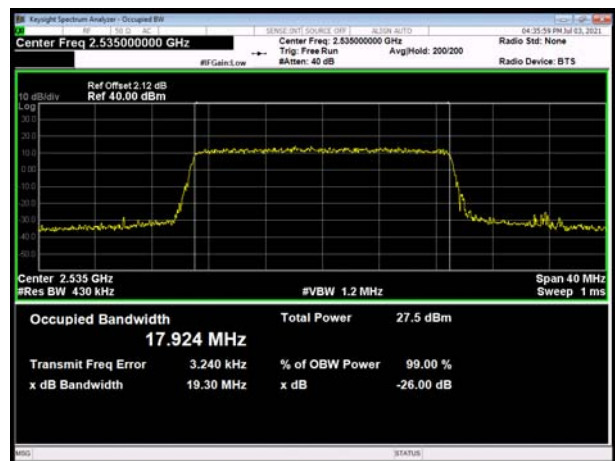

LTE Band 7 16QAM 15MHz CH-High

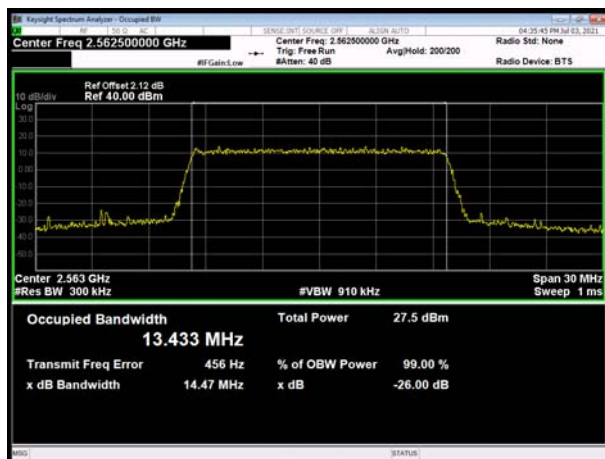


LTE Band 7 16QAM 20MHz CH-High

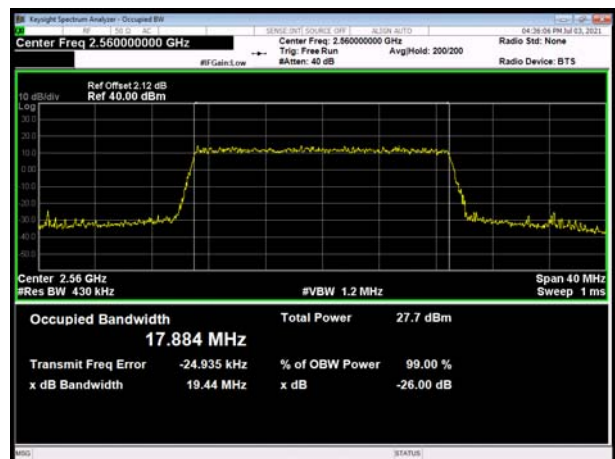





LTE Band 7 64QAM 5MHz CH-Low

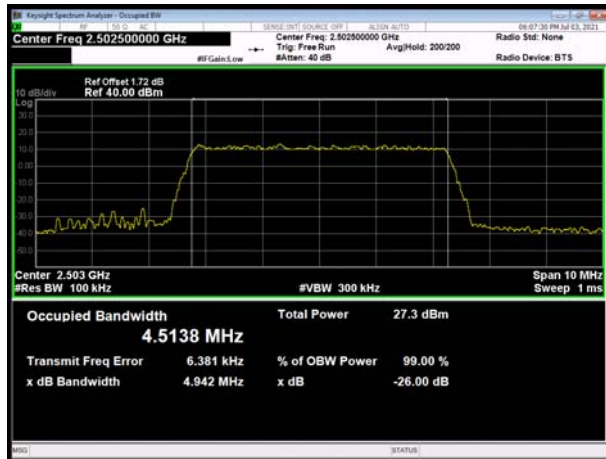


LTE Band 7 64QAM 10MHz CH-Low

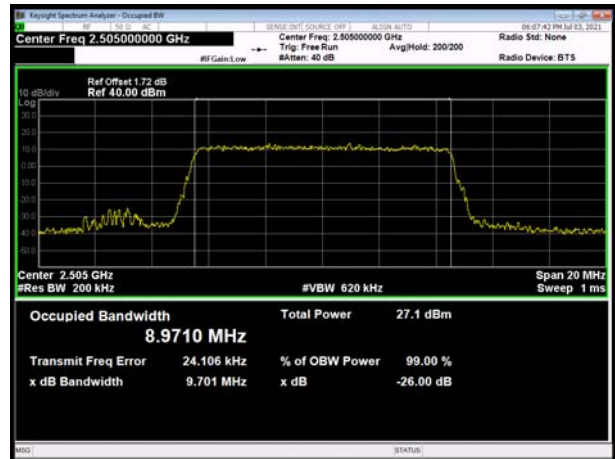


LTE Band 7 64QAM 5MHz CH-Middle

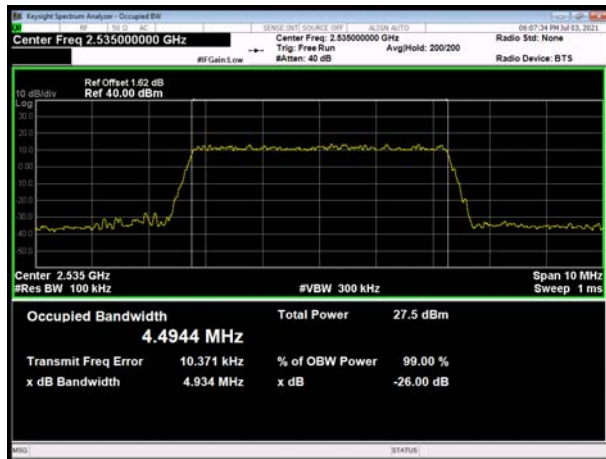


LTE Band 7 64QAM 10MHz CH-Middle

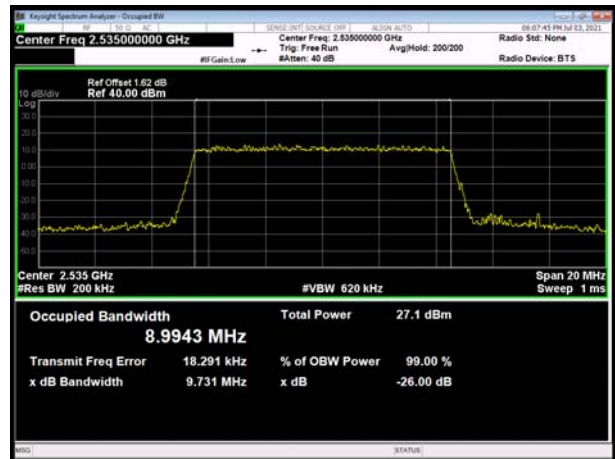

LTE Band 7 64QAM 5MHz CH-High

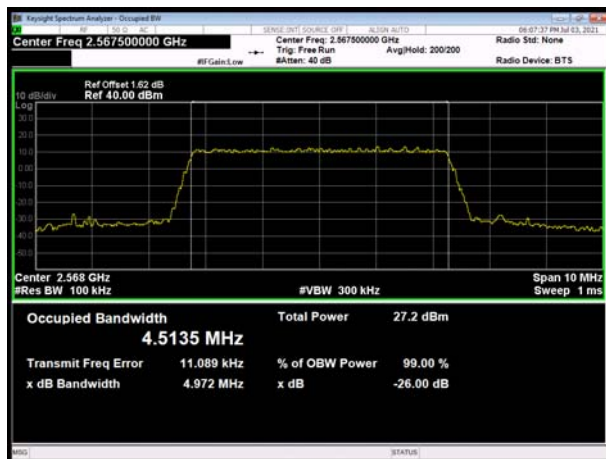


LTE Band 7 64QAM 10MHz CH-High

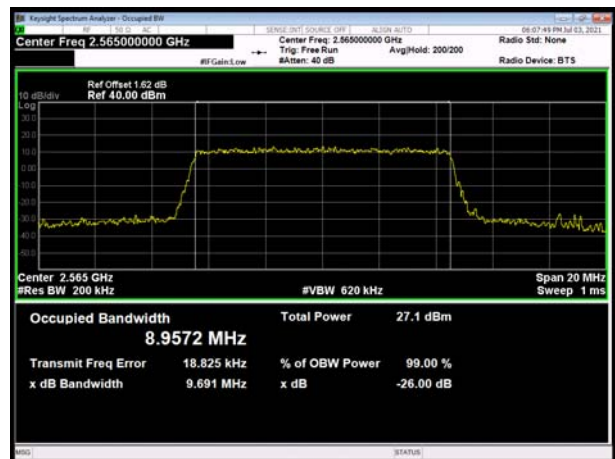





LTE Band 7 64QAM 15MHz CH-Low

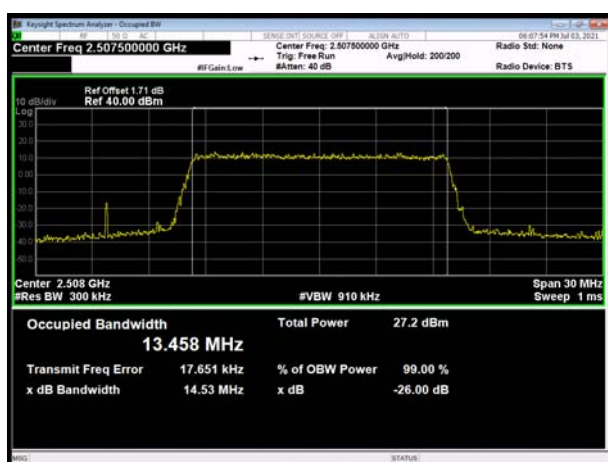


LTE Band 7 64QAM 20MHz CH-Low

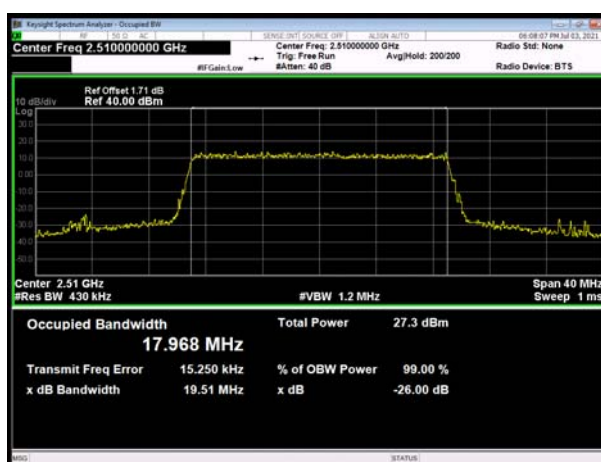


LTE Band 7 64QAM 15MHz CH-Middle

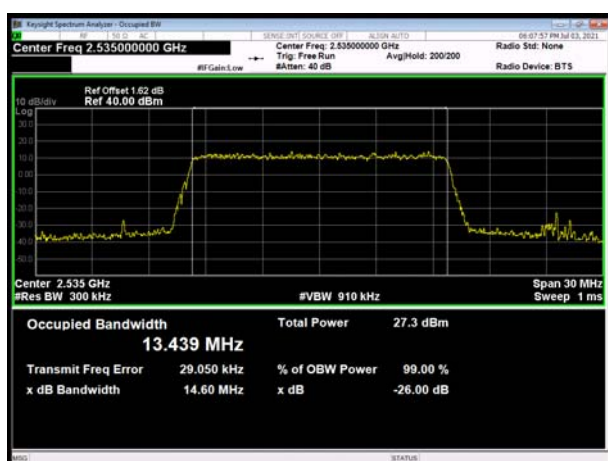


LTE Band 7 64QAM 20MHz CH-Middle

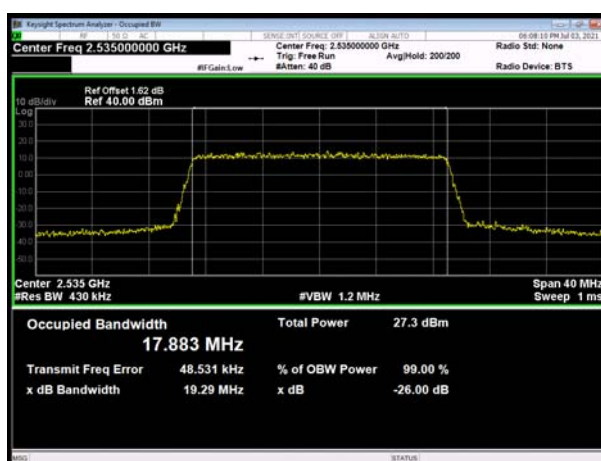


LTE Band 7 64QAM 15MHz CH-High

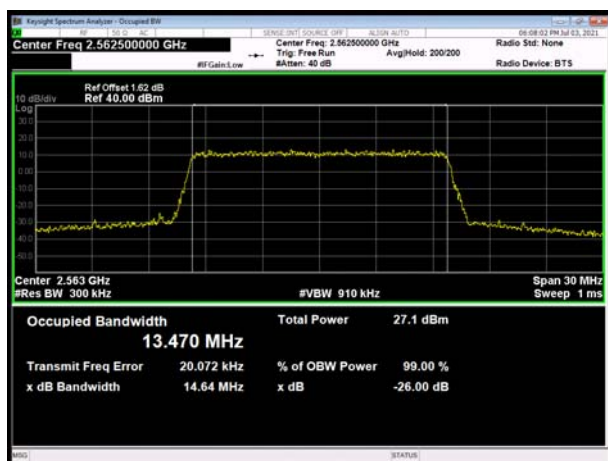


LTE Band 7 64QAM 20MHz CH-High

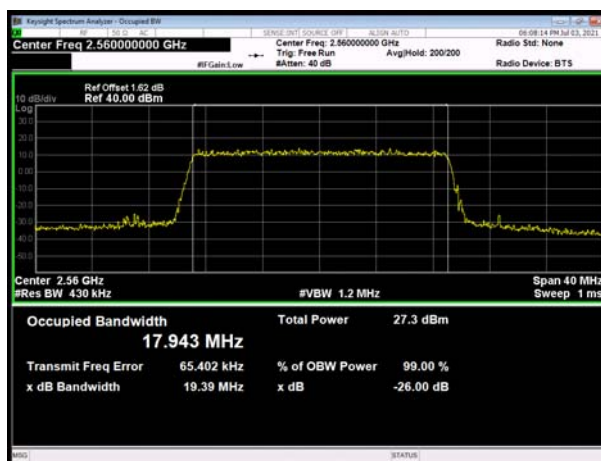


LTE Band 38 QPSK 5MHz CH-Low

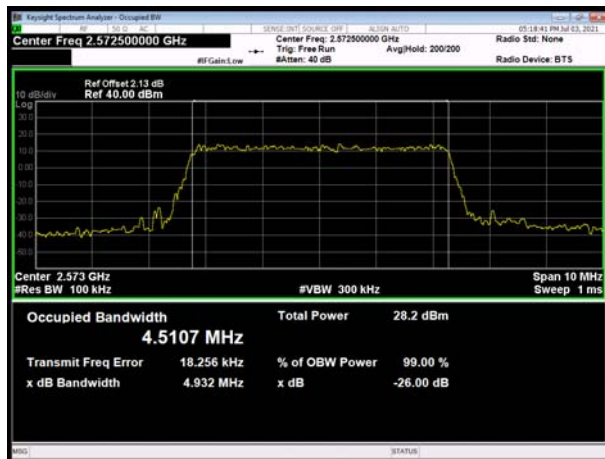


LTE Band 38 QPSK 10MHz CH-Low

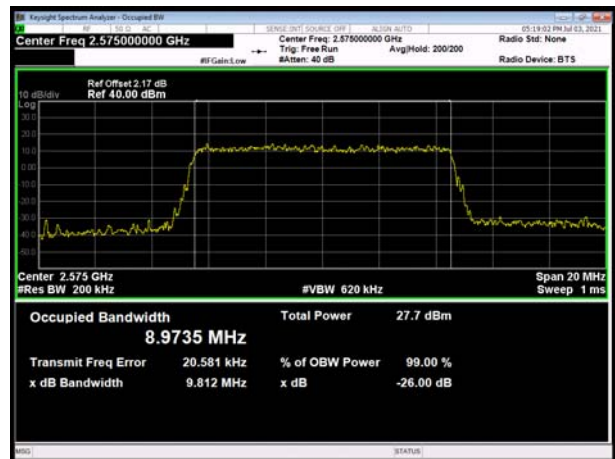


LTE Band 38 QPSK 5MHz CH-Middle

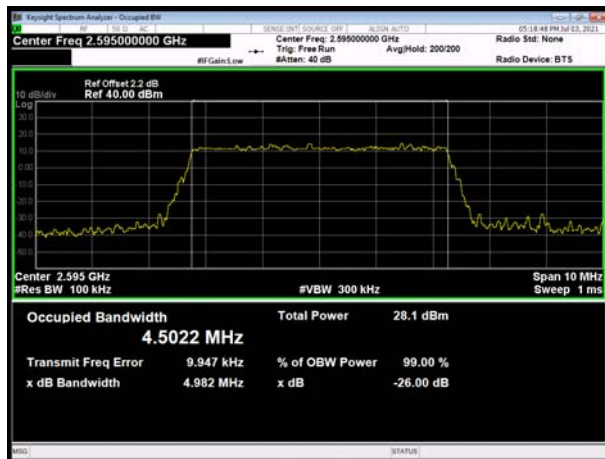


LTE Band 38 QPSK 10MHz CH-Middle

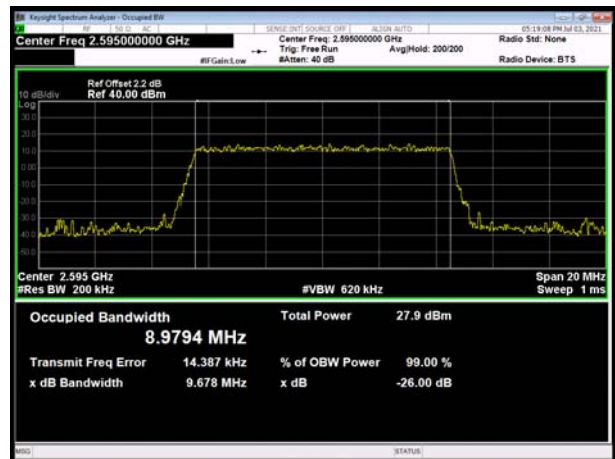

LTE Band 38 QPSK 5MHz CH-High

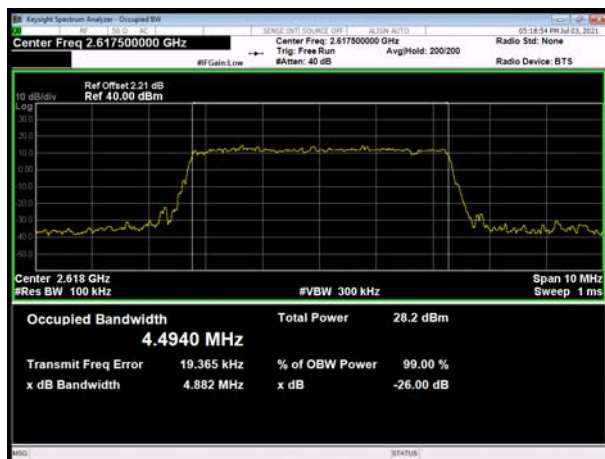


LTE Band 38 QPSK 10MHz CH-High

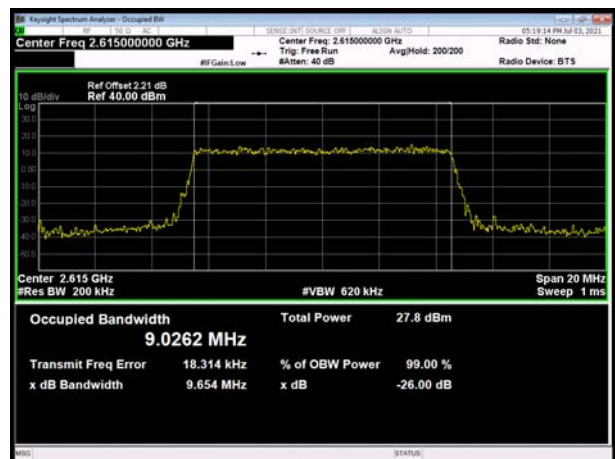





LTE Band 38 QPSK 15MHz CH-Low

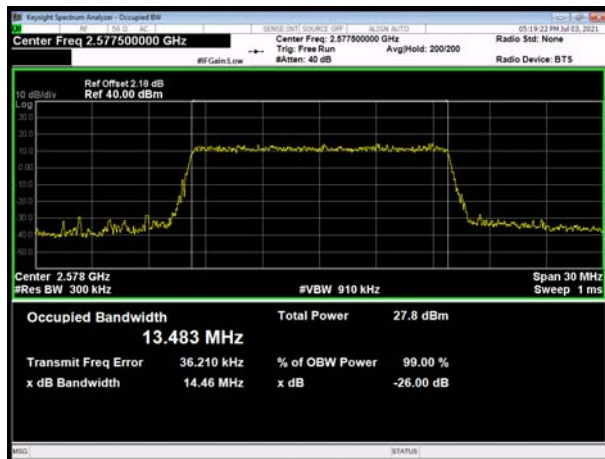


LTE Band 38 QPSK 20MHz CH-Low

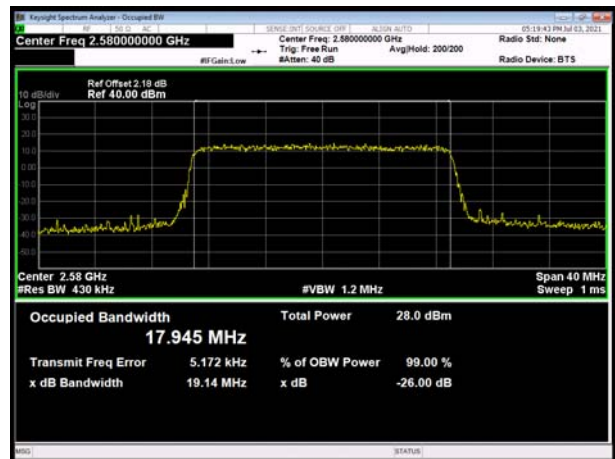


LTE Band 38 QPSK 15MHz CH-Middle

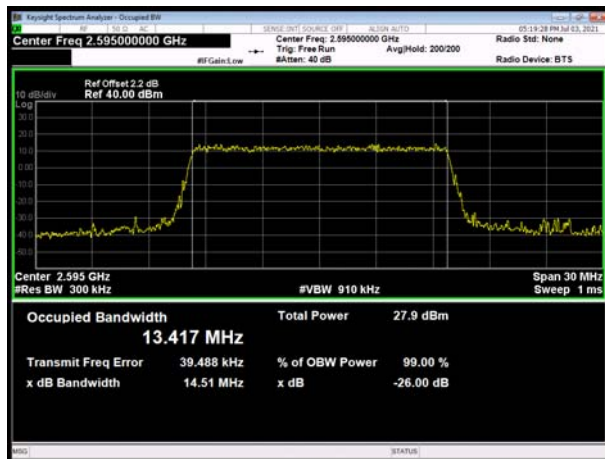


LTE Band 38 QPSK 20MHz CH-Middle

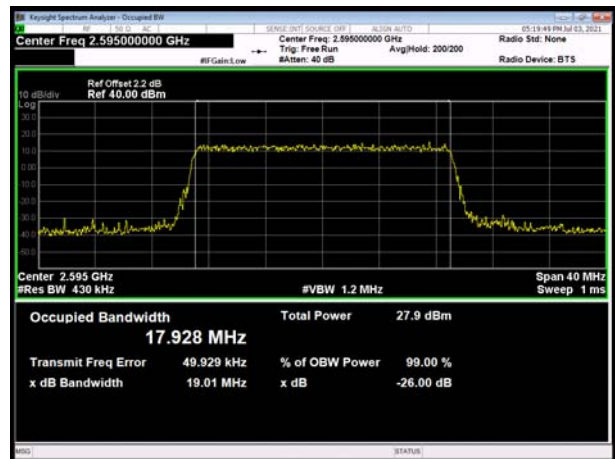

LTE Band 38 QPSK 15MHz CH-High

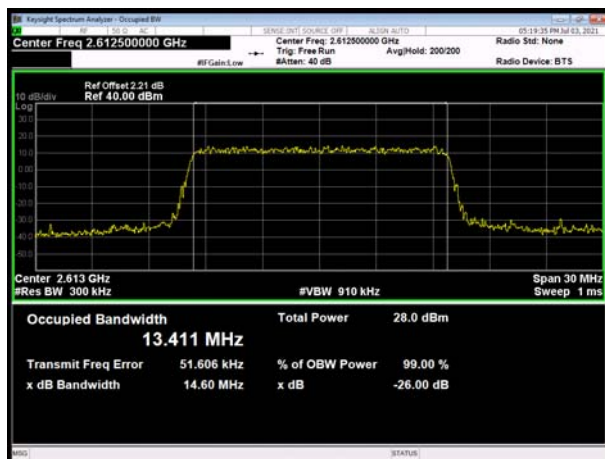


LTE Band 38 QPSK 20MHz CH-High

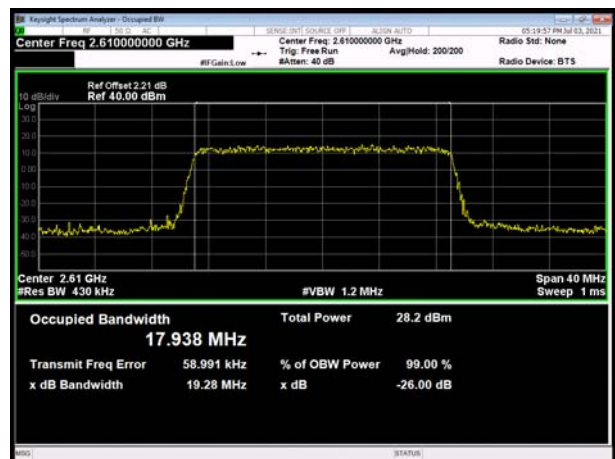





LTE Band 38 16QAM 5MHz CH-Low

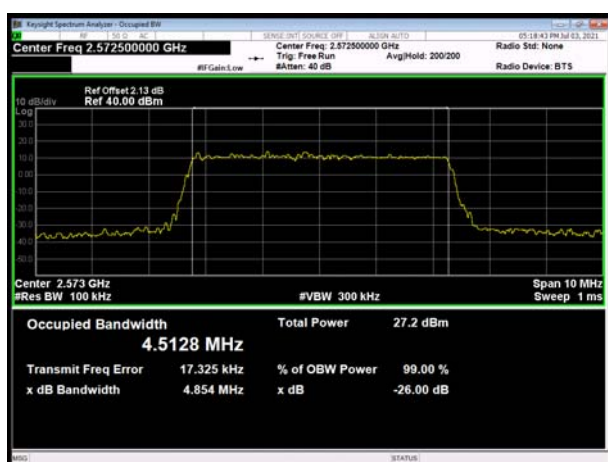


LTE Band 38 16QAM 10MHz CH-Low

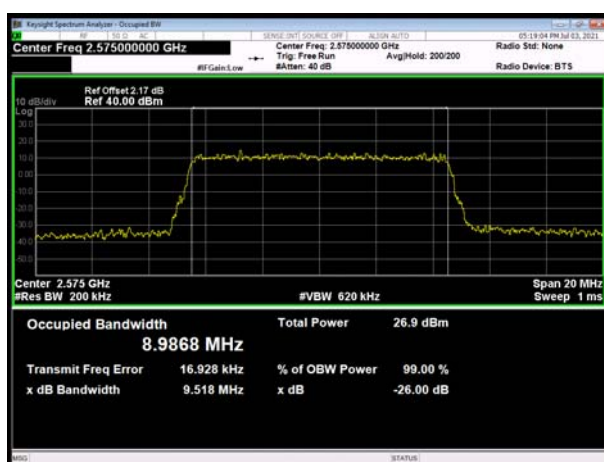


LTE Band 38 16QAM 5MHz CH-Middle

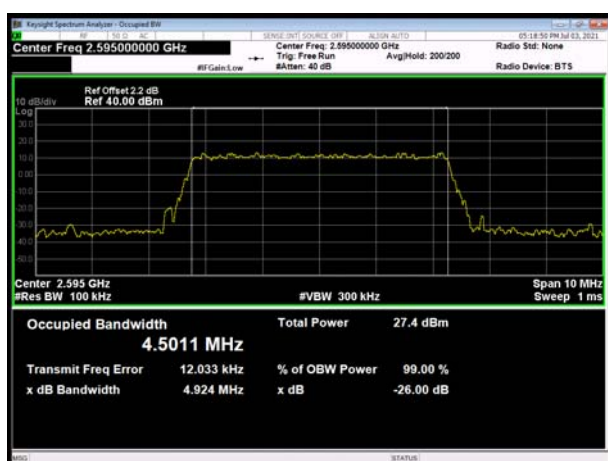


LTE Band 38 16QAM 10MHz CH-Middle

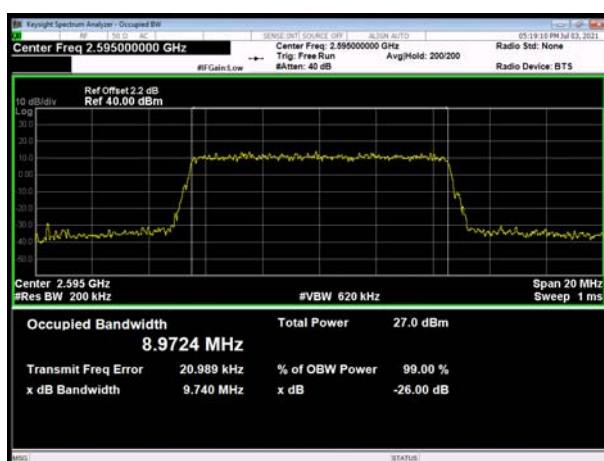

LTE Band 38 16QAM 5MHz CH-High

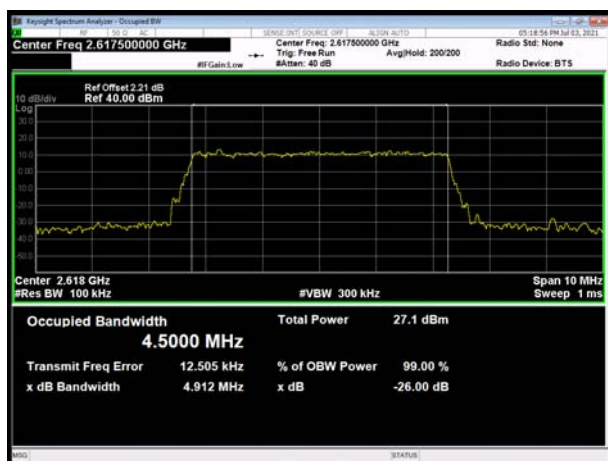


LTE Band 38 16QAM 10MHz CH-High

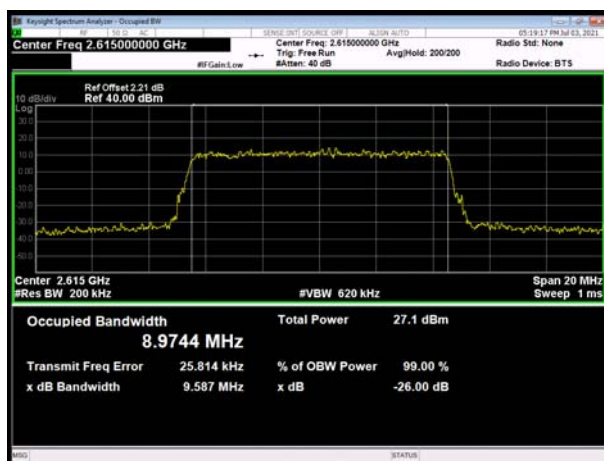





LTE Band 38 16QAM 15MHz CH-Low

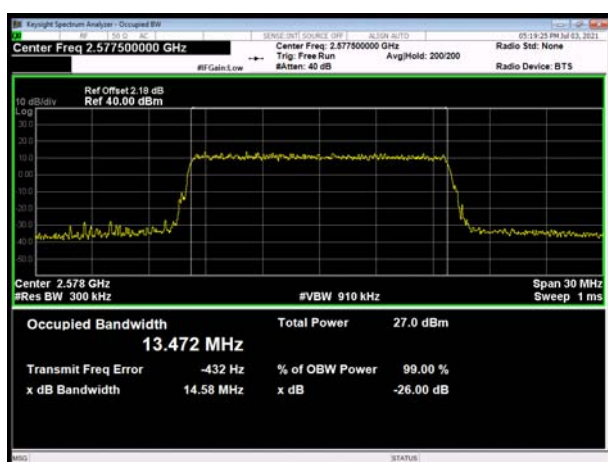


LTE Band 38 16QAM 20MHz CH-Low

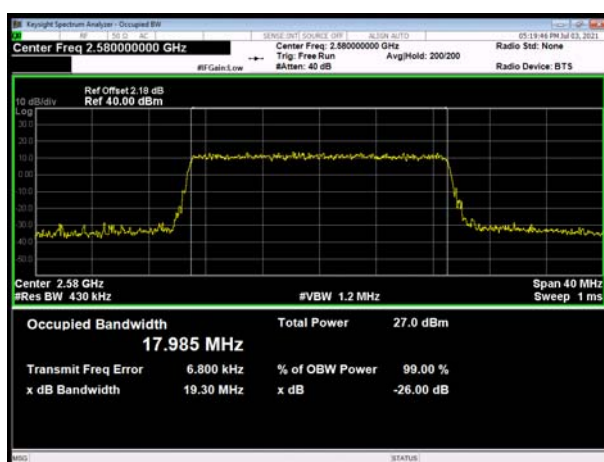


LTE Band 38 16QAM 15MHz CH-Middle

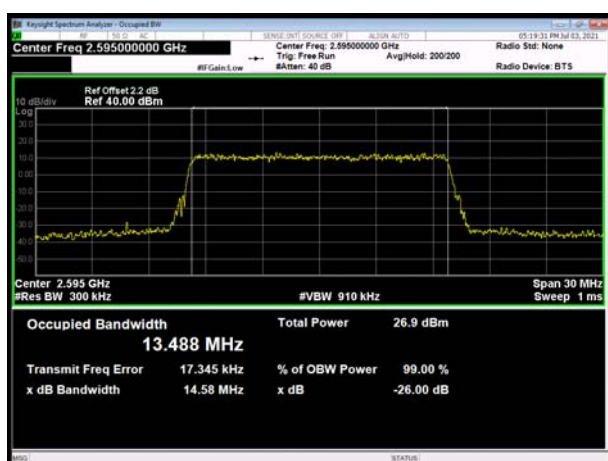


LTE Band 38 16QAM 20MHz CH-Middle

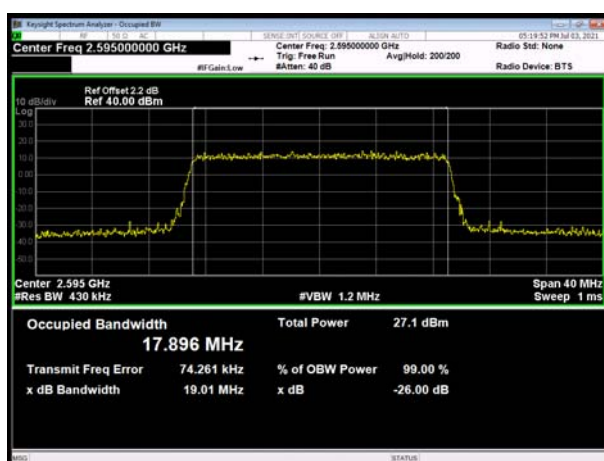

LTE Band 38 16QAM 15MHz CH-High

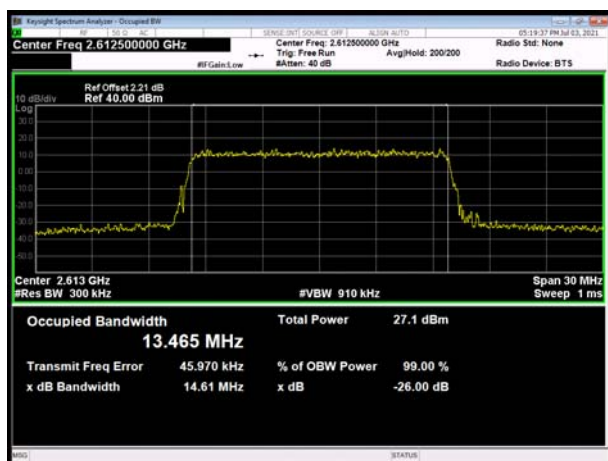

LTE Band 38 16QAM 20MHz CH-High

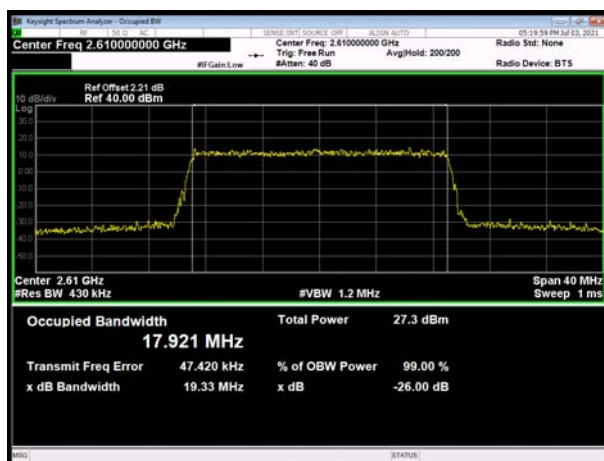





LTE Band 38 64QAM 5MHz CH-Low




LTE Band 38 64QAM 10MHz CH-Low

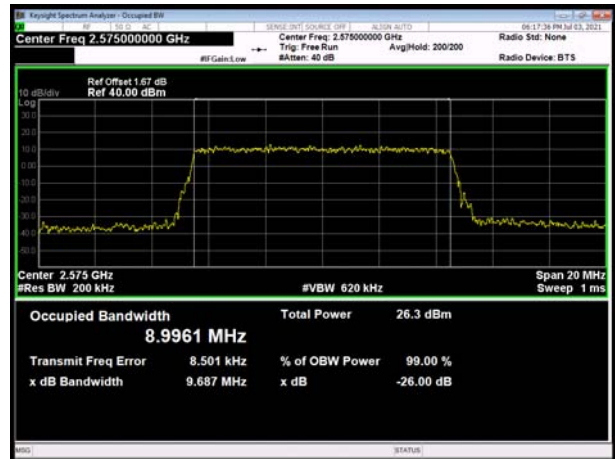


LTE Band 38 64QAM 5MHz CH-Middle

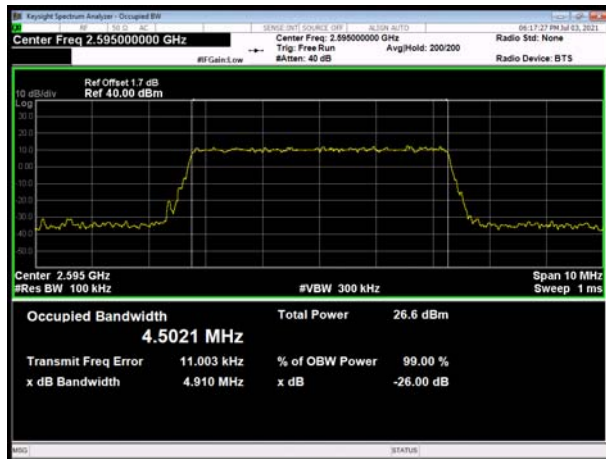


LTE Band 38 64QAM 10MHz CH-Middle

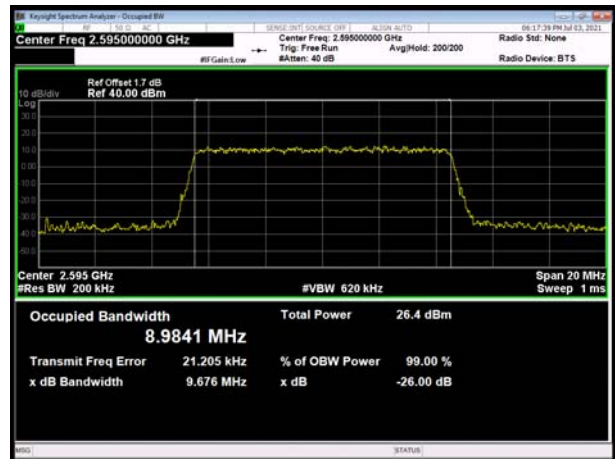

LTE Band 38 64QAM 5MHz CH-High

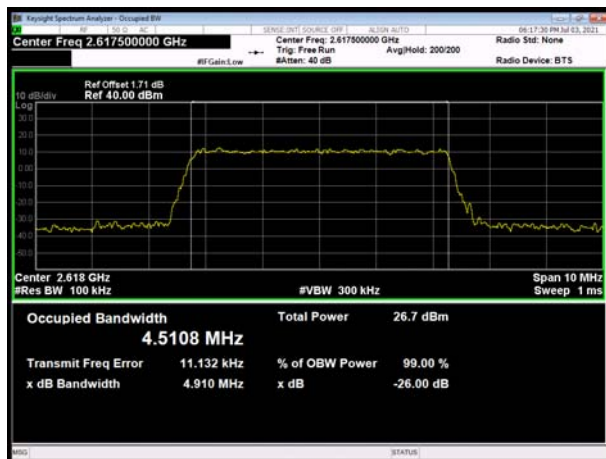


LTE Band 38 64QAM 10MHz CH-High

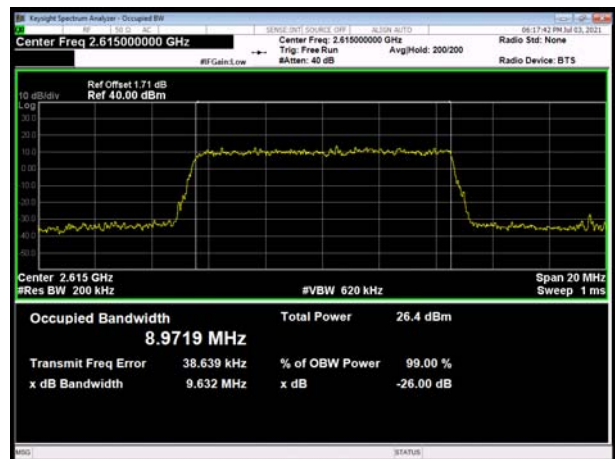





LTE Band 38 64QAM 15MHz CH-Low

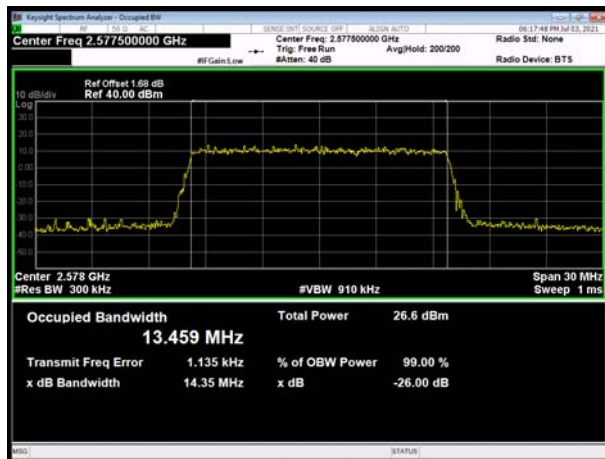


LTE Band 38 64QAM 20MHz CH-Low

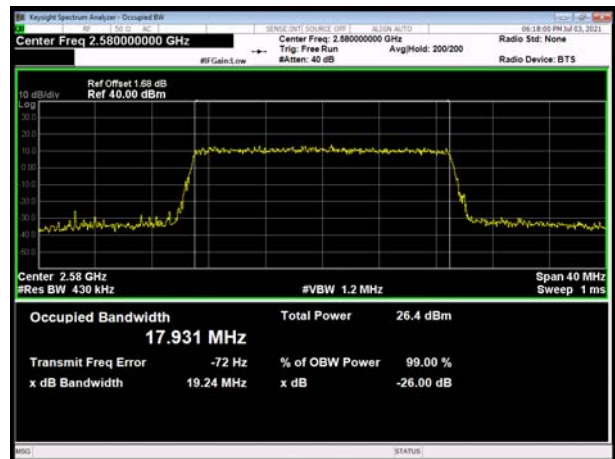


LTE Band 38 64QAM 15MHz CH-Middle

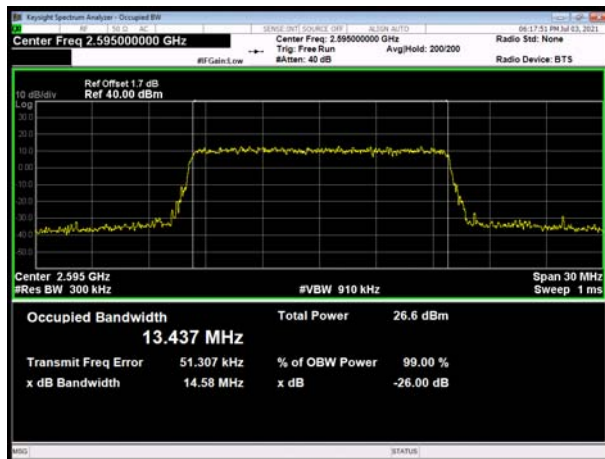


LTE Band 38 64QAM 20MHz CH-Middle

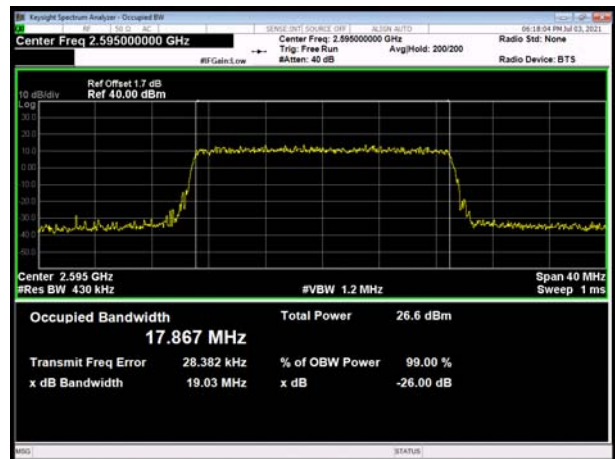

LTE Band 38 64QAM 15MHz CH-High

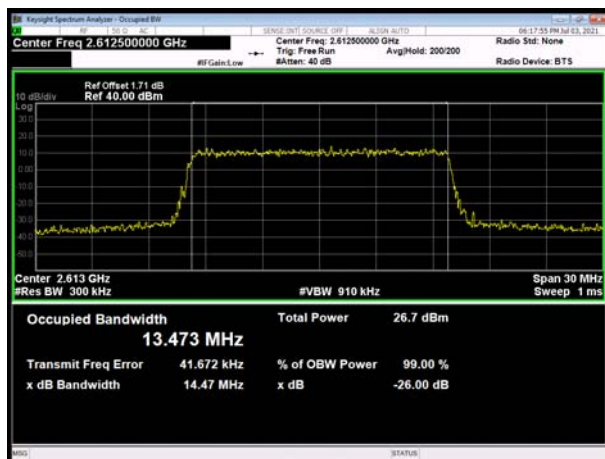

LTE Band 38 64QAM 20MHz CH-High

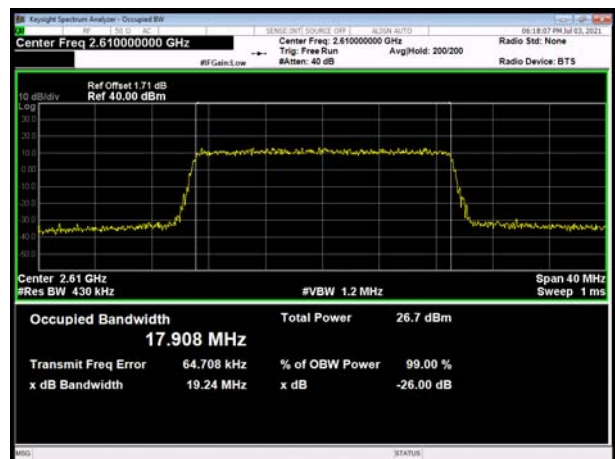

5.3 Band Edge Compliance

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The band edge of the lowest and highest channels were measured.

The testing follows KDB 971168 D01 v03r01 Section 6.0

The EUT was connected to spectrum analyzer and system simulator via a power divider.

The band edges of low and high channels for the highest RF powers were measured.

For LTE Band 7/38/ the middle channel, high channel of set RBW $\geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge. Beyond the 1 MHz band from the band edge, RBW=1MHz was used.

RBW is set to $\geq 1\%$ EBW, VBW is set to 3x RBW


on spectrum analyzer.

Set spectrum analyzer with RMS detector.

The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

Checked that all the results comply with the emission limit line.

Test Setup

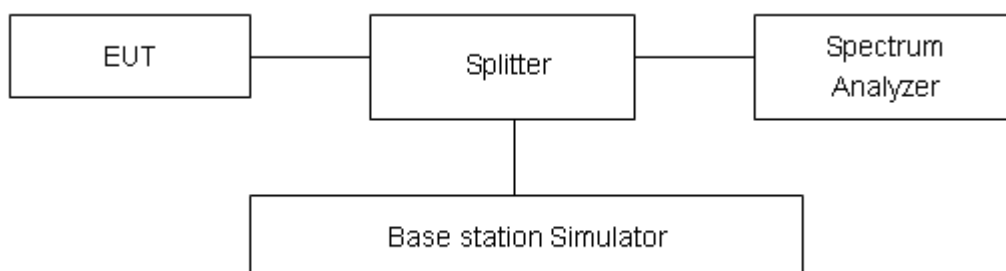

Limits

Rule Part 27.53(i) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2305 and 2320 MHz.

Rule Part 27.53(m) (4)/ specifies that “for BRS and EBS stations. For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual



emission bandwidth as defined in paragraph (m)(4) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

Example:

The limit line is derived from $43 + 10 \log (P)$ dB below the transmitter power P (Watts)

$= P(W) - [43 + 10 \log (P)]$ (dB)

$= [30 + 10 \log (P)]$ (dBm) - $[43 + 10 \log (P)]$ (dB) = -13dBm.


Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U=0.684$ dB.


Test Result

All the test traces in the plots shows the test results clearly.


LTE Band 7 QPSK 5MHz CH-Low, 1 RB

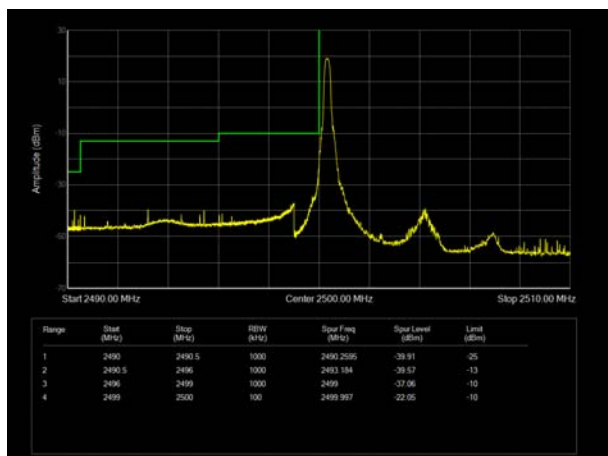


LTE Band 7 QPSK 5MHz CH-High, 1 RB

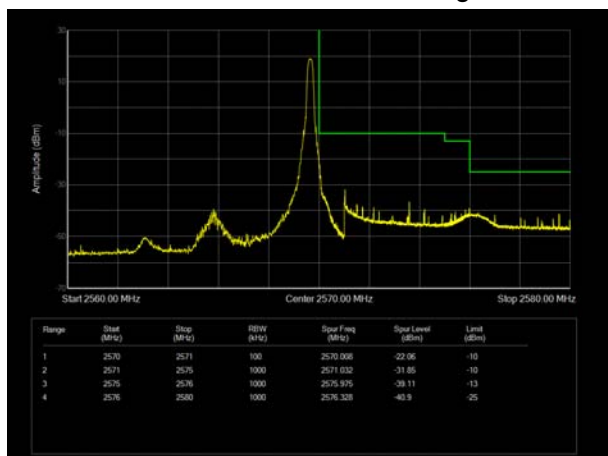


LTE Band 7 QPSK 5MHz CH-Low, 100%RB

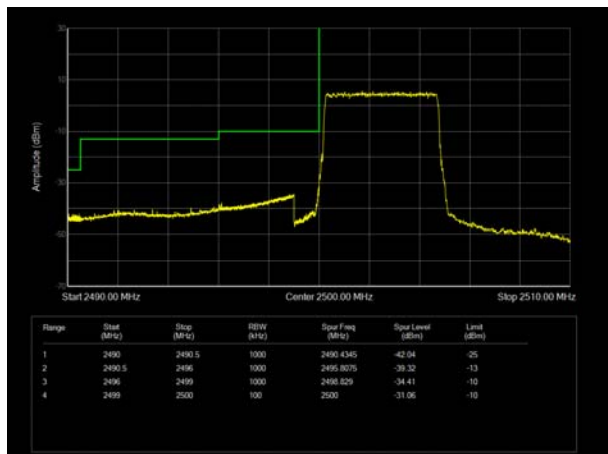


LTE Band 7 QPSK 5MHz CH-High, 100%RB

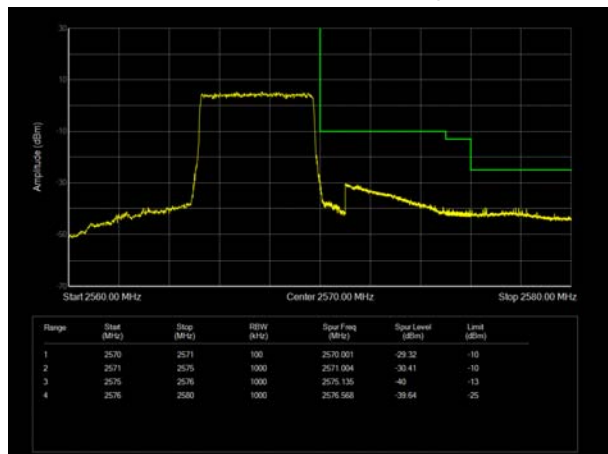


LTE Band 7 QPSK 10MHz CH-Low, 1 RB

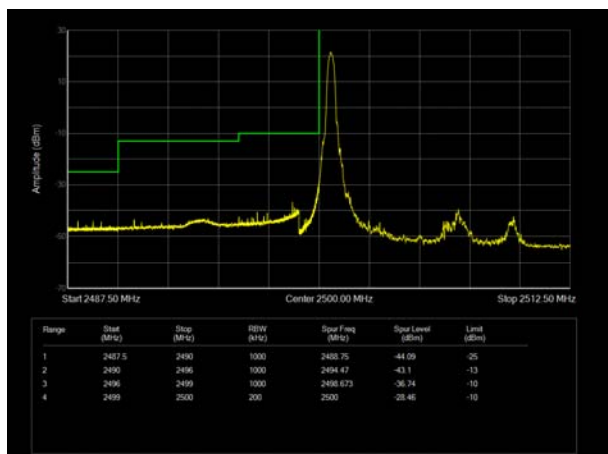


LTE Band 7 QPSK 10MHz CH-High, 1 RB

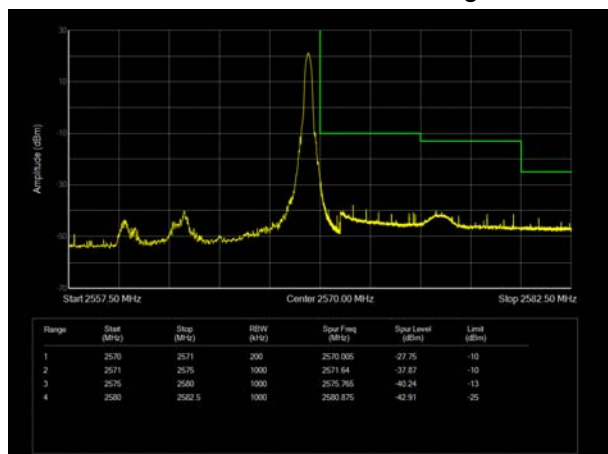


LTE Band 7 QPSK 10MHz CH-Low, 100%RB

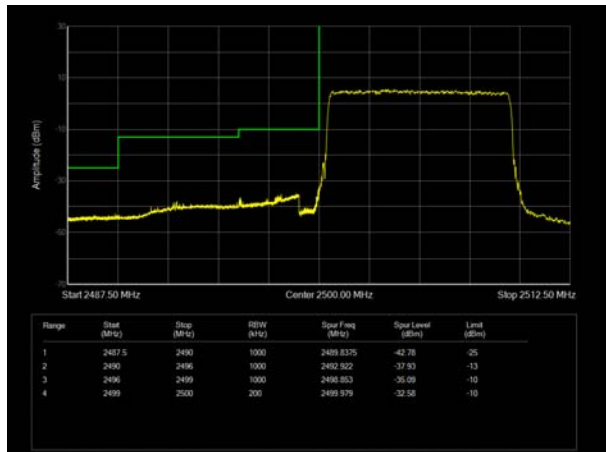


LTE Band 7 QPSK 10MHz CH-High, 100%RB

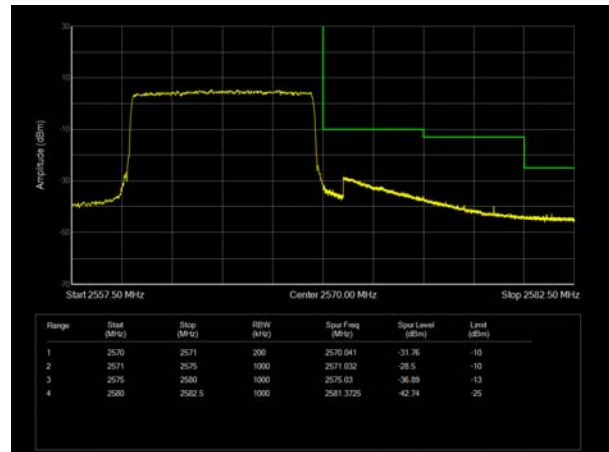


LTE Band 7 QPSK 15MHz CH-Low, 1 RB

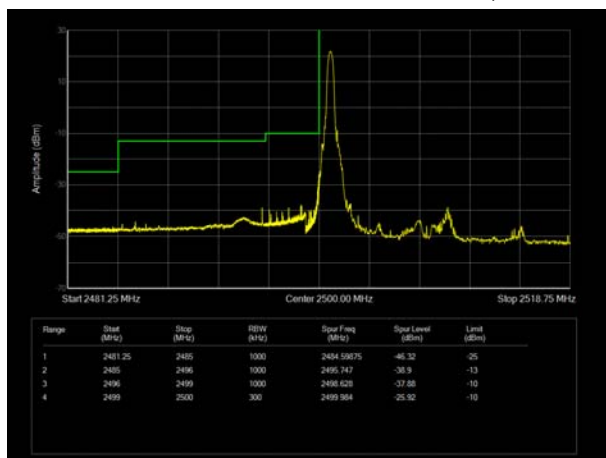


LTE Band 7 QPSK 15MHz CH-High, 1 RB

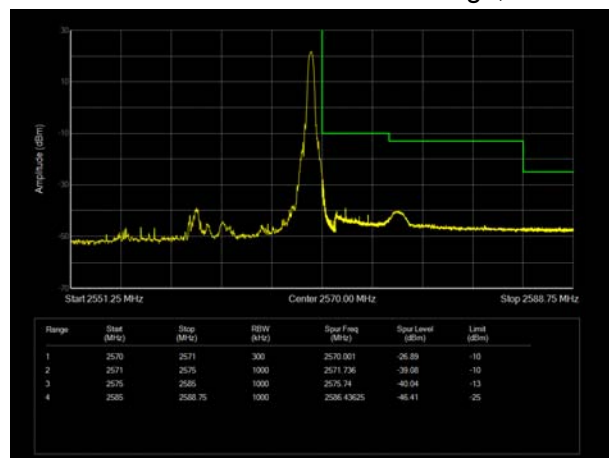


LTE Band 7 QPSK 15MHz CH-Low, 100%RB

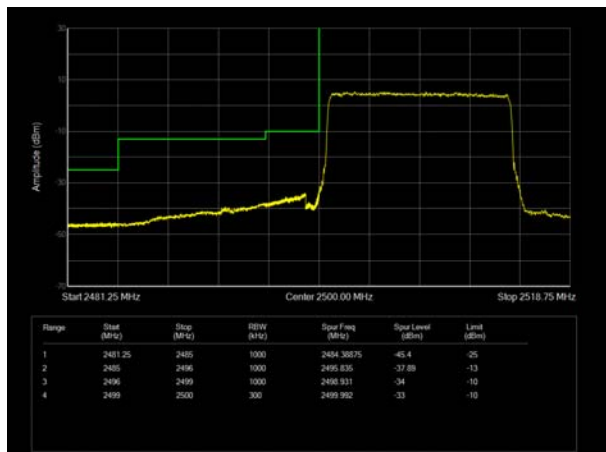


LTE Band 7 QPSK 15MHz CH-High, 100%RB

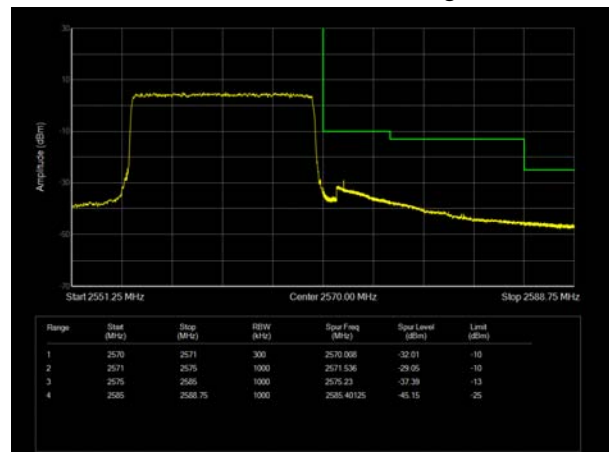


LTE Band 7 QPSK 20MHz CH-Low, 1 RB

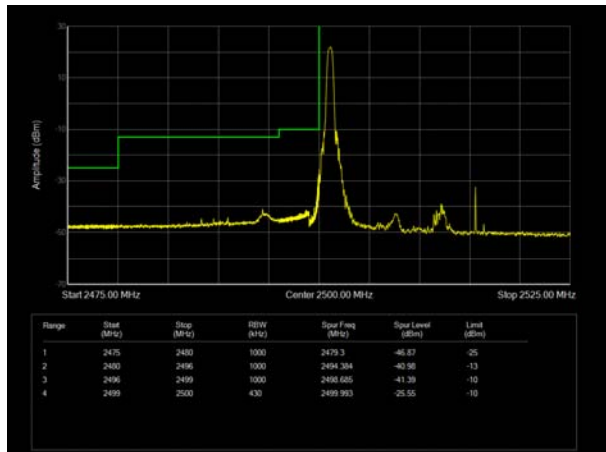


LTE Band 7 QPSK 20MHz CH-High, 1 RB

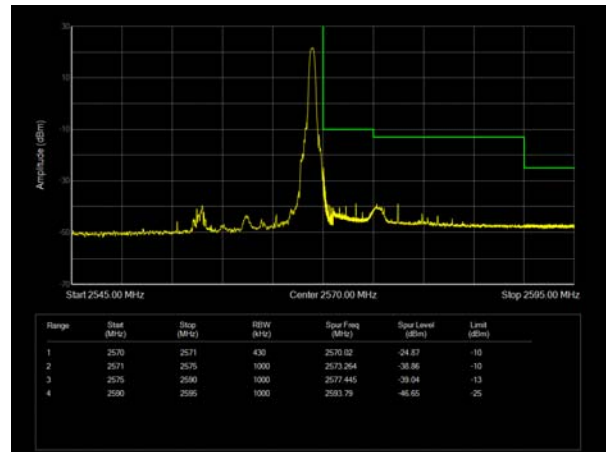


LTE Band 7 QPSK 20MHz CH-Low, 100%RB

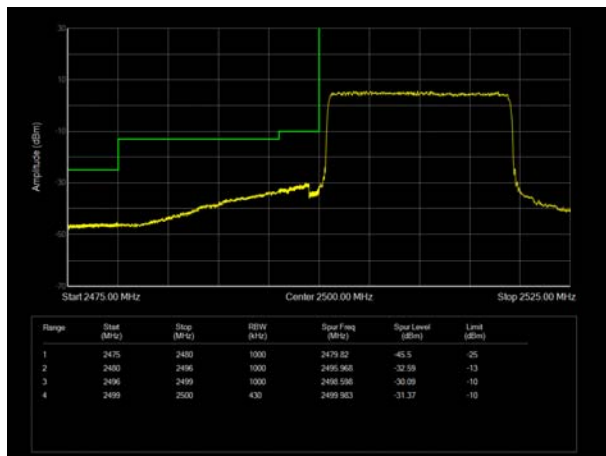


LTE Band 7 QPSK 20MHz CH-High, 100%RB

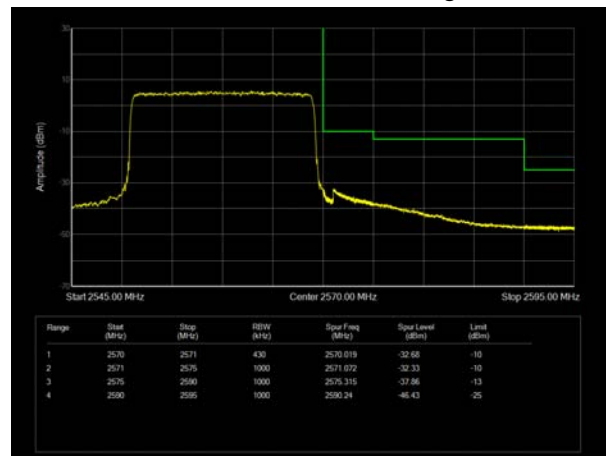


LTE Band 7 16QAM 5MHz CH-Low, 1 RB

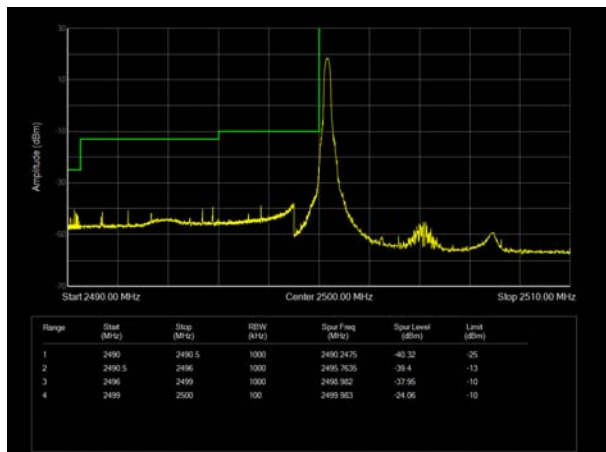


LTE Band 7 16QAM 5MHz CH-High, 1 RB

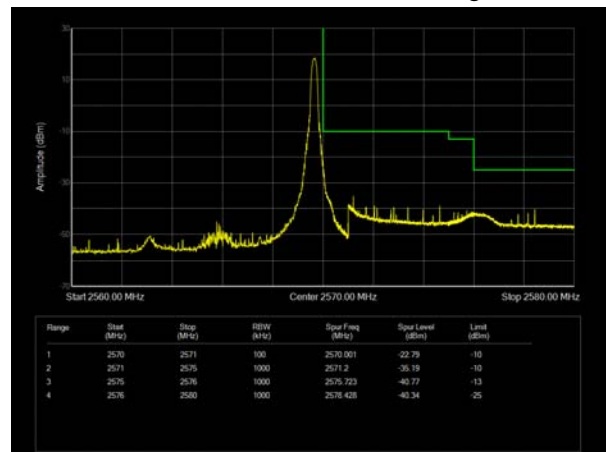


LTE Band 7 16QAM 5MHz CH-Low, 100%RB

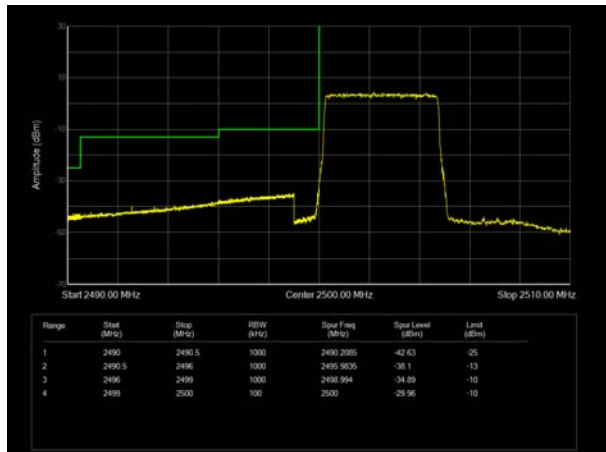


LTE Band 7 16QAM 5MHz CH-High, 100%RB

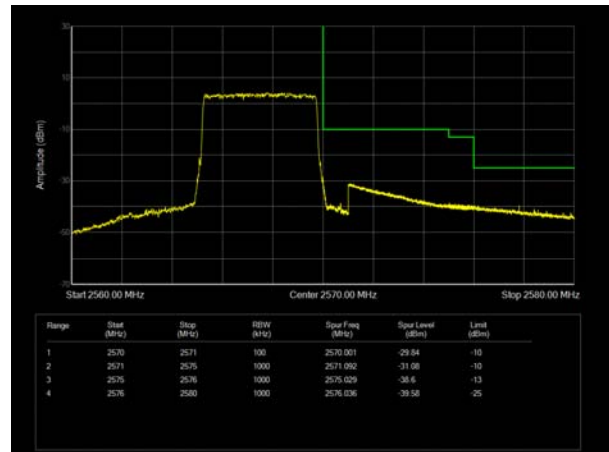


LTE Band 7 16QAM 10MHz CH-Low, 1 RB

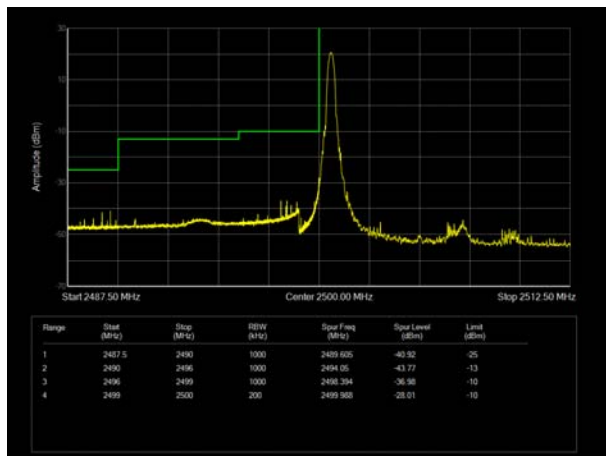


LTE Band 7 16QAM 10MHz CH-High, 1 RB

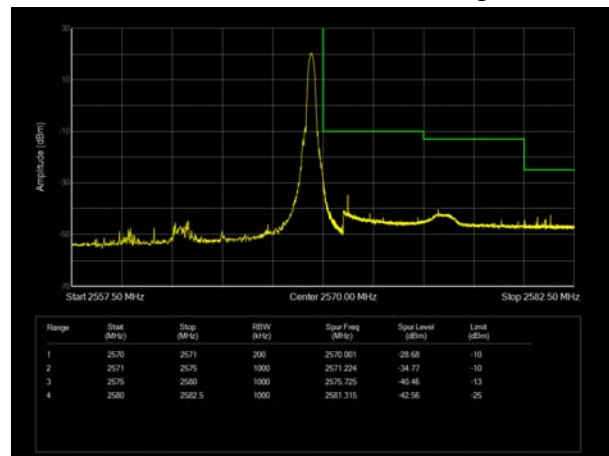


LTE Band 7 16QAM 10MHz CH-Low, 100%RB

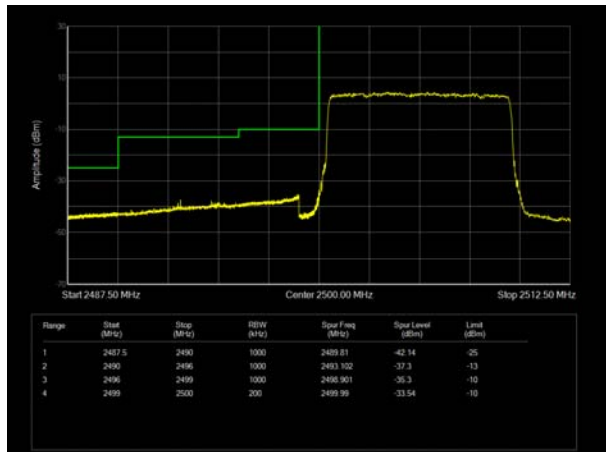


LTE Band 7 16QAM 10MHz CH-High, 100%RB

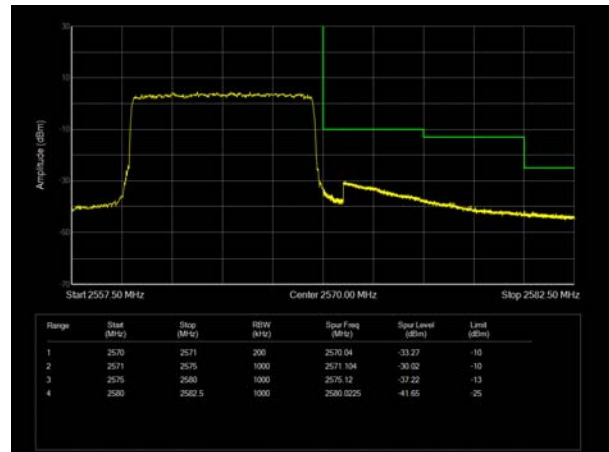


LTE Band 7 16QAM 15MHz CH-Low, 1 RB

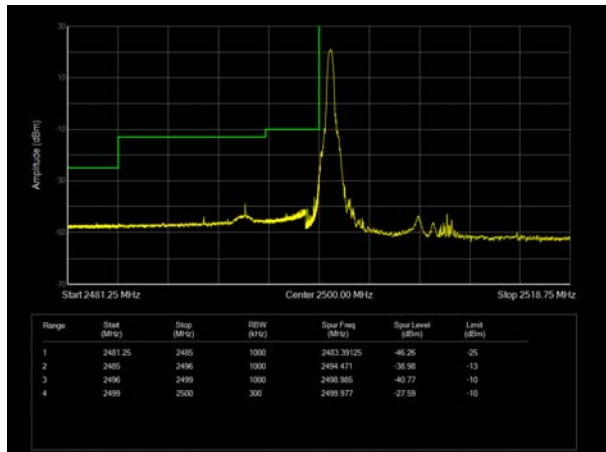


LTE Band 7 16QAM 15MHz CH-High, 1 RB

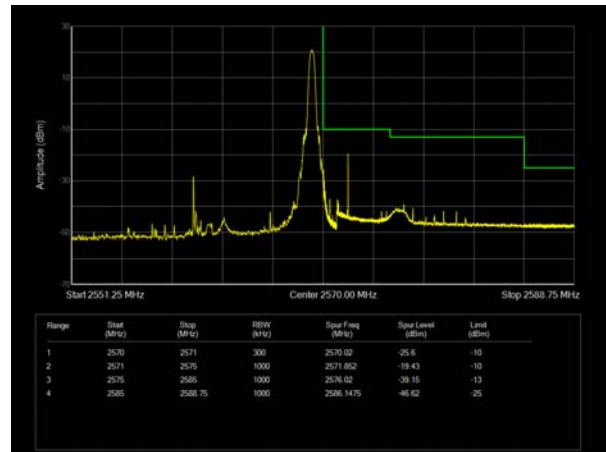


LTE Band 7 16QAM 15MHz CH-Low, 100%RB

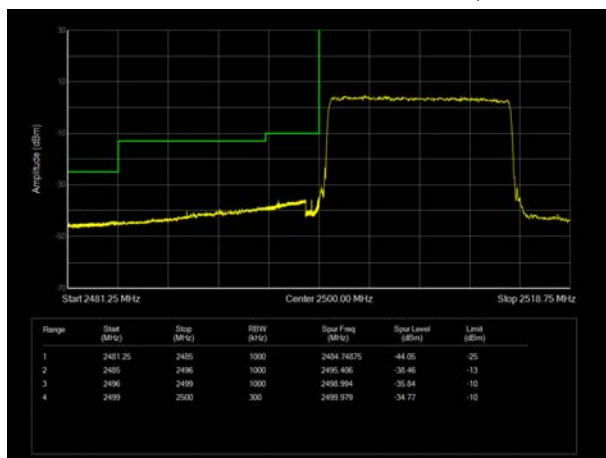


LTE Band 7 16QAM 15MHz CH-High, 100%RB

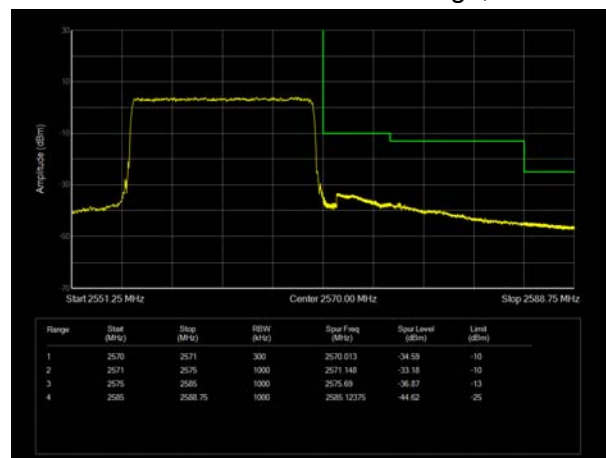


LTE Band 7 16QAM 20MHz CH-Low, 1 RB

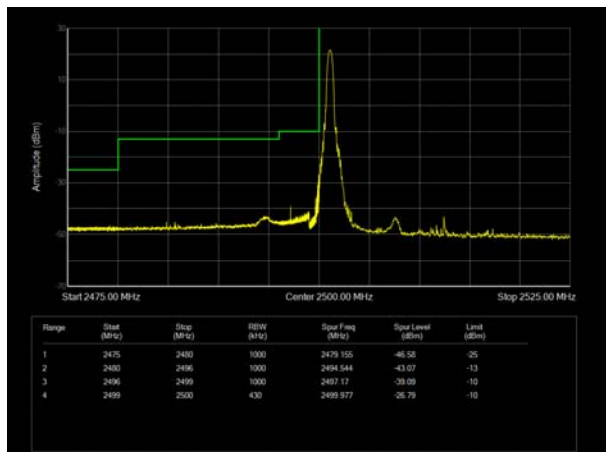


LTE Band 7 16QAM 20MHz CH-High, 1 RB

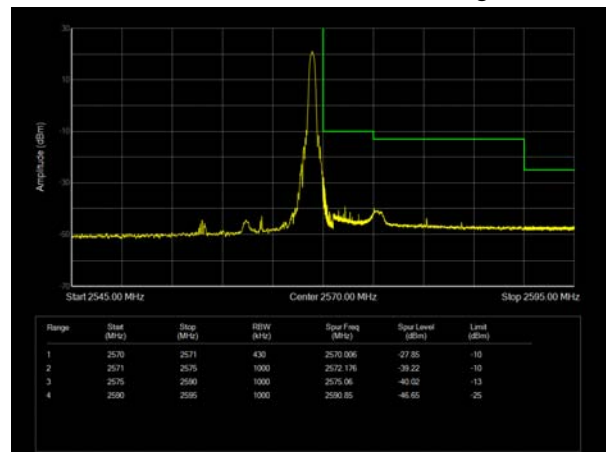


LTE Band 7 16QAM 20MHz CH-Low, 100%RB

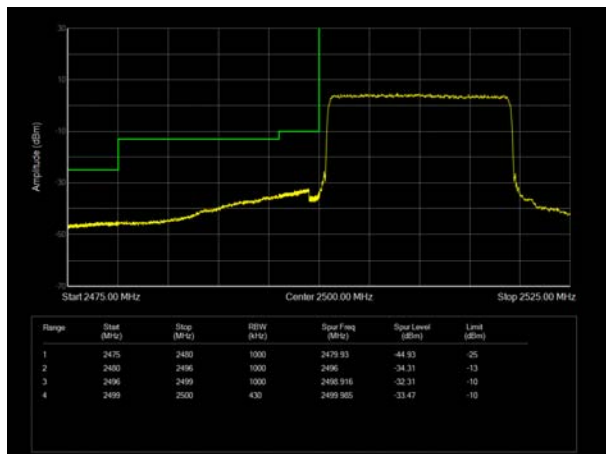


LTE Band 7 16QAM 20MHz CH-High, 100%RB

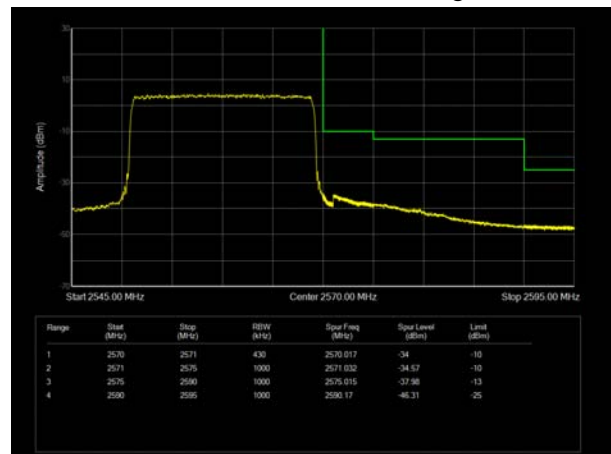


LTE Band 7 64QAM 5MHz CH-Low, 1 RB

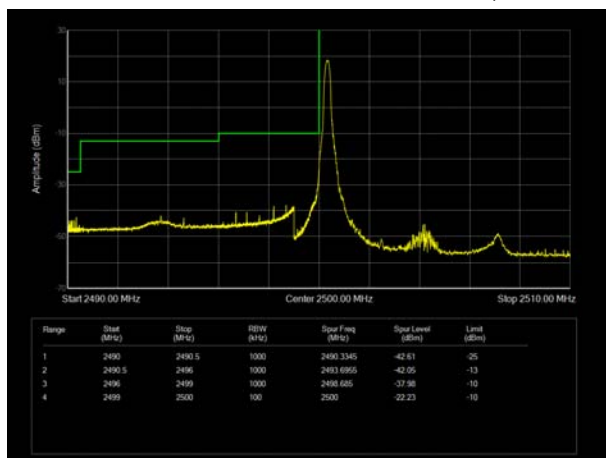


LTE Band 7 64QAM 5MHz CH-High, 1 RB

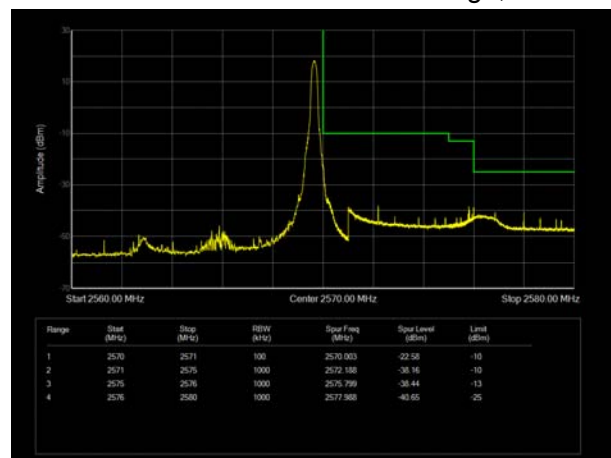


LTE Band 7 64QAM 5MHz CH-Low, 100%RB

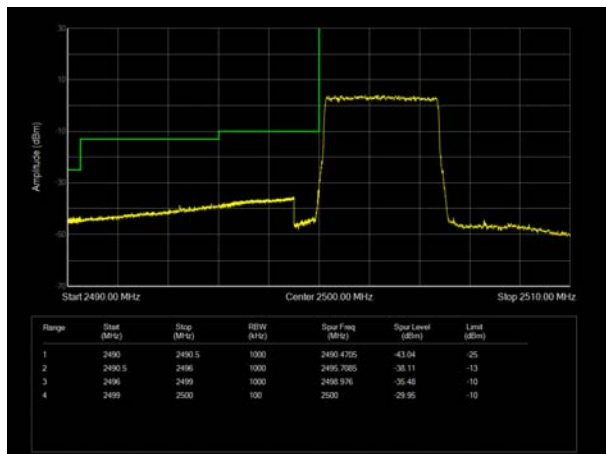


LTE Band 7 64QAM 5MHz CH-High, 100%RB

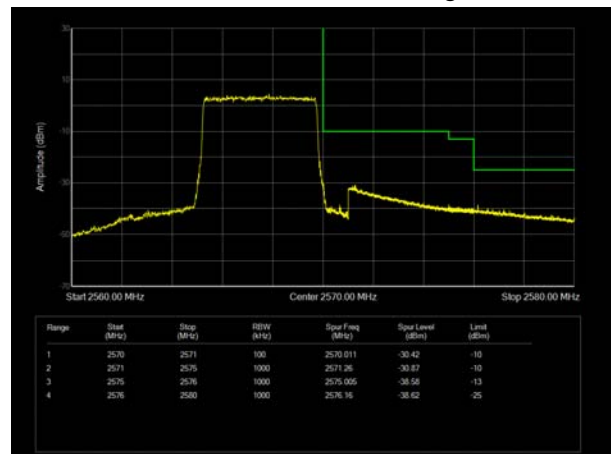


LTE Band 7 64QAM 10MHz CH-Low, 1 RB

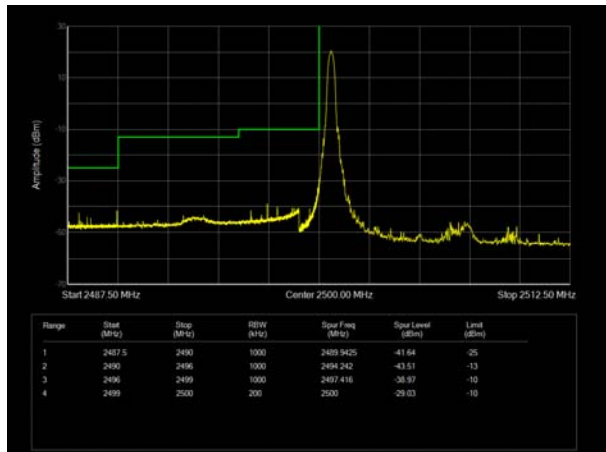


LTE Band 7 64QAM 10MHz CH-High, 1 RB

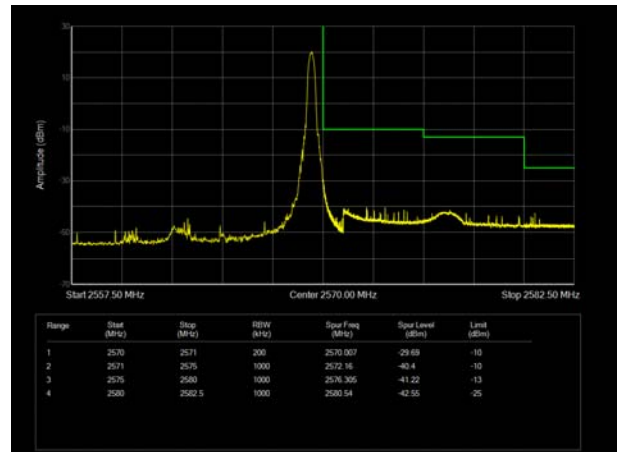


LTE Band 7 64QAM 10MHz CH-Low, 100%RB

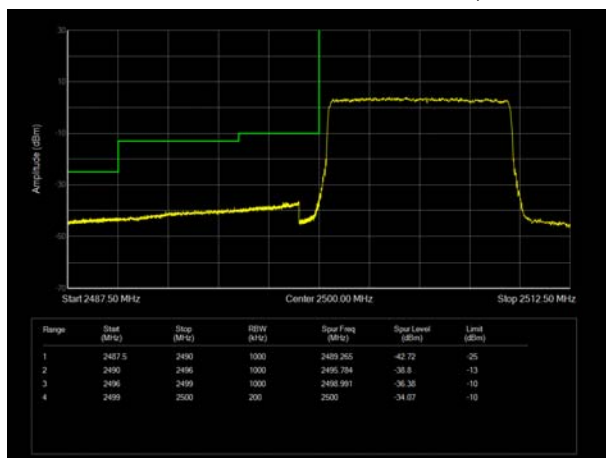


LTE Band 7 64QAM 10MHz CH-High, 100%RB

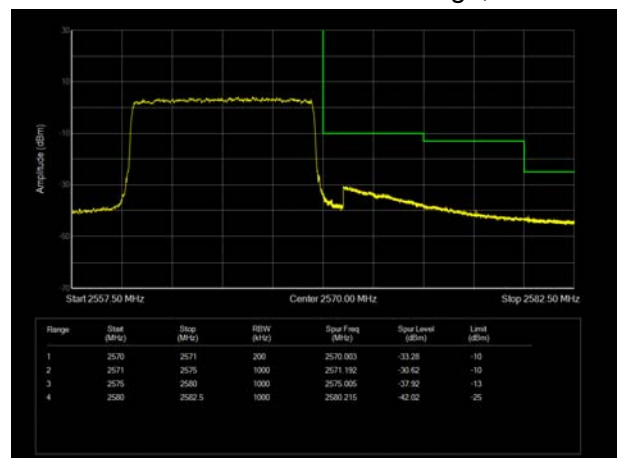


LTE Band 7 64QAM 15MHz CH-Low, 1 RB

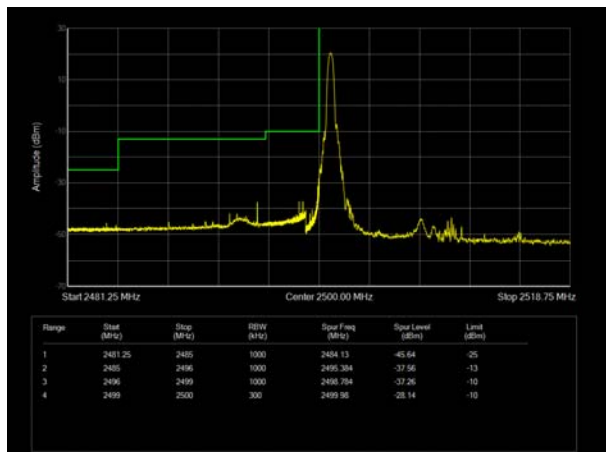


LTE Band 7 64QAM 15MHz CH-High, 1 RB

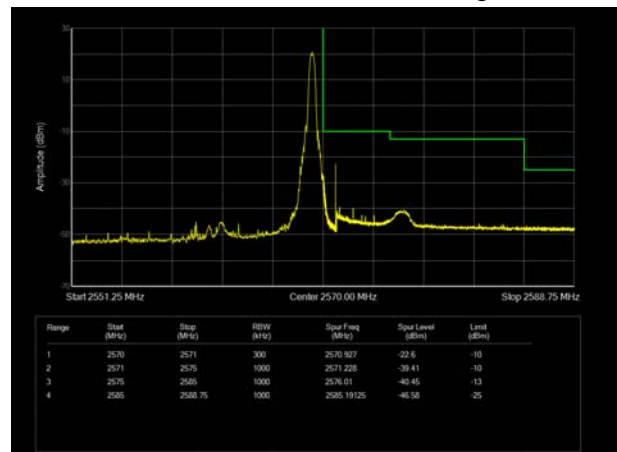


LTE Band 7 64QAM 15MHz CH-Low, 100%RB

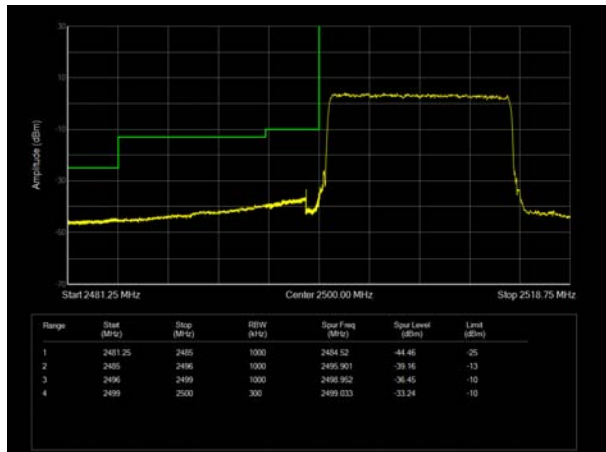


LTE Band 7 64QAM 15MHz CH-High, 100%RB

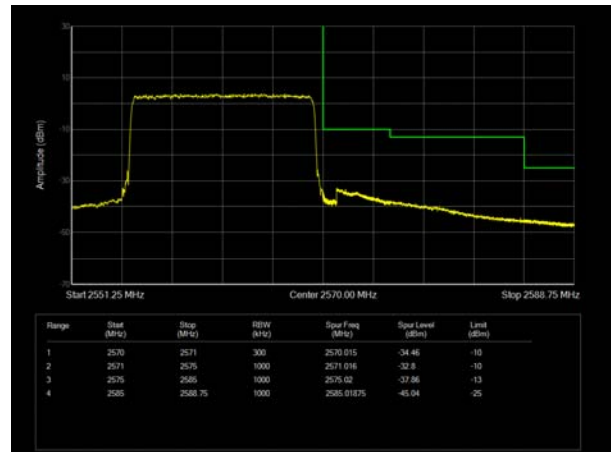


LTE Band 7 64QAM 20MHz CH-Low, 1 RB

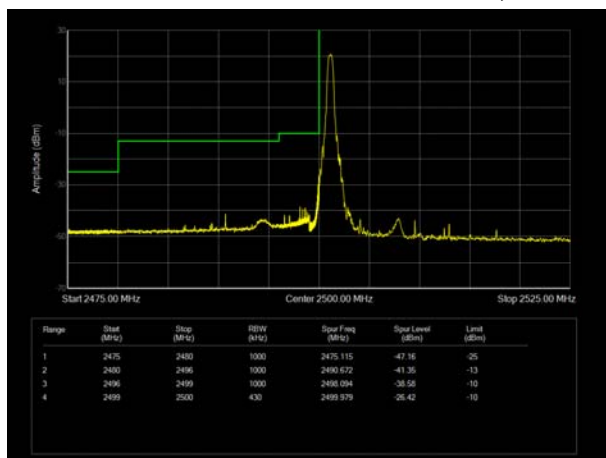


LTE Band 7 64QAM 20MHz CH-High, 1 RB

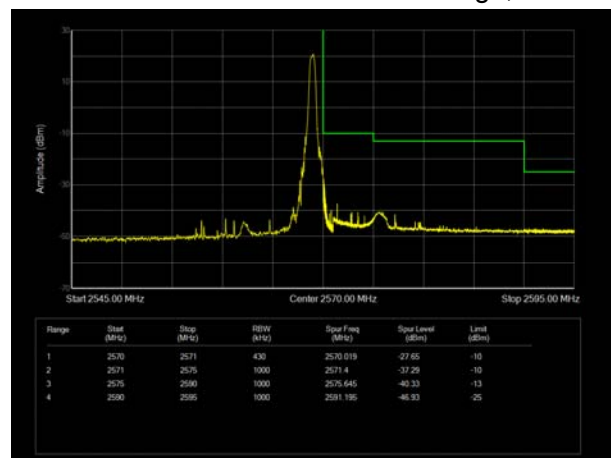


LTE Band 7 64QAM 20MHz CH-Low, 100%RB

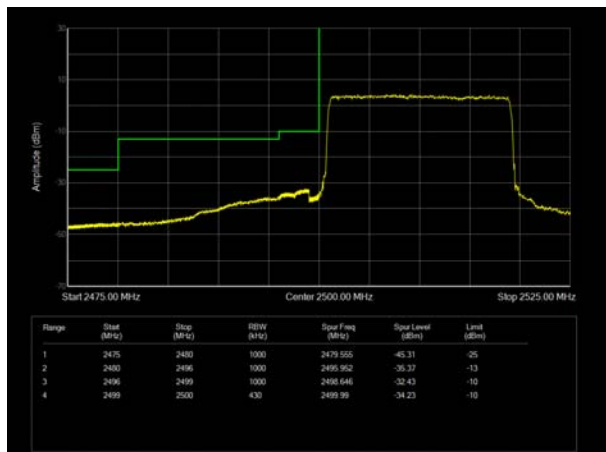


LTE Band 7 64QAM 20MHz CH-High, 100%RB

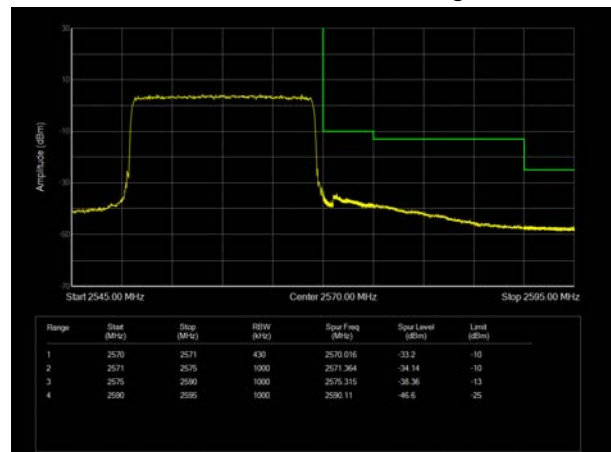


LTE Band 38 QPSK 5MHz CH-Low, 1 RB

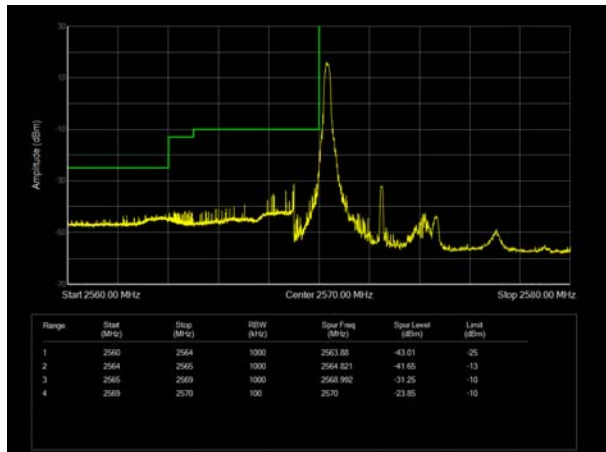


LTE Band 38 QPSK 5MHz CH-High, 1 RB

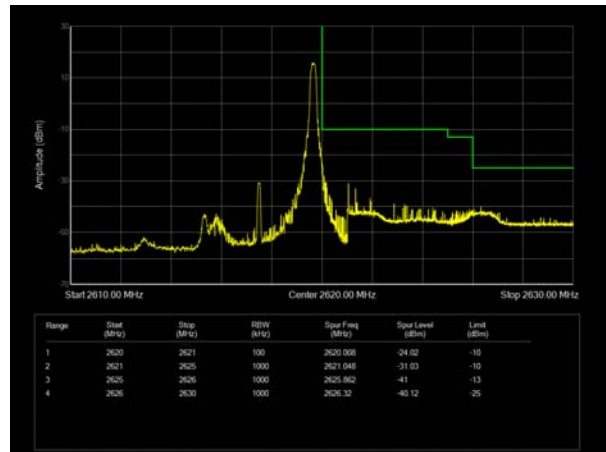


LTE Band 38 QPSK 5MHz CH-Low, 100%RB

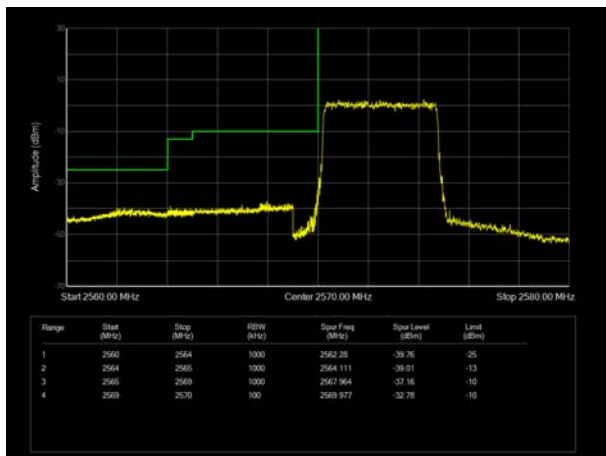


LTE Band 38 QPSK 5MHz CH-High, 100%RB

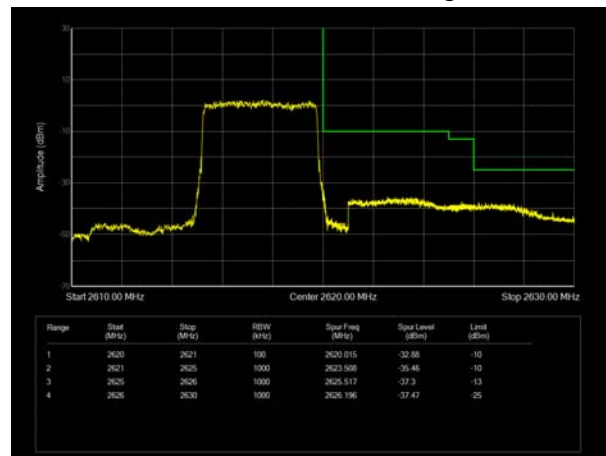


LTE Band 38 QPSK 10MHz CH-Low, 1 RB

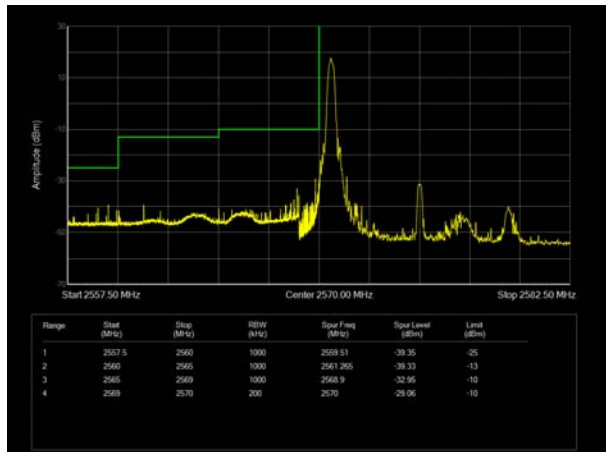


LTE Band 38 QPSK 10MHz CH-High, 1 RB

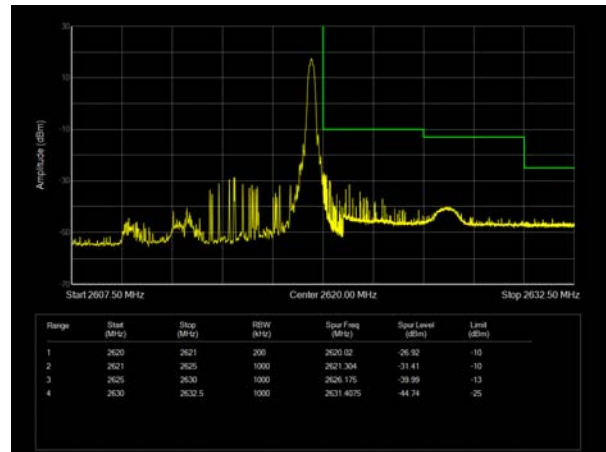


LTE Band 38 QPSK 10MHz CH-Low, 100%RB

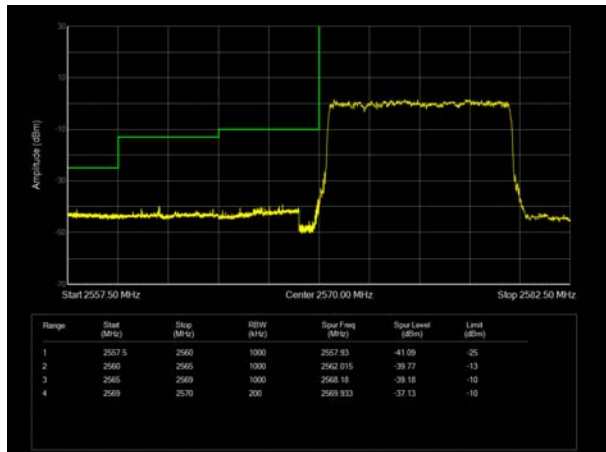


LTE Band 38 QPSK 10MHz CH-High, 100%RB

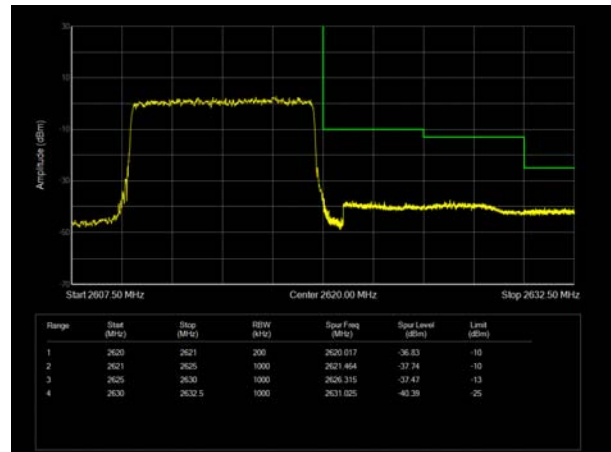


LTE Band 38 QPSK 15MHz CH-Low, 1 RB

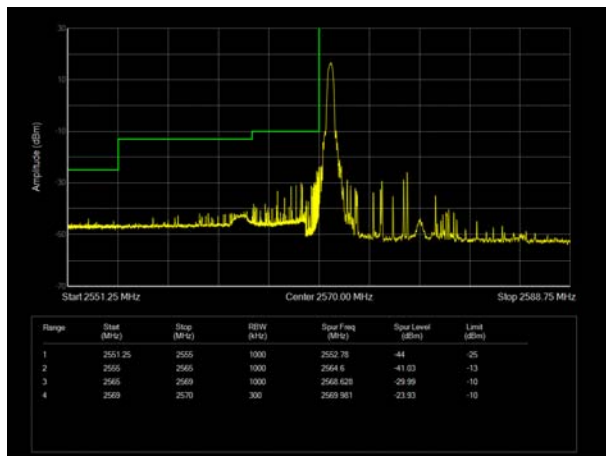


LTE Band 38 QPSK 15MHz CH-High, 1 RB

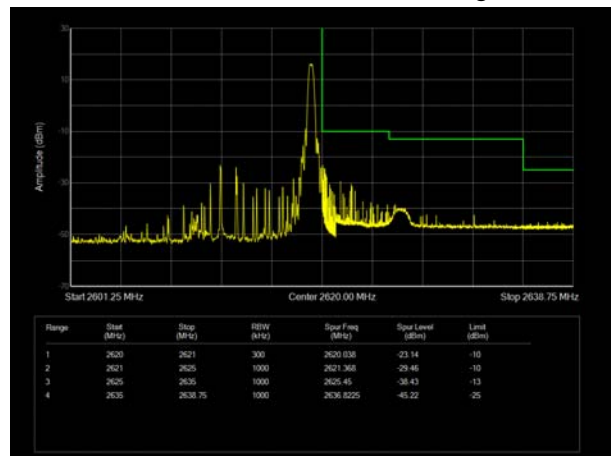


LTE Band 38 QPSK 15MHz CH-Low, 100%RB

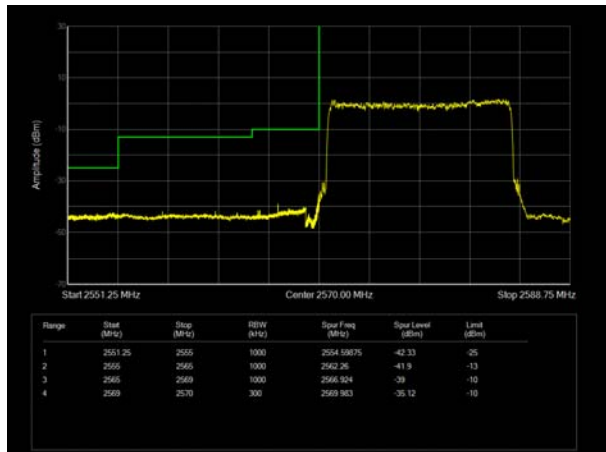


LTE Band 38 QPSK 15MHz CH-High, 100%RB

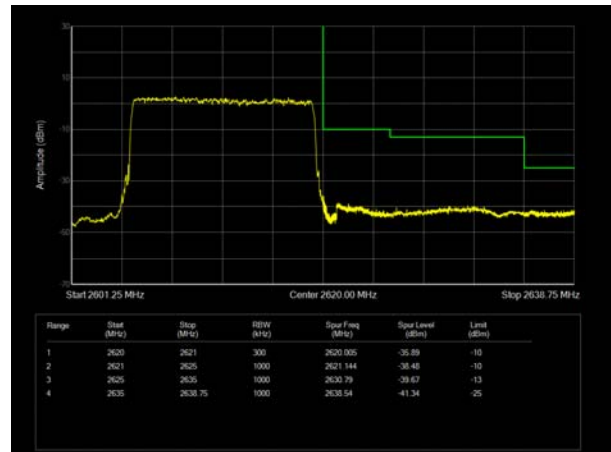


LTE Band 38 QPSK 20MHz CH-Low, 1 RB

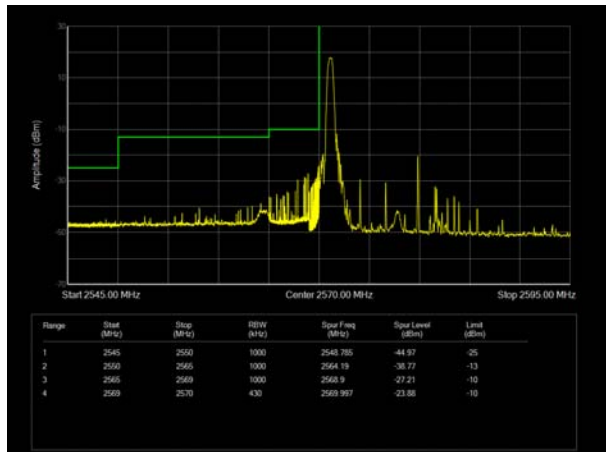


LTE Band 38 QPSK 20MHz CH-High, 1 RB

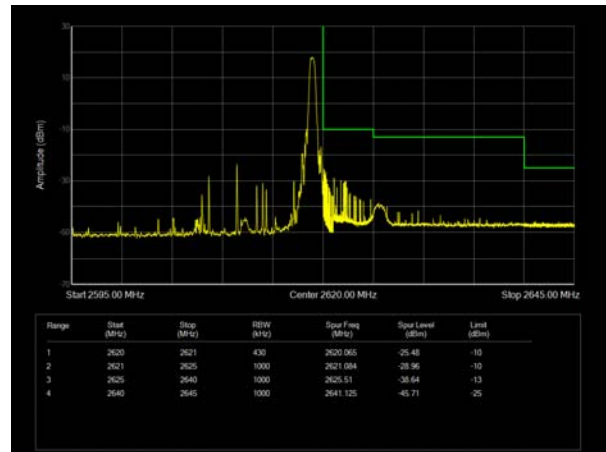


LTE Band 38 QPSK 20MHz CH-Low, 100%RB

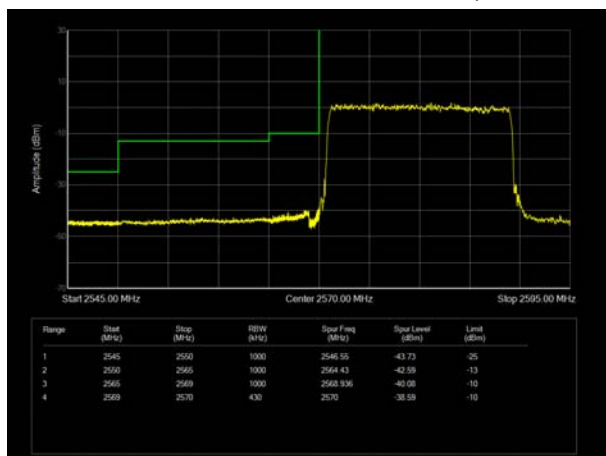


LTE Band 38 QPSK 20MHz CH-High, 100%RB

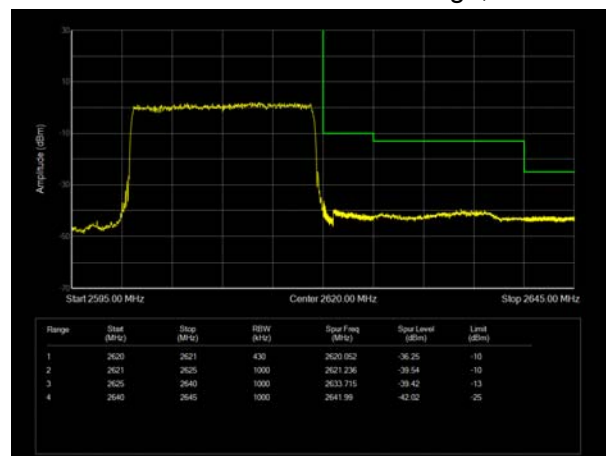


LTE Band 38 16QAM 5MHz CH-Low, 1 RB

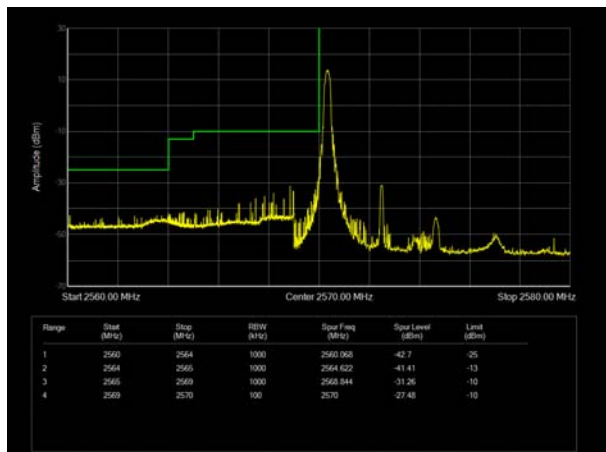


LTE Band 38 16QAM 5MHz CH-High, 1 RB

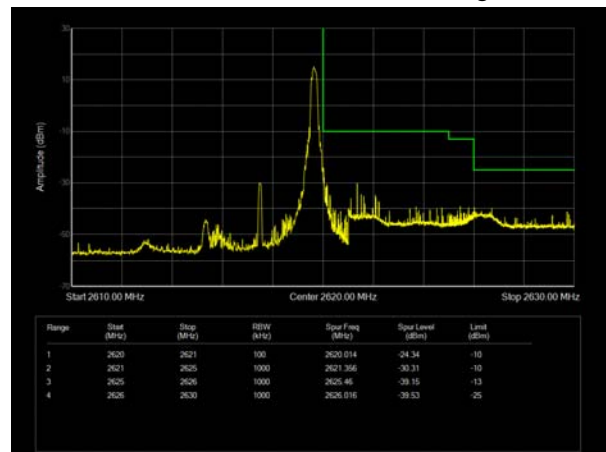


LTE Band 38 16QAM 5MHz CH-Low, 100%RB

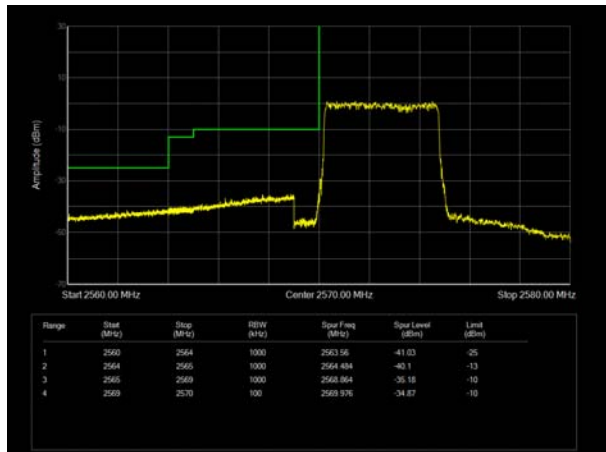


LTE Band 38 16QAM 5MHz CH-High, 100%RB

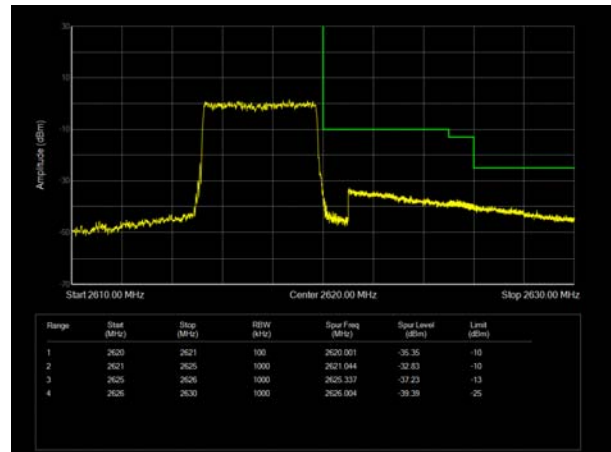


LTE Band 38 16QAM 10MHz CH-Low, 1 RB

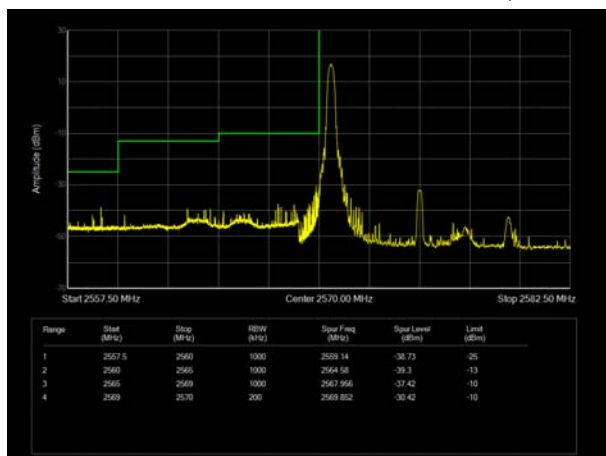


LTE Band 38 16QAM 10MHz CH-High, 1 RB

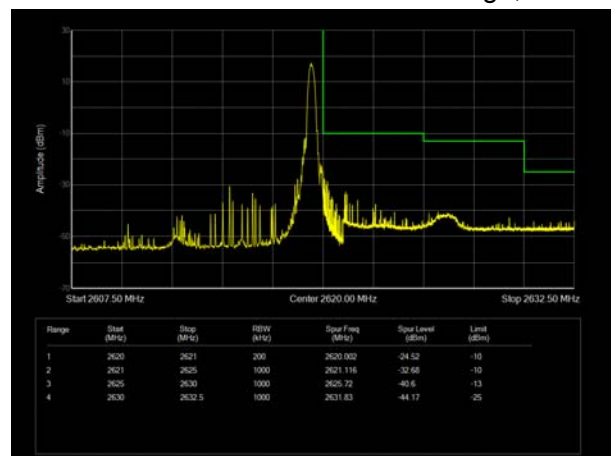


LTE Band 38 16QAM 10MHz CH-Low, 100%RB

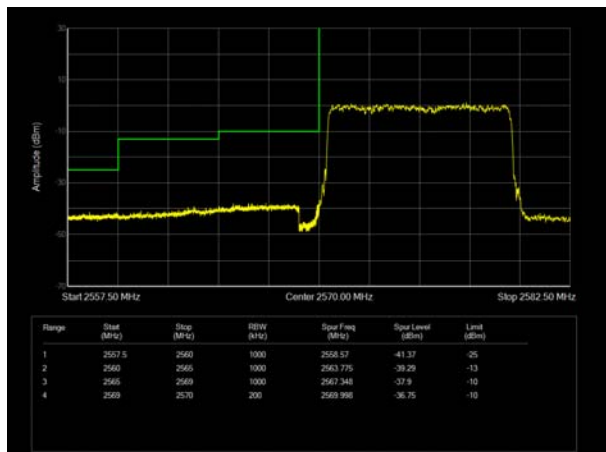


LTE Band 38 16QAM 10MHz CH-High, 100%RB

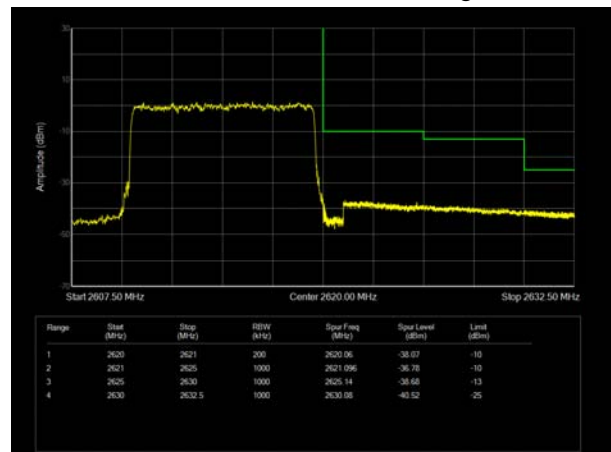


LTE Band 38 16QAM 15MHz CH-Low, 1 RB

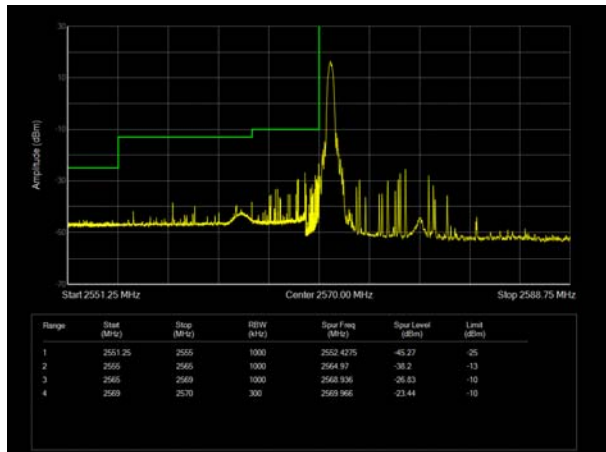


LTE Band 38 16QAM 15MHz CH-High, 1 RB

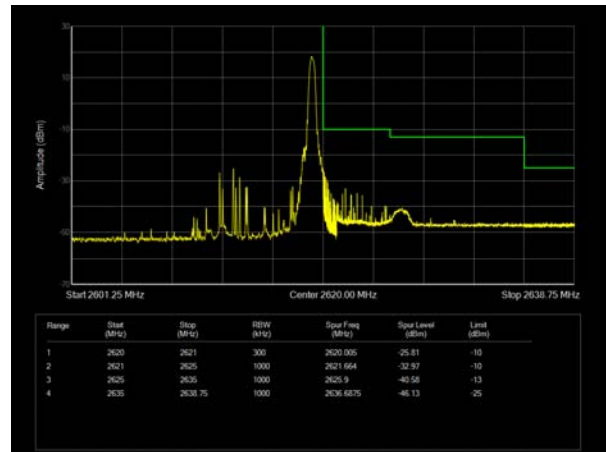


LTE Band 38 16QAM 15MHz CH-Low, 100%RB

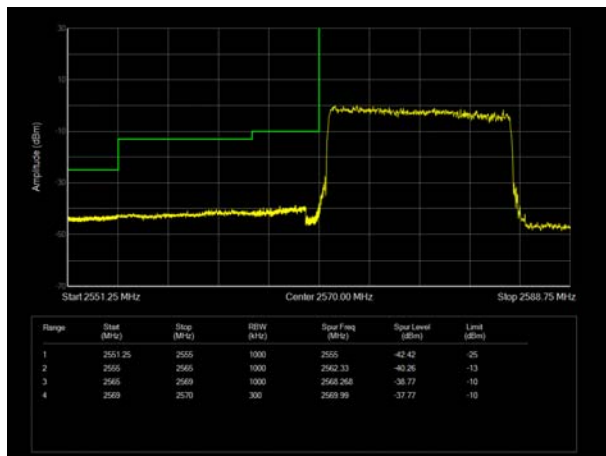


LTE Band 38 16QAM 15MHz CH-High, 100%RB

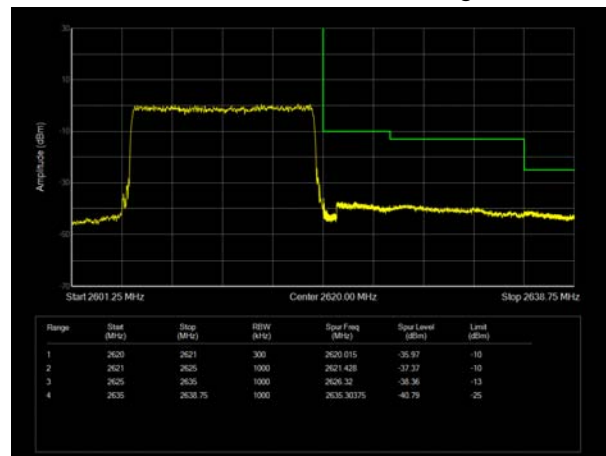


LTE Band 38 16QAM 20MHz CH-Low, 1 RB

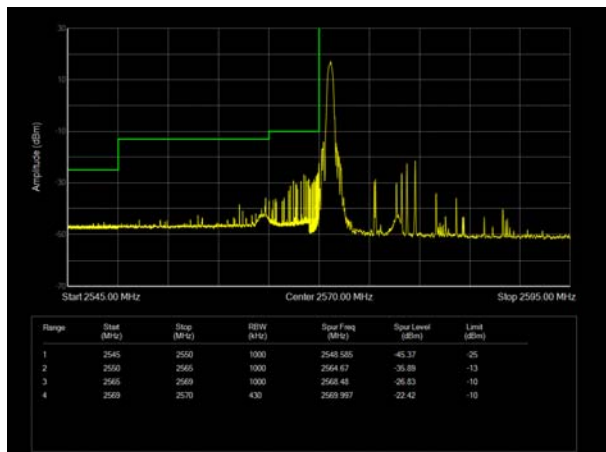


LTE Band 38 16QAM 20MHz CH-High, 1 RB

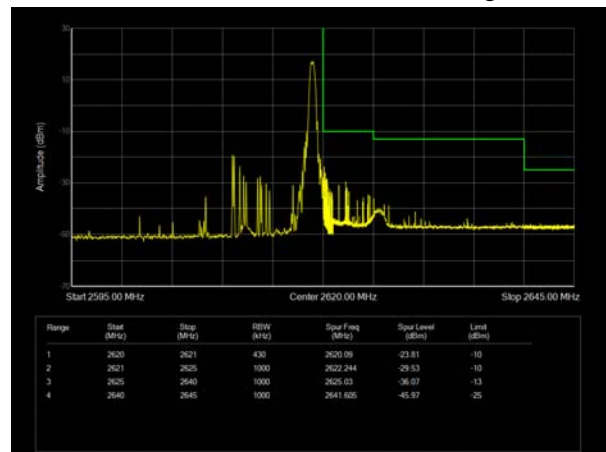


LTE Band 38 16QAM 20MHz CH-Low, 100%RB

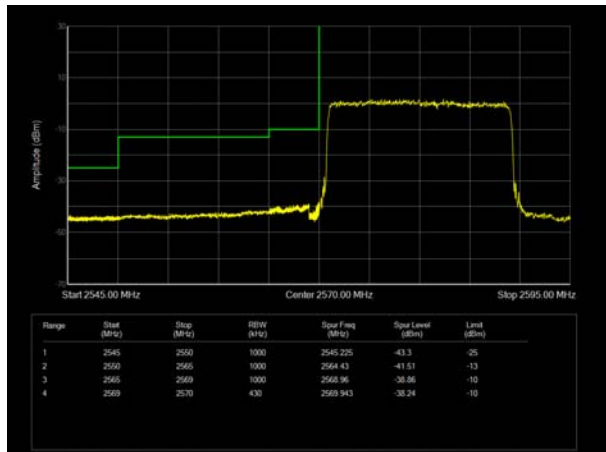


LTE Band 38 16QAM 20MHz CH-High, 100%RB

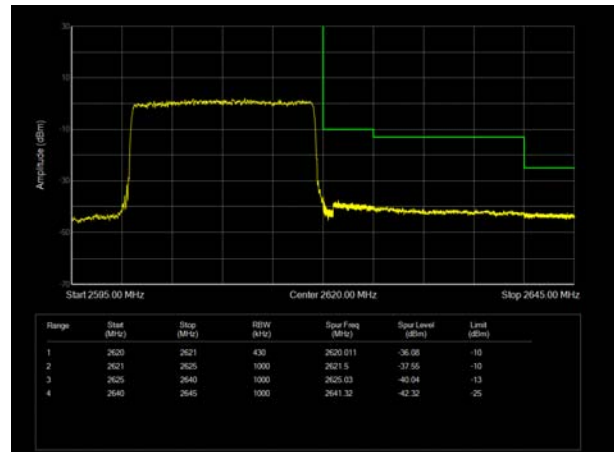


LTE Band 38 64QAM 5MHz CH-Low, 1 RB

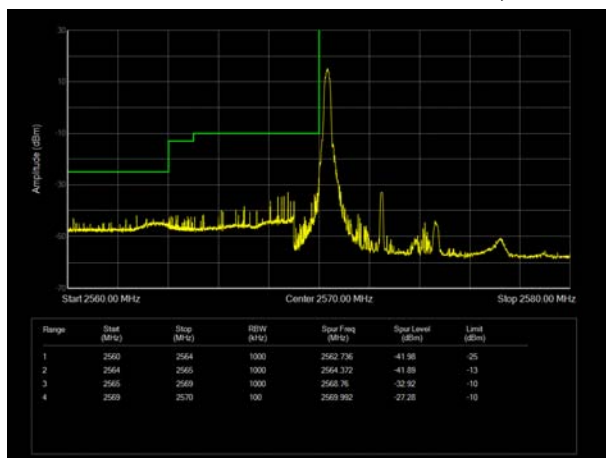


LTE Band 38 64QAM 5MHz CH-High, 1 RB

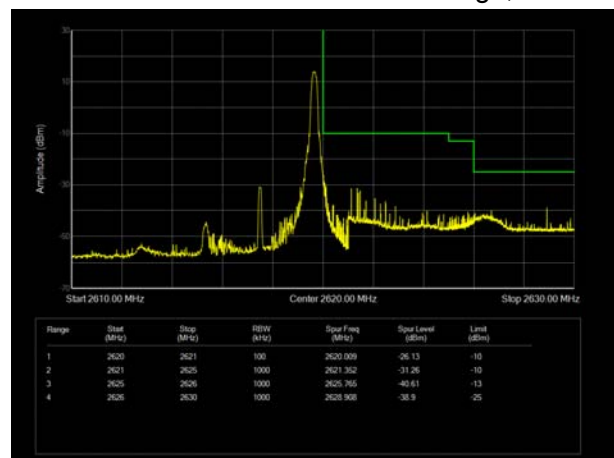


LTE Band 38 64QAM 5MHz CH-Low, 100%RB

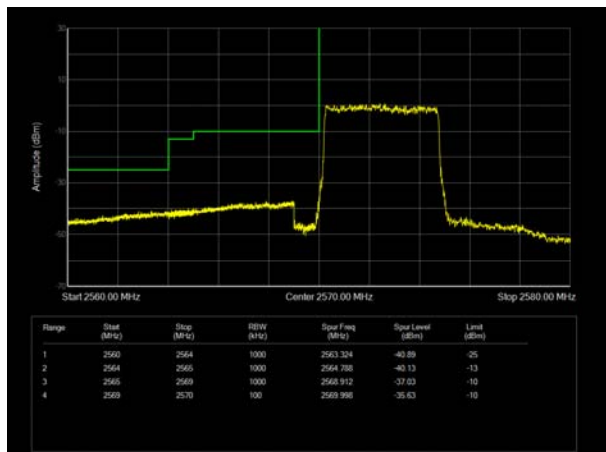


LTE Band 38 64QAM 5MHz CH-High, 100%RB

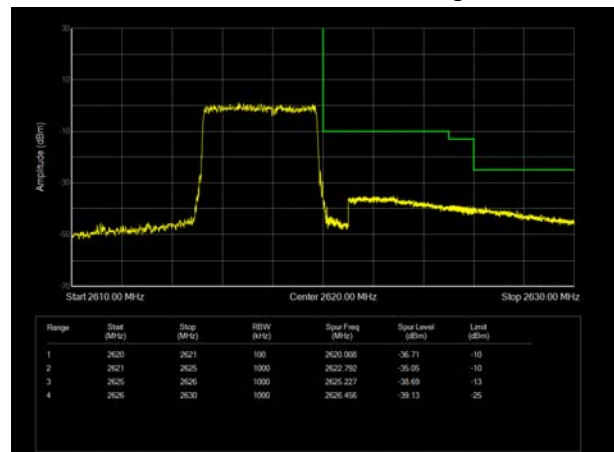


LTE Band 38 64QAM 10MHz CH-Low, 1 RB

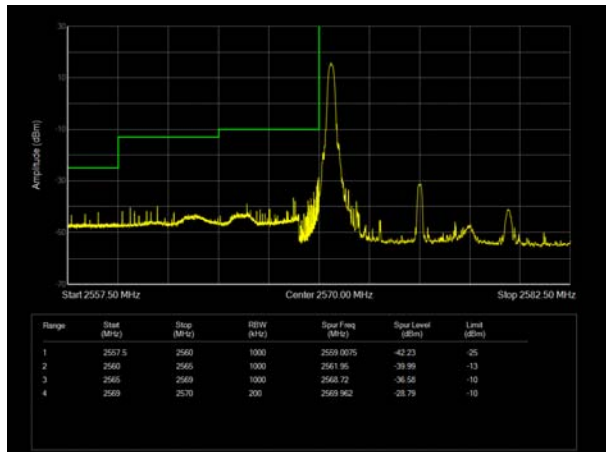


LTE Band 38 64QAM 10MHz CH-High, 1 RB

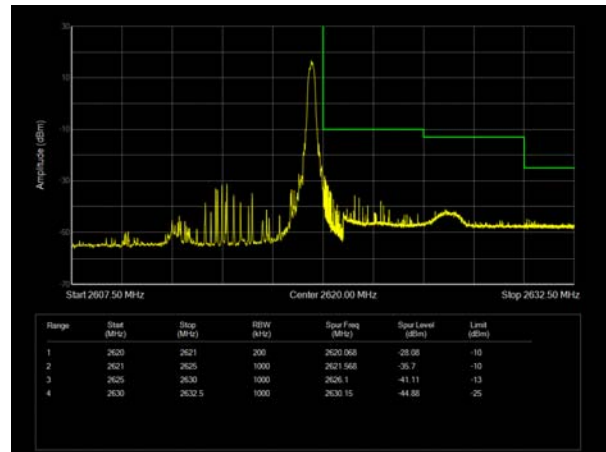


LTE Band 38 64QAM 10MHz CH-Low, 100%RB

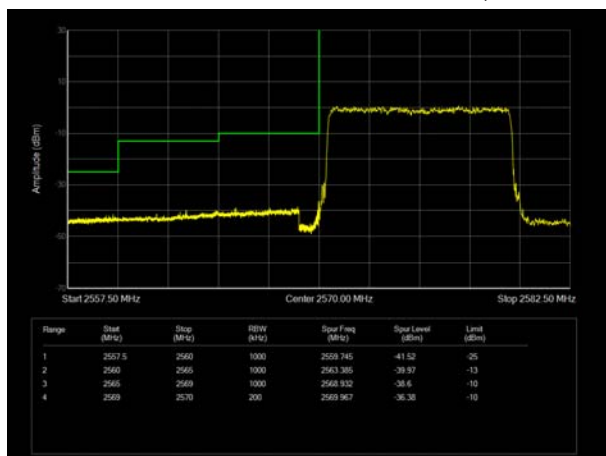


LTE Band 38 64QAM 10MHz CH-High, 100%RB

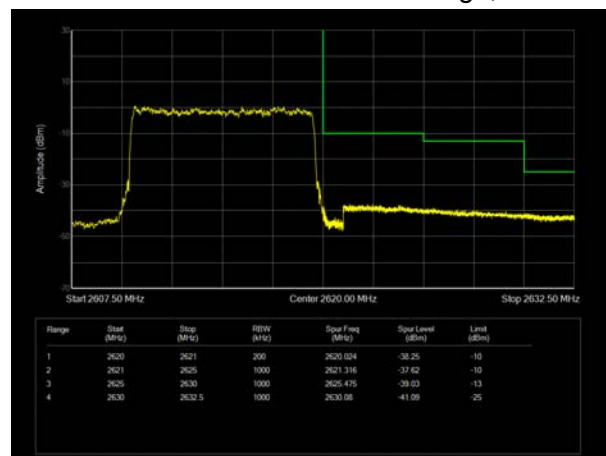


LTE Band 38 64QAM 15MHz CH-Low, 1 RB

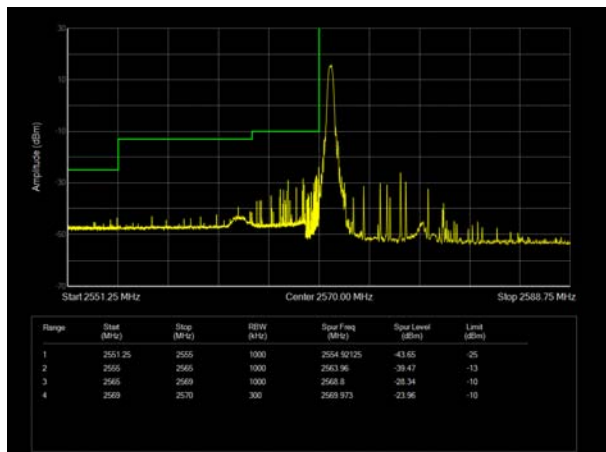


LTE Band 38 64QAM 15MHz CH-High, 1 RB

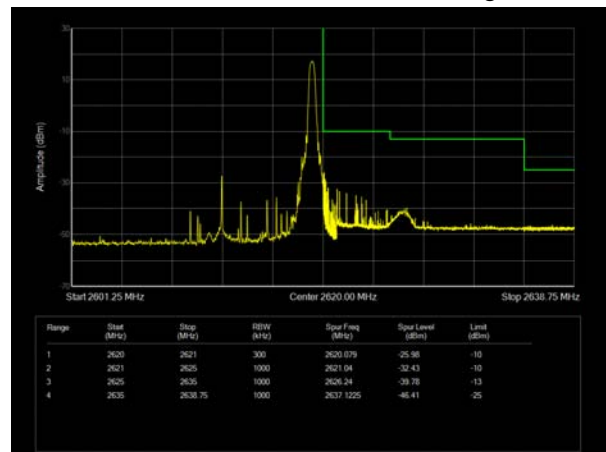


LTE Band 38 64QAM 15MHz CH-Low, 100%RB

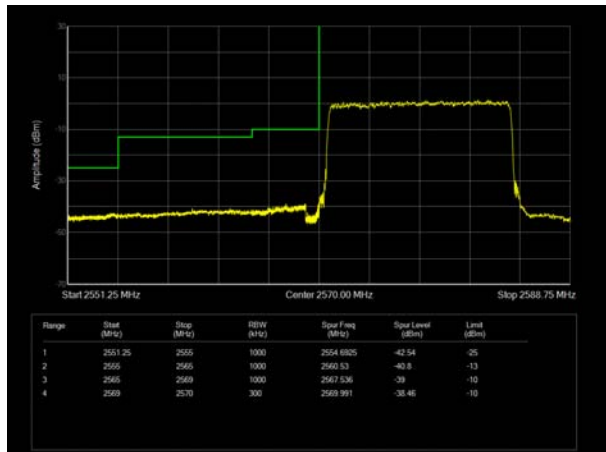


LTE Band 38 64QAM 15MHz CH-High, 100%RB

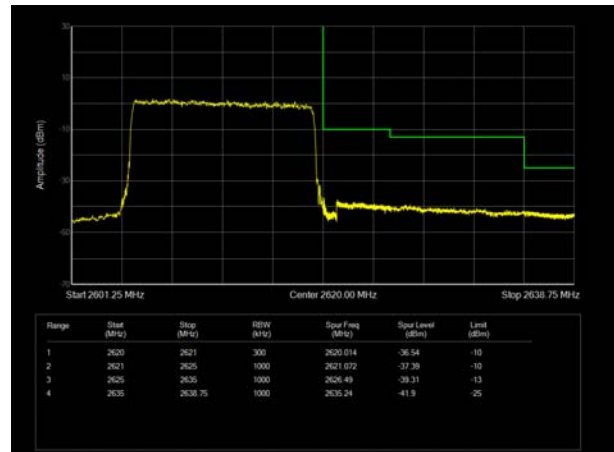


LTE Band 38 64QAM 20MHz CH-Low, 1 RB

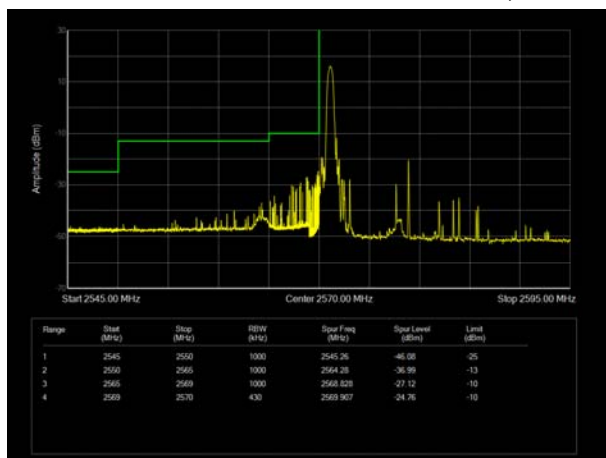


LTE Band 38 64QAM 20MHz CH-High, 1 RB

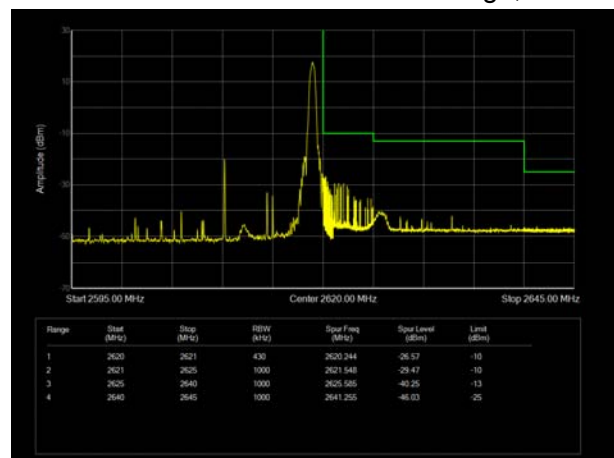

LTE Band 38 64QAM 20MHz CH-Low, 100%RB

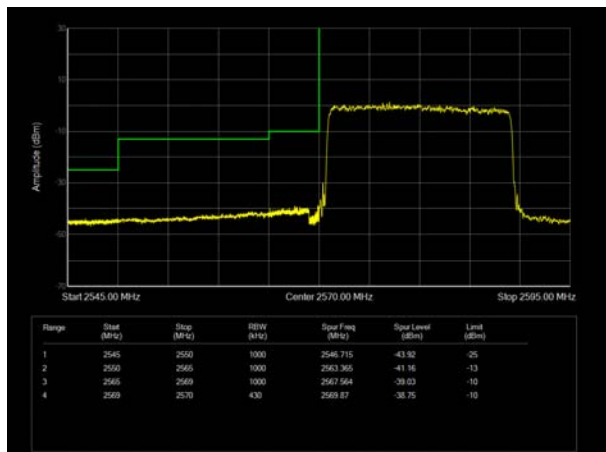

LTE Band 38 64QAM 20MHz CH-High, 100%RB

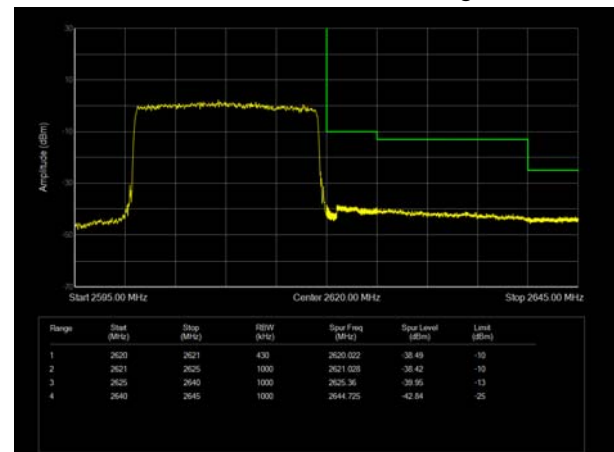

5.4 Peak-to-Average Power Ratio (PAPR)

Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

Measure the total peak power and record as PPk. And measure the total average power and record as PAvg. Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:

$$\text{PAPR (dB)} = \text{PPk (dBm)} - \text{PAvg (dBm)}.$$

Test Setup

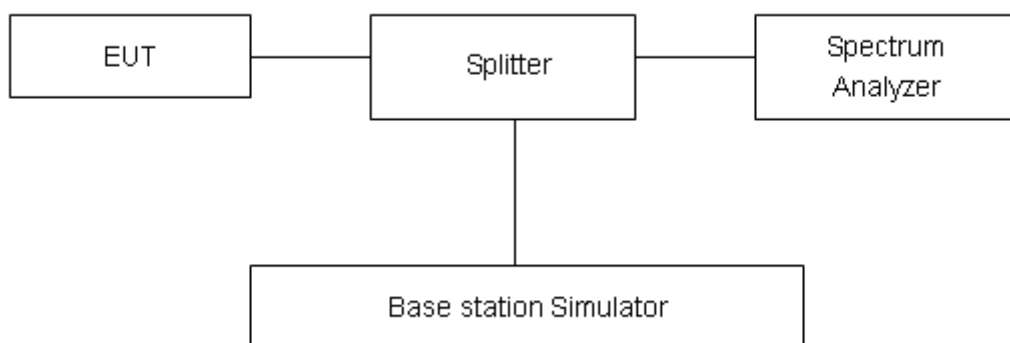

Limits

Rule Part 27.50(d)(5) Equipment employed must be authorized in accordance with the provisions of 24.51. Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (d)(6) of this section. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.4$ dB.



Test Results

LTE Band 7								
Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	Peak (dBm)	Avg (dBm)	PAPR (dB)	Limit (dB)	Conclusion
QPSK	5	20775	2502.5	25.96	20.69	5.27	≤13	PASS
		21100	2535	25.87	20.60	5.27	≤13	PASS
		21425	2567.5	25.87	20.61	5.26	≤13	PASS
	10	20800	2505	26.01	20.70	5.31	≤13	PASS
		21100	2535	25.87	20.65	5.22	≤13	PASS
		21400	2565	25.75	20.52	5.23	≤13	PASS
	15	20825	2507.5	26.14	20.63	5.51	≤13	PASS
		21100	2535	26.13	20.59	5.54	≤13	PASS
		21375	2562.5	26.03	20.52	5.51	≤13	PASS
	20	20850	2510	25.98	20.66	5.32	≤13	PASS
		21100	2535	25.88	20.62	5.26	≤13	PASS
		21350	2560	25.93	20.63	5.30	≤13	PASS
16QAM	5	20775	2502.5	25.78	19.73	6.05	≤13	PASS
		21100	2535	25.64	19.61	6.03	≤13	PASS
		21425	2567.5	25.70	19.62	6.08	≤13	PASS
	10	20800	2505	25.76	19.70	6.06	≤13	PASS
		21100	2535	25.69	19.65	6.04	≤13	PASS
		21400	2565	25.54	19.51	6.03	≤13	PASS
	15	20825	2507.5	25.80	19.67	6.13	≤13	PASS
		21100	2535	25.81	19.59	6.22	≤13	PASS
		21375	2562.5	25.69	19.54	6.15	≤13	PASS
	20	20850	2510	25.76	19.68	6.08	≤13	PASS
		21100	2535	25.68	19.64	6.04	≤13	PASS
		21350	2560	25.70	19.64	6.06	≤13	PASS
64QAM	5	20775	2502.5	25.33	19.34	5.99	≤13	PASS
		21100	2535	25.24	19.27	5.97	≤13	PASS
		21425	2567.5	25.36	19.27	6.09	≤13	PASS
	10	20800	2505	25.37	19.34	6.03	≤13	PASS
		21100	2535	25.27	19.27	6.00	≤13	PASS
		21400	2565	25.27	19.20	6.07	≤13	PASS
	15	20825	2507.5	25.45	19.32	6.13	≤13	PASS



		21100	2535	25.42	19.25	6.17	≤13	PASS
		21375	2562.5	25.37	19.19	6.18	≤13	PASS
	20	20850	2510	25.41	19.34	6.07	≤13	PASS
		21100	2535	25.31	19.27	6.04	≤13	PASS
		21350	2560	25.34	19.28	6.06	≤13	PASS

LTE Band 38								
Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	Peak (dBm)	Avg (dBm)	PAPR (dB)	Limit (dB)	Conclusion
QPSK	5	37775	2572.5	25.59	15.92	9.67	≤13	PASS
		38000	2595	25.73	16.56	9.17	≤13	PASS
		38225	2617.5	25.65	15.47	10.18	≤13	PASS
	10	37800	2575	25.59	17.01	8.58	≤13	PASS
		38000	2595	25.70	16.88	8.82	≤13	PASS
		38200	2615	25.56	14.91	10.65	≤13	PASS
	15	37825	2577.5	25.80	16.42	9.38	≤13	PASS
		38000	2595	25.87	16.63	9.24	≤13	PASS
		38175	2612.5	25.96	16.82	9.14	≤13	PASS
	20	37850	2580	25.64	17.91	7.73	≤13	PASS
		38000	2595	25.59	16.60	8.99	≤13	PASS
		38150	2610	25.83	17.60	8.23	≤13	PASS
16QAM	5	37775	2572.5	25.23	15.81	9.42	≤13	PASS
		38000	2595	25.51	16.22	9.29	≤13	PASS
		38225	2617.5	25.46	14.98	10.48	≤13	PASS
	10	37800	2575	25.29	15.68	9.61	≤13	PASS
		38000	2595	25.48	16.30	9.18	≤13	PASS
		38200	2615	25.35	14.58	10.77	≤13	PASS
	15	37825	2577.5	25.55	16.24	9.31	≤13	PASS
		38000	2595	25.53	15.69	9.84	≤13	PASS
		38175	2612.5	25.57	15.16	10.41	≤13	PASS
	20	37850	2580	25.39	15.94	9.45	≤13	PASS
		38000	2595	25.46	16.53	8.93	≤13	PASS
		38150	2610	25.53	15.86	9.67	≤13	PASS
64QAM	5	37775	2572.5	24.64	13.80	10.84	≤13	PASS



		38000	2595	24.95	15.64	9.31	≤13	PASS
		38225	2617.5	25.08	15.70	9.38	≤13	PASS
	10	37800	2575	24.72	13.90	10.82	≤13	PASS
		38000	2595	24.93	15.33	9.60	≤13	PASS
		38200	2615	25.03	15.73	9.30	≤13	PASS
	15	37825	2577.5	25.08	15.67	9.41	≤13	PASS
		38000	2595	24.93	13.83	11.10	≤13	PASS
		38175	2612.5	25.05	14.96	10.09	≤13	PASS
	20	37850	2580	24.90	15.45	9.45	≤13	PASS
		38000	2595	24.89	15.49	9.40	≤13	PASS
		38150	2610	25.05	15.39	9.66	≤13	PASS

5.5 Frequency Stability

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

Frequency Stability (Temperature Variation)

The temperature inside the climate chamber is varied from -30°C to +55°C in 10°C step size.

(1) With all power removed, the temperature was decreased to -10°C and permitted to stabilize for three hours.

(2) Measure the carrier frequency with the test equipment in a “call mode”. These measurements should be made within 1 minute of powering up the mobile station, to prevent significant self warming.

(3) Repeat the above measurements at 10°C increments from -30°C to +55°C. Allow at least 1.5 hours at each temperature, un-powered, before making measurements.


Frequency Stability (Voltage Variation)

The frequency stability shall be measured with variation of primary supply voltage as follows:

Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

This transceiver is specified to operate with an input voltage of between 3.3 V and 4.4 V, with a nominal voltage of 3.8V.

Test setup

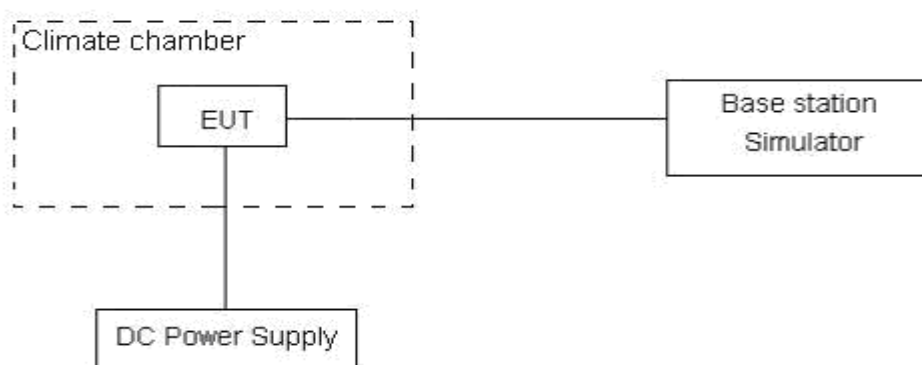

Limits

The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor $k = 3, U = 0.01\text{ppm}$.



Test Result

LTE Band 7 (2535MHz)								
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	5MHz							
Temperature	Voltage	64QAM	16QAM	QPSK	64QAM	16QAM	QPSK	
Normal (25℃)	Normal	12.23	13.90	15.46	0.00650	0.00739	0.00822	PASS
Extreme (55℃)		16.70	16.03	2.22	0.00889	0.00853	0.00118	PASS
Extreme (50℃)		5.04	10.26	5.60	0.00268	0.00546	0.00298	PASS
Extreme (40℃)		16.85	4.78	17.10	0.00896	0.00254	0.00910	PASS
Extreme (30℃)		8.10	4.66	17.07	0.00431	0.00248	0.00908	PASS
Extreme (20℃)		15.13	6.63	10.71	0.00805	0.00353	0.00570	PASS
Extreme (10℃)		10.69	8.91	6.59	0.00569	0.00474	0.00350	PASS
Extreme (0℃)		17.81	12.03	17.06	0.00948	0.00640	0.00907	PASS
Extreme (-10℃)		3.78	16.64	13.26	0.00201	0.00885	0.00705	PASS
Extreme (-20℃)		14.36	3.27	2.80	0.00764	0.00174	0.00149	PASS
Extreme (-30℃)		17.42	14.90	7.22	0.00926	0.00793	0.00384	PASS
25℃	LV	2.85	12.79	3.70	0.00152	0.00680	0.00197	PASS
	HV	14.64	14.73	11.10	0.00779	0.00783	0.00591	PASS
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	10MHz							
Temperature	Voltage	64QAM	16QAM	QPSK	64QAM	16QAM	QPSK	
Normal (25℃)	Normal	2.87	9.98	15.81	0.00153	0.00531	0.00841	PASS
Extreme (55℃)		1.77	10.37	10.93	0.00094	0.00552	0.00581	PASS
Extreme (50℃)		9.58	7.66	12.67	0.00510	0.00407	0.00674	PASS
Extreme (40℃)		14.98	4.95	18.00	0.00797	0.00263	0.00957	PASS
Extreme (30℃)		11.92	16.60	9.72	0.00634	0.00883	0.00517	PASS
Extreme (20℃)		5.99	16.97	5.57	0.00319	0.00903	0.00296	PASS
Extreme (10℃)		17.65	2.97	9.69	0.00939	0.00158	0.00515	PASS
Extreme (0℃)		15.46	9.58	7.08	0.00822	0.00509	0.00376	PASS
Extreme (-10℃)		14.83	9.26	6.96	0.00789	0.00493	0.00370	PASS
Extreme (-20℃)		8.33	12.94	3.67	0.00443	0.00689	0.00195	PASS
Extreme (-30℃)		12.86	12.20	12.48	0.00684	0.00649	0.00664	PASS
25℃	LV	13.63	7.33	10.83	0.00725	0.00390	0.00576	PASS
	HV	3.28	13.65	1.96	0.00174	0.00726	0.00104	PASS
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	15MHz							
Temperature	Voltage	64QAM	16QAM	QPSK	64QAM	16QAM	QPSK	



Normal (25℃)	Normal	11.22	17.56	6.81	0.00597	0.00934	0.00362	PASS
Extreme (55℃)		12.11	9.56	14.16	0.00644	0.00509	0.00753	PASS
Extreme (50℃)		17.53	9.02	15.75	0.00933	0.00480	0.00838	PASS
Extreme (40℃)		9.97	7.03	3.56	0.00530	0.00374	0.00189	PASS
Extreme (30℃)		9.72	10.94	9.21	0.00517	0.00582	0.00490	PASS
Extreme (20℃)		11.55	1.23	8.42	0.00615	0.00065	0.00448	PASS
Extreme (10℃)		2.24	14.93	13.42	0.00119	0.00794	0.00714	PASS
Extreme (0℃)		1.38	2.09	16.77	0.00073	0.00111	0.00892	PASS
Extreme (-10℃)		13.90	6.82	2.12	0.00739	0.00363	0.00113	PASS
Extreme (-20℃)		2.46	13.60	16.11	0.00131	0.00723	0.00857	PASS
Extreme (-30℃)		8.31	2.66	3.33	0.00442	0.00141	0.00177	PASS
25℃	LV	6.77	16.29	15.36	0.00360	0.00867	0.00817	PASS
	HV	9.28	12.18	16.30	0.00494	0.00648	0.00867	PASS
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	20MHz							
Temperature	Voltage	64QAM	16QAM	QPSK	64QAM	16QAM	QPSK	
Normal (25℃)	Normal	14.15	14.20	8.13	0.00753	0.00755	0.00432	PASS
Extreme (55℃)		7.48	17.29	7.12	0.00398	0.00920	0.00379	PASS
Extreme (50℃)		13.67	7.34	17.15	0.00727	0.00390	0.00912	PASS
Extreme (40℃)		9.40	1.36	11.89	0.00500	0.00072	0.00633	PASS
Extreme (30℃)		2.92	13.84	2.45	0.00155	0.00736	0.00131	PASS
Extreme (20℃)		10.22	17.37	1.38	0.00544	0.00924	0.00074	PASS
Extreme (10℃)		12.87	13.94	5.88	0.00684	0.00742	0.00313	PASS
Extreme (0℃)		3.93	5.98	5.58	0.00209	0.00318	0.00297	PASS
Extreme (-10℃)		5.12	8.53	10.42	0.00272	0.00454	0.00554	PASS
Extreme (-20℃)		8.50	1.28	11.90	0.00452	0.00068	0.00633	PASS
Extreme (-30℃)		17.53	9.78	15.10	0.00932	0.00520	0.00803	PASS
25℃	LV	12.32	13.22	15.97	0.00655	0.00703	0.00850	PASS
	HV	8.39	9.51	12.77	0.00446	0.00506	0.00679	PASS

LTE Band 38 (2595MHz)

Condition		Freq.Error (Hz)	Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	5MHz							
Temperature	Voltage	64QAM	16QAM	QPSK	64QAM	16QAM	QPSK	
Normal (25℃)	Normal	12.38	12.05	7.98	0.00659	0.00641	0.00424	PASS
Extreme (55℃)		3.43	6.44	4.47	0.00183	0.00342	0.00238	PASS
Extreme (50℃)		15.86	16.22	11.64	0.00844	0.00863	0.00619	PASS
Extreme (40℃)		4.56	4.64	10.14	0.00242	0.00247	0.00540	PASS
Extreme (30℃)		7.84	13.03	11.64	0.00417	0.00693	0.00619	PASS



Extreme (20℃)		11.91	6.23	12.49	0.00633	0.00332	0.00664	PASS
Extreme (10℃)		15.18	7.07	2.62	0.00807	0.00376	0.00139	PASS
Extreme (0℃)		15.95	9.55	15.21	0.00848	0.00508	0.00809	PASS
Extreme (-10℃)		1.84	3.04	3.32	0.00098	0.00162	0.00177	PASS
Extreme (-20℃)		10.46	7.27	6.41	0.00556	0.00387	0.00341	PASS
Extreme (-30℃)		8.68	13.32	12.60	0.00462	0.00709	0.00670	PASS
25℃	LV	7.86	13.79	2.05	0.00418	0.00734	0.00109	PASS
	HV	10.66	11.85	10.21	0.00567	0.00630	0.00543	PASS
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	10MHz							
Temperature	Voltage	64QAM	16QAM	QPSK	64QAM	16QAM	QPSK	
Normal (25℃)	Normal	7.93	12.31	1.66	0.00422	0.00655	0.00088	PASS
Extreme (55℃)		8.23	8.34	4.68	0.00438	0.00444	0.00249	PASS
Extreme (50℃)		4.06	14.81	14.61	0.00216	0.00788	0.00777	PASS
Extreme (40℃)		4.65	7.40	14.91	0.00247	0.00393	0.00793	PASS
Extreme (30℃)		4.90	11.37	9.38	0.00261	0.00605	0.00499	PASS
Extreme (20℃)		5.42	2.68	7.69	0.00288	0.00143	0.00409	PASS
Extreme (10℃)		16.70	10.64	13.45	0.00888	0.00566	0.00715	PASS
Extreme (0℃)		12.03	16.27	12.75	0.00640	0.00866	0.00678	PASS
Extreme (-10℃)		4.00	1.23	12.05	0.00213	0.00066	0.00641	PASS
Extreme (-20℃)		9.35	2.07	2.84	0.00497	0.00110	0.00151	PASS
Extreme (-30℃)		7.36	13.53	2.02	0.00391	0.00720	0.00107	PASS
25℃	LV	6.92	11.43	7.91	0.00368	0.00608	0.00421	PASS
	HV	1.76	8.06	2.70	0.00094	0.00428	0.00144	PASS
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	15MHz							
Temperature	Voltage	64QAM	16QAM	QPSK	64QAM	16QAM	QPSK	
Normal (25℃)	Normal	11.20	2.11	17.20	0.00596	0.00112	0.00915	PASS
Extreme (55℃)		5.53	12.45	1.29	0.00294	0.00662	0.00069	PASS
Extreme (50℃)		4.62	12.68	15.21	0.00246	0.00675	0.00809	PASS
Extreme (40℃)		11.47	7.73	7.63	0.00610	0.00411	0.00406	PASS
Extreme (30℃)		2.75	16.45	11.73	0.00146	0.00875	0.00624	PASS
Extreme (20℃)		15.62	17.53	1.69	0.00831	0.00933	0.00090	PASS
Extreme (10℃)		1.92	6.34	9.47	0.00102	0.00337	0.00503	PASS
Extreme (0℃)		5.90	11.49	4.20	0.00314	0.00611	0.00223	PASS
Extreme (-10℃)		16.78	11.10	9.74	0.00892	0.00590	0.00518	PASS
Extreme (-20℃)		8.30	1.60	1.10	0.00442	0.00085	0.00058	PASS
Extreme (-30℃)		13.98	7.81	14.68	0.00744	0.00415	0.00781	PASS
25℃	LV	14.65	15.82	11.91	0.00779	0.00841	0.00634	PASS



	HV	9.53	17.63	5.75	0.00507	0.00938	0.00306	PASS
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	20MHz							
Temperature	Voltage	64QAM	16QAM	QPSK	64QAM	16QAM	QPSK	
Normal (25℃)	Normal	17.80	11.11	15.79	0.00947	0.00591	0.00840	PASS
Extreme (55℃)		8.84	1.13	14.15	0.00470	0.00060	0.00752	PASS
Extreme (50℃)		17.95	10.65	8.40	0.00955	0.00566	0.00447	PASS
Extreme (40℃)		8.83	14.00	2.10	0.00470	0.00744	0.00112	PASS
Extreme (30℃)		15.29	11.58	8.72	0.00814	0.00616	0.00464	PASS
Extreme (20℃)		5.03	6.94	11.77	0.00267	0.00369	0.00626	PASS
Extreme (10℃)		10.18	6.91	11.17	0.00541	0.00367	0.00594	PASS
Extreme (0℃)		1.90	6.76	10.37	0.00101	0.00360	0.00552	PASS
Extreme (-10℃)		13.13	12.04	16.29	0.00699	0.00640	0.00866	PASS
Extreme (-20℃)		8.86	14.85	9.08	0.00471	0.00790	0.00483	PASS
Extreme (-30℃)		11.50	5.03	8.05	0.00612	0.00268	0.00428	PASS
25℃	LV	15.50	17.67	14.54	0.00824	0.00940	0.00773	PASS
	HV	1.76	7.60	13.17	0.00094	0.00404	0.00701	PASS

5.6 Spurious Emissions at Antenna Terminals

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The measurement is carried out using a spectrum analyzer. The spectrum analyzer scans from 9kHz to the 10th harmonic of the carrier. The peak detector is used.

RBW is set to 100kHz, VBW is set to 300kHz for 30MHz~1GHz

RBW is set to 1MHz, VBW is set to 3MHz for above 1GHz, Sweep is set to ATUO.

RBW is set to 1 kHz (0.009MHz~ 0.15 MHz),

RBW is set to 10 kHz (0.15 MHz~ 30 MHz)


RBW is set to 100 kHz (30MHz~1000 MHz)

RBW is set to 1000 kHz (above 1000MHz)

Of those disturbances below (limit – 20 dB), the mark is not required for the EUT.

The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

Test setup

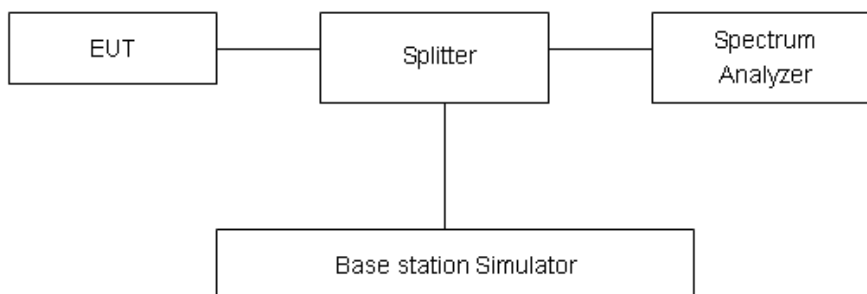

Limits

Rule Part 27.53(m) $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(4) of this section.

Part 27.53(m) Limit	-25 dBm
---------------------	---------



Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor $k = 1.96$.


Frequency	Uncertainty
9kHz-1GHz	0.684 dB
1GHz-27GHz	1.407 dB

Test Result


Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the emissions more than 20 dB below the limit are not reported.

The signal beyond the limit is carrier.


LTE Band 7 5MHz CH-Low 9kHz~26GHz

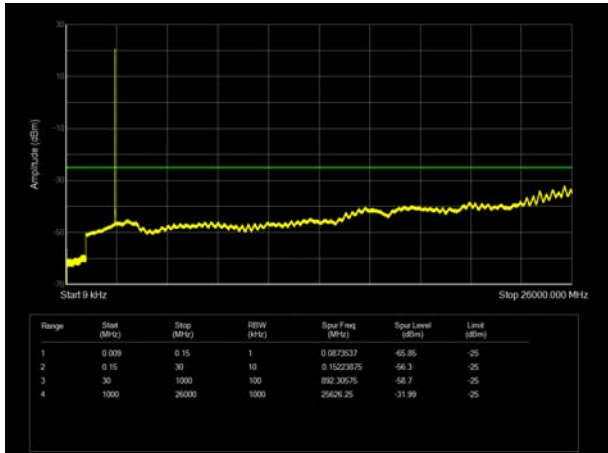


LTE Band 7 10MHz CH- Low 9kHz~26GHz

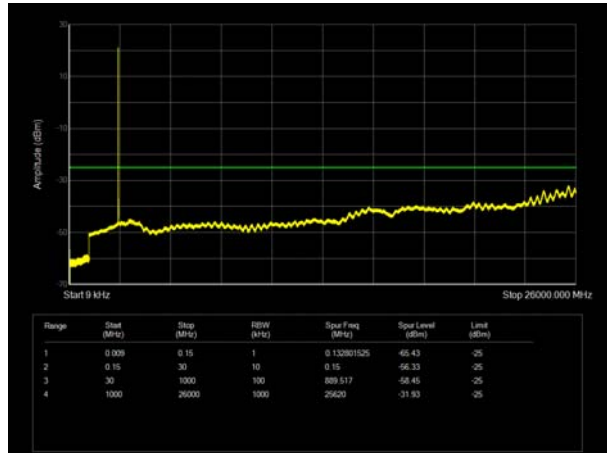


LTE Band 7 5MHz CH- Middle 9kHz~26GHz

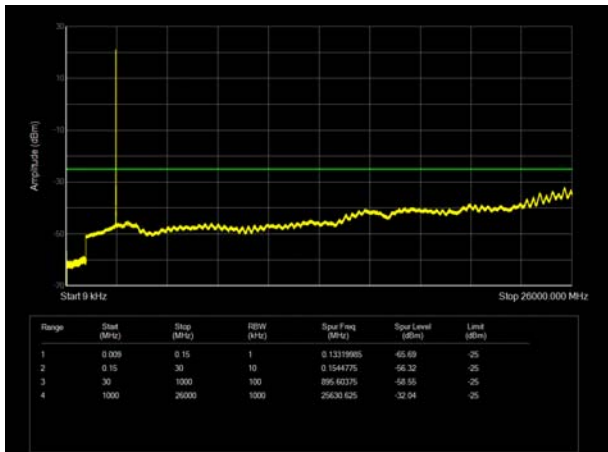


LTE Band 7 10MHz CH- Middle 9kHz~26GHz

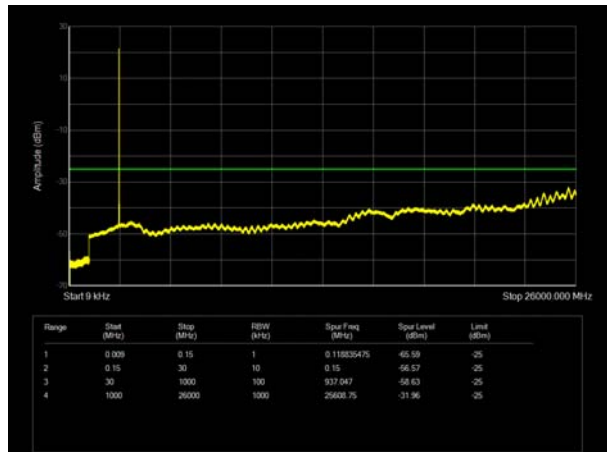


LTE Band 7 5MHz CH- High 9kHz~26GHz

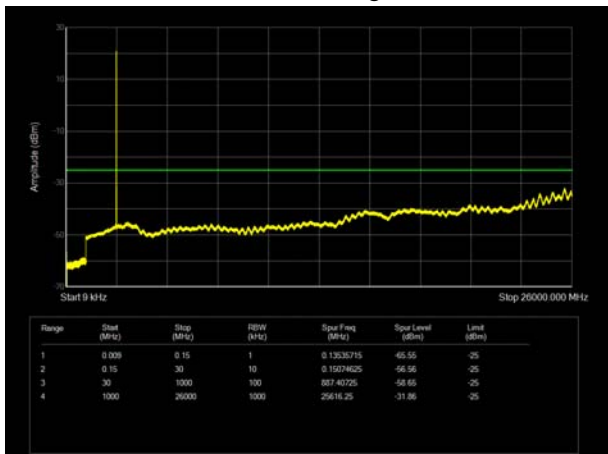


LTE Band 7 10MHz CH-High 9kHz~26GHz

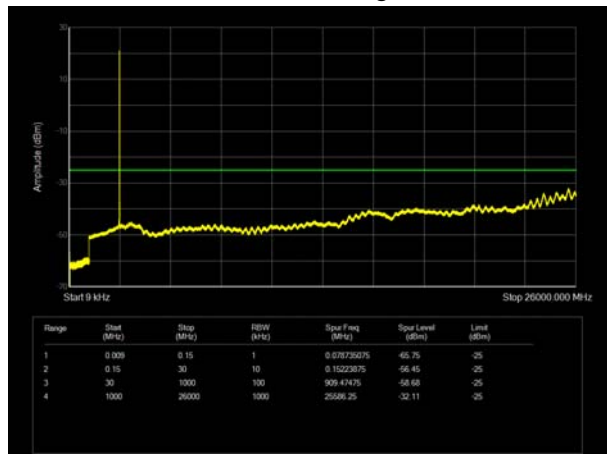


LTE Band 7 15MHz CH- Low 9kHz~26GHz

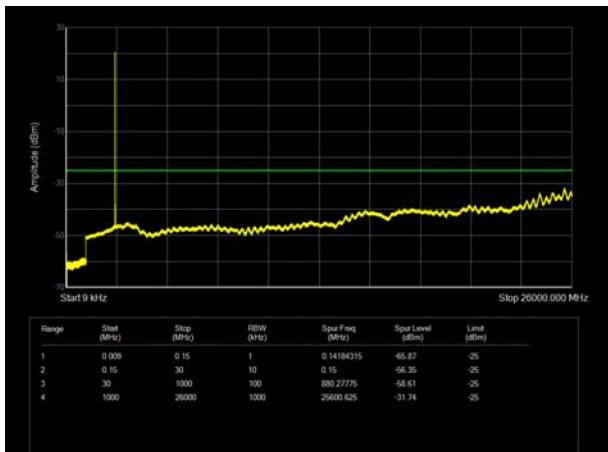


LTE Band 7 20MHz CH-Low 9kHz~26GHz

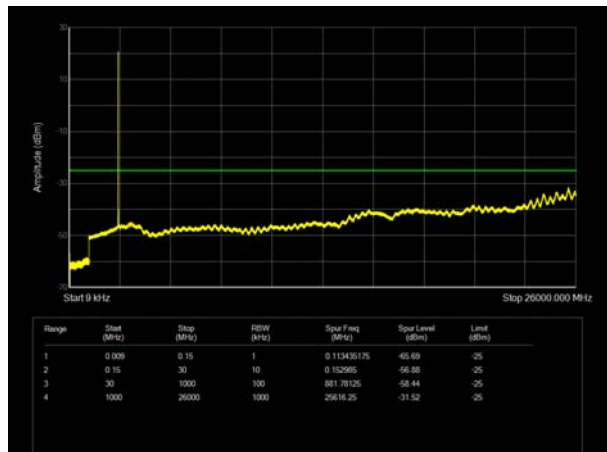


LTE Band 7 15MHz CH- Middle 9kHz~26GHz

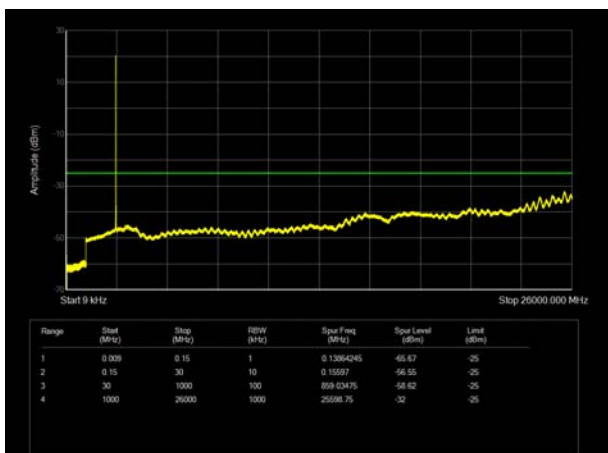


LTE Band 7 20MHz CH- Middle 9kHz~26GHz

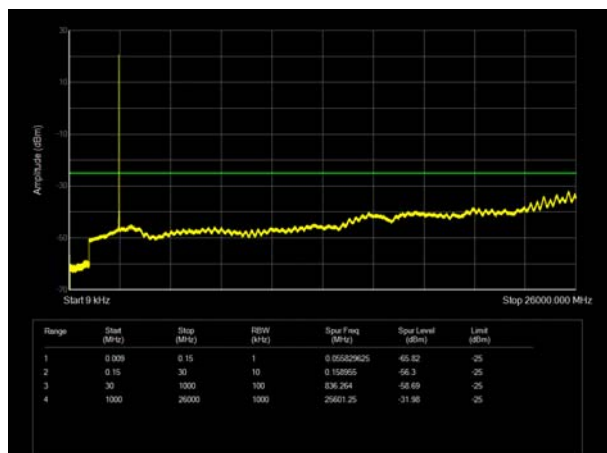

LTE Band 7 15MHz CH-High 9kHz~26GHz

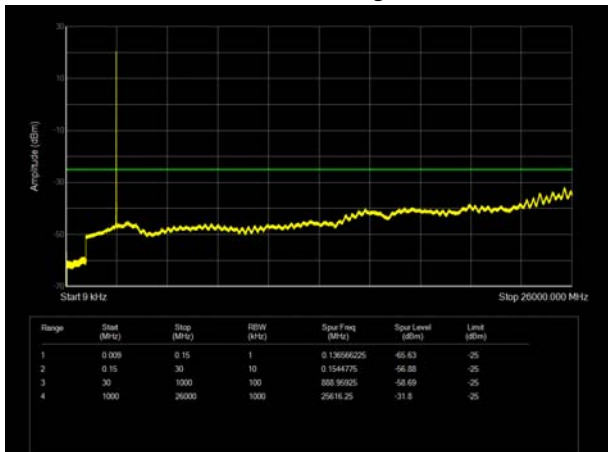


LTE Band 7 20MHz CH- High 9kHz~26GHz

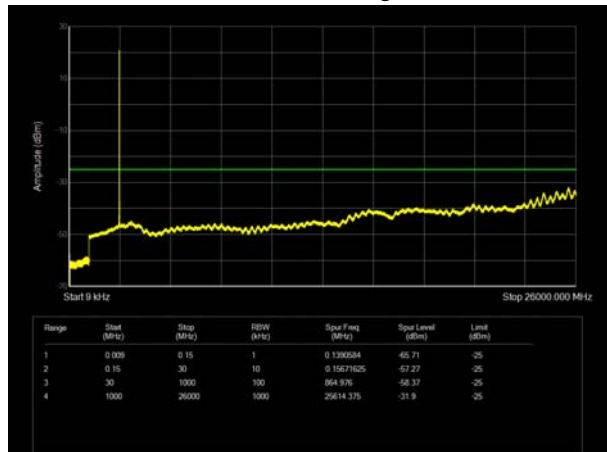





LTE Band 38 5MHz CH-Low 9kHz~26.5GHz

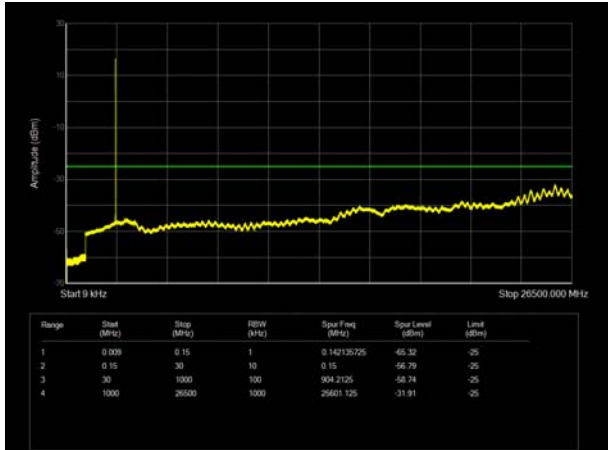


LTE Band 38 10MHz CH- Low 9kHz~26.5GHz

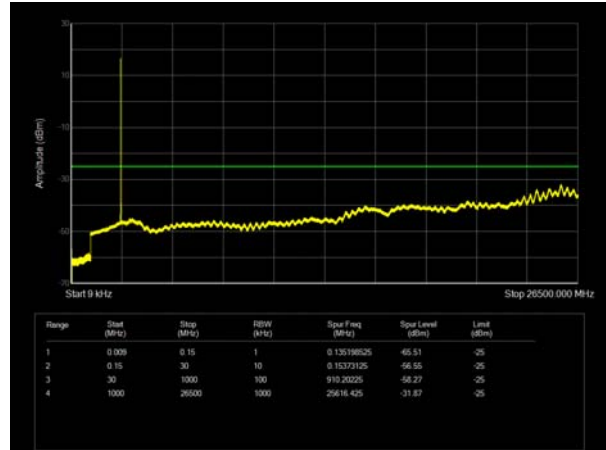


LTE Band 38 5MHz CH- Middle 9kHz~26.5GHz

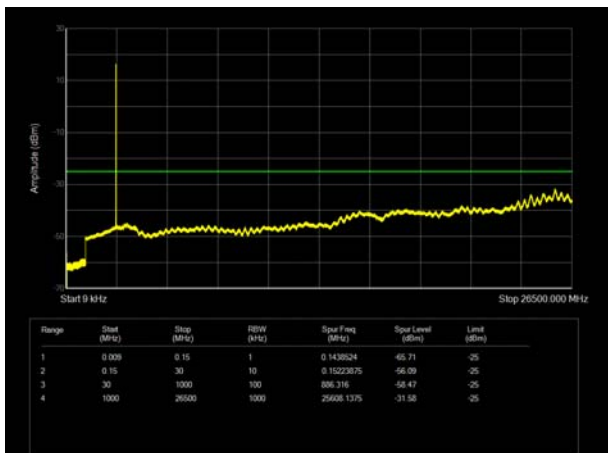


LTE Band 38 10MHz CH- Middle 9kHz~26.5GHz

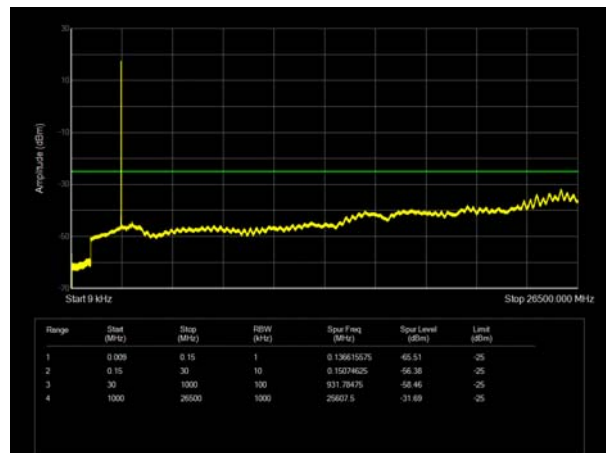


LTE Band 38 5MHz CH- High 9kHz~26.5GHz

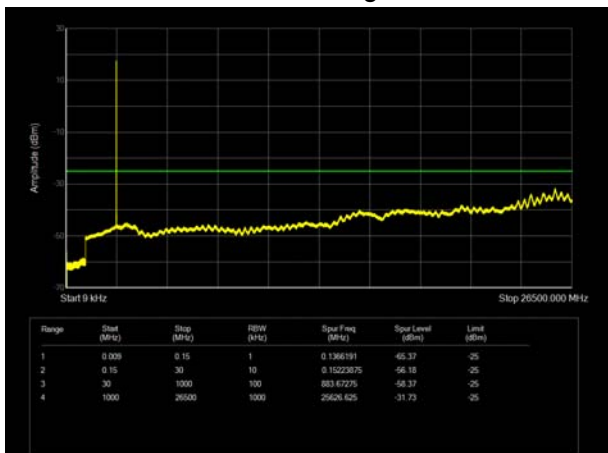


LTE Band 38 10MHz CH-High 9kHz~26.5GHz

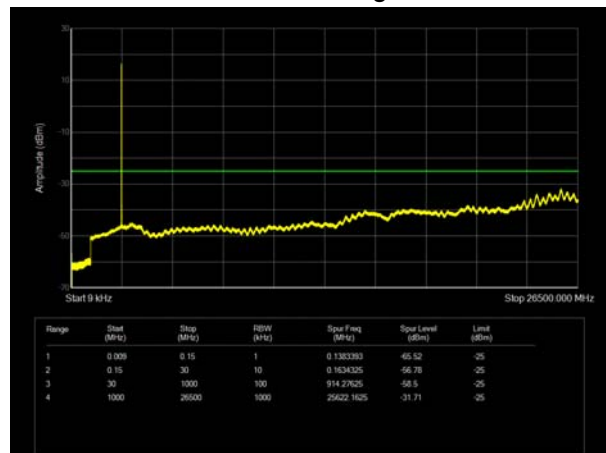


LTE Band 38 15MHz CH- Low 9kHz~26.5GHz

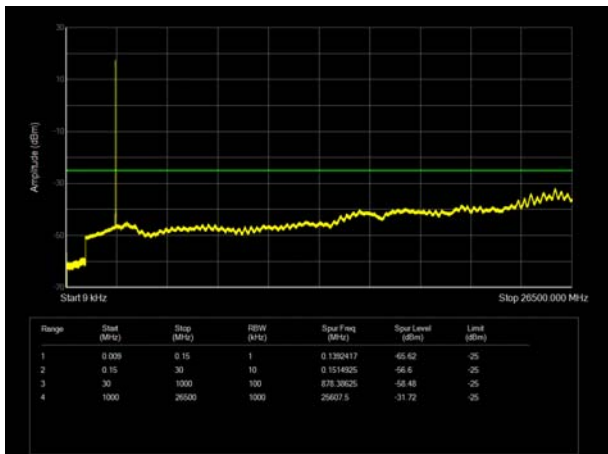


LTE Band 38 20MHz CH-Low 9kHz~26.5GHz

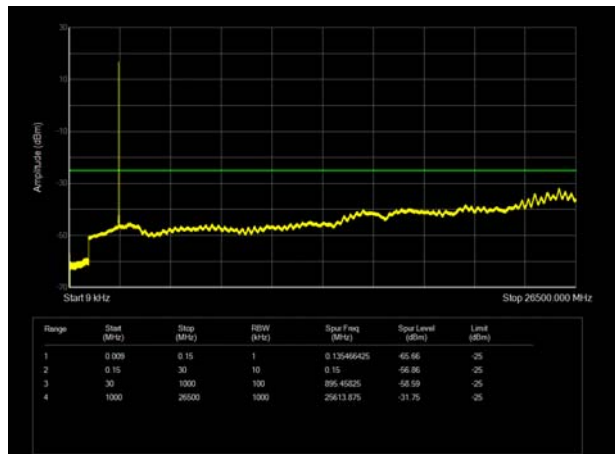


LTE Band 38 15MHz CH- Middle 9kHz~26.5GHz

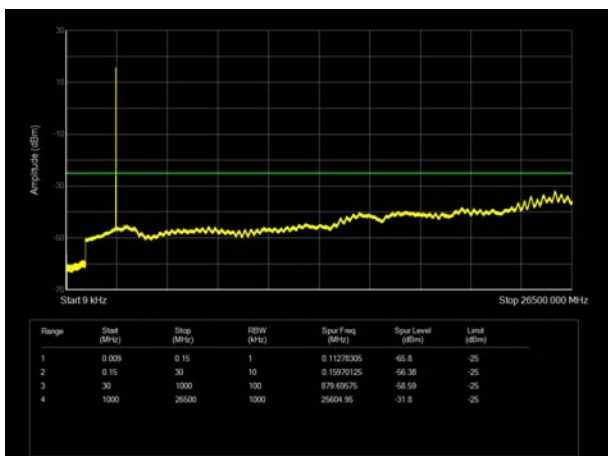


LTE Band 38 20MHz CH- Middle 9kHz~26.5GHz

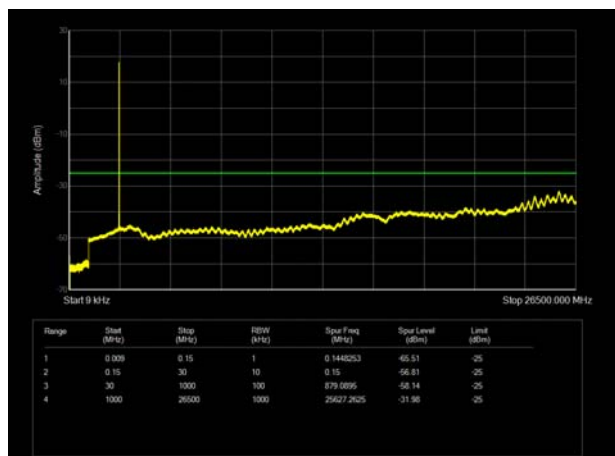

LTE Band 38 15MHz CH-High 9kHz~26.5GHz

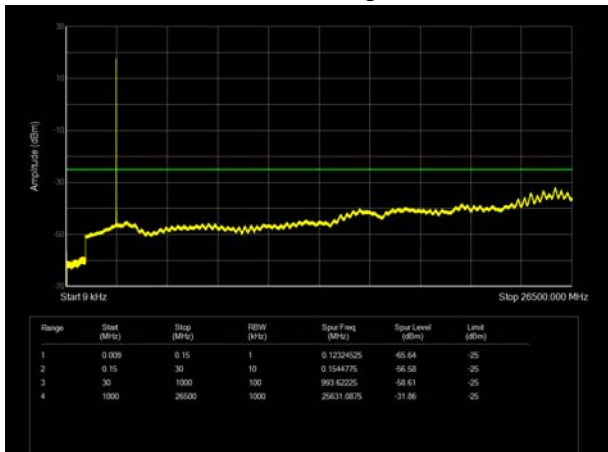

LTE Band 38 20MHz CH- High 9kHz~26.5GHz

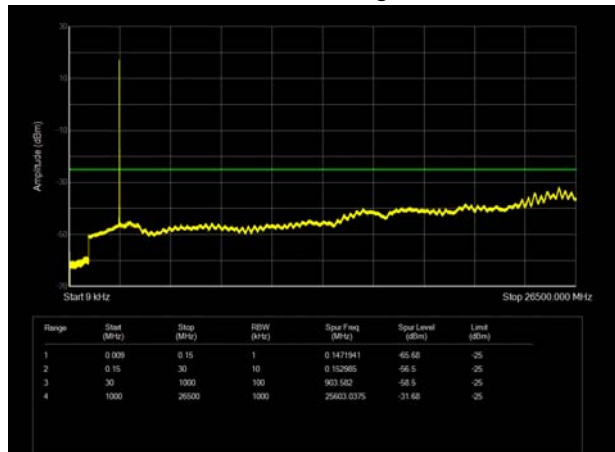

5.7 Radiates Spurious Emission

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

1. The testing follows FCC KDB 971168 D01 v03r01 Section 5.8 and ANSI C63.26 (2015).
2. Below 1GHz: The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H). Above 1GHz: (Note: the FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014.) The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).
3. A loop antenna, A log-periodic antenna or horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
4. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=100kHz, VBW=300kHz for 30MHz to 1GHz and RBW=1MHz, VBW=3MHz for above 1GHz, and the maximum value of the receiver should be recorded as (Pr).
5. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
6. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAG) should be recorded after test.
7. The measurement results are obtained as described below:


$$\text{Power(EIRP)} = \text{PMea} - \text{PAG} - \text{Pcl} + \text{Ga}$$
The measurement results are amend as described below:

$$\text{Power(EIRP)} = \text{PMea} - \text{Pcl} + \text{Ga}$$
8. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole, $\text{ERP} = \text{EIRP} - 2.15\text{dBi}$.


The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

Test setup


9KHz ~ 30MHz

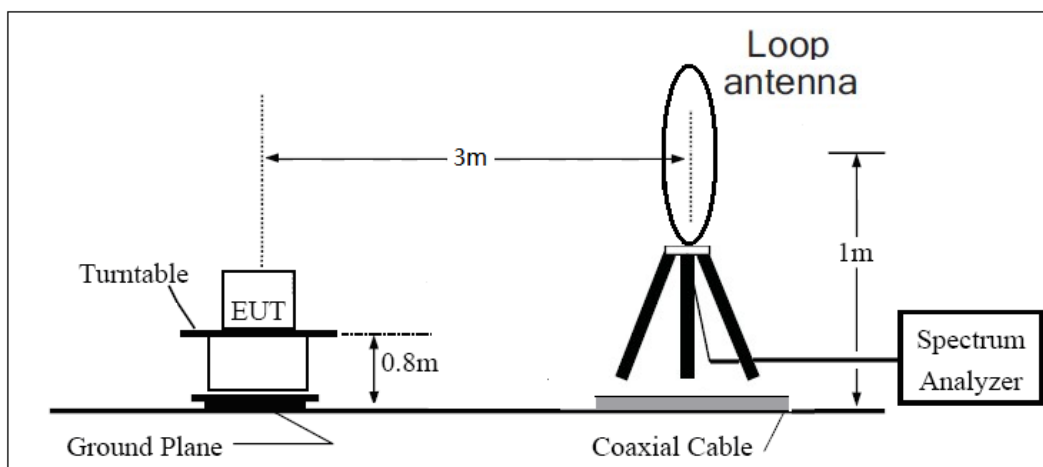

30MHz ~ 1GHz

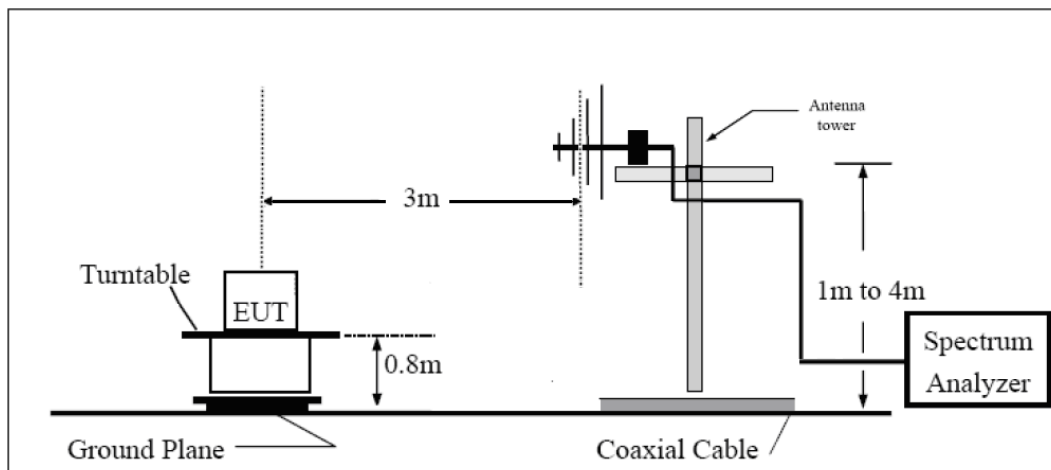

Above 1GHz

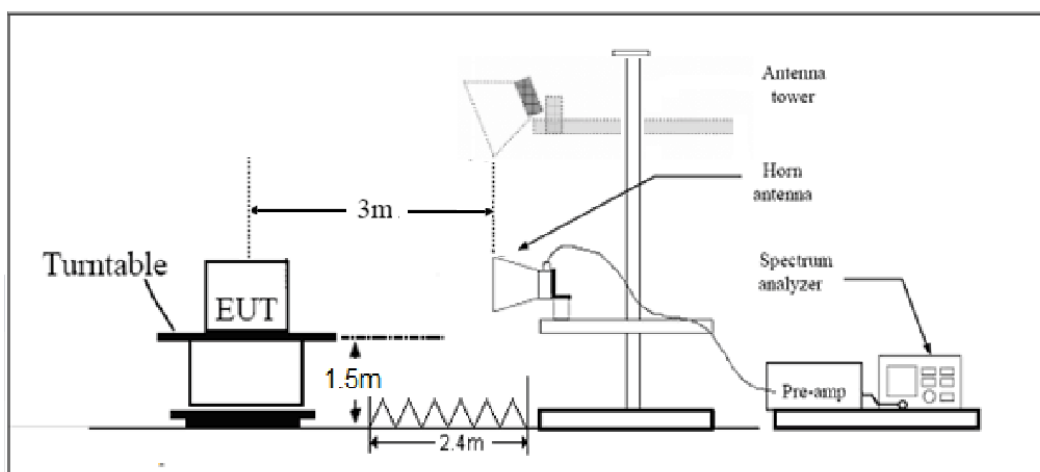

Note: Area side:2.4mX3.6m

**Limits**

Rule Part 27.53(m) $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(4) of this section.

Part 27.53(m) Limit	-25 dBm
---------------------	---------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = \pm 1.96$, $U = \pm 3.55$ dB.

**Test Result**

Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the emissions below the noise floor will not be recorded in the report.

LTE Band 7 QPSK 5MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5065.8	-51.99	3.40	12.50	Horizontal	-42.89	-25.0	17.89	135
3	7598.6	-57.71	4.40	12.20	Horizontal	-49.91	-25.0	24.91	45
4	10130.6	-51.40	4.70	11.30	Horizontal	-44.80	-25.0	19.80	135
5	12675.0	-49.56	5.40	13.20	Horizontal	-41.76	-25.0	16.76	225
6	15210.0	-47.31	6.10	13.10	Horizontal	-40.31	-25.0	15.31	0
7	17745.0	-48.58	6.10	14.20	Horizontal	-40.48	-25.0	15.48	45
8	20280.0	--	--	--	--	--	--	--	--
9	22815.0	--	--	--	--	--	--	--	--
10	25350.0	--	--	--	--	--	--	--	--

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

LTE Band 7 QPSK 20MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5052.4	-51.54	3.40	12.50	Horizontal	-42.44	-25.0	17.44	225
3	7605.0	-58.25	4.40	12.20	Horizontal	-50.45	-25.0	25.45	135
4	10140.0	-51.34	4.70	11.30	Horizontal	-44.74	-25.0	19.74	45
5	12675.0	-50.93	5.40	13.20	Horizontal	-43.13	-25.0	18.13	135
6	15210.0	-47.01	6.10	13.10	Horizontal	-40.01	-25.0	15.01	225
7	17745.0	-48.58	6.10	14.20	Horizontal	-40.48	-25.0	15.48	45
8	20280.0	--	--	--	--	--	--	--	--
9	22815.0	--	--	--	--	--	--	--	--
10	25350.0	--	--	--	--	--	--	--	--

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.



LTE Band 38 QPSK 5MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5185.0	-62.19	3.20	12.50	Horizontal	-52.89	-25.0	27.89	45
3	7777.5	-56.98	4.40	12.30	Horizontal	-49.08	-25.0	24.08	0
4	10370.0	-50.66	4.70	11.80	Horizontal	-43.56	-25.0	18.56	135
5	12962.5	-51.71	5.40	14.00	Horizontal	-43.11	-25.0	18.11	225
6	15555.0	-53.04	6.10	16.80	Horizontal	-42.34	-25.0	17.34	0
7	18147.5	--	--	--	--	--	--	--	--
8	20740.0	--	--	--	--	--	--	--	--
9	23332.5	--	--	--	--	--	--	--	--
10	254925.0	--	--	--	--	--	--	--	--

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

LTE Band 38 QPSK 20MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5172.0	-56.02	3.20	12.50	Horizontal	-46.72	-25.0	21.72	45
3	7755.0	-59.32	4.40	12.30	Horizontal	-51.42	-25.0	26.42	135
4	10340.0	-51.75	4.70	11.80	Horizontal	-44.65	-25.0	19.65	90
5	12925.0	-51.27	5.40	14.00	Horizontal	-42.67	-25.0	17.67	135
6	15510.0	-53.41	6.10	16.80	Horizontal	-42.71	-25.0	17.71	45
7	18095.0	--	--	--	--	--	--	--	--
8	20680.0	--	--	--	--	--	--	--	--
9	23265.0	--	--	--	--	--	--	--	--
10	25850.0	--	--	--	--	--	--	--	--

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.



6 Main Test Instruments

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
Base Station Simulator	R&S	CMW500	113824	2021-05-15	2022-05-14
Power Splitter	Hua Xiang	SHX-GF2-2-13	10120101	/	/
Spectrum Analyzer	Key sight	N9010A	MY50210259	2021-05-15	2022-05-14
Signal Analyzer	R&S	FSV3030	101411	2020-12-13	2021-12-12
Loop Antenna	SCHWARZBECK	FMZB1519	1519-047	2020-04-02	2023-04-01
TRILOG Broadband Antenna	SCHWARZBECK	VULB 9163	391	2019-12-16	2022-12-15
Horn Antenna	R&S	HF907	102723	2018-08-11	2021-08-10
Horn Antenna	ETS-Lindgren	3160-09	00102643	2018-06-20	2021-06-19
Signal generator	R&S	SMB 100A	102594	2021-05-15	2022-05-14
Climatic Chamber	ESPEC	SU-242	93000506	2020-12-13	2021-12-12
Preamplifier	R&S	SCU18	102327	2021-05-15	2022-05-14
MOB COMMS DC SUPPLY	Keysight	66319D	MY43004105	2021-06-09	2021-12-08
RF Cable	Agilent	SMA 15cm	0001	2021-06-09	2021-12-08
Software	R&S	EMC32	9.26.0	/	/

*****END OF REPORT *****



ANNEX A: The EUT Appearance

The EUT Appearance are submitted separately.



ANNEX B: Test Setup Photos

The Test Setup Photos are submitted separately.