



FCC RF Test Report

APPLICANT : Ring LLC
EQUIPMENT : Video Doorbell Pro 2
BRAND NAME : Ring
MODEL NAME : 5AT2S2
FCC ID : 2AEUPBHALP031
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System

The product was received on Sep. 08, 2020 and testing was completed on Dec. 31, 2020. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.

Jason Jia

Reviewed by: Jason Jia / Supervisor

James Huang

Approved by: James Huang / Manager



Sporton International (Kunshan) Inc.

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer.....	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	6
1.5 Modification of EUT	6
1.6 Testing Location	6
1.7 Test Software.....	7
1.8 Applicable Standards.....	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1 Carrier Frequency and Channel	8
2.2 Test Mode.....	9
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system	10
2.5 EUT Operation Test Setup	10
2.6 Measurement Results Explanation Example.....	11
3 TEST RESULT	12
3.1 6dB and 99% Bandwidth Measurement	12
3.2 Output Power Measurement.....	14
3.3 Power Spectral Density Measurement	15
3.4 Conducted Band Edges and Spurious Emission Measurement	17
3.5 Radiated Band Edges and Spurious Emission Measurement	36
3.6 AC Conducted Emission Measurement.....	40
3.7 Antenna Requirements.....	42
4 LIST OF MEASURING EQUIPMENT	43
5 UNCERTAINTY OF EVALUATION	44
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR090815C	Rev. 01	Initial issue of report	Jan. 11, 2021

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	99% Bandwidth	-	Pass	-
3.2	15.247(b)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.08 dB at 2388.520 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 22.39 dB at 16.839 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

Ring LLC

1523 26th St, Santa Monica, CA 90404, USA

1.2 Manufacturer

Goertek Inc.

No.268 Dongfang Road High-Tech Industrial Development District, Weifang Shandong, China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Video Doorbell Pro 2
Brand Name	Ring
Model Name	5AT2S2
FCC ID	2AEUPBHALP031
EUT supports Radios application	WLAN 2.4GHz 802.11b/g/n HT20 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE LoRa DTS/LoRa FHSS/FSK FHSS Radar
HW Version	R6
SW Version	7.1.61
EUT Stage	Production Unit

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification			
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz		
Maximum (Peak) Output Power to antenna	<MIMO Ant.1+2> 802.11b : 23.21 dBm (0.2094 W) 802.11g : 27.67 dBm (0.5848 W) 802.11n HT20 : 27.72 dBm (0.5916 W)		
99% Occupied Bandwidth	<MIMO Ant.1+2> 802.11b : 13.84MHz 802.11g : 17.78MHz 802.11n HT20 : 18.58MHz		
Antenna Type / Gain	<Ant.1> : Loop Antenna with gain 1.75 dBi <Ant.2> : Loop Antenna with gain 2.46 dBi		
Antenna Function for Transmitter		Ant. 1	Ant. 2
	802.11b/g/n SISO/MIMO	V	V
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)		

Note: For WLAN SISO & MIMO mode, the whole testing has assessed only MIMO mode by referring to the higher normal conducted power.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International (Kunshan) Inc.		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH06-KS TH01-KS	CN1257	314309

1.7 Test Software

Item	Site	Manufacture	Name	Version
1.	03CH06-KS	AUDIX	E3	6.2009-8-24al
2.	CO01-KS	AUDIX	E3	6.2009-8-24

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437		

2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.


MIMO Antenna

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0


Test Cases	
AC Conducted Emission	Mode 1 :Lora Tx + Bluetooth Link + WLAN Link(2.4G) + charging from adaptor + 24G Radar Tx
Remark: For Radiated Test Cases, The tests were performance with Adapter.	

2.3 Connection Diagram of Test System

For Conducted Emission:

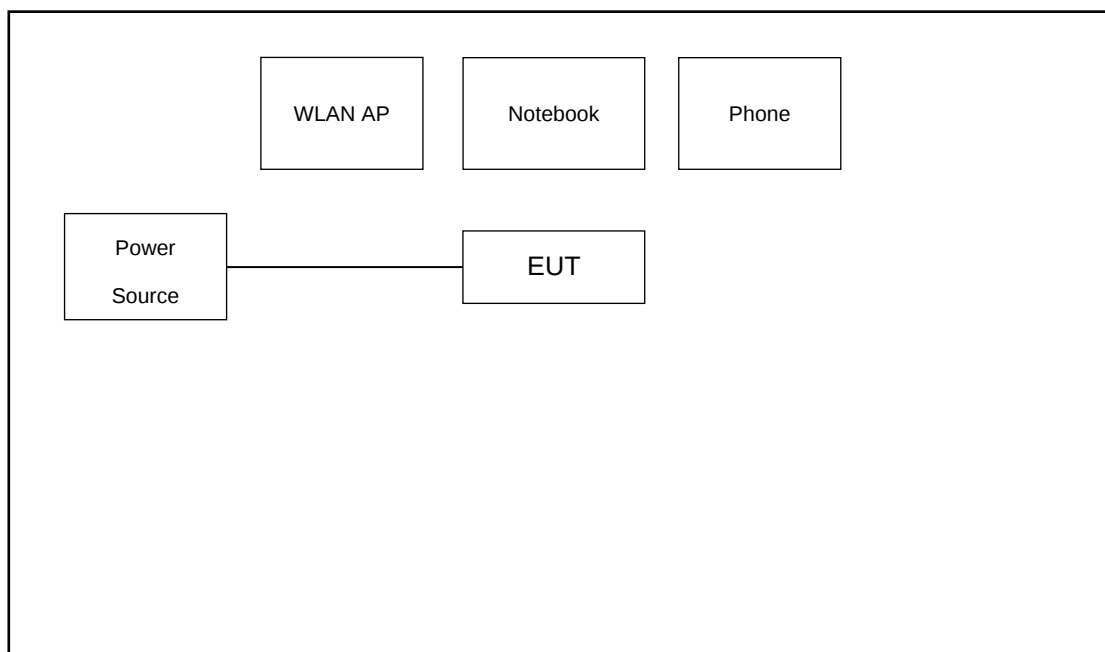

For Radiated Emission:

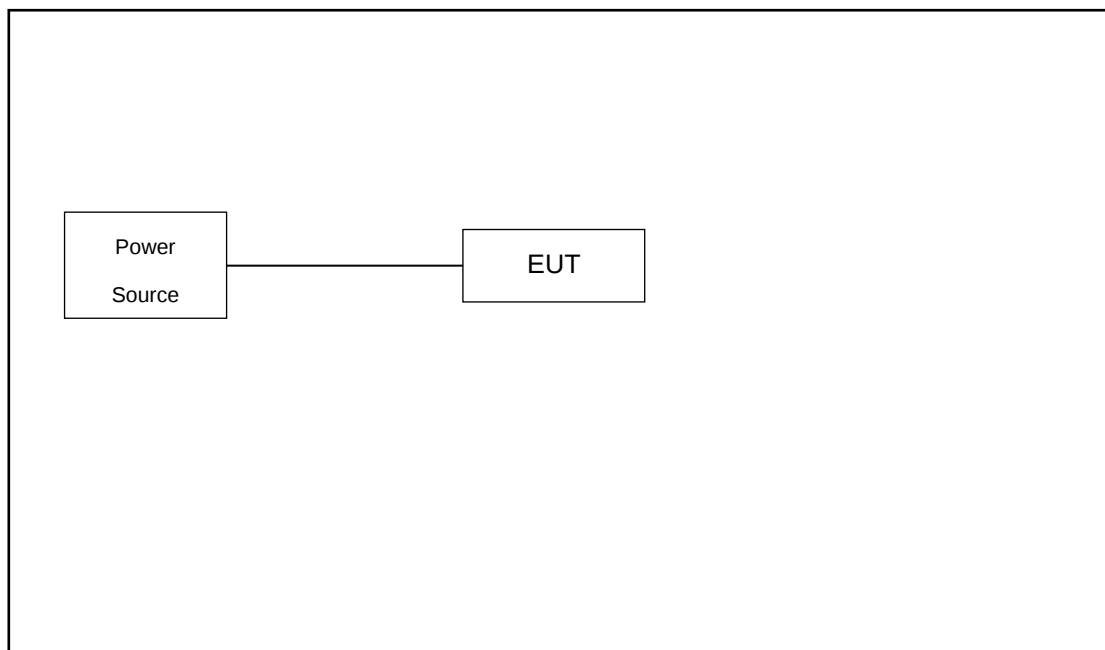

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded, 1.8m
2.	Notebook	Lenovo	G480	QDS-BRCM1050I	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
3.	Phone	MOTO	XT1952-1	XXXX	N/A	N/A

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.



2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 5.2 dB.

Offset(dB) = RF cable loss(dB).

= 5.2 (dB)

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 1MHz and set the Video bandwidth (VBW) = 3MHz.
6. Measure and record the results in the test report.


3.1.4 Test Setup





3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A.

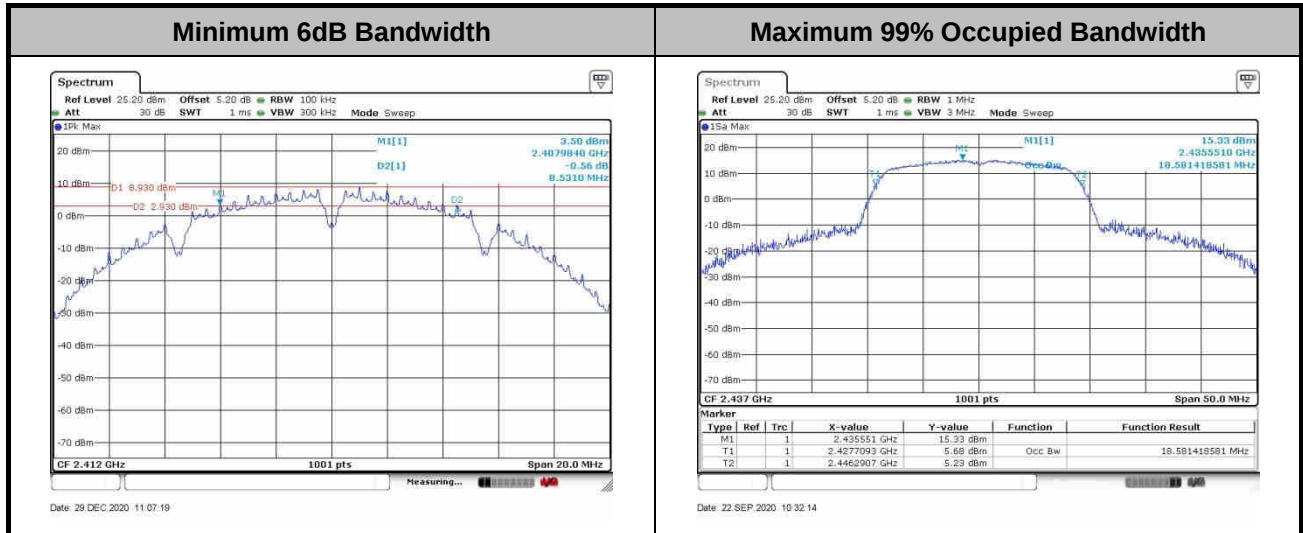

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna with directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.2 Method AVGPM-G method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.
5. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

3.2.4 Test Setup



3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.2.6 Test Result of Average output Power (Reporting Only)

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.


If measurements performed using method (2) plus $10 \log(N)$ exceeds the emission limit, the test should choose method (1) before declaring that the device fails the emission limit.

Method (1): Measure and sum the spectra across the outputs.

The total final Power Spectral Density is from a device with 2 transmitter outputs. The spectrum measurements of the individual outputs are all performed with the same span and number of points, the spectrum value in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 to obtain the value for the first frequency bin of the summed spectrum.


Method (2): Measure and add $10 \log(N)$ dB, where N is the number of outputs. (N=2)

3.3.4 Test Setup

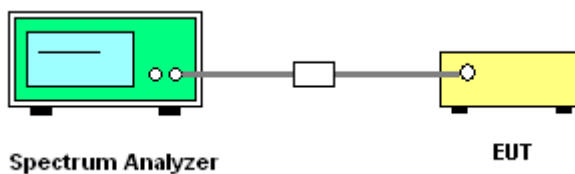

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

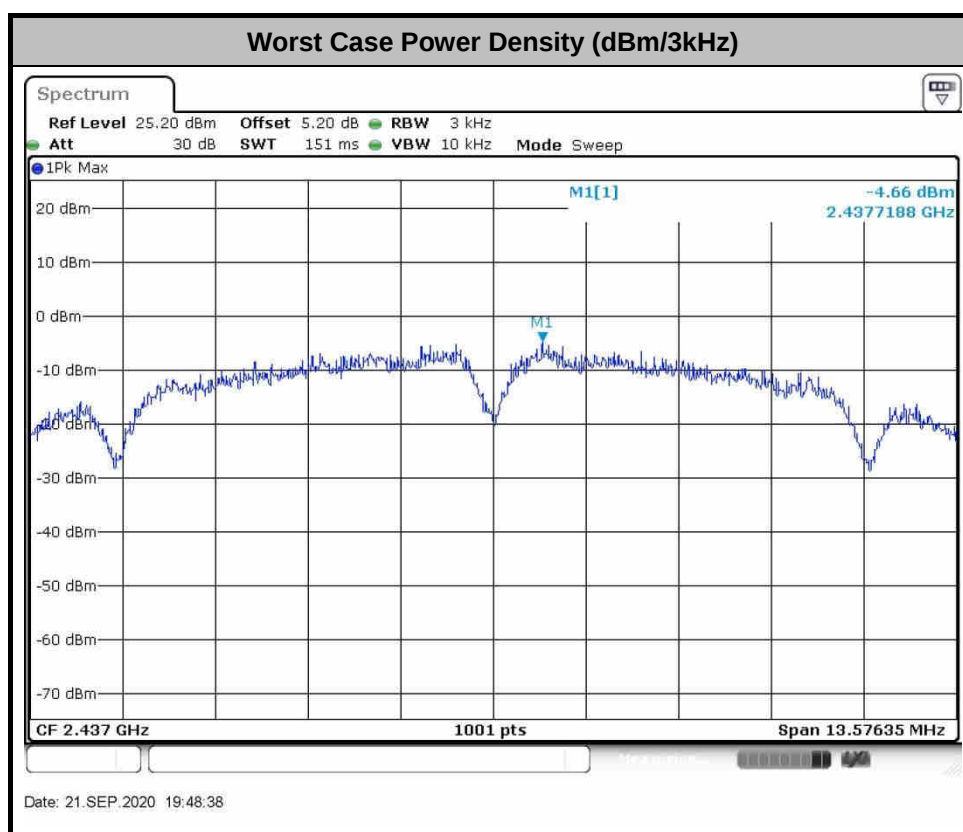

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.13
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

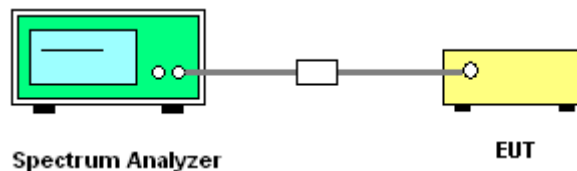





3.4.5 Test Result of Conducted Band Edges and Spurious Emission


Test Engineer :	Rise liu	Temperature :	21~25°C
		Relative Humidity :	51~54%

Number of TX = 2, Ant. 1 (Measured)

Test Mode :	802.11b	Test Channel :	01
-------------	---------	----------------	----

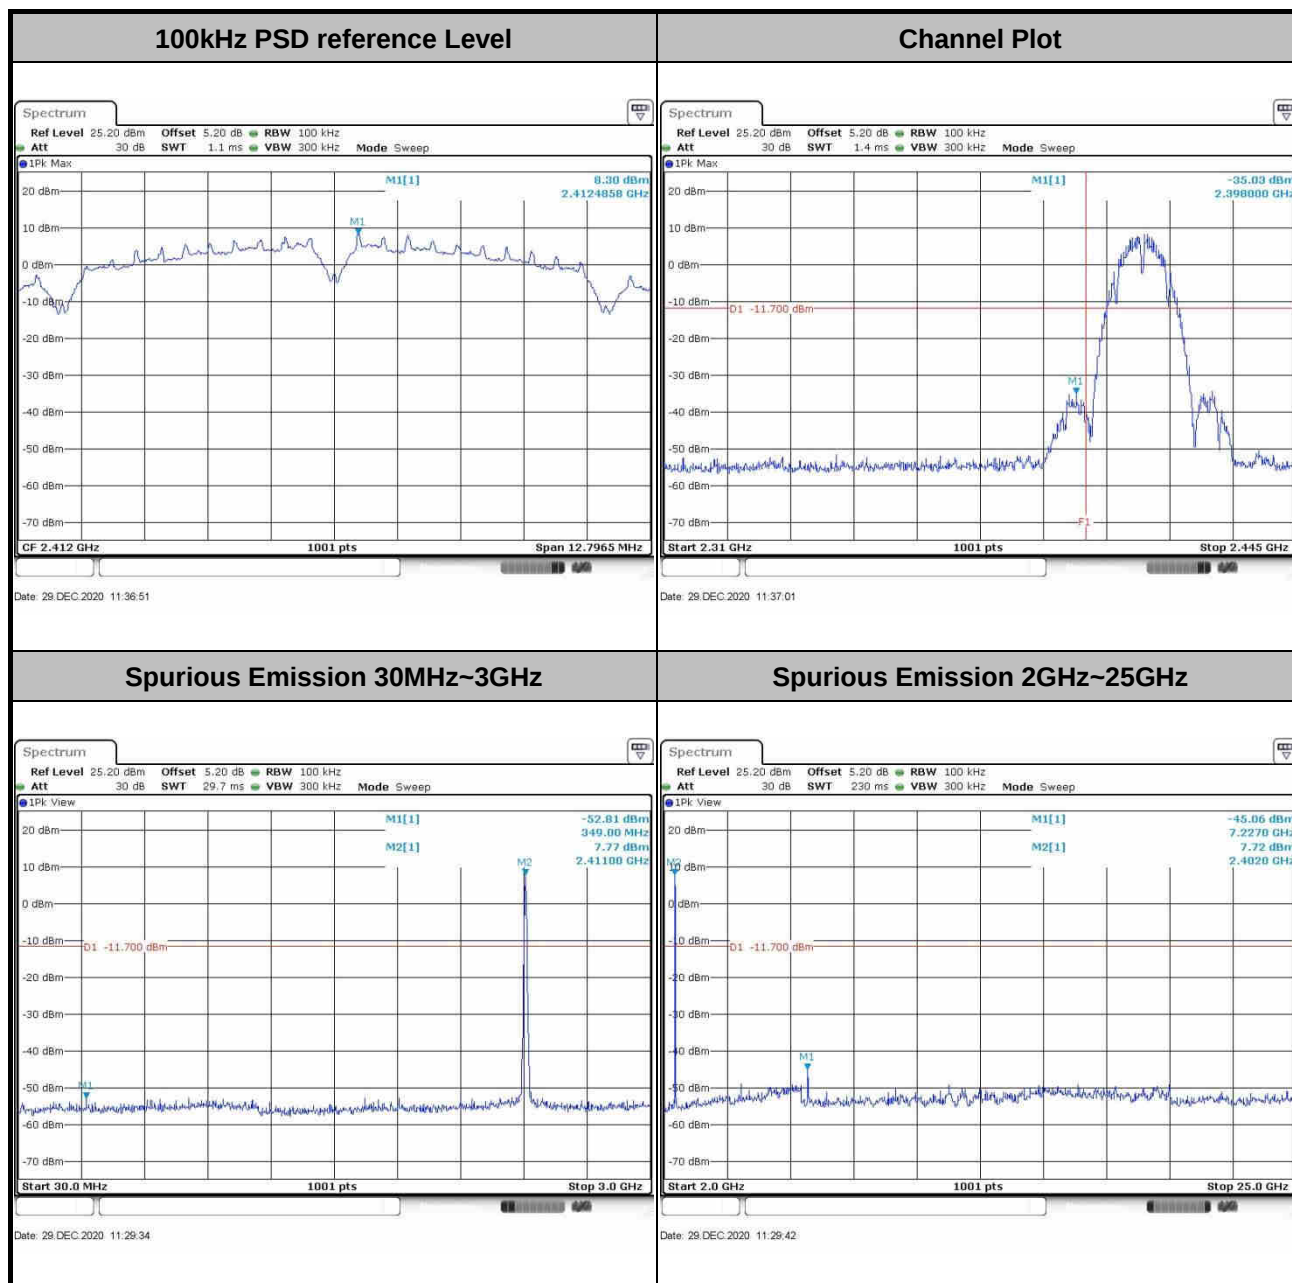

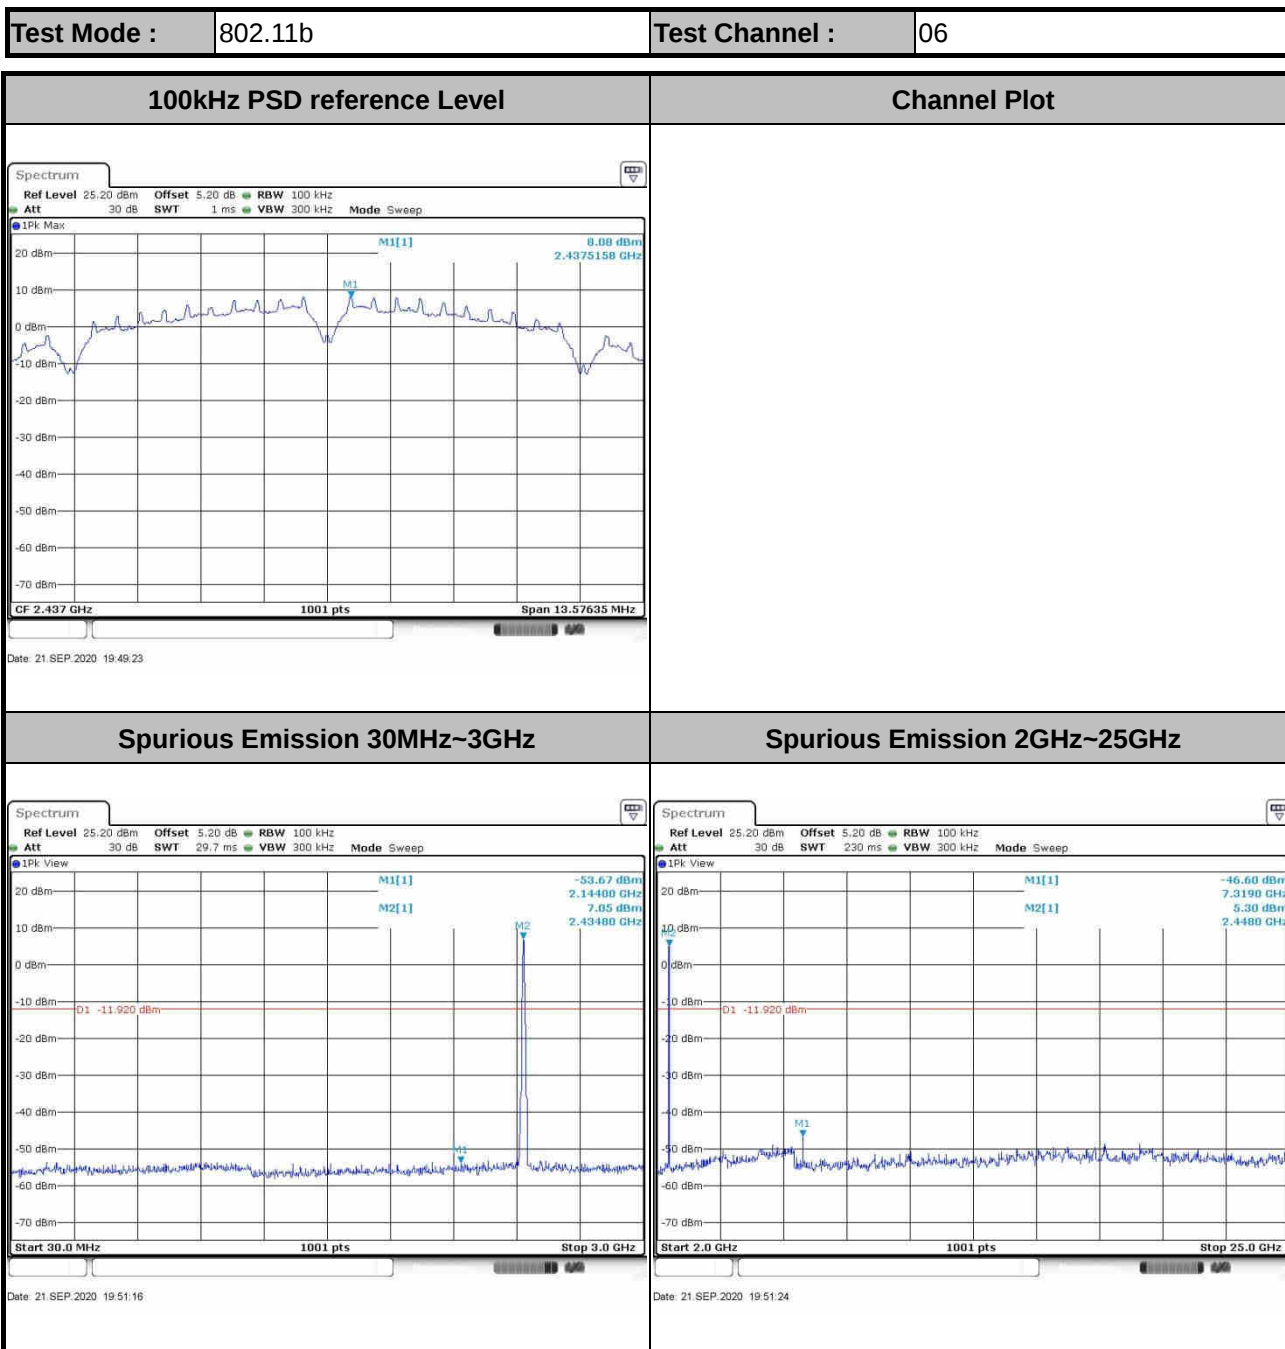

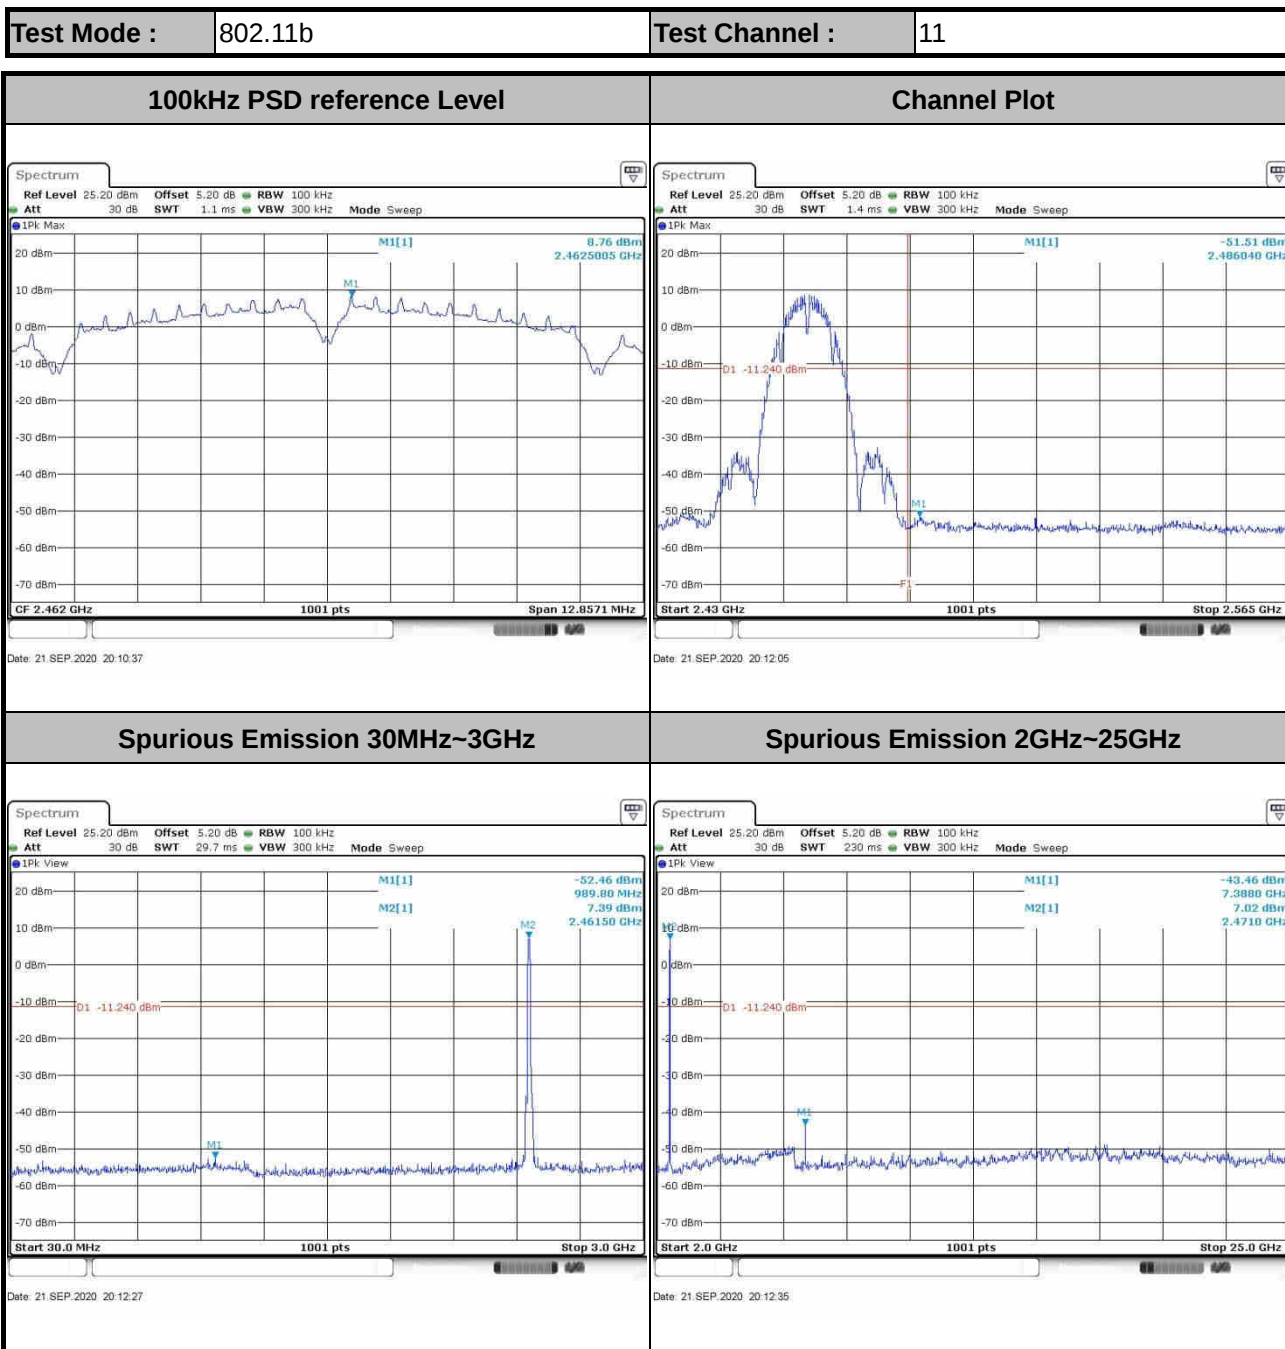





Test Mode : 802.11g

Test Channel : 01


100kHz PSD reference Level

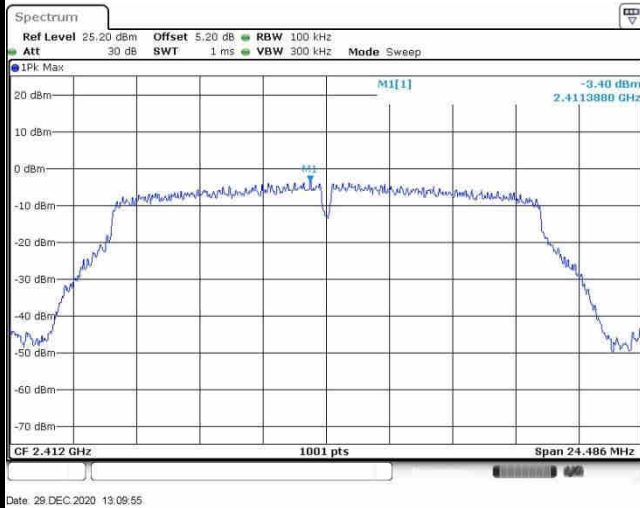


Channel Plot

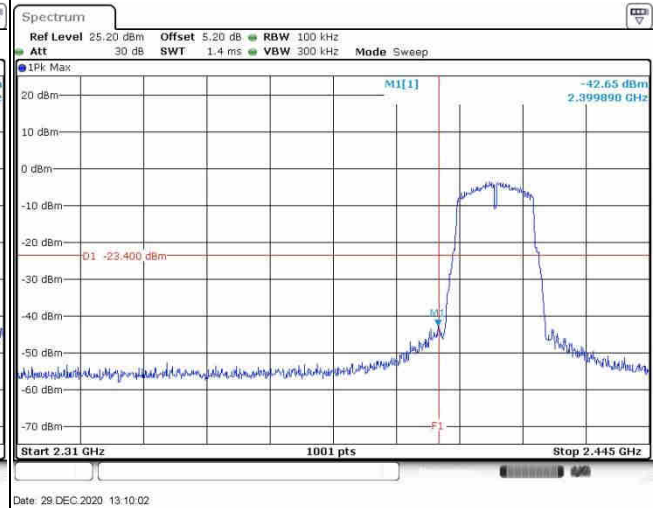

Spurious Emission 30MHz~3GHz

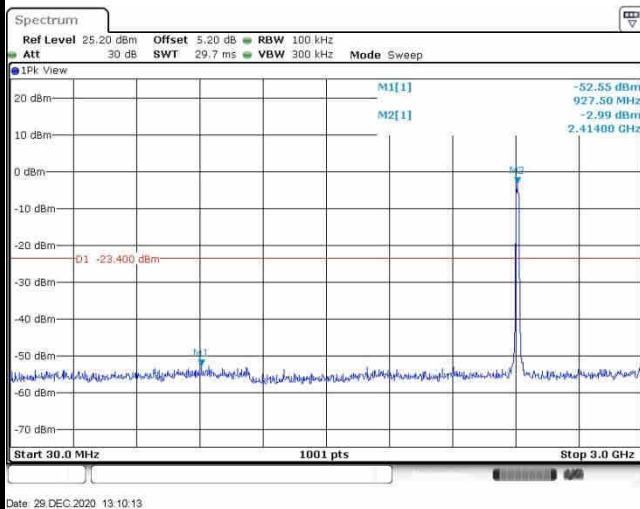


Spurious Emission 2GHz~25GHz

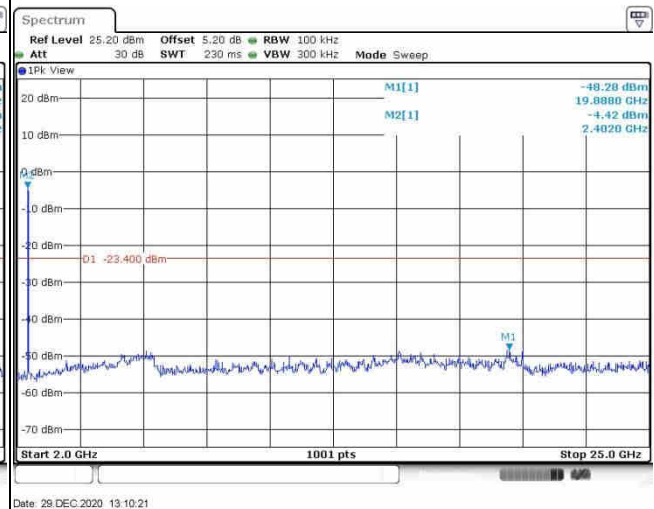




Test Mode :	802.11g	Test Channel :	06
-------------	---------	----------------	----

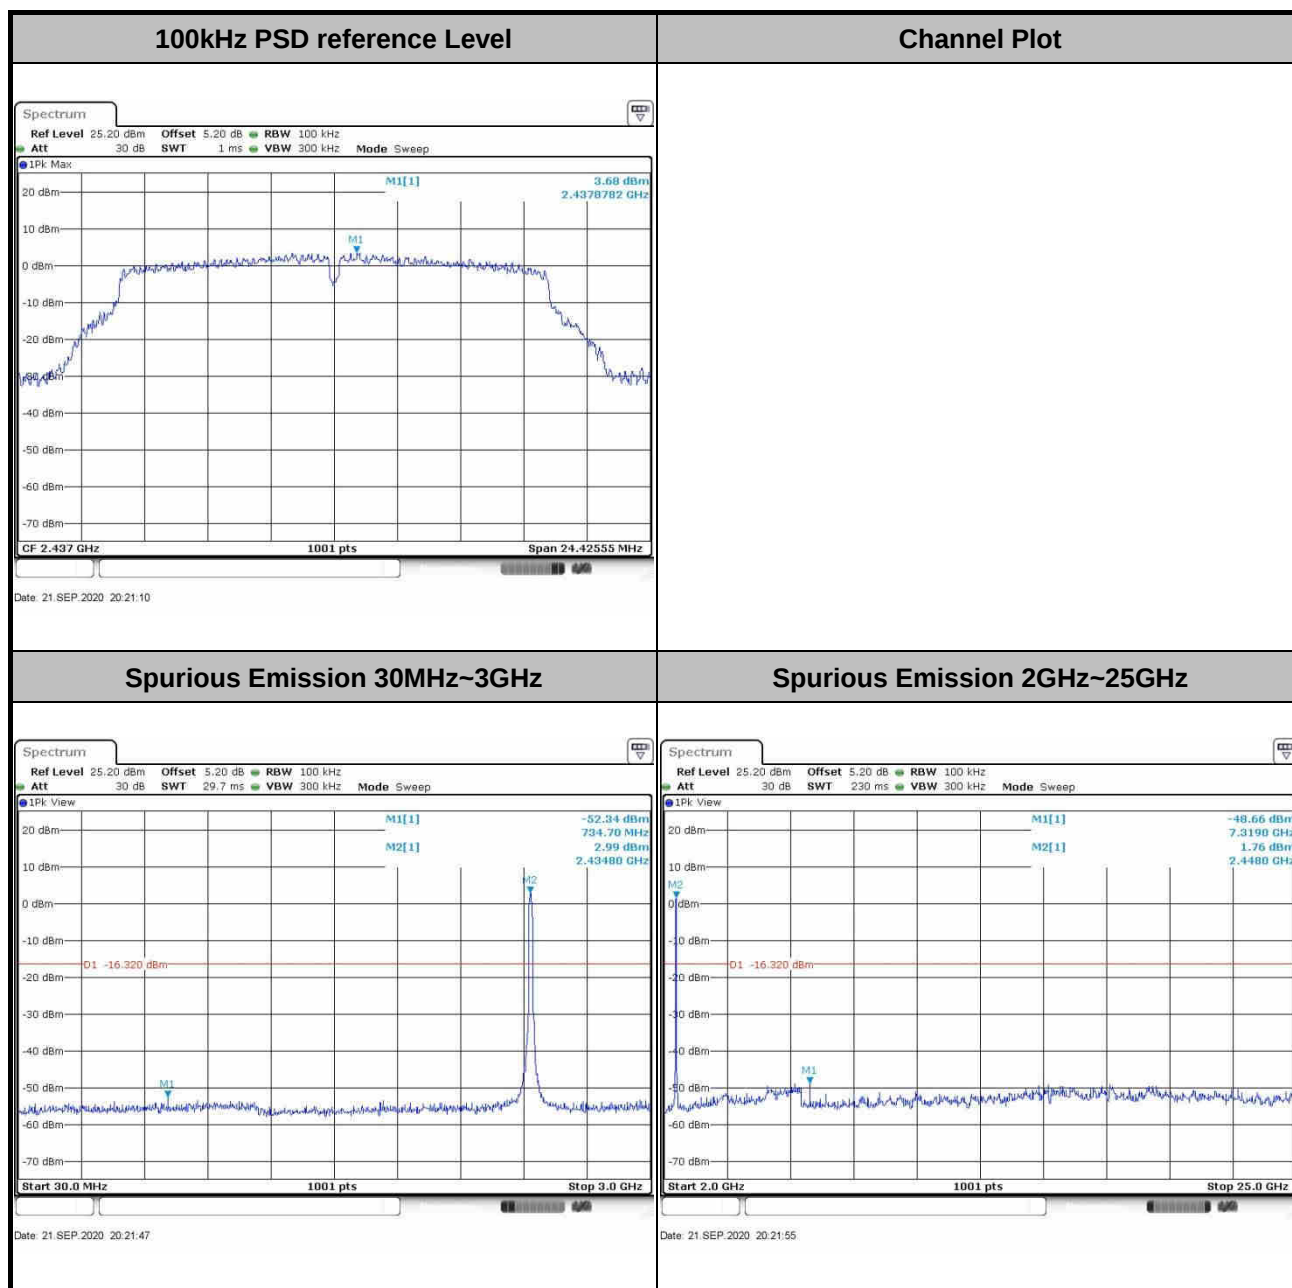




Test Mode :	802.11g	Test Channel :	11
-------------	---------	----------------	----


100kHz PSD reference Level

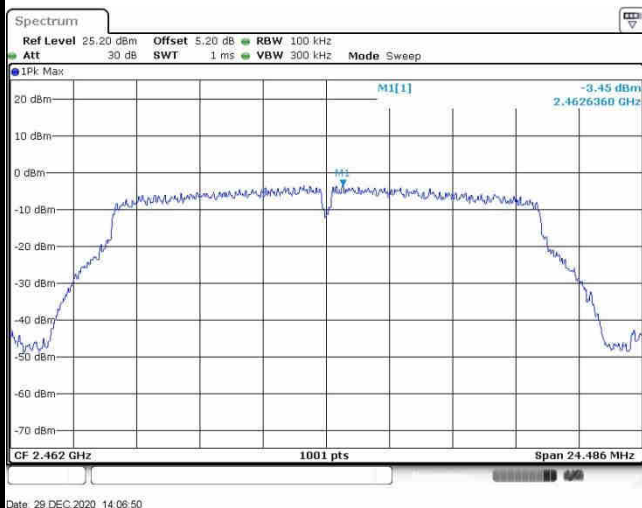


Channel Plot

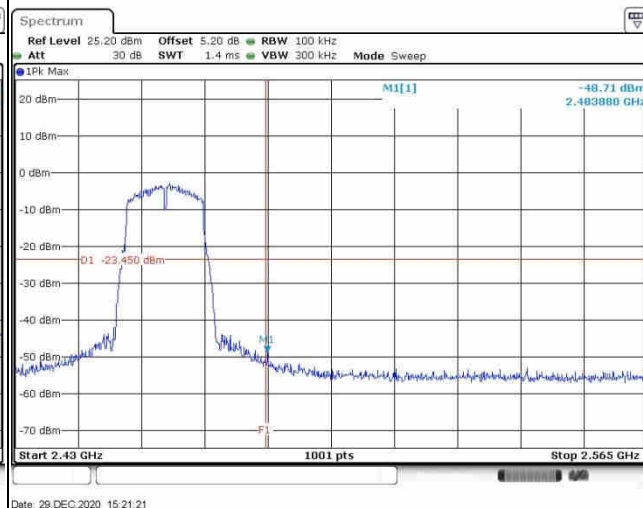

Spurious Emission 30MHz~3GHz

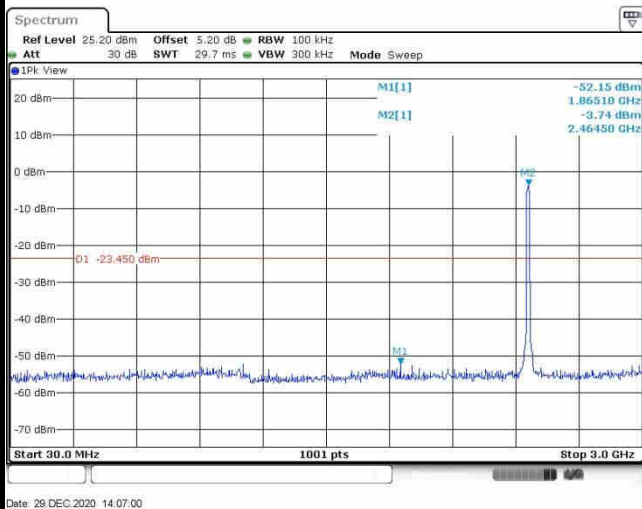

Spurious Emission 2GHz~25GHz

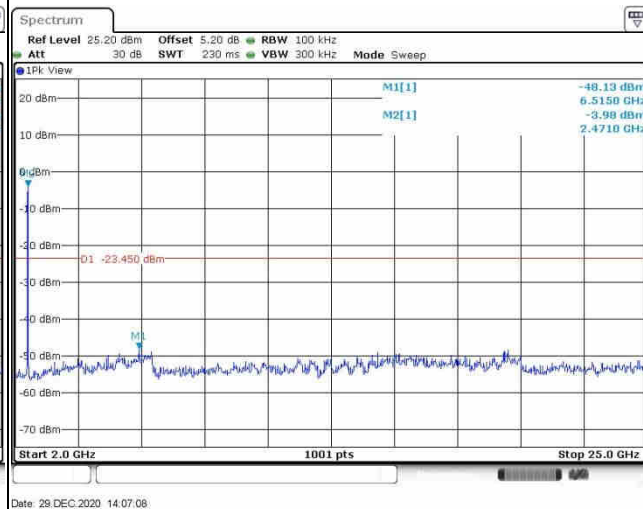




Test Mode : 802.11n HT20


Test Channel : 01

100kHz PSD reference Level

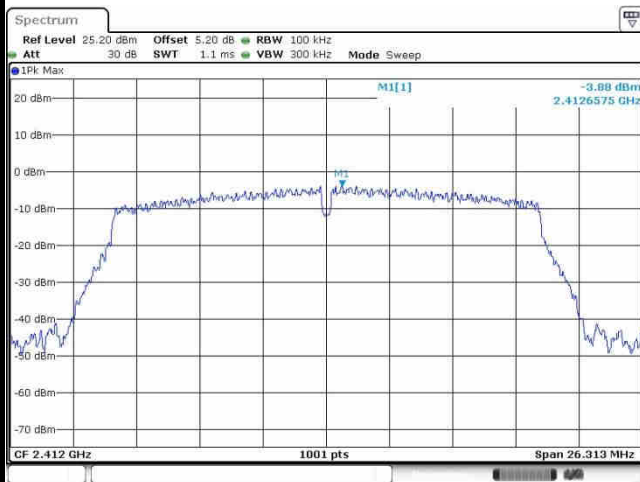


Date: 29 DEC 2020 14:30:52

Channel Plot

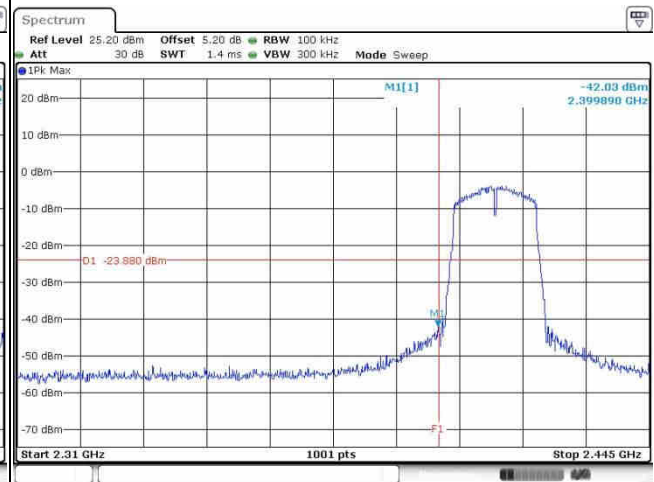


Date: 29 DEC 2020 15:17:50

Spurious Emission 30MHz~3GHz

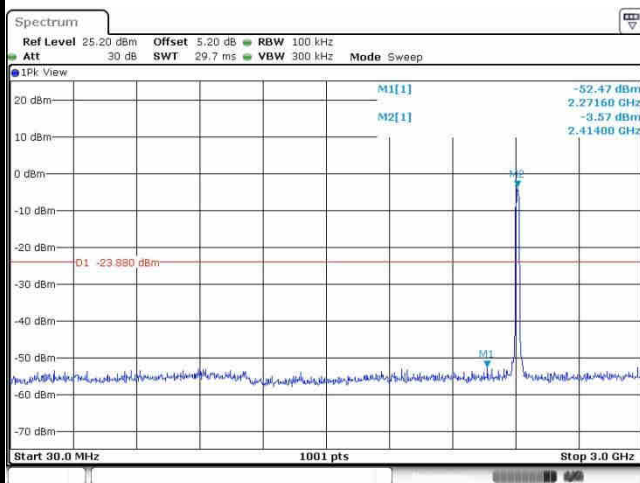


Date: 29 DEC 2020 14:31:01

Spurious Emission 2GHz~25GHz

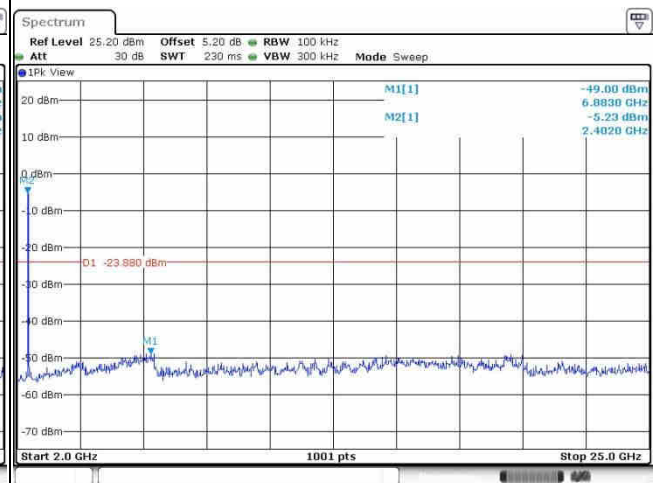

Date: 29 DEC 2020 14:31:09

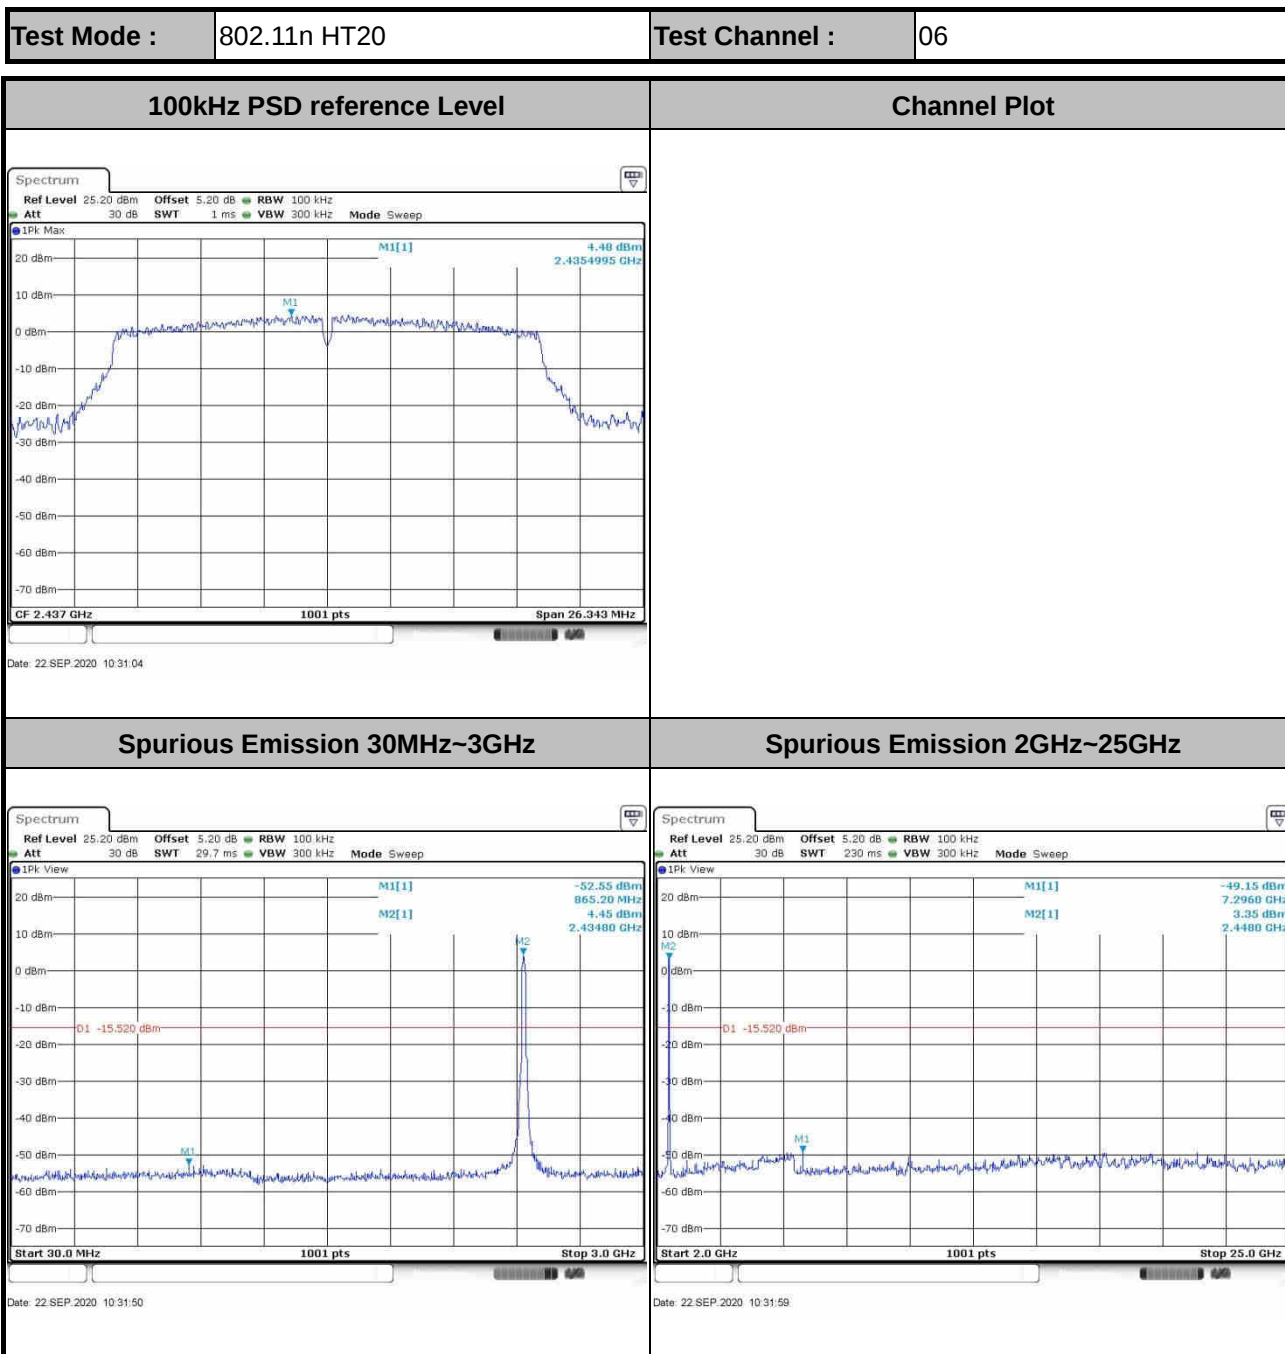





Test Mode : 802.11n HT20

Test Channel : 11


100kHz PSD reference Level

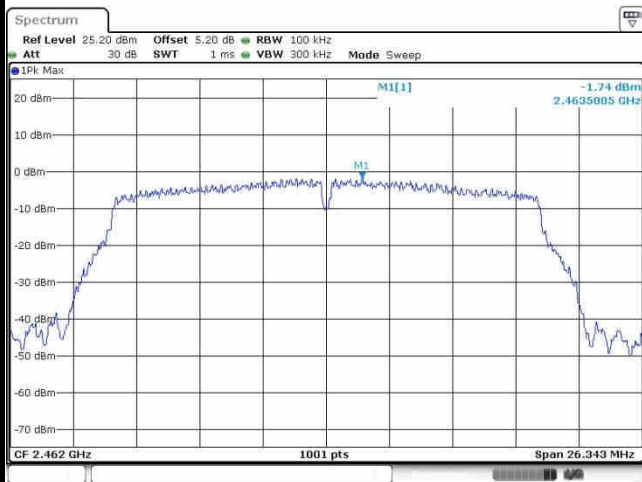


Channel Plot

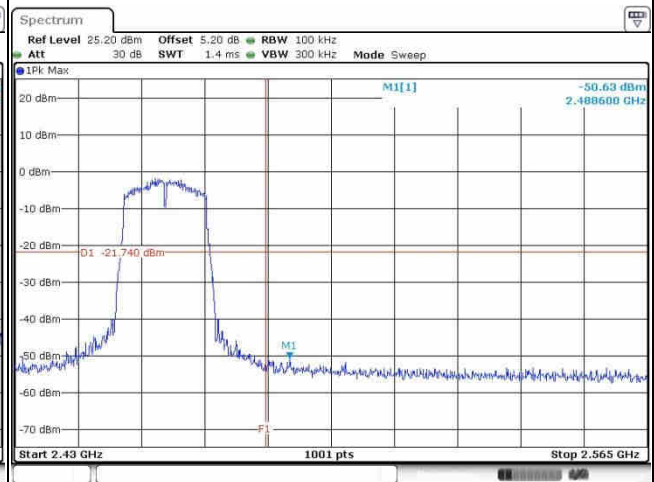

Spurious Emission 30MHz~3GHz

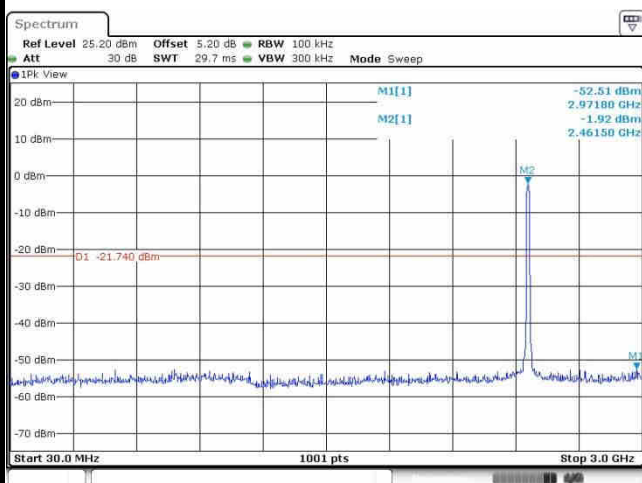


Spurious Emission 2GHz~25GHz

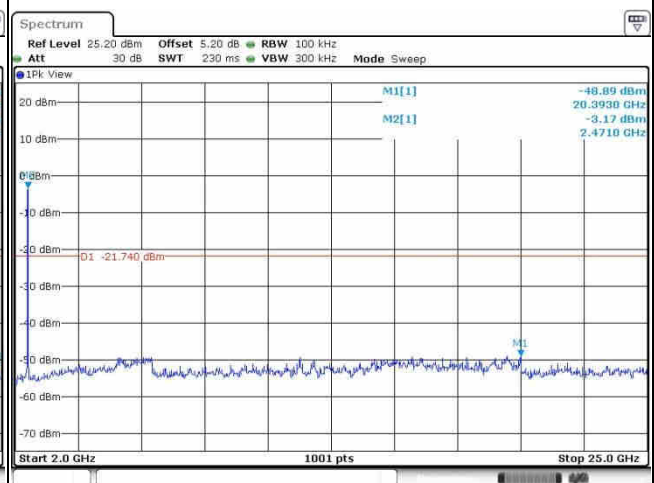




Number of TX = 2, Ant. 2 (Measured)

Test Mode :	802.11b	Test Channel :	01
-------------	---------	----------------	----

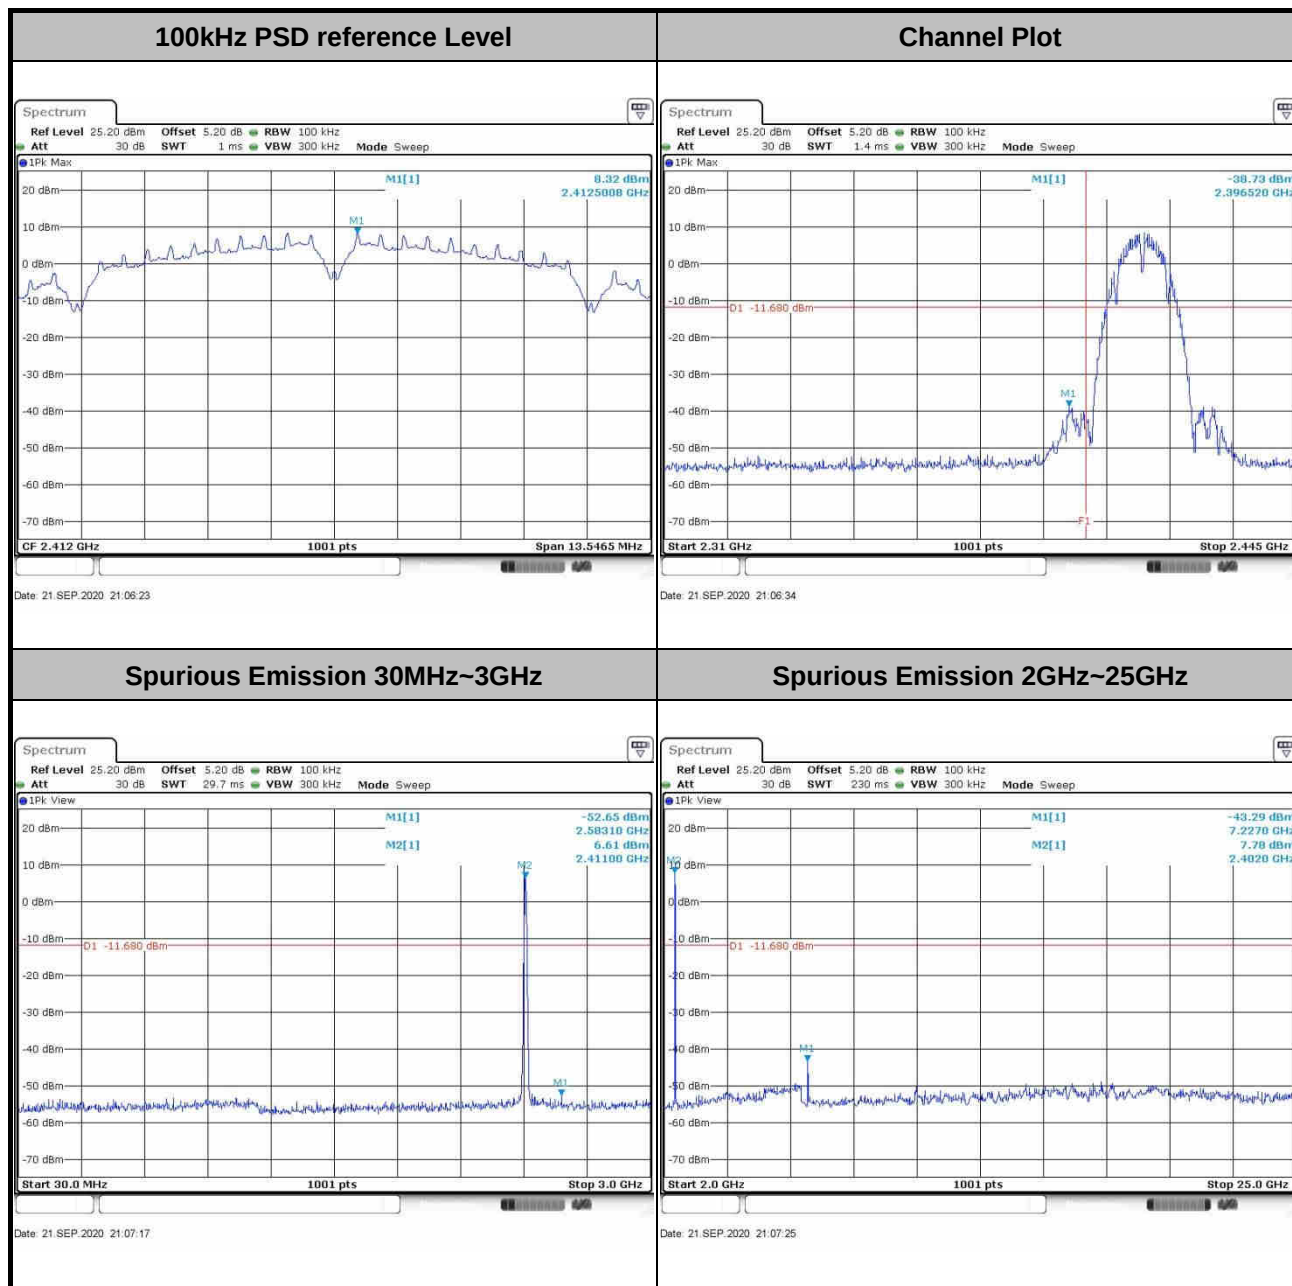

Test Mode :	802.11b	Test Channel :	06
--------------------	---------	-----------------------	----

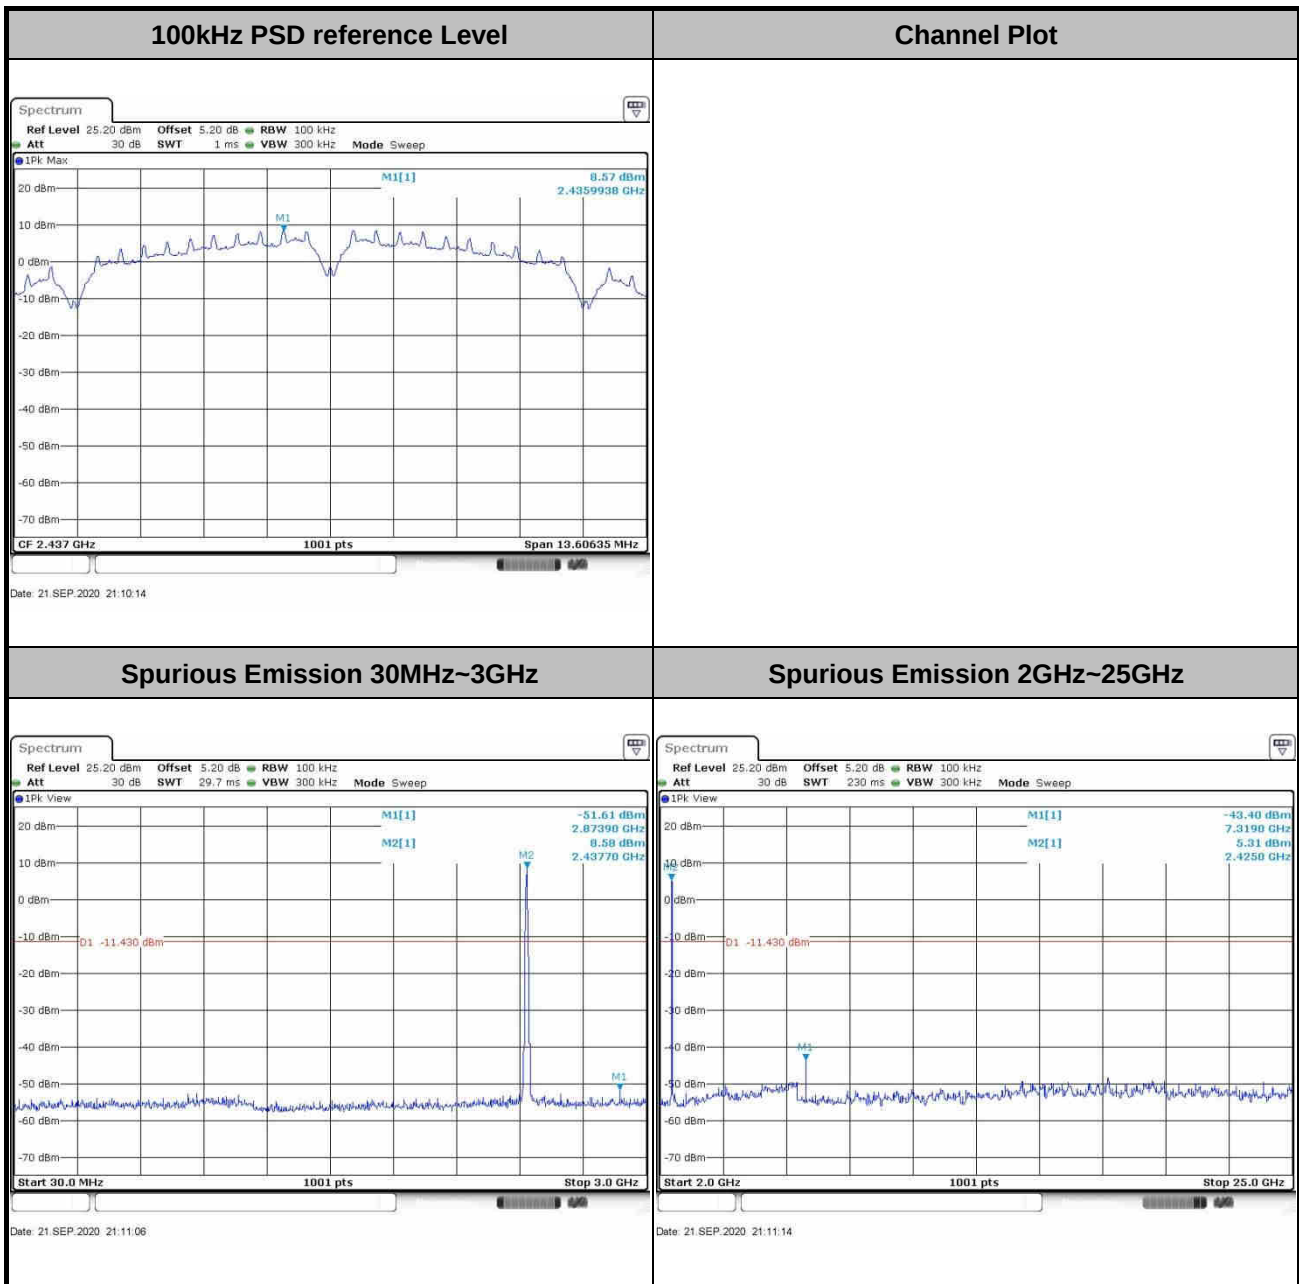





Test Mode : 802.11b

Test Channel : 11


100kHz PSD reference Level

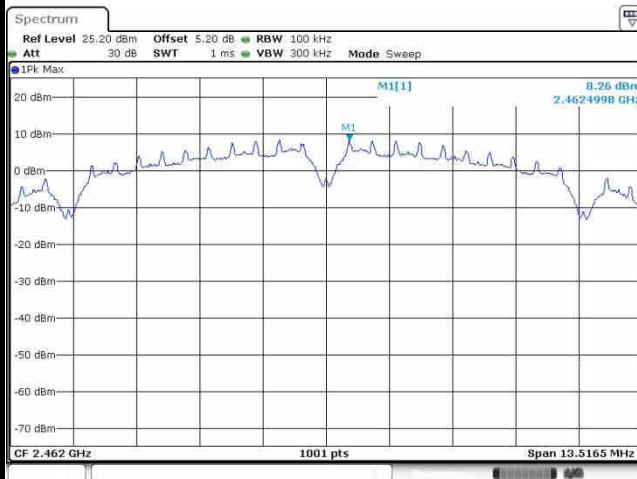


Channel Plot

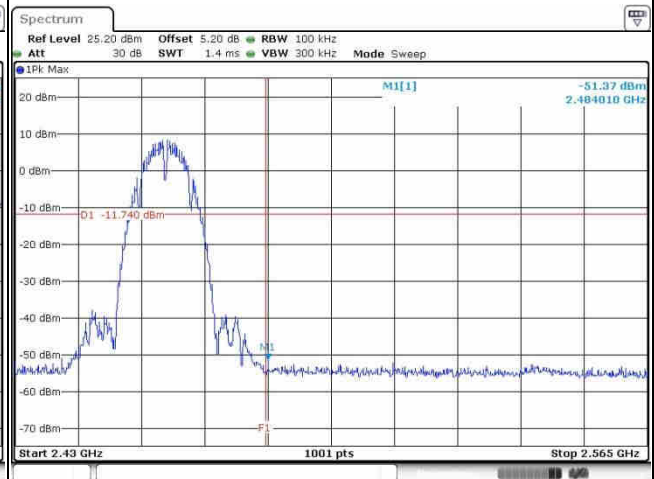

Spurious Emission 30MHz~3GHz

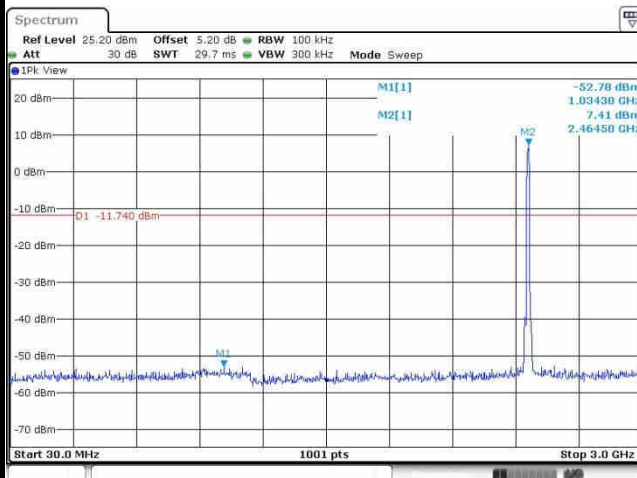


Spurious Emission 2GHz~25GHz

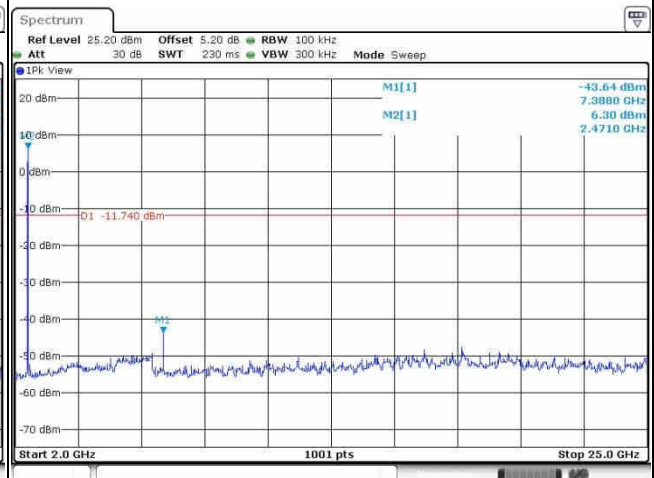




Test Mode :	802.11g	Test Channel :	01
-------------	---------	----------------	----


100kHz PSD reference Level

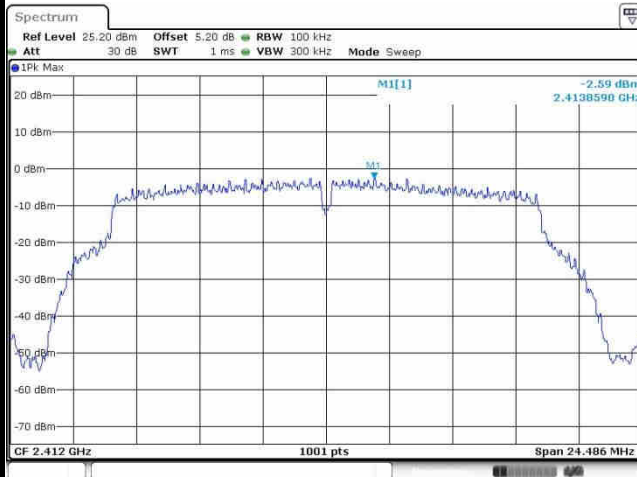


Channel Plot

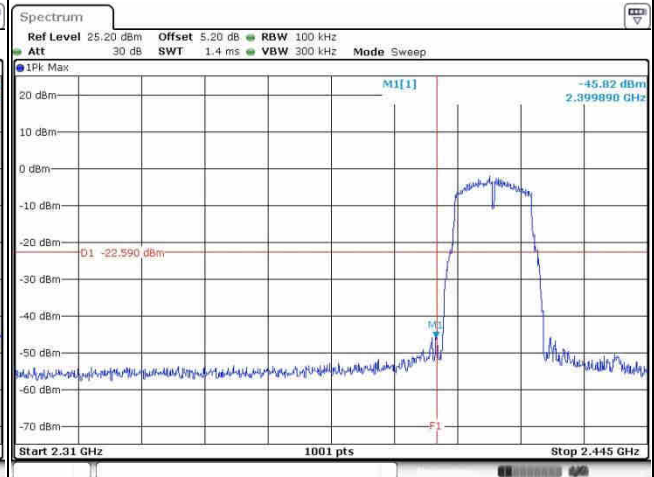


Spurious Emission 30MHz~3GHz

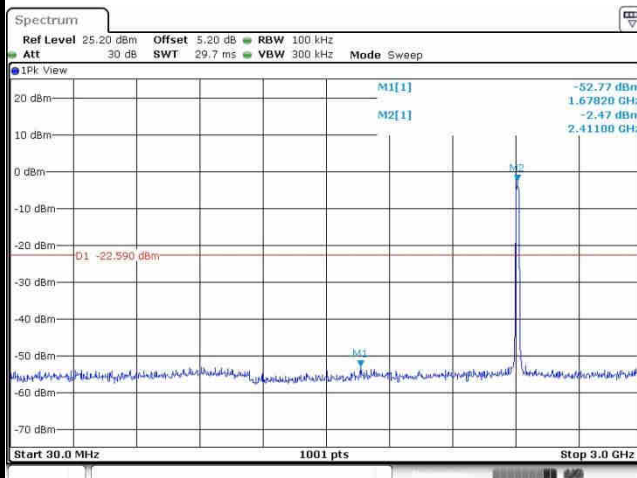

Spurious Emission 2GHz~25GHz

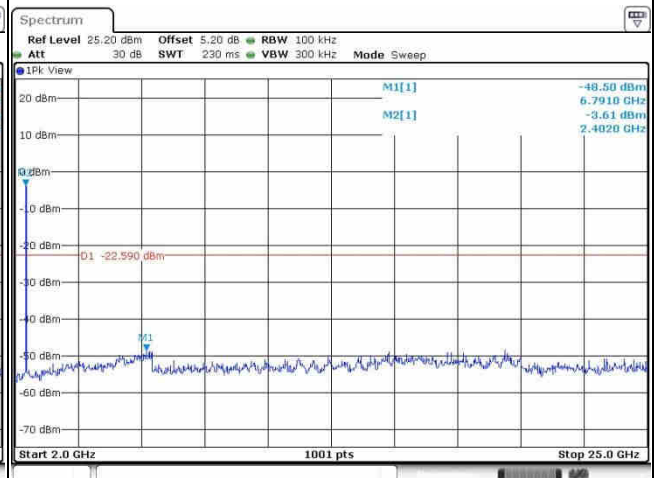

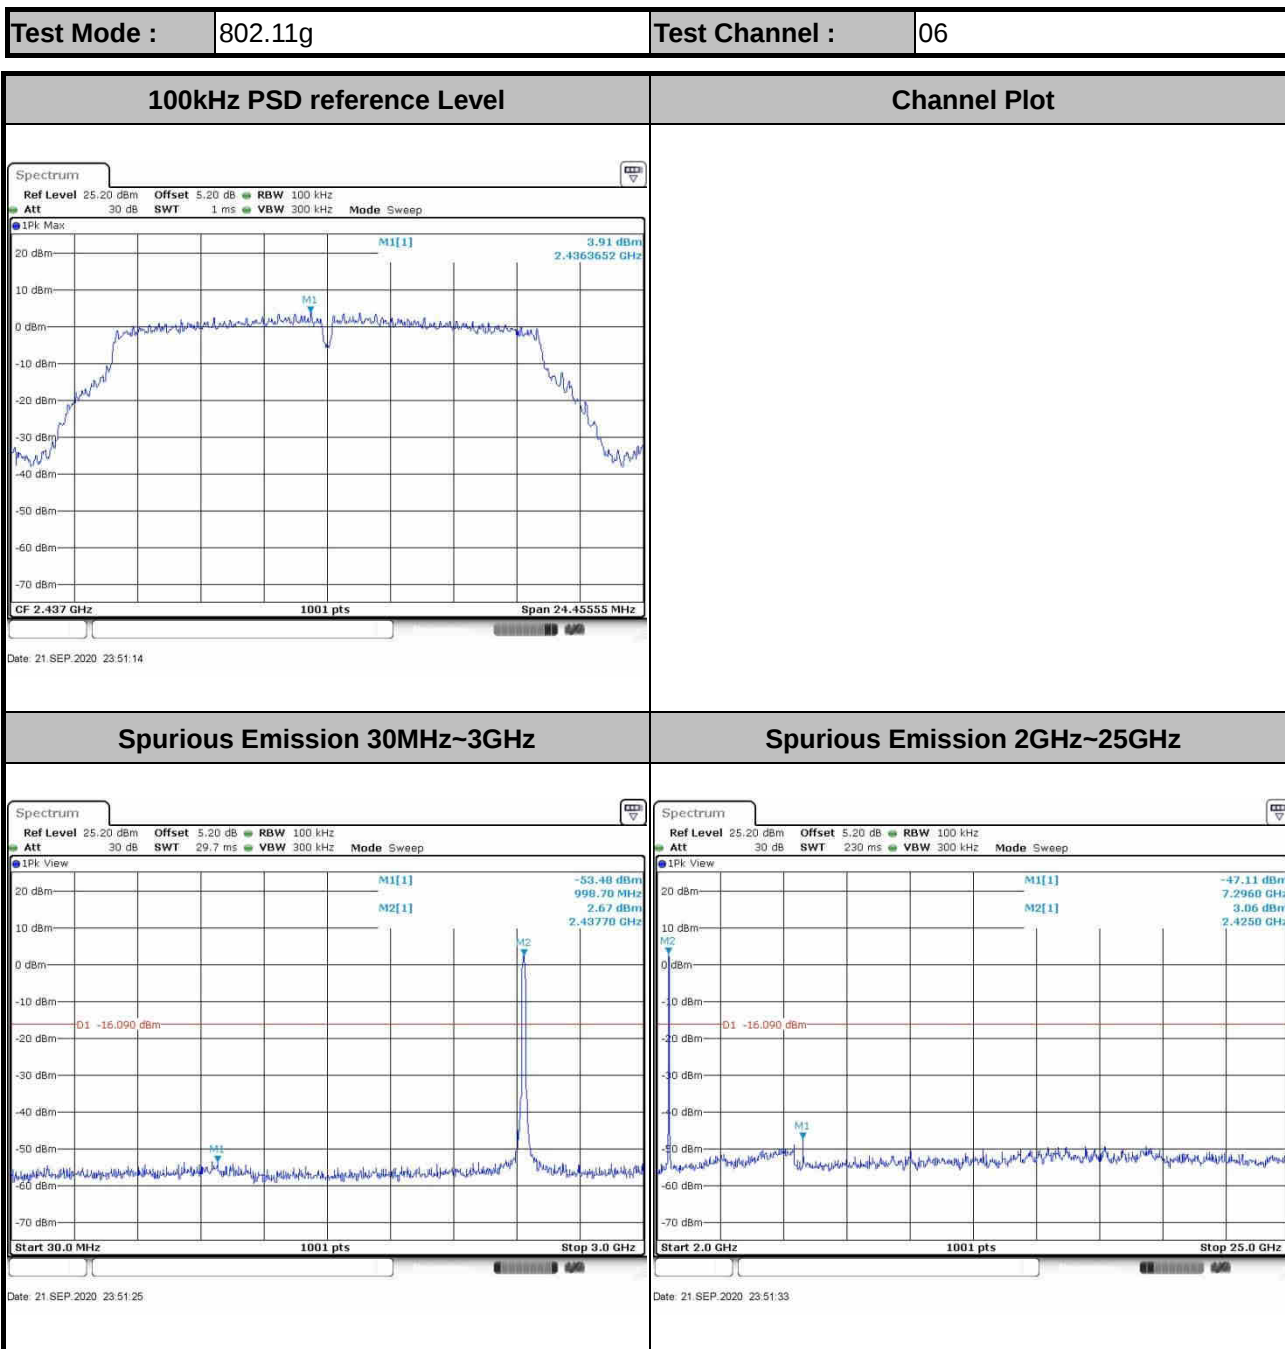





Test Mode : 802.11g

Test Channel : 11


100kHz PSD reference Level

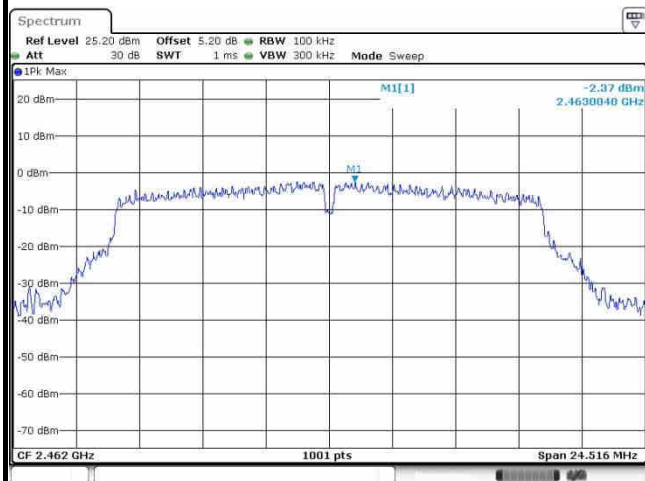


Channel Plot

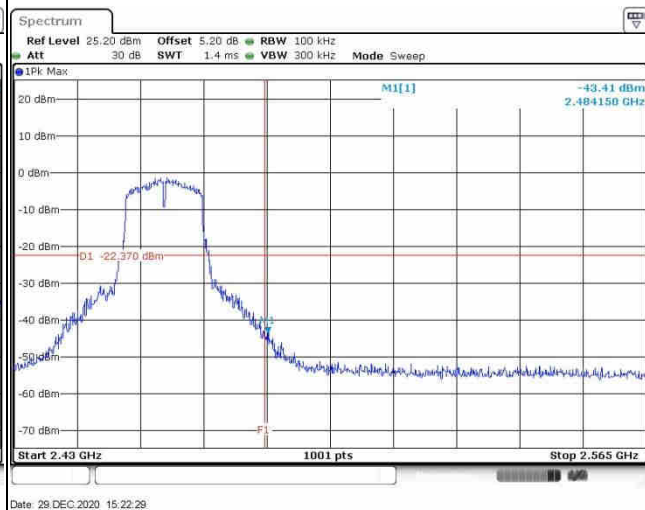

Spurious Emission 30MHz~3GHz

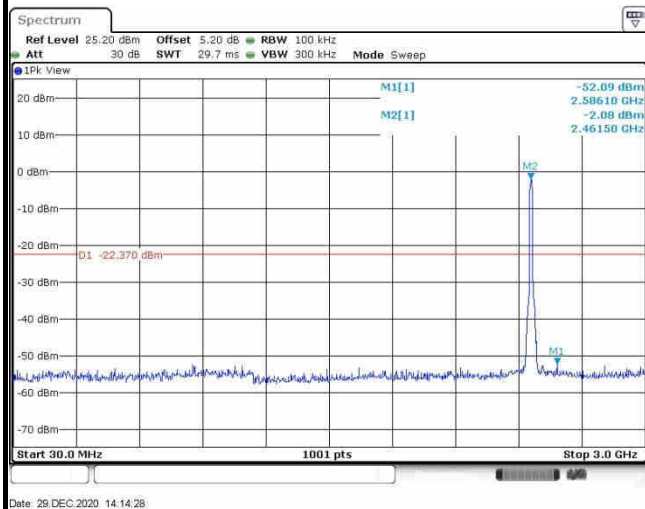

Spurious Emission 2GHz~25GHz

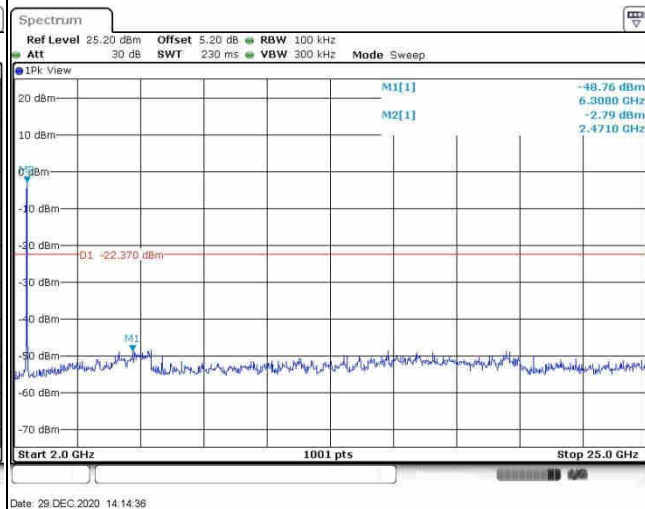




Test Mode : 802.11n HT20


Test Channel : 01

100kHz PSD reference Level

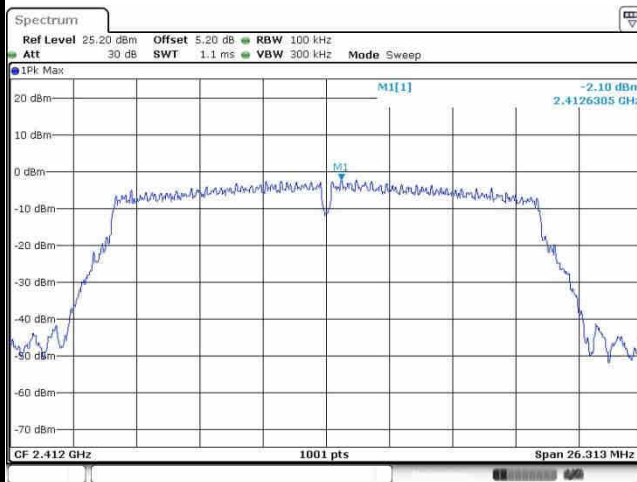


Date: 29 DEC 2020 14:23:50

Channel Plot

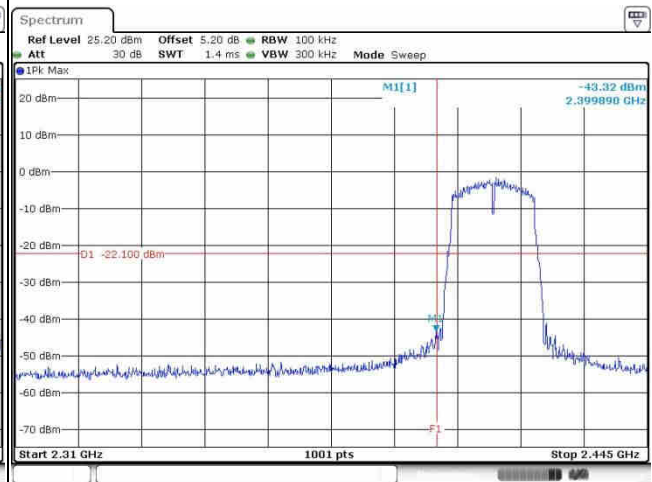


Date: 29 DEC 2020 14:23:59

Spurious Emission 30MHz~3GHz

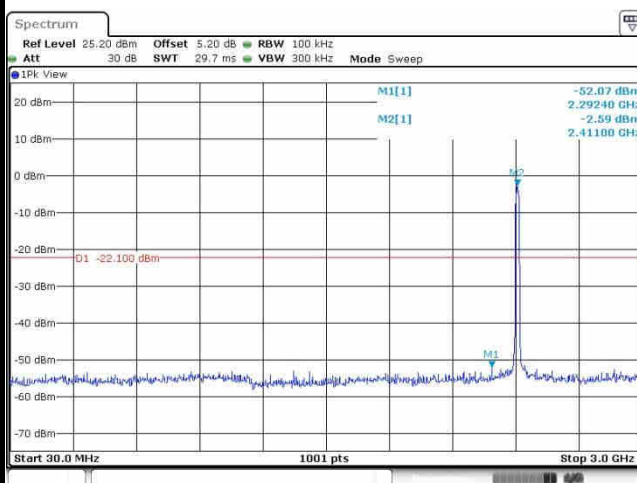

Date: 29 DEC 2020 14:24:09

Spurious Emission 2GHz~25GHz

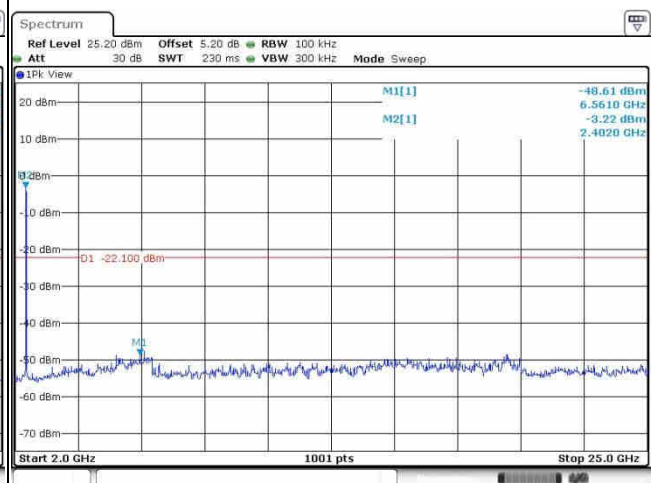


Date: 29 DEC 2020 14:24:17



Test Mode : 802.11n HT20


Test Channel : 06

100kHz PSD reference Level

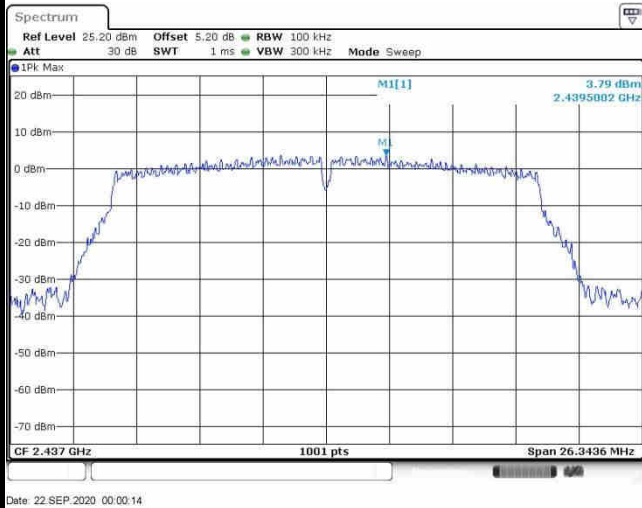


Channel Plot

Spurious Emission 30MHz~3GHz

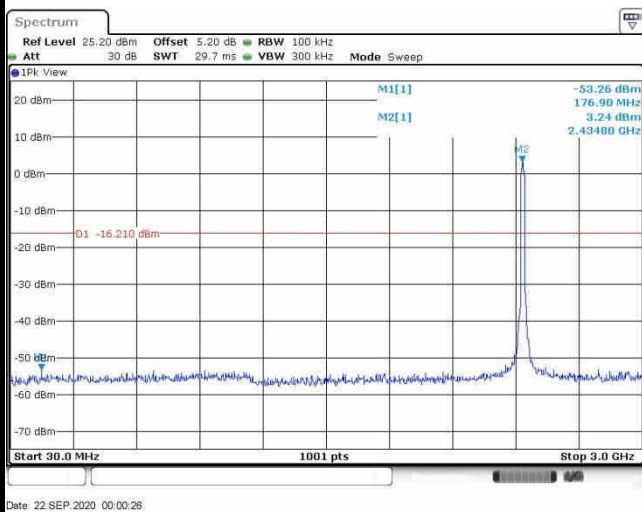

Spurious Emission 2GHz~25GHz

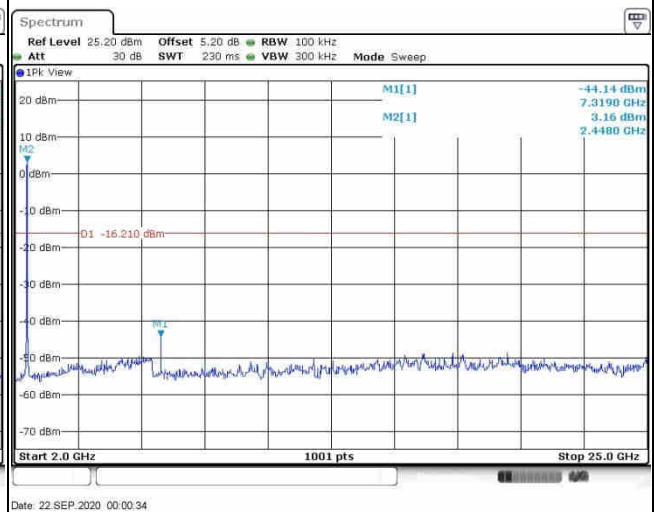





Test Mode : 802.11n HT20

Test Channel : 11


100kHz PSD reference Level

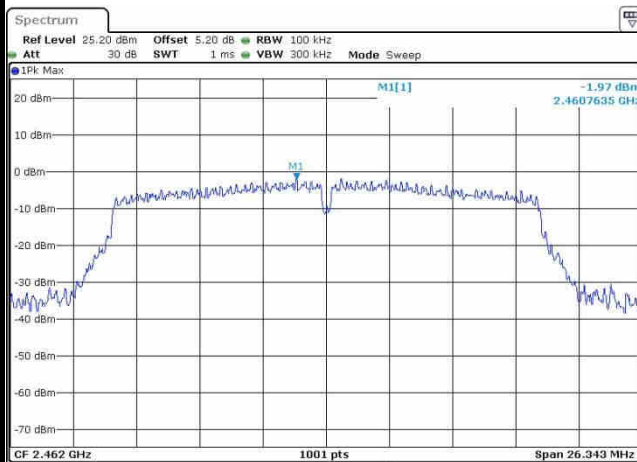


Channel Plot

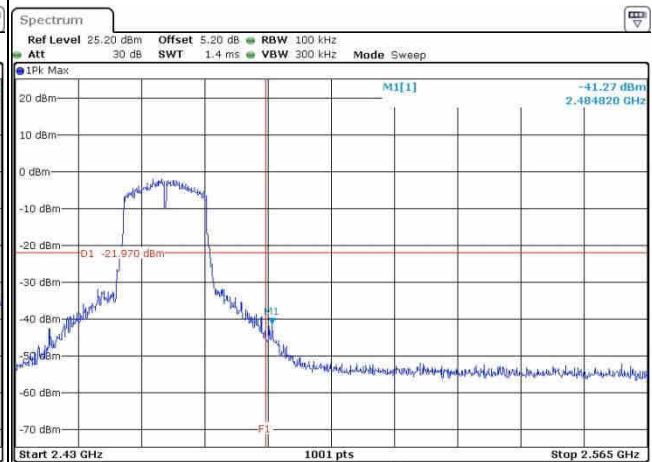

Spurious Emission 30MHz~3GHz

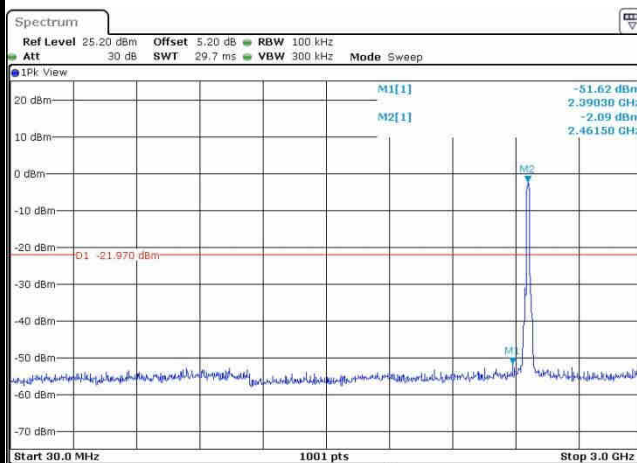

Spurious Emission 2GHz~25GHz

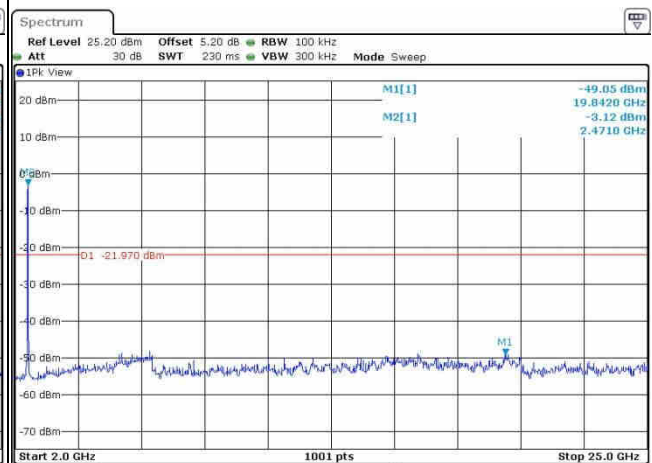

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

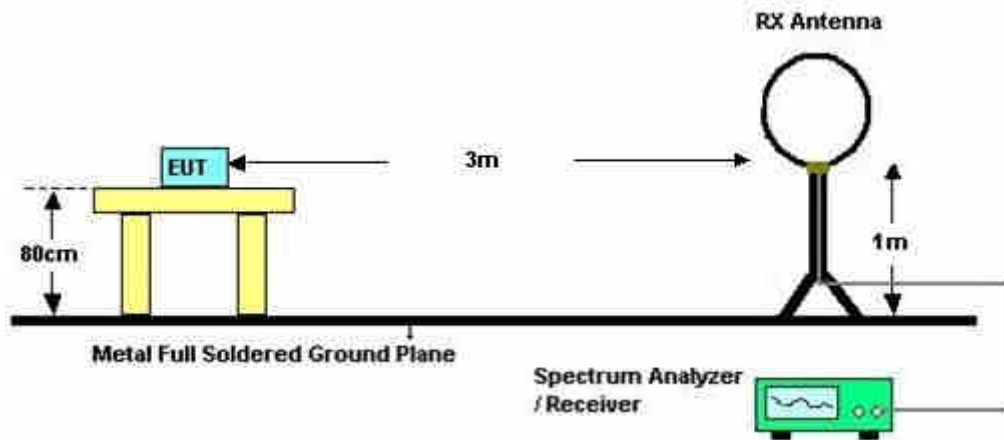

For radiated emissions from 30MHz to 1GHz

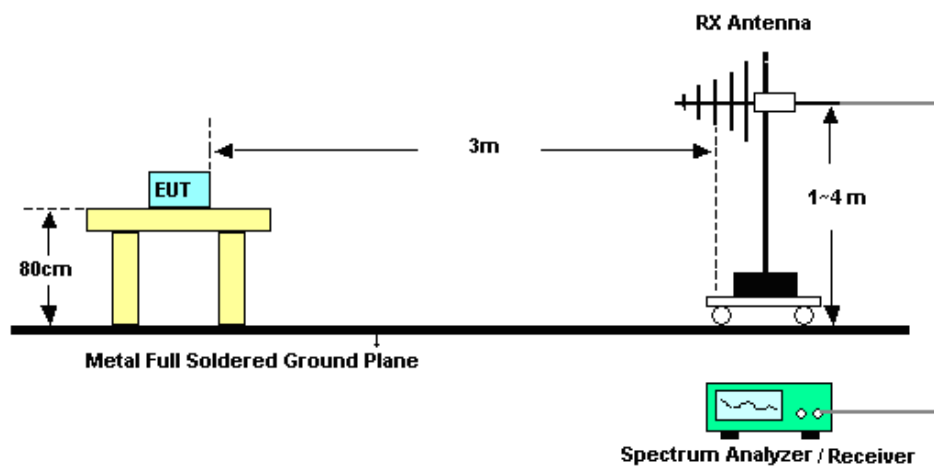

For radiated emissions above 1GHz

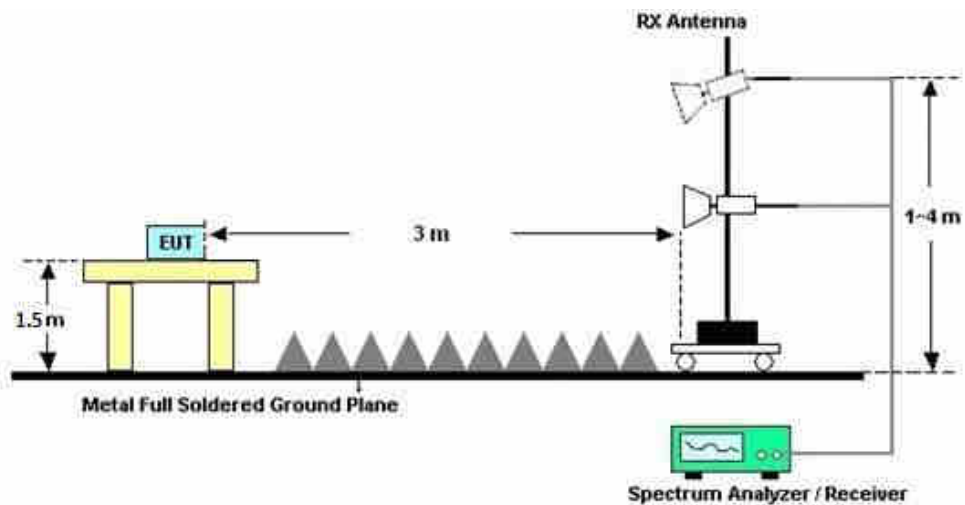



3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

3.6.4 Test Setup

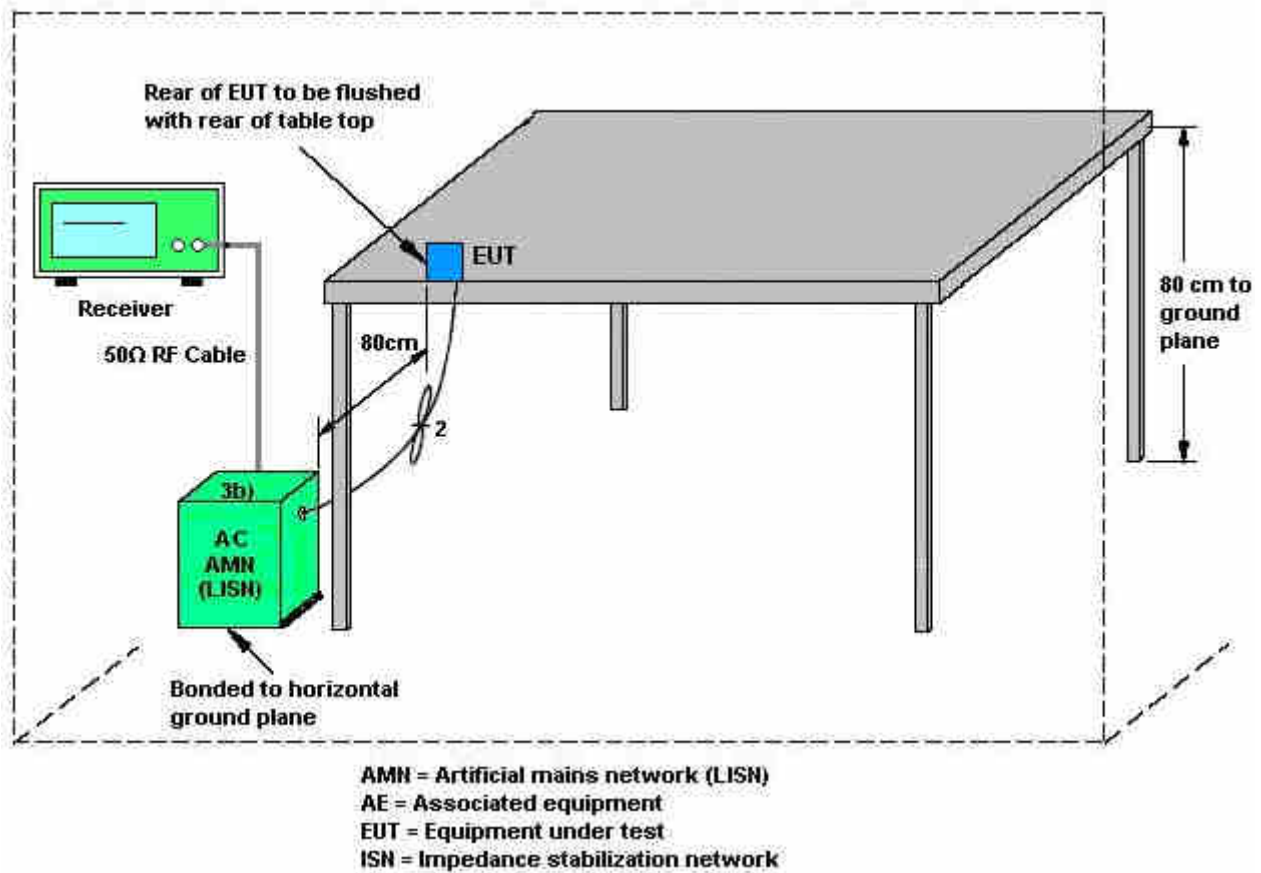

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.

3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

For power, the directional gain G_{ANT} is set equal to the antenna having the highest gain, i.e., F)2)f)i).

For PSD, the directional gain calculation is following F)2)f)ii) of KDB 662911 D01 v02r01.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain "DG" is calculated as following table.

			DG for Power (dBi)	DG for PSD (dBi)	Power Limit Reduction (dB)	PSD Limit Reduction (dB)
	Ant. 1 (dBi)	Ant. 2 (dBi)				
2.4 GHz	1.75	2.46	2.46	2.46	0.00	0.00

$Power\ Limit\ Reduction = DG(Power) - 6dBi, (min = 0)$

$PSD\ Limit\ Reduction = DG(PSD) - 6dBi, (min = 0)$



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Nov. 02, 2019	Sep. 21, 2020~ Dec. 29, 2020	Nov. 01, 2020	Conducted (TH01-KS)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Nov. 01, 2020		Oct. 31, 2021	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 15, 2020	Sep. 21, 2020~ Dec. 29, 2020	Jan. 14, 2021	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 08, 2020	Sep. 21, 2020~ Dec. 29, 2020	Jan. 07, 2021	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz; Max 30dBm	Oct. 17, 2020	Dec. 31, 2020	Oct. 16, 2021	Radiation (03CH06-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150208	10Hz~44GHz	Apr. 14, 2020	Dec. 31, 2020	Apr. 13, 2021	Radiation (03CH06-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Nov. 1, 2020	Dec. 31, 2020	Oct. 31, 2021	Radiation (03CH06-KS)
Bilog Antenna	TeseQ	CBL6111D	49921	30MHz~1GHz	May 29, 2020	Dec. 31, 2020	May 28, 2021	Radiation (03CH06-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218652	1GHz~18GHz	Apr. 27, 2020	Dec. 31, 2020	Apr. 26, 2021	Radiation (03CH06-KS)
SHF-EHF Horn	Com-power	AH-840	101115	18GHz~40GHz	Jun. 05, 2020	Dec. 31, 2020	Jun. 04, 2021	Radiation (03CH06-KS)
Amplifier	SONOMA	310N	187289	9KHz ~1GHZ	Apr. 14, 2020	Dec. 31, 2020	Apr. 13, 2021	Radiation (03CH06-KS)
Amplifier	MITEQ	EM18G40GGA	060728	18~40GHz	Jan. 08, 2020	Dec. 31, 2020	Jan. 07, 2021	Radiation (03CH06-KS)
high gain Amplifier	MITEQ	AMF-7D-00101800-30-10P	2025788	1Ghz-18Ghz	Jan. 02, 2020	Dec. 31, 2020	Jan. 01, 2021	Radiation (03CH06-KS)
Amplifier	Keysight	83017A	MY53270203	500MHz~26.5GHz	Apr. 15, 2020	Dec. 31, 2020	Apr. 14, 2021	Radiation (03CH06-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Dec. 31, 2020	NCR	Radiation (03CH06-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Dec. 31, 2020	NCR	Radiation (03CH06-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Dec. 31, 2020	NCR	Radiation (03CH06-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 14, 2020	Sep. 28, 2020	Apr. 13, 2021	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 18, 2019	Sep. 28, 2020	Oct. 17, 2020	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Oct. 28, 2019	Sep. 28, 2020	Oct. 27, 2020	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 18, 2019	Sep. 28, 2020	Oct. 17, 2020	Conduction (CO01-KS)

NCR: No Calibration Required

5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage $K=2$ to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.94dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------



Appendix A. Conducted Test Results

Test Engineer:	Kib Shi	Temperature:	21~25	°C
Test Date:	2020/09/21 ~ 2020/12/29	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)		6dB BW (MHz)		6dB BW Limit (MHz)	Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2		
11b	1Mbps	2	1	2412	13.79	13.64	8.53	8.53	0.50	Pass
11b	1Mbps	2	6	2437	13.84	13.69	9.05	9.07	0.50	Pass
11b	1Mbps	2	11	2462	13.84	13.64	8.57	9.01	0.50	Pass
11g	6Mbps	2	1	2412	17.58	17.38	16.32	16.32	0.50	Pass
11g	6Mbps	2	2	2417	17.78	17.43	16.32	16.32	0.50	Pass
11g	6Mbps	2	3	2422	17.63	17.53	16.32	16.32	0.50	Pass
11g	6Mbps	2	6	2437	17.63	17.33	16.28	16.30	0.50	Pass
11g	6Mbps	2	10	2457	17.58	17.38	16.34	16.32	0.50	Pass
11g	6Mbps	2	11	2462	17.63	17.53	16.32	16.34	0.50	Pass
HT20	MCS0	2	1	2412	18.33	18.23	17.54	17.54	0.50	Pass
HT20	MCS0	2	2	2417	18.33	18.23	17.58	17.56	0.50	Pass
HT20	MCS0	2	3	2422	18.38	18.23	17.56	17.56	0.50	Pass
HT20	MCS0	2	6	2437	18.58	18.18	17.56	17.56	0.50	Pass
HT20	MCS0	2	10	2462	18.28	18.18	17.58	17.58	0.50	Pass
HT20	MCS0	2	11	2457	18.23	18.38	17.56	17.56	0.50	Pass

TEST RESULTS DATA
Peak Output Power

2.4GHz Band																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
					Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	
11b	1Mbps	2	1	2412	19.19	19.21	22.21	30.00		2.46		24.67		36.00		Pass
11b	1Mbps	2	6	2437	20.23	20.16	23.21	30.00		2.46		25.67		36.00		Pass
11b	1Mbps	2	11	2462	19.91	19.91	22.92	30.00		2.46		25.38		36.00		Pass
11g	6Mbps	2	1	2412	17.32	18.75	21.10	30.00		2.46		23.56		36.00		Pass
11g	6Mbps	2	2	2417	20.88	20.54	23.72	30.00		2.46		26.18		36.00		Pass
11g	6Mbps	2	3	2422	23.64	23.22	26.45	30.00		2.46		28.91		36.00		Pass
11g	6Mbps	2	6	2437	24.03	25.21	27.67	30.00		2.46		30.13		36.00		Pass
11g	6Mbps	2	10	2457	23.02	23.32	26.18	30.00		2.46		28.64		36.00		Pass
11g	6Mbps	2	11	2462	19.92	20.46	23.21	30.00		2.46		25.67		36.00		Pass
HT20	MCS0	2	1	2412	19.48	19.85	22.68	30.00		2.46		25.14		36.00		Pass
HT20	MCS0	2	2	2417	21.30	21.75	24.54	30.00		2.46		27.00		36.00		Pass
HT20	MCS0	2	3	2422	23.60	23.42	26.52	30.00		2.46		28.98		36.00		Pass
HT20	MCS0	2	6	2437	24.14	25.21	27.72	30.00		2.46		30.18		36.00		Pass
HT20	MCS0	2	10	2457	23.23	23.17	26.21	30.00		2.46		28.67		36.00		Pass
HT20	MCS0	2	11	2462	19.86	20.05	22.97	30.00		2.46		25.43		36.00		Pass

Note: Measured power (dBm) has offset with cable loss.

TEST RESULTS DATA
Average Output Power

2.4GHz Band									
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)		
					Ant 1	Ant 2	Ant 1	Ant 2	SUM
11b	1Mbps	2	1	2412	0.00	0.00	17.05	16.82	19.95
11b	1Mbps	2	6	2437	0.00	0.00	17.92	17.89	20.92
11b	1Mbps	2	11	2462	0.00	0.00	17.69	17.61	20.66
11g	6Mbps	2	1	2412	0.18	0.18	9.94	11.12	13.58
11g	6Mbps	2	2	2417	0.18	0.18	13.50	12.94	16.24
11g	6Mbps	2	3	2422	0.18	0.18	17.06	16.01	19.57
11g	6Mbps	2	6	2437	0.18	0.18	17.81	17.92	20.87
11g	6Mbps	2	10	2457	0.18	0.18	16.33	15.83	19.09
11g	6Mbps	2	11	2462	0.18	0.18	10.05	11.31	13.73
HT20	MCS0	2	1	2412	0.17	0.17	9.80	11.13	13.52
HT20	MCS0	2	2	2417	0.17	0.17	13.97	14.09	17.04
HT20	MCS0	2	3	2422	0.17	0.17	15.89	15.99	18.95
HT20	MCS0	2	6	2437	0.17	0.17	17.71	17.97	20.85
HT20	MCS0	2	10	2457	0.17	0.17	16.62	16.53	19.58
HT20	MCS0	2	11	2462	0.17	0.17	11.19	11.13	14.17

Note: Measured power (dBm) has offset with cable loss.

TEST RESULTS DATA
Peak Power Spectral Density


2.4GHz Band												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm/3kHz)			DG (dBi)		Peak PSD Limit (dBm/3kHz)		Pass/Fail
					Ant 1	Ant 2	Worse + 3.01	Ant 1	Ant 2	Ant 1	Ant 2	
11b	1Mbps	2	1	2412	-5.95	-5.80	-2.79	2.46		8.00		Pass
11b	1Mbps	2	6	2437	-4.66	-4.97	-1.65	2.46		8.00		Pass
11b	1Mbps	2	11	2462	-4.67	-5.12	-1.66	2.46		8.00		Pass
11g	6Mbps	2	1	2412	-14.57	-13.50	-10.49	2.46		8.00		Pass
11g	6Mbps	2	2	2417	-11.48	-12.14	-8.47	2.46		8.00		Pass
11g	6Mbps	2	3	2422	-6.71	-6.98	-3.70	2.46		8.00		Pass
11g	6Mbps	2	6	2437	-7.95	-8.11	-4.94	2.46		8.00		Pass
11g	6Mbps	2	10	2457	-8.87	-8.47	-5.46	2.46		8.00		Pass
11g	6Mbps	2	11	2462	-14.88	-13.58	-10.57	2.46		8.00		Pass
HT20	MCS0	2	1	2412	-15.37	-14.12	-11.11	2.46		8.00		Pass
HT20	MCS0	2	2	2417	-11.00	-11.63	-7.99	2.46		8.00		Pass
HT20	MCS0	2	3	2422	-7.46	-7.91	-4.45	2.46		8.00		Pass
HT20	MCS0	2	6	2437	-6.40	-8.27	-3.39	2.46		8.00		Pass
HT20	MCS0	2	10	2457	-8.37	-8.94	-5.36	2.46		8.00		Pass
HT20	MCS0	2	11	2462	-14.78	-14.65	-11.64	2.46		8.00		Pass

Measured power density (dBm) has offset with cable loss.



Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos Zhang	Temperature :	24.2~25.6°C
		Relative Humidity :	37~39%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

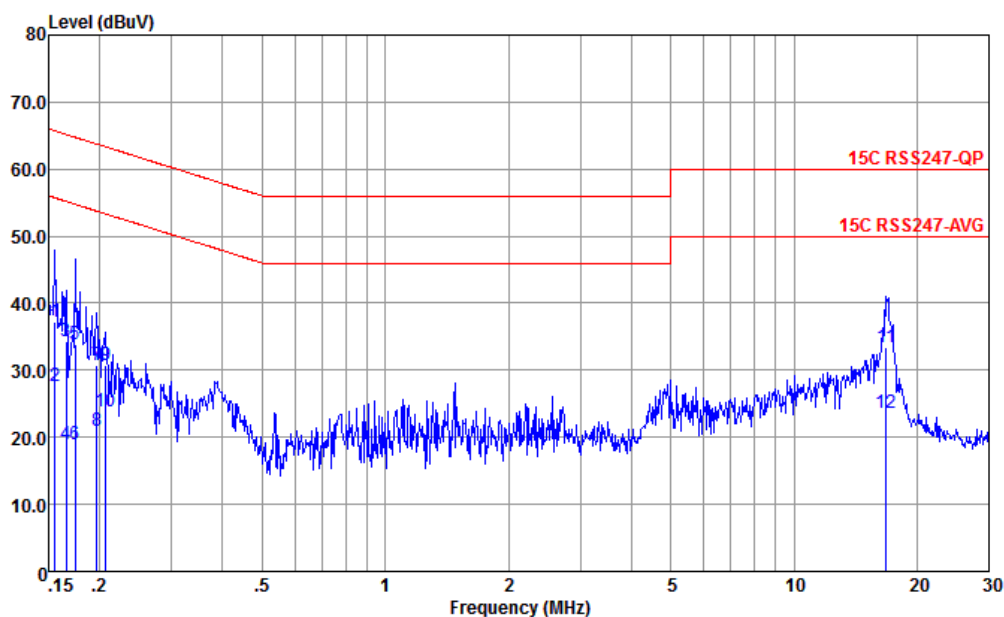


Site : CO01-KS
Condition : 15C RSS247-QP LISN-L-191028-CN02 LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.156	37.14	-28.55	65.69	26.60	0.07	10.47	QP
2	0.156	27.74	-27.95	55.69	17.20	0.07	10.47	Average
3	0.166	34.32	-30.84	65.16	23.80	0.08	10.44	QP
4	0.166	19.02	-36.14	55.16	8.50	0.08	10.44	Average
5	0.174	33.80	-30.97	64.77	23.30	0.08	10.42	QP
6	0.174	19.00	-35.77	54.77	8.50	0.08	10.42	Average
7	0.197	30.66	-33.10	63.76	20.20	0.09	10.37	QP
8	0.197	21.06	-32.70	53.76	10.60	0.09	10.37	Average
9	0.207	30.85	-32.47	63.32	20.40	0.09	10.36	QP
10	0.207	23.75	-29.57	53.32	13.30	0.09	10.36	Average
11	16.839	33.43	-26.57	60.00	21.19	1.80	10.44	QP
12 *	16.839	23.73	-26.27	50.00	11.49	1.80	10.44	Average



Test Engineer :	Amos Zhang	Temperature :	24.2~25.6°C
		Relative Humidity :	37~39%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

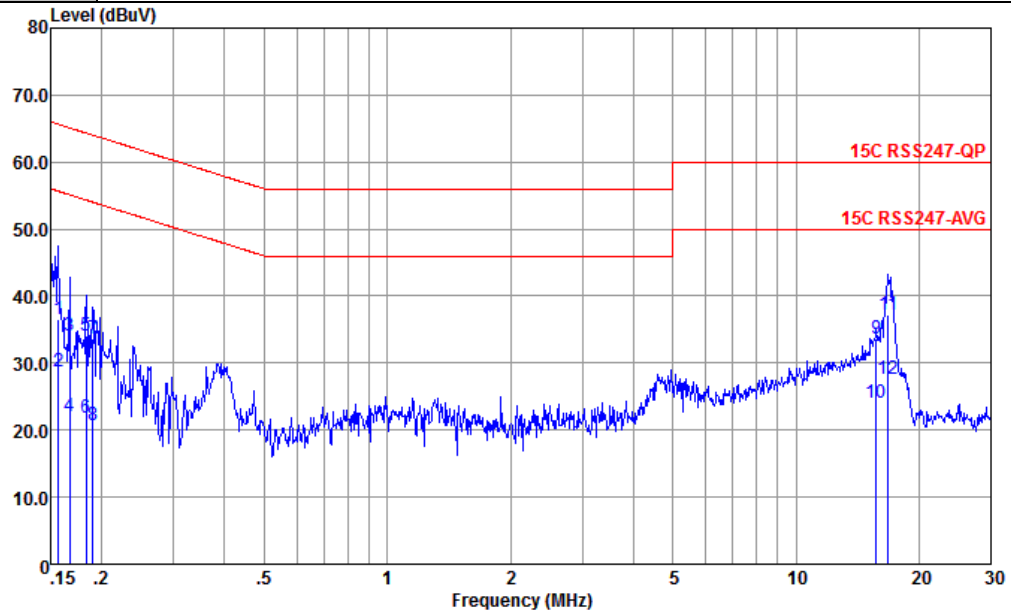

Site : CO01-KS
Condition : 15C RSS247-QP LISN-N-191028-CN02 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.156	36.52	-29.13	65.65	25.91	0.15	10.46	QP
2	0.156	28.82	-26.83	55.65	18.21	0.15	10.46	Average
3	0.167	34.19	-30.93	65.12	23.59	0.16	10.44	QP
4	0.167	22.09	-33.03	55.12	11.49	0.16	10.44	Average
5	0.183	34.06	-30.27	64.33	23.50	0.16	10.40	QP
6	0.183	21.76	-32.57	54.33	11.20	0.16	10.40	Average
7	0.190	33.65	-30.37	64.02	23.11	0.16	10.38	QP
8	0.190	20.75	-33.27	54.02	10.21	0.16	10.38	Average
9	15.718	33.67	-26.33	60.00	21.20	2.06	10.41	QP
10	15.718	24.07	-25.93	50.00	11.60	2.06	10.41	Average
11	16.839	37.31	-22.69	60.00	24.59	2.28	10.44	QP
12 *	16.839	27.61	-22.39	50.00	14.89	2.28	10.44	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission

2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 01 2412MHz		2387.61	58.87	-15.13	74	51.35	33.5	7.47	33.45	300	355	P	H
	!	2387.35	48.52	-5.48	54	41	33.5	7.47	33.45	300	355	A	H
	*	2414	115.65	-	-	108.24	33.37	7.48	33.44	300	355	P	H
	*	2414	112.53	-	-	105.12	33.37	7.48	33.44	300	355	A	H
		2383.84	56.53	-17.47	74	49.25	33.29	7.44	33.45	274	320	P	V
		2387.22	46.57	-7.43	54	39.05	33.5	7.47	33.45	274	320	A	V
	*	2414	111.13	-	-	103.72	33.37	7.48	33.44	274	320	P	V
	*	2414	108.11	-	-	100.7	33.37	7.48	33.44	274	320	A	V
802.11b CH 11 2462MHz	*	2464	113.17	-	-	106.08	32.99	7.53	33.43	298	23	P	H
	*	2464	110.19	-	-	103.1	32.99	7.53	33.43	298	23	A	H
		2483.5	57.15	-16.85	74	50.17	32.86	7.55	33.43	298	23	P	H
		2483.5	46.38	-7.62	54	39.4	32.86	7.55	33.43	298	23	A	H
	*	2462	110.16	-	-	103.07	32.99	7.53	33.43	102	333	P	V
	*	2460	107.06	-	-	99.97	32.99	7.53	33.43	102	333	A	V
		2497.36	56.34	-17.66	74	49.47	32.73	7.56	33.42	102	333	P	V
		2483.5	45.1	-8.9	54	38.12	32.86	7.55	33.43	102	333	A	V
Remark	1. No other spurious found.												
	2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11b (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11b CH 01 2412MHz		4824	49.02	-24.98	74	65.06	34.84	10.84	61.72	300	0	P	H
		7236	47.75	-37.65	85.4	60.01	36.34	13.3	61.9	300	0	P	H
		4824	54.56	-19.44	74	70.6	34.84	10.84	61.72	222	128	P	V
	!	4824	50.82	-3.18	54	66.86	34.84	10.84	61.72	222	128	A	V
802.11b CH 06 2437MHz		4874	50.45	-23.55	74	66.44	34.83	10.89	61.71	300	0	P	H
		7311	44.29	-29.71	74	56.45	36.39	13.35	61.9	300	0	P	H
		4874	56.3	-17.7	74	72.29	34.83	10.89	61.71	115	102	P	V
	!	4874	49.8	-4.2	54	65.79	34.83	10.89	61.71	115	102	A	V
		7311	54.93	-19.07	74	67.09	36.39	13.35	61.9	124	147	P	V
		7311	45.86	-8.14	54	58.02	36.39	13.35	61.9	127	147	A	V
802.11b CH 11 2462MHz		4924	49.5	-24.5	74	65.46	34.82	10.93	61.71	300	0	P	H
		7386	43.6	-30.4	74	55.65	36.44	13.41	61.9	300	0	P	H
		4924	49.11	-24.89	74	65.07	34.82	10.93	61.71	300	360	P	V
		7386	46.51	-27.49	74	58.56	36.44	13.41	61.9	300	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
WIFI 802.11g (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 01 2412MHz		2389.56	63.18	-10.82	74	55.66	33.5	7.47	33.45	299	353	P	H
	!	2389.95	50.25	-3.75	54	42.73	33.5	7.47	33.45	299	353	A	H
	*	2412	113.12	-	-	105.71	33.37	7.48	33.44	299	353	P	H
	*	2410	105.27	-	-	97.86	33.37	7.48	33.44	299	353	A	H
		2389.82	58.22	-15.78	74	50.7	33.5	7.47	33.45	299	282	P	V
		2389.95	46.71	-7.29	54	39.19	33.5	7.47	33.45	299	282	A	V
	*	2410	107.19	-	-	99.78	33.37	7.48	33.44	299	282	P	V
	*	2410	99.23	-	-	91.82	33.37	7.48	33.44	299	282	A	V
802.11g CH 11 2462MHz		2483.8	65.64	-8.36	74	58.66	32.86	7.55	33.43	288	354	P	H
	!	2483.5	49.48	-4.52	54	42.5	32.86	7.55	33.43	288	354	A	H
	*	2460	112.09	-	-	105	32.99	7.53	33.43	288	354	P	H
	*	2460	104.28	-	-	97.19	32.99	7.53	33.43	288	354	A	H
		2483.86	58.7	-15.3	74	51.72	32.86	7.55	33.43	100	30	P	V
		2483.5	46.27	-7.73	54	39.29	32.86	7.55	33.43	100	30	A	V
	*	2458	106.85	-	-	99.76	32.99	7.53	33.43	100	30	P	V
	*	2458	99.08	-	-	91.99	32.99	7.53	33.43	100	30	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 02 2417MHz		2388.91	62.6	-11.4	74	55.08	33.5	7.47	33.45	300	351	P	H
	!	2389.69	50.5	-3.5	54	42.98	33.5	7.47	33.45	300	351	A	H
	*	2420	113.28	-	-	105.98	33.24	7.5	33.44	300	351	P	H
	*	2418	105.48	-	-	98.07	33.37	7.48	33.44	300	351	A	H
		2389.3	59.58	-14.42	74	52.06	33.5	7.47	33.45	300	85	P	V
		2389.95	47.18	-6.82	54	39.66	33.5	7.47	33.45	300	85	A	V
	*	2418	108.84	-	-	101.43	33.37	7.48	33.44	300	85	P	V
	*	2418	100.86	-	-	93.45	33.37	7.48	33.44	300	85	A	V
802.11g CH 03 2422MHz		2389.69	62.15	-11.85	74	54.63	33.5	7.47	33.45	292	358	P	H
	!	2389.95	50.81	-3.19	54	43.29	33.5	7.47	33.45	292	358	A	H
		2487.76	57.32	-16.68	74	50.45	32.73	7.56	33.42	292	358	P	H
		2483.8	45.98	-8.02	54	39	32.86	7.55	33.43	292	358	A	H
	*	2424	115.89	-	-	108.59	33.24	7.5	33.44	292	358	P	H
	*	2424	108.09	-	-	100.79	33.24	7.5	33.44	292	358	A	H
		2389.17	60.7	-13.3	74	53.18	33.5	7.47	33.45	100	30	P	V
		2389.3	49.33	-4.67	54	41.81	33.5	7.47	33.45	100	30	A	V
		2493.64	56.69	-17.31	74	49.82	32.73	7.56	33.42	100	30	P	V
		2500	45.64	-8.36	54	38.77	32.73	7.56	33.42	100	30	A	V
	*	2422	110.5	-	-	103.2	33.24	7.5	33.44	100	30	P	V
	*	2422	103.2	-	-	95.9	33.24	7.5	33.44	100	30	A	V
802.11g CH 10 2457MHz		2483.8	62.65	-11.35	74	55.67	32.86	7.55	33.43	250	120	P	H
	!	2484.4	50.57	-3.43	54	43.59	32.86	7.55	33.43	250	120	A	H
	*	2460	114.78	-	-	107.69	32.99	7.53	33.43	250	120	P	H
	*	2460	106.84	-	-	99.75	32.99	7.53	33.43	250	120	A	H
		2485.24	59.08	-14.92	74	52.1	32.86	7.55	33.43	100	4	P	V
		2484.58	47.74	-6.26	54	40.76	32.86	7.55	33.43	100	4	A	V
	*	2458	111.16	-	-	104.07	32.99	7.53	33.43	100	4	P	V
	*	2458	103.34	-	-	96.25	32.99	7.53	33.43	100	4	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11g (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 01 2412MHz		4824	44.3	-29.7	74	60.34	34.84	10.84	61.72	300	0	P	H
		4824	43.19	-30.81	74	59.23	34.84	10.84	61.72	300	360	P	V
802.11g CH 06 2437MHz		4874	47.97	-26.03	74	63.96	34.83	10.89	61.71	300	0	P	H
		7311	42.54	-31.46	74	54.7	36.39	13.35	61.9	300	0	P	H
		4874	47.09	-26.91	74	63.08	34.83	10.89	61.71	300	360	P	V
		7311	48.67	-25.33	74	60.83	36.39	13.35	61.9	300	360	P	V
802.11g CH 11 2462MHz		4924	42.9	-31.1	74	58.86	34.82	10.93	61.71	300	0	P	H
		7386	42.59	-31.41	74	54.64	36.44	13.41	61.9	300	0	P	H
		4926	43.73	-30.27	74	59.69	34.82	10.93	61.71	300	360	P	V
		7386	43.42	-30.58	74	55.47	36.44	13.41	61.9	300	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 02 2417MHz		4834	43.27	-30.73	74	59.3	34.83	10.86	61.72	300	0	P	H
		7251	43.91	-30.09	74	56.14	36.36	13.31	61.9	300	0	P	H
		4836	44.39	-29.61	74	60.42	34.83	10.86	61.72	300	360	P	V
		7251	43.94	-30.06	74	56.17	36.36	13.31	61.9	300	360	P	V
802.11g CH 03 2422MHz		4842	45.71	-28.29	74	61.74	34.83	10.86	61.72	300	0	P	H
		7266	43.26	-30.74	74	55.47	36.37	13.32	61.9	300	0	P	H
		4848	45.66	-28.34	74	61.69	34.83	10.86	61.72	300	360	P	V
		7266	43.24	-30.76	74	55.45	36.37	13.32	61.9	300	360	P	V
802.11g CH 10 2457MHz		4914	45.78	-28.22	74	61.75	34.82	10.92	61.71	300	0	P	H
		7371	44.03	-29.97	74	56.1	36.43	13.4	61.9	300	0	P	H
		4914	47.25	-26.75	74	63.22	34.82	10.92	61.71	300	360	P	V
		7371	44.92	-29.08	74	56.99	36.43	13.4	61.9	300	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 01 2412MHz		2389.95	64.34	-9.66	74	56.82	33.5	7.47	33.45	298	354	P	H
	!	2389.95	50.78	-3.22	54	43.26	33.5	7.47	33.45	298	354	A	H
	*	2410	112.68	-	-	105.27	33.37	7.48	33.44	298	354	P	H
	*	2412	105.27	-	-	97.86	33.37	7.48	33.44	298	354	A	H
		2389.82	59.09	-14.91	74	51.57	33.5	7.47	33.45	162	327	P	V
		2389.95	46.91	-7.09	54	39.39	33.5	7.47	33.45	162	327	A	V
	*	2412	107.14	-	-	99.73	33.37	7.48	33.44	162	327	P	V
	*	2412	99.39	-	-	91.98	33.37	7.48	33.44	162	327	A	V
802.11n HT20 CH 11 2462MHz		2483.86	64.7	-9.3	74	57.72	32.86	7.55	33.43	172	0	P	H
	!	2483.5	50.29	-3.71	54	43.31	32.86	7.55	33.43	172	0	A	H
	*	2464	110.84	-	-	103.75	32.99	7.53	33.43	172	0	P	H
	*	2464	103.25	-	-	96.16	32.99	7.53	33.43	172	0	A	H
		2483.56	60.46	-13.54	74	53.48	32.86	7.55	33.43	103	331	P	V
		2483.5	46.22	-7.78	54	39.24	32.86	7.55	33.43	103	331	A	V
	*	2460	106.77	-	-	99.68	32.99	7.53	33.43	103	331	P	V
	*	2460	99	-	-	91.91	32.99	7.53	33.43	103	331	A	V



WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n20 CH 02 2417MHz		2388.91	62.44	-11.56	74	54.92	33.5	7.47	33.45	300	345	P	H
	!	2388.52	50.92	-3.08	54	43.4	33.5	7.47	33.45	300	345	A	H
	*	2416	113.49	-	-	106.08	33.37	7.48	33.44	300	345	P	H
	*	2416	105.72	-	-	98.31	33.37	7.48	33.44	300	345	A	H
		2389.69	59.59	-14.41	74	52.07	33.5	7.47	33.45	276	310	P	V
		2389.69	48.66	-5.34	54	41.14	33.5	7.47	33.45	276	310	A	V
	*	2416	108.26	-	-	100.85	33.37	7.48	33.44	276	310	P	V
	*	2416	100.5	-	-	93.09	33.37	7.48	33.44	276	310	A	V
802.11n HT20 CH 03 2422MHz		2386.83	63.12	-10.88	74	55.6	33.5	7.47	33.45	293	357	P	H
		2389.95	50.8	-3.2	54	43.28	33.5	7.47	33.45	293	357	A	H
		2490.1	56.9	-17.1	74	50.03	32.73	7.56	33.42	293	357	P	H
		2483.5	45.81	-8.19	54	38.83	32.86	7.55	33.43	293	357	A	H
	*	2424	114.19	-	-	106.89	33.24	7.5	33.44	293	357	P	H
	*	2424	106.77	-	-	99.47	33.24	7.5	33.44	293	357	A	H
		2378.9	61.09	-12.91	74	53.81	33.29	7.44	33.45	100	32	P	V
		2389.95	50.1	-3.9	54	42.58	33.5	7.47	33.45	100	32	A	V
		2494.9	56.25	-17.75	74	49.38	32.73	7.56	33.42	100	32	P	V
		2496.82	45.5	-8.5	54	38.63	32.73	7.56	33.42	100	32	A	V
	*	2422	109.61	-	-	102.31	33.24	7.5	33.44	100	32	P	V
	*	2422	102.38	-	-	95.08	33.24	7.5	33.44	100	32	A	V
802.11n20 CH 10 2457MHz		2485.42	64.17	-9.83	74	57.19	32.86	7.55	33.43	249	226	P	H
	!	2483.5	50.8	-3.2	54	43.82	32.86	7.55	33.43	249	226	A	H
	*	2456	113.67	-	-	106.58	32.99	7.53	33.43	249	226	P	H
	*	2456	106.56	-	-	99.47	32.99	7.53	33.43	249	226	A	H
		2485.18	60.79	-13.21	74	53.81	32.86	7.55	33.43	100	6	P	V
		2483.5	47.88	-6.12	54	40.9	32.86	7.55	33.43	100	6	A	V
	*	2458	110.98	-	-	103.89	32.99	7.53	33.43	100	6	P	V
	*	2458	103.23	-	-	96.14	32.99	7.53	33.43	100	6	A	V
Remark	1. No other spurious found.												
	2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 01 2412MHz		4824	42.95	-31.05	74	58.99	34.84	10.84	61.72	300	0	P	H
		4824	44.21	-29.79	74	60.25	34.84	10.84	61.72	300	360	P	V
802.11n HT20 CH 06 2437MHz		4874	44.87	-29.13	74	60.86	34.83	10.89	61.71	300	0	P	H
		7311	46.7	-27.3	74	58.86	36.39	13.35	61.9	300	0	P	H
		4874	47.81	-26.19	74	63.8	34.83	10.89	61.71	300	360	P	V
		7311	47.82	-26.18	74	59.98	36.39	13.35	61.9	300	360	P	V
802.11n HT20 CH 11 2462MHz		4924	42.18	-31.82	74	58.14	34.82	10.93	61.71	300	0	P	H
		7386	42.22	-31.78	74	54.27	36.44	13.41	61.9	300	0	P	H
		4924	42.32	-31.68	74	58.28	34.82	10.93	61.71	300	360	P	V
		7386	43.38	-30.62	74	55.43	36.44	13.41	61.9	300	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n20 CH 02 2417MHz		4834	41.57	-32.43	74	57.6	34.83	10.86	61.72	300	0	P	H
		7251	42.69	-31.31	74	54.92	36.36	13.31	61.9	300	0	P	H
		4834	43.93	-30.07	74	59.96	34.83	10.86	61.72	300	360	P	V
		7251	43.3	-30.7	74	55.53	36.36	13.31	61.9	300	360	P	V
802.11n20 CH 03 2422MHz		4842	42.52	-31.48	74	58.55	34.83	10.86	61.72	300	0	P	H
		7266	43.19	-30.81	74	55.4	36.37	13.32	61.9	300	0	P	H
		4842	45.42	-28.58	74	61.45	34.83	10.86	61.72	300	360	P	V
		7266	44.36	-29.64	74	56.57	36.37	13.32	61.9	300	360	P	V
802.11n20 CH 10 2457MHz		4914	44.17	-29.83	74	60.14	34.82	10.92	61.71	300	0	P	H
		7371	43.57	-30.43	74	55.64	36.43	13.4	61.9	300	0	P	H
		4914	45.49	-28.51	74	61.46	34.82	10.92	61.71	300	360	P	V
		7371	42.84	-31.16	74	54.91	36.43	13.4	61.9	300	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

Emission below 1GHz

2.4GHz WIFI 802.11HT20 (LF)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz 802.11n HT20 LF		52.31	17.27	-22.73	40	34.9	13.9	1.63	33.16	-	-	P	H
		154.16	22.38	-21.12	43.5	35.92	16.86	2.8	33.2	-	-	P	H
		277.35	26.48	-19.52	46	36.68	19.2	3.75	33.15	-	-	P	H
		650.8	25.99	-20.01	46	26.35	26.5	5.74	32.6	-	-	P	H
		903	28.27	-17.73	46	24.4	29.21	6.75	32.09	100	0	P	H
		985.45	29.08	-24.92	54	23.38	30.72	7.05	32.07	-	-	P	H
		30	23.3	-16.7	40	30.26	25.1	1.24	33.3	-	-	P	V
		52.31	25.84	-14.16	40	43.47	13.9	1.63	33.16	100	0	P	V
		94.99	19.79	-23.71	43.5	35.14	15.45	2.2	33	-	-	P	V
		151.25	18.67	-24.83	43.5	32.06	17.04	2.77	33.2	-	-	P	V
		572.23	23.69	-22.31	46	25.44	25.58	5.38	32.71	-	-	P	V
		850.62	27.23	-18.77	46	23.58	29.3	6.55	32.2	-	-	P	V
Remark	1. No other spurious found.												
	2. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)

2. Level(dBμV/m) =

Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)

= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.

Appendix D. Duty Cycle Plots


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11b	100	-	-	10Hz
802.11g	100	-	-	10Hz
802.11n HT20	100	-	-	10Hz

802.11b





802.11g

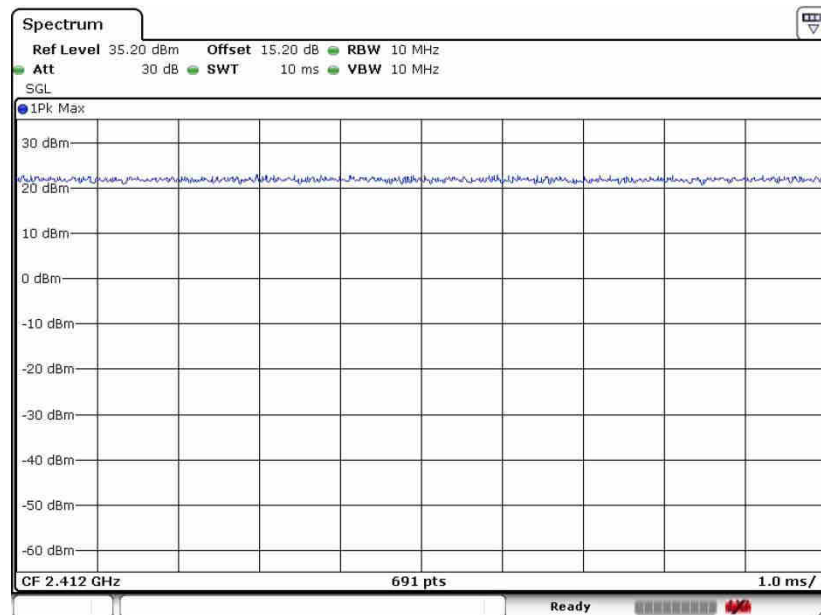

802.11n HT20

