

TEST DATA OF JMA-2344

Type	JMA-2343	Ser.No. LX54346
Scanner Unit	NKE-249	Ser.No. LX34431
Display Unit	NCD-4170	Ser.No. LX24346
Ship's Main	DC10.8 – 42 V	

Date October.28.2002

Section Chief A. Yoshida

inspector I. Nakamura

1. Mechanical Tests

Appearance and Structure

Scanner Unit	Good
--------------	------

Display Unit	Good
--------------	------

2. Electrical Tests

2.1 Working of each operation unit

Scanner Unit	Good
--------------	------

Control Panel	Good
---------------	------

STBY/OFF Key	Good
--------------	------

X-MIT/OFF Key	Good
---------------	------

EBL Key	Good
---------	------

VRM Key	Good
---------	------

BRIL/HL OFF Key	Good
-----------------	------

MENU Key	Good
----------	------

ENTER Key	Good
-----------	------

Range Key	Good
-----------	------

Cross Key	Good
-----------	------

Soft Key 1	Good
------------	------

Soft Key 2	Good
------------	------

Soft Key 3	Good
------------	------

Soft Key 4	Good
------------	------

[TUNE] Control	Good
----------------	------

[GAIN] Control	Good
----------------	------

[STC] Control	Good
---------------	------

[FTC] Control	Good
---------------	------

2.2 Scanner Unit

VSWR	frequency (MHz)	VSWR
	9380	1.2
	9410	1.2
	9440	1.2
Scanner Rotation Speed		27 rpm

2.3 Transmitter

Magnetron Ser.No.	E0099C
Operating Frequency	
(at 0.08 μ s PULS 0.75 n.m.)	9415 MHz
(at 0.25 μ s PULS 3.0 n.m.)	9415 MHz
(at 0.5 μ s PULS 6.0 n.m.)	9414 MHz
(at 1.0 μ s PULS 12.0 n.m.)	9413 MHz
Peak Output Power	
(at 0.08 μ s PULS 0.75 n.m.)	4.33 kW
(at 0.25 μ s PULS 3.0 n.m.)	4.63 kW
(at 0.5 μ s PULS 6.0 n.m.)	4.87 kW
(at 1.0 μ s PULS 12.0 n.m.)	4.95 kW
Pulse Length	
(at 0.08 μ s PULS 0.75 n.m.)	0.08 μ s
(at 0.25 μ s PULS 3.0 n.m.)	0.23 μ s
(at 0.5 μ s PULS 6.0 n.m.)	0.44 μ s
(at 1.0 μ s PULS 12.0 n.m.)	0.84 μ s

2.3 Receiver

MIC Frontend Ser.No.	A0209A
Diode limiter Ser.No.	Q8154A
IF Center Frequency	60 MHz
IF Bandwidth	20/6/3 MHz

2.4 Display


Input Voltage and Current	DC.24V 2.43A (58W)
Repetition Frequency	
(0.08 μ s)	2250 Hz
(0.25 μ s)	1700 Hz
(0.5 μ s)	1200 Hz
(1.0 μ s)	650 Hz

3. Overall Test

Working Time of Timer	1.5 m
Input Variation (10.8Vdc – 42Vdc)	Good
Overall Sensitivity	Good
Minimum Range	Good
Bearing Accuracy	Good
Mechanical Noise	Good

(Sec. 2.985) 1.0 RF Power Output

(Sec. 2.989) 2.0 Occupied Bandwidth

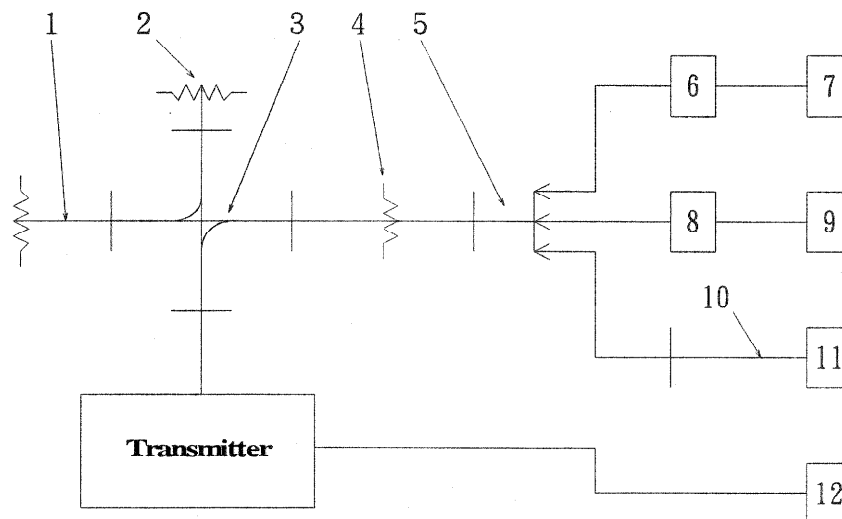

1:Dummy Load	4D104	Shimada
2:high power Dummy Load	4D371A	Shimada
3:Directional Coupler	5D102A	Shimada
Coupling 30dB		
Directivity 30dB		
4:Attenuator	S382C	HP
5:Adaptor	S281A	HP
6:Power Sensor	8481A	HP
7:Power Meter	435A	HP
8:Crystal Detector	423B	HP
9:Oscilloscope	2445B	Tektronix
10:Coaxial Cable	MI-04	SONY/Tectronix
11:Spectrum Analyzer	8592A	HP
12:Frequency Counter	5300A	HP

Measurement Point : Trasmmitter Output

FCC Submittal Material Data

(Sec. 2.985)

1.0 RF Power Output

1.1 Peak Power

(at 0.08 μ s PULS 0.75 n.m.)	3.33 kW
(at 0.25 μ s PULS 1.5 n.m. long)	3.33 kW
(at 0.5 μ s PULS 3 n.m. long)	3.39 kW
(at 1.0 μ s PULS 12n.m.)	3.39 kW

1.2 Average Power


(at 0.08 μ s PULS 0.75 n.m.)	0.75 W
(at 0.25 μ s PULS 1.5 n.m. long)	1.53 W
(at 0.5 μ s PULS 3 n.m. long)	1.91 W
(at 1.0 μ s PULS 12n.m.)	1.94 W

1.3 Load Impedance

VSWR 1.05 at 9.36 – 9.46 GHz

(Sec. 2.989) 2.0 Occupid Bandwidth
 2.1 0.08 μ S Pulse PRF 2250Hz
 0.08 μ S Pulse Length 0.10 μ S

Scale
 10dB/Div

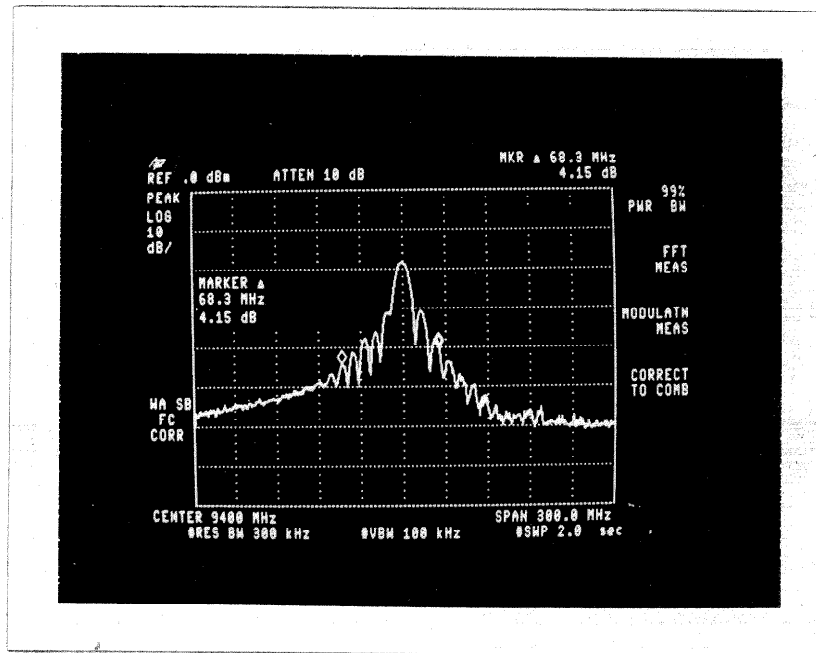


RF Spectrum
 0.08 μ S Pulse
 OBW=68.3MHz

Scale 30MHz/Div
 Center Frequency 9400MHz

(Sec. 2.987)

Scale
 20mV/Div

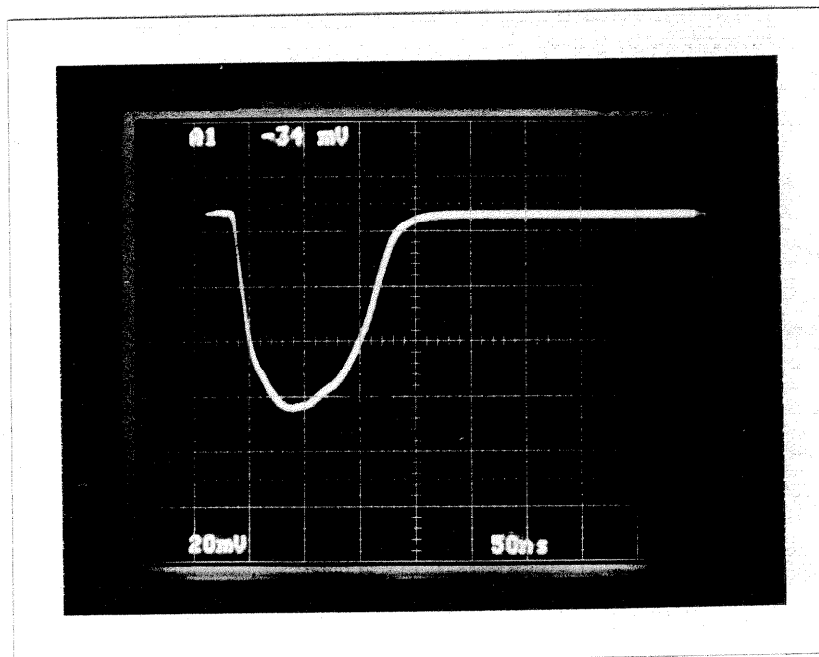

← - 3 dB

Detected RF
 Pulse


0.08 μ S Pulse

Scale 0.05 μ S/Div

(Sec. 2.989)

2.2 0.25 μ S Pulse PRF 1700Hz
0.25 μ S Pulse Length 0.27 μ S

Scale
10dB/Div

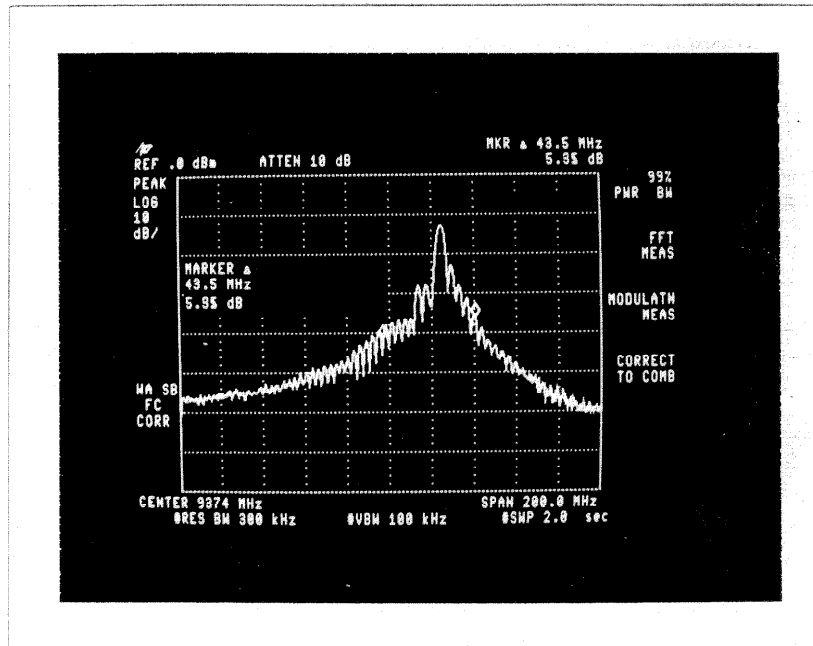


RF Spectrum
0.25 μ S Pulse
OBW=43.5MHz

Scale 20MHz/Div
Center Frequency 9374MHz

(Sec. 2.987)

Scale
20mV/Div

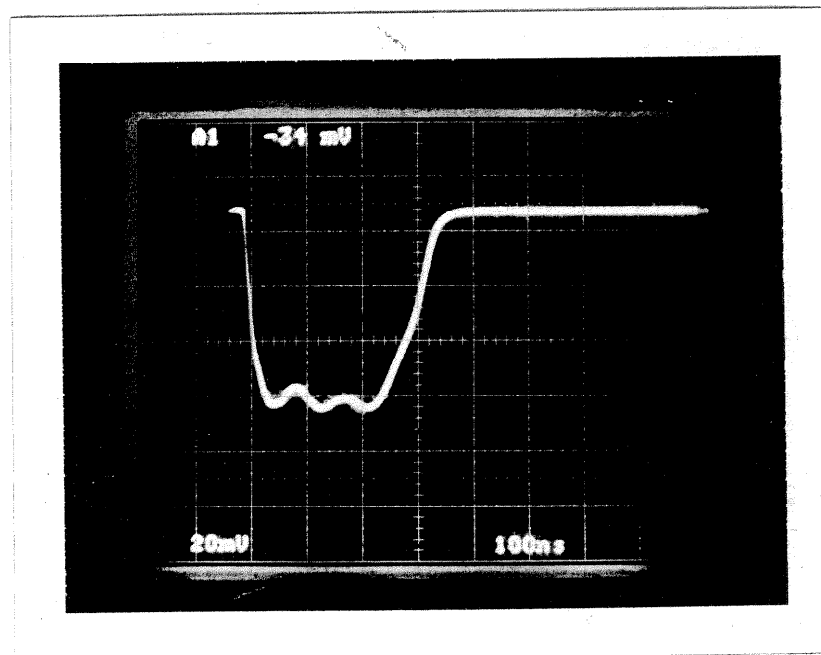

← -3 dB

Detected RF
Pulse


0.25 μ S Pulse

Scale 0.1 μ S/Div

(Sec. 2.989)

2.3 0.5 μ S Pulse PRF 1200Hz
0.5 μ S Pulse Length 0.47 μ S

Scale
10dB/Div

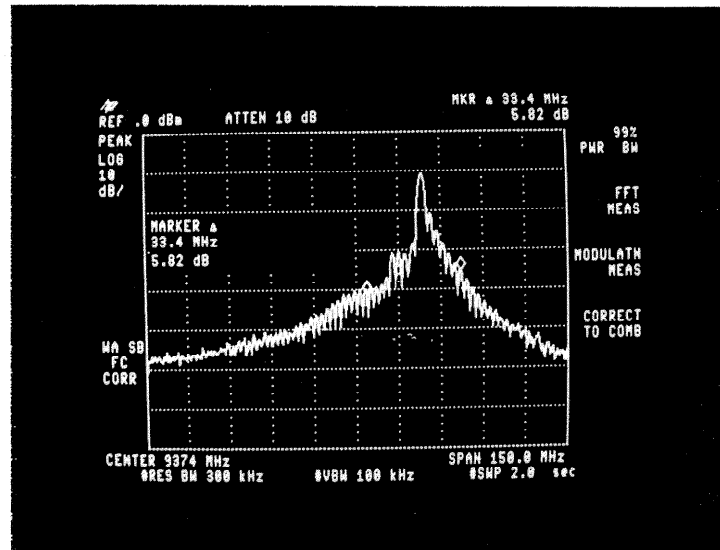


RF Spectrum
0.5 μ S Pulse
OBW=33.4MHz

Scale 15MHz/Div
Center Frequency 9374MHz

(Sec. 2.987)

Scale
20mV/Div

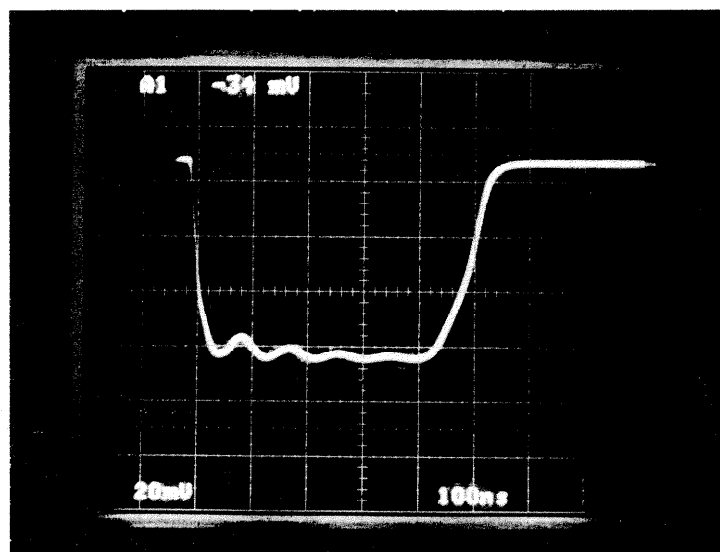

← -3 dB

Detected RF
Pulse


0.5 μ S Pulse

Scale 0.1 μ S/Div

(Sec. 2.989)

2.4 $1.0\ \mu\text{S}$ Pulse PRF 650Hz
 $1.0\ \mu\text{S}$ Pulse Length $0.88\ \mu\text{S}$

Scale
10dB/Div

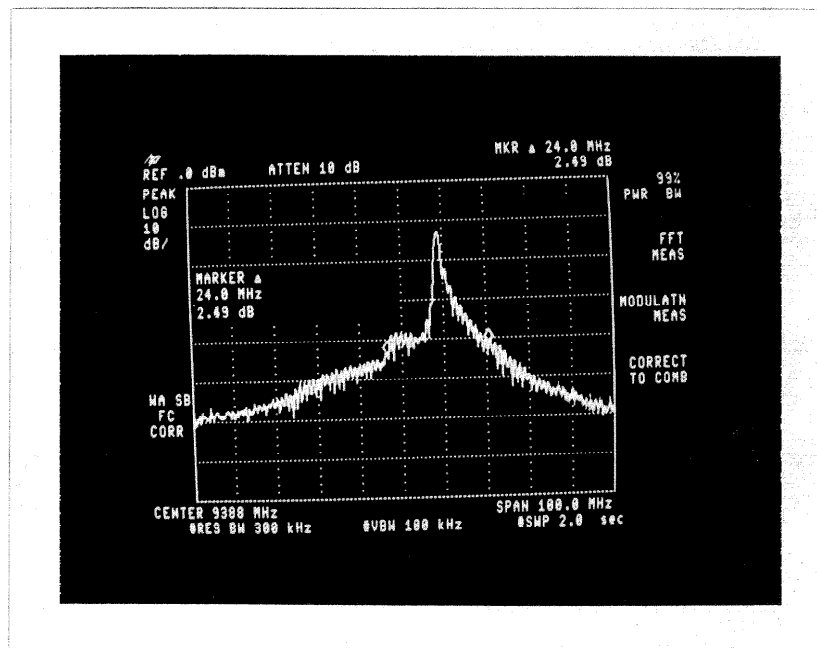


RF Spectrum
 $1.0\ \mu\text{S}$ Pulse

OBW=24.0MHz

Scale 10MHz/Div
Center Frequency 9388MHz

(Sec. 2.987)

Scale
20mV/Div

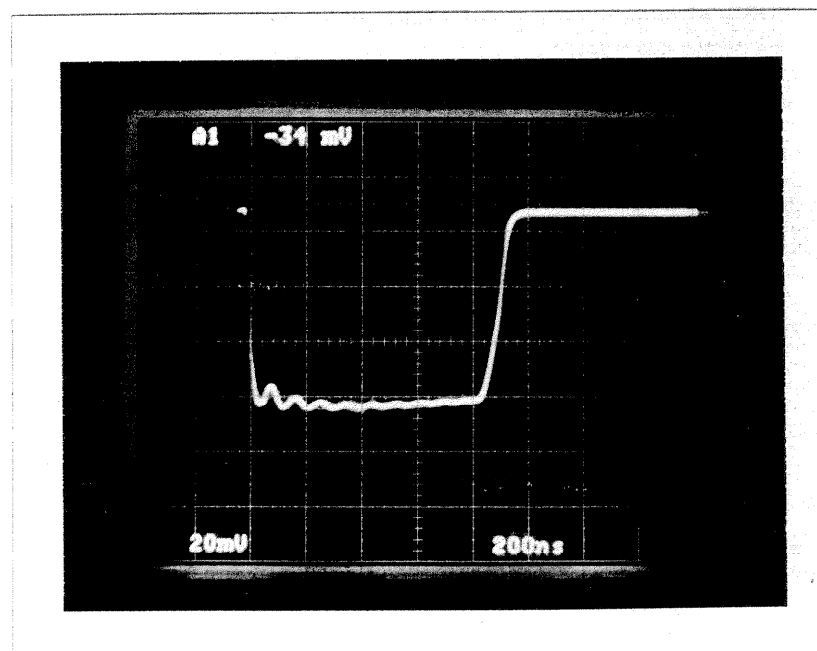

← - 3 dB


Detected RF
Pulse

$1.0\ \mu\text{S}$ Pulse

Scale $0.2\ \mu\text{S}/\text{Div}$

(Sec.2.991) 3.0 Spurious signal at antenna port

condition 1 : 0 to 20 GHz

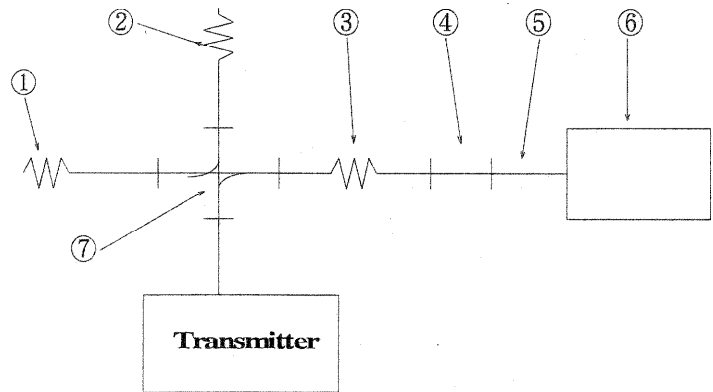


1. Dummy Load	4D104	Shimada
2. high power Dummy Load	4D371A	Shimada
3. Attenuator	S382C	HP
4. Adaptor	S281A	HP
5. Coaxial Cable	*****	HP
6. Spectrum Analyzer	8563A	HP
7. Direction Coupler	5D102A	Shimada
Coupling	30dB	
Directivity	30dB	

Attenuation 3 :30 dB

Measurement Point :Transmitter Output

(Sec. 2.991)

Scale
↑ 10dB/Div
→ 290MHz/Div

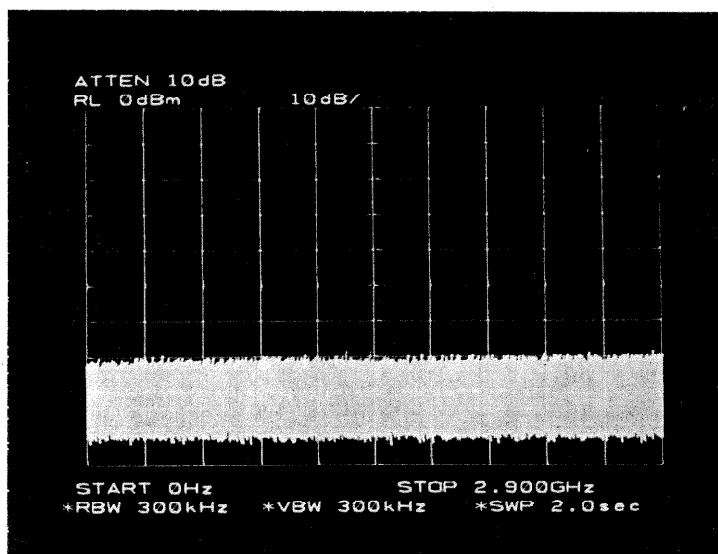


Spurious
Signal

OFF

0 to 2.9 GHz

Scale
↑ 10dB/Div
→ 290MHz/Div

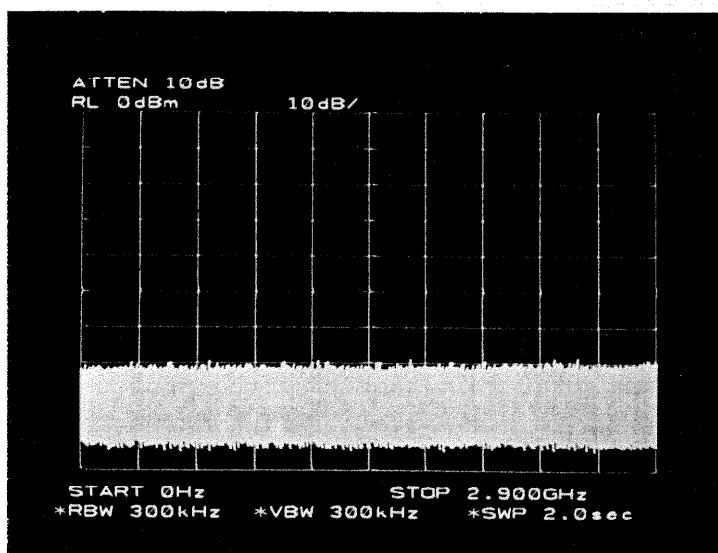


Spurious
Signal

Stand-By

0 to 2.9 GHz

Scale
↑ 10dB/Div
→ 290MHz/Div

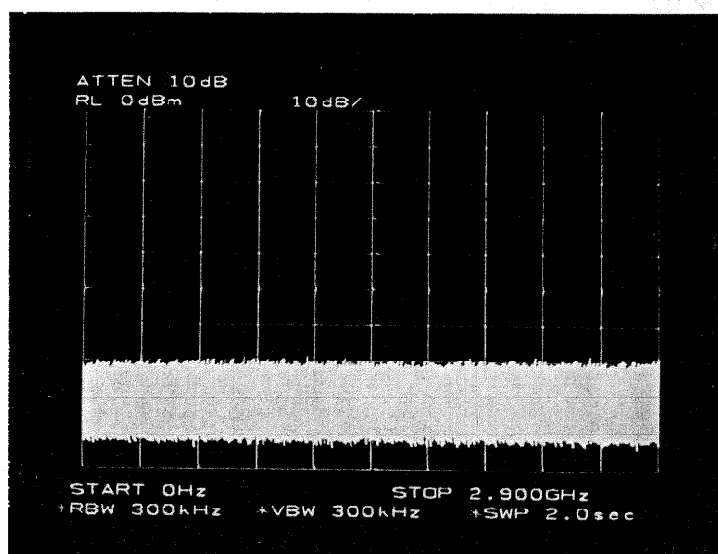


Spurious
Signal

0.08 μ S Pulse

0 to 2.9 GHz


(Sec. 2.991)

Scale
↑ 10dB/Div
→ 290MHz/Div

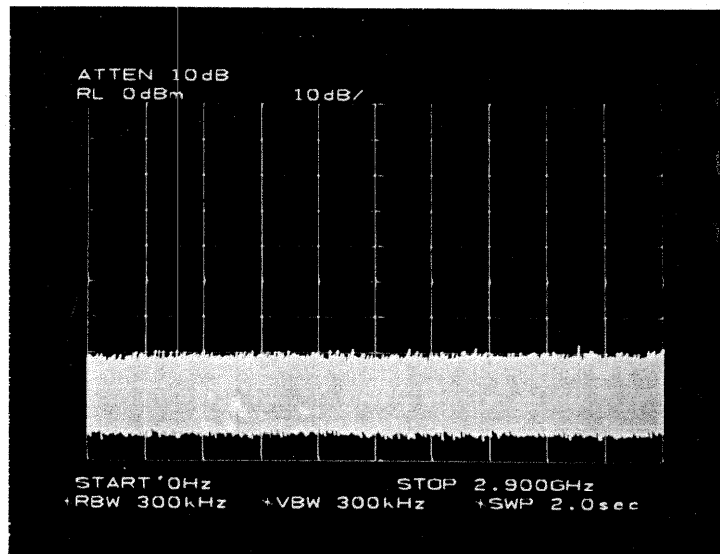


Spurious
Signal
0.25 μ S Pulse
0 to 2.9 GHz

Scale
↑ 10dB/Div
→ 290MHz/Div

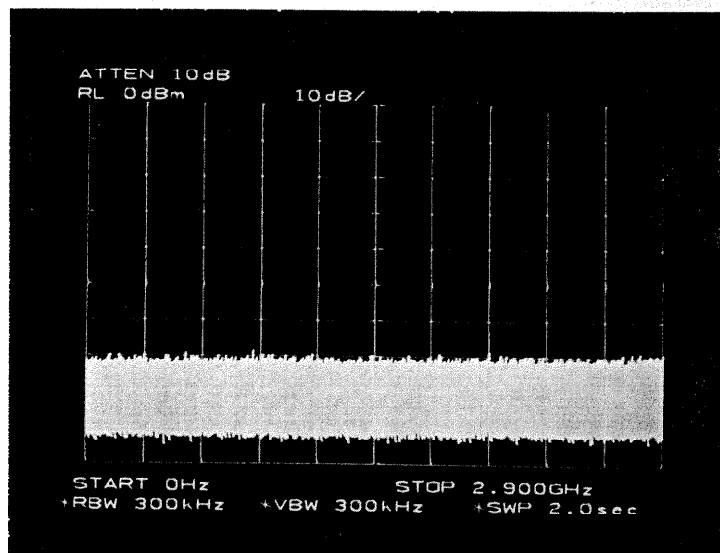

Spurious
Signal
0.5 μ S Pulse
0 to 2.9 GHz


Scale
↑ 10dB/Div
→ 290MHz/Div

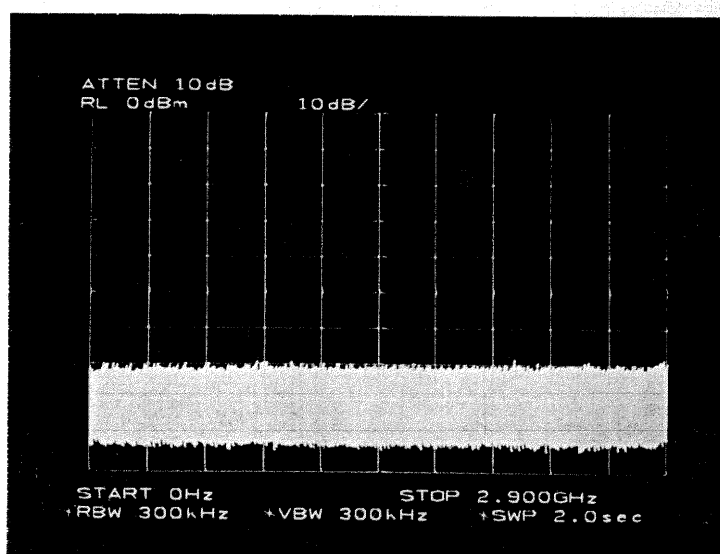

Spurious
Signal
1.0 μ S Pulse
0 to 2.9 GHz

(Sec. 2.991)

Scale
↑ 10dB/Div
→ 350MHz/Div

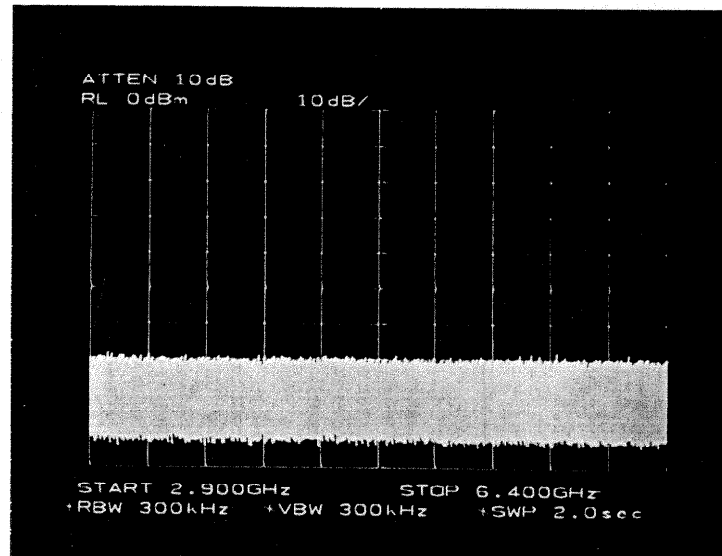


Spurious
Signal

OFF

2.9 to 6.4 GHz

Scale
↑ 10dB/Div
→ 350MHz/Div

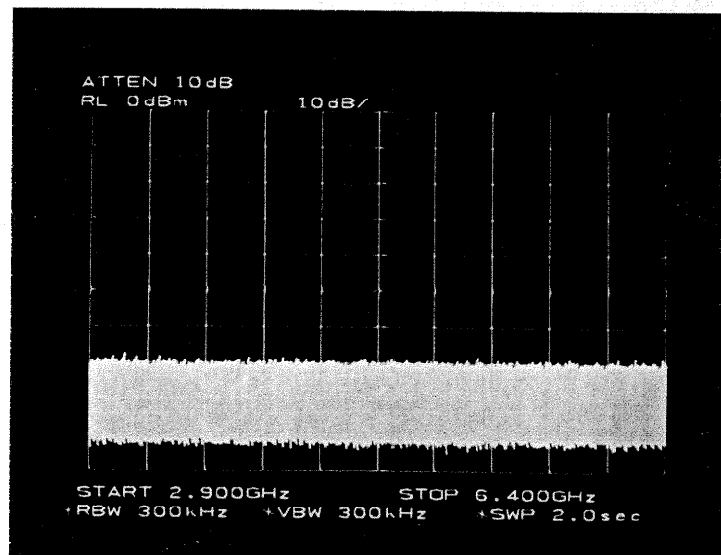


Spurious
Signal

Stand-By

2.9 to 6.4 GHz

Scale
↑ 10dB/Div
→ 350MHz/Div

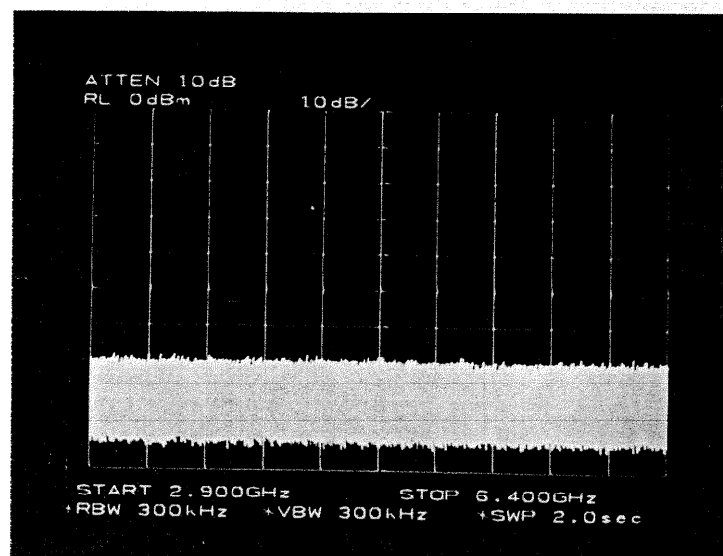


Spurious
Signal

0.08 μ S Pulse

2.9 to 6.4 GHz

(Sec. 2.991)

Scale
↑ 10dB/Div
→ 350MHz/Div

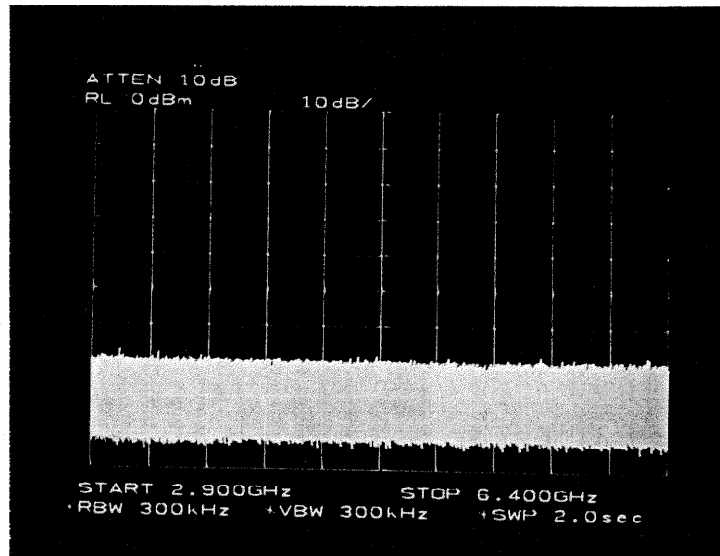


Spurious
Signal

0.25 μ S Pulse

2.9 to 6.4 GHz

Scale
↑ 10dB/Div
→ 350MHz/Div

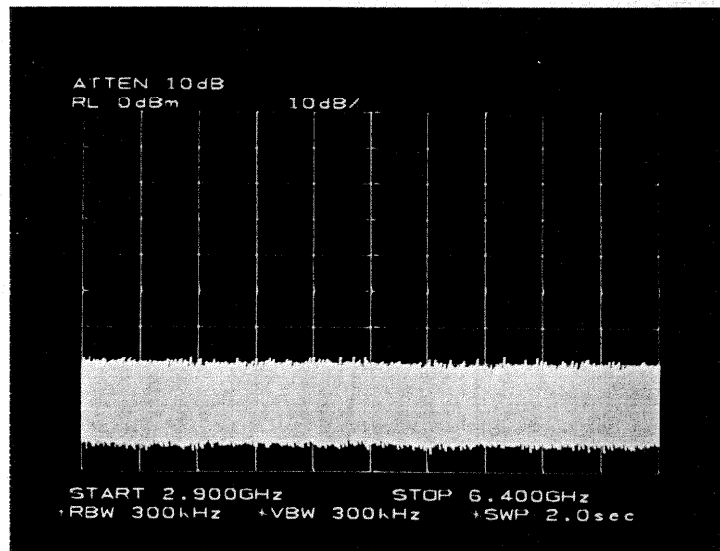


Spurious
Signal

0.5 μ S Pulse

2.9 to 6.4 GHz

Scale
↑ 10dB/Div
→ 350MHz/Div

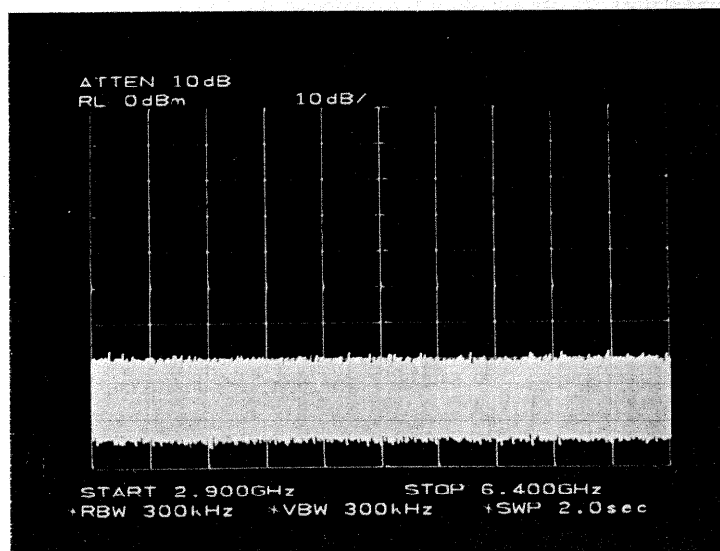


Spurious
Signal

1.0 μ S Pulse

2.9 to 6.4 GHz

(Sec. 2.991)

Scale
↑ 10dB/Div
→ 660MHz/Div

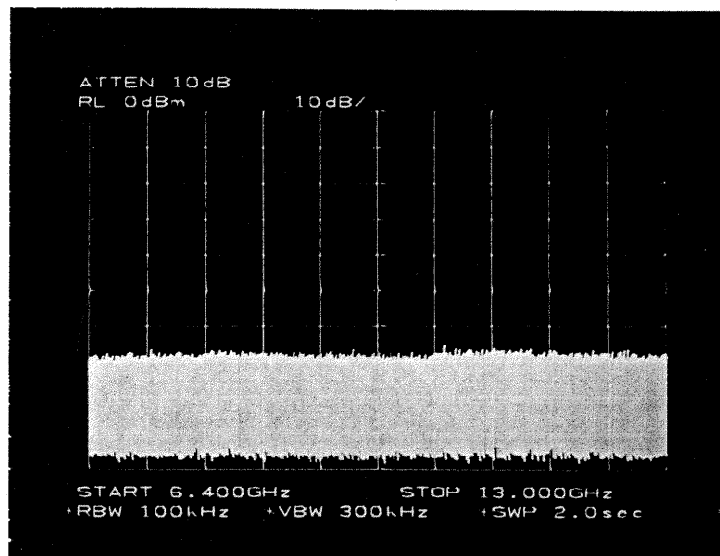


Spurious
Signal

OFF

6.4 to 13.0 GHz

Scale
↑ 10dB/Div
→ 660MHz/Div

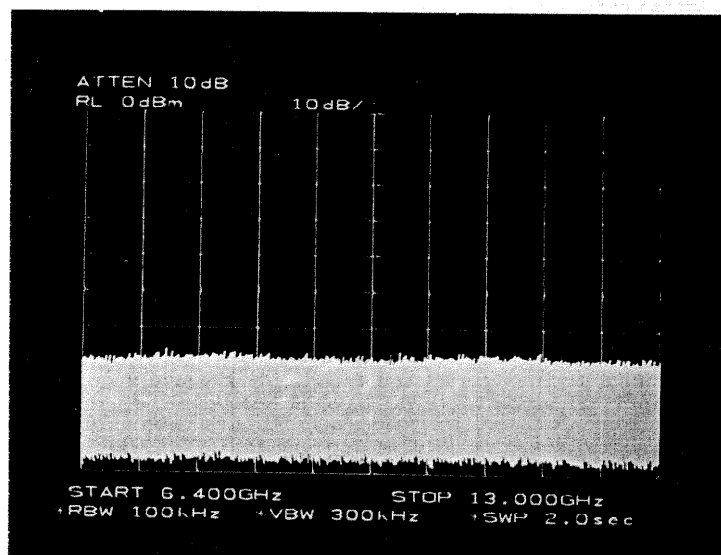


Spurious
Signal

Stand-By

6.4 to 13.0 GHz

Scale
↑ 10dB/Div
→ 660MHz/Div

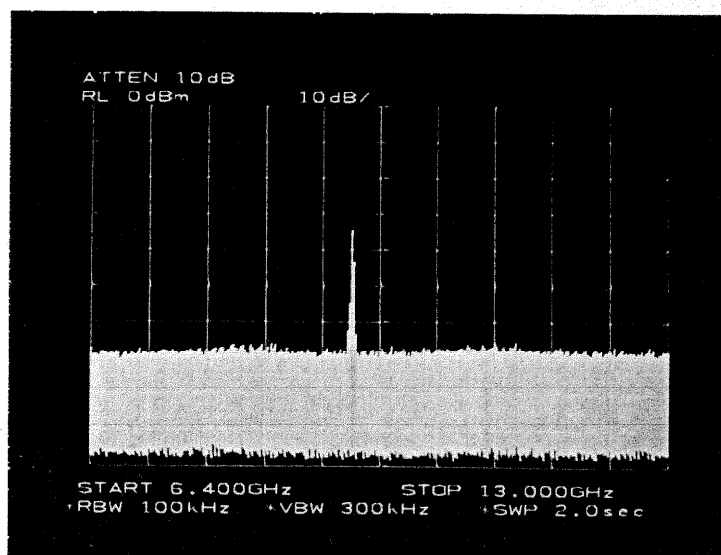


Spurious
Signal

0.08 μ S Pulse

6.4 to 13.0 GHz

(Sec. 2.991)

Scale
↑ 10dB/Div
→ 660MHz/Div

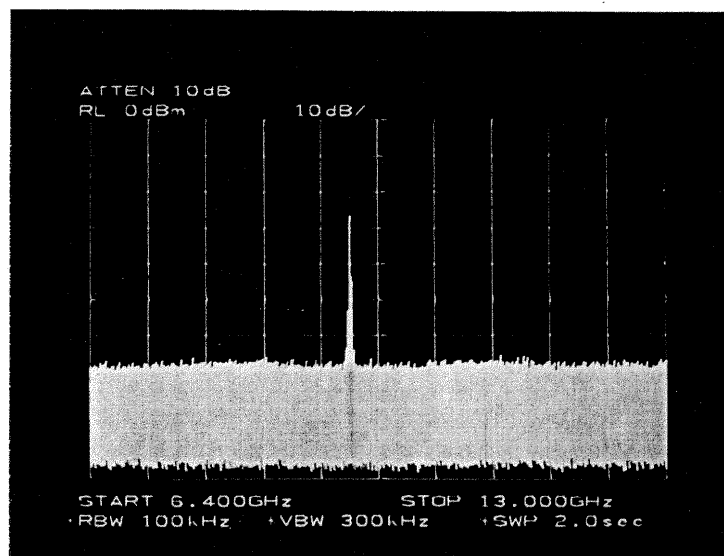


Spurious
Signal

0.25 μ S Pulse

6.4 to 13.0 GHz

Scale
↑ 10dB/Div
→ 660MHz/Div

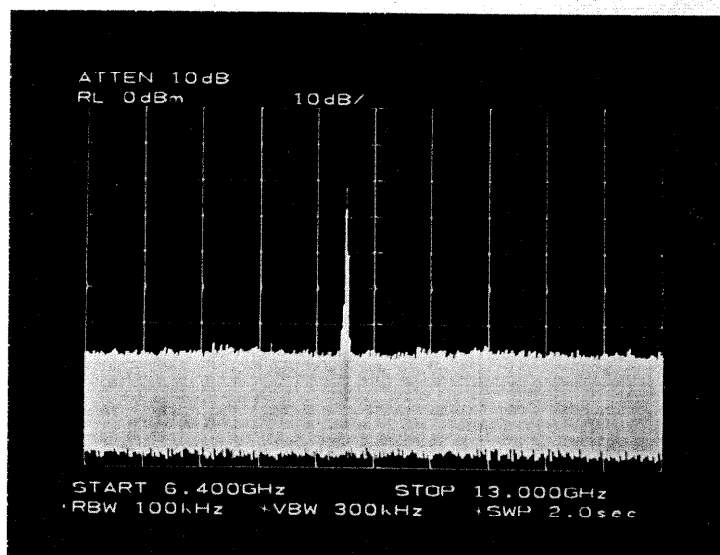


Spurious
Signal

0.5 μ S Pulse

6.4 to 13.0 GHz

Scale
↑ 10dB/Div
→ 660MHz/Div

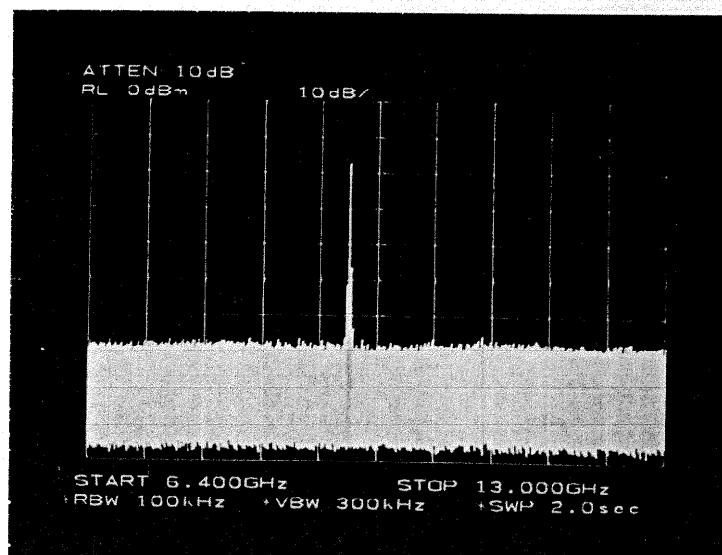


Spurious
Signal

1.0 μ S Pulse

6.4 to 13.0 GHz

(Sec. 2.991)

Scale
↑ 10dB/Div
→ 700MHz/Div

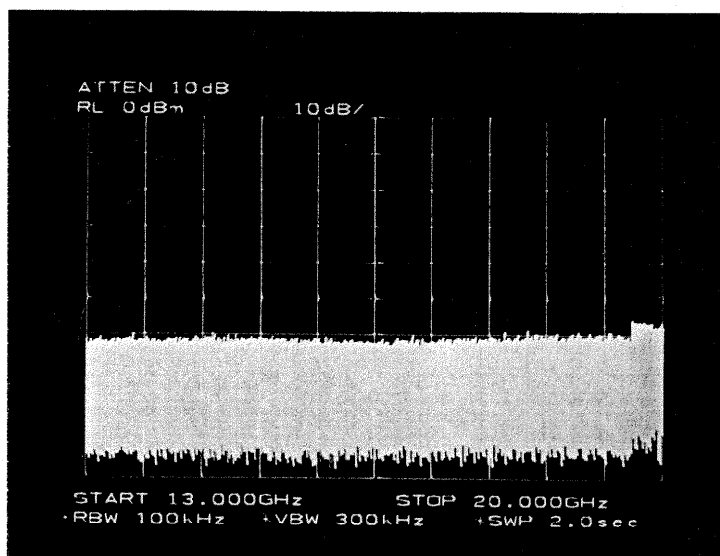


Spurious
Signal

OFF

13.0 to 20 GHz

Scale
↑ 10dB/Div
→ 700MHz/Div

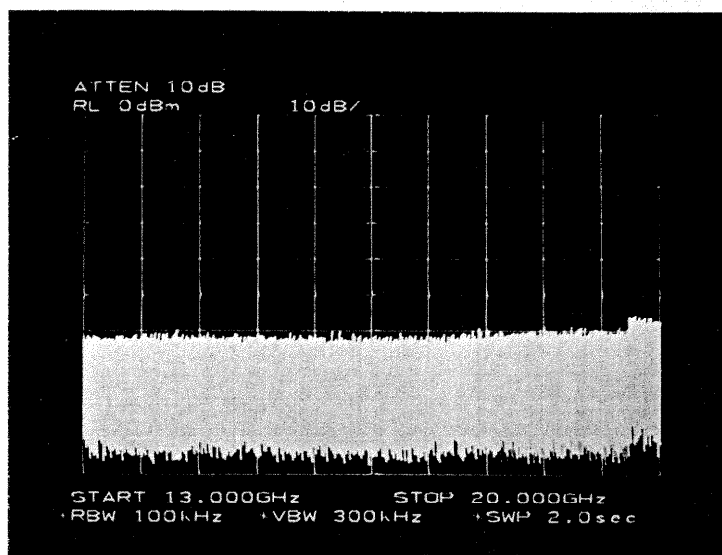


Spurious
Signal

Stand-By

13.0 to 20 GHz

Scale
↑ 10dB/Div
→ 700MHz/Div

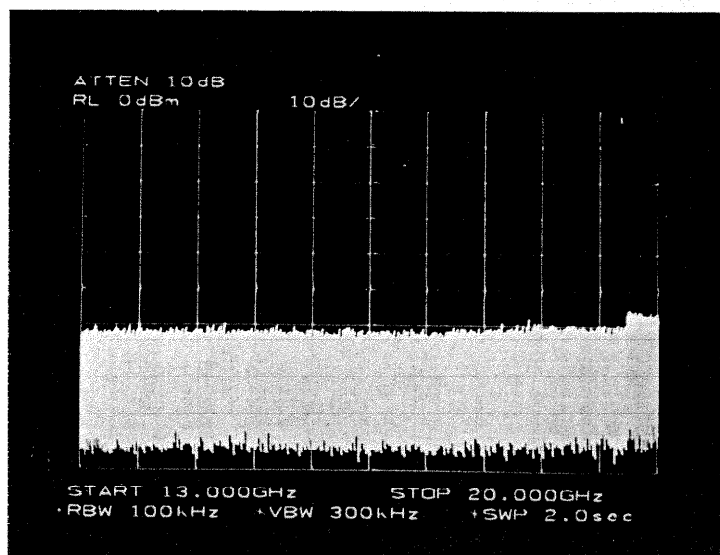


Spurious
Signal

0.08 μ S Pulse

13.0 to 20 GHz


(Sec. 2.991)

Scale
↑ 10dB/Div
→ 700MHz/Div

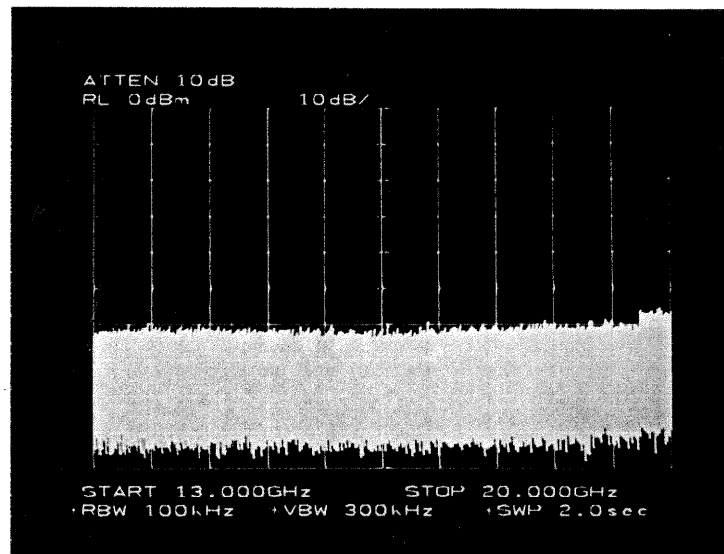


Spurious
Signal
0.25 μ S Pulse
13.0 to 20 GHz

Scale
↑ 10dB/Div
→ 700MHz/Div

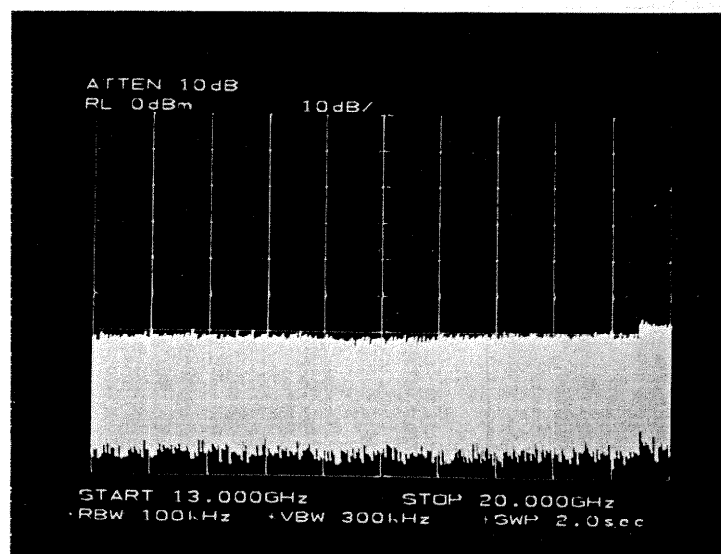

Spurious
Signal
0.5 μ S Pulse
13.0 to 20 GHz

Scale
↑ 10dB/Div
→ 700MHz/Div

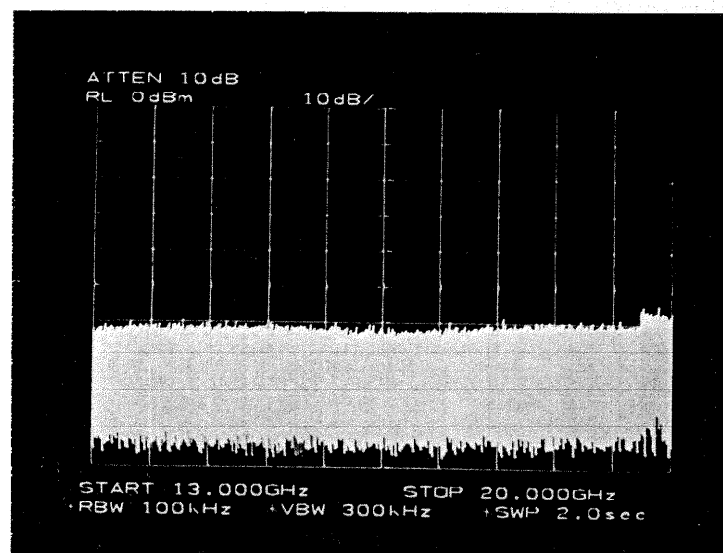

Spurious
Signal
1.0 μ S Pulse
13.0 to 20 GHz