
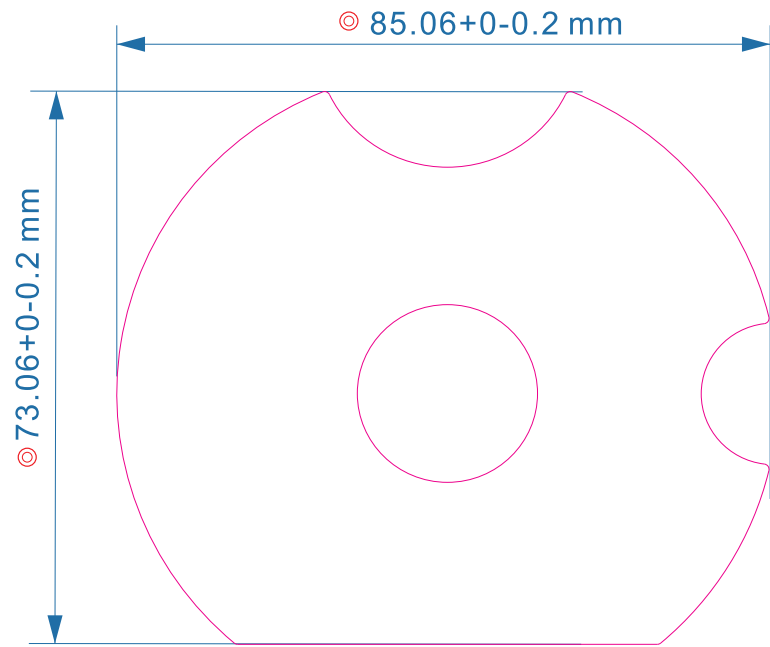


REV.	LTR	D	DATE	C	UPDATE	DESCRIPTION	B	REMARK	A	SIGN	APPROVER

NOTES:

- 1 .Material: PC (t:0.178mm)
- 2 .Adhesive: 3M 467 (t: 0.05mm)
- 3 .Coating: N/A
- 4 .Background Color: C70/M62/Y64/K95
- 5 .Text Color:C33/M27/Y28/K0



MATERIAL STRUCTURE		REMARK	DATE	UNIT	SIZE	RevF			
		1. ◎ SYMBOL MEANS IMPORTANT SIZE. 2. □ SYMBOL MEANS IMPORTANT ITEM. 3. ▲ SYMBOL MEANS ILLUSTRATE. 4. THIS PART SHOULD NOT CONTAIN ANY SUBSTANCES WHICH ARE SPECIFIED IN SPT-00001 OR SPT-00002 (WHEN SPECIFIED FOR HALOGEN FREE/ LOW HALOGEN), ISSUED BY PEGATRON. 5. — CUT LINE.		MM	A 4	PEGATRON Corporation			
				SCALE	1:1	DESCRIPTION			
				SELECT	V	V	BOTTOM LABEL PICKLE CYMMETRIK_R2		
				DIM (mm)	TOL.	A	B	MODEL NO.	DRAWING NO.
				~50	±	0.5	1.0	PICKLE	1510-XXXXXXX
				51~100	±	1.0	2.0	CHECKED	APPROVED
				101~150	±	2.0	3.0	DESIGNED	
				151~	±	2.0	3.0	Emma Tang	



R580

TRIMBLE INCORPORATED
WWW.TRIMBLE.COM

THIS DEVICE COMPLIES WITH PART 15
OF THE FCC RULES, OPERATION IS
SUBJECT TO THE FOLLOWING TWO
CONDITIONS: (1) THIS DEVICE MAY NOT
CAUSE HARMFUL INTERFERENCE, AND
(2) THIS DEVICE MUST ACCEPT ANY
INTERFERENCE RECEIVED, INCLUDING
INTERFERENCE THAT MAY CAUSE
UNDESIRABLE OPERATION.

Contains:
FCC ID: JUP-R580
IC: 1756A-R580



SEE OPERATIONS
MANUAL

CAN ICES-3 (B) / NMB-3 (B)

CAN RSS-Gen / CNR-Gen

ASSEMBLED IN TAIWAN



INPUT VOLTAGE
5 VDC 2.0 A



Bluetooth™



code 碼:
199020-01

