



**FCC CFR47 PART 15 SUBPART C  
INDUSTRY CANADA RSS-247 ISSUE 1**

**CERTIFICATION TEST REPORT**

**FOR**

**WLAN 2X2 MIMO 802.11a/b/g/n/ac with BLUETOOTH**

**MODEL NUMBER: P2180**

**FCC ID: VOB-P2180**

**IC: 7361A-P2180**

**REPORT NUMBER: 15U21878-E3V2**

**ISSUE DATE: NOVEMBER 2, 2015**

*Prepared for*  
**NVIDIA CORP.**  
**2701 SAN TOMAS EXPY**  
**SANTA CLARA, CA 95050**

*Prepared by*  
**UL VERIFICATION SERVICES INC.**  
**47173 BENICIA STREET**  
**FREMONT, CA 94538, U.S.A.**  
**TEL: (510) 771-1000**  
**FAX: (510) 661-0888**



**NVLAP LAB CODE 200065-0**

Revision History

| <u>Rev.</u> | <u>Issue<br/>Date</u> | <u>Revisions</u>  | <u>Revised By</u> |
|-------------|-----------------------|-------------------|-------------------|
| V1          | 10/23/15              | Initial Issue     |                   |
| V2          | 11/02/15              | Updated Section 7 | D. Corona         |

## TABLE OF CONTENTS

|                                                             |           |
|-------------------------------------------------------------|-----------|
| <b>1. ATTESTATION OF TEST RESULTS .....</b>                 | <b>5</b>  |
| <b>2. TEST METHODOLOGY .....</b>                            | <b>6</b>  |
| <b>3. FACILITIES AND ACCREDITATION .....</b>                | <b>6</b>  |
| <b>4. CALIBRATION AND UNCERTAINTY .....</b>                 | <b>6</b>  |
| 4.1. MEASURING INSTRUMENT CALIBRATION .....                 | 6         |
| 4.2. SAMPLE CALCULATION .....                               | 6         |
| 4.3. MEASUREMENT UNCERTAINTY .....                          | 6         |
| <b>5. EQUIPMENT UNDER TEST .....</b>                        | <b>7</b>  |
| 5.1. DESCRIPTION OF EUT .....                               | 7         |
| 5.2. MAXIMUM OUTPUT POWER.....                              | 7         |
| 5.3. DESCRIPTION OF AVAILABLE ANTENNAS .....                | 7         |
| 5.4. SOFTWARE AND FIRMWARE.....                             | 7         |
| 5.5. WORST-CASE CONFIGURATION AND MODE.....                 | 8         |
| 5.6. DESCRIPTION OF TEST SETUP.....                         | 9         |
| <b>6. TEST AND MEASUREMENT EQUIPMENT .....</b>              | <b>11</b> |
| <b>7. MEASUREMENT METHODS .....</b>                         | <b>12</b> |
| <b>8. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS .....</b> | <b>13</b> |
| 8.1. ON TIME AND DUTY CYCLE RESULTS.....                    | 13        |
| 8.2. DUTY CYCLE PLOTS .....                                 | 14        |
| <b>9. SUMMARY TABLE .....</b>                               | <b>15</b> |
| <b>10. ANTENNA PORT TEST RESULTS .....</b>                  | <b>16</b> |
| 10.1. 6 dB BANDWIDTH .....                                  | 16        |
| 10.1.1. 802.11b MODE IN THE 2.4 GHz BAND .....              | 17        |
| 10.1.2. 802.11g MODE IN THE 2.4 GHz BAND .....              | 17        |
| 10.1.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND.....          | 17        |
| 10.1.1. 802.11n HT40 MODE IN THE 2.4 GHz BAND.....          | 17        |
| 10.1.1. 6 dB BANDWIDTH MID CH PLOTS .....                   | 18        |
| 10.2. 99% BANDWIDTH .....                                   | 20        |
| 10.2.1. 802.11b MODE IN THE 2.4 GHz BAND .....              | 20        |
| 10.2.2. 802.11g MODE IN THE 2.4 GHz BAND .....              | 20        |
| 10.2.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND.....          | 20        |
| 10.2.1. 802.11n HT40 MODE IN THE 2.4 GHz BAND.....          | 20        |
| 10.2.1. 99% BANDWIDTH MID CH PLOTS .....                    | 21        |
| 10.3. OUTPUT POWER.....                                     | 23        |
| 10.3.1. 802.11b MODE IN THE 2.4 GHz BAND .....              | 24        |
| 10.3.2. 802.11g MODE IN THE 2.4 GHz BAND .....              | 26        |

|         |                                                               |     |
|---------|---------------------------------------------------------------|-----|
| 10.3.3. | 802.11n HT20 MODE IN THE 2.4 GHz BAND .....                   | 28  |
| 10.3.1. | 802.11n HT40 MODE IN THE 2.4 GHz BAND .....                   | 29  |
| 10.4.   | <i>PSD</i> .....                                              | 30  |
| 10.4.1. | 802.11b MODE IN THE 2.4 GHz BAND .....                        | 30  |
| 10.4.2. | 802.11g MODE IN THE 2.4 GHz BAND .....                        | 31  |
| 10.4.3. | 802.11n HT20 MODE IN THE 2.4 GHz BAND .....                   | 31  |
| 10.4.1. | 802.11n HT40 MODE IN THE 2.4 GHz BAND .....                   | 31  |
| 10.4.1. | PSD MID CH PLOTS .....                                        | 32  |
| 10.5.   | <i>OUT-OF-BAND EMISSIONS</i> .....                            | 34  |
| 10.5.1. | 802.11b MODE IN THE 2.4 GHz BAND .....                        | 35  |
| 10.5.2. | 802.11g MODE IN THE 2.4 GHz BAND .....                        | 38  |
| 10.5.3. | 802.11n HT20 MODE IN THE 2.4 GHz BAND .....                   | 41  |
| 10.5.4. | 802.11n HT40 MODE IN THE 2.4 GHz BAND .....                   | 44  |
| 11.     | <b>RADIATED TEST RESULTS</b> .....                            | 47  |
| 11.1.   | <i>LIMITS AND PROCEDURE</i> .....                             | 47  |
| 11.2.   | <i>TRANSMITTER ABOVE 1 GHz</i> .....                          | 48  |
| 11.2.1. | TX ABOVE 1 GHz 802.11b MODE IN THE 2.4 GHz BAND Chain 0 ..... | 48  |
| 11.2.1. | TX ABOVE 1 GHz 802.11b MODE IN THE 2.4 GHz BAND Chain 1 ..... | 61  |
| 11.2.1. | TX ABOVE 1 GHz 802.11g MODE IN THE 2.4 GHz BAND Chain 0 ..... | 74  |
| 11.2.1. | TX ABOVE 1 GHz 802.11g MODE IN THE 2.4 GHz BAND Chain 1 ..... | 87  |
| 11.2.1. | TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 2.4 GHz BAND .....    | 100 |
| 11.2.1. | TX ABOVE 1 GHz 802.11n HT40 MODE IN THE 2.4 GHz BAND .....    | 113 |
| 11.3.   | <i>WORST-CASE BELOW 1 GHz</i> .....                           | 126 |
| 12.     | <b>AC POWER LINE CONDUCTED EMISSIONS</b> .....                | 128 |
| 13.     | <b>SETUP PHOTOS</b> .....                                     | 131 |
| 14.     | <b>EUT PHOTOS</b> .....                                       | 133 |

## 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** NVIDIA Corp.  
**EUT DESCRIPTION:** WLAN 2x2 MIMO 802.11a/b/g/n/ac with Bluetooth  
**MODEL:** P2180  
**SERIAL NUMBER:** 333715030009, 333615050430, 333715030024, 333815010589  
**DATE TESTED:** OCTOBER 9-OCTOBER 16, 2015

| APPLICABLE STANDARDS            |              |
|---------------------------------|--------------|
| STANDARD                        | TEST RESULTS |
| CFR 47 Part 15 Subpart C        | Pass         |
| INDUSTRY CANADA RSS-247 Issue 1 | Pass         |
| INDUSTRY CANADA RSS-GEN Issue 3 | Pass         |

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released  
For UL Verification Services Inc. By:



DAN CORONIA  
CONSUMER TECHNOLOGY DIVISION  
WiSE PROJECT LEAD  
UL VERIFICATION SERVICES INC

Tested By:



STEVEN TRAN  
CONSUMER TECHNOLOGY DIVISION  
WiSE ENGINEER  
UL VERIFICATION SERVICES INC

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, ANSI C63.4-2013, RSS-GEN Issue 3, and RSS-247 Issue 1.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

| 47173 Benicia Street                                       | 47266 Benicia Street                            |
|------------------------------------------------------------|-------------------------------------------------|
| <input checked="" type="checkbox"/> Chamber A(IC: 2324B-1) | <input type="checkbox"/> Chamber D(IC: 2324B-4) |
| <input checked="" type="checkbox"/> Chamber B(IC: 2324B-2) | <input type="checkbox"/> Chamber E(IC: 2324B-5) |
| <input checked="" type="checkbox"/> Chamber C(IC: 2324B-3) | <input type="checkbox"/> Chamber F(IC: 2324B-6) |
|                                                            | <input type="checkbox"/> Chamber G(IC: 2324B-7) |
|                                                            | <input type="checkbox"/> Chamber H(IC: 2324B-8) |

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamplifier Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

### 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

| PARAMETER                             | UNCERTAINTY |
|---------------------------------------|-------------|
| Conducted Disturbance, 0.15 to 30 MHz | 3.52 dB     |
| Radiated Disturbance, 30 to 18000 MHz | 4.94 dB     |

Uncertainty figures are valid to a confidence level of 95%.

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

WLAN 2X2 MIMO 802.11a/b/g/n/ac with BLUETOOTH

### 5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum total conducted output power as follows:

| Frequency Range<br>(MHz) | Mode         | Total Output<br>Power<br>(dBm) | Total Output<br>Power<br>(mW) |
|--------------------------|--------------|--------------------------------|-------------------------------|
| 2412 - 2462              | 802.11b      | 17.8                           | 60.26                         |
| 2412 - 2462              | 802.11g      | 16.5                           | 44.67                         |
| 2412 - 2462              | 802.11n HT20 | 17.04                          | 50.58                         |
| 2412 - 2462              | 802.11n HT40 | 17.84                          | 60.81                         |

### 5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a dual band dipole antenna, with a maximum gain of 2.86 dBi.

### 5.4. SOFTWARE AND FIRMWARE

The firmware installed in the EUT during testing was Nvidia Rev. 7.10.RC 0.0

The EUT driver software installed during testing Nvidia Rev 7.35 2200 <r532988 wlttest>

## 5.5. WORST-CASE CONFIGURATION AND MODE

Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three transmitting antenna degrees: 0, 45, and 90. It was determined that 90 degrees was the worst case antenna position; therefore all final radiated testing was performed with the antenna position at 90 degrees.

Based on the baseline scan, the worst-case data rates were:

802.11b mode: 1 Mbps

802.11g mode: 6 Mbps

802.11n HT20mode: MCS0

802.11n HT40mode: MCS0



## 5.6. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

| Support Equipment List |              |          |               |        |
|------------------------|--------------|----------|---------------|--------|
| Description            | Manufacturer | Model    | Serial Number | FCC ID |
| Base board             | NVIDIA       | P2597    | 333715040297  | DoC    |
| AC Adapter             | Mean Well    | GST90A19 | EB58E32121    | N/A    |
| Laptop                 | Lenovo       | T430     | PFB1R5R       | N/A    |


### I/O CABLES

| I/O Cable List |      |                      |                |            |                  |                  |
|----------------|------|----------------------|----------------|------------|------------------|------------------|
| Cable No       | Port | # of identical ports | Connector Type | Cable Type | Cable Length (m) | Remarks          |
| 1              | AC   | 1                    | US115V         | Unshielded | 0.5              |                  |
| 2              | DC   | 1                    | 19 Vdc         | Unshielded | 1                | Ferrite Attached |
| 3              | USB  | 1                    | USB            | Shielded   | 1.5              |                  |

### TEST SETUP

The EUT is a stand-alone unit during the tests. Test software exercised the radio card.

**SETUP DIAGRAM FOR TESTS**

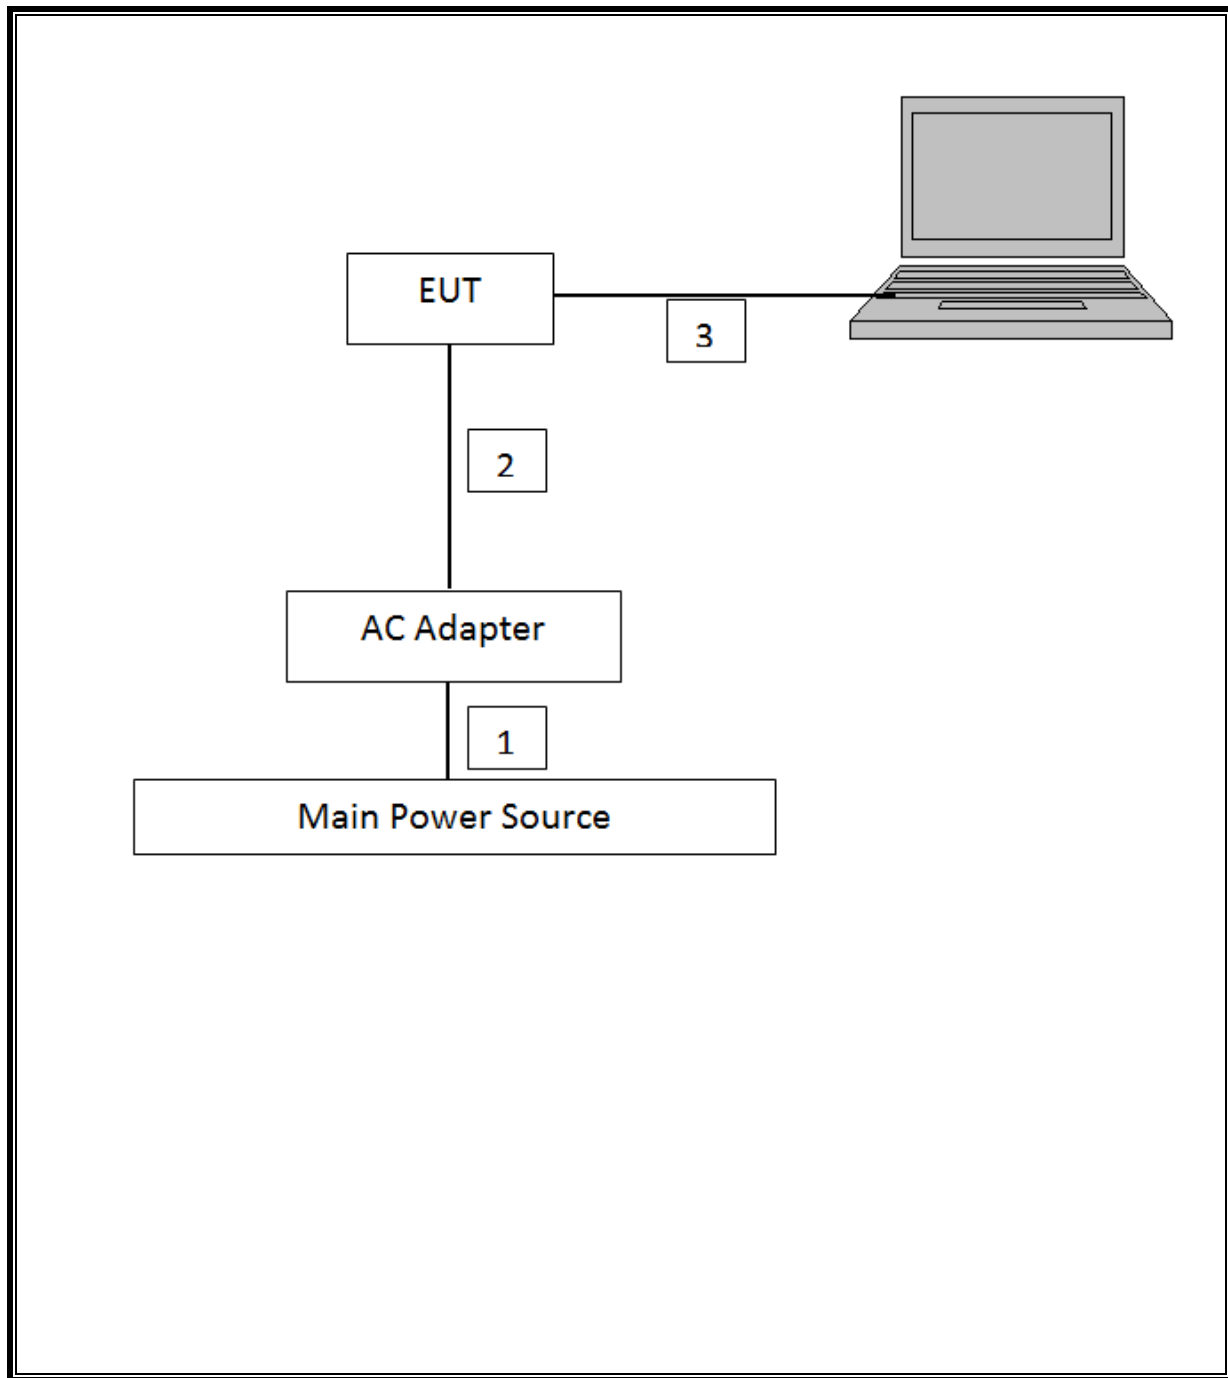

## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

| Test Equipment List                |                |             |         |          |
|------------------------------------|----------------|-------------|---------|----------|
| Description                        | Manufacturer   | Model       | Asset   | Cal Due  |
| Spectrum Analyzer, 44 GHz          | Agilent / HP   | E4446A      | C01069  | 12/20/15 |
| Spectrum Analyzer, 9KHz-40GHz      | HP             | 8564E       | C00986  | 04/01/16 |
| EMI Test Receiver, 9 kHz-7 GHz     | R & S          | ESCI 7      | 1000741 | 08/13/16 |
| EMI Test Receiver, 30 MHz          | R & S          | ESHS 20     | N02396  | 08/18/16 |
| Peak Power Meter                   | Agilent / HP   | E4416A      | C00963  | 12/13/15 |
| Peak / Average Power Sensor        | Agilent / HP   | E9327A      | C00964  | 12/13/15 |
| Antenna, Horn, 1-18 GHz            | ETS            | 3117        | C01022  | 02/21/16 |
| Antenna, Horn, 18- 26 GHz          | ARA            | MWH-1826/B  | C00946  | 11/12/15 |
| Antenna, Horn, 26-40 GHz           | ARA            | MWH-2640    | C00891  | 06/28/16 |
| Antenna, Bilog, 30MHz-1 GHz        | Sunol Sciences | JB1         | T243    | 03/06/16 |
| RF Preamplifier, 100KHz -> 1300MHz | HP             | TBD         | C00825  | 06/01/16 |
| RF Preamplifier, 1GHz - 18GHz      | Miteq          | NSP4000-SP2 | 924343  | 03/23/16 |
| RF Preamplifier, 1GHz - 26.5GHz    | HP             | 8449B       | T404    | 06/29/16 |
| AC Power Supply, 2,500VA 45-500Hz  | Elgar-Ametek   | CW2501M     | F00013  | CNR      |
| RF Preamplifier, 1GHz - 40GHz      | Miteq          | NSP4000-SP2 | C00990  | 08/20/16 |
| Attenuator / Switch driver         | HP             | 11713A      | F00204  | CNR      |
| Low Pass Filter 3GHz               | Micro-Tronics  | LPS17541    | F00219  | 05/23/16 |
| High Pass Filter 5GHz              | Micro-Tronics  | HPS17542    | F00222  | 05/22/16 |
| High Pass Filter 6GHz              | Micro-Tronics  | HPM17543    | F00224  | 05/22/16 |

| Test Software List    |              |        |                          |
|-----------------------|--------------|--------|--------------------------|
| Description           | Manufacturer | Model  | Version                  |
| Radiated Software     | UL           | UL EMC | Ver 9.5, July 22, 2014   |
| Conducted Software    | UL           | UL EMC | Ver 9.5, May 17 2012     |
| CLT Software          | UL           | UL RF  | Ver 1.0, Feb 2 2015      |
| Antenna Port Software | UL           | UL RF  | Ver 2.1.1.1, Jan 20 2015 |

## 7. MEASUREMENT METHODS

On Time and Duty Cycle: KDB 558074 D01 v03r03, Section 6.0.

6 dB BW: KDB 558074 D01 v03r03, Section 8.1.

99% BW: ANSI C63.10-2013, Section 6.9.3.

Output Power: KDB 558074 D01 v03r03, Section 9.2.3.2, and KDB 662911 D01 v02r01.

Power Spectral Density: KDB 558074 D01 v03r03, Section 10.3 and 10.5 and KDB 662911 D01 v02r01

Out-of-band emissions in non-restricted bands: KDB 558074 D01 v03r03, Section 11.0.

Out-of-band emissions in restricted bands: KDB 558074 D01 v03r03, Section 12.1.

AC Power Line Conducted Emissions: ANSI C63.10-2009 and ANSI C63.10-2013, Section 6.2.

## 8. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS


### LIMITS

None; for reporting purposes only.

### 8.1. ON TIME AND DUTY CYCLE RESULTS

| Mode                 | ON Time<br>B<br>(msec) | Period<br>(msec) | Duty Cycle<br>x<br>(linear) | Duty<br>Cycle<br>(%) | Duty Cycle<br>Correction Factor<br>(dB) | 1/B<br>Minimum VBW<br>(kHz) |
|----------------------|------------------------|------------------|-----------------------------|----------------------|-----------------------------------------|-----------------------------|
| <b>2.4GHz Band</b>   |                        |                  |                             |                      |                                         |                             |
| 802.11b              | 8.600                  | 8.695            | 0.989                       | 98.91%               | 0.00                                    | 0.010                       |
| 802.11g              | 1.425                  | 1.536            | 0.928                       | 92.77%               | 0.33                                    | 0.702                       |
| 802.11n HT20 CDD 2TX | 0.692                  | 0.793            | 0.872                       | 87.23%               | 0.59                                    | 1.446                       |
| 802.11n HT40 CDD 2TX | 0.356                  | 0.457            | 0.780                       | 77.99%               | 1.08                                    | 2.807                       |

## 8.2. DUTY CYCLE PLOTS

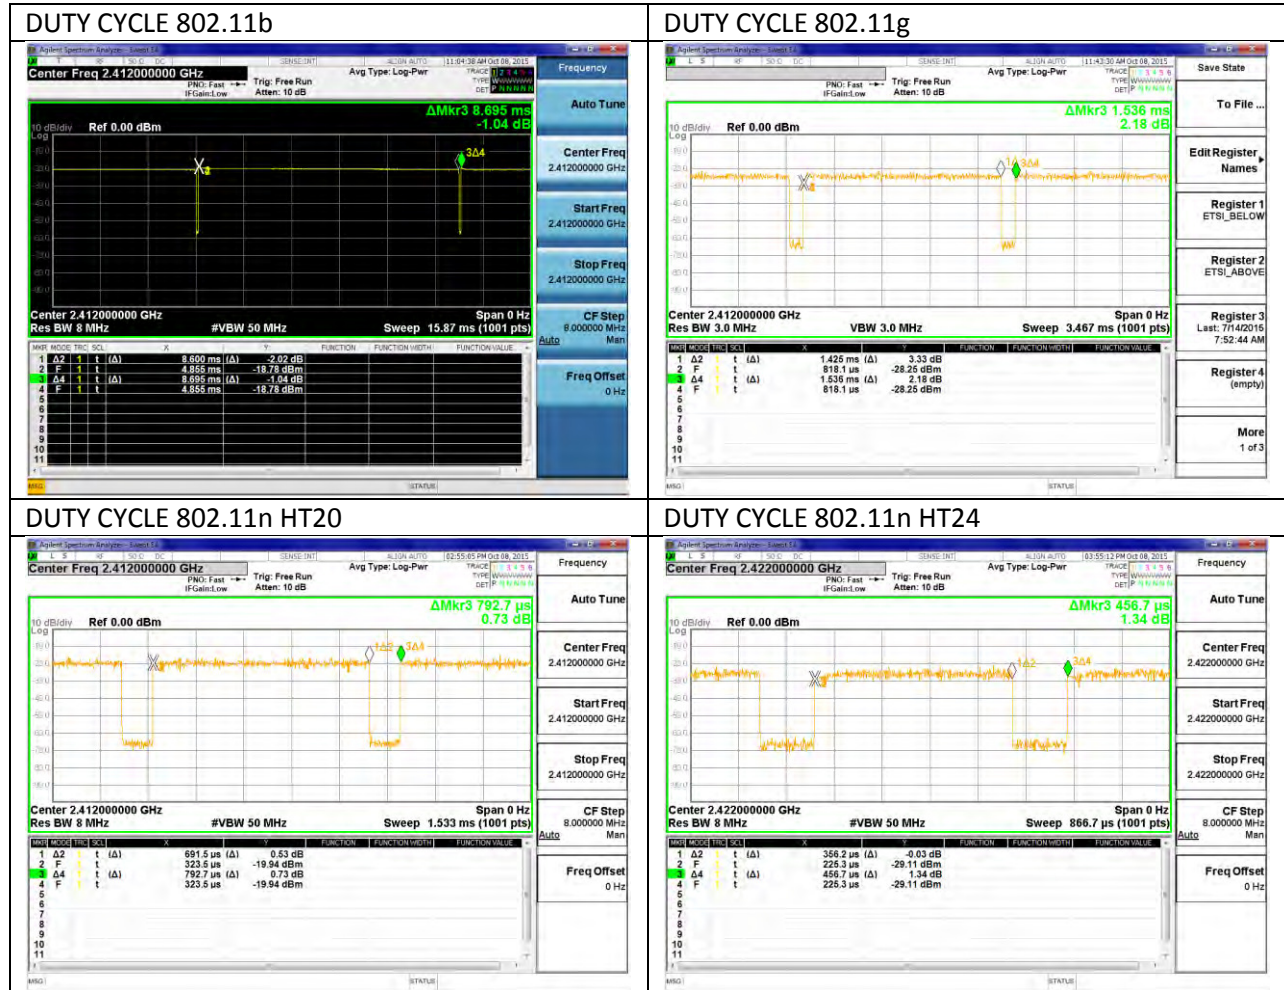

## 9. SUMMARY TABLE

| FCC Part Section   | RSS Section(s) | Test Description                        | Test Limit | Test Condition | Test Result | Worst Case   |
|--------------------|----------------|-----------------------------------------|------------|----------------|-------------|--------------|
| 15.247 (a)(2)      | RSS-247 5.2.1  | Occupied Band width (6dB)               | >500KHz    | Conducted      | Pass        | 8.554 MHz    |
| 2.1051, 15.247 (d) | RSS-247 5.5    | Band Edge / Conducted Spurious Emission | -30dBc     |                | Pass        | -27.63 dBm   |
| 15.247             | RSS-247 5.4.4  | TX conducted output power               | <30dBm     |                | Pass        | 17.84dBm     |
| 15.247             | RSS-247 5.2.2  | PSD                                     | <8dBm      |                | Pass        | -3.782dBm    |
| 15.207 (a)         | RSS-GEN 8.8    | AC Power Line conducted emissions       | Section 10 | Radiated       | Pass        | 36.85 dBuV   |
| 15.205, 15.209     | RSS-GEN 8.9/7  | Radiated Spurious Emission              | < 54dBuV/m |                | Pass        | 51.88 dBuV/m |

## 10. ANTENNA PORT TEST RESULTS

### 10.1. 6 dB BANDWIDTH

#### LIMITS

FCC §15.247 (a) (2)

IC RSS-247 5.2.1

The minimum 6 dB bandwidth shall be at least 500 kHz.

#### TEST PROCEDURE

Reference to KDB 558074 D01 DTS Meas Guidance v03r03: The transmitter output is connected to a spectrum analyzer with the RBW set to 100KHz, the VBW  $\geq 3 \times$  RBW, peak detector and max hold.

#### RESULTS



### 10.1.1. 802.11b MODE IN THE 2.4 GHz BAND

| Channel | Frequency<br>(MHz) | 6 dB BW<br>Chain 0<br>(MHz) | 6 dB BW<br>Chain 1<br>(MHz) | Minimum<br>Limit<br>(MHz) |
|---------|--------------------|-----------------------------|-----------------------------|---------------------------|
| Low     | 2412               | 9.058                       | 9.086                       | 0.5                       |
| Mid     | 2437               | 9.086                       | 9.016                       | 0.5                       |
| High    | 2462               | 8.554                       | 8.580                       | 0.5                       |

### 10.1.2. 802.11g MODE IN THE 2.4 GHz BAND

| Channel | Frequency<br>(MHz) | 6 dB BW<br>Chain 0<br>(MHz) | 6 dB BW<br>Chain 1<br>(MHz) | Minimum<br>Limit<br>(MHz) |
|---------|--------------------|-----------------------------|-----------------------------|---------------------------|
| Low     | 2412               | 16.350                      | 16.325                      | 0.5                       |
| Mid     | 2437               | 16.325                      | 16.350                      | 0.5                       |
| High    | 2462               | 16.400                      | 16.375                      | 0.5                       |


### 10.1.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND


| Channel | Frequency<br>(MHz) | 6 dB BW<br>Chain 0<br>(MHz) | 6 dB BW<br>Chain 1<br>(MHz) | Minimum<br>Limit<br>(MHz) |
|---------|--------------------|-----------------------------|-----------------------------|---------------------------|
| Low     | 2412               | 17.334                      | 17.604                      | 0.5                       |
| Mid     | 2437               | 17.550                      | 17.631                      | 0.5                       |
| High    | 2462               | 17.631                      | 17.604                      | 0.5                       |

### 10.1.1. 802.11n HT40 MODE IN THE 2.4 GHz BAND

| Channel | Frequency<br>(MHz) | 6 dB BW<br>Chain 0<br>(MHz) | 6 dB BW<br>Chain 1<br>(MHz) | Minimum<br>Limit<br>(MHz) |
|---------|--------------------|-----------------------------|-----------------------------|---------------------------|
| Low     | 2422               | 36.080                      | 35.964                      | 0.5                       |
| Mid     | 2437               | 36.300                      | 36.355                      | 0.5                       |
| High    | 2452               | 36.355                      | 36.300                      | 0.5                       |

## 10.1.1. 6 dB BANDWIDTH MID CH PLOTS

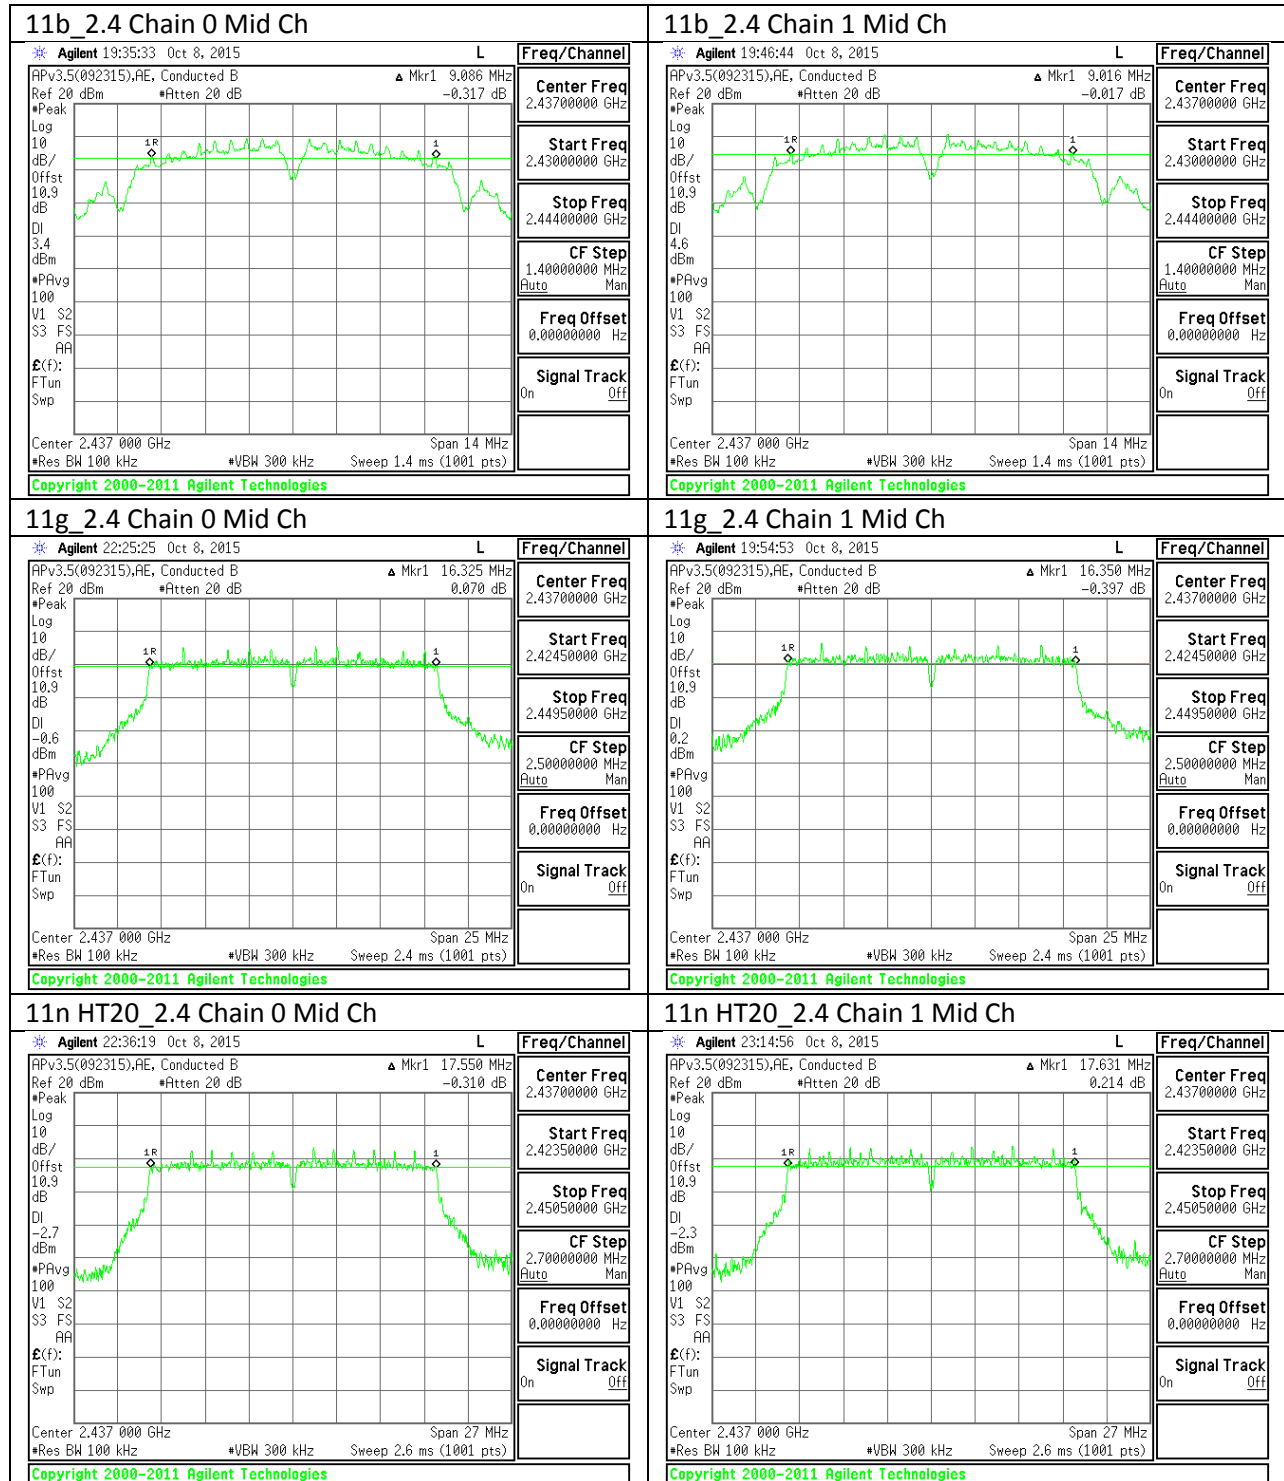

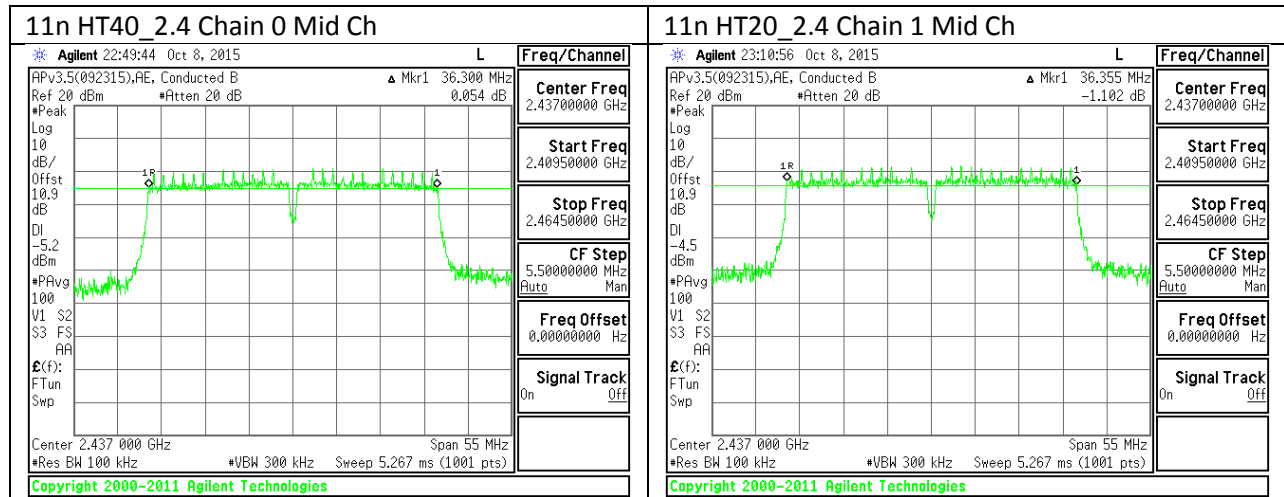

## 10.2. 99% BANDWIDTH

### LIMITS

None; for reporting purposes only.

### RESULTS

#### 10.2.1. 802.11b MODE IN THE 2.4 GHz BAND

| Channel | Frequency<br>(MHz) | 99% BW<br>Chain 0<br>(MHz) | 99% BW<br>Chain 1<br>(MHz) |
|---------|--------------------|----------------------------|----------------------------|
| Low     | 2412               | 11.9797                    | 11.9345                    |
| Mid     | 2437               | 11.9138                    | 11.8043                    |
| High    | 2462               | 11.9675                    | 11.9109                    |

#### 10.2.2. 802.11g MODE IN THE 2.4 GHz BAND

| Channel | Frequency<br>(MHz) | 99% BW<br>Chain 0<br>(MHz) | 99% BW<br>Chain 1<br>(MHz) |
|---------|--------------------|----------------------------|----------------------------|
| Low     | 2412               | 16.6198                    | 16.5840                    |
| Mid     | 2437               | 16.6169                    | 16.5971                    |
| High    | 2462               | 16.5968                    | 16.5804                    |


#### 10.2.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND


| Channel | Frequency<br>(MHz) | 99% BW<br>Chain 0<br>(MHz) | 99% BW<br>Chain 1<br>(MHz) |
|---------|--------------------|----------------------------|----------------------------|
| Low     | 2412               | 17.7425                    | 17.7212                    |
| Mid     | 2437               | 17.7540                    | 17.7578                    |
| High    | 2462               | 17.7597                    | 17.7601                    |

#### 10.2.1. 802.11n HT40 MODE IN THE 2.4 GHz BAND

| Channel | Frequency<br>(MHz) | 99% BW<br>Chain 0<br>(MHz) | 99% BW<br>Chain 1<br>(MHz) |
|---------|--------------------|----------------------------|----------------------------|
| Low     | 2422               | 36.3115                    | 36.2610                    |
| Mid     | 2437               | 36.2804                    | 36.3118                    |
| High    | 2452               | 36.3552                    | 36.2108                    |

## 10.2.1. 99% BANDWIDTH MID CH PLOTS

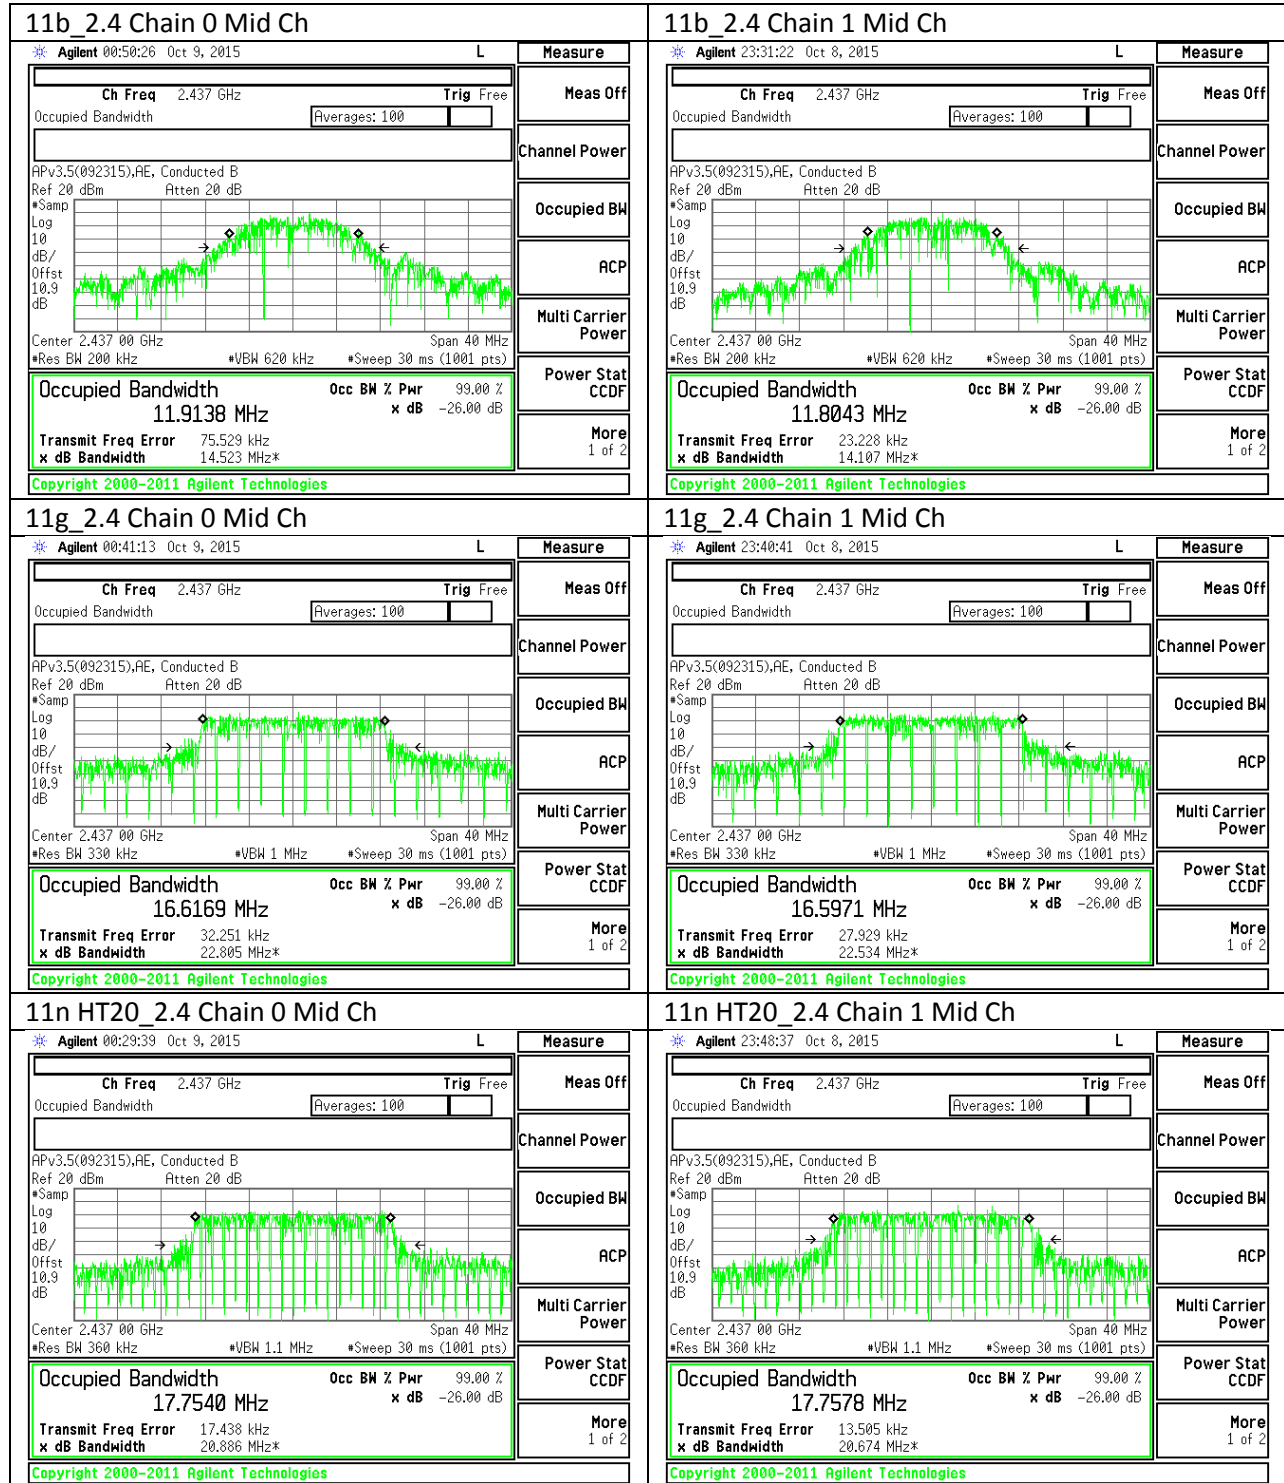

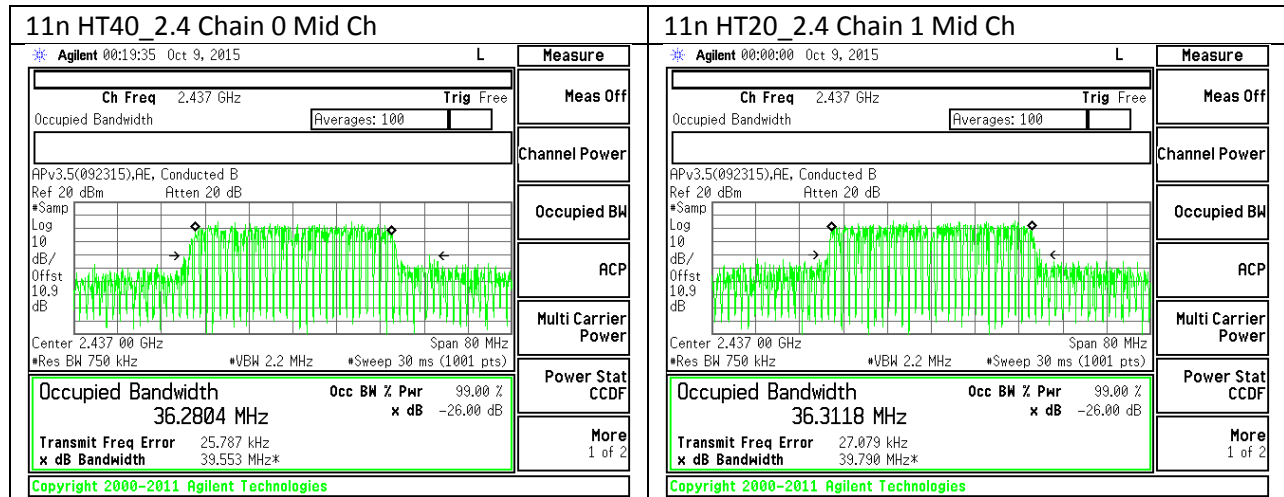

### **10.3. OUTPUT POWER**

#### **LIMITS**

FCC §15.247

IC RSS-247 5.4.4

For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt, based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### **DIRECTIONAL ANTENNA GAIN**

The TX chains are uncorrelated and the antenna gain is the same for each chain. The directional gain is equal to the antenna gain.

#### **RESULTS**

### 10.3.1. 802.11b MODE IN THE 2.4 GHz BAND

#### Chain 0

##### Limits

| Channel | Frequency<br>(MHz) | Directional<br>Gain<br>(dBi) | FCC<br>Power<br>Limit<br>(dBm) | IC<br>Power<br>Limit<br>(dBm) | IC<br>EIRP<br>Limit<br>(dBm) | Max<br>Power<br>(dBm) |
|---------|--------------------|------------------------------|--------------------------------|-------------------------------|------------------------------|-----------------------|
| Low     | 2412               | 2.86                         | 30.00                          | 30                            | 36                           | 30.00                 |
| Mid     | 2437               | 2.86                         | 30.00                          | 30                            | 36                           | 30.00                 |
| High    | 2462               | 2.86                         | 30.00                          | 30                            | 36                           | 30.00                 |

##### Results

| Channel | Frequency<br>(MHz) | Chain 0<br>Meas<br>Power<br>(dBm) | Total<br>Corr'd<br>Power<br>(dBm) | Power<br>Limit<br>(dBm) | Margin<br>(dB) |
|---------|--------------------|-----------------------------------|-----------------------------------|-------------------------|----------------|
| Low     | 2412               | 17.4                              | 17.4                              | 30.00                   | -12.60         |
| Mid     | 2437               | 17.7                              | 17.7                              | 30.00                   | -12.30         |
| High    | 2462               | 17.3                              | 17.3                              | 30.00                   | -12.70         |
| Worst   |                    |                                   | 17.7                              |                         |                |

**Note:** the power readings above were measured with gated method, and the measurement was taken only during the ON time. No duty cycle correction was necessary.



# **Chain 1**

## **Limits**

| Channel | Frequency<br>(MHz) | Directional<br>Gain<br>(dBi) | FCC<br>Power<br>Limit<br>(dBm) | IC<br>Power<br>Limit<br>(dBm) | IC<br>EIRP<br>Limit<br>(dBm) | Max<br>Power<br>(dBm) |
|---------|--------------------|------------------------------|--------------------------------|-------------------------------|------------------------------|-----------------------|
| Low     | 2412               | 2.86                         | 30.00                          | 30                            | 36                           | 30.00                 |
| Mid     | 2437               | 2.86                         | 30.00                          | 30                            | 36                           | 30.00                 |
| High    | 2462               | 2.86                         | 30.00                          | 30                            | 36                           | 30.00                 |

## **Results**

| Channel | Frequency<br>(MHz) | Chain 0<br>Meas<br>Power<br>(dBm) | Total<br>Corr'd<br>Power<br>(dBm) | Power<br>Limit<br>(dBm) | Margin<br>(dB) |
|---------|--------------------|-----------------------------------|-----------------------------------|-------------------------|----------------|
| Low     | 2412               | 17.1                              | 17.1                              | 30.00                   | -12.88         |
| Mid     | 2437               | 17.1                              | 17.1                              | 30.00                   | -12.90         |
| High    | 2462               | 17.8                              | 17.8                              | 30.00                   | -12.20         |
| Worst   |                    |                                   | 17.8                              |                         |                |

**Note:** the power readings above were measured with gated method, and the measurement was taken only during the ON time. No duty cycle correction was necessary.

### 10.3.2. 802.11g MODE IN THE 2.4 GHz BAND

#### Chain 0

##### Limits

| Channel | Frequency<br>(MHz) | Directional<br>Gain<br>(dBi) | FCC<br>Power<br>Limit<br>(dBm) | IC<br>Power<br>Limit<br>(dBm) | IC<br>EIRP<br>Limit<br>(dBm) | Max<br>Power<br>(dBm) |
|---------|--------------------|------------------------------|--------------------------------|-------------------------------|------------------------------|-----------------------|
| Low     | 2412               | 2.86                         | 30.00                          | 30                            | 36                           | 30.00                 |
| Mid     | 2437               | 2.86                         | 30.00                          | 30                            | 36                           | 30.00                 |
| High    | 2462               | 2.86                         | 30.00                          | 30                            | 36                           | 30.00                 |

##### Results

| Channel | Frequency<br>(MHz) | Chain 0<br>Meas<br>Power<br>(dBm) | Total<br>Corr'd<br>Power<br>(dBm) | Power<br>Limit<br>(dBm) | Margin<br>(dB) |
|---------|--------------------|-----------------------------------|-----------------------------------|-------------------------|----------------|
| Low     | 2412               | 15.4                              | 15.4                              | 30.00                   | -14.60         |
| Mid     | 2437               | 16.0                              | 16.0                              | 30.00                   | -14.00         |
| High    | 2462               | 12.7                              | 12.7                              | 30.00                   | -17.30         |
| Worst   |                    |                                   | 16.0                              |                         |                |

**Note:** the power readings above were measured with gated method, and the measurement was taken only during the ON time. No duty cycle correction was necessary.

# **Chain 1**

## **Limits**

| Channel | Frequency<br>(MHz) | Directional<br>Gain<br>(dBi) | FCC<br>Power<br>Limit<br>(dBm) | IC<br>Power<br>Limit<br>(dBm) | IC<br>EIRP<br>Limit<br>(dBm) | Max<br>Power<br>(dBm) |
|---------|--------------------|------------------------------|--------------------------------|-------------------------------|------------------------------|-----------------------|
| Low     | 2412               | 2.86                         | 30.00                          | 30                            | 36                           | 30.00                 |
| Mid     | 2437               | 2.86                         | 30.00                          | 30                            | 36                           | 30.00                 |
| High    | 2462               | 2.86                         | 30.00                          | 30                            | 36                           | 30.00                 |

## **Results**

| Channel | Frequency<br>(MHz) | Chain 0<br>Meas<br>Power<br>(dBm) | Total<br>Corr'd<br>Power<br>(dBm) | Power<br>Limit<br>(dBm) | Margin<br>(dB) |
|---------|--------------------|-----------------------------------|-----------------------------------|-------------------------|----------------|
| Low     | 2412               | 13.9                              | 13.9                              | 30.00                   | -16.10         |
| Mid     | 2437               | 16.5                              | 16.5                              | 30.00                   | -13.50         |
| High    | 2462               | 13.1                              | 13.1                              | 30.00                   | -16.94         |
| Worst   |                    |                                   | 16.5                              |                         |                |

**Note:** the power readings above were measured with gated method, and the measurement was taken only during the ON time. No duty cycle correction was necessary.

### 10.3.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND

#### Limits

| Channel | Frequency<br>(MHz) | Directional<br>Gain<br>(dBi) | FCC<br>Power<br>Limit<br>(dBm) | IC<br>Power<br>Limit<br>(dBm) | IC<br>EIRP<br>Limit<br>(dBm) | Max<br>Power<br>(dBm) |
|---------|--------------------|------------------------------|--------------------------------|-------------------------------|------------------------------|-----------------------|
| Low     | 2412               | 2.86                         | 30.00                          | 30                            | 36                           | 30.00                 |
| Mid     | 2437               | 2.86                         | 30.00                          | 30                            | 36                           | 30.00                 |
| High    | 2462               | 2.86                         | 30.00                          | 30                            | 36                           | 30.00                 |

#### Results

| Channel | Frequency<br>(MHz) | Chain 0<br>Meas<br>Power<br>(dBm) | Chain 1<br>Meas<br>Power<br>(dBm) | Total<br>Corr'd<br>Power<br>(dBm) | Power<br>Limit<br>(dBm) | Margi<br>(dB) |
|---------|--------------------|-----------------------------------|-----------------------------------|-----------------------------------|-------------------------|---------------|
| Low     | 2412               | 13.0                              | 13.8                              | 16.43                             | 30.00                   | -13.57        |
| Mid     | 2437               | 13.5                              | 14.5                              | 17.04                             | 30.00                   | -12.96        |
| High    | 2462               | 11.4                              | 12.1                              | 14.77                             | 30.00                   | -15.23        |

**Note:** the power readings above were measured with gated method, and the measurement was taken only during the ON time. No duty cycle correction was necessary.

### 10.3.1. 802.11n HT40 MODE IN THE 2.4 GHz BAND

#### Limits

| Channel | Frequency<br>(MHz) | Directional<br>Gain<br>(dBi) | FCC<br>Power<br>Limit<br>(dBm) | IC<br>Power<br>Limit<br>(dBm) | IC<br>EIRP<br>Limit<br>(dBm) | Max<br>Power<br>(dBm) |
|---------|--------------------|------------------------------|--------------------------------|-------------------------------|------------------------------|-----------------------|
| Low     | 2412               | 2.86                         | 30.00                          | 30                            | 36                           | 30.00                 |
| Mid     | 2437               | 2.86                         | 30.00                          | 30                            | 36                           | 30.00                 |
| High    | 2462               | 2.86                         | 30.00                          | 30                            | 36                           | 30.00                 |

#### Results

| Channel | Frequency<br>(MHz) | Chain 0<br>Meas<br>Power<br>(dBm) | Chain 1<br>Meas<br>Power<br>(dBm) | Total<br>Corr'd<br>Power<br>(dBm) | Power<br>Limit<br>(dBm) | Margi<br>(dB) |
|---------|--------------------|-----------------------------------|-----------------------------------|-----------------------------------|-------------------------|---------------|
| Low     | 2412               | 13.0                              | 13.8                              | 16.43                             | 30.00                   | -13.57        |
| Mid     | 2437               | 14.3                              | 15.3                              | 17.84                             | 30.00                   | -12.16        |
| High    | 2462               | 10.8                              | 11.9                              | 14.40                             | 30.00                   | -15.60        |

**Note:** the power readings above were measured with gated method, and the measurement was taken only during the ON time. No duty cycle correction was necessary.

## 10.4. PSD

### LIMITS

FCC §15.247

IC RSS-247 5.4.4

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### RESULTS

#### 10.4.1. 802.11b MODE IN THE 2.4 GHZ BAND

##### Chain 0

###### PSD Results

| Channel | Frequency<br>(MHz) | Chain 0<br>Meas<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
|---------|--------------------|--------------------------|----------------|----------------|
| Low     | 2412               | -4.12                    | 8.0            | -12.1          |
| Mid     | 2437               | -3.87                    | 8.0            | -11.9          |
| High    | 2462               | -4.15                    | 8.0            | -12.2          |

##### Chain 1

###### PSD Results

| Channel | Frequency<br>(MHz) | Chain 0<br>Meas<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
|---------|--------------------|--------------------------|----------------|----------------|
| Low     | 2412               | -4.96                    | 8.0            | -13.0          |
| Mid     | 2437               | -4.58                    | 8.0            | -12.6          |
| High    | 2462               | -4.41                    | 8.0            | -12.4          |

## 10.4.2. 802.11g MODE IN THE 2.4 GHz BAND

### Chain 0

#### PSD Results

| Channel | Frequency<br>(MHz) | Chain 0<br>Meas<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
|---------|--------------------|--------------------------|----------------|----------------|
| Low     | 2412               | -8.03                    | 8.0            | -16.0          |
| Mid     | 2437               | -7.78                    | 8.0            | -15.8          |
| High    | 2462               | -10.89                   | 8.0            | -18.9          |

### Chain 1

#### PSD Results

| Channel | Frequency<br>(MHz) | Chain 0<br>Meas<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
|---------|--------------------|--------------------------|----------------|----------------|
| Low     | 2412               | -7.76                    | 8.0            | -15.8          |
| Mid     | 2437               | -7.51                    | 8.0            | -15.5          |
| High    | 2462               | -10.81                   | 8.0            | -18.8          |

## 10.4.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND

#### PSD Results


| Channel | Frequency<br>(MHz) | Chain 0<br>Meas<br>(dBm) | Chain 1<br>Meas<br>(dBm) | Total<br>PSD<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
|---------|--------------------|--------------------------|--------------------------|-----------------------|----------------|----------------|
| Low     | 2412               | -11.63                   | -10.49                   | -8.01                 | 8.0            | -16.0          |
| Mid     | 2437               | -11.40                   | -10.48                   | -7.90                 | 8.0            | -15.9          |
| High    | 2462               | -13.67                   | -12.06                   | -9.78                 | 8.0            | -17.8          |

## 10.4.1. 802.11n HT40 MODE IN THE 2.4 GHz BAND


#### PSD Results

| Channel | Frequency<br>(MHz) | Chain 0<br>Meas<br>(dBm) | Chain 1<br>Meas<br>(dBm) | Total<br>PSD<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
|---------|--------------------|--------------------------|--------------------------|-----------------------|----------------|----------------|
| Low     | 2422               | -14.22                   | -12.53                   | -10.29                | 8.0            | -18.3          |
| Mid     | 2437               | -13.28                   | -11.00                   | -8.98                 | 8.0            | -17.0          |
| High    | 2452               | -15.81                   | -15.09                   | -12.42                | 8.0            | -20.4          |

## 10.4.1. PSD MID CH PLOTS

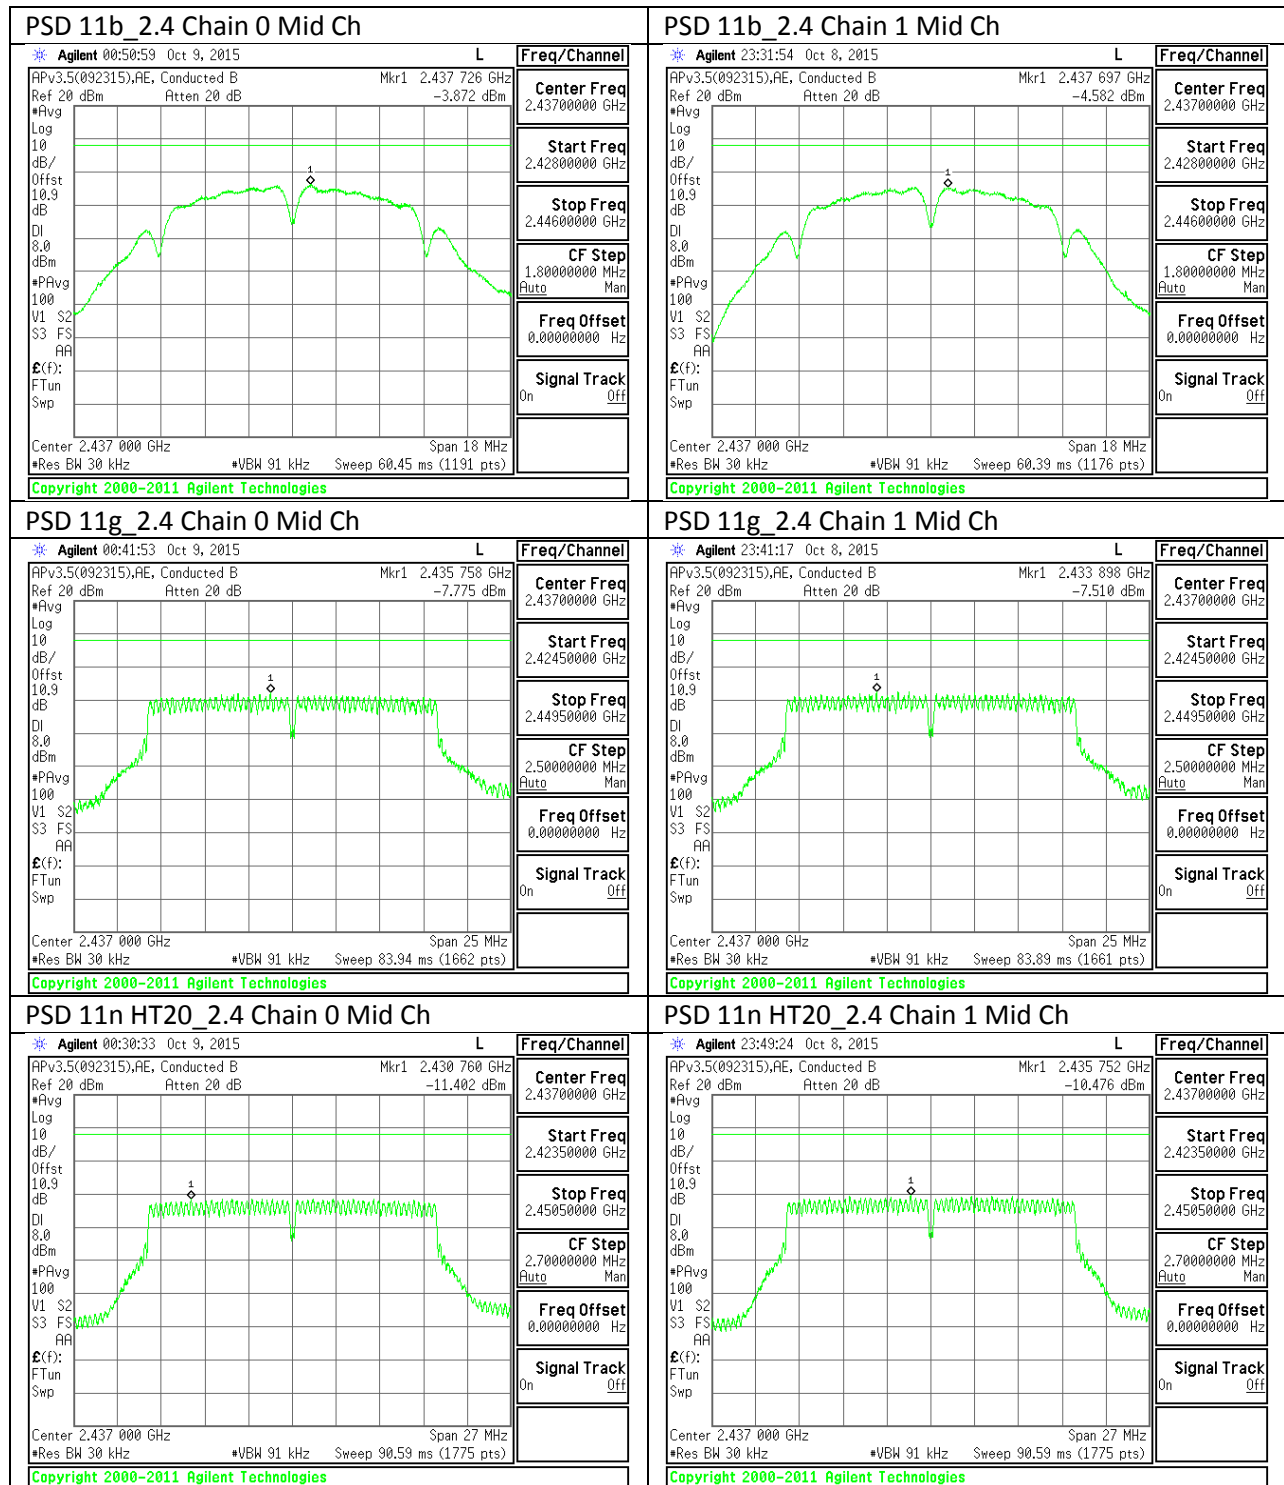



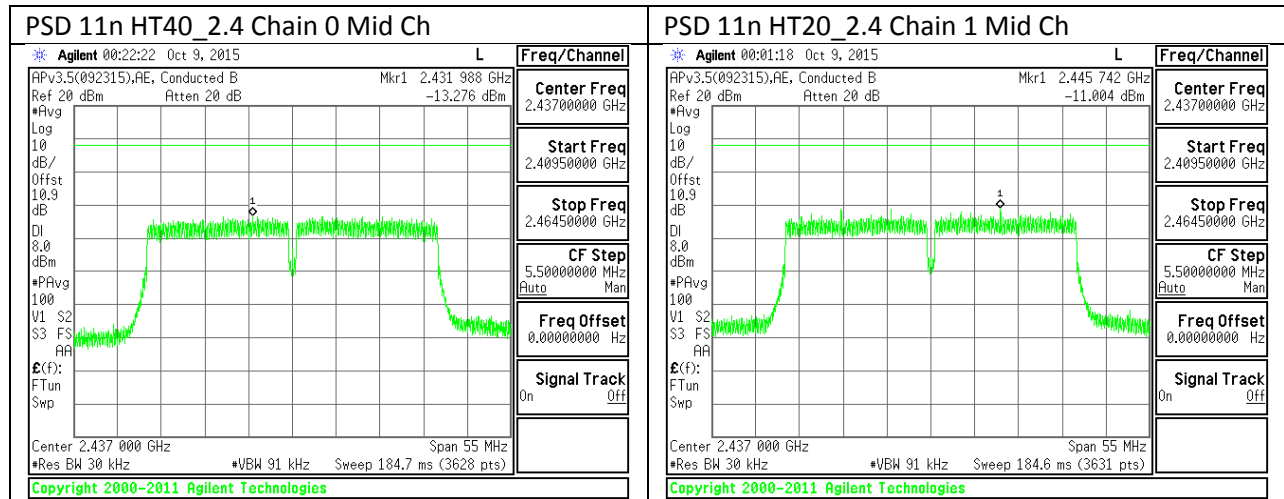

## **10.5. OUT-OF-BAND EMISSIONS**

### **LIMITS**

FCC §15.247 (d)

IC RSS-247 5.4.4

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.


### **TEST PROCEDURE**

The transmitter output is connected to a spectrum analyzer with RBW = 100 kHz, VBW = 300 kHz, peak detector, and max hold. Measurements utilizing these settings are made of the in-band reference level, bandedge (where measurements to the general radiated limits will not be made) and out-of-band emissions.


### **RESULTS**

## 10.5.1. 802.11b MODE IN THE 2.4 GHZ BAND


### IN-BAND REFERENCE LEVEL

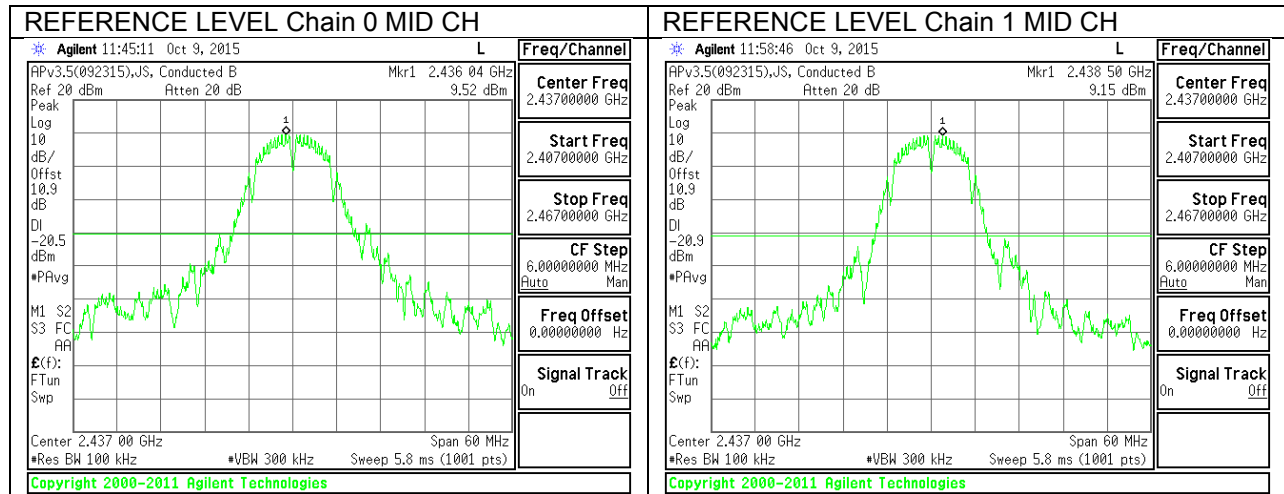


### LOW CHANNEL BAND EDGE


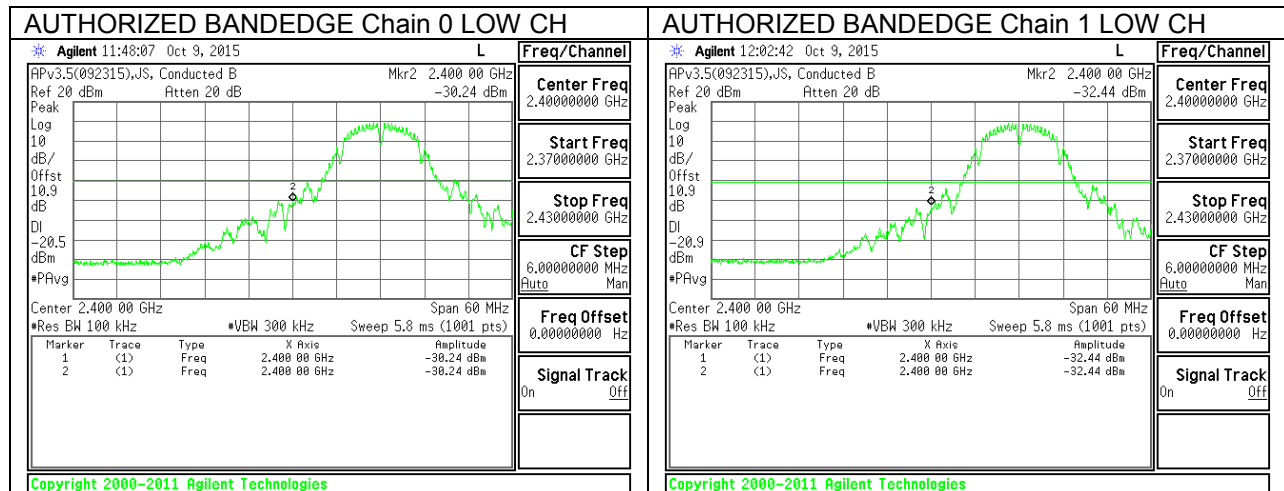


## HIGH CHANNEL BAND EDGE

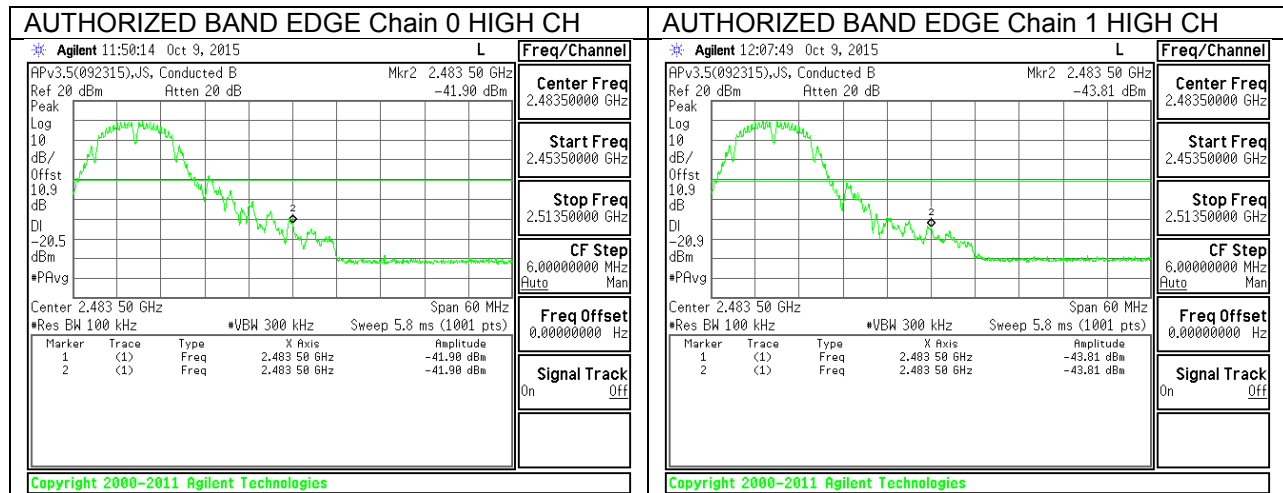


## OUT-OF-BAND EMISSIONS

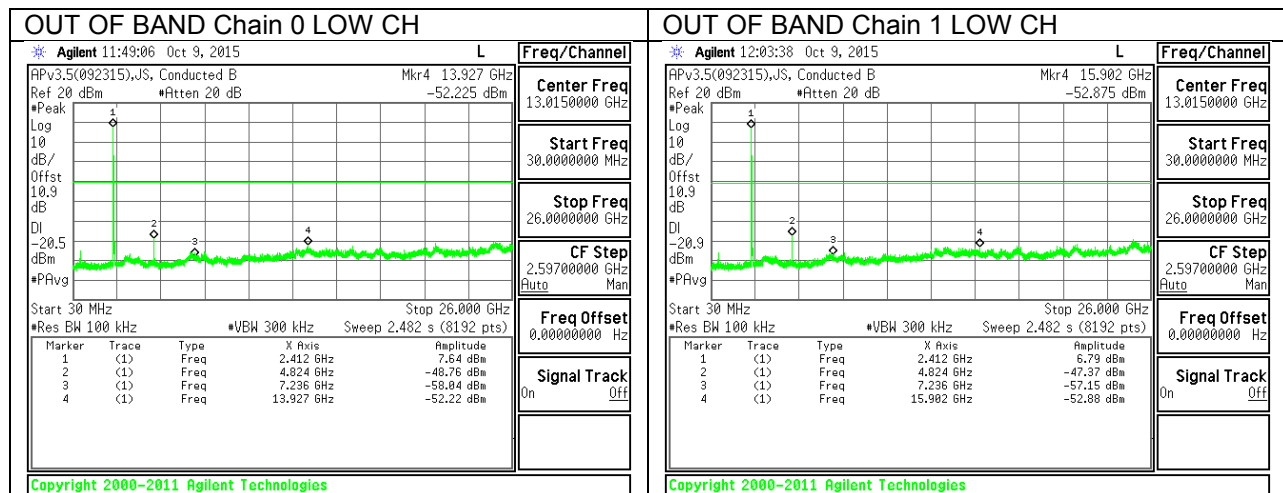

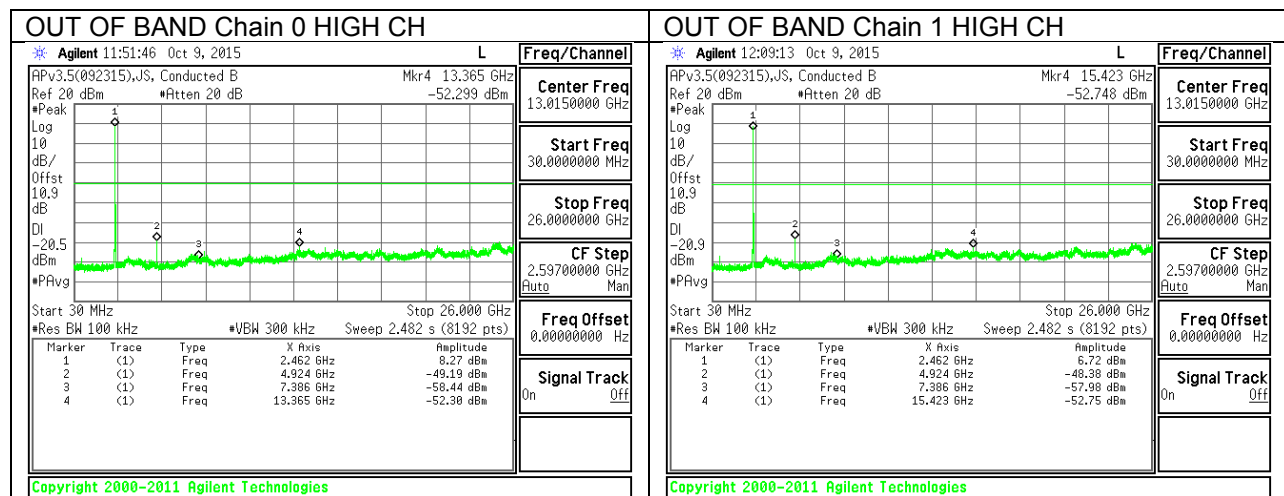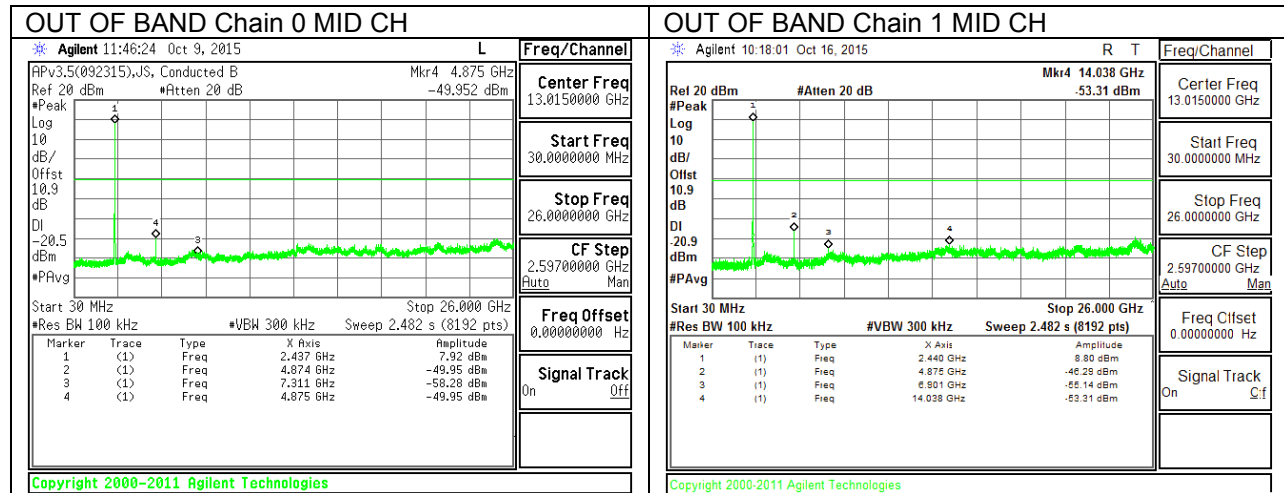


## 10.5.2. 802.11g MODE IN THE 2.4 GHZ BAND


### IN-BAND REFERENCE LEVEL

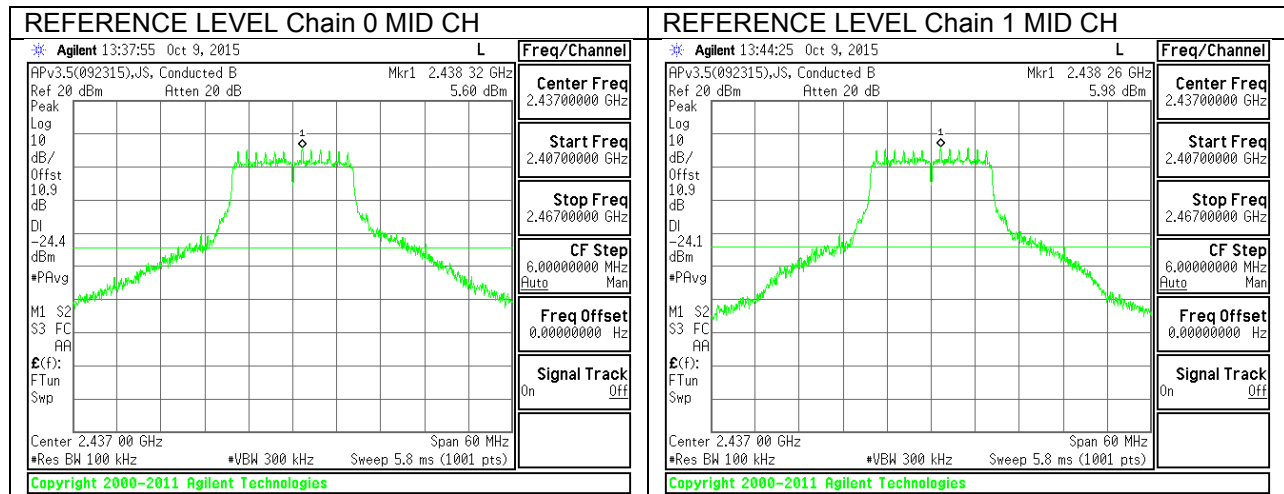


### LOW CHANNEL BAND EDGE


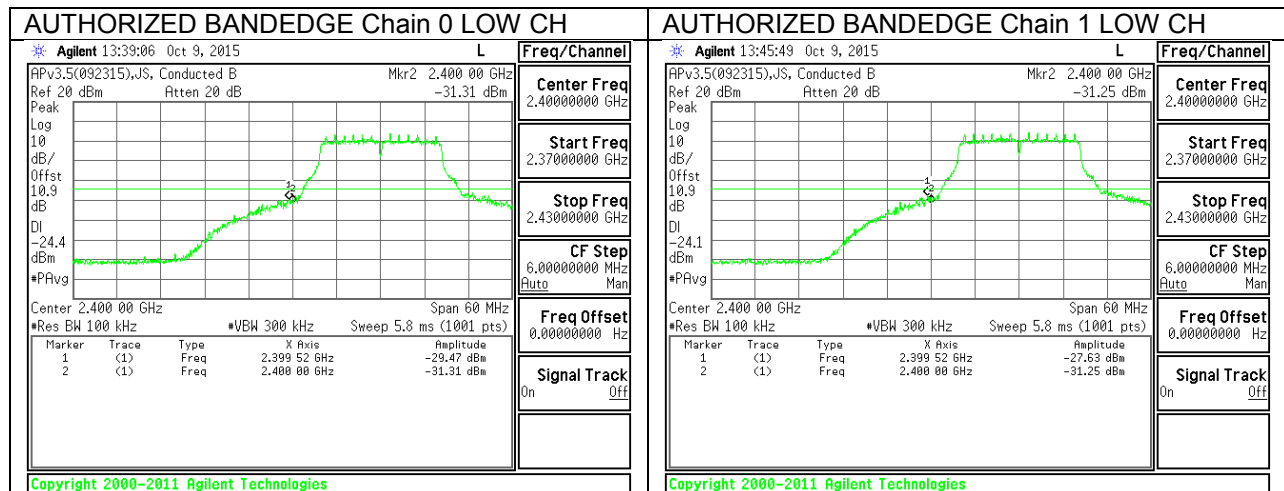


## HIGH CHANNEL BAND EDGE

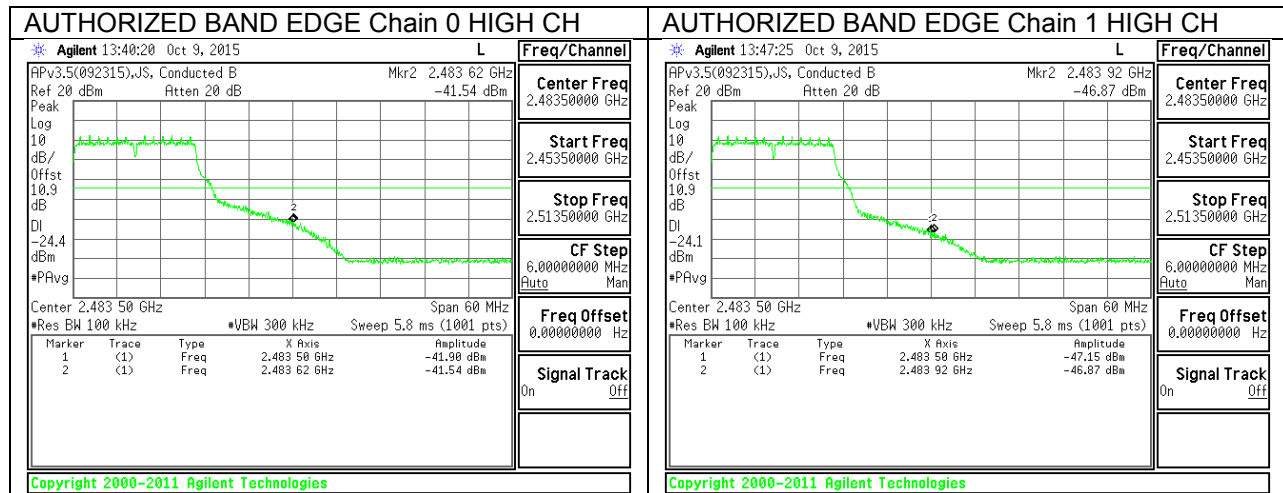

## OUT-OF-BAND EMISSIONS

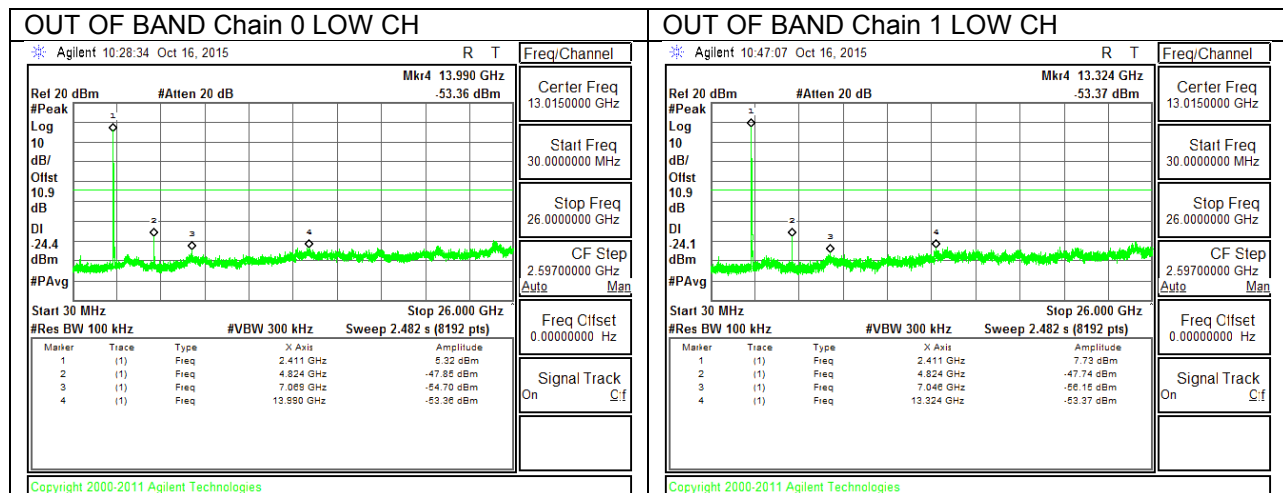


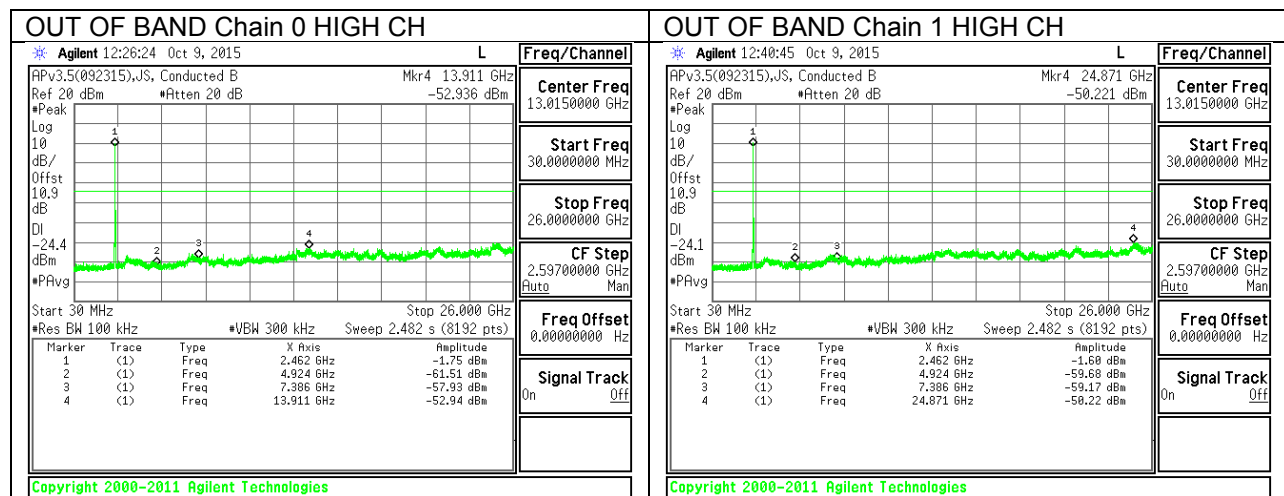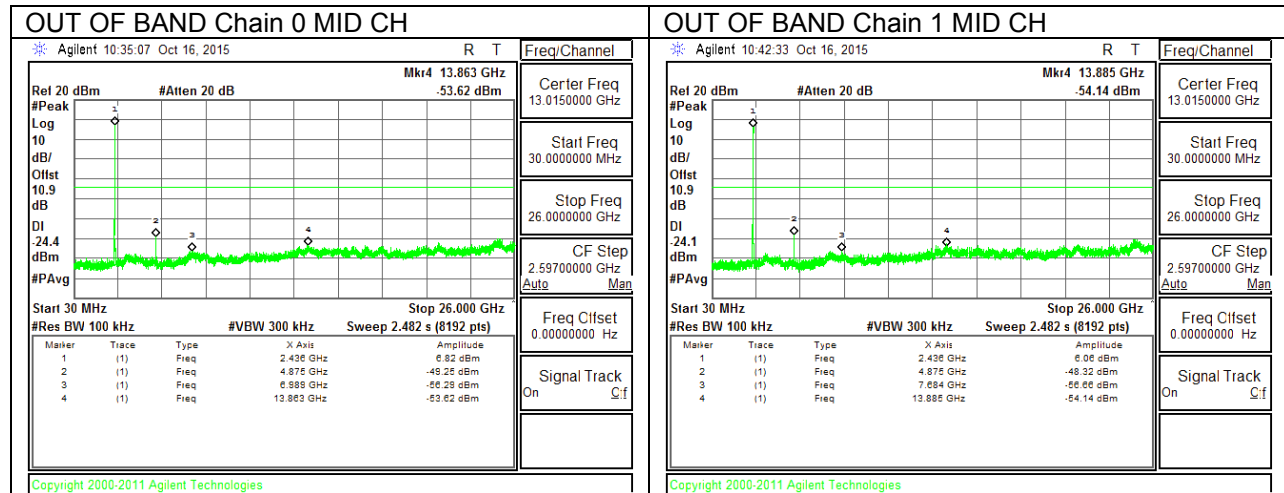




### 10.5.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND


#### IN-BAND REFERENCE LEVEL

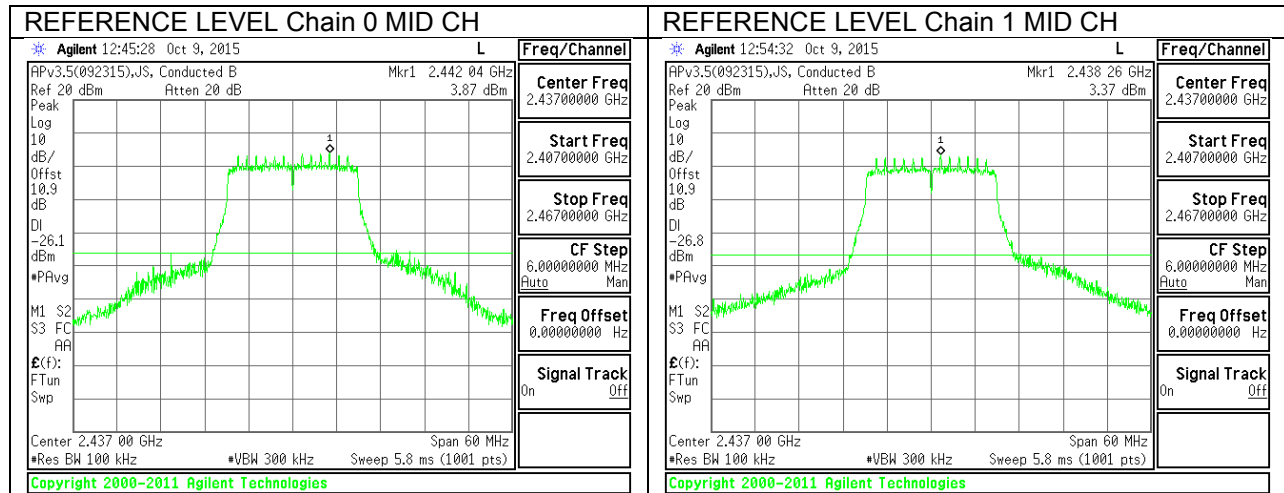


#### LOW CHANNEL BAND EDGE


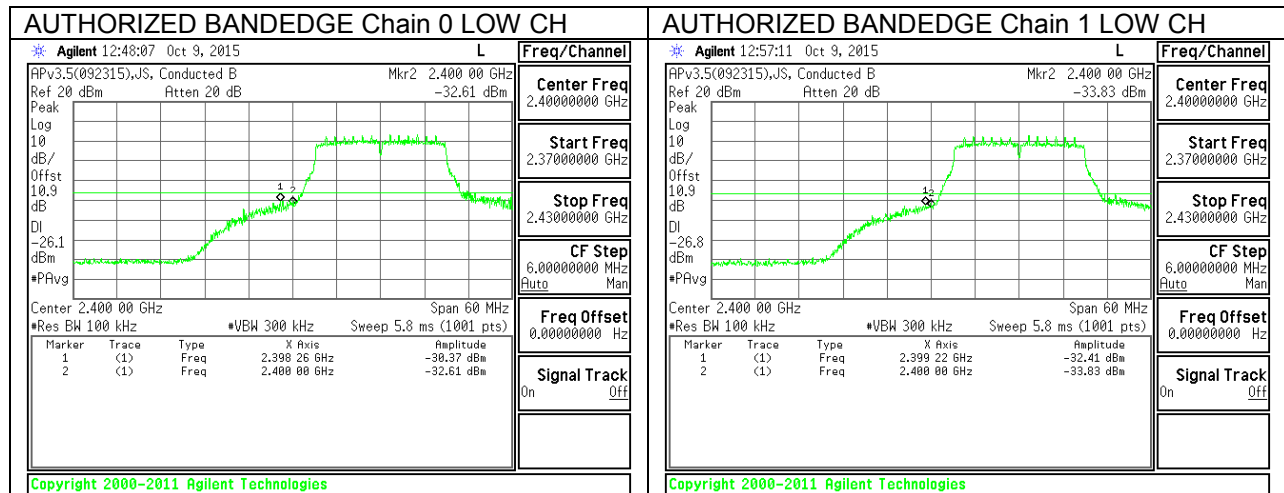


# HIGH CHANNEL BAND EDGE

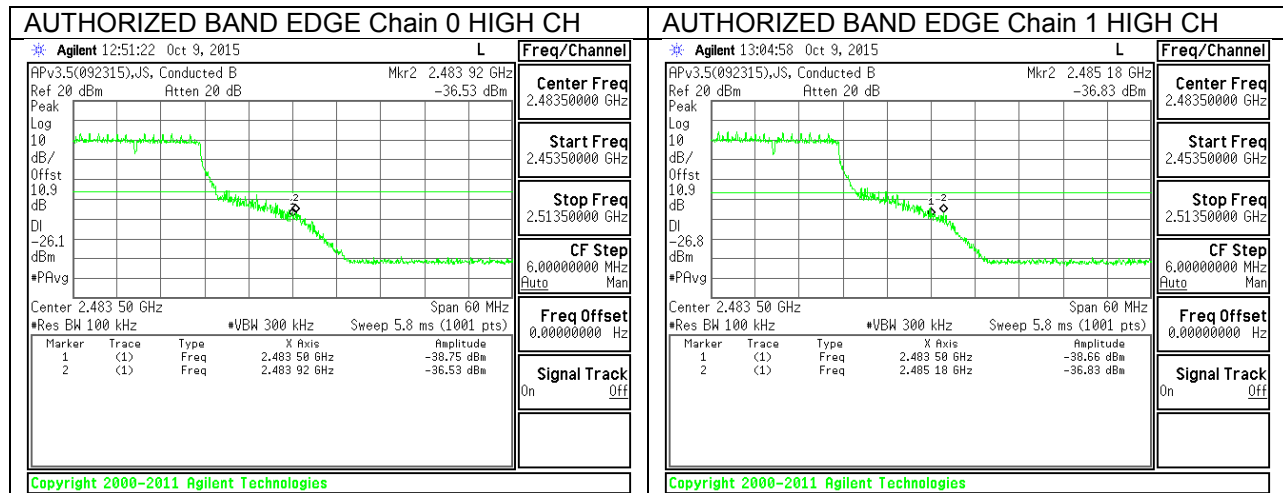


# OUT-OF-BAND EMISSIONS

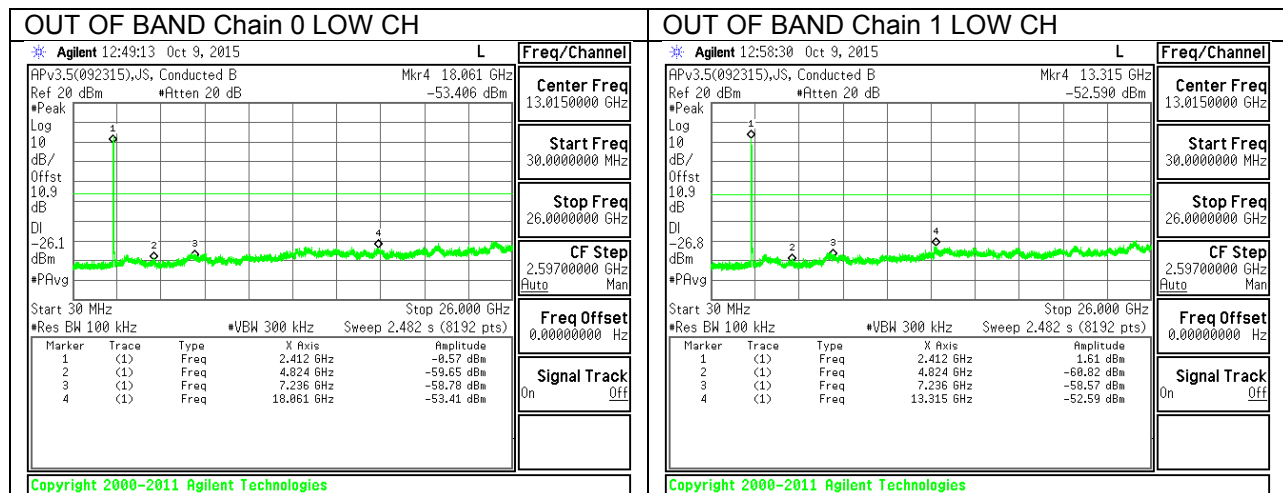

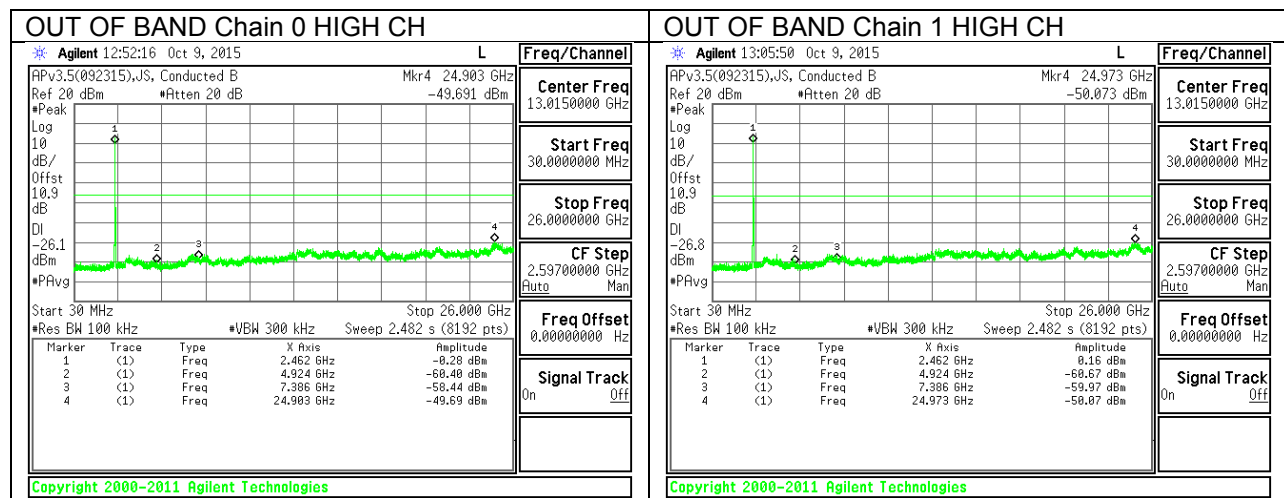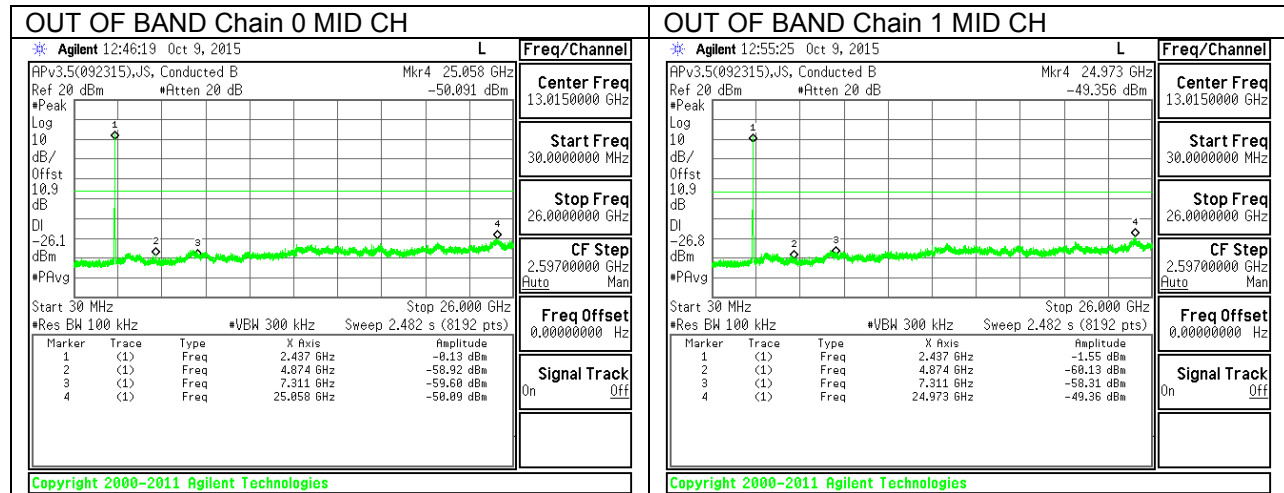


## 10.5.4. 802.11n HT40 MODE IN THE 2.4 GHz BAND


### IN-BAND REFERENCE LEVEL

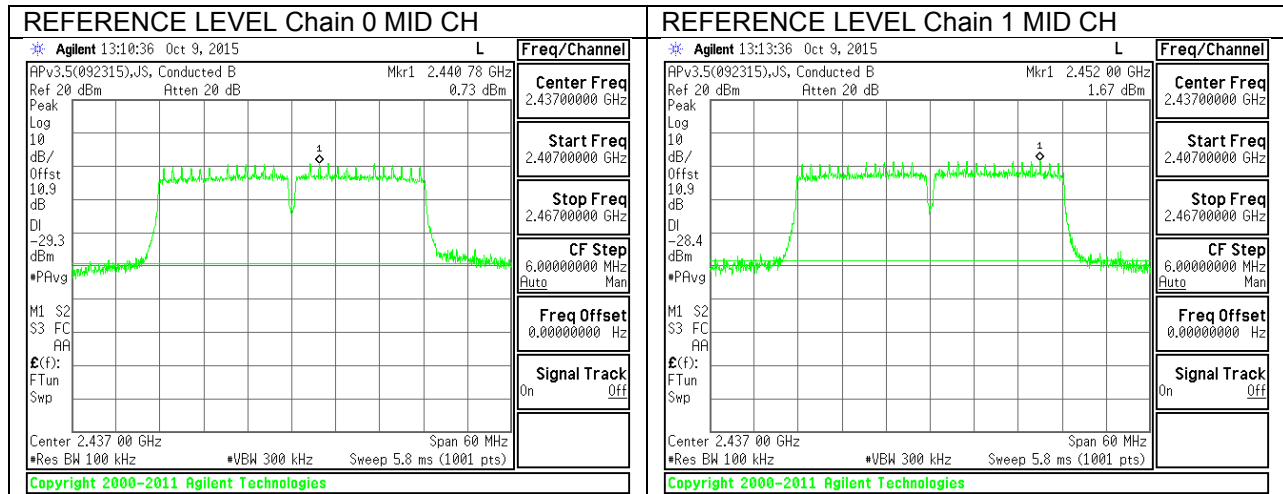


### LOW CHANNEL BAND EDGE


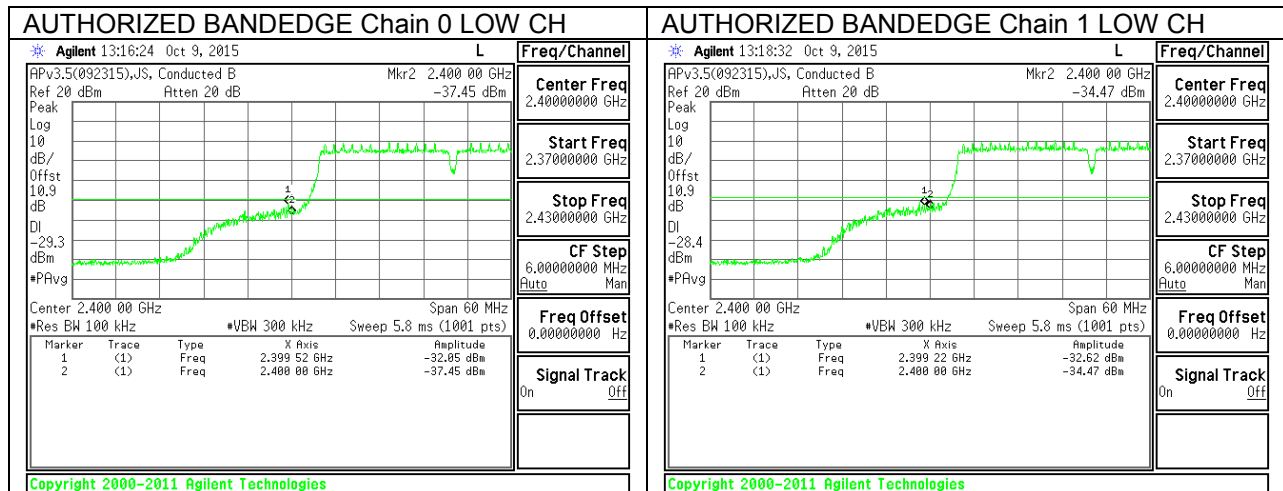


## HIGH CHANNEL BAND EDGE

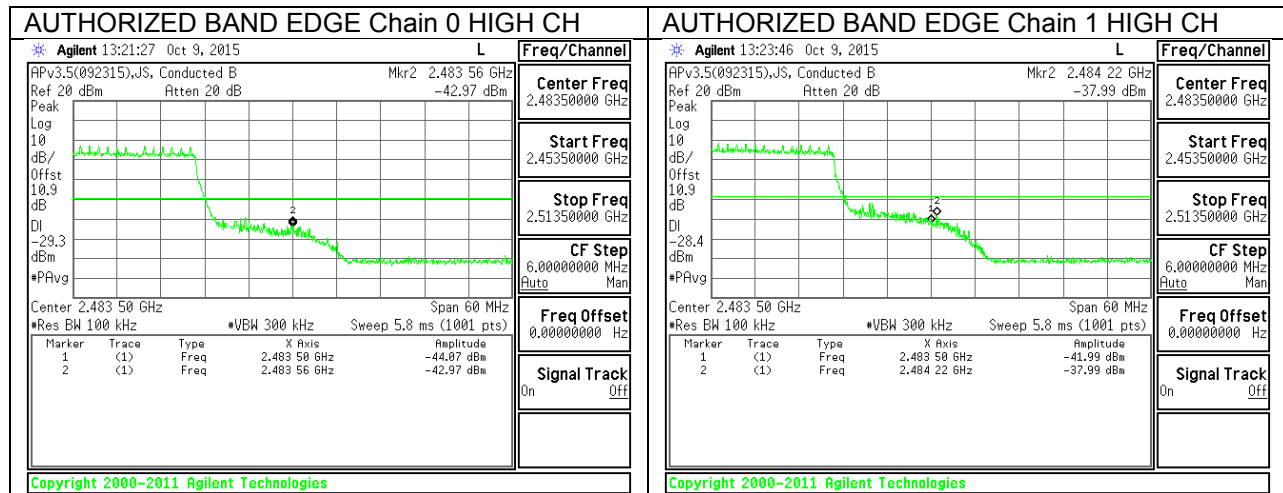

## OUT-OF-BAND EMISSIONS

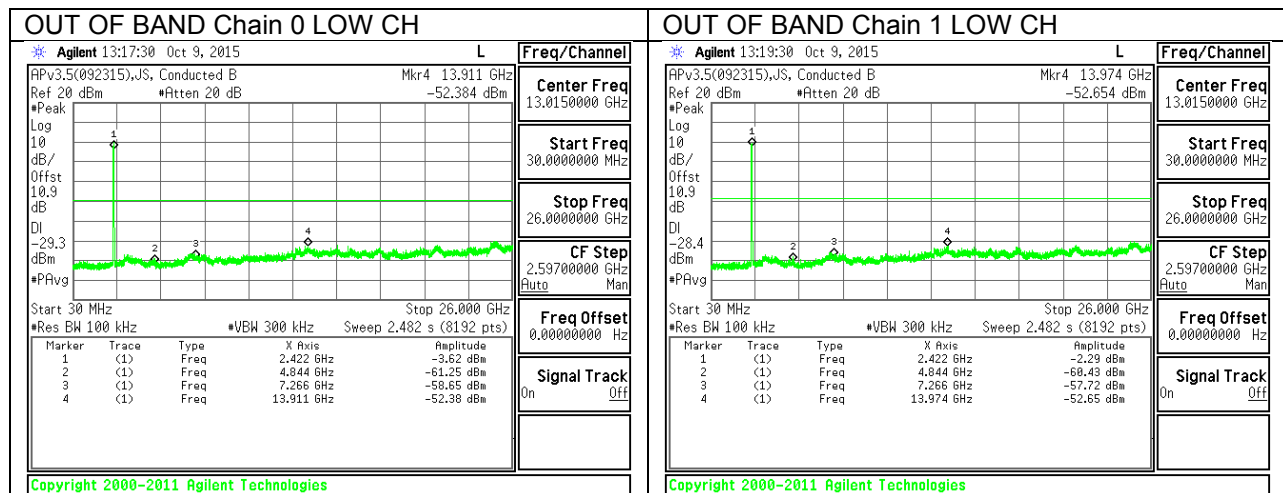

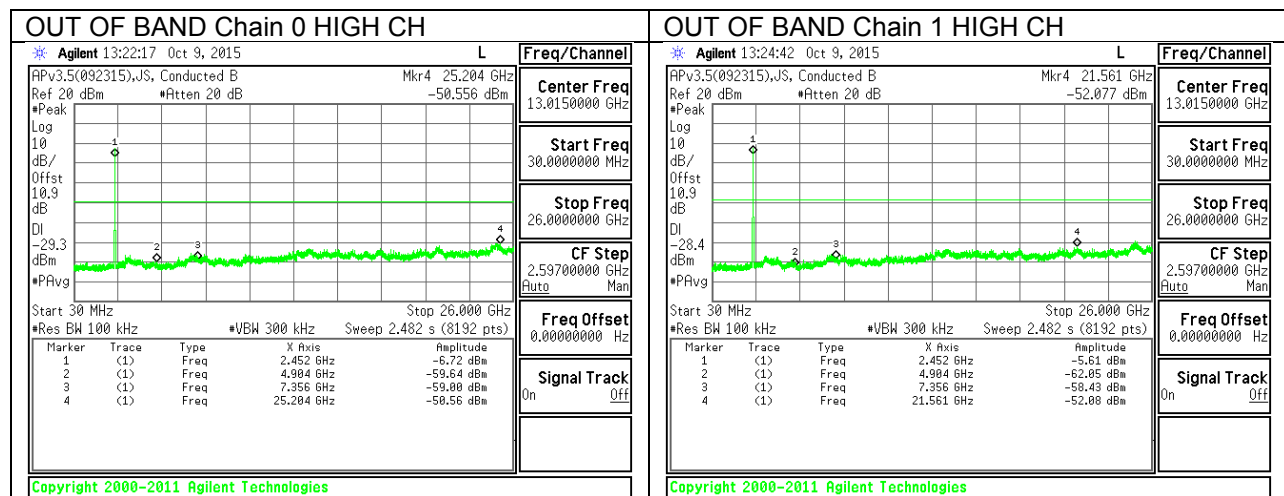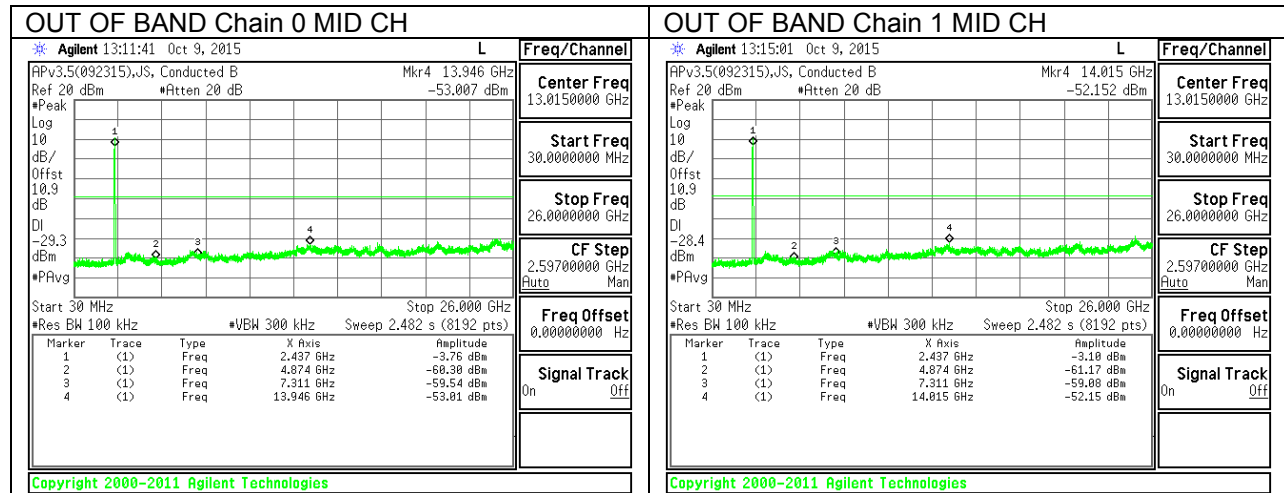

## 11. RADIATED TEST RESULTS

### 11.1. LIMITS AND PROCEDURE

#### LIMITS

FCC §15.205 and §15.209

IC RSS-GEN Clause 8.9 (Transmitter)

| Frequency Range (MHz) | Field Strength Limit (uV/m) at 3 m | Field Strength Limit (dBuV/m) at 3 m |
|-----------------------|------------------------------------|--------------------------------------|
| 30 - 88               | 100                                | 40                                   |
| 88 - 216              | 150                                | 43.5                                 |
| 216 - 960             | 200                                | 46                                   |
| Above 960             | 500                                | 54                                   |

#### TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements and add duty cycle factor for average measurements. Duty cycle factor=  $10\log(1/x)$  For this sample B mode = 0dB (duty cycle >98%); G mode = 0.33dB; N HT20 mode = 0.59dB; N HT40 1.08dB.

The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each applicable band.


The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

## 11.2. TRANSMITTER ABOVE 1 GHz

### 11.2.1. TX ABOVE 1 GHz 802.11b MODE IN THE 2.4 GHz BAND Chain 0

#### RESTRICTED BANDEDGE (LOW CHANNEL)

##### HORIZONTAL PEAK AND AVERAGE PLOT

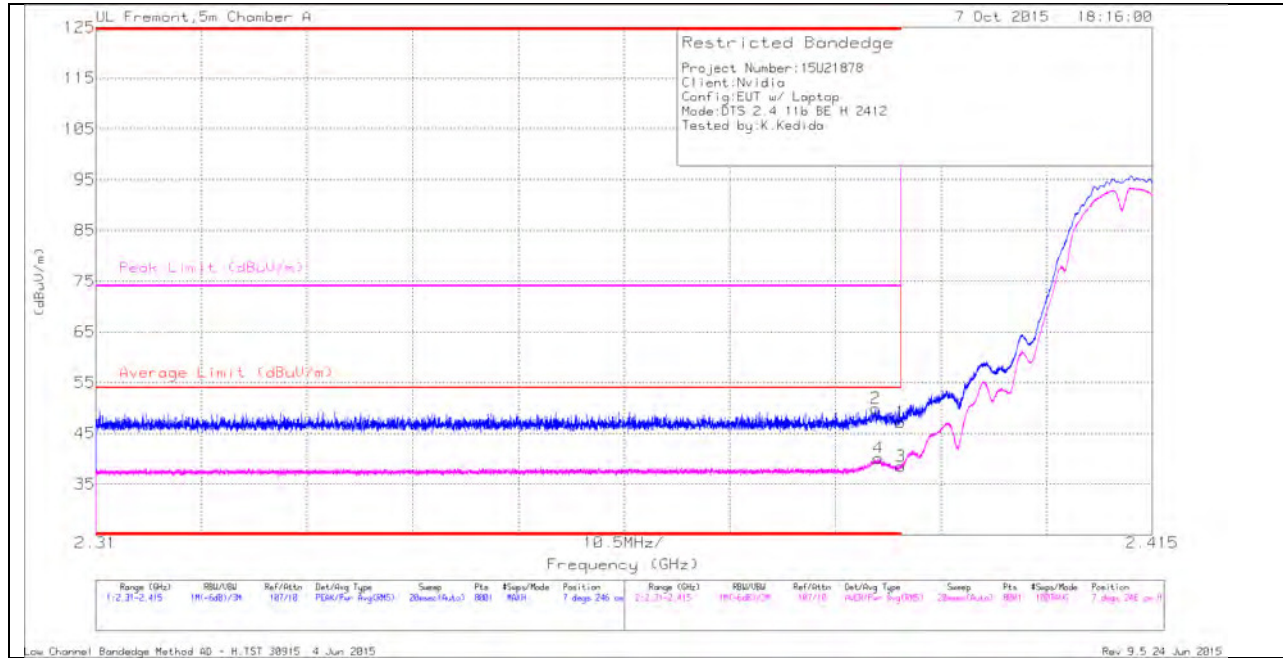

##### HORIZONTAL DATA

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T136 (dB/m) | Amp/Cbl/ Ftr/Pad (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|-----------------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 2      | * 2.387         | 42.52                | Pk  | 32             | -24.6                 | 49.92                      | -                      | -           | 74                  | -24.08         | 7              | 246         | H        |
| 4      | * 2.388         | 32.69                | RMS | 32             | -24.6                 | 40.09                      | 54                     | -13.91      | -                   | -              | 7              | 246         | H        |
| 1      | * 2.39          | 39.8                 | Pk  | 32             | -24.6                 | 47.2                       | -                      | -           | 74                  | -26.8          | 7              | 246         | H        |
| 3      | * 2.39          | 31.12                | RMS | 32             | -24.6                 | 38.52                      | 54                     | -15.48      | -                   | -              | 7              | 246         | H        |


\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

RMS - RMS detection



### VERTICAL PEAK AND AVERAGE PLOT

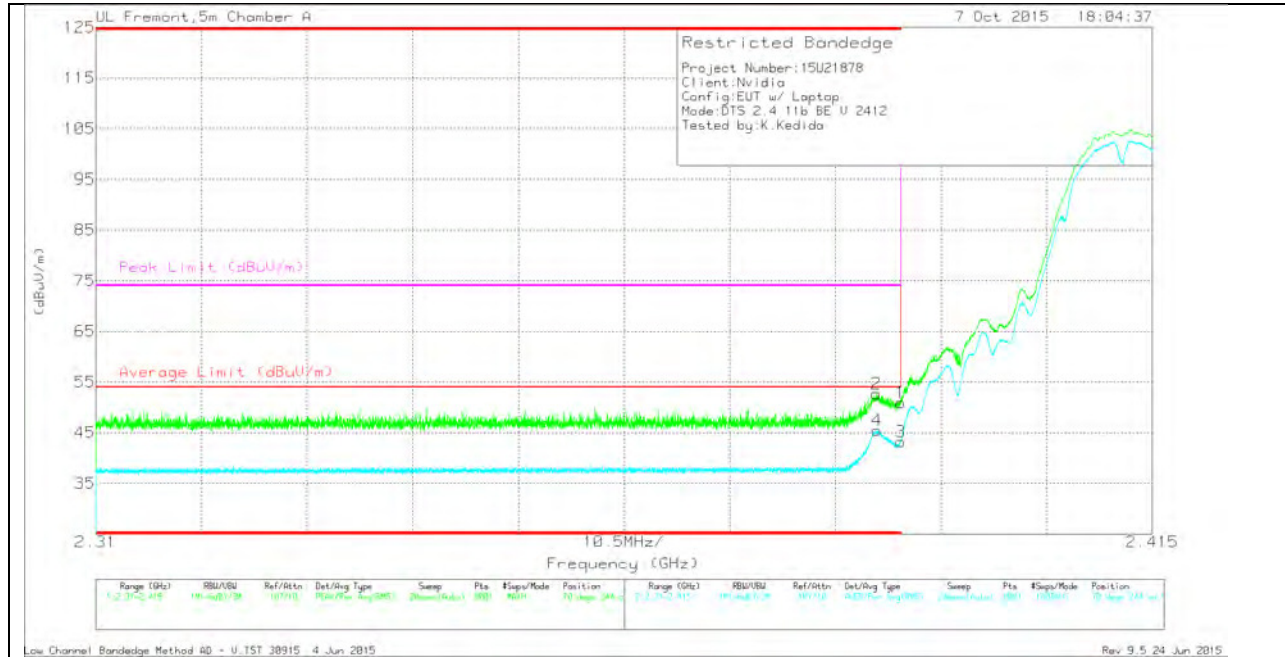

### VERTICAL DATA

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T136 (dB/m) | Amp/Cbl/Fltr/Pad (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|-----------------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 2      | * 2.388         | 45.21                | Pk  | 32             | -24.6                 | 52.61                      | -                      | -           | 74                  | -21.39         | 70             | 244         | V        |
| 4      | * 2.388         | 38.02                | RMS | 32             | -24.6                 | 45.42                      | 54                     | -8.58       | -                   | -              | 70             | 244         | V        |
| 1      | * 2.39          | 43.46                | Pk  | 32             | -24.6                 | 50.86                      | -                      | -           | 74                  | -23.14         | 70             | 244         | V        |
| 3      | * 2.39          | 35.86                | RMS | 32             | -24.6                 | 43.26                      | 54                     | -10.74      | -                   | -              | 70             | 244         | V        |


\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

RMS - RMS detection

## AUTHORIZED BANDEDGE (HIGH CHANNEL)

### HORIZONTAL PEAK AND AVERAGE PLOT

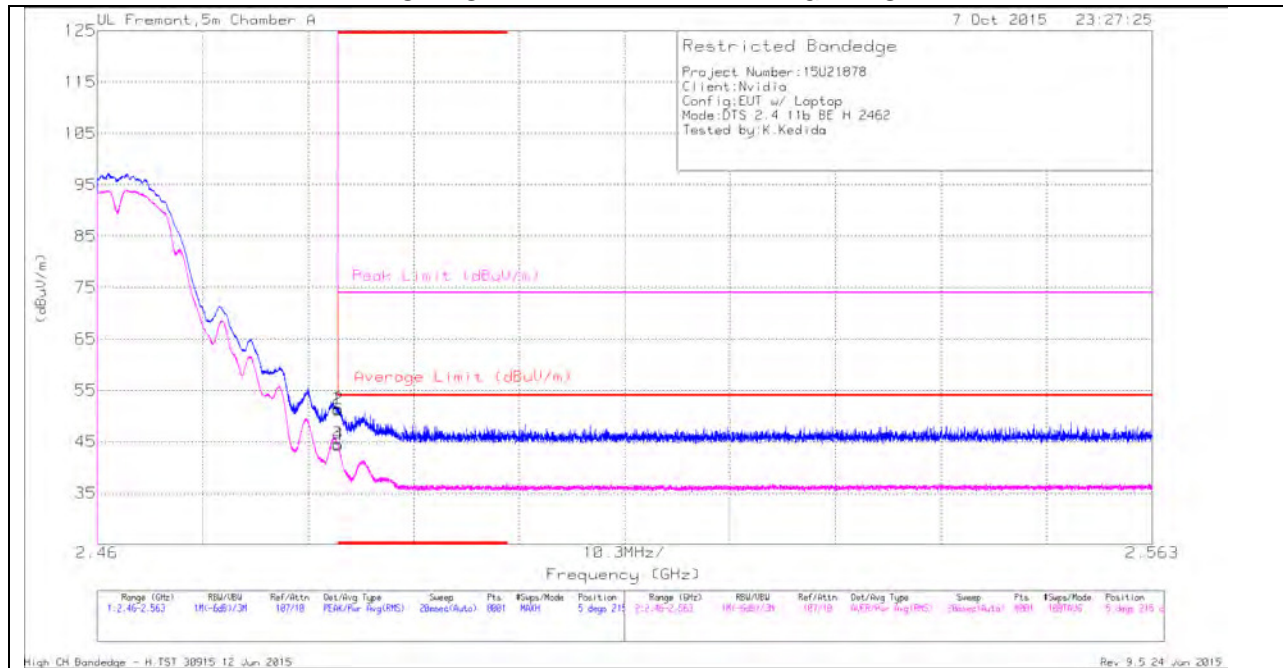

### HORIZONTAL DATA


| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T136 (dB/m) | Amp/Cbl/ Ftr/Pad (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|-----------------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 2.484         | 39.45                | Pk  | 32.1           | -20.3                 | 51.25                      | -                      | -           | 74                  | -22.75         | 5              | 215         | H        |
| 2      | * 2.484         | 39.61                | Pk  | 32.1           | -20.3                 | 51.41                      | -                      | -           | 74                  | -22.59         | 5              | 215         | H        |
| 3      | * 2.484         | 32.84                | RMS | 32.1           | -20.3                 | 44.64                      | 54                     | -9.36       | -                   | -              | 5              | 215         | H        |
| 4      | * 2.484         | 32.59                | RMS | 32.1           | -20.3                 | 44.39                      | 54                     | -9.61       | -                   | -              | 5              | 215         | H        |

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

RMS - RMS detection

### VERTICAL PEAK AND AVERAGE PLOT

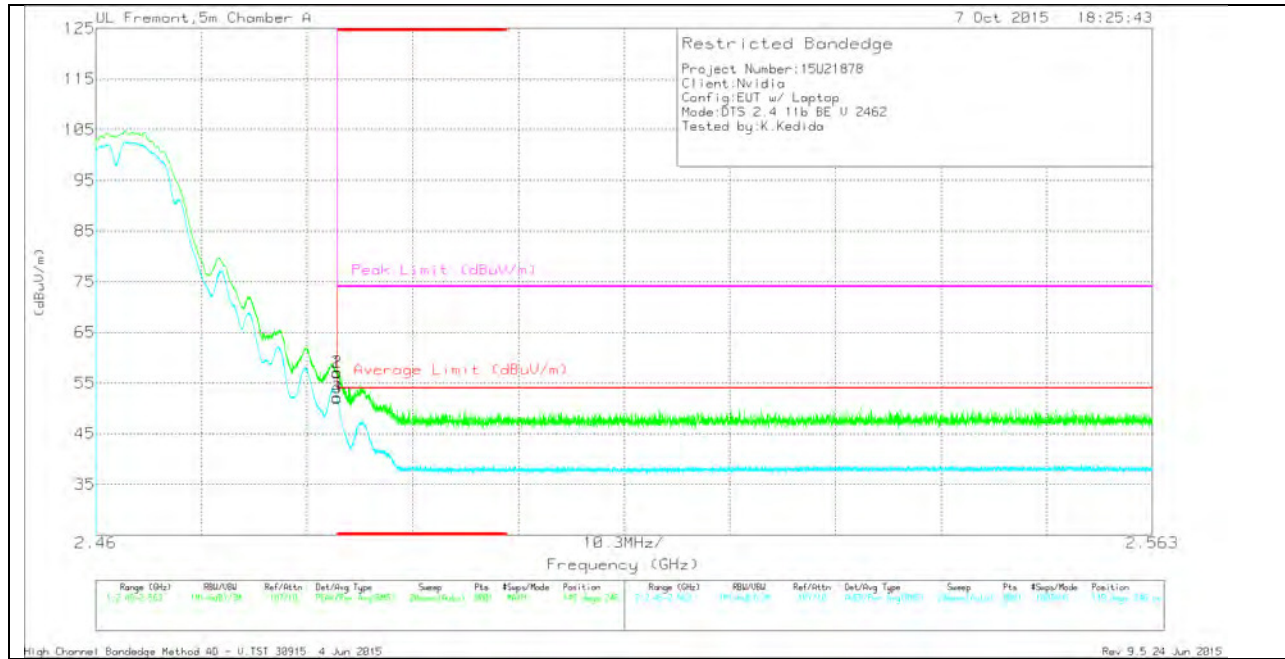

### VERTICAL DATA

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T136 (dB/m) | Amp/Cbl/Fltr/Pad (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|-----------------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 2.484         | 49.39                | Pk  | 32.1           | -24.5                 | 56.99                      | -                      | -           | 74                  | -17.01         | 149            | 246         | V        |
| 2      | * 2.484         | 49.51                | Pk  | 32.1           | -24.5                 | 57.11                      | -                      | -           | 74                  | -16.89         | 149            | 246         | V        |
| 3      | * 2.484         | 44.61                | RMS | 32.1           | -24.5                 | 52.21                      | 54                     | -1.79       | -                   | -              | 149            | 246         | V        |
| 4      | * 2.484         | 44.43                | RMS | 32.1           | -24.5                 | 52.03                      | 54                     | -1.97       | -                   | -              | 149            | 246         | V        |


\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

RMS - RMS detection


## HARMONICS AND SPURIOUS EMISSIONS

### LOW CHANNEL HORIZONTAL

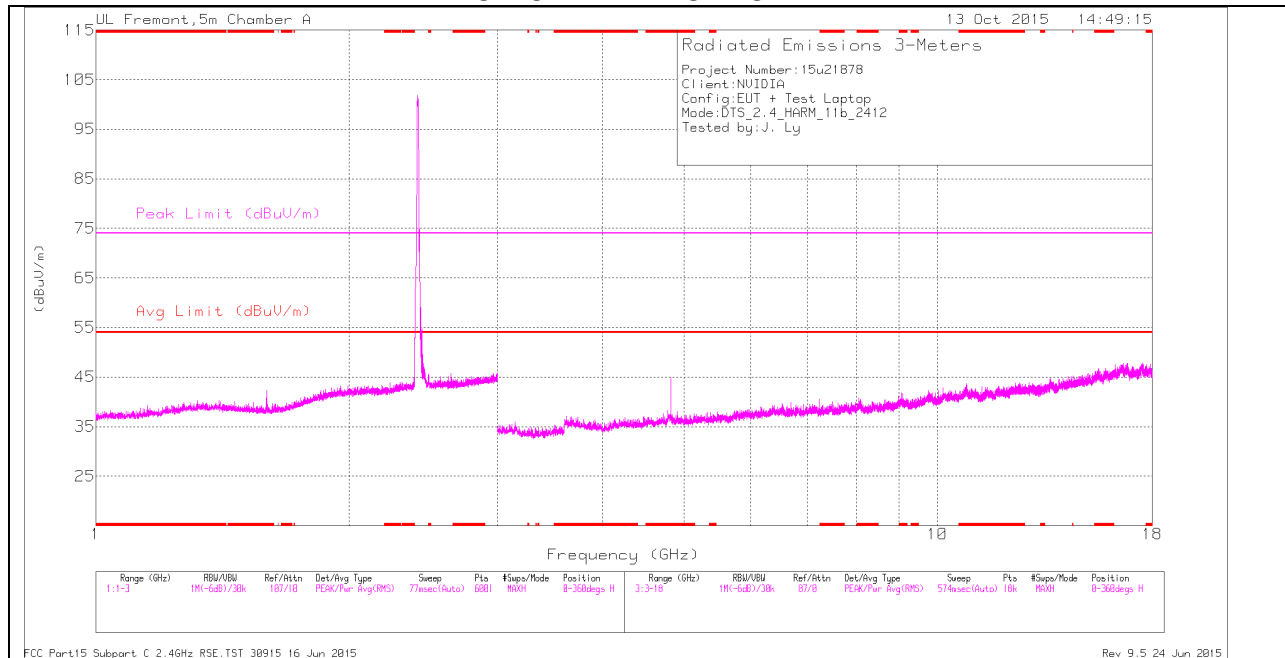

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

### LOW CHANNEL VERTICAL

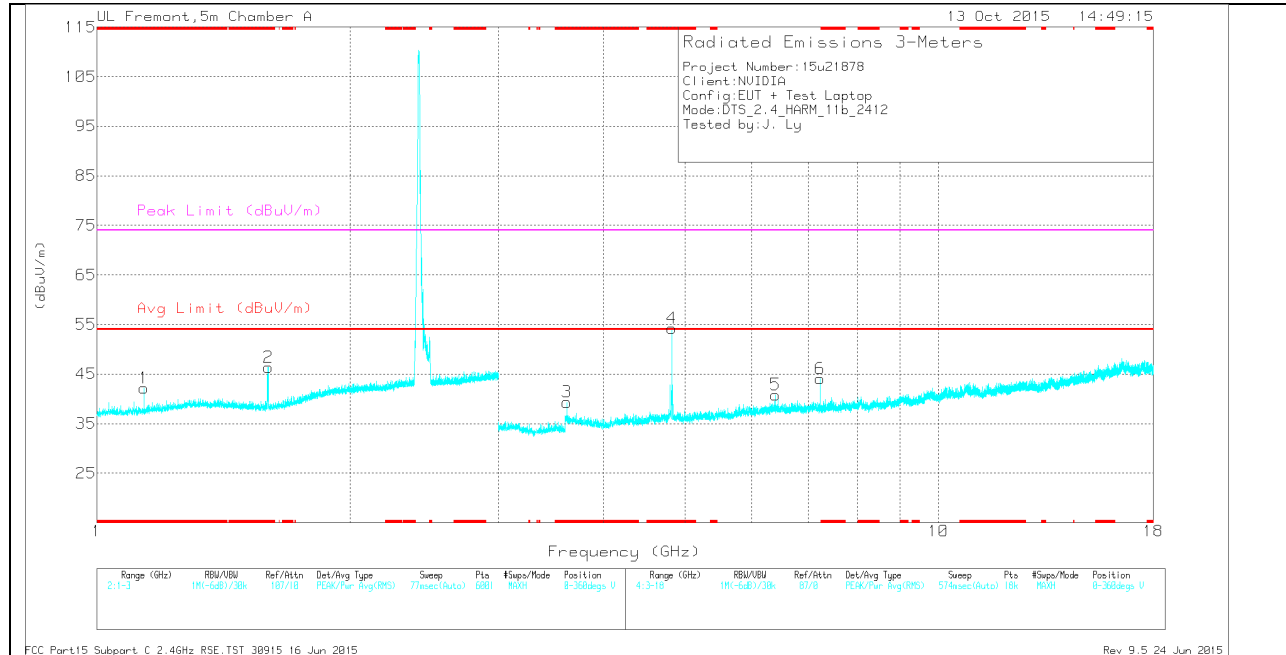

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

## LOW CHANNEL DATA

### TRACE MARKERS


| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T136 (dB/m) | Amp/Cb/Ftr /Pad (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|----------------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 1.137         | 40.76                | Pk  | 27.5           | -26.1                | 42.16                      | -                  | -           | 74                  | -31.84         | 0-360          | 200         | V        |
| 2      | * 1.599         | 44.05                | Pk  | 27.9           | -25.6                | 46.35                      | -                  | -           | 74                  | -27.65         | 0-360          | 100         | V        |
| 3      | * 3.617         | 38.42                | Pk  | 33.1           | -32.2                | 39.32                      | -                  | -           | 74                  | -34.68         | 0-360          | 200         | V        |
| 4      | * 4.824         | 49.97                | Pk  | 33.9           | -29.6                | 54.27                      | -                  | -           | 74                  | -19.73         | 0-360          | 100         | V        |
| 5      | 6.399           | 32.54                | Pk  | 35.5           | -27.2                | 40.84                      | -                  | -           | -                   | -              | 0-360          | 200         | V        |
| 6      | 7.235           | 35.12                | Pk  | 35.5           | -26.5                | 44.12                      | -                  | -           | -                   | -              | 0-360          | 200         | V        |

PK - Peak detector

### RADIATED EMISSIONS


| Frequency (GHz) | Meter Reading (dBuV) | Det  | AF T136 (dB/m) | Amp/Cb/Ftr /Pad (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|-----------------|----------------------|------|----------------|----------------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| * 1.137         | 44.98                | PK-U | 27.5           | -26.1                | 46.38                      | -                  | -           | 74                  | -27.62         | 29             | 301         | H        |
| * 1.137         | 32.73                | ADR  | 27.5           | -26.1                | 34.13                      | 54                 | -19.87      | -                   | -              | 29             | 301         | H        |
| * 1.597         | 47.47                | PK-U | 27.9           | -25.6                | 49.77                      | -                  | -           | 74                  | -24.23         | 316            | 391         | H        |
| * 1.598         | 32.76                | ADR  | 27.9           | -25.6                | 35.06                      | 54                 | -18.94      | -                   | -              | 316            | 391         | H        |
| * 4.824         | 44.04                | PK-U | 33.9           | -29.6                | 48.34                      | -                  | -           | 74                  | -25.66         | 101            | 103         | H        |
| * 4.824         | 36.23                | ADR  | 33.9           | -29.6                | 40.53                      | 54                 | -13.47      | -                   | -              | 101            | 103         | H        |
| * 3.616         | 43.28                | PK-U | 33.1           | -32.2                | 44.18                      | -                  | -           | 74                  | -29.82         | 273            | 373         | H        |
| * 3.616         | 30.78                | ADR  | 33.1           | -32.2                | 31.68                      | 54                 | -22.32      | -                   | -              | 273            | 373         | H        |
| 6.399           | 39.4                 | PK-U | 35.5           | -27.2                | 47.7                       | -                  | -           | -                   | -              | 236            | 200         | H        |
| 7.234           | 40.44                | PK-U | 35.5           | -26.5                | 49.44                      | -                  | -           | -                   | -              | 314            | 325         | H        |

### MID CHANNEL HORIZONTAL

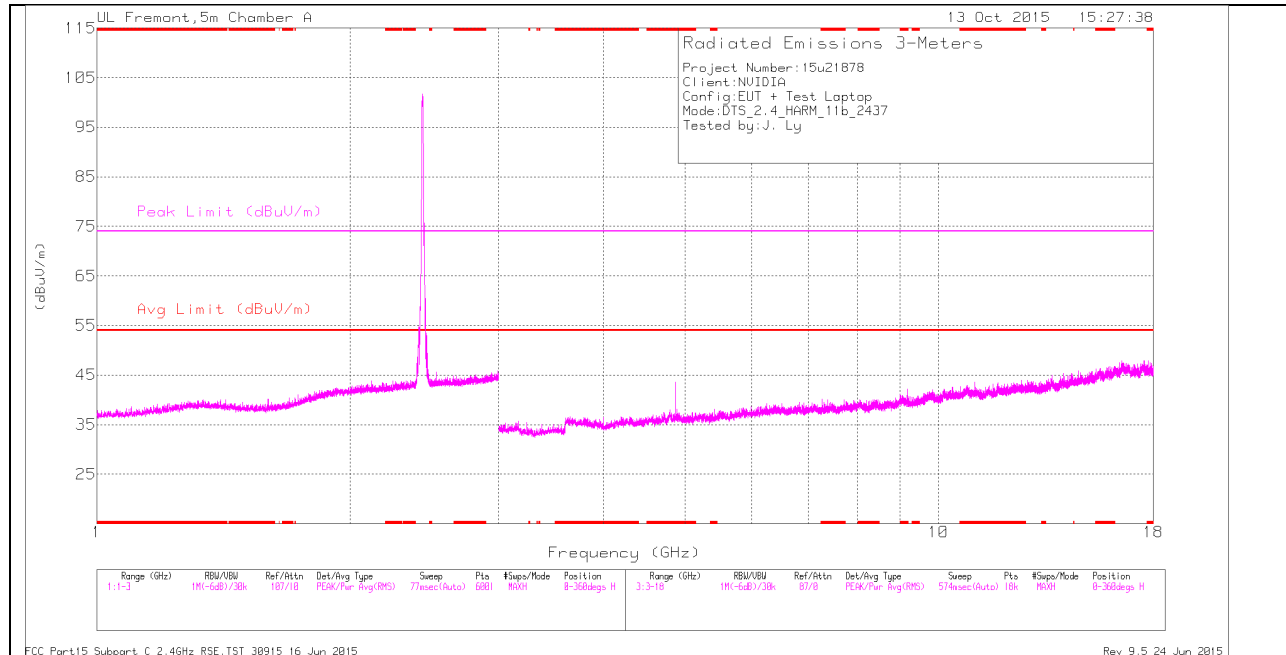

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

### MID CHANNEL VERTICAL

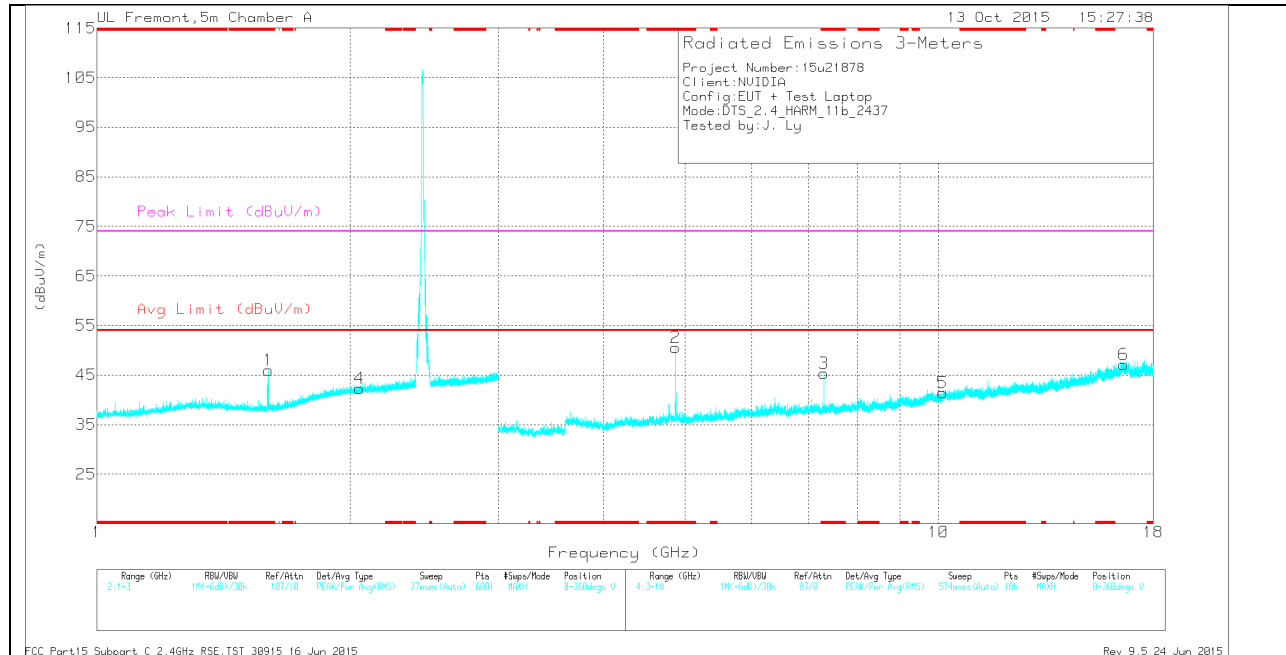

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.



## MID CHANNEL DATA

### TRACE MARKERS


| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T136 (dB/m) | Amp/Cb/Ftr /Pad (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|----------------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 1.599         | 43.67                | Pk  | 27.9           | -25.6                | 45.97                      | 54                 | -8.03       | 74                  | -28.03         | 0-360          | 100         | V        |
| 2      | * 4.874         | 45.95                | Pk  | 33.9           | -29.3                | 50.55                      | 54                 | -3.45       | 74                  | -23.45         | 0-360          | 200         | V        |
| 3      | * 7.31          | 36.46                | Pk  | 35.5           | -26.6                | 45.36                      | 54                 | -8.64       | 74                  | -28.64         | 0-360          | 200         | V        |
| 4      | 2.05            | 36.01                | Pk  | 31.3           | -25                  | 42.31                      | -                  | -           | -                   | -              | 0-360          | 200         | V        |
| 5      | 10.117          | 26.92                | Pk  | 37.2           | -22.7                | 41.42                      | -                  | -           | -                   | -              | 0-360          | 200         | V        |
| 6      | 16.597          | 27.07                | Pk  | 41.5           | -21.5                | 47.07                      | -                  | -           | -                   | -              | 0-360          | 200         | V        |

PK - Peak detector

### RADIATED EMISSIONS


| Frequency (GHz) | Meter Reading (dBuV) | Det  | AF T136 (dB/m) | Amp/Cb/Ftr /Pad (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|-----------------|----------------------|------|----------------|----------------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| * 1.598         | 45.59                | PK-U | 27.9           | -25.6                | 47.89                      |                    |             | 74                  | -26.11         | 65             | 389         | H        |
| * 1.599         | 32.67                | ADR  | 27.9           | -25.6                | 34.97                      | 54                 | -19.03      | -                   | -              | 65             | 389         | H        |
| * 4.874         | 44.1                 | PK-U | 33.9           | -29.3                | 48.7                       |                    |             | 74                  | -25.3          | 215            | 171         | H        |
| * 4.874         | 38.02                | ADR  | 33.9           | -29.3                | 42.62                      | 54                 | -11.38      | -                   | -              | 215            | 171         | H        |
| * 7.31          | 39.92                | PK-U | 35.5           | -26.6                | 48.82                      |                    |             | 74                  | -25.18         | 232            | 284         | H        |
| * 7.31          | 30.13                | ADR  | 35.5           | -26.6                | 39.03                      | 54                 | -14.97      | -                   | -              | 232            | 284         | H        |
| 2.051           | 44.88                | PK-U | 31.3           | -25                  | 51.18                      | -                  | -           | -                   | -              | 98             | 188         | H        |
| 10.119          | 34.57                | PK-U | 37.2           | -22.7                | 49.07                      | -                  | -           | -                   | -              | 356            | 191         | H        |
| 16.595          | 34.76                | PK-U | 41.5           | -21.5                | 54.76                      | -                  | -           | -                   | -              | 51             | 174         | H        |

### HIGH CHANNEL HORIZONTAL

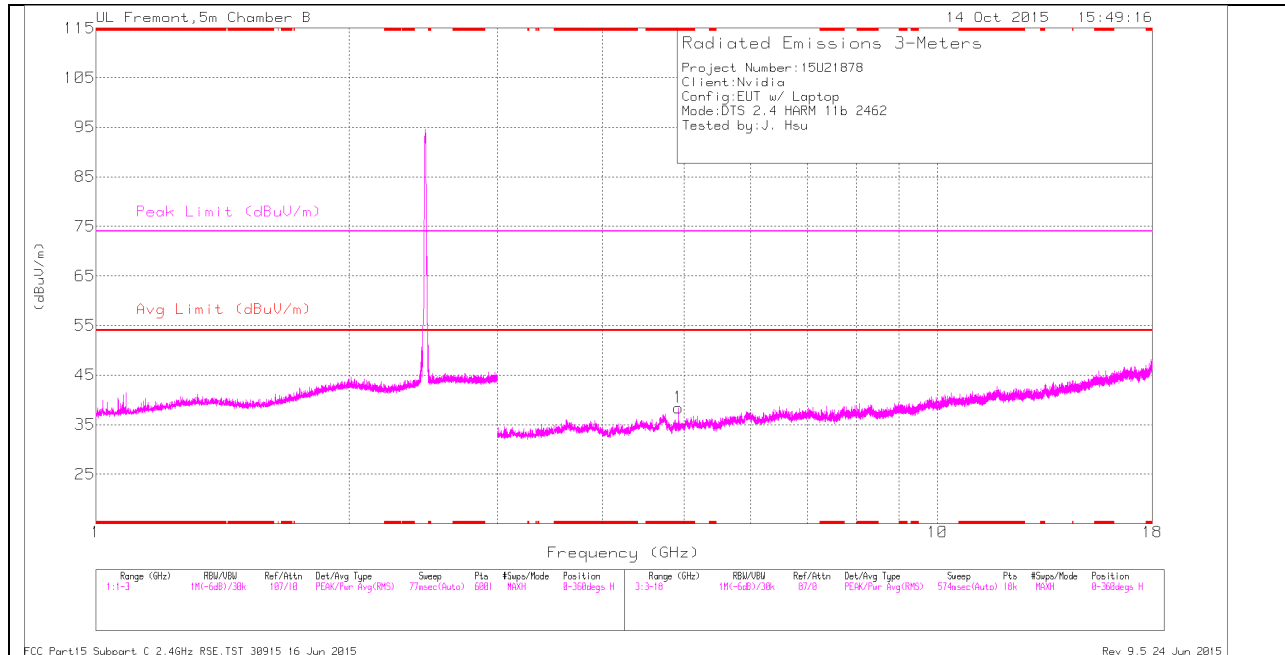

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

### HIGH CHANNEL VERTICAL

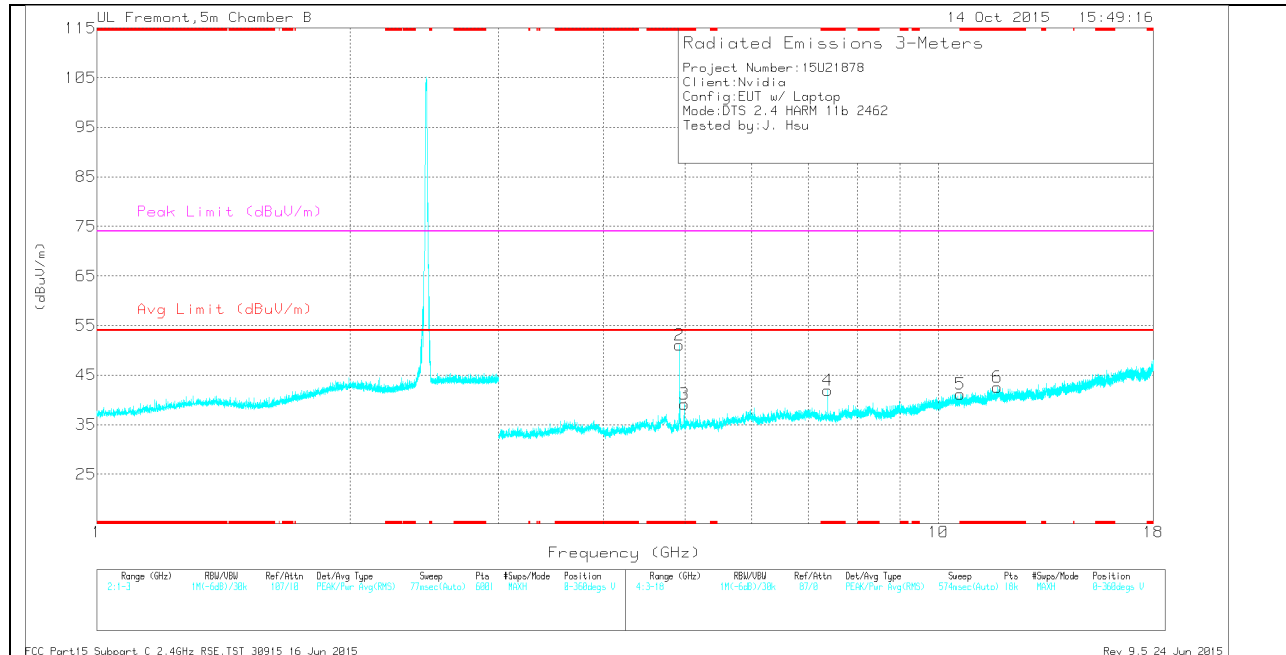

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

## HIGH CHANNEL DATA

### TRACE MARKERS

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T345 (dB/m) | Amp/Cbl/Filtr/Pad (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|------------------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 4.924         | 36.83                | Pk  | 34.1           | -32.5                  | 38.43                      | -                  | -           | 74                  | -35.57         | 0-360          | 199         | H        |
| 2      | * 4.924         | 49.46                | Pk  | 34.1           | -32.5                  | 51.06                      | -                  | -           | 74                  | -22.94         | 0-360          | 199         | V        |
| 3      | * 4.987         | 36.7                 | Pk  | 34             | -31.6                  | 39.1                       | -                  | -           | 74                  | -34.9          | 0-360          | 101         | V        |
| 4      | * 7.385         | 35.72                | Pk  | 35.4           | -29.2                  | 41.92                      | -                  | -           | 74                  | -32.08         | 0-360          | 199         | V        |
| 5      | * 10.621        | 28.62                | Pk  | 37.6           | -25.1                  | 41.12                      | -                  | -           | 74                  | -32.88         | 0-360          | 199         | V        |
| 6      | * 11.741        | 28.68                | Pk  | 38.5           | -24.6                  | 42.58                      | -                  | -           | 74                  | -31.42         | 0-360          | 199         | V        |

PK - Peak detector


### RADIATED EMISSIONS

| Frequency (GHz) | Meter Reading (dBuV) | Det  | AF T345 (dB/m) | Amp/Cbl/Filtr/Pad (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|-----------------|----------------------|------|----------------|------------------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| * 4.924         | 45.12                | PK2  | 34.1           | -32.5                  | 46.72                      | -                  | -           | 74                  | -27.28         | 178            | 264         | H        |
| * 4.924         | 38.15                | MAV1 | 34.1           | -32.5                  | 39.75                      | 54                 | -14.25      | -                   | -              | 178            | 264         | H        |
| * 4.924         | 53.15                | PK2  | 34.1           | -32.5                  | 54.75                      | -                  | -           | 74                  | -19.25         | 113            | 231         | V        |
| * 4.924         | 50.28                | MAV1 | 34.1           | -32.5                  | 51.88                      | 54                 | -2.12       | -                   | -              | 113            | 231         | V        |
| * 4.987         | 49.37                | PK2  | 34             | -31.6                  | 51.77                      | -                  | -           | 74                  | -22.23         | 253            | 339         | V        |
| * 4.986         | 29.57                | MAV1 | 34             | -31.6                  | 31.97                      | 54                 | -22.03      | -                   | -              | 253            | 339         | V        |
| * 7.385         | 39.77                | PK2  | 35.4           | -29.2                  | 45.97                      | -                  | -           | 74                  | -28.03         | 253            | 339         | V        |
| * 7.384         | 28.87                | MAV1 | 35.4           | -29.2                  | 35.07                      | 54                 | -18.93      | -                   | -              | 253            | 339         | V        |
| * 10.622        | 36.15                | PK2  | 37.6           | -25.1                  | 48.65                      | -                  | -           | 74                  | -25.35         | 253            | 339         | V        |
| * 10.622        | 25.08                | MAV1 | 37.6           | -25.1                  | 37.58                      | 54                 | -16.42      | -                   | -              | 253            | 339         | V        |
| * 11.74         | 37.2                 | PK2  | 38.5           | -24.6                  | 51.1                       | -                  | -           | 74                  | -22.9          | 253            | 339         | V        |
| * 11.741        | 24.86                | MAV1 | 38.5           | -24.6                  | 38.76                      | 54                 | -15.24      | -                   | -              | 253            | 339         | V        |

### 11.2.1. TX ABOVE 1 GHz 802.11b MODE IN THE 2.4 GHz BAND Chain 1

## RESTRICTED BANDEDGE (LOW CHANNEL)

### HORIZONTAL PEAK AND AVERAGE PLOT

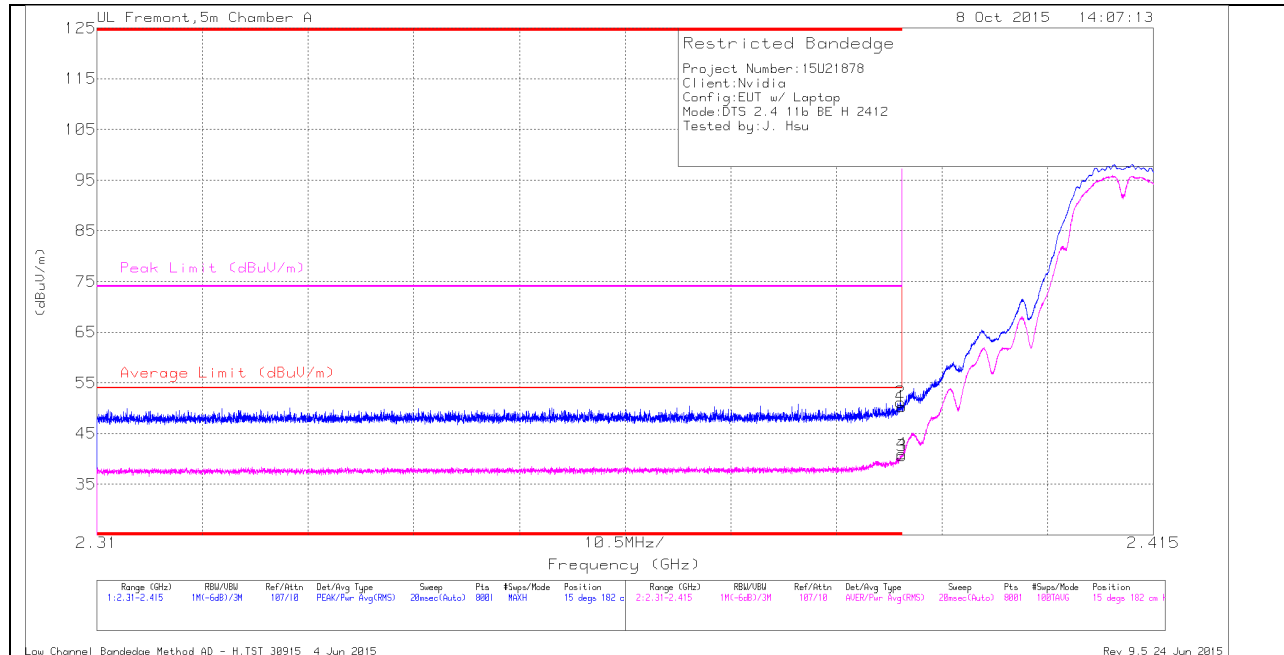

### HORIZONTAL DATA


| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T136 (dB/m) | Amp/Cbl/ Ftr/Pad (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|-----------------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 2.39          | 42.9                 | Pk  | 32             | -24.6                 | 50.3                       | -                      | -           | 74                  | -23.7          | 15             | 182         | H        |
| 2      | * 2.39          | 43.78                | Pk  | 32             | -24.6                 | 51.18                      | -                      | -           | 74                  | -22.82         | 15             | 182         | H        |
| 3      | * 2.39          | 33.16                | RMS | 32             | -24.6                 | 40.56                      | 54                     | -13.44      | -                   | -              | 15             | 182         | H        |
| 4      | * 2.39          | 33.53                | RMS | 32             | -24.6                 | 40.93                      | 54                     | -13.07      | -                   | -              | 15             | 182         | H        |

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

RMS - RMS detection

### VERTICAL PEAK AND AVERAGE PLOT

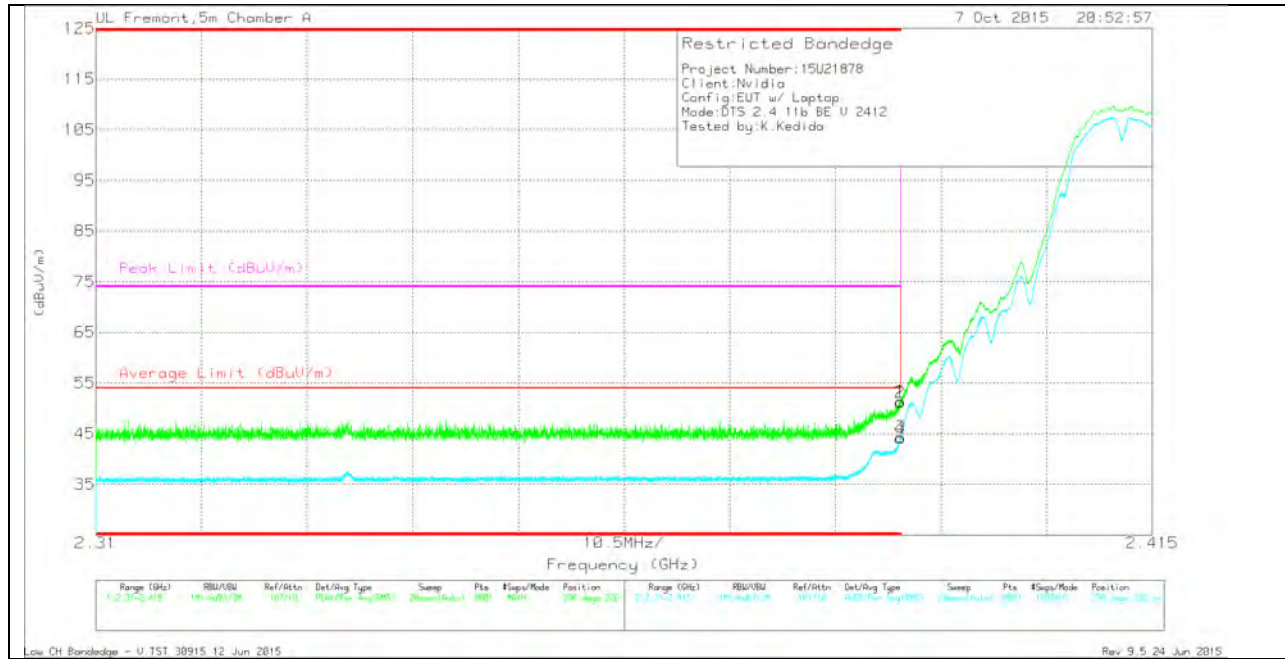

### VERTICAL DATA

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T136 (dB/m) | Amp/Cbl/Fltr/Pad (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|-----------------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 2.39          | 39.57                | Pk  | 32             | -20.2                 | 51.37                      | -                      | -           | 74                  | -22.63         | 298            | 226         | V        |
| 2      | * 2.39          | 39.35                | Pk  | 32             | -20.2                 | 51.15                      | -                      | -           | 74                  | -22.85         | 298            | 226         | V        |
| 3      | * 2.39          | 32.57                | RMS | 32             | -20.2                 | 44.37                      | 54                     | -9.63       | -                   | -              | 298            | 226         | V        |
| 4      | * 2.39          | 32.29                | RMS | 32             | -20.2                 | 44.09                      | 54                     | -9.91       | -                   | -              | 298            | 226         | V        |


\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

RMS - RMS detection

## AUTHORIZED BANDEDGE (HIGH CHANNEL)

### HORIZONTAL PEAK AND AVERAGE PLOT

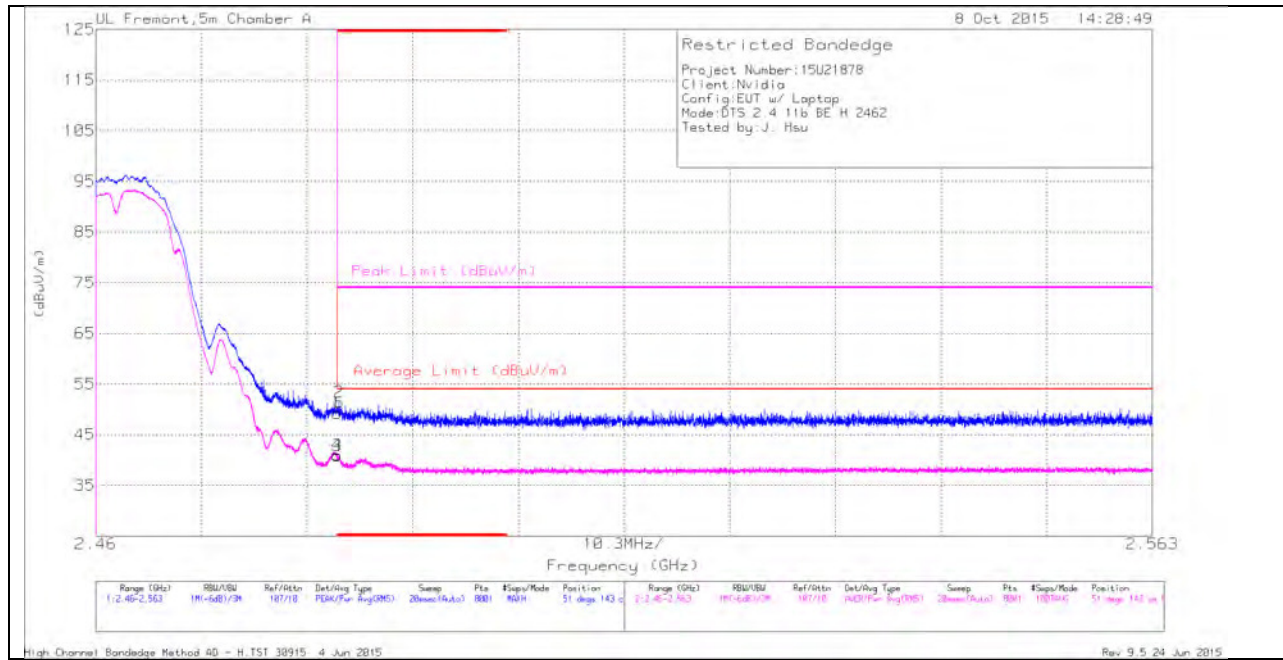

### HORIZONTAL DATA


| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AFT136 (dB/m) | Amp/Cbl/Filtr/Pad (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|---------------|------------------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 2.484         | 41.57                | Pk  | 32.1          | -24.5                  | 49.17                      | -                      | -           | 74                  | -24.83         | 51             | 143         | H        |
| 2      | * 2.484         | 43.85                | Pk  | 32.1          | -24.5                  | 51.45                      | -                      | -           | 74                  | -22.55         | 51             | 143         | H        |
| 3      | * 2.484         | 33.2                 | RMS | 32.1          | -24.5                  | 40.8                       | 54                     | -13.2       | -                   | -              | 51             | 143         | H        |
| 4      | * 2.484         | 33.33                | RMS | 32.1          | -24.5                  | 40.93                      | 54                     | -13.07      | -                   | -              | 51             | 143         | H        |

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

RMS - RMS detection

### VERTICAL PEAK AND AVERAGE PLOT

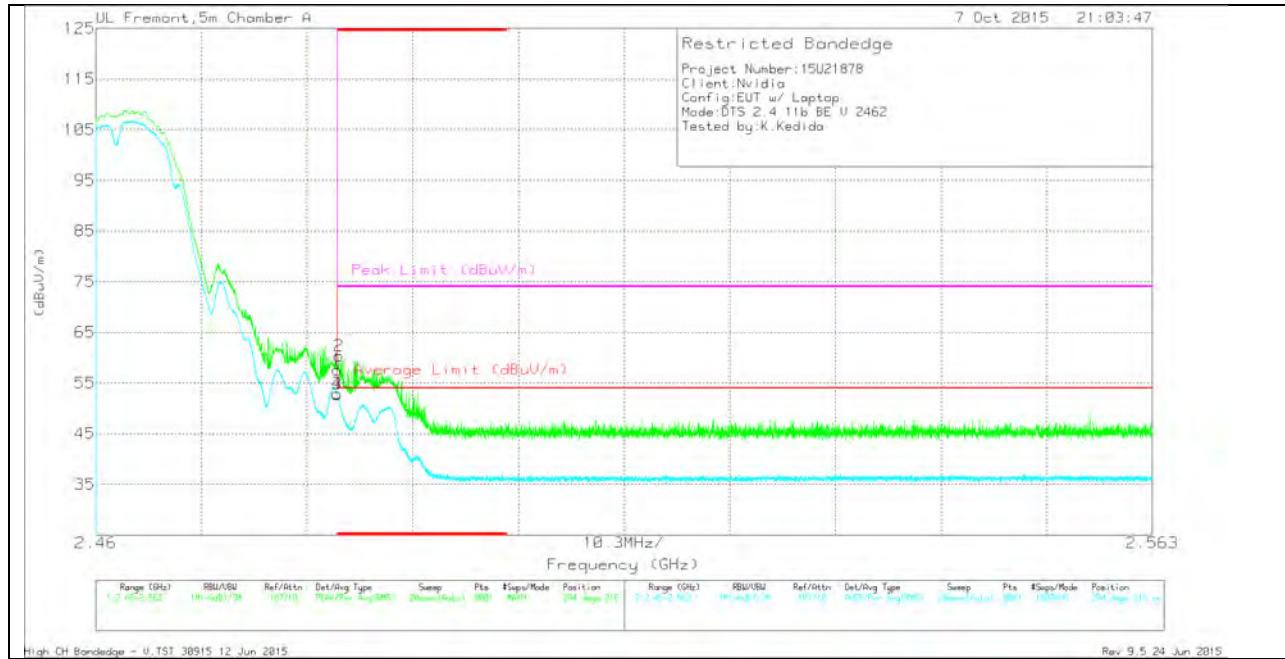

### VERTICAL DATA

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T136 (dB/m) | Amp/Cbl/ Ftr/Pad (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|-----------------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 2.484         | 45.85                | Pk  | 32.1           | -20.3                 | 57.65                      | -                      | -           | 74                  | -16.35         | 294            | 216         | V        |
| 2      | * 2.484         | 48.52                | Pk  | 32.1           | -20.3                 | 60.32                      | -                      | -           | 74                  | -13.68         | 294            | 216         | V        |
| 3      | * 2.484         | 41.04                | RMS | 32.1           | -20.3                 | 52.84                      | 54                     | -1.16       | -                   | -              | 294            | 216         | V        |
| 4      | * 2.484         | 41.05                | RMS | 32.1           | -20.3                 | 52.85                      | 54                     | -1.15       | -                   | -              | 294            | 216         | V        |

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


Pk - Peak detector

RMS - RMS detection




## HARMONICS AND SPURIOUS EMISSIONS

### LOW CHANNEL HORIZONTAL

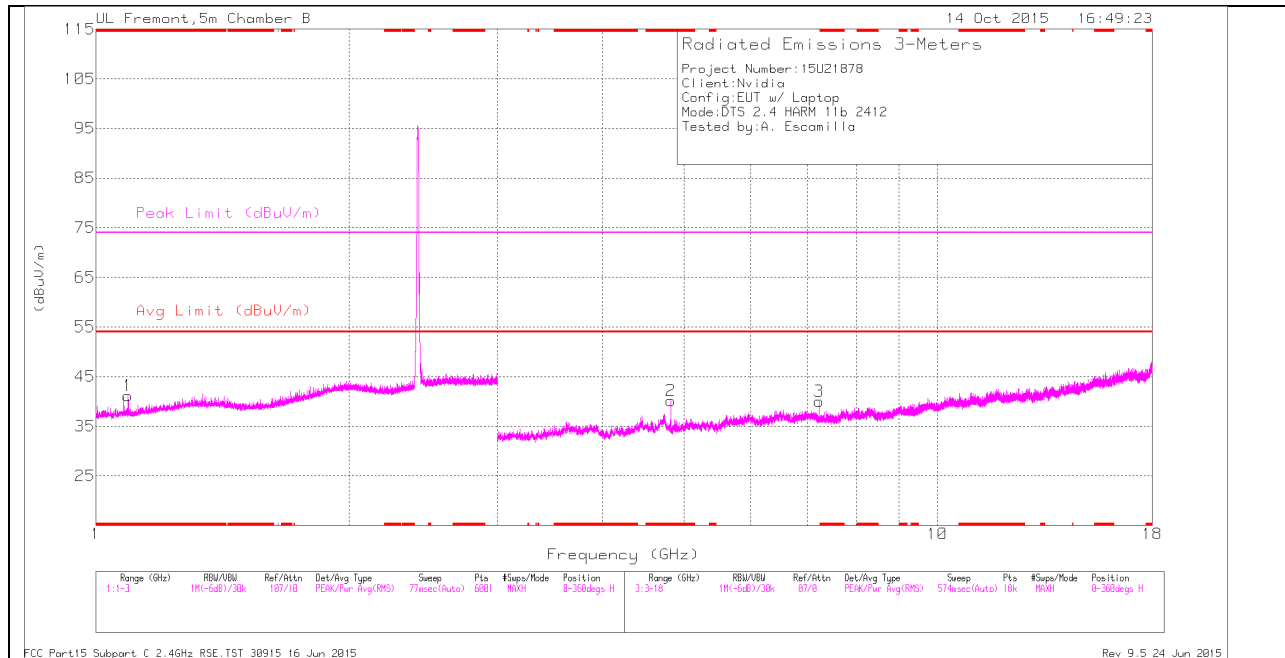

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

# LOW CHANNEL VERTICAL

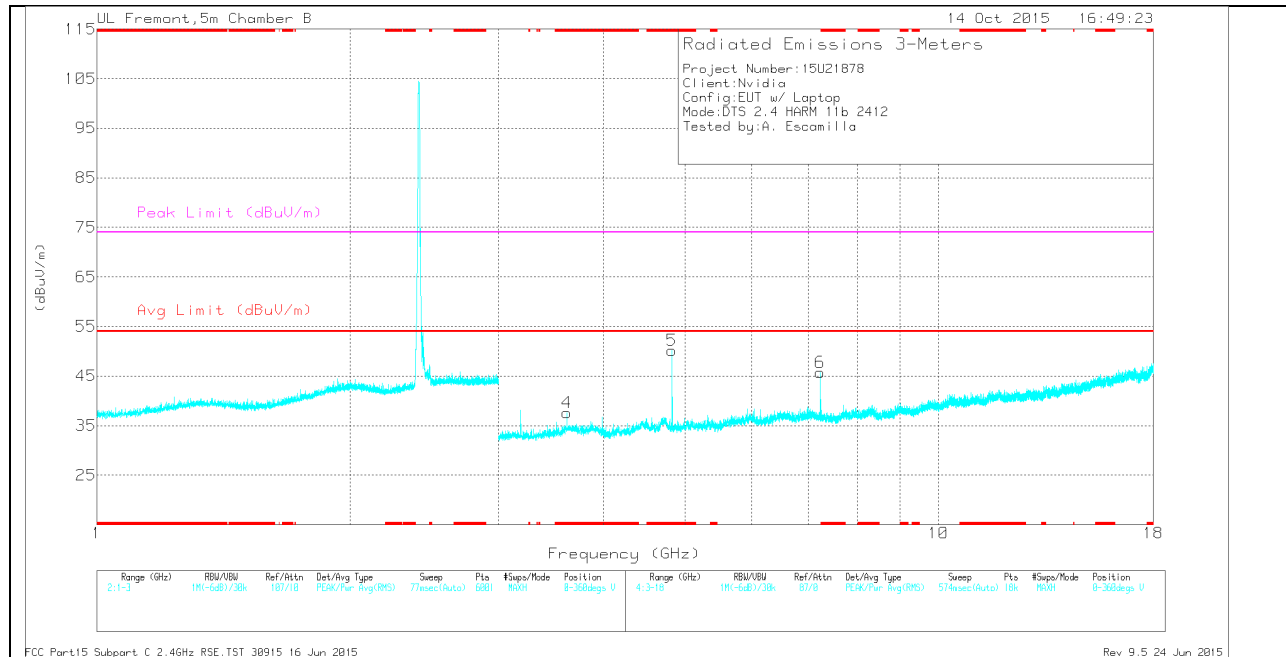

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

## LOW CHANNEL DATA

### TRACE MARKERS


| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T345 (dB/m) | Amp/Cb/Ftr /Pad (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|----------------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 1.092         | 39.23                | Pk  | 27.6           | -25.7                | 41.13                      | -                  | -           | 74                  | -32.87         | 0-360          | 101         | H        |
| 2      | * 4.824         | 37.39                | Pk  | 34.3           | -31.6                | 40.09                      | -                  | -           | 74                  | -33.91         | 0-360          | 199         | H        |
| 4      | * 3.618         | 36.73                | Pk  | 33.8           | -32.9                | 37.63                      | -                  | -           | 74                  | -36.37         | 0-360          | 199         | V        |
| 5      | * 4.824         | 47.48                | Pk  | 34.3           | -31.6                | 50.18                      | -                  | -           | 74                  | -23.82         | 0-360          | 199         | V        |
| 3      | 7.236           | 34.65                | Pk  | 35.3           | -29.9                | 40.05                      | -                  | -           | -                   | -              | 0-360          | 199         | H        |
| 6      | 7.236           | 40.36                | Pk  | 35.3           | -29.9                | 45.76                      | -                  | -           | -                   | -              | 0-360          | 199         | V        |

PK - Peak detector

### RADIATED EMISSIONS


| Frequency (GHz) | Meter Reading (dBuV) | Det  | AF T345 (dB/m) | Amp/Cb/Ftr /Pad (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|-----------------|----------------------|------|----------------|----------------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| * 1.092         | 48.45                | PK2  | 27.6           | -25.7                | 50.35                      | -                  | -           | 74                  | -23.65         | 347            | 118         | H        |
| * 1.094         | 32.96                | MAV1 | 27.6           | -25.7                | 34.86                      | 54                 | -19.14      | -                   | -              | 347            | 118         | H        |
| * 4.824         | 43.41                | PK2  | 34.3           | -31.6                | 46.11                      | -                  | -           | 74                  | -27.89         | 332            | 173         | H        |
| * 4.824         | 35.62                | MAV1 | 34.3           | -31.6                | 38.32                      | 54                 | -15.68      | -                   | -              | 332            | 173         | H        |
| * 3.618         | 43.67                | PK2  | 33.8           | -32.9                | 44.57                      | -                  | -           | 74                  | -29.43         | 319            | 391         | V        |
| * 3.618         | 34.25                | MAV1 | 33.8           | -32.9                | 35.15                      | 54                 | -18.85      | -                   | -              | 319            | 391         | V        |
| * 4.824         | 51.64                | PK2  | 34.3           | -31.6                | 54.34                      | -                  | -           | 74                  | -19.66         | 347            | 229         | V        |
| * 4.824         | 48.95                | MAV1 | 34.3           | -31.6                | 51.65                      | 54                 | -2.35       | -                   | -              | 347            | 229         | V        |
| 7.235           | 41.62                | PK2  | 35.3           | -29.8                | 47.12                      | -                  | -           | -                   | -              | 28             | 205         | H        |
| 7.235           | 30.66                | MAV1 | 35.3           | -29.8                | 36.16                      | -                  | -           | -                   | -              | 28             | 205         | H        |
| 7.235           | 40.59                | MAV1 | 35.3           | -29.8                | 46.09                      | -                  | -           | -                   | -              | 40             | 220         | V        |
| 7.236           | 46.82                | PK2  | 35.3           | -29.8                | 52.32                      | -                  | -           | -                   | -              | 40             | 220         | V        |

### MID CHANNEL HORIZONTAL

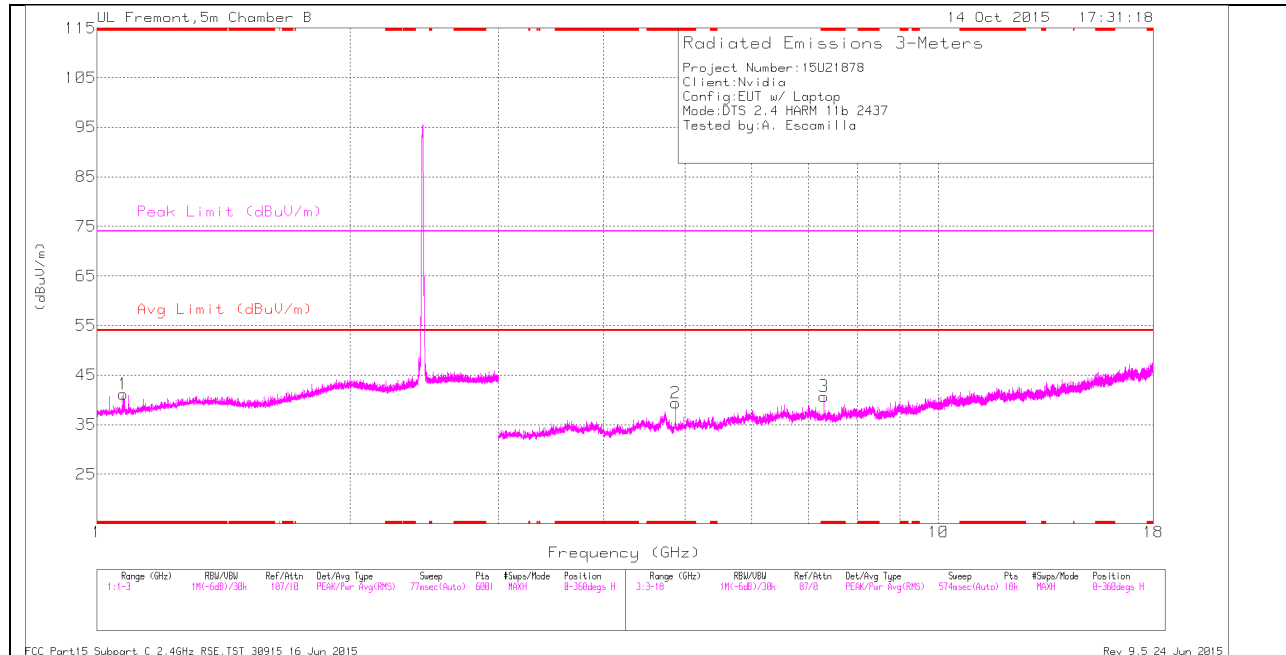

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

### MID CHANNEL VERTICAL

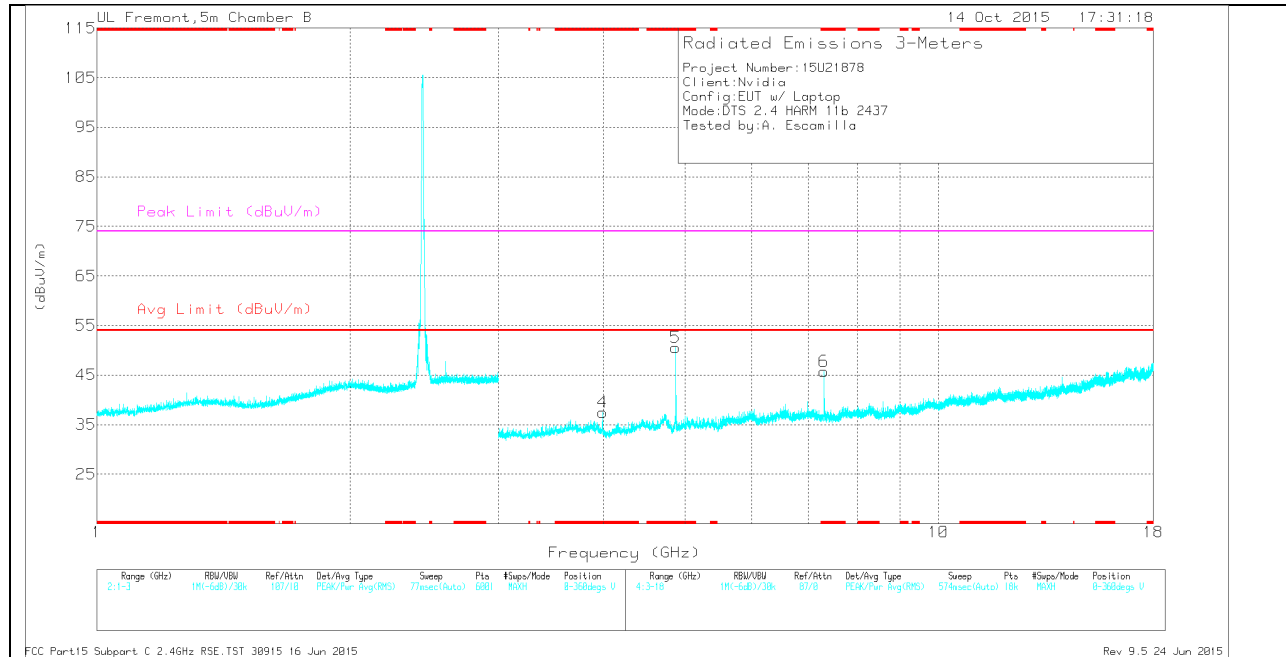

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

## MID CHANNEL DATA

### TRACE MARKERS


| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T345 (dB/m) | Amp/Cb/Ftr /Pad (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|----------------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 1.075         | 39.4                 | Pk  | 27.5           | -25.7                | 41.2                       | -                  | -           | 74                  | -32.8          | 0-360          | 199         | H        |
| 2      | * 4.874         | 37.58                | Pk  | 34.2           | -32.4                | 39.38                      | -                  | -           | 74                  | -34.62         | 0-360          | 199         | H        |
| 3      | * 7.31          | 35.61                | Pk  | 35.3           | -30.2                | 40.71                      | -                  | -           | 74                  | -33.29         | 0-360          | 199         | H        |
| 4      | * 3.988         | 36.83                | Pk  | 33.3           | -32.6                | 37.53                      | -                  | -           | 74                  | -36.47         | 0-360          | 199         | V        |
| 5      | * 4.874         | 48.71                | Pk  | 34.2           | -32.4                | 50.51                      | -                  | -           | 74                  | -23.49         | 0-360          | 199         | V        |
| 6      | * 7.312         | 40.61                | Pk  | 35.3           | -30.2                | 45.71                      | -                  | -           | 74                  | -28.29         | 0-360          | 199         | V        |

PK - Peak detector

### RADIATED EMISSIONS


| Frequency (GHz) | Meter Reading (dBuV) | Det  | AF T345 (dB/m) | Amp/Cb/Ftr /Pad (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|-----------------|----------------------|------|----------------|----------------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| * 1.075         | 49.44                | PK2  | 27.5           | -25.7                | 51.24                      | -                  | -           | 74                  | -22.76         | 34             | 170         | H        |
| * 1.075         | 33.03                | MAV1 | 27.5           | -25.7                | 34.83                      | 54                 | -19.17      | -                   | -              | 34             | 170         | H        |
| * 4.874         | 44.2                 | PK2  | 34.2           | -32.4                | 46                         | -                  | -           | 74                  | -28            | 333            | 182         | H        |
| * 4.874         | 37.23                | MAV1 | 34.2           | -32.4                | 39.03                      | 54                 | -14.97      | -                   | -              | 333            | 182         | H        |
| * 7.308         | 42.03                | PK2  | 35.3           | -30.3                | 47.03                      | -                  | -           | 74                  | -26.97         | 33             | 190         | H        |
| * 7.31          | 31.49                | MAV1 | 35.3           | -30.2                | 36.59                      | 54                 | -17.41      | -                   | -              | 33             | 190         | H        |
| * 3.989         | 44.9                 | PK2  | 33.3           | -32.7                | 45.5                       | -                  | -           | 74                  | -28.5          | 278            | 202         | V        |
| * 3.988         | 31.11                | MAV1 | 33.3           | -32.6                | 31.81                      | 54                 | -22.19      | -                   | -              | 278            | 202         | V        |
| * 4.874         | 50.62                | PK2  | 34.2           | -32.4                | 52.42                      | -                  | -           | 74                  | -21.58         | 331            | 180         | V        |
| * 4.874         | 47.5                 | MAV1 | 34.2           | -32.4                | 49.3                       | 54                 | -4.7        | -                   | -              | 331            | 180         | V        |
| * 7.312         | 47                   | PK2  | 35.3           | -30.2                | 52.1                       | -                  | -           | 74                  | -21.9          | 50             | 201         | V        |
| * 7.312         | 40.58                | MAV1 | 35.3           | -30.2                | 45.68                      | 54                 | -8.32       | -                   | -              | 50             | 201         | V        |

### HIGH CHANNEL HORIZONTAL

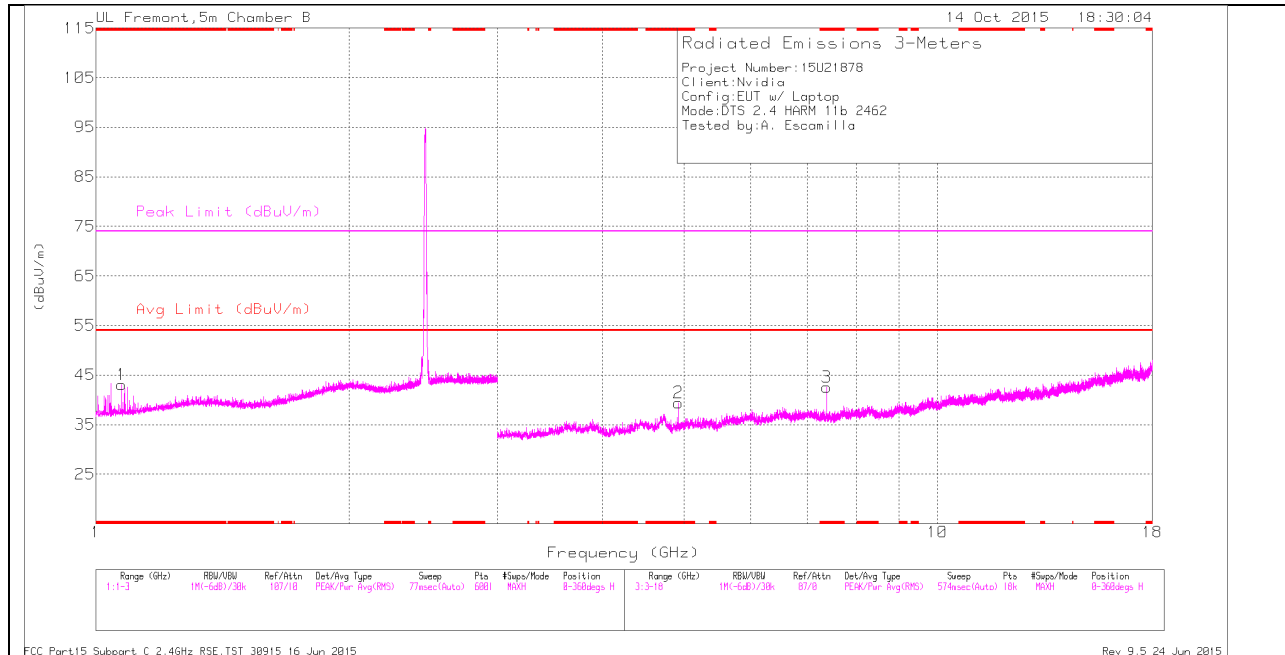

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

### HIGH CHANNEL VERTICAL

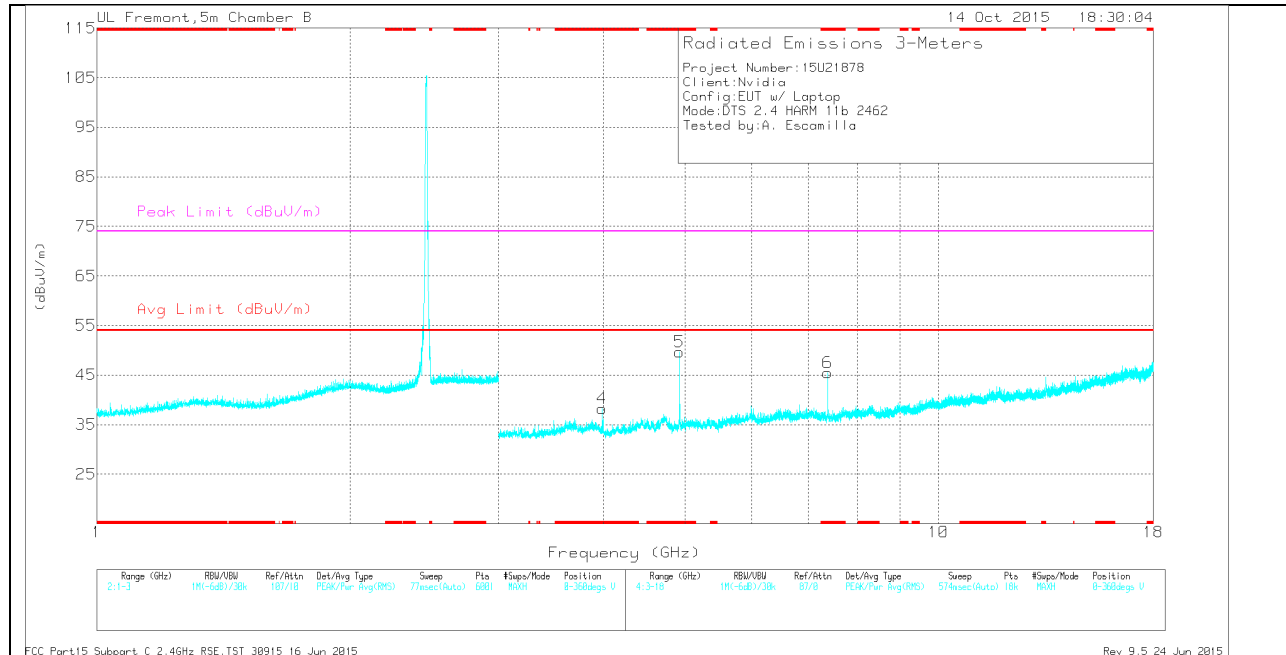

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.



## HIGH CHANNEL DATA

### TRACE MARKERS

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T345 (dB/m) | Amp/Cbl/Ftr /Pad (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|-----------------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 1.073         | 41.24                | Pk  | 27.5           | -25.7                 | 43.04                      | -                  | -           | 74                  | -30.96         | 0-360          | 200         | H        |
| 2      | * 4.924         | 37.84                | Pk  | 34.1           | -32.5                 | 39.44                      | -                  | -           | 74                  | -34.56         | 0-360          | 200         | H        |
| 3      | * 7.387         | 36.31                | Pk  | 35.4           | -29.1                 | 42.61                      | -                  | -           | 74                  | -31.39         | 0-360          | 200         | H        |
| 4      | * 3.986         | 37.53                | Pk  | 33.3           | -32.6                 | 38.23                      | -                  | -           | 74                  | -35.77         | 0-360          | 101         | V        |
| 5      | * 4.924         | 48.06                | Pk  | 34.1           | -32.5                 | 49.66                      | -                  | -           | 74                  | -24.34         | 0-360          | 200         | V        |
| 6      | * 7.386         | 39.28                | Pk  | 35.4           | -29.2                 | 45.48                      | -                  | -           | 74                  | -28.52         | 0-360          | 200         | V        |

PK - Peak detector


### RADIATED EMISSIONS

| Frequency (GHz) | Meter Reading (dBuV) | Det  | AF T345 (dB/m) | Amp/Cbl/Ftr /Pad (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|-----------------|----------------------|------|----------------|-----------------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| * 1.072         | 53.48                | PK2  | 27.5           | -25.7                 | 55.28                      | -                  | -           | 74                  | -18.72         | 22             | 157         | H        |
| * 1.075         | 33.27                | MAV1 | 27.5           | -25.7                 | 35.07                      | 54                 | -18.93      | -                   | -              | 22             | 157         | H        |
| * 4.924         | 44.39                | PK2  | 34.1           | -32.5                 | 45.99                      | -                  | -           | 74                  | -28.01         | 304            | 218         | H        |
| * 4.924         | 36.86                | MAV1 | 34.1           | -32.5                 | 38.46                      | 54                 | -15.54      | -                   | -              | 304            | 218         | H        |
| * 7.387         | 43.52                | PK2  | 35.4           | -29.1                 | 49.82                      | -                  | -           | 74                  | -24.18         | 3              | 220         | H        |
| * 7.387         | 35.58                | MAV1 | 35.4           | -29.1                 | 41.88                      | 54                 | -12.12      | -                   | -              | 3              | 220         | H        |
| * 4.924         | 51.7                 | PK2  | 34.1           | -32.5                 | 53.3                       | -                  | -           | 74                  | -20.7          | 334            | 234         | V        |
| * 4.924         | 48.51                | MAV1 | 34.1           | -32.5                 | 50.11                      | 54                 | -3.89       | -                   | -              | 334            | 234         | V        |
| * 7.387         | 45.52                | PK2  | 35.4           | -29.2                 | 51.72                      | -                  | -           | 74                  | -22.28         | 58             | 188         | V        |
| * 7.385         | 39.06                | MAV1 | 35.4           | -29.2                 | 45.26                      | 54                 | -8.74       | -                   | -              | 58             | 188         | V        |
| * 3.988         | 47.25                | PK2  | 33.3           | -32.6                 | 47.95                      | -                  | -           | 74                  | -26.05         | 3              | 205         | V        |
| * 3.988         | 31.21                | MAV1 | 33.3           | -32.6                 | 31.91                      | 54                 | -22.09      | -                   | -              | 3              | 205         | V        |

# 11.2.1. TX ABOVE 1 GHz 802.11g MODE IN THE 2.4 GHz BAND Chain 0

## RESTRICTED BANDEDGE (LOW CHANNEL)

### HORIZONTAL PEAK AND AVERAGE PLOT

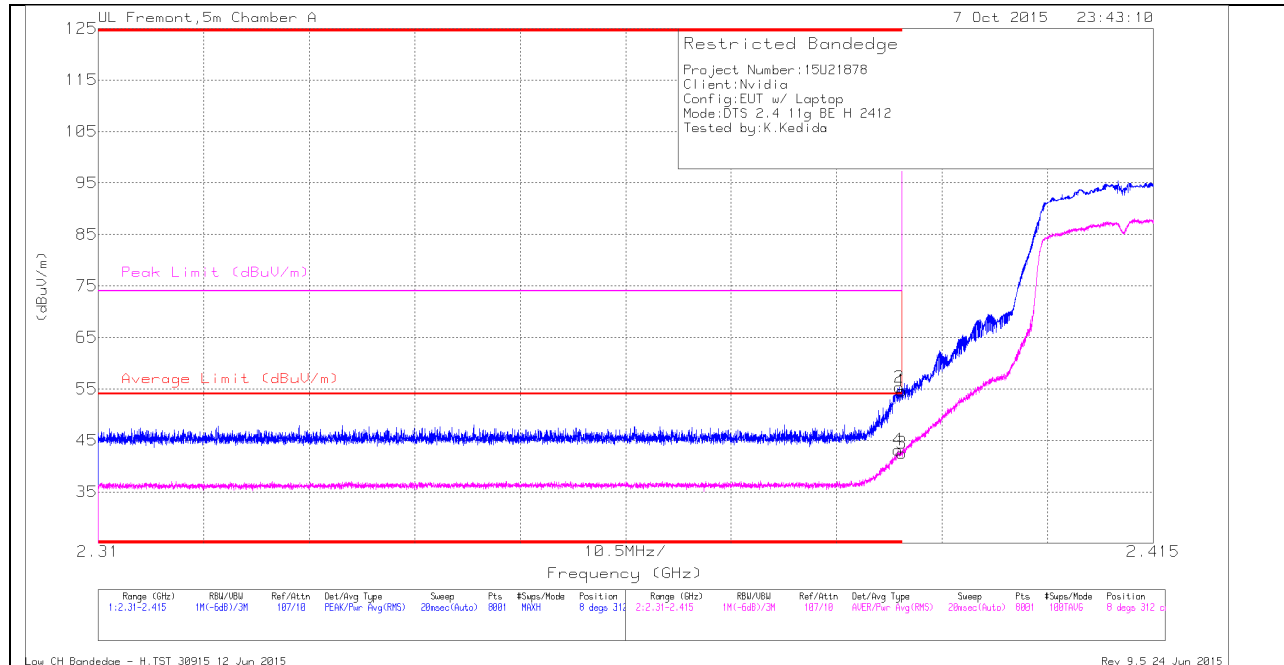

### HORIZONTAL DATA


| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T136 (dB/m) | Amp/Cbl/Fit r/Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|------------------------|--------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 2.39          | 42.83                | Pk  | 32             | -20.2                  | 0            | 54.63                      | -                      | -           | 74                  | -19.37         | 8              | 312         | H        |
| 2      | * 2.39          | 43.54                | Pk  | 32             | -20.2                  | 0            | 55.34                      | -                      | -           | 74                  | -18.66         | 8              | 312         | H        |
| 3      | * 2.39          | 30.4                 | RMS | 32             | -20.2                  | .33          | 42.53                      | 54                     | -11.47      | -                   | -              | 8              | 312         | H        |
| 4      | * 2.39          | 30.91                | RMS | 32             | -20.1                  | .33          | 43.14                      | 54                     | -10.86      | -                   | -              | 8              | 312         | H        |

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

RMS - RMS detection

### VERTICAL PEAK AND AVERAGE PLOT

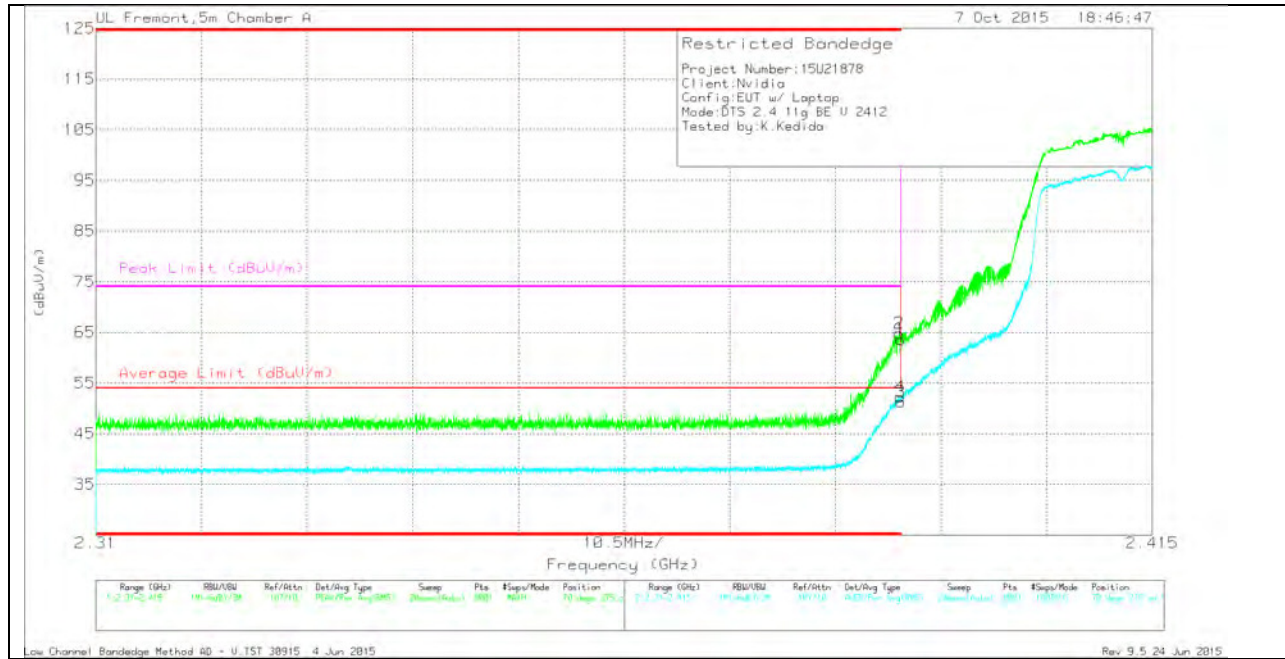

### VERTICAL DATA

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T136 (dB/m) | Amp/Cbl/Filt r/Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|-------------------------|--------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 2.39          | 56.16                | Pk  | 32             | -24.6                   | 0            | 63.56                      | -                      | -           | 74                  | -10.44         | 70             | 275         | V        |
| 2      | * 2.39          | 57.44                | Pk  | 32             | -24.6                   | 0            | 64.84                      | -                      | -           | 74                  | -9.16          | 70             | 275         | V        |
| 3      | * 2.39          | 43.57                | RMS | 32             | -24.6                   | .33          | 51.3                       | 54                     | -2.7        | -                   | -              | 70             | 275         | V        |
| 4      | * 2.39          | 44.56                | RMS | 32             | -24.6                   | .33          | 52.29                      | 54                     | -1.71       | -                   | -              | 70             | 275         | V        |


\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

RMS - RMS detection

## AUTHORIZED BANDEDGE (HIGH CHANNEL)

### HORIZONTAL PEAK AND AVERAGE PLOT

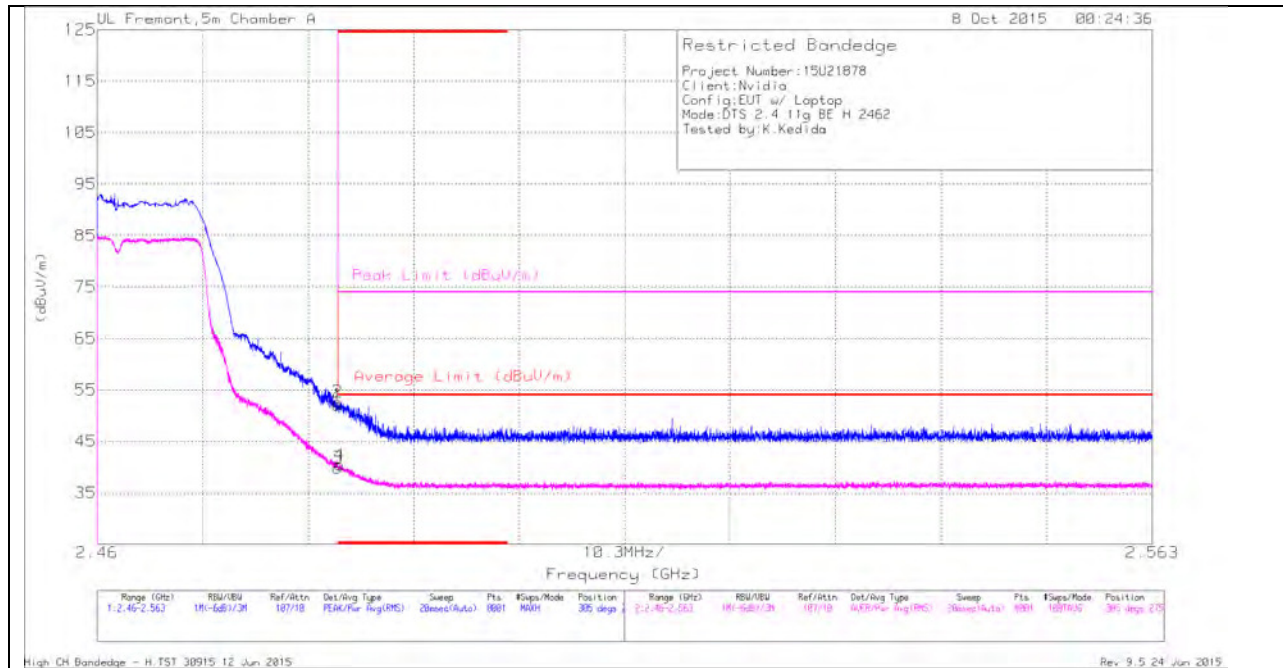

### HORIZONTAL DATA


| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T136 (dB/m) | Amp/Cb/Flt r/Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|-----------------------|--------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 2.484         | 40.31                | Pk  | 32.1           | -20.3                 | 0            | 52.11                      | -                      | -           | 74                  | -21.89         | 305            | 275         | H        |
| 2      | * 2.484         | 40.87                | Pk  | 32.1           | -20.3                 | 0            | 52.67                      | -                      | -           | 74                  | -21.33         | 305            | 275         | H        |
| 3      | * 2.484         | 27.73                | RMS | 32.1           | -20.3                 | .33          | 39.86                      | 54                     | -14.14      | -                   | -              | 305            | 275         | H        |
| 4      | * 2.484         | 28.28                | RMS | 32.1           | -20.3                 | .33          | 40.41                      | 54                     | -13.59      | -                   | -              | 305            | 275         | H        |

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

RMS - RMS detection

### VERTICAL PEAK AND AVERAGE PLOT

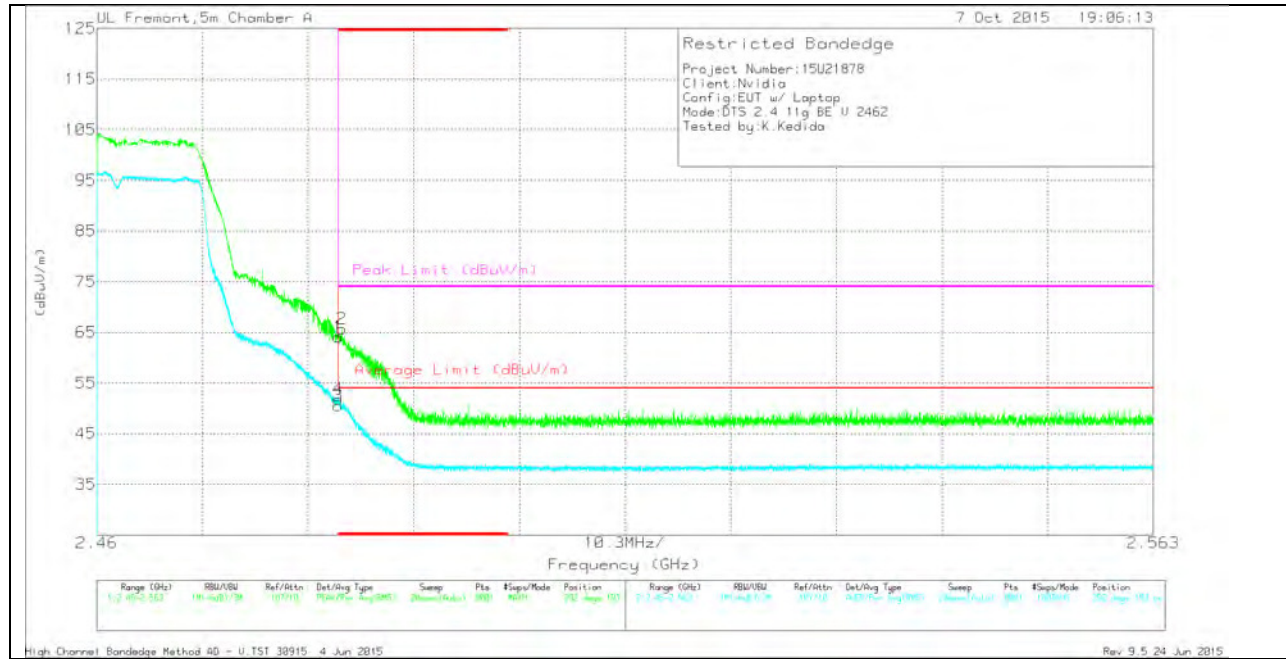

### VERTICAL DATA

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T136 (dB/m) | Amp/Cbl/Filt r/Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|-------------------------|--------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 2.484         | 56.46                | Pk  | 32.1           | -24.5                   | 0            | 64.06                      | -                      | -           | 74                  | -9.94          | 292            | 193         | V        |
| 2      | * 2.484         | 58.1                 | Pk  | 32.1           | -24.5                   | 0            | 65.7                       | -                      | -           | 74                  | -8.3           | 292            | 193         | V        |
| 3      | * 2.484         | 42.65                | RMS | 32.1           | -24.5                   | .33          | 50.58                      | 54                     | -3.42       | -                   | -              | 292            | 193         | V        |
| 4      | * 2.484         | 43.91                | RMS | 32.1           | -24.5                   | .33          | 51.84                      | 54                     | -2.16       | -                   | -              | 292            | 193         | V        |


\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

RMS - RMS detection


## HARMONICS AND SPURIOUS EMISSIONS

### LOW CHANNEL HORIZONTAL

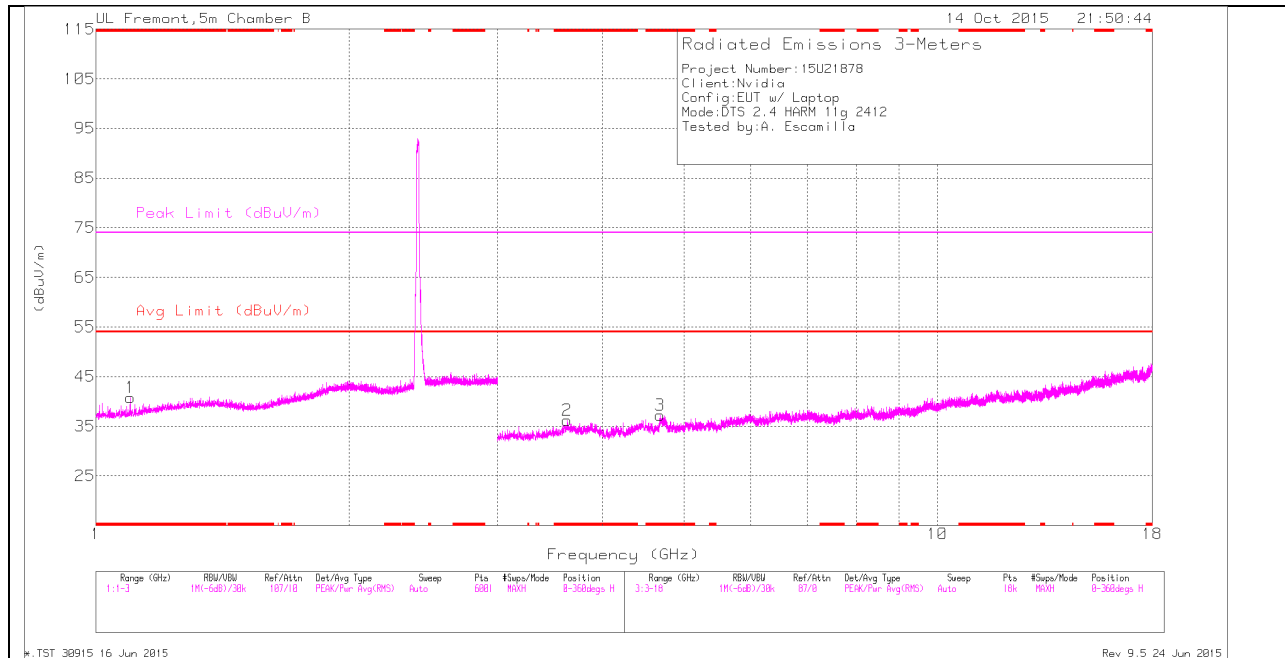

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

### LOW CHANNEL VERTICAL

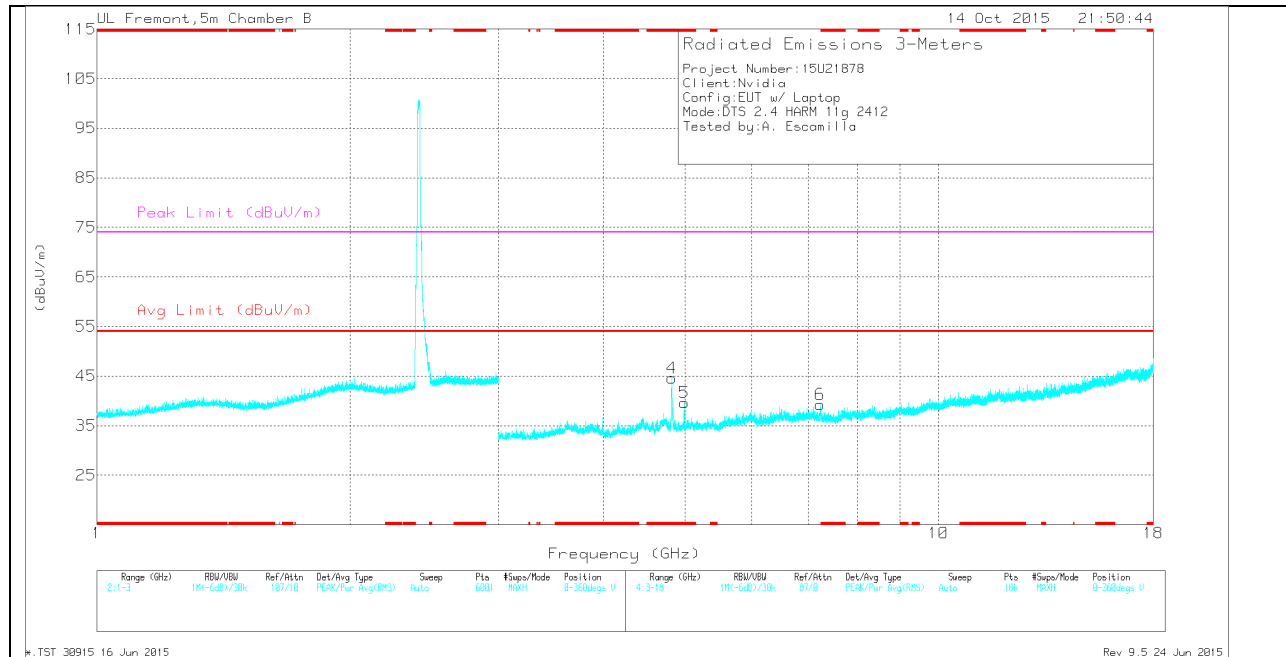

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

## LOW CHANNEL DATA

### TRACE MARKERS

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T345 (dB/m) | Amp/Cb/Fitr /Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|-----------------------|--------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 1.098         | 38.86                | Pk  | 27.6           | -25.7                 | 0            | 40.76                      | -                  | -           | 74                  | -33.24         | 0-360          | 101         | H        |
| 2      | * 3.632         | 35.19                | Pk  | 33.8           | -32.8                 | 0            | 36.19                      | -                  | -           | 74                  | -37.81         | 0-360          | 101         | H        |
| 3      | * 4.679         | 34.95                | Pk  | 34.2           | -31.9                 | 0            | 37.25                      | -                  | -           | 74                  | -36.75         | 0-360          | 199         | H        |
| 4      | * 4.822         | 41.94                | Pk  | 34.3           | -31.6                 | 0            | 44.64                      | -                  | -           | 74                  | -29.36         | 0-360          | 199         | V        |
| 5      | * 4.989         | 37.29                | Pk  | 34             | -31.6                 | 0            | 39.69                      | -                  | -           | 74                  | -34.31         | 0-360          | 199         | V        |
| 6      | 7.23            | 33.62                | Pk  | 35.3           | -29.7                 | 0            | 39.22                      | -                  | -           | -                   | -              | 0-360          | 199         | V        |


PK - Peak detector

### RADIATED EMISSIONS

| Frequency (GHz) | Meter Reading (dBuV) | Det  | AF T345 (dB/m) | Amp/Cb/Fitr /Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|-----------------|----------------------|------|----------------|-----------------------|--------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| * 1.097         | 46.44                | PK2  | 27.6           | -25.7                 | 0            | 48.34                      | -                  | -           | 74                  | -25.66         | 325            | 168         | H        |
| * 1.1           | 32.85                | MAV1 | 27.6           | -25.7                 | .33          | 35.08                      | 54                 | -18.92      | -                   | -              | 325            | 168         | H        |
| * 3.633         | 42.8                 | PK2  | 33.8           | -32.8                 | 0            | 43.8                       | -                  | -           | 74                  | -30.2          | 282            | 161         | H        |
| * 3.631         | 30.89                | MAV1 | 33.8           | -32.8                 | .33          | 32.22                      | 54                 | -21.78      | -                   | -              | 282            | 161         | H        |
| * 4.678         | 41.91                | PK2  | 34.2           | -31.9                 | 0            | 44.21                      | -                  | -           | 74                  | -29.79         | 57             | 190         | H        |
| * 4.677         | 31.05                | MAV1 | 34.2           | -31.9                 | .33          | 33.68                      | 54                 | -20.32      | -                   | -              | 57             | 190         | H        |
| * 4.822         | 50.51                | PK2  | 34.3           | -31.6                 | 0            | 53.21                      | -                  | -           | 74                  | -20.79         | 128            | 224         | V        |
| * 4.821         | 38.26                | MAV1 | 34.3           | -31.5                 | .33          | 41.39                      | 54                 | -12.61      | -                   | -              | 128            | 224         | V        |
| * 4.987         | 47.29                | PK2  | 34             | -31.6                 | 0            | 49.69                      | -                  | -           | 74                  | -24.31         | 203            | 236         | V        |
| * 4.988         | 29.48                | MAV1 | 34             | -31.6                 | .33          | 32.21                      | 54                 | -21.79      | -                   | -              | 203            | 236         | V        |
| 7.229           | 29.04                | MAV1 | 35.3           | -29.7                 | .33          | 34.97                      | -                  | -           | -                   | -              | 230            | 215         | V        |
| 7.23            | 41.17                | PK2  | 35.3           | -29.7                 | 0            | 46.77                      | -                  | -           | -                   | -              | 230            | 215         | V        |




### MID CHANNEL HORIZONTAL

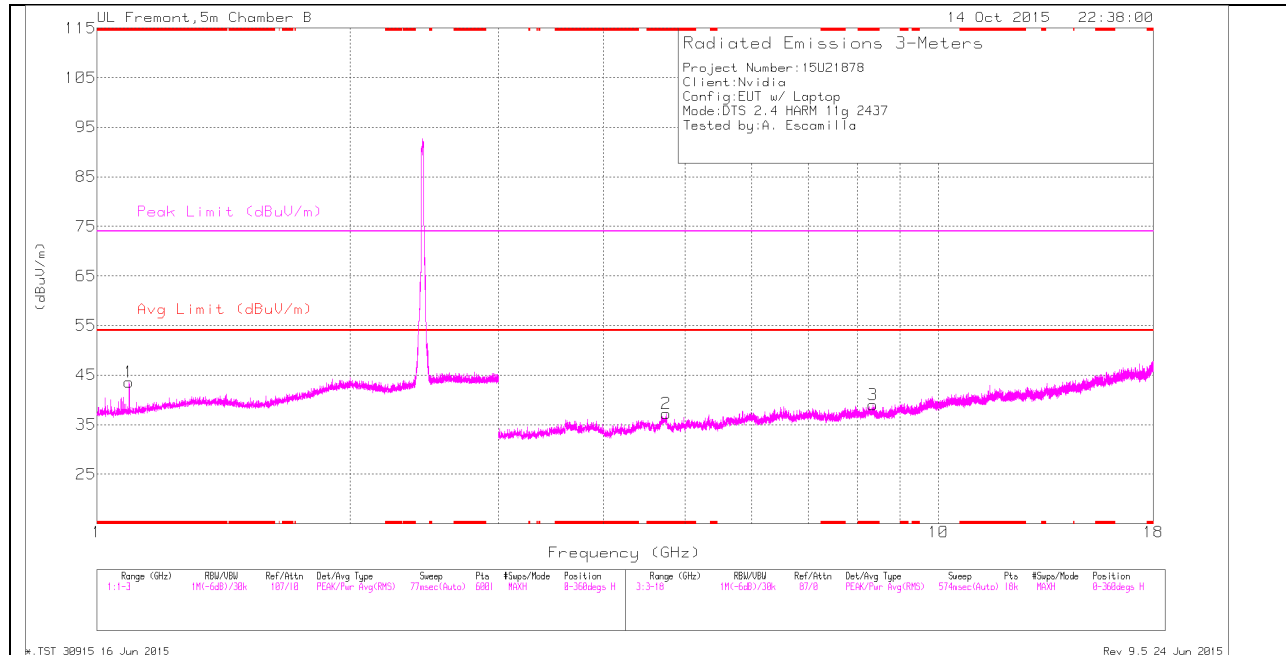

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

### MID CHANNEL VERTICAL

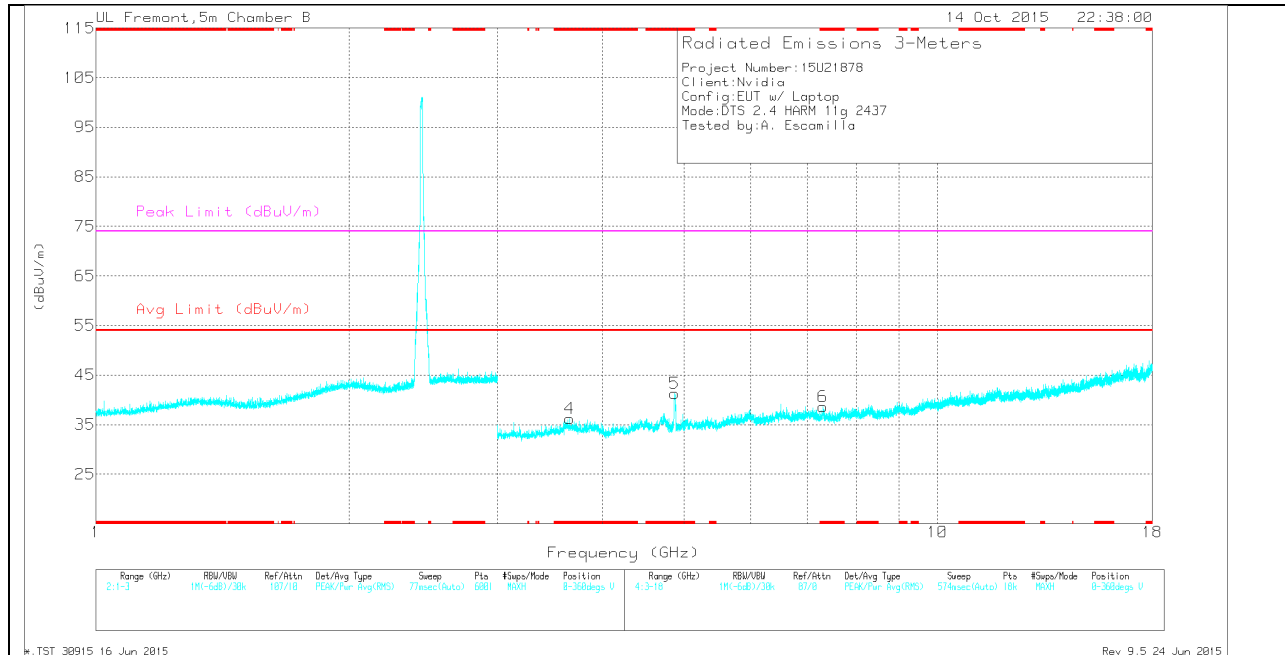

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

## MID CHANNEL DATA

### TRACE MARKERS


| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T345 (dB/m) | Amp/Cb/Fitr /Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|-----------------------|--------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 1.091         | 41.63                | Pk  | 27.6           | -25.7                 | 0            | 43.53                      | -                  | -           | 74                  | -30.47         | 0-360          | 200         | H        |
| 2      | * 4.748         | 33.66                | Pk  | 34.3           | -30.7                 | 0            | 37.26                      | -                  | -           | 74                  | -36.74         | 0-360          | 200         | H        |
| 3      | * 8.356         | 30.55                | Pk  | 35.7           | -27.3                 | 0            | 38.95                      | -                  | -           | 74                  | -35.05         | 0-360          | 200         | H        |
| 4      | * 3.655         | 35.13                | Pk  | 33.7           | -32.6                 | 0            | 36.23                      | -                  | -           | 74                  | -37.77         | 0-360          | 200         | V        |
| 5      | * 4.87          | 39.44                | Pk  | 34.2           | -32.4                 | 0            | 41.24                      | -                  | -           | 74                  | -32.76         | 0-360          | 200         | V        |
| 6      | * 7.311         | 33.47                | Pk  | 35.3           | -30.2                 | 0            | 38.57                      | -                  | -           | 74                  | -35.43         | 0-360          | 200         | V        |

PK - Peak detector

### RADIATED EMISSIONS


| Frequency (GHz) | Meter Reading (dBuV) | Det  | AF T345 (dB/m) | Amp/Cb/Fitr /Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|-----------------|----------------------|------|----------------|-----------------------|--------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| * 1.09          | 46.16                | PK2  | 27.6           | -25.7                 | 0            | 48.06                      | -                  | -           | 74                  | -25.94         | 65             | 201         | H        |
| * 1.092         | 33.03                | MAV1 | 27.6           | -25.7                 | .33          | 35.26                      | 54                 | -18.74      | -                   | -              | 65             | 201         | H        |
| * 4.75          | 41.43                | PK2  | 34.3           | -30.7                 | 0            | 45.03                      | -                  | -           | 74                  | -28.97         | 119            | 182         | H        |
| * 4.747         | 30.58                | MAV1 | 34.3           | -30.7                 | .33          | 34.51                      | 54                 | -19.49      | -                   | -              | 119            | 182         | H        |
| * 8.355         | 38.36                | PK2  | 35.7           | -27.2                 | 0            | 46.86                      | -                  | -           | 74                  | -27.14         | 119            | 218         | H        |
| * 8.356         | 27.26                | MAV1 | 35.7           | -27.3                 | .33          | 35.99                      | 54                 | -18.01      | -                   | -              | 119            | 218         | H        |
| * 4.87          | 48.48                | PK2  | 34.2           | -32.4                 | 0            | 50.28                      | -                  | -           | 74                  | -23.72         | 120            | 227         | V        |
| * 4.87          | 37.32                | MAV1 | 34.2           | -32.4                 | .33          | 39.45                      | 54                 | -14.55      | -                   | -              | 120            | 227         | V        |
| * 7.31          | 42.31                | PK2  | 35.3           | -30.2                 | 0            | 47.41                      | -                  | -           | 74                  | -26.59         | 93             | 212         | V        |
| * 7.312         | 30.96                | MAV1 | 35.3           | -30.2                 | .33          | 36.39                      | 54                 | -17.61      | -                   | -              | 93             | 212         | V        |
| * 3.655         | 42.18                | PK2  | 33.7           | -32.6                 | 0            | 43.28                      | -                  | -           | 74                  | -30.72         | 43             | 185         | V        |
| * 3.656         | 30.68                | MAV1 | 33.7           | -32.6                 | .33          | 32.11                      | 54                 | -21.89      | -                   | -              | 43             | 185         | V        |

### HIGH CHANNEL HORIZONTAL

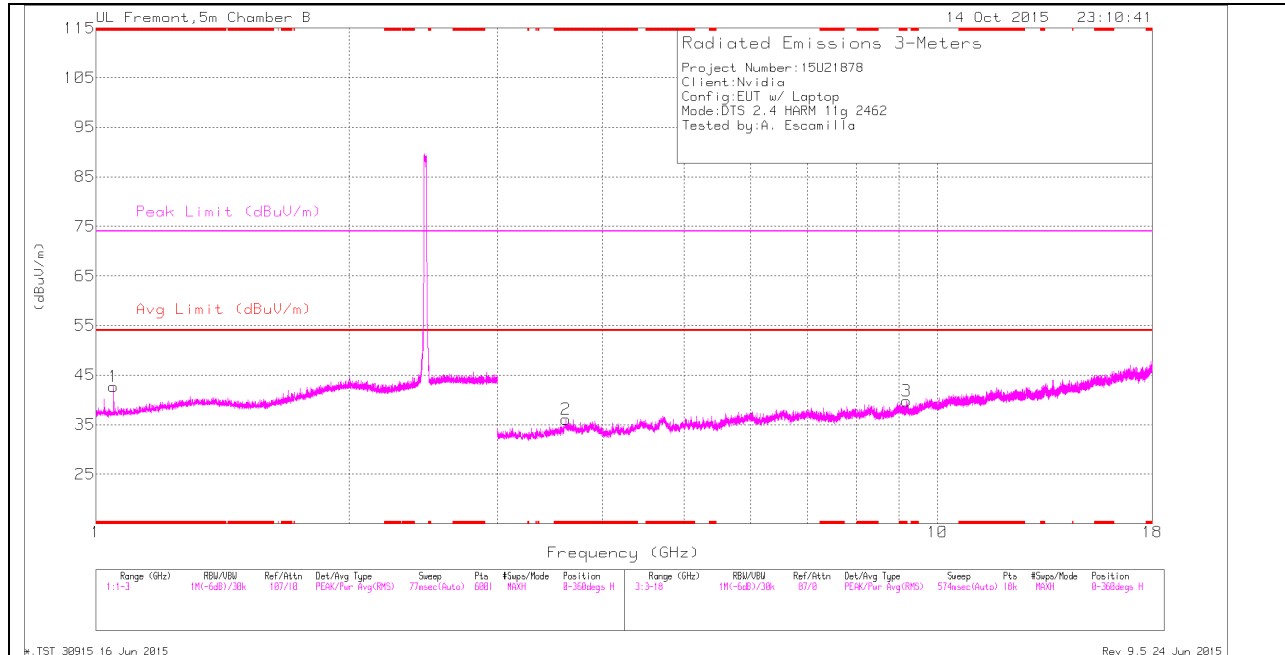

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

### HIGH CHANNEL VERTICAL

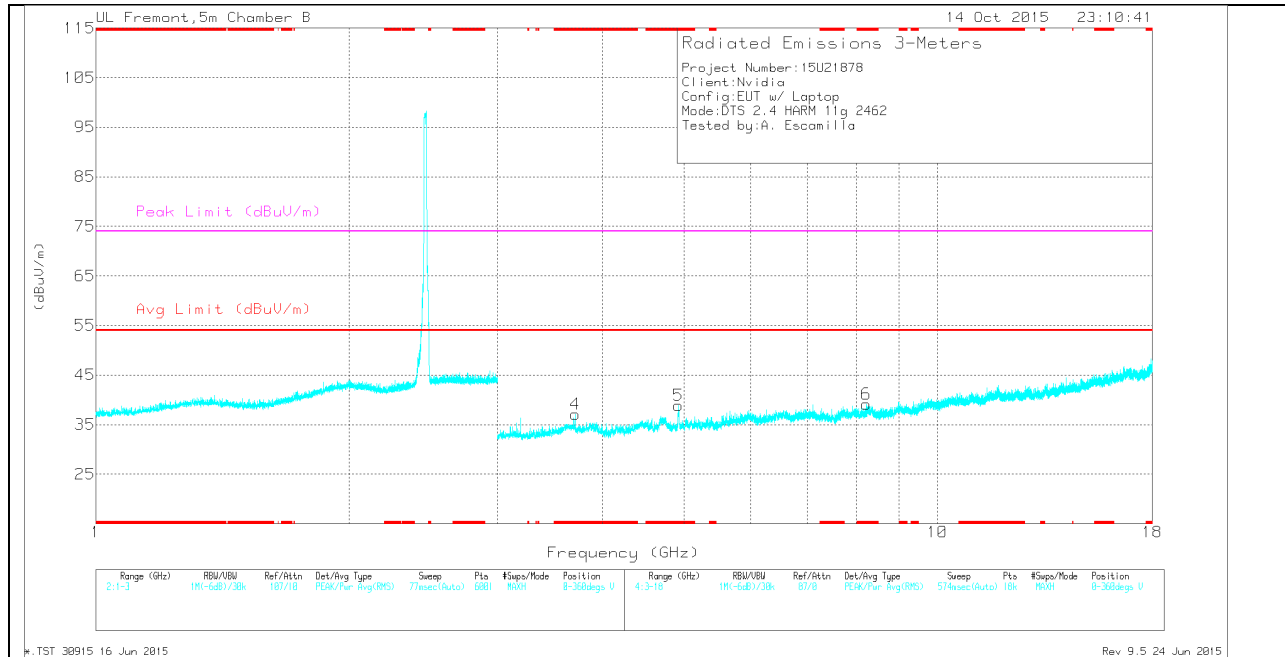

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

## HIGH CHANNEL DATA

### TRACE MARKERS

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T345 (dB/m) | Amp/Cb/Fitr /Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|-----------------------|--------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 1.05          | 41.03                | Pk  | 27.5           | -25.8                 | 0            | 42.73                      | -                  | -           | 74                  | -31.27         | 0-360          | 199         | H        |
| 2      | * 3.618         | 35.13                | Pk  | 33.8           | -32.9                 | 0            | 36.03                      | -                  | -           | 74                  | -37.97         | 0-360          | 199         | H        |
| 3      | * 9.193         | 30.22                | Pk  | 36.1           | -26.6                 | 0            | 39.72                      | -                  | -           | 74                  | -34.28         | 0-360          | 199         | H        |
| 4      | * 3.713         | 36.22                | Pk  | 33.6           | -32.7                 | 0            | 37.12                      | -                  | -           | 74                  | -36.88         | 0-360          | 101         | V        |
| 5      | * 4.925         | 37.28                | Pk  | 34.1           | -32.5                 | 0            | 38.88                      | -                  | -           | 74                  | -35.12         | 0-360          | 199         | V        |
| 6      | * 8.236         | 31.97                | Pk  | 35.7           | -28.5                 | 0            | 39.17                      | -                  | -           | 74                  | -34.83         | 0-360          | 199         | V        |

PK - Peak detector


### RADIATED EMISSIONS

| Frequency (GHz) | Meter Reading (dBuV) | Det  | AF T345 (dB/m) | Amp/Cb/Fitr /Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|-----------------|----------------------|------|----------------|-----------------------|--------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| * 1.049         | 52.85                | PK2  | 27.5           | -25.8                 | 0            | 54.55                      | -                  | -           | 74                  | -19.45         | 36             | 139         | H        |
| * 1.052         | 32.96                | MAV1 | 27.5           | -25.8                 | .33          | 34.99                      | 54                 | -19.01      | -                   | -              | 36             | 139         | H        |
| * 3.617         | 42.21                | PK2  | 33.8           | -32.9                 | 0            | 43.11                      | -                  | -           | 74                  | -30.89         | 94             | 176         | H        |
| * 3.618         | 30.87                | MAV1 | 33.8           | -32.9                 | .33          | 32.1                       | 54                 | -21.9       | -                   | -              | 94             | 176         | H        |
| * 9.194         | 37.19                | PK2  | 36.1           | -26.6                 | 0            | 46.69                      | -                  | -           | 74                  | -27.31         | 177            | 215         | H        |
| * 9.192         | 26.11                | MAV1 | 36.1           | -26.6                 | .33          | 35.94                      | 54                 | -18.06      | -                   | -              | 177            | 215         | H        |
| * 3.715         | 42.17                | PK2  | 33.6           | -32.7                 | 0            | 43.07                      | -                  | -           | 74                  | -30.93         | 338            | 192         | V        |
| * 3.713         | 31.01                | MAV1 | 33.6           | -32.7                 | .33          | 32.24                      | 54                 | -21.76      | -                   | -              | 338            | 192         | V        |
| * 4.923         | 46.26                | PK2  | 34.1           | -32.5                 | 0            | 47.86                      | -                  | -           | 74                  | -26.14         | 115            | 208         | V        |
| * 4.924         | 33.87                | MAV1 | 34.1           | -32.5                 | .33          | 35.8                       | 54                 | -18.2       | -                   | -              | 115            | 208         | V        |
| * 8.237         | 38.84                | PK2  | 35.7           | -28.5                 | 0            | 46.04                      | -                  | -           | 74                  | -27.96         | 102            | 190         | V        |
| * 8.237         | 28.14                | MAV1 | 35.7           | -28.5                 | .33          | 35.67                      | 54                 | -18.33      | -                   | -              | 102            | 190         | V        |

# 11.2.1. TX ABOVE 1 GHz 802.11g MODE IN THE 2.4 GHz BAND Chain 1

## RESTRICTED BANDEDGE (LOW CHANNEL)

### HORIZONTAL PEAK AND AVERAGE PLOT

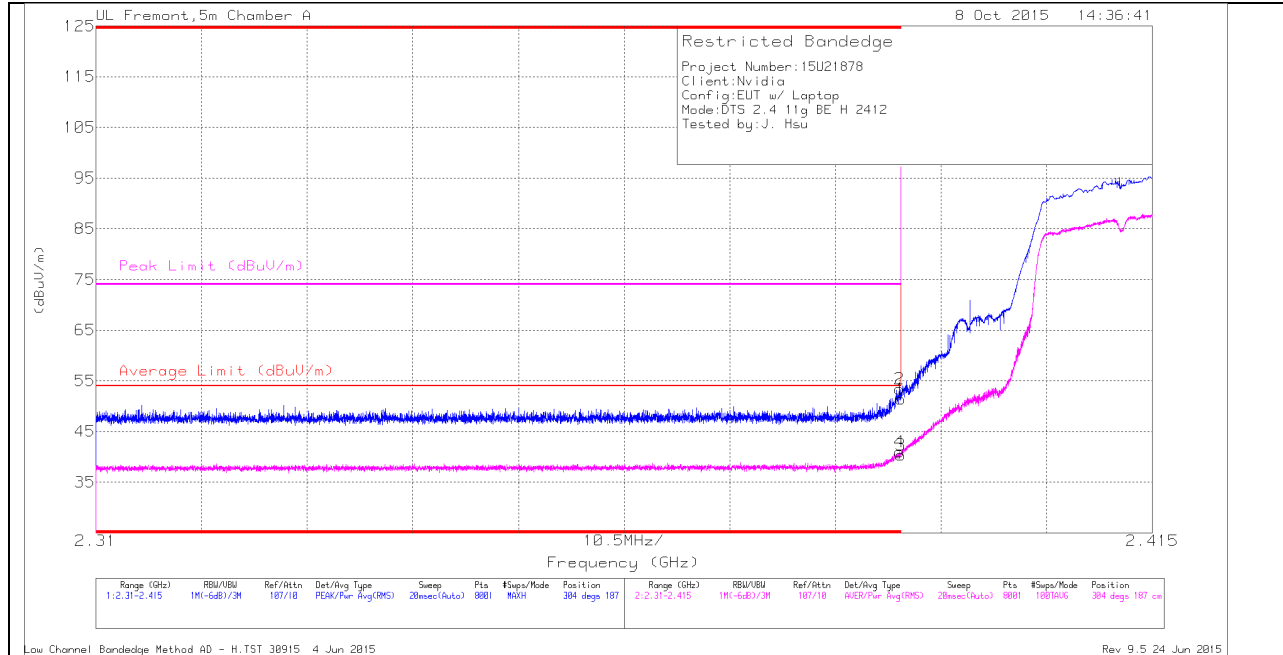

### HORIZONTAL DATA


| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T136 (dB/m) | Amp/Cb/Filter (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|--------------------|--------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 2.39          | 43.97                | Pk  | 32             | -24.6              | 0            | 51.37                      | -                      | -           | 74                  | -22.63         | 304            | 187         | H        |
| 2      | * 2.39          | 46.02                | Pk  | 32             | -24.6              | 0            | 53.42                      | -                      | -           | 74                  | -20.58         | 304            | 187         | H        |
| 3      | * 2.39          | 32.61                | RMS | 32             | -24.6              | .33          | 40.34                      | 54                     | -13.66      | -                   | -              | 304            | 187         | H        |
| 4      | * 2.39          | 33.21                | RMS | 32             | -24.6              | .33          | 40.94                      | 54                     | -13.06      | -                   | -              | 304            | 187         | H        |

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

RMS - RMS detection

### VERTICAL PEAK AND AVERAGE PLOT

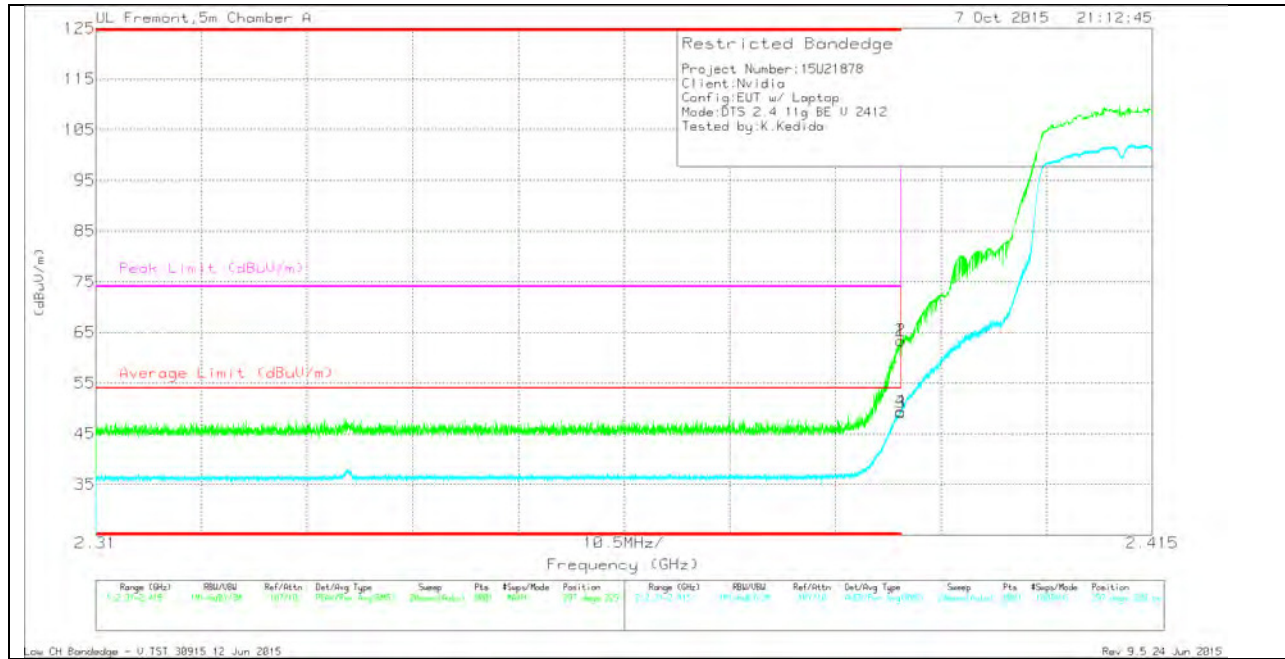

### VERTICAL DATA

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T136 (dB/m) | Amp/Cbl/Filt r/Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|-------------------------|--------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 2.39          | 51.55                | Pk  | 32             | -20.2                   | 0            | 63.35                      | -                      | -           | 74                  | -10.65         | 297            | 229         | V        |
| 2      | * 2.39          | 51.59                | Pk  | 32             | -20.2                   | 0            | 63.39                      | -                      | -           | 74                  | -10.61         | 297            | 229         | V        |
| 3      | * 2.39          | 37                   | RMS | 32             | -20.2                   | .33          | 49.13                      | 54                     | -4.87       | -                   | -              | 297            | 229         | V        |
| 4      | * 2.39          | 37.32                | RMS | 32             | -20.2                   | .33          | 49.45                      | 54                     | -4.55       | -                   | -              | 297            | 229         | V        |

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


Pk - Peak detector

RMS - RMS detection



## AUTHORIZED BANDEDGE (HIGH CHANNEL)

### HORIZONTAL PEAK AND AVERAGE PLOT

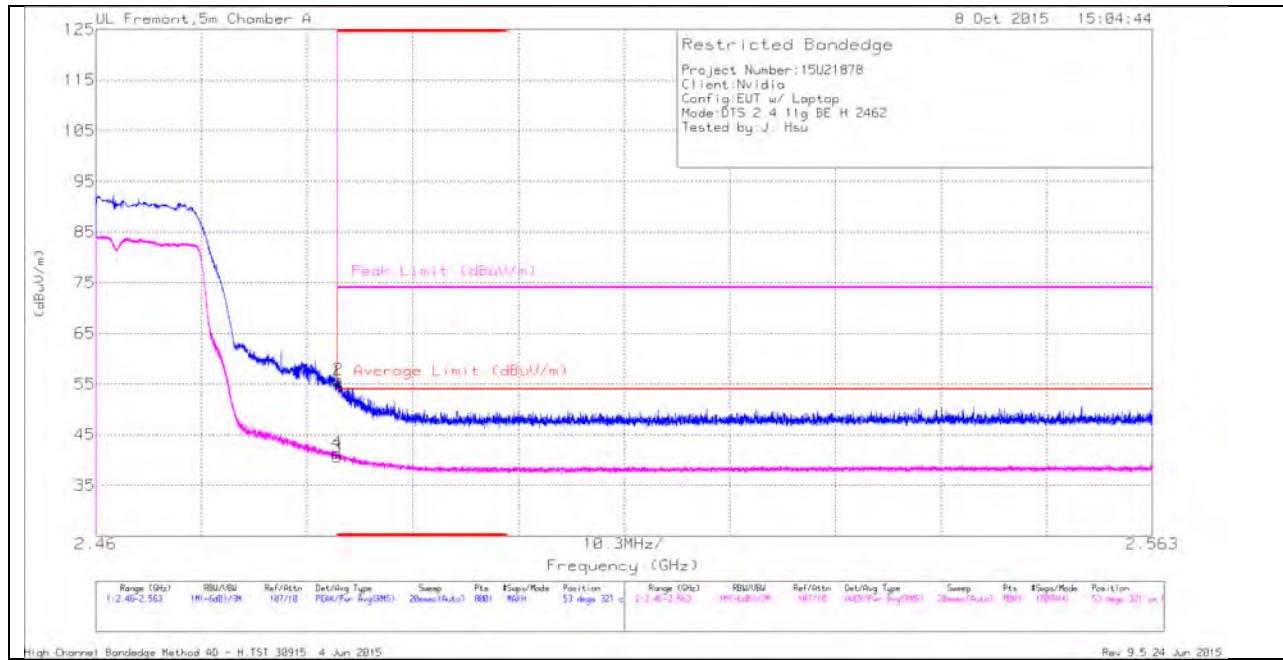

### HORIZONTAL DATA


| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T136 (dB/m) | Amp/Cb/Filter/Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|------------------------|--------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 2.484         | 47.89                | Pk  | 32.1           | -24.5                  | 0            | 55.49                      | -                      | -           | 74                  | -18.51         | 53             | 321         | H        |
| 2      | * 2.484         | 48.29                | Pk  | 32.1           | -24.5                  | 0            | 55.89                      | -                      | -           | 74                  | -18.11         | 53             | 321         | H        |
| 3      | * 2.484         | 32.73                | RMS | 32.1           | -24.5                  | .33          | 40.66                      | 54                     | -13.34      | -                   | -              | 53             | 321         | H        |
| 4      | * 2.484         | 33.48                | RMS | 32.1           | -24.5                  | .33          | 41.41                      | 54                     | -12.59      | -                   | -              | 53             | 321         | H        |

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

RMS - RMS detection

### VERTICAL PEAK AND AVERAGE PLOT

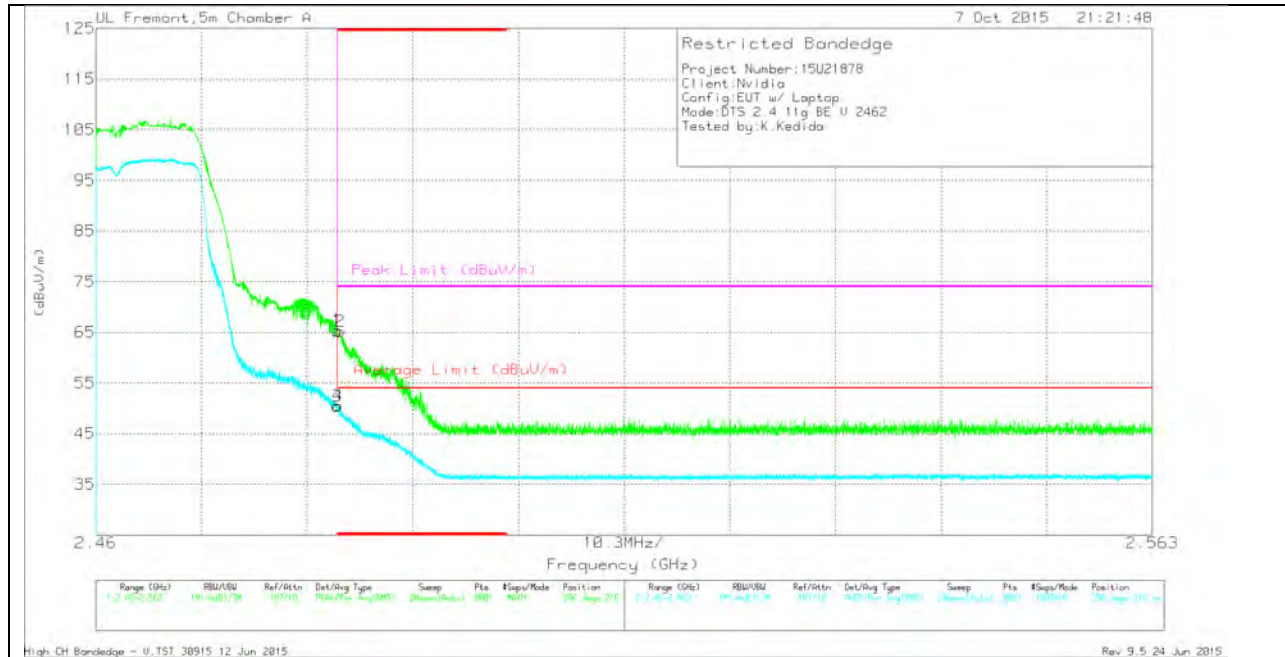

### VERTICAL DATA

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T136 (dB/m) | Amp/Cbl/Filt r/Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|-------------------------|--------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 2.484         | 53.58                | Pk  | 32.1           | -20.3                   | 0            | 65.38                      | -                      | -           | 74                  | -8.62          | 296            | 216         | V        |
| 2      | * 2.484         | 53.44                | Pk  | 32.1           | -20.3                   | 0            | 65.24                      | -                      | -           | 74                  | -8.76          | 296            | 216         | V        |
| 3      | * 2.484         | 38.24                | RMS | 32.1           | -20.3                   | .33          | 50.37                      | 54                     | -3.63       | -                   | -              | 296            | 216         | V        |
| 4      | * 2.484         | 38.45                | RMS | 32.1           | -20.3                   | .33          | 50.58                      | 54                     | -3.42       | -                   | -              | 296            | 216         | V        |


\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

RMS - RMS detection


## HARMONICS AND SPURIOUS EMISSIONS

### LOW CHANNEL HORIZONTAL

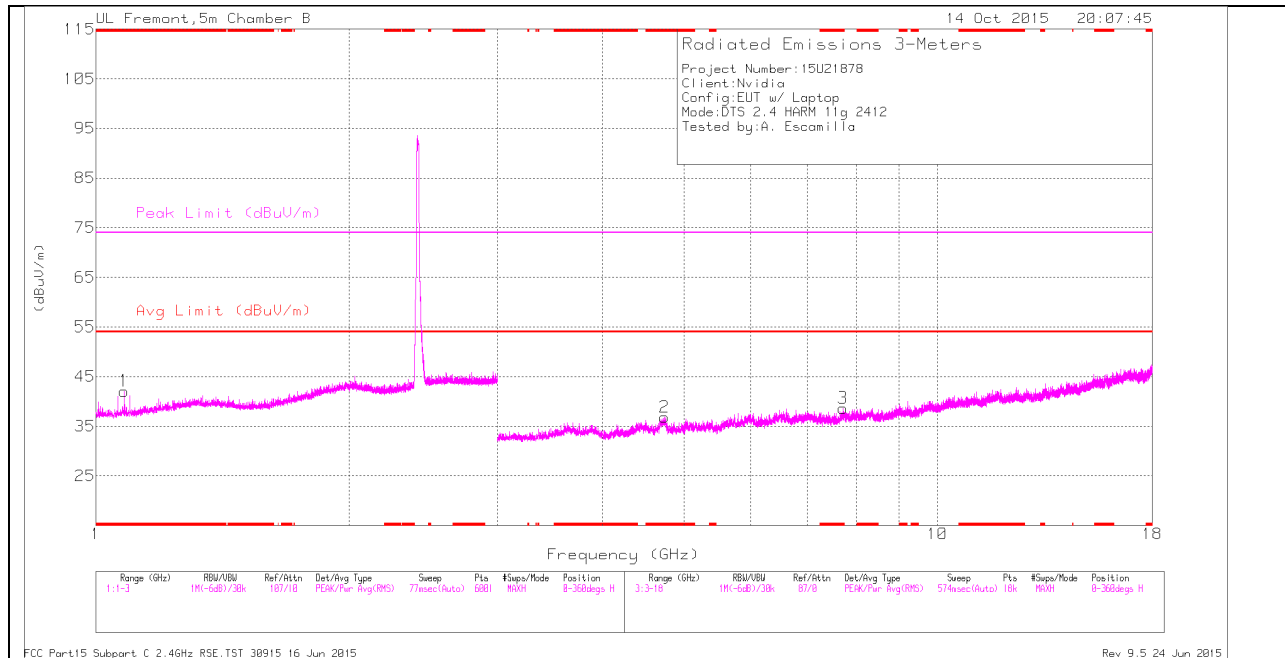

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

### LOW CHANNEL VERTICAL

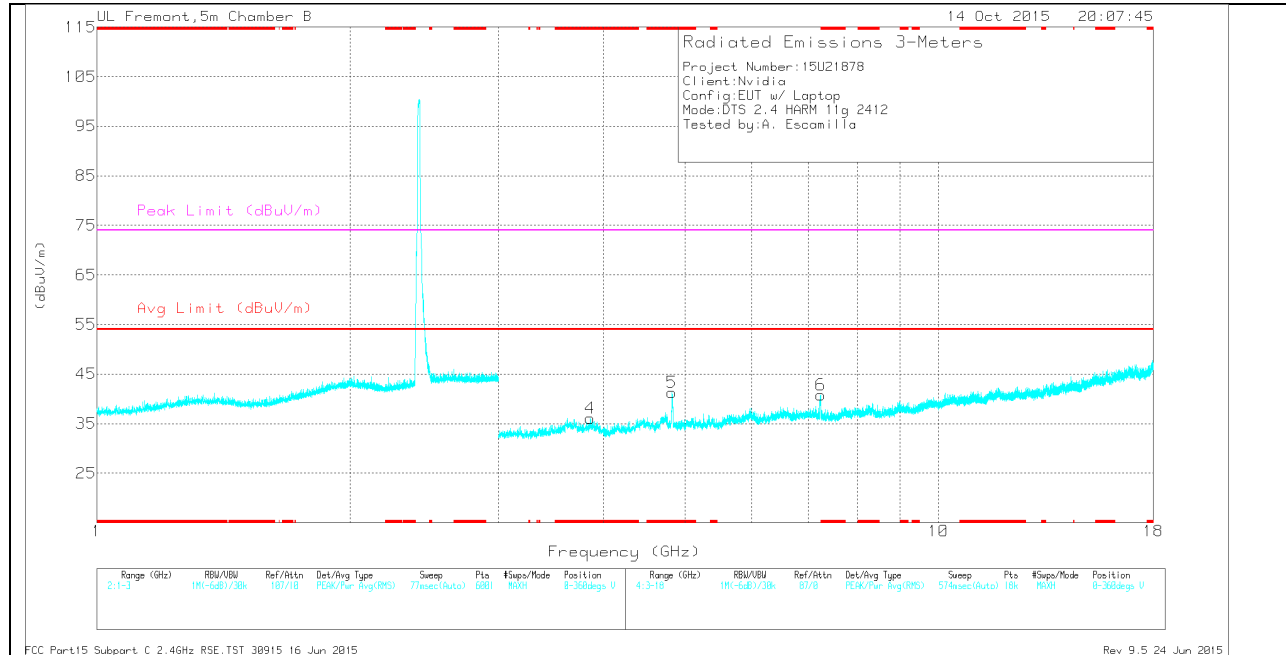

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

## LOW CHANNEL DATA

### TRACE MARKERS


| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T345 (dB/m) | Amp/Cb/Fitr /Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|-----------------------|--------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 1.08          | 40.21                | Pk  | 27.6           | -25.7                 | 0            | 42.11                      | -                  | -           | 74                  | -31.89         | 0-360          | 199         | H        |
| 2      | * 4.742         | 33.21                | Pk  | 34.3           | -30.7                 | 0            | 36.81                      | -                  | -           | 74                  | -37.19         | 0-360          | 199         | H        |
| 3      | * 7.727         | 31.38                | Pk  | 35.5           | -28.2                 | 0            | 38.68                      | -                  | -           | 74                  | -35.32         | 0-360          | 101         | H        |
| 4      | * 3.856         | 34.6                 | Pk  | 33.4           | -31.9                 | 0            | 36.1                       | -                  | -           | 74                  | -37.9          | 0-360          | 101         | V        |
| 5      | * 4.823         | 38.6                 | Pk  | 34.3           | -31.6                 | 0            | 41.3                       | -                  | -           | 74                  | -32.7          | 0-360          | 101         | V        |
| 6      | 7.242           | 35.4                 | Pk  | 35.3           | -29.9                 | 0            | 40.8                       | -                  | -           | -                   | -              | 0-360          | 199         | V        |

PK - Peak detector

### RADIATED EMISSIONS


| Frequency (GHz) | Meter Reading (dBuV) | Det  | AF T345 (dB/m) | Amp/Cb/Fitr /Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|-----------------|----------------------|------|----------------|-----------------------|--------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| * 1.082         | 48.03                | PK2  | 27.6           | -25.7                 | 0            | 49.93                      | -                  | -           | 74                  | -24.07         | 259            | 238         | H        |
| * 1.082         | 32.87                | MAV1 | 27.6           | -25.7                 | .33          | 35.1                       | 54                 | -18.9       | -                   | -              | 259            | 238         | H        |
| * 4.742         | 41.24                | PK2  | 34.3           | -30.7                 | 0            | 44.84                      | -                  | -           | 74                  | -29.16         | 348            | 266         | H        |
| * 4.744         | 30.89                | MAV1 | 34.3           | -30.7                 | .33          | 34.82                      | 54                 | -19.18      | -                   | -              | 348            | 266         | H        |
| * 7.727         | 39.62                | PK2  | 35.5           | -28.2                 | 0            | 46.92                      | -                  | -           | 74                  | -27.08         | 181            | 176         | H        |
| * 7.729         | 27.73                | MAV1 | 35.5           | -28.2                 | .33          | 35.36                      | 54                 | -18.64      | -                   | -              | 181            | 176         | H        |
| * 4.823         | 48.65                | PK2  | 34.3           | -31.6                 | 0            | 51.35                      | -                  | -           | 74                  | -22.65         | 321            | 264         | V        |
| * 4.825         | 36.81                | MAV1 | 34.3           | -31.6                 | .33          | 39.84                      | 54                 | -14.16      | -                   | -              | 321            | 264         | V        |
| * 3.856         | 41.65                | PK2  | 33.4           | -31.9                 | 0            | 43.15                      | -                  | -           | 74                  | -30.85         | 57             | 191         | V        |
| * 3.856         | 30.84                | MAV1 | 33.4           | -32                   | .33          | 32.57                      | 54                 | -21.43      | -                   | -              | 57             | 191         | V        |
| 7.244           | 39.45                | PK2  | 35.3           | -30                   | 0            | 44.75                      | -                  | -           | -                   | -              | 17             | 169         | V        |
| 7.244           | 28.65                | MAV1 | 35.3           | -30                   | .33          | 34.28                      | -                  | -           | -                   | -              | 17             | 169         | V        |

### MID CHANNEL HORIZONTAL

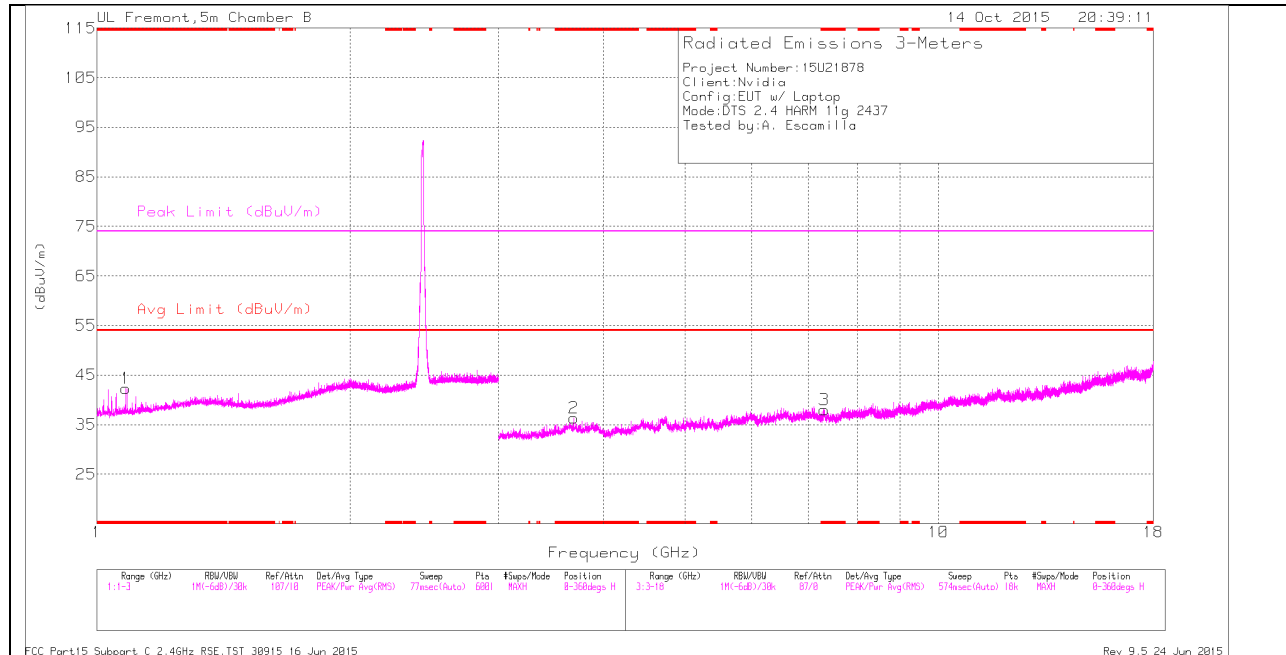

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

### MID CHANNEL VERTICAL

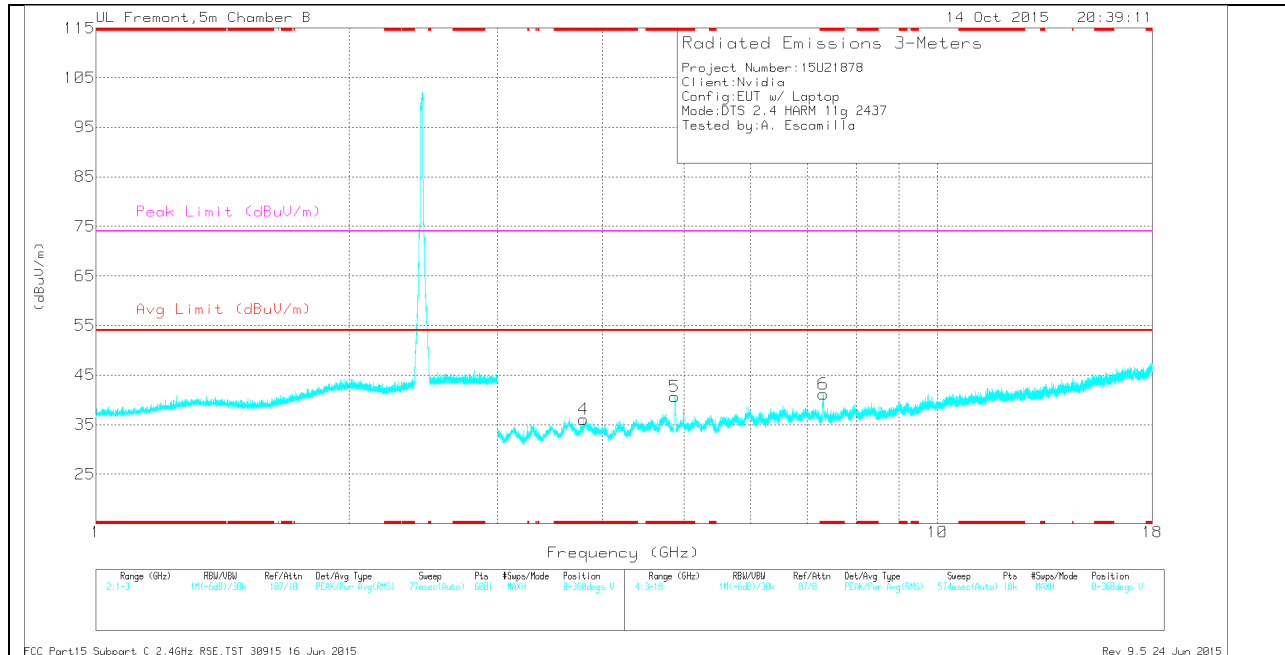

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

## MID CHANNEL DATA

### TRACE MARKERS

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T345 (dB/m) | Amp/Cb/Fitr /Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|-----------------------|--------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 1.082         | 40.39                | Pk  | 27.6           | -25.7                 | 0            | 42.29                      | -                  | -           | 74                  | -31.71         | 0-360          | 101         | H        |
| 2      | * 3.685         | 35.59                | Pk  | 33.6           | -32.8                 | 0            | 36.39                      | -                  | -           | 74                  | -37.61         | 0-360          | 101         | H        |
| 3      | * 7.316         | 32.77                | Pk  | 35.3           | -30.1                 | 0            | 37.97                      | -                  | -           | 74                  | -36.03         | 0-360          | 200         | H        |
| 4      | * 3.797         | 35.48                | Pk  | 33.3           | -32.7                 | 0            | 36.08                      | -                  | -           | 74                  | -37.92         | 0-360          | 200         | V        |
| 5      | * 4.872         | 38.88                | Pk  | 34.2           | -32.4                 | 0            | 40.68                      | -                  | -           | 74                  | -33.32         | 0-360          | 200         | V        |
| 6      | * 7.316         | 35.99                | Pk  | 35.3           | -30.1                 | 0            | 41.19                      | -                  | -           | 74                  | -32.81         | 0-360          | 200         | V        |


PK - Peak detector

### RADIATED EMISSIONS

| Frequency (GHz) | Meter Reading (dBuV) | Det  | AF T345 (dB/m) | Amp/Cb/Fitr /Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|-----------------|----------------------|------|----------------|-----------------------|--------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| * 1.082         | 44.73                | PK2  | 27.6           | -25.7                 | 0            | 46.63                      | -                  | -           | 74                  | -27.37         | 81             | 162         | H        |
| * 1.082         | 32.8                 | MAV1 | 27.6           | -25.7                 | .33          | 35.03                      | 54                 | -18.97      | -                   | -              | 81             | 162         | H        |
| * 3.685         | 42.16                | PK2  | 33.6           | -32.8                 | 0            | 42.96                      | -                  | -           | 74                  | -31.04         | 113            | 207         | H        |
| * 3.686         | 31.18                | MAV1 | 33.6           | -32.8                 | .33          | 32.31                      | 54                 | -21.69      | -                   | -              | 113            | 207         | H        |
| * 7.316         | 41.92                | PK2  | 35.3           | -30.1                 | 0            | 47.12                      | -                  | -           | 74                  | -26.88         | 54             | 193         | H        |
| * 7.315         | 30.22                | MAV1 | 35.3           | -30.1                 | .33          | 35.75                      | 54                 | -18.25      | -                   | -              | 54             | 193         | H        |
| * 3.798         | 42.79                | PK2  | 33.3           | -32.7                 | 0            | 43.39                      | -                  | -           | 74                  | -30.61         | 129            | 244         | V        |
| * 3.799         | 30.94                | MAV1 | 33.3           | -32.7                 | .33          | 31.87                      | 54                 | -22.13      | -                   | -              | 129            | 244         | V        |
| * 4.873         | 49.19                | PK2  | 34.2           | -32.4                 | 0            | 50.99                      | -                  | -           | 74                  | -23.01         | 336            | 247         | V        |
| * 4.872         | 36.88                | MAV1 | 34.2           | -32.4                 | .33          | 39.01                      | 54                 | -14.99      | -                   | -              | 336            | 247         | V        |
| * 7.315         | 47.31                | PK2  | 35.3           | -30.1                 | 0            | 52.51                      | -                  | -           | 74                  | -21.49         | 68             | 198         | V        |
| * 7.314         | 33.22                | MAV1 | 35.3           | -30.1                 | .33          | 38.75                      | 54                 | -15.25      | -                   | -              | 68             | 198         | V        |




### HIGH CHANNEL HORIZONTAL

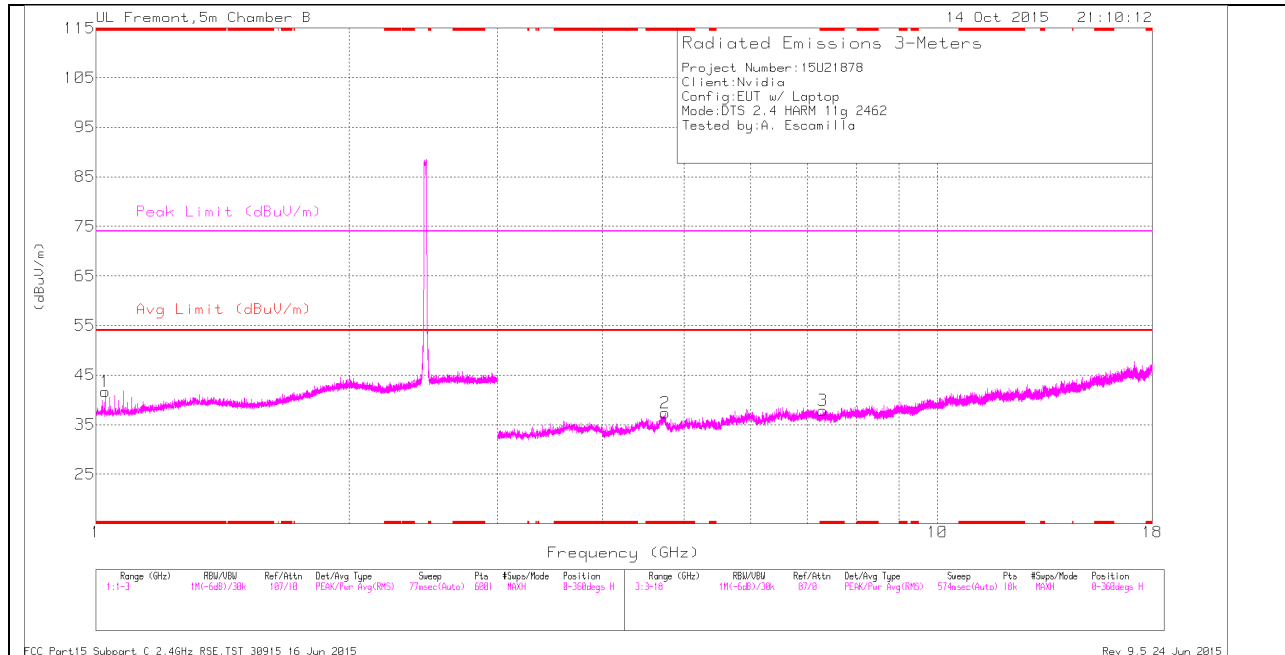

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

### HIGH CHANNEL VERTICAL

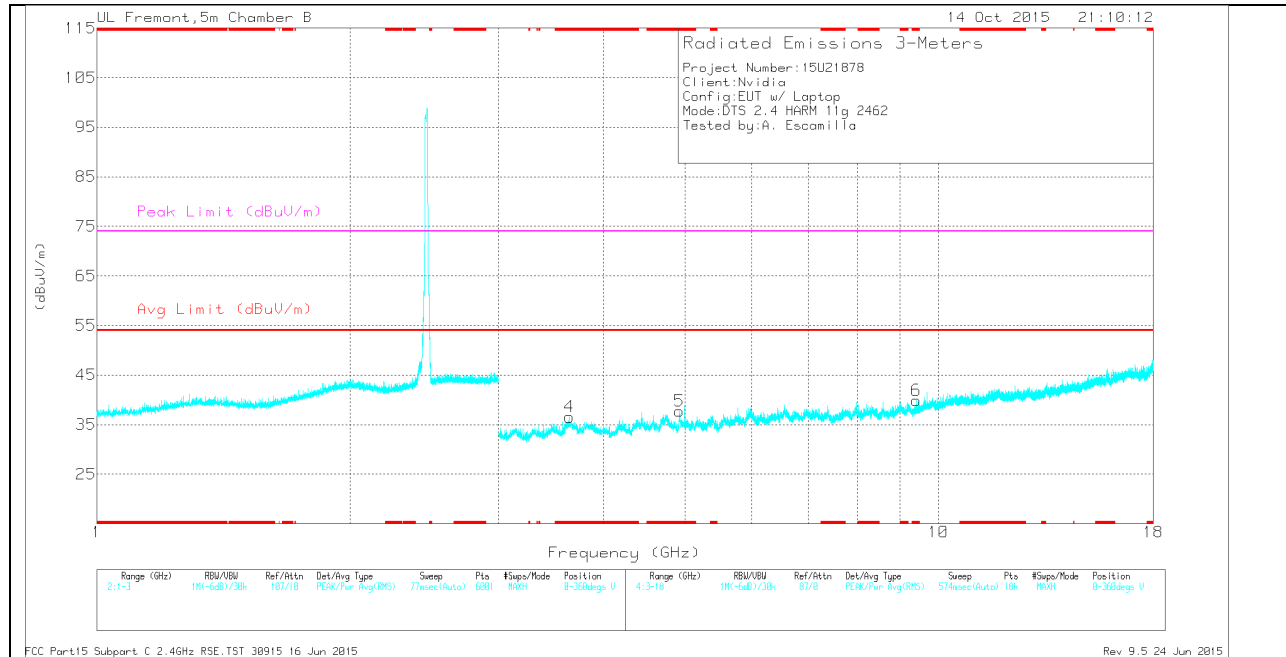

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

## HIGH CHANNEL DATA

### TRACE MARKERS

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T345 (dB/m) | Amp/Cb/Fitr /Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|-----------------------|--------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 1.025         | 40.07                | Pk  | 27.4           | -25.8                 | 0            | 41.67                      | -                  | -           | 74                  | -32.33         | 0-360          | 199         | H        |
| 2      | * 4.744         | 33.8                 | Pk  | 34.3           | -30.7                 | 0            | 37.4                       | -                  | -           | 74                  | -36.6          | 0-360          | 101         | H        |
| 3      | * 7.314         | 32.66                | Pk  | 35.3           | -30.1                 | 0            | 37.86                      | -                  | -           | 74                  | -36.14         | 0-360          | 101         | H        |
| 4      | * 3.642         | 35.53                | Pk  | 33.7           | -32.7                 | 0            | 36.53                      | -                  | -           | 74                  | -37.47         | 0-360          | 101         | V        |
| 5      | * 4.922         | 36.18                | Pk  | 34.1           | -32.5                 | 0            | 37.78                      | -                  | -           | 74                  | -36.22         | 0-360          | 200         | V        |
| 6      | * 9.41          | 30.47                | Pk  | 36.4           | -27                   | 0            | 39.87                      | -                  | -           | 74                  | -34.13         | 0-360          | 200         | V        |

PK - Peak detector


### RADIATED EMISSIONS

| Frequency (GHz) | Meter Reading (dBuV) | Det  | AF T345 (dB/m) | Amp/Cb/Fitr /Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|-----------------|----------------------|------|----------------|-----------------------|--------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| * 1.024         | 52                   | PK2  | 27.4           | -25.8                 | 0            | 53.6                       | -                  | -           | 74                  | -20.4          | 30             | 156         | H        |
| * 1.027         | 32.97                | MAV1 | 27.4           | -25.8                 | .33          | 34.9                       | 54                 | -19.1       | -                   | -              | 30             | 156         | H        |
| * 4.743         | 41.93                | PK2  | 34.3           | -30.7                 | 0            | 45.53                      | -                  | -           | 74                  | -28.47         | 83             | 200         | H        |
| * 4.744         | 30.61                | MAV1 | 34.3           | -30.7                 | .33          | 34.54                      | 54                 | -19.46      | -                   | -              | 83             | 200         | H        |
| * 7.313         | 40.47                | PK2  | 35.3           | -30.2                 | 0            | 45.57                      | -                  | -           | 74                  | -28.43         | 64             | 186         | H        |
| * 7.314         | 29.21                | MAV1 | 35.3           | -30.2                 | .33          | 34.64                      | 54                 | -19.36      | -                   | -              | 64             | 186         | H        |
| * 3.642         | 41.69                | PK2  | 33.7           | -32.7                 | 0            | 42.69                      | -                  | -           | 74                  | -31.31         | 21             | 193         | V        |
| * 3.642         | 30.8                 | MAV1 | 33.7           | -32.7                 | .33          | 32.13                      | 54                 | -21.87      | -                   | -              | 21             | 193         | V        |
| * 4.922         | 42                   | PK2  | 34.1           | -32.5                 | 0            | 43.6                       | -                  | -           | 74                  | -30.4          | 107            | 213         | V        |
| * 4.921         | 30.89                | MAV1 | 34.1           | -32.6                 | .33          | 32.72                      | 54                 | -21.28      | -                   | -              | 107            | 213         | V        |
| * 9.409         | 37.73                | PK2  | 36.4           | -27                   | 0            | 47.13                      | -                  | -           | 74                  | -26.87         | 57             | 190         | V        |
| * 9.408         | 26.09                | MAV1 | 36.4           | -27                   | .33          | 35.82                      | 54                 | -18.18      | -                   | -              | 57             | 190         | V        |

# 11.2.1. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 2.4 GHz BAND

## RESTRICTED BANDEDGE (LOW CHANNEL)

### HORIZONTAL PEAK AND AVERAGE PLOT

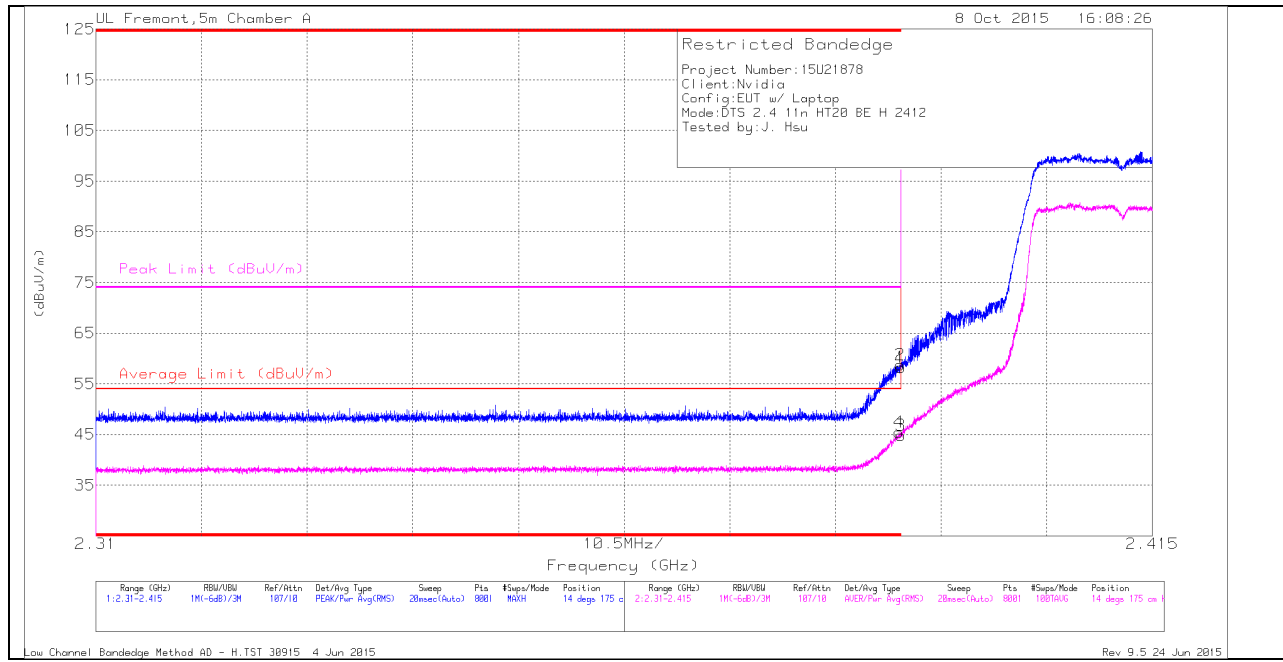

### HORIZONTAL DATA


| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T136 (dB/m) | Amp/Cb/Filter/Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|------------------------|--------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 2.39          | 50.84                | Pk  | 32             | -24.6                  | 0            | 58.24                      | -                      | -           | 74                  | -15.76         | 14             | 175         | H        |
| 2      | * 2.39          | 51.39                | Pk  | 32             | -24.6                  | 0            | 58.79                      | -                      | -           | 74                  | -15.21         | 14             | 175         | H        |
| 3      | * 2.39          | 36.79                | RMS | 32             | -24.6                  | .59          | 44.78                      | 54                     | -9.22       | -                   | -              | 14             | 175         | H        |
| 4      | * 2.39          | 37.46                | RMS | 32             | -24.6                  | .59          | 45.45                      | 54                     | -8.55       | -                   | -              | 14             | 175         | H        |

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

RMS - RMS detection

### VERTICAL PEAK AND AVERAGE PLOT

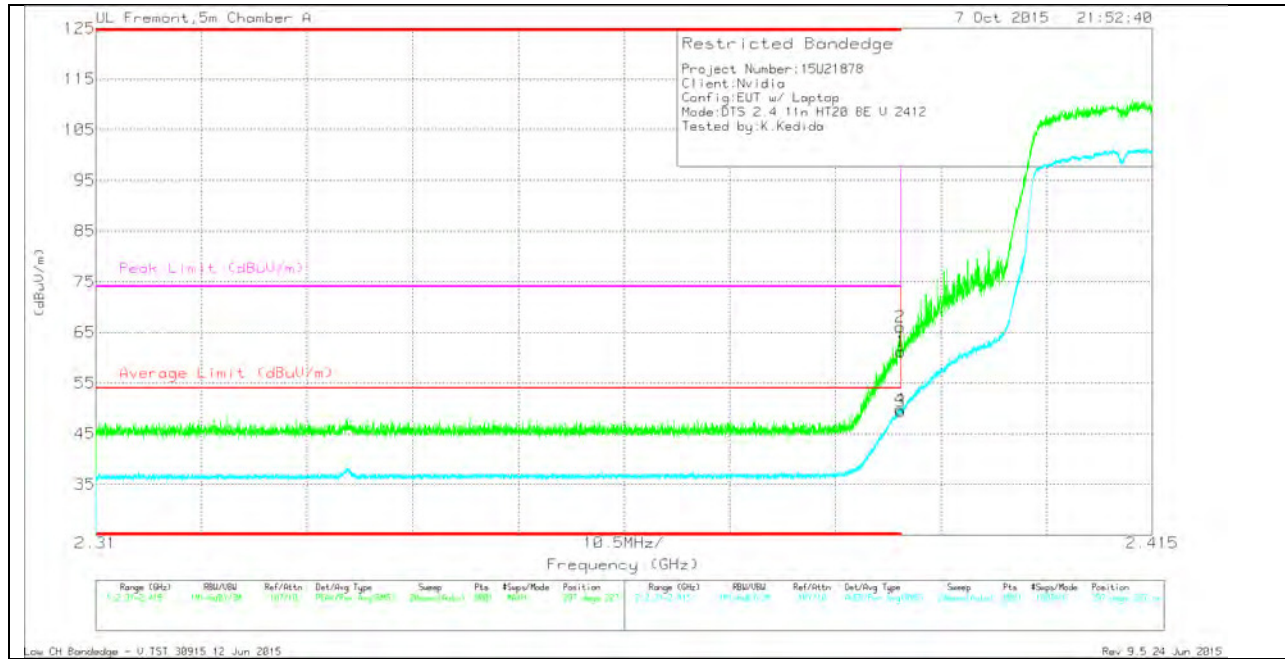

### VERTICAL DATA

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T136 (dB/m) | Amp/Cbl/Filt r/Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|-------------------------|--------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 2.39          | 49.47                | Pk  | 32             | -20.2                   | 0            | 61.27                      | -                      | -           | 74                  | -12.73         | 297            | 227         | V        |
| 2      | * 2.39          | 54.3                 | Pk  | 32             | -20.2                   | 0            | 66.1                       | -                      | -           | 74                  | -7.9           | 297            | 227         | V        |
| 3      | * 2.39          | 37.03                | RMS | 32             | -20.2                   | .59          | 49.42                      | 54                     | -4.58       | -                   | -              | 297            | 227         | V        |
| 4      | * 2.39          | 37.46                | RMS | 32             | -20.2                   | .59          | 49.85                      | 54                     | -4.15       | -                   | -              | 297            | 227         | V        |


\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

RMS - RMS detection

## AUTHORIZED BANDEDGE (HIGH CHANNEL)

### HORIZONTAL PEAK AND AVERAGE PLOT

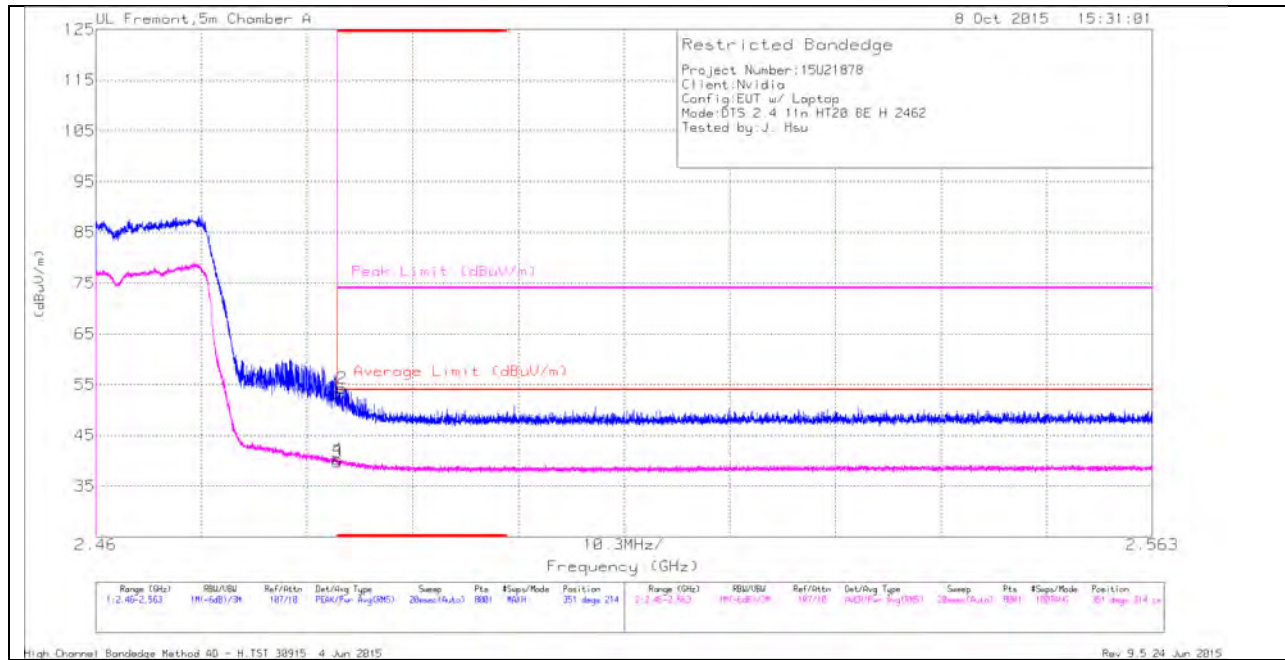

### HORIZONTAL DATA


| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T136 (dB/m) | Amp/Cb/Filter/Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|------------------------|--------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 2.484         | 45.72                | Pk  | 32.1           | -24.5                  | 0            | 53.32                      | -                      | -           | 74                  | -20.68         | 351            | 214         | H        |
| 2      | * 2.484         | 46.7                 | Pk  | 32.1           | -24.5                  | 0            | 54.3                       | -                      | -           | 74                  | -19.7          | 351            | 214         | H        |
| 3      | * 2.484         | 31.5                 | RMS | 32.1           | -24.5                  | .59          | 39.69                      | 54                     | -14.31      | -                   | -              | 351            | 214         | H        |
| 4      | * 2.484         | 32.04                | RMS | 32.1           | -24.5                  | .59          | 40.23                      | 54                     | -13.77      | -                   | -              | 351            | 214         | H        |

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

RMS - RMS detection

### VERTICAL PEAK AND AVERAGE PLOT

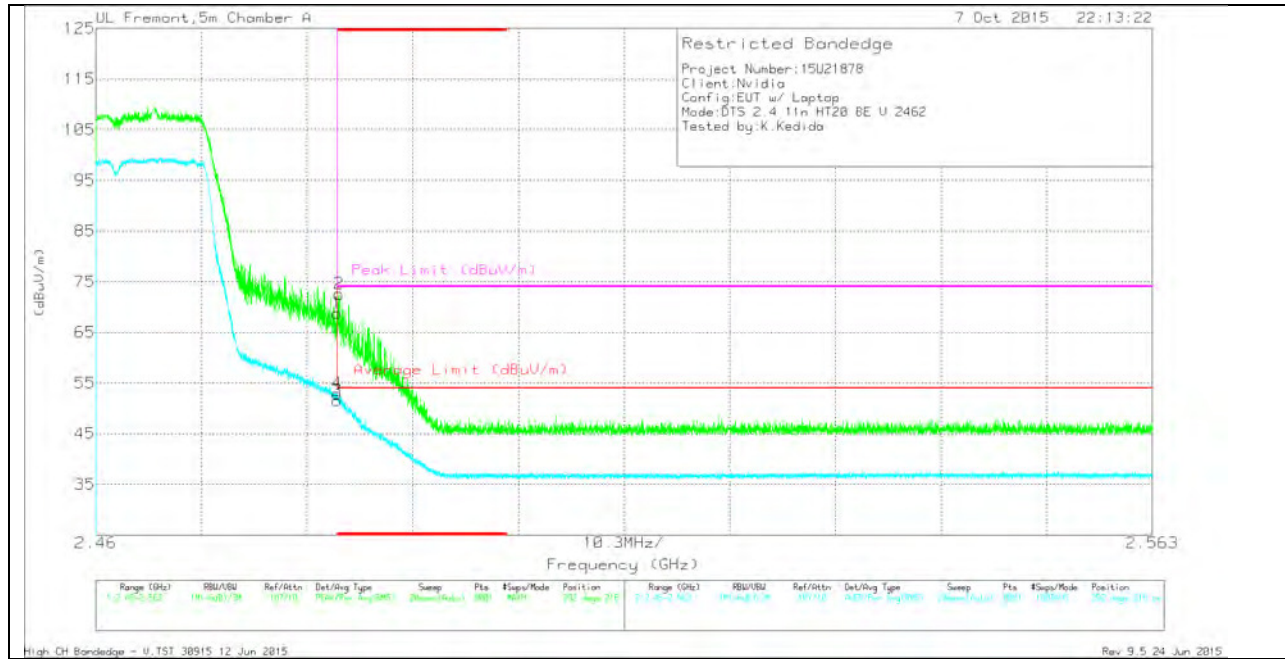

### VERTICAL DATA

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T136 (dB/m) | Amp/Cbl/Fitter/Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|-------------------------|--------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 2.484         | 56.97                | Pk  | 32.1           | -20.3                   | 0            | 68.77                      | -                      | -           | 74                  | -5.23          | 292            | 218         | V        |
| 2      | * 2.484         | 60.78                | Pk  | 32.1           | -20.3                   | 0            | 72.58                      | -                      | -           | 74                  | -1.42          | 292            | 218         | V        |
| 3      | * 2.484         | 39.11                | RMS | 32.1           | -20.3                   | .59          | 51.5                       | 54                     | -2.5        | -                   | -              | 292            | 218         | V        |
| 4      | * 2.484         | 40.47                | RMS | 32.1           | -20.3                   | .59          | 52.86                      | 54                     | -1.14       | -                   | -              | 292            | 218         | V        |


\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

RMS - RMS detection

## HARMONICS AND SPURIOUS EMISSIONS


### LOW CHANNEL HORIZONTAL

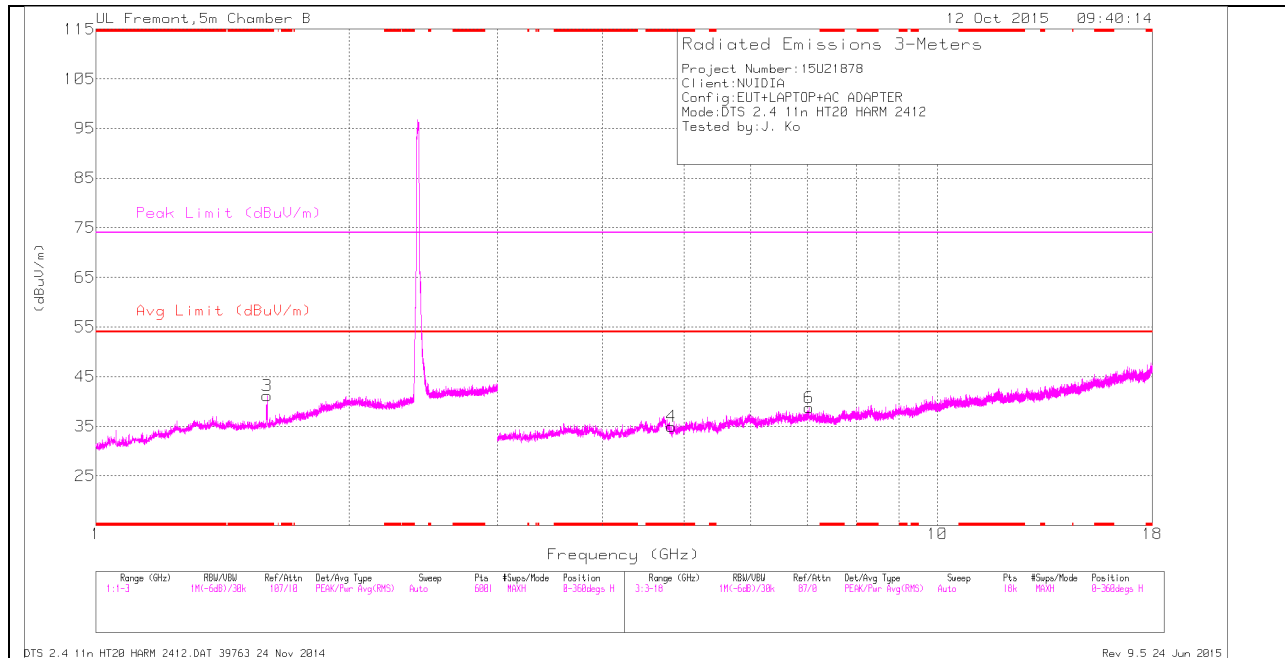

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.



### LOW CHANNEL VERTICAL

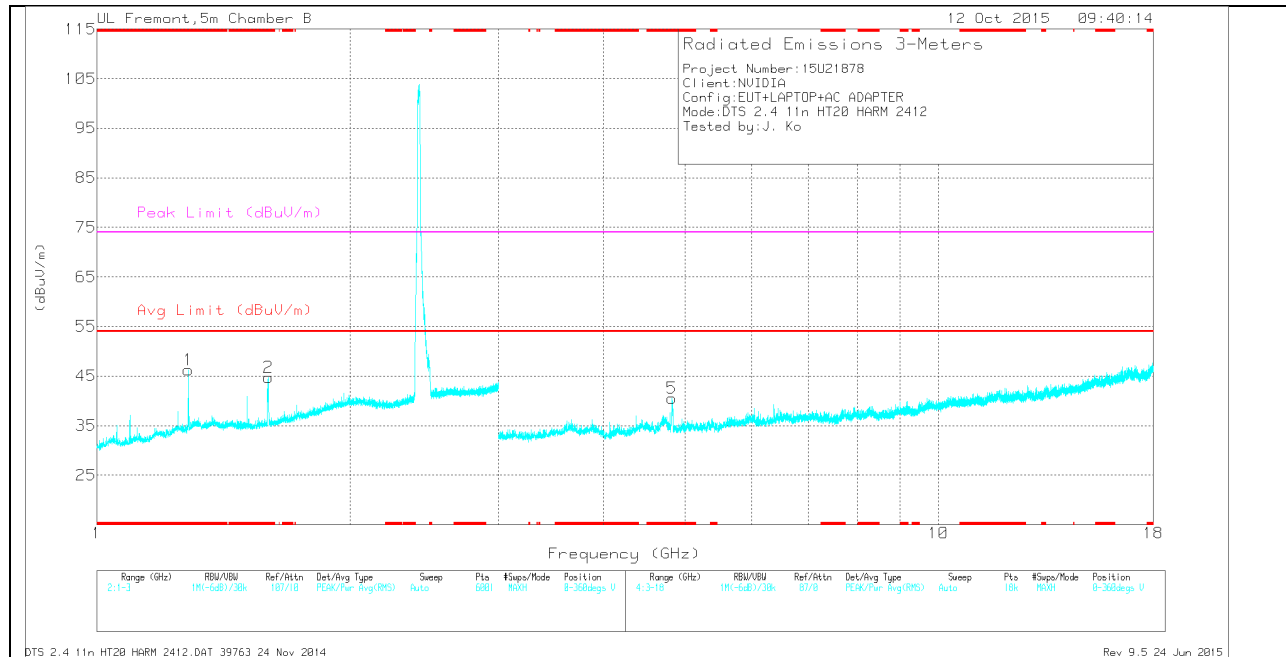

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

## LOW CHANNEL DATA

### TRACE MARKERS


| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T345 (dB/m) | Amp/Cb/Ftr /Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|----------------------|--------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 3      | * 1.597         | 34.26                | Pk  | 28.8           | -21.9                | 0            | 41.16                      | -                  | -           | 74                  | -32.84         | 0-360          | 199         | H        |
| 1      | * 1.284         | 39.68                | Pk  | 29.3           | -22.7                | 0            | 46.28                      | -                  | -           | 74                  | -27.72         | 0-360          | 199         | V        |
| 2      | * 1.598         | 37.79                | Pk  | 28.8           | -21.9                | 0            | 44.69                      | -                  | -           | 74                  | -29.31         | 0-360          | 101         | V        |
| 4      | * 4.832         | 32.49                | Pk  | 34.3           | -31.8                | 0            | 34.99                      | -                  | -           | 74                  | -39.01         | 0-360          | 101         | H        |
| 5      | * 4.825         | 37.84                | Pk  | 34.3           | -31.6                | 0            | 40.54                      | -                  | -           | 74                  | -33.46         | 0-360          | 199         | V        |
| 6      | 7.041           | 33.12                | Pk  | 35.9           | -30.3                | 0            | 38.72                      | -                  | -           | 74                  | -35.28         | 0-360          | 101         | H        |

PK - Peak detector

### RADIATED EMISSIONS


| Frequency (GHz) | Meter Reading (dBuV) | Det  | AF T345 (dB/m) | Amp/Cb/Ftr /Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|-----------------|----------------------|------|----------------|----------------------|--------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| * 1.599         | 43.16                | PK2  | 28.8           | -21.9                | 0            | 50.06                      | -                  | -           | 74                  | -23.94         | 61             | 247         | H        |
| * 1.598         | 25.43                | MAV1 | 28.8           | -21.9                | .59          | 32.93                      | 54                 | -21.07      | -                   | -              | 61             | 247         | H        |
| * 1.286         | 36.61                | PK2  | 29.3           | -22.6                | 0            | 43.31                      | -                  | -           | 74                  | -30.69         | 225            | 298         | V        |
| * 1.286         | 25.01                | MAV1 | 29.3           | -22.6                | .59          | 32.31                      | 54                 | -21.69      | -                   | -              | 225            | 298         | V        |
| * 1.596         | 45.95                | PK2  | 28.8           | -21.9                | 0            | 52.85                      | -                  | -           | 74                  | -21.15         | 10             | 122         | V        |
| * 1.596         | 25.94                | MAV1 | 28.8           | -21.9                | .59          | 33.44                      | 54                 | -20.56      | -                   | -              | 10             | 122         | V        |
| * 4.832         | 40.4                 | PK2  | 34.3           | -31.8                | 0            | 42.9                       | -                  | -           | 74                  | -31.1          | 307            | 106         | H        |
| * 4.831         | 28.47                | MAV1 | 34.3           | -31.8                | .59          | 31.57                      | 54                 | -22.43      | -                   | -              | 307            | 106         | H        |
| * 4.827         | 46.55                | PK2  | 34.3           | -31.7                | 0            | 49.15                      | -                  | -           | 74                  | -24.85         | 180            | 208         | V        |
| * 4.823         | 34.97                | MAV1 | 34.3           | -31.6                | .59          | 38.27                      | 54                 | -15.73      | -                   | -              | 180            | 208         | V        |

### MID CHANNEL HORIZONTAL

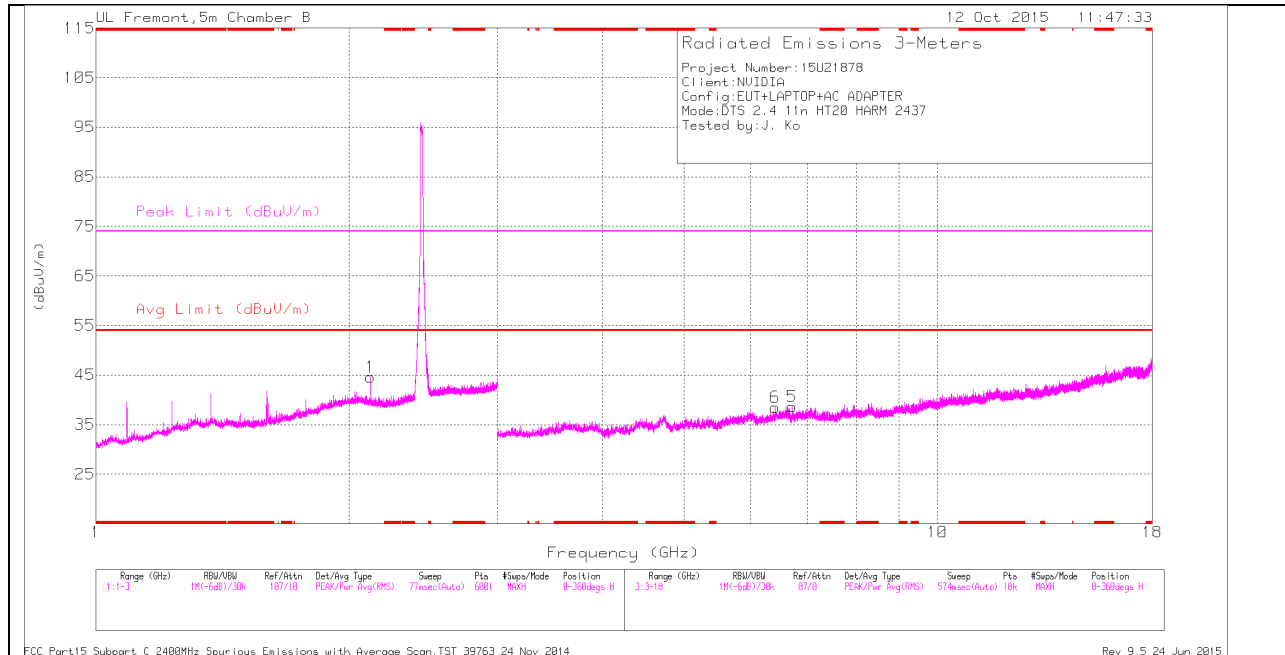

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

### MID CHANNEL VERTICAL

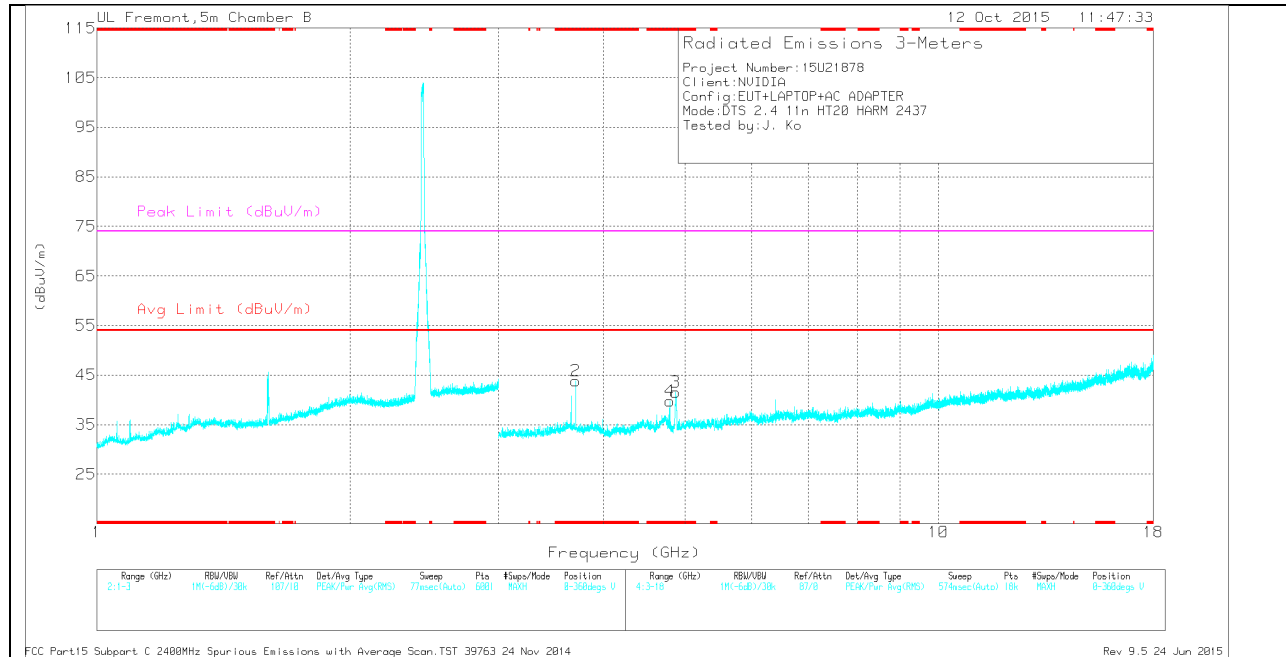

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

## MID CHANNEL DATA

### TRACE MARKERS


| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T345 (dB/m) | Amp/Cb/Ftr /Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|----------------------|--------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 2      | * 3.708         | 42.95                | Pk  | 33.6           | -32.7                | 0            | 43.85                      | -                  | -           | 74                  | -30.15         | 0-360          | 101         | V        |
| 3      | * 4.873         | 39.74                | Pk  | 34.2           | -32.4                | 0            | 41.54                      | -                  | -           | 74                  | -32.46         | 0-360          | 199         | V        |
| 4      | * 4.798         | 36.41                | Pk  | 34.3           | -30.9                | 0            | 39.81                      | -                  | -           | 74                  | -34.19         | 0-360          | 199         | V        |
| 1      | 2.119           | 34.67                | Pk  | 31.7           | -21.8                | 0            | 44.57                      | -                  | -           | 74                  | -29.43         | 0-360          | 200         | H        |
| 6      | 6.419           | 34.07                | Pk  | 35.7           | -31.3                | 0            | 38.47                      | -                  | -           | 74                  | -35.53         | 0-360          | 101         | H        |
| 5      | 6.724           | 33.87                | Pk  | 35.9           | -31.1                | 0            | 38.67                      | -                  | -           | 74                  | -35.33         | 0-360          | 101         | H        |

PK - Peak detector

### RADIATED EMISSIONS


| Frequency (GHz) | Meter Reading (dBuV) | Det  | AF T345 (dB/m) | Amp/Cb/Ftr /Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|-----------------|----------------------|------|----------------|----------------------|--------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| * 3.707         | 42.04                | PK2  | 33.6           | -32.7                | 0            | 42.94                      | -                  | -           | 74                  | -31.06         | 202            | 266         | V        |
| * 3.708         | 30.37                | MAV1 | 33.6           | -32.7                | .59          | 31.87                      | 54                 | -22.13      | -                   | -              | 202            | 266         | V        |
| * 4.871         | 47.78                | PK2  | 34.2           | -32.4                | 0            | 49.58                      | -                  | -           | 74                  | -24.42         | 161            | 163         | V        |
| * 4.873         | 35.33                | MAV1 | 34.2           | -32.4                | .59          | 37.73                      | 54                 | -16.27      | -                   | -              | 161            | 157         | V        |
| * 4.797         | 43.78                | PK2  | 34.3           | -30.9                | 0            | 47.18                      | -                  | -           | 74                  | -26.82         | 322            | 225         | V        |
| * 4.796         | 28.45                | MAV1 | 34.3           | -30.9                | .59          | 32.45                      | 54                 | -21.55      | -                   | -              | 322            | 225         | V        |

### HIGH CHANNEL HORIZONTAL

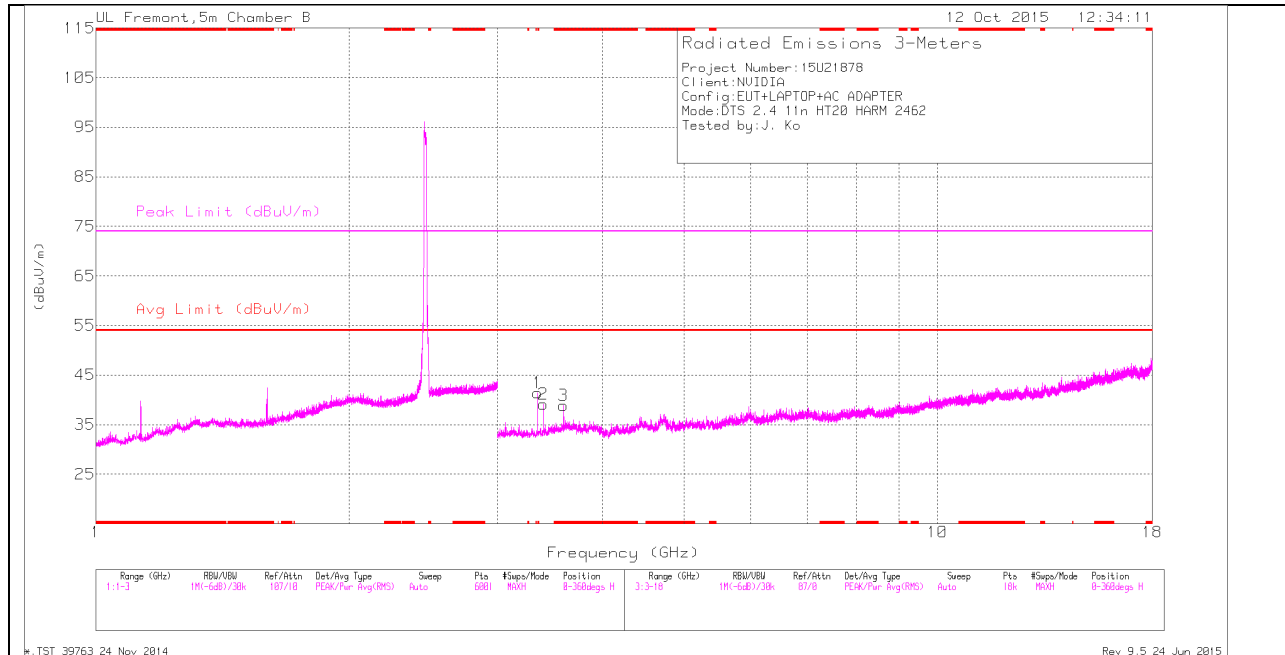

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

### HIGH CHANNEL VERTICAL

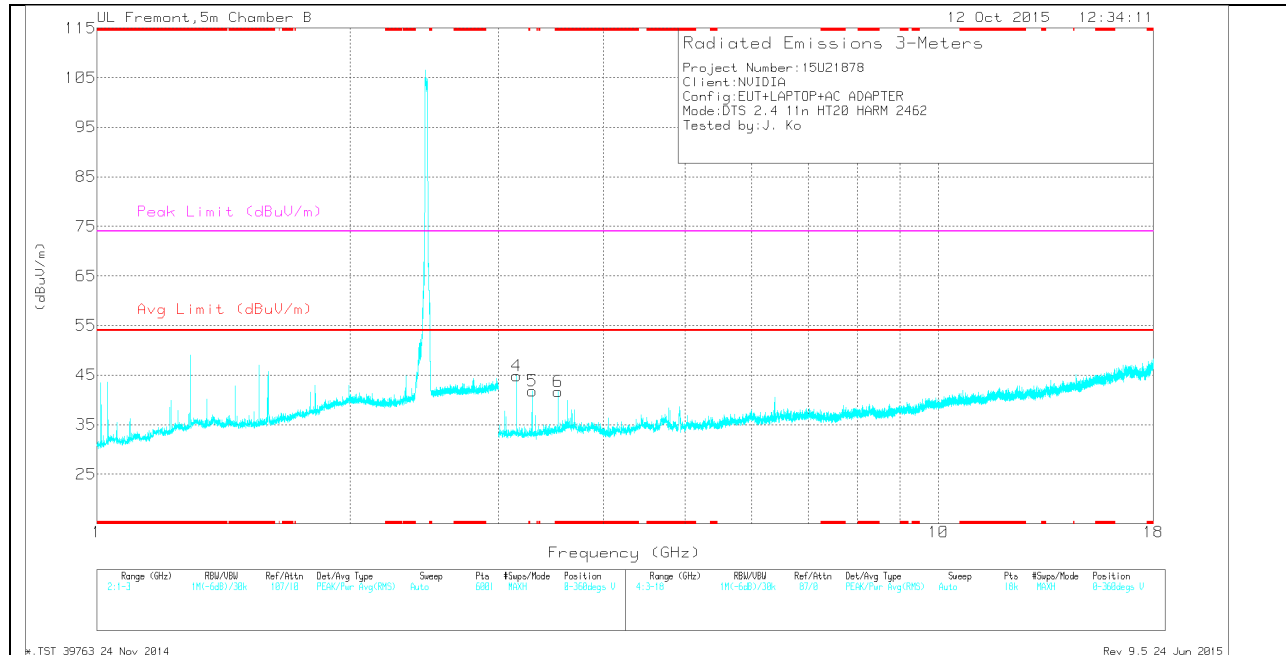

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

## HIGH CHANNEL DATA

### TRACE MARKERS

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T345 (dB/m) | Amp/Cb/Ftr /Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|----------------------|--------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 3.348         | 41.24                | Pk  | 32.9           | -32.7                | 0            | 41.44                      | -                  | -           | 74                  | -32.56         | 0-360          | 199         | H        |
| 3      | * 3.596         | 37.88                | Pk  | 33.8           | -32.8                | 0            | 38.88                      | -                  | -           | 74                  | -35.12         | 0-360          | 199         | H        |
| 6      | * 3.532         | 40.91                | Pk  | 33.7           | -32.9                | 0            | 41.71                      | -                  | -           | 74                  | -32.29         | 0-360          | 101         | V        |
| 4      | 3.152           | 44.67                | Pk  | 32.5           | -32.3                | 0            | 44.87                      | -                  | -           | 74                  | -29.13         | 0-360          | 101         | V        |
| 5      | 3.289           | 41.84                | Pk  | 32.7           | -32.8                | 0            | 41.74                      | -                  | -           | 74                  | -32.26         | 0-360          | 101         | V        |
| 2      | 3.399           | 39.12                | Pk  | 33             | -33                  | 0            | 39.12                      | -                  | -           | 74                  | -34.88         | 0-360          | 199         | H        |

PK - Peak detector

### RADIATED EMISSIONS


| Frequency (GHz) | Meter Reading (dBuV) | Det  | AF T345 (dB/m) | Amp/Cb/Ftr /Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|-----------------|----------------------|------|----------------|----------------------|--------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| * 3.35          | 45.38                | PK2  | 32.9           | -32.7                | 0            | 45.58                      | -                  | -           | 74                  | -28.42         | 195            | 150         | H        |
| * 3.347         | 30.21                | MAV1 | 32.9           | -32.8                | .59          | 30.91                      | 54                 | -23.09      | -                   | -              | 195            | 150         | H        |
| * 3.595         | 54.18                | PK2  | 33.8           | -32.8                | 0            | 55.18                      | -                  | -           | 74                  | -18.82         | 236            | 280         | H        |
| * 3.595         | 30.11                | MAV1 | 33.8           | -32.8                | .59          | 31.71                      | 54                 | -22.29      | -                   | -              | 236            | 280         | H        |
| * 3.531         | 42.28                | PK2  | 33.7           | -32.9                | 0            | 43.08                      | -                  | -           | 74                  | -30.92         | 39             | 162         | V        |
| * 3.531         | 30.22                | MAV1 | 33.7           | -32.9                | .59          | 31.62                      | 54                 | -22.38      | -                   | -              | 39             | 162         | V        |



# 11.2.1. TX ABOVE 1 GHz 802.11n HT40 MODE IN THE 2.4 GHz BAND

## RESTRICTED BANDEDGE (LOW CHANNEL)

### HORIZONTAL PEAK AND AVERAGE PLOT

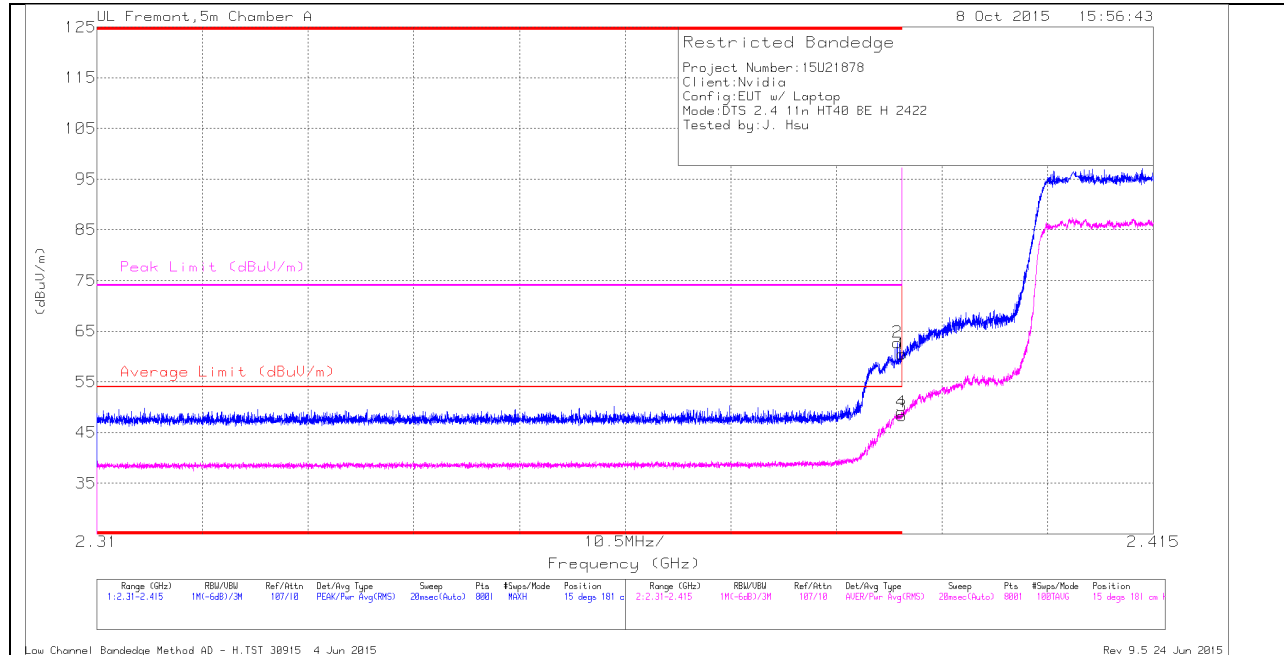

### HORIZONTAL DATA


| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T136 (dB/m) | Amp/Cbl/Fit r/Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|------------------------|--------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 2.39          | 53.12                | Pk  | 32             | -24.6                  | 0            | 60.52                      | -                      | -           | 74                  | -13.48         | 15             | 181         | H        |
| 2      | * 2.39          | 55.37                | Pk  | 32             | -24.6                  | 0            | 62.77                      | -                      | -           | 74                  | -11.23         | 15             | 181         | H        |
| 3      | * 2.39          | 39.82                | RMS | 32             | -24.6                  | 1.08         | 48.3                       | 54                     | -5.7        | -                   | -              | 15             | 181         | H        |
| 4      | * 2.39          | 40.52                | RMS | 32             | -24.6                  | 1.08         | 49                         | 54                     | -5          | -                   | -              | 15             | 181         | H        |

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

RMS - RMS detection

### VERTICAL PEAK AND AVERAGE PLOT

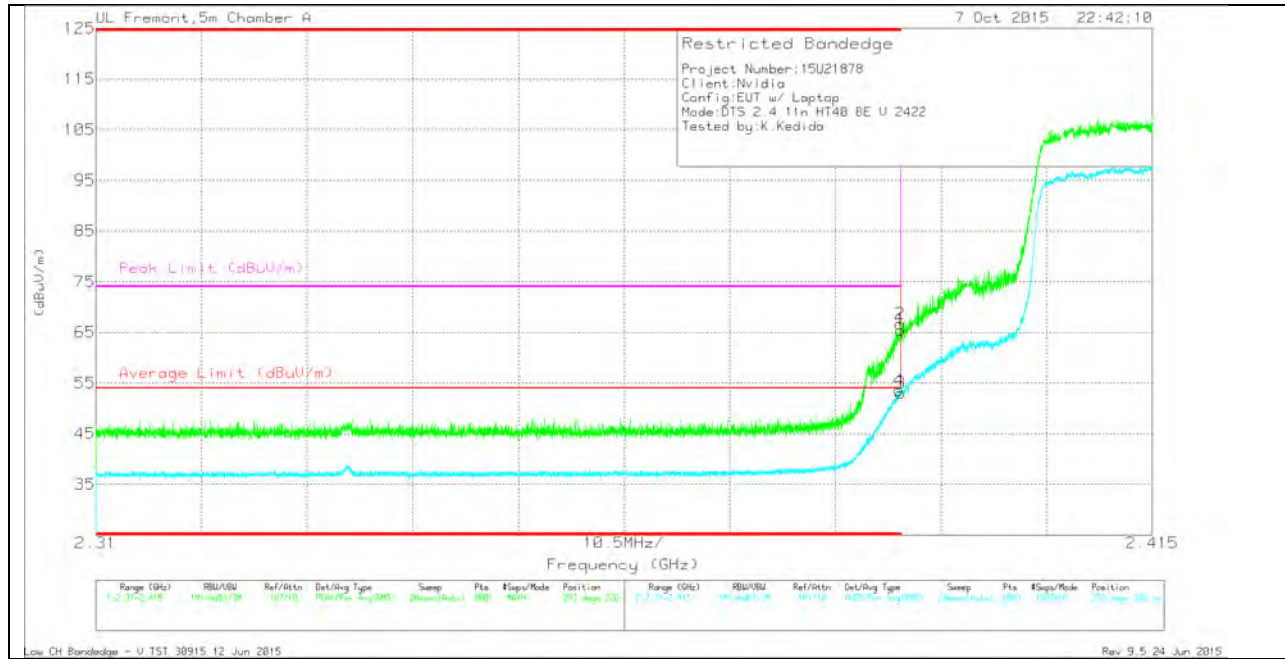

### VERTICAL DATA

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T136 (dB/m) | Amp/Cbl/Filt r/Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|-------------------------|--------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 2.39          | 53.7                 | Pk  | 32             | -20.2                   | 0            | 65.5                       | -                      | -           | 74                  | -8.5           | 293            | 226         | V        |
| 2      | * 2.39          | 54.85                | Pk  | 32             | -20.2                   | 0            | 66.65                      | -                      | -           | 74                  | -7.35          | 293            | 226         | V        |
| 3      | * 2.39          | 40.12                | RMS | 32             | -20.2                   | 1.08         | 53                         | 54                     | -1          | -                   | -              | 293            | 226         | V        |
| 4      | * 2.39          | 40.59                | RMS | 32             | -20.2                   | 1.08         | 53.47                      | 54                     | -53         | -                   | -              | 293            | 226         | V        |


\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

RMS - RMS detection

## AUTHORIZED BANDEDGE (HIGH CHANNEL)

### HORIZONTAL PEAK AND AVERAGE PLOT

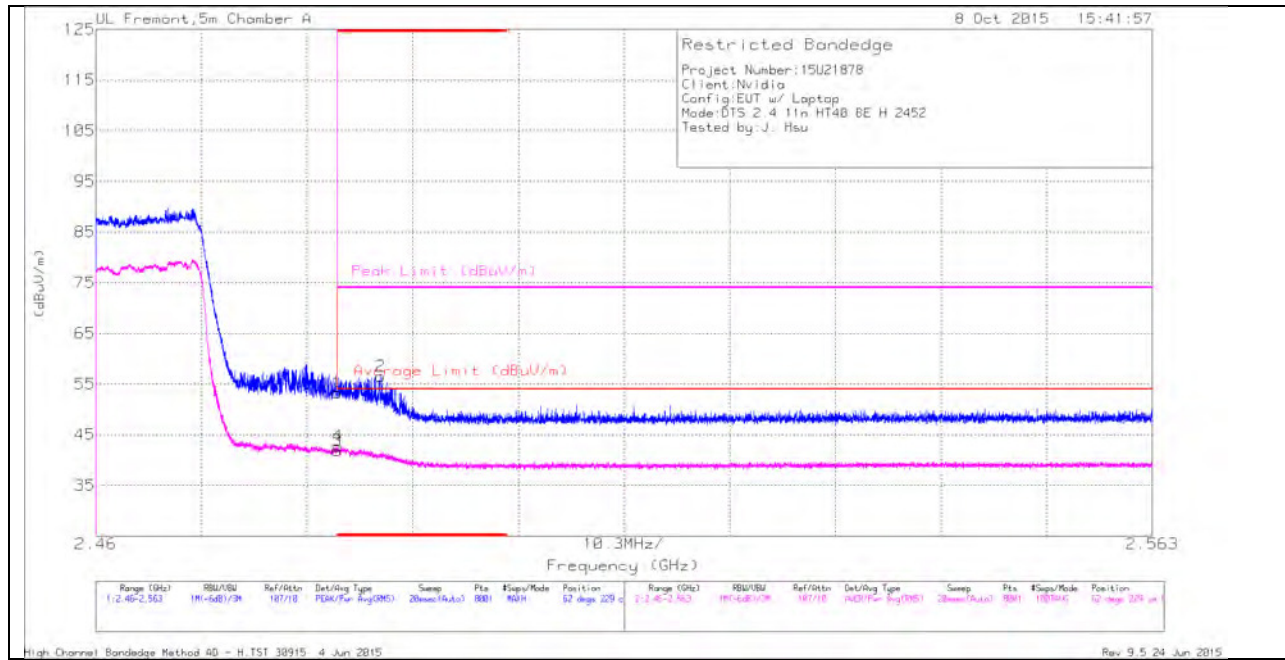

### HORIZONTAL DATA


| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T136 (dB/m) | Amp/Cb/Filter/Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|------------------------|--------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 2.484         | 45.67                | Pk  | 32.1           | -24.5                  | 0            | 53.27                      | -                      | -           | 74                  | -20.73         | 62             | 229         | H        |
| 2      | * 2.488         | 48.87                | Pk  | 32.1           | -24.5                  | 0            | 56.47                      | -                      | -           | 74                  | -17.53         | 62             | 229         | H        |
| 3      | * 2.484         | 33.2                 | RMS | 32.1           | -24.5                  | 1.08         | 41.88                      | 54                     | -12.12      | -                   | -              | 62             | 229         | H        |
| 4      | * 2.484         | 34.09                | RMS | 32.1           | -24.5                  | 1.08         | 42.77                      | 54                     | -11.23      | -                   | -              | 62             | 229         | H        |

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

RMS - RMS detection

### VERTICAL PEAK AND AVERAGE PLOT

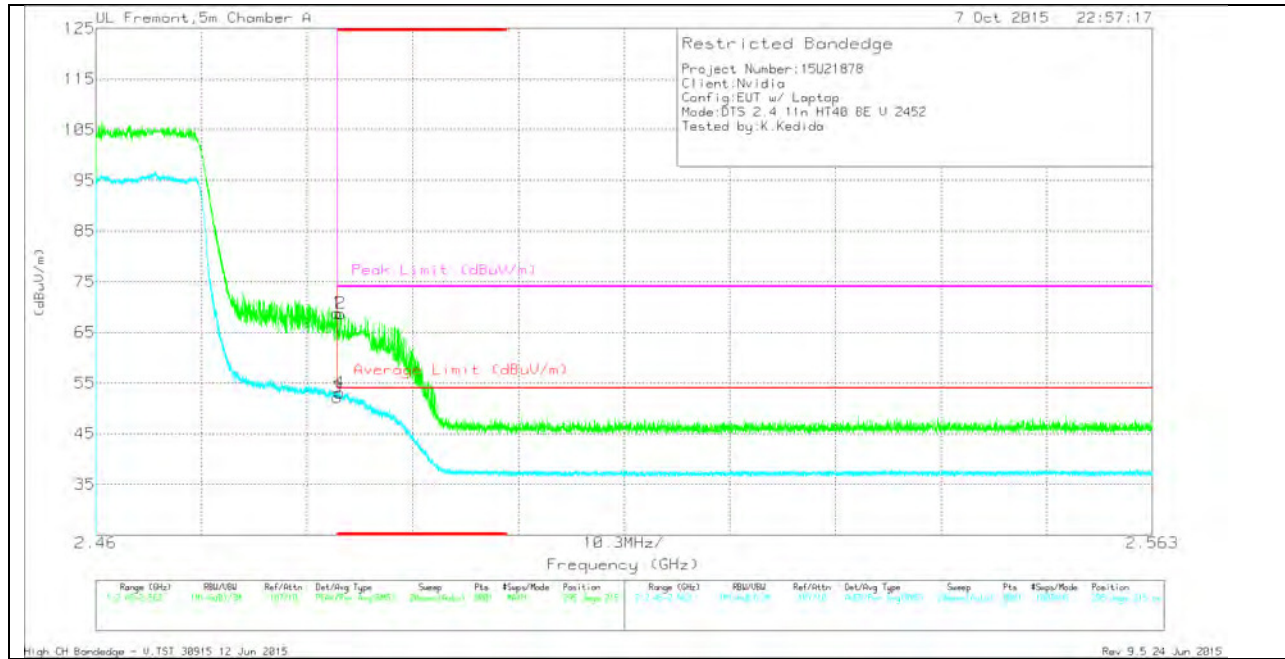

### VERTICAL DATA

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T136 (dB/m) | Amp/Cbl/Filt r/Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|-------------------------|--------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 2.484         | 57.05                | Pk  | 32.1           | -20.3                   | 0            | 68.85                      | -                      | -           | 74                  | -5.15          | 295            | 215         | V        |
| 2      | * 2.484         | 56.93                | Pk  | 32.1           | -20.3                   | 0            | 68.73                      | -                      | -           | 74                  | -5.27          | 295            | 215         | V        |
| 3      | * 2.484         | 39.23                | RMS | 32.1           | -20.3                   | 1.08         | 52.11                      | 54                     | -1.89       | -                   | -              | 295            | 215         | V        |
| 4      | * 2.484         | 40.21                | RMS | 32.1           | -20.3                   | 1.08         | 53.09                      | 54                     | -0.91       | -                   | -              | 295            | 215         | V        |


\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

RMS - RMS detection


## HARMONICS AND SPURIOUS EMISSIONS

### LOW CHANNEL HORIZONTAL

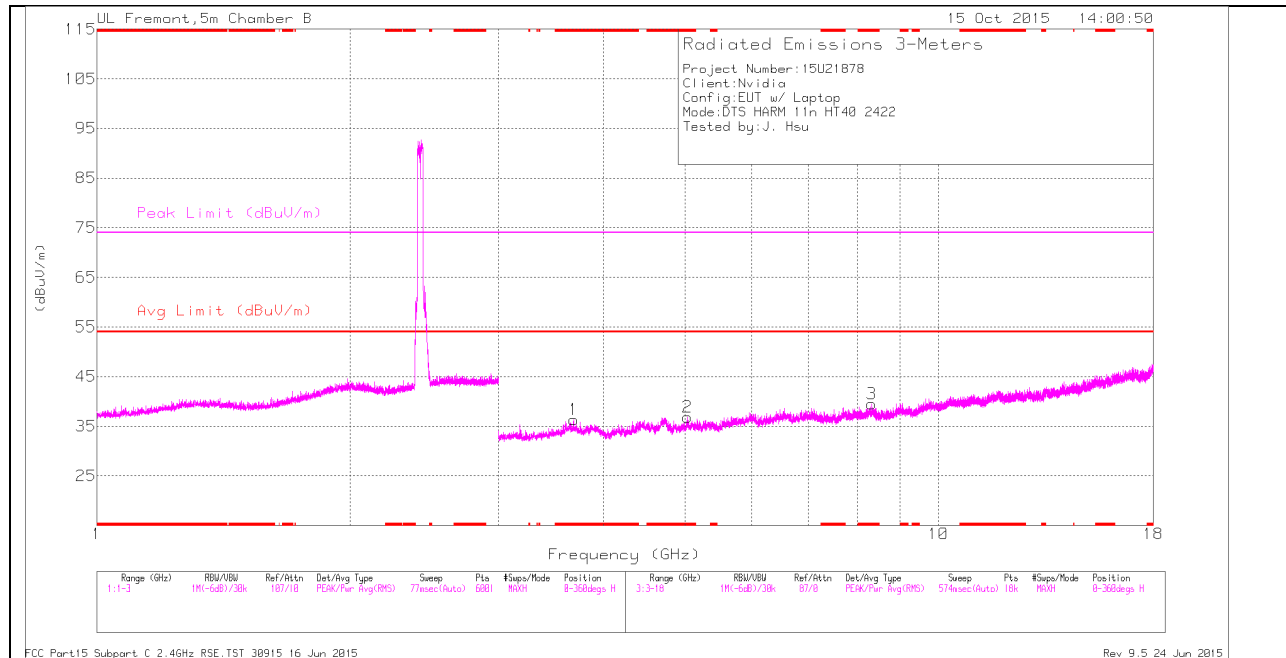

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

### LOW CHANNEL VERTICAL

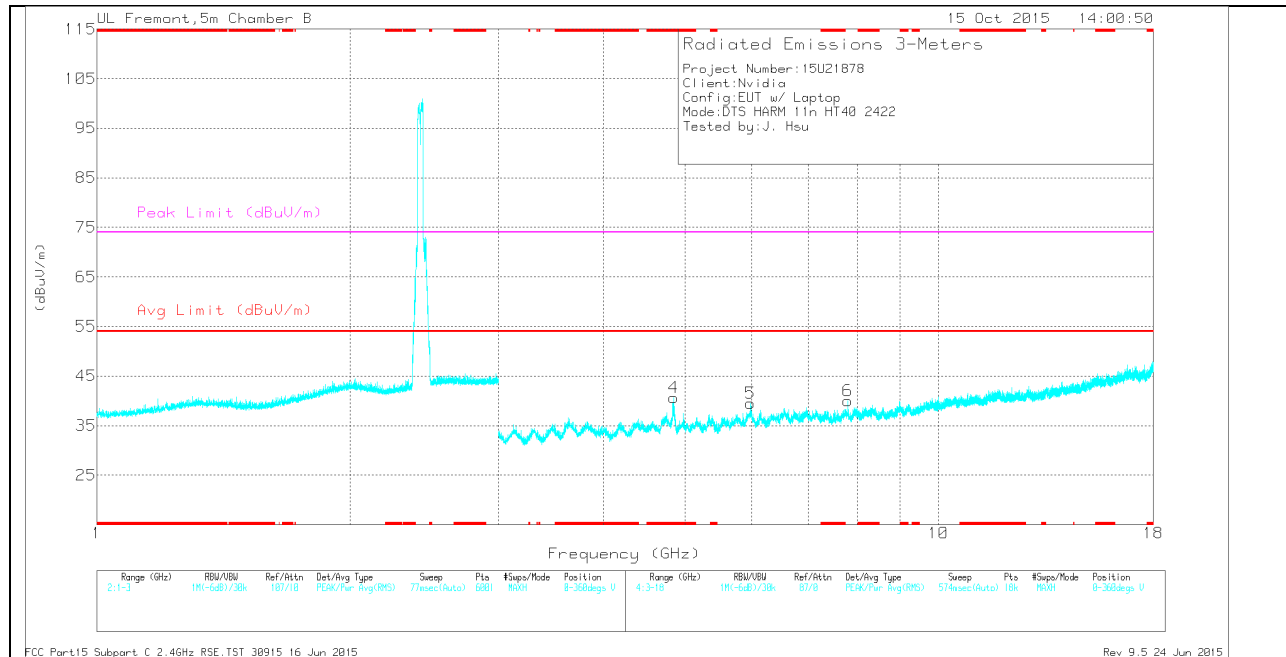

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

## LOW CHANNEL DATA

### TRACE MARKERS


| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T345 (dB/m) | Amp/Cb/Ftr /Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|----------------------|--------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 3.686         | 35.52                | Pk  | 33.6           | -32.8                | 0            | 36.32                      | -                  | -           | 74                  | -37.68         | 0-360          | 199         | H        |
| 2      | * 5.032         | 33.41                | Pk  | 34             | -30.6                | 0            | 36.81                      | -                  | -           | 74                  | -37.19         | 0-360          | 199         | H        |
| 3      | * 8.334         | 31.41                | Pk  | 35.7           | -27.6                | 0            | 39.51                      | -                  | -           | 74                  | -34.49         | 0-360          | 101         | H        |
| 4      | * 4.842         | 38.49                | Pk  | 34.2           | -32                  | 0            | 40.69                      | -                  | -           | 74                  | -33.31         | 0-360          | 199         | V        |
| 5      | 5.973           | 34.57                | Pk  | 35.6           | -30.7                | 0            | 39.47                      | -                  | -           | -                   | -              | 0-360          | 101         | V        |
| 6      | 7.806           | 33.14                | Pk  | 35.5           | -28.6                | 0            | 40.04                      | -                  | -           | -                   | -              | 0-360          | 199         | V        |

PK - Peak detector

### RADIATED EMISSIONS

| Frequency (GHz) | Meter Reading (dBuV) | Det  | AF T345 (dB/m) | Amp/Cb/Ftr /Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|-----------------|----------------------|------|----------------|----------------------|--------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| * 3.685         | 42.48                | PK2  | 33.6           | -32.8                | 0            | 43.28                      | -                  | -           | 74                  | -30.72         | 1              | 101         | H        |
| * 3.687         | 31.11                | MAV1 | 33.6           | -32.8                | 1.08         | 32.99                      | 54                 | -21.01      | -                   | -              | 1              | 101         | H        |
| * 5.031         | 40.81                | PK2  | 34             | -30.6                | 0            | 44.21                      | -                  | -           | 74                  | -29.79         | 1              | 101         | H        |
| * 5.033         | 29.33                | MAV1 | 34             | -30.6                | 1.08         | 33.81                      | 54                 | -20.19      | -                   | -              | 1              | 101         | H        |
| * 8.333         | 38.98                | PK2  | 35.7           | -27.6                | 0            | 47.08                      | -                  | -           | 74                  | -26.92         | 1              | 101         | H        |
| * 8.333         | 27.4                 | MAV1 | 35.7           | -27.6                | 1.08         | 36.58                      | 54                 | -17.42      | -                   | -              | 1              | 101         | H        |
| * 4.843         | 46.81                | PK2  | 34.2           | -32                  | 0            | 49.01                      | -                  | -           | 74                  | -24.99         | 353            | 215         | V        |
| * 4.843         | 33.4                 | MAV1 | 34.2           | -32                  | 1.08         | 36.68                      | 54                 | -17.32      | -                   | -              | 353            | 215         | V        |
| 5.972           | 29.43                | MAV1 | 35.6           | -30.7                | 1.08         | 35.41                      | -                  | -           | -                   | -              | 353            | 215         | V        |
| 5.973           | 41.42                | PK2  | 35.6           | -30.7                | 0            | 46.32                      | -                  | -           | -                   | -              | 353            | 215         | V        |
| 7.804           | 39.64                | PK2  | 35.5           | -28.6                | 0            | 46.54                      | -                  | -           | -                   | -              | 353            | 215         | V        |
| 7.808           | 28.02                | MAV1 | 35.5           | -28.6                | 1.08         | 36                         | -                  | -           | -                   | -              | 353            | 215         | V        |


### MID CHANNEL HORIZONTAL

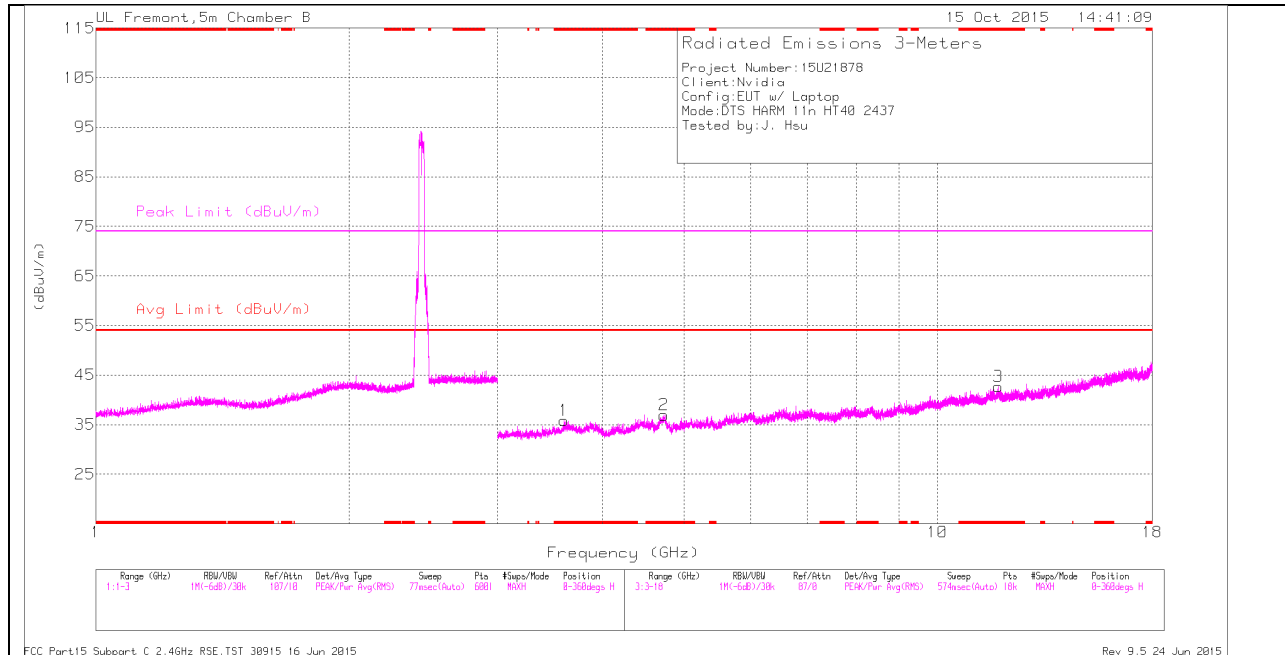

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.



### MID CHANNEL VERTICAL

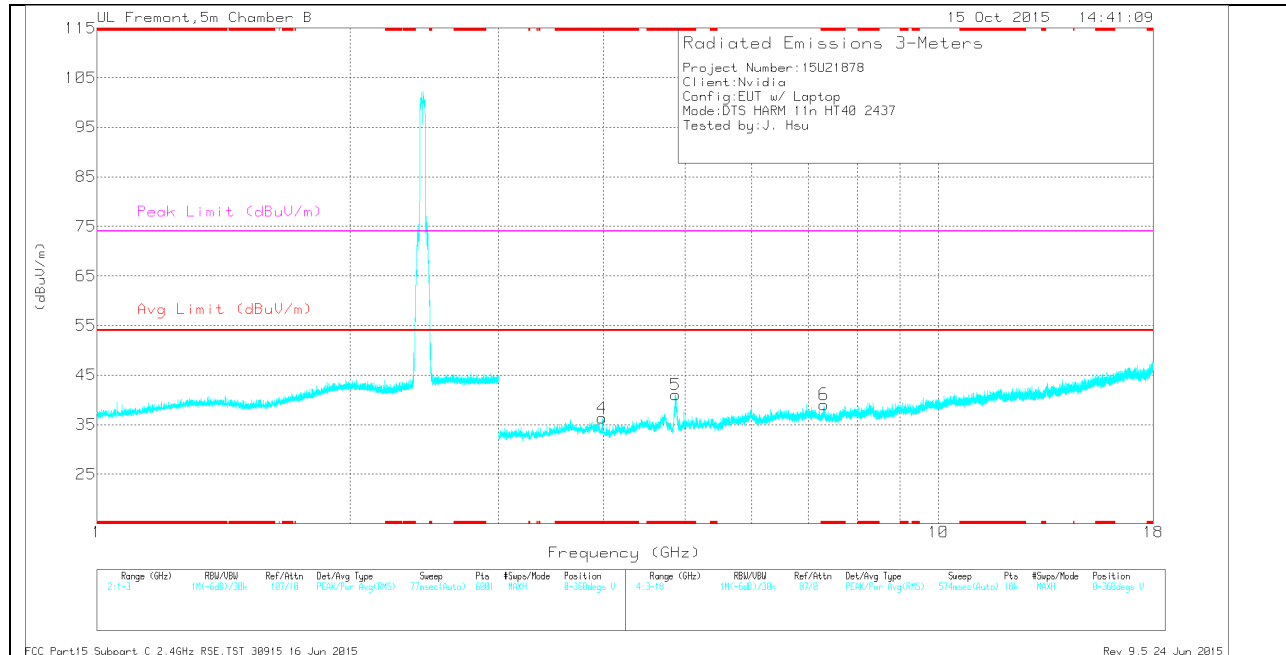

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

## MID CHANNEL DATA

### TRACE MARKERS


| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T345 (dB/m) | Amp/Cb/Ftr /Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|----------------------|--------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 3.6           | 34.83                | Pk  | 33.8           | -32.8                | 0            | 35.83                      | -                  | -           | 74                  | -38.17         | 0-360          | 199         | H        |
| 2      | * 4.733         | 33.31                | Pk  | 34.3           | -30.7                | 0            | 36.91                      | -                  | -           | 74                  | -37.09         | 0-360          | 101         | H        |
| 3      | * 11.805        | 28.14                | Pk  | 38.6           | -24.1                | 0            | 42.64                      | -                  | -           | 74                  | -31.36         | 0-360          | 101         | H        |
| 4      | * 3.987         | 35.59                | Pk  | 33.3           | -32.6                | 0            | 36.29                      | -                  | -           | 74                  | -37.71         | 0-360          | 199         | V        |
| 5      | * 4.868         | 39.16                | Pk  | 34.2           | -32.3                | 0            | 41.06                      | -                  | -           | 74                  | -32.94         | 0-360          | 101         | V        |
| 6      | * 7.307         | 34.06                | Pk  | 35.3           | -30.3                | 0            | 39.06                      | -                  | -           | 74                  | -34.94         | 0-360          | 199         | V        |

PK - Peak detector

### RADIATED EMISSIONS


| Frequency (GHz) | Meter Reading (dBuV) | Det  | AF T345 (dB/m) | Amp/Cb/Ftr /Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|-----------------|----------------------|------|----------------|----------------------|--------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| * 3.601         | 41.8                 | PK2  | 33.8           | -32.8                | 0            | 42.8                       | -                  | -           | 74                  | -31.2          | 360            | 101         | H        |
| * 3.599         | 30.81                | MAV1 | 33.8           | -32.8                | 1.08         | 32.89                      | 54                 | -21.11      | -                   | -              | 360            | 101         | H        |
| * 4.734         | 42.13                | PK2  | 34.3           | -30.7                | 0            | 45.73                      | -                  | -           | 74                  | -28.27         | 360            | 101         | H        |
| * 4.735         | 30.71                | MAV1 | 34.3           | -30.7                | 1.08         | 35.39                      | 54                 | -18.61      | -                   | -              | 360            | 101         | H        |
| * 11.805        | 35.01                | PK2  | 38.6           | -24.1                | 0            | 49.51                      | -                  | -           | 74                  | -24.49         | 360            | 101         | H        |
| * 11.806        | 24.6                 | MAV1 | 38.6           | -24.1                | 1.08         | 40.18                      | 54                 | -13.82      | -                   | -              | 360            | 101         | H        |
| * 3.987         | 43.51                | PK2  | 33.3           | -32.6                | 0            | 44.21                      | -                  | -           | 74                  | -29.79         | 360            | 101         | V        |
| * 3.986         | 31.05                | MAV1 | 33.3           | -32.6                | 1.08         | 32.83                      | 54                 | -21.17      | -                   | -              | 360            | 101         | V        |
| * 4.867         | 43.63                | PK2  | 34.2           | -32.3                | 0            | 45.53                      | -                  | -           | 74                  | -28.47         | 96             | 215         | V        |
| * 4.866         | 31.56                | MAV1 | 34.2           | -32.3                | 1.08         | 34.54                      | 54                 | -19.46      | -                   | -              | 96             | 215         | V        |
| * 7.307         | 41.33                | PK2  | 35.3           | -30.3                | 0            | 46.33                      | -                  | -           | 74                  | -27.67         | 96             | 215         | V        |
| * 7.308         | 29.68                | MAV1 | 35.3           | -30.3                | 1.08         | 35.76                      | 54                 | -18.24      | -                   | -              | 96             | 215         | V        |

### HIGH CHANNEL HORIZONTAL

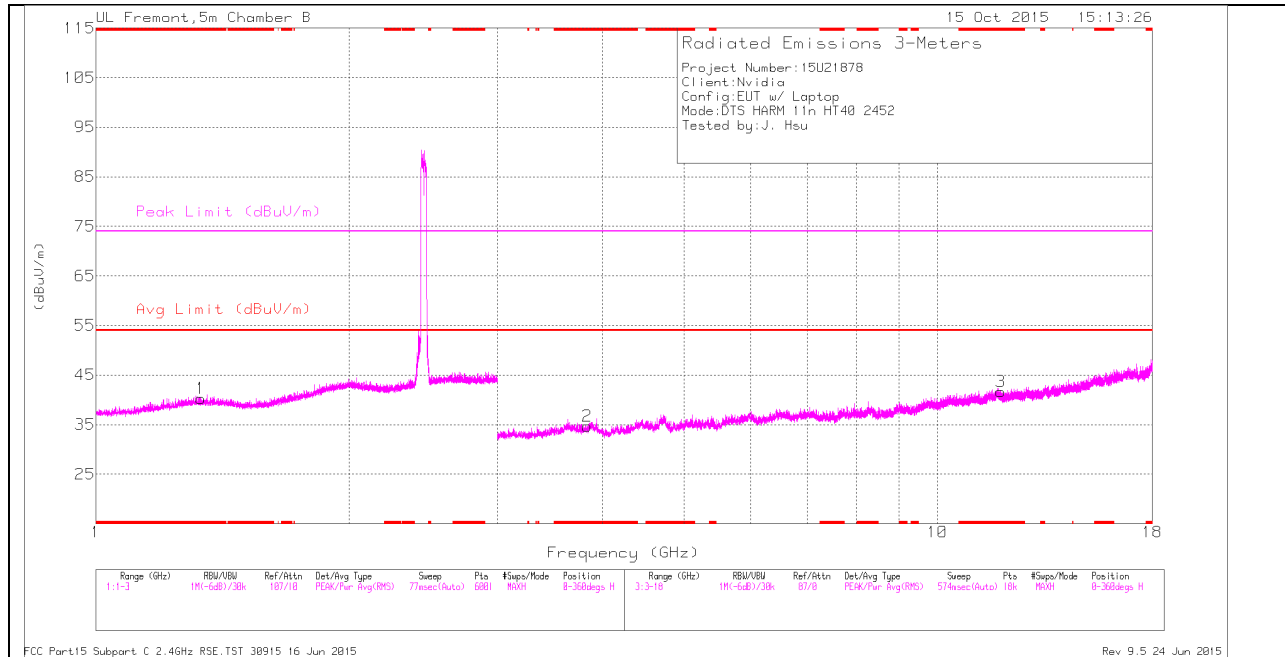

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

### HIGH CHANNEL VERTICAL

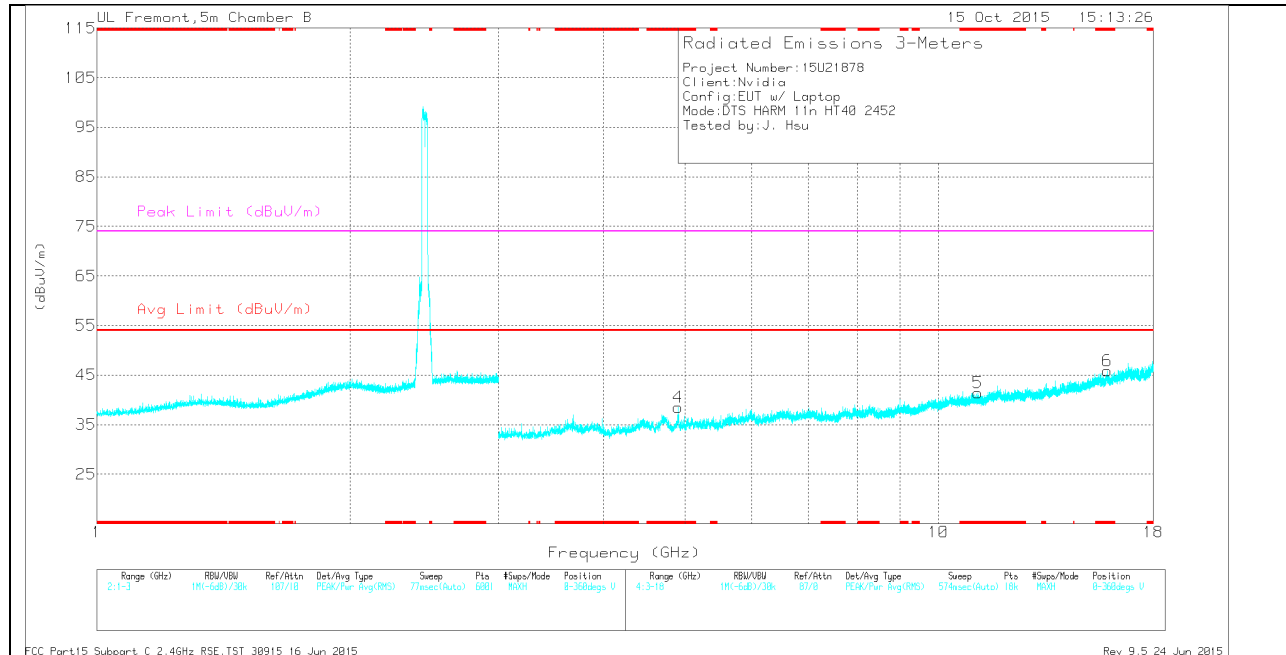

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

## HIGH CHANNEL DATA

### TRACE MARKERS

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T345 (dB/m) | Amp/Cb/Fitr /Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|-----------------------|--------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 1.333         | 36.24                | Pk  | 29.4           | -25.4                 | 0            | 40.24                      | -                  | -           | 74                  | -33.76         | 0-360          | 199         | H        |
| 2      | * 3.833         | 33.36                | Pk  | 33.4           | -32.1                 | 0            | 34.66                      | -                  | -           | 74                  | -39.34         | 0-360          | 200         | H        |
| 3      | * 11.892        | 27.95                | Pk  | 38.6           | -24.9                 | 0            | 41.65                      | -                  | -           | 74                  | -32.35         | 0-360          | 101         | H        |
| 4      | * 4.902         | 36.95                | Pk  | 34.2           | -32.6                 | 0            | 38.55                      | -                  | -           | 74                  | -35.45         | 0-360          | 200         | V        |
| 5      | * 11.138        | 28.57                | Pk  | 37.8           | -25                   | 0            | 41.37                      | -                  | -           | 74                  | -32.63         | 0-360          | 200         | V        |
| 6      | * 15.86         | 26.21                | Pk  | 40.6           | -21                   | 0            | 45.81                      | -                  | -           | 74                  | -28.19         | 0-360          | 200         | V        |


PK - Peak detector

### RADIATED EMISSIONS


| Frequency (GHz) | Meter Reading (dBuV) | Det  | AF T345 (dB/m) | Amp/Cb/Fitr /Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|-----------------|----------------------|------|----------------|-----------------------|--------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| * 1.332         | 44.15                | PK2  | 29.4           | -25.4                 | 0            | 48.15                      | -                  | -           | 74                  | -25.85         | 1              | 101         | H        |
| * 1.335         | 32.71                | MAV1 | 29.4           | -25.4                 | 1.08         | 37.79                      | 54                 | -16.21      | -                   | -              | 1              | 101         | H        |
| * 3.835         | 41.85                | PK2  | 33.4           | -32.1                 | 0            | 43.15                      | -                  | -           | 74                  | -30.85         | 1              | 101         | H        |
| * 3.835         | 30.81                | MAV1 | 33.4           | -32.1                 | 1.08         | 33.19                      | 54                 | -20.81      | -                   | -              | 1              | 101         | H        |
| * 11.893        | 35.91                | PK2  | 38.6           | -24.9                 | 0            | 49.61                      | -                  | -           | 74                  | -24.39         | 1              | 101         | H        |
| * 11.89         | 24.51                | MAV1 | 38.6           | -24.9                 | 1.08         | 39.29                      | 54                 | -14.71      | -                   | -              | 1              | 101         | H        |
| * 4.903         | 46.31                | PK2  | 34.2           | -32.6                 | 0            | 47.91                      | -                  | -           | 74                  | -26.09         | 344            | 222         | V        |
| * 4.903         | 32.85                | MAV1 | 34.2           | -32.6                 | 1.08         | 35.53                      | 54                 | -18.47      | -                   | -              | 344            | 222         | V        |
| * 11.139        | 36.12                | PK2  | 37.8           | -25                   | 0            | 48.92                      | -                  | -           | 74                  | -25.08         | 344            | 222         | V        |
| * 11.136        | 25.08                | MAV1 | 37.8           | -25                   | 1.08         | 38.96                      | 54                 | -15.04      | -                   | -              | 344            | 222         | V        |
| * 15.861        | 34.26                | PK2  | 40.6           | -21                   | 0            | 53.86                      | -                  | -           | 74                  | -20.14         | 344            | 222         | V        |
| * 15.858        | 22.75                | MAV1 | 40.6           | -21                   | 1.08         | 43.43                      | 54                 | -10.57      | -                   | -              | 344            | 222         | V        |

### 11.3. WORST-CASE BELOW 1 GHz

#### SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

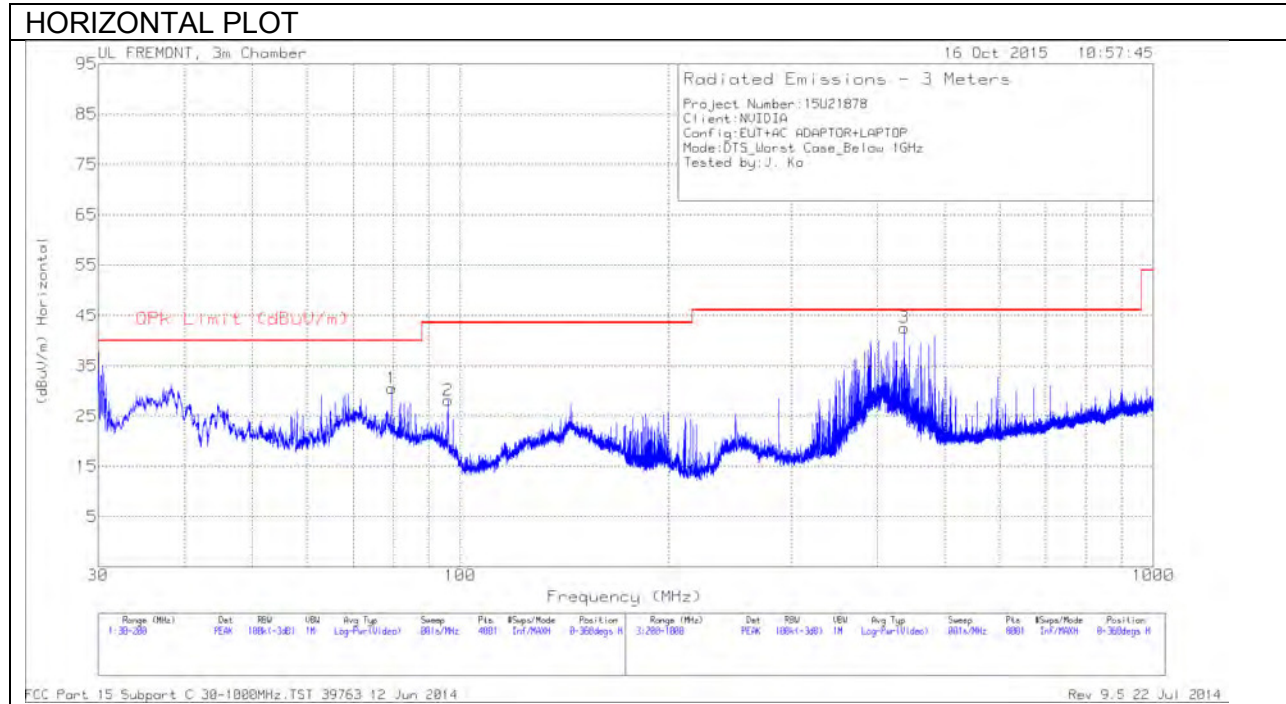

**SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)**

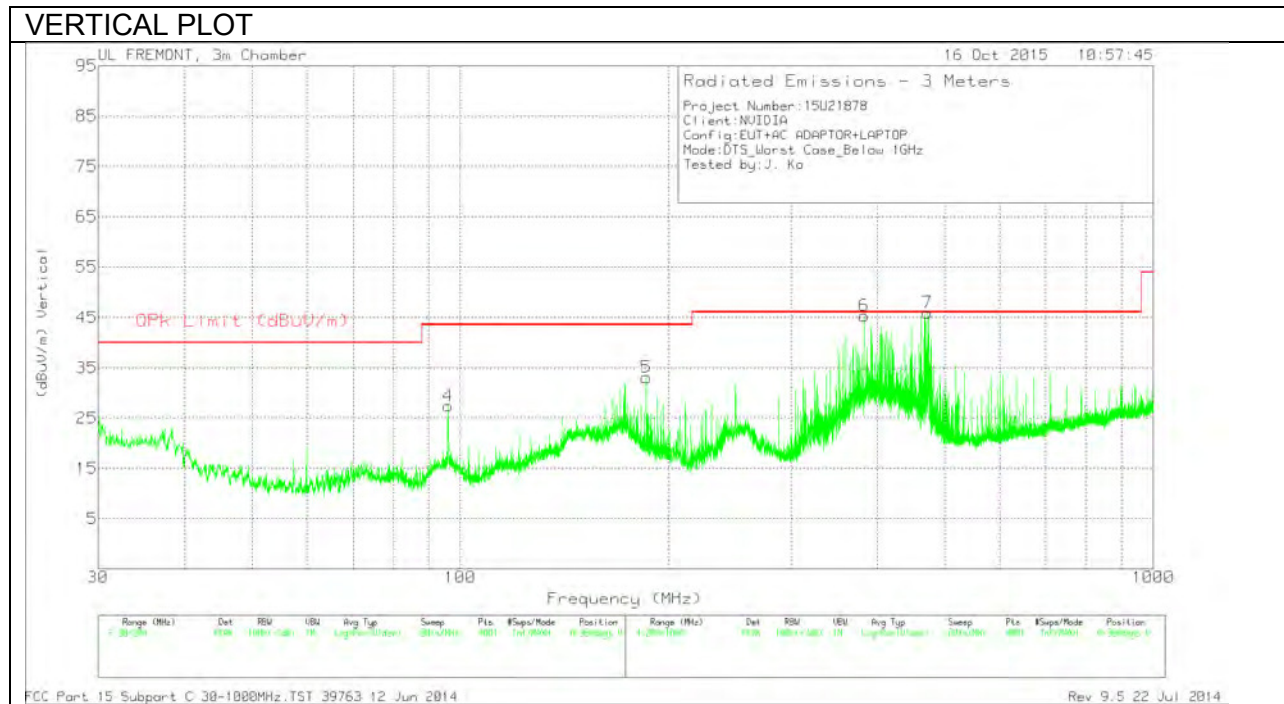

**Below 1G Data**

**Trace Markers**

| Marker | Frequency (MHz) | Meter Reading (dBuV) | Det | AF T185 (dB/m) | Amp/Cbl (dB) | Corrected Reading (dBuV/m) | QPk Limit (dBuV/m) | Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|--------------|----------------------------|--------------------|-------------|----------------|-------------|----------|
| 1      | 79.5975         | 49.09                | PK  | 8              | -26.6        | 30.49                      | 40                 | -9.51       | 0-360          | 100         | H        |
| 2      | 96.0025         | 45.66                | PK  | 8.8            | -26.3        | 28.16                      | 43.52              | -15.36      | 0-360          | 200         | H        |
| 4      | 96.0025         | 44.9                 | PK  | 8.8            | -26.3        | 27.4                       | 43.52              | -16.12      | 0-360          | 100         | V        |
| 5      | 185.55          | 47.39                | PK  | 11             | -25.3        | 33.09                      | 43.52              | -10.43      | 0-360          | 100         | V        |
| 6      | 382.4           | 55.03                | PK  | 15             | -24.7        | 45.33                      | 46.02              | -.69        | 0-360          | 100         | V        |
| 3      | 437.4           | 50.67                | PK  | 16.8           | -24.9        | 42.57                      | 46.02              | -3.45       | 0-360          | 100         | H        |
| 7      | 472             | 53.72                | PK  | 17.2           | -25          | 45.92                      | 46.02              | -.1         | 0-360          | 200         | V        |

PK - Peak detector

**Radiated Emissions**

| Frequency (MHz) | Meter Reading (dBuV) | Det | AF T185 (dB/m) | Amp/Cbl (dB) | Corrected Reading (dBuV/m) | QPk Limit (dBuV/m) | Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|-----------------|----------------------|-----|----------------|--------------|----------------------------|--------------------|-------------|----------------|-------------|----------|
| 382.793         | 36.15                | QP  | 15             | -24.7        | 26.45                      | 46.02              | -19.57      | 1              | 110         | V        |
| 437.594         | 29.5                 | QP  | 16.8           | -24.9        | 21.4                       | 46.02              | -24.62      | 117            | 101         | H        |
| 471.525         | 31.19                | QP  | 17.2           | -25          | 23.39                      | 46.02              | -22.63      | 130            | 188         | V        |

QP - Quasi-Peak detector

## 12. AC POWER LINE CONDUCTED EMISSIONS

### LIMITS

FCC §15.207 (a)

RSS-Gen 8.8

| Frequency of Emission (MHz) | Conducted Limit (dBuV) |            |
|-----------------------------|------------------------|------------|
|                             | Quasi-peak             | Average    |
| 0.15-0.5                    | 66 to 56 *             | 56 to 46 * |
| 0.5-5                       | 56                     | 46         |
| 5-30                        | 60                     | 50         |

\* Decreases with the logarithm of the frequency.

### TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4 2009.

The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.


Line conducted data is recorded for both NEUTRAL and HOT lines.

### RESULTS



## 6 WORST EMISSIONS

### LINE 1 PLOT

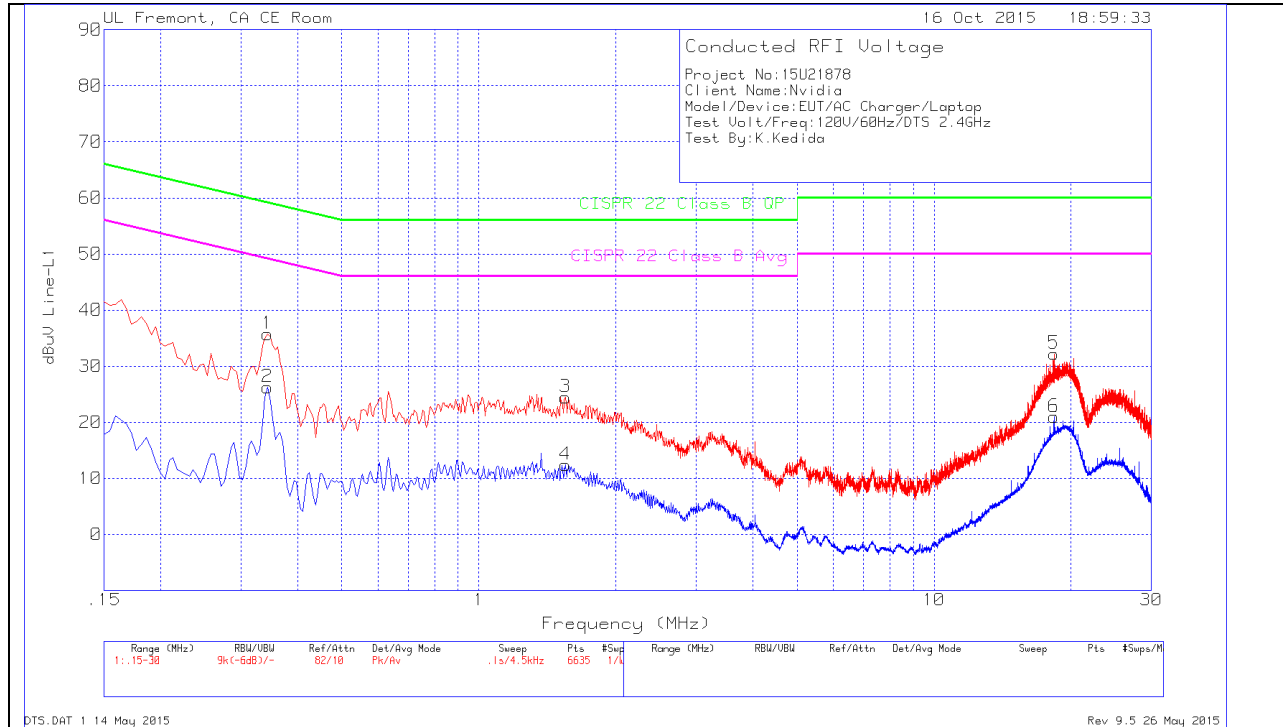


### LINE 1 RESULTS

| Marker | Frequency (MHz) | Meter Reading (dBuV) | Det | T24 IL L1 | LC Cables 1&3 | Corrected Reading dBuV | CISPR 22 Class B QP | Margin (dB) | CISPR 22 Class B Avg | Margin (dB) |
|--------|-----------------|----------------------|-----|-----------|---------------|------------------------|---------------------|-------------|----------------------|-------------|
| 1      | .3435           | 35.25                | Pk  | .5        | 0             | 35.75                  | 59.12               | -23.37      |                      |             |
| 2      | .3435           | 25.77                | Av  | .5        | 0             | 26.27                  | -                   | -           | 49.12                | -22.85      |
| 3      | 1.5495          | 24.18                | Pk  | .2        | .1            | 24.48                  | 56                  | -31.52      |                      |             |
| 4      | 1.5495          | 12.1                 | Av  | .2        | .1            | 12.4                   | -                   | -           | 46                   | -33.6       |
| 5      | 18.339          | 31.7                 | Pk  | .3        | .2            | 32.2                   | 60                  | -27.8       |                      |             |
| 6      | 18.339          | 20.46                | Av  | .3        | .2            | 20.96                  | -                   | -           | 50                   | -29.04      |

Pk - Peak detector

Av - Average detection

## LINE 2 PLOT

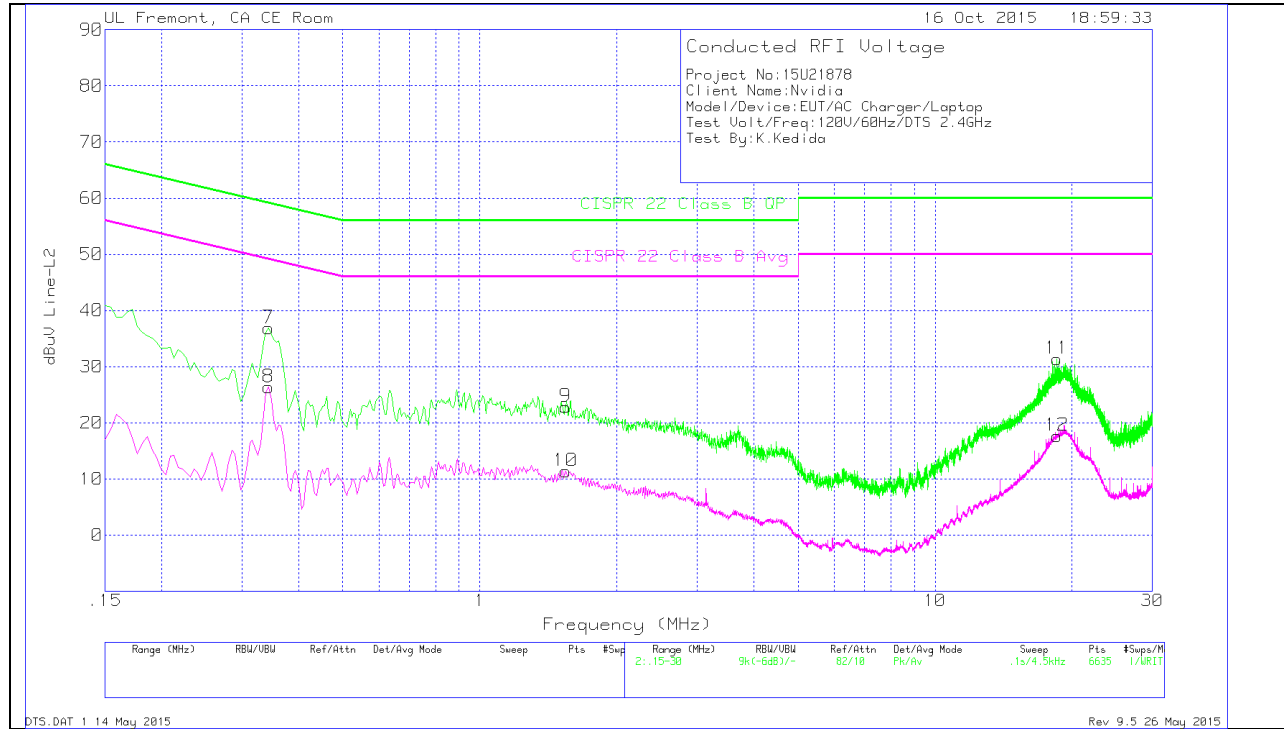

## LINE 2 RESULTS

Range 2: Line-L2 .15 - 30MHz

| Marker | Frequency (MHz) | Meter Reading (dBuV) | Det | T24 IL L2 | LC Cables 2&3 | Corrected Reading dBuV | CISPR 22 Class B QP | Margin (dB) | CISPR 22 Class B Avg | Margin (dB) |
|--------|-----------------|----------------------|-----|-----------|---------------|------------------------|---------------------|-------------|----------------------|-------------|
| 7      | .3435           | 36.35                | Pk  | .5        | 0             | 36.85                  | 59.12               | -22.27      |                      |             |
| 8      | .3435           | 25.83                | Av  | .5        | 0             | 26.33                  | -                   | -           | 49.12                | -22.79      |
| 9      | 1.545           | 22.54                | Pk  | .2        | .1            | 22.84                  | 56                  | -33.16      |                      |             |
| 10     | 1.545           | 11.07                | Av  | .2        | .1            | 11.37                  | -                   | -           | 46                   | -34.63      |
| 11     | 18.5325         | 30.9                 | Pk  | .3        | .2            | 31.4                   | 60                  | -28.6       |                      |             |
| 12     | 18.5325         | 17.2                 | Av  | .3        | .2            | 17.7                   | -                   | -           | 50                   | -32.3       |

Pk - Peak detector

Av - Average detection