

NORTHWEST EMC

Onity Inc., A Division of UTCFS

Advance RFID BTLE Wall Reader

FCC 15.225:2015

Report # ONIT0007.2



NVLAP Lab Code: 200630-0

This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government of the United States of America. This Report may only be duplicated in its entirety

CERTIFICATE OF TEST

Last Date of Test: September 30, 2015
Onity Inc., A Division of UTCFS
Model: Advance RFID BTLE Wall Reader
For a complete model list, reference document P/N 10104088P1
(DOC, ADVANCE RFID BTLE WALL READER MODEL LIST)

Radio Equipment Testing

Standards

Specification	Method
FCC 15.225:2015	ANSI C63.10:2013


Results

Method Clause	Test Description	Applied	Results	Comments
6.2	Powerline Conducted Emissions	No	N/A	Not required for a battery powered EUT.
6.4	Field Strength of Fundamental	Yes	Pass	
6.4	Field Strength of Spurious Emissions Less Than 30 MHz	Yes	Pass	
6.5	Field Strength of Spurious Emissions Greater Than 30 MHz	Yes	Pass	
6.8	Frequency Stability	Yes	Pass	

Deviations From Test Standards

None

Approved By:



Kyle Holgate, Operations Manager

Product compliance is the responsibility of the client; therefore, the tests and equipment modes of operation represented in this report were agreed upon by the client, prior to testing. The results of this test pertain only to the sample(s) tested. The specific description is noted in each of the individual sections of the test report supporting this certificate of test. This report reflects only those tests from the referenced standards shown in the certificate of test. It does not include inspection or verification of labels, identification, marking or user information.

REVISION HISTORY

Revision Number		Description	Date	Page Number
00		None		

ACCREDITATIONS AND AUTHORIZATIONS

United States

FCC - Designated by the FCC as a Telecommunications Certification Body (TCB). Certification chambers, Open Area Test Sites, and conducted measurement facilities are listed with the FCC.

A2LA - Accredited by A2LA to ISO / IEC 17065 as a product certifier. This allows Northwest EMC to certify transmitters to FCC and IC specifications.

NVLAP - Each laboratory is accredited by NVLAP to ISO 17025

Canada

IC - Recognized by Industry Canada as a Certification Body (CB). Certification chambers and Open Area Test Sites are filed with IC.

European Union

European Commission – Validated by the European Commission as a Conformity Assessment Body (CAB) under the EMC directive and as a Notified Body under the R&TTE Directive.

Australia/New Zealand

ACMA - Recognized by ACMA as a CAB for the acceptance of test data.

Korea

MSIP / RRA - Recognized by KCC's RRA as a CAB for the acceptance of test data.

Japan

VCCI - Associate Member of the VCCI. Conducted and radiated measurement facilities are registered.

Taiwan

BSMI – Recognized by BSMI as a CAB for the acceptance of test data.

NCC - Recognized by NCC as a CAB for the acceptance of test data.

Singapore

IDA – Recognized by IDA as a CAB for the acceptance of test data.

Israel

MOC – Recognized by MOC as a CAB for the acceptance of test data.

Hong Kong

OFCA – Recognized by OFCA as a CAB for the acceptance of test data.

Vietnam

MIC – Recognized by MIC as a CAB for the acceptance of test data.

SCOPE

For details on the Scopes of our Accreditations, please visit:

<http://www.nwemc.com/accreditations/>
<http://gsi.nist.gov/global/docs/cabs/designations.html>

MEASUREMENT UNCERTAINTY

Measurement Uncertainty

When a measurement is made, the result will be different from the true or theoretically correct value. The difference is the result of tolerances in the measurement system that cannot be completely eliminated. To the extent that technology allows us, it has been our aim to minimize this error. Measurement uncertainty is a statistical expression of measurement error qualified by a probability distribution.

A measurement uncertainty estimation has been performed for each test per our internal quality document WP 342. The estimation is used to compare the measured result with its "true" or theoretically correct value. The expanded measurement uncertainty (K=2) for each test is on each data sheet. Our measurement data meets or exceeds the measurement uncertainty requirements of the applicable specification; therefore, the test data can be compared directly to the specification limit to determine compliance. The calculations for estimating measurement uncertainty are based upon ETSI TR 100 028 (or CISPR 16-4-2 as applicable), and are available upon request.



The following table represents the Measurement Uncertainty (MU) budgets for each of the tests that may be contained in this report.

Test	+ MU	- MU
Frequency Accuracy (Hz)	0.0007%	-0.0007%
Amplitude Accuracy (dB)	1.2 dB	-1.2 dB
Conducted Power (dB)	0.3 dB	-0.3 dB
Radiated Power via Substitution (dB)	0.7 dB	-0.7 dB
Temperature (degrees C)	0.7°C	-0.7°C
Humidity (% RH)	2.5% RH	-2.5% RH
Voltage (AC)	1.0%	-1.0%
Voltage (DC)	0.7%	-0.7%
Field Strength (dB)	5.2 dB	-5.2 dB
AC Powerline Conducted Emissions (dB)	2.4 dB	-2.4 dB

FACILITIES



California Labs OC01-13 41 Tesla Irvine, CA 92618 (949) 861-8918	Minnesota Labs MN01-08, MN10 9349 W Broadway Ave. Brooklyn Park, MN 55445 (612)-638-5136	New York Labs NY01-04 4939 Jordan Rd. Elbridge, NY 13060 (315) 554-8214	Oregon Labs EV01-12 22975 NW Evergreen Pkwy Hillsboro, OR 97124 (503) 844-4066	Texas Labs TX01-09 3801 E Plano Pkwy Plano, TX 75074 (469) 304-5255	Washington Labs NC01-05 19201 120 th Ave NE Bothell, WA 9801 (425)984-6600
NVLAP					
NVLAP Lab Code: 200676-0	NVLAP Lab Code: 200881-0	NVLAP Lab Code: 200761-0	NVLAP Lab Code: 200630-0	NVLAP Lab Code:201049-0	NVLAP Lab Code: 200629-0
Industry Canada					
2834B-1, 2834B-3	2834E-1	N/A	2834D-1, 2834D-2	2834G-1	2834F-1
BSMI					
SL2-IN-E-1154R	SL2-IN-E-1152R	N/A	SL2-IN-E-1017	SL2-IN-E-1158R	SL2-IN-E-1153R
VCCI					
A-0029	A-0109	N/A	A-0108	A-0201	A-0110
Recognized Phase I CAB for ACMA, BSMI, IDA, KCC/RRR, MIC, MOC, NCC, OFCA					
US0158	US0175	N/A	US0017	US0191	US0157

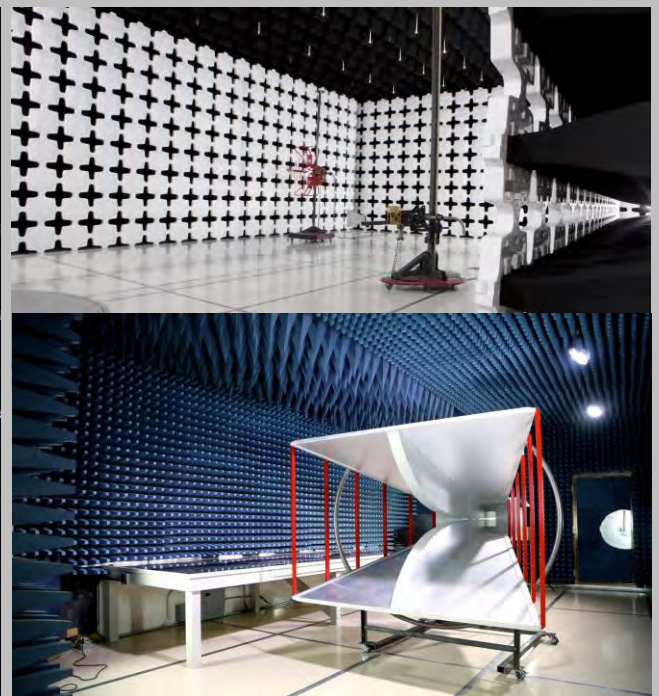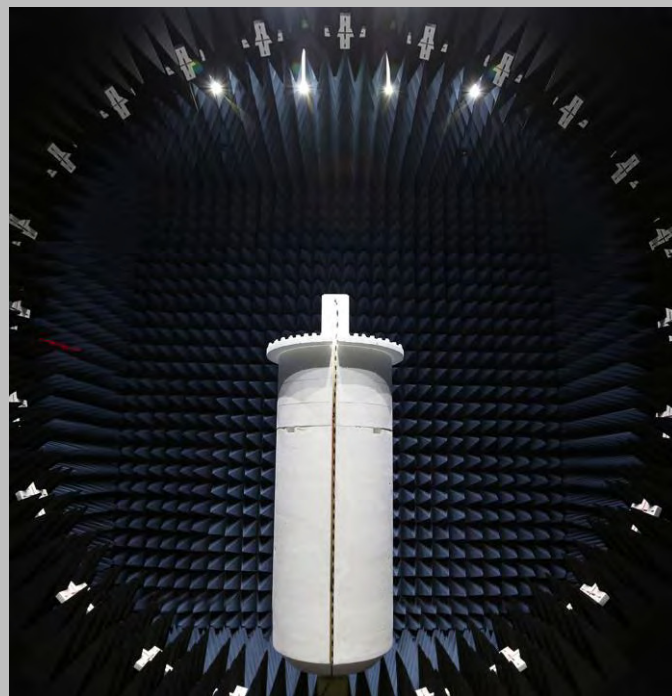

PRODUCT DESCRIPTION

Client and Equipment Under Test (EUT) Information

Company Name:	Onity Inc., A Division of UTCFS
Address:	4001 Fairview Industrial Drive
City, State, Zip:	Salem, OR 97302-1142
Test Requested By:	Mike Gersztyn
Model:	Advance RFID BTLE Wall Reader
First Date of Test:	September 28, 2015
Last Date of Test:	September 30, 2015
Receipt Date of Samples:	September 02, 2015
Equipment Design Stage:	Production
Equipment Condition:	No Damage

Information Provided by the Party Requesting the Test

Functional Description of the EUT:
RFID card reading device w/ DirectKey Module
Testing Objective:
To demonstrate compliance to FCC Part 15.225 specifications for 13.56 MHz RFID radio.

CONFIGURATIONS

Configuration ONIT0007- 2

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
BT/RFID Lock	Onity Inc., A Division of UTCFS	Advance RFID BTLE Wall Reader	None

Peripherals in test setup boundary			
Description	Manufacturer	Model/Part Number	Serial Number
Lock Power Supply/Charger Box	Onity Inc., A Division of UTCFS	AL300ALT	None

Remote Equipment Outside of Test Setup Boundary			
Description	Manufacturer	Model/Part Number	Serial Number
Tablet	Microsoft	WinBook	None

Cables					
Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
AC Power	No	1.7m	No	AC Mains	Lock Power Supply/Charger Box
Lock Cable	No	0.8m	No	Lock Power Supply/Charger Box	BT/RFID Lock
DC Leads x2	No	1.0m	No	DC Power Supply	Lock Power Supply/Charger Box

Configuration ONIT0007- 3

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
BT/RFID Lock	Onity Inc., A Division of UTCFS	Advance RFID BTLE Wall Reader	None

Peripherals in test setup boundary			
Description	Manufacturer	Model/Part Number	Serial Number
Lock Power Supply/Charger Box	Onity Inc., A Division of UTCFS	AL300ALT	None

Cables					
Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
AC Power	No	1.7m	No	AC Mains	Lock Power Supply/Charger Box
Lock Cable	No	0.8m	No	Lock Power Supply/Charger Box	BT/RFID Lock

MODIFICATIONS

Equipment Modifications

Item	Date	Test	Modification	Note	Disposition of EUT
1	9/28/2015	Frequency Stability	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
2	9/30/2015	Field Strength of Spurious Emissions greater than 30 MHz	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
3	9/30/2015	Field Strength of Fundamental	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
4	9/30/2015	Field Strength of Spurious Emissions less than 30 MHz	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	Scheduled testing was completed.

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data. The test data represents the configuration / operating mode/ model that produced the highest emission levels as compared to the specification limit.

MODES OF OPERATION

RFID continuous Tx at 13.56MHz

POWER SETTINGS INVESTIGATED

120VAC/60Hz

CONFIGURATIONS INVESTIGATED

ONIT0007 - 3

FREQUENCY RANGE INVESTIGATED

Start Frequency | 12.5 MHz

Stop Frequency | 14.5 MHz

SAMPLE CALCULATIONS

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation

TEST EQUIPMENT


Description	Manufacturer	Model	ID	Last Cal.	Interval
Cable	None	10m Test Distance Cable	EVL	5/11/2015	12 mo
Antenna, Loop	EMCO	6502	AOA	6/24/2014	24 mo
Analyzer - Spectrum Analyzer	Agilent	E4443A	AFB	3/17/2015	12 mo

TEST DESCRIPTION

The antennas to be used with the EUT were tested. The EUT was continuously transmitting while set to the channel specified.


While scanning, fundamental carrier from the EUT was maximized by rotating the EUT, adjusting the measurement antenna height and orientation in 3 orthogonal planes, the EUT and/or associated antenna is positioned in 3 orthogonal planes (per ANSI C63.10). An active loop antenna was used for this test in order to provide sufficient measurement sensitivity.

As outlined in 15.209(e) and 15.31(f)(2), measurements may be performed at a distance closer than what is specified with the limit. The limit at the specified distance is shown on the data sheet. Measurements are made at a closer distance and the data is adjusted using a distance correction factor of 40dB/decade for comparison to the limit.

Work Order:	ONIT0007	Date:	09/30/15	
Project:	None	Temperature:	21.3 °C	
Job Site:	EV11	Humidity:	41.3% RH	
Serial Number:	None	Barometric Pres.:	1012.6 mbar	
EUT:	Advance RFID BTLE Wall Reader			
Configuration:	3			
Customer:	Onity Inc., A Division of UTCFS			
Attendees:	None			
EUT Power:	120VAC/60Hz			
Operating Mode:	RFID continuous Tx at 13.56MHz			
Deviations:	None			
Comments:	See data comments for EUT orientation			

Test Specifications	Test Method
FCC 15.225:2015	ANSI C63.10:2013

Run #	14	Test Distance (m)	10	Antenna Height(s)	1 to 4(m)	Results	Pass
-------	----	-------------------	----	-------------------	-----------	---------	------

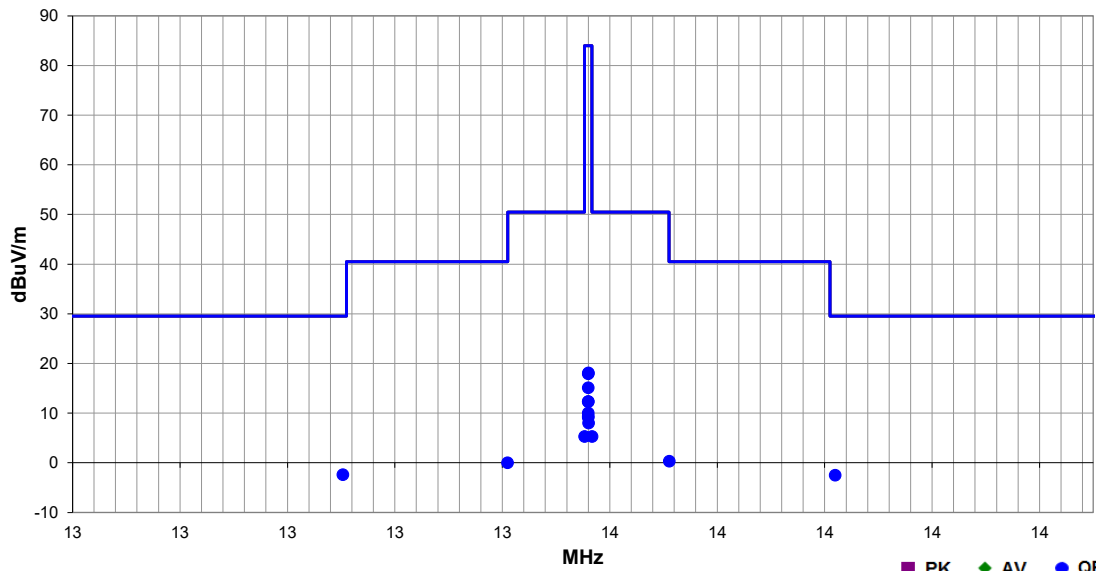

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Test Distance (meters)	External Attenuation (dB)	Polarity/ Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
13.103	5.9	10.8	1.0	192.0	10.0	0.0	See Comments	QP	-19.1	-2.4	29.5	-31.9	Ant. perp to floor/perp to EUT, EUT On Side
14.020	5.8	10.8	1.0	126.0	10.0	0.0	See Comments	QP	-19.1	-2.5	29.5	-32.0	Ant. perp to floor/perp to EUT, EUT On Side
13.711	8.6	10.8	1.0	100.0	10.0	0.0	See Comments	QP	-19.1	0.3	40.5	-40.2	Ant. perp to floor/perp to EUT, EUT On Side
13.410	8.3	10.8	1.0	84.0	10.0	0.0	See Comments	QP	-19.1	0.0	40.5	-40.5	Ant. perp to floor/perp to EUT, EUT On Side
13.553	13.6	10.8	1.0	114.0	10.0	0.0	See Comments	QP	-19.1	5.3	50.5	-45.2	Ant. perp to floor/perp to EUT, EUT On Side
13.567	13.6	10.8	1.0	91.0	10.0	0.0	See Comments	QP	-19.1	5.3	50.5	-45.2	Ant. perp to floor/perp to EUT, EUT On Side
13.560	26.4	10.8	1.0	48.0	10.0	0.0	See Comments	QP	-19.1	18.1	84.0	-65.9	Ant. perp to floor/perp to EUT, EUT On Side
13.560	26.2	10.8	1.0	92.0	10.0	0.0	See Comments	QP	-19.1	17.9	84.0	-66.1	Ant. perp to floor/perp to EUT, EUT Vert
13.560	23.4	10.8	1.0	265.0	10.0	0.0	See Comments	QP	-19.1	15.1	84.0	-68.9	Ant. perp to floor/perp to EUT, EUT Horz
13.560	20.6	10.8	1.0	162.0	10.0	0.0	See Comments	QP	-19.1	12.3	84.0	-71.7	Ant. perp to floor/para to EUT, EUT On Side
13.560	20.6	10.8	1.0	220.0	10.0	0.0	See Comments	QP	-19.1	12.3	84.0	-71.7	Ant. perp to floor/para to EUT, EUT Vert
13.560	18.3	10.8	1.0	21.0	10.0	0.0	See Comments	QP	-19.1	10.0	84.0	-74.0	Ant. perp to floor/para to EUT, EUT Horz
13.560	17.7	10.8	1.0	84.0	10.0	0.0	See Comments	QP	-19.1	9.4	84.0	-74.6	Ant. para to floor/perp to EUT, EUT Vert
13.560	17.4	10.8	1.0	51.0	10.0	0.0	See Comments	QP	-19.1	9.1	84.0	-74.9	Ant. para to floor/perp to EUT, EUT On Side
13.560	16.3	10.8	1.0	286.0	10.0	0.0	See Comments	QP	-19.1	8.0	84.0	-76.0	Ant. para to floor/perp to EUT, EUT Horz

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data. The test data represents the configuration / operating mode/ model that produced the highest emission levels as compared to the specification limit.

MODES OF OPERATION

RFID continuous Tx at 13.56MHz

POWER SETTINGS INVESTIGATED

120VAC/60Hz

CONFIGURATIONS INVESTIGATED

ONIT0007 - 3

FREQUENCY RANGE INVESTIGATED

Start Frequency	9 kHz	Stop Frequency	30 MHz
-----------------	-------	----------------	--------

SAMPLE CALCULATIONS

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation

TEST EQUIPMENT


Description	Manufacturer	Model	ID	Last Cal.	Interval
Cable	None	10m Test Distance Cable	EVL	5/11/2015	12 mo
Antenna, Loop	EMCO	6502	AOA	6/24/2014	24 mo
Analyzer - Spectrum Analyzer	Agilent	E4443A	AFB	3/17/2015	12 mo

TEST DESCRIPTION

The antennas to be used with the EUT were tested. The EUT was continuously transmitting while set to the channel specified.


While scanning, emissions from the EUT were maximized by rotating the EUT, adjusting the measurement antenna height and orientation in 3 orthogonal planes, the EUT and/or associated antenna is positioned in 3 orthogonal planes (per ANSI C63.10). An active loop antenna was used for this test in order to provide sufficient measurement sensitivity.

As outlined in 15.209(e) and 15.31(f)(2), measurements may be performed at a distance closer than what is specified with the limit. The limit at the specified distance is shown on the data sheet. Measurements are made at a closer distance and the data is adjusted using a distance correction factor of 40dB/decade for comparison to the limit.

Work Order:	ONIT0007	Date:	09/30/15			
Project:	None	Temperature:	21.3 °C			
Job Site:	EV11	Humidity:	41.3% RH			
Serial Number:	None	Barometric Pres.:	1012.6 mbar			
EUT:		Advance RFID BTLE Wall Reader			Tested by:	Cole Ghizzone, Brandon Hobbs
Configuration:		3				
Customer:		Onity Inc., A Division of UTCFS				
Attendees:		None				
EUT Power:		120VAC/60Hz				
Operating Mode:		RFID continuous Tx at 13.56MHz				
Deviations:		None				
Comments:		See comments for EUT orientation				

Test Specifications	Test Method
FCC 15.225:2015	ANSI C63.10:2013

Run #	21	Test Distance (m)	10	Antenna Height(s)	1m	Results	Pass
--------------	----	--------------------------	----	--------------------------	----	----------------	------

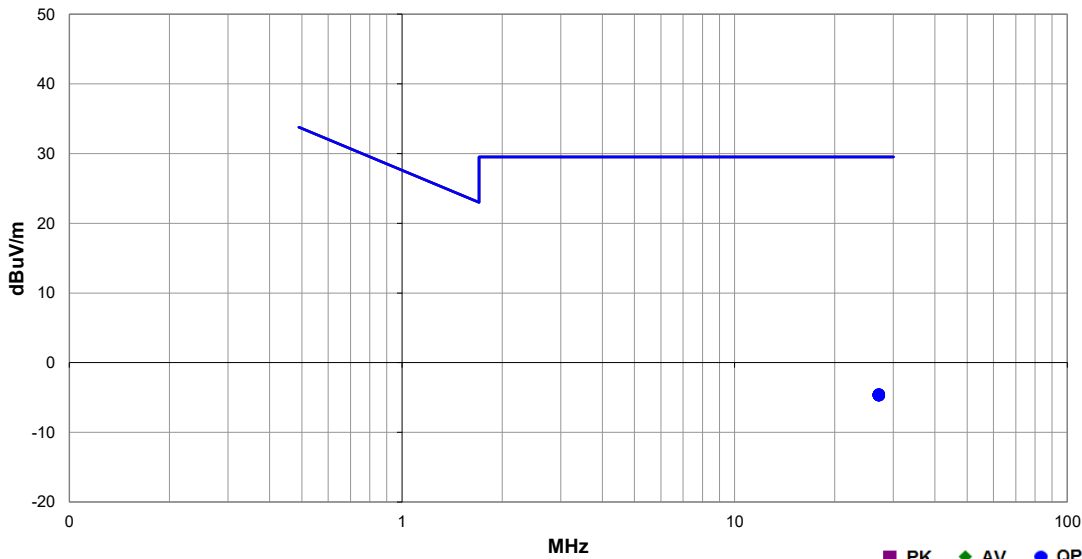

■ PK ◆ AV ● QP

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Test Distance (meters)	External Attenuation (dB)	Polarity/ Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
27.119	5.6	8.9	1.0	274.0	10.0	0.0	See Comments	QP	-19.1	-4.5	29.5	-34.1	Ant. perp to floor/perp to EUT, EUT Horz
27.116	5.5	8.9	1.0	65.0	10.0	0.0	See Comments	QP	-19.1	-4.6	29.5	-34.2	Ant. para to floor/perp to EUT, EUT Horz
27.116	5.5	8.9	1.0	32.0	10.0	0.0	See Comments	QP	-19.1	-4.6	29.5	-34.2	Ant. perp to floor/para to EUT, EUT On Side
27.118	5.5	8.9	1.0	284.0	10.0	0.0	See Comments	QP	-19.1	-4.6	29.5	-34.2	Ant. para to floor/perp to EUT, EUT Vert
27.119	5.5	8.9	1.0	308.0	10.0	0.0	See Comments	QP	-19.1	-4.6	29.5	-34.2	Ant. perp to floor/para to EUT, EUT Horz
27.119	5.5	8.9	1.0	18.0	10.0	0.0	See Comments	QP	-19.1	-4.6	29.5	-34.2	Ant. para to floor/perp to EUT, EUT On Side
27.120	5.5	8.9	1.0	11.0	10.0	0.0	See Comments	QP	-19.1	-4.6	29.5	-34.2	Ant. perp to floor/para to EUT, EUT Vert
27.120	5.5	8.9	1.0	94.0	10.0	0.0	See Comments	QP	-19.1	-4.6	29.5	-34.2	Ant. perp to floor/perp to EUT, EUT Vert
27.124	5.5	8.9	1.0	74.0	10.0	0.0	See Comments	QP	-19.1	-4.6	29.5	-34.2	Ant. perp to floor/perp to EUT, EUT On Side

FIELD STRENGTH OF SPURIOUS EMISSIONS GREATER THAN 30MHz

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data. The test data represents the configuration / operating mode/ model that produced the highest emission levels as compared to the specification limit.

MODES OF OPERATION

RFID continuous Tx at 13.56MHz

POWER SETTINGS INVESTIGATED

120VAC/60Hz

CONFIGURATIONS INVESTIGATED

ONIT0007 - 1

FREQUENCY RANGE INVESTIGATED

Start Frequency	30 MHz	Stop Frequency	1000 MHz
-----------------	--------	----------------	----------

SAMPLE CALCULATIONS

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Cable	N/A	Bilog Cables	EVA	2/10/2015	12 mo
Amplifier - Pre-Amplifier	Miteq	AM-1616-1000	AOL	2/10/2015	12 mo
Antenna - Biconilog	EMCO	3141	AXE	8/29/2014	24 mo
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFN	2/10/2015	12 mo

TEST DESCRIPTION


The antennas to be used with the EUT were tested. The EUT was transmitting while set at the operating channel.

While scanning, emissions from the EUT were maximized by rotating the EUT, adjusting the measurement antenna height and polarization, and manipulating the EUT antenna in 3 orthogonal planes (per ANSIC63.10:2009).




FIELD STRENGTH OF SPURIOUS EMISSIONS GREATER THAN 30MHz

PSA-ESCI 2015.03.03
EmiR5 2015.08.28

Work Order:	ONIT0007	Date:	09/30/15	
Project:	None	Temperature:	22.4 °C	
Job Site:	EV01	Humidity:	38.8% RH	
Serial Number:	None	Barometric Pres.:	1012.7 mbar	
EUT:	Advance RFID BTLE Wall Reader			
Configuration:	3			
Customer:	Onity Inc., A Division of UTCFS			
Attendees:	None			
EUT Power:	120VAC/60Hz			
Operating Mode:	RFID continuous Tx at 13.56MHz			
Deviations:	None			
Comments:	See comments for EUT orientation			
Tested by:	Cole Ghizzone, Brandon Hobbs			

Test Specifications	Test Method
FCC 15.225:2015	ANSI C63.10:2013

Run #	3	Test Distance (m)	3	Antenna Height(s)	1 to 4(m)	Results	Pass
-------	---	-------------------	---	-------------------	-----------	---------	------

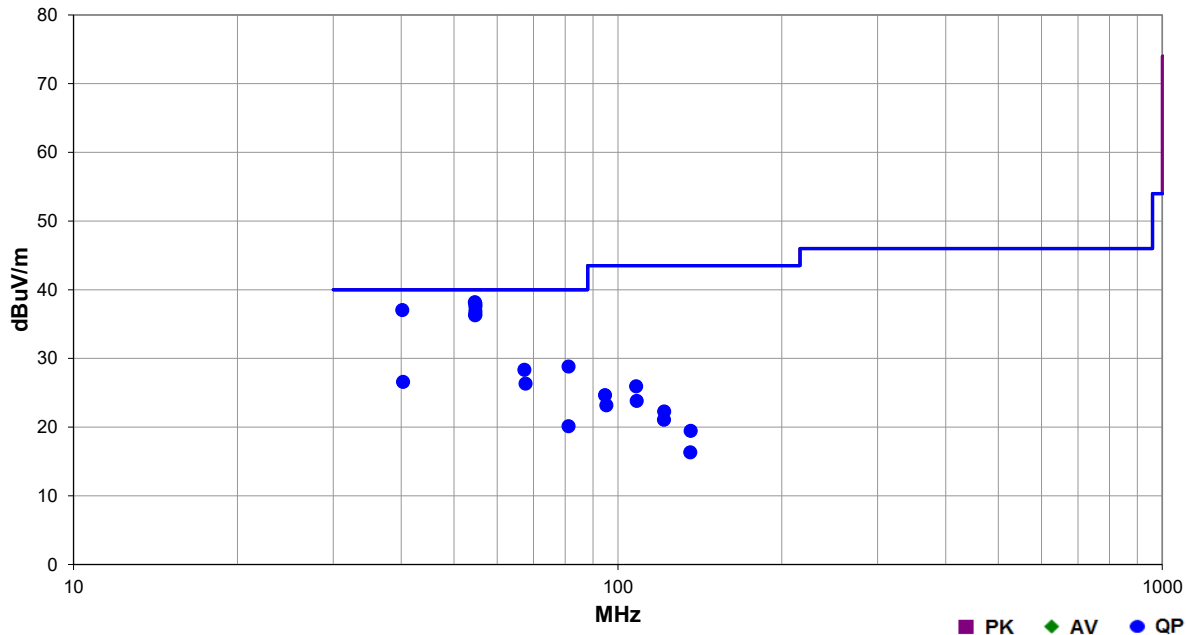

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Test Distance (meters)	External Attenuation (dB)	Polarity/ Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
54.585	48.3	-10.1	1.0	96.0	3.0	0.0	Vert	QP	0.0	38.2	40.0	-1.8	EUT Horz
54.740	48.1	-10.1	1.0	69.0	3.0	0.0	Vert	QP	0.0	38.0	40.0	-2.0	EUT Vert
54.740	47.7	-10.1	4.0	182.0	3.0	0.0	Horz	QP	0.0	37.6	40.0	-2.4	EUT On Side
40.180	43.3	-6.3	1.0	73.0	3.0	0.0	Vert	QP	0.0	37.0	40.0	-3.0	EUT Horz
54.740	47.0	-10.1	3.9	199.0	3.0	0.0	Horz	QP	0.0	36.9	40.0	-3.1	EUT Vert
54.740	46.5	-10.1	1.0	71.0	3.0	0.0	Vert	QP	0.0	36.4	40.0	-3.6	EUT On Side
54.652	46.4	-10.1	4.0	360.0	3.0	0.0	Horz	QP	0.0	36.3	40.0	-3.7	EUT Horz
81.165	40.2	-11.4	1.0	123.0	3.0	0.0	Vert	QP	0.0	28.8	40.0	-11.2	EUT Horz
67.343	39.6	-11.2	1.0	145.0	3.0	0.0	Vert	QP	0.0	28.4	40.0	-11.6	EUT Horz
40.290	32.9	-6.3	2.4	357.0	3.0	0.0	Horz	QP	0.0	26.6	40.0	-13.4	EUT On Side
67.660	37.6	-11.3	2.8	173.0	3.0	0.0	Horz	QP	0.0	26.3	40.0	-13.7	EUT On Side
107.980	35.9	-10.0	3.1	32.0	3.0	0.0	Horz	QP	0.0	25.9	43.5	-17.6	EUT On Side
94.730	34.7	-10.0	1.0	78.0	3.0	0.0	Vert	QP	0.0	24.7	43.5	-18.8	EUT Horz
108.248	33.8	-10.0	1.0	56.0	3.0	0.0	Vert	QP	0.0	23.8	43.5	-19.7	EUT Horz
81.175	31.5	-11.4	3.7	199.0	3.0	0.0	Horz	QP	0.0	20.1	40.0	-19.9	EUT On Side
95.212	33.2	-10.0	2.4	46.0	3.0	0.0	Horz	QP	0.0	23.2	43.5	-20.3	EUT On Side
121.593	33.0	-10.7	1.0	133.0	3.0	0.0	Vert	QP	0.0	22.3	43.5	-21.2	EUT Horz
121.558	31.8	-10.7	2.7	66.0	3.0	0.0	Horz	QP	0.0	21.1	43.5	-22.4	EUT On Side
136.073	30.0	-10.5	1.0	92.0	3.0	0.0	Vert	QP	0.0	19.5	43.5	-24.0	EUT Horz
135.842	26.9	-10.6	2.3	136.0	3.0	0.0	Horz	QP	0.0	16.3	43.5	-27.2	EUT On Side

FREQUENCY STABILITY

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Attenuator	S.M. Electronics	SA26B-20	AUY	7/14/2015	12
Chamber - Temperature/Humidity	Cincinnati Sub Zero (CSZ)	ZPH-8-2-SCT/AC	TBI	NCR	0
Thermometer	Omegaette	HH311	DTY	1/21/2015	36
Power Supply - DC	Topward	TPS-2000	TPD	NCR	0
Meter - Multimeter	Tektronix	DMM912	MMH	2/5/2013	36
Probe - Near Field Set	EMCO	7405	IPD	NCR	0
Block - DC	Fairview Microwave	SD3379	AMP	6/18/2015	12
Analyzer - Spectrum Analyzer	Agilent	E4446A	AAQ	3/10/2015	12

TEST DESCRIPTION

A near field probe measurement was made between the EUT's integral antenna and a spectrum analyzer. The spectrum analyzer is equipped with a precision frequency reference that exceeds the stability requirement of the EUT.


Measurements were made at the edges of the main transmit bands as called out on the data sheets. Testing was done with while poling at 100% duty cycle.

The primary supply voltage was varied from 85 % to 115% of the nominal voltage Using a temperature chamber, the transmit frequency was recorded at the extremes of the specified temperature range (-30 ° to +50° C) and at 10°C intervals.

FREQUENCY STABILITY




XMR 2015.01.14


EUT: Advance RFID BTLE Wall Reader		Work Order: ONIT0007				
Serial Number: None		Date: 09/28/15				
Customer: Onity Inc., A Division of UTCFS		Temperature: 21.7°C				
Attendees: None		Humidity: 37%				
Project: None		Barometric Pres.: 1014.2				
Tested by: Brandon Hobbs	Power: 12VDC Nominal	Job Site: EV06				
TEST SPECIFICATIONS						
FCC 15.225:2015		Test Method: ANSI C63.10:2013				
COMMENTS						
The EUT was operating at 100% duty cycle.						
DEVIATIONS FROM TEST STANDARD						
Configuration #	2	Signature 				
		Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results
RFID 13.56 MHz						
	Voltage: 115%	13.559974	13.56	1.9	100	Pass
	Voltage: 100%	13.559972	13.56	2.1	100	Pass
	Voltage: 85%	13.559982	13.56	1.3	100	Pass
	Temperature: +50°	13.559944	13.56	4.1	100	Pass
	Temperature: +40°	13.559957	13.56	3.2	100	Pass
	Temperature: +30°	13.559945	13.56	4.1	100	Pass
	Temperature: +20°	13.55998	13.56	1.5	100	Pass
	Temperature: +10°	13.559985	13.56	1.1	100	Pass
	Temperature: 0°	13.560024	13.56	1.8	100	Pass
	Temperature: -10°	13.560023	13.56	1.7	100	Pass
	Temperature: -20°	13.560009	13.56	0.7	100	Pass
	Temperature: -30°	13.559959	13.56	3	100	Pass

FREQUENCY STABILITY

RFID 13.56 MHz, Voltage: 115%						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	13.559974	13.56	1.9	100	Pass	

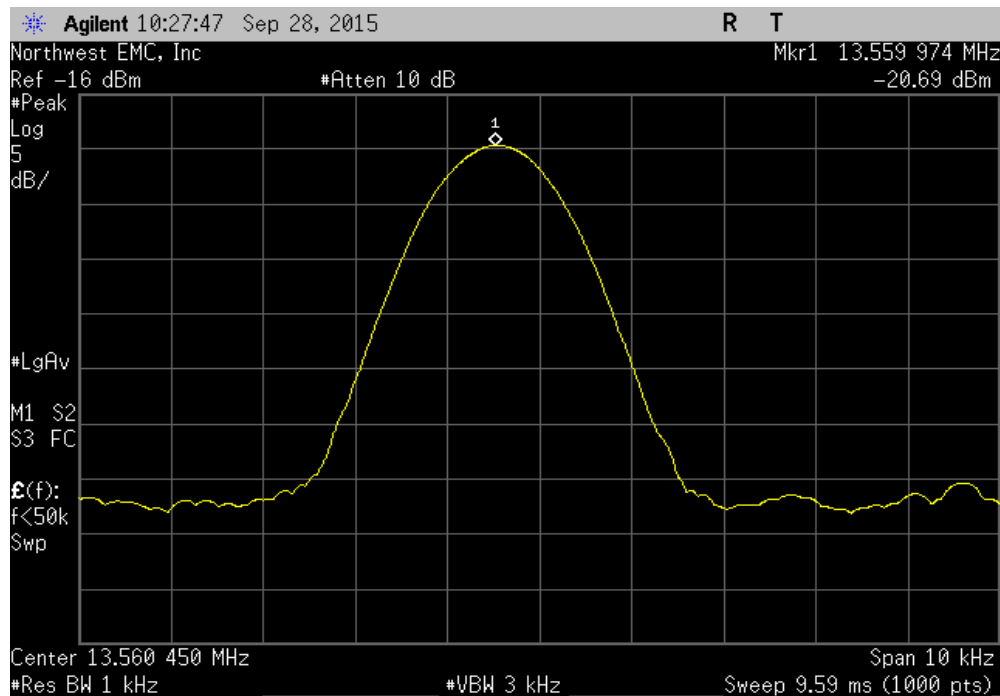


RFID 13.56 MHz, Voltage: 100%						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	13.559972	13.56	2.1	100	Pass	

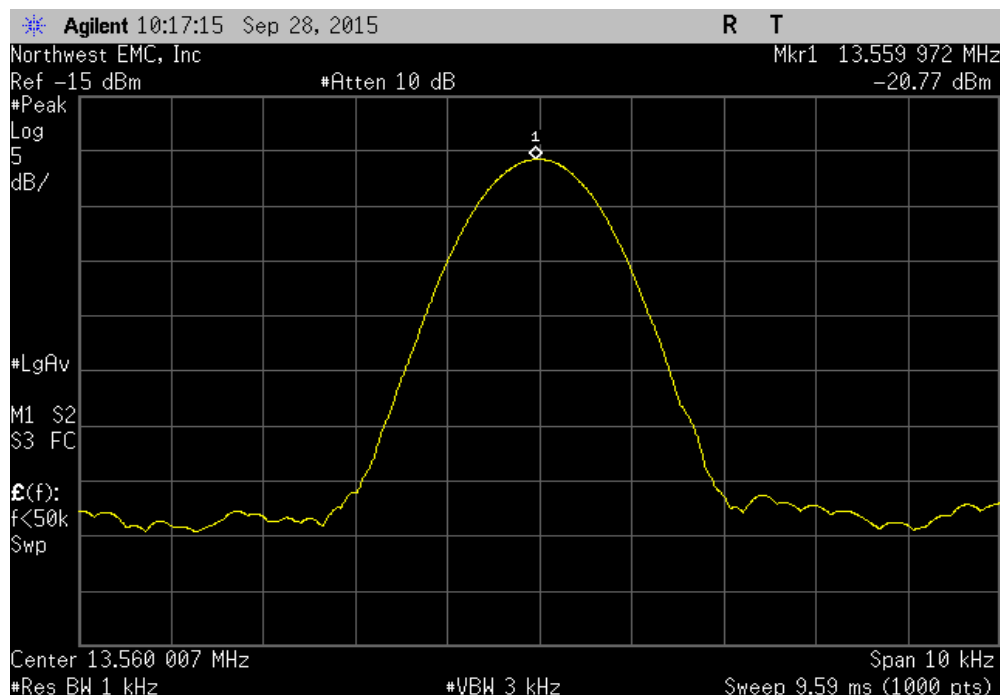


FREQUENCY STABILITY

RFID 13.56 MHz, Voltage: 85%						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	13.559982	13.56	1.3	100	Pass	

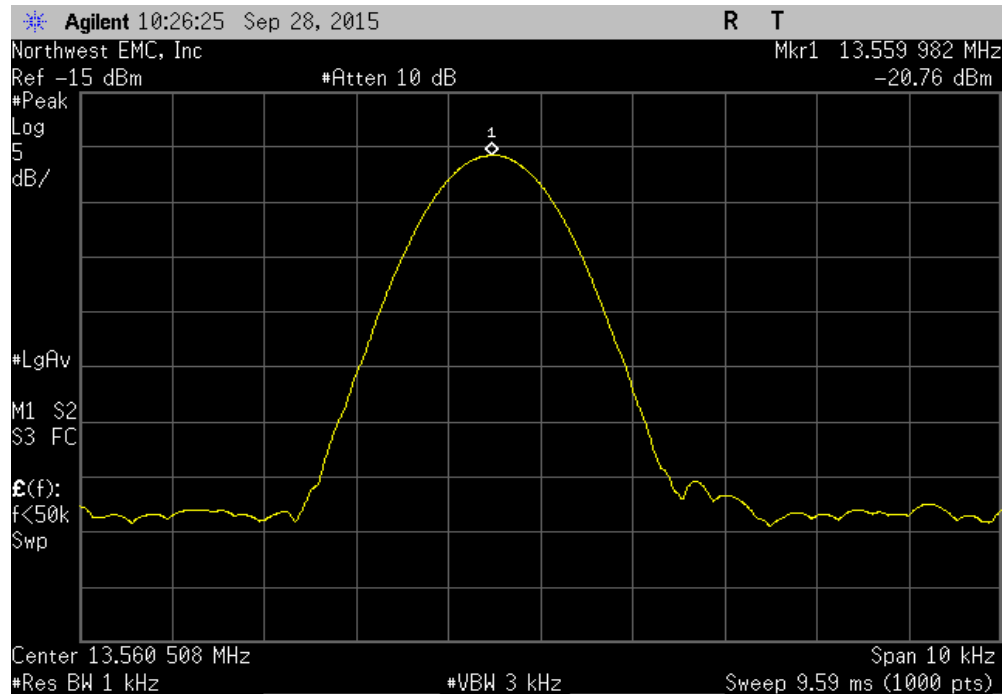


RFID 13.56 MHz, Temperature: +50°						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	13.559944	13.56	4.1	100	Pass	

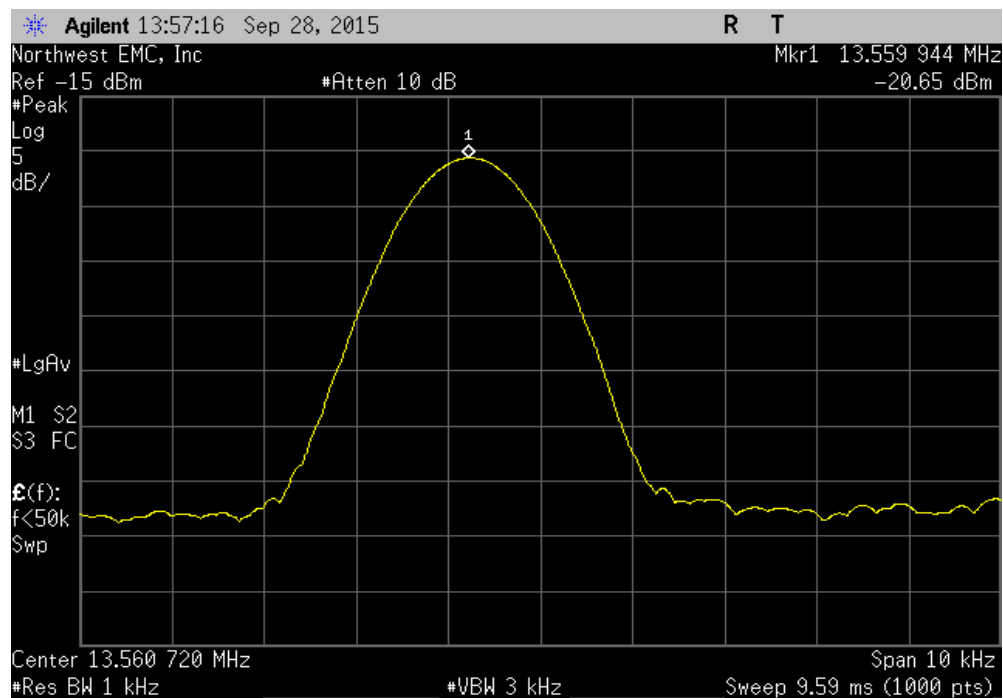


FREQUENCY STABILITY

RFID 13.56 MHz, Temperature: +40°						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	13.559957	13.56	3.2	100	Pass	

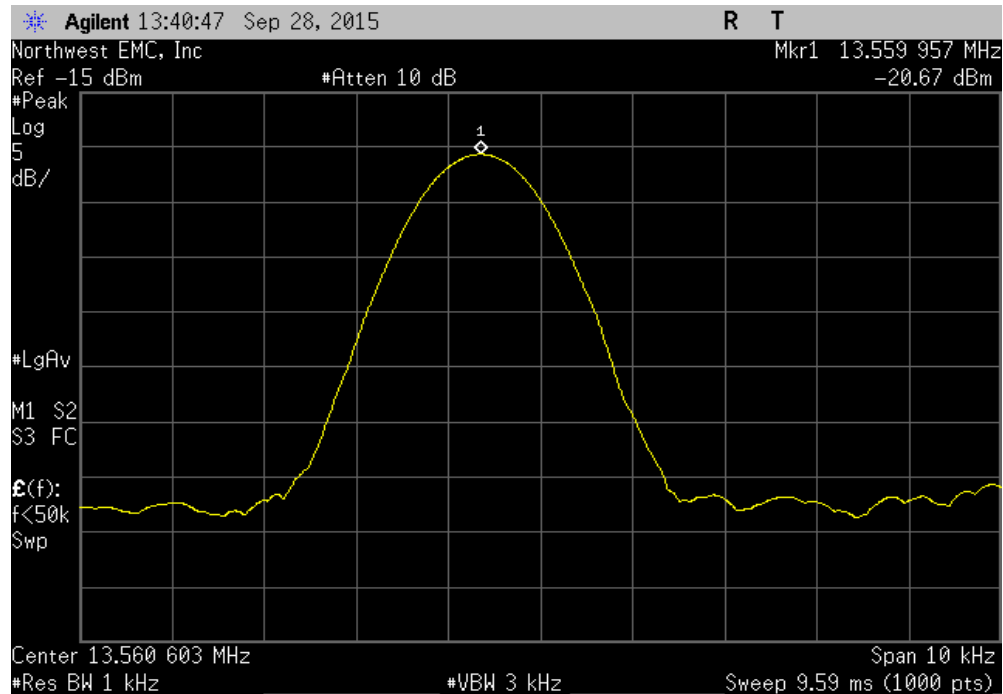


RFID 13.56 MHz, Temperature: +30°						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	13.559945	13.56	4.1	100	Pass	

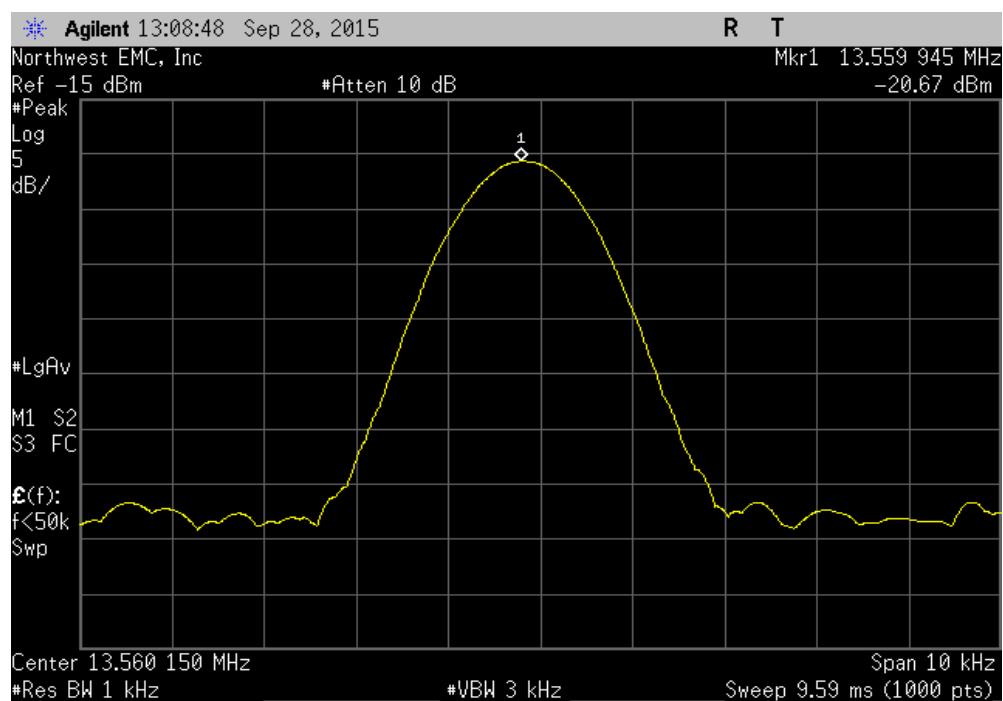


FREQUENCY STABILITY

RFID 13.56 MHz, Temperature: +20°						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	13.55998	13.56	1.5	100	Pass	

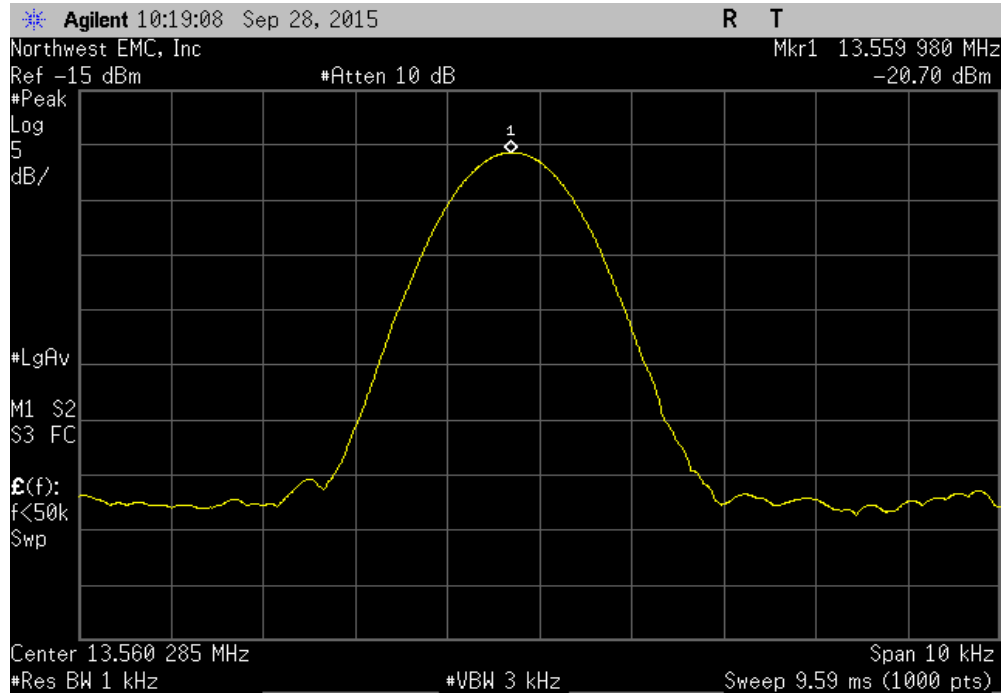


RFID 13.56 MHz, Temperature: +10°						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	13.559985	13.56	1.1	100	Pass	

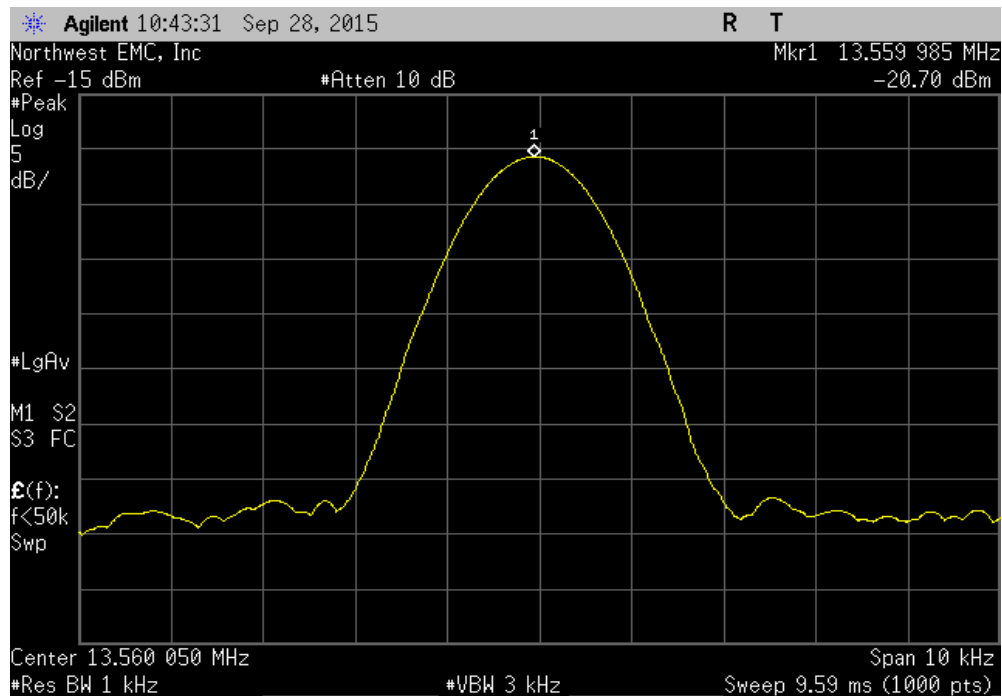


FREQUENCY STABILITY

RFID 13.56 MHz, Temperature: 0°						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	13.560024	13.56	1.8	100	Pass	

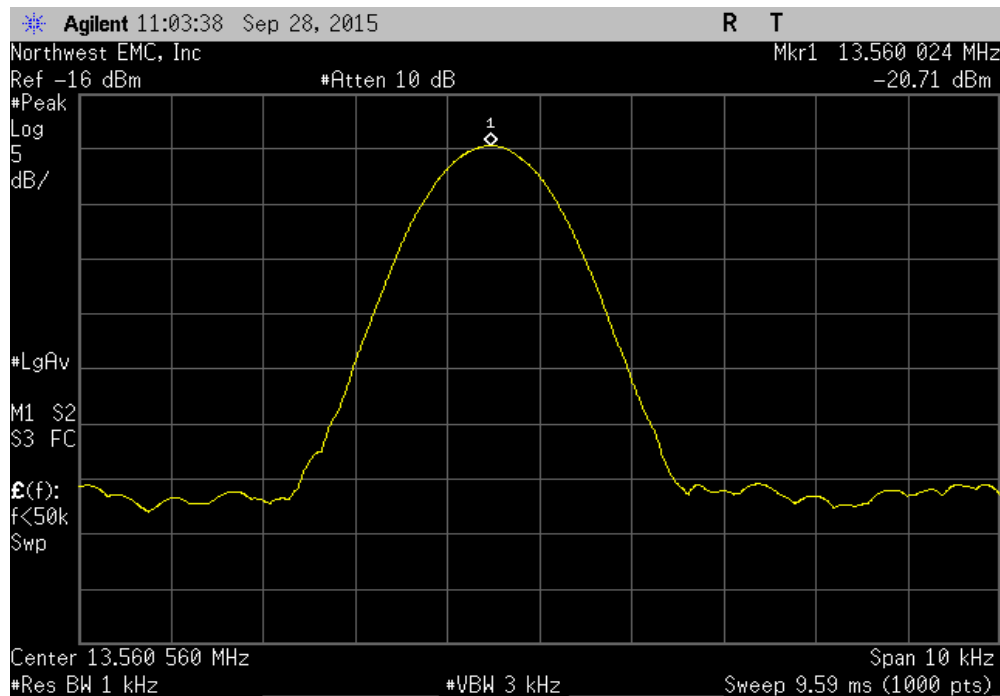


RFID 13.56 MHz, Temperature: -10°						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	13.560023	13.56	1.7	100	Pass	

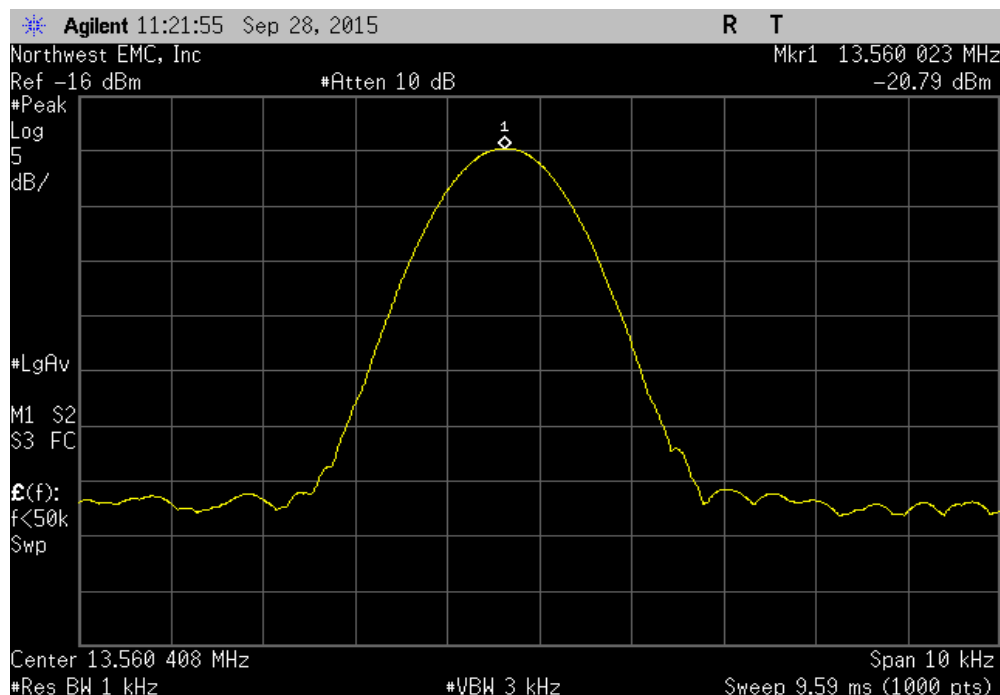

FREQUENCY STABILITY

RFID 13.56 MHz, Temperature: -20°						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	13.560009	13.56	0.7	100	Pass	

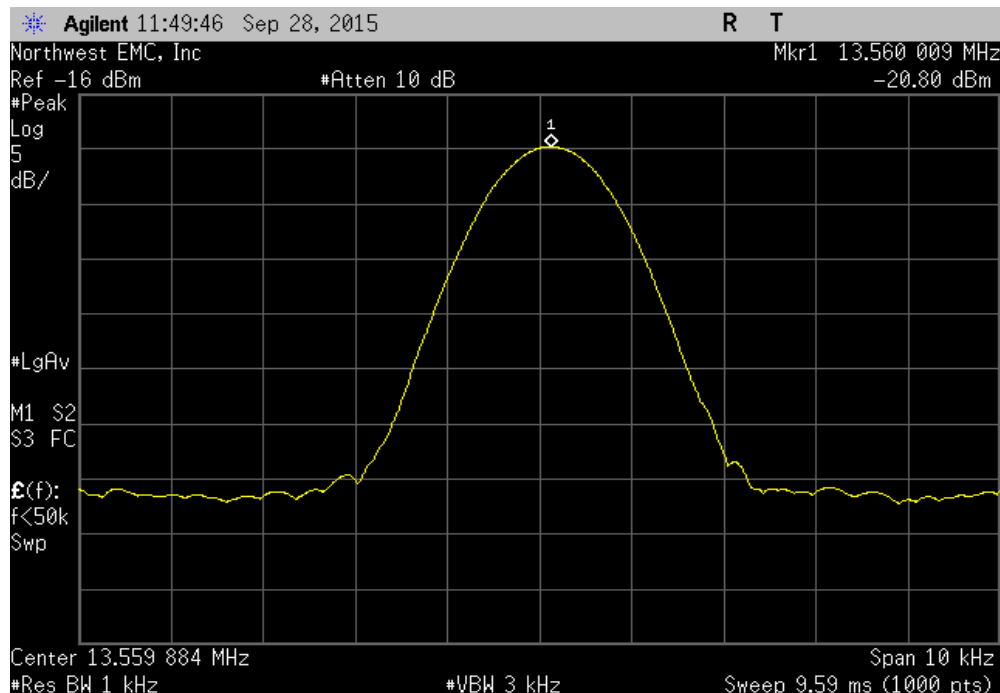

RFID 13.56 MHz, Temperature: -30°						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	13.559959	13.56	3	100	Pass	

