



**FCC CFR47 PART 15 SUBPART C
CERTIFICATION
TEST REPORT**

FOR

PDA PHONE

MODEL NUMBER: WIZA100, WIZA110, WIZA200

FCC ID: NW8WZ

REPORT NUMBER: 05T3452-2

ISSUE DATE: JUNE 21, 2005

Prepared for
**HIGH TECH COMPUTER CORP.
23 HSIN-HUA RD., TAOYUAN 330
TAIWAN, R.O.C.**

Prepared by
**COMPLIANCE ENGINEERING SERVICES, INC.
d.b.a.
COMPLIANCE CERTIFICATION SERVICES
561F MONTEREY ROAD,
MORGAN HILL, CA 95037, USA
TEL: (408) 463-0885
FAX: (408) 463-0888**

NVLAP[®]
LAB CODE:200065-0

Revision History

| Rev. | Issue Date | Revisions | Revised By |
|------|---------------|---------------|------------|
| A | 6/21/05 | Initial Issue | MH |

TABLE OF CONTENTS

| | |
|---|------------|
| 1. ATTESTATION OF TEST RESULTS..... | 5 |
| 2. TEST METHODOLOGY | 6 |
| 3. CROSS REFERENCE TO OTHER REPORT ON THIS PRODUCT..... | 6 |
| 4. FACILITIES AND ACCREDITATION | 6 |
| 5. CALIBRATION AND UNCERTAINTY..... | 6 |
| 5.1. MEASURING INSTRUMENT CALIBRATION..... | 6 |
| 5.2. MEASUREMENT UNCERTAINTY..... | 6 |
| 6. EQUIPMENT UNDER TEST..... | 7 |
| 6.1. DESCRIPTION OF EUT | 7 |
| 6.2. MAXIMUM OUTPUT POWER | 7 |
| 6.3. DESCRIPTION OF AVAILABLE ANTENNAS..... | 7 |
| 6.4. MANUFACTURER'S DESCRIPTION OF MODEL DIFFERENCES..... | 8 |
| 6.5. SOFTWARE AND FIRMWARE | 8 |
| 6.6. WORST-CASE CONFIGURATION AND MODE..... | 8 |
| 6.7. DESCRIPTION OF TEST SETUP | 9 |
| 7. TEST AND MEASUREMENT EQUIPMENT | 13 |
| 8. LIMITS AND RESULTS | 14 |
| 8.1. CHANNEL TESTS..... | 14 |
| 8.1.1. 6 dB BANDWIDTH | 14 |
| 8.1.2. 99% BANDWIDTH..... | 24 |
| 8.1.3. PEAK OUTPUT POWER | 34 |
| 8.1.4. AVERAGE POWER..... | 45 |
| 8.1.5. PEAK POWER SPECTRAL DENSITY | 46 |
| 8.1.6. CONDUCTED SPURIOUS EMISSIONS..... | 56 |
| 8.2. RADIATED EMISSIONS..... | 75 |
| 8.2.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS ABOVE 1GHz..... | 75 |
| 8.2.2. WIZA 100 MODEL | 78 |
| 8.2.3. WIZA 110 MODEL | 105 |
| 8.2.4. WIZA 200 MODEL | 132 |
| 8.2.5. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz..... | 159 |
| 8.2.6. WIZA 100 MODEL | 159 |
| 8.2.7. WIZA 110 MODEL | 163 |
| 8.2.8. WIZA 200 MODEL | 167 |
| 9. DIGITAL DEVICE CONFIGURATION - LIMITS AND RESULTS | 171 |
| 9.1. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz | 171 |

| | | |
|------|-------------------------------------|-----|
| 9.2. | POWERLINE CONDUCTED EMISSIONS | 175 |
| 10. | SETUP PHOTOS | 181 |

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: HIGH TECH COMPUTER CORP.
23 HSIN HUA ROAD
TAOYUAN 330, TAIWAN R.O.C.

EUT DESCRIPTION: PDA PHONE

MODEL: WIZA100, WIZA110, WIZA200

SERIAL NUMBER: HT521EB00034, HT521EB00012, HT520EE00118

DATE TESTED: JUNE 01 - 08, 2005

| APPLICABLE STANDARDS | |
|-----------------------|-------------------------|
| STANDARD | TEST RESULTS |
| FCC PART 15 SUBPART C | NO NON-COMPLIANCE NOTED |

Compliance Certification Services, Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document. No part of this report may be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any government agency.

Approved & Released For CCS By:

Tested By:



MIKE HECKROTTE
ENGINEERING MANAGER
COMPLIANCE CERTIFICATION SERVICES

CHIN PANG
EMC ENGINEER
COMPLIANCE CERTIFICATION SERVICES

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2003, FCC CFR 47 Part 2 and FCC CFR 47 Part 15.

3. CROSS REFERENCE TO OTHER REPORT ON THIS PRODUCT

Other FCC report applicable to this product includes CCS 05U3452-1.

4. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 561F Monterey Road, Morgan Hill, California, USA. The sites are constructed in conformance with the requirements of ANSI C63.4, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

5. CALIBRATION AND UNCERTAINTY

5.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

5.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

| PARAMETER | UNCERTAINTY |
|-------------------------------------|----------------|
| Radiated Emission, 30 to 200 MHz | +/- 3.3 dB |
| Radiated Emission, 200 to 1000 MHz | +4.5 / -2.9 dB |
| Radiated Emission, 1000 to 2000 MHz | +4.5 / -2.9 dB |
| Power Line Conducted Emission | +/- 2.9 dB |

Uncertainty figures are valid to a confidence level of 95%.

6. EQUIPMENT UNDER TEST

6.1. DESCRIPTION OF EUT

The EUT is a PDA Phone with all auxiliary equipment as described below.

| Auxiliary Equipment | Brand | Model No. |
|-----------------------------|----------------|---------------------------|
| Li-Ion Rechargeable Battery | HP | HSTNH-D06B |
| AC adaptor | Delta | ADP-5FH B |
| Earphone | Cotron Corp. | CHM-201STV01007 |
| Earphone | eAcetech Corp. | TS168-34-03206N- VM-02 |
| Earphone | eAcetech Corp. | TS888-03206N |

6.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

2400 to 2483.5 MHz Authorized Band

| Frequency Range (MHz) | Mode | Output Power (dBm) | Output Power (mW) |
|--------------------------|-----------|-----------------------|----------------------|
| 2402 - 2480 | Bluetooth | 2.84 | 1.92 |
| 2412 - 2462 | 802.11b | 16.27 | 42.36 |
| 2412 - 2462 | 802.11g | 17.56 | 57.02 |

6.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes has an antenna as describe below:

- BT with a PIFA antenna of maximum gain -1 dBi.
- WLAN with a PIFA antenna of maximum gain 1 dBi.

6.4. MANUFACTURER'S DESCRIPTION OF MODEL DIFFERENCES

The PDA Phone under this application has three models: WIZA200, WIZA100 and WIZA110. The WIZA200 and WIZA100 are electrically identical except that there are slight differences in housing, WIZA 110 is identical to WIZA100 except that WIZA110 does not have a CMOS function as WIZA does.

The three models share the same PCB layout /placement /schematics /BOM.

6.5. SOFTWARE AND FIRMWARE

For the WLAN: the firmware installed in the EUT during testing was T1250_HTC_Testtool_0_0.20 and the EUT driver software installed during testing was "WLANSARS.004".

For the Bluetooth: the firmware installed in the EUT during testing was Mapi_Firmware_1150_3422 and the test driver software was "BTTestmode2".

6.6. WORST-CASE CONFIGURATION AND MODE

The worst-case channel is determined as the channel with the highest average output power. The highest measured output powers were at 2480MHz for Bluetooth mode and 2437MHz for b/g mode.

The worst-case data rate for the channel is determined to be 11 MP/s for WLAN mode.

6.7. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

| PERIPHERAL SUPPORT EQUIPMENT LIST | | | | |
|-----------------------------------|------------------|-----------|---------------|--------|
| Description | Manufacturer | Model | Serial Number | FCC ID |
| AC Adapter | Delta Electronic | ADP-5FH B | 4MW0512038391 | DoC |


I/O CABLES

| I/O CABLE LIST | | | | | | |
|----------------|------|----------------------|----------------|------------|--------------|---------|
| Cable No. | Port | # of Identical Ports | Connector Type | Cable Type | Cable Length | Remarks |
| 1 | DC | 1 | DC | Unshielded | 2m | No |

TEST SETUP

The EUT is installed as a stand-alone device during the tests.

SETUP DIAGRAM FOR TESTS

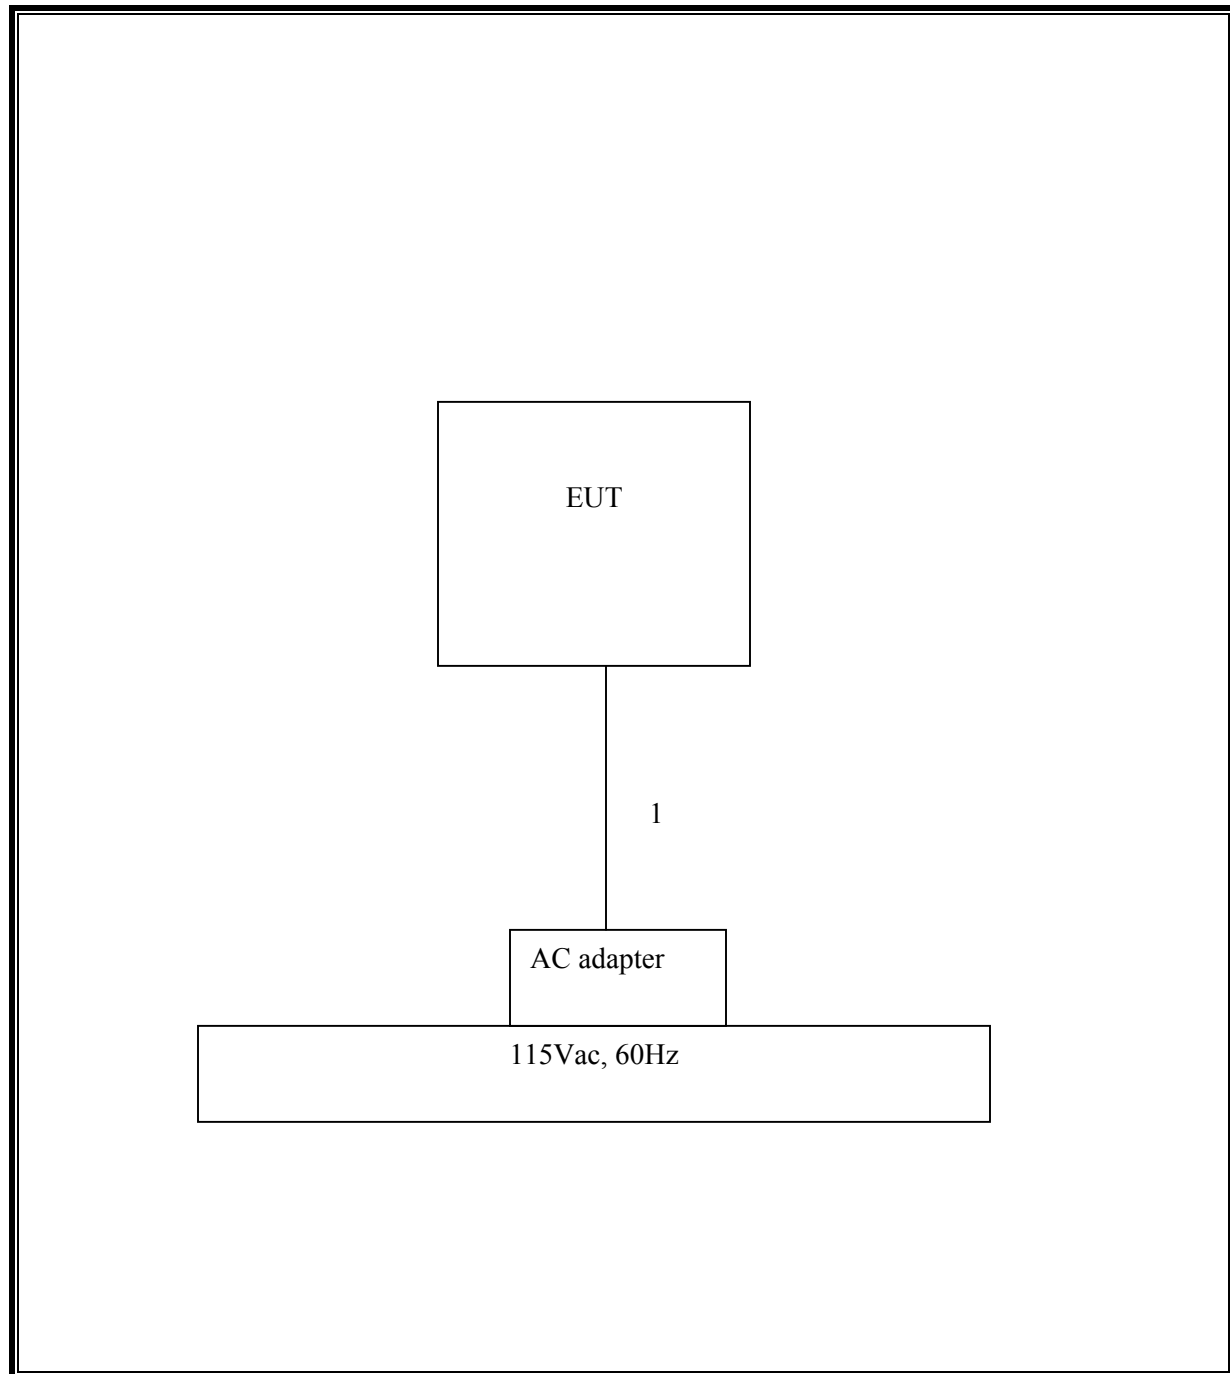

SETUP FOR DIGITAL DEVICE TESTS

SUPPORT EQUIPMENT

| PERIPHERAL SUPPORT EQUIPMENT LIST | | | | |
|-----------------------------------|--------------|-----------------|---------------|-------------------|
| Description | Manufacturer | Model | Serial Number | FCC ID |
| Printer | HP | 2225C | 2930S52614 | DSI6XU2225 |
| Modem | Hayes | 4714US | A02247143261 | BFJUSA-31719-M5-E |
| Monitor | Samsung | PG17HS | CCS00914 | N/A |
| PC | HP | VectraVE D6533T | US82209954 | DoC |
| Mouse | Microsoft | 91289 | 1917031 | C3KKMP3 |
| Keyboard | HP | SK-2502 | HR804075765 | GYUR41SK |


I/O CABLES

| I/O CABLE LIST | | | | | | |
|----------------|----------|----------------------|----------------|-------------|--------------|-------------------------|
| Cable No. | Port | # of Identical Ports | Connector Type | Cable Type | Cable Length | Remarks |
| 1 | AC | 2 | US 115V | Un-shielded | 2m | Bundle with LC test |
| 2 | DC | 2 | DC plug | Un-shielded | 2m | N/A |
| 3 | Serial | 1 | DB9 | Shielded | 1m | N/A |
| 4 | Parallel | 1 | DB25 | Shielded | 2m | N/A |
| 5 | KB | 1 | PS/2 | Shielded | 2m | N/A |
| 6 | Mouse | 1 | PS/2 | Un-shielded | 2m | N/A |
| 7 | Video | 1 | DB15 | Shielded | 2m | One Torroid on Each End |
| 8 | USB | 1 | USB | Un-shielded | 2m | N/A |

TEST SETUP

The EUT is connected to a laptop computer system with minimum configuration during the tests. Test software exercised and linked with the EUT

SETUP DIAGRAM FOR DIGITAL DEVICE TESTS

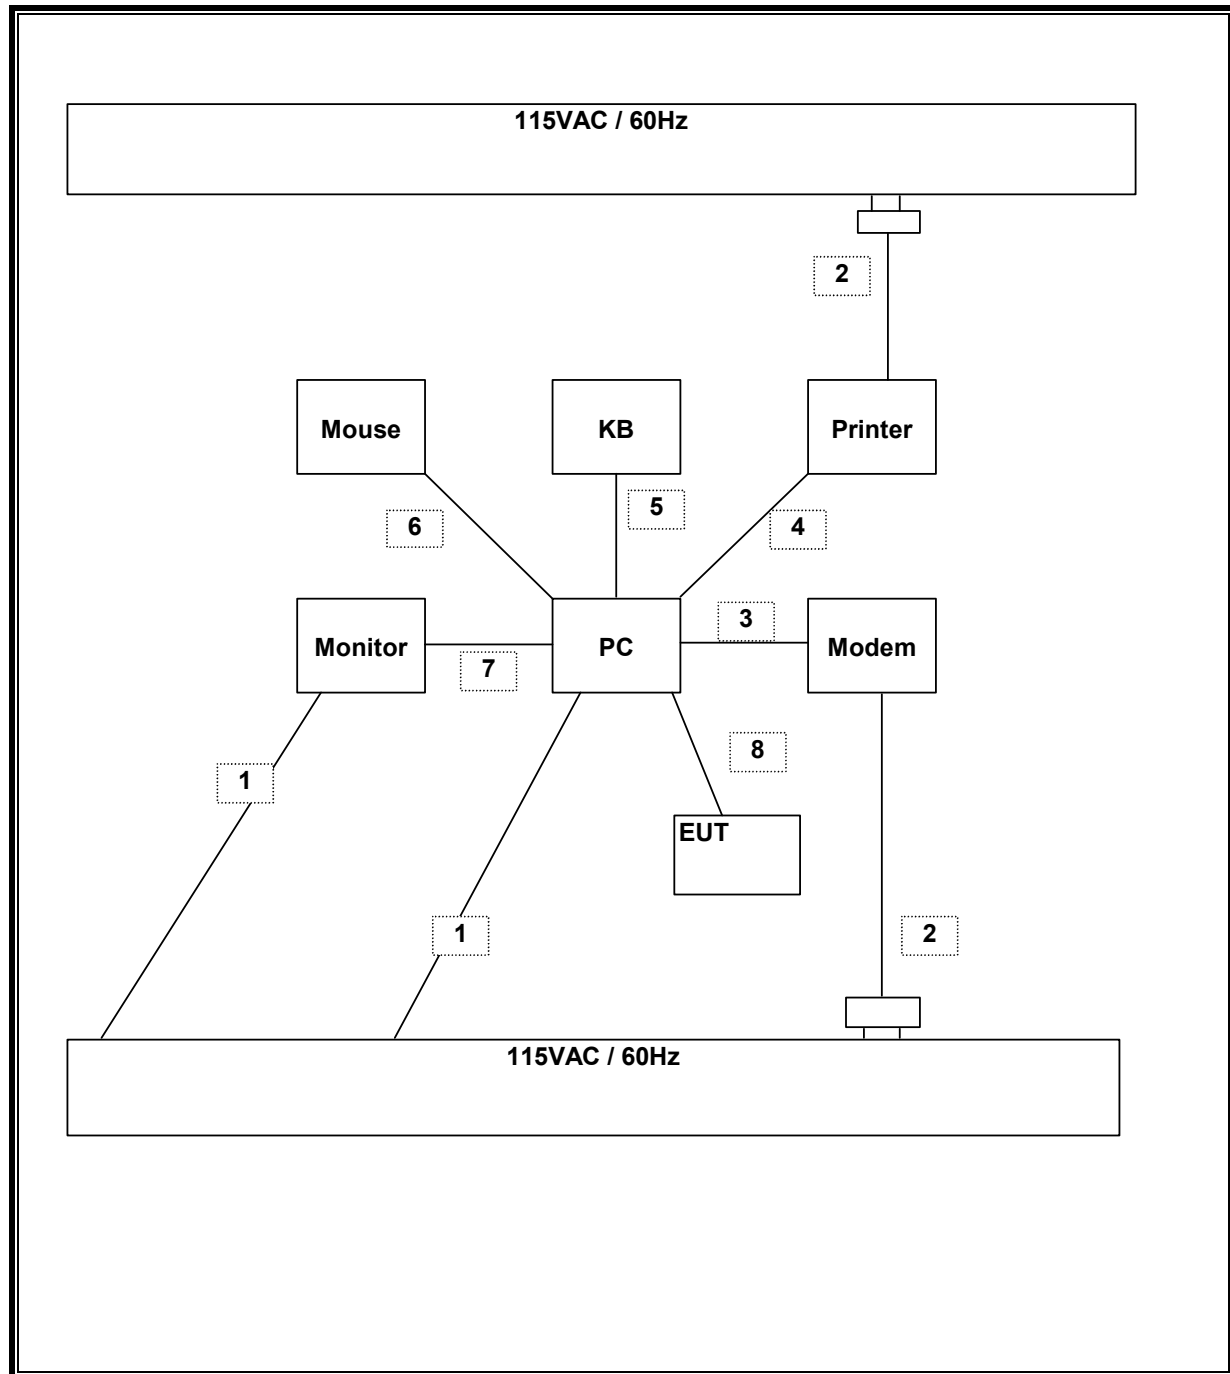

7. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

| TEST EQUIPMENT LIST | | | | |
|------------------------------------|----------------|------------------|---------------|------------|
| Description | Manufacturer | Model | Serial Number | Cal Due |
| Peak Power Meter | Agilent | E4416A | GB41291160 | 2/9/2006 |
| Oscilloscope, 100MHz 4Ch. | HP | 54601A | 3106A00123 | 5/17/2006 |
| Peak / Average Power Sensor | Agilent | E9327A | US40440755 | 2/10/2006 |
| Oscilloscope, 100MHz 4Ch. | HP | 54601A | 3106A00123 | 5/17/2006 |
| Spectrum Analyzer 3 Hz ~ 44 GHz | Agilent | E4446A | MY43360112 | 3/28/2006 |
| Power Sensor, 18GHz, 300 mW | R&S | NVR-Z51 | DE 13014 | 10/20/2005 |
| Microwave Detector 0.01 ~ 33 GHz | Agilent | 8474C | 2905A04047 | 11/10/05 |
| Power Splitter | HP | 11667B | NA | CNR |
| Antenna, Bilog 30MHz ~ 2Ghz | Sunol Sciences | JB1 | A121003 | 3/3/2006 |
| RF Filter Section | HP | 85420E | 3705A00256 | 3/29/2006 |
| EMI Receiver, 9 kHz ~ 2.9 GHz | HP | 8542E | 3942A00286 | 3/29/2006 |
| EMI Test Receiver | R & S | ESHS 20 | 827129/006 | 6/3/2006 |
| LISN, 10 kHz ~ 30 MHz | Solar | 8012-50-R-24-BNC | 8379443 | 10/21/05 |
| Site A Line Stabilizer/Conditioner | Tripplite | LC-1800a | A005181 | CNR |
| 4.0 High Pass Filter | Micro Tronics | HPM13351 | 3 | N/A |

8. LIMITS AND RESULTS

8.1. CHANNEL TESTS

8.1.1. 6 dB BANDWIDTH

LIMIT

§15.247 (a) (2) For direct sequence systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

RESULTS

No non-compliance noted:

BLUETOOTH

| Channel | Frequency (MHz) | 6 dB Bandwidth (kHz) | Minimum Limit (kHz) | Margin (kHz) |
|---------|--------------------|-------------------------|------------------------|-----------------|
| Low | 2402 | 513 | 500 | 13 |
| Middle | 2441 | 510 | 500 | 10 |
| High | 2480 | 513 | 500 | 13 |


802.11b Mode


| Channel | Frequency (MHz) | 6 dB Bandwidth (kHz) | Minimum Limit (kHz) | Margin (kHz) |
|---------|--------------------|-------------------------|------------------------|-----------------|
| Low | 2412 | 13030 | 500 | 12530 |
| Middle | 2437 | 13030 | 500 | 12530 |
| High | 2462 | 13030 | 500 | 12530 |


802.11g Mode

| Channel | Frequency (MHz) | 6 dB Bandwidth (kHz) | Minimum Limit (kHz) | Margin (kHz) |
|---------|--------------------|-------------------------|------------------------|-----------------|
| Low | 2412 | 16470 | 500 | 15970 |
| Middle | 2437 | 16530 | 500 | 16030 |
| High | 2462 | 16530 | 500 | 16030 |


6 DB BANDWIDTH (BLUETOOTH)

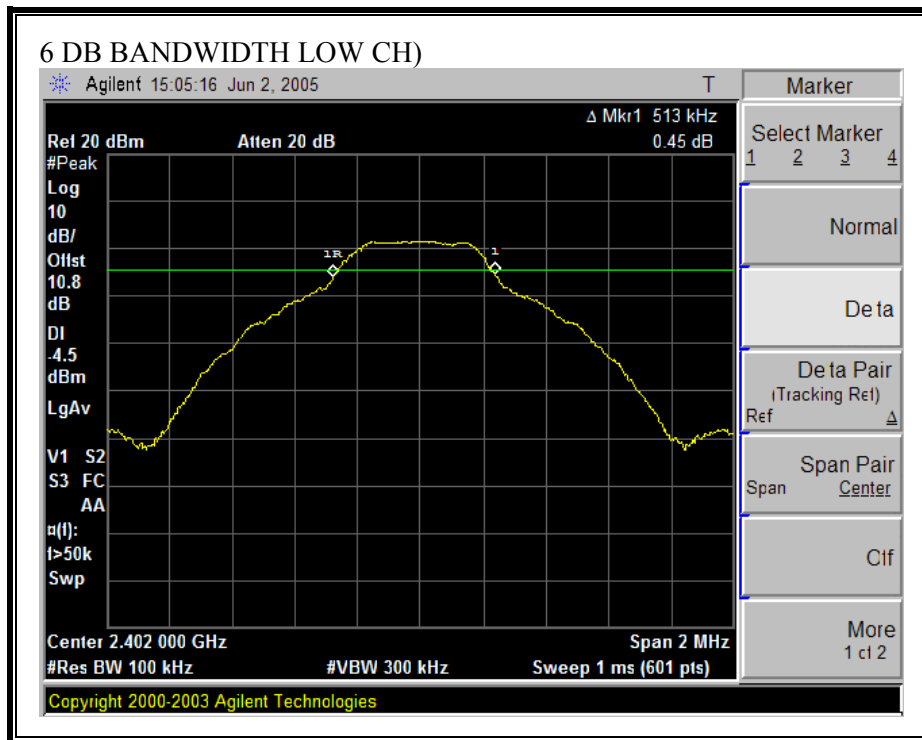


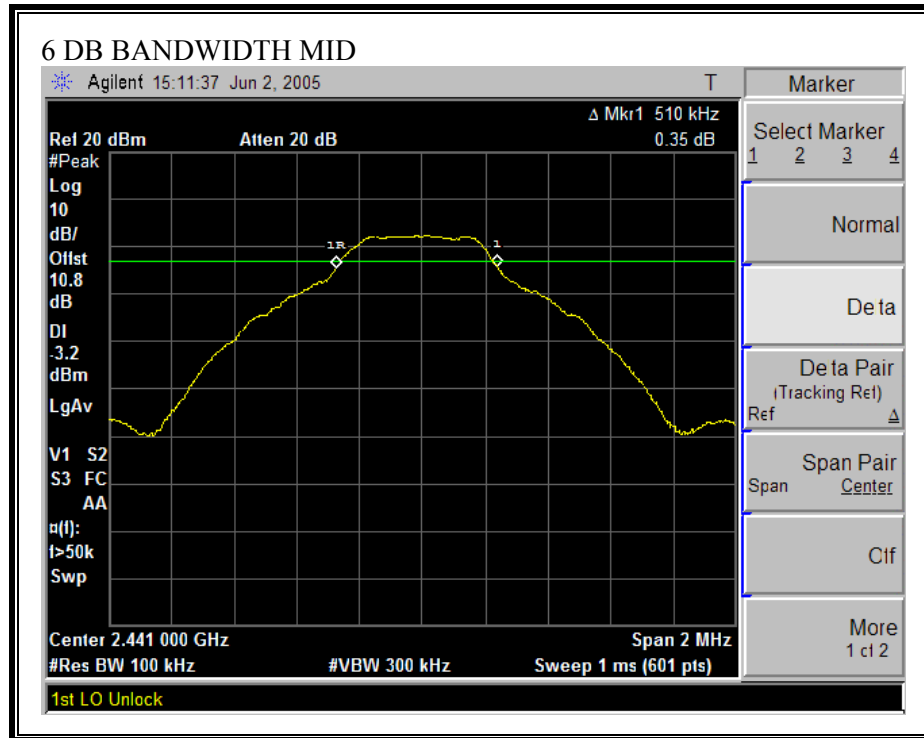


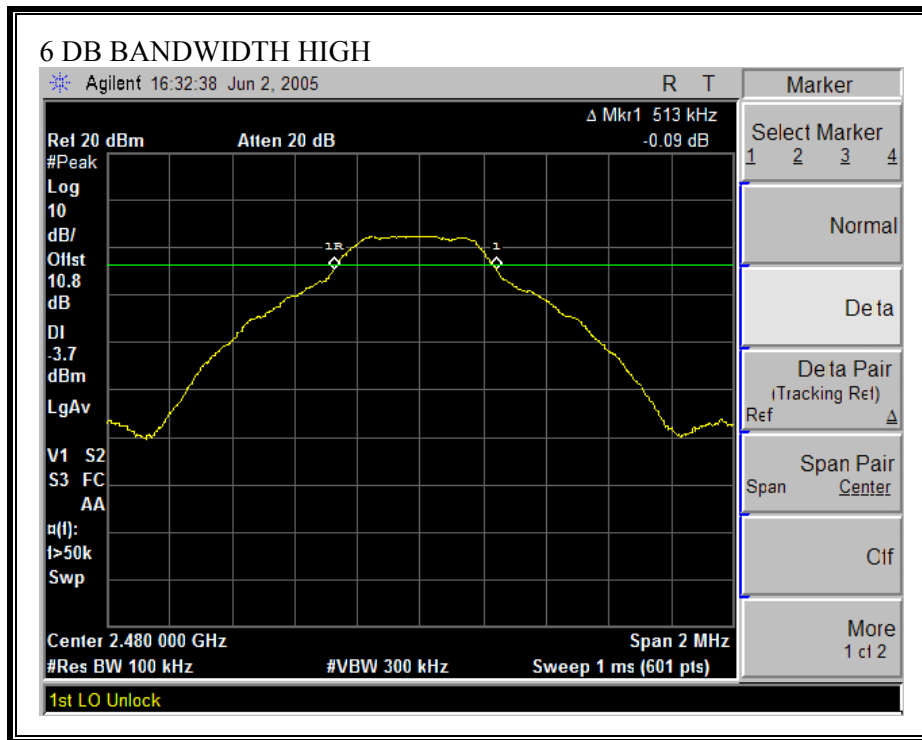


6 DB BANDWIDTH (802.11b MODE)

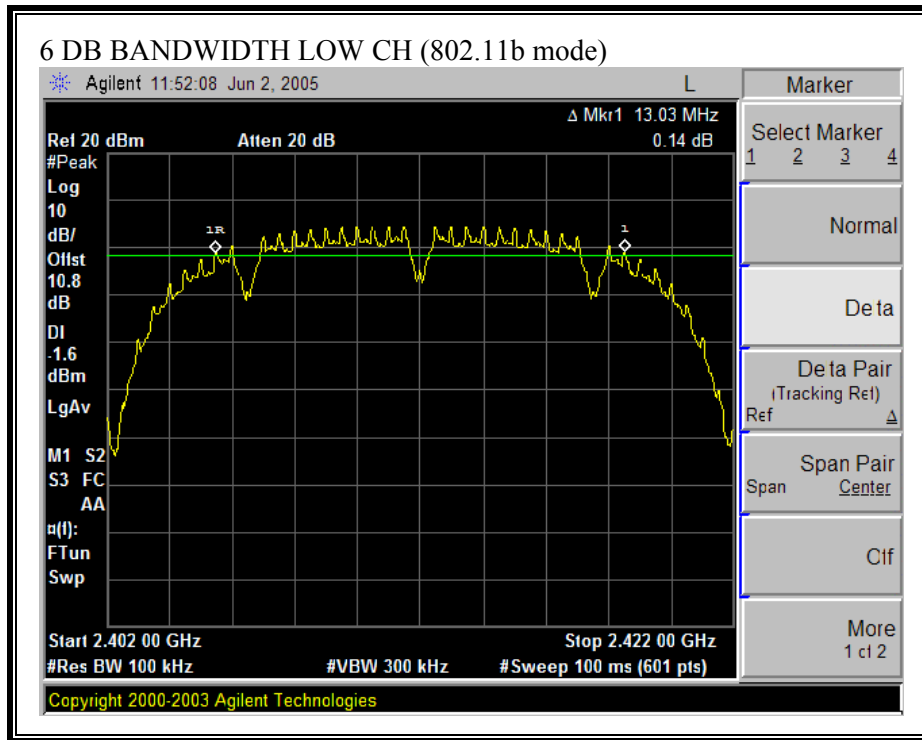


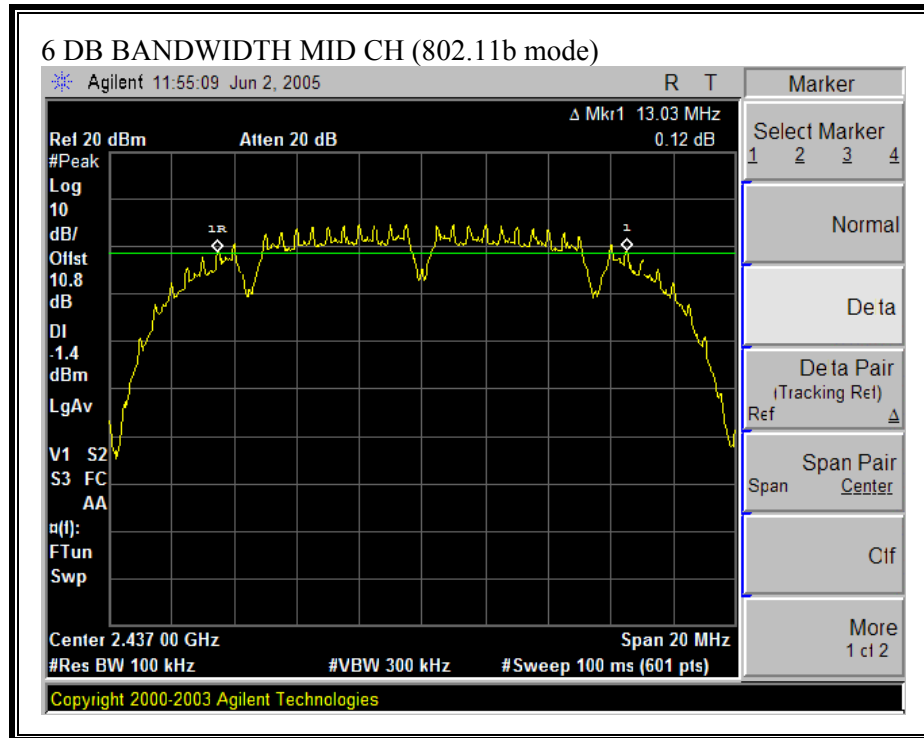


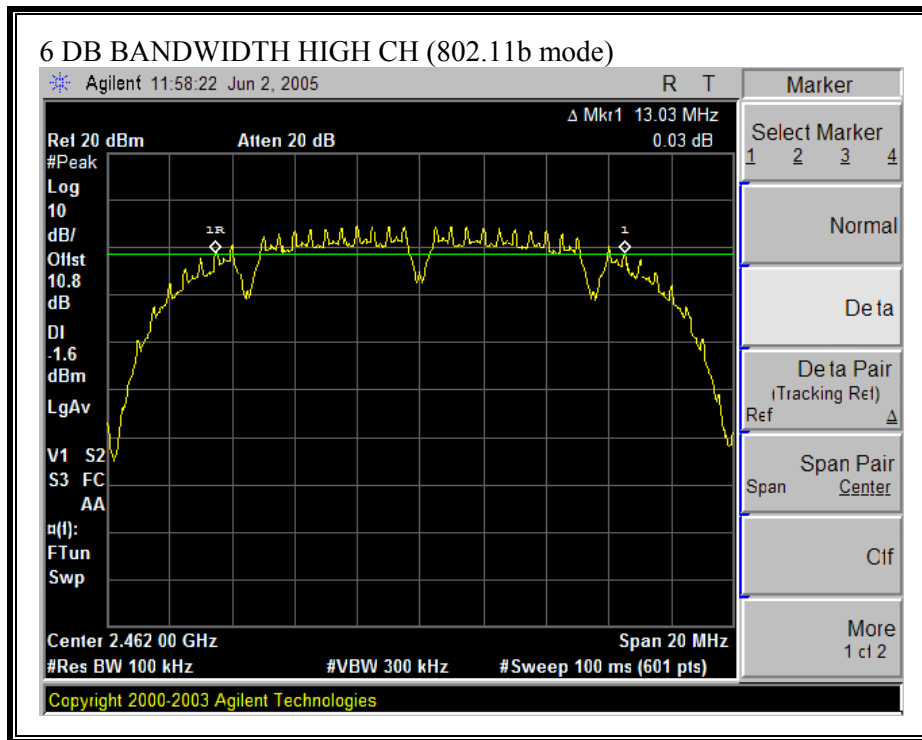

6 DB BANDWIDTH (802.11g MODE)

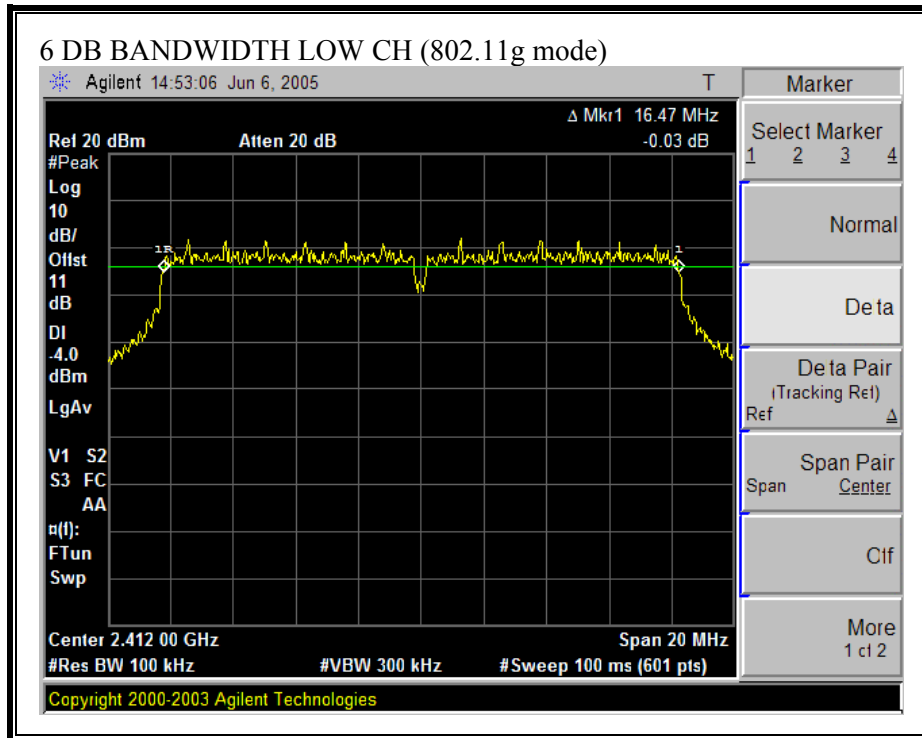

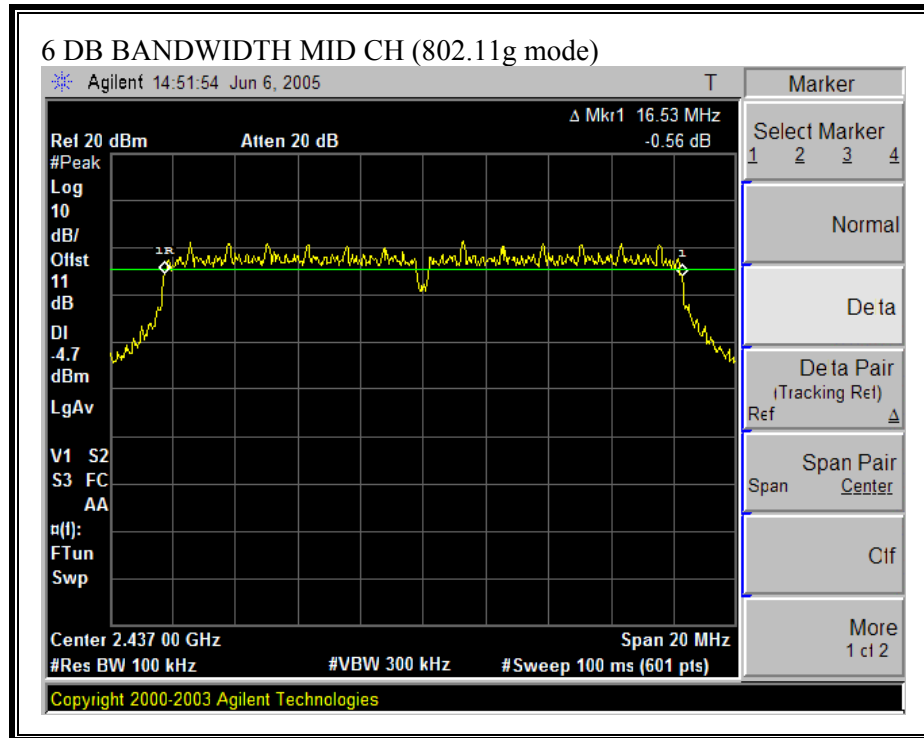

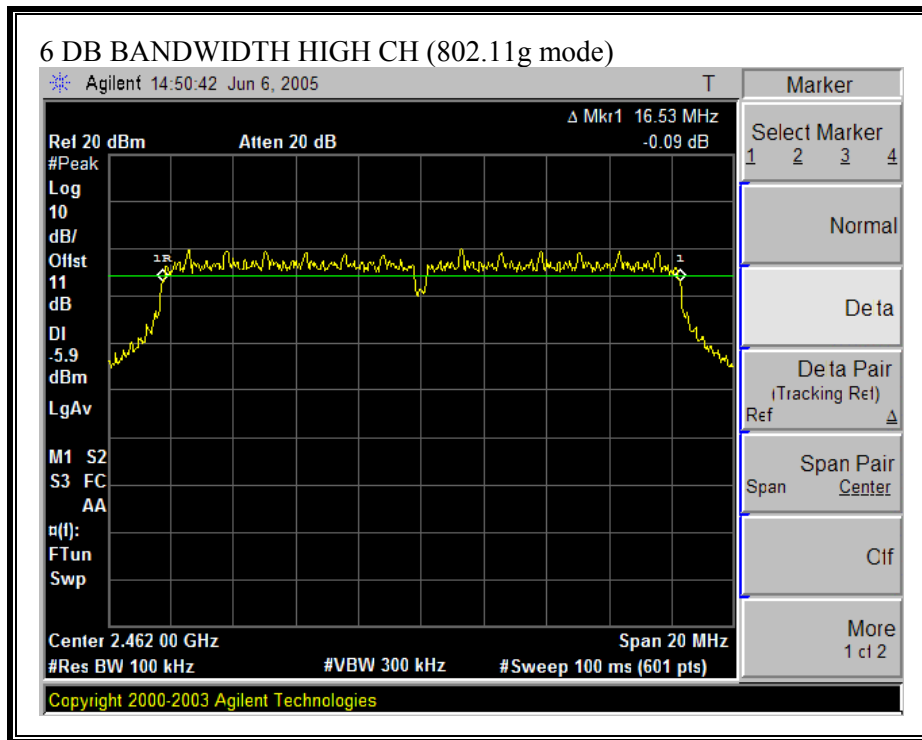

8.1.2. 99% BANDWIDTH

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

RESULTS

No non-compliance noted:

BLUETOOTH

| Channel | Frequency (MHz) | 99% Bandwidth (KHz) |
|---------|--------------------|------------------------|
| Low | 2402 | 821.3604 |
| Middle | 2441 | 822.0856 |
| High | 2480 | 817.1149 |


802.11b Mode

| Channel | Frequency (MHz) | 99% Bandwidth (MHz) |
|---------|--------------------|------------------------|
| Low | 2412 | 15.5362 |
| Middle | 2437 | 15.5197 |
| High | 2462 | 15.5059 |


802.11g Mode

| Channel | Frequency (MHz) | 99% Bandwidth (MHz) |
|---------|--------------------|------------------------|
| Low | 2412 | 16.4941 |
| Middle | 2437 | 16.4995 |
| High | 2462 | 16.5082 |


99% BANDWIDTH (BLUETOOTH MODE)

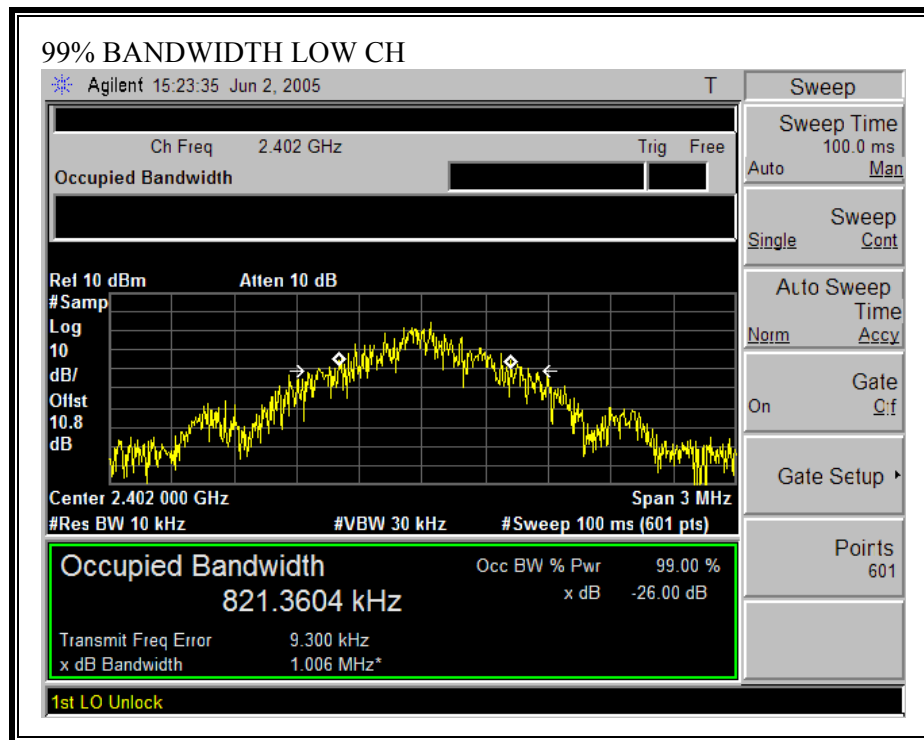





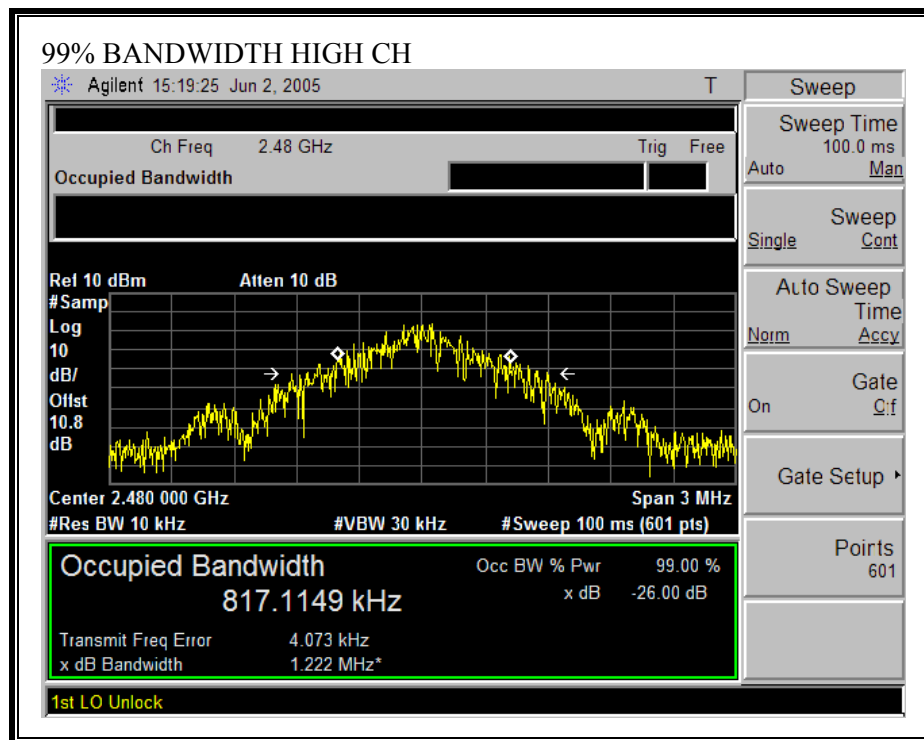


99% BANDWIDTH (802.11b MODE)

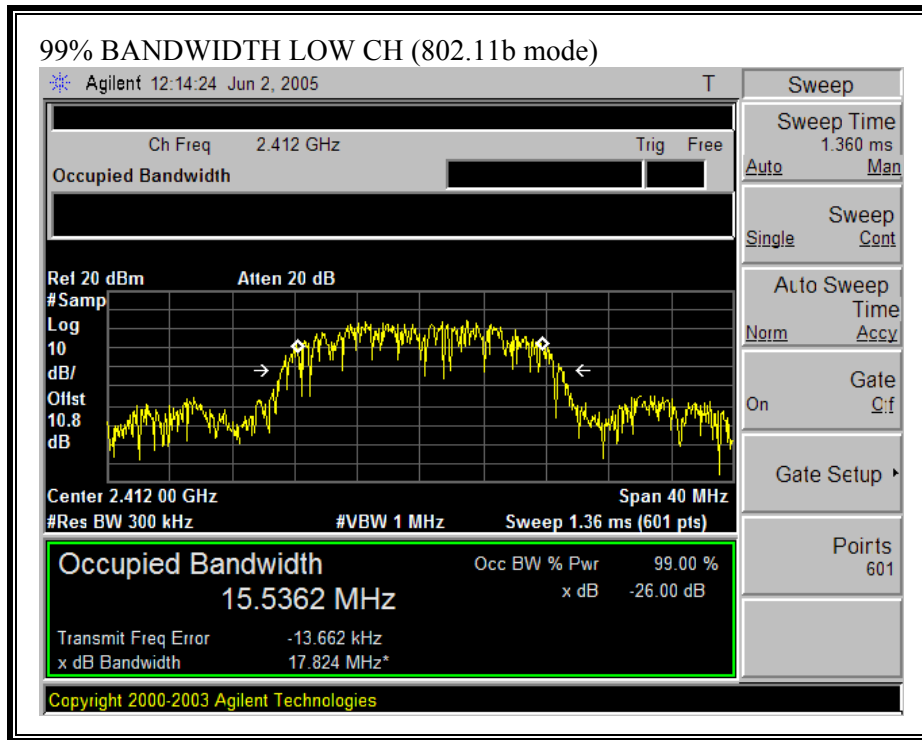


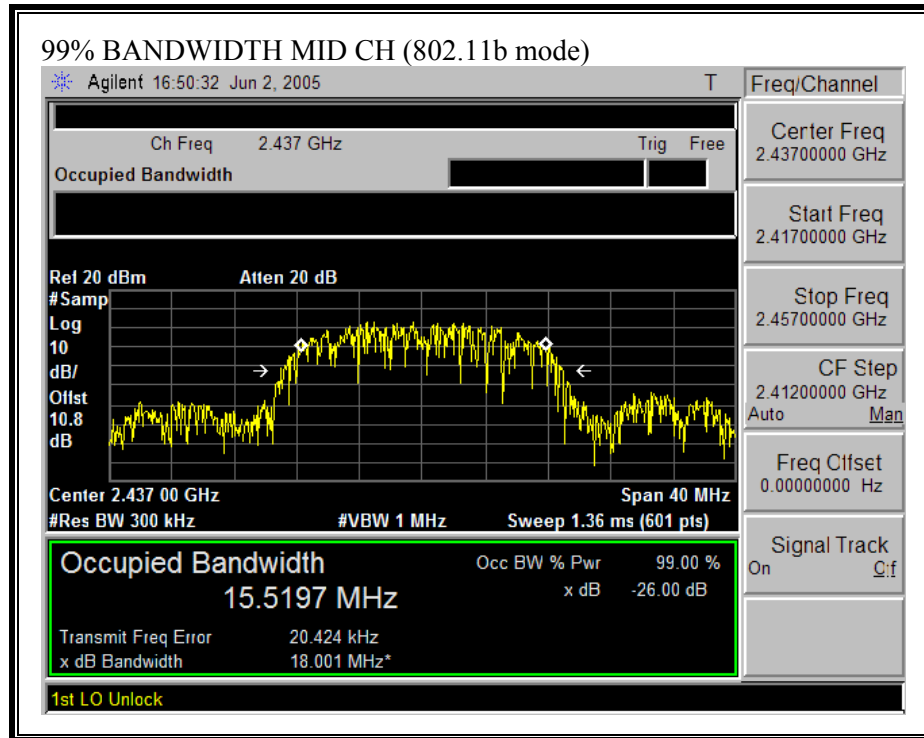


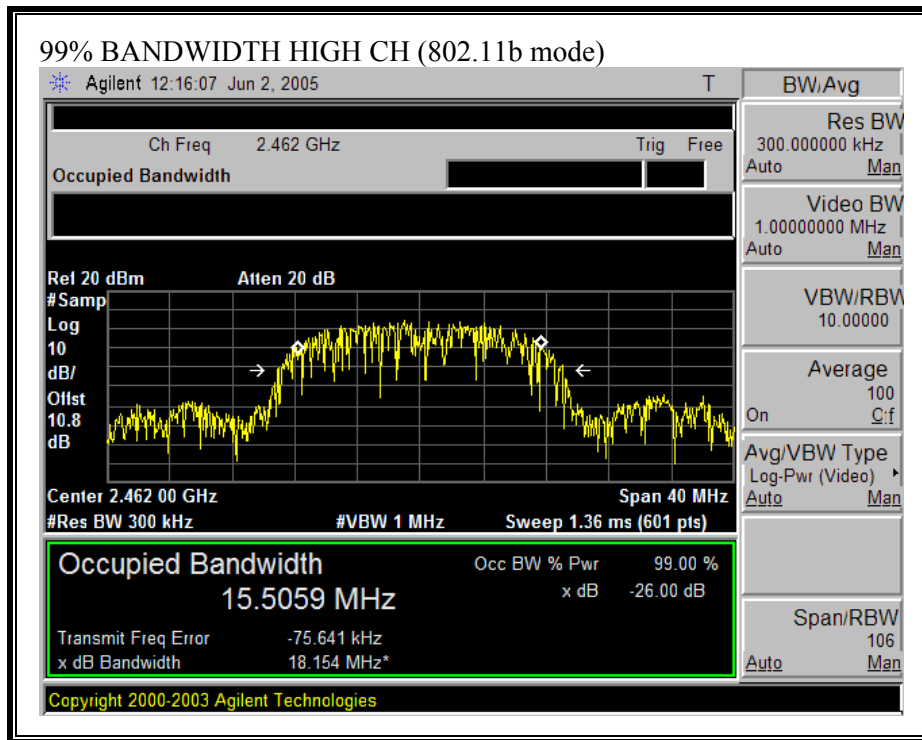

99% BANDWIDTH (802.11g MODE)

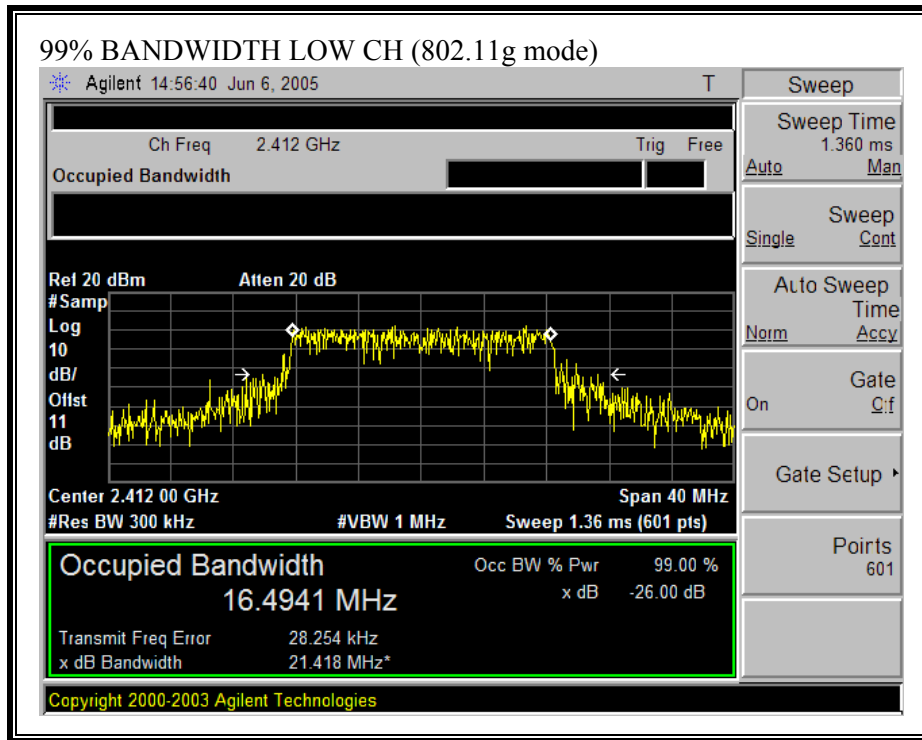

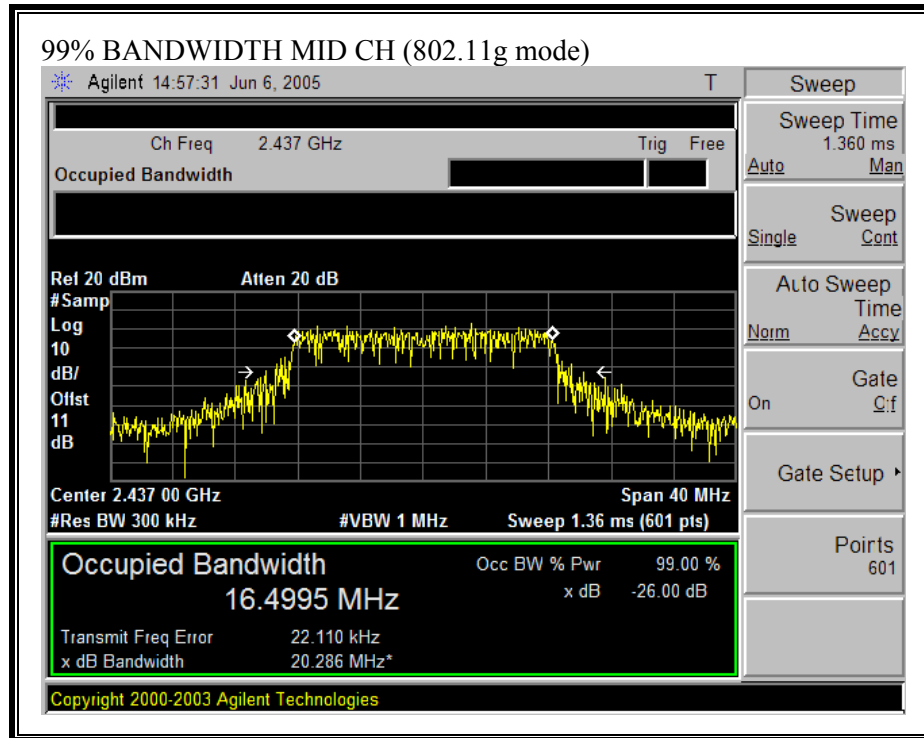

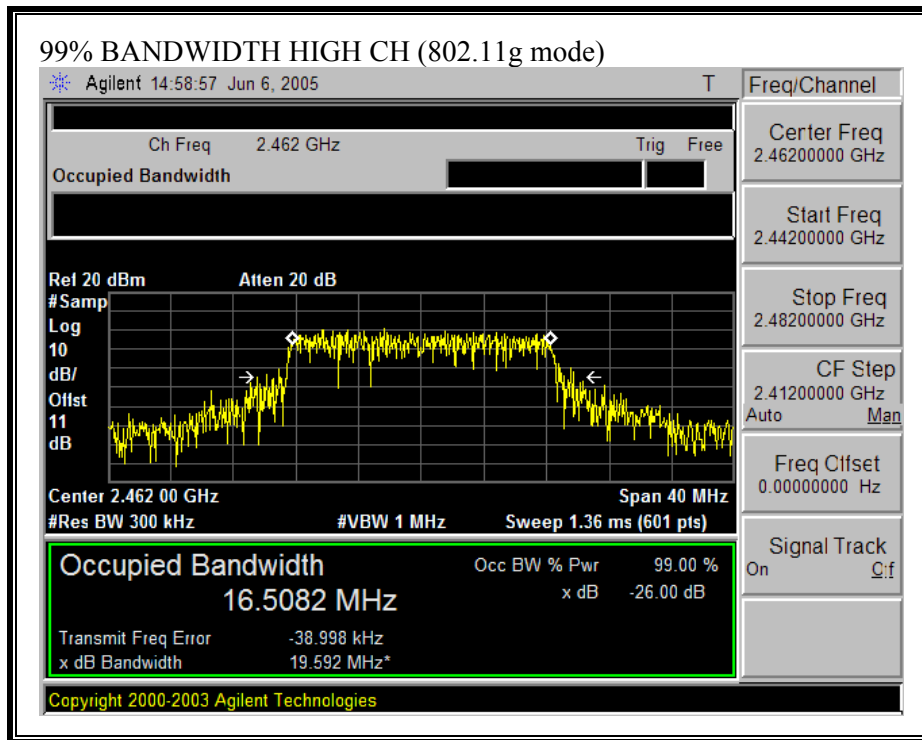

8.1.3. PEAK OUTPUT POWER

PEAK POWER LIMIT

§15.247 (b) The maximum peak output power of the intentional radiator shall not exceed the following:

§15.247 (b) (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz , and 5725-5850 MHz bands: 1 watt.

§15.247 (b) (4) Except as shown in paragraphs (b)(4) (i), (ii) and (iii) of this section, if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

§15.247 (b) (4) (i) Systems operating in the 2400–2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer and the analyzer's internal channel power integration function is used to integrate the power over a bandwidth greater than or equal to the 99% bandwidth.

RESULTS

The maximum antenna gain is -1 dBi of Bluetooth, and 1 dBi of WLAN for other than fixed, point-to-point operations, therefore the limit is 30 dBm.

No non-compliance noted:

BT Mode

| Channel | Frequency (MHz) | Peak Power (dBm) | Limit (dBm) | Margin (dB) |
|---------|-----------------|------------------|-------------|-------------|
| Low | 2402 | 1.97 | 30 | -28.03 |
| Middle | 2441 | 2.75 | 30 | -27.25 |
| High | 2480 | 2.84 | 30 | -27.16 |


802.11b Mode


| Channel | Frequency (MHz) | Peak Power (dBm) | Limit (dBm) | Margin (dB) |
|---------|-----------------|------------------|-------------|-------------|
| Low | 2412 | 16.12 | 30 | -13.88 |
| Middle | 2437 | 16.27 | 30 | -13.73 |
| High | 2462 | 16.11 | 30 | -13.89 |


802.11g Mode

| Channel | Frequency (MHz) | Peak Power (dBm) | Limit (dBm) | Margin (dB) |
|---------|-----------------|------------------|-------------|-------------|
| Low | 2412 | 17.52 | 30 | -12.48 |
| Middle | 2437 | 17.56 | 30 | -12.44 |
| High | 2462 | 17.31 | 30 | -12.69 |


OUTPUT POWER (BLUETOOTH MODE)

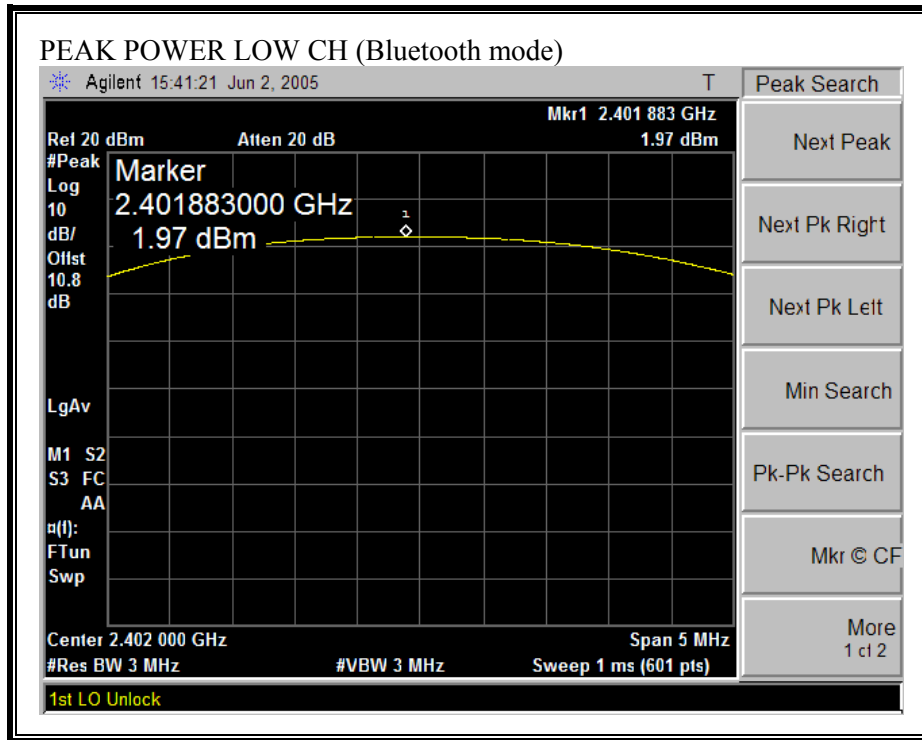


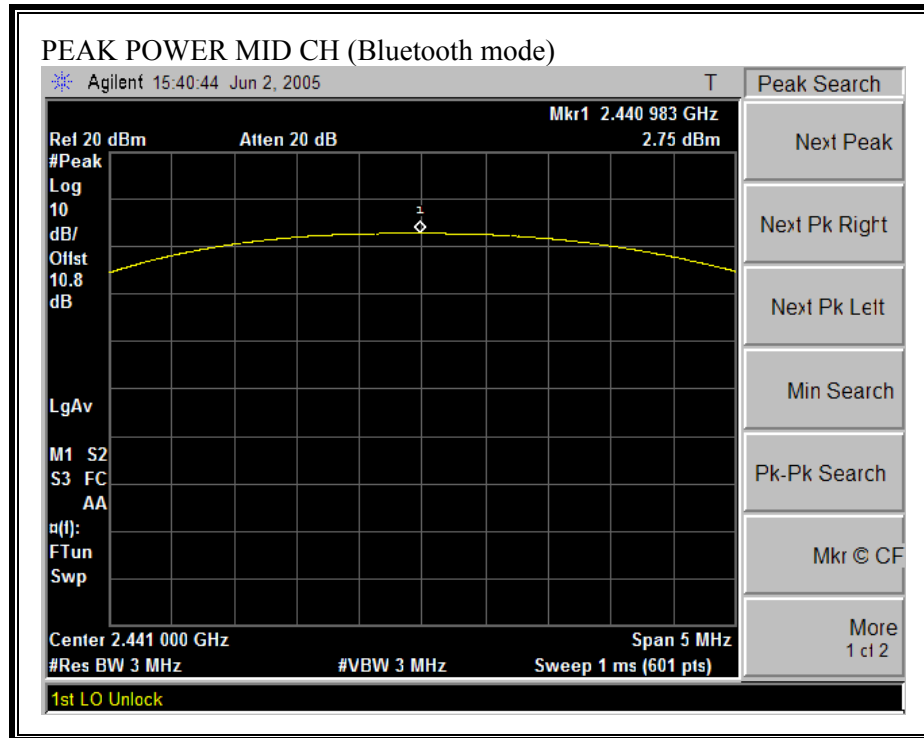


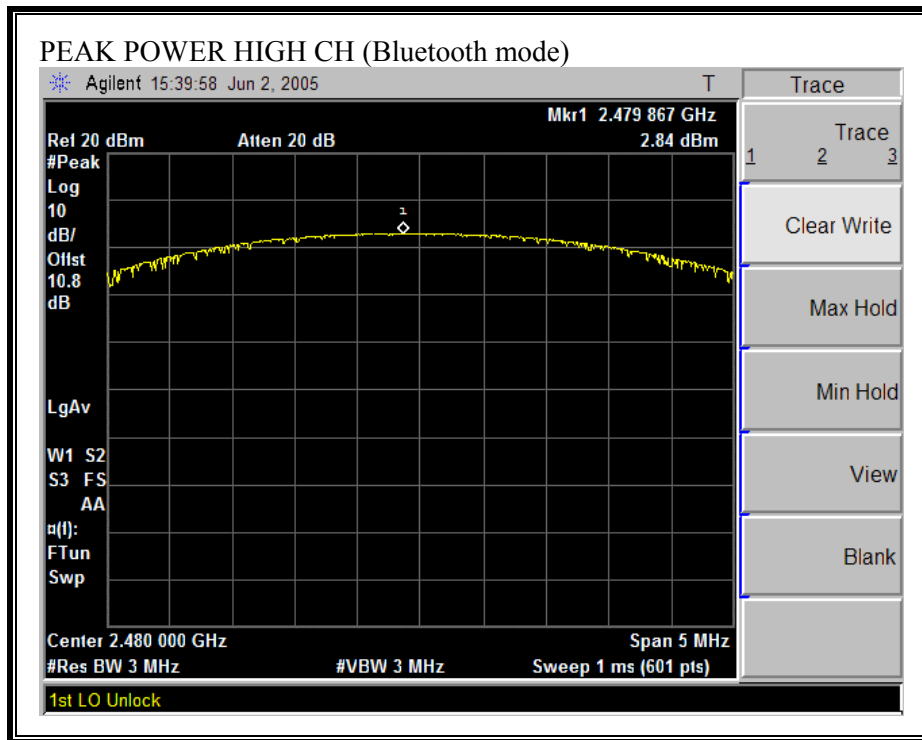


OUTPUT POWER (802.11b MODE)

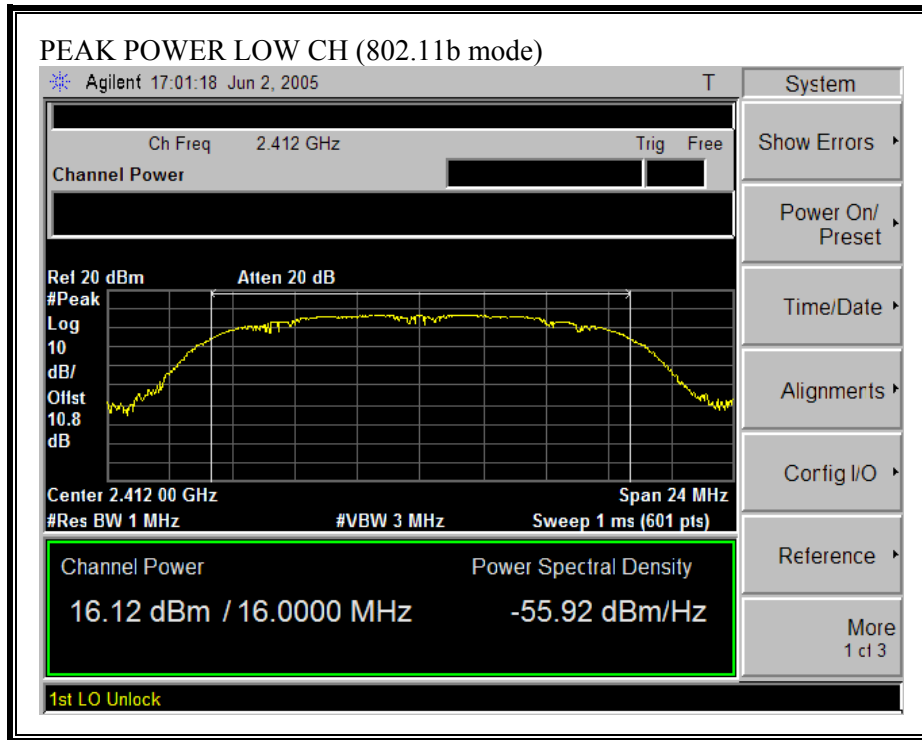


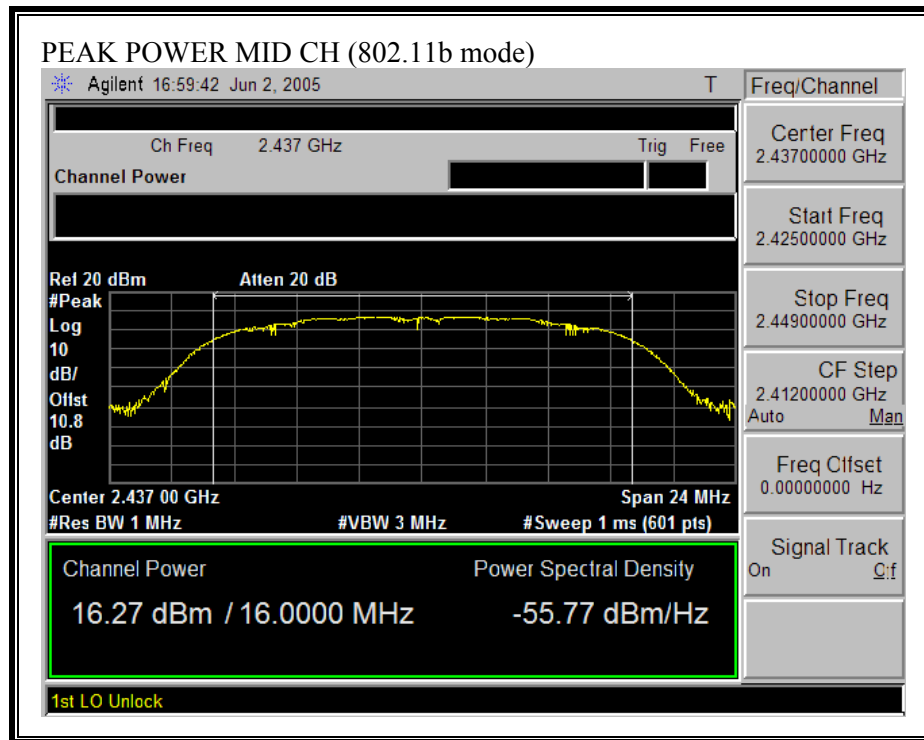


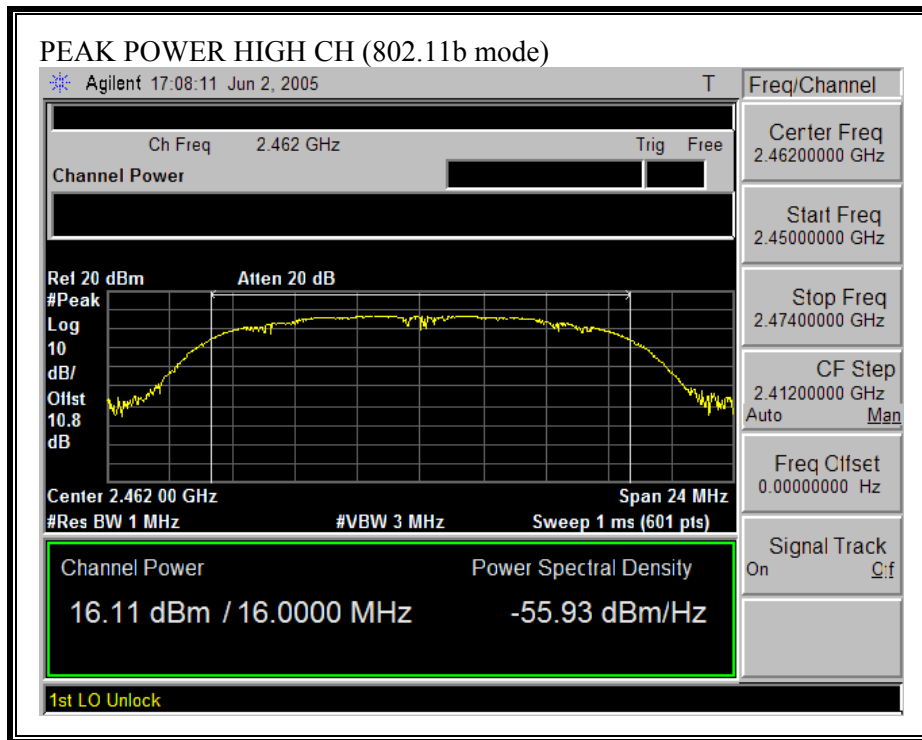

OUTPUT POWER (802.11g MODE)

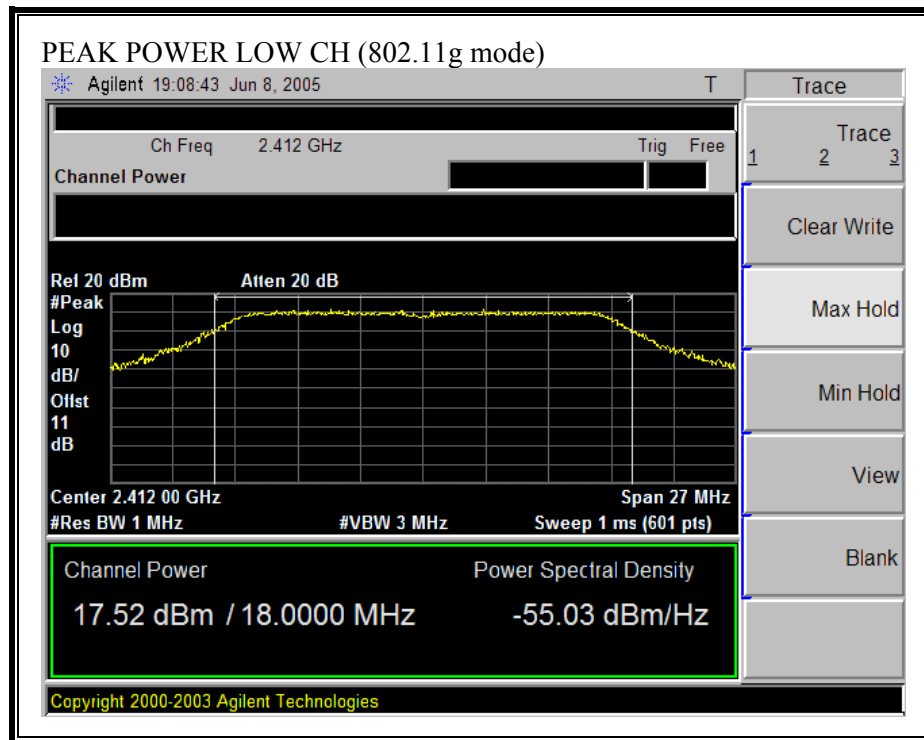

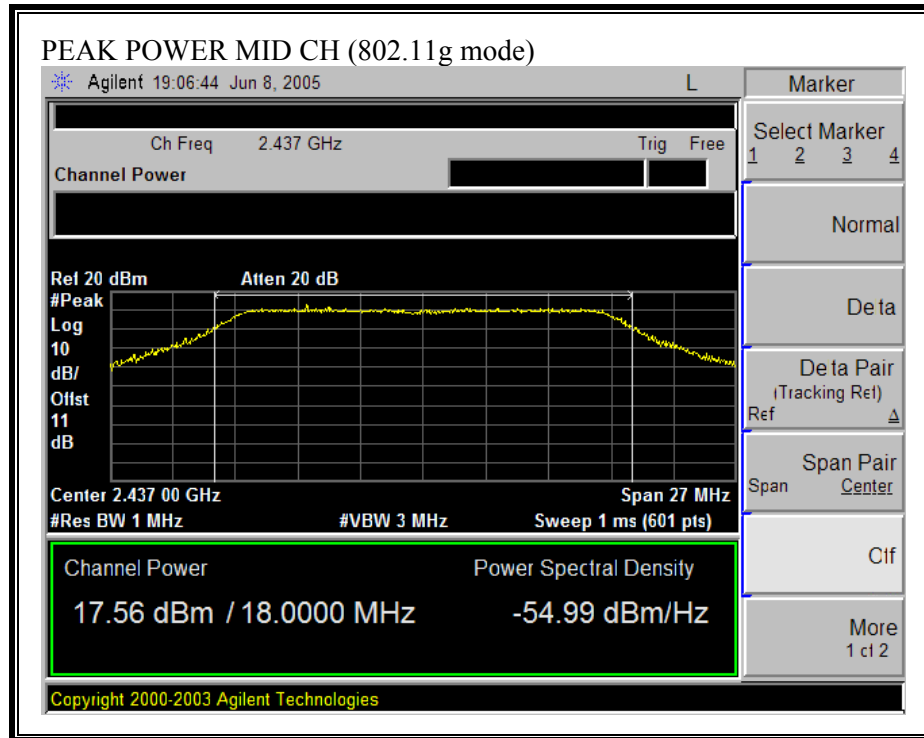

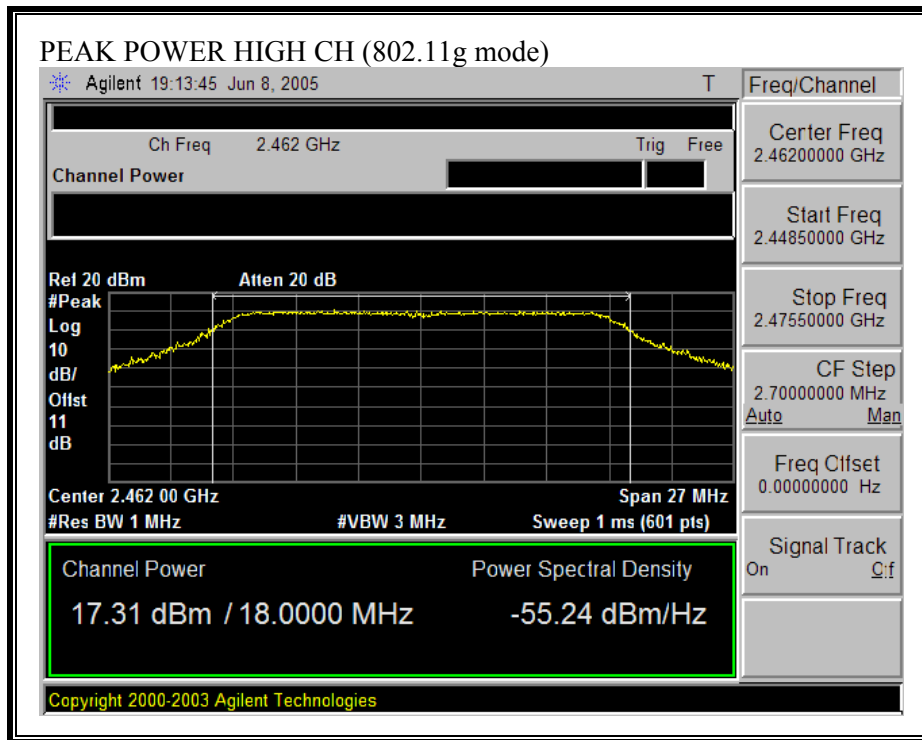

8.1.4. AVERAGE POWER

AVERAGE POWER LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

No non-compliance noted:

The cable assembly insertion loss of 11 dB (including 10 dB pad and 0.75dB cable) was entered as an offset in the power meter to allow for direct reading of power.

BLUETOOTH

| Channel | Frequency (MHz) | Power (dBm) |
|---------|--------------------|----------------|
| Low | 2402 | 0.41 |
| Middle | 2441 | 1.15 |
| High | 2480 | 1.36 |

802.11b Mode

| Channel | Frequency (MHz) | Power (dBm) |
|---------|--------------------|----------------|
| Low | 2412 | 14.45 |
| Middle | 2437 | 14.48 |
| High | 2462 | 14.40 |

802.11g Mode

| Channel | Frequency (MHz) | Power (dBm) |
|---------|--------------------|----------------|
| Low | 2412 | 14.19 |
| Middle | 2437 | 13.50 |
| High | 2462 | 13.40 |

8.1.5. PEAK POWER SPECTRAL DENSITY

LIMIT

§15.247 (d) For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer, the maximum level in a 3 kHz bandwidth is measured with the spectrum analyzer using RBW = 3 kHz and VBW > 3 kHz, sweep time = span / 3 kHz, and video averaging is turned off. The PPSD is the highest level found across the emission in any 3 kHz band.

RESULTS

No non-compliance noted:

Bluetooth Mode

| Channel | Frequency (MHz) | PPSD (dBm) | Limit (dBm) | Margin (dB) |
|---------|-----------------|------------|-------------|-------------|
| Low | 2402 | -9.06 | 8 | -17.06 |
| Middle | 2441 | -8.47 | 8 | -16.47 |
| High | 2480 | -8.26 | 8 | -16.26 |


802.11b Mode


| Channel | Frequency (MHz) | PPSD (dBm) | Limit (dBm) | Margin (dB) |
|---------|-----------------|------------|-------------|-------------|
| Low | 2412 | -9.56 | 8 | -17.56 |
| Middle | 2437 | -9.06 | 8 | -17.06 |
| High | 2462 | -9.03 | 8 | -17.03 |


802.11g Mode

| Channel | Frequency (MHz) | PPSD (dBm) | Limit (dBm) | Margin (dB) |
|---------|-----------------|------------|-------------|-------------|
| Low | 2412 | -10.62 | 8 | -18.62 |
| Middle | 2437 | -11.40 | 8 | -19.40 |
| High | 2462 | -12.31 | 8 | -20.31 |


PEAK POWER SPECTRAL DENSITY (BLUETOOTH MODE)

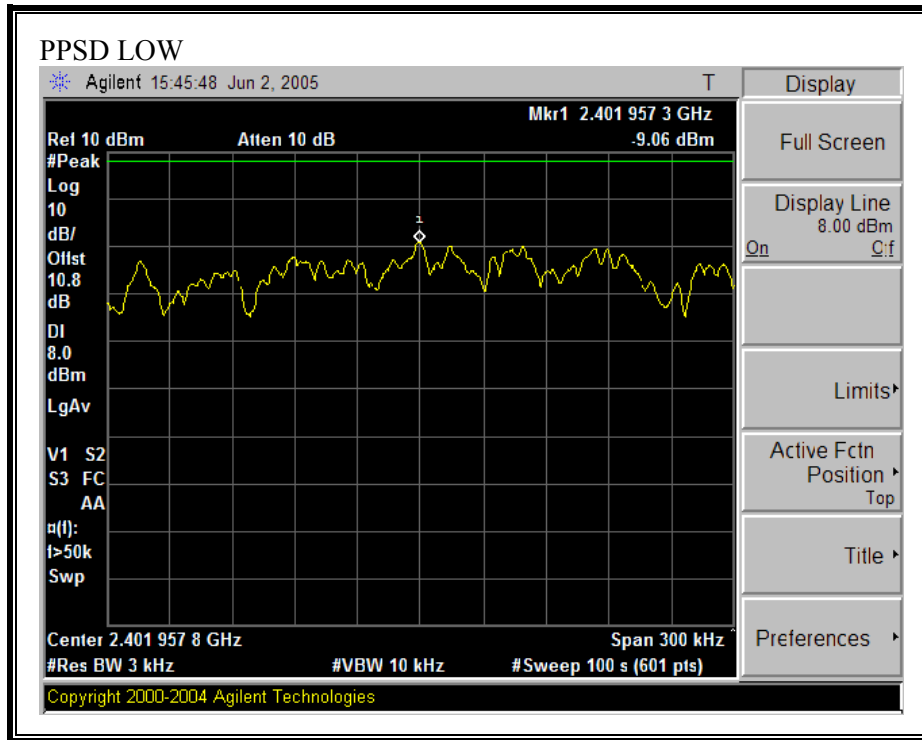


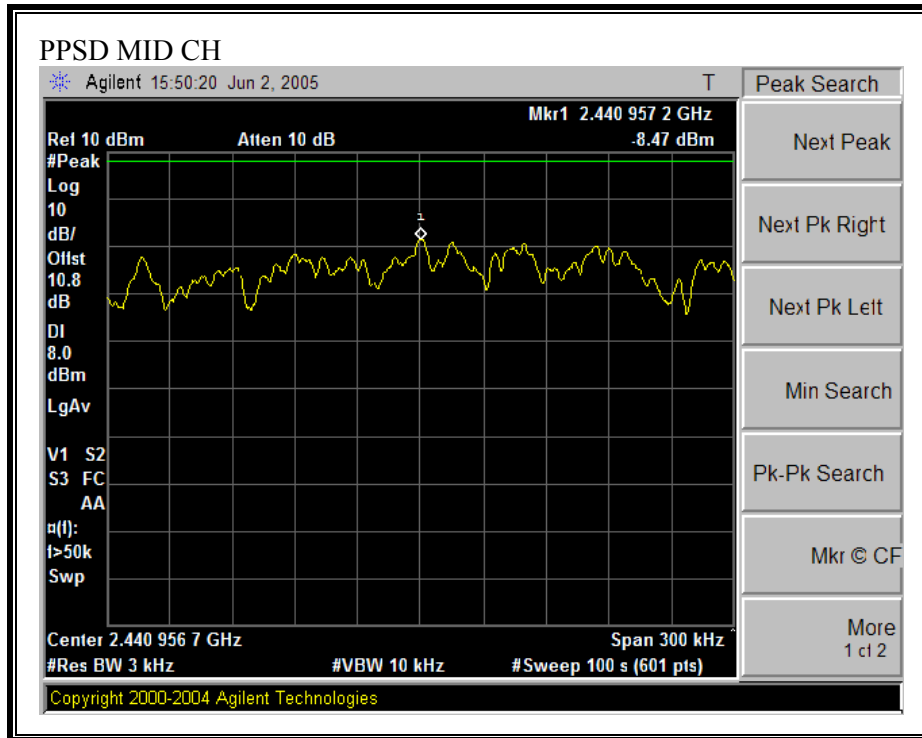


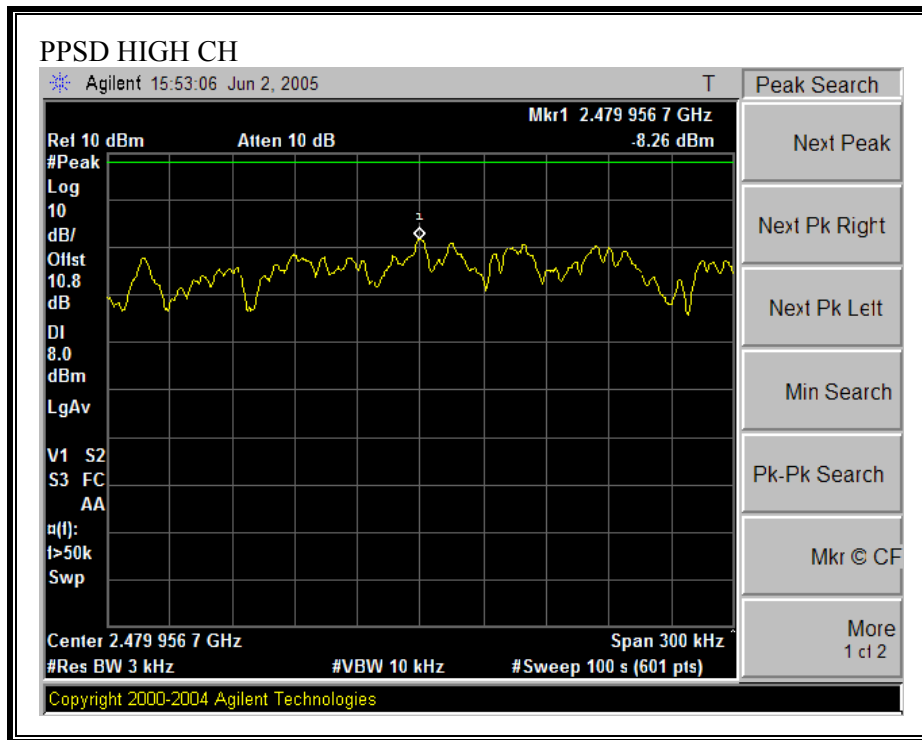


PEAK POWER SPECTRAL DENSITY (802.11b MODE)

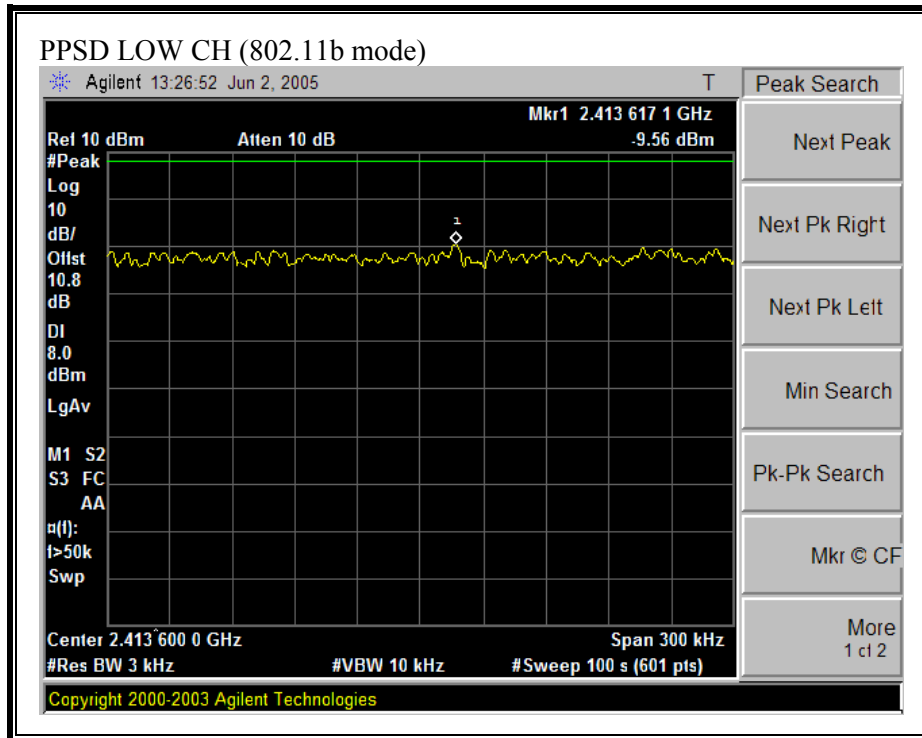


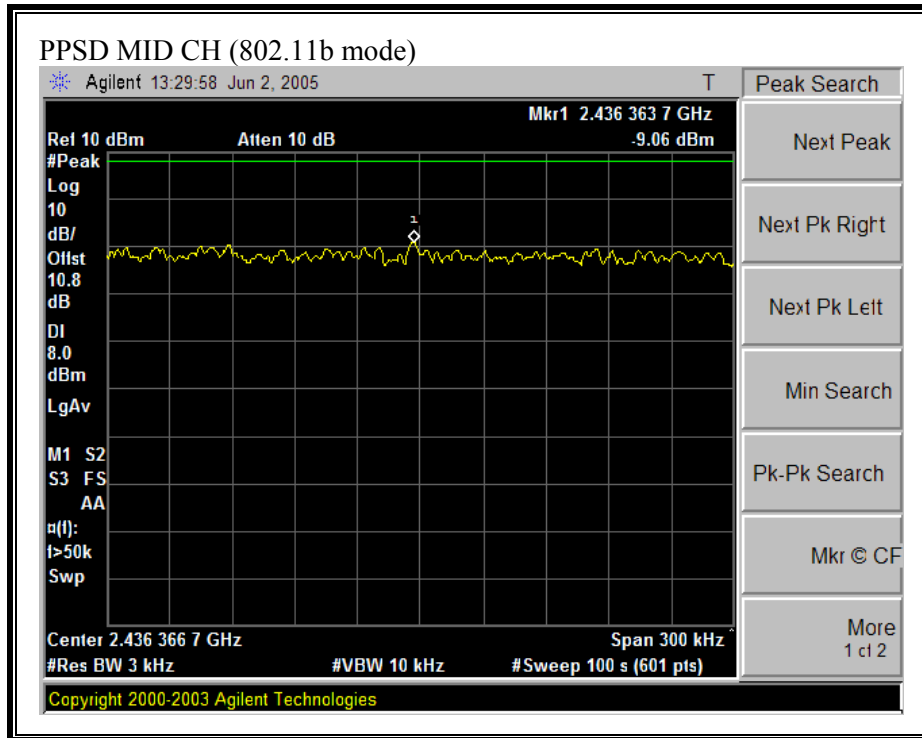


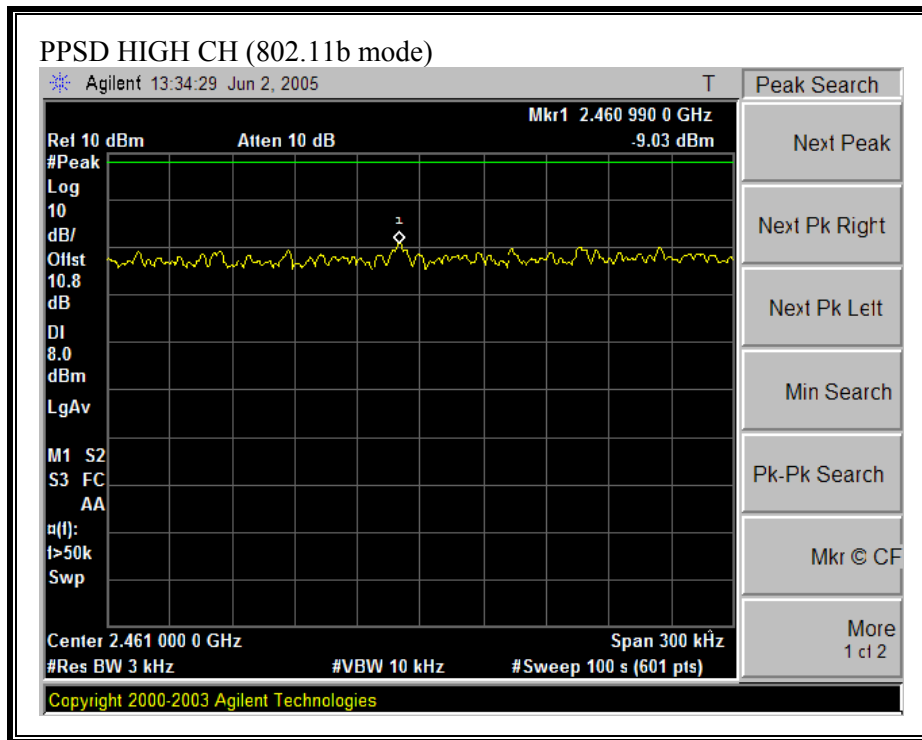

PEAK POWER SPECTRAL DENSITY (802.11g MODE)

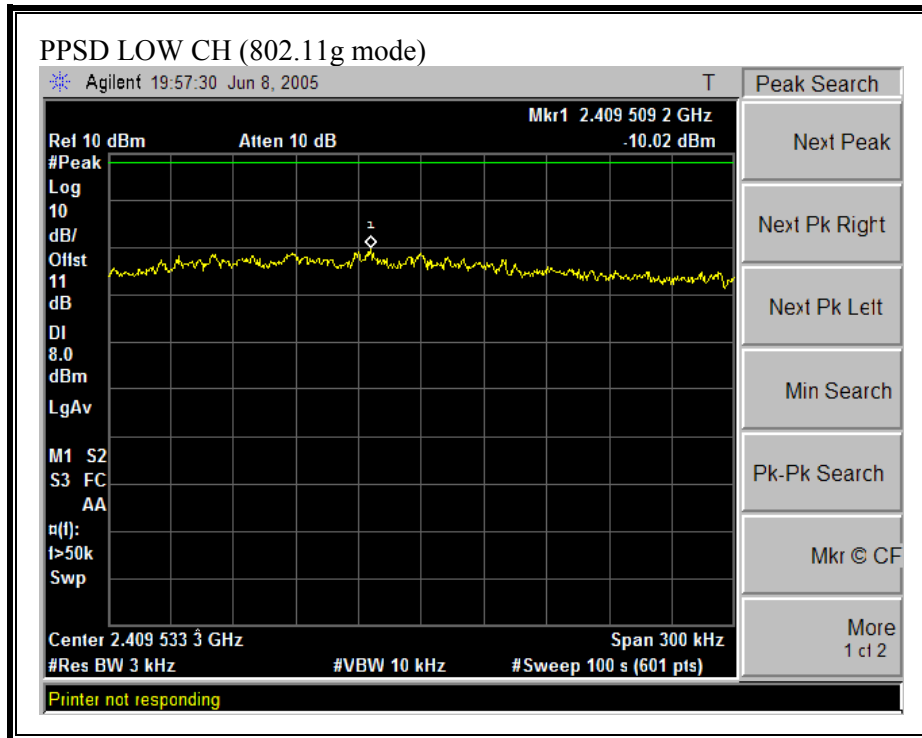

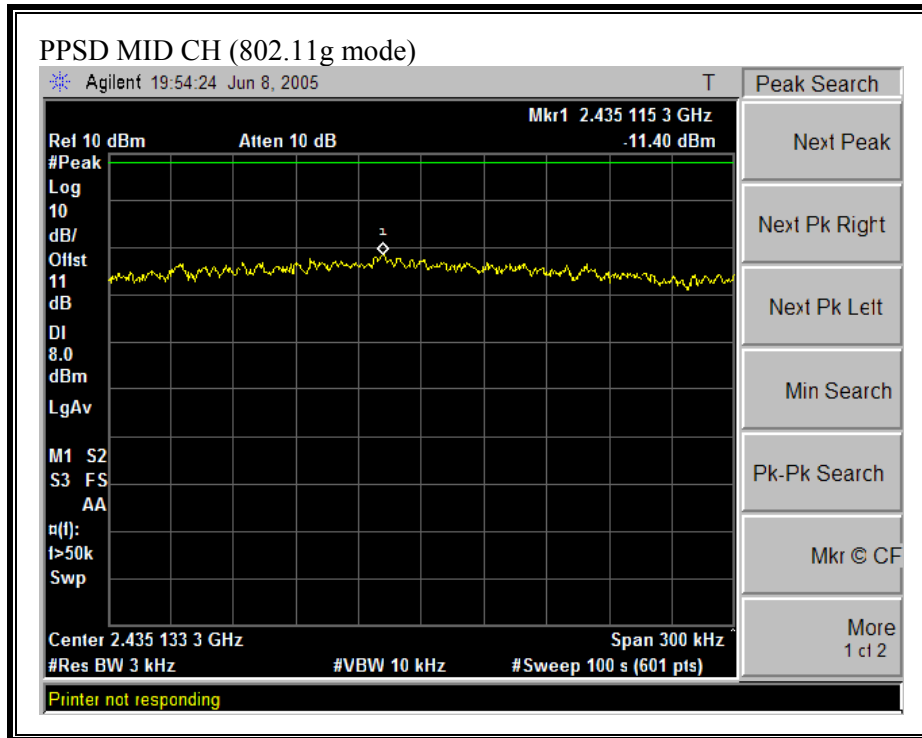

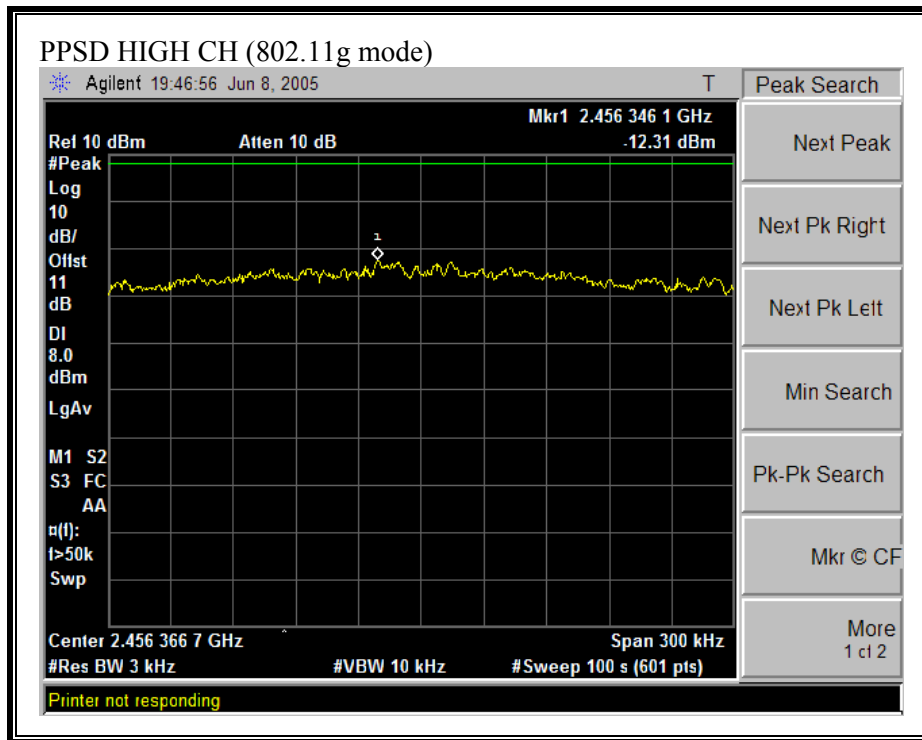

8.1.6. CONDUCTED SPURIOUS EMISSIONS

LIMITS

§15.247 (c) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

RESULTS


No non-compliance noted:


SPURIOUS EMISSIONS, LOW CHANNEL (BLUETOOTH MODE)

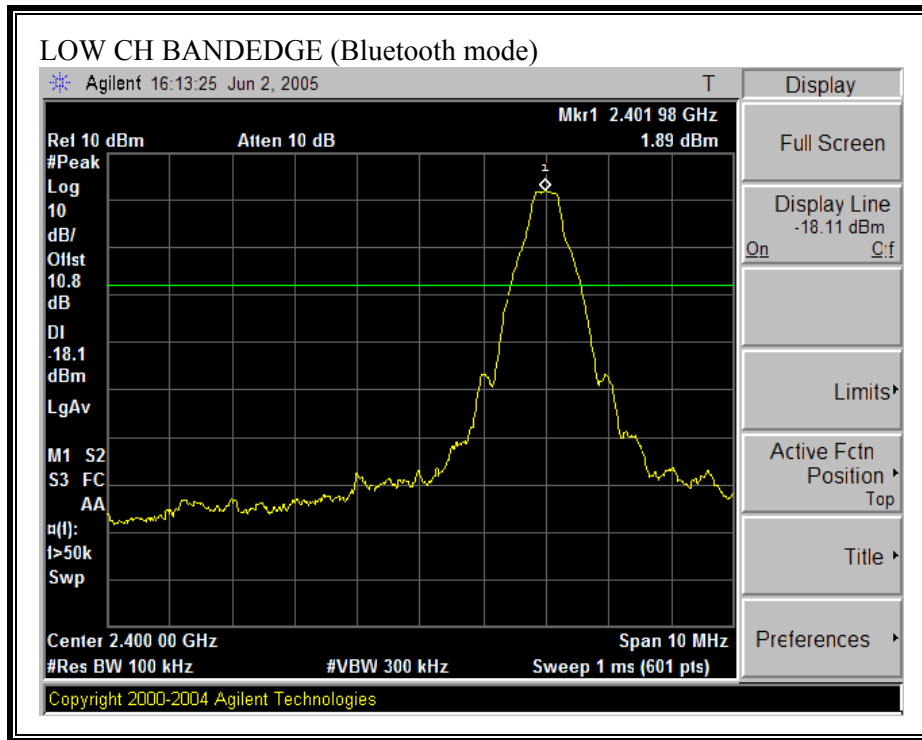

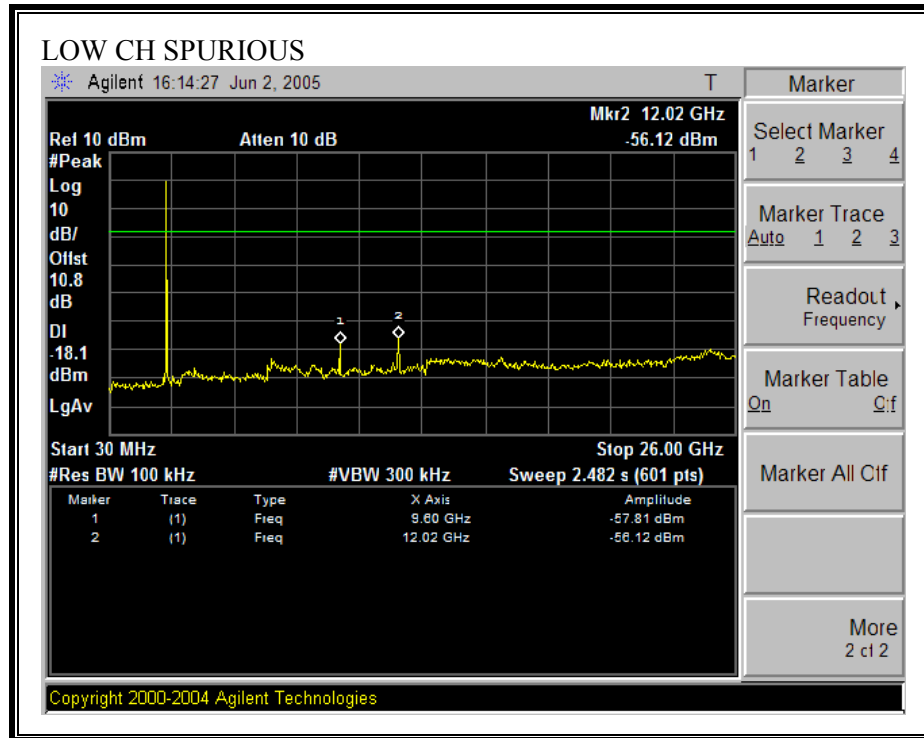



SPURIOUS EMISSIONS, MID CHANNEL (BLUETOOTH MODE)

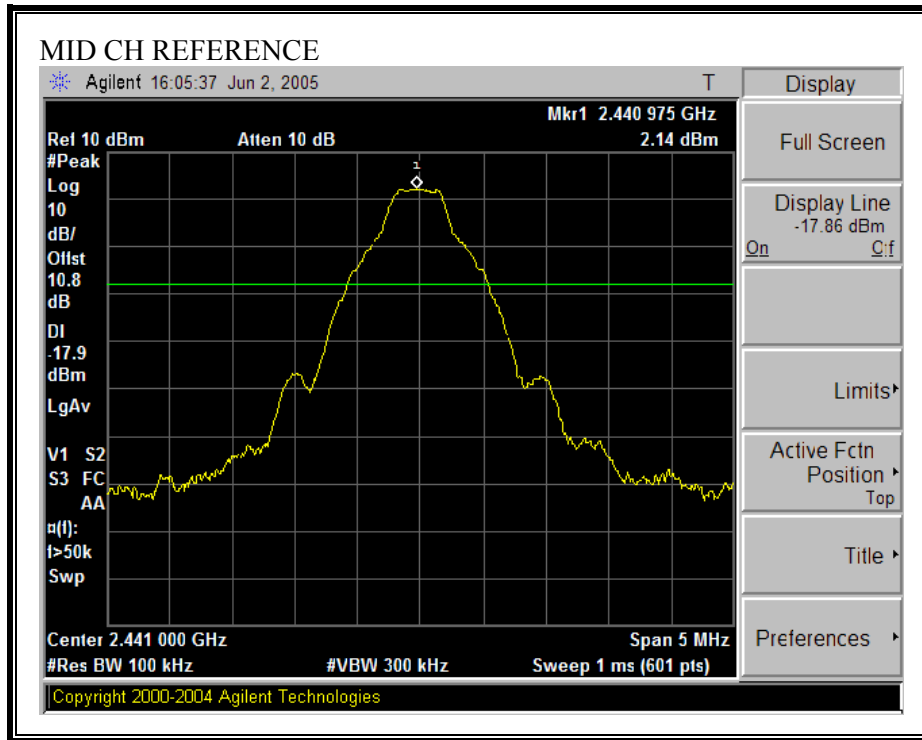

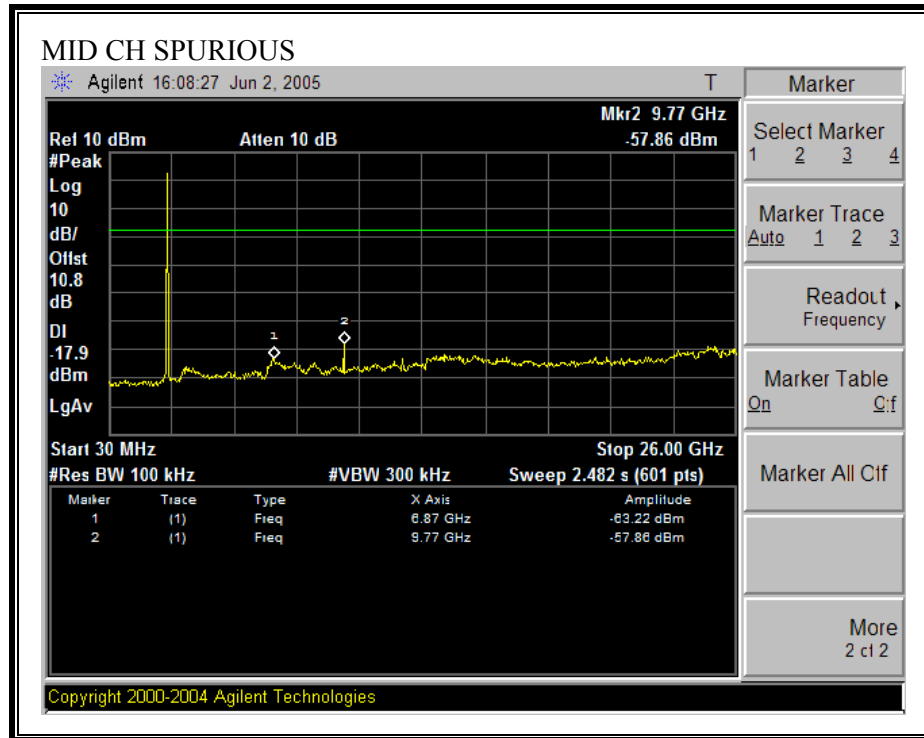



SPURIOUS EMISSIONS, HIGH CHANNEL (BLUETOOTH MODE)

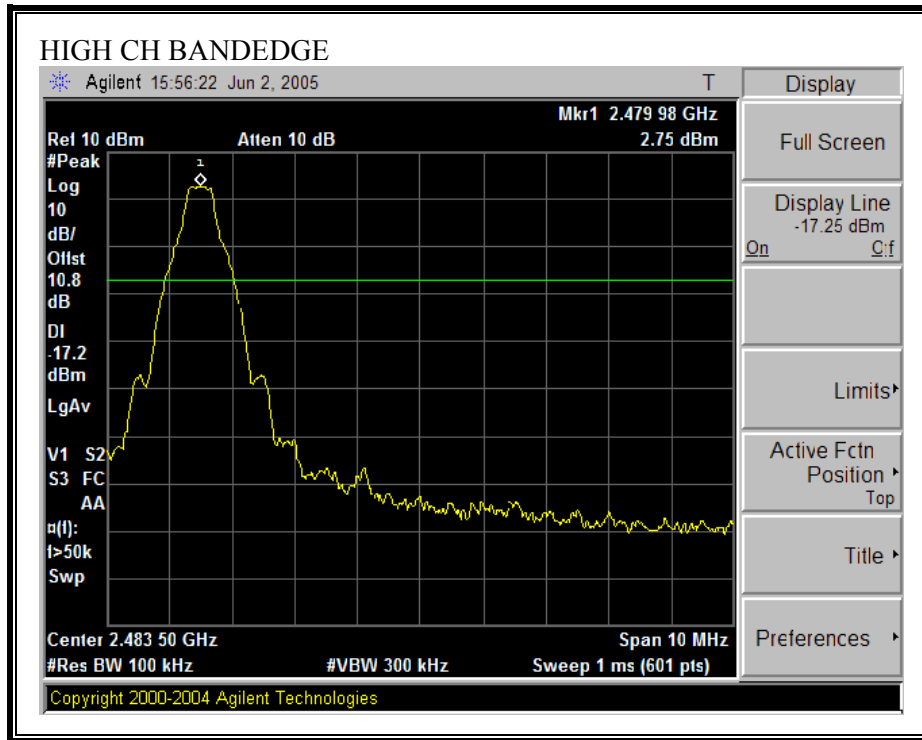

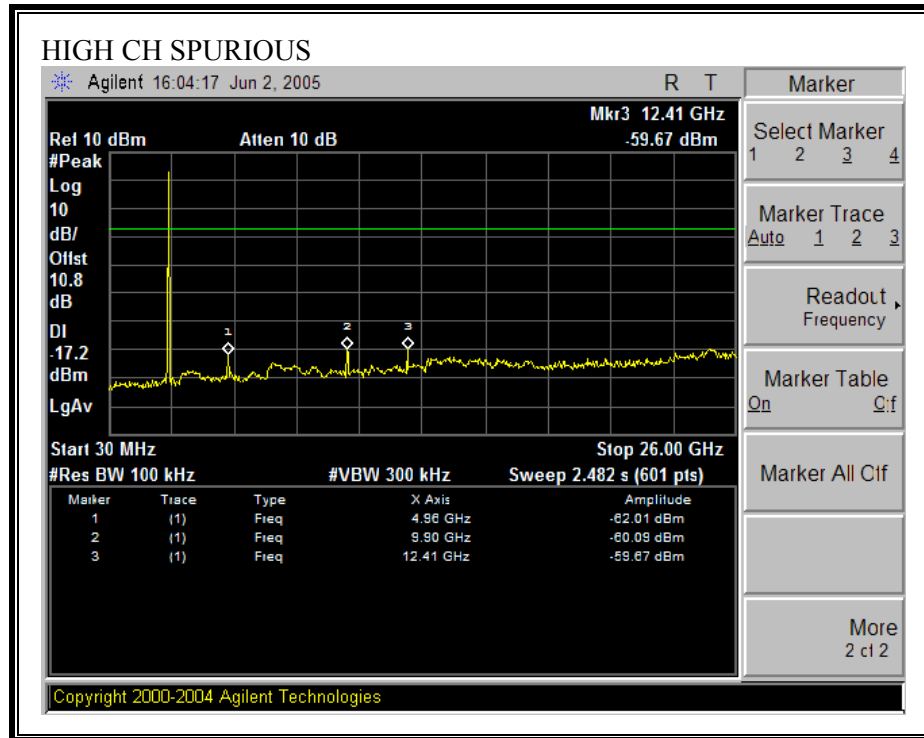



SPURIOUS EMISSIONS, LOW CHANNEL (802.11b MODE)

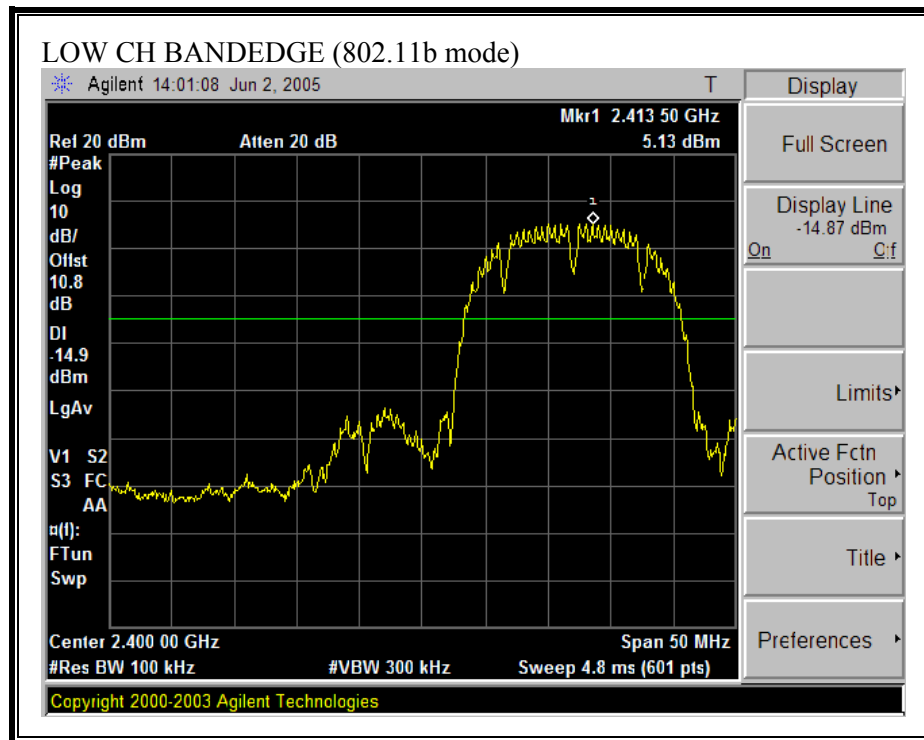

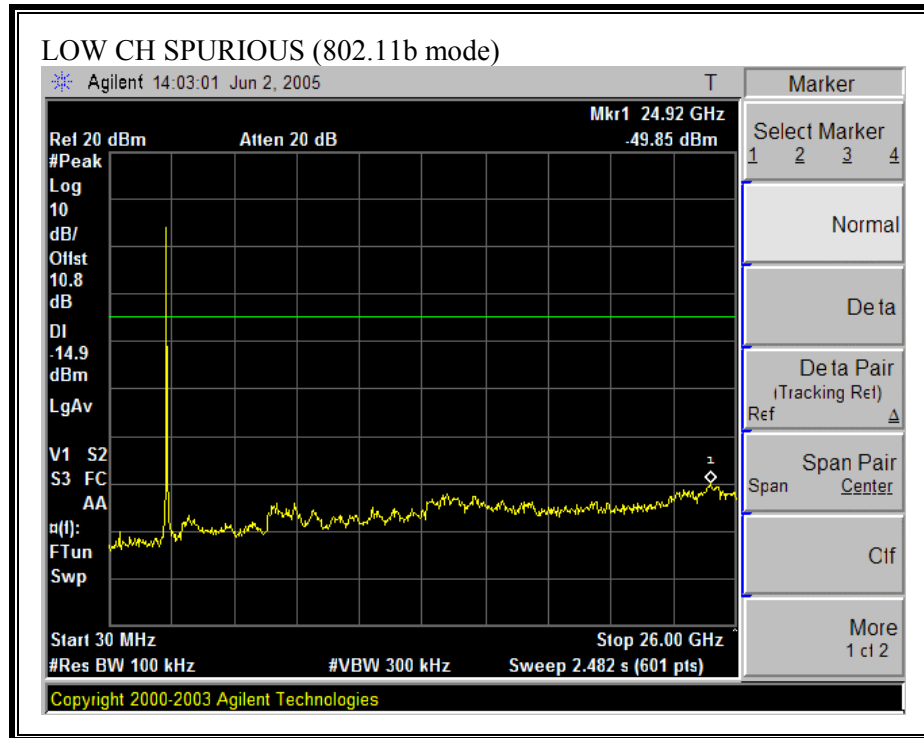



SPURIOUS EMISSIONS, MID CHANNEL (802.11b MODE)

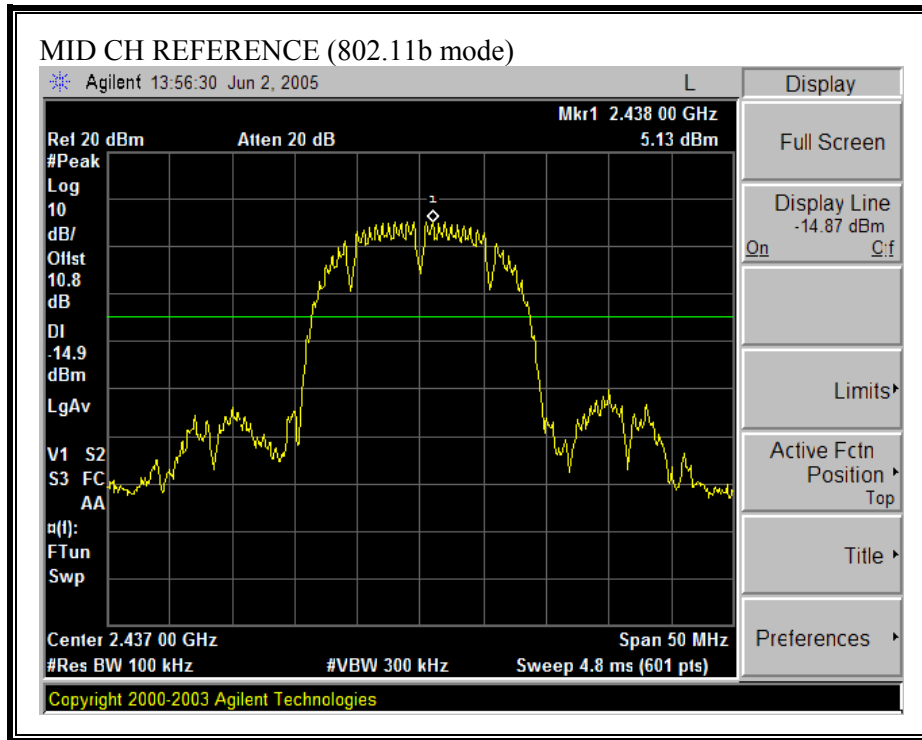

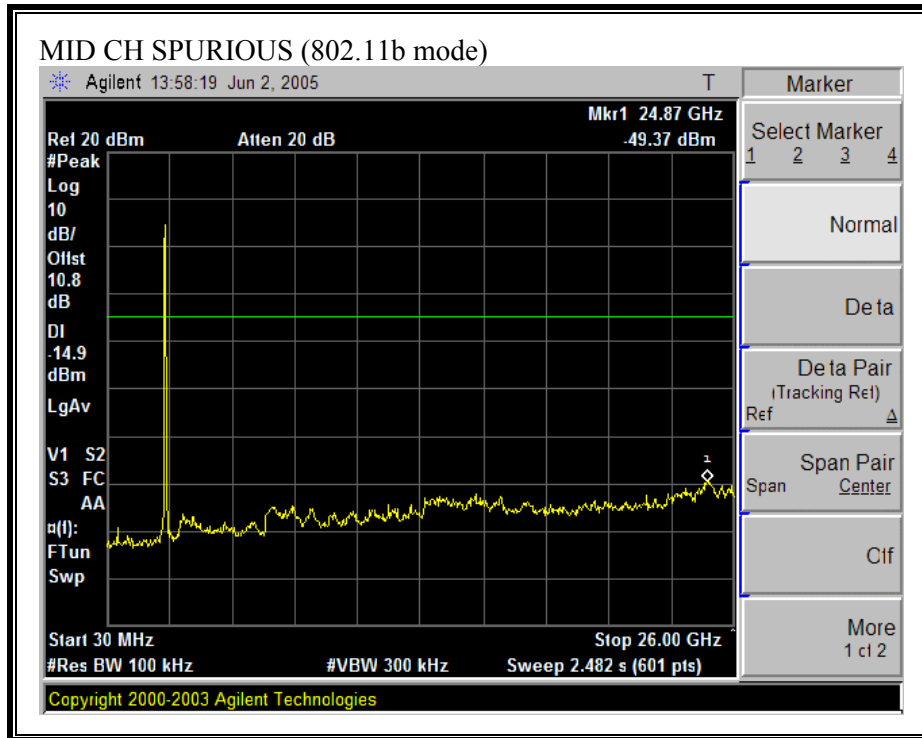



SPURIOUS EMISSIONS, HIGH CHANNEL (802.11b MODE)

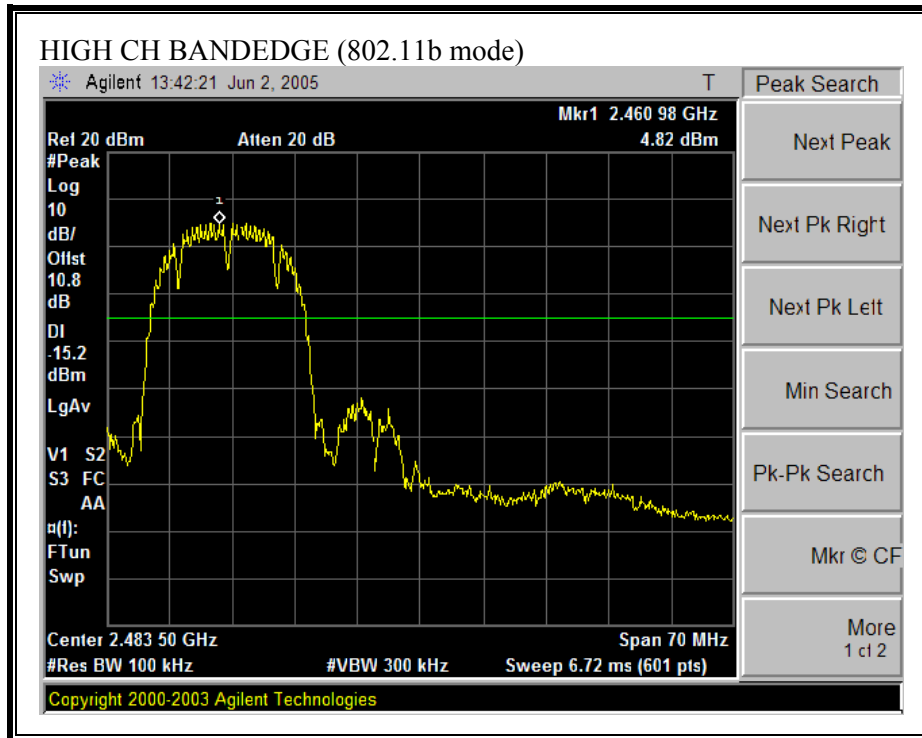

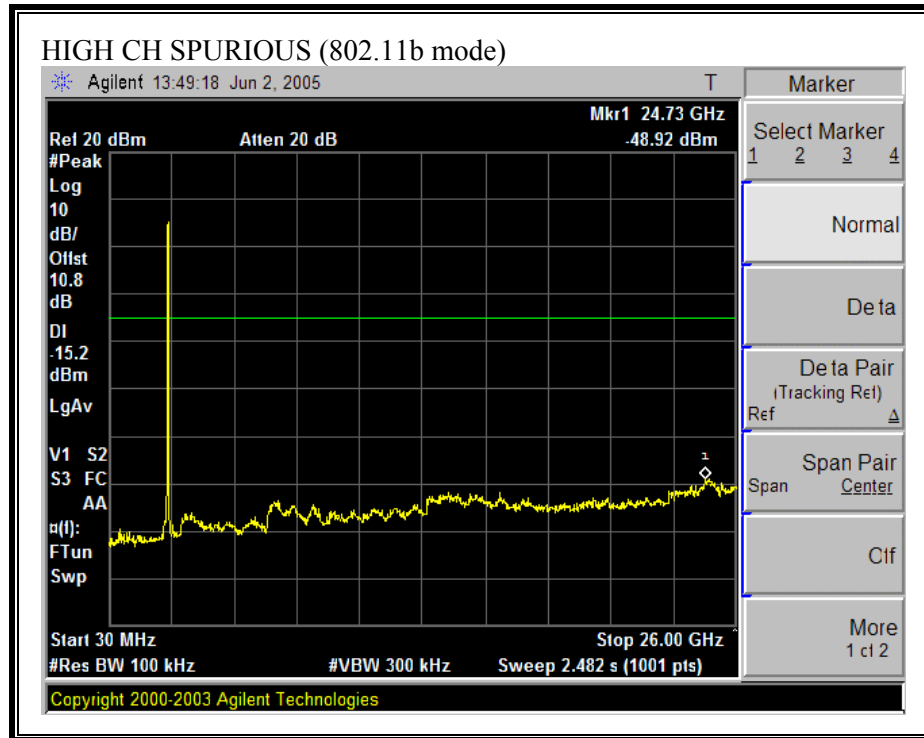



SPURIOUS EMISSIONS, LOW CHANNEL (802.11g MODE)

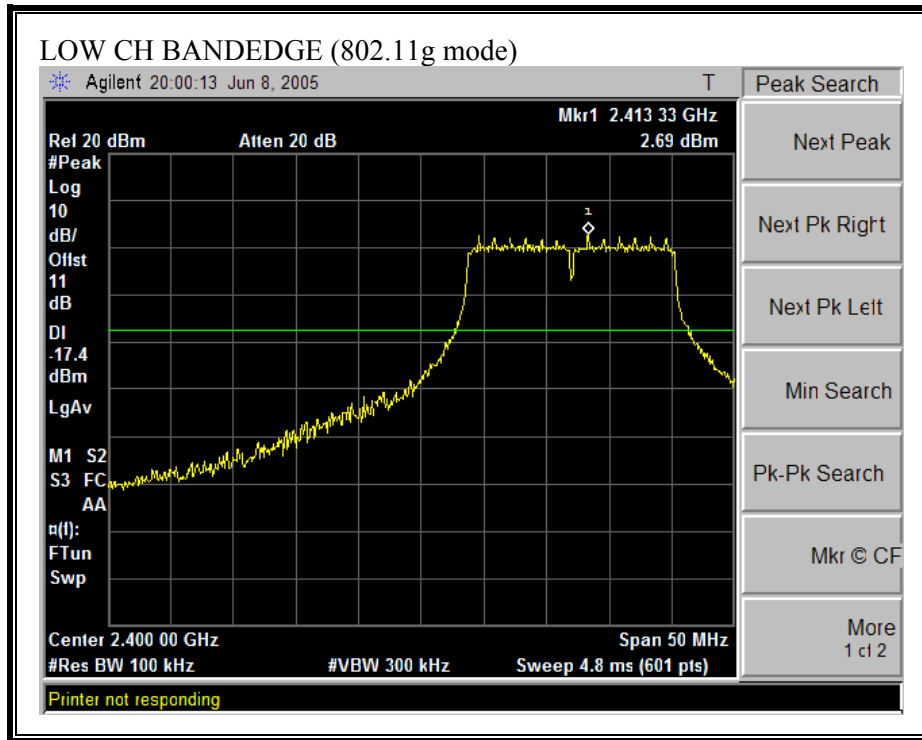

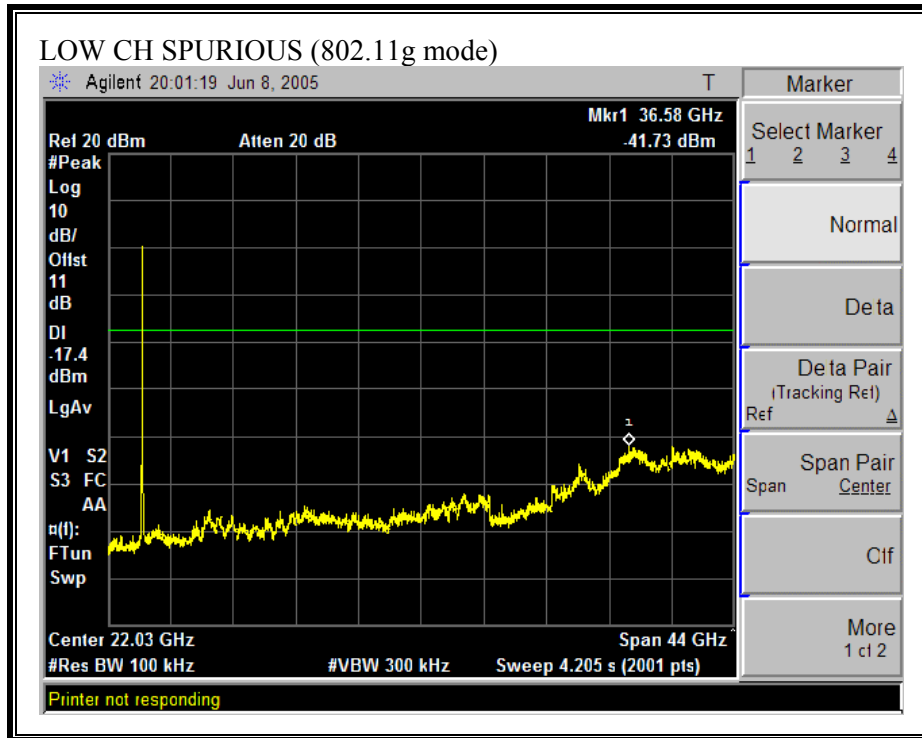



SPURIOUS EMISSIONS, MID CHANNEL (802.11g MODE)

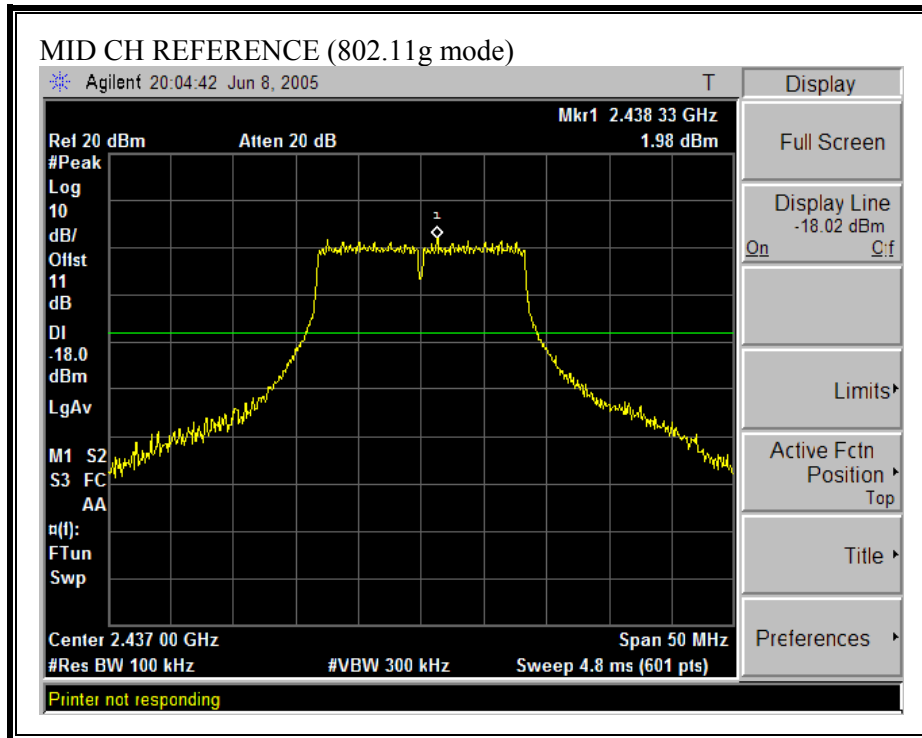

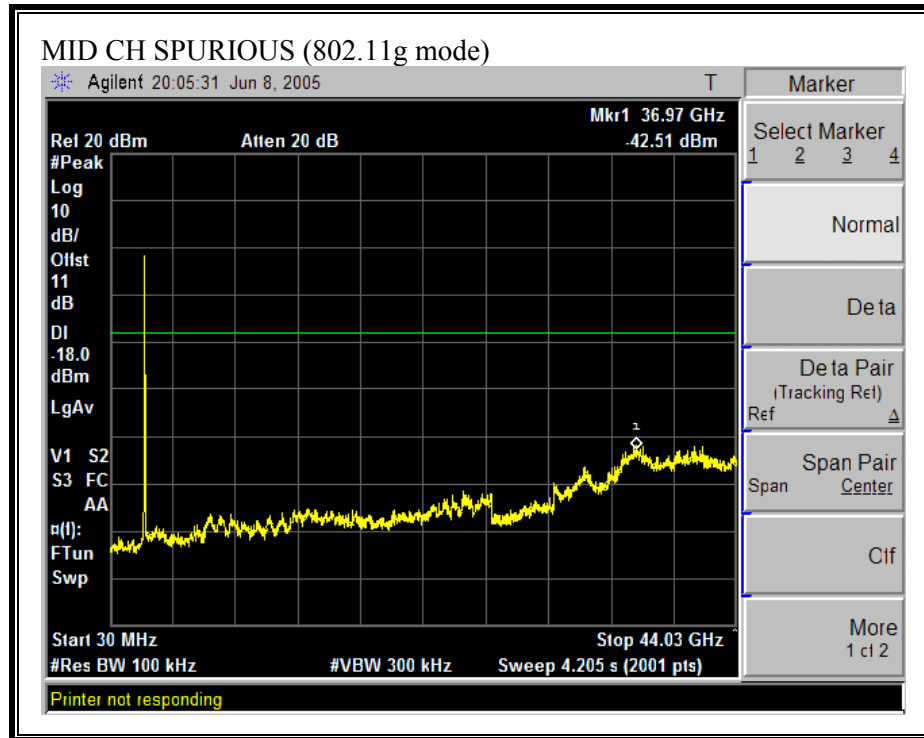

SPURIOUS EMISSIONS, HIGH CHANNEL (802.11g MODE)

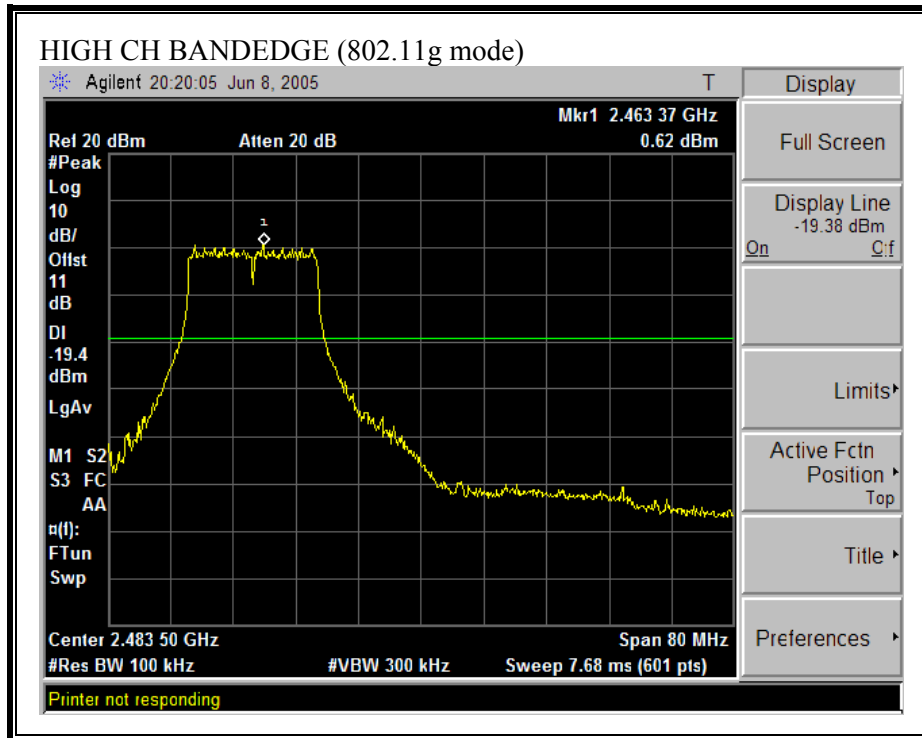

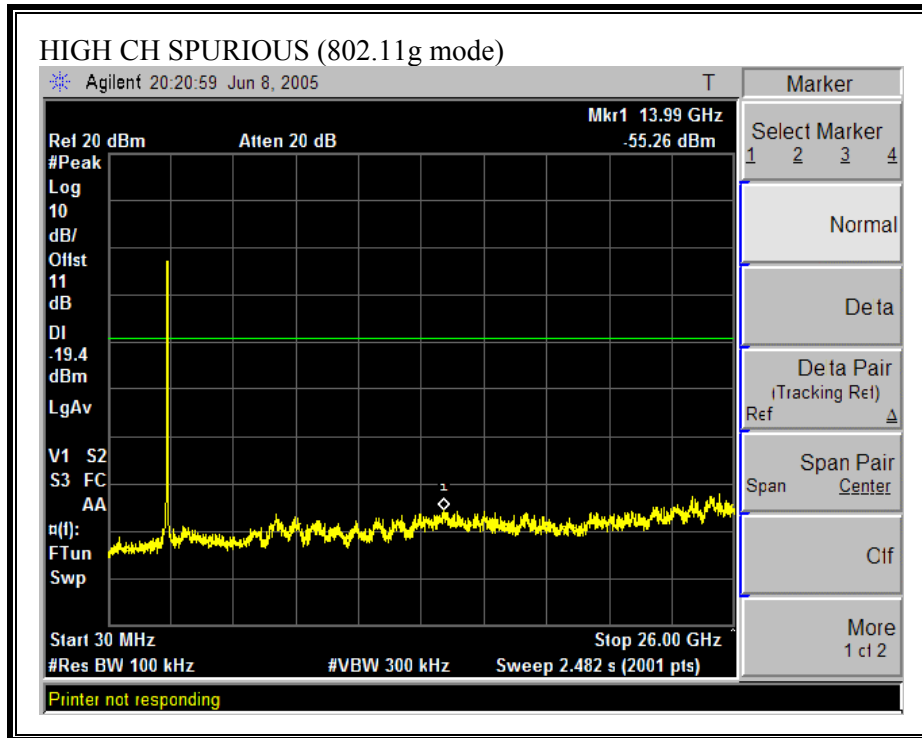

8.2. RADIATED EMISSIONS

8.2.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS ABOVE 1GHz

LIMITS

§15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

| MHz | MHz | MHz | GHz |
|----------------------------|-----------------------|-----------------|------------------|
| 0.090 - 0.110 | 16.42 - 16.423 | 399.9 - 410 | 4.5 - 5.15 |
| ¹ 0.495 - 0.505 | 16.69475 - 16.69525 | 608 - 614 | 5.35 - 5.46 |
| 2.1735 - 2.1905 | 16.80425 - 16.80475 | 960 - 1240 | 7.25 - 7.75 |
| 4.125 - 4.128 | 25.5 - 25.67 | 1300 - 1427 | 8.025 - 8.5 |
| 4.17725 - 4.17775 | 37.5 - 38.25 | 1435 - 1626.5 | 9.0 - 9.2 |
| 4.20725 - 4.20775 | 73 - 74.6 | 1645.5 - 1646.5 | 9.3 - 9.5 |
| 6.215 - 6.218 | 74.8 - 75.2 | 1660 - 1710 | 10.6 - 12.7 |
| 6.26775 - 6.26825 | 108 - 121.94 | 1718.8 - 1722.2 | 13.25 - 13.4 |
| 6.31175 - 6.31225 | 123 - 138 | 2200 - 2300 | 14.47 - 14.5 |
| 8.291 - 8.294 | 149.9 - 150.05 | 2310 - 2390 | 15.35 - 16.2 |
| 8.362 - 8.366 | 156.52475 - 156.52525 | 2483.5 - 2500 | 17.7 - 21.4 |
| 8.37625 - 8.38675 | 156.7 - 156.9 | 2655 - 2900 | 22.01 - 23.12 |
| 8.41425 - 8.41475 | 162.0125 - 167.17 | 3260 - 3267 | 23.6 - 24.0 |
| 12.29 - 12.293 | 167.72 - 173.2 | 3332 - 3339 | 31.2 - 31.8 |
| 12.51975 - 12.52025 | 240 - 285 | 3345.8 - 3358 | 36.43 - 36.5 |
| 12.57675 - 12.57725 | 322 - 335.4 | 3600 - 4400 | (²) |
| 13.36 - 13.41 | | | |

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

§15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| Frequency (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|--------------------|--------------------------------------|----------------------------------|
| 30 - 88 | 100 ** | 3 |
| 88 - 216 | 150 ** | 3 |
| 216 - 960 | 200 ** | 3 |
| Above 960 | 500 | 3 |

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.


The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each 5 GHz band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.


8.2.2. WIZA 100 MODEL


RESTRICTED BANDEDGE (BLUETOOTH MODE, LOW CHANNEL, HORIZONTAL)

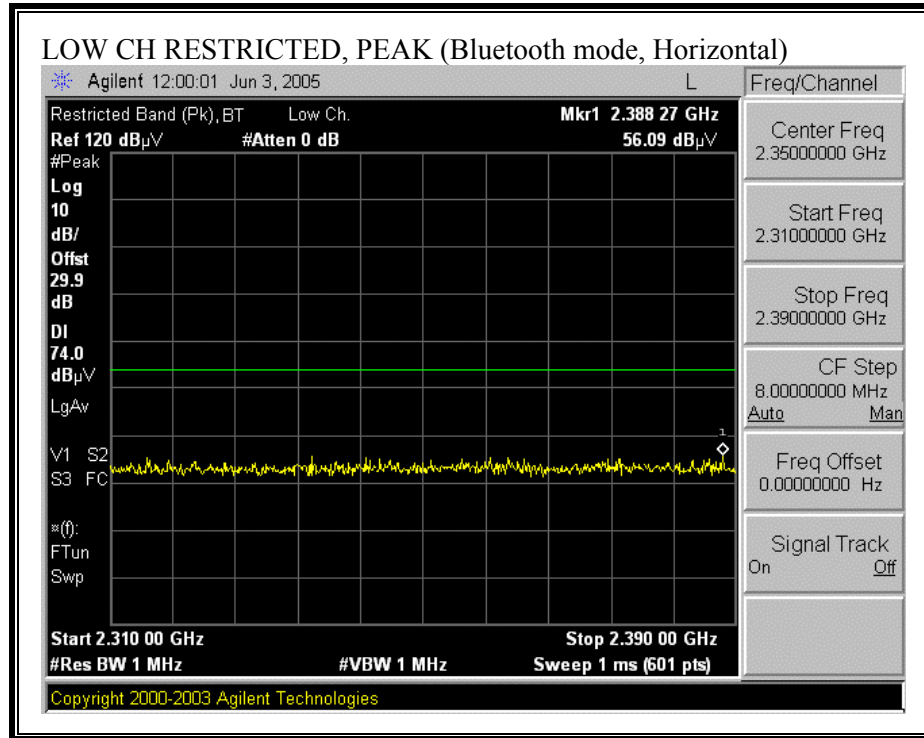

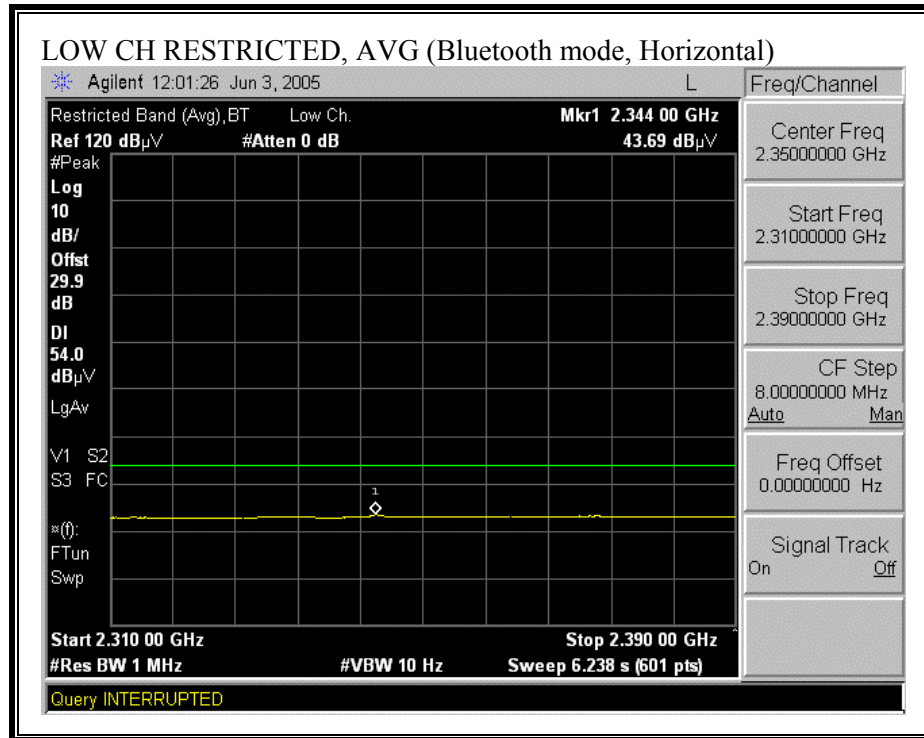



RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, VERTICAL)

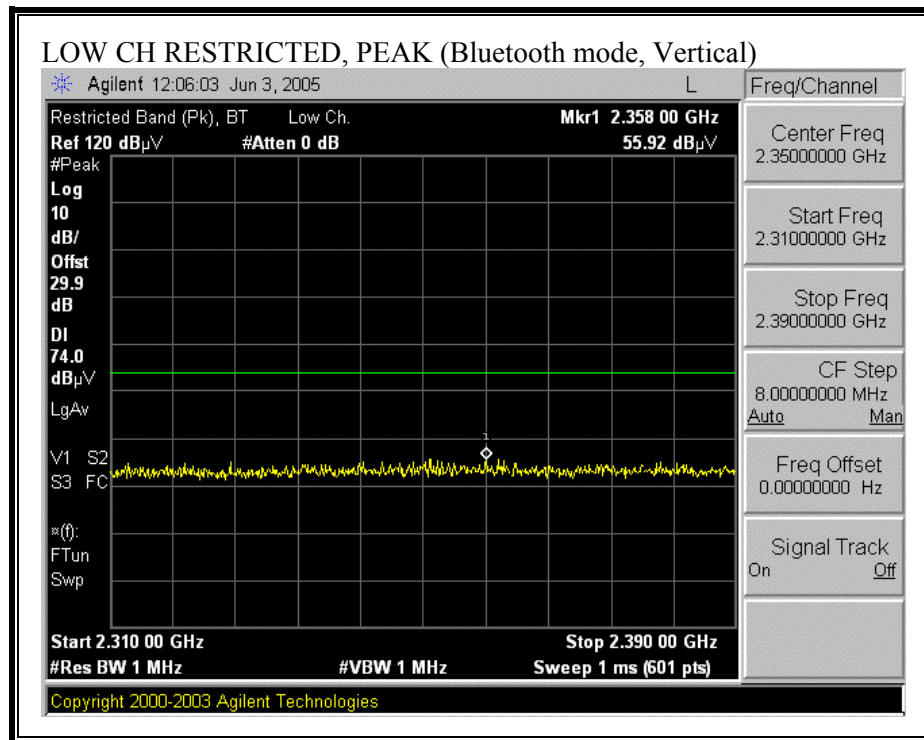

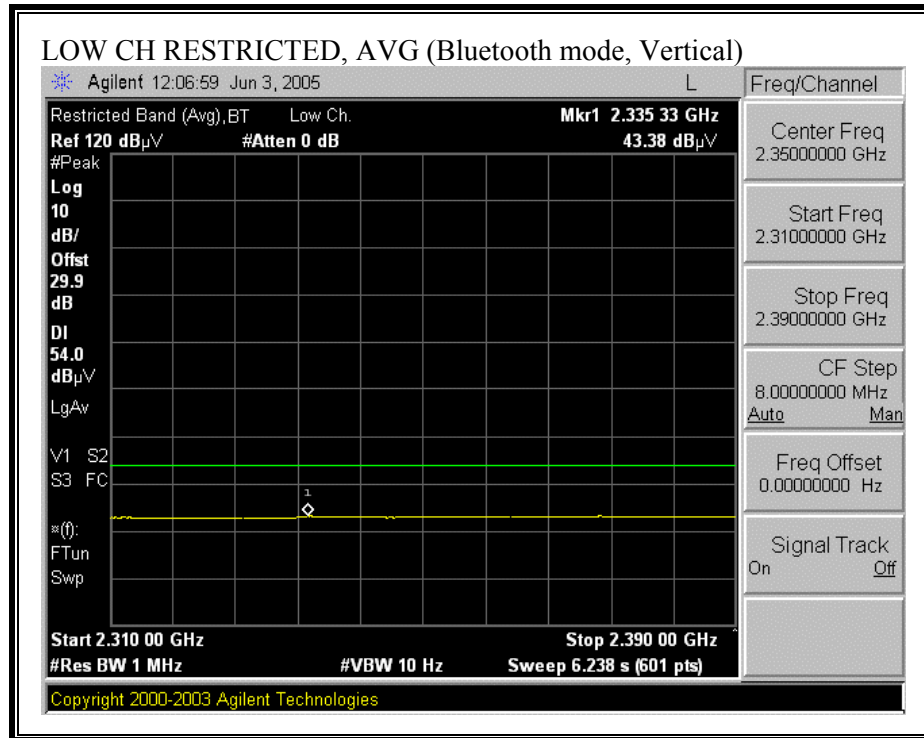



RESTRICTED BANDEDGE (BLUETOOTH MODE, HIGH CHANNEL, HORIZONTAL)

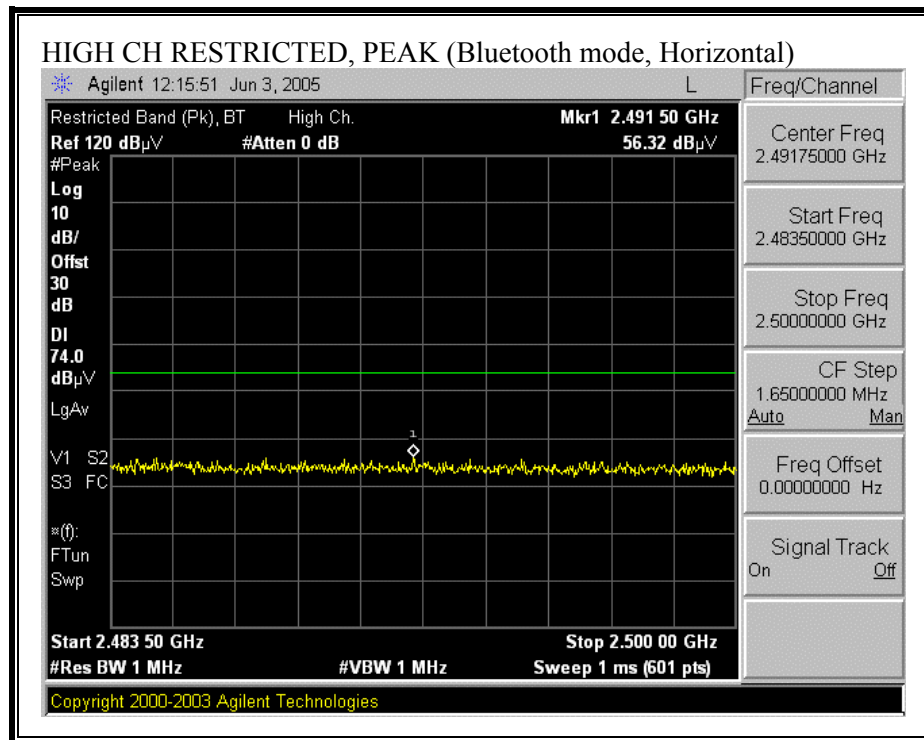

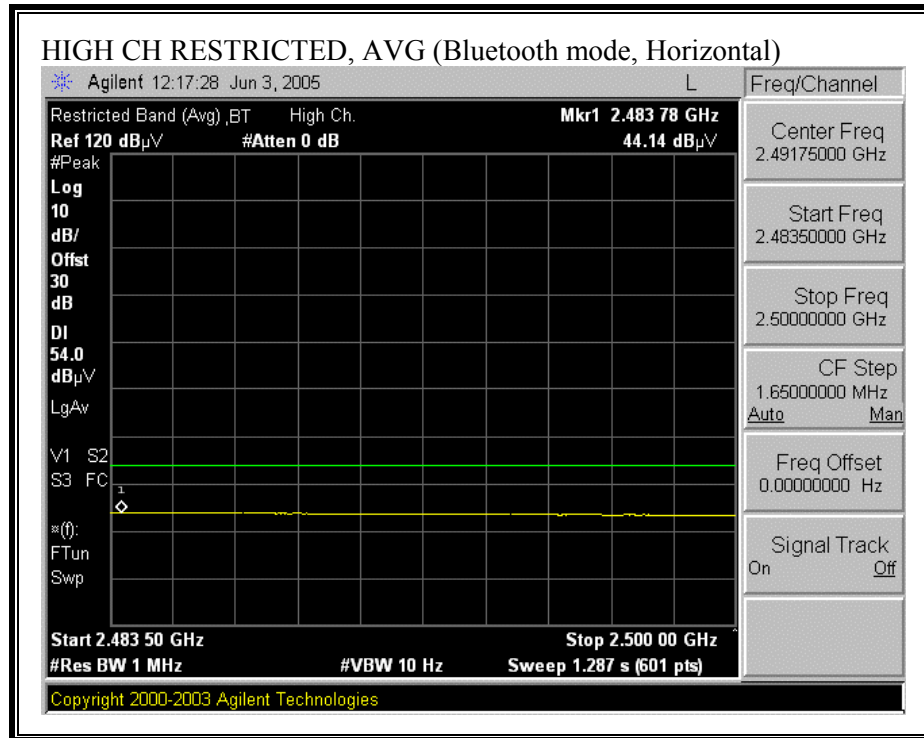

RESTRICTED BANDEDGE (BLUETOOTH MODE, HIGH CHANNEL, VERTICAL)

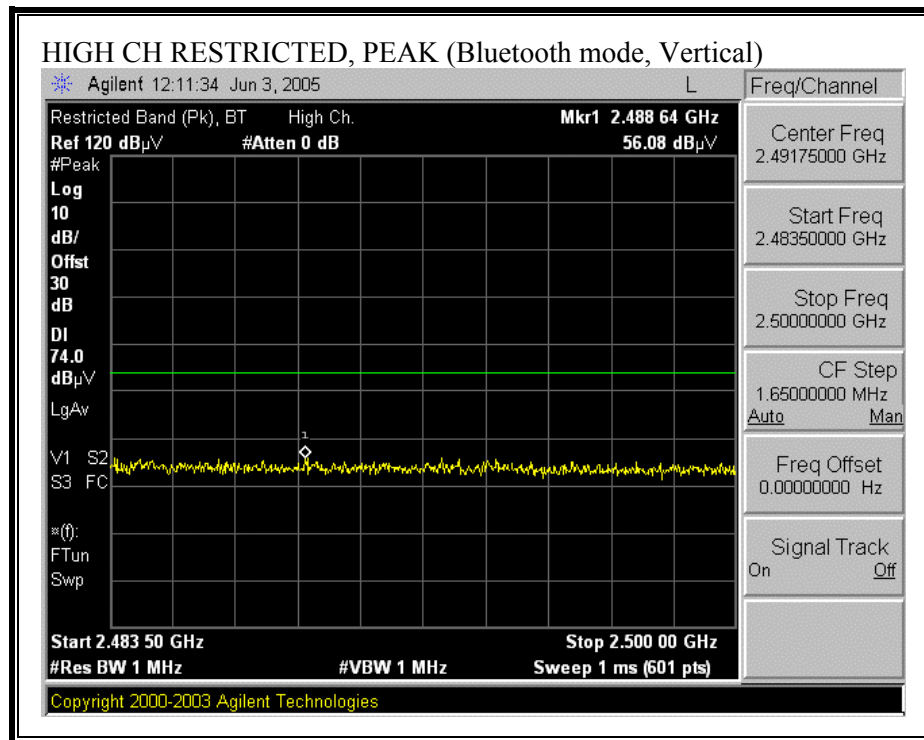

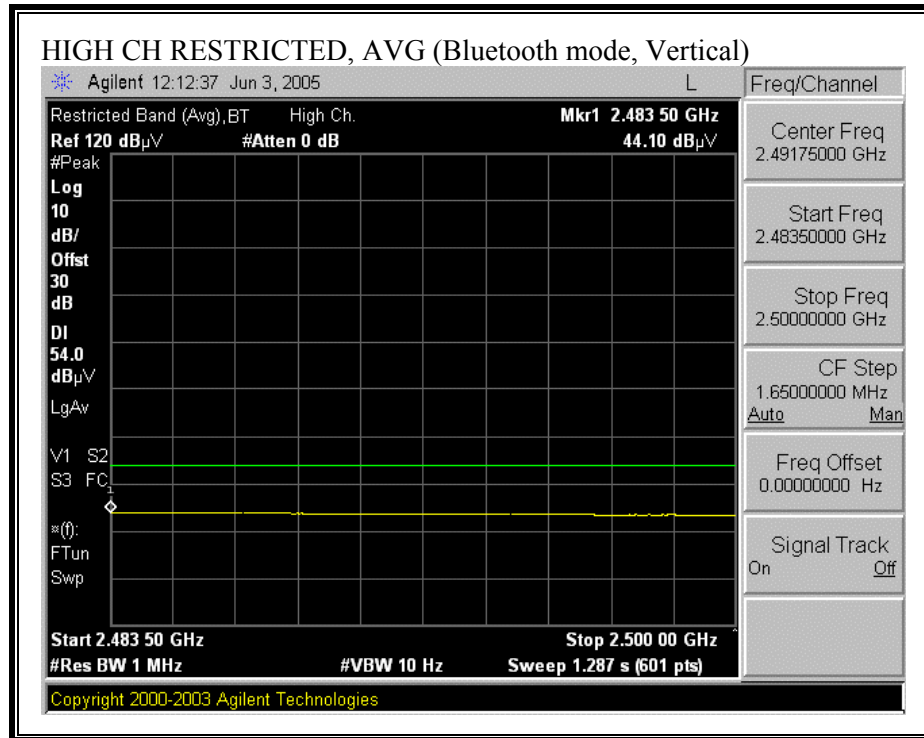

HARMONICS AND SPURIOUS EMISSIONS (BLUETOOTH MODE)

06/03/05 High Frequency Measurement
Compliance Certification Services, Morgan Hill Open Field Site

Test Engr: Thanh Nguyen
Project #: 05T3452-2
Company: HIGH TECH COMPUTER CORP.
EUT Descrip.: PDA Phone(GSM 800.900, EDGE,BT, 802. 11b/g
EUT M/N: WIZA100
Test Target: FCC Part 15.247
Mode Oper: Transmit BlueTooth. Worst Y Position.

Test Equipment:


| | | | | |
|--------------------|-----------------------|------------------------|--------------|-------|
| EMCO Horn 1-18GHz | Pre-amplifier 1-26GHz | Pre-amplifier 26-40GHz | Horn > 18GHz | Limit |
| T60; S/N: 2238 @3m | T34 HP 8449B | | | |


| | | | | | | |
|---------------------|--------------|--------------|---------------|------------|---------------|---|
| Hi Frequency Cables | | | | HPF | Reject Filter | Peak Measurements REW=VBW=1MHz |
| 2 foot cable | 3 foot cable | 4 foot cable | 12 foot cable | HPF 4.0GHz | | Average Measurements REW=1MHz ; VBW=10Hz |
| 2_Thanh | | | 12_Thanh | | | |

| f GHz | Dist (m) | Read Pk dBuV | Read Avg. dBuV | AF dB/m | CL dB | Amp dB | D Corr dB | Filtr dB | Peak dBuV/m | Avg dBuV/m | Pk Lim dBuV/m | Avg Lim dBuV/m | Pk Mar dB | Avg Mar dB | Notes (V/H) |
|---|-------------|-----------------|-------------------|------------|----------|-----------|--------------|-------------|----------------|---------------|------------------|-------------------|--------------|---------------|----------------|
| High Channel 2480MHz | | | | | | | | | | | | | | | |
| 2.496 | 3.0 | 56.3 | 43.4 | 28.6 | 2.2 | -35.4 | 0.0 | 0.0 | 51.8 | 38.9 | 74 | 54 | -22.2 | -15.1 | Noise floor |
| No harmonic and Spurious emissions were detected above fundamental signal for all channels. | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | |


| | | | | | |
|------|-----------------------|--------|--------------------------------|---------|------------------------------|
| f | Measurement Frequency | Amp | Preamp Gain | Avg Lim | Average Field Strength Limit |
| Dist | Distance to Antenna | D Corr | Distance Correct to 3 meters | Pk Lim | Peak Field Strength Limit |
| Read | Analyzer Reading | Avg | Average Field Strength @ 3 m | Avg Mar | Margin vs. Average Limit |
| AF | Antenna Factor | Peak | Calculated Peak Field Strength | Pk Mar | Margin vs. Peak Limit |
| CL | Cable Loss | HPF | High Pass Filter | | |


RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, HORIZONTAL)

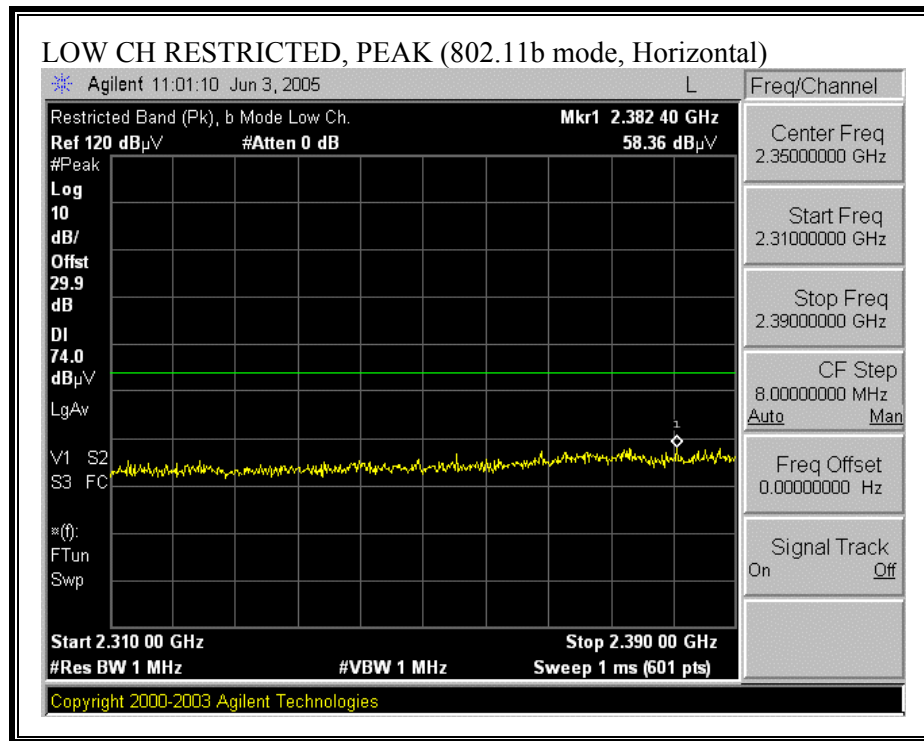

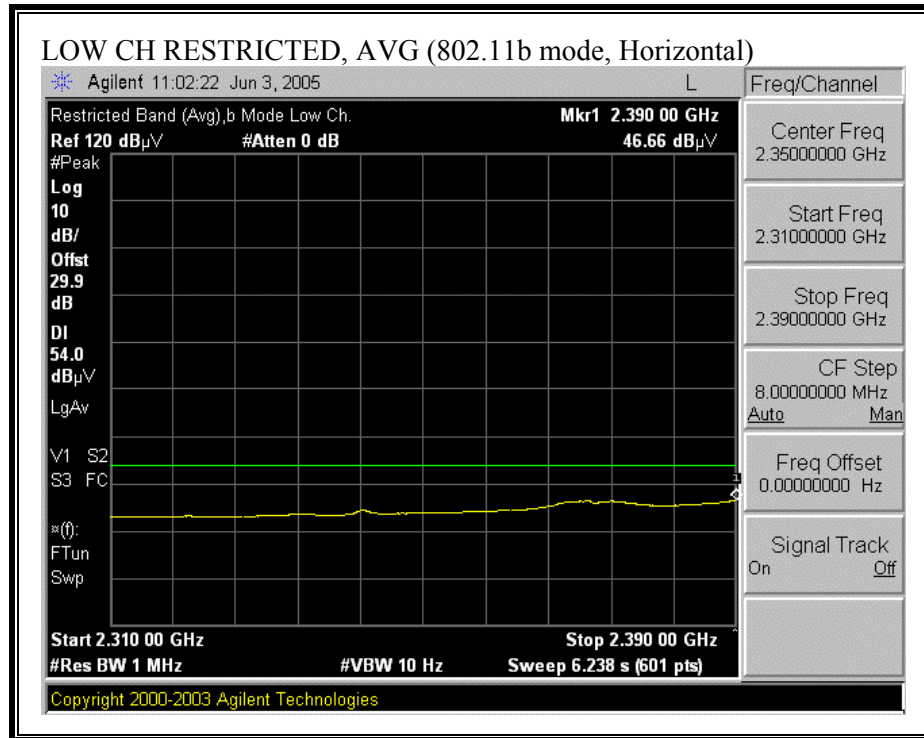



RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, VERTICAL)

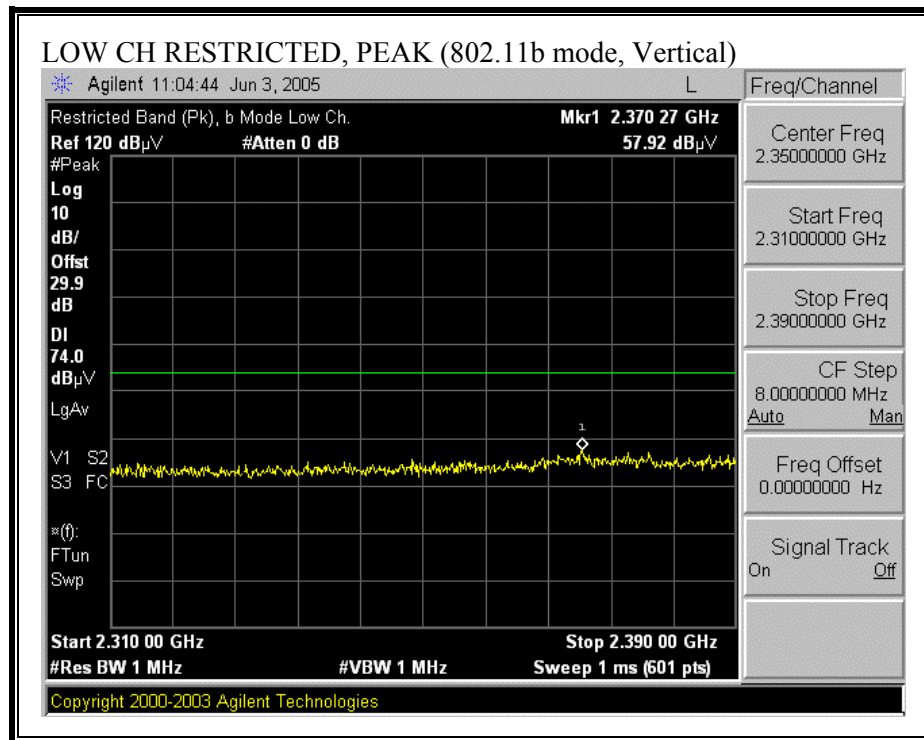

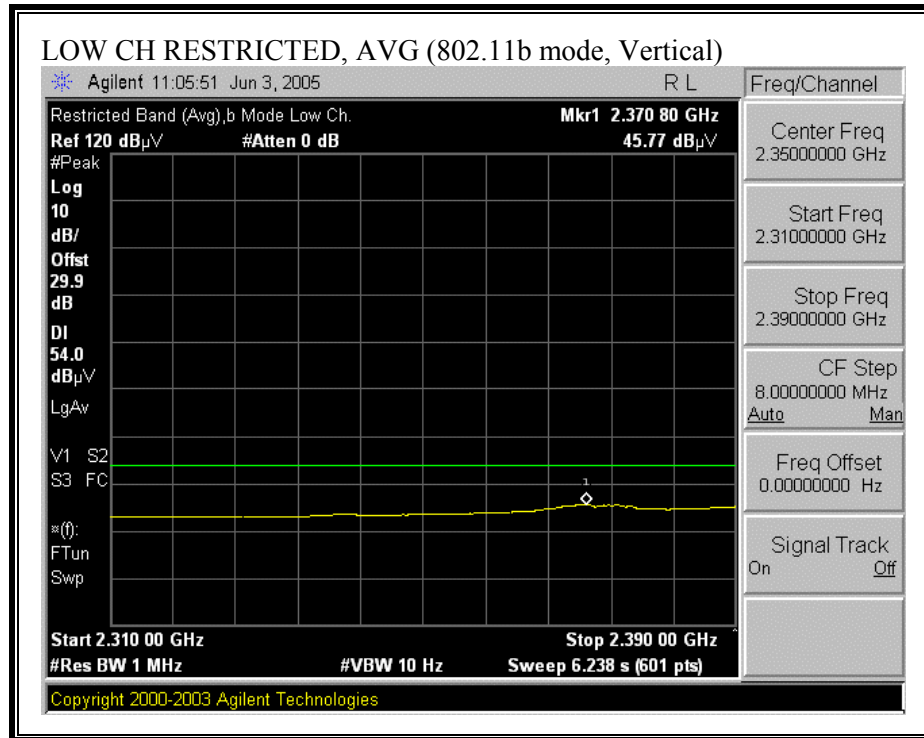



RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, HORIZONTAL)

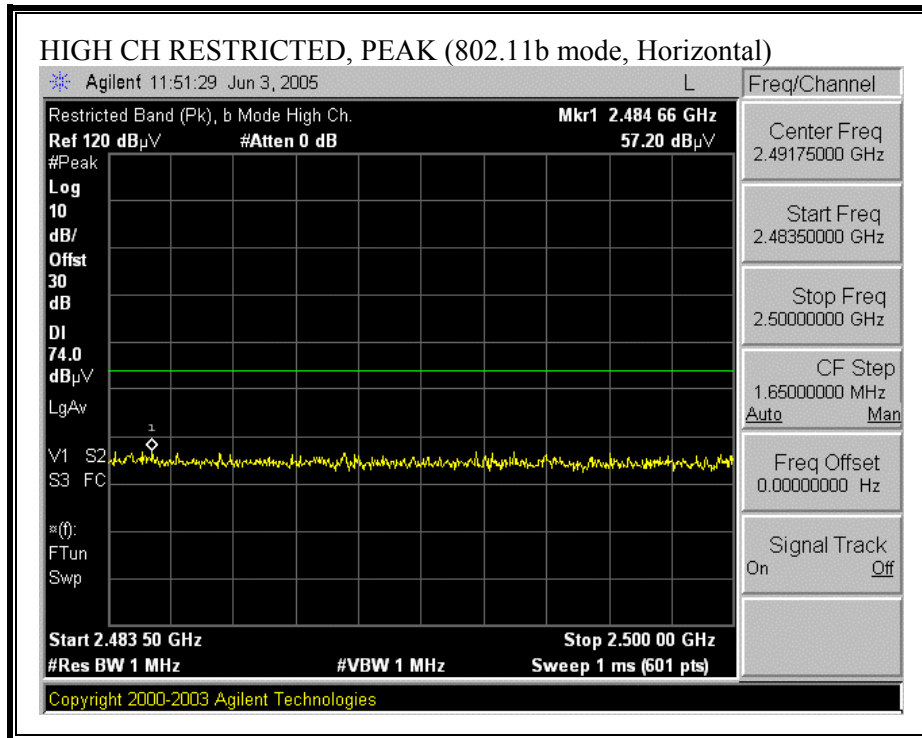

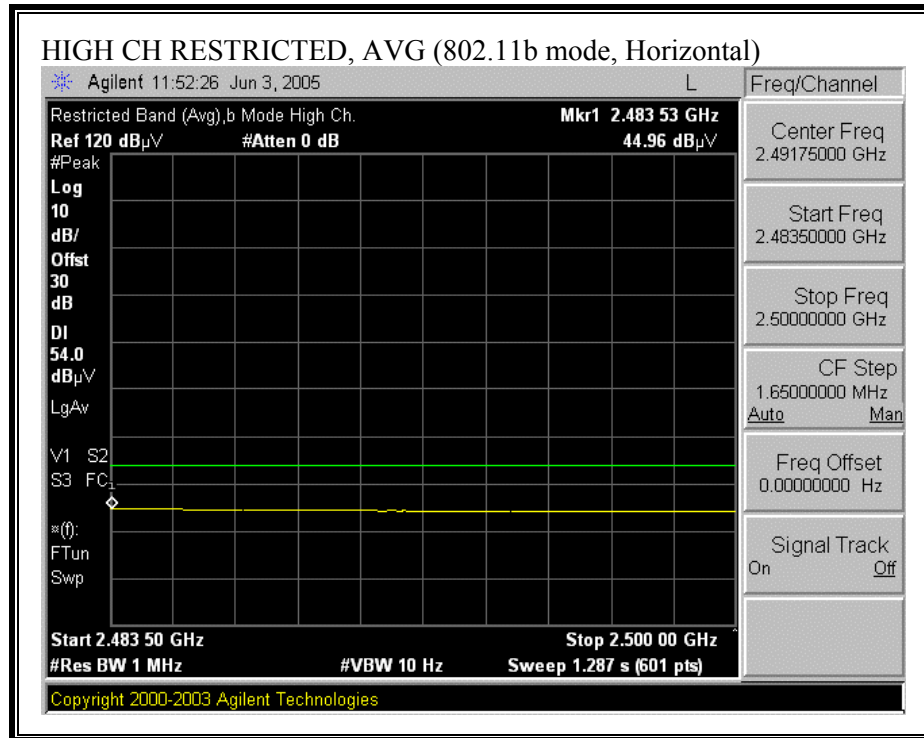

RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, VERTICAL)

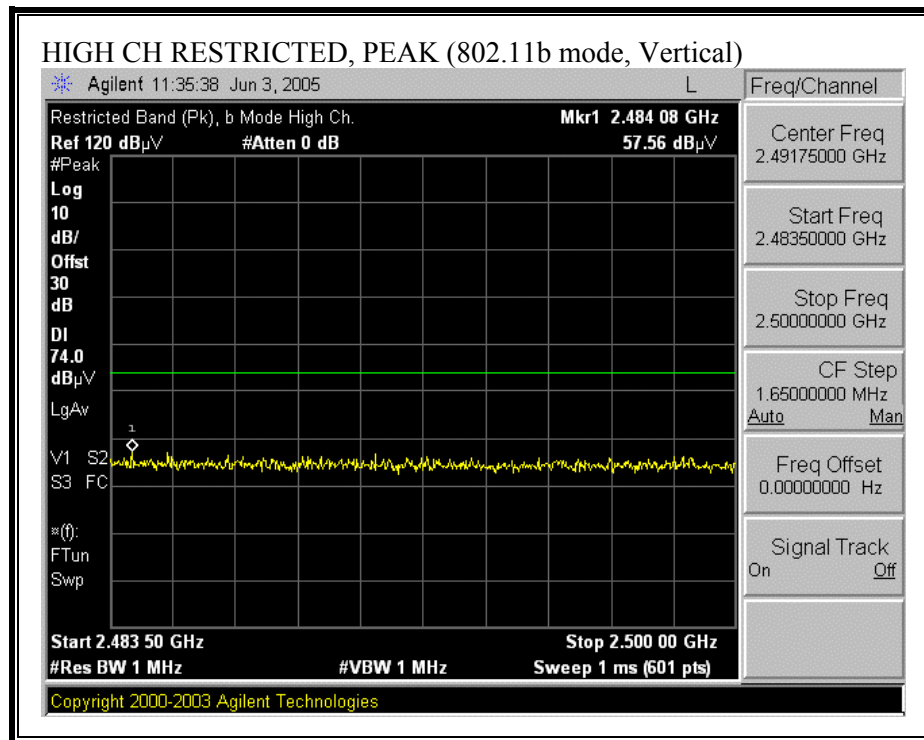


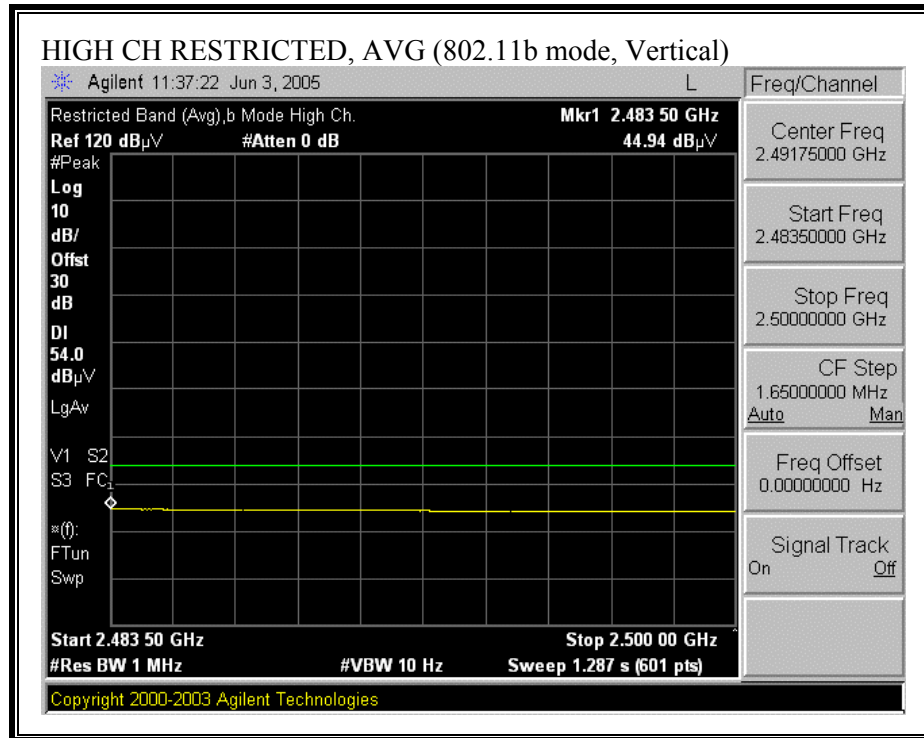


HARMONICS AND SPURIOUS EMISSIONS (b MODE)


| | | | | | | | | | | | | | | | |
|---|-----------------------|---------------------------------------|-------------------|------------------------|----------|---------------------------|--------------------------------|--|----------------|---------------|------------------|-------------------|------------------------------|---------------|----------------|
| 06/03/05 High Frequency Measurement Compliance Certification Services, Morgan Hill Open Field Site Test Engr: Thanh Nguyen Project #: 05T3452-2 Company: HIGH TECH COMPUTER CORP. EUT Descrip.: PDA Phone(GSM 800.900, EDGE,BT, 802. 11b/g) EUT M/N: WIZA100 Test Target: FCC Part 15.247 Mode Oper: Transmit WLAN b/g mode, Worst Y Position. | | | | | | | | | | | | | | | |
| Test Equipment: | | | | | | | | | | | | | | | |
| EMCO Horn 1-18GHz T60; S/N: 2238 @3m | | Pre-amplifier 1-26GHz T34 HP 8449B | | Pre-amplifier 26-40GHz | | Horn > 18GHz | | Limit | | | | | | | |
| Hi Frequency Cables | | | | HPF | | Reject Filter | | Peak Measurements REW=VBW=1MHz Average Measurements REW=1MHz ; VBW=10Hz | | | | | | | |
| 2 foot cable 2_Thanh | | 3 foot cable | | 4 foot cable | | 12 foot cable 12_Thanh | | HPF HPF_4.0GHz | | Reject Filter | | | | | |
| f GHz | Dist (m) | Read Pk dBuV | Read Avg. dBuV | AF dB/m | CL dB | Amp dB | D Corr dB | Filtr dB | Peak dBuV/m | Avg dBuV/m | Pk Lim dBuV/m | Avg Lim dBuV/m | Pk Mar dB | Avg Mar dB | Notes (V/H) |
| LOW Channel 2412MHz | | | | | | | | | | | | | | | |
| 2412 | 3.0 | 53.3 | 43.6 | 28.4 | 2.2 | -35.5 | 0.0 | 0.0 | 48.4 | 38.6 | 74 | 54 | -25.6 | -15.4 | Noise floor |
| No harmonic and spurious emissions were detected above fundamental for all channels b and g mode | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | |
| f | Measurement Frequency | | | | | Amp | Preamp Gain | | | | | Avg Lim | Average Field Strength Limit | | |
| Dist | Distance to Antenna | | | | | D Corr | Distance Correct to 3 meters | | | | | Pk Lim | Peak Field Strength Limit | | |
| Read | Analyzer Reading | | | | | Avg | Average Field Strength @ 3 m | | | | | Avg Mar | Margin vs. Average Limit | | |
| AF | Antenna Factor | | | | | Peak | Calculated Peak Field Strength | | | | | Pk Mar | Margin vs. Peak Limit | | |
| CL | Cable Loss | | | | | HPF | High Pass Filter | | | | | | | | |


RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, HORIZONTAL)

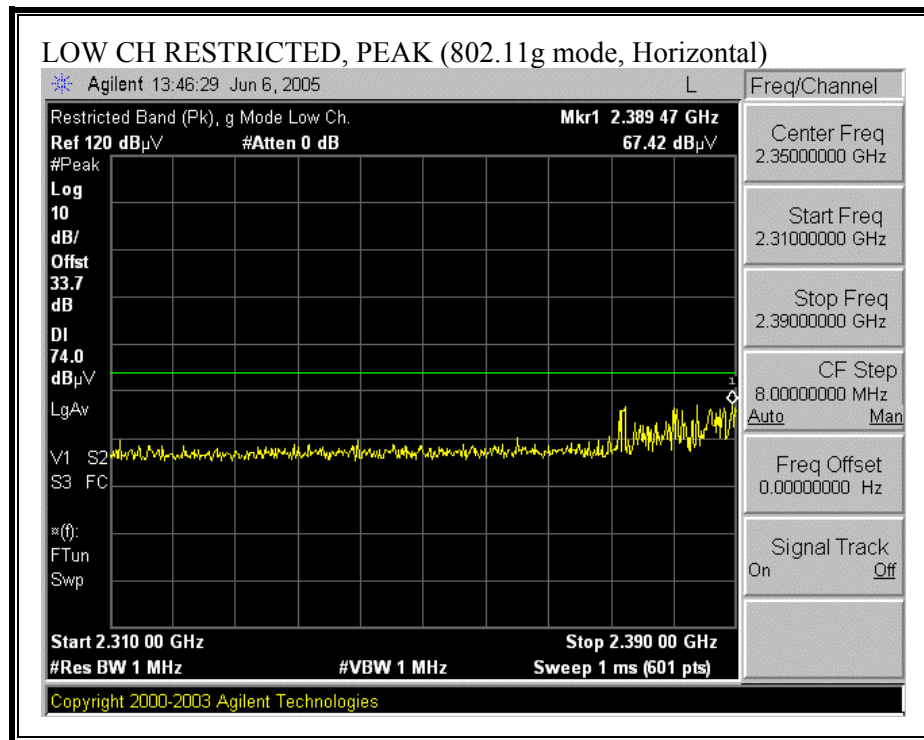

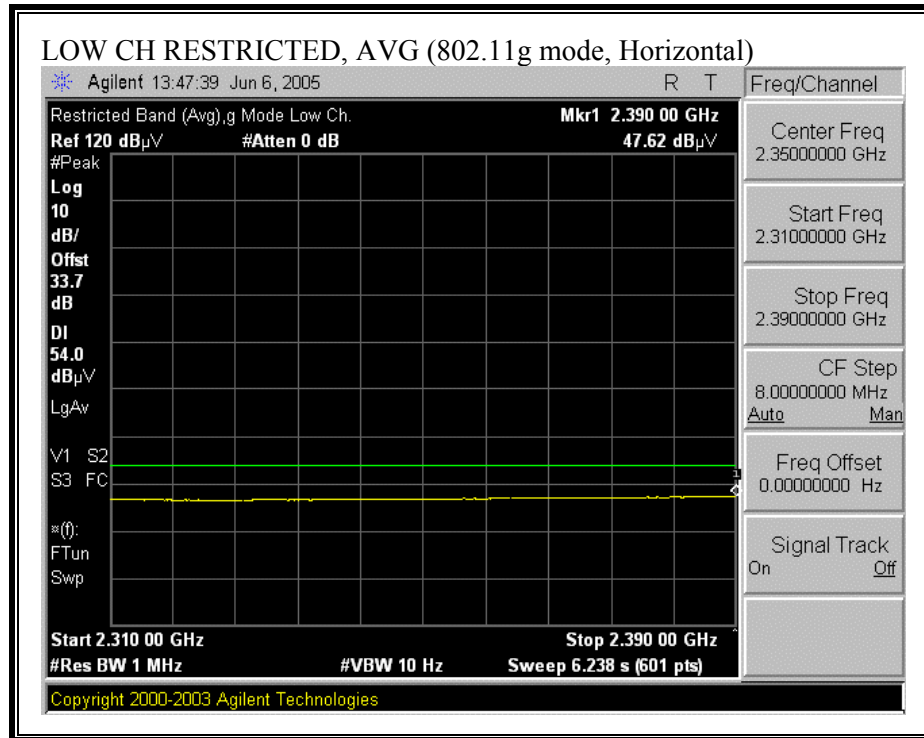



RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, VERTICAL)

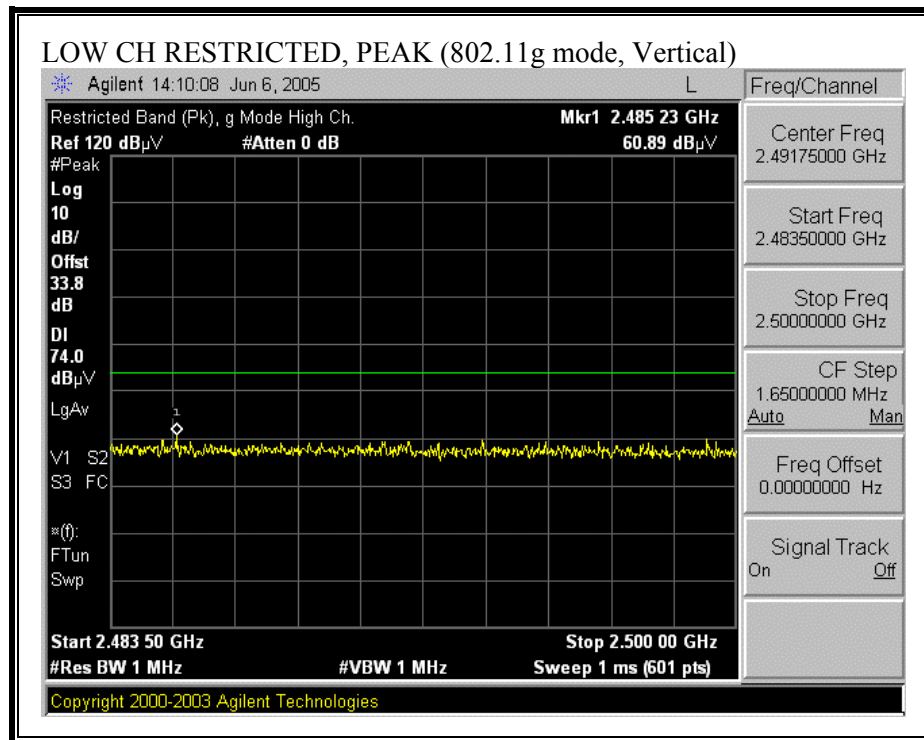

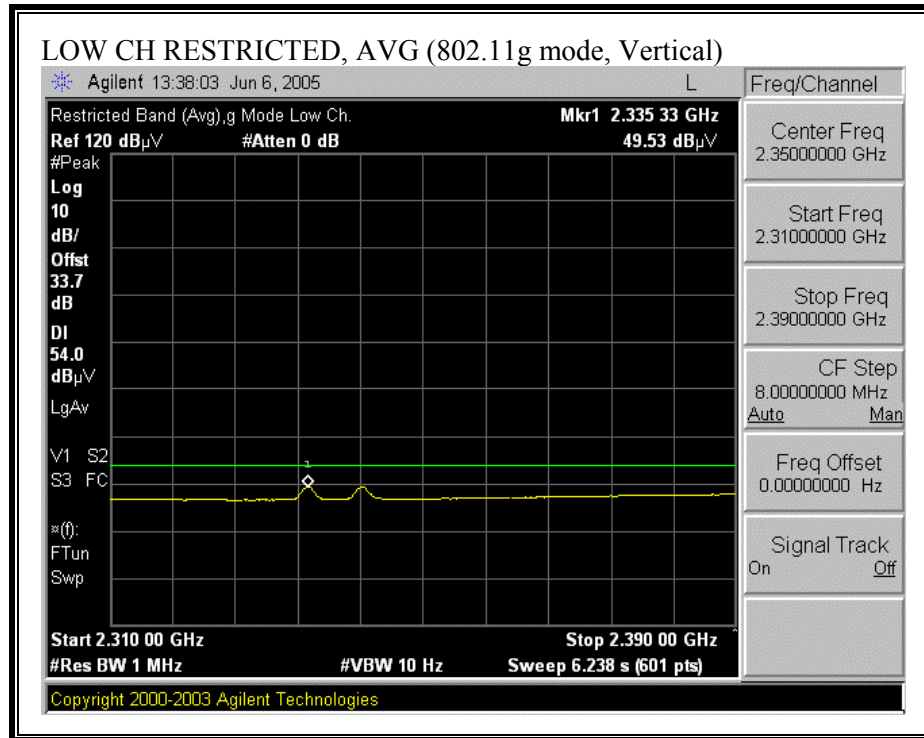



RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, HORIZONTAL)

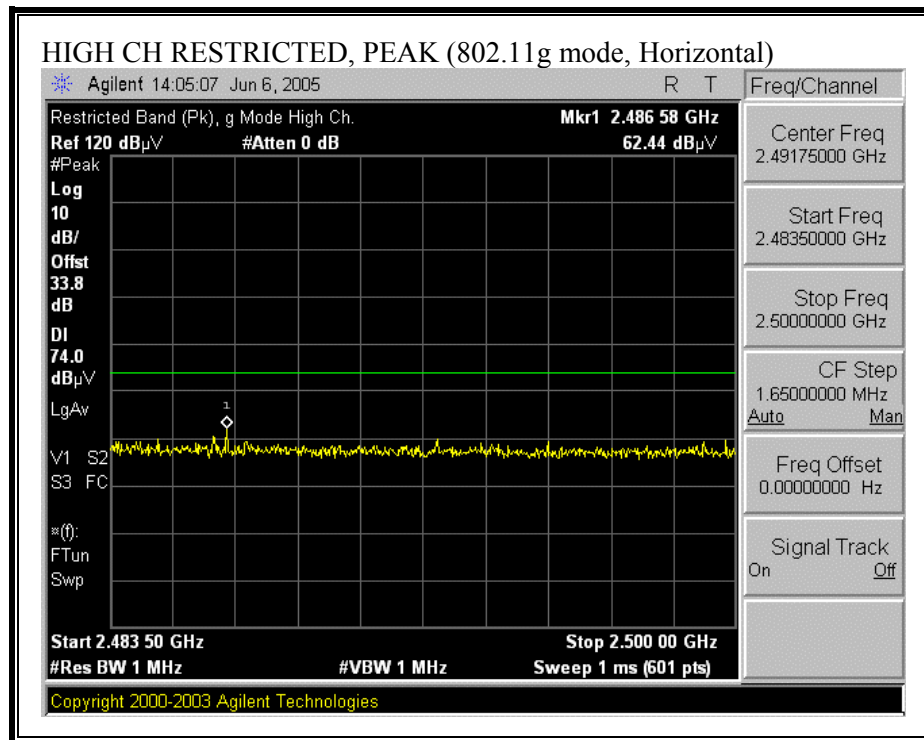

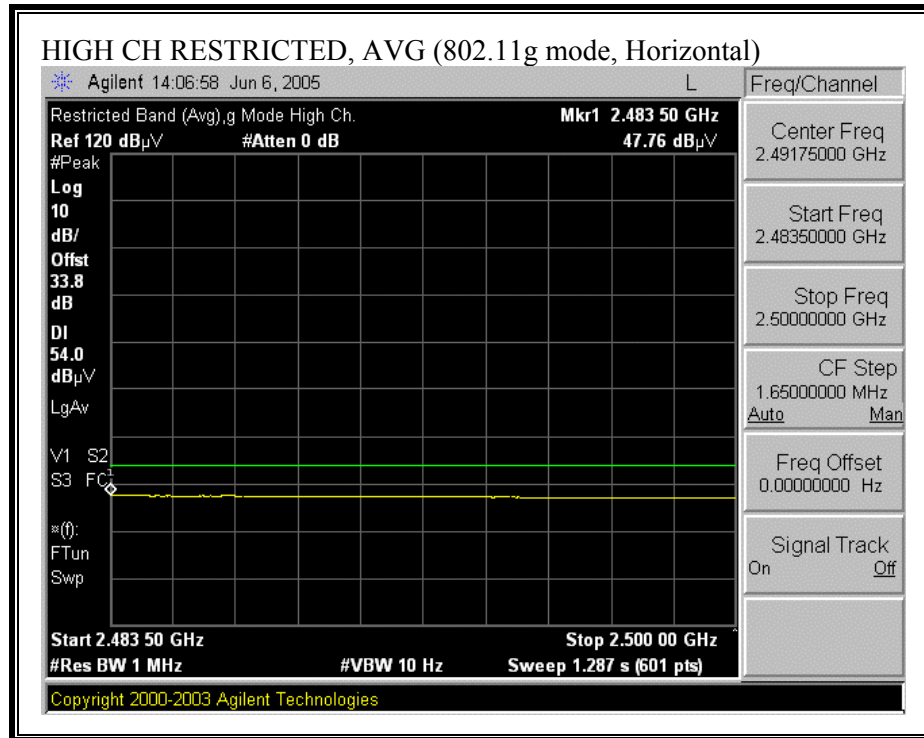

RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, VERTICAL)

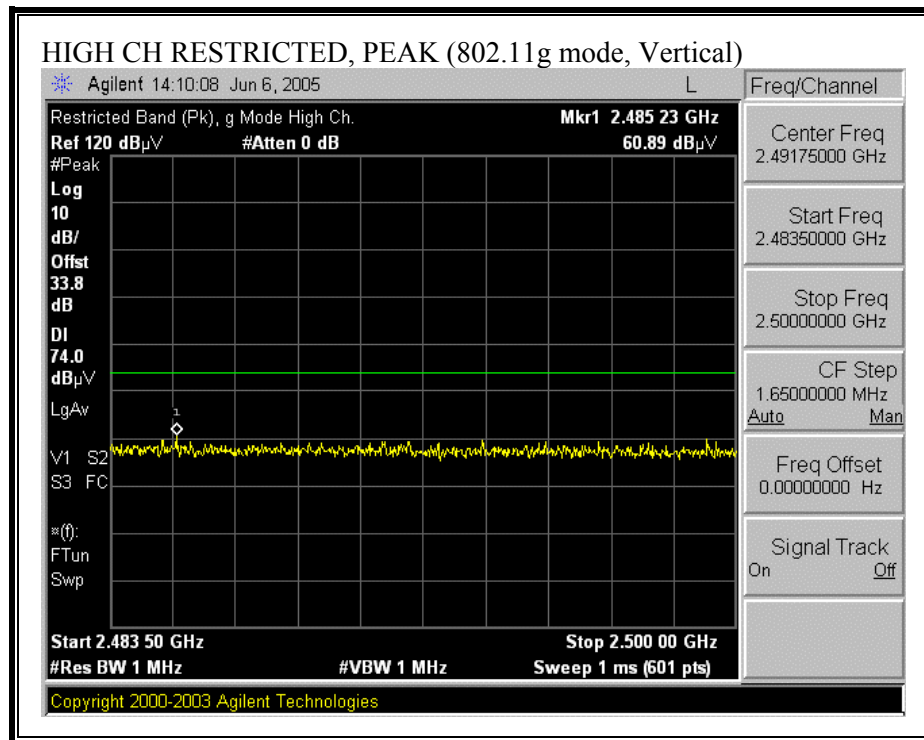

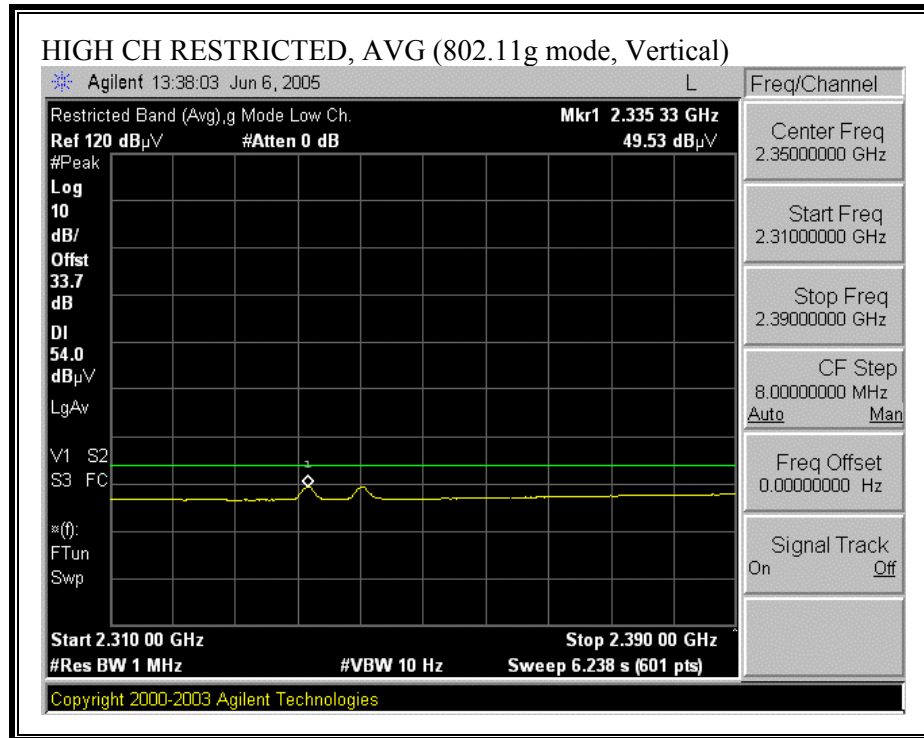



HARMONICS AND SPURIOUS EMISSIONS (g MODE)

| | | | | | | | | | | | | | | | | |
|---|-----------------------|---------------------------------------|-------------------|------------------------|----------|---------------------------|--------------------------------|--|----------------|---------------|------------------|-------------------|------------------------------|---------------|----------------|--|
| 06/03/05 High Frequency Measurement Compliance Certification Services, Morgan Hill Open Field Site Test Engr: Thanh Nguyen Project #: 05T3452-2 Company: HIGH TECH COMPUTER CORP. EUT Descrip.: PDA Phone(GSM 800.900, EDGE,BT, 802. 11b/g) EUT M/N: WIZA100 Test Target: FCC Part 15.247 Mode Oper: Transmit WLAN b/g mode, Worst Y Position. | | | | | | | | | | | | | | | | |
| Test Equipment: | | | | | | | | | | | | | | | | |
| EMCO Horn 1-18GHz T60; S/N: 2238 @3m | | Pre-amplifier 1-26GHz T34 HP 8449B | | Pre-amplifier 26-40GHz | | Horn > 18GHz | | Limit | | | | | | | | |
| Hi Frequency Cables | | | | HPF | | Reject Filter | | Peak Measurements REW=VBW=1MHz Average Measurements REW=1MHz ; VBW=10Hz | | | | | | | | |
| 2 foot cable 2_Thanh | | 3 foot cable | | 4 foot cable | | 12 foot cable 12_Thanh | | HPF HPF_4.0GHz | | Reject Filter | | | | | | |
| f GHz | Dist (m) | Read Pk dBuV | Read Avg. dBuV | AF dB/m | CL dB | Amp dB | D Corr dB | Filtr dB | Peak dBuV/m | Avg dBuV/m | Pk Lim dBuV/m | Avg Lim dBuV/m | Pk Mar dB | Avg Mar dB | Notes (V/H) | |
| LOW Channel 2412MHz | | | | | | | | | | | | | | | | |
| 2412 | 3.0 | 53.3 | 43.6 | 28.4 | 2.2 | -35.5 | 0.0 | 0.0 | 48.4 | 38.6 | 74 | 54 | -25.6 | -15.4 | Noise floor | |
| No harmonic and spurious emissions were detected above fundamental for all channels b and g mode | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | |
| f | Measurement Frequency | | | | | Amp | Preamp Gain | | | | | Avg Lim | Average Field Strength Limit | | | |
| Dist | Distance to Antenna | | | | | D Corr | Distance Correct to 3 meters | | | | | Pk Lim | Peak Field Strength Limit | | | |
| Read | Analyzer Reading | | | | | Avg | Average Field Strength @ 3 m | | | | | Avg Mar | Margin vs. Average Limit | | | |
| AF | Antenna Factor | | | | | Peak | Calculated Peak Field Strength | | | | | Pk Mar | Margin vs. Peak Limit | | | |
| CL | Cable Loss | | | | | HPF | High Pass Filter | | | | | | | | | |


8.2.3. WIZA 110 MODEL


RESTRICTED BANDEDGE (BLUETOOTH MODE, LOW CHANNEL, HORIZONTAL)

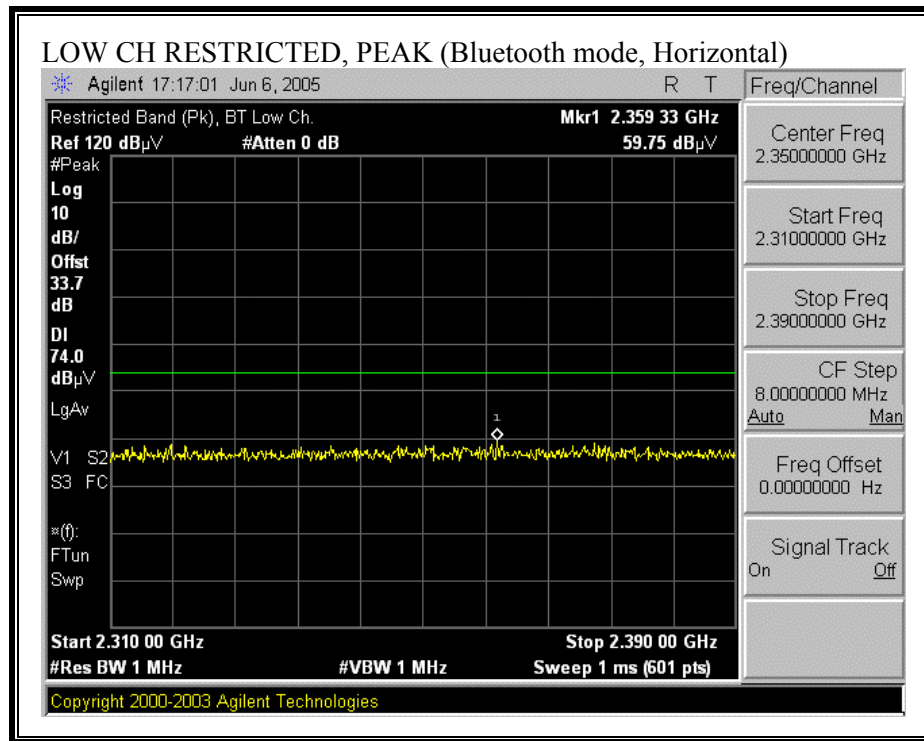

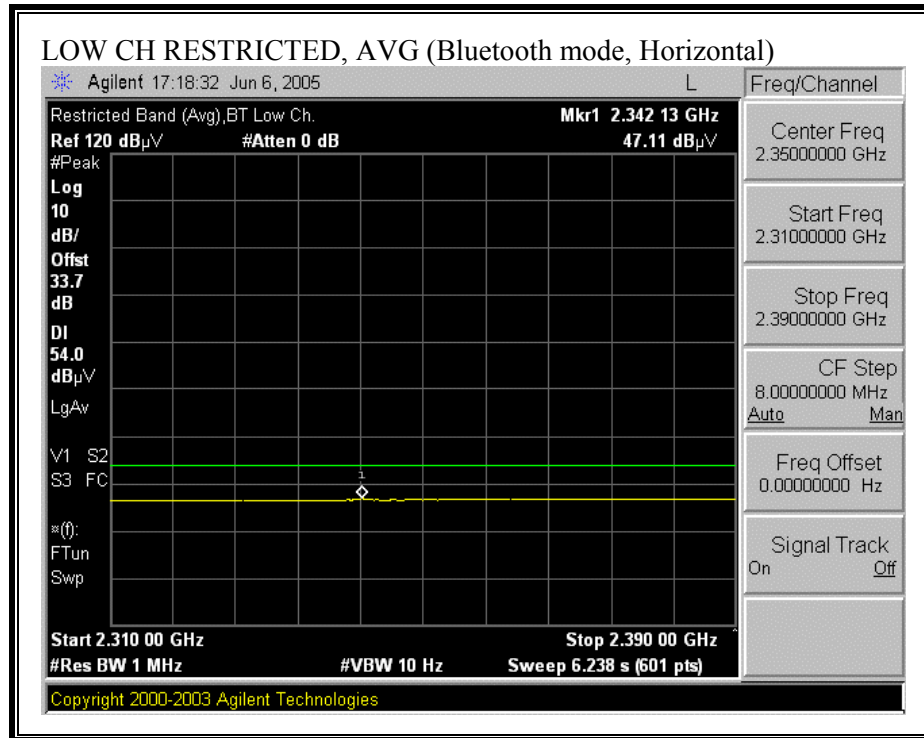



RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, VERTICAL)

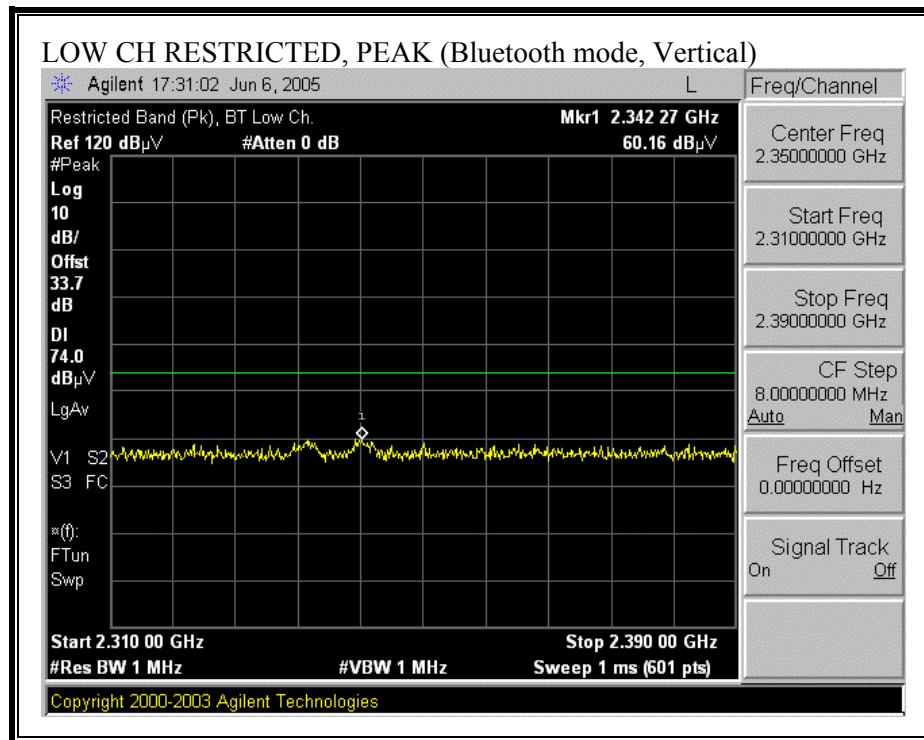

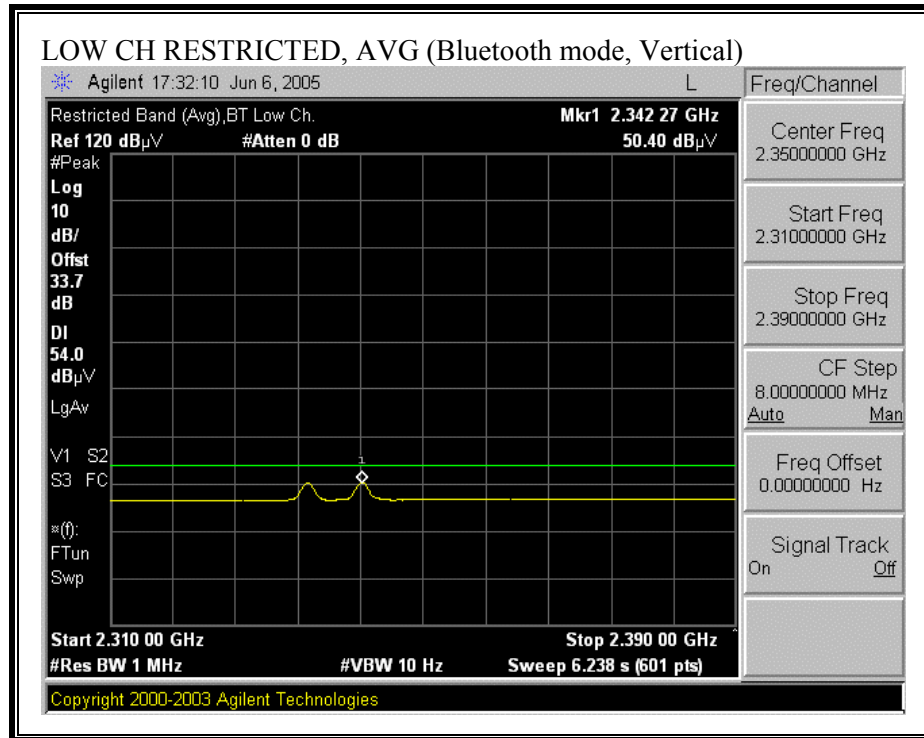



RESTRICTED BANDEDGE (BLUETOOTH MODE, HIGH CHANNEL, HORIZONTAL)

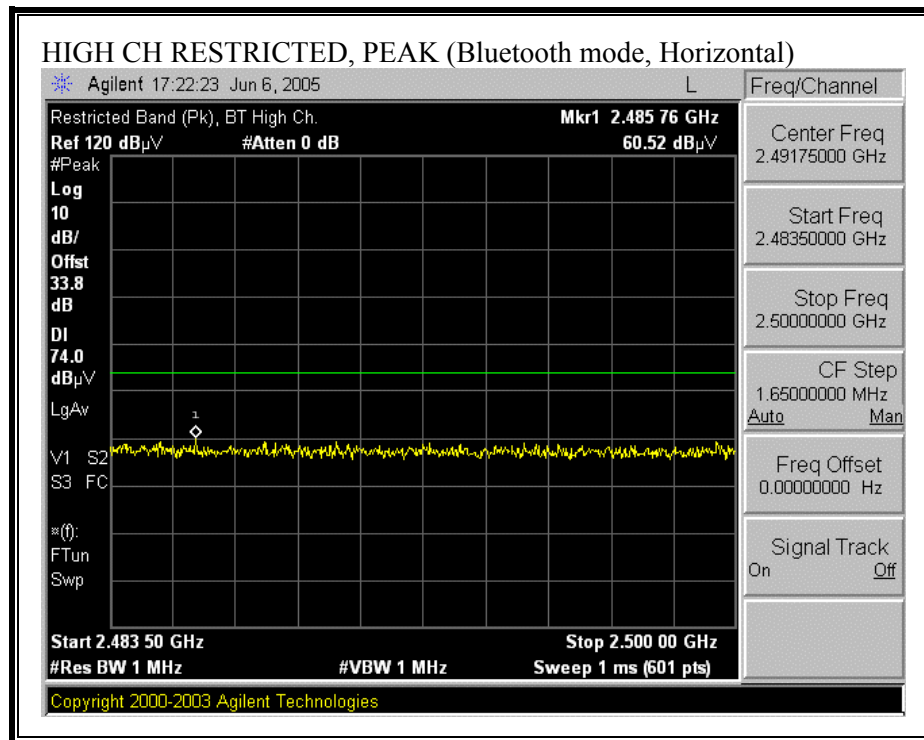

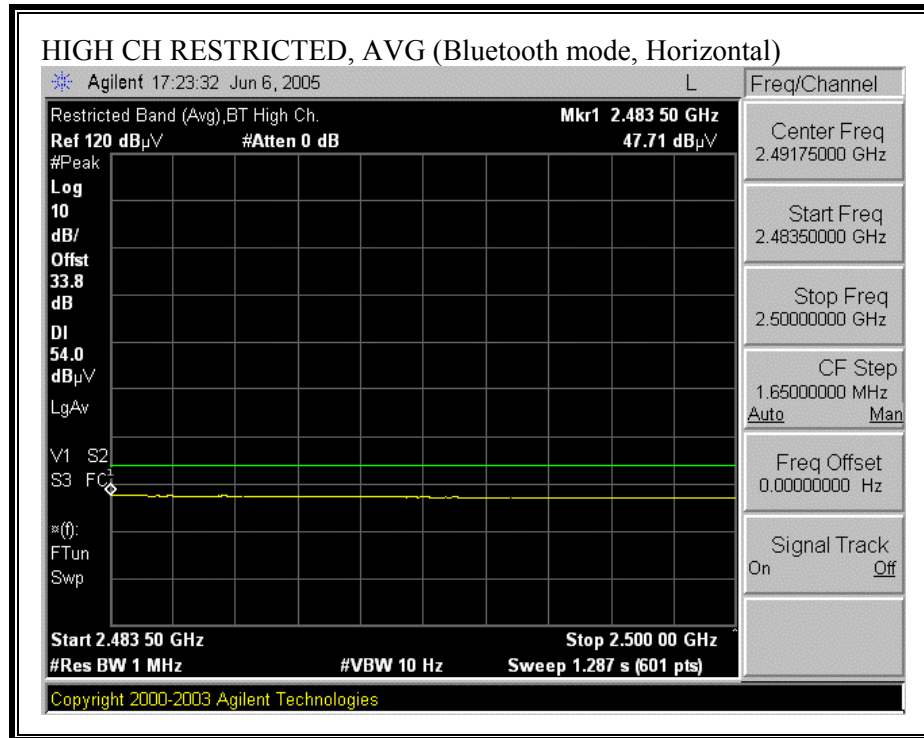



RESTRICTED BANDEDGE (BLUETOOTH MODE, HIGH CHANNEL, VERTICAL)

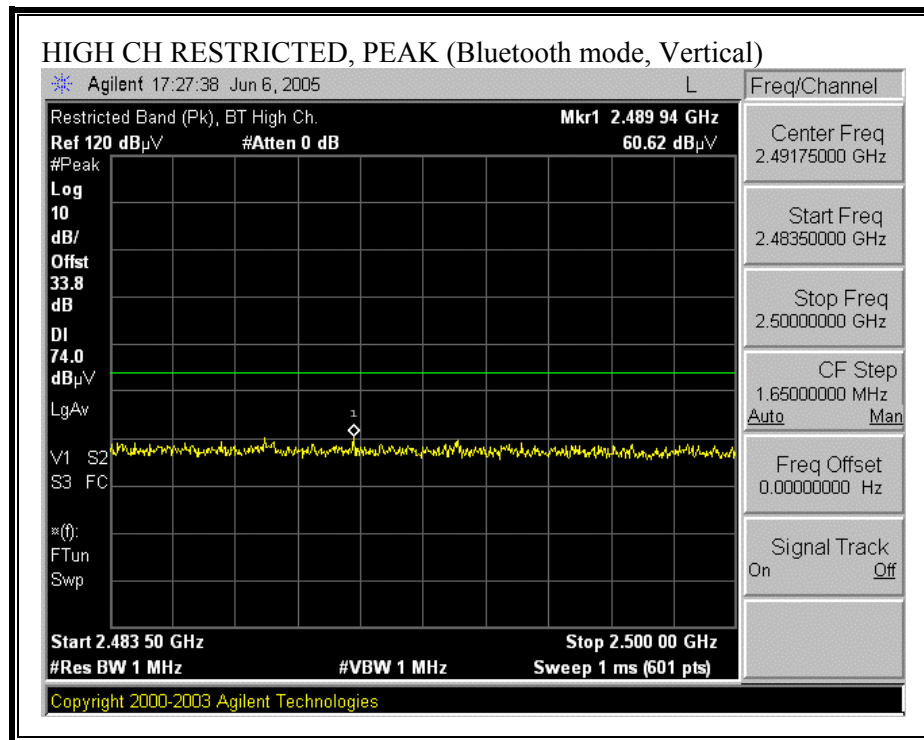

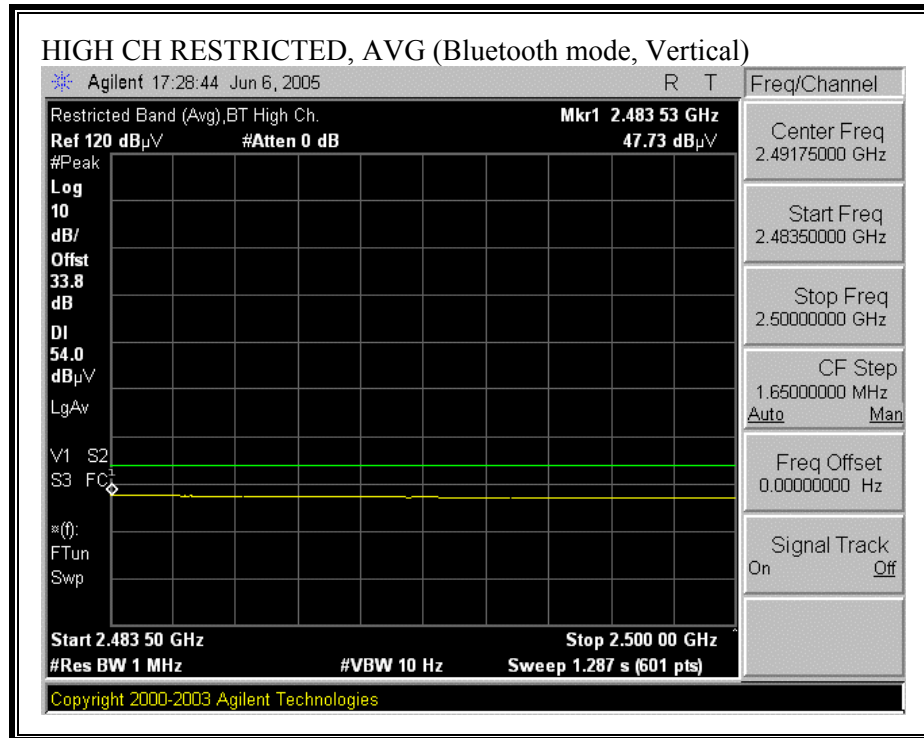



RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, HORIZONTAL)

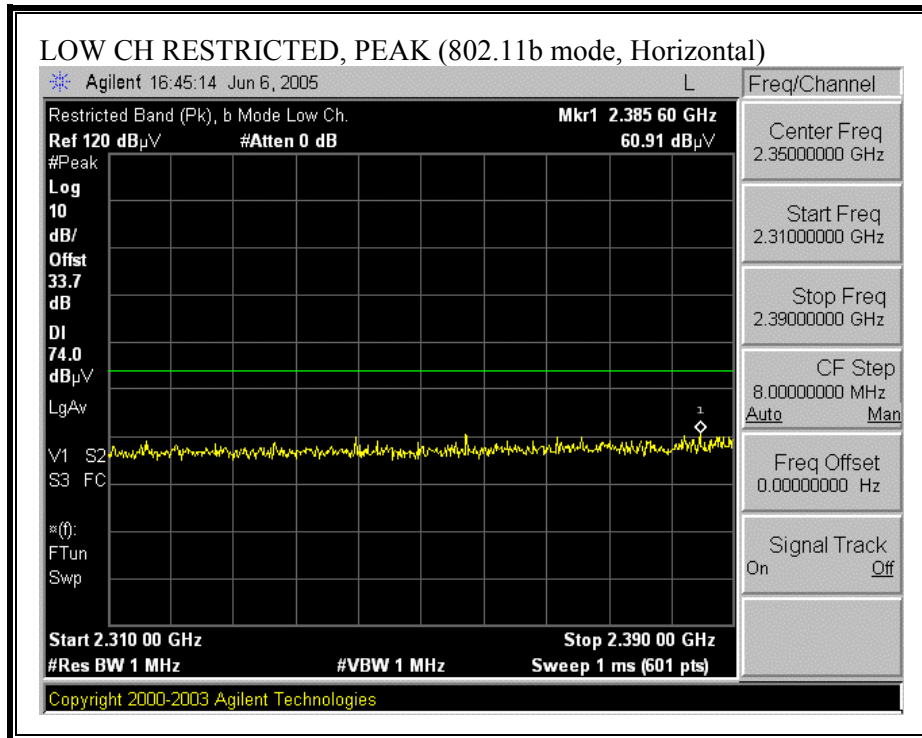

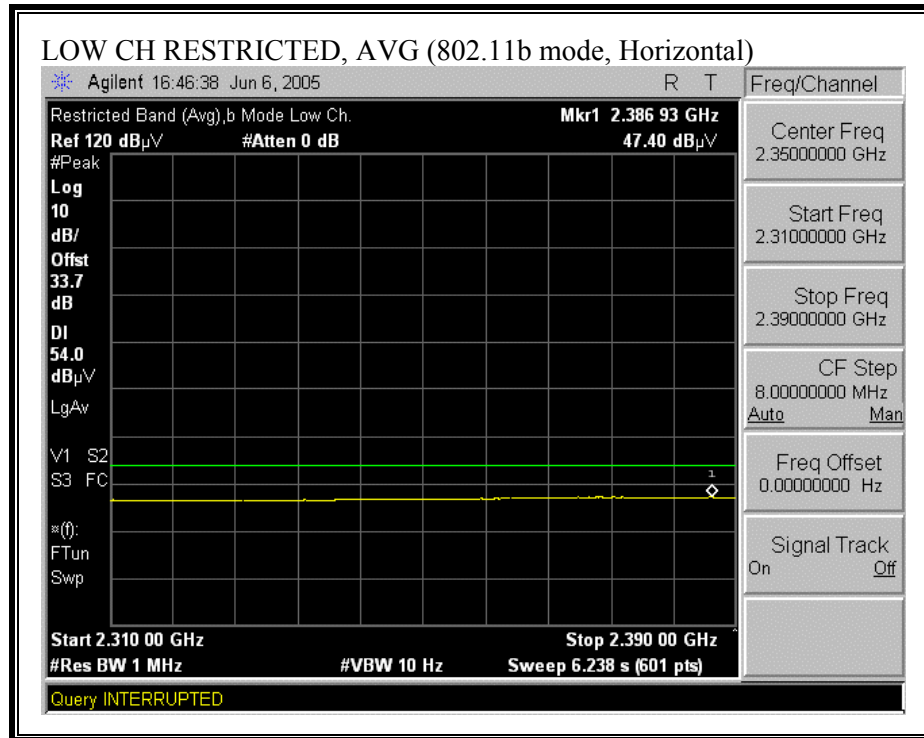



RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, VERTICAL)

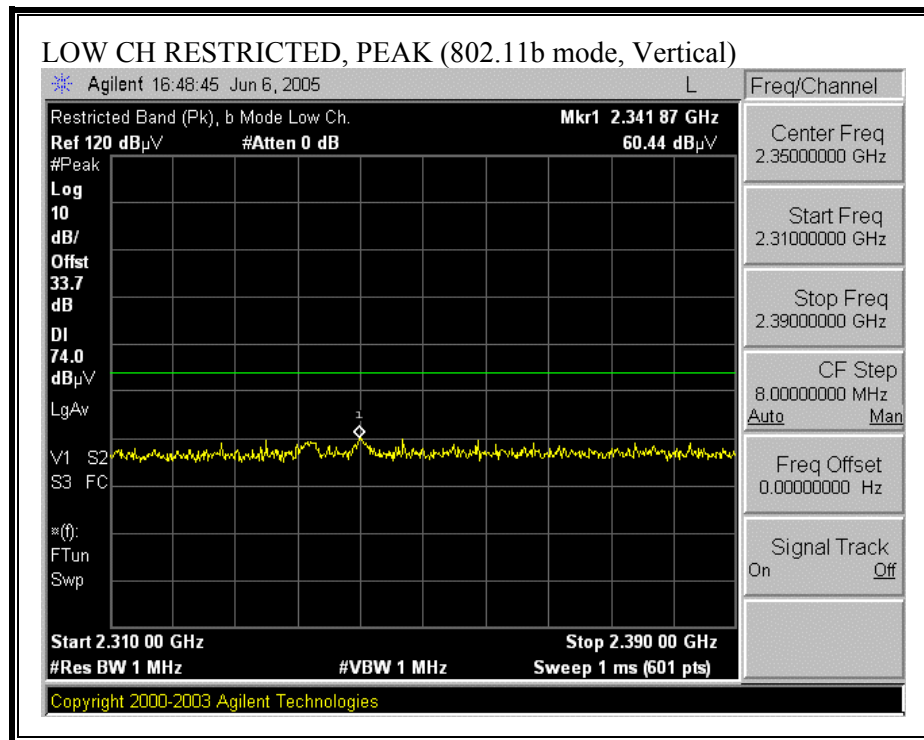

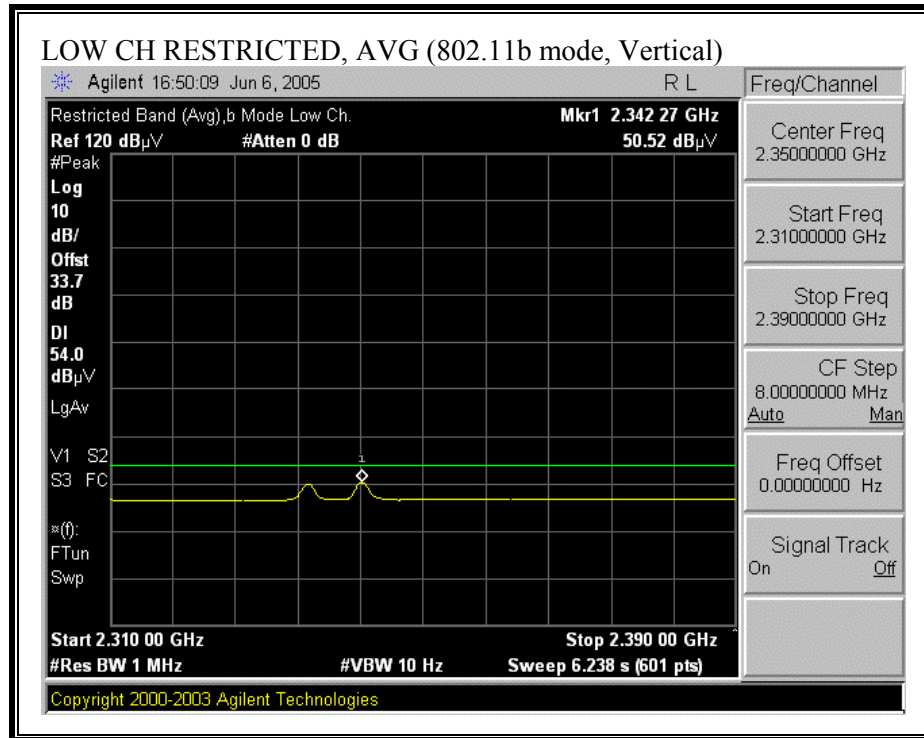



RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, HORIZONTAL)

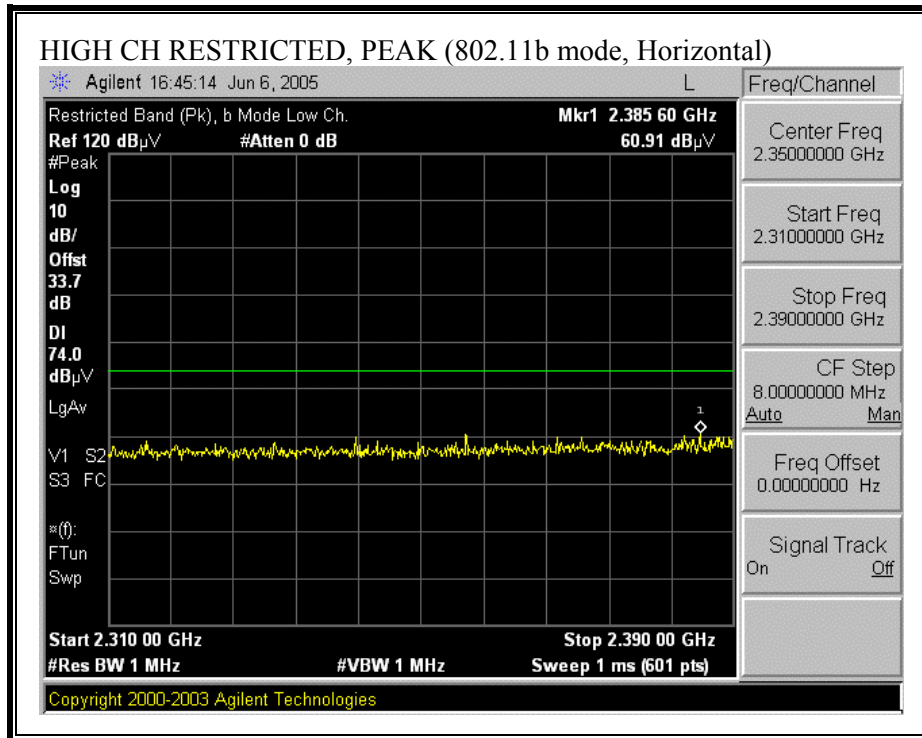

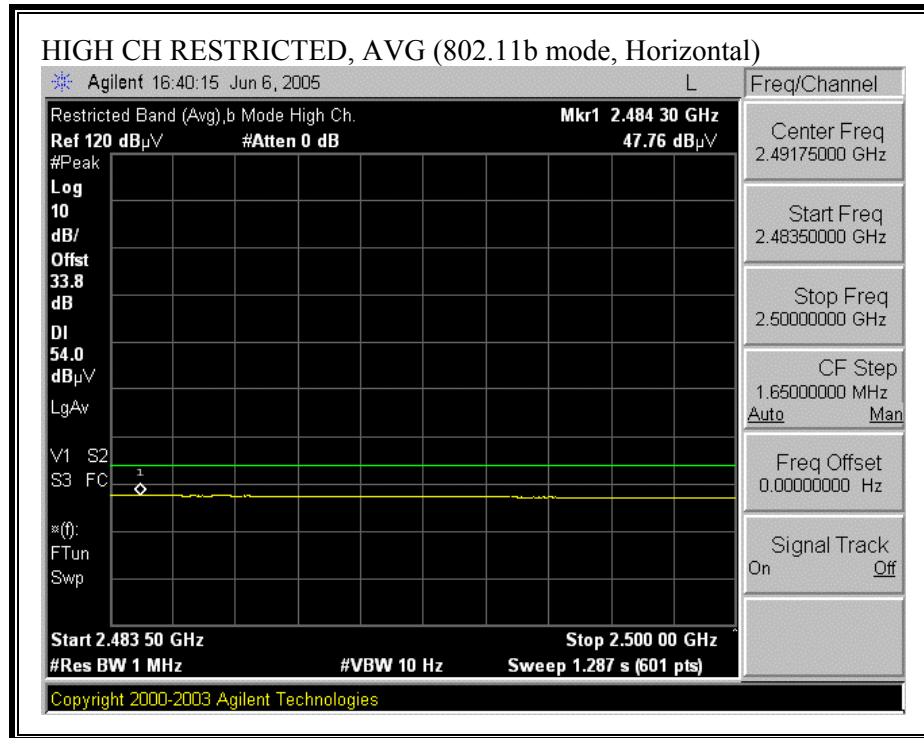

RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, VERTICAL)

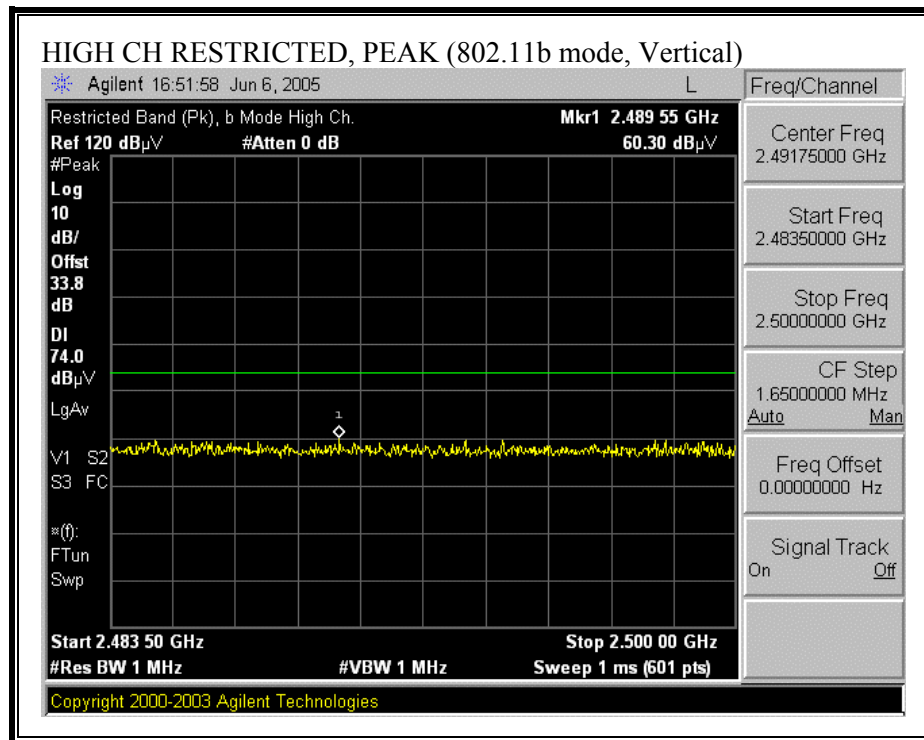


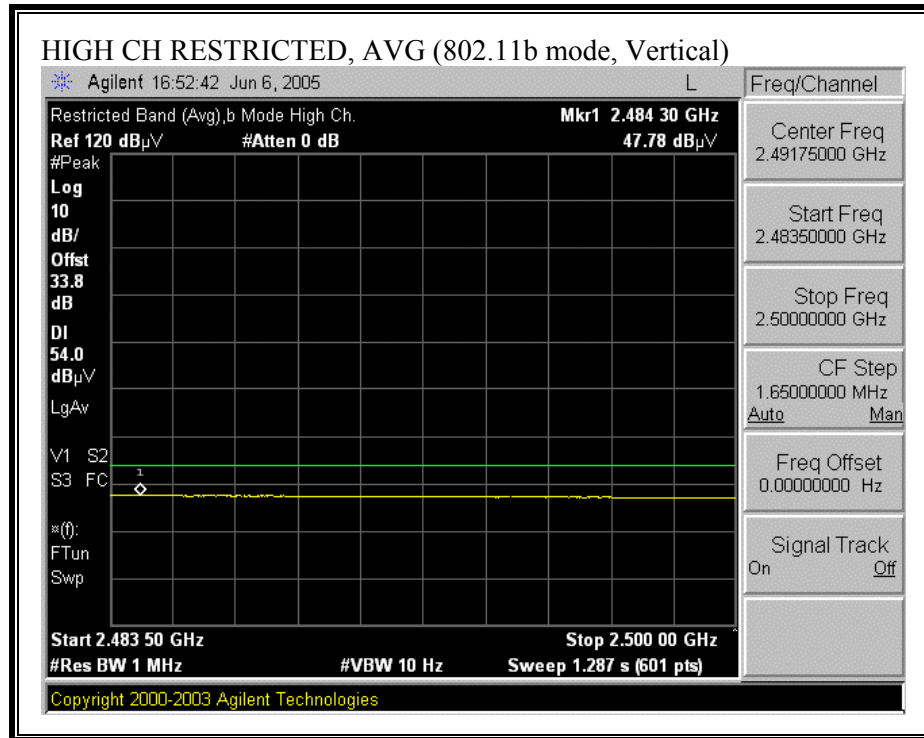


HARMONICS AND SPURIOUS EMISSIONS (b MODE)


| | | | | | | | | | | | | | | | | |
|---|-----------------------|---------------------------------------|-------------------|------------------------|----------|---------------------------|--------------------------------|-----------------------------------|----------------|---------------|------------------|---|------------------------------|---------------|----------------|--|
| 06/07/05 High Frequency Measurement Compliance Certification Services, Morgan Hill Open Field Site | | | | | | | | | | | | | | | | |
| Test Engr: Thanh Nguyen Project #: 05T3452-2 Company: HIGH TECH COMPUTER CORP. EUT Descrip.: PDA Phone(GSM 800.900, EDGE,BT, 802. 11b/g) EUT M/N: WIZAI10 Test Target: FCC Part 15.247 Mode Oper: Transmit WLAN b/g mode, Worst Y Position. | | | | | | | | | | | | | | | | |
| Test Equipment: | | | | | | | | | | | | | | | | |
| EMCO Horn 1-18GHz T60; S/N: 2238 @3m | | Pre-amplifier 1-26GHz T34 HP 8449B | | Pre-amplifier 26-40GHz | | Horn > 18GHz | | Limit | | | | | | | | |
| Hi Frequency Cables | | | | HPF | | Reject Filter | | Peak Measurements REW=VBW=1MHz | | | | | | | | |
| 2 foot cable 2_Thanh | | 3 foot cable | | 4 foot cable | | 12 foot cable 12_Thanh | | HPF 4.0GHz | | Reject Filter | | Average Measurements REW=1MHz ; VBW=10Hz | | | | |
| f GHz | Dist (m) | Read Pk dBuV | Read Avg. dBuV | AF dB/m | CL dB | Amp dB | D Corr dB | Filtr dB | Peak dBuV/m | Avg dBuV/m | Pk Lim dBuV/m | Avg Lim dBuV/m | Pk Mar dB | Avg Mar dB | Notes (V/H) | |
| LOW Channel 2412MHz | | | | | | | | | | | | | | | | |
| 2412 | 3.0 | 53.3 | 43.6 | 28.4 | 2.2 | -35.5 | 0.0 | 0.0 | 48.4 | 38.6 | 74 | 54 | -25.6 | -15.4 | Noise floor | |
| No harmonic and spurious emissions were detected above fundamental for all channels b and g mode | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | |
| f | Measurement Frequency | | | | | Amp | Preamp Gain | | | | | Avg Lim | Average Field Strength Limit | | | |
| Dist | Distance to Antenna | | | | | D Corr | Distance Correct to 3 meters | | | | | Pk Lim | Peak Field Strength Limit | | | |
| Read | Analyzer Reading | | | | | Avg | Average Field Strength @ 3 m | | | | | Avg Mar | Margin vs. Average Limit | | | |
| AF | Antenna Factor | | | | | Peak | Calculated Peak Field Strength | | | | | Pk Mar | Margin vs. Peak Limit | | | |
| CL | Cable Loss | | | | | HPF | High Pass Filter | | | | | | | | | |


RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, HORIZONTAL)

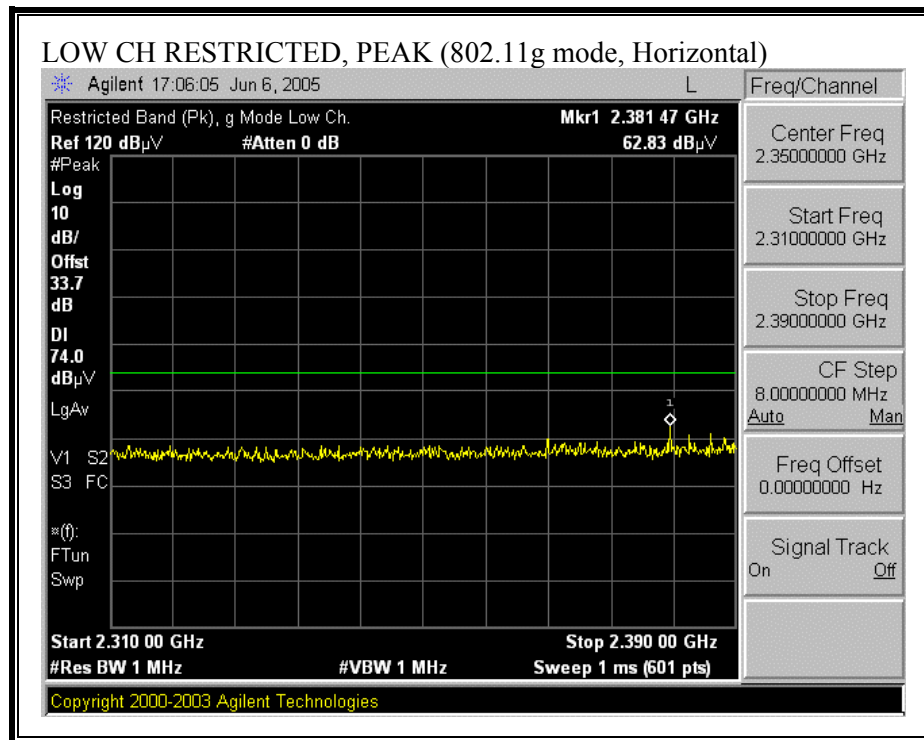

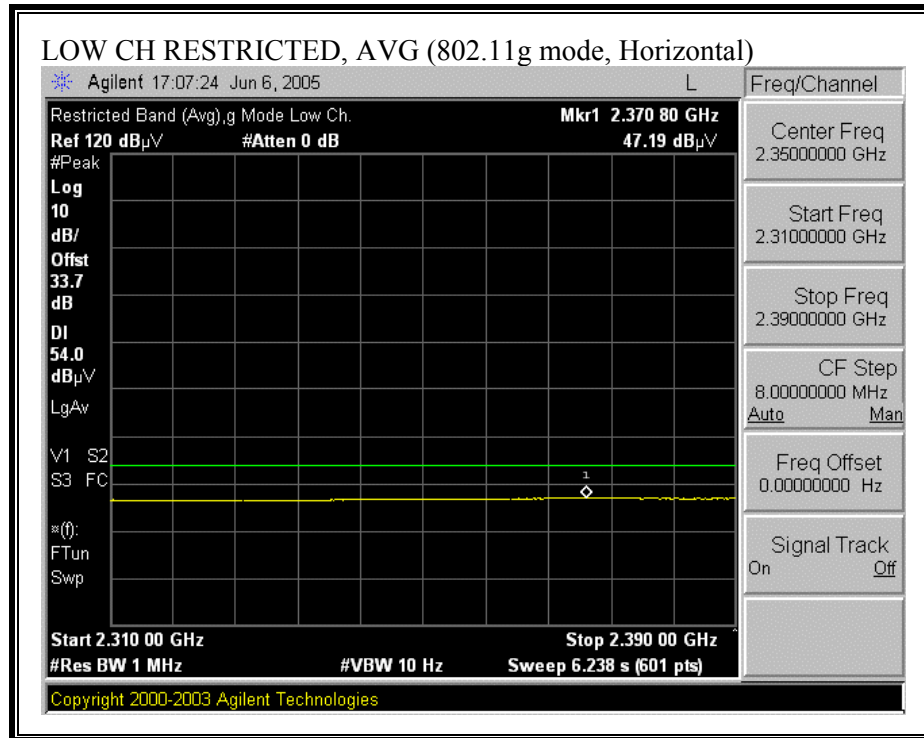



RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, VERTICAL)

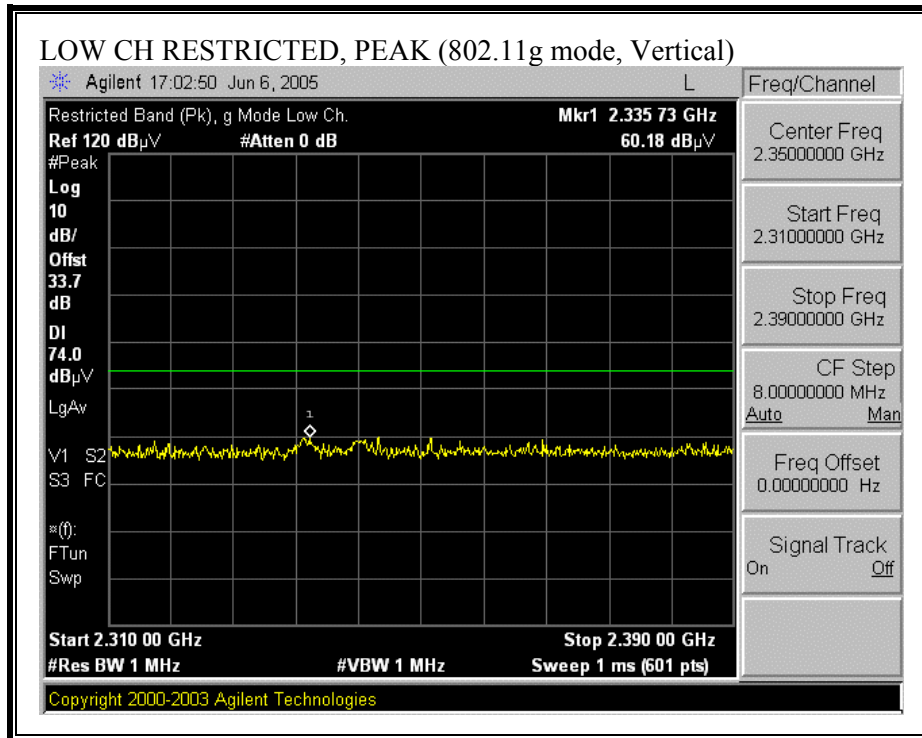

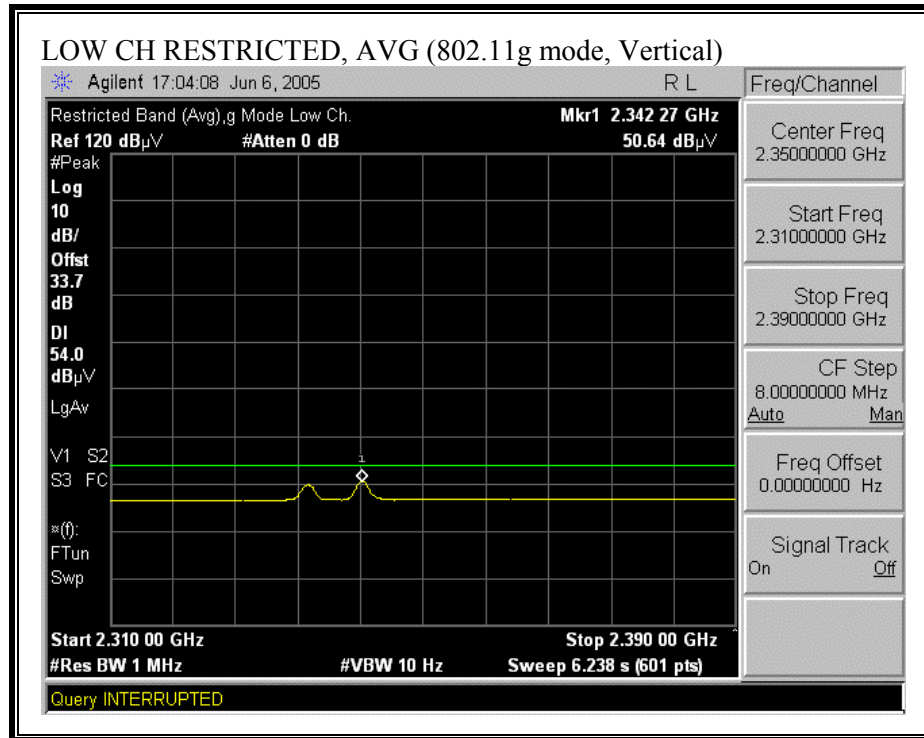



RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, HORIZONTAL)

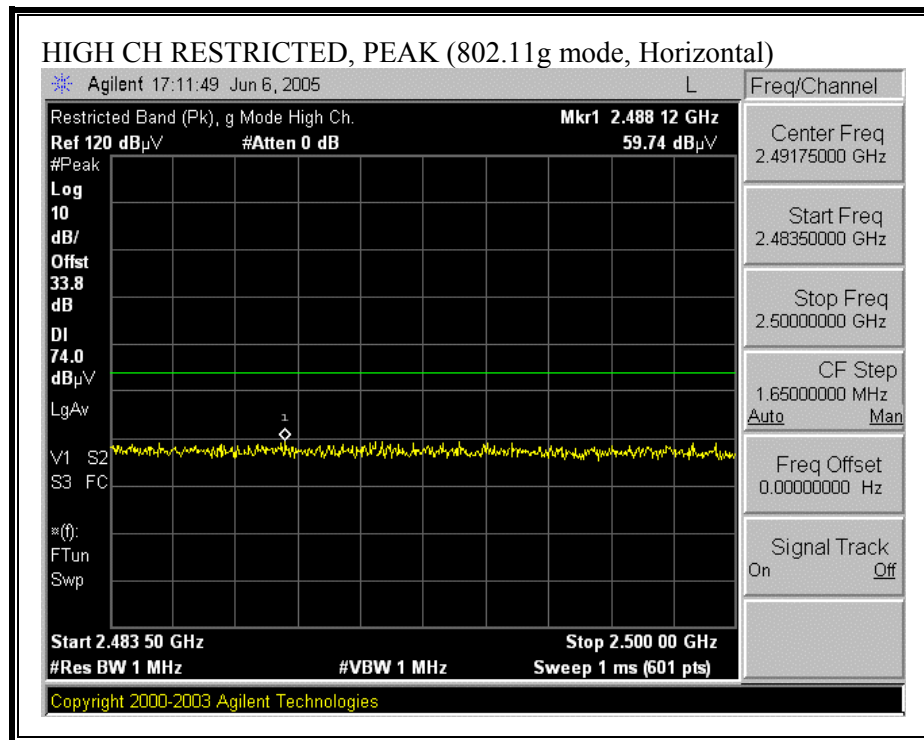

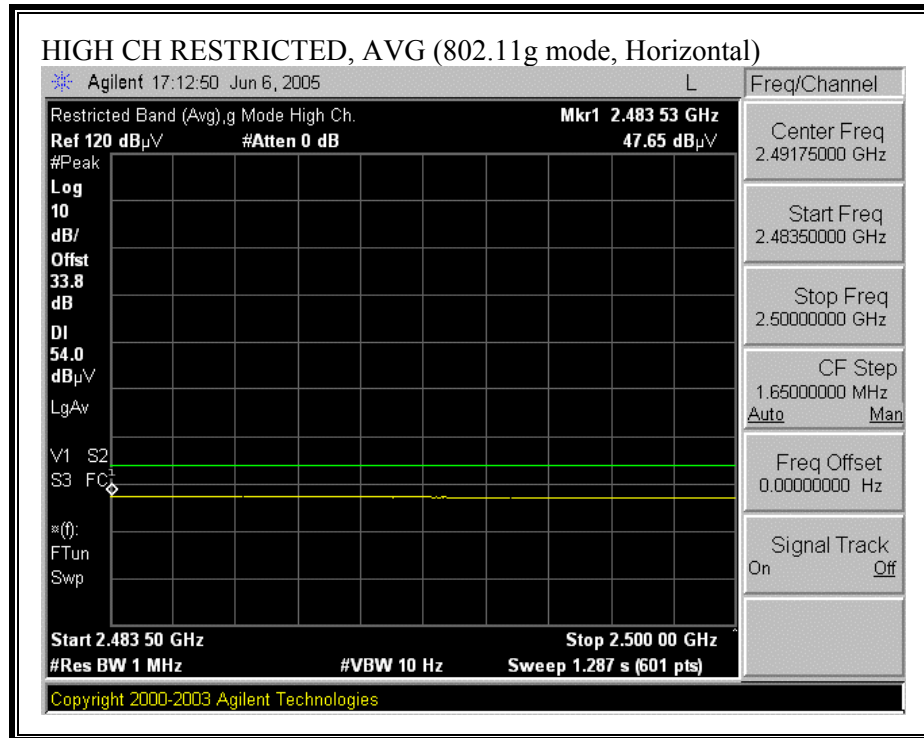

RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, VERTICAL)

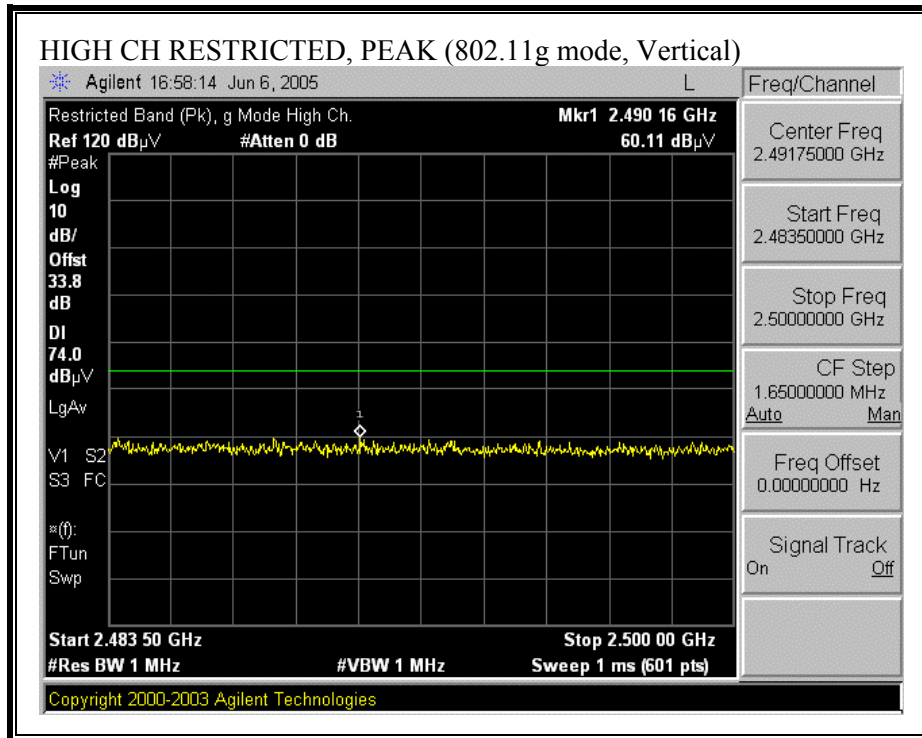

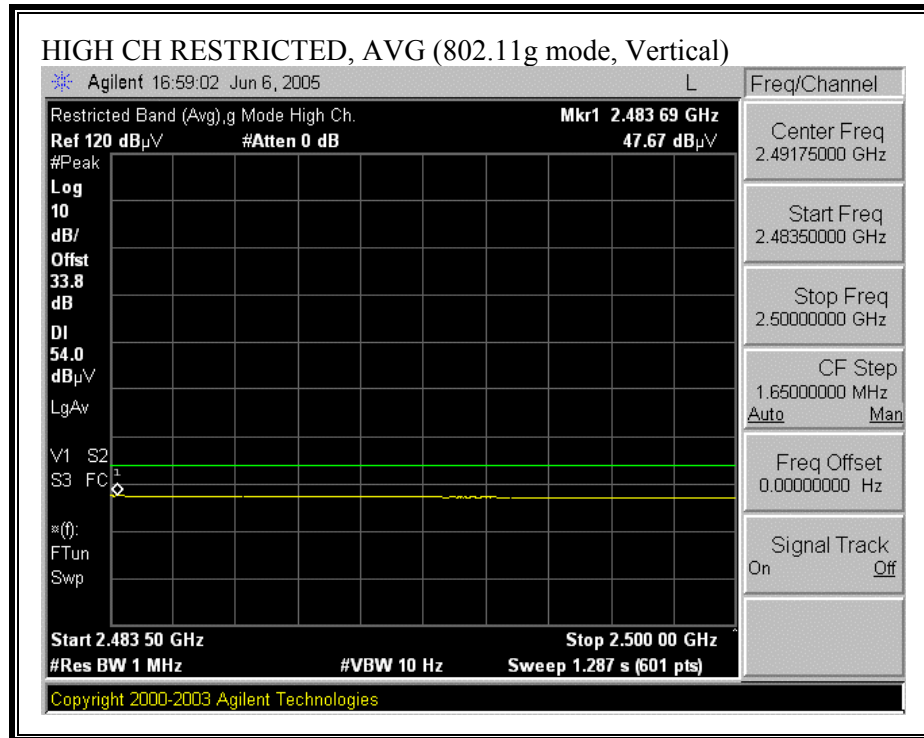



HARMONICS AND SPURIOUS EMISSIONS (g MODE)

| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|---------------------------------------|------------------------|---------------------------|------------|---------------|---|--------------------------------|-------------|----------------|---------------|------------------|-------------------|------------------------------|---------------|----------------|---|---------------------------------------|------------------------|--------------|-------|---------------------|--|--|--|-----|---------------|-----------------------------------|-------------------------|--------------|--------------|---------------------------|------------|--|---|
| <p>06/07/05 High Frequency Measurement Compliance Certification Services, Morgan Hill Open Field Site</p> <p>Test Engr: Thanh Nguyen Project #: 05T3452-2 Company: HIGH TECH COMPUTER CORP. EUT Descrip.: PDA Phone(GSM 800.900, EDGE,BT, 802. 11b/g) EUT M/N: WIZAI10 Test Target: FCC Part 15.247 Mode Oper: Transmit WLAN b/g mode, Worst Y Position.</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>Test Equipment:</p> <table border="1"> <tr> <td>EMCO Horn 1-18GHz T60; S/N: 2238 @3m</td> <td>Pre-amplifier 1-26GHz T34 HP 8449B</td> <td>Pre-amplifier 26-40GHz</td> <td>Horn > 18GHz</td> <td>Limit</td> </tr> </table> <table border="1"> <tr> <td colspan="4">Hi Frequency Cables</td> <td>HPF</td> <td>Reject Filter</td> <td>Peak Measurements REW=VBW=1MHz</td> </tr> <tr> <td>2 foot cable 2_Thanh</td> <td>3 foot cable</td> <td>4 foot cable</td> <td>12 foot cable 12_Thanh</td> <td>HPF 4.0GHz</td> <td></td> <td>Average Measurements REW=1MHz ; VBW=10Hz</td> </tr> </table> | | | | | | | | | | | | | | | | EMCO Horn 1-18GHz T60; S/N: 2238 @3m | Pre-amplifier 1-26GHz T34 HP 8449B | Pre-amplifier 26-40GHz | Horn > 18GHz | Limit | Hi Frequency Cables | | | | HPF | Reject Filter | Peak Measurements REW=VBW=1MHz | 2 foot cable 2_Thanh | 3 foot cable | 4 foot cable | 12 foot cable 12_Thanh | HPF 4.0GHz | | Average Measurements REW=1MHz ; VBW=10Hz |
| EMCO Horn 1-18GHz T60; S/N: 2238 @3m | Pre-amplifier 1-26GHz T34 HP 8449B | Pre-amplifier 26-40GHz | Horn > 18GHz | Limit | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Hi Frequency Cables | | | | HPF | Reject Filter | Peak Measurements REW=VBW=1MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 foot cable 2_Thanh | 3 foot cable | 4 foot cable | 12 foot cable 12_Thanh | HPF 4.0GHz | | Average Measurements REW=1MHz ; VBW=10Hz | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| f GHz | Dist (m) | Read Pk dBuV | Read Avg. dBuV | AF dB/m | CL dB | Amp dB | D Corr dB | Filtr dB | Peak dBuV/m | Avg dBuV/m | Pk Lim dBuV/m | Avg Lim dBuV/m | Pk Mar dB | Avg Mar dB | Notes (V/H) | | | | | | | | | | | | | | | | | | | |
| LOW Channel 2412MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2412 | 3.0 | 53.3 | 43.6 | 28.4 | 2.2 | -35.5 | 0.0 | 0.0 | 48.4 | 38.6 | 74 | 54 | -25.6 | -15.4 | Noise floor | | | | | | | | | | | | | | | | | | | |
| No harmonic and spurious emissions were detected above fundamental for all channels b and g mode | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| f | Measurement Frequency | | | | | Amp | Preamp Gain | | | | | Avg Lim | Average Field Strength Limit | | | | | | | | | | | | | | | | | | | | | |
| Dist | Distance to Antenna | | | | | D Corr | Distance Correct to 3 meters | | | | | Pk Lim | Peak Field Strength Limit | | | | | | | | | | | | | | | | | | | | | |
| Read | Analyzer Reading | | | | | Avg | Average Field Strength @ 3 m | | | | | Avg Mar | Margin vs. Average Limit | | | | | | | | | | | | | | | | | | | | | |
| AF | Antenna Factor | | | | | Peak | Calculated Peak Field Strength | | | | | Pk Mar | Margin vs. Peak Limit | | | | | | | | | | | | | | | | | | | | | |
| CL | Cable Loss | | | | | HPF | High Pass Filter | | | | | | | | | | | | | | | | | | | | | | | | | | | |


8.2.4. WIZA 200 MODEL


RESTRICTED BANDEDGE (BLUETOOTH MODE, LOW CHANNEL, HORIZONTAL)

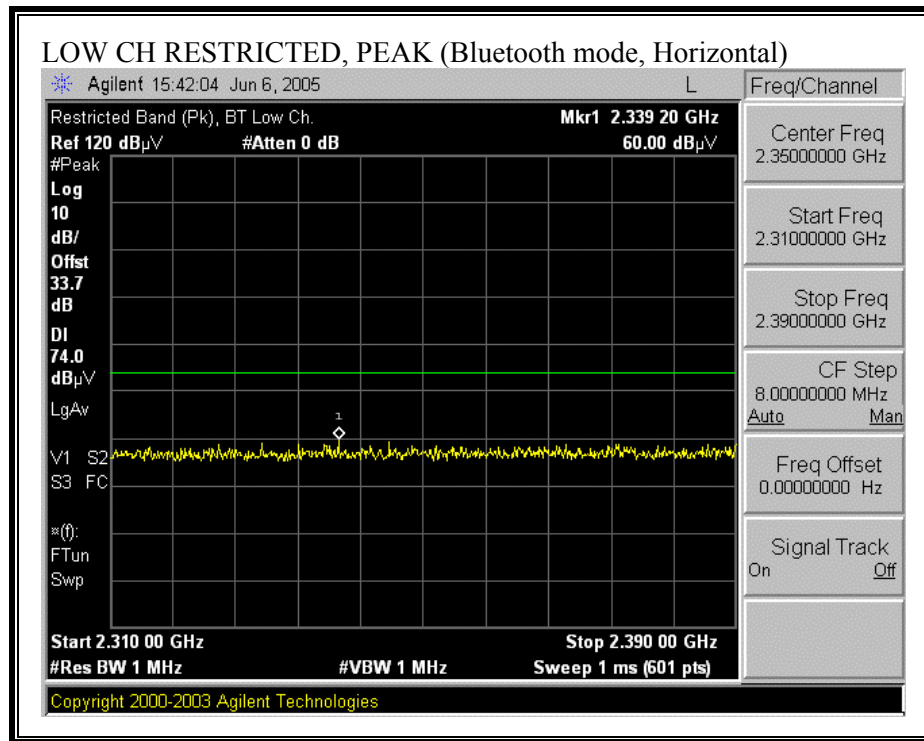

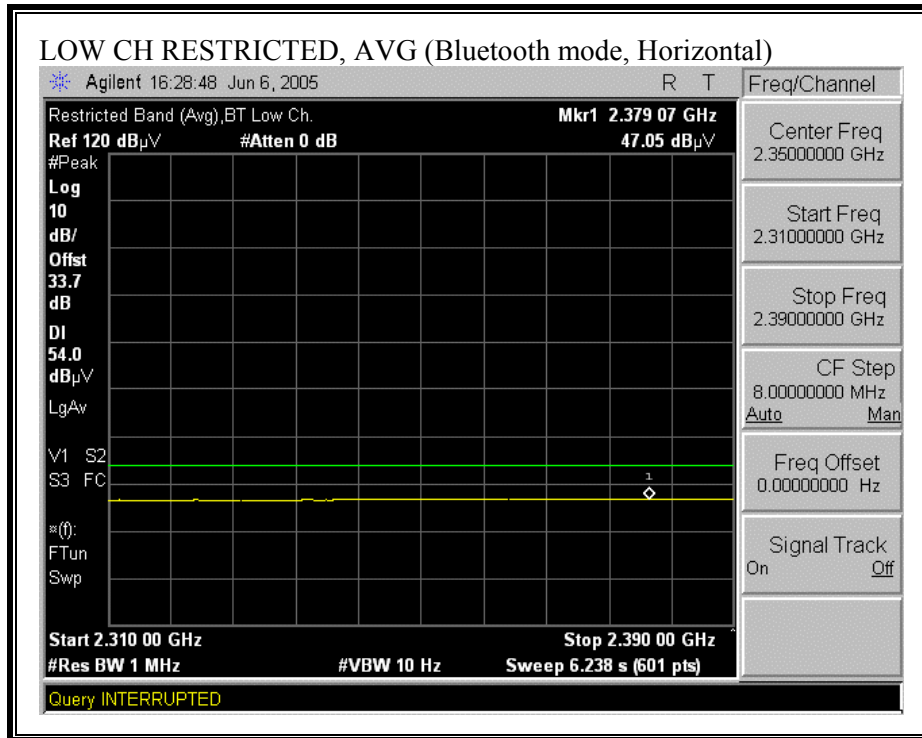



RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, VERTICAL)

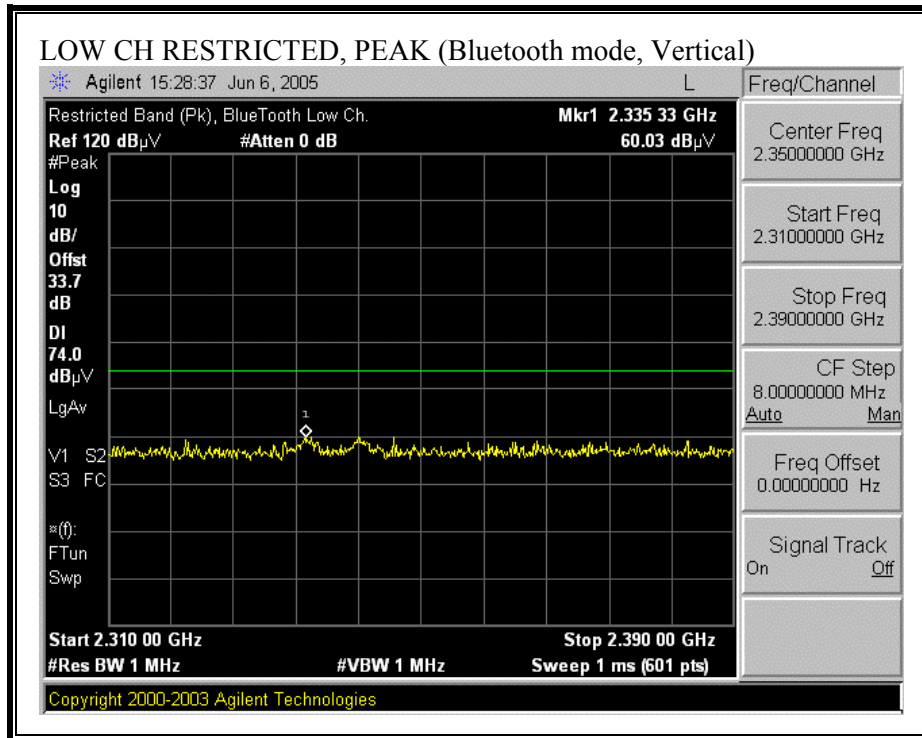

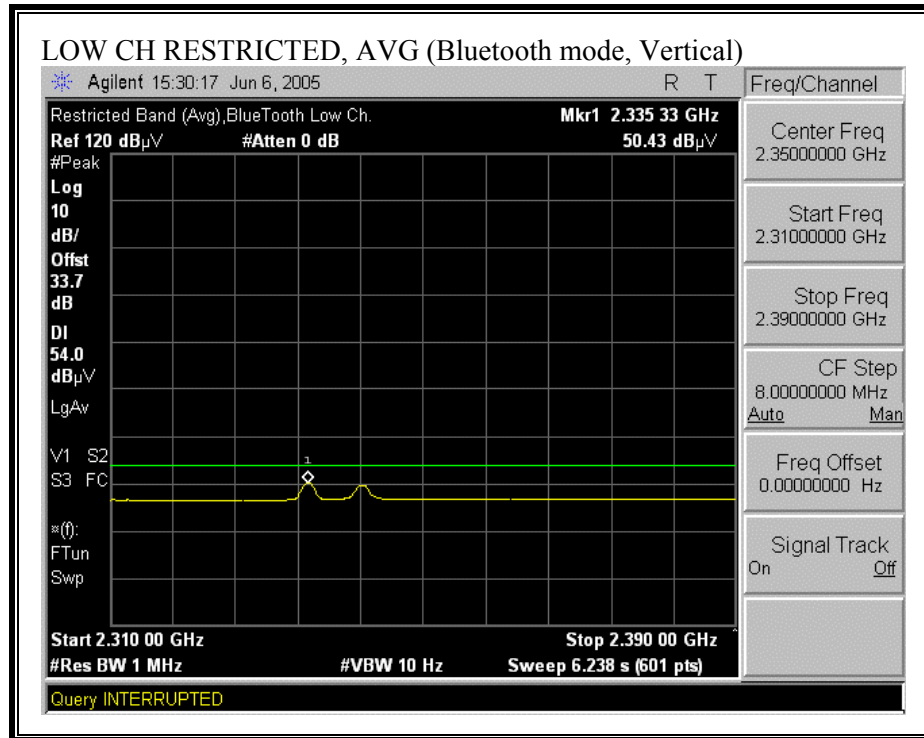



RESTRICTED BANDEDGE (BLUETOOTH MODE, HIGH CHANNEL, HORIZONTAL)

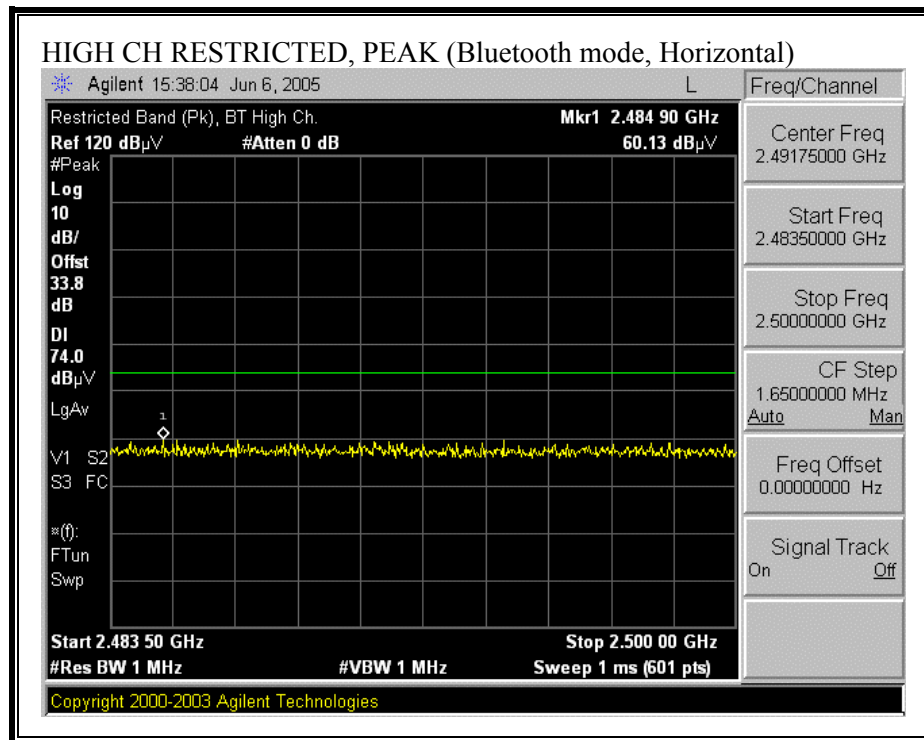

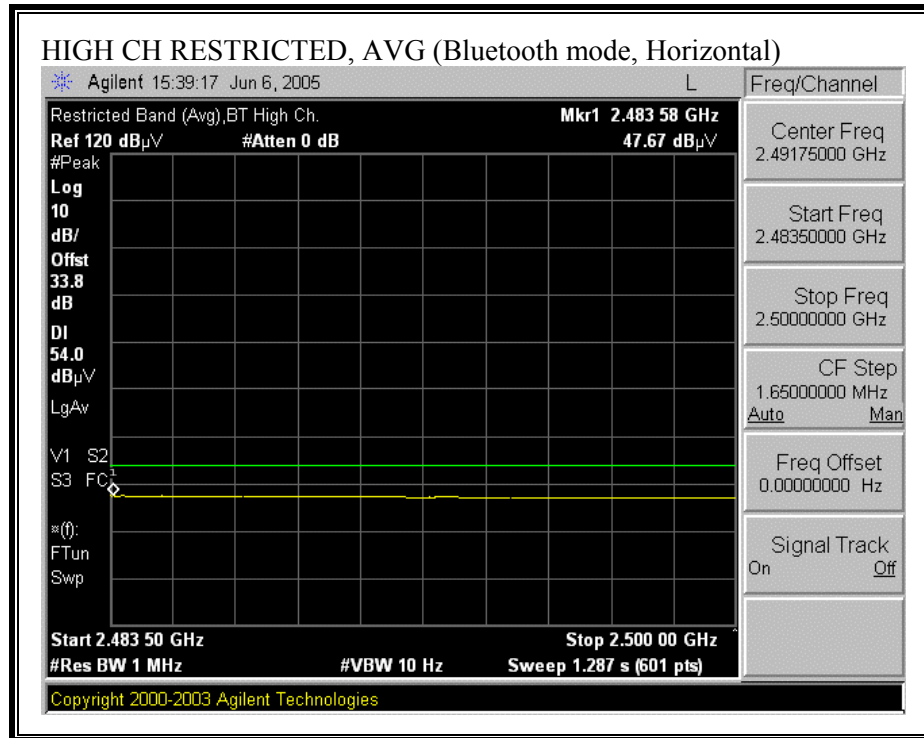

RESTRICTED BANDEDGE (BLUETOOTH MODE, HIGH CHANNEL, VERTICAL)

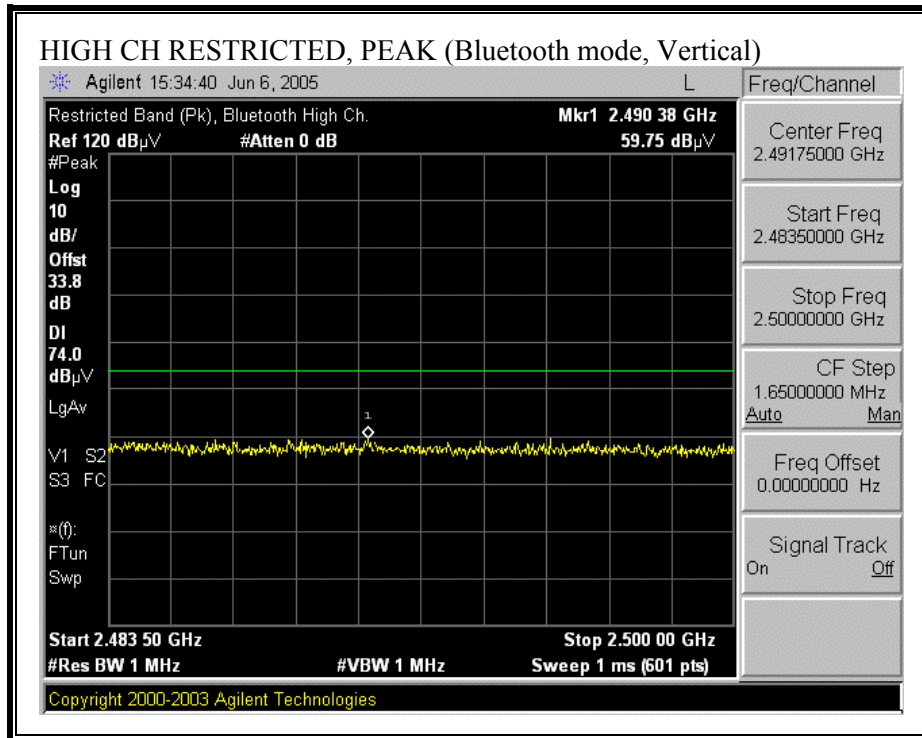

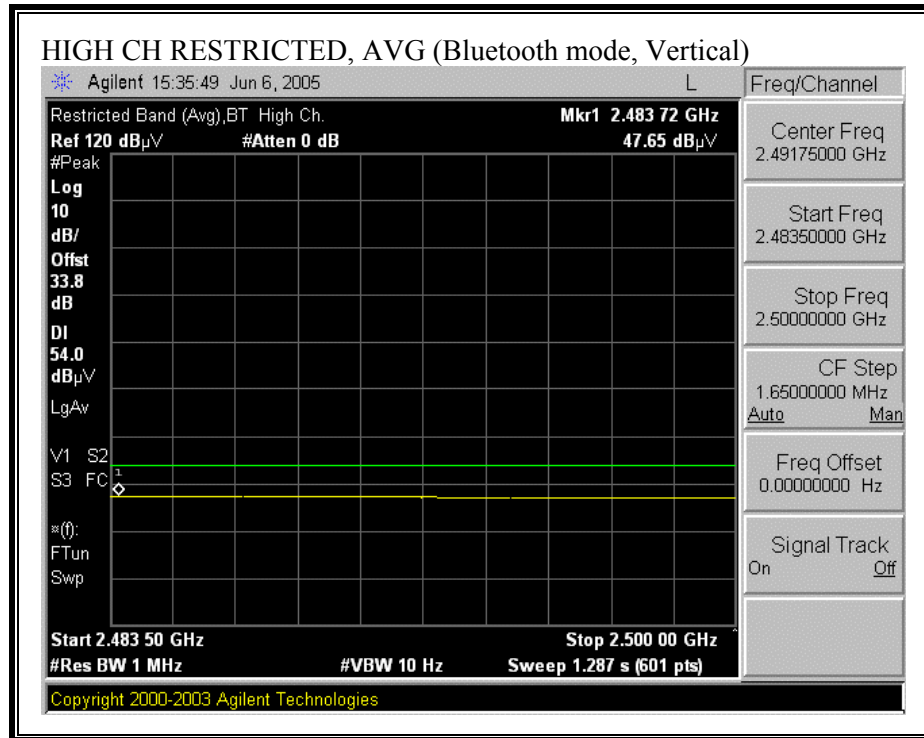

HARMONICS AND SPURIOUS EMISSIONS (BLUETOOTH MODE)

Test Engr: Thanh Nguyen

Project #:05T3452-2

Company: HIGH TECH COMPUTER CORP.

EUT Descrip.: PDA Phone(GSM 800.900, EDGE,BT, 802. 11b/g

EUT M/N: WIZA200

Test Target: FCC Part 15.247

Mode Oper: Transmit BlueTooth. Worst Y Position.

Test Equipment:


| | | | | |
|--------------------|-----------------------|------------------------|--------------|-------|
| EMCO Horn 1-18GHz | Pre-amplifier 1-26GHz | Pre-amplifier 26-40GHz | Horn > 18GHz | Limit |
| T60; S/N: 2238 @3m | T34 HP 8449B | | | |


| | | | | | | |
|---------------------|--------------|--------------|---------------|------------|---------------|---|
| Hi Frequency Cables | | | | HPF | Reject Filter | Peak Measurements RBW=VBW=1MHz |
| 2 foot cable | 3 foot cable | 4 foot cable | 12 foot cable | | | Average Measurements RBW=1MHz ; VBW=10Hz |
| 2_Thanh | | | 12_Thanh | HPF_4.0GHz | | |

| f GHz | Dist (m) | Read Pk dBuV | Read Avg. dBuV | AF dB/m | CL dB | Amp dB | D Corr dB | Fldr dB | Peak dBuV/m | Avg dBuV/m | Pk Lim dBuV/m | Avg Lim dBuV/m | Pk Mar dB | Avg Mar dB | Notes (V/H) |
|---|-------------|-----------------|-------------------|------------|----------|-----------|--------------|------------|----------------|---------------|------------------|-------------------|--------------|---------------|----------------|
| High Channel 2480MHz | | | | | | | | | | | | | | | |
| 2.496 | 3.0 | 56.8 | 45.2 | 28.6 | 2.2 | -35.4 | 0.0 | 0.0 | 52.3 | 40.7 | 74 | 54 | -21.7 | -13.3 | Noise floor |
| No harmonic and Spurious emissions were detected above fundamental signal for all channels. | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | |


| | | | | | |
|------|-----------------------|--------|--------------------------------|---------|------------------------------|
| f | Measurement Frequency | Amp | Preamp Gain | Avg Lim | Average Field Strength Limit |
| Dist | Distance to Antenna | D Corr | Distance Correct to 3 meters | Pk Lim | Peak Field Strength Limit |
| Read | Analyzer Reading | Avg | Average Field Strength @ 3 m | Avg Mar | Margin vs. Average Limit |
| AF | Antenna Factor | Peak | Calculated Peak Field Strength | Pk Mar | Margin vs. Peak Limit |
| CL | Cable Loss | HPF | High Pass Filter | | |


RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, HORIZONTAL)

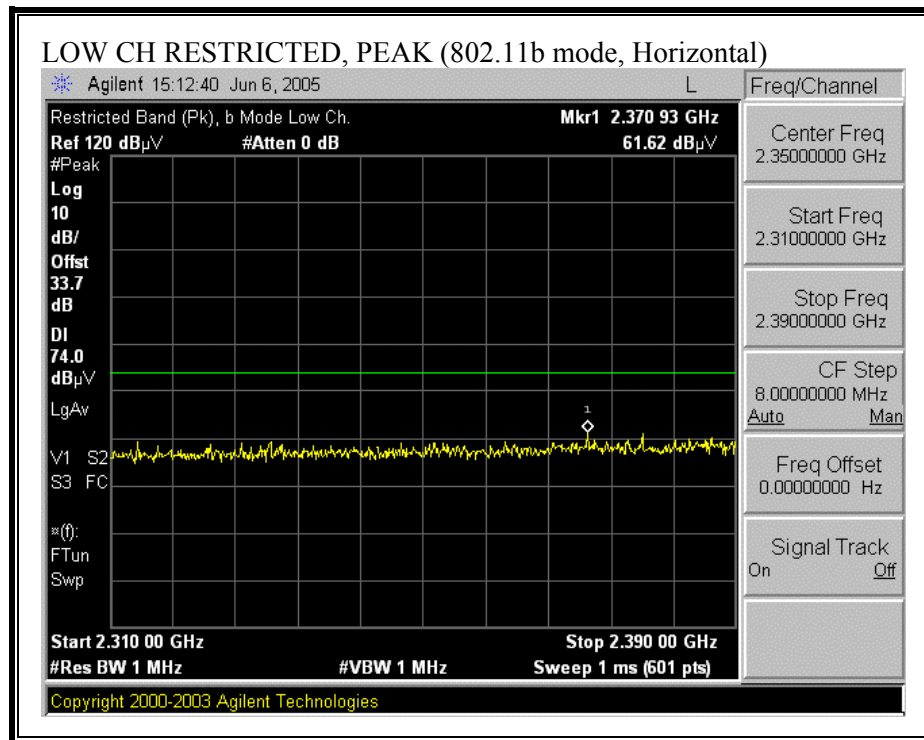

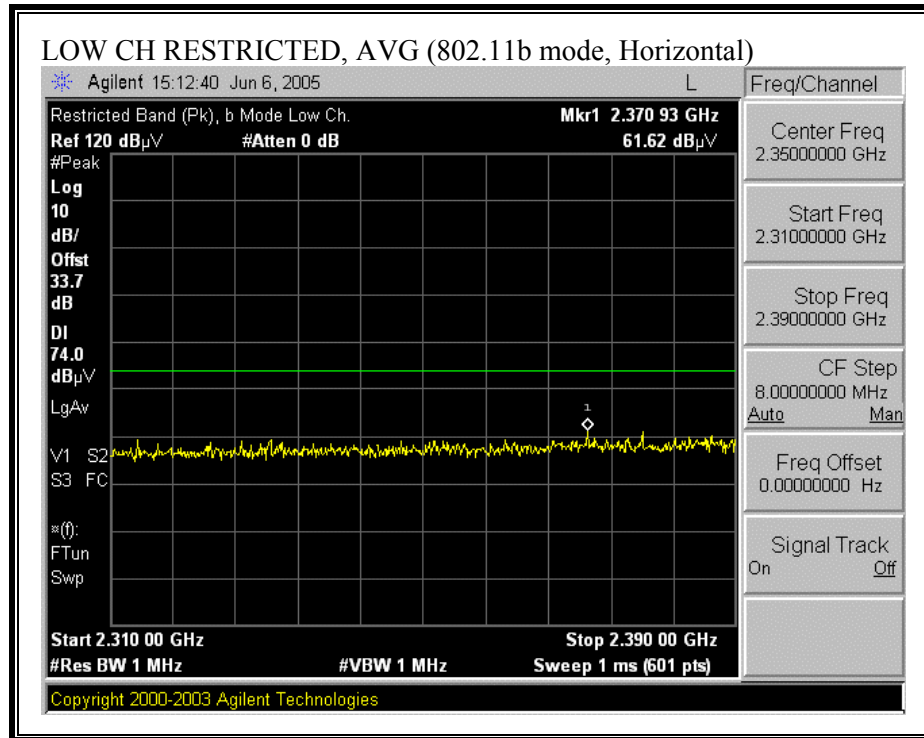



RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, VERTICAL)

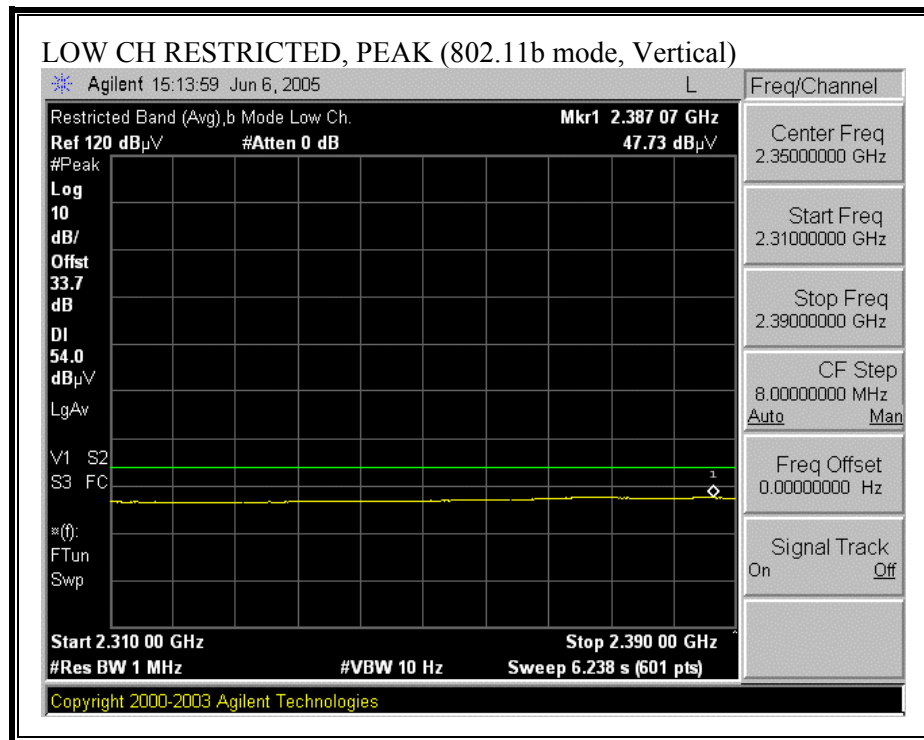

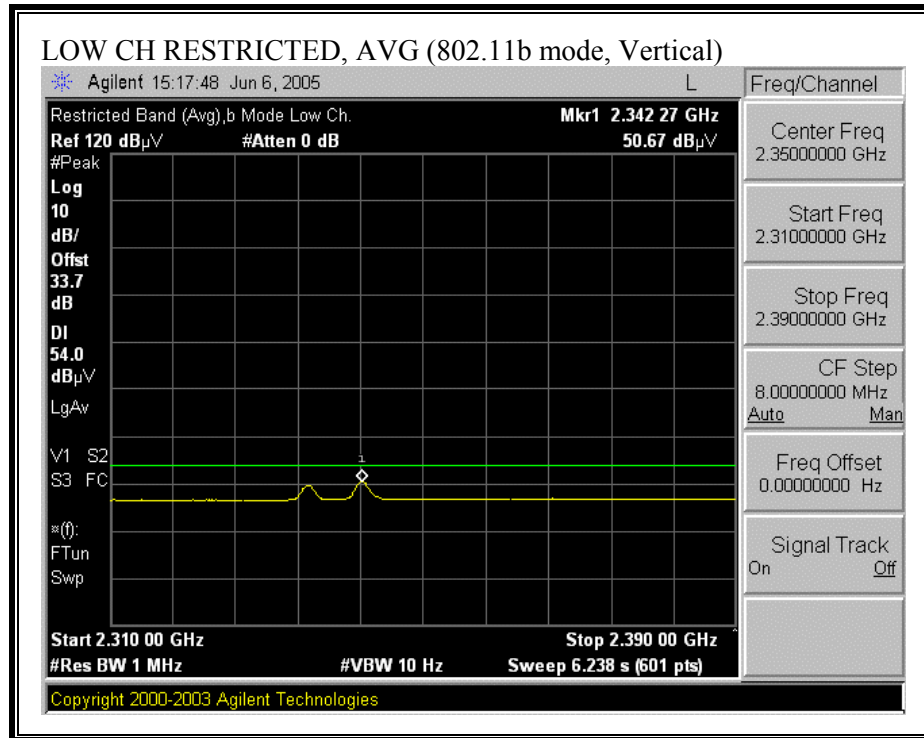



RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, HORIZONTAL)

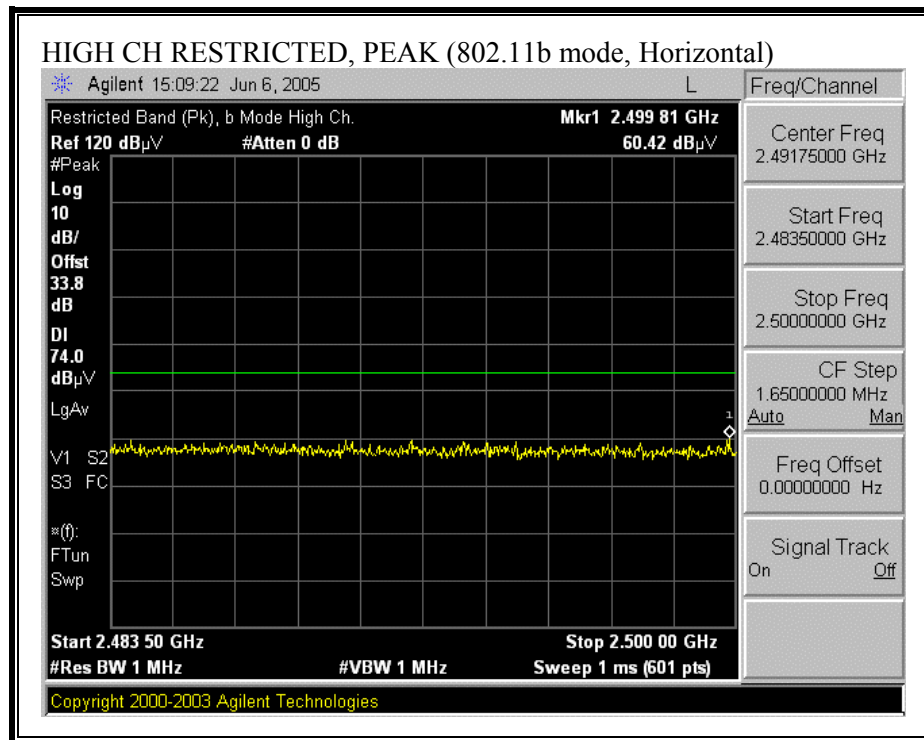

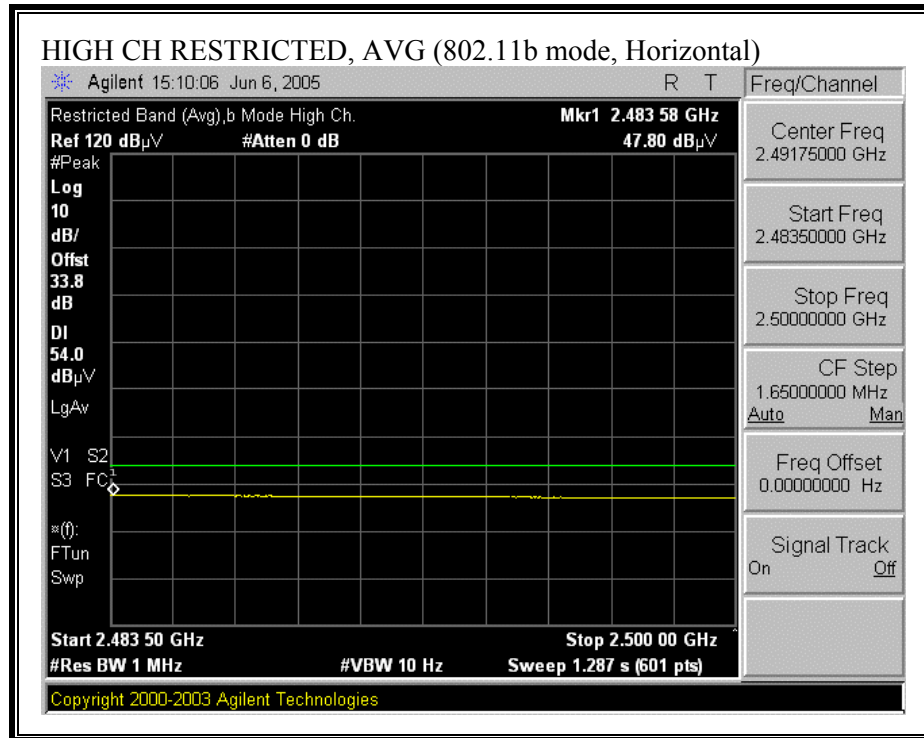

RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, VERTICAL)

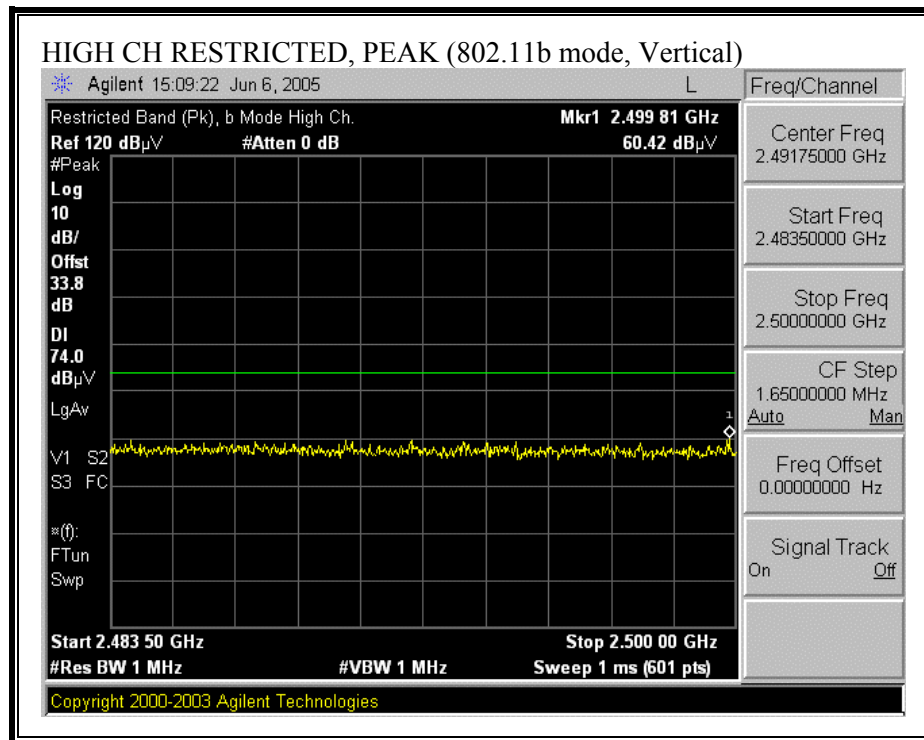


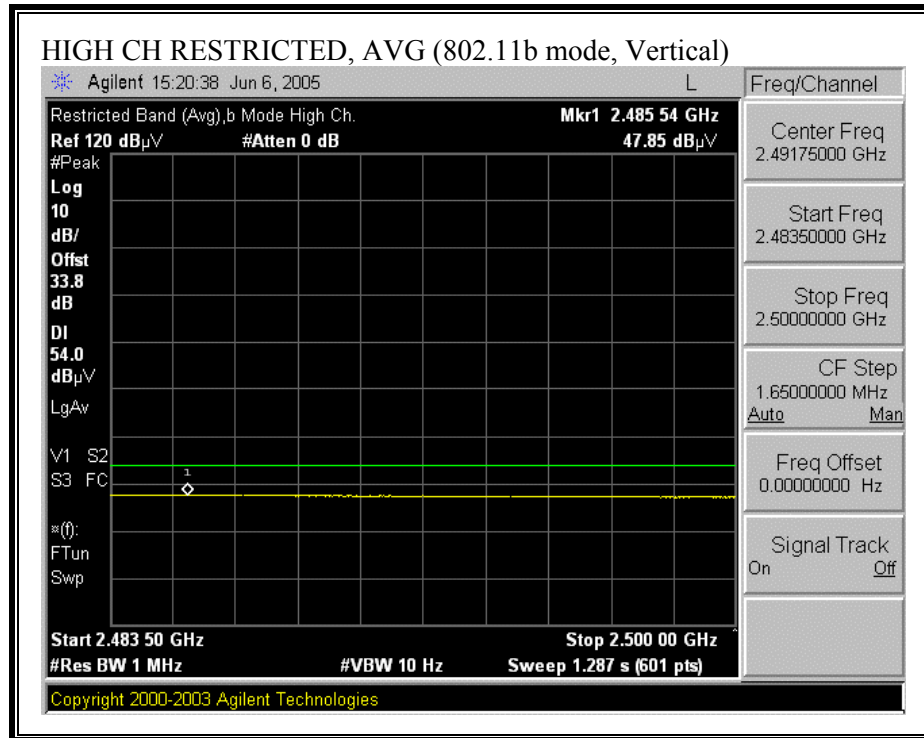


HARMONICS AND SPURIOUS EMISSIONS (b MODE)


| | | | | | | | | | | | | | | | |
|--|-----------------------|-----------------------|-------------------|------------------------|----------|---------------|--------------------------------|-------------|----------------|---------------|------------------|-------------------|------------------------------|--|----------------|
| 06/07/05 High Frequency Measurement Compliance Certification Services, Morgan Hill Open Field Site Test Engr: Thanh Nguyen Project #: 05T3452-2 Company: HIGH TECH COMPUTER CORP. EUT Descrip.: PDA Phone(GSM 800.900, EDGE,BT, 802. 11b/g) EUT M/N: WIZA200 Test Target: FCC Part 15.247 Mode Oper: Transmit WLAN b/g mode, Worst Y Position. | | | | | | | | | | | | | | | |
| Test Equipment: | | | | | | | | | | | | | | | |
| EMCO Horn 1-18GHz | | Pre-amplifier 1-26GHz | | Pre-amplifier 26-40GHz | | Horn > 18GHz | | Limit | | | | | | | |
| T60; S/N: 2238 @3m | | T34 HP 8449B | | | | | | | | | | | | | |
| Hi Frequency Cables | | | | | | | | | | HPF | | Reject Filter | | Peak Measurements REW=VBW=1MHz Average Measurements REW=1MHz ; VBW=10Hz | |
| 2 foot cable | | 3 foot cable | | 4 foot cable | | 12 foot cable | | | | HPF | | Reject Filter | | | |
| 2_Thanh | | | | | | 12_Thanh | | | | HPF_4.0GHz | | | | | |
| f GHz | Dist (m) | Read Pk dBuV | Read Avg. dBuV | AF dB/m | CL dB | Amp dB | D Corr dB | Filtr dB | Peak dBuV/m | Avg dBuV/m | Pk Lim dBuV/m | Avg Lim dBuV/m | Pk Mar dB | Avg Mar dB | Notes (V/H) |
| LOW Channel 2412MHz | | | | | | | | | | | | | | | |
| 2412 | 3.0 | 53.3 | 43.6 | 28.4 | 2.2 | -35.5 | 0.0 | 0.0 | 48.4 | 38.6 | 74 | 54 | -25.6 | -15.4 | Noise floor |
| No harmonic and spurious emissions were detected above fundamental for all channels b and g mode | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | |
| f | Measurement Frequency | | | | | Amp | Preamp Gain | | | | | Avg Lim | Average Field Strength Limit | | |
| Dist | Distance to Antenna | | | | | D Corr | Distance Correct to 3 meters | | | | | Pk Lim | Peak Field Strength Limit | | |
| Read | Analyzer Reading | | | | | Avg | Average Field Strength @ 3 m | | | | | Avg Mar | Margin vs. Average Limit | | |
| AF | Antenna Factor | | | | | Peak | Calculated Peak Field Strength | | | | | Pk Mar | Margin vs. Peak Limit | | |
| CL | Cable Loss | | | | | HPF | High Pass Filter | | | | | | | | |


RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, HORIZONTAL)

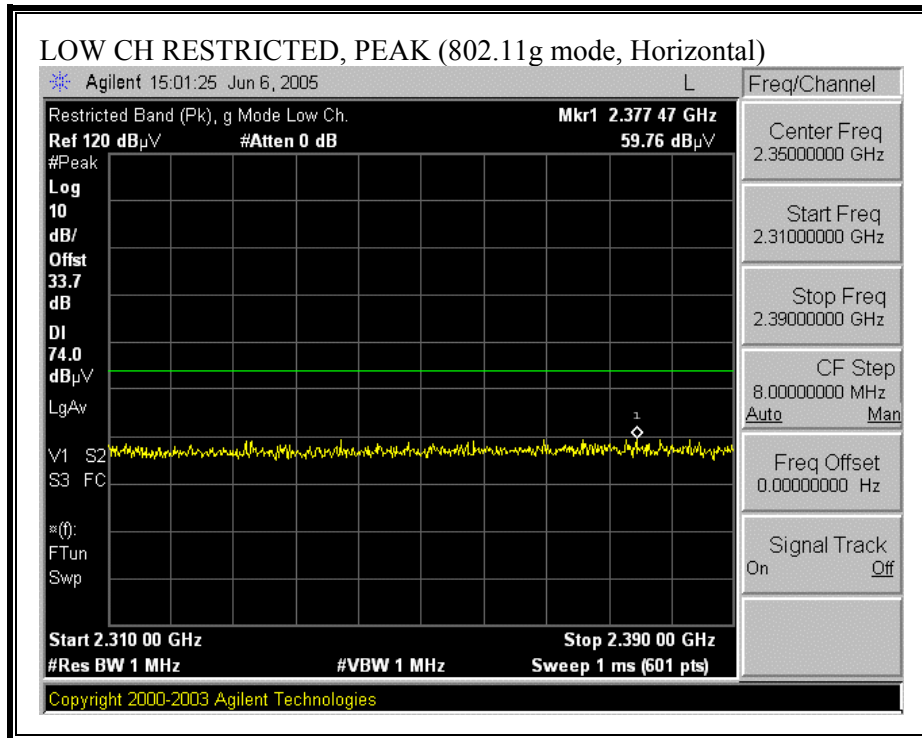

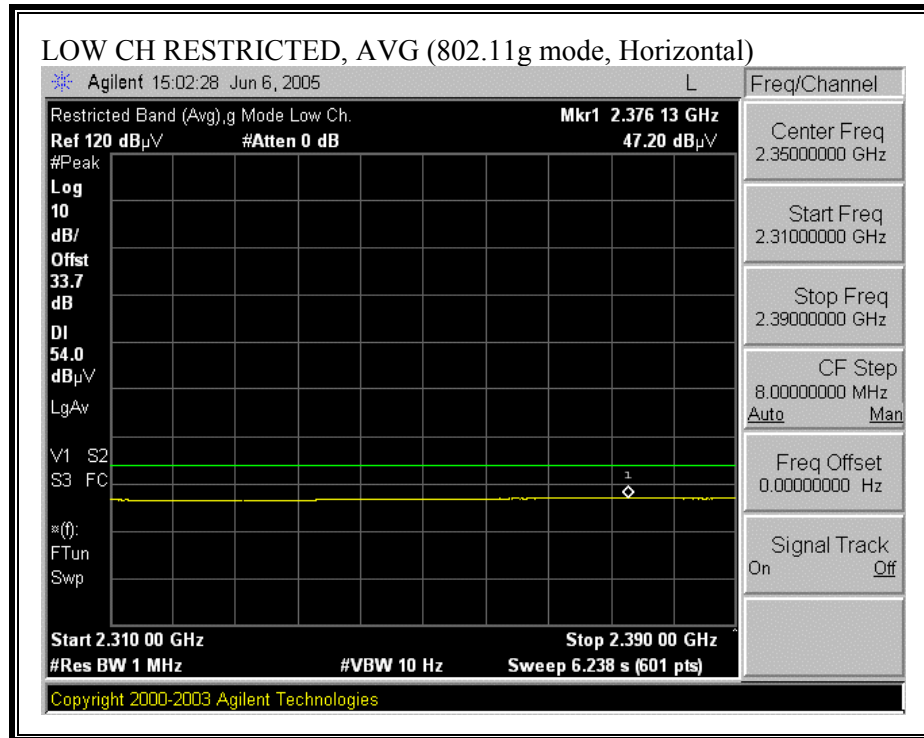



RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, VERTICAL)

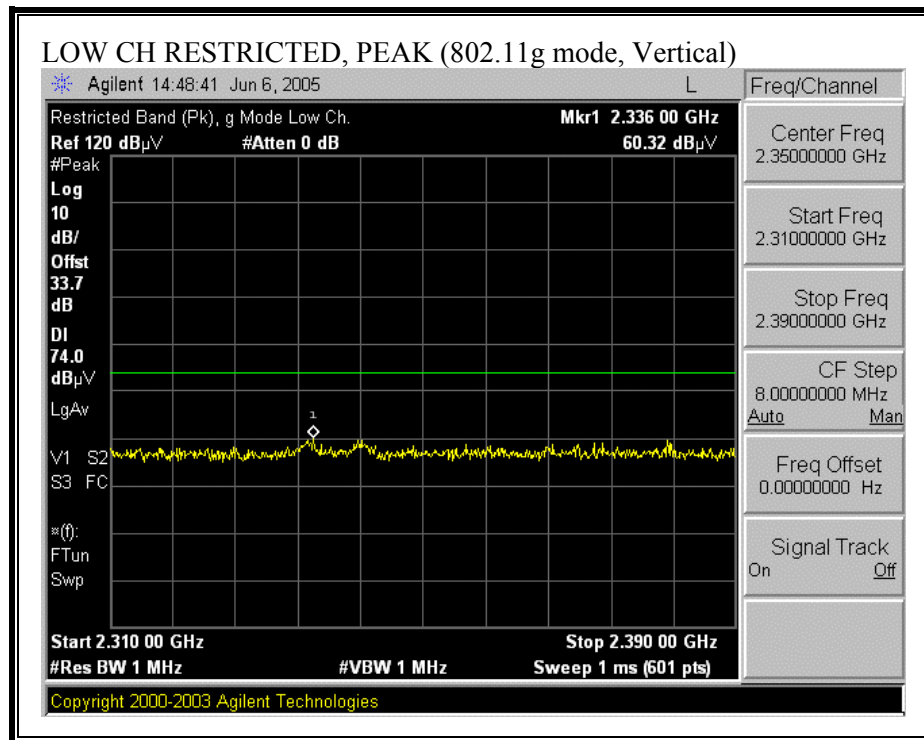

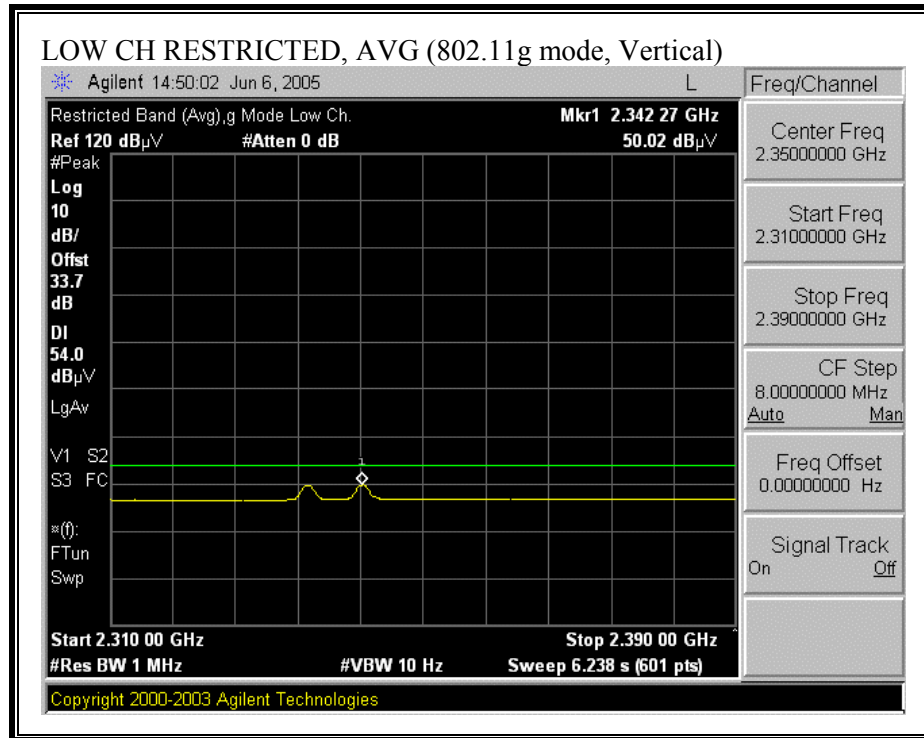



RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, HORIZONTAL)

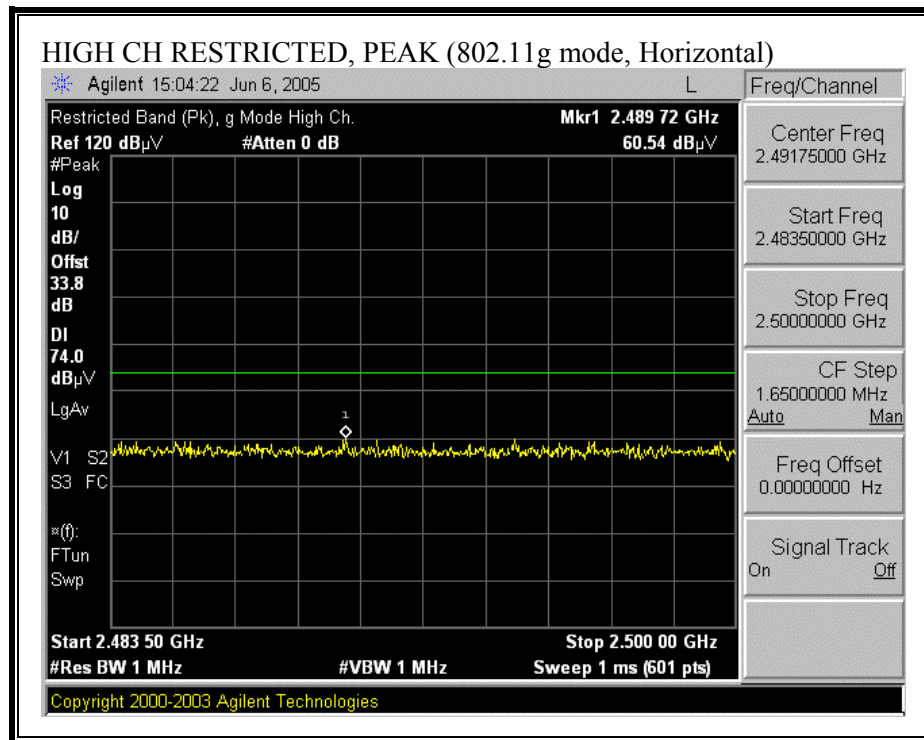

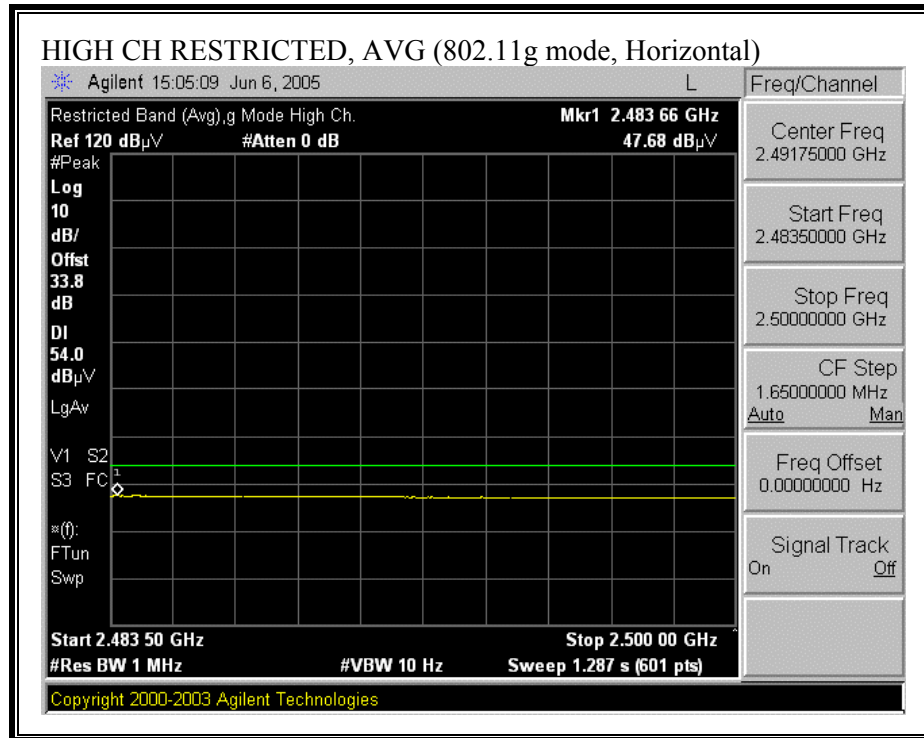

RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, VERTICAL)

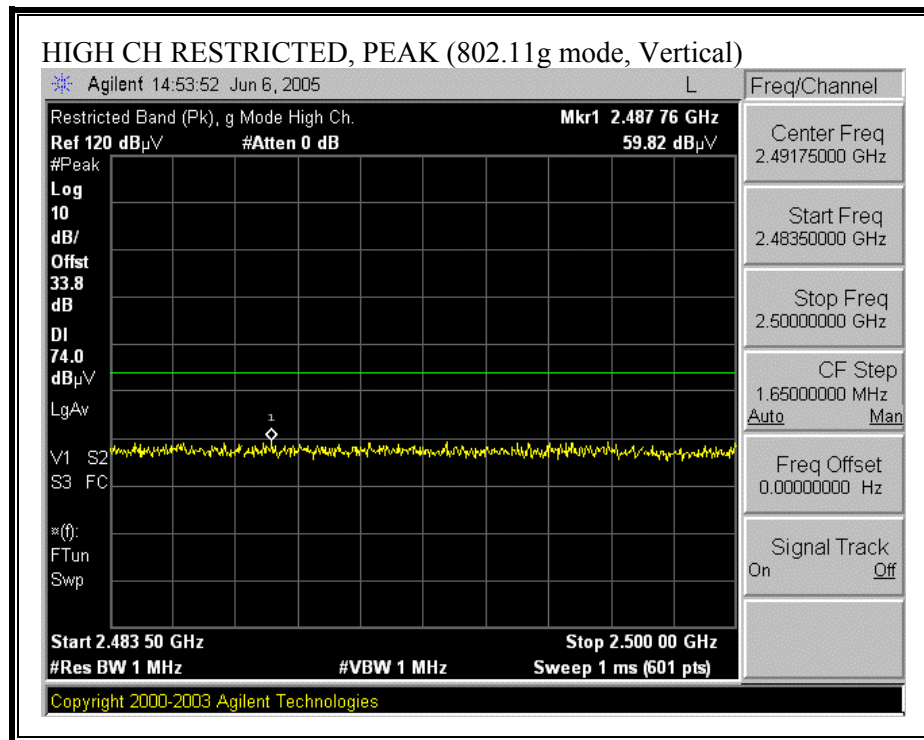

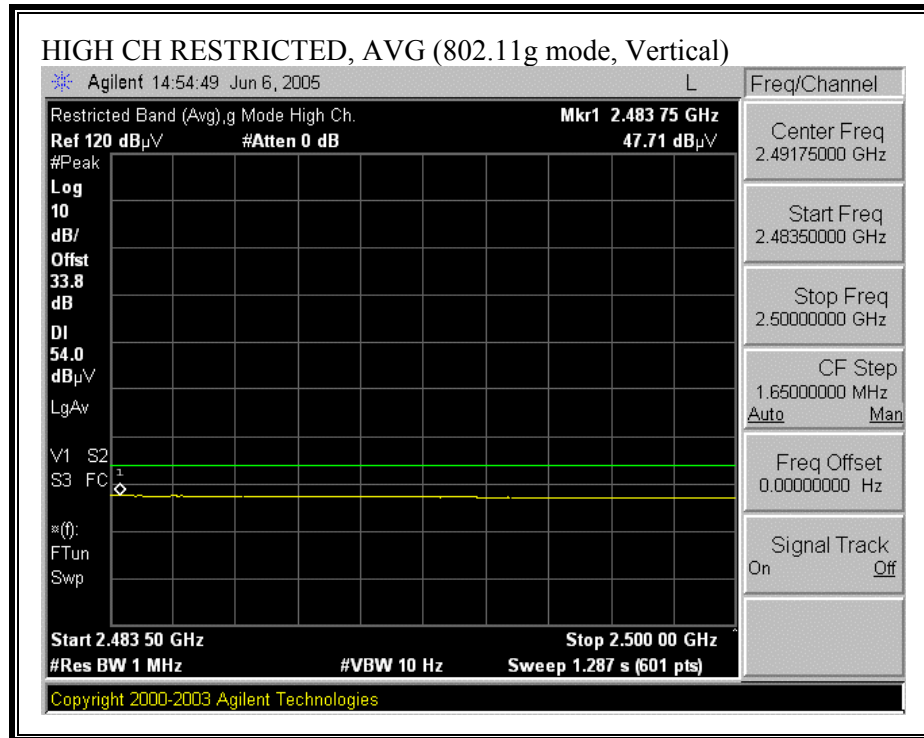

HARMONICS AND SPURIOUS EMISSIONS (g MODE)

| | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--|---------------------------------------|------------------------|-------------------|---------------------------|-------------------|---------------|--|-------------|----------------|---------------|------------------|-------------------|------------------------------|---------------|----------------|---|---------------------------------------|------------------------|--------------|-------|---------------------|-------------------------|--------------|--------------|---------------------------|-------------------|---------------|--|
| 06/07/05 High Frequency Measurement Compliance Certification Services, Morgan Hill Open Field Site Test Engr: Thanh Nguyen Project #: 05T3452-2 Company: HIGH TECH COMPUTER CORP. EUT Descrip.: PDA Phone(GSM 800.900, EDGE,BT, 802. 11b/g) EUT M/N: WIZA200 Test Target: FCC Part 15.247 Mode Oper: Transmit WLAN b/g mode, Worst Y Position. | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Test Equipment: <table border="1"> <tr> <td>EMCO Horn 1-18GHz T60; S/N: 2238 @3m</td> <td>Pre-amplifier 1-26GHz T34 HP 8449B</td> <td>Pre-amplifier 26-40GHz</td> <td>Horn > 18GHz</td> <td>Limit</td> </tr> </table> <table border="1"> <tr> <td>Hi Frequency Cables</td> <td>2 foot cable 2_Thanh</td> <td>3 foot cable</td> <td>4 foot cable</td> <td>12 foot cable 12_Thanh</td> <td>HPF HPF_4.0GHz</td> <td>Reject Filter</td> <td> Peak Measurements REW=VBW=1MHz Average Measurements REW=1MHz ; VBW=10Hz </td> </tr> </table> | | | | | | | | | | | | | | | | EMCO Horn 1-18GHz T60; S/N: 2238 @3m | Pre-amplifier 1-26GHz T34 HP 8449B | Pre-amplifier 26-40GHz | Horn > 18GHz | Limit | Hi Frequency Cables | 2 foot cable 2_Thanh | 3 foot cable | 4 foot cable | 12 foot cable 12_Thanh | HPF HPF_4.0GHz | Reject Filter | Peak Measurements REW=VBW=1MHz Average Measurements REW=1MHz ; VBW=10Hz |
| EMCO Horn 1-18GHz T60; S/N: 2238 @3m | Pre-amplifier 1-26GHz T34 HP 8449B | Pre-amplifier 26-40GHz | Horn > 18GHz | Limit | | | | | | | | | | | | | | | | | | | | | | | | |
| Hi Frequency Cables | 2 foot cable 2_Thanh | 3 foot cable | 4 foot cable | 12 foot cable 12_Thanh | HPF HPF_4.0GHz | Reject Filter | Peak Measurements REW=VBW=1MHz Average Measurements REW=1MHz ; VBW=10Hz | | | | | | | | | | | | | | | | | | | | | |
| f GHz | Dist (m) | Read Pk dBuV | Read Avg. dBuV | AF dB/m | CL dB | Amp dB | D Corr dB | Filtr dB | Peak dBuV/m | Avg dBuV/m | Pk Lim dBuV/m | Avg Lim dBuV/m | Pk Mar dB | Avg Mar dB | Notes (V/H) | | | | | | | | | | | | | |
| LOW Channel 2412MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2412 | 3.0 | 53.3 | 43.6 | 28.4 | 2.2 | -35.5 | 0.0 | 0.0 | 48.4 | 38.6 | 74 | 54 | -25.6 | -15.4 | Noise floor | | | | | | | | | | | | | |
| No harmonic and spurious emissions were detected above fundamental for all channels b and g mode | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| f | Measurement Frequency | | | | | Amp | Preamp Gain | | | | | Avg Lim | Average Field Strength Limit | | | | | | | | | | | | | | | |
| Dist | Distance to Antenna | | | | | D Corr | Distance Correct to 3 meters | | | | | Pk Lim | Peak Field Strength Limit | | | | | | | | | | | | | | | |
| Read | Analyzer Reading | | | | | Avg | Average Field Strength @ 3 m | | | | | Avg Mar | Margin vs. Average Limit | | | | | | | | | | | | | | | |
| AF | Antenna Factor | | | | | Peak | Calculated Peak Field Strength | | | | | Pk Mar | Margin vs. Peak Limit | | | | | | | | | | | | | | | |
| CL | Cable Loss | | | | | HPF | High Pass Filter | | | | | | | | | | | | | | | | | | | | | |

8.2.5. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz

8.2.6. WIZA 100 MODEL


SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL

HORIZONTAL PLOT



561F Monterey Road
Morgan Hill, CA 95037
Tel: (408) 463-0888
Fax: (408) 463-0885

Data#: 2 File#: 100.EMI Date: 06-03-2005 Time: 16:33:05

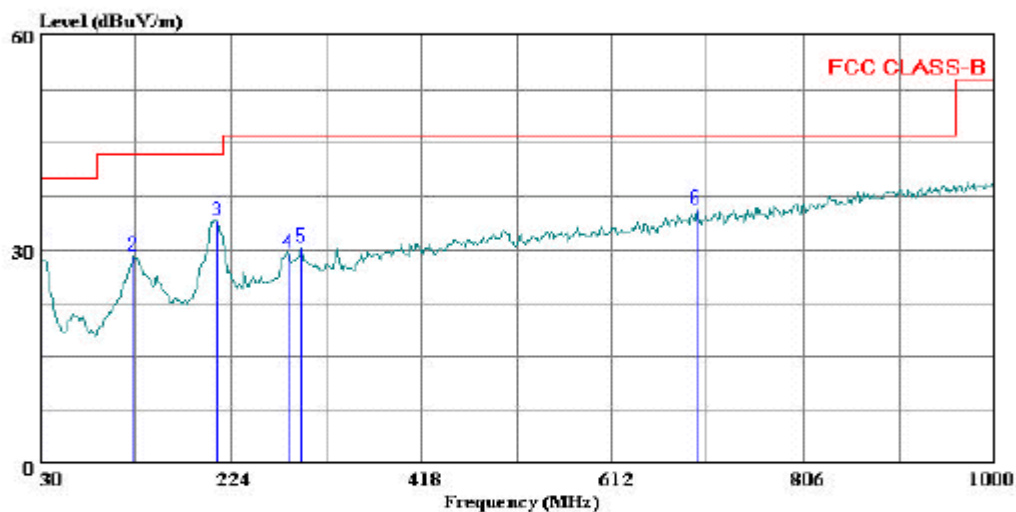

(Auxiliary ATC)

Trace: 1

Ref Trace:

Condition: FCC CLASS-B HORIZONTAL
Test Operator: : Thanh Nguyen
Project #: : 05T3452-2
Company: : HIGH TECH COMPUTER, Corp.
EUT: : PDA Phone (GSM800/1900, EDGE, BT, 802.11)
Model No.: : WIZA100
Configuration: : EUT, Stand Alone
Target of Test: : FCC CLASS B
Mode of Operation: Tx WLAN, worst case

HORIZONTAL DATA

| | Freq | Read Level | Factor | Level | Limit Line | Over Limit | Remark |
|---|---------|---------------|--------|--------|---------------|---------------|--------|
| | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | |
| 1 | 30.970 | 8.80 | 20.45 | 29.25 | 40.00 | -10.75 | Peak |
| 2 | 125.060 | 13.83 | 15.26 | 29.09 | 43.50 | -14.42 | Peak |
| 3 | 210.420 | 20.96 | 13.11 | 34.07 | 43.50 | -9.43 | Peak |
| 4 | 282.200 | 14.46 | 15.02 | 29.48 | 46.00 | -16.52 | Peak |
| 5 | 295.780 | 14.79 | 15.50 | 30.29 | 46.00 | -15.71 | Peak |
| 6 | 698.330 | 12.62 | 23.08 | 35.70 | 46.00 | -10.30 | Peak |


SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)

VERTICAL PLOT



561F Monterey Road
Morgan Hill, CA 95037
Tel: (408) 463-0888
Fax: (408) 463-0885

Data#: 4 File#: 100.EMI Date: 06-03-2005 Time: 16:42:12

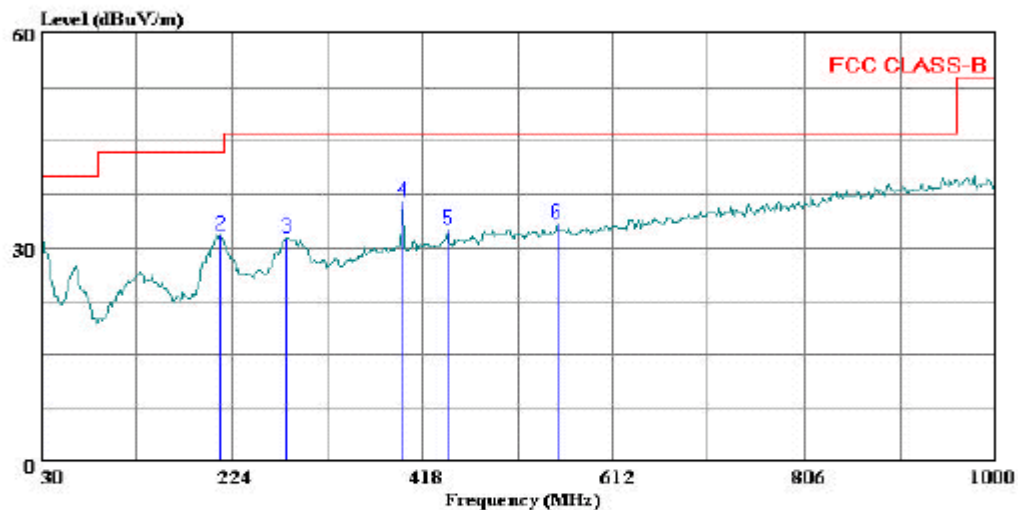

(Auxiliary ATC)

Trace: 3

Ref Trace:

Condition: FCC CLASS-B VERTICAL
Test Operator: : Thanh Nguyen
Project #: : 05T3452-2
Company: : HIGH TECH COMPUTER, Corp.
EUT: : PDA Phone (GSM800/1900, EDGE, ET, 802.11)
Model No.: : WIZA100
Configuration : EUT, Stand Alone
Target of Test : FCC CLASS B
Mode of Operation: Tx WLAN, worst case

VERTICAL DATA

| | Freq | Read Level | Factor | Level | Limit Line | Over Limit | Remark |
|---|---------|---------------|--------|--------|---------------|---------------|--------|
| | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | |
| 1 | 31.940 | 11.55 | 19.94 | 31.49 | 40.00 | -8.51 | Peak |
| 2 | 213.330 | 19.10 | 12.71 | 31.81 | 43.50 | -11.69 | Peak |
| 3 | 280.260 | 16.40 | 14.96 | 31.36 | 46.00 | -14.64 | Peak |
| 4 | 397.630 | 18.49 | 17.99 | 36.48 | 46.00 | -9.52 | Peak |
| 5 | 444.190 | 13.66 | 19.04 | 32.70 | 46.00 | -13.30 | Peak |
| 6 | 555.740 | 12.49 | 20.95 | 33.44 | 46.00 | -12.56 | Peak |

8.2.7. WIZA 110 MODEL


SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

HORIZONTAL PLOT



561F Monterey Road
Morgan Hill, CA 95037
Tel: (408) 463-0888
Fax: (408) 463-0885

Data#: 16 File#: 100.EMI Date: 06-03-2005 Time: 17:25:42

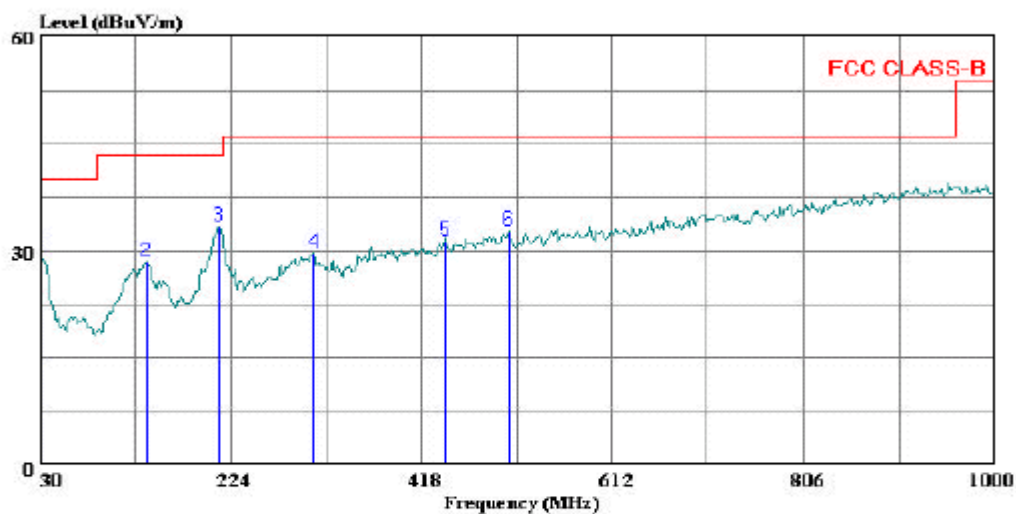

Condition: FCC CLASS-B HORIZONTAL
Test Operator: : Thanh Nguyen
Project #: : 05T3452-2
Company: : HIGH TECH COMPUTER, Corp.
EUT: : PDA Phone (GSM800/1900, EDGE, BT, 802.11)
Model No. : WIZA110
Configuration : EUT, Stand Alone
Target of Test : FCC CLASS B
Mode of Operation: Tx ,WLAN Worst Case

HORIZONTAL DATA

| | Freq | Read Level | Factor | Level | Limit Line | Over Limit | Remark |
|---|---------|---------------|--------|--------|---------------|---------------|--------|
| | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | |
| 1 | 30.970 | 8.95 | 20.45 | 29.40 | 40.00 | -10.60 | Peak |
| 2 | 138.640 | 13.64 | 14.89 | 28.53 | 43.50 | -14.97 | Peak |
| 3 | 212.360 | 20.58 | 12.81 | 33.39 | 43.50 | -10.11 | Peak |
| 4 | 308.390 | 13.75 | 15.87 | 29.62 | 46.00 | -16.38 | Peak |
| 5 | 442.250 | 12.27 | 19.02 | 31.29 | 46.00 | -14.71 | Peak |
| 6 | 507.240 | 12.40 | 20.31 | 32.71 | 46.00 | -13.29 | Peak |


SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)

VERTICAL PLOT



561F Monterey Road
Morgan Hill, CA 95037
Tel: (408) 463-0888
Fax: (408) 463-0885

Data#: 14 File#: 100.EMI Date: 06-03-2005 Time: 17:22:26

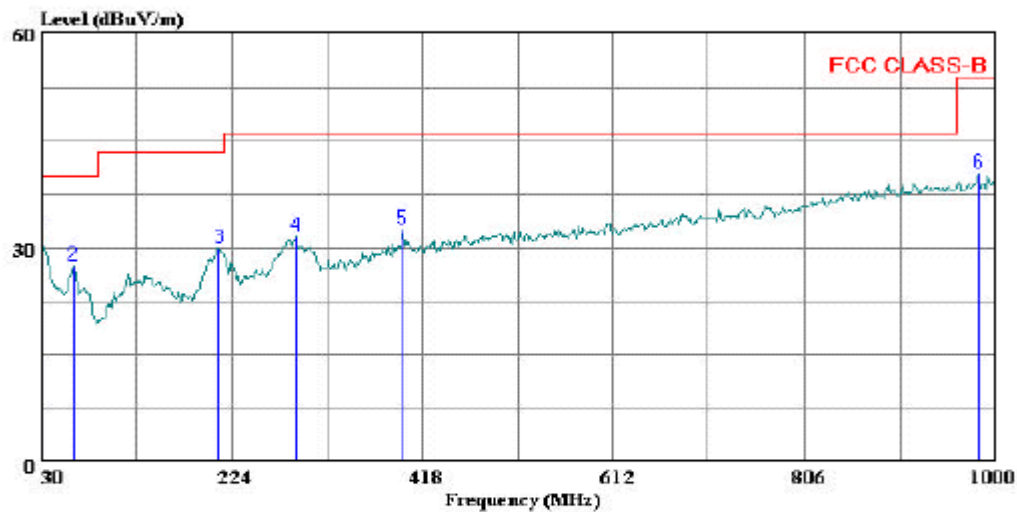

(Auxiliary ATC)

Trace: 13

Ref Trace:

Condition: FCC CLASS-B VERTICAL
Test Operator: : Thanh Nguyen
Project #: : 05T3452-2
Company: : HIGH TECH COMPUTER, Corp.
EUT: : PDA Phone (GSM800/1900, EDGE, BT, 802.11
Model No. : WIZA110
Configuration : EUT, Stand Alone
Target of Test : FCC CLASS B
Mode of Operation: Tx ,WLAN Worst Case

VERTICAL DATA

| | Freq | Read Level | Factor | Level | Limit Line | Over Limit | Remark |
|---|---------|---------------|--------|--------|---------------|---------------|--------|
| | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | |
| 1 | 30.970 | 10.39 | 20.45 | 30.84 | 40.00 | -9.16 | Peak |
| 2 | 62.980 | 18.61 | 8.90 | 27.51 | 40.00 | -12.49 | Peak |
| 3 | 211.390 | 16.91 | 12.92 | 29.83 | 43.50 | -13.67 | Peak |
| 4 | 288.990 | 16.25 | 15.26 | 31.51 | 46.00 | -14.49 | Peak |
| 5 | 397.630 | 14.53 | 17.99 | 32.52 | 46.00 | -13.48 | Peak |
| 6 | 982.540 | 13.77 | 26.74 | 40.51 | 54.00 | -13.49 | Peak |

8.2.8. WIZA 200 MODEL


SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

HORIZONTAL PLOT



561F Monterey Road
Morgan Hill, CA 95037
Tel: (408) 463-0888
Fax: (408) 463-0885

Data#: 10 File#: 100.EMI Date: 06-03-2005 Time: 17:06:50

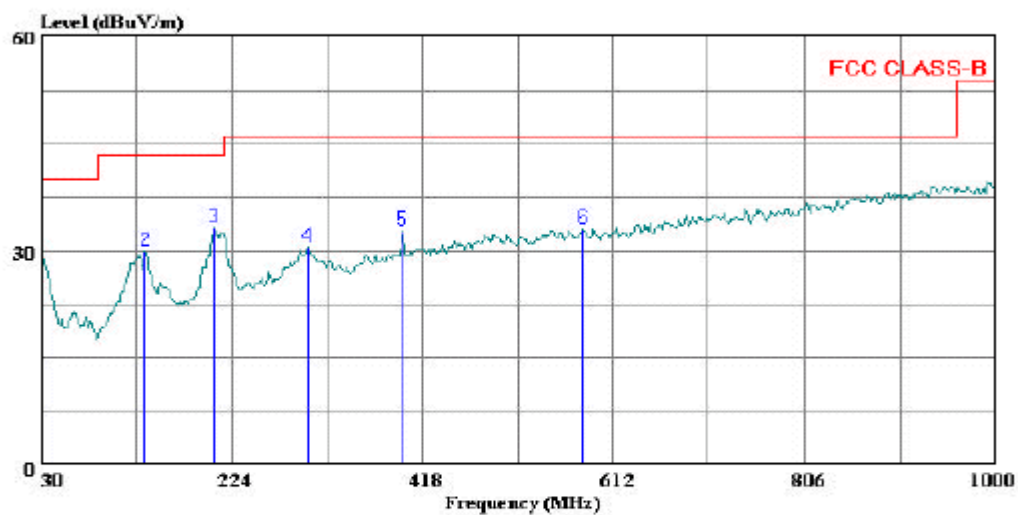

(Auxiliary ATC)

Trace: 9

Ref Trace:

Condition: FCC CLASS-B HORIZONTAL

Test Operator: : Thanh Nguyen

Project #: : 05T3452-2

Company: : HIGH TECH COMPUTER, Corp.

EUT: : PDA Phone (GSM800/1900, EDGE, ET, 802.11)

Model No. : WIZA200

Configuration : EUT, Stand Alone

Target of Test : FCC CLASS B

Mode of Operation: Tx Bluetooth, Channel 0

HORIZONTAL DATA

| | Freq | Read Level | Factor | Level | Limit Line | Over Limit | Remark |
|---|---------|---------------|--------|--------|---------------|---------------|--------|
| | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | |
| 1 | 30.000 | 9.67 | 20.45 | 30.12 | 40.00 | -9.88 | Peak |
| 2 | 135.730 | 14.85 | 14.96 | 29.81 | 43.50 | -13.69 | Peak |
| 3 | 206.540 | 19.52 | 13.61 | 33.13 | 43.50 | -10.37 | Peak |
| 4 | 300.630 | 14.76 | 15.67 | 30.43 | 46.00 | -15.57 | Peak |
| 5 | 397.630 | 14.85 | 17.99 | 32.84 | 46.00 | -13.16 | Peak |
| 6 | 581.930 | 11.64 | 21.31 | 32.95 | 46.00 | -13.05 | Peak |


SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)

VERTICAL PLOT



561F Monterey Road
Morgan Hill, CA 95037
Tel: (408) 463-0888
Fax: (408) 463-0885

Data#: 12 File#: 100.EMI Date: 06-03-2005 Time: 17:10:44

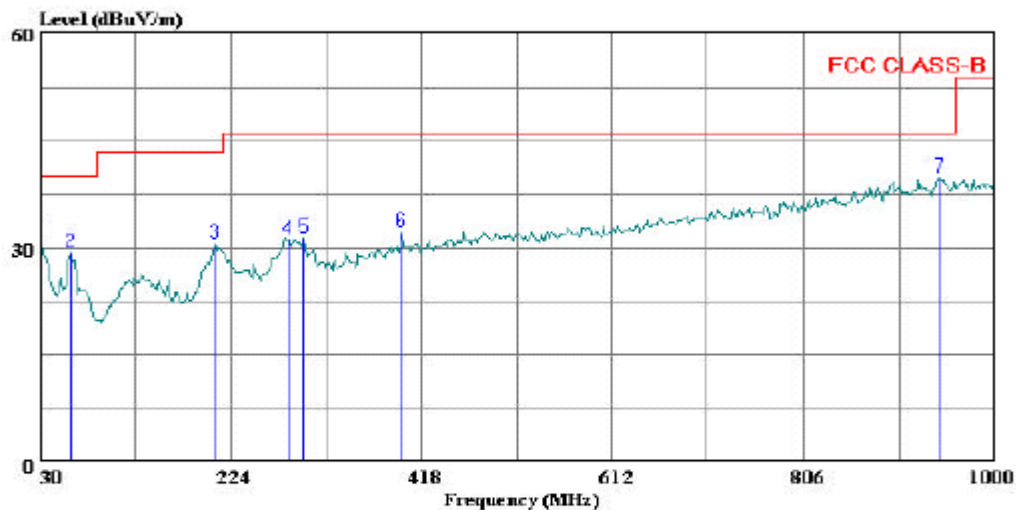

(Auxiliary)

Trace: 11

Ref Trace:

Condition: FCC CLASS-B VERTICAL
Test Operator: : Thanh Nguyen
Project #: : 05T3452-2
Company: : HIGH TECH COMPUTER, Corp.
EUT: : PDA Phone (GSM800/1900, EDGE, BT, 802.11)
Model No. : WIZA200
Configuration : EUT, Stand Alone
Target of Test : FCC CLASS B
Mode of Operation: Tx Bluetooth, Channel 0


VERTICAL DATA

| | Freq | Read Level | Factor | Level | Limit Line | Over Limit | Remark |
|---|---------|---------------|--------|--------|---------------|---------------|--------|
| | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | |
| 1 | 30.970 | 10.30 | 20.45 | 30.75 | 40.00 | -9.25 | Peak |
| 2 | 61.040 | 20.44 | 8.78 | 29.22 | 40.00 | -10.78 | Peak |
| 3 | 208.480 | 17.13 | 13.30 | 30.43 | 43.50 | -13.07 | Peak |
| 4 | 282.200 | 16.20 | 15.02 | 31.23 | 46.00 | -14.77 | Peak |
| 5 | 298.690 | 15.69 | 15.63 | 31.32 | 46.00 | -14.68 | Peak |
| 6 | 397.630 | 14.14 | 17.99 | 32.13 | 46.00 | -13.87 | Peak |
| 7 | 943.740 | 13.40 | 26.43 | 39.83 | 46.00 | -6.17 | Peak |

9. DIGITAL DEVICE CONFIGURATION - LIMITS AND RESULTS

9.1. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

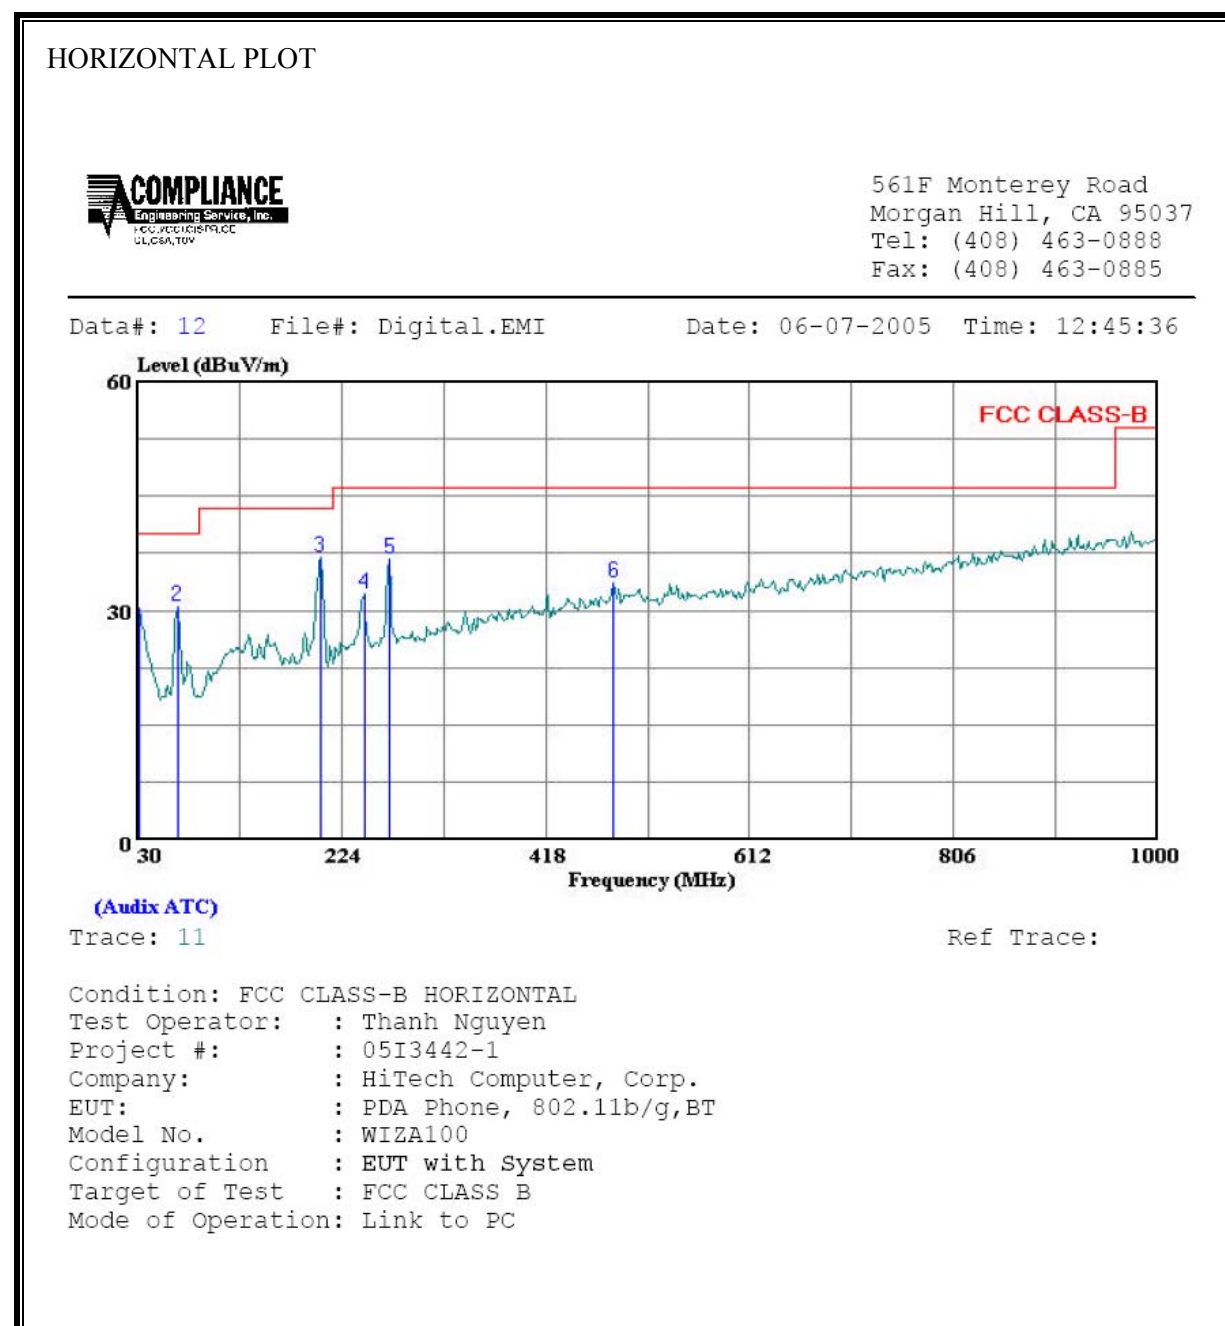

HORIZONTAL DATA

| | Freq | Read Level | Factor | Level | Limit Line | Over Limit | Remark |
|---|---------|---------------|--------|--------|---------------|---------------|--------|
| | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | |
| 1 | 30.970 | 9.97 | 20.45 | 30.42 | 40.00 | -9.58 | Peak |
| 2 | 67.830 | 21.38 | 9.20 | 30.58 | 40.00 | -9.42 | Peak |
| 3 | 203.630 | 22.88 | 14.01 | 36.89 | 43.50 | -6.61 | Peak |
| 4 | 245.340 | 18.48 | 13.72 | 32.20 | 46.00 | -13.80 | Peak |
| 5 | 269.590 | 22.23 | 14.61 | 36.84 | 46.00 | -9.16 | Peak |
| 6 | 482.990 | 13.85 | 19.89 | 33.74 | 46.00 | -12.26 | Peak |


SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)

VERTICAL PLOT



561F Monterey Road
Morgan Hill, CA 95037
Tel: (408) 463-0888
Fax: (408) 463-0885

Data#: 10 File#: Digital.EMI Date: 06-07-2005 Time: 12:41:04

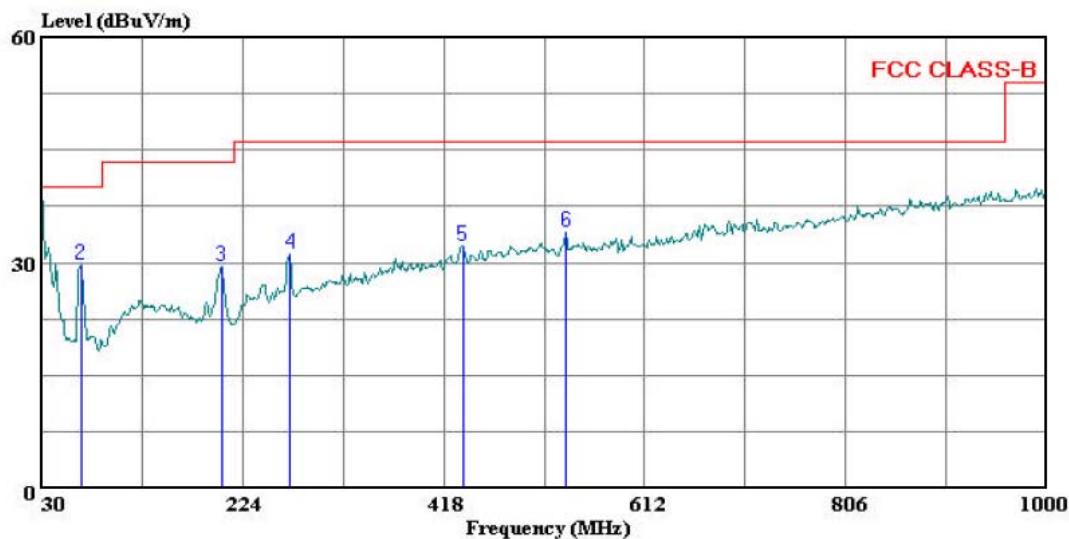

(Auxil ATC)

Trace: 9

Ref Trace:

Condition: FCC CLASS-B VERTICAL
Test Operator: : Thanh Nguyen
Project #: : 05I3442-1
Company: : HiTech Computer, Corp.
EUT: : PDA Phone, 802.11b/g,BT
Model No. : WIZA100
Configuration : EUT with System
Target of Test : FCC CLASS B
Mode of Operation: Link to PC

VERTICAL DATA

| | Freq | Read Level | Factor | Level | Limit Line | Over Limit | Remark |
|---|---------|---------------|--------|--------|---------------|---------------|--------|
| | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | |
| 1 | 30.000 | 19.20 | 20.45 | 39.65 | 40.00 | -0.35 | Peak |
| 2 | 67.830 | 20.51 | 9.20 | 29.71 | 40.00 | -10.29 | Peak |
| 3 | 203.630 | 15.38 | 14.01 | 29.39 | 43.50 | -14.11 | Peak |
| 4 | 269.590 | 16.49 | 14.61 | 31.10 | 46.00 | -14.90 | Peak |
| 5 | 436.430 | 13.28 | 18.89 | 32.17 | 46.00 | -13.83 | Peak |
| 6 | 536.340 | 13.28 | 20.73 | 34.01 | 46.00 | -11.99 | Peak |

9.2. POWERLINE CONDUCTED EMISSIONS

LIMIT

§15.207 (a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

The lower limit applies at the boundary between the frequency ranges.

| Frequency of Emission (MHz) | Conducted Limit (dBuV) | |
|-----------------------------|------------------------|------------|
| | Quasi-peak | Average |
| 0.15-0.5 | 66 to 56 * | 56 to 46 * |
| 0.5-5 | 56 | 46 |
| 5-30 | 60 | 50 |

* Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The resolution bandwidth is set to 9 kHz for both peak detection and quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

No non-compliance noted:

6 WORST EMISSIONS (EUT STAND ALONE)


| CONDUCTED EMISSIONS DATA (115VAC 60Hz) | | | | | | | | | |
|--|-----------|-----------|-----------|-------|-------|-------|---------|---------|---------|
| Freq. | Reading | | | Closs | Limit | FCC_B | Margin | | Remark |
| (MHz) | PK (dBuV) | QP (dBuV) | AV (dBuV) | (dB) | QP | AV | QP (dB) | AV (dB) | L1 / L2 |
| 0.18 | 60.79 | -- | 48.02 | 0.00 | 64.30 | 54.30 | -3.51 | -6.28 | L1 |
| 0.56 | 48.26 | -- | 35.42 | 0.00 | 56.00 | 46.00 | -7.74 | -10.58 | L1 |
| 0.74 | 46.23 | -- | 35.05 | 0.00 | 56.00 | 46.00 | -9.77 | -10.95 | L1 |
| 0.18 | 58.50 | -- | 40.78 | 0.00 | 64.39 | 54.39 | -5.89 | -13.61 | L2 |
| 0.33 | 51.80 | -- | 27.20 | 0.00 | 59.35 | 49.35 | -7.55 | -22.15 | L2 |
| 0.55 | 46.86 | -- | 27.71 | 0.00 | 56.00 | 46.00 | -9.14 | -18.29 | L2 |
| 6 Worst Data | | | | | | | | | |

6 WORST EMISSIONS (EUT WITH SYSTEM)


| CONDUCTED EMISSIONS DATA (115VAC 60Hz) | | | | | | | | | |
|--|-----------|-----------|-----------|-------|-------|-------|---------|---------|---------|
| Freq. | Reading | | | Closs | Limit | FCC_B | Margin | | Remark |
| (MHz) | PK (dBuV) | QP (dBuV) | AV (dBuV) | (dB) | QP | AV | QP (dB) | AV (dB) | L1 / L2 |
| 0.76 | 37.94 | -- | -- | 0.00 | 56.00 | 46.00 | -18.06 | -8.06 | L1 |
| 3.33 | 29.48 | -- | -- | 0.00 | 56.00 | 46.00 | -26.52 | -16.52 | L1 |
| 12.99 | 33.24 | -- | -- | 0.00 | 60.00 | 50.00 | -26.76 | -16.76 | L1 |
| 0.22 | 40.96 | -- | -- | 0.00 | 63.01 | 53.01 | -22.05 | -12.05 | L2 |
| 0.76 | 36.40 | -- | -- | 0.00 | 56.00 | 46.00 | -19.60 | -9.60 | L2 |
| 11.56 | 33.40 | -- | -- | 0.00 | 60.00 | 50.00 | -26.60 | -16.60 | L2 |
| 6 Worst Data | | | | | | | | | |

EUT STAND ALONE:

LINE 1 RESULTS

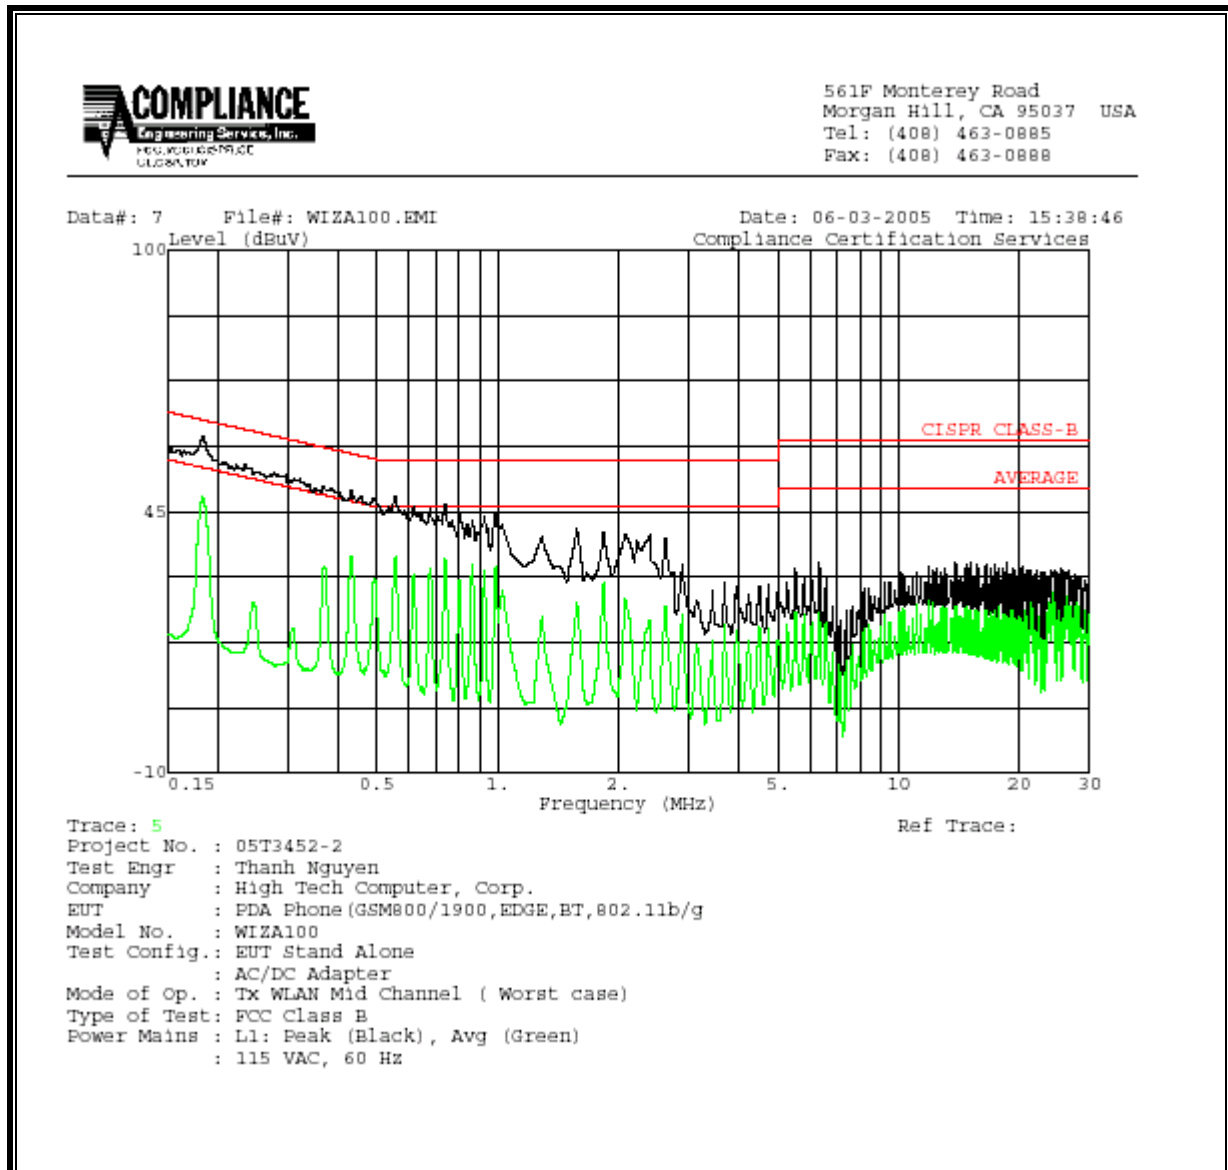


LINE 2 RESULTS

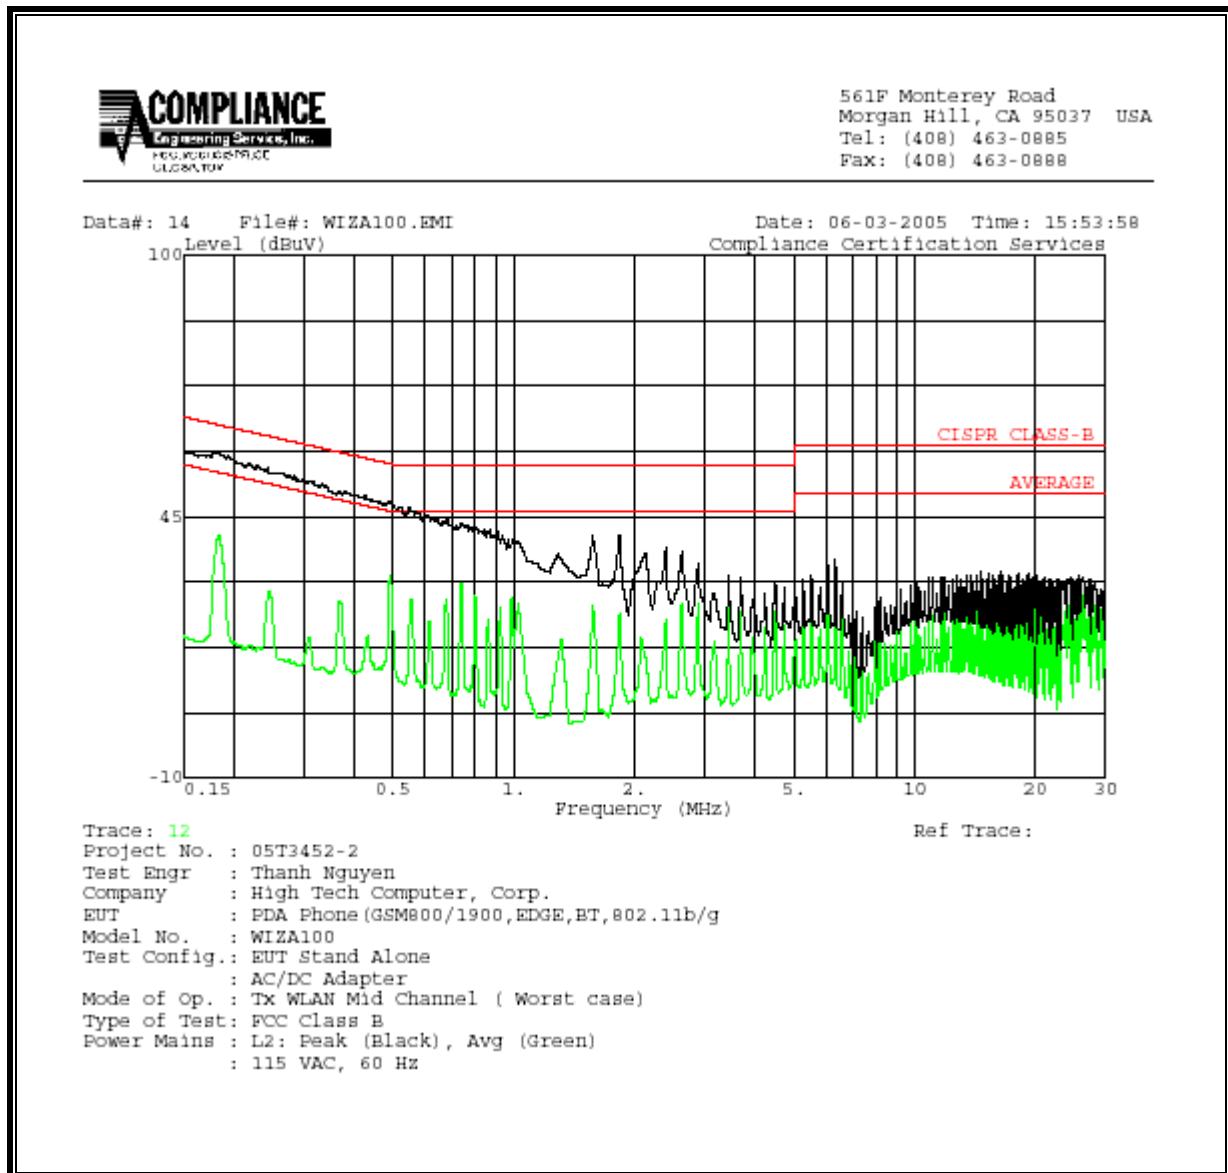


EUT WITH SYSTEM:

LINE 1 RESULTS

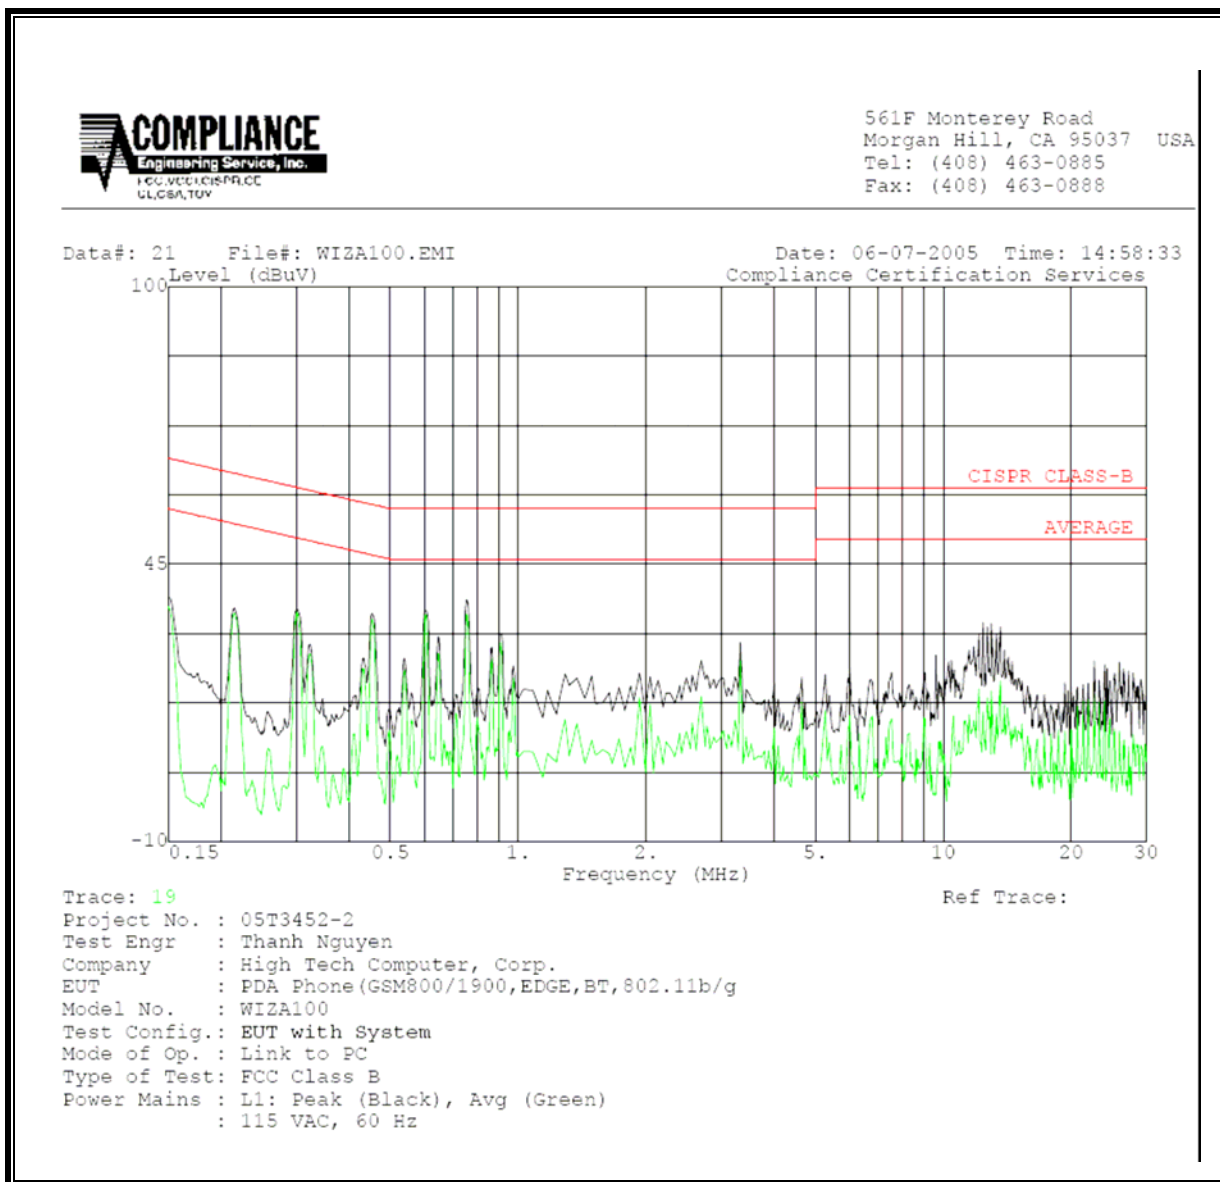

LINE 2 RESULTS

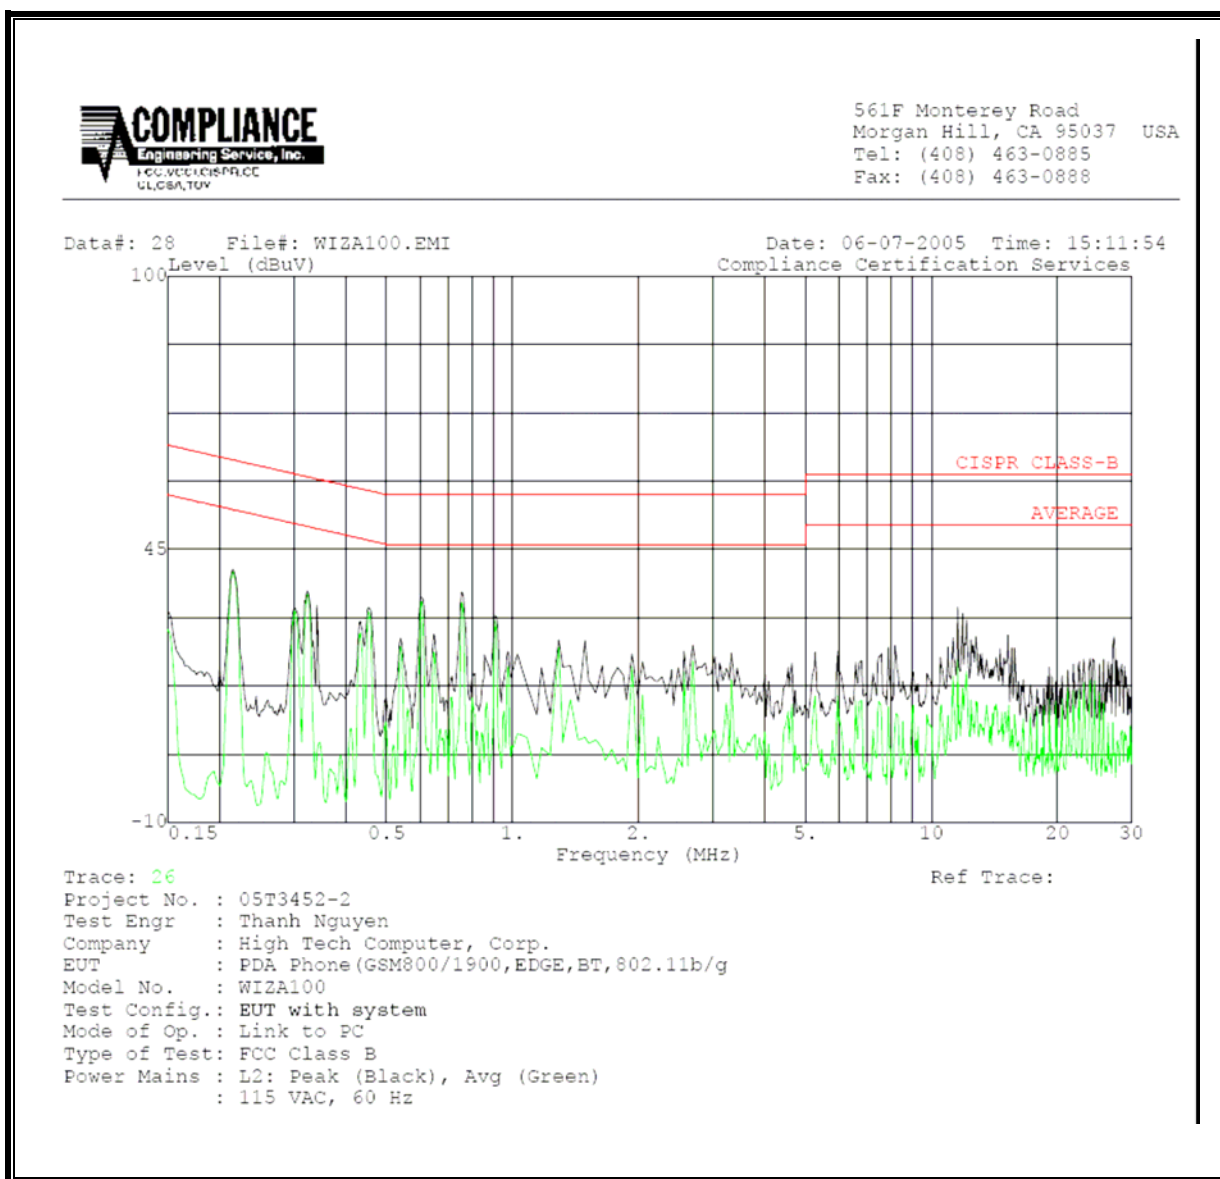

(Note: Setup Photos on pages 181 through 195 have been extracted under separate document purposely.)