



Engineering and Testing for EMC and Safety Compliance

CERTIFICATION APPLICATION REPORT
FCC PART 24

Test Lab: Rhein Tech Laboratories, Inc. Phone: 703-689-0368 360 Herndon Parkway Fax: 703-689-2056 Suite 1400 Web Site: www.rheintech.com Herndon, VA 20170 Contact: ATCBINFO@rheintech.com		Applicant: UTStarcom, Inc. Phone: 732-516-7524 33 Wood Avenue South Fax: 732-767-5283 3 rd Floor Iselin, NJ 08830 USA Contact: Tom Borrelli (borrelli@utstar.com)	
FCC ID:	O6YUTS-FSU811	GRANTEE FRN NUMBER:	0005823877
PLAT FORM:	Transmitter	RTL WORK ORDER NUMBER:	2004005
MODEL:	UTS-FSU811	RTL QUOTE NUMBER:	QRTL04-026
DATE OF TEST REPORT:	March 10, 2004		
American National Standard Institute:	ANSI/TIA-603-B-2002		
FCC Classification:	PCB – Licensed Base Station for Part 24		
FCC Rule Part(s):	Part 24: Personal Communications Services Subpart E – Broadband PCS		
Digital Interface Information	Digital Interface was found to be compliant		
Receiver Information	Receiver was found to be compliant		
Frequency Range (MHz)	Power (W)	Frequency Tolerance	Emission Designator
1880.15-1909.85	0.060	1.7 ppm	263KDXW

I, the undersigned, hereby declare that the equipment tested and referenced in this report conforms to the identified standard(s) as described in this test report. Modifications were made to the equipment during testing in order to achieve compliance with these standards; please see section 2.3 for details.

Furthermore, there was no deviation from, additions to, or exclusions from, the FCC Part 2, FCC Part 15, FCC Part 24, ANSI C63.4 and ANSI/TIA-603-B-2002.

Signature: 

Date: March 10, 2004

Typed/Printed Name: Desmond Fraser

Position: President

Report #: 2004005 Rev 0.02

Note: This report may not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.

This report may not be reproduced, except in full, without the written approval of Rhein Tech Laboratories, Inc.

TABLE OF CONTENTS

1	GENERAL INFORMATION	6
1.1	SCOPE	6
1.2	TEST FACILITY	6
1.3	RELATED SUBMITTAL(S)/GRANT(S).....	6
2	EQUIPMENT INFORMATION	7
2.1	JUSTIFICATION	7
2.2	EXERCISING THE EUT	7
2.3	MODIFICATIONS	7
2.4	TEST SYSTEM DETAILS	8
2.5	CONFIGURATION OF TESTED SYSTEM	8
3	DC VOLTAGES AND CURRENTS - PART §2.1033(C)(8)	9
3.1	DC VOLTAGES AND CURRENTS TEST EQUIPMENT	9
4	RF POWER OUTPUT - §2.1046	10
4.1	ANSI/TIA-603-B-2002, SECTION 2.2.17 TEST PROCEDURE	10
4.2	EFFECTIVE ISOTROPIC RADIATED POWER LIMITS - §24.232 (B)TEST PROCEDURE	10
4.3	RF POWER TEST EQUIPMENT	10
4.4	EFFECTIVE ISOTROPIC RADIATED POWER TEST DATA- §2.1046	11
5	OCCUPIED BANDWIDTH - §2.1049; NECESSARY BANDWIDTH §2.202 (OCCUPIED BANDWIDTH) – PART 24.238 (B) (EMISSION BANDWIDTH)	13
5.1	TEST PROCEDURE.....	13
5.2	OCCUPIED BANDWIDTH TEST EQUIPMENT	13
5.3	TEST DATA (CHANNEL 50: OCCUPIED BANDWIDTH = 263 KHZ)	14
6	CONDUCTED SPURIOUS AND HARMONIC EMISSIONS - §2.1051	15
6.1	TEST PROCEDURE.....	15
6.2	CONDUCTED SPURIOUS AND HARMONIC EMISSIONS TEST EQUIPMENT	15
6.3	CONDUCTED SPURIOUS AND HARMONIC TEST DATA - §2.1051	16
7	RADIATED SPURIOUS AND HARMONIC EMISSIONS - §2.1053.....	20
7.1	RADIATED SPURIOUS AND HARMONIC EMISSIONS - §2.1053	20
7.2	RADIATED SPURIOUS TEST EQUIPMENT	20
7.3	FIELD STRENGTH OF SPURIOUS RADIATION TEST DATA - §2.1053	21
8	BAND-EDGE COMPLIANCE - PART 24.238	23
8.1	TEST PROCEDURE.....	23
8.2	TEST DATA	24
9	FREQUENCY STABILITY / TEMPERATURE VARIATION - §2.1055.....	43
9.1	MEASUREMENT METHOD:.....	43
9.2	FREQUENCY STABILITY TEST EQUIPMENT	43
9.3	TIME PERIOD AND PROCEDURE:.....	43
9.4	FREQUENCY STABILITY § 24.235.....	44
9.5	FREQUENCY STABILITY TEST DATA - §2.1055	44
10	CONCLUSION.....	47

TABLE INDEX

TABLE 2-1:	EQUIPMENT UNDER TEST (EUT).....	8
TABLE 3-1:	DC VOLTAGES AND CURRENTS TEST EQUIPMENT	9
TABLE 3-2:	DC VOLTAGES AND CURRENTS DATA.....	9
TABLE 4-1:	POWER OUTPUT AT THE ANTENNA PORT DATA - §2.1046.....	10
TABLE 4-2:	RF POWER TEST EQUIPMENT	10
TABLE 4-3:	RADIATED POWER DATA - §2.1046 – WHIP ANTENNA	11
TABLE 4-4:	RADIATED POWER DATA - §2.1046 – PATCH ANTENNA	11
TABLE 4-5:	RADIATED POWER DATA - §2.1046 – ROD ANTENNA.....	11
TABLE 5-1:	OCCUPIED BANDWIDTH TEST EQUIPMENT.....	13
TABLE 6-1:	CONDUCTED SPURIOUS AND HARMONIC EMISSIONS TEST EQUIPMENT.....	15
TABLE 6-2:	CONDUCTED SPURIOUS AND HARMONIC DATA §2.1051	16
TABLE 6-3:	CONDUCTED SPURIOUS AND HARMONIC DATA §2.1051	17
TABLE 6-4:	CONDUCTED SPURIOUS AND HARMONIC DATA §2.1051	18
TABLE 6-5:	CONDUCTED SPURIOUS AND HARMONIC DATA §2.1051	19
TABLE 7-1:	RADIATED SPURIOUS TEST EQUIPMENT.....	20
TABLE 7-2:	FIELD STRENGTH OF SPURIOUS RADIATION TEST DATA §2.1053; WHIP ANTENNA.....	21
TABLE 7-3:	FIELD STRENGTH OF SPURIOUS RADIATION TEST DATA §2.1053; PATCH ANTENNA.....	22
TABLE 7-4:	FIELD STRENGTH OF SPURIOUS RADIATION TEST DATA §2.1053; ROD ANTENNA.....	22
TABLE 8-1:	BAND-EDGE TEST EQUIPMENT.....	23
TABLE 8-2:	BAND EDGE COMPLIANCE – WHIP ANTENNA.....	24
TABLE 8-3:	BAND EDGE COMPLIANCE – PATCH ANTENNA.....	24
TABLE 8-4:	BAND EDGE COMPLIANCE – ROD ANTENNA	24
TABLE 9-1:	FREQUENCY STABILITY TEST EQUIPMENT.....	43
TABLE 9-2:	TEMPERATURE FREQUENCY STABILITY DATA - §2.1055	44
TABLE 9-3:	VOLTAGE FREQUENCY STABILITY DATA - §2.1055	45

PLOT INDEX

PLOT 5-1:	OCCUPIED BANDWIDTH (-26 DB)	14
PLOT 8-1:	LOWER BAND EDGE BLOCK B - WHIP ANTENNA.....	25
PLOT 8-2:	UPPER BAND EDGE BLOCK B - WHIP ANTENNA	26
PLOT 8-3:	LOWER BAND EDGE BLOCK F - WHIP ANTENNA	27
PLOT 8-4:	UPPER BAND EDGE BLOCK F - WHIP ANTENNA.....	28
PLOT 8-5:	LOWER BAND EDGE BLOCK C - WHIP ANTENNA.....	29
PLOT 8-6:	UPPER BAND EDGE BLOCK C - WHIP ANTENNA	30
PLOT 8-7:	LOWER BAND EDGE BLOCK B - PATCH ANTENNA.....	31
PLOT 8-8:	UPPER BAND EDGE BLOCK B - PATCH ANTENNA.....	32
PLOT 8-9:	LOWER BAND EDGE BLOCK F - PATCH ANTENNA	33
PLOT 8-10:	UPPER BAND EDGE BLOCK F - PATCH ANTENNA	34
PLOT 8-11:	LOWER BAND EDGE BLOCK C - PATCH ANTENNA.....	35
PLOT 8-12:	UPPER BAND EDGE BLOCK C - PATCH ANTENNA.....	36
PLOT 8-13:	LOWER BAND EDGE BLOCK B - ROD ANTENNA.....	37
PLOT 8-14:	UPPER BAND EDGE BLOCK B - ROD ANTENNA	38
PLOT 8-15:	LOWER BAND EDGE BLOCK F - ROD ANTENNA.....	39
PLOT 8-16:	UPPER BAND EDGE BLOCK F - ROD ANTENNA.....	40
PLOT 8-17:	LOWER BAND EDGE BLOCK C - ROD ANTENNA.....	41
PLOT 8-18:	UPPER BAND EDGE BLOCK C - ROD ANTENNA	42
PLOT 9-1:	TEMPERATURE FREQUENCY STABILITY DATA - §2.1055	45
PLOT 9-2:	VOLTAGE FREQUENCY STABILITY	46

APPENDIX INDEX

APPENDIX A:	RF EXPOSURE COMPLIANCE	48
APPENDIX B:	AGENCY AUTHORIZATION LETTER.....	52
APPENDIX C:	CONFIDENTIALITY REQUEST LETTER	53
APPENDIX D:	PRODUCT DESCRIPTION	54
APPENDIX E:	LABEL AND LABEL LOCATION	55
APPENDIX F:	BILL OF MATERIAL (PARTS LIST).....	57
APPENDIX G:	SCHEMATIC	58
APPENDIX H:	MANUAL.....	59
APPENDIX I:	TEST PHOTOGRAPHS	60
APPENDIX J:	EXTERNAL PHOTOGRAPHS	72
APPENDIX K:	INTERNAL PHOTOGRAPHS.....	82

PHOTOGRAPH INDEX

PHOTOGRAPH 1:	FCC ID LABEL LOCATION	56
PHOTOGRAPH 2:	RADIATED FRONT VIEW WITH WHIP ANTENNA	60
PHOTOGRAPH 3:	RADIATED BACK VIEW WITH WHIP ANTENNA	61
PHOTOGRAPH 4:	RADIATED FRONT VIEW WITH PATCH ANTENNA	62
PHOTOGRAPH 5:	RADIATED BACK VIEW WITH PATCH ANTENNA	63
PHOTOGRAPH 6:	RADIATED FRONT VIEW WITH ROD ANTENNA	64
PHOTOGRAPH 7:	RADIATED BACK VIEW WITH ROD ANTENNA	65
PHOTOGRAPH 8:	CONDUCTED FRONT VIEW WITH WHIP ANTENNA	66
PHOTOGRAPH 9:	CONDUCTED BACK VIEW WITH WHIP ANTENNA	67
PHOTOGRAPH 10:	CONDUCTED FRONT VIEW WITH PATCH ANTENNA	68
PHOTOGRAPH 11:	CONDUCTED BACK VIEW WITH PATCH ANTENNA	69
PHOTOGRAPH 12:	CONDUCTED FRONT VIEW WITH ROD ANTENNA	70
PHOTOGRAPH 13:	CONDUCTED BACK VIEW WITH ROD ANTENNA	71
PHOTOGRAPH 14:	TOP VIEW	72
PHOTOGRAPH 15:	BOTTOM VIEW	73
PHOTOGRAPH 16:	RIGHT SIDE VIEW	74
PHOTOGRAPH 17:	LEFT SIDE VIEW	75
PHOTOGRAPH 18:	REAR VIEW	76
PHOTOGRAPH 19:	WHIP ANTENNA	77
PHOTOGRAPH 20:	PATCH ANTENNA	78
PHOTOGRAPH 21:	ROD ANTENNA	79
PHOTOGRAPH 22:	6.8 V DC POWER SUPPLY	80
PHOTOGRAPH 23:	DATA CABLE	81
PHOTOGRAPH 24:	INSIDE HANDSET	82
PHOTOGRAPH 25:	INSIDE TOP COVER	83
PHOTOGRAPH 26:	INSIDE BOTTOM CASE	84
PHOTOGRAPH 27:	INSIDE BOTTOM CASE WITH PCB'S ATTACHED	85
PHOTOGRAPH 28:	INSIDE TOP CASE WITH PCB'S ATTACHED	86
PHOTOGRAPH 29:	TOP OF RF PCB WITH SHIELDS	87
PHOTOGRAPH 30:	TOP OF RF PCB WITHOUT SHIELDS	88
PHOTOGRAPH 31:	BOTTOM OF RF PCB	89
PHOTOGRAPH 32:	BACK OF SMALL PCB	90
PHOTOGRAPH 33:	FRONT OF SMALL PCB	91
PHOTOGRAPH 34:	TOP OF MAIN PCB	92
PHOTOGRAPH 35:	BOTTOM OF MAIN PCB	93
PHOTOGRAPH 36:	TOP OF LCD DISPLAY PCB	94
PHOTOGRAPH 37:	BOTTOM OF LCD DISPLAY PCB	95
PHOTOGRAPH 38:	TOP OF KEYPAD PCB	96
PHOTOGRAPH 39:	BOTTOM OF KEYPAD PCB	97
PHOTOGRAPH 40:	TOP OF SPEAKER	98
PHOTOGRAPH 41:	BOTTOM OF SPEAKER	99
PHOTOGRAPH 42:	BATTERY LABEL	100
PHOTOGRAPH 43:	BATTERY IN UNIT	101

1 GENERAL INFORMATION

1.1 SCOPE

FCC Rules Part 24 (E) Personal Communications Services – Broadband PCS

All measurements contained in this application were conducted in accordance with the FCC Rules and Regulations CFR47 and ANSI/TIA-603-B-2002 Land Mobile FM or PM Communications Equipment Measurement and Performance Standards. The instrumentation utilized for the measurements conforms to the ANSI C63.4 standard for EMI and Field Strength Instrumentation. Calibration checks are performed regularly on the instruments, and all accessories including high pass filter, coaxial attenuator, preamplifier and cables.

1.2 TEST FACILITY

The open area test site and conducted measurement facility used to collect the radiated data is located at 360 Herndon Parkway, Suite 1400, Herndon, Virginia 20170. This site has been fully described in a report and approved by the Federal Communications Commission to perform AC line conducted and radiated emissions testing (ANSI C63.4 1992).

1.3 RELATED SUBMITTAL(S)/GRANT(S)

This is a new application submittal. The digital interface and receiver were investigated and found compliant. A DoC report can be provided upon request. The IF, LO and up to the 2nd LO were investigated.

2 EQUIPMENT INFORMATION

2.1 JUSTIFICATION

To complete the test configuration required by the FCC, the transmitter was software-controlled by the manufacturer to operate in a continuous mode. The final data was taken as a substitution measurement. The device is provided with an external antenna connector. EIRP measurement is provided to support the RF exposure requirements for the antennas listed in this application filing.

2.2 EXERCISING THE EUT

The FSU811 is a desk phone transmitter designed to link to a PHS phone network which transmits at a frequency within the range 1880.15 MHz – 1909.85 MHz. Four channels were investigated: 1880.15 MHz, 1893.65 MHz, 1902.35 MHz, and 1909.85 MHz, in three orthogonal planes, with the receiving antenna in both horizontal and vertical polarities, from 1 meter to 4 meters in height.

2.3 MODIFICATIONS

EUT modifications were necessary to mitigate failing emissions. X101 was changed from a Kyocera part number KT18B-EER28NB-19.200M-T to a Murata equivalent, and additional internal shielding was added. There were no deviations from the test standards(s) and/or methods.

2.4 TEST SYSTEM DETAILS

The test sample was received on January 12, 2004. The FCC Identifiers for all equipment, plus descriptions of all cables used in the tested system, are:

TABLE 2-1: EQUIPMENT UNDER TEST (EUT)

PART	MANUFACTURER	MODEL	SERIAL NUMBER	FCC ID	CABLE DESCRIPTION	RTL BAR CODE
4.5 dBi Omni Antenna	UTSTARCOM	QHA0008600	H03793	N/A	Shielded	015647
Phone	UTSTARCOM	FSU811	7556680011	O6YUTS-FSU811	N/A	015646
Antenna cable	UTSTARCOM	N/A	N/A	N/A	Shielded	015645
10 dBi Patch Antenna	UTSTARCOM	N/A	N/A	N/A	Shielded	015644
Interface Cable	UTSTARCOM	USB-D2	N/A	N/A	Unshielded	015643
AC Adapter	UTSTARCOM	FSU 811	CB200311	N/A	Unshielded	015642
Interface Box	UTSTARCOM	UTS702-U SO Writer	N/A	N/A	N/A	015641
2.5 dBi Omni Antenna	UTSTARCOM	Whip	N/A	N/A	N/A	015640

2.5 CONFIGURATION OF TESTED SYSTEM

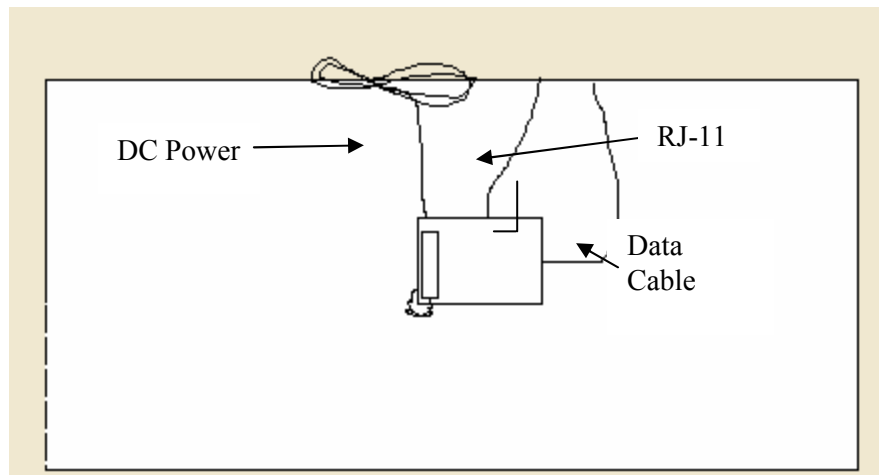


FIGURE 1: CONFIGURATION OF TESTED SYSTEM

3 DC VOLTAGES AND CURRENTS - PART §2.1033(C)(8)

The DC voltages applied to, and DC currents into, the several elements of the final radio frequency amplifying device for normal operation over the power range.

3.1 DC VOLTAGES AND CURRENTS TEST EQUIPMENT

TABLE 3-1: DC VOLTAGES AND CURRENTS TEST EQUIPMENT


RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due
901247	Wavetek	DM25XT	Multimeter	40804098	2/14/05

TABLE 3-2: DC VOLTAGES AND CURRENTS DATA

	Typical
Voltage (DC)	7.2
Current (mA)	27

TEST PERSONNEL:

Daniel W. Baltzell
EMC Test Engineer



Signature


February 26, 2004
Date Of Test

4 RF POWER OUTPUT - §2.1046

TABLE 4-1: POWER OUTPUT AT THE ANTENNA PORT DATA - §2.1046

Channel	Frequency (MHz)	Peak Power Meter Level (dBm)
206	1880.15	17.8
251	1893.65	17.6
25	1902.35	17.3
50	1909.85	17.1

TEST PERSONNEL:

Daniel W. Baltzell EMC Test Engineer	 Signature	March 5, 2004 Date Of Test
---	--	-------------------------------

4.1 ANSI/TIA-603-B-2002, SECTION 2.2.17 TEST PROCEDURE

Substitution method.

4.2 EFFECTIVE ISOTROPIC RADIATED POWER LIMITS - §24.232 (B)TEST PROCEDURE

Mobile/portable stations are limited to 2 watts EIRP peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.

4.3 RF POWER TEST EQUIPMENT

TABLE 4-2: RF POWER TEST EQUIPMENT

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due
901053	Schaffner Chase	CBL6112B	Bi-Log Antenna (20 MHz - 2 GHz)	2648	7/03/04
901020	Hewlett Packard	8564E	Portable Spectrum Analyzer (9 kHz - 40 GHz)	3943A01719	7/15/04
900928	Hewlett Packard	83752A	Synthesized Sweeper (0.01 - 20 GHz)	3610A00866	8/5/04
900814	Electro-Metrics	EM-6961 (RGA-60)	Double Ridged Guide Antenna (1 - 18 GHz)	2310	2/17/06
901184	Agilent Technologies	E4416A	EPM-P Power Meter, single channel	GB41050573	7/30/04
901186	Agilent Technologies	E9323A (50MHz-6GHz)	Peak & Average Power Sensor	US40410380	7/30/04

4.4 EFFECTIVE ISOTROPIC RADIATED POWER TEST DATA- §2.1046

TABLE 4-3: RADIATED POWER DATA - §2.1046 – WHIP ANTENNA

Channel	Test Detector	Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Signal Generator Level (dBm)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)
206	Pk	1880.15	89.4	18.4	6.5	5.1	17.0	0.050
251	Pk	1893.65	71.9	12.7	1.1	7.0	18.6	0.072
25	Pk	1902.35	70.8	12.0	1.2	7.0	17.8	0.060
50	Pk	1909.85	70.1	12.0	1.3	7.0	17.6	0.058

TABLE 4-4: RADIATED POWER DATA - §2.1046 – PATCH ANTENNA

Channel	Test Detector	Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Signal Generator Level (dBm)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)
206	Pk	1880.15	90.3	20.4	6.5	5.3	19.2	0.083
251	Pk	1893.65	73.5	14.3	1.1	7.0	20.2	0.105
25	Pk	1902.35	73.5	14.7	1.2	7.0	20.5	0.112
50	Pk	1909.85	73.3	15.2	1.3	7.0	20.8	0.120

TABLE 4-5: RADIATED POWER DATA - §2.1046 – ROD ANTENNA

Channel	Test Detector	Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Signal Generator Level (dBm)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)
206	Pk	1880.15	86.7	15.7	6.5	5.1	14.3	0.027
251	Pk	1893.65	68.1	8.9	1.1	7.0	14.8	0.030
25	Pk	1902.35	69.9	11.1	1.2	7.0	16.9	0.049
50	Pk	1909.85	68.3	10.2	1.3	7.0	15.8	0.038

Notes: Pk = Peak Detector

EIRP Measurements by Substitution Method.

The EUT was placed on a turntable 3 meters from the receive antenna. The field of maximum intensity was found by rotating the EUT approximately 360 degrees and changing the height of the receive antenna from 1 to 4 meters. The field strength was maximized using a calibrated spectrum analyzer using a 1 MHz resolution bandwidth for each channel being tested, and adjusted to an peak and average level using a power meter attached at the end of the receive antenna. A double ridge horn antenna was substituted in place of the EUT. The horn antenna was fed by a signal generator and adjusted until the previous level was attained. This level was recorded and was further corrected by subtracting the cable loss from the signal generator to the transmit antenna and adding the horn gain.

i.e., $S_g - CL + G_n = \text{EIRP (dBm)}$


S_g = Signal Generator Level (dBm)

CL = Cable Loss (dB)

G_n = Transmitting horn antenna gain (dBi)

TEST PERSONNEL:

Daniel W. Baltzell
EMC Test Engineer



Signature

March 2, 2004
Date Of Test

5 OCCUPIED BANDWIDTH - §2.1049; NECESSARY BANDWIDTH §2.202 (OCCUPIED BANDWIDTH) – PART 24.238 (B) (EMISSION BANDWIDTH)

Channel 50 was found to be the worst case and is shown below.

Type of Emission: DXW

Necessary bandwidth designator derived from measurement of emission bandwidth (-26 dB) (263 kHz): 263KDXW

OCCUPIED BANDWIDTH (99% POWER BANDWIDTH) - COMPLIANCE WITH THE EMISSION MASKS

5.1 TEST PROCEDURE

ANSI/TIA-603-B-2002, section 2.2.11

Device with digital modulation: operation to its maximum extent

Note: Reference level is average conducted power measurement.


5.2 OCCUPIED BANDWIDTH TEST EQUIPMENT

TABLE 5-1: OCCUPIED BANDWIDTH TEST EQUIPMENT

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due
901020	Hewlett Packard	8564E	Portable Spectrum Analyzer (9 kHz - 40 GHz)	3943A01719	7/15/04

5.3 TEST DATA (CHANNEL 50: OCCUPIED BANDWIDTH = 263 KHZ)

PLOT 5-1: OCCUPIED BANDWIDTH (-26 DB)

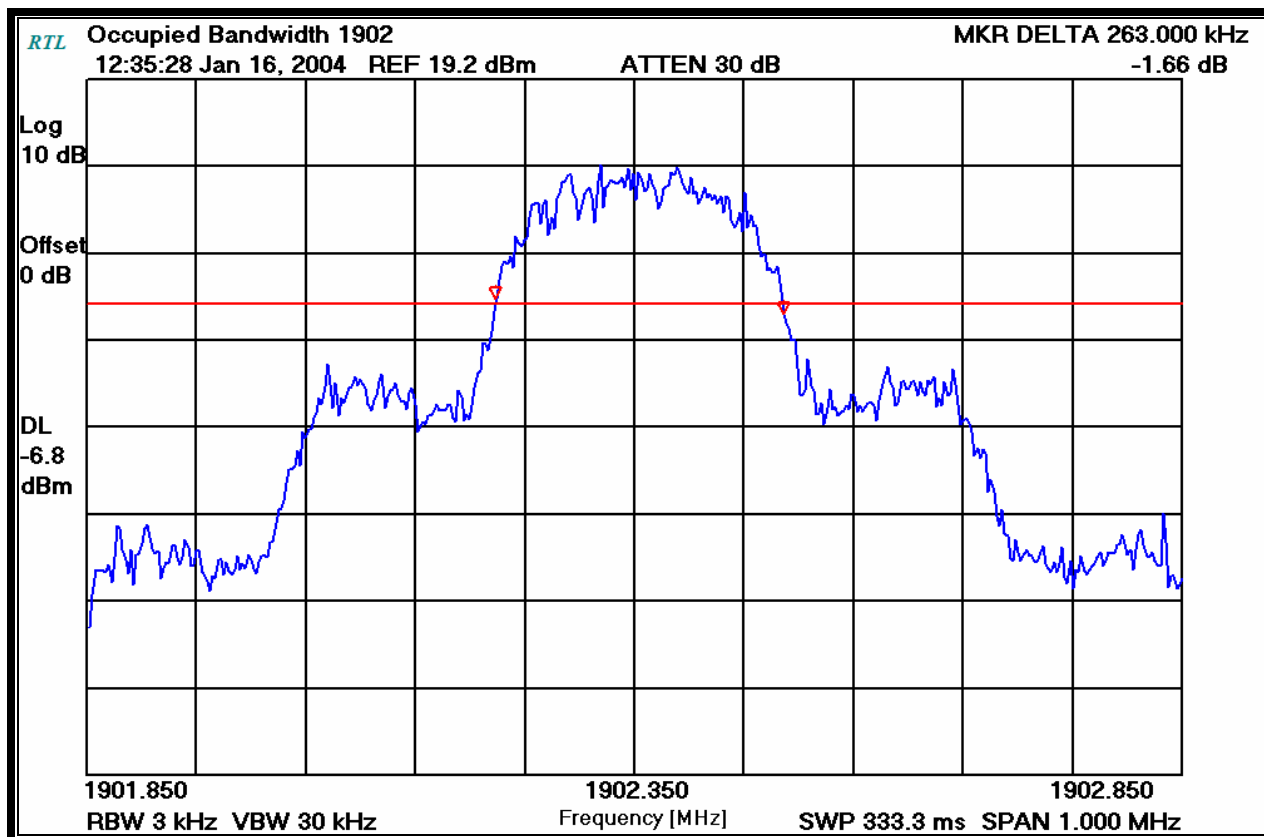

TEST PERSONNEL:

Daniel W. Baltzell
 EMC Test Engineer

Signature

January 16, 2004
 Date Of Test

6 CONDUCTED SPURIOUS AND HARMONIC EMISSIONS - §2.1051

6.1 TEST PROCEDURE

ANSI/TIA-603-B-2002, Section 2.2.13

The transmitter antenna terminal is connected with the 50 Ω impedance input to the spectrum analyzer.
The worst case average channel test data is provided.

6.2 CONDUCTED SPURIOUS AND HARMONIC EMISSIONS TEST EQUIPMENT

TABLE 6-1: CONDUCTED SPURIOUS AND HARMONIC EMISSIONS TEST EQUIPMENT

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due
901020	Hewlett Packard	8564E	Portable Spectrum Analyzer (9 kHz - 40 GHz)	3943A01719	7/15/04

6.3 CONDUCTED SPURIOUS AND HARMONIC TEST DATA - §2.1051


Operating Frequency (MHz): 1880.15
Channel: 206
Measured Power at the Antenna Port (dBm): 17.8
Modulation: DXW
Limit (dBc): 30.8

TABLE 6-2: CONDUCTED SPURIOUS AND HARMONIC DATA §2.1051

Frequency (MHz)	Measured Level (dBc)	Margin (dB)
68.800	60.9	-30.1
1647.100	56.1	-25.3
1865.430	46.1	-15.3
1895.430	45.5	-14.7
2113.500	47.9	-17.1
2346.450	58.3	-27.5
3760.300	56.7	-25.9
5640.450	77.1	-46.3
7520.600	68.0	-37.2
9400.750	77.3	-46.5
11280.900	79.2	-48.4
13161.050	75.3	-44.5
15041.200	74.3	-43.5
16921.350	75.7	-44.9
18801.500	70.4	-39.6

TEST PERSONNEL:

Daniel W. Baltzell
EMC Test Engineer



Signature

March 5, 2004
Date Of Test


Operating Frequency (MHz): 1893.65
Channel: 251
Measured Power at the Antenna Port (dBm): 17.6
Modulation: DXW
Limit (dBc): 30.6

TABLE 6-3: CONDUCTED SPURIOUS AND HARMONIC DATA §2.1051

Frequency (MHz)	Measured Level (dBc)	Margin (dB)
879.741	67.9	-37.3
1660.500	55.1	-24.5
1865.200	42.2	-11.6
1922.030	42.7	-12.1
2126.850	44.7	-14.1
2359.950	55.5	-24.9
3787.300	47.8	-17.2
5680.950	69.2	-38.6
7574.600	75.4	-44.8
9468.250	91.4	-60.8
11361.900	91.1	-60.5
13255.550	89.3	-58.7
15149.200	90.1	-59.5
17042.850	91.3	-60.7
18936.500	89.9	-59.3

TEST PERSONNEL:

Daniel W. Baltzell
 EMC Test Engineer



Signature

January 12, 2004
 Date Of Test


Operating Frequency (MHz): 1902.35
Channel: 25
Measured Power at the Antenna Port (dBm): 17.3
Modulation: DXW
Limit (dBc): 30.3

TABLE 6-4: CONDUCTED SPURIOUS AND HARMONIC DATA §2.1051

Frequency (MHz)	Measured Level (dBc)	Margin (dB)
892.786	66.2	-35.9
1339.300	50.6	-20.3
1669.100	41.3	-11.0
1865.200	43.2	-12.9
1940.100	45.1	-14.8
2135.500	49.8	-19.5
2368.670	57.2	-26.9
3804.700	48.5	-18.2
5707.050	65.7	-35.4
7609.400	76.0	-45.7
9511.750	90.8	-60.5
11414.100	91.0	-60.7
13316.450	90.0	-59.7
15218.800	88.8	-58.5
17121.150	90.1	-59.8
19023.500	91.1	-60.8

TEST PERSONNEL:

Daniel W. Baltzell
 EMC Test Engineer



Signature

January 12, 2004
 Date Of Test


Operating Frequency (MHz): 1909.85
Channel: 50
Measured Power at the Antenna Port (dBm): 17.1
Modulation: DXW
Limit (dBc): 30.1

TABLE 6-5: CONDUCTED SPURIOUS AND HARMONIC DATA §2.1051

Frequency (MHz)	Measured Level (dBc)	Margin (dB)
904.128	66.1	-36.0
1676.710	53.8	-23.7
1865.203	44.3	-14.2
1954.468	46.1	-16.0
2375.139	57.1	-27.0
3819.700	51.3	-21.2
5729.550	61.5	-31.4
7639.400	74.2	-44.1
9549.250	90.4	-60.3
11459.100	91.1	-61.0
13368.950	89.1	-59.0
15278.800	89.6	-59.5
17188.650	90.4	-60.3
19098.500	90.8	-60.7

TEST PERSONNEL:

Daniel W. Baltzell
 EMC Test Engineer



Signature

January 12, 2004
 Date Of Test

7 RADIATED SPURIOUS AND HARMONIC EMISSIONS - §2.1053

7.1 RADIATED SPURIOUS AND HARMONIC EMISSIONS - §2.1053

Substitution method. The EUT was terminated with a 50 ohm termination and placed on a turntable 3 meters from the receive antenna. The field of maximum intensity was found by rotating the EUT approximately 360 degrees and changing the height of the receive antenna from 1 to 4 meters. The field strength was recorded from a calibrated spectrum analyzer for each channel being tested. A double ridge horn antenna was substituted in place of the EUT. The horn antenna was fed by a signal generator and adjusted until the previous level was attained. The signal generator level was recorded. It was further corrected by subtracting the cable loss from the signal generator to the dipole and adding the horn gain. The worst case average channel test data is provided.

7.2 RADIATED SPURIOUS TEST EQUIPMENT

TABLE 7-1: RADIATED SPURIOUS TEST EQUIPMENT

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due
901053	Schaffner Chase	CBL6112B	Bi-Log Antenna (20 MHz - 2 GHz)	2648	7/03/04
900932	Hewlett Packard	8449B OPT H02	Preamplifier (1 - 26.5 GHz)	3008A00505	4/22/04
901020	Hewlett Packard	8564E	Portable Spectrum Analyzer (9 kHz - 40 GHz)	3943A01719	7/15/04
900928	Hewlett Packard	83752A	Synthesized Sweeper (0.01 - 20 GHz)	3610A00866	8/5/04
900814	Electro-Metrics	EM-6961 (RGA-60)	Double Ridged Guide Antenna (1 - 18 GHz)	2310	2/17/04

7.3 FIELD STRENGTH OF SPURIOUS RADIATION TEST DATA - §2.1053

Operating Frequency (MHz): 1902.35
Channel: 25
Measured Power at the Antenna Port (dBm): 17.3
Modulation: DXW
Distance (m): 3
Limit (dBc): 30.3

TABLE 7-2: FIELD STRENGTH OF SPURIOUS RADIATION TEST DATA §2.1053; WHIP ANTENNA

Frequency (MHz)	Signal Generator Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)	Corrected Signal Generator Level (dBm)	Corrected Level (dBc)	Margin (dB)
1669.1	-55.1	5.0	6.9	-53.2	70.5	-40.2
1865.2	-44.5	5.5	7.1	-42.9	60.2	-29.9
1940.1	-41.5	5.6	7.2	-39.9	57.2	-26.9
2135.5	-33.1	6.3	7.7	-31.7	49.0	-18.7
3804.7	-29.4	8.1	9.3	-28.2	45.5	-15.2
5707.1	-40.5	8.0	10.5	-38.0	55.3	-25.0
7609.4	-36.4	10.1	10.6	-35.9	53.2	-22.9
9511.8	-32.9	10.5	11.0	-32.4	49.7	-19.4
11414.1	-29.7	11.4	11.9	-29.2	46.5	-16.2

TABLE 7-3: FIELD STRENGTH OF SPURIOUS RADIATION TEST DATA §2.1053; PATCH ANTENNA


Frequency (MHz)	Signal Generator Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)	Corrected Signal Generator Level (dBm)	Corrected Level (dBc)	Margin (dB)
1669.1	-54.7	5.0	6.9	-52.8	70.1	-39.8
1865.2	-40.1	5.5	7.1	-38.5	55.8	-25.5
1940.1	-46.9	5.6	7.2	-45.3	62.6	-32.3
2135.5	-41.0	6.3	7.7	-39.6	56.9	-26.6
2368.67	-44.9	6.4	8.5	-42.8	60.1	-29.8
3804.7	-33.2	8.1	9.3	-32.0	49.3	-19.0
5707.1	-39.6	8.0	10.5	-37.1	54.4	-24.1
7609.4	-36.4	10.1	10.6	-35.9	53.2	-22.9
9511.8	-33.6	10.5	11.0	-33.1	50.4	-20.1
11414.1	-29.0	11.4	11.9	-28.5	45.8	-15.5

TABLE 7-4: FIELD STRENGTH OF SPURIOUS RADIATION TEST DATA §2.1053; ROD ANTENNA

Frequency (MHz)	Signal Generator Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)	Corrected Signal Generator Level (dBm)	Corrected Level (dBc)	Margin (dB)
1669.1	-53.6	5.0	6.9	-51.7	69.0	-38.7
1865.2	-47.9	5.5	7.1	-46.3	63.6	-33.3
1940.1	-50.4	5.6	7.2	-48.8	66.1	-35.8
2135.5	-35.8	6.3	7.7	-34.4	51.7	-21.4
2368.67	-44.2	6.4	8.5	-42.1	59.4	-29.1
3804.7	-32.1	8.1	9.3	-30.9	48.2	-17.9
5707.1	-43.4	8.0	10.5	-40.9	58.2	-27.9
7609.4	-39.3	10.1	10.6	-38.8	56.1	-25.8
9511.8	-35.8	10.5	11.0	-35.3	52.6	-22.3
11414.1	-33.0	11.4	11.9	-32.5	49.8	-19.5

TEST PERSONNEL:

Daniel W. Baltzell
EMC Test Engineer



Signature

January 13, 2004
Date Of Test

8 BAND-EDGE COMPLIANCE - PART 24.238

8.1 TEST PROCEDURE:

Delta Marker method : The resolution of the spectrum analyzer is adjusted to 1% of the emission bandwidth after the reference level is adjusted to the EIRP level using a resolution and video bandwidth of 1 MHz. The frequency is centered on the band edge of interest with a span capable of showing the peak; a delta-to-peak is performed with the display line set at – 13 dBm ($43+10\log P$).

TABLE 8-1: BAND-EDGE TEST EQUIPMENT

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due
901053	Schaffner Chase	CBL6112B	Bi-Log Antenna (20 MHz - 2 GHz)	2648	7/03/04
901020	Hewlett Packard	8564E	Portable Spectrum Analyzer (9 kHz - 40 GHz)	3943A01719	7/15/04

8.2 TEST DATA

TABLE 8-2: BAND EDGE COMPLIANCE – WHIP ANTENNA

Block applicable	Frequency (MHz)	Spurious at block edge (dBm)	Limit (dBm)	Margin (dB)
B	1870.00	-56.9	-13.0	43.9
B	1885.00	-42.3	-13.0	29.3
F	1890.00	-46.1	-13.0	33.1
F	1895.00	-16.2	-13.0	3.2
C	1894.87	-23.3	-13.0	10.3
C	1910.00	-17.0	-13.0	4.0


TABLE 8-3: BAND EDGE COMPLIANCE – PATCH ANTENNA

Block applicable	Frequency (MHz)	Spurious at block edge (dBm)	Limit (dBm)	Margin (dB)
B	1870.00	-57.2	-13.0	44.2
B	1885.00	-41.3	-13.0	28.3
F	1890.00	-39.4	-13.0	26.4
F	1895.00	-17.4	-13.0	4.4
C	1894.87	-23.0	-13.0	10.0
C	1910.00	-16.0	-13.0	3.0

TABLE 8-4: BAND EDGE COMPLIANCE – ROD ANTENNA

Block applicable	Frequency (MHz)	Spurious at block edge (dBm)	Limit (dBm)	Margin (dB)
B	1870.00	-57.6	-13.0	44.6
B	1885.00	-43.2	-13.0	30.2
F	1890.00	-41.0	-13.0	28.0
F	1895.00	-16.7	-13.0	3.7
C	1894.87	-25.5	-13.0	12.5
C	1910.00	-18.8	-13.0	5.8

PLOT 8-1: LOWER BAND EDGE BLOCK B - WHIP ANTENNA

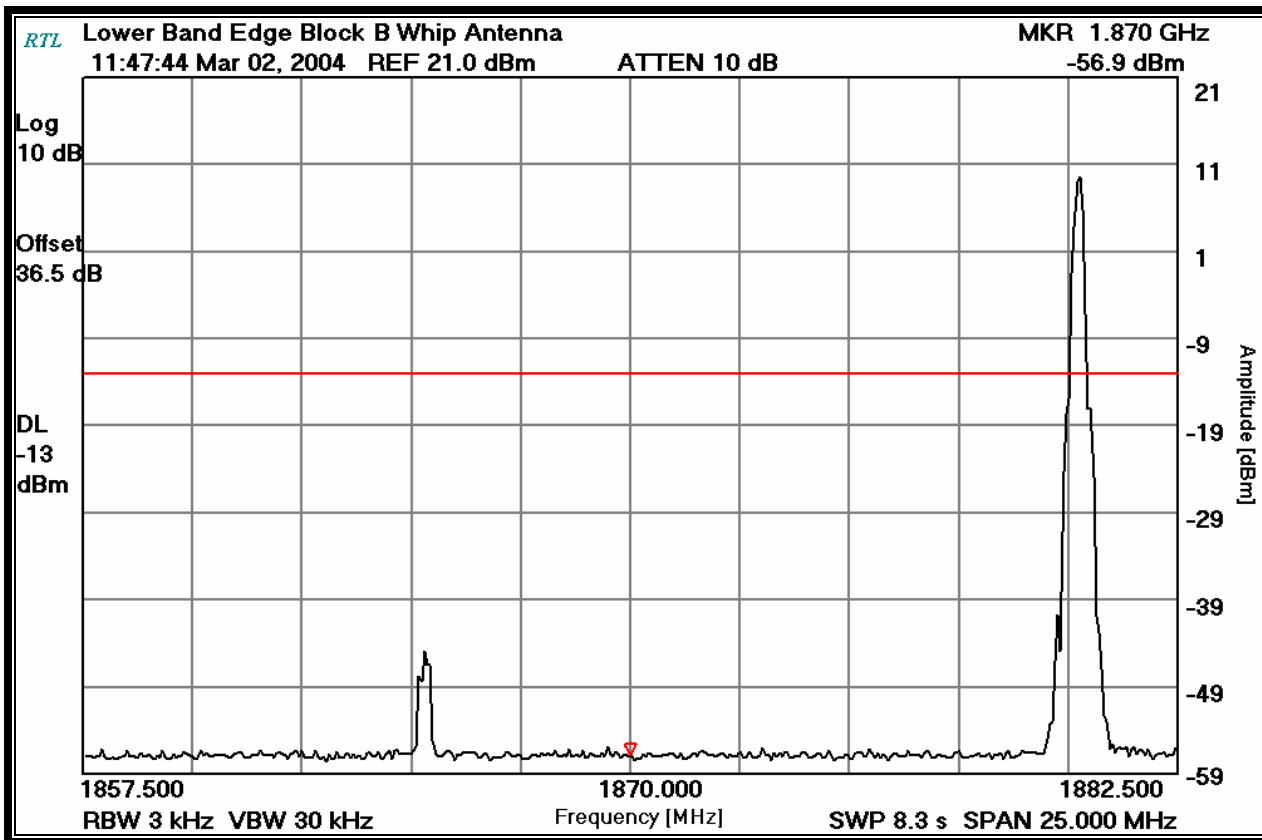


TEST PERSONNEL:

Daniel W. Baltzell
 EMC Test Engineer

Signature

March 2, 2004
 Date Of Test


PLOT 8-2: UPPER BAND EDGE BLOCK B - WHIP ANTENNA

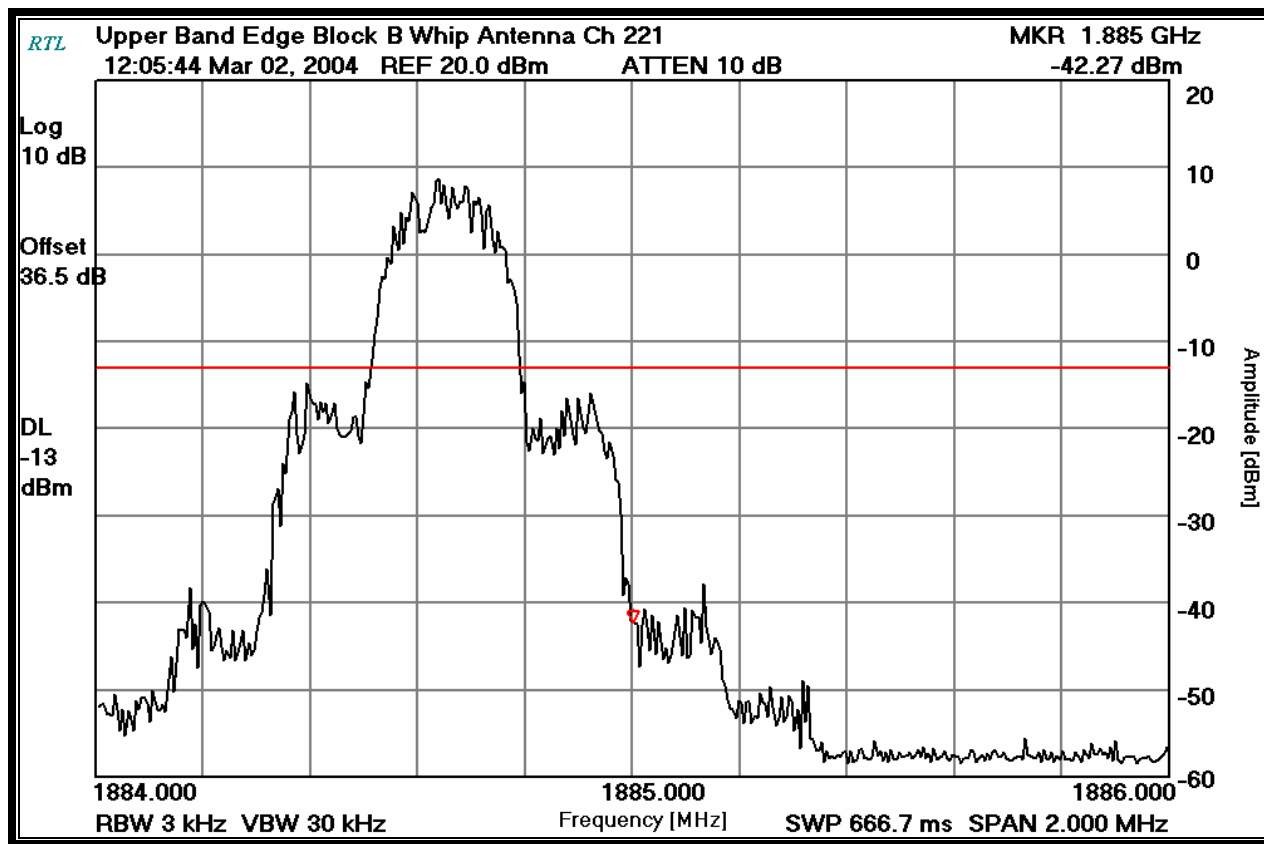

TEST PERSONNEL:

Daniel W. Baltzell EMC Test Engineer	 Signature	March 2, 2004 Date Of Test
---	--	-------------------------------

PLOT 8-3: LOWER BAND EDGE BLOCK F - WHIP ANTENNA

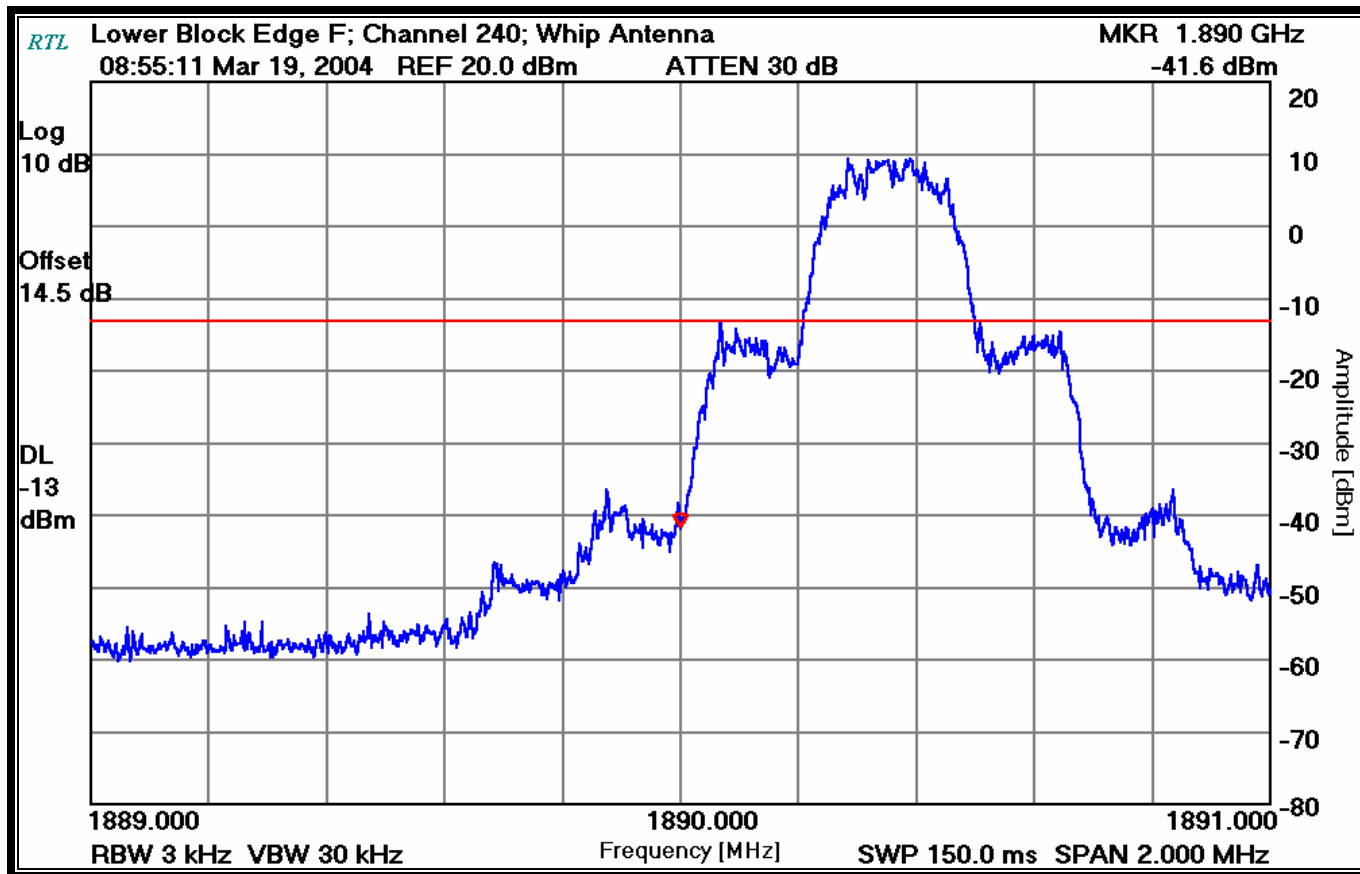


TEST PERSONNEL:

Daniel W. Baltzell
 EMC Test Engineer


Signature

March 19, 2004
 Date Of Test


PLOT 8-4: UPPER BAND EDGE BLOCK F - WHIP ANTENNA

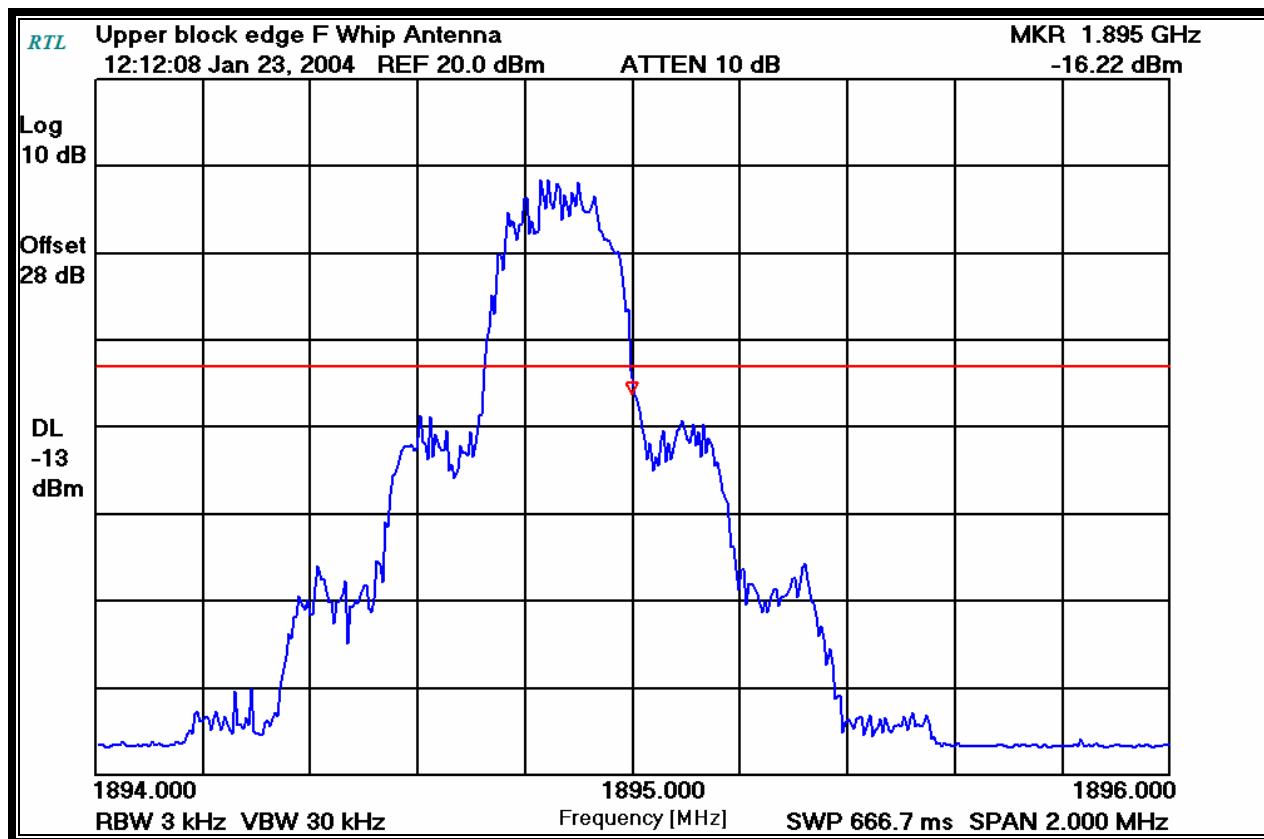


TEST PERSONNEL:

Daniel W. Baltzell EMC Test Engineer	 Signature	January 23, 2004 Date Of Test
---	--	----------------------------------


PLOT 8-5: LOWER BAND EDGE BLOCK C - WHIP ANTENNA

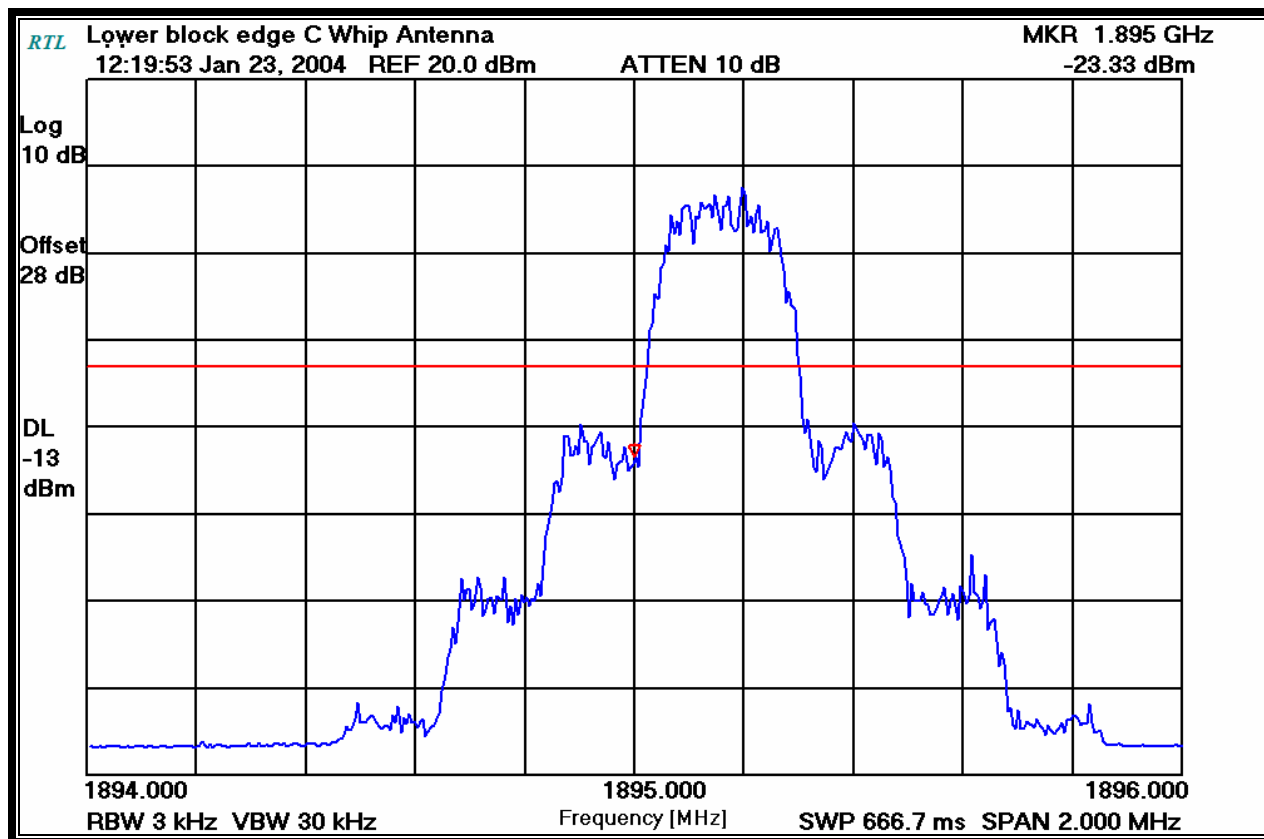

TEST PERSONNEL:

Daniel W. Baltzell EMC Test Engineer	 Signature	January 23, 2004 Date Of Test
---	--	----------------------------------

PLOT 8-6: UPPER BAND EDGE BLOCK C - WHIP ANTENNA

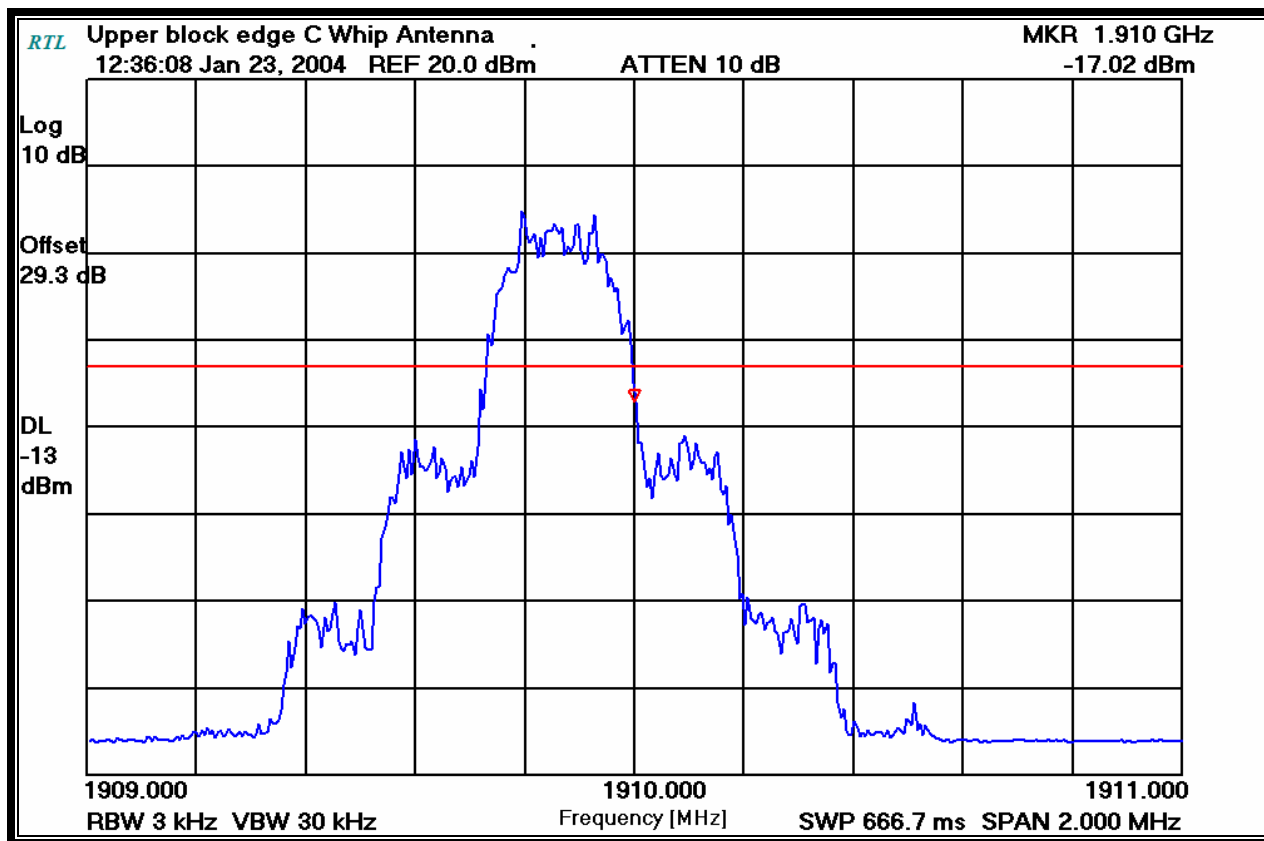


TEST PERSONNEL:

Daniel W. Baltzell
 EMC Test Engineer


Signature

January 23, 2004
 Date Of Test


PLOT 8-7: LOWER BAND EDGE BLOCK B - PATCH ANTENNA

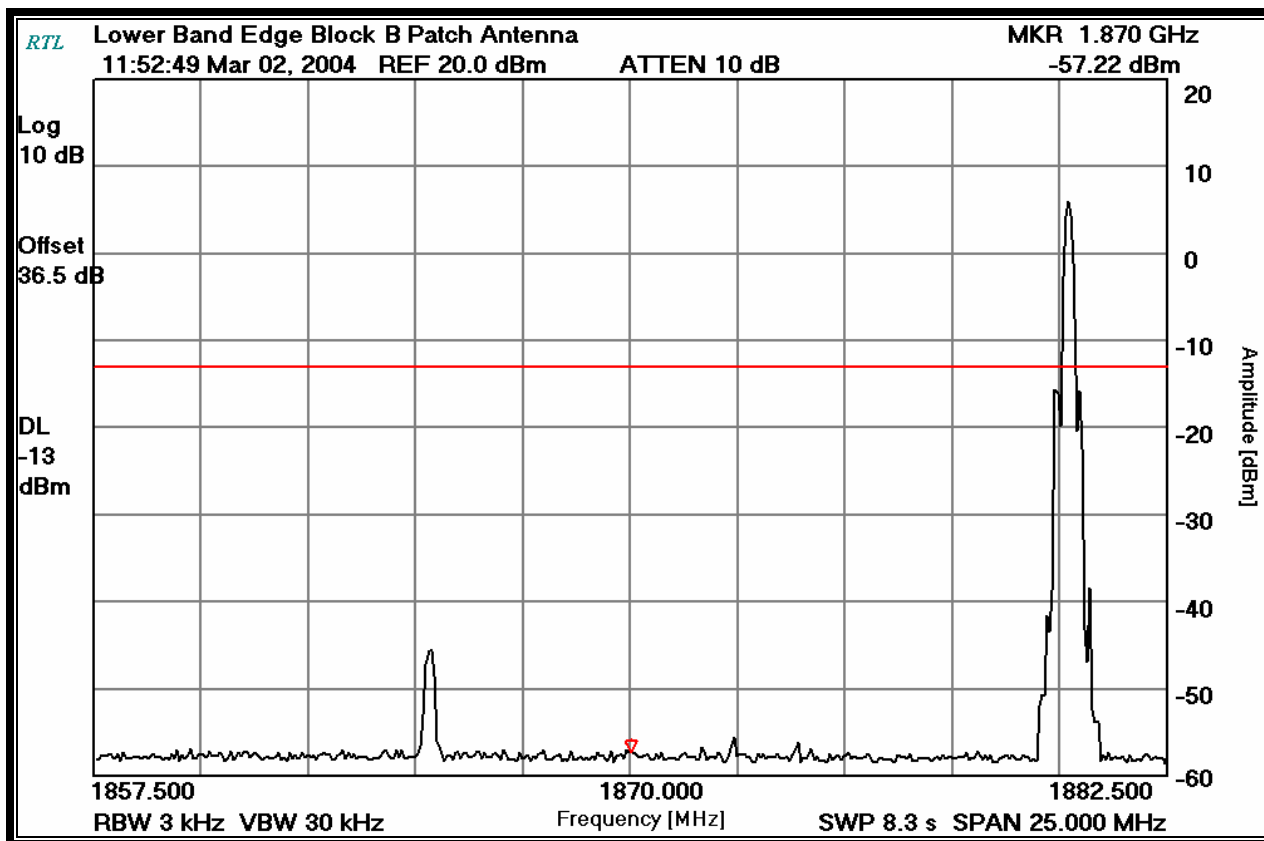


TEST PERSONNEL:

Daniel W. Baltzell EMC Test Engineer	 Signature	March 2, 2004 Date Of Test
---	--	-------------------------------


PLOT 8-8: UPPER BAND EDGE BLOCK B - PATCH ANTENNA

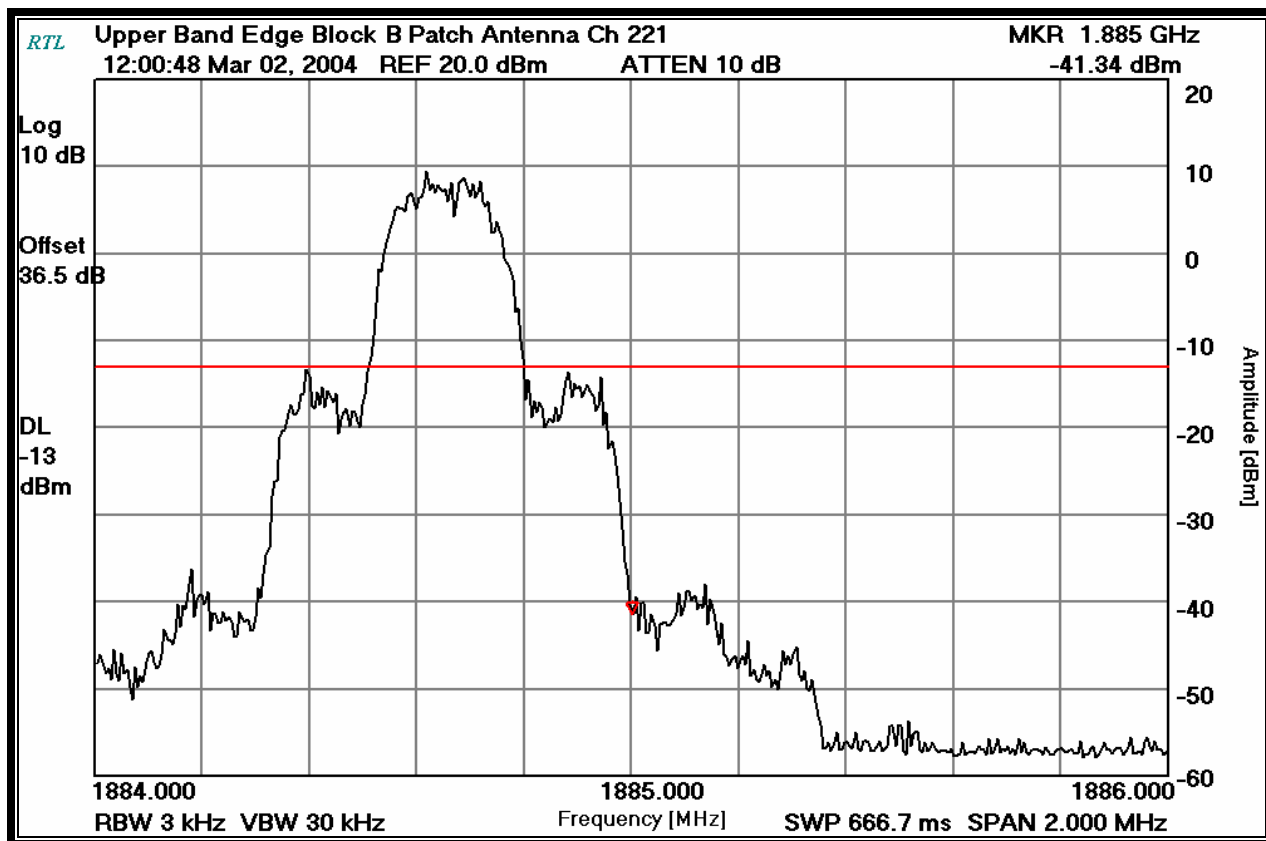

TEST PERSONNEL:

Daniel W. Baltzell EMC Test Engineer	 Signature	March 2, 2004 Date Of Test
---	--	-------------------------------

PLOT 8-9: LOWER BAND EDGE BLOCK F - PATCH ANTENNA

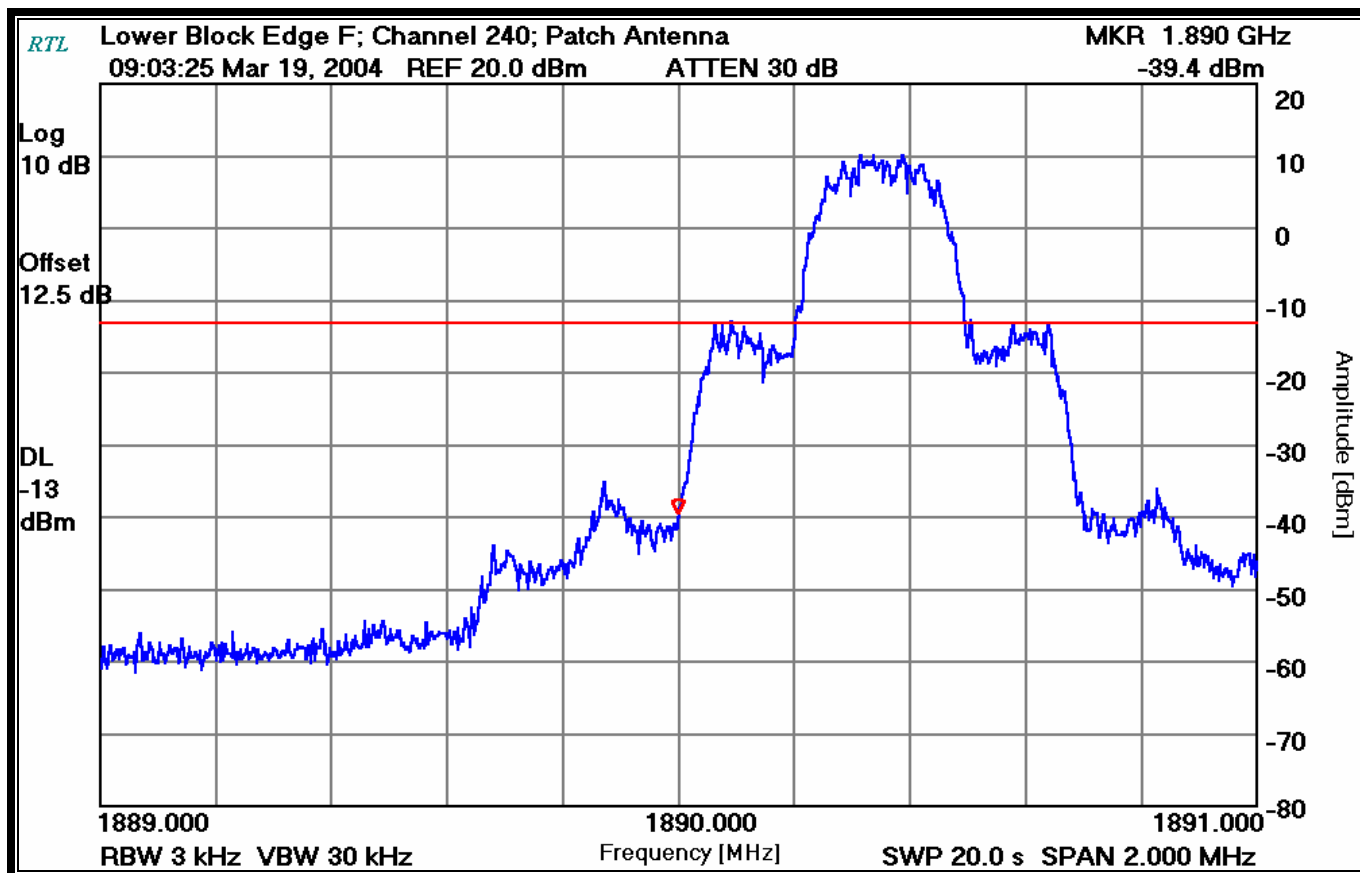


TEST PERSONNEL:

Daniel W. Baltzell
 EMC Test Engineer


Signature

March 19, 2004
 Date Of Test


PLOT 8-10: UPPER BAND EDGE BLOCK F - PATCH ANTENNA

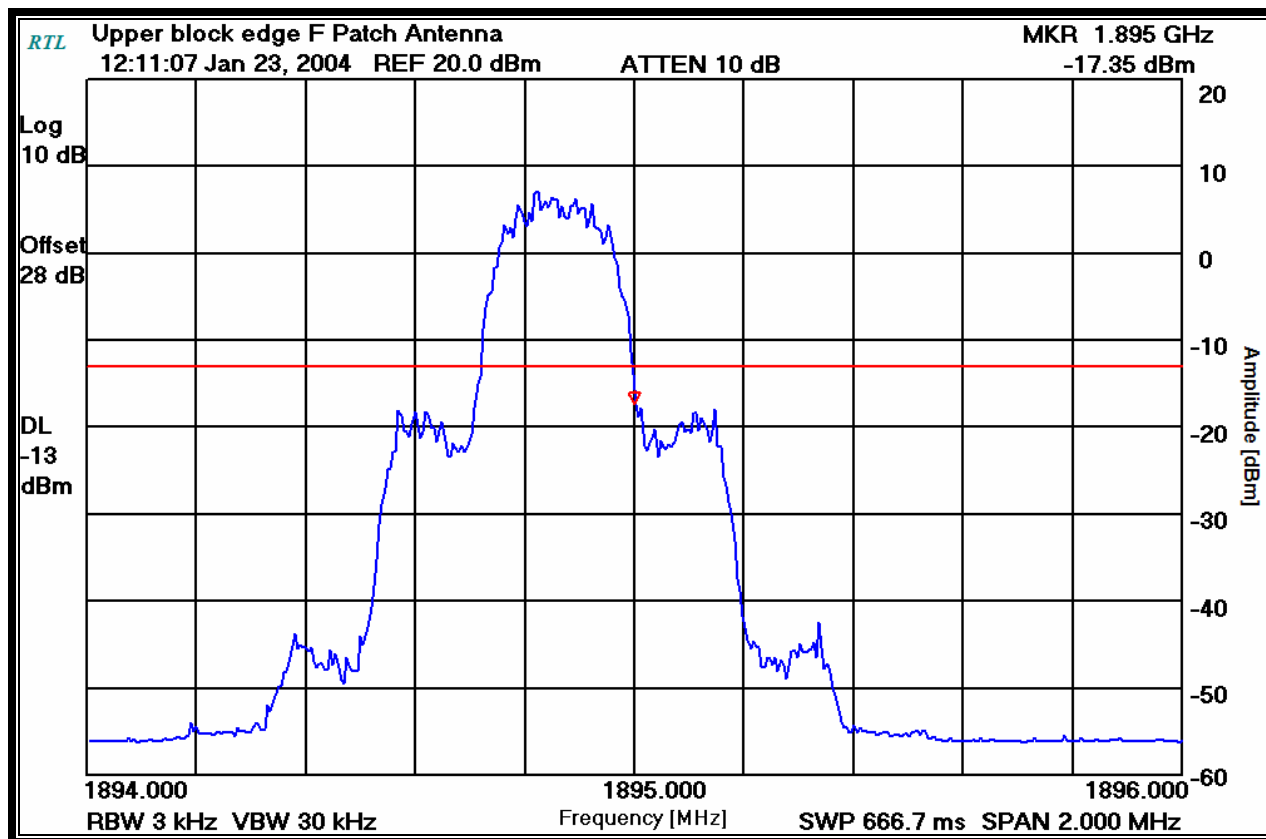


TEST PERSONNEL:

Daniel W. Baltzell EMC Test Engineer	 Signature	January 23, 2004 Date Of Test
---	--	----------------------------------


PLOT 8-11: LOWER BAND EDGE BLOCK C - PATCH ANTENNA

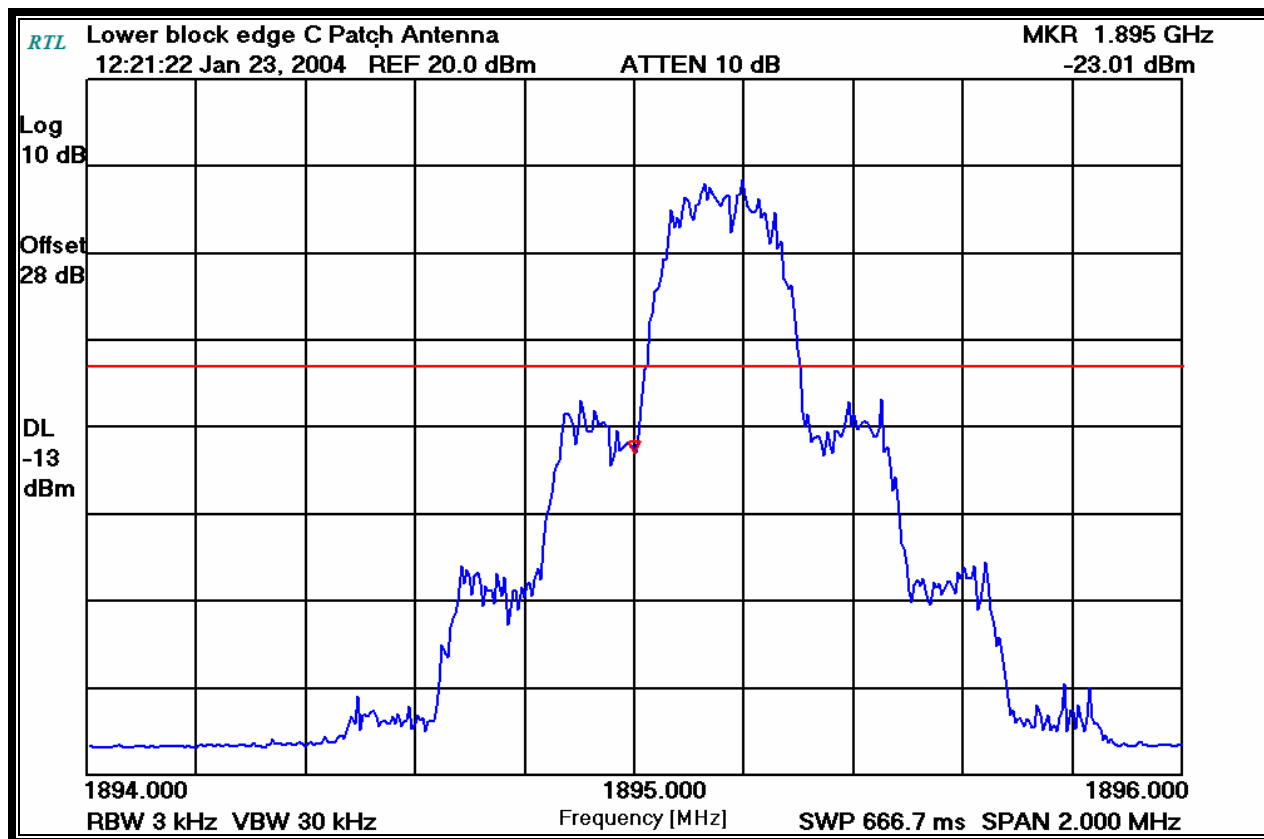


TEST PERSONNEL:

Daniel W. Baltzell EMC Test Engineer	 Signature	January 23, 2004 Date Of Test
---	--	----------------------------------


PLOT 8-12: UPPER BAND EDGE BLOCK C - PATCH ANTENNA

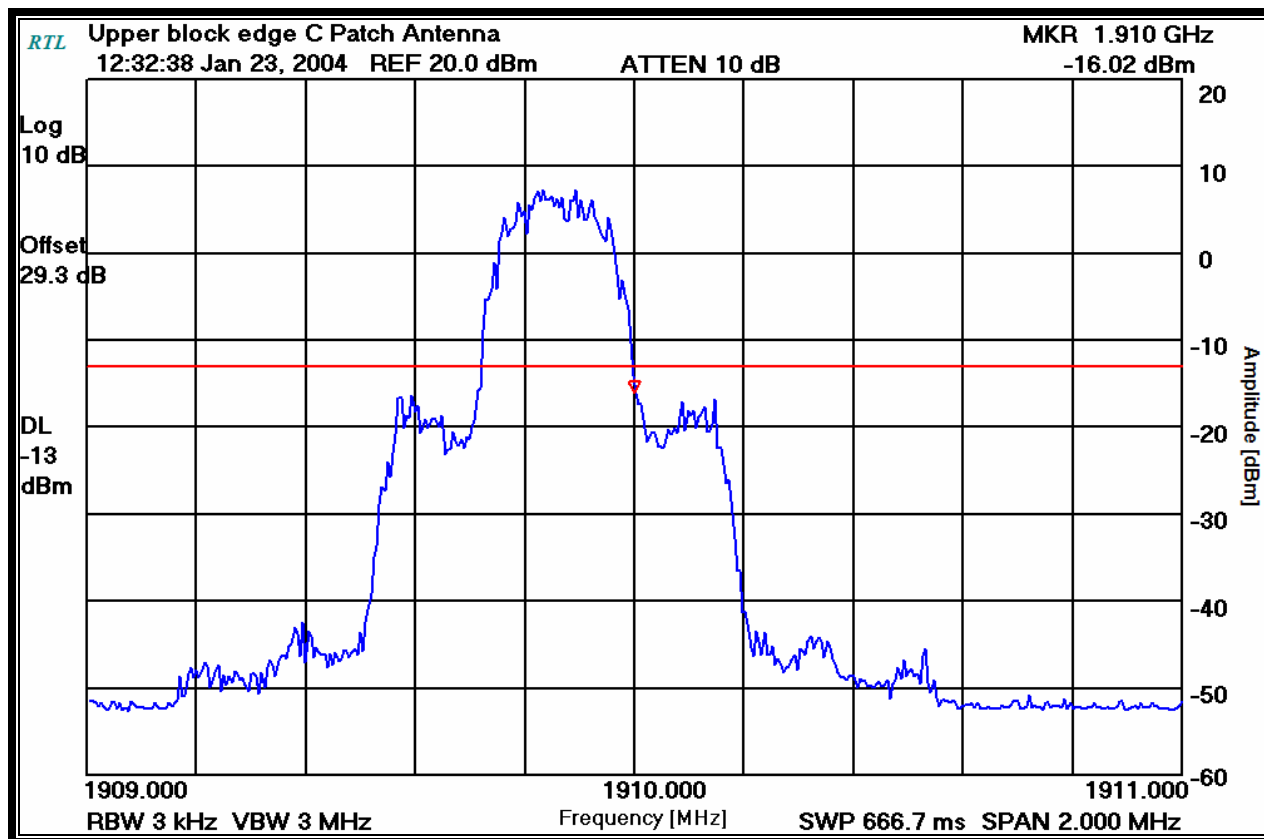


TEST PERSONNEL:

Daniel W. Baltzell EMC Test Engineer	 Signature	January 23, 2004 Date Of Test
---	--	----------------------------------


PLOT 8-13: LOWER BAND EDGE BLOCK B - ROD ANTENNA

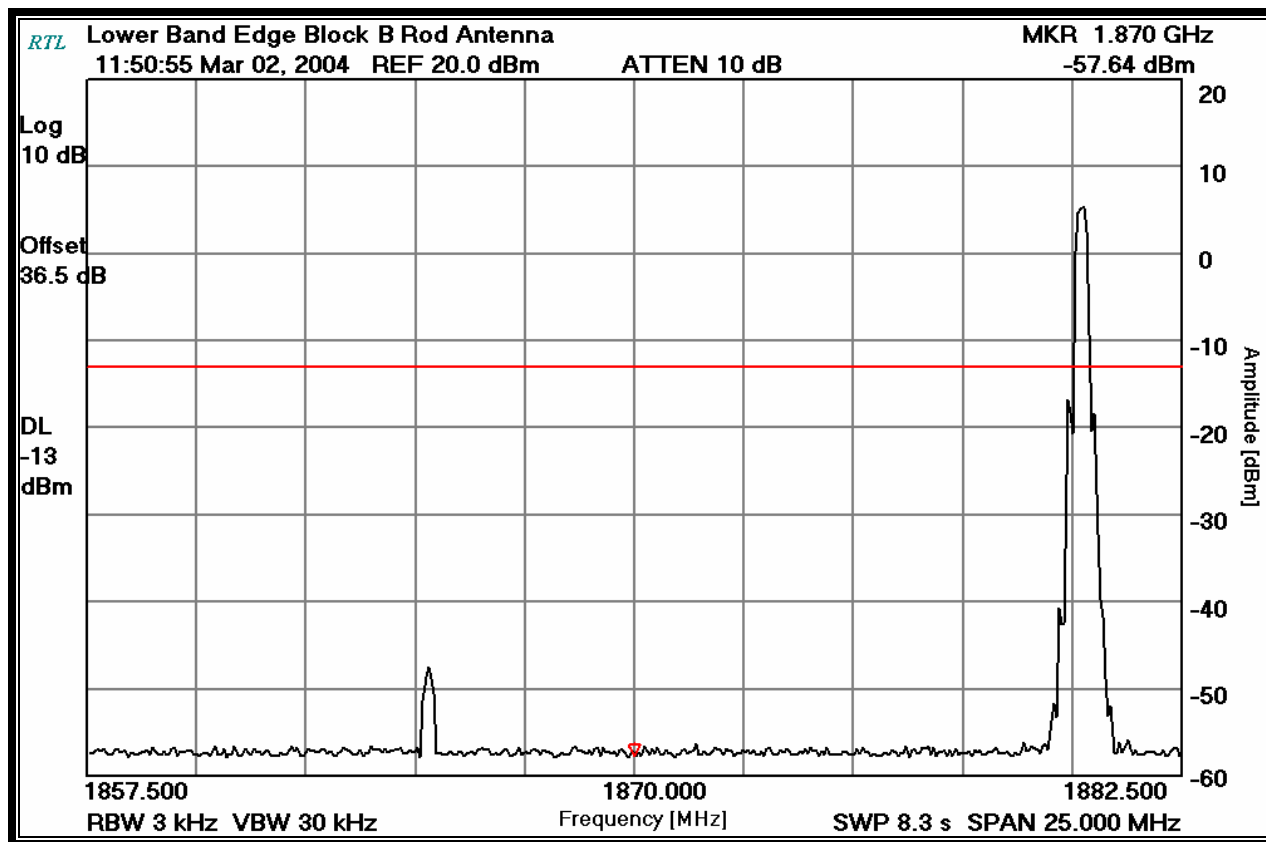


TEST PERSONNEL:

Daniel W. Baltzell EMC Test Engineer	 Signature	March 2, 2004 Date Of Test
---	--	-------------------------------


PLOT 8-14: UPPER BAND EDGE BLOCK B - ROD ANTENNA

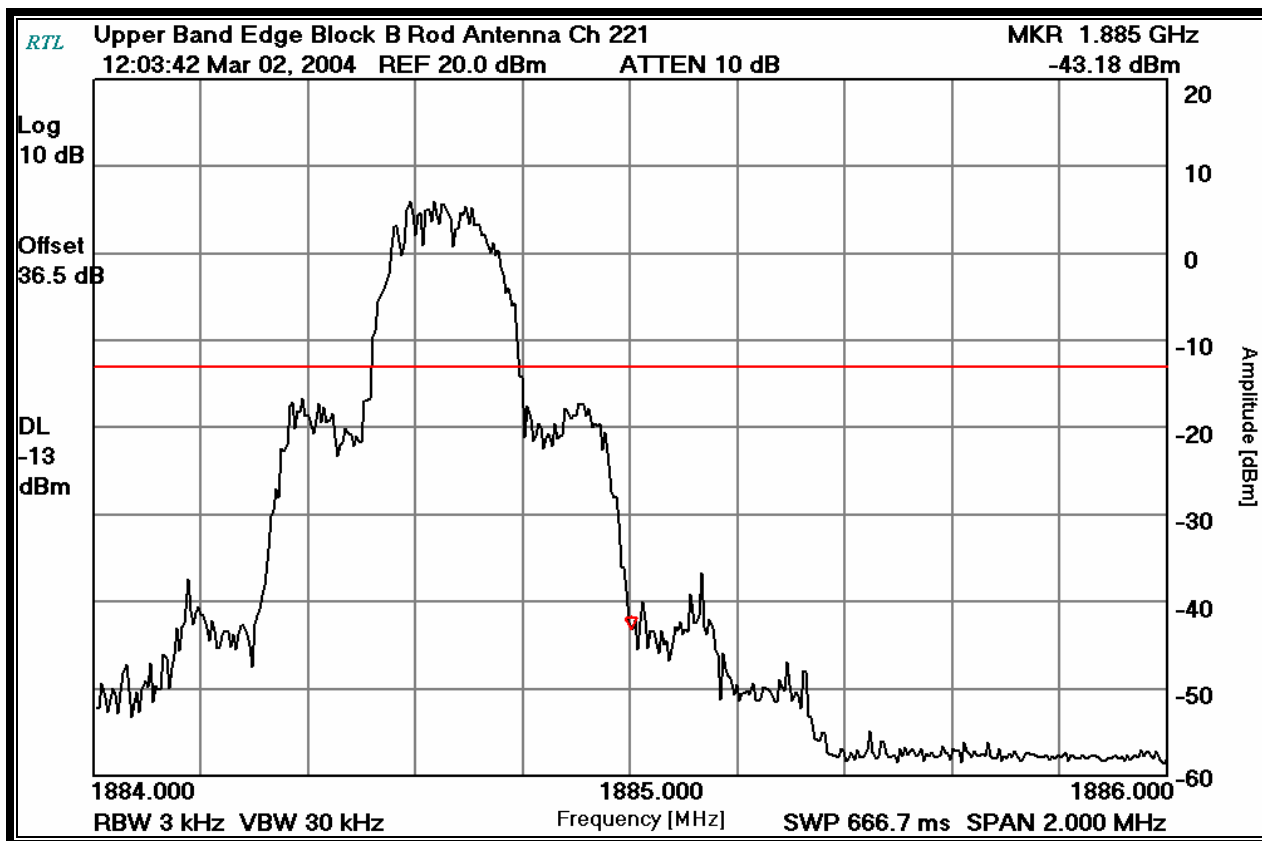

TEST PERSONNEL:

Daniel W. Baltzell		March 2, 2004
EMC Test Engineer	Signature	Date Of Test

PLOT 8-15: LOWER BAND EDGE BLOCK F - ROD ANTENNA

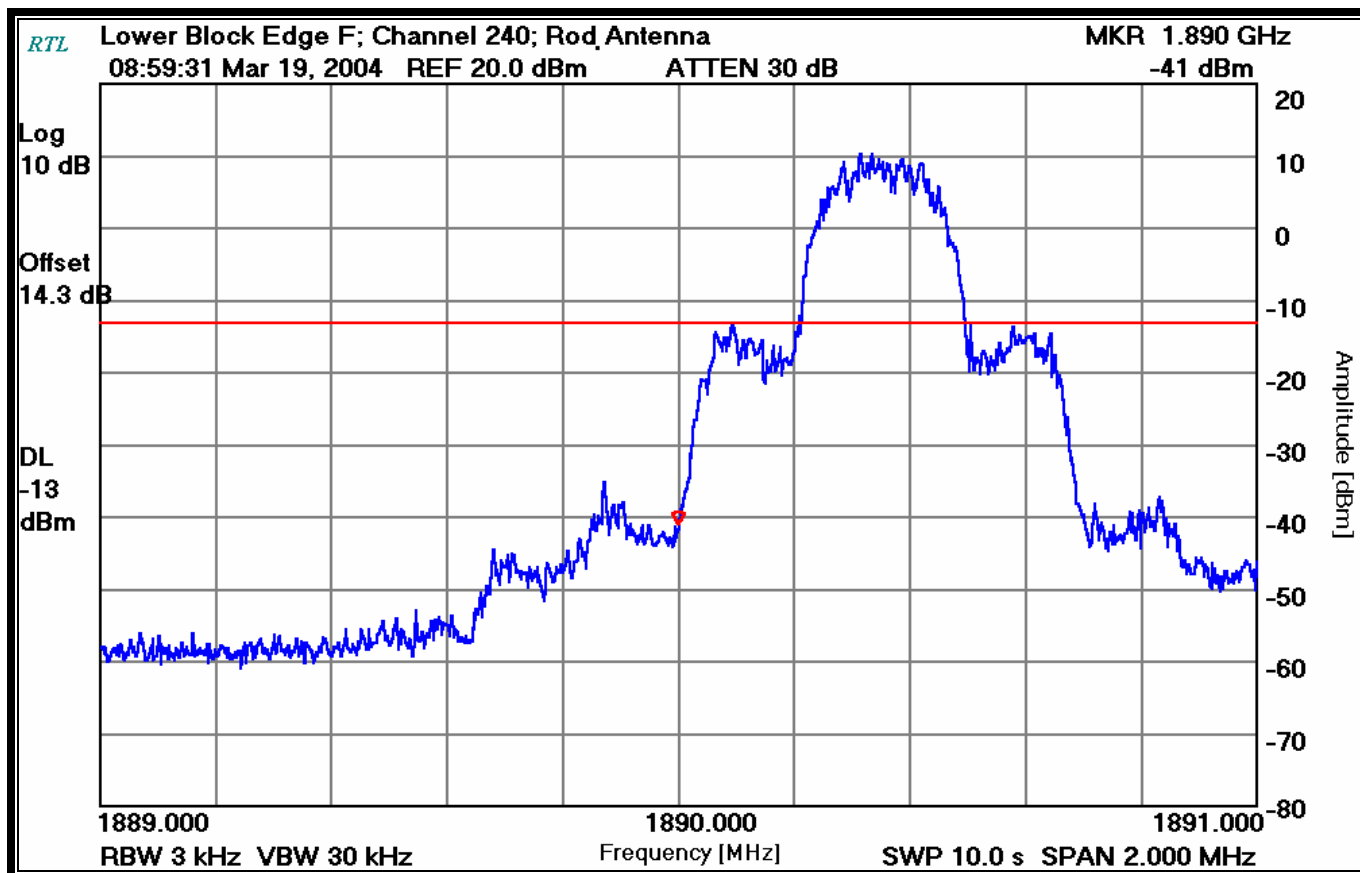


TEST PERSONNEL:

Daniel W. Baltzell
 EMC Test Engineer


Signature

March 19, 2004
 Date Of Test


PLOT 8-16: UPPER BAND EDGE BLOCK F - ROD ANTENNA

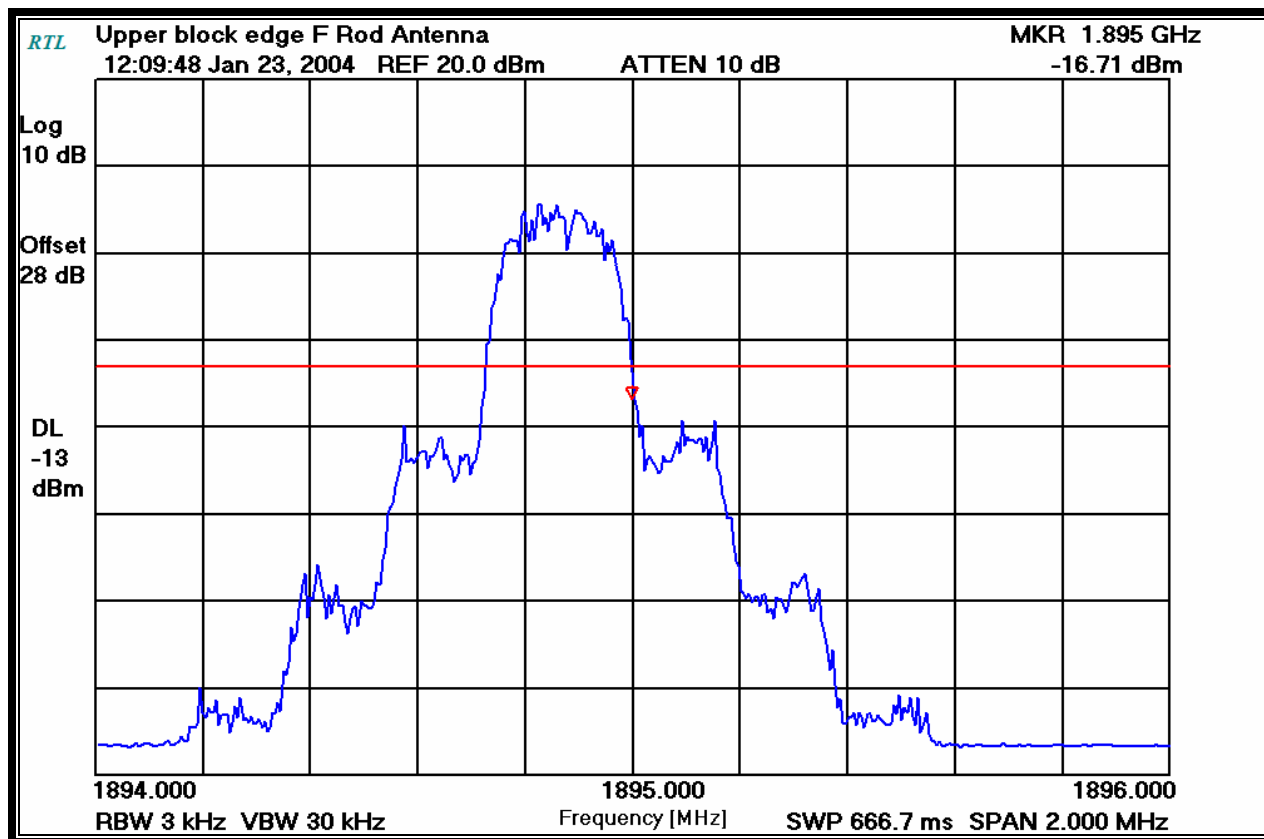


TEST PERSONNEL:

Daniel W. Baltzell EMC Test Engineer	 Signature	January 23, 2004 Date Of Test
---	--	----------------------------------


PLOT 8-17: LOWER BAND EDGE BLOCK C - ROD ANTENNA

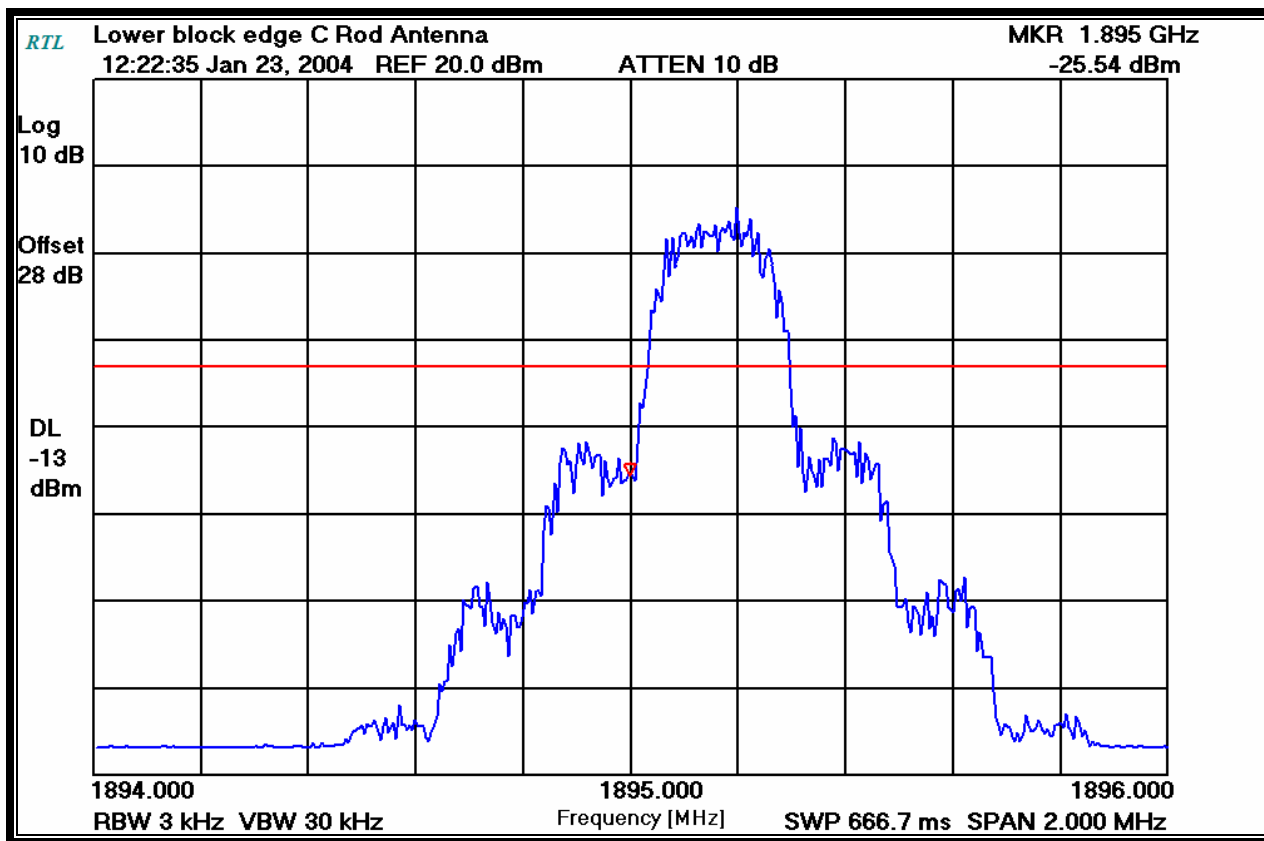


TEST PERSONNEL:

Daniel W. Baltzell EMC Test Engineer	 Signature	January 23, 2004 Date Of Test
---	--	----------------------------------

PLOT 8-18: UPPER BAND EDGE BLOCK C - ROD ANTENNA

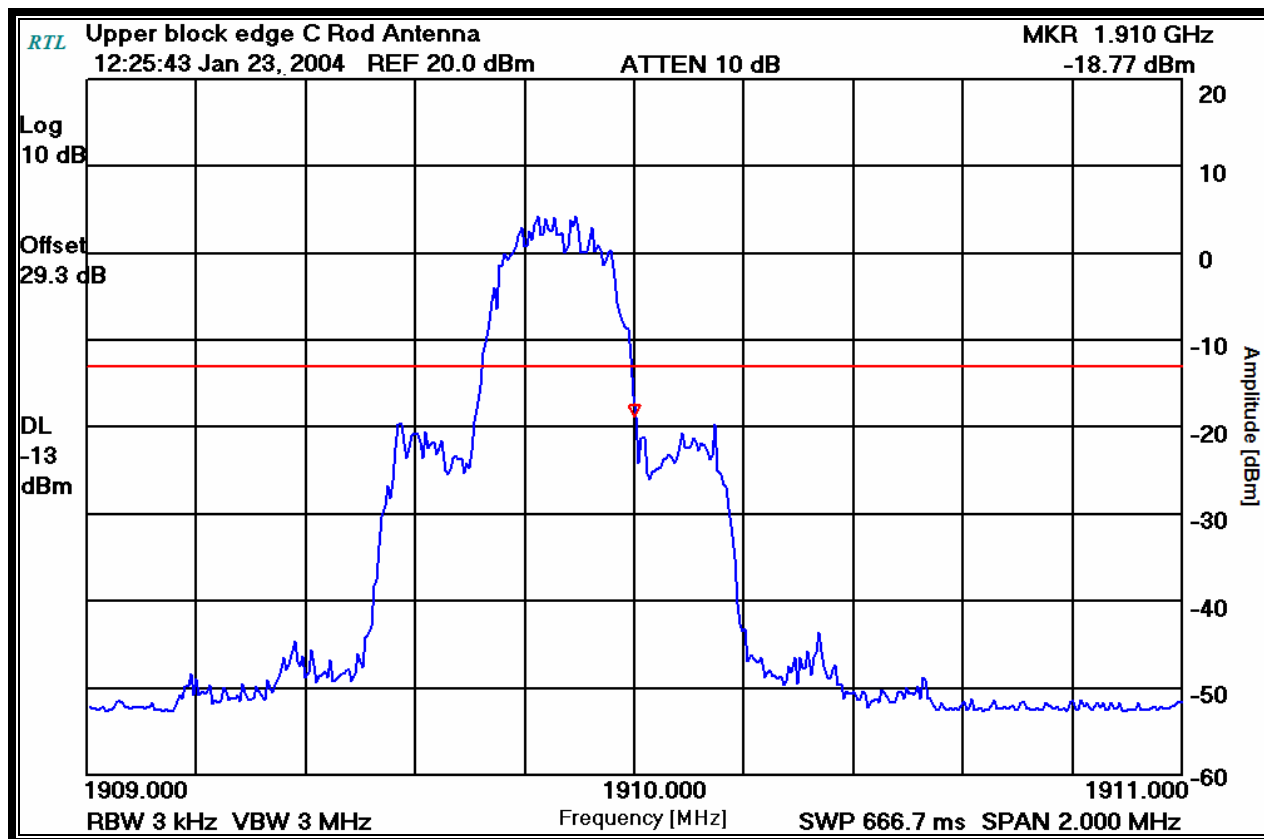

TEST PERSONNEL:

Daniel W. Baltzell EMC Test Engineer	 Signature	January 23, 2004 Date Of Test
---	--	----------------------------------

9 FREQUENCY STABILITY / TEMPERATURE VARIATION - §2.1055

The frequency stability and RF power, measured at the antenna connector using a communications test set as the specified load, are plotted against supply voltage variations and temperature variations at the highest power levels for each modulation type. All measurements are made at the center of the frequency band.

9.1 MEASUREMENT METHOD:

The frequency stability of the transmitter was measured by:

1. Temperature: The temperature was varied from -30°C to +50°C at intervals no more than 10°C throughout the temperature range using an environmental chamber. A period of time sufficient to stabilize all of the components in the equipment shall be allowed prior to each frequency measurement.
2. Primary Supply Voltage: The primary supply voltage was varied from 85% to 115% of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied. The EUT was tested down to the battery endpoint.

9.2 FREQUENCY STABILITY TEST EQUIPMENT

TABLE 9-1: FREQUENCY STABILITY TEST EQUIPMENT

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due
900946	Tenney Engineering, Inc	TH65	Temperature Chamber	11380	2/3/05
901020	Hewlett Packard	8564E	Portable Spectrum Analyzer (9 kHz - 40 GHz)	3943A01719	7/15/04

9.3 TIME PERIOD AND PROCEDURE:

1. The carrier frequency of the transmitter was measured at room temperature (25°C to provide a reference).
2. The equipment was subjected to a “soak” at -30°C without any power applied.
3. After the “soak” at -30°C, the measurement of the carrier frequency of the transmitter was made within a three-minute interval after applying power to the transmitter.
4. Frequency measurements were made at 10°C intervals up to +50°C, then back to room temperature. A minimum period of one hour was provided to allow stabilization of the equipment at each temperature level.

9.4 FREQUENCY STABILITY § 24.235

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

9.5 FREQUENCY STABILITY TEST DATA - §2.1055


Operating Frequency (MHz): 1909.35
Channel: 25
Reference Voltage (VDC): 6.8
Deviation Limit (ppm): 2.5

TABLE 9-2: TEMPERATURE FREQUENCY STABILITY DATA - §2.1055

Temperature	Frequency Measured (MHz)	ppm
-30	1902.350867	0.5
-20	1902.350783	0.4
-10	1902.349858	-0.1
0	1902.349508	-0.3
10	1902.350992	0.5
20	1902.350000	0.0
30	1902.350250	0.1
40	1902.350000	0.0
50	1902.350567	0.3

TEST PERSONNEL:

Daniel W. Baltzell
EMC Test Engineer



Signature

January 21, 2004
Date Of Test

PLOT 9-1: TEMPERATURE FREQUENCY STABILITY DATA - §2.1055

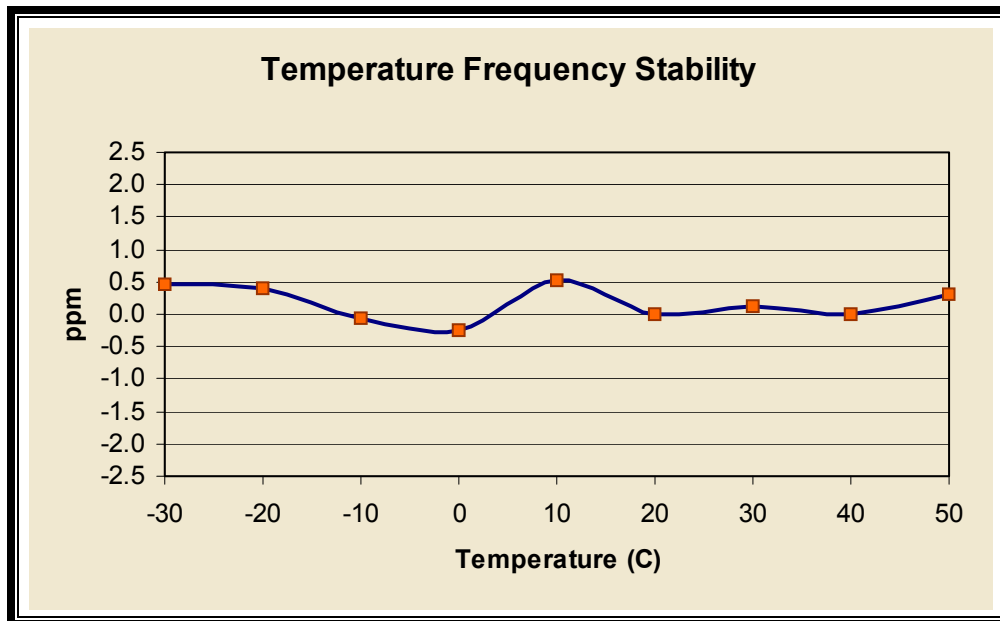


TABLE 9-3: VOLTAGE FREQUENCY STABILITY DATA - §2.1055

Battery endpoint = 3.74 VDC

Voltage	Frequency Measured (MHz)	ppm
3.74	1902.346716	-1.7
3.90	1902.346899	-1.6
4.00	1902.349883	-0.1
5.78	1902.349508	-0.3
6.80	1902.349892	-0.1
7.82	1902.349950	0.0


TEST PERSONNEL:

Daniel W. Baltzell
 EMC Test Engineer

Signature

January 21, 2004
 Date Of Test

PLOT 9-2: VOLTAGE FREQUENCY STABILITY

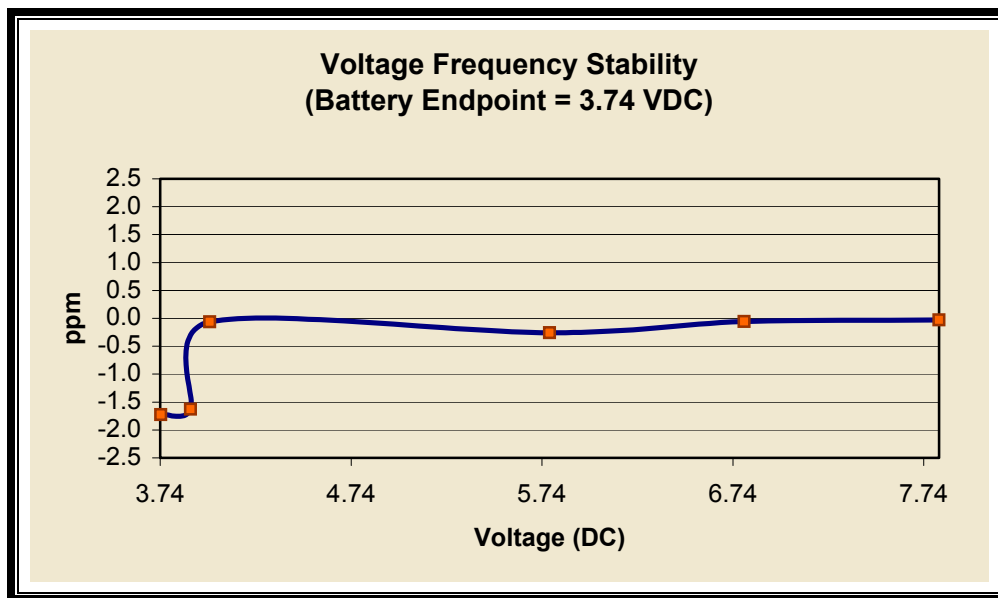

TEST PERSONNEL:

Daniel W. Baltzell
EMC Test Engineer

Signature

January 21, 2004
Date Of Test

10 CONCLUSION

The data in this measurement report shows that the UTStarcom, Inc. Model # UTS-FSU811, FCC ID: O6YUTS-FSU811, complies with all the requirements of Parts 2 and 24 of the FCC Rules.