

Shenzhen Sansheng Chuang electronic Technology Co., LTD

Letter of acceptance

客 戶:
CUSTOMER: Shenzhen Hancal Technology Co., LTD

客 戶 料 號:
CUST P/N:

三盛创 料 號:
FINE P/N: G43.5-6.4UH 单线圈 0.08*72P*10TS

產 品 型 號:
DESC: Φ43.5MMX5.3MMX0.8MM

日 期:
DATE: 2024.01.17

版 本:
Version: A.0

擬制 PREPARED BY	審核 CHECKED BY	批准 APPROVED BY	客戶承認 CUSTOMER APPROVE
林素玲	安帅印	安帅印	

深圳市三盛创电子科技有限公司

Shenzhen Sansheng Chuang electronic Technology Co., LTD

工廠地址：深圳市光明新区玉律社区大洋一路 19 号 2 楼

Factory address: 2nd Floor, No. 19, Dayang Road, Yulu Community, Guangming

New District, Shenzhen


Version Change History

[illegible]


SPECIFICATION

產品型號: DESC	Φ 20.5x40-6.4uH-0.08X72P*10mm	版本 Rev: A.0	客戶 CUST:	
			客戶料号 CUST P/N:	

一、尺寸 DIMENSION:(mm)

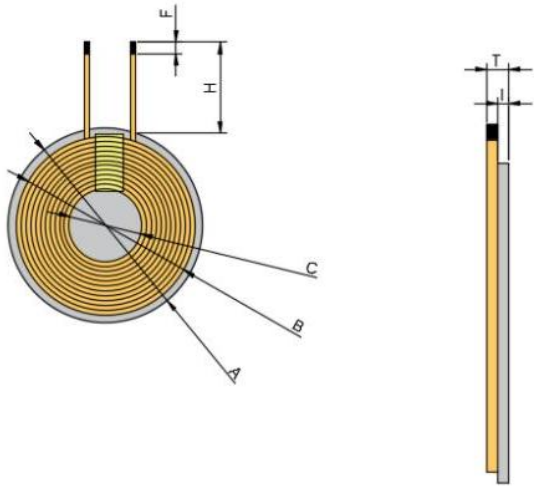

二、原理图 SCHEMATIC DIAGRAM:

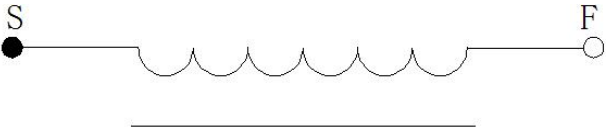

A	43.5±0.5
B	40.0±0.1
C	20.5±0.5
H	10±2
T	2.0±0.2
I	0.8±0.1
F	3±1

- 注:
- 1.1. Cross out wire;;
 - 2.Wrap 8mm(ref) width high-temperature adhesive paper 1-2Ts around the outlet position;
 - 3.The coil is attached to a circular hard magnetic disc with a groove, the magnetic disc size is 43.5 ±0.5mm, the inner hole is 5.3mm, and the thickness is 0.8±0.1mm。
 - 4.The center is fitted with a direct 19.5mm round small magnetic disc

三、绕线参数 Winding Specification:

序号 NO.	端子 TERMINAL		线径 WIRE	圈数 Turns	绕线方向 Winding Direction
1	S	F	热风线 0.08*72P	10Ts	CCW

四、电气特性 ELECTRICAL CHARACTERISTICS:

温度 TEMPERATURE:25±10°C, 湿度 RELATIVE HUMIDITY:65±20%

序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS
1	IND.	S-F	4.0uH +10% individual coil	100KHz/0.25V	LCZ METER 1062B
2	IND.	S-F	6.4uH +10% plus diskettes	100KHz/0.25V	LCZ METER 1062B
3	DCR	S-F	≤55m Ω	100KHz/0.25V	LCZ METER 502B
4	Q 值	S-F	≥ 75	100KHz/0.25V	LCZ METER 502B

拟制/日期 PREPARED BY/DATE	审核/日期 CHECKED BY/DATE
林素玲 2024.01.17	安帅印 2024.01.17