LABEL

The labels shown below are affixed on the bottom of the EasyST and side panel of ProST radio units as shown below.
The label material is PVC with a permanent adhesive.

EasyST 4.9 GHz TDD bottom, label with FCC ID:PIDASMAX49 location

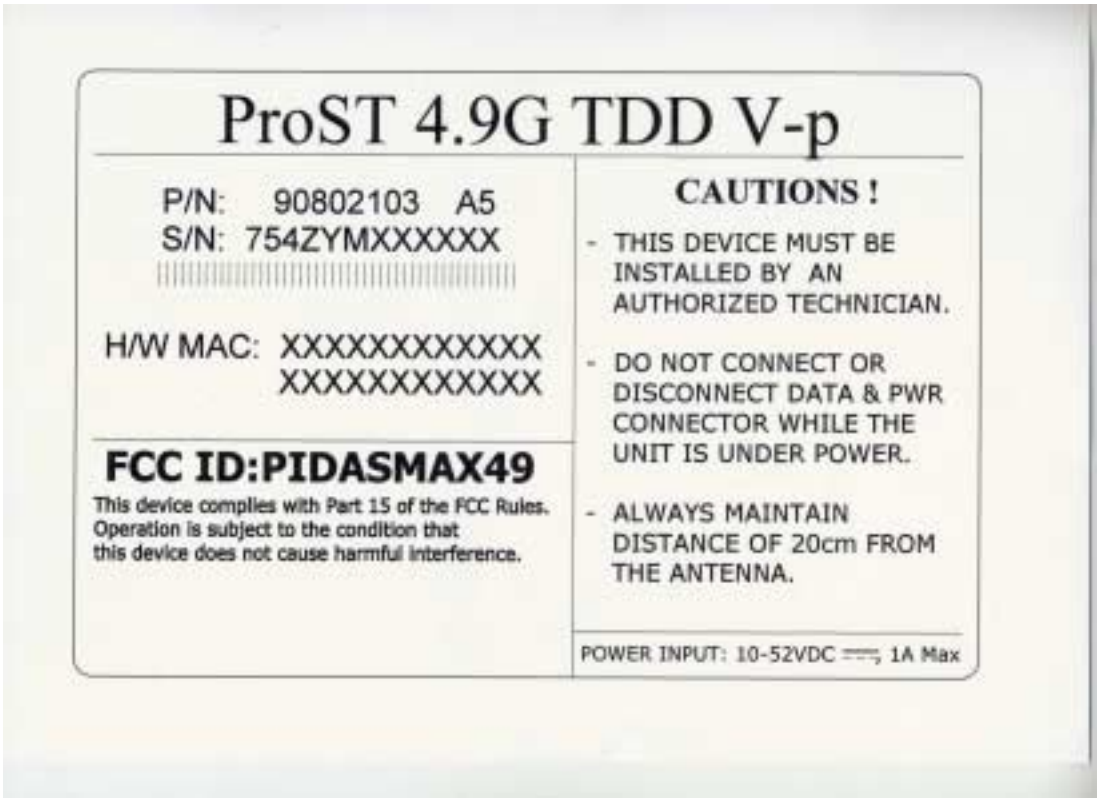
ProST 4.9G TDD V-p
P/N: 90802103 A5
S/N: 754ZYMXXXXXX
H/W MAC: XXXXXXXXXXXX
XXXXXXXXXXXX
FCC ID:PIDASMAX49
This device complies with Part 15 of the FCC Rules.
Operation is subject to the condition that
this device does not cause harmful interference.
CAUTIONS !
- THIS DEVICE MUST BE INSTALLED BY AN AUTHORIZED TECHNICIAN.
- DO NOT CONNECT OR DISCONNECT DATA & PWR CONNECTOR WHILE THE UNIT IS UNDER POWER.
- ALWAYS MAINTAIN DISTANCE OF 20cm FROM THE ANTENNA.
POWER INPUT: 10-52VDC ⎓ 1A Max

Airspan
ProST 4.9G TDD V-p
AS MAX
DATA & PWR
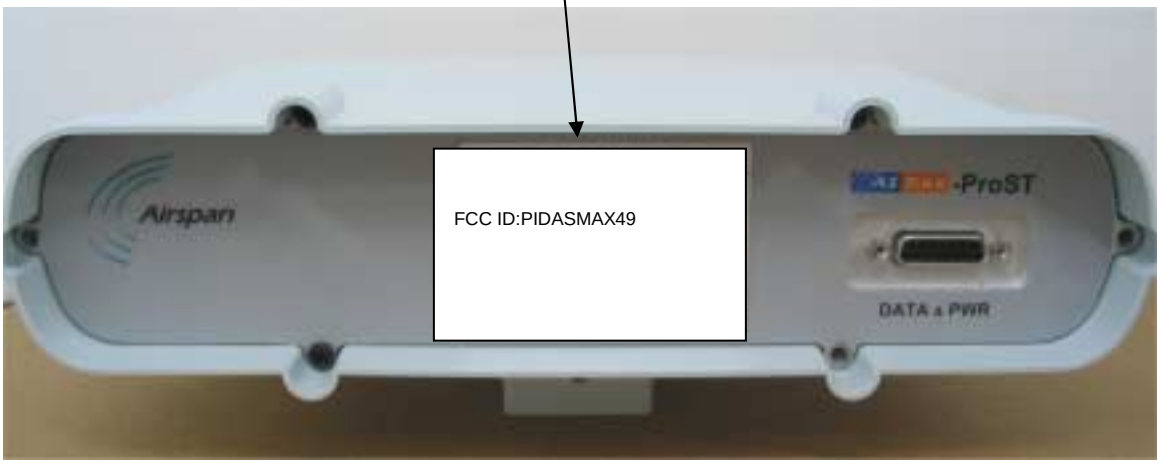
ProST 4.9 GHz TDD side panel, label with FCC ID:PIDASMAX49 location