



A D T

# FCC TEST REPORT (BLUETOOTH+EDR)

**REPORT NO.:** RF110830D08C-1

**MODEL NO.:** INWL01c

**FCC ID:** EHA-INWL01C

**RECEIVED:** Sep. 12, 2013

**TESTED:** Sep. 23 ~ 24, 2013

**ISSUED:** Nov. 19, 2013

**APPLICANT:** Intermec Technologies Corporation

**ADDRESS:** 550 Second street SE Cedar Rapids Iowa  
52401-2029 USA

**ISSUED BY:** Bureau Veritas Consumer Products Services  
(H.K.) Ltd., Taoyuan Branch

**LAB ADDRESS:** No. 47, 14th Ling, Chia Pau Vil., Lin Kou Dist.,  
New Taipei City, Taiwan, R.O.C.

This report should not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

## Table of Contents

|                                                                                                |    |
|------------------------------------------------------------------------------------------------|----|
| RELEASE CONTROL RECORD .....                                                                   | 3  |
| 1. CERTIFICATION .....                                                                         | 4  |
| 2. SUMMARY OF TEST RESULTS .....                                                               | 5  |
| 2.1 MEASUREMENT UNCERTAINTY .....                                                              | 5  |
| 3. GENERAL INFORMATION .....                                                                   | 6  |
| 3.1 GENERAL DESCRIPTION OF EUT .....                                                           | 6  |
| 3.2 DESCRIPTION OF TEST MODES .....                                                            | 7  |
| 3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL .....                                  | 8  |
| 3.3 DESCRIPTION OF SUPPORT UNITS .....                                                         | 9  |
| 3.3.1 CONFIGURATION OF SYSTEM UNDER TEST .....                                                 | 9  |
| 3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS .....                                             | 10 |
| 4. TEST TYPES AND RESULTS .....                                                                | 11 |
| 4.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT .....                                           | 11 |
| 4.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT .....                               | 11 |
| 4.1.2 TEST INSTRUMENTS .....                                                                   | 12 |
| 4.1.3 TEST PROCEDURES .....                                                                    | 13 |
| 4.1.4 DEVIATION FROM TEST STANDARD .....                                                       | 13 |
| 4.1.5 TEST SETUP .....                                                                         | 14 |
| 4.1.6 EUT OPERATING CONDITIONS .....                                                           | 14 |
| 4.1.7 TEST RESULTS .....                                                                       | 15 |
| 5. PHOTOGRAPHS OF THE TEST CONFIGURATION .....                                                 | 22 |
| 6. INFORMATION ON THE TESTING LABORATORIES .....                                               | 23 |
| 7. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING<br>CHANGES TO THE EUT BY THE LAB ..... | 24 |



A D T

## RELEASE CONTROL RECORD

| ISSUE NO.      | REASON FOR CHANGE | DATE ISSUED   |
|----------------|-------------------|---------------|
| RF110830D08C-1 | Original release  | Nov. 19, 2013 |



A D T

## 1. CERTIFICATION

**PRODUCT:** WLAN/BT board

**BRAND NAME:** Intermec

**MODEL NO.:** INWL01c

**APPLICANT:** Intermec Technologies Corporation

**TESTED:** Sep. 23 ~ 24, 2013

**TEST SAMPLE:** ENGINEERING SAMPLE

**STANDARDS:** FCC Part 15, Subpart C (Section 15.247)

ANSI C63.10-2009

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**PREPARED BY :** Celia Chen , **DATE:** Nov. 19, 2013  
( Celia Chen / Senior Specialist )

**APPROVED BY :** Rex Lai , **DATE:** Nov. 19, 2013  
( Rex Lai / Assistant Manager )



A D T

## 2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

| APPLIED STANDARD: FCC Part 15, Subpart C |                                                                                                               |        |                                                                               |
|------------------------------------------|---------------------------------------------------------------------------------------------------------------|--------|-------------------------------------------------------------------------------|
| STANDARD SECTION                         | TEST TYPE AND LIMIT                                                                                           | RESULT | REMARK                                                                        |
| 15.207                                   | AC Power Conducted Emission                                                                                   | NA     | Refer to NOTE below                                                           |
| 15.247(a)(1) (iii)                       | Number of Hopping Frequency Used                                                                              | NA     | Refer to NOTE below                                                           |
| 15.247(a)(1) (iii)                       | Dwell Time on Each Channel                                                                                    | NA     | Refer to NOTE below                                                           |
| 15.247(a)(1)                             | 1. Hopping Channel Separation<br>2. Spectrum Bandwidth of a Frequency Hopping Sequence Spread Spectrum System | NA     | Refer to NOTE below                                                           |
| 15.247(b)                                | Maximum Peak Output Power                                                                                     | NA     | Refer to NOTE below                                                           |
| 15.247(d)                                | Transmitter Radiated Emissions                                                                                | PASS   | Meet the requirement of limit. Minimum passing margin is -7.3dB at 665.59MHz. |
| 15.247(d)                                | Band Edge Measurement                                                                                         | NA     | Refer to NOTE below                                                           |
| 15.203                                   | Antenna Requirement                                                                                           | PASS   | Antenna connector is SMA (MALE-RP) not a standard connector.                  |

**NOTE:** Test item for Radiated Emission Test was performed for this addendum. Other testing data refer to original report.

### 2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

| Measurement        | Frequency    | Uncertainty |
|--------------------|--------------|-------------|
| Radiated emissions | 30MHz ~ 1GHz | 4.30 dB     |
|                    | Above 1GHz   | 3.36 dB     |

### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

|                              |                             |
|------------------------------|-----------------------------|
| <b>EUT</b>                   | WLAN/BT board               |
| <b>MODEL NO.</b>             | INWL01c                     |
| <b>NOMINAL VOLTAGE</b>       | 5.0Vdc                      |
| <b>MODULATION TYPE</b>       | GFSK, $\pi/4$ -DQPSK, 8DPSK |
| <b>MODULATION TECHNOLOGY</b> | FHSS                        |
| <b>TRANSFER RATE</b>         | 1/2/3Mbps                   |
| <b>OPERATING FREQUENCY</b>   | 2402 ~ 2480MHz              |
| <b>NUMBER OF CHANNEL</b>     | 79                          |
| <b>OUTPUT POWER</b>          | 6.8mW                       |
| <b>ANTENNA TYPE</b>          | Refer to note below         |
| <b>ANTENNA CONNECTER</b>     | Refer to note below         |
| <b>DATA CABLE</b>            | Refer to User's manual      |
| <b>I/O PORTS</b>             | Refer to User's manual      |
| <b>ACCESSORY DEVICES</b>     | NA                          |

#### NOTE:

1. This report is a supplementary report of the original one (BV CPS report no.: RF110830D08-1) issued on Oct. 7, 2011 to verify test result for the new antenna source (additional as shaded area):

| Brand name             | Model name | Type   | Connector     | Gain (dBi) | Remark     |
|------------------------|------------|--------|---------------|------------|------------|
| Amphenol               | Kilimanjro | Dipole | IPEX U.FL     | 2          | Original   |
| KINSUN INDUSTRIES INC. | 6603A03081 | Dipole | SMA (MALE-RP) | 2.32       | Additional |

2. The changes are meeting the antenna changes of the permissive changes rules; therefore this report is prepared for FCC class II permissive change.
3. The EUT is a WLAN/BT board, the WLAN & Bluetooth function can't transmit simultaneously.
4. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

## 3.2 DESCRIPTION OF TEST MODES

79 channels are provided to this EUT:

| CHANNEL | FREQ.<br>(MHz) | CHANNEL | FREQ.<br>(MHz) | CHANNEL | FREQ.<br>(MHz) | CHANNEL | FREQ.<br>(MHz) |
|---------|----------------|---------|----------------|---------|----------------|---------|----------------|
| 0       | 2402           | 20      | 2422           | 40      | 2442           | 60      | 2462           |
| 1       | 2403           | 21      | 2423           | 41      | 2443           | 61      | 2463           |
| 2       | 2404           | 22      | 2424           | 42      | 2444           | 62      | 2464           |
| 3       | 2405           | 23      | 2425           | 43      | 2445           | 63      | 2465           |
| 4       | 2406           | 24      | 2426           | 44      | 2446           | 64      | 2466           |
| 5       | 2407           | 25      | 2427           | 45      | 2447           | 65      | 2467           |
| 6       | 2408           | 26      | 2428           | 46      | 2448           | 66      | 2468           |
| 7       | 2409           | 27      | 2429           | 47      | 2449           | 67      | 2469           |
| 8       | 2410           | 28      | 2430           | 48      | 2450           | 68      | 2470           |
| 9       | 2411           | 29      | 2431           | 49      | 2451           | 69      | 2471           |
| 10      | 2412           | 30      | 2432           | 50      | 2452           | 70      | 2472           |
| 11      | 2413           | 31      | 2433           | 51      | 2453           | 71      | 2473           |
| 12      | 2414           | 32      | 2434           | 52      | 2454           | 72      | 2474           |
| 13      | 2415           | 33      | 2435           | 53      | 2455           | 73      | 2475           |
| 14      | 2416           | 34      | 2436           | 54      | 2456           | 74      | 2476           |
| 15      | 2417           | 35      | 2437           | 55      | 2457           | 75      | 2477           |
| 16      | 2418           | 36      | 2438           | 56      | 2458           | 76      | 2478           |
| 17      | 2419           | 37      | 2439           | 57      | 2459           | 77      | 2479           |
| 18      | 2420           | 38      | 2440           | 58      | 2460           | 78      | 2480           |
| 19      | 2421           | 39      | 2441           | 59      | 2461           |         |                |

### 3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

| EUT CONFIGURE MODE | APPLICABLE TO      |       |      |      |      | DESCRIPTION |
|--------------------|--------------------|-------|------|------|------|-------------|
|                    | RE <sup>3</sup> 1G | RE<1G | PLC  | APCM | OB   |             |
| -                  | √                  | √     | Note | Note | Note | -           |

Where **RE<sup>3</sup>1G**: Radiated Emission above 1GHz **RE<1G**: Radiated Emission below 1GHz  
**PLC**: Power Line Conducted Emission **APCM**: Antenna Port Conducted Measurement  
**OB**: Conducted Out-Band Emission Measurement

**NOTE**: No need to re-test the test item due to the change should not influence test result.

#### RADIATED EMISSION TEST (BELOW 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, packet types data rate, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

| AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | PACKET TYPE | DATE RATE | AXIS |
|-------------------|----------------|-----------------------|-----------------|-------------|-----------|------|
| 0 to 78           | 78             | FHSS                  | 8DPSK           | DH5         | 3         | Z    |

#### RADIATED EMISSION TEST (ABOVE 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, packet types data rate, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

| AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | PACKET TYPE | DATE RATE | AXIS |
|-------------------|----------------|-----------------------|-----------------|-------------|-----------|------|
| 0 to 78           | 0, 39, 78      | FHSS                  | GFSK            | DH5         | 1         | Z    |
| 0 to 78           | 0, 39, 78      | FHSS                  | 8DPSK           | DH5         | 3         | Z    |

#### TEST CONDITION:

| APPLICABLE TO      | ENVIRONMENTAL CONDITIONS | INPUT POWER (SYSTEM) | TESTED BY |
|--------------------|--------------------------|----------------------|-----------|
| RE<1G              | 25deg. C, 75% RH         | 120Vac, 60Hz         | Joey Liu  |
| RE <sup>3</sup> 1G | 25deg. C, 75% RH         | 120Vac, 60Hz         | Joey Liu  |

### 3.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


| NO. | PRODUCT                   | BRAND | MODEL NO.  | SERIAL NO. | FCC ID           |
|-----|---------------------------|-------|------------|------------|------------------|
| 1   | NOTEBOOK COMPUTER         | DELL  | 510m       | 1KZ1G1S    | FCC DoC Approved |
| 2   | Mechanical tool           | N/A   | N/A        | N/A        | N/A              |
| 3   | Mechanical tool's Adapter | FSP   | FSP070-RAA | N/A        | Verification     |

| NO. | SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS |
|-----|-----------------------------------------------------|
| 1   | N/A                                                 |
| 2   | One RS232 cable (1.8m)                              |
| 3   | Non-shielded DC cable (1.8m)                        |

**NOTE:** (1) All power cords of the above support units are non shielded (1.8m).

(2) The support units 2 & 3 were provided by client.

#### 3.3.1 CONFIGURATION OF SYSTEM UNDER TEST

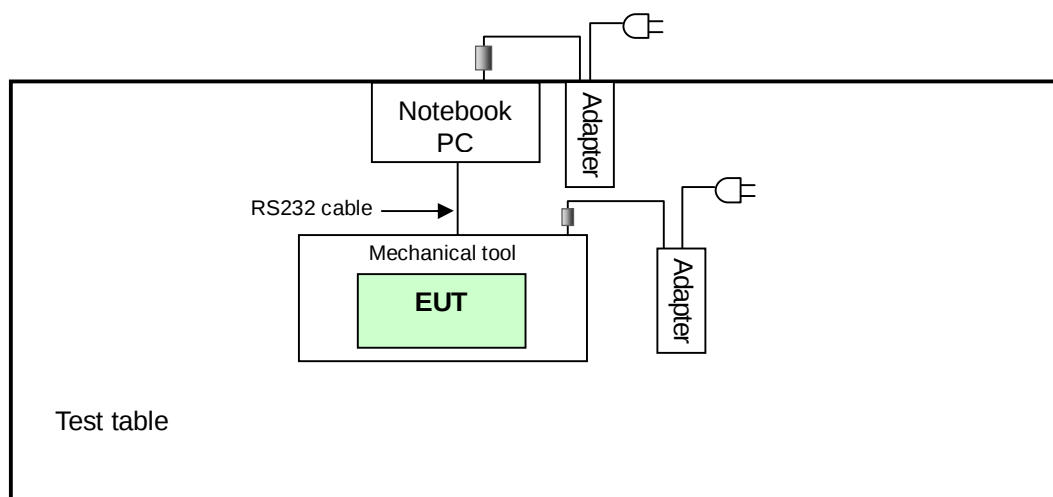

### **3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS**

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart C. (15.247)**

ANSI C63.10-2009

All test items have been performed and recorded as per the above standards.

## 4. TEST TYPES AND RESULTS

### 4.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT

#### 4.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

| FREQUENCIES (MHz) | FIELD STRENGTH (microvolts/meter) | MEASUREMENT DISTANCE (meters) |
|-------------------|-----------------------------------|-------------------------------|
| 0.009 ~ 0.490     | 2400/F(kHz)                       | 300                           |
| 0.490 ~ 1.705     | 24000/F(kHz)                      | 30                            |
| 1.705 ~ 30.0      | 30                                | 30                            |
| 30 ~ 88           | 100                               | 3                             |
| 88 ~ 216          | 150                               | 3                             |
| 216 ~ 960         | 200                               | 3                             |
| Above 960         | 500                               | 3                             |

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



A D T

## 4.1.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER                   | MODEL NO.                    | SERIAL NO. | CALIBRATED DATE | CALIBRATED UNTIL |
|----------------------------------------------|------------------------------|------------|-----------------|------------------|
| HP Preamplifier                              | 8447D                        | 2432A03504 | Feb. 26, 2013   | Feb. 25, 2014    |
| HP Preamplifier                              | 8449B                        | 3008A01201 | Feb. 26, 2013   | Feb. 25, 2014    |
| Agilent<br>TEST RECEIVER                     | N9038A                       | MY51210129 | Jan. 03, 2013   | Jan. 02, 2014    |
| Schwarzbeck Antenna                          | VULB 9168                    | 137        | Mar. 20, 2013   | Mar. 19, 2014    |
| Schwarzbeck Antenna                          | VHBA 9123                    | 480        | May 29, 2013    | May 28, 2014     |
| ADT. Turn Table                              | TT100                        | 0306       | NA              | NA               |
| ADT. Tower                                   | AT100                        | 0306       | NA              | NA               |
| Software                                     | ADT_Radiated_V<br>7.6.15.9.2 | NA         | NA              | NA               |
| SUHNER RF cable                              | SF102                        | CABLE-CH6  | Aug. 19, 2013   | Aug. 18, 2014    |
| Schwarzbeck Horn<br>Antenna                  | BBHA 9120-D1                 | D130       | May 13, 2013    | May 12, 2014     |
| Highpass filter<br>Wainwright<br>Instruments | WHK<br>3.1/18G-10SS          | SN 8       | NA              | NA               |
| ROHDE & SCHWARZ<br>Spectrum Analyzer         | FSP 40                       | 100036     | May. 17, 2013   | May. 16, 2014    |
| Anritsu<br>Power Sensor                      | MA2411B                      | 0738404    | Apr. 24, 2013   | Apr. 23, 2014    |
| Anritsu<br>Power Meter                       | ML2495A                      | 0842014    | Apr. 25, 2013   | Apr. 24, 2014    |

- NOTE:** 1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in Chamber No. 6.
4. The Industry Canada Reference No. IC 7450E-6.
5. The FCC Site Registration No. is 447212.

### 4.1.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

**NOTE:**


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. All modes of operation were investigated and the worst-case emissions are reported.

### 4.1.4 DEVIATION FROM TEST STANDARD


No deviation.

#### 4.1.5 TEST SETUP

Frequency range 30MHz~1GHz

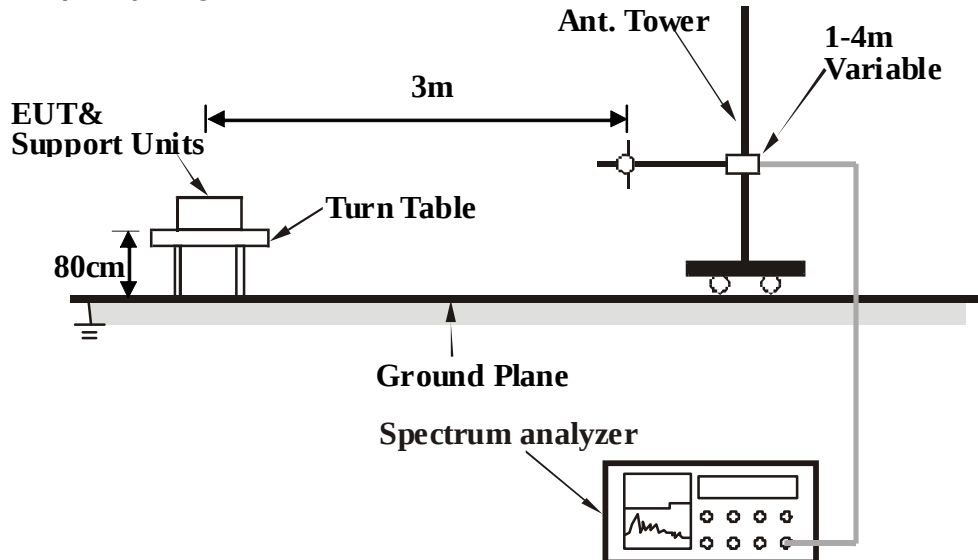

Frequency range above 1GHz

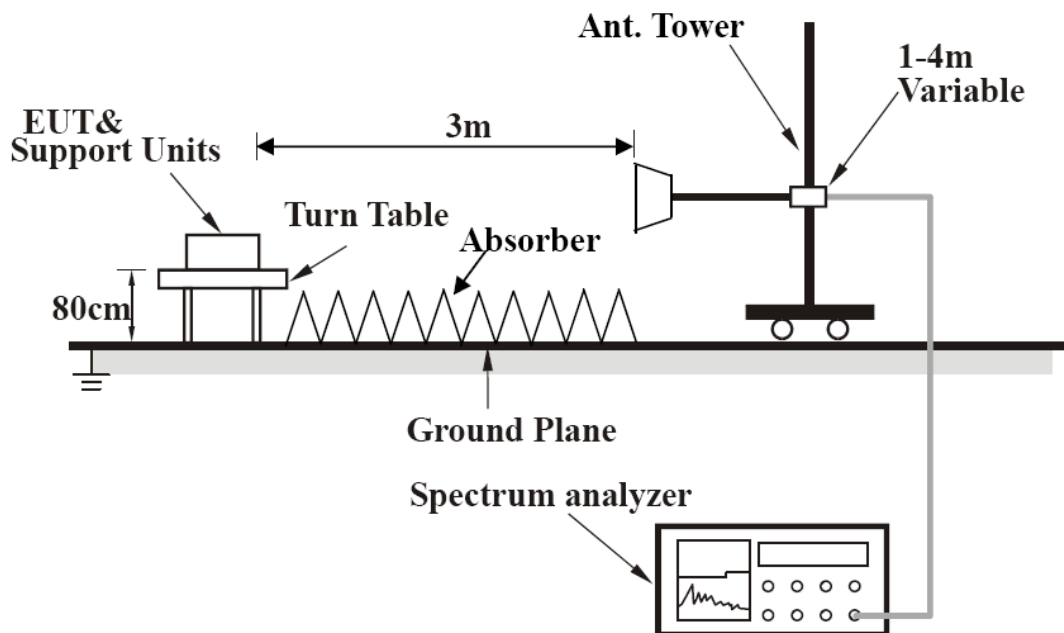

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.6 EUT OPERATING CONDITIONS

- Turn on the power of all equipment.
- Connected the EUT with Notebook PC via Mechanical tool placed on testing table.
- Notebook PC ran a test program (provided by manufacture) to enable EUT under transmitting condition at specific channel continuously.

## 4.1.7 TEST RESULTS

### BELOW 1GHz WORST-CASE DATA

#### BT\_8DPSK

|                 |               |                      |                 |
|-----------------|---------------|----------------------|-----------------|
| CHANNEL         | TX Channel 78 | DETECTOR<br>FUNCTION | Quasi-Peak (QP) |
| FREQUENCY RANGE | 30MHz ~ 1GHz  |                      |                 |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |                |                               |                   |                |                          |                            |                        |                                |
|-----------------------------------------------------|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO.                                                 | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1                                                   | 132.22         | 28.7 QP                       | 43.5              | -14.8          | 1.22 H                   | 244                        | 43.24                  | -14.53                         |
| 2                                                   | 200.33         | 34.2 QP                       | 43.5              | -9.3           | 1.63 H                   | 74                         | 50.10                  | -15.94                         |
| 3                                                   | 300.61         | 32.2 QP                       | 46.0              | -13.8          | 1.17 H                   | 199                        | 43.59                  | -11.42                         |
| 4                                                   | 488.22         | 38.7 QP                       | 46.0              | -7.4           | 1.28 H                   | 159                        | 46.30                  | -7.65                          |
| 5                                                   | 665.59         | 38.7 QP                       | 46.0              | -7.3           | 1.91 H                   | 244                        | 43.01                  | -4.27                          |
| 6                                                   | 995.03         | 38.8 QP                       | 54.0              | -15.2          | 1.31 H                   | 65                         | 38.14                  | 0.69                           |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M   |                |                               |                   |                |                          |                            |                        |                                |
| NO.                                                 | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1                                                   | 83.98          | 31.2 QP                       | 40.0              | -8.8           | 1.17 V                   | 193                        | 50.31                  | -19.15                         |
| 2                                                   | 200.09         | 35.1 QP                       | 43.5              | -8.4           | 1.23 V                   | 360                        | 51.09                  | -15.95                         |
| 3                                                   | 665.64         | 38.3 QP                       | 46.0              | -7.7           | 1.19 V                   | 234                        | 42.54                  | -4.27                          |
| 4                                                   | 832.34         | 35.7 QP                       | 46.0              | -10.4          | 1.26 V                   | 360                        | 37.16                  | -1.51                          |
| 5                                                   | 997.43         | 34.4 QP                       | 54.0              | -19.6          | 1.49 V                   | 22                         | 33.71                  | 0.68                           |
| 6                                                   | 5589.53        | 39.9 QP                       | 54.0              | -14.1          | 1.26 V                   | 238                        | 39.94                  | 0.00                           |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value



A D T

## ABOVE 1GHz DATA

## BT\_GFSK

|                 |              |                      |                           |
|-----------------|--------------|----------------------|---------------------------|
| CHANNEL         | TX Channel 0 | DETECTOR<br>FUNCTION | Peak (PK)<br>Average (AV) |
| FREQUENCY RANGE | 1GHz ~ 25GHz |                      |                           |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |                |                               |                   |                |                          |                            |                        |                                |
|-----------------------------------------------------|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO.                                                 | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1                                                   | 2390.00        | 48.1 PK                       | 74.0              | -25.9          | 1.00 H                   | 283                        | 51.87                  | -3.75                          |
| 2                                                   | 2390.00        | 27.3 AV                       | 54.0              | -26.7          | 1.00 H                   | 283                        | 31.08                  | -3.75                          |
| 3                                                   | *2402.00       | 98.5 PK                       |                   |                | 1.00 H                   | 283                        | 102.19                 | -3.69                          |
| 4                                                   | *2402.00       | 86.1 AV                       |                   |                | 1.00 H                   | 283                        | 89.78                  | -3.69                          |
| 5                                                   | 4804.00        | 43.0 PK                       | 74.0              | -31.0          | 1.00 H                   | 283                        | 39.34                  | 3.70                           |
| 6                                                   | 4804.00        | 35.5 AV                       | 54.0              | -18.5          | 1.00 H                   | 283                        | 31.81                  | 3.70                           |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M   |                |                               |                   |                |                          |                            |                        |                                |
| NO.                                                 | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1                                                   | 2390.00        | 55.3 PK                       | 74.0              | -18.7          | 1.11 V                   | 41                         | 59.06                  | -3.75                          |
| 2                                                   | 2390.00        | 29.5 AV                       | 54.0              | -24.5          | 1.11 V                   | 41                         | 33.29                  | -3.75                          |
| 3                                                   | *2402.00       | 101.8 PK                      |                   |                | 1.11 V                   | 41                         | 105.48                 | -3.69                          |
| 4                                                   | *2402.00       | 89.0 AV                       |                   |                | 1.11 V                   | 41                         | 92.67                  | -3.69                          |
| 5                                                   | 4804.00        | 46.6 PK                       | 74.0              | -27.4          | 1.11 V                   | 43                         | 42.94                  | 3.70                           |
| 6                                                   | 4804.00        | 36.8 AV                       | 54.0              | -17.2          | 1.11 V                   | 43                         | 33.07                  | 3.70                           |

## REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.



A D T

|                 |               |                      |                           |
|-----------------|---------------|----------------------|---------------------------|
| CHANNEL         | TX Channel 39 | DETECTOR<br>FUNCTION | Peak (PK)<br>Average (AV) |
| FREQUENCY RANGE | 1GHz ~ 25GHz  |                      |                           |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |                |                               |                   |                |                          |                            |                        |                                |
|-----------------------------------------------------|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO.                                                 | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1                                                   | *2441.00       | 96.2 PK                       |                   |                | 1.00 H                   | 285                        | 99.75                  | -3.51                          |
| 2                                                   | *2441.00       | 84.8 AV                       |                   |                | 1.00 H                   | 285                        | 88.26                  | -3.51                          |
| 3                                                   | 4882.00        | 43.2 PK                       | 74.0              | -30.8          | 1.00 H                   | 285                        | 39.41                  | 3.76                           |
| 4                                                   | 4882.00        | 35.0 AV                       | 54.0              | -19.0          | 1.00 H                   | 285                        | 31.24                  | 3.76                           |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M   |                |                               |                   |                |                          |                            |                        |                                |
| NO.                                                 | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1                                                   | *2441.00       | 103.9 PK                      |                   |                | 1.11 V                   | 97                         | 107.40                 | -3.51                          |
| 2                                                   | *2441.00       | 90.7 AV                       |                   |                | 1.11 V                   | 97                         | 94.20                  | -3.51                          |
| 3                                                   | 4882.00        | 47.5 PK                       | 74.0              | -26.5          | 1.11 V                   | 96                         | 43.71                  | 3.76                           |
| 4                                                   | 4882.00        | 38.2 AV                       | 54.0              | -15.8          | 1.11 V                   | 96                         | 34.43                  | 3.76                           |

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.



A D T

|                 |               |                      |                           |
|-----------------|---------------|----------------------|---------------------------|
| CHANNEL         | TX Channel 78 | DETECTOR<br>FUNCTION | Peak (PK)<br>Average (AV) |
| FREQUENCY RANGE | 1GHz ~ 25GHz  |                      |                           |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |                |                               |                   |                |                          |                            |                        |                                |
|-----------------------------------------------------|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO.                                                 | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1                                                   | *2480.00       | 95.3 PK                       |                   |                | 1.00 H                   | 281                        | 98.64                  | -3.33                          |
| 2                                                   | *2480.00       | 83.9 AV                       |                   |                | 1.00 H                   | 281                        | 87.21                  | -3.33                          |
| 3                                                   | 2483.50        | 40.5 PK                       | 74.0              | -33.5          | 1.00 H                   | 281                        | 43.86                  | -3.32                          |
| 4                                                   | 2483.50        | 28.2 AV                       | 54.0              | -25.8          | 1.00 H                   | 281                        | 31.48                  | -3.32                          |
| 5                                                   | 4960.00        | 42.8 PK                       | 74.0              | -31.2          | 1.00 H                   | 283                        | 39.07                  | 3.70                           |
| 6                                                   | 4960.00        | 35.6 AV                       | 54.0              | -18.4          | 1.00 H                   | 283                        | 31.86                  | 3.70                           |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M   |                |                               |                   |                |                          |                            |                        |                                |
| NO.                                                 | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1                                                   | *2480.00       | 102.3 PK                      |                   |                | 1.00 V                   | 209                        | 105.66                 | -3.33                          |
| 2                                                   | *2480.00       | 89.6 AV                       |                   |                | 1.00 V                   | 209                        | 92.95                  | -3.33                          |
| 3                                                   | 2483.50        | 42.6 PK                       | 74.0              | -31.4          | 1.00 V                   | 209                        | 45.92                  | -3.32                          |
| 4                                                   | 2483.50        | 29.0 AV                       | 54.0              | -25.0          | 1.00 V                   | 209                        | 32.28                  | -3.32                          |
| 5                                                   | 4960.00        | 45.9 PK                       | 74.0              | -28.1          | 1.00 V                   | 201                        | 42.16                  | 3.70                           |
| 6                                                   | 4960.00        | 35.1 AV                       | 54.0              | -18.9          | 1.00 V                   | 201                        | 31.40                  | 3.70                           |

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.



A D T

## BT\_8DPSK

|                 |              |                      |                           |
|-----------------|--------------|----------------------|---------------------------|
| CHANNEL         | TX Channel 0 | DETECTOR<br>FUNCTION | Peak (PK)<br>Average (AV) |
| FREQUENCY RANGE | 1GHz ~ 25GHz |                      |                           |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |                |                               |                   |                |                          |                            |                        |                                |
|-----------------------------------------------------|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO.                                                 | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1                                                   | 2390.00        | 40.9 PK                       | 74.0              | -33.1          | 1.00 H                   | 248                        | 44.67                  | -3.75                          |
| 2                                                   | 2390.00        | 27.4 AV                       | 54.0              | -26.6          | 1.00 H                   | 248                        | 31.19                  | -3.75                          |
| 3                                                   | *2402.00       | 97.5 PK                       |                   |                | 1.00 H                   | 248                        | 101.20                 | -3.69                          |
| 4                                                   | *2402.00       | 65.5 AV                       |                   |                | 1.00 H                   | 248                        | 69.15                  | -3.69                          |
| 5                                                   | 4804.00        | 43.0 PK                       | 74.0              | -31.0          | 1.00 H                   | 242                        | 39.27                  | 3.70                           |
| 6                                                   | 4804.00        | 34.8 AV                       | 54.0              | -19.2          | 1.00 H                   | 242                        | 31.10                  | 3.70                           |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M   |                |                               |                   |                |                          |                            |                        |                                |
| NO.                                                 | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1                                                   | 2390.00        | 53.4 PK                       | 74.0              | -20.6          | 1.12 V                   | 34                         | 57.16                  | -3.75                          |
| 2                                                   | 2390.00        | 27.6 AV                       | 54.0              | -26.4          | 1.12 V                   | 34                         | 31.34                  | -3.75                          |
| 3                                                   | *2402.00       | 103.3 PK                      |                   |                | 1.12 V                   | 34                         | 107.02                 | -3.69                          |
| 4                                                   | *2402.00       | 68.5 AV                       |                   |                | 1.12 V                   | 34                         | 72.14                  | -3.69                          |
| 5                                                   | 4804.00        | 45.6 PK                       | 74.0              | -28.4          | 1.12 V                   | 38                         | 41.86                  | 3.70                           |
| 6                                                   | 4804.00        | 35.7 AV                       | 54.0              | -18.3          | 1.12 V                   | 38                         | 31.98                  | 3.70                           |

## REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.



A D T

|                 |               |                      |                           |
|-----------------|---------------|----------------------|---------------------------|
| CHANNEL         | TX Channel 39 | DETECTOR<br>FUNCTION | Peak (PK)<br>Average (AV) |
| FREQUENCY RANGE | 1GHz ~ 25GHz  |                      |                           |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |                |                               |                   |                |                          |                            |                        |                                |
|-----------------------------------------------------|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO.                                                 | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1                                                   | *2441.00       | 95.8 PK                       |                   |                | 1.00 H                   | 319                        | 99.35                  | -3.51                          |
| 2                                                   | *2441.00       | 65.5 AV                       |                   |                | 1.00 H                   | 319                        | 68.99                  | -3.51                          |
| 3                                                   | 4882.00        | 42.0 PK                       | 74.0              | -32.0          | 1.00 H                   | 314                        | 38.21                  | 3.76                           |
| 4                                                   | 4882.00        | 35.2 AV                       | 54.0              | -18.8          | 1.00 H                   | 314                        | 31.48                  | 3.76                           |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M   |                |                               |                   |                |                          |                            |                        |                                |
| NO.                                                 | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1                                                   | *2441.00       | 103.9 PK                      |                   |                | 1.11 V                   | 96                         | 107.42                 | -3.51                          |
| 2                                                   | *2441.00       | 69.3 AV                       |                   |                | 1.11 V                   | 96                         | 72.76                  | -3.51                          |
| 3                                                   | 4882.00        | 46.0 PK                       | 74.0              | -28.0          | 1.11 V                   | 98                         | 42.24                  | 3.76                           |
| 4                                                   | 4882.00        | 35.2 AV                       | 54.0              | -18.9          | 1.11 V                   | 98                         | 31.39                  | 3.76                           |

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.



A D T

|                 |               |                      |                           |
|-----------------|---------------|----------------------|---------------------------|
| CHANNEL         | TX Channel 78 | DETECTOR<br>FUNCTION | Peak (PK)<br>Average (AV) |
| FREQUENCY RANGE | 1GHz ~ 25GHz  |                      |                           |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |                |                               |                   |                |                          |                            |                        |                                |
|-----------------------------------------------------|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO.                                                 | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1                                                   | *2480.00       | 98.3 PK                       |                   |                | 1.10 H                   | 267                        | 101.59                 | -3.33                          |
| 2                                                   | *2480.00       | 66.2 AV                       |                   |                | 1.10 H                   | 267                        | 69.48                  | -3.33                          |
| 3                                                   | 2483.50        | 42.6 PK                       | 74.0              | -31.4          | 1.10 H                   | 267                        | 45.91                  | -3.32                          |
| 4                                                   | 2483.50        | 27.8 AV                       | 54.0              | -26.2          | 1.10 H                   | 267                        | 31.14                  | -3.32                          |
| 5                                                   | 4960.00        | 42.9 PK                       | 74.0              | -31.1          | 1.10 H                   | 264                        | 39.19                  | 3.70                           |
| 6                                                   | 4960.00        | 35.5 AV                       | 54.0              | -18.5          | 1.10 H                   | 264                        | 31.77                  | 3.70                           |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M   |                |                               |                   |                |                          |                            |                        |                                |
| NO.                                                 | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1                                                   | *2480.00       | 104.4 PK                      |                   |                | 1.10 V                   | 97                         | 107.70                 | -3.33                          |
| 2                                                   | *2480.00       | 69.3 AV                       |                   |                | 1.10 V                   | 97                         | 72.62                  | -3.33                          |
| 3                                                   | 2483.50        | 47.4 PK                       | 74.0              | -26.7          | 1.10 V                   | 97                         | 50.67                  | -3.32                          |
| 4                                                   | 2483.50        | 29.8 AV                       | 54.0              | -24.2          | 1.10 V                   | 97                         | 33.13                  | -3.32                          |
| 5                                                   | 4960.00        | 46.3 PK                       | 74.0              | -27.7          | 1.10 V                   | 99                         | 42.60                  | 3.70                           |
| 6                                                   | 4960.00        | 35.0 AV                       | 54.0              | -19.0          | 1.10 V                   | 99                         | 31.27                  | 3.70                           |

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.



A D T

## 5. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).

## 6. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Linko EMC/RF Lab:**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF Lab:**

Tel: 886-3-5935343

Fax: 886-3-5935342

**Hwa Ya EMC/RF/Safety/Telecom Lab:**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

## **7. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB**

No modifications were made to the EUT by the lab during the test.

**--- END ---**