

# TEST REPORT

Applicant Name: YEALINK(XIAMEN) NETWORK TECHNOLOGY CO.,LTD.  
Address: No.666 Hu'an Rd. Huli District Xiamen City, Fujian, P.R. China  
Report Number: 2401Y67777E-RFE  
FCC ID: T2C-T73W  
IC: 10741A-T73W

## Test Standard (s)

FCC PART 15.247; RSS-GEN ISSUE 5, FEBRUARY 2021 AMENDMENT 2;  
RSS-247 ISSUE 3, AUGUST 2023

## Sample Description

Product Type: Ultra Business Phone  
Model No.: SIP-T73W  
Multiple Model(s) No.: N/A  
Trade Mark: **Yealink**  
Date Received: 2024/10/15  
Issue Date: 2025/01/24

Test Result:

Pass▲

▲ In the configuration tested, the EUT complied with the standards above.

## Prepared and Checked By:

Ekko Wu

Ekko Wu  
RF Engineer

## Approved By:

Nancy Wang

Nancy Wang  
RF Supervisor

Note: The information marked # is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP or any agency of the U.S. Government.

This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "▼".

## Bay Area Compliance Laboratories Corp. (Shenzhen)

5F(B-West), 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China

Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

## **TABLE OF CONTENTS**

<b>DOCUMENT REVISION HISTORY .....</b>	<b>4</b>
<b>GENERAL INFORMATION.....</b>	<b>5</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....	5
OBJECTIVE .....	5
TEST METHODOLOGY .....	5
MEASUREMENT UNCERTAINTY .....	6
TEST FACILITY .....	6
<b>SYSTEM TEST CONFIGURATION .....</b>	<b>7</b>
DESCRIPTION OF TEST CONFIGURATION .....	7
EUT EXERCISE SOFTWARE .....	7
SPECIAL ACCESSORIES .....	7
EQUIPMENT MODIFICATIONS .....	7
SUPPORT EQUIPMENT LIST AND DETAILS .....	7
EXTERNAL I/O CABLE.....	8
BLOCK DIAGRAM OF TEST SETUP .....	8
<b>SUMMARY OF TEST RESULTS .....</b>	<b>11</b>
<b>TEST EQUIPMENT LIST .....</b>	<b>12</b>
<b>FCC §15.247 (I) &amp; §1.1307 (B) (3) &amp; §2.1091- MPE-BASED EXEMPTION .....</b>	<b>14</b>
APPLICABLE STANDARD .....	14
RESULT .....	14
<b>RSS-102 § 6.6 –FIELD REFERENCE LEVEL EXPOSURE EXEMPTION LIMITS .....</b>	<b>15</b>
APPLICABLE STANDARD .....	15
RESULT .....	15
<b>FCC §15.203 &amp; RSS-GEN §6.8 - ANTENNA REQUIREMENT .....</b>	<b>16</b>
APPLICABLE STANDARD .....	16
ANTENNA CONNECTOR CONSTRUCTION .....	17
<b>FCC §15.207 (A) &amp; RSS-GEN § 8.8 - AC LINE CONDUCTED EMISSIONS.....</b>	<b>18</b>
APPLICABLE STANDARD .....	18
EUT SETUP.....	18
EMI TEST RECEIVER SETUP.....	18
TEST PROCEDURE .....	18
FACTOR & OVER LIMIT CALCULATION.....	19
TEST DATA .....	19
<b>FCC §15.209, §15.205 &amp; §15.247(D) &amp; RSS-247§ 5.5 - SPURIOUS EMISSIONS .....</b>	<b>28</b>
APPLICABLE STANDARD .....	28
EUT SETUP .....	28
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP .....	29
TEST PROCEDURE .....	30
FACTOR & OVER LIMIT/MARGIN CALCULATION .....	30
TEST DATA .....	30

<b>FCC §15.247(A) (1) &amp; RSS-247 § 5.1 (B) - CHANNEL SEPARATION TEST .....</b>	<b>60</b>
APPLICABLE STANDARD .....	60
TEST PROCEDURE .....	60
TEST DATA .....	61
<b>FCC §15.247(A) (1) &amp; RSS-247 § 5.1 (A), RSS-GEN § 6.7 - 20 DB EMISSION BANDWIDTH &amp; 99% OCCUPIED BANDWIDTH .....</b>	<b>62</b>
APPLICABLE STANDARD .....	62
TEST PROCEDURE .....	63
TEST DATA .....	64
<b>FCC §15.247(A) (1) (III) &amp; RSS-247 § 5.1 (D) - QUANTITY OF HOPPING CHANNEL TEST.....</b>	<b>65</b>
APPLICABLE STANDARD .....	65
TEST PROCEDURE .....	65
TEST DATA .....	66
<b>FCC §15.247(A) (1) (III) &amp; RSS-247 § 5.1 (D) - TIME OF OCCUPANCY (DWELL TIME) .....</b>	<b>67</b>
APPLICABLE STANDARD .....	67
TEST PROCEDURE .....	67
TEST DATA .....	68
<b>FCC §15.247(B) (1) &amp; RSS-247§ 5.1(B) &amp;§ 5.4(B) - PEAK OUTPUT POWER MEASUREMENT .....</b>	<b>69</b>
APPLICABLE STANDARD .....	69
TEST PROCEDURE .....	69
TEST DATA .....	70
<b>FCC §15.247(D) &amp; RSS-247 § 5.5 - BAND EDGES TESTING .....</b>	<b>71</b>
APPLICABLE STANDARD .....	71
TEST PROCEDURE .....	71
TEST DATA .....	72
<b>EUT PHOTOGRAPHS .....</b>	<b>73</b>
<b>TEST SETUP PHOTOGRAPHS .....</b>	<b>74</b>
<b>APPENDIX .....</b>	<b>75</b>
APPENDIX A: 20dB EMISSION BANDWIDTH.....	75
APPENDIX B: OCCUPIED CHANNEL BANDWIDTH .....	81
APPENDIX C: MAXIMUM CONDUCTED PEAK OUTPUT POWER.....	87
APPENDIX D: CARRIER FREQUENCY SEPARATION .....	93
APPENDIX E: TIME OF OCCUPANCY .....	96
APPENDIX F: NUMBER OF HOPPING CHANNELS .....	106
APPENDIX G: BAND EDGE MEASUREMENTS .....	108

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	2401Y67777E-RFE	Original Report	2025/01/24

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

HVIN	T73W
FVIN	183.87.255.100
Product	Ultra Business Phone
Tested Model	SIP-T73W
Multiple Model(s)	N/A
Frequency Range	Bluetooth: 2402-2480MHz
Transmit Power	6.66dBm
Modulation Technique	Bluetooth: GFSK, $\pi/4$ -DQPSK, 8DPSK
Antenna Specification <sup>#</sup>	3.11dBi (provided by the applicant)
Voltage Range	DC 5V from Adapter or DC 48V from PoE
Sample serial number	2SUF-9 for Conducted and Radiated Emissions Test 2SUF-8 for RF Conducted Test (Assigned by BACL, Shenzhen)
Sample/EUT Status	Good condition
Adapter Information	Adapter 1 Model: YLPS052000B1-US Input: AC 100-240V, 50/60Hz, 0.5A Output: DC 5.0V, 2.0A Adapter 2 Model: YLPS052000C1-US Input: AC 100-240V, 50/60Hz, 0.5A Output: DC 5.0V, 2.0A Adapter 3 Model: YLPS052000E1-US Input: AC 100-240V, 50/60Hz, 0.5A Output: DC 5.0V, 2.0A

### Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commissions rules, section 15.203, 15.205, 15.207, 15.209, 15.247 rules and RSS-247 Issue 3, August 2023, RSS-GEN Issue 5, Feb. 2021 Amendment 2 of the Innovation, Science and Economic Development Canada rules.

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and RSS-247 Issue 3, August 2023, RSS-GEN Issue 5, Feb. 2021 Amendment 2 of the Innovation, Science and Economic Development Canada rules.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Each test item follows test standards and with no deviation.

## Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		109.2kHz(k=2, 95% level of confidence)
RF output power, conducted		0.86dB(k=2, 95% level of confidence)
AC Power Lines Conducted Emissions	9kHz-150kHz	3.63dB(k=2, 95% level of confidence)
	150kHz-30MHz	3.66dB(k=2, 95% level of confidence)
Radiated Emissions	0.009MHz~30MHz	3.60dB(k=2, 95% level of confidence)
	30MHz~200MHz (Horizontal)	5.32dB(k=2, 95% level of confidence)
	30MHz~200MHz (Vertical)	5.43dB(k=2, 95% level of confidence)
	200MHz~1000MHz (Horizontal)	5.77dB(k=2, 95% level of confidence)
	200MHz~1000MHz (Vertical)	5.73dB(k=2, 95% level of confidence)
	1GHz - 6GHz	5.34dB(k=2, 95% level of confidence)
	6GHz - 18GHz	5.40dB(k=2, 95% level of confidence)
	18GHz - 40GHz	5.64dB(k=2, 95% level of confidence)
Temperature		±1°C
Humidity		±1%
Supply voltages		±0.4%

*Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.*

## Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 5F(B-West) , 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 715558, the FCC Designation No. : CN5045.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0023.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

The system was configured for testing in an engineering mode.

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	40	2442
1	2403	41	2443
2	2404	42	2444
...	...	...	...
...	...	...	...
36	2438	75	2477
37	2439	76	2478
38	2440	77	2479
39	2441	78	2480

EUT was tested with Channel 0, 39 and 78.

### EUT Exercise Software

“Authentication Tool.exe V 2.0.11.0”<sup>#</sup> exercise software was used and the power level is default <sup>#</sup>. The software and power level was provided by the applicant.

### Special Accessories

No special accessory.

### Equipment Modifications

No modification was made to the EUT tested.

### Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
DELL	PC	Latitude E5430	37K4X AOO
Unknown	USB disk	Unknown	Unknown
Unknown	Headset	Unknown	Unknown
GOSPEL	POE	G0720-480-050	200200019


**External I/O Cable**

Cable Description	Length (m)	From Port	To
Un-shielded Un-detachable AC cable	1.5	Receptacle	LISN/AC Mains
Un-shielded Un-detachable DC cable	1.5	Adapter	EUT
Un-shielded Detachable Audio cable	1.2	EUT	Headset
Un-shielded Detachable RJ45 cable	5.0	EUT	PC
Un-shielded Detachable RJ45 cable	5.0	EUT/POE	Internet
Un-shielded Detachable AC cable	0.5	POE	Receptacle
Un-shielded Detachable RJ45 cable	1.0	EUT	POE
Un-shielded Detachable AC cable	1.0	POE	AC Mains
Un-shielded Detachable RJ45 cable	3.0	EUT	POE

**Block Diagram of Test Setup**


For Conducted Emissions:

For Adapter

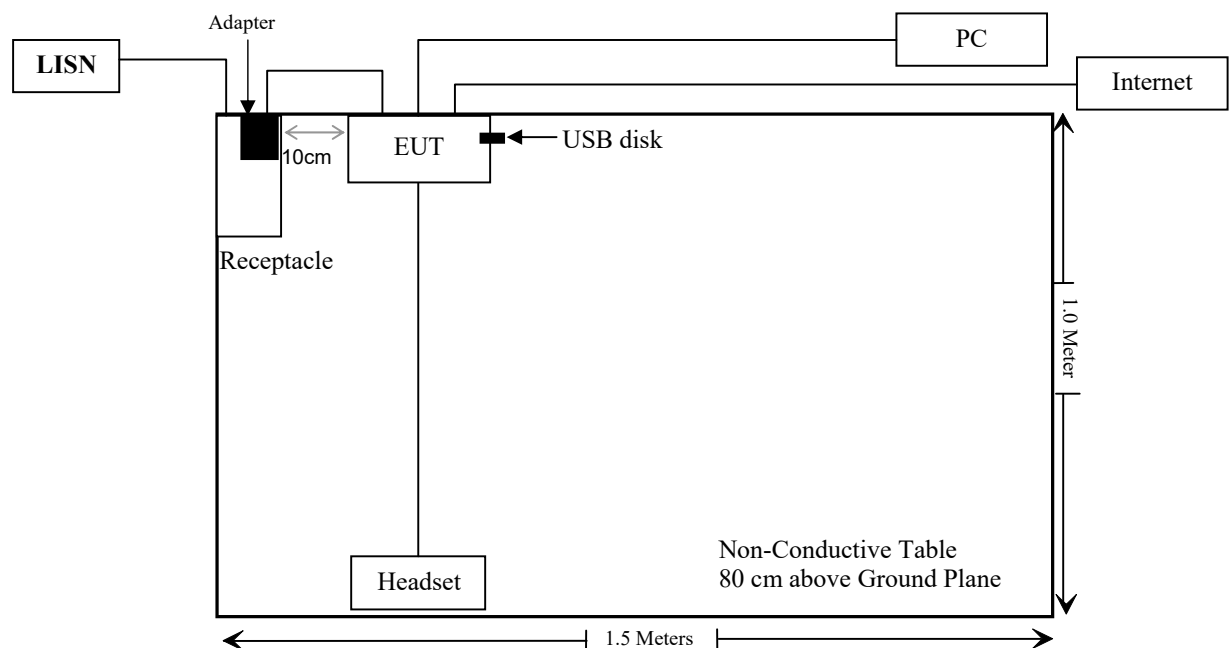




For POE

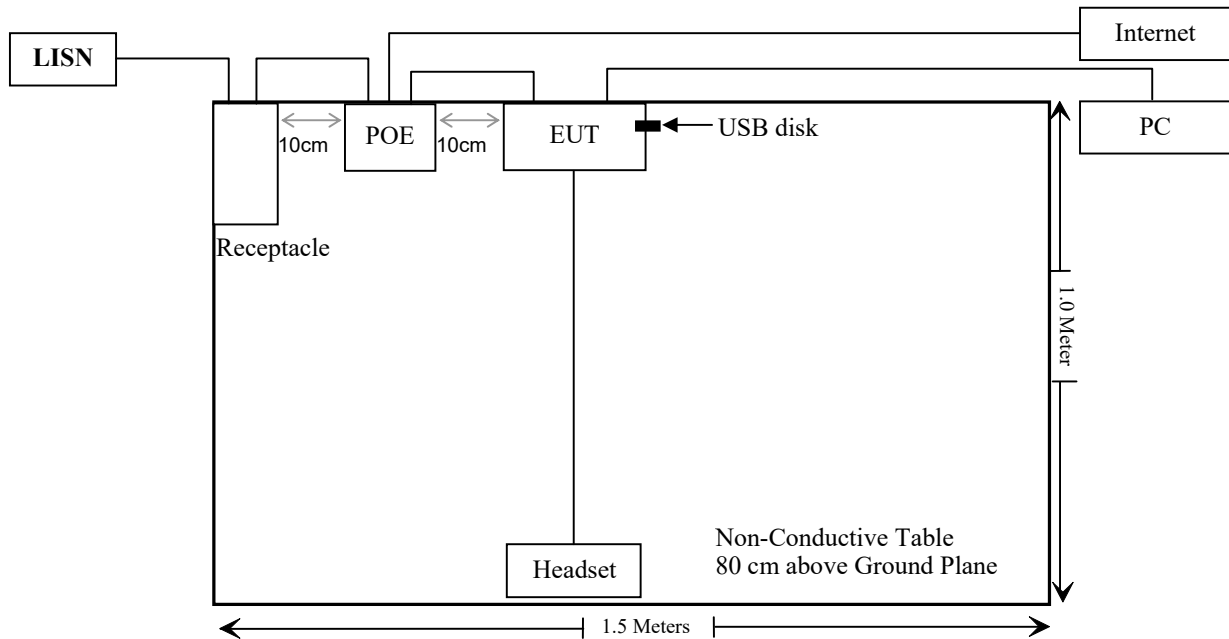


For Radiated Emissions below 1GHz:


For Adapter

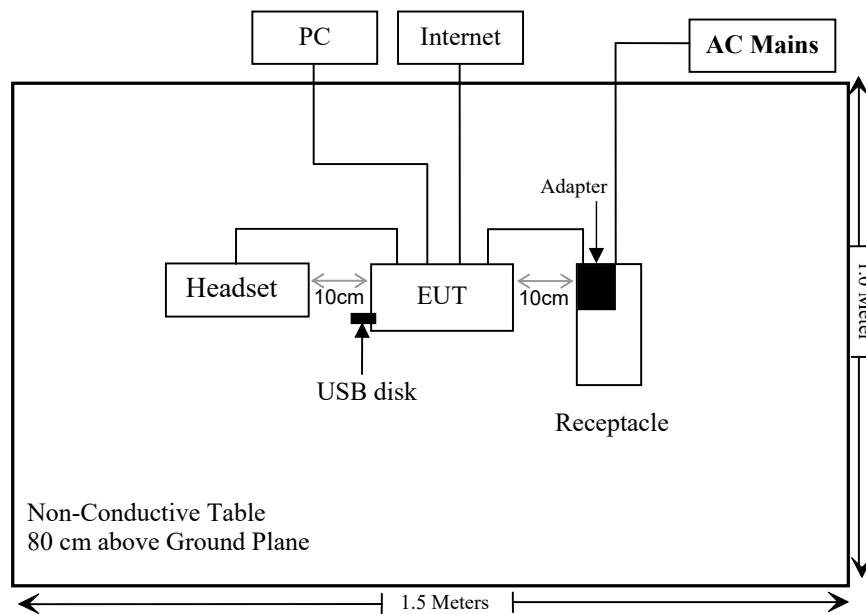

For POE

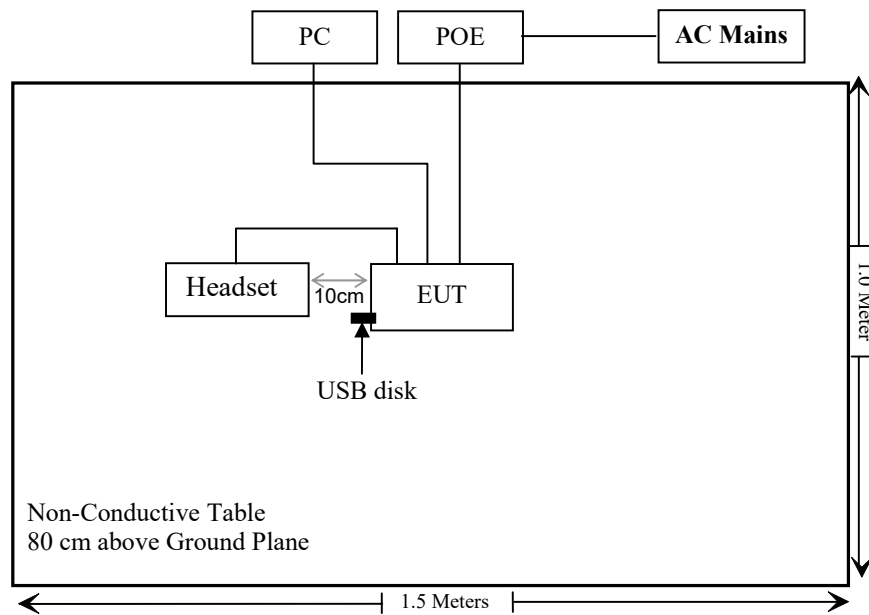

For Radiated Emissions above 1GHz:

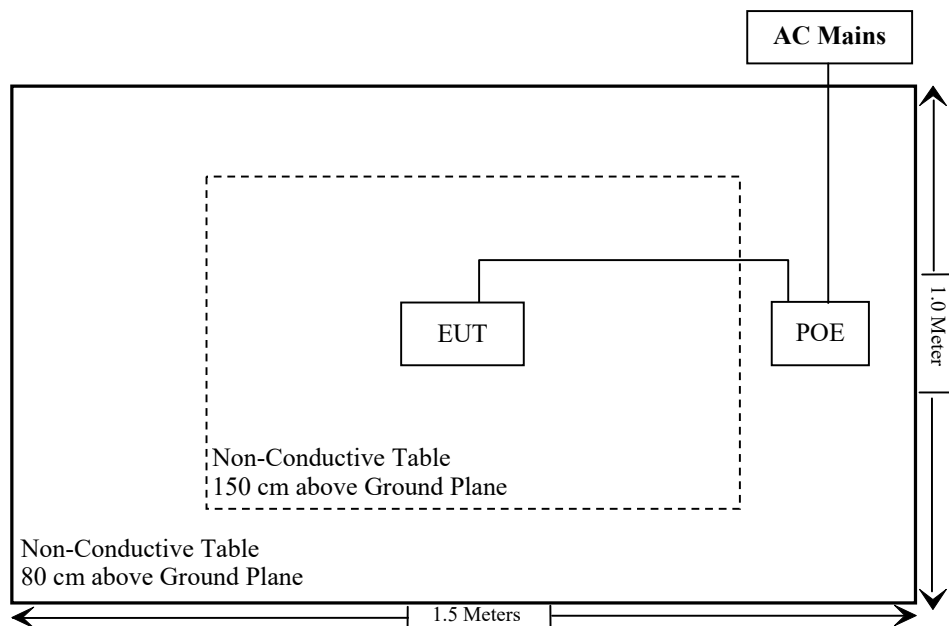

**SUMMARY OF TEST RESULTS**

FCC Rules	RSS Rules	Description of Test	Result
§ 15.247 (i), §1.1307 (b) (3) & §2.1091	/	MPE-Based Exemption	Compliant
/	RSS-102 § 6.6	Field Reference Level Exposure Exemption Limits	Compliant
FCC §15.203	RSS-Gen §6.8	Antenna Requirement	Compliant
FCC §15.207(a)	RSS-Gen §8.8	AC Line Conducted Emissions	Compliant
FCC §15.205, §15.209, §15.247(d)	RSS-247 § 5.5, RSS-GEN § 8.10	Radiated Emissions	Compliant
FCC §15.247(a)(1)	RSS-247 § 5.1(a), RSS-GEN § 6.7	20 dB Emission Bandwidth & 99% Occupied Bandwidth	Compliant
FCC §15.247(a)(1)	RSS-247 § 5.1 (b)	Channel Separation Test	Compliant
FCC §15.247(a)(1)(iii)	RSS-247 § 5.1 (d)	Time of Occupancy (Dwell Time)	Compliant
FCC §15.247(a)(1)(iii)	RSS-247 § 5.1 (d)	Quantity of hopping channel Test	Compliant
FCC §15.247(b)(1)	RSS-247 § 5.1(b) & § 5.4(b)	Peak Output Power Measurement	Compliant
FCC §15.247(d)	RSS-247 § 5.5	Band edges	Compliant

**TEST EQUIPMENT LIST**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
<b>Conducted Emission Test</b>					
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2024/01/16	2025/01/15
Rohde & Schwarz	LISN	ENV216	101613	2024/01/16	2025/01/15
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2024/05/21	2025/05/20
Unknown	CE Cable	Unknown	UF A210B-1-0720-504504	2024/05/21	2025/05/20
Audix	EMI Test software	E3	191218(V9)	NCR	NCR
<b>Radiated Emission Test</b>					
Rohde & Schwarz	EMI Test Receiver	ESR3	102455	2024/01/16	2025/01/15
Sonoma instrument	Pre-amplifier	310 N	186238	2024/05/21	2025/05/20
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2023/07/20	2026/07/19
Unknown	Cable	Chamber A Cable 1	N/A	2024/06/18	2025/06/17
Unknown	Cable	XH500C	J-10M-A	2024/06/18	2025/06/17
BACL	Active Loop Antenna	1313-1A	4031911	2024/05/14	2027/05/13
Unknown	Cable	2Y194	0735	2024/05/21	2025/05/20
Unknown	Cable	PNG214	1354	2024/05/21	2025/05/20
Audix	EMI Test software	E3	19821b(V9)	NCR	NCR
Rohde & Schwarz	Spectrum Analyzer	FSV40	101605	2024/03/27	2025/03/26
COM-POWER	Pre-amplifier	PA-122	181919	2024/06/18	2025/06/17
Schwarzbeck	Horn Antenna	BBHA9120D(1201)	1143	2023/07/26	2026/07/25
Unknown	RF Cable	KMSE	735	2024/06/18	2025/06/17
Unknown	RF Cable	UFA147	219661	2024/06/18	2025/06/17
Unknown	RF Cable	XH750A-N	J-10M	2024/06/18	2025/06/17
JD	Multiplex Switch Test Control Set	DT7220FSU	DQ77926	2024/06/18	2025/06/17
A.H.System	Pre-amplifier	PAM-1840VH	190	2024/06/18	2025/06/17
Electro-Mechanics Co	Horn Antenna	3116	9510-2270	2023/09/18	2026/09/17
UTIFLEX	RF Cable	NO. 13	232308-001	2024/06/18	2025/06/17
Audix	EMI Test software	E3	191218(V9)	NCR	NCR

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted Test					
Tonscend	RF control Unit	JS0806-2	19D8060154	2024/08/06	2025/08/05
Rohde & Schwarz	Spectrum Analyzer	FSV40	101473	2024/12/04	2025/12/03
Unknown	10dB Attenuator	Unknown	F-03-EM190	2024/06/27	2025/06/26

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

## FCC §15.247 (i) & §1.1307 (b) (3) & §2.1091- MPE-BASED EXEMPTION

### Applicable Standard

According to subpart 15.247 (i) and subpart 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

According to KDB 447498 D04 Interim General RF Exposure Guidance

MPE-Based Exemption:

General frequency and separation-distance dependent MPE-based effective radiated power(ERP) thresholds are in Table B.1 [Table 1 of § 1.1307(b)(3)(i)(C)] to support an exemption from further evaluation from 300 kHz through 100 GHz.

Table 1 to § 1.1307(b)(3)(i)(C) - Single RF Sources Subject to Routine Environmental Evaluation

RF Source frequency (MHz)	Threshold ERP (watts)
0.3-1.34	$1,920 R^2$ .
1.34-30	$3,450 R^2/f^2$ .
30-300	$3.83 R^2$ .
300-1,500	$0.0128 R^2 f$ .
1,500-100,000	$19.2 R^2$ .

R is the minimum separation distance in meters  
f = frequency in MHz

### Result

Mode	Frequency (MHz)	Tune up conducted power <sup>#</sup>	Antenna Gain <sup>#</sup>		ERP		Evaluation Distance (m)	ERP Limit (mW)
		(dBm)	(dBi)	(dBd)	(dBm)	(mW)		
BT	2402-2480	7.0	3.11	0.96	7.96	6.25	0.2	768
BLE	2402-2480	4.0	3.11	0.96	4.96	3.13	0.2	768
2.4G Wi-Fi	2412-2462	19.5	3.11	0.96	20.46	111.17	0.2	768
5.2G Wi-Fi	5180-5240	17.0	1.02	-1.13	15.87	38.64	0.2	768
5.3G Wi-Fi	5260-5320	18.5	1.02	-1.13	17.37	54.58	0.2	768
5.6G Wi-Fi	5500-5700	18.0	1.02	-1.13	16.87	48.64	0.2	768
5.8G Wi-Fi	5745-5825	14.5	1.02	-1.13	13.37	21.73	0.2	768

Note: 1. The tune up conducted power and antenna gain was declared by the applicant.  
2. The BT, 2.4G Wi-Fi and 5G Wi-Fi cannot transmit at same time.  
3. 0dBd=2.15dBi

To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

**Result: Compliant.**

## RSS-102 § 6.6 –FIELD REFERENCE LEVEL EXPOSURE EXEMPTION LIMITS

### Applicable Standard

According to RSS-102 Issue 6 § (6.6):

#### 6.6 Field reference level exposure exemption limits

Field reference level (FRL) exposure evaluation is required if the separation distance between the user and/or bystander and the device's radiating element is greater than 20 cm (i.e. mobile devices), except when the device operates as follows:

- below 20 MHz and the source-based, time-averaged maximum EIRP of the device is equal to or less than 1 W (adjusted for tune-up tolerance)
- at or above 20 MHz and below 48 MHz and the source-based, time-averaged maximum EIRP of the device is equal to or less than  $4.49/f^{0.5}W$  (adjusted for tune-up tolerance), where  $f$  is in MHz
- at or above 48 MHz and below 300 MHz and the source-based, time-averaged maximum EIRP of the device is equal to or less than 0.6 W (adjusted for tune-up tolerance)
- at or above 300 MHz and below 6 GHz and the source-based, time-averaged maximum EIRP of the device is equal to or less than  $1.31 \times 10^{-2} f^{0.6834}W$  (adjusted for tune-up tolerance), where  $f$  is in MHz
- at or above 6 GHz and the source-based, time-averaged maximum EIRP of the device is equal to or less than 5 W (adjusted for tune-up tolerance)

In these cases, the information contained in the RF exposure technical brief may be limited to information that demonstrates how the EIRP was derived.

### Result

For worst case:

Mode	Frequency (MHz)	Maximum tune-up conducted power <sup>#</sup>	Antenna Gain <sup>#</sup>	Maximum tune-up EIRP		Evaluation Distance (cm)	Limit (mW)
		(dBm)		(dBm)	(mW)		
BT	2402-2480	7.0	3.11	10.11	10.26	20	2676
BLE	2402-2480	4.0	3.11	7.11	5.14	20	2676
2.4G Wi-Fi	2412-2462	19.5	3.11	22.61	182.39	20	2684
5.2G Wi-Fi	5180-5240	17.0	1.02	18.02	63.39	20	4525
5.3G Wi-Fi	5260-5320	18.5	1.02	19.52	89.54	20	4573
5.6G Wi-Fi	5500-5700	18.0	1.02	19.02	79.80	20	4714
5.8G Wi-Fi	5745-5825	14.5	1.02	15.52	35.65	20	4857

Note: 1. The tune up conducted power and antenna gain was declared by the applicant.  
2. The BT, 2.4G Wi-Fi and 5G Wi-Fi cannot transmit at same time.

To maintain compliance with the IC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

**Result:** The RF Exposure evaluation can be exempted.

## **FCC §15.203 & RSS-GEN §6.8 - ANTENNA REQUIREMENT**

### **Applicable Standard**

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited.

Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.
- c. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.

The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

For licence-exempt equipment with detachable antennas, the user manual shall also contain the following notice in a conspicuous location:



This radio transmitter [enter the device's ISED certification number] has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device. Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

### Antenna Connector Construction

The EUT has one internal antenna arrangement which was permanently attached for Bluetooth and the maximum antenna gain<sup>#</sup> is 3.11dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Antenna Type	Antenna Gain <sup>#</sup>	Impedance	Frequency Range
PCB	3.11dBi	50Ω	2.4~2.5GHz


**Result: Compliant**

## FCC §15.207 (a) & RSS-GEN § 8.8 - AC LINE CONDUCTED EMISSIONS

### Applicable Standard

FCC §15.207(a), RSS-GEN § 8.8

### EUT Setup

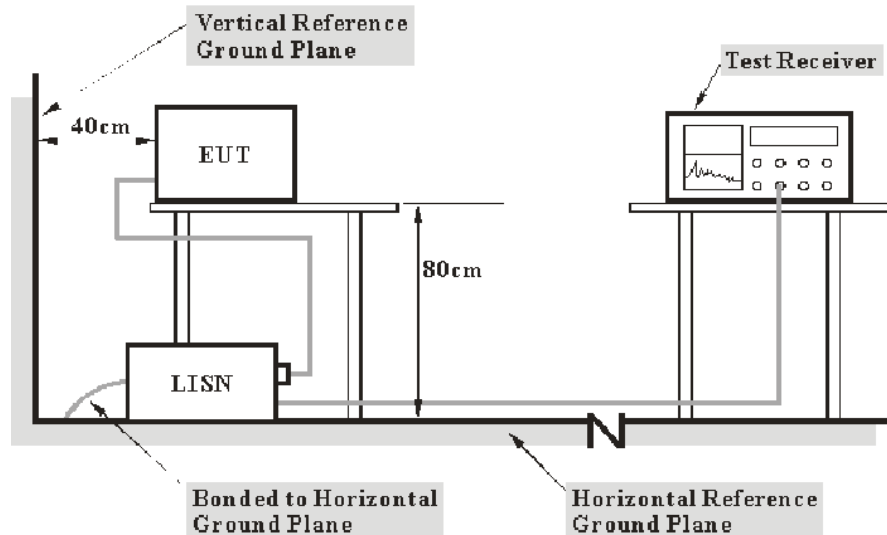

Note: 1. Support units were connected to second LISN.  
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207 & RSS-Gen.

The spacing between the peripherals was 10 cm.

### EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

### Test Procedure

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

## Factor & Over Limit Calculation

The factor is calculated by adding LISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over limit of -7 dB means the emission is 7 dB below the limit. The equation for calculation is as follows:

$$\begin{aligned}\text{Over Limit} &= \text{Level} - \text{Limit} \\ \text{Level} &= \text{Read Level} + \text{Factor}\end{aligned}$$

Note: The term "cable loss" refers to the combination of a cable and a 10dB transient limiter (attenuator).

## Test Data

### Environmental Conditions


Temperature:	21~26°C
Relative Humidity:	35~44 %
ATM Pressure:	101~103 kPa

*The testing was performed by Macy Shi from 2024-11-06 to 2024-12-24.*

*EUT operation mode: Transmitting (Maximum output power mode, EDR Mode (8DPSK) Low channel)*

For Adapter1

AC 120V/60 Hz, Line

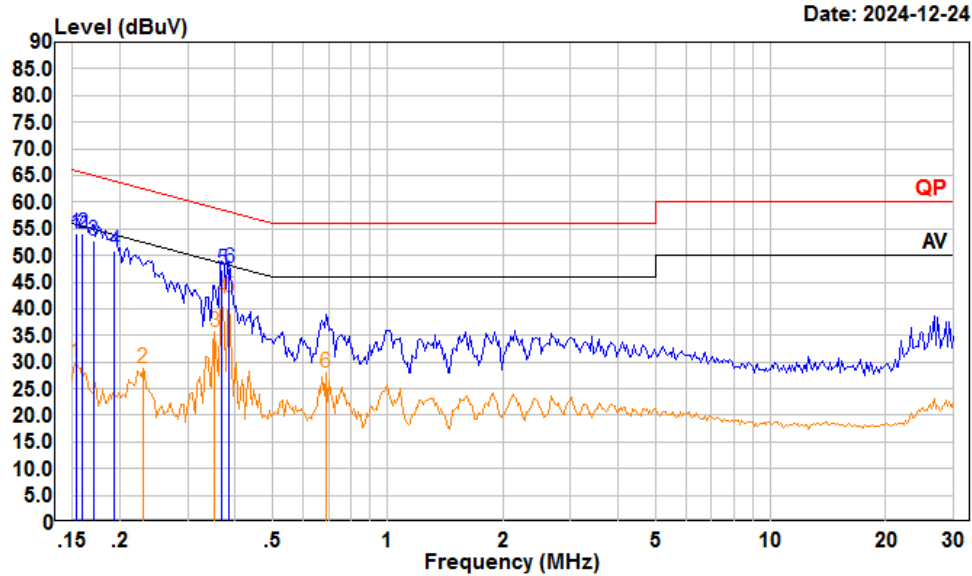

Trace: 1

Condition: Line


Project : 2401Y6777E-RF

tester : Macy.shi Note:Transmitting

Setting : RBW:9kHz VBW:Auto SWT:Auto

		Read		LISN	Cable	Limit	Over	
	Freq	Level	Level	Factor	Loss	Line	Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.153	33.00	54.02	10.89	10.13	65.82	-11.80	QP
2	0.160	33.09	54.09	10.88	10.12	65.47	-11.38	QP
3	0.170	31.70	52.66	10.86	10.10	64.94	-12.28	QP
4	0.193	30.00	50.90	10.81	10.09	63.89	-12.99	QP
5	0.369	26.60	47.31	10.60	10.11	58.52	-11.21	QP
6	0.385	26.79	47.49	10.59	10.11	58.17	-10.68	QP
	Freq	Read		LISN	Cable	Limit	Over	
	MHz	Level	Level	Factor	Loss	Line	Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.153	8.87	29.89	10.89	10.13	55.82	-25.93	Average
2	0.229	7.87	28.71	10.76	10.08	52.48	-23.77	Average
3	0.354	14.90	35.63	10.61	10.12	48.87	-13.24	Average
4	0.369	21.06	41.77	10.60	10.11	48.52	-6.75	Average
5	0.385	21.39	42.09	10.59	10.11	48.17	-6.08	Average
6	0.690	7.38	28.03	10.50	10.15	46.00	-17.97	Average

## AC 120V/60 Hz, Neutral

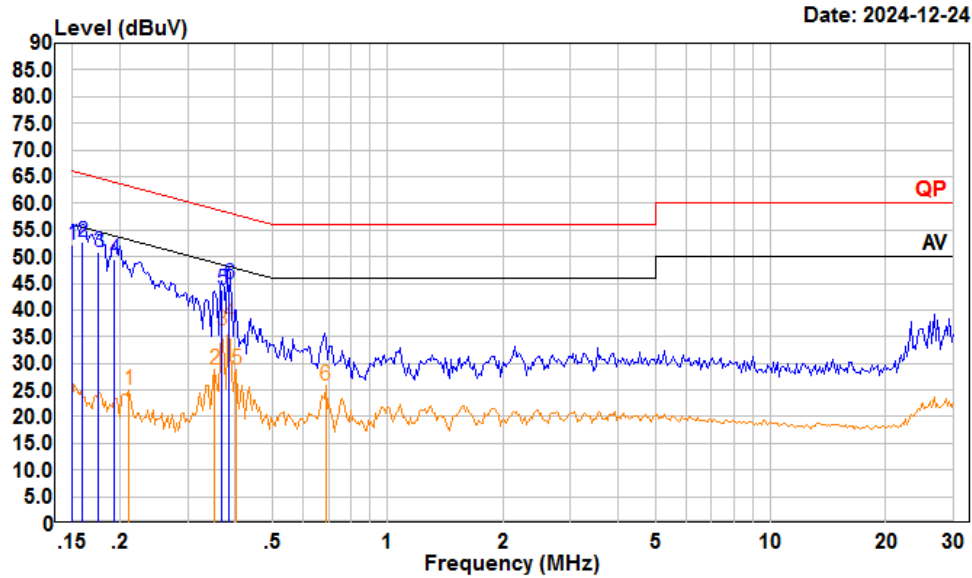

Trace: 1

Condition: Neutral

Project : 2401Y6777E-RF


tester : Macy.shi Note:Transmitting

Setting : RBW:9kHz VBW:Auto SWT:Auto

	Freq	Read Level	LISN Level	Cable Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.150	31.60	52.33	10.60	10.13	66.00	-13.67	QP
2	0.160	31.99	52.67	10.56	10.12	65.47	-12.80	QP
3	0.176	30.40	50.99	10.49	10.10	64.68	-13.69	QP
4	0.193	28.91	49.42	10.42	10.09	63.89	-14.47	QP
5	0.369	23.00	43.71	10.60	10.11	58.52	-14.81	QP
6	0.385	24.20	44.92	10.61	10.11	58.17	-13.25	QP
	Freq	Read Level	LISN Level	Cable Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.211	4.45	24.96	10.42	10.09	53.18	-28.22	Average
2	0.354	8.00	28.71	10.59	10.12	48.87	-20.16	Average
3	0.369	15.38	36.09	10.60	10.11	48.52	-12.43	Average
4	0.385	16.82	37.54	10.61	10.11	48.17	-10.63	Average
5	0.402	8.19	28.92	10.63	10.10	47.81	-18.89	Average
6	0.690	4.98	25.83	10.70	10.15	46.00	-20.17	Average

For Adapter2

AC 120V/60 Hz, Line

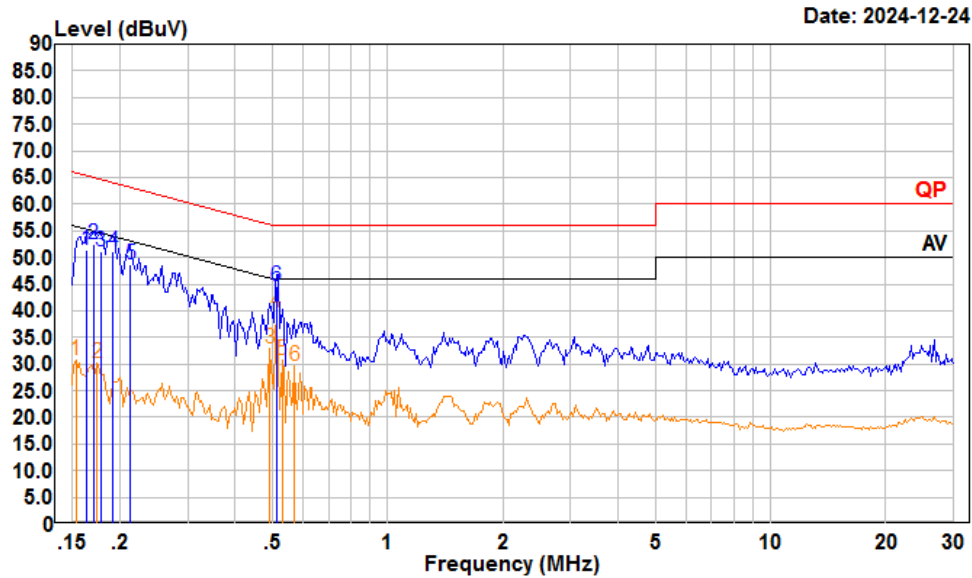

Trace: 1

Condition: Line


Project : 2401Y6777E-RF

tester : Macy.shi Note:Transmitting

Setting : RBW:9kHz VBW:Auto SWT:Auto

		Read		LISN	Cable	Limit	Over	
	Freq	Level	Level	Factor	Loss	Line	Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.163	30.30	51.28	10.87	10.11	65.30	-14.02	QP
2	0.170	31.40	52.36	10.86	10.10	64.94	-12.58	QP
3	0.178	30.20	51.14	10.84	10.10	64.59	-13.45	QP
4	0.191	30.20	51.11	10.82	10.09	63.98	-12.87	QP
5	0.213	27.90	48.77	10.78	10.09	63.10	-14.33	QP
6	0.513	24.00	44.64	10.50	10.14	56.00	-11.36	QP
	Freq	Read		LISN	Cable	Limit	Over	
	Freq	Level	Level	Factor	Loss	Line	Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.153	9.79	30.81	10.89	10.13	55.82	-25.01	Average
2	0.174	9.25	30.20	10.85	10.10	54.77	-24.57	Average
3	0.491	12.22	32.87	10.51	10.14	46.14	-13.27	Average
4	0.513	19.07	39.71	10.50	10.14	46.00	-6.29	Average
5	0.529	10.20	30.83	10.50	10.13	46.00	-15.17	Average
6	0.570	9.03	29.66	10.50	10.13	46.00	-16.34	Average

## AC 120V/60 Hz, Neutral

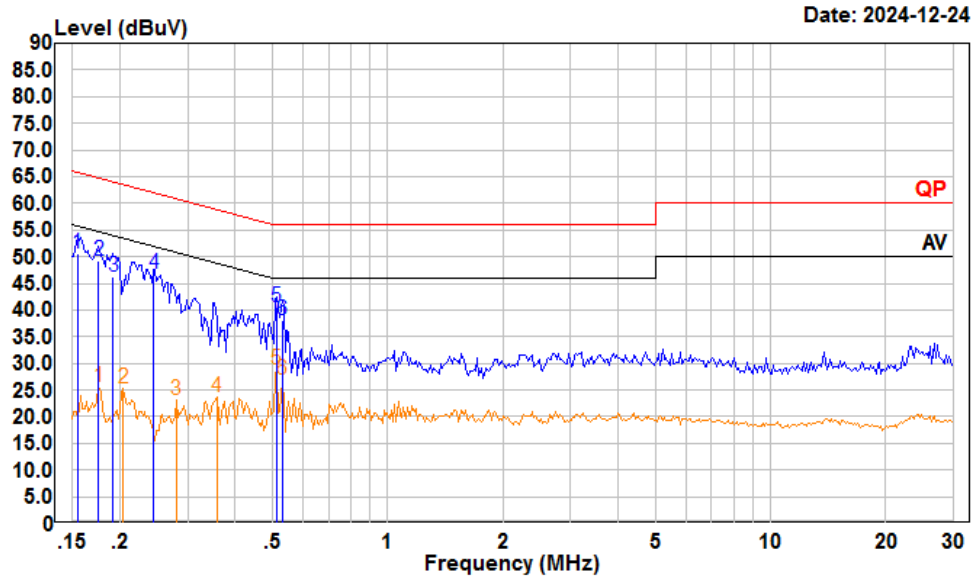

Trace: 1

Condition: Neutral


Project : 2401Y6777E-RF

tester : Macy.shi Note:Transmitting

Setting : RBW:9kHz VBW:Auto SWT:Auto

	Freq	Read Level	LISN Level	Cable Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.155	29.80	50.50	10.58	10.12	65.74	-15.24	QP
2	0.176	28.70	49.29	10.49	10.10	64.68	-15.39	QP
3	0.191	25.80	46.32	10.43	10.09	63.98	-17.66	QP
4	0.244	26.20	46.75	10.47	10.08	61.95	-15.20	QP
5	0.513	19.70	40.54	10.70	10.14	56.00	-15.46	QP
6	0.529	17.30	38.13	10.70	10.13	56.00	-17.87	QP
	Freq	Read Level	LISN Level	Cable Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.176	5.07	25.66	10.49	10.10	54.68	-29.02	Average
2	0.204	4.72	25.22	10.41	10.09	53.45	-28.23	Average
3	0.280	2.52	23.13	10.51	10.10	50.81	-27.68	Average
4	0.358	2.97	23.68	10.59	10.12	48.78	-25.10	Average
5	0.513	8.08	28.92	10.70	10.14	46.00	-17.08	Average
6	0.529	6.17	27.00	10.70	10.13	46.00	-19.00	Average

For Adapter3  
AC 120V/60 Hz, Line

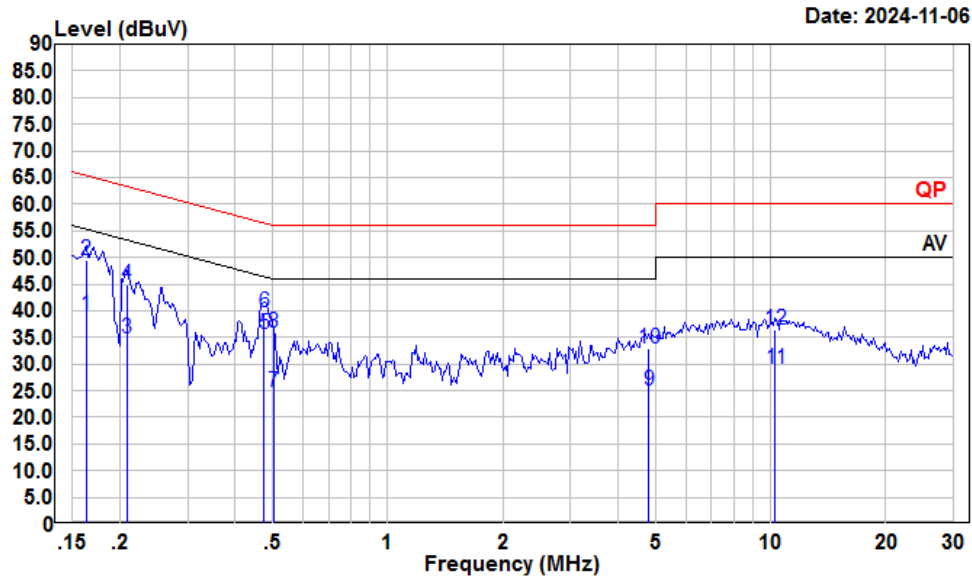

Condition: Line

Project : 2401Y6777E-RF


tester : Macy.shi Note:Transmitting

Setting : RBW:9kHz VBW:Auto SWT:Auto

	Freq	Read Level	LISN Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.163	18.27	39.25	10.87	10.11	55.30	-16.05	Average
2	0.163	28.52	49.50	10.87	10.11	65.30	-15.80	QP
3	0.208	13.98	34.86	10.79	10.09	53.27	-18.41	Average
4	0.208	24.12	45.00	10.79	10.09	63.27	-18.27	QP
5	0.476	14.92	35.57	10.52	10.13	46.41	-10.84	Average
6	0.476	18.95	39.60	10.52	10.13	56.41	-16.81	QP
7	0.502	4.17	24.81	10.50	10.14	46.00	-21.19	Average
8	0.502	15.19	35.83	10.50	10.14	56.00	-20.17	QP
9	4.797	4.37	24.92	10.36	10.19	46.00	-21.08	Average
10	4.797	12.29	32.84	10.36	10.19	56.00	-23.16	QP
11	10.288	8.40	29.21	10.60	10.21	50.00	-20.79	Average
12	10.288	15.66	36.47	10.60	10.21	60.00	-23.53	QP



## AC 120V/60 Hz, Neutral

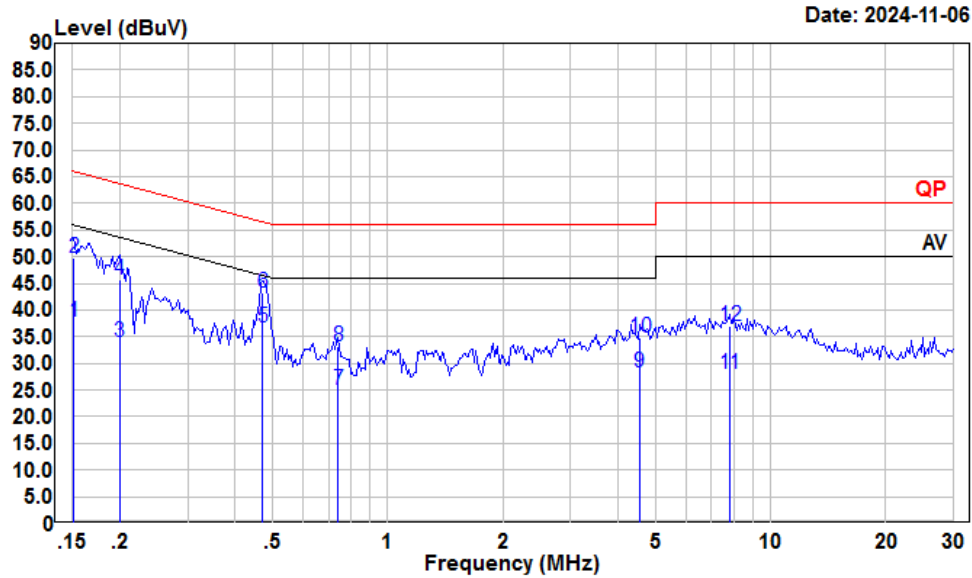

Condition: Neutral

Project : 2401Y6777E-RF


tester : Macy.shi Note:Transmitting

Setting : RBW:9kHz VBW:Auto SWT:Auto

	Freq	Read Level	LISN Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.152	16.99	37.71	10.59	10.13	55.91	-18.20	Average
2	0.152	28.93	49.65	10.59	10.13	65.91	-16.26	QP
3	0.200	13.58	34.07	10.40	10.09	53.62	-19.55	Average
4	0.200	25.08	45.57	10.40	10.09	63.62	-18.05	QP
5	0.471	15.81	36.62	10.68	10.13	46.49	-9.87	Average
6	0.471	22.55	43.36	10.68	10.13	56.49	-13.13	QP
7	0.743	4.25	25.12	10.73	10.14	46.00	-20.88	Average
8	0.743	12.29	33.16	10.73	10.14	56.00	-22.84	QP
9	4.549	7.76	28.42	10.47	10.19	46.00	-17.58	Average
10	4.549	14.22	34.88	10.47	10.19	56.00	-21.12	QP
11	7.810	7.22	28.15	10.73	10.20	50.00	-21.85	Average
12	7.810	15.95	36.88	10.73	10.20	60.00	-23.12	QP

For POE

AC 120V/60 Hz, Line

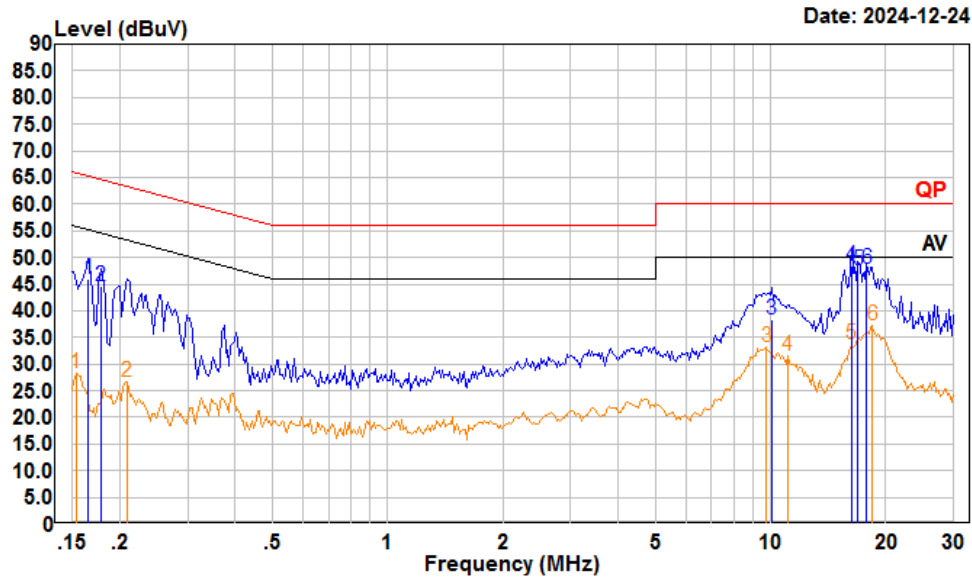

Condition: Line


Project : 2401Y6777E-RF

tester : Macy.shi Note:Transmitting

Setting : RBW:9kHz VBW:Auto SWT:Auto

		Read		LISN	Cable	Limit	Over	
	Freq	Level	Level	Factor	Loss	Line	Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.165	25.09	46.07	10.87	10.11	65.21	-19.14	QP
2	0.178	23.60	44.54	10.84	10.10	64.59	-20.05	QP
3	10.072	17.60	38.41	10.60	10.21	60.00	-21.59	QP
4	16.226	27.60	48.49	10.68	10.21	60.00	-11.51	QP
5	16.928	26.70	47.63	10.73	10.20	60.00	-12.37	QP
6	17.849	26.90	47.87	10.78	10.19	60.00	-12.13	QP
	Freq	Read		LISN	Cable	Limit	Over	
	MHz	Level	Level	Factor	Loss	Line	Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.153	7.14	28.16	10.89	10.13	55.82	-27.66	Average
2	0.208	5.83	26.71	10.79	10.09	53.27	-26.56	Average
3	9.757	12.39	33.19	10.59	10.21	50.00	-16.81	Average
4	11.080	10.66	31.47	10.60	10.21	50.00	-18.53	Average
5	16.226	12.78	33.67	10.68	10.21	50.00	-16.33	Average
6	18.426	16.16	37.16	10.81	10.19	50.00	-12.84	Average

## AC 120V/60 Hz, Neutral

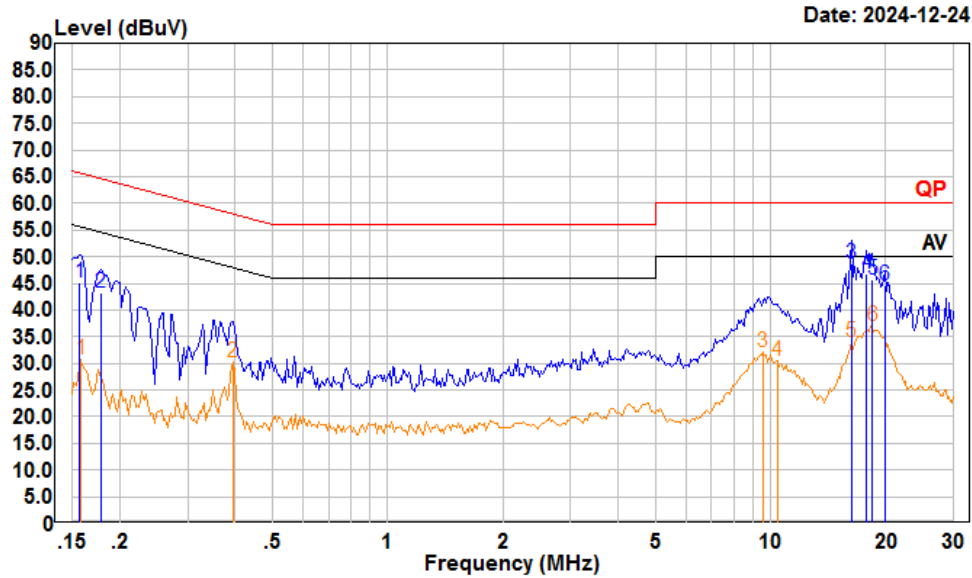

Condition: Neutral

Project : 2401Y67777E-RF

tester : Macy.shi Note:Transmitting

Setting : RBW:9kHz VBW:Auto SWT:Auto

	Freq	Read Level	LISN Level	Cable Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.156	24.40	45.09	10.57	10.12	65.65	-20.56	QP
2	0.178	22.80	43.38	10.48	10.10	64.59	-21.21	QP
3	16.226	27.80	48.78	10.77	10.21	60.00	-11.22	QP
4	17.849	25.80	46.73	10.74	10.19	60.00	-13.27	QP
5	18.426	24.89	45.81	10.73	10.19	60.00	-14.19	QP
6	19.845	23.80	44.67	10.70	10.17	60.00	-15.33	QP
	Freq	Read Level	LISN Level	Cable Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.158	9.95	30.63	10.56	10.12	55.56	-24.93	Average
2	0.393	9.44	30.16	10.62	10.10	47.99	-17.83	Average
3	9.552	11.17	32.17	10.79	10.21	50.00	-17.83	Average
4	10.397	9.44	30.45	10.80	10.21	50.00	-19.55	Average
5	16.226	13.08	34.06	10.77	10.21	50.00	-15.94	Average
6	18.426	16.20	37.12	10.73	10.19	50.00	-12.88	Average


## FCC §15.209, §15.205 & §15.247(D) & RSS-247§ 5.5 - SPURIOUS EMISSIONS

### Applicable Standard


FCC §15.205; §15.209; §15.247(d); RSS-247§ 5.5; RSS-GEN § 8.10


### EUT Setup

9 kHz-30MHz:

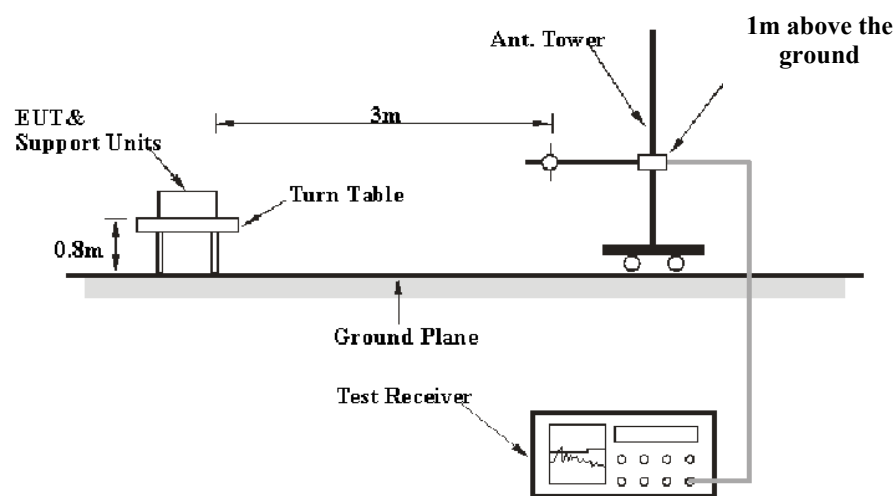

30MHz-1GHz:

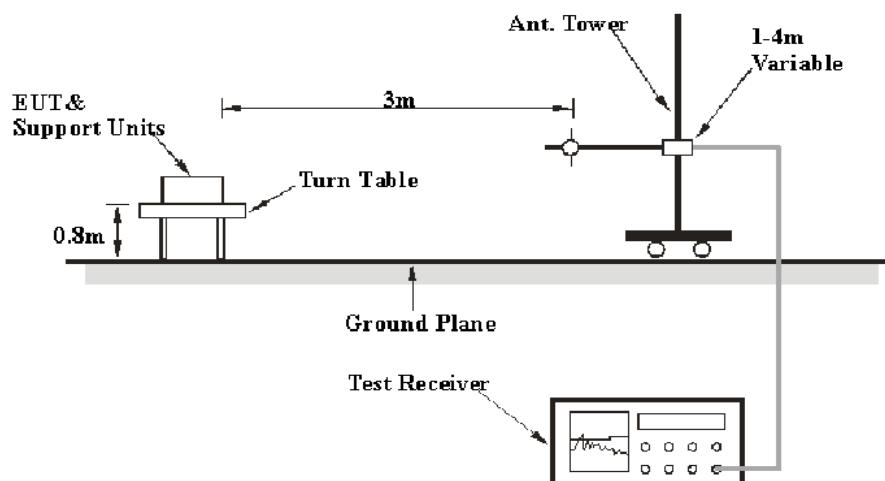

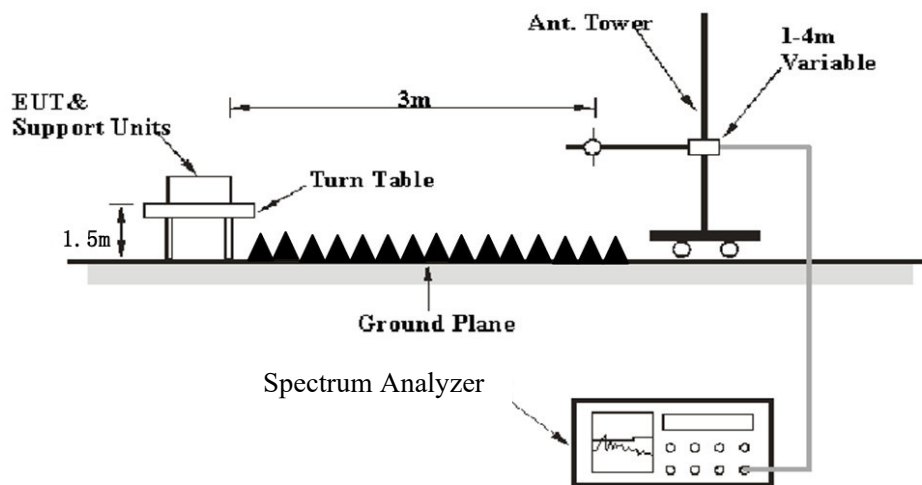**Above 1GHz:**

The radiated emission performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, FCC 15.247, RSS-247, RSS-Gen limits.

**EMI Test Receiver & Spectrum Analyzer Setup**

The EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
9 kHz – 150 kHz	/	/	200 Hz	QP
	300 Hz	1 kHz	/	PK
150 kHz – 30 MHz	/	/	9 kHz	QP
	10 kHz	30 kHz	/	PK
30 MHz – 1000 MHz	/	/	120 kHz	QP
	100 kHz	300 kHz	/	PK
Above 1 GHz	Harmonics & Band Edge			
	1MHz	3 MHz	/	PK
	Average Emission Level=Peak Emission Level+20*log(Duty cycle)			
	Other Emissions			
	1MHz	3 MHz	/	PK
	1MHz	≥10 Hz	/	Average

For Duty cycle measurement:

Use the duty cycle factor correction factor method per 15.35(c).

Duty cycle=On time/100milliseconds, On time= $N_1 \cdot L_1 + N_2 \cdot L_2 + \dots + N_{n-1} \cdot L_{n-1} + N_n \cdot L_n$ ,

Where  $N_1$  is number of type 1 pulses,  $L_1$  is length of type 1 pulse, etc.

## Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz, average detection modes for frequency bands 9–90 kHz and 110–490 kHz, peak and average detection modes for frequencies above 1 GHz.

For 9 kHz-30MHz, the report shall list the six emissions with the smallest margin relative to the limit, for each of the three antenna orientations (parallel, perpendicular, and ground-parallel) unless the margin is greater than 20 dB.

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

All emissions under the average limit and under the noise floor have not recorded in the report.

## Factor & Over Limit/Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit/Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned}\text{Over Limit/Margin} &= \text{Level} / \text{Corrected Amplitude} - \text{Limit} \\ \text{Level} / \text{Corrected Amplitude} &= \text{Read Level} + \text{Factor}\end{aligned}$$

## Test Data

### Environmental Conditions

Temperature:	25 °C
Relative Humidity:	50 %
ATM Pressure:	101 kPa

The testing was performed by Anson Su on 2024-11-16 for below 1GHz and Zenos Qiao on 2024-11-30 for above 1GHz.

EUT operation mode: Transmitting


Note: After pre-scan in the X, Y and Z axes of orientation, the worst case z-axis of orientation were recorded.

The spurious emission from 9 kHz-30MHz of IC RSS-Gen standard, the unit of final result on the test plots are dB $\mu$ V/m, so the limit should be added by 51,5 dB from dB $\mu$ A/m to dB $\mu$ V/m.

**9 kHz-30MHz:** (Maximum output power mode, EDR Mode (8DPSK) Low channel)


Parallel (worst case)

For Adapter1

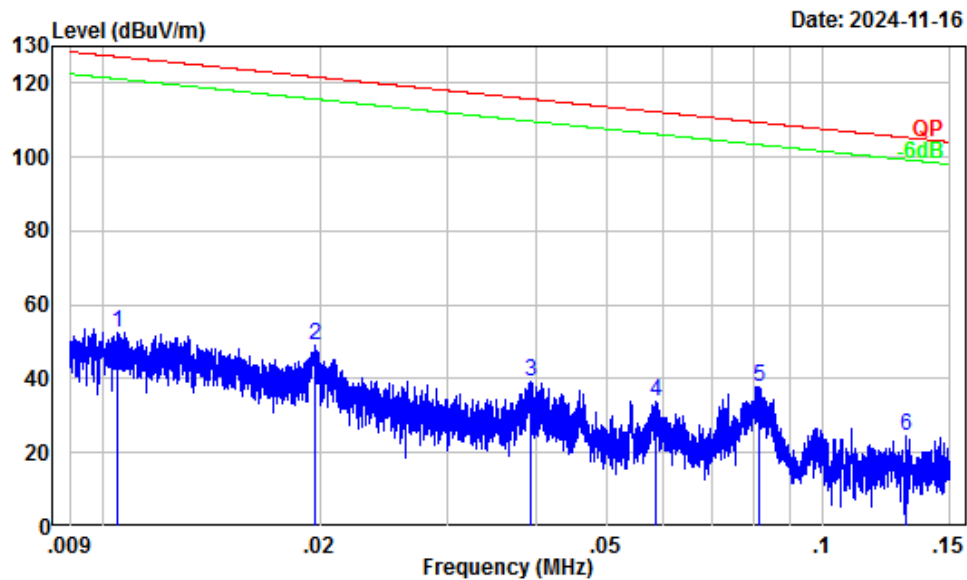

Site : Chamber A  
Condition : 3m  
Project Number: 2401Y67777E-RF  
Test Mode : BT Transmitting  
Tester : Anson Su


	Freq	Factor	Read Level	Read Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.01	37.45	15.22	52.67	127.20	-74.53	Peak
2	0.02	32.74	16.46	49.20	121.72	-72.52	Peak
3	0.04	25.45	13.66	39.11	115.74	-76.63	Peak
4	0.06	21.89	11.89	33.78	112.23	-78.45	Peak
5	0.08	18.88	18.96	37.84	109.38	-71.54	Peak
6	0.13	15.63	8.88	24.51	105.29	-80.78	Peak

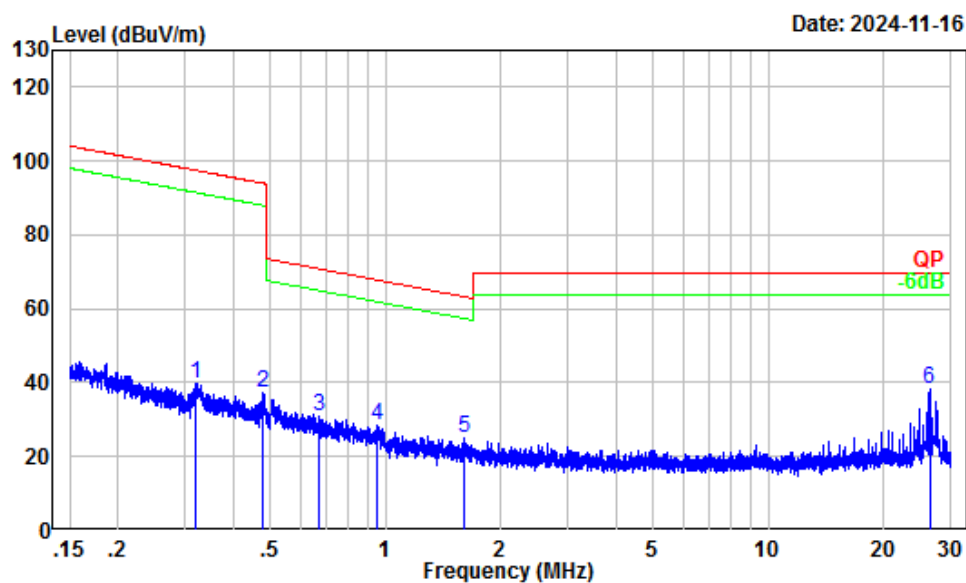

Site : Chamber A  
 Condition : 3m  
 Project Number: 2401Y67777E-RF  
 Test Mode : BT Transmitting  
 Tester : Anson Su


	Freq	Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.32	7.27	32.28	39.55	97.47	-57.92	Peak
2	0.48	3.97	33.23	37.20	94.03	-56.83	Peak
3	0.67	1.44	29.62	31.06	71.02	-39.96	Peak
4	0.95	-1.25	29.52	28.27	67.89	-39.62	Peak
5	1.60	-3.68	28.48	24.80	63.30	-38.50	Peak
6	26.38	-4.88	43.32	38.44	69.54	-31.10	Peak

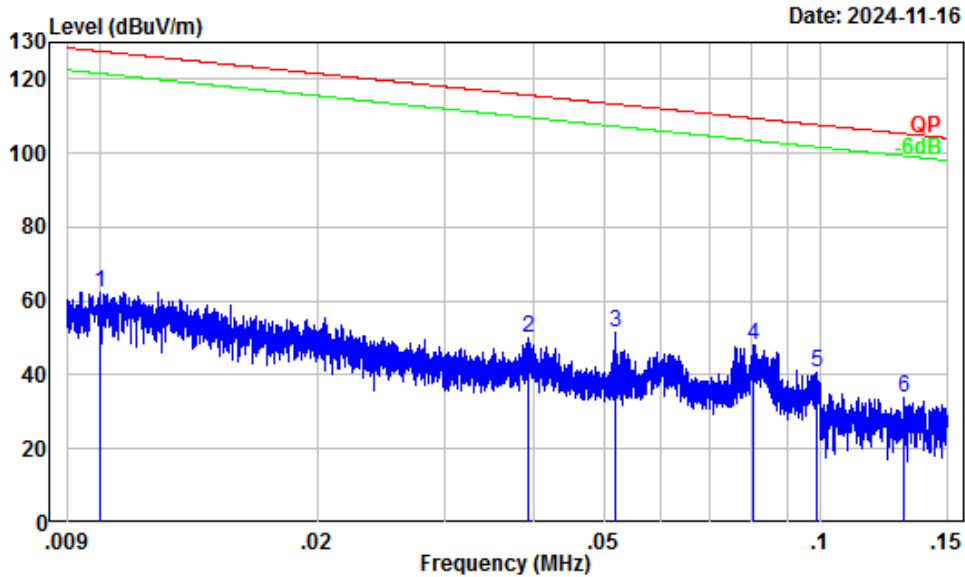

*For Adapter2*


Site : Chamber A  
Condition : 3m  
Project Number: 2401Y67777E-RF  
Test Mode : BT Transmitting  
Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.01	37.68	24.80	62.48	127.59	-65.11	Peak
2	0.04	25.45	24.50	49.95	115.74	-65.79	Peak
3	0.05	22.81	28.46	51.27	113.30	-62.03	Peak
4	0.08	18.97	28.95	47.92	109.48	-61.56	Peak
5	0.10	17.16	23.44	40.60	107.71	-67.11	Peak
6	0.13	15.65	18.17	33.82	105.32	-71.50	Peak

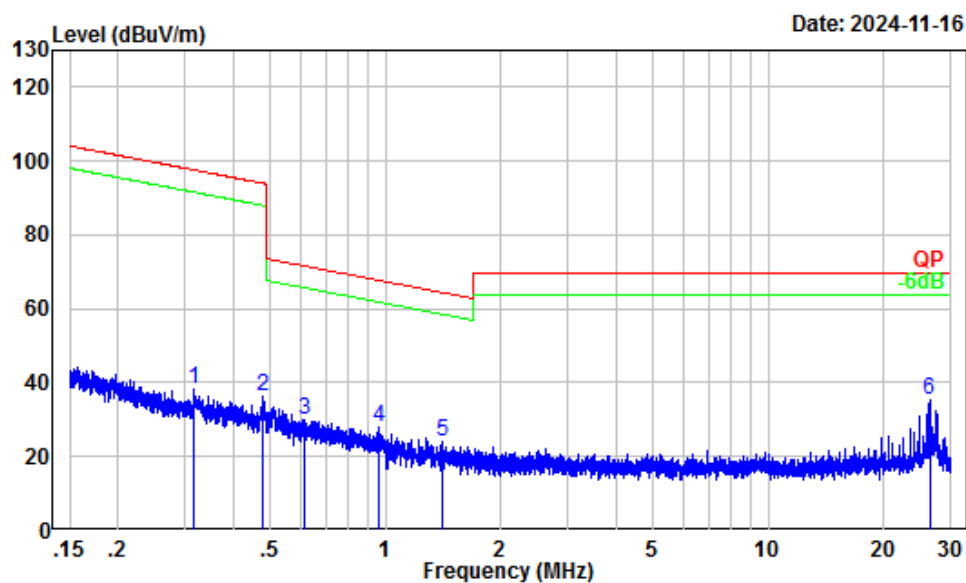


Site : Chamber A  
 Condition : 3m  
 Project Number: 2401Y67777E-RF  
 Test Mode : BT Transmitting  
 Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.32	7.37	30.73	38.10	97.59	-59.49	Peak
2	0.48	3.92	32.38	36.30	93.99	-57.69	Peak
3	0.62	2.09	27.95	30.04	71.76	-41.72	Peak
4	0.96	-1.29	29.19	27.90	67.84	-39.94	Peak
5	1.41	-3.03	27.08	24.05	64.41	-40.36	Peak
6	26.38	-4.88	40.37	35.49	69.54	-34.05	Peak

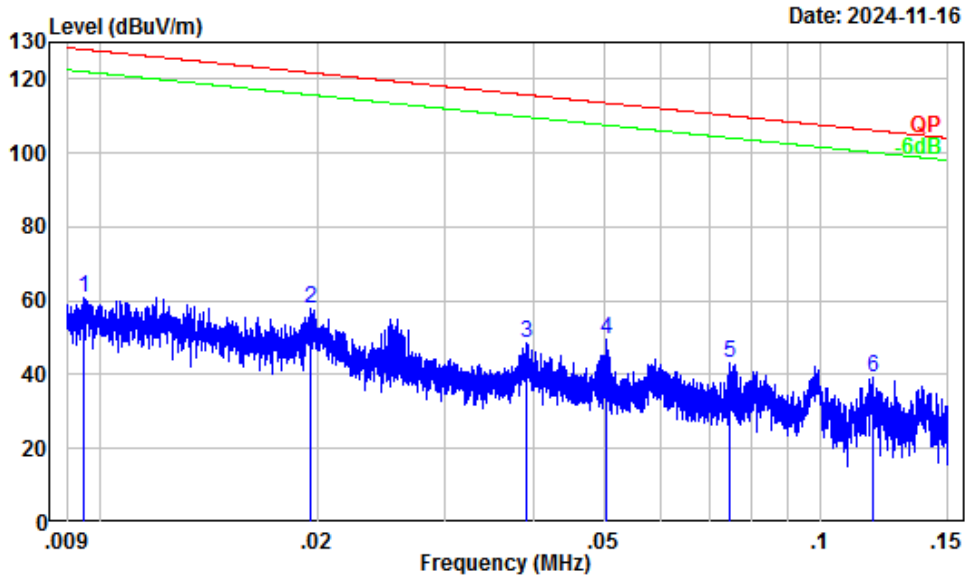*For Adapter3*


Site : Chamber A  
Condition : 3m  
Project Number: 2401Y67777E-RF  
Test Mode : BT Transmitting  
Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.01	38.10	22.78	60.88	128.06	-67.18	Peak
2	0.02	32.80	25.12	57.92	121.77	-63.85	Peak
3	0.04	25.51	22.96	48.47	115.79	-67.32	Peak
4	0.05	23.02	26.65	49.67	113.56	-63.89	Peak
5	0.07	19.72	23.64	43.36	110.12	-66.76	Peak
6	0.12	16.22	22.94	39.16	106.18	-67.02	Peak

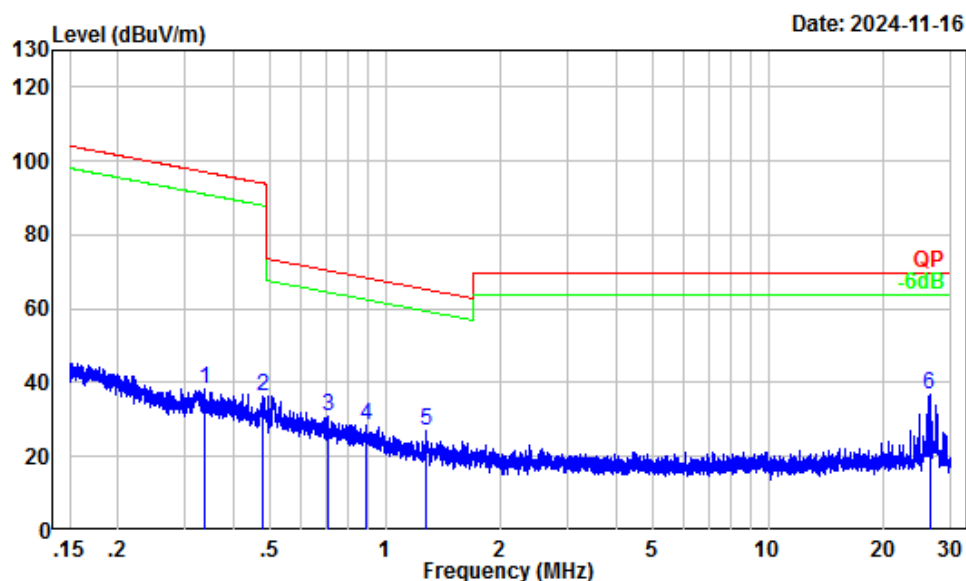


Site : Chamber A  
 Condition : 3m  
 Project Number: 2401Y67777E-RF  
 Test Mode : BT Transmitting  
 Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.34	6.94	31.39	38.33	97.05	-58.72	Peak
2	0.48	3.95	32.49	36.44	94.02	-57.58	Peak
3	0.71	0.97	29.72	30.69	70.51	-39.82	Peak
4	0.89	-0.76	29.07	28.31	68.53	-40.22	Peak
5	1.27	-2.54	29.37	26.83	65.33	-38.50	Peak
6	26.38	-4.88	41.86	36.98	69.54	-32.56	Peak

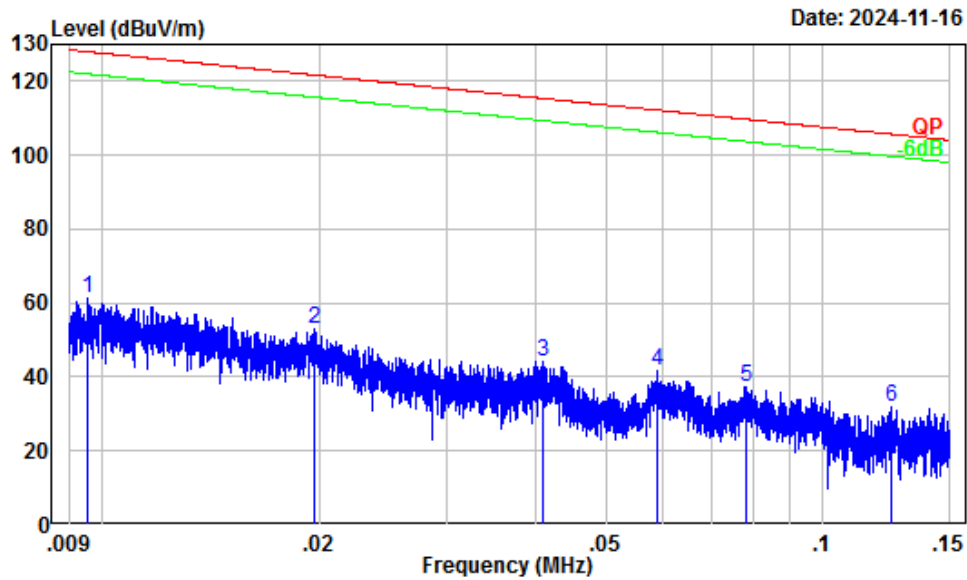*For POE*

Site : Chamber A  
Condition : 3m  
Project Number: 2401Y67777E-RF  
Test Mode : BT Transmitting  
Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.01	38.06	23.25	61.31	128.02	-66.71	Peak
2	0.02	32.74	20.04	52.78	121.72	-68.94	Peak
3	0.04	25.07	18.95	44.02	115.37	-71.35	Peak
4	0.06	21.88	19.86	41.74	112.21	-70.47	Peak
5	0.08	19.28	18.09	37.37	109.75	-72.38	Peak
6	0.12	15.91	16.10	32.01	105.70	-73.69	Peak

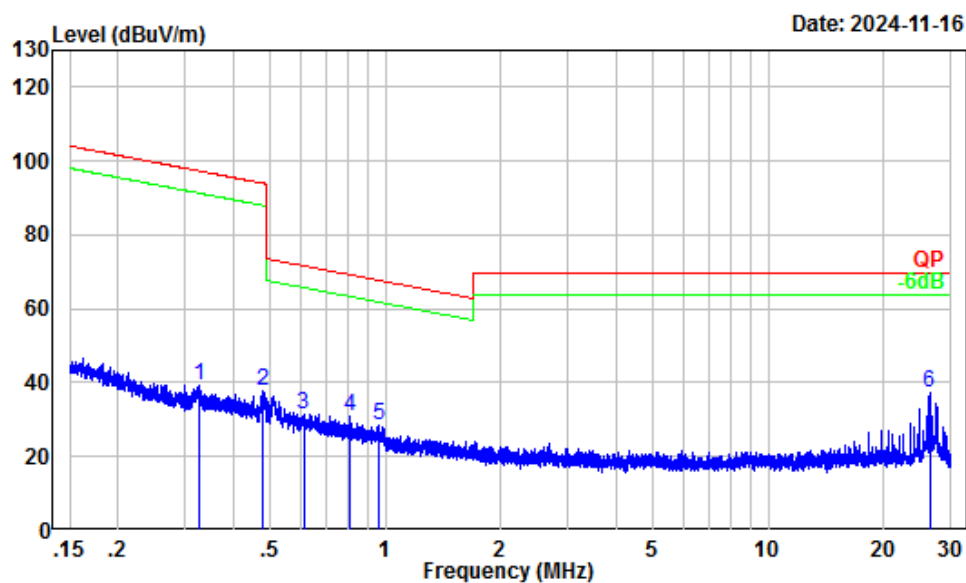


Site : Chamber A  
 Condition : 3m  
 Project Number: 2401Y67777E-RF  
 Test Mode : BT Transmitting  
 Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.32	7.19	31.92	39.11	97.37	-58.26	Peak
2	0.48	3.93	33.84	37.77	94.00	-56.23	Peak
3	0.61	2.14	29.43	31.57	71.83	-40.26	Peak
4	0.81	-0.16	31.18	31.02	69.38	-38.36	Peak
5	0.96	-1.30	29.64	28.34	67.82	-39.48	Peak
6	26.38	-4.88	42.18	37.30	69.54	-32.24	Peak

30MHz-1GHz: (Maximum output power mode, EDR Mode (8DPSK) Low channel)

For Adapter1


Horizontal

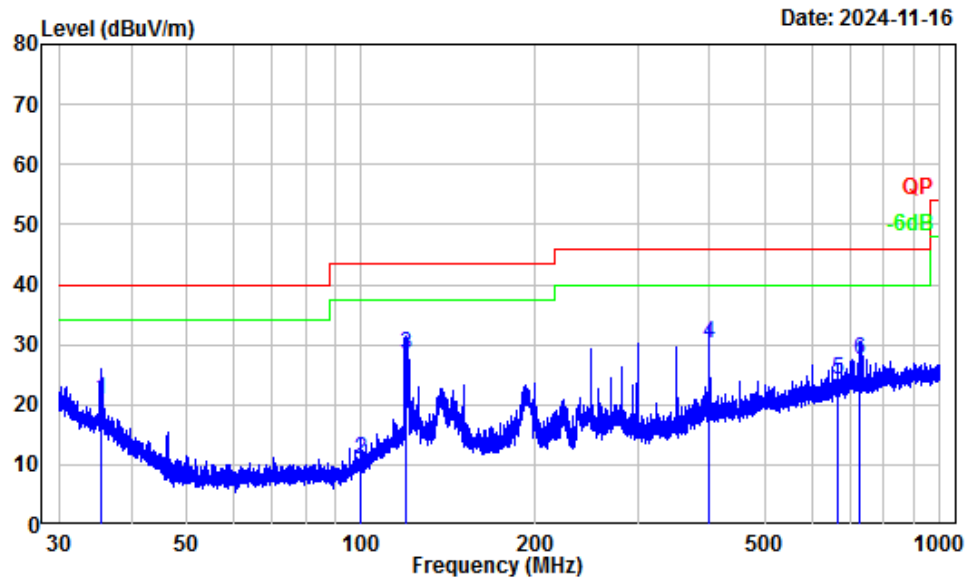

Site : Chamber A  
Condition : 3m Horizontal  
Project Number: 2401Y67777E-RF  
Test Mode : BT Transmitting  
Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	35.56	-9.22	30.00	20.78	40.00	-19.22	QP
2	99.97	-15.90	26.91	11.01	43.50	-32.49	QP
3	119.80	-11.47	39.77	28.30	43.50	-15.20	QP
4	400.08	-8.41	38.69	30.28	46.00	-15.72	QP
5	665.22	-3.87	27.92	24.05	46.00	-21.95	QP
6	728.40	-3.13	30.64	27.51	46.00	-18.49	QP

Vertical

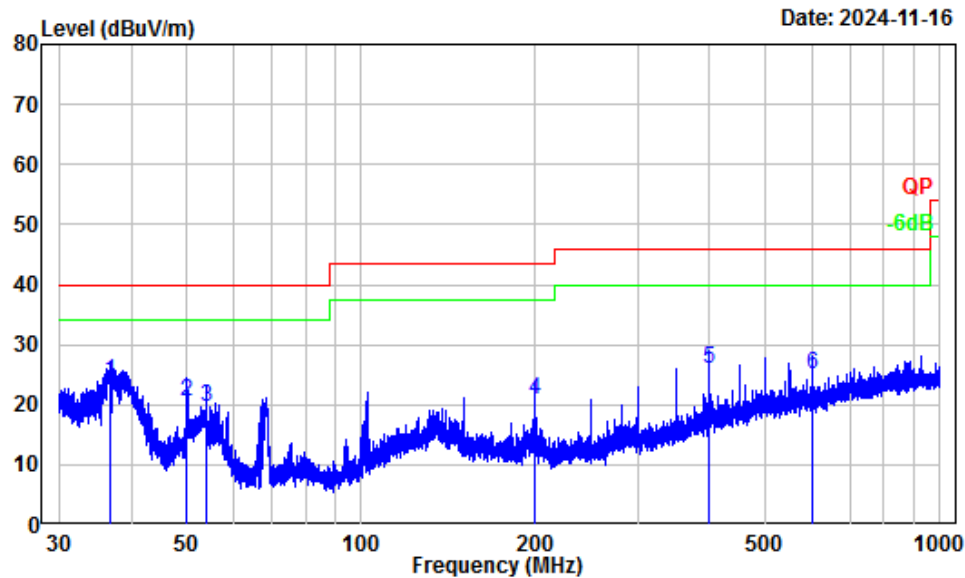


Site : Chamber A  
Condition : 3m Vertical  
Project Number: 2401Y67777E-RF  
Test Mode : BT Transmitting  
Tester : Anson Su

	Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	36.77		-10.09	33.80	23.71	40.00	-16.29	QP
2	49.97		-17.91	38.36	20.45	40.00	-19.55	QP
3	53.91		-18.32	38.03	19.71	40.00	-20.29	QP
4	199.99		-13.06	33.89	20.83	43.50	-22.67	QP
5	400.08		-8.41	34.41	26.00	46.00	-20.00	QP
6	600.11		-5.28	30.37	25.09	46.00	-20.91	QP



For Adapter2


Horizontal

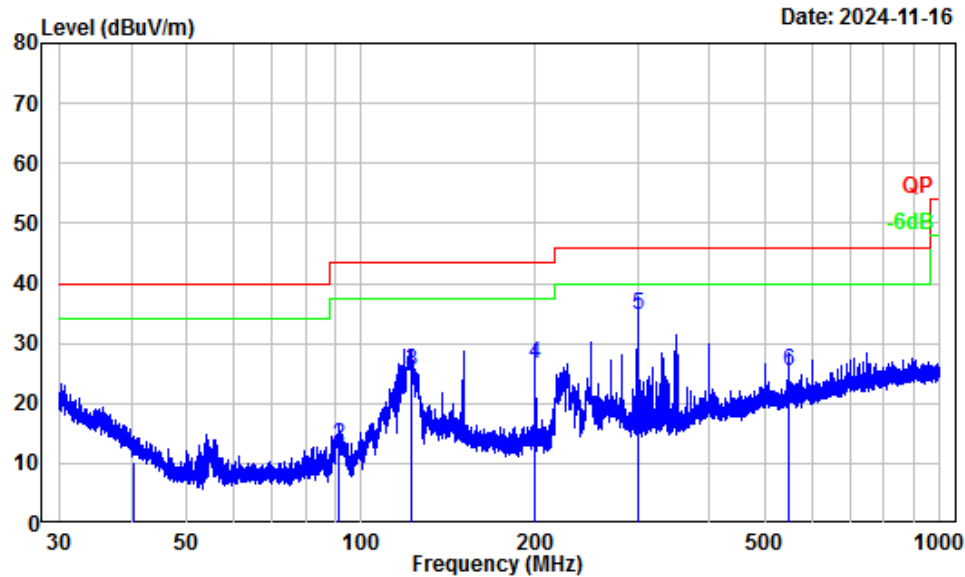

Site : Chamber A  
Condition : 3m Horizontal  
Project Number: 2401Y67777E-RF  
Test Mode : BT Transmitting  
Tester : Anson Su

	Freq Factor		Read Level		Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	Limit	
1	40.35	-12.61	22.95	10.34	40.00	-29.66	QP
2	91.45	-17.90	31.02	13.12	43.50	-30.38	QP
3	121.66	-11.28	36.60	25.32	43.50	-18.18	QP
4	199.99	-13.06	39.77	26.71	43.50	-16.79	QP
5	299.97	-11.20	45.84	34.64	46.00	-11.36	QP
6	549.02	-5.51	30.88	25.37	46.00	-20.63	QP

Vertical

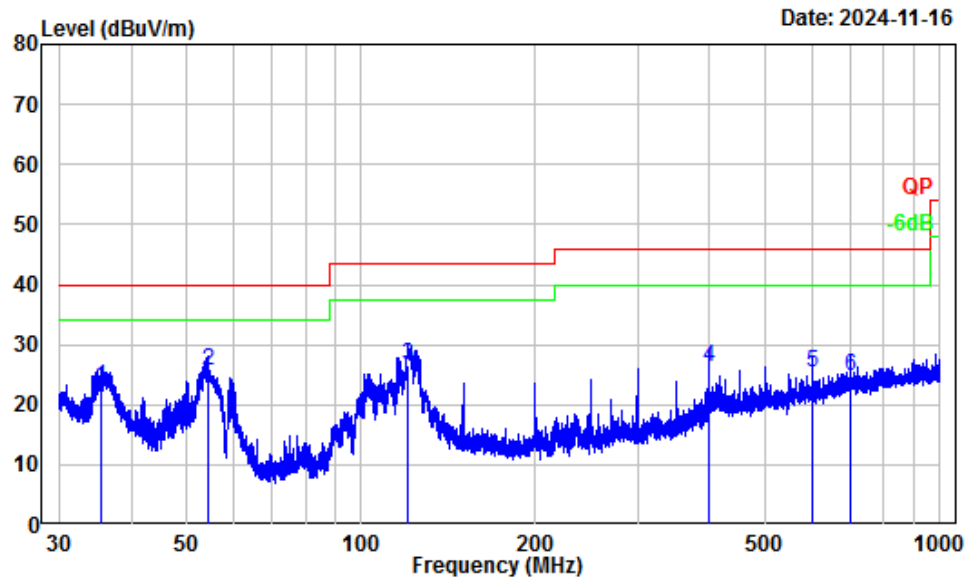


Site : Chamber A  
Condition : 3m Vertical  
Project Number: 2401Y67777E-RF  
Test Mode : BT Transmitting  
Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	35.47	-9.16	32.19	23.03	40.00	-16.97	QP
2	54.21	-18.32	44.00	25.68	40.00	-14.32	QP
3	120.65	-11.39	38.08	26.69	43.50	-16.81	QP
4	400.08	-8.41	34.54	26.13	46.00	-19.87	QP
5	600.11	-5.28	30.51	25.23	46.00	-20.77	QP
6	701.15	-3.50	28.36	24.86	46.00	-21.14	QP

For Adapter3


Horizontal

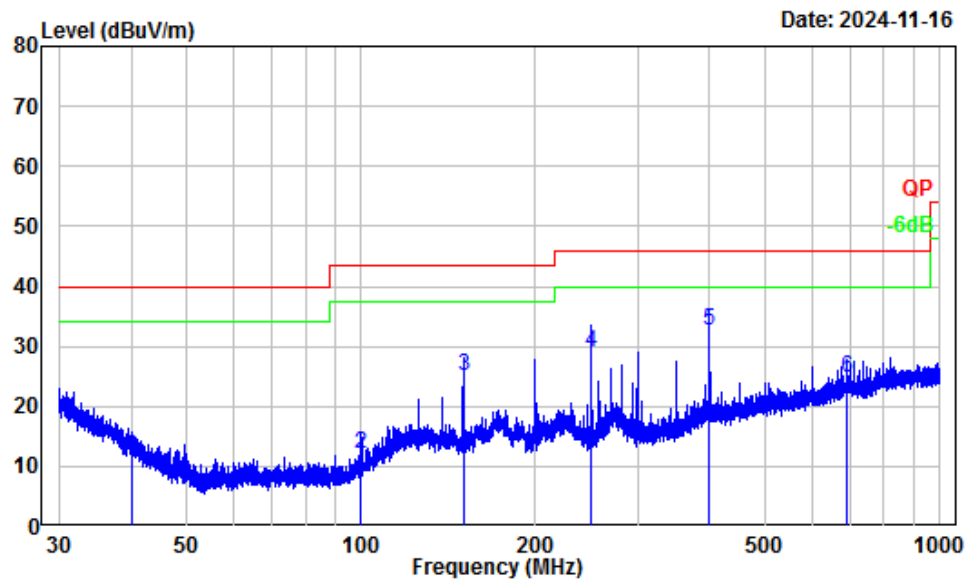

Site : Chamber A  
Condition : 3m Horizontal  
Project Number: 2401Y67777E-RF  
Test Mode : BT Transmitting  
Tester : Anson Su

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	Limit	
1	40.01 -12.38	23.94	11.56	40.00	-28.44	QP
2	100.01 -15.89	27.97	12.08	43.50	-31.42	QP
3	150.01 -12.46	37.43	24.97	43.50	-18.53	QP
4	249.97 -13.09	42.20	29.11	46.00	-16.89	QP
5	400.08 -8.41	41.13	32.72	46.00	-13.28	QP
6	688.96 -3.67	28.57	24.90	46.00	-21.10	QP

Vertical

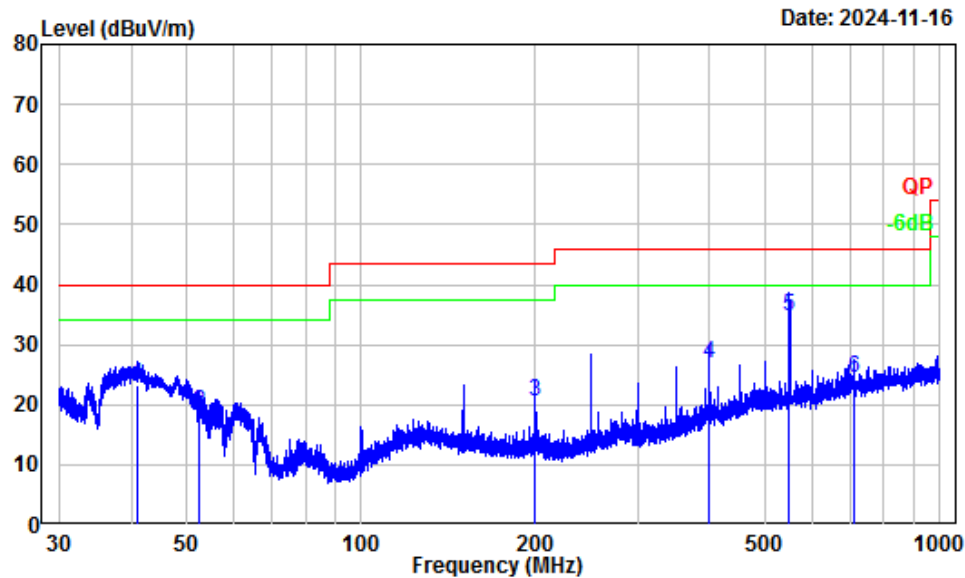


Site : Chamber A  
Condition : 3m Vertical  
Project Number: 2401Y67777E-RF  
Test Mode : BT Transmitting  
Tester : Anson Su

	Freq Factor		Read Level	Limit Level	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	40.95	-13.05	36.23	23.18	40.00	-16.82 QP
2	52.41	-18.25	37.05	18.80	40.00	-21.20 QP
3	199.99	-13.06	33.67	20.61	43.50	-22.89 QP
4	400.08	-8.41	35.33	26.92	46.00	-19.08 QP
5	549.98	-5.43	40.00	34.57	46.00	-11.43 QP
6	712.92	-3.35	27.72	24.37	46.00	-21.63 QP

For POE


Horizontal

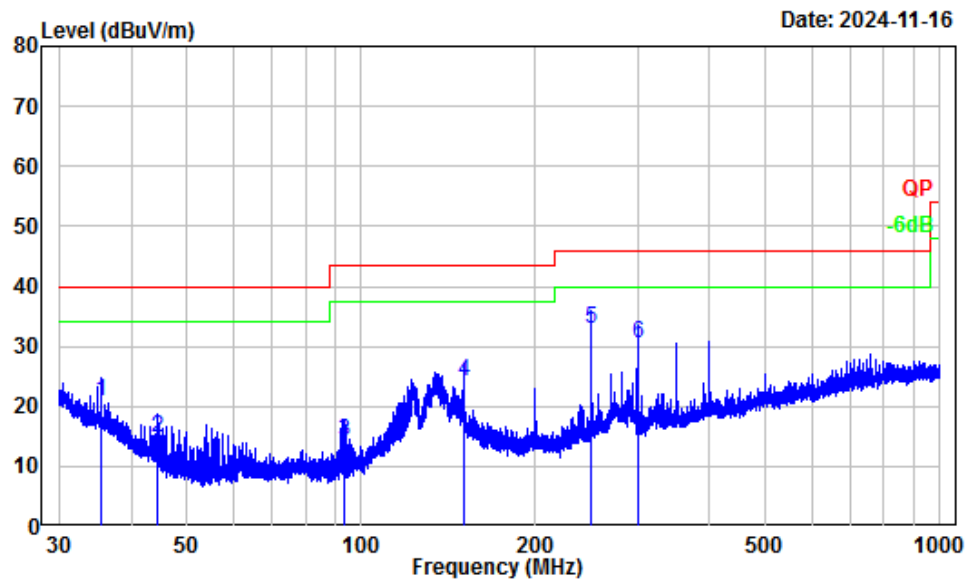

Site : Chamber A  
Condition : 3m Horizontal  
Project Number: 2401Y67777E-RF  
Test Mode : BT Transmitting  
Tester : Anson Su

	Freq Factor		Read Level		Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	Limit	
1	35.47	-9.16	30.11	20.95	40.00	-19.05	QP
2	44.53	-15.55	30.24	14.69	40.00	-25.31	QP
3	93.40	-17.60	31.85	14.25	43.50	-29.25	QP
4	150.01	-12.46	36.48	24.02	43.50	-19.48	QP
5	249.97	-13.09	46.04	32.95	46.00	-13.05	QP
6	299.97	-11.20	41.56	30.36	46.00	-15.64	QP

Vertical

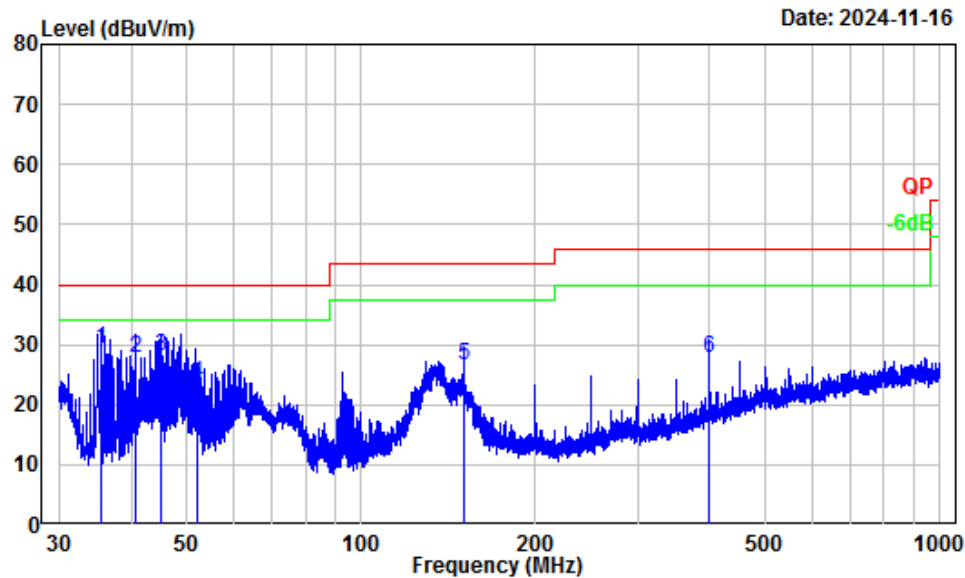

Site : Chamber A  
Condition : 3m Vertical  
Project Number: 2401Y67777E-RF  
Test Mode : BT Transmitting  
Tester : Anson Su

	Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	35.45	-9.16	38.56	29.40	40.00	-10.60	QP
2	40.76	-12.90	40.64	27.74	40.00	-12.26	QP
3	45.04	-15.90	43.90	28.00	40.00	-12.00	QP
4	52.23	-18.23	41.68	23.45	40.00	-16.55	QP
5	150.01	-12.46	39.02	26.56	43.50	-16.94	QP
6	400.08	-8.41	36.11	27.70	46.00	-18.30	QP

**Above 1GHz:**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave					
Maximum output power mode, EDR Mode (8DPSK)							
Low Channel 2402MHz							
4804.00	47.96	PK	H	2.42	50.38	74	-23.62
4804.00	48.57	PK	V	2.42	50.99	74	-23.01
Middle Channel 2441MHz							
4882.00	48.75	PK	H	2.58	51.33	74	-22.67
4882.00	49.38	PK	V	2.58	51.96	74	-22.04
High Channel 2480MHz							
4960.00	48.34	PK	H	2.68	51.02	74	-22.98
4960.00	48.89	PK	V	2.68	51.57	74	-22.43

**Note:**

Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor


Corrected Amplitude = Factor + Reading

Margin = Corrected. Amplitude - Limit


The other spurious emission which is in the noise floor level was not recorded.


The test result of peak was less than the limit of average, so just peak values were recorded.


Test plots for Band Edge Measurements (Radiated):

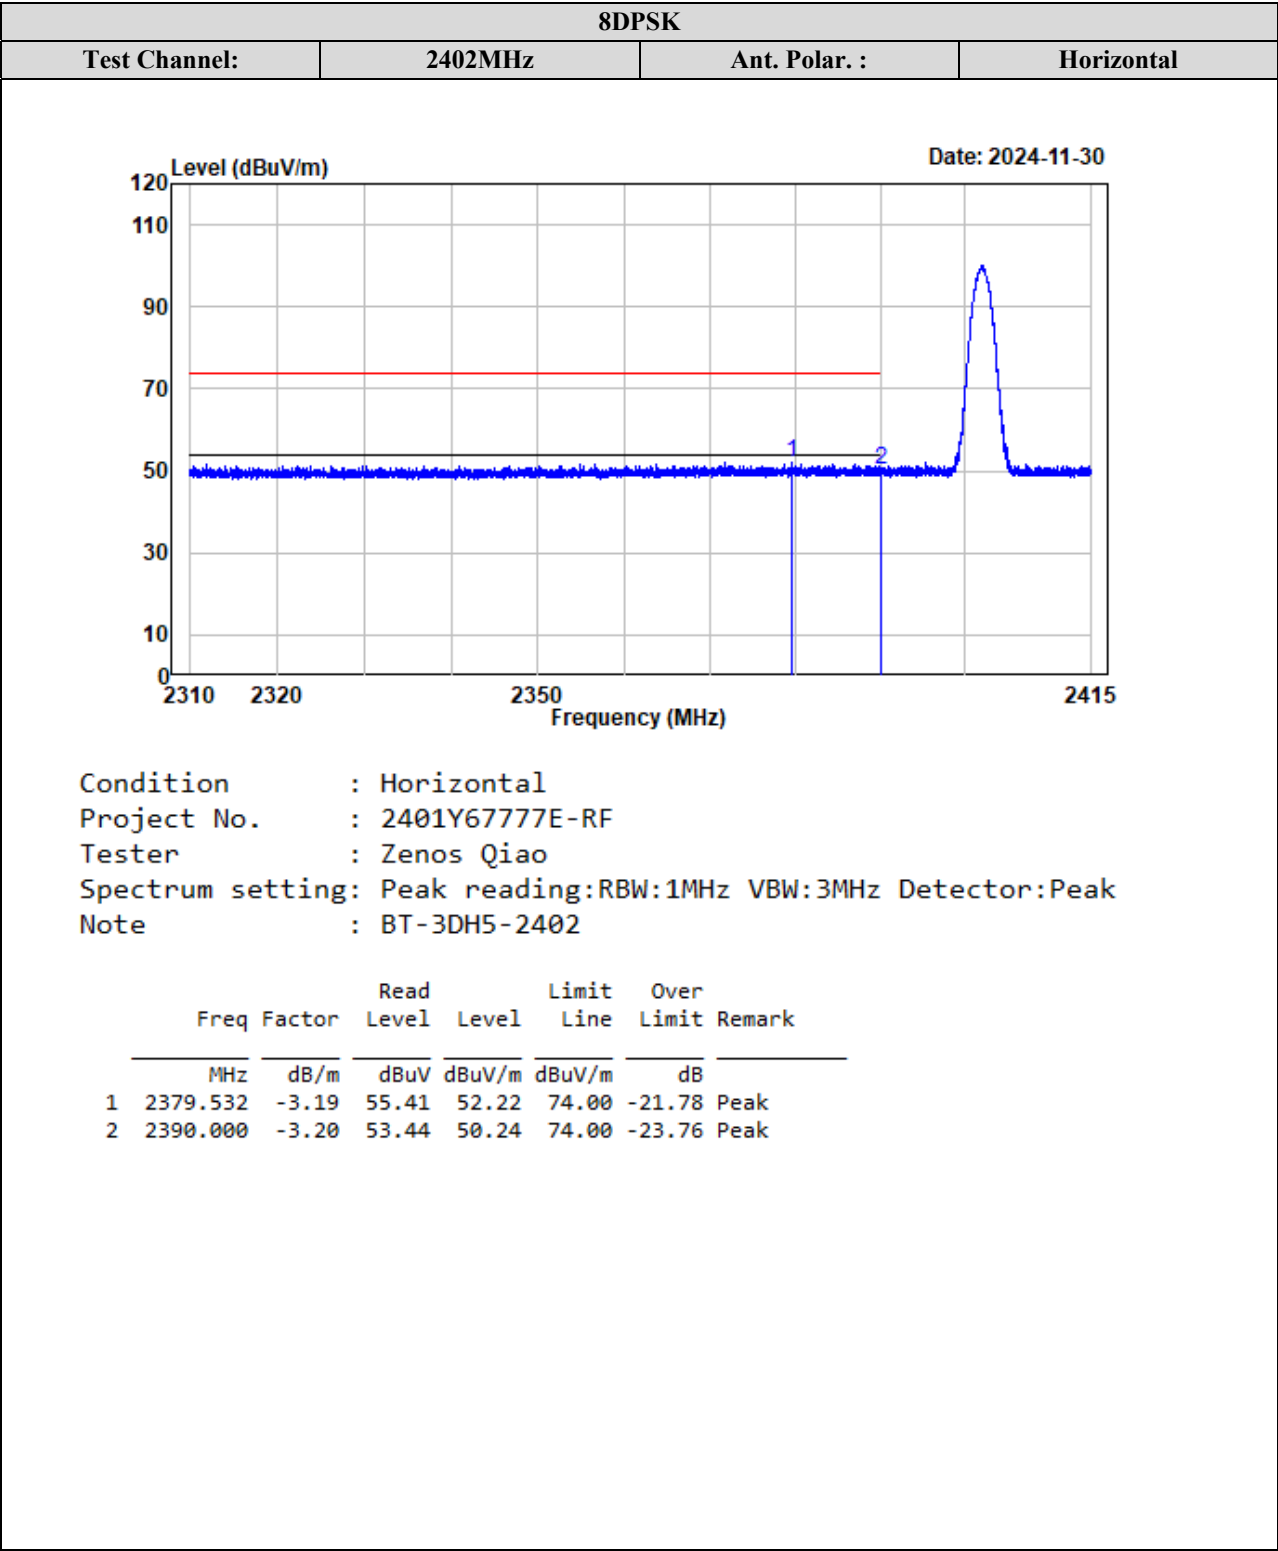




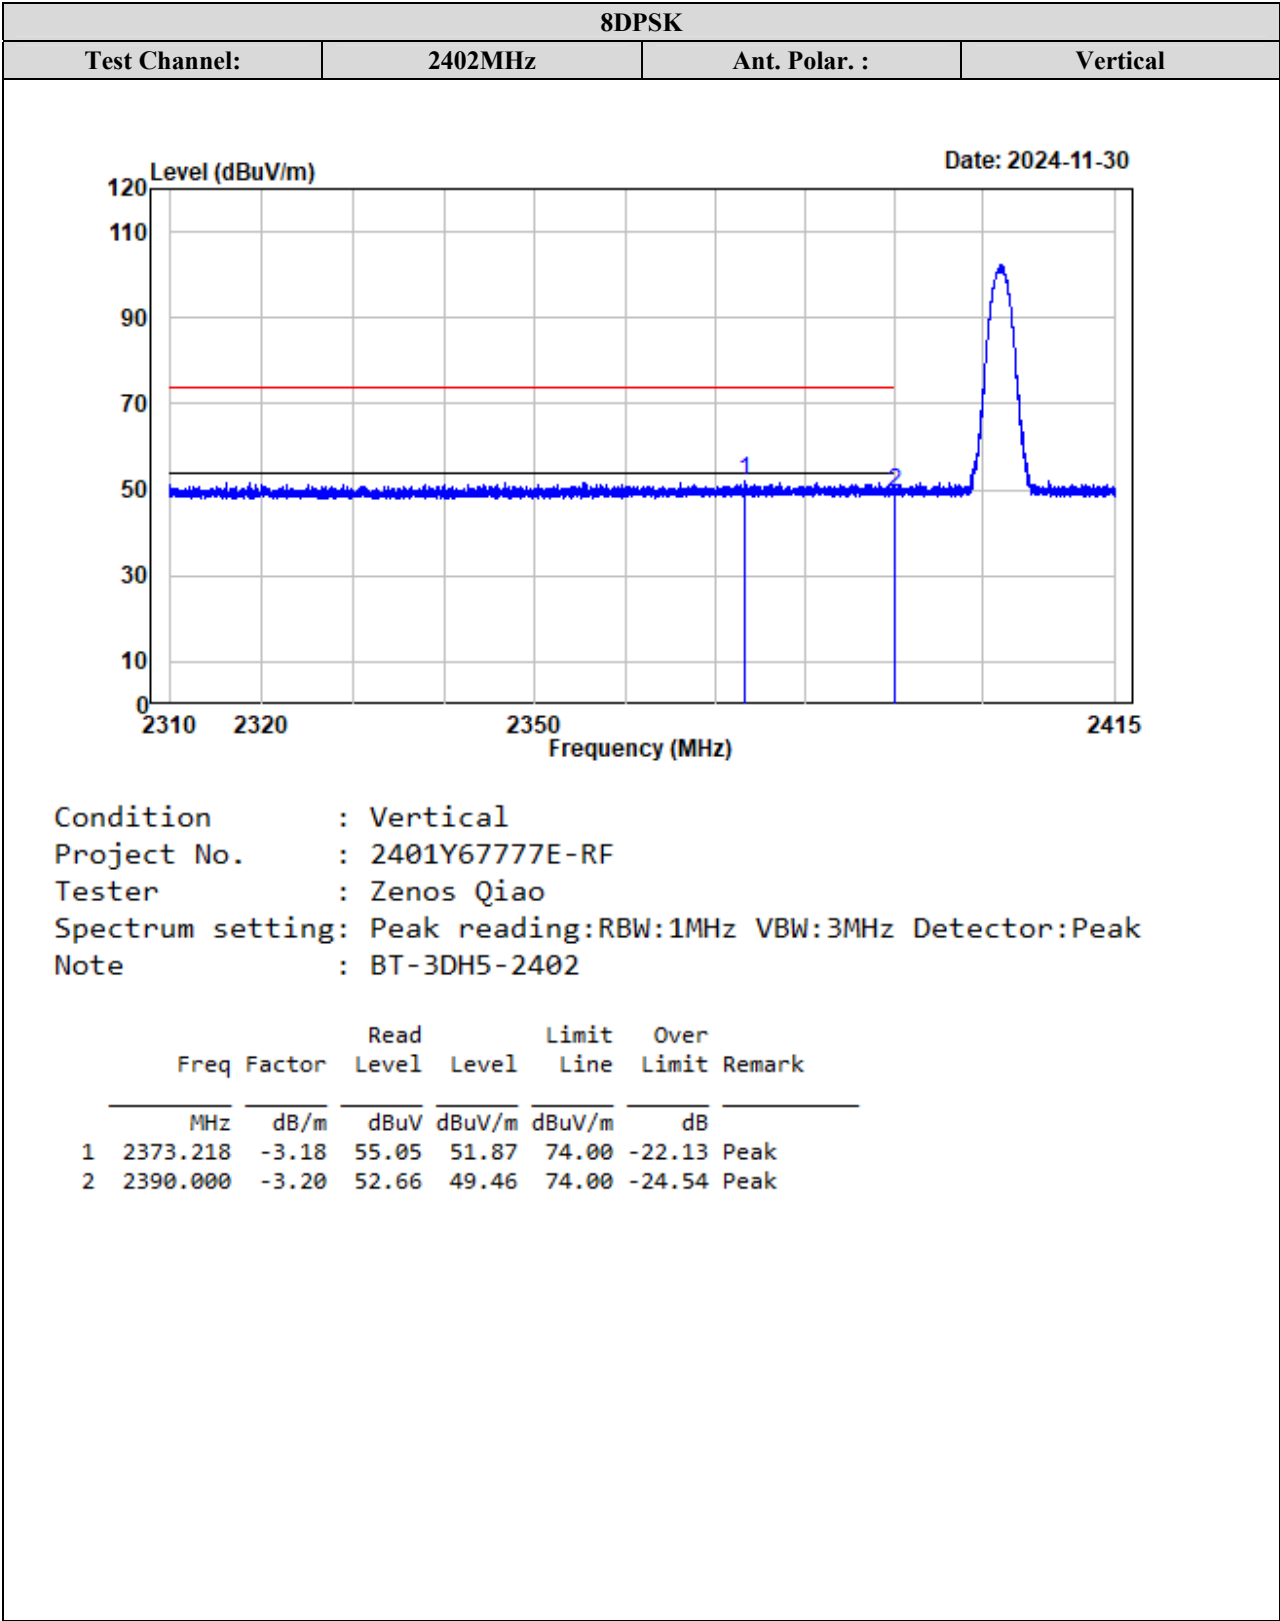


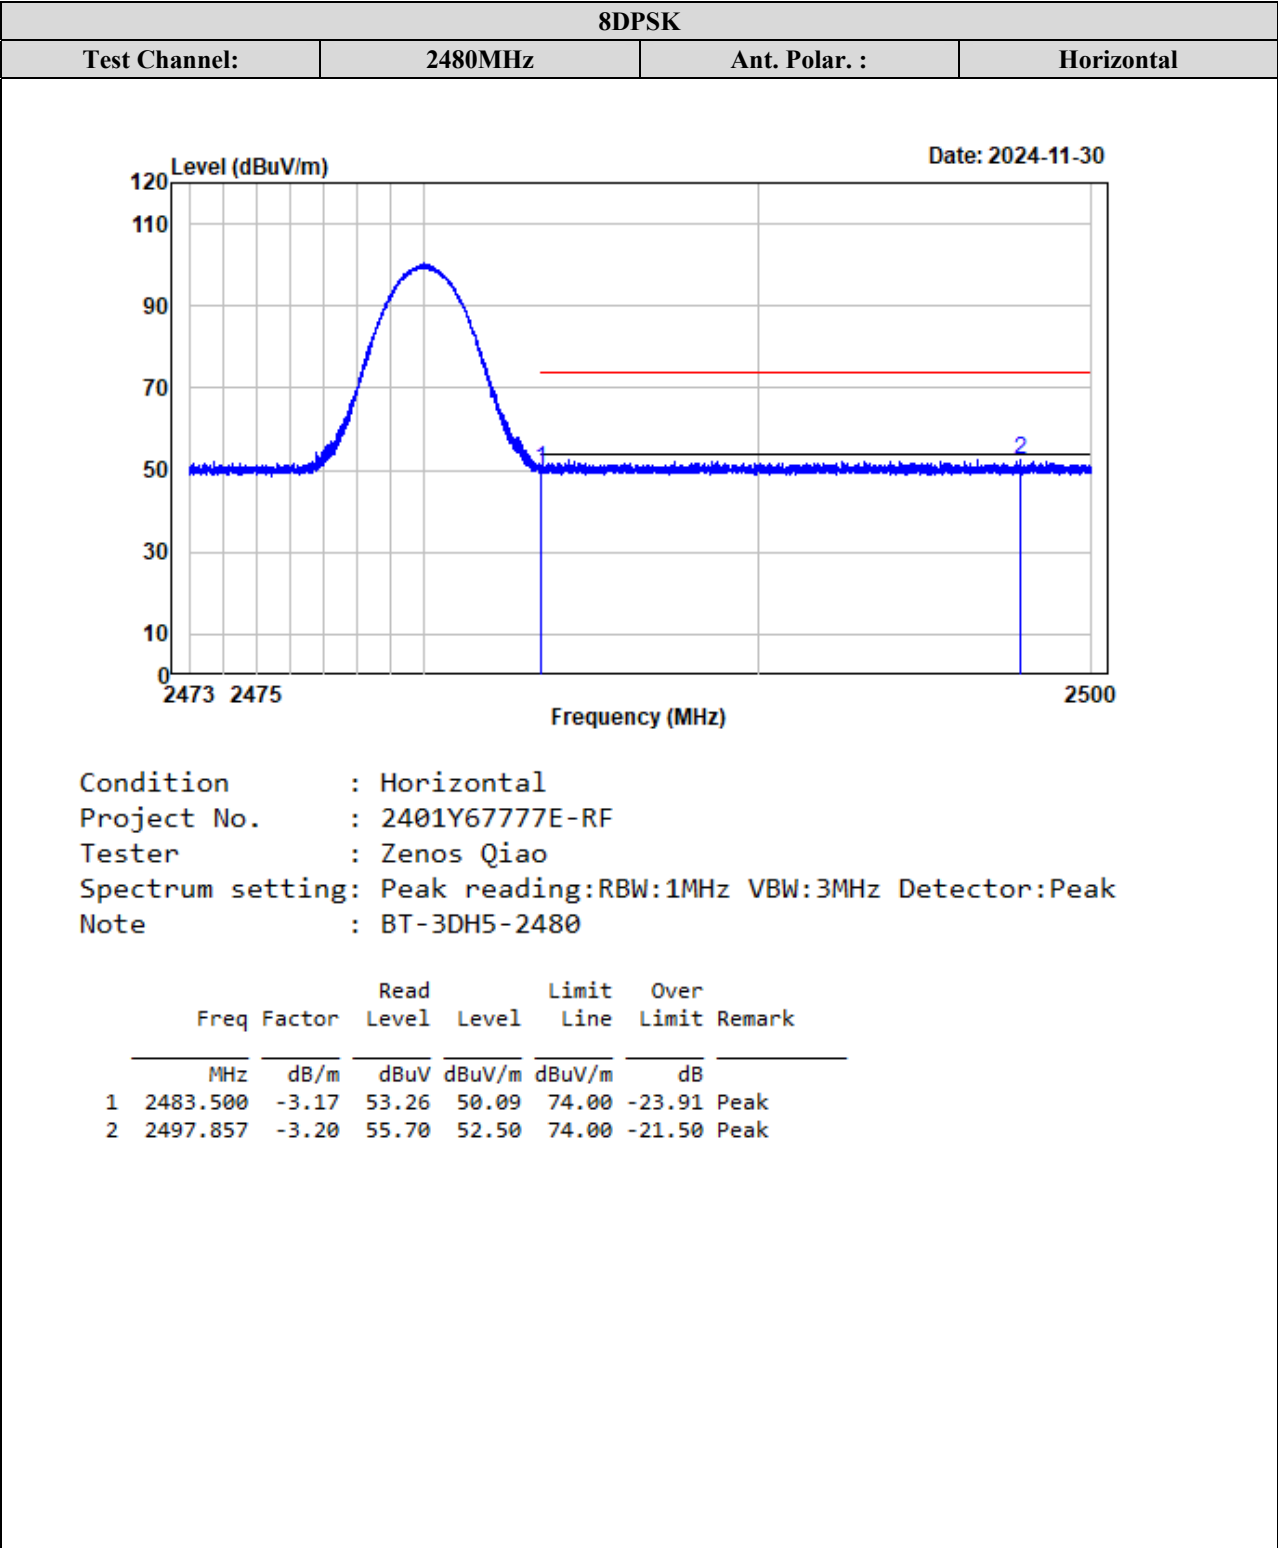


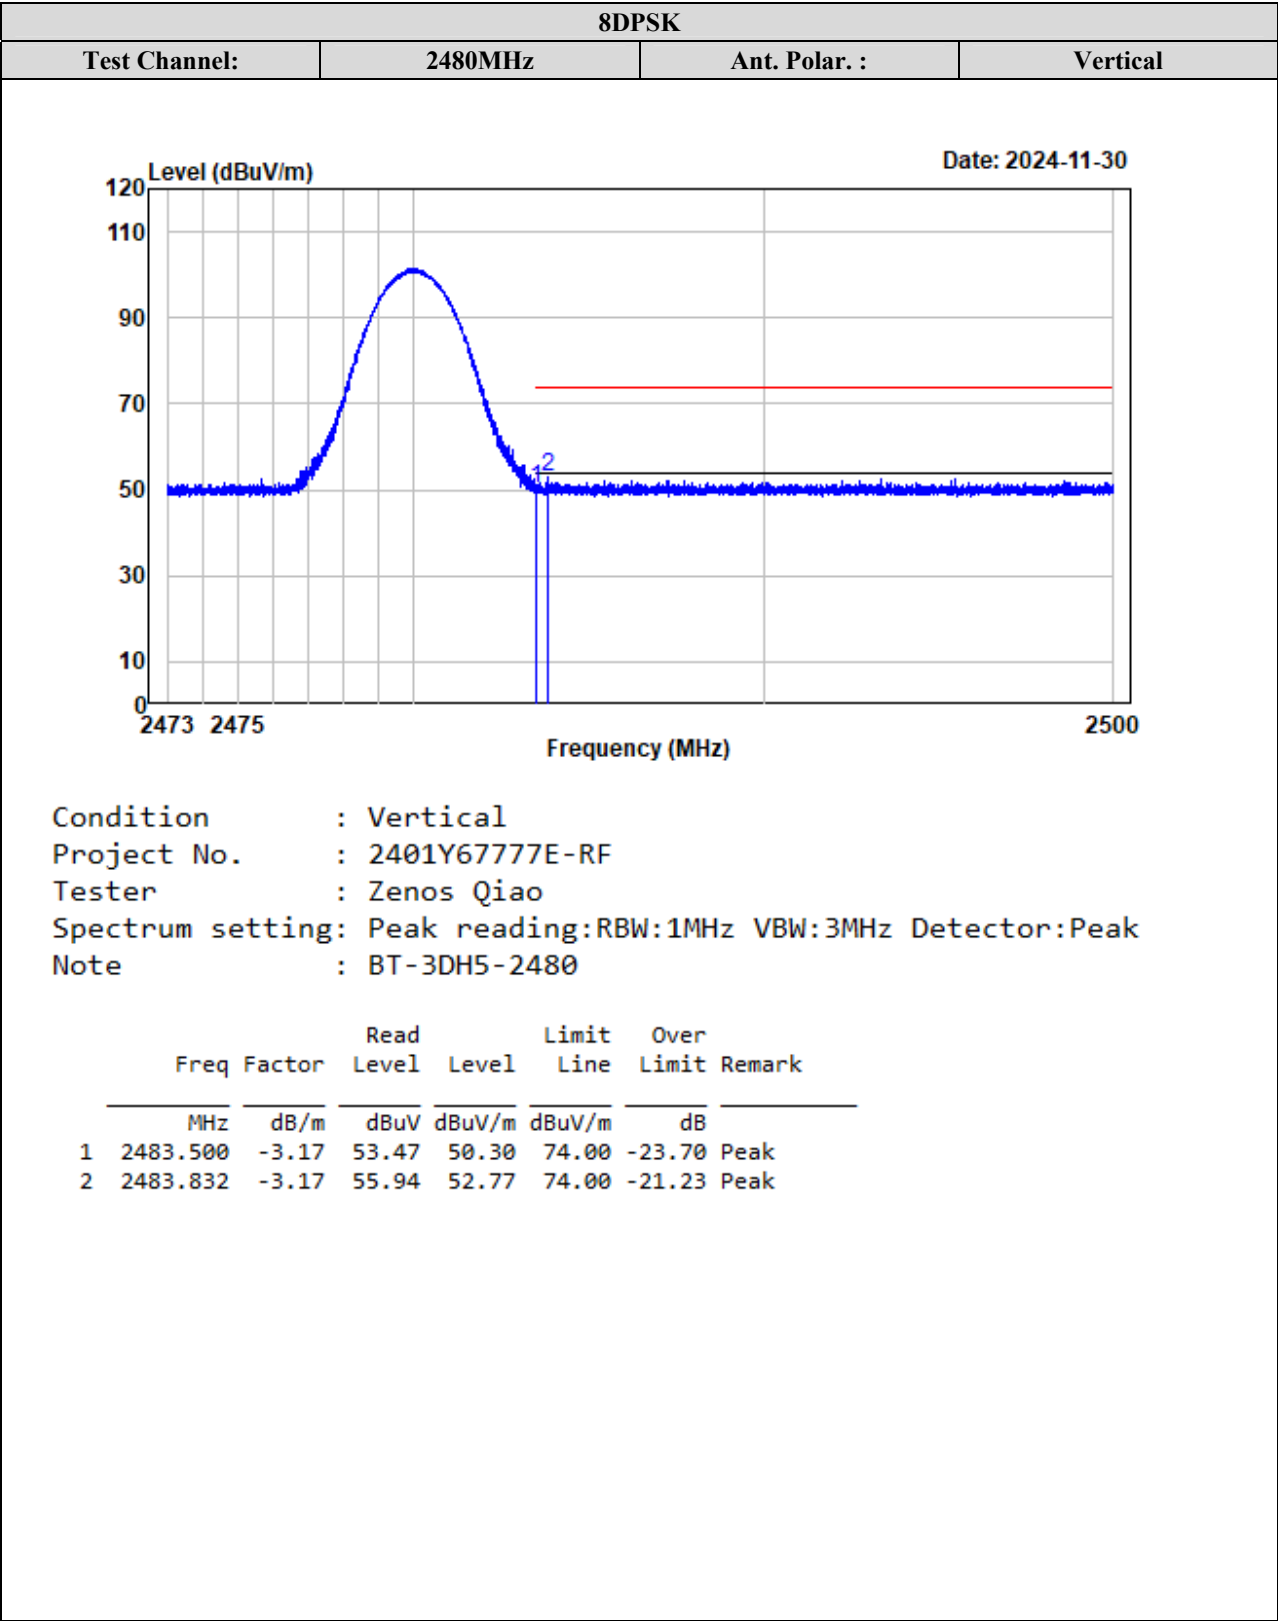



Listed with the worst harmonic margin test plot:

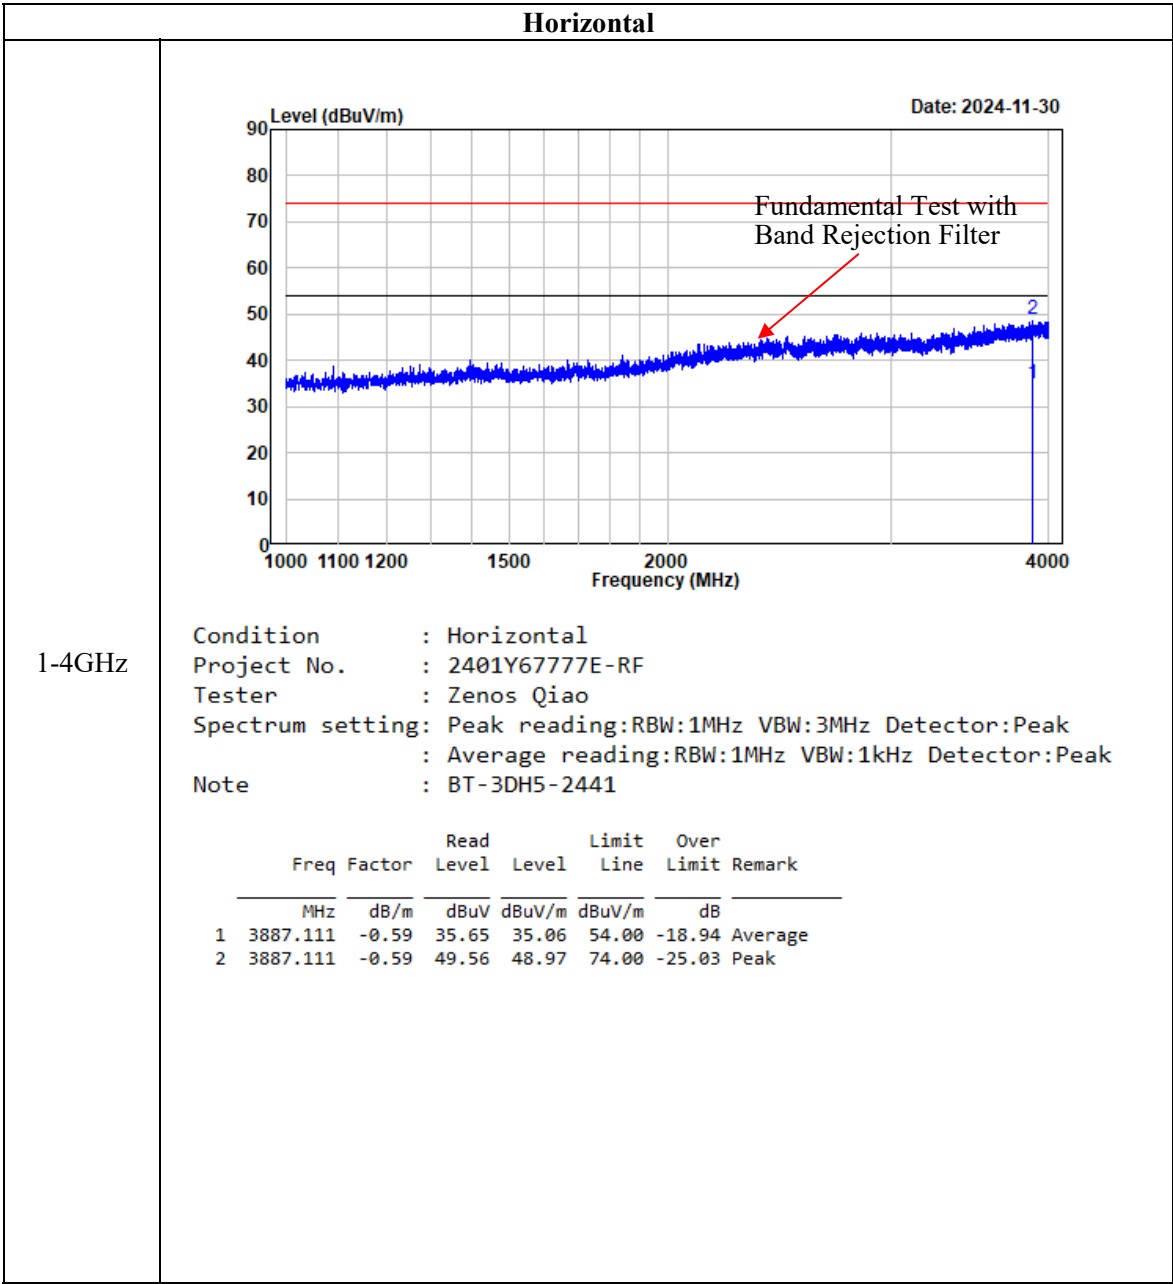

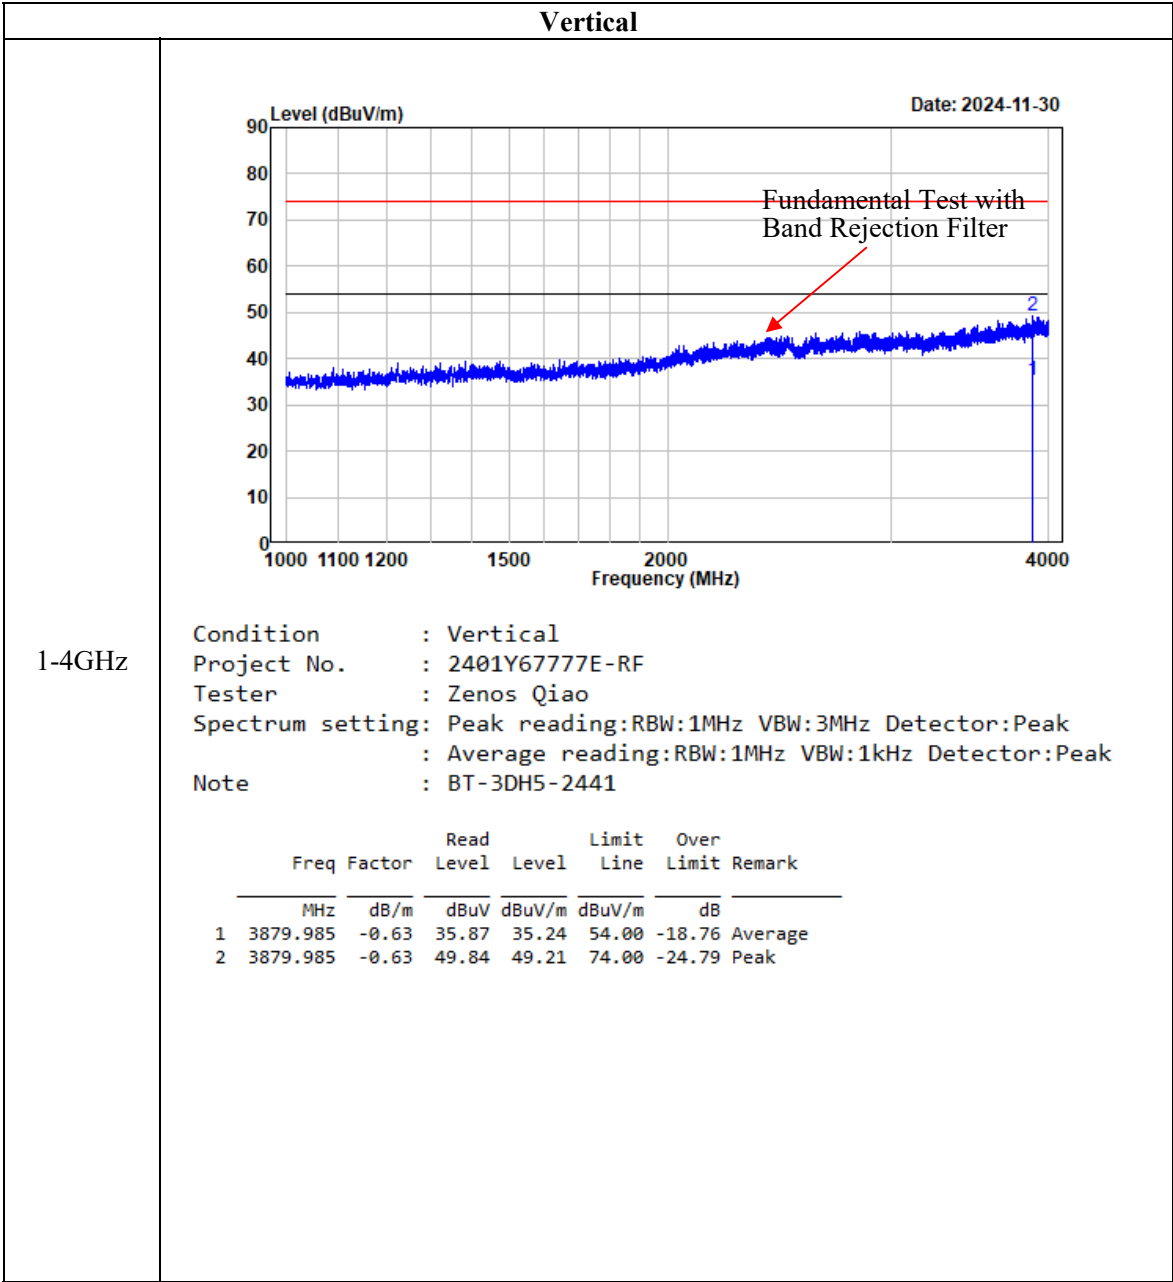


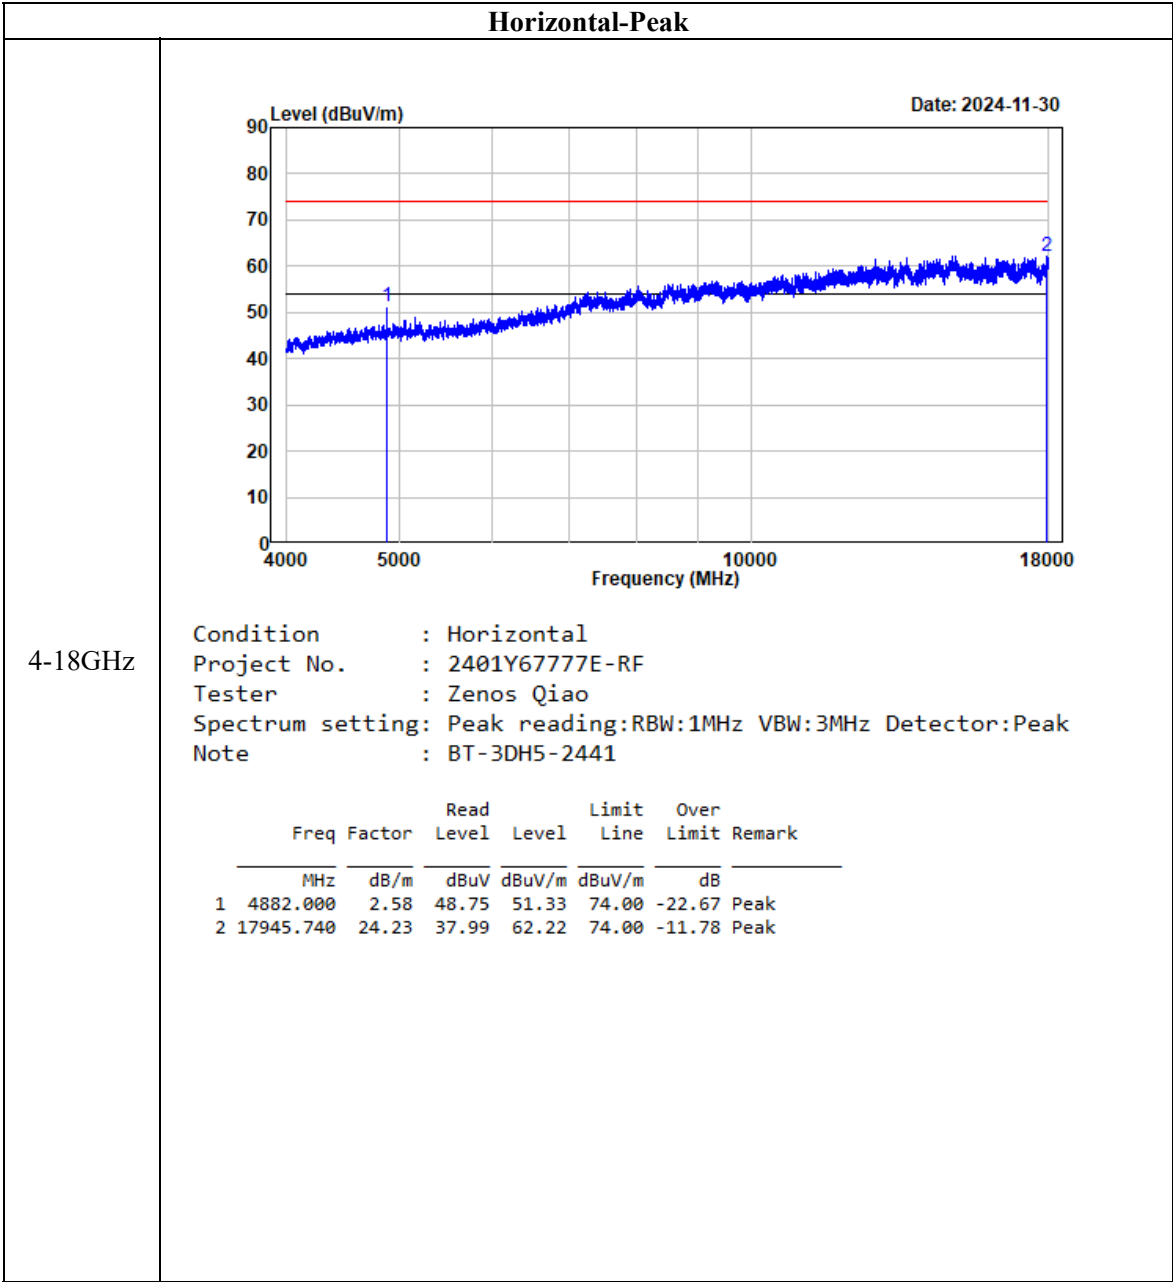


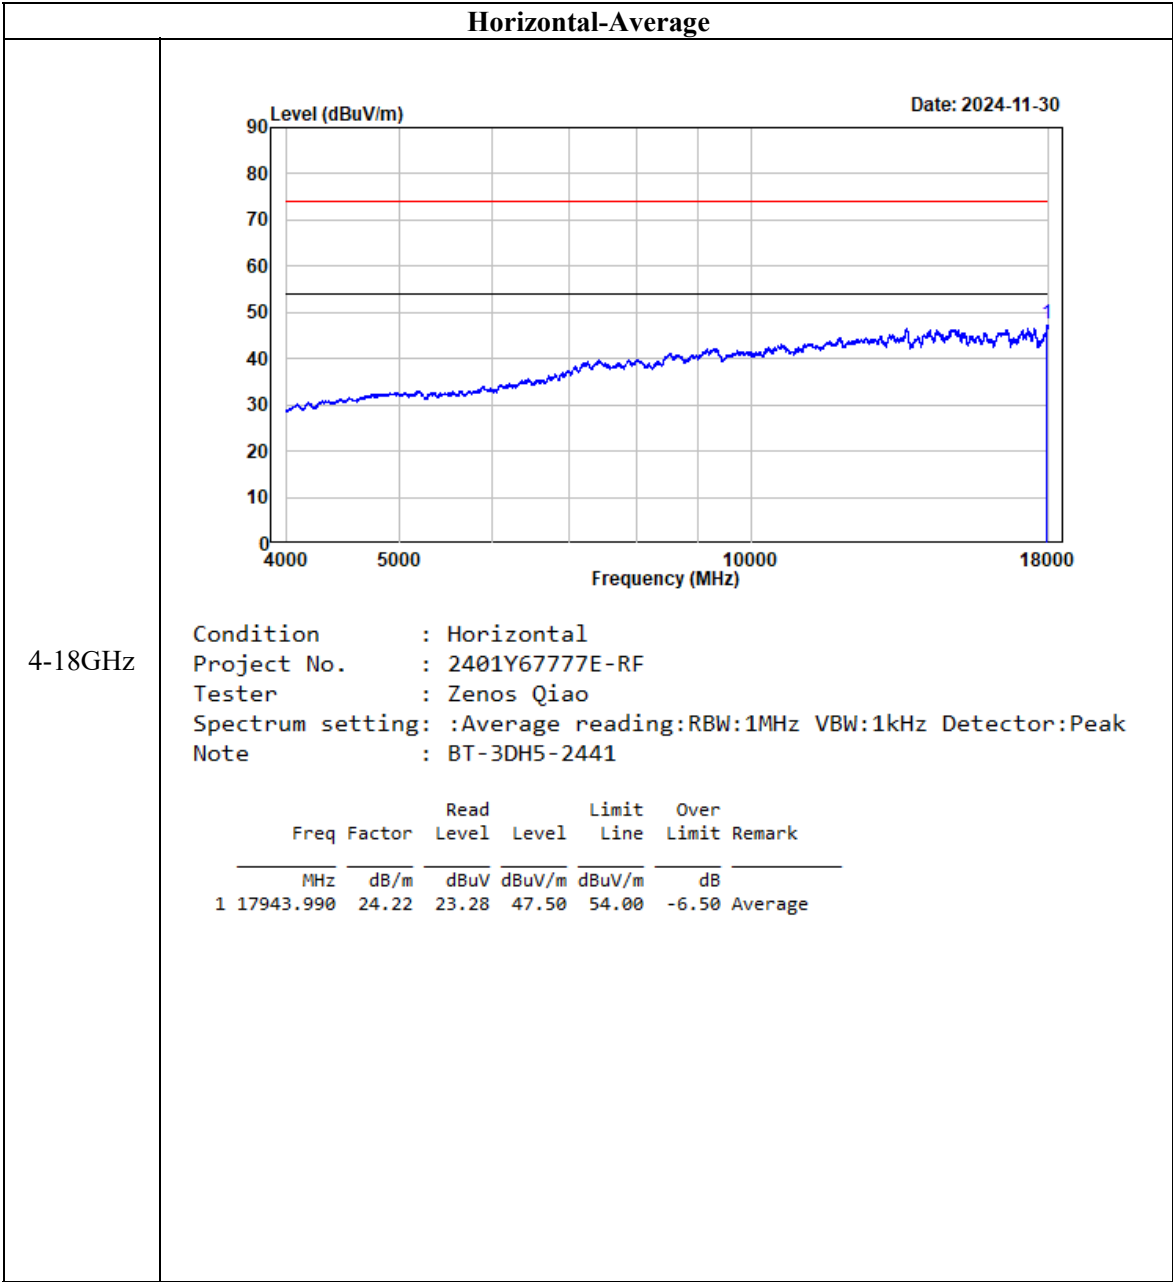


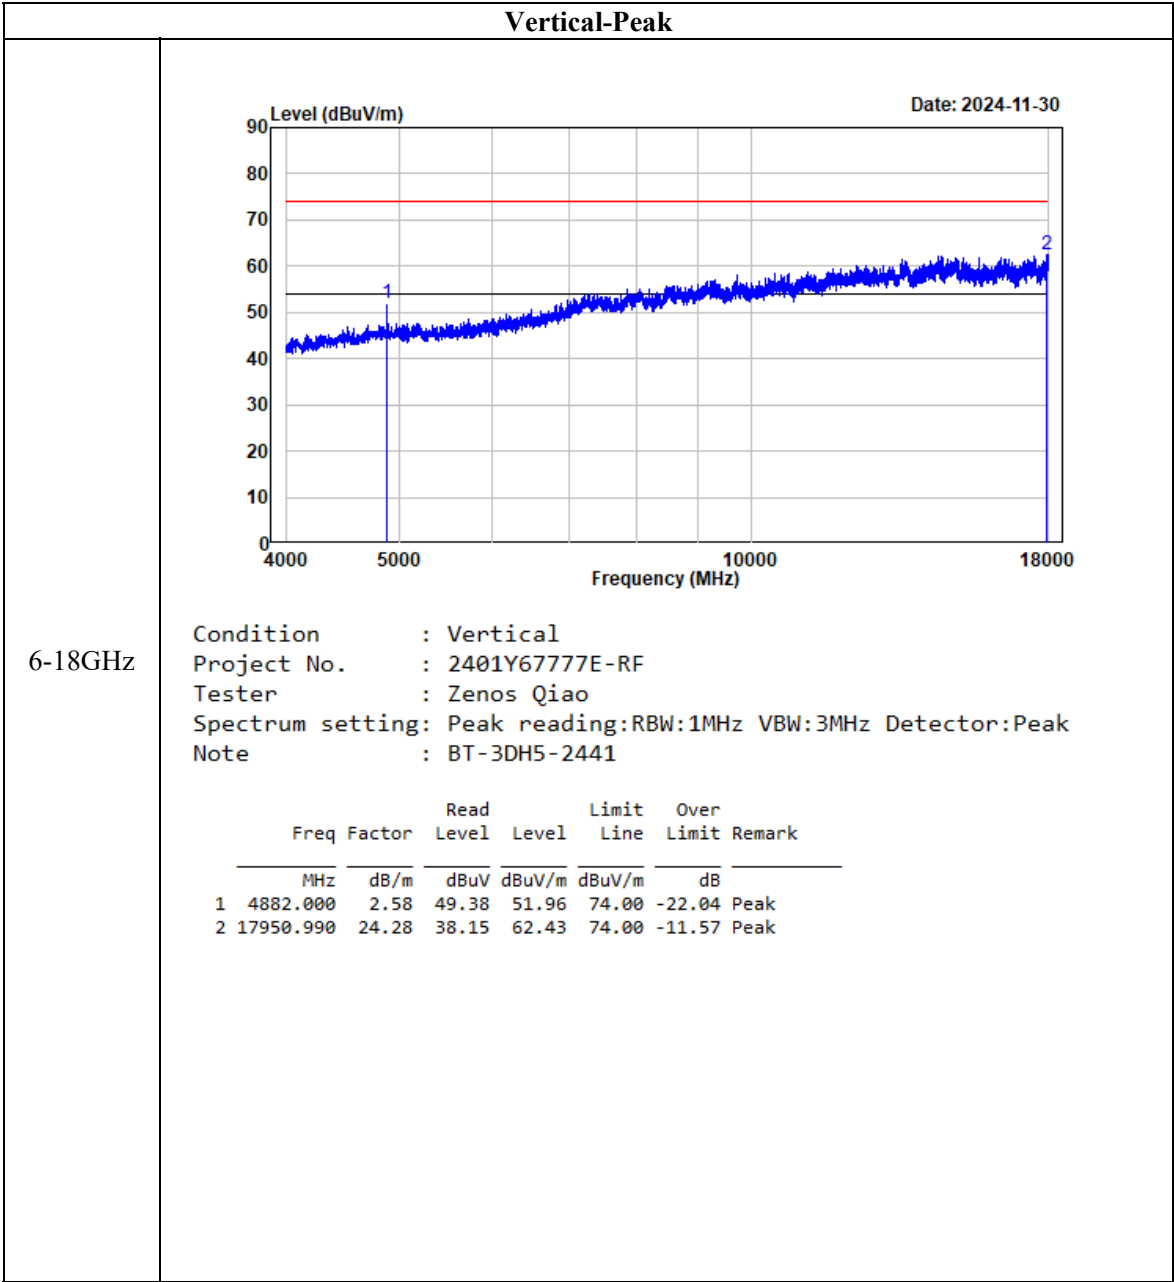



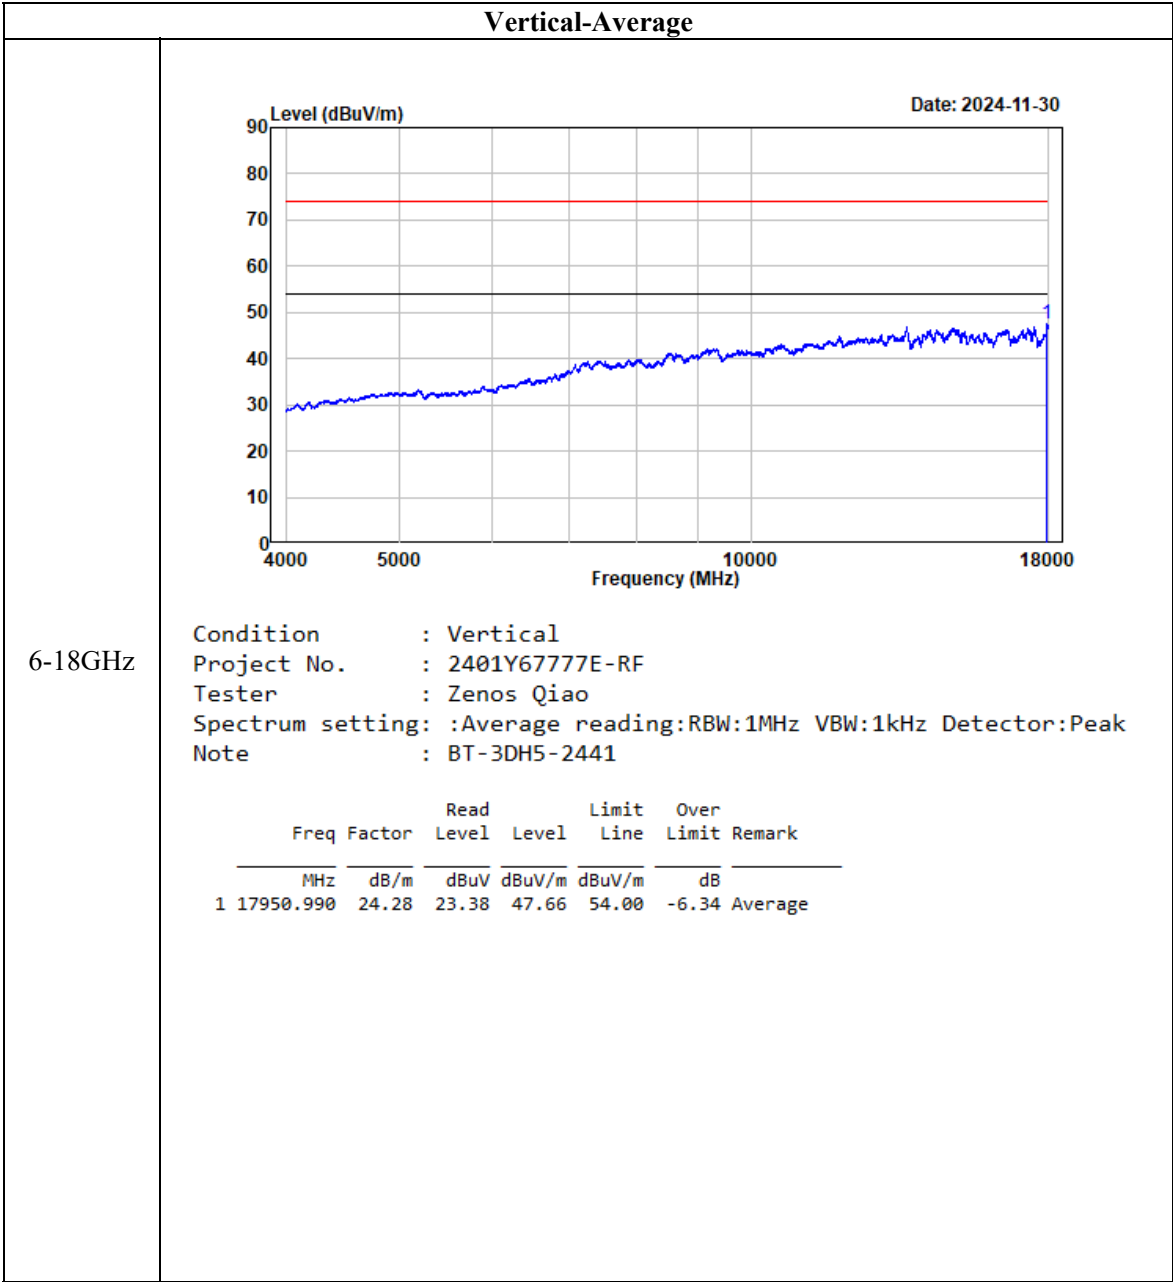

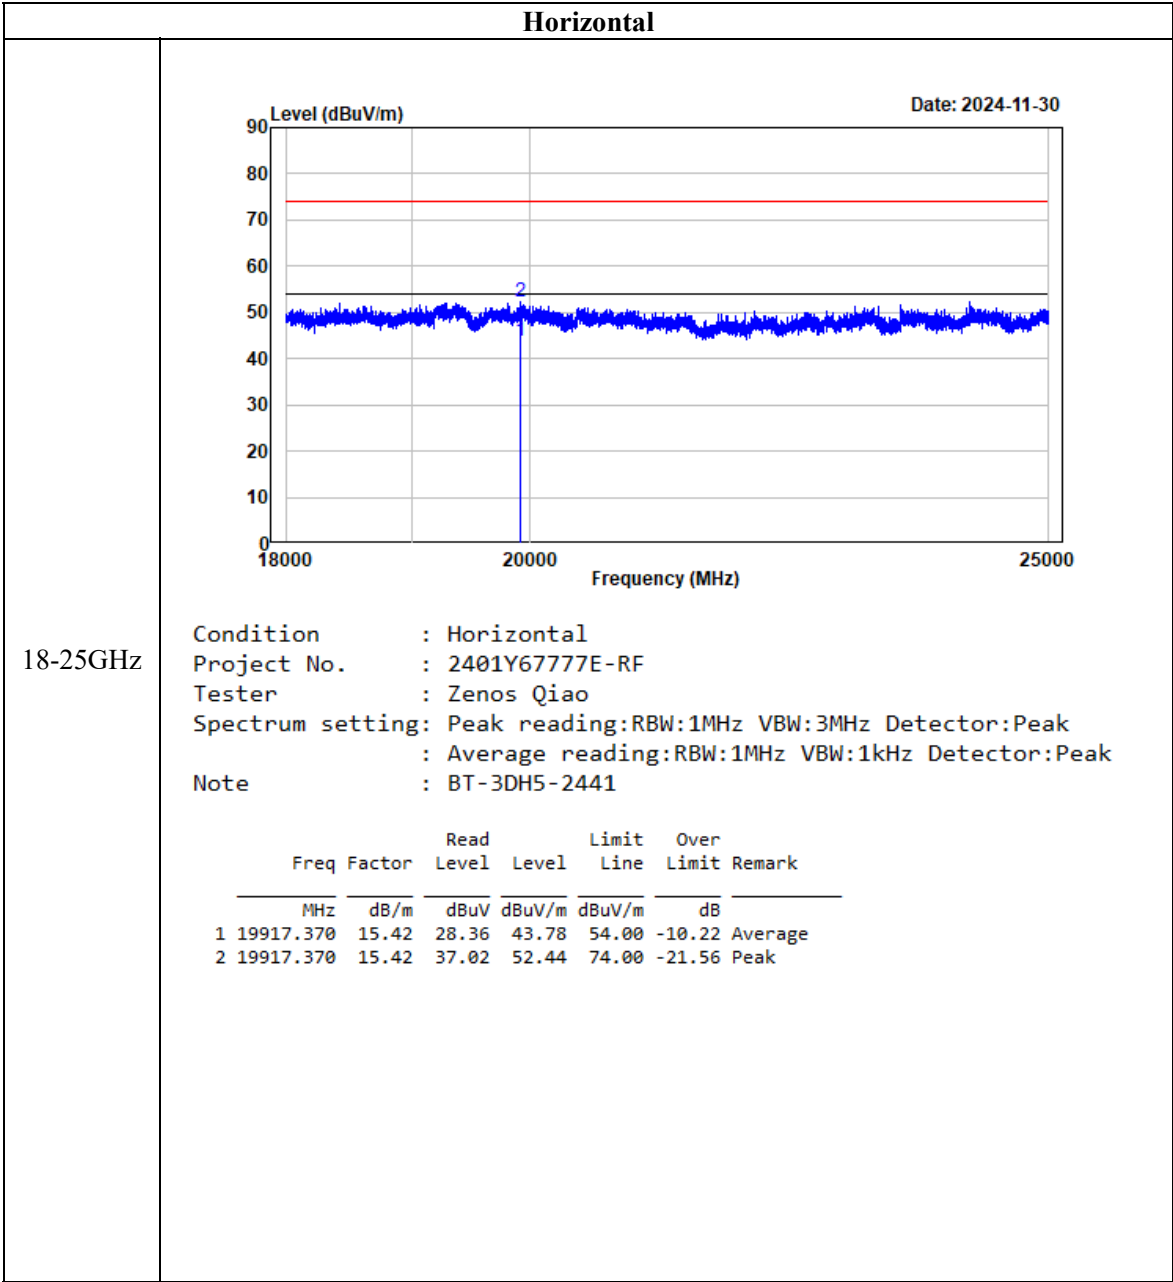

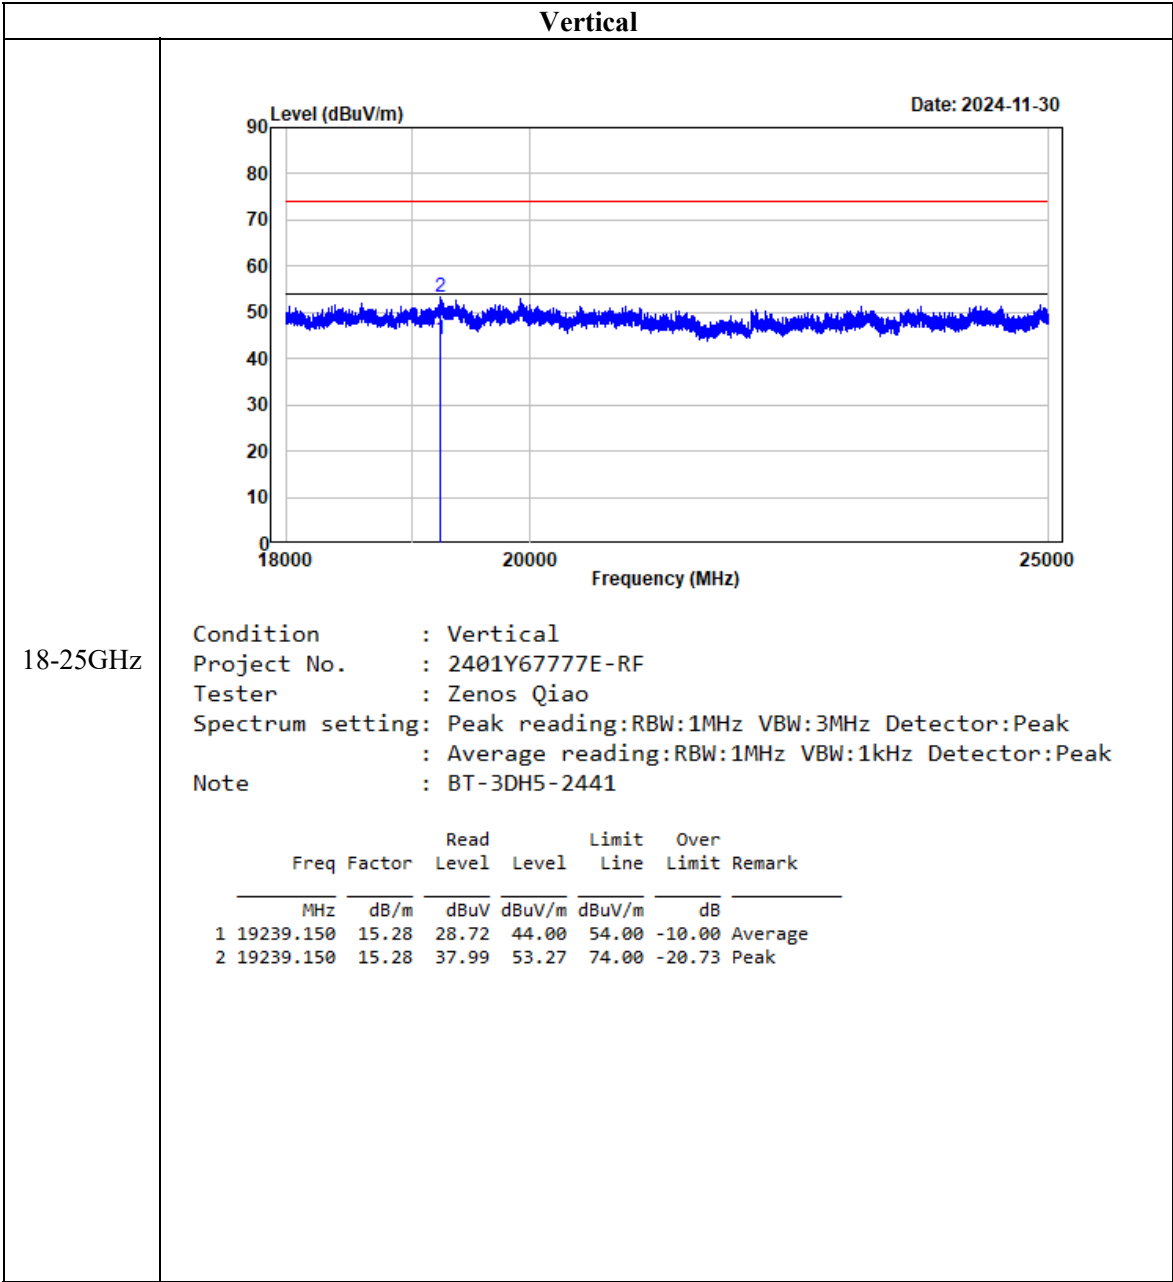

## **FCC §15.247(a) (1) & RSS-247 § 5.1 (b) - CHANNEL SEPARATION TEST**

### **Applicable Standard**

According to FCC §15.247(a) (1):

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.


According to RSS-247 § 5.1 (b):

Frequency hopping systems (FHSs) shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the -20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, FHSs operating in the band 2400-2483.5 MHz may have hopping channel carrier frequencies that are separated by 25 kHz or two thirds of the -20 dB bandwidth of the hopping channel, whichever is greater, provided that the systems operate with an output power no greater than 0.125 W. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

### **Test Procedure**

Test Method: ANSI C63.10-2013 Clause 7.8.2

1. Set the EUT in transmitting mode, max hold the channel.
2. Set the adjacent channel of the EUT and max hold another trace.
3. Measure the channel separation.

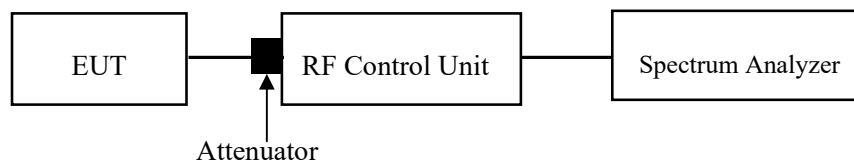

**Test Data****Environmental Conditions**

<b>Temperature:</b>	25°C
<b>Relative Humidity:</b>	55 %
<b>ATM Pressure:</b>	101 kPa

*The testing was performed by Lee Li on 2024-12-11.*

*EUT operation mode: Transmitting*

***Test Result: Compliant Please refer to the Appendix.***

## **FCC §15.247(a) (1) & RSS-247 § 5.1 (a), RSS-GEN § 6.7 - 20 dB EMISSION BANDWIDTH & 99% OCCUPIED BANDWIDTH**

### **Applicable Standard**

According to FCC §15.247(a) (1):

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

According to RSS-247 § 5.1 (a), RSS-GEN § 6.7:

The occupied bandwidth or the “99% emission bandwidth” is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs.

In some cases, the “x dB bandwidth” is required, which is defined as the frequency range between two points, one at the lowest frequency below and one at the highest frequency above the carrier frequency, at which the maximum power level of the transmitted emission is attenuated x dB below the maximum in-band power level of the modulated signal, where the two points are on the outskirts of the in-band emission.

The following conditions shall be observed for measuring the occupied bandwidth and x dB bandwidth:

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.
- The detector of the spectrum analyzer shall be set to “Sample”. However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or “Max Hold”) may be necessary to determine the occupied / x dB bandwidth if the device is not transmitting continuously.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / x dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted.

Note: It may be necessary to repeat the measurement a few times until the RBW and VBW are in compliance with the above requirement.

For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).

## Test Procedure


Test Method: ANSI C63.10-2013 Clause 7.8.7 & Clause 6.9.2 & RSS-Gen §6.7

The following conditions shall be observed for measuring the occupied bandwidth and 20 dB bandwidth:

- a. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the EMI receiver or spectrum analyzer shall be between two times and five times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than  $[10 \log (OBW/RBW)]$  below the reference level.
- d) Steps a) through c) might require iteration to adjust within the specified tolerances.
- e) The dynamic range of the instrument at the selected RBW shall be more than 10 dB below the target “-xx dB down” requirement; that is, if the requirement calls for measuring the -20 dB OBW, the instrument noise floor at the selected RBW shall be at least 30 dB below the reference value.
- f) Set detection mode to peak and trace mode to max hold.
- g) Determine the reference value: Set the EUT to transmit an un-modulated carrier or modulated signal, as applicable. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace (this is the reference value).
- h) Determine the “-xx dB down amplitude” using  $[(\text{reference value}) - xx]$ . Alternatively, this calculation may be made by using the marker-delta function of the instrument.
- i) If the reference value is determined by an un-modulated carrier, then turn the EUT modulation on, and either clear the existing trace or start a new trace on the spectrum analyzer and allow the new trace to stabilize. Otherwise, the trace from step g) shall be used for step j).
- j) Place two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “- xx” dB down amplitude determined in step h). If a marker is below this “-xx dB down amplitude” value, then it shall be as close as possible to this value. The occupied bandwidth is the frequency difference between the two markers. Alternatively, set a marker at the lowest frequency of the envelope of the spectral display, such that the marker is at or slightly below the “- xx dB down amplitude” determined in step h). Reset the marker-delta function and move the marker to the other side of the emission until the delta marker amplitude is at the same level as the reference marker amplitude. The marker-delta frequency reading at this point is the specified emission bandwidth.
- k) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. Procedure as below

- a. The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- b. The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW (for RSS rules, VBW shall not be smaller than three times the RBW, unless otherwise specified by the applicable requirement).
- c. Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than  $[10 \log (OBW/RBW)]$  below the reference level.
- d. Step a) through step c) might require iteration to adjust within the specified range.
- e. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- f. Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.
- g. If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.
- h. The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data maybe reported in addition to the plot(s).

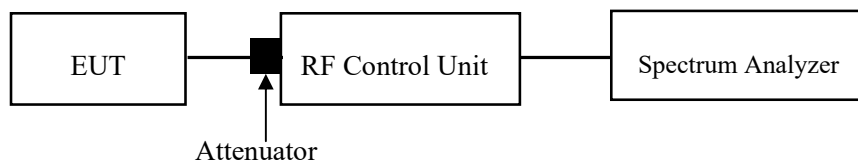

## Test Data

### Environmental Conditions

Temperature:	25°C
Relative Humidity:	55 %
ATM Pressure:	101 kPa

*The testing was performed by Lee Li on 2024-12-11.*

*EUT operation mode: Transmitting*

***Test Result: Compliant. Please refer to the Appendix.***



## FCC §15.247(a) (1) (iii) & RSS-247 § 5.1 (d) - QUANTITY OF HOPPING CHANNEL TEST

### Applicable Standard

According to FCC §15.247(a) (1) (iii):

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.


According to RSS-247 § 5.1 (d):

Frequency hopping systems (FHSS) operating in the band 2400-2483.5 MHz shall use at least 15 hopping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds, multiplied by the number of hopping channels employed. Transmissions on particular hopping frequencies may be avoided or suppressed provided that at least 15 hopping channels are used.

### Test Procedure

Test Method: ANSI C63.10-2013 Clause 7.8.3

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the max-hold function record the quantity of the channel.

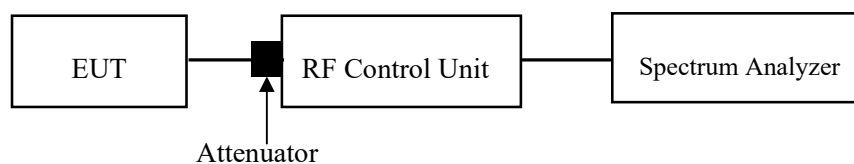

Note: Limit=20 dB bandwidth\*2/3

**Test Data****Environmental Conditions**

<b>Temperature:</b>	25°C
<b>Relative Humidity:</b>	55 %
<b>ATM Pressure:</b>	101 kPa

*The testing was performed by Lee Li on 2024-12-11.*

*EUT operation mode: Transmitting*

***Test Result: Compliant. Please refer to the Appendix.***

## FCC §15.247(a) (1) (iii) & RSS-247 § 5.1 (d) - TIME OF OCCUPANCY (DWELL TIME)

### Applicable Standard

According to FCC §15.247(a) (1) (iii):

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.


According to RSS-247 § 5.1 (d):

Frequency hopping systems (FHSs) operating in the band 2400-2483.5 MHz shall use at least 15 hopping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds, multiplied by the number of hopping channels employed. Transmissions on particular hopping frequencies may be avoided or suppressed provided that at least 15 hopping channels are used.

### Test Procedure

Test Method: ANSI C63.10-2013 Clause 7.8.4

1. The EUT was worked in channel hopping.
2. Set the RBW to: 1MHz.
3. Set the VBW  $\geq 3 \times$  RBW.
4. Set the span to 0Hz.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Recorded the time of single pulses

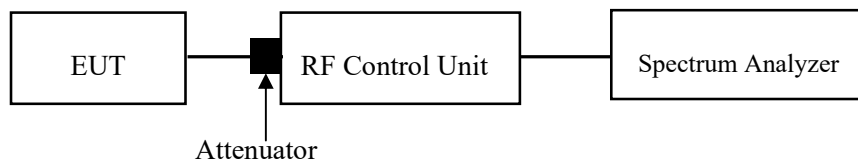

Note 1: A period time=0.4\*79=31.6(S), Result=BurstWidth\*Totalhops

Note 2: Totalhops=Hopping Number in 3.16s\*10

Note 3: Hopping Number in 3.16s=Total of highest signals in 3.16s(Second high signals were other channel)

Test Data

Environmental Conditions

Temperature:	25°C
Relative Humidity:	55 %
ATM Pressure:	101 kPa

*The testing was performed by Lee Li on 2024-12-11.*

*EUT operation mode: Transmitting*

***Test Result: Compliant. Please refer to the Appendix.***

## FCC §15.247(b) (1) & RSS-247§ 5.1(b) &§ 5.4(b) - PEAK OUTPUT POWER MEASUREMENT

### Applicable Standard

According to FCC §15.247(b) (1):

For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

According to RSS-247§ 5.1(b) &§ 5.4(b):


For frequency hopping systems (FHSs) operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W if the hopset uses 75 or more hopping channels; the maximum peak conducted output power shall not exceed 0.125 W if the hopset uses less than 75 hopping channels. The e.i.r.p. shall not exceed 4 W (see Section 5.4(e) for exceptions).

Frequency hopping systems (FHSs) shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the -20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, FHSs operating in the band 2400-2483.5 MHz may have hopping channel carrier frequencies that are separated by 25 kHz or two thirds of the -20 dB bandwidth of the hopping channel, whichever is greater, provided that the systems operate with an output power no greater than 0.125 W.

### Test Procedure

Test Method: ANSI C63.10-2013 Clause 7.8.5

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

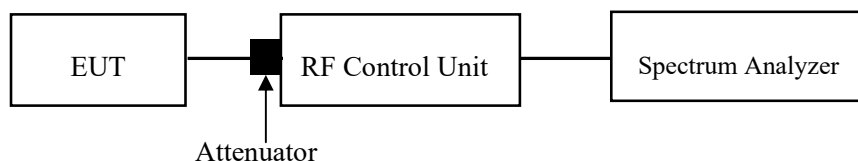

Note: A short RF cable with low cable loss connected to the EUT antenna port, which was provided by client or lab, the cable loss was add with offset into test equipment, the total offset consists of attenuator and/or RF cable loss.

**Test Data****Environmental Conditions**

<b>Temperature:</b>	25°C
<b>Relative Humidity:</b>	55 %
<b>ATM Pressure:</b>	101 kPa

*The testing was performed by Lee Li on 2024-12-11.*

*EUT operation mode: Transmitting*

***Test Result: Compliant. Please refer to the Appendix.***

## FCC §15.247(d) & RSS-247 § 5.5 - BAND EDGES TESTING

### Applicable Standard

According to FCC §15.247(d).

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).


According to RSS-247 § 5.5.

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(e), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

### Test Procedure

Test Method: ANSI C63.10-2013 Clause 7.8.6 & Clause 6.10

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

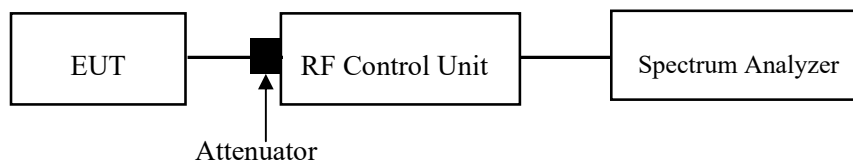

**Test Data****Environmental Conditions**

<b>Temperature:</b>	25~25.6°C
<b>Relative Humidity:</b>	39.5~55 %
<b>ATM Pressure:</b>	101 kPa

*The testing was performed by Lee Li from 2024-12-11 to 2025-01-24.*

*EUT operation mode: Transmitting*

***Test Result: Compliant. Please refer to the Appendix.***



## **EUT PHOTOGRAPHS**

Please refer to the attachment 2401Y6777E-RF External photo and 2401Y6777E-RF Internal photo.

## **TEST SETUP PHOTOGRAPHS**

Please refer to the attachment 2401Y6777E-RFA Test Setup photo.


## APPENDIX


### Appendix A: 20dB Emission Bandwidth


#### Test Result


Test Mode	Antenna	Channel	20dB EBW[MHz]	Limit[MHz]	Verdict
DH1	Ant1	2402	1.03	---	---
		2441	1.02	---	---
		2480	1.03	---	---
2DH1	Ant1	2402	1.30	---	---
		2441	1.30	---	---
		2480	1.30	---	---
3DH1	Ant1	2402	1.25	---	---
		2441	1.25	---	---
		2480	1.25	---	---


Test Graphs

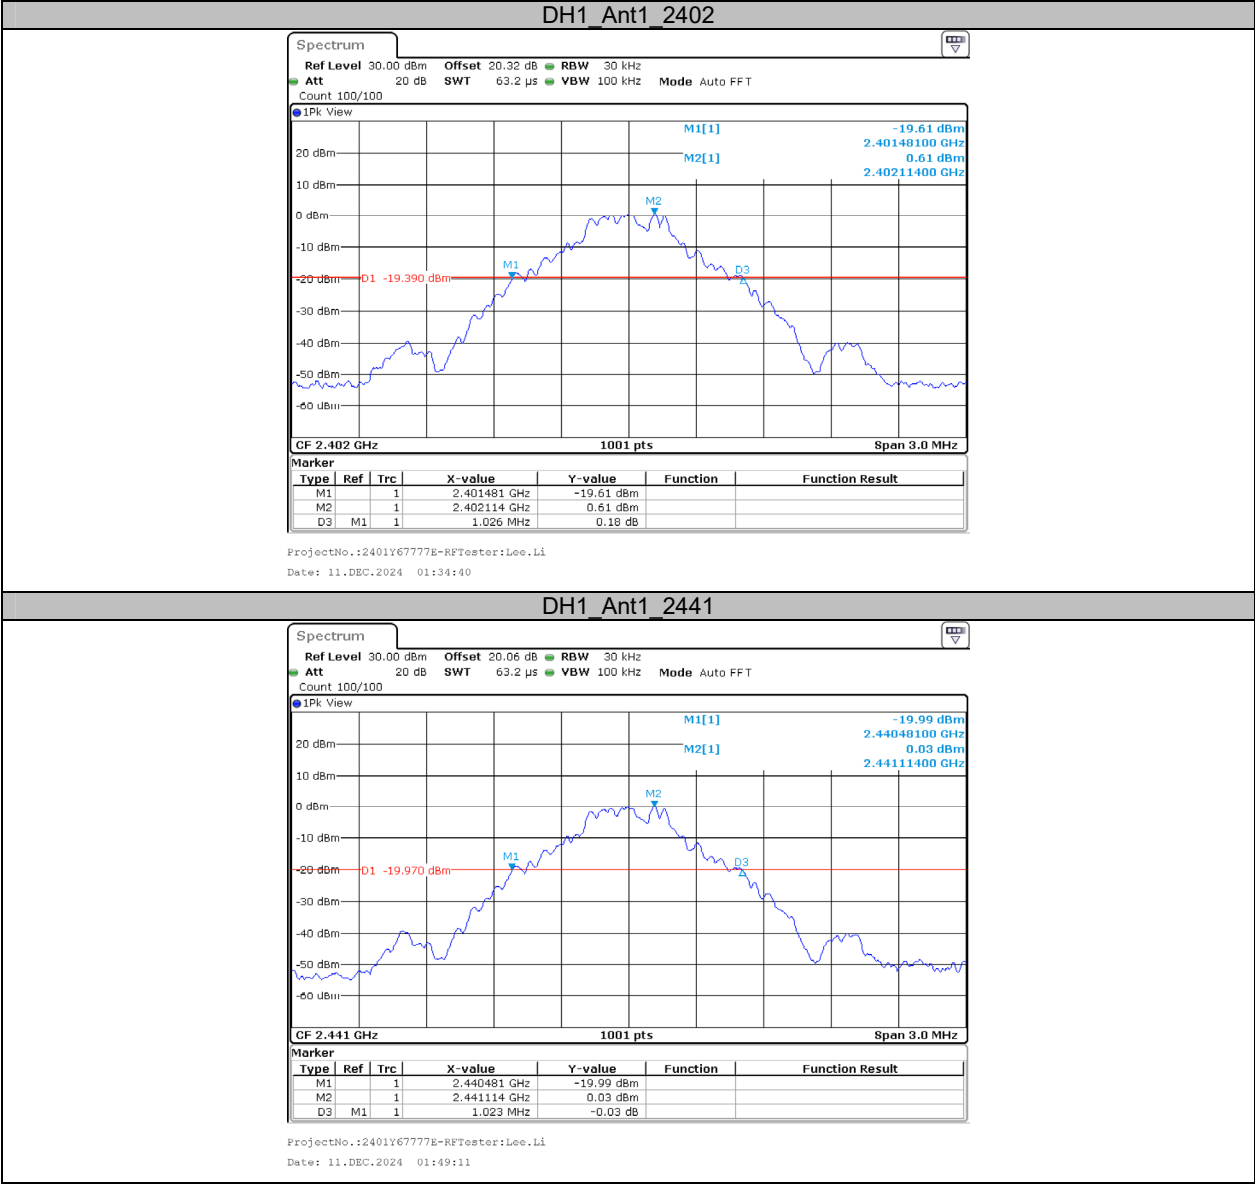

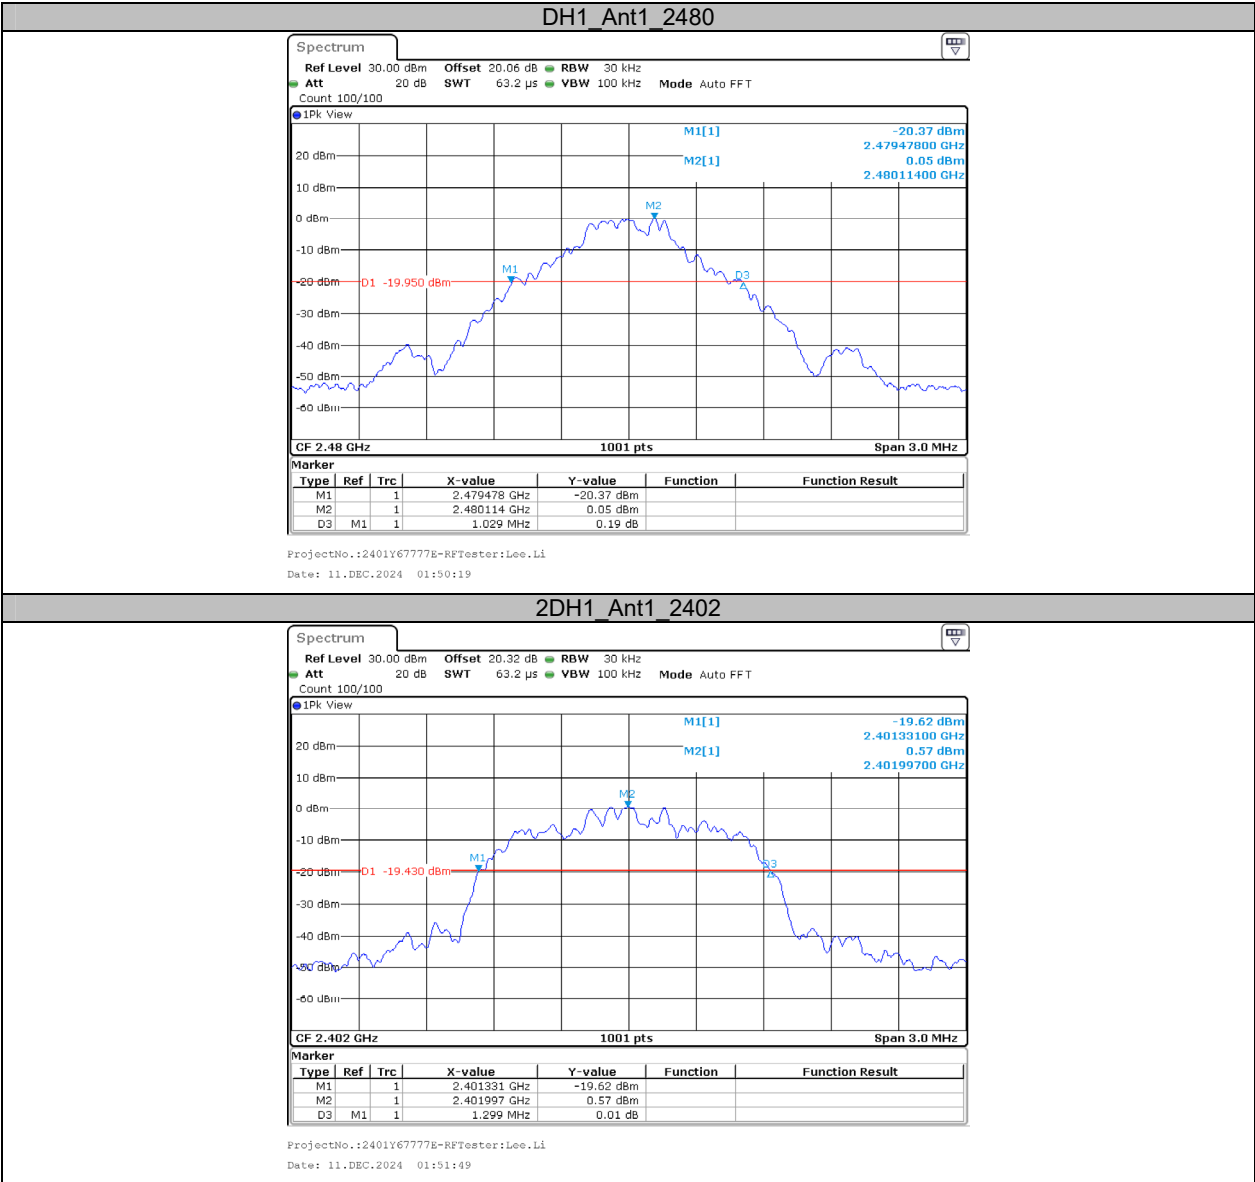

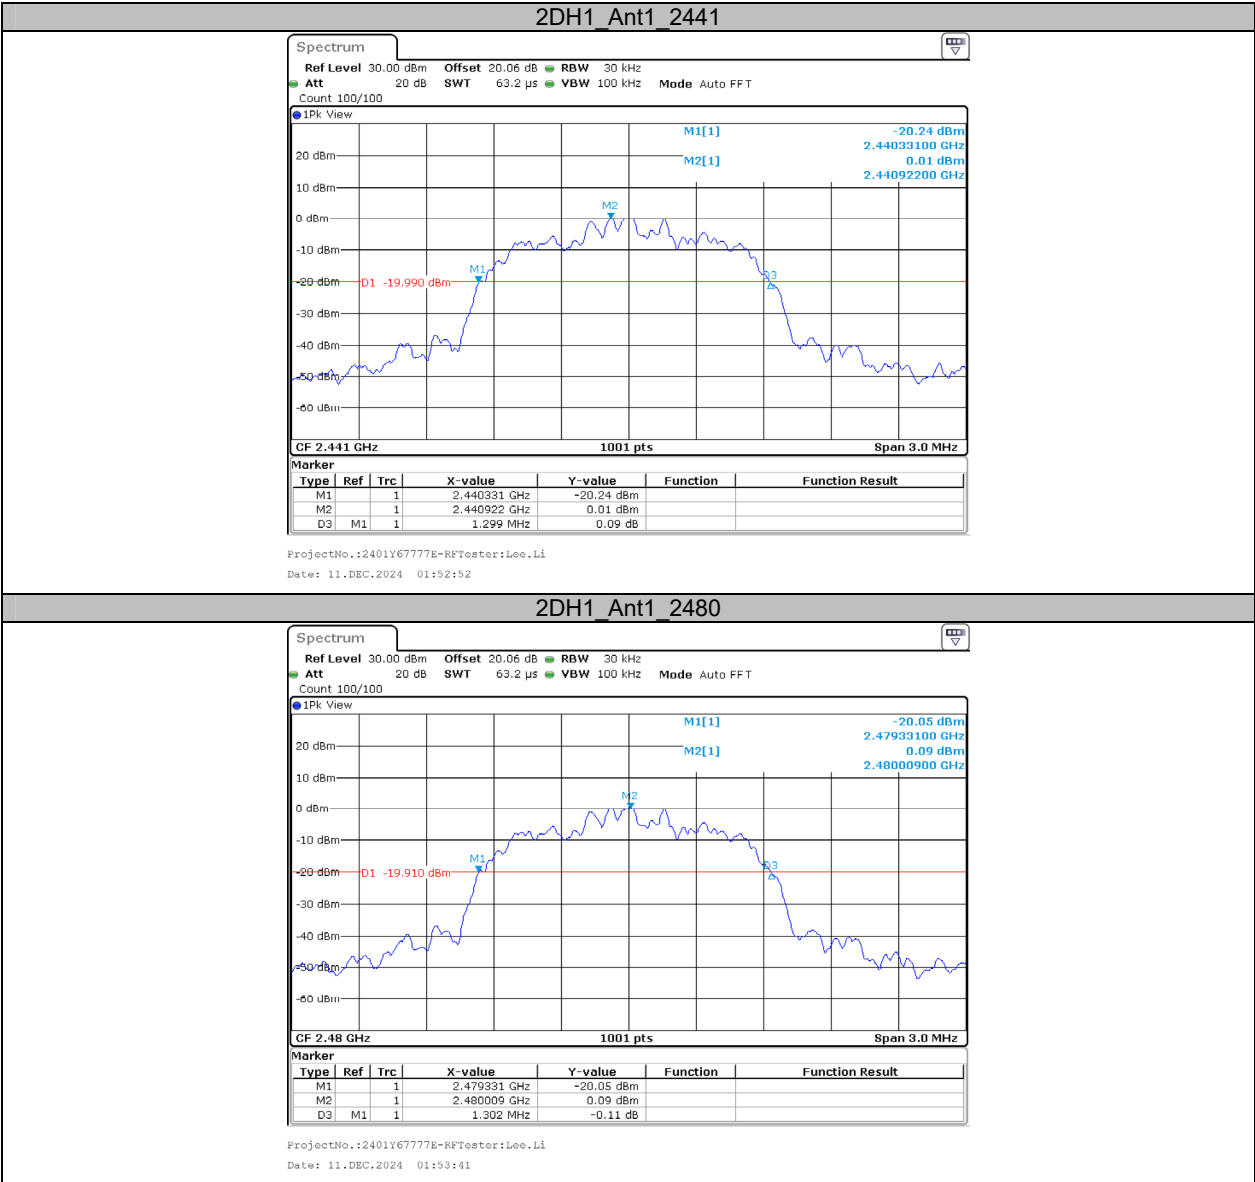

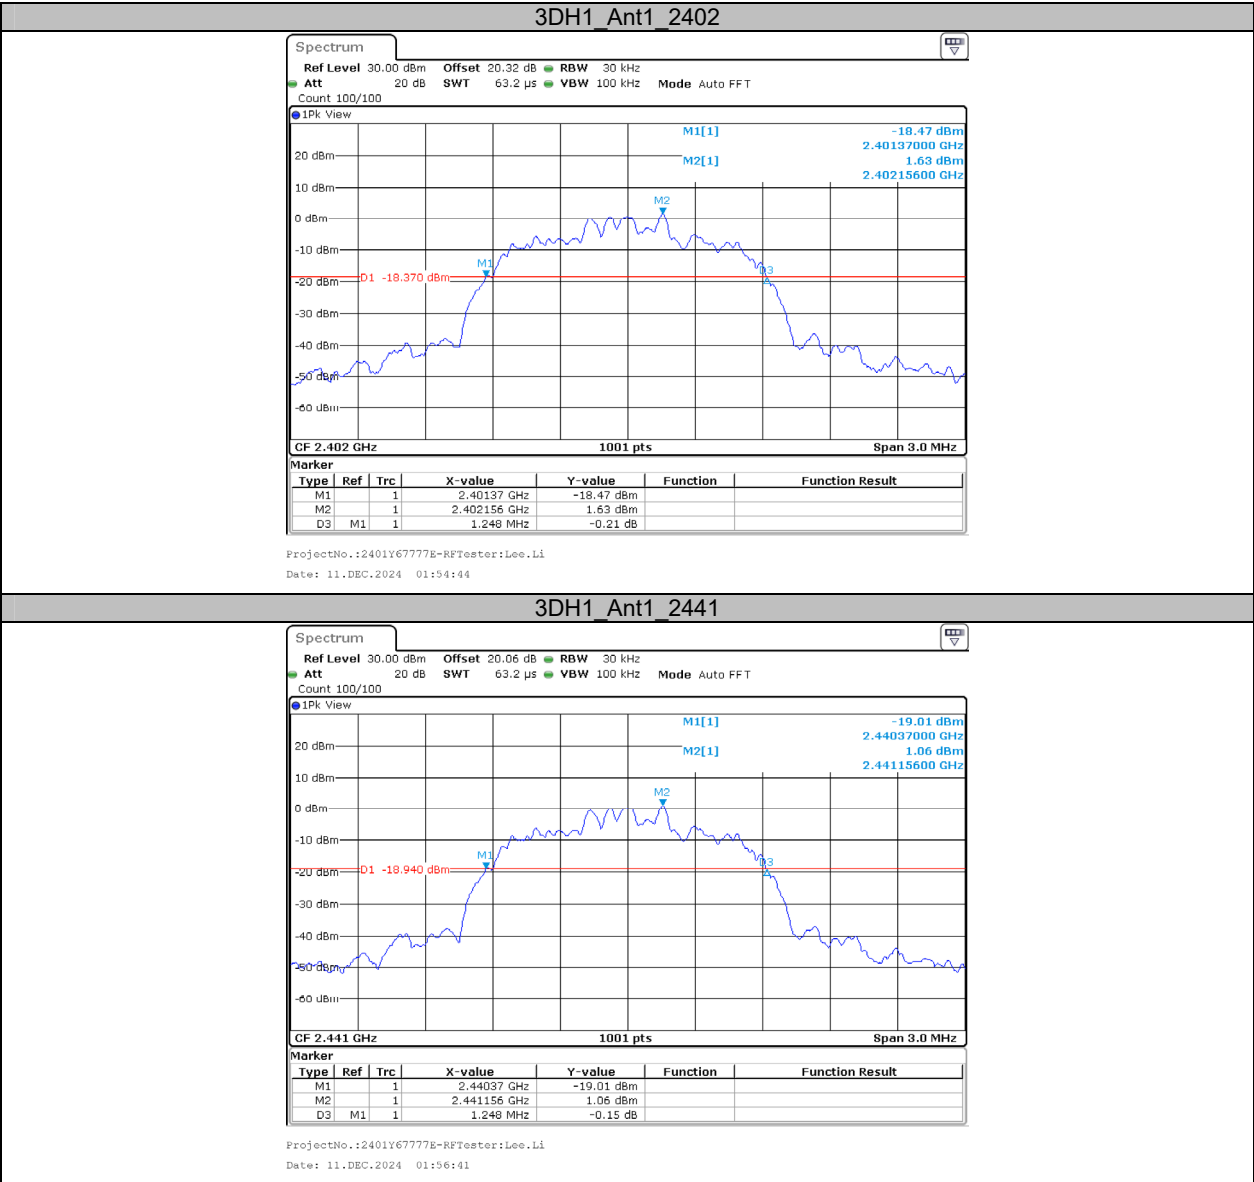

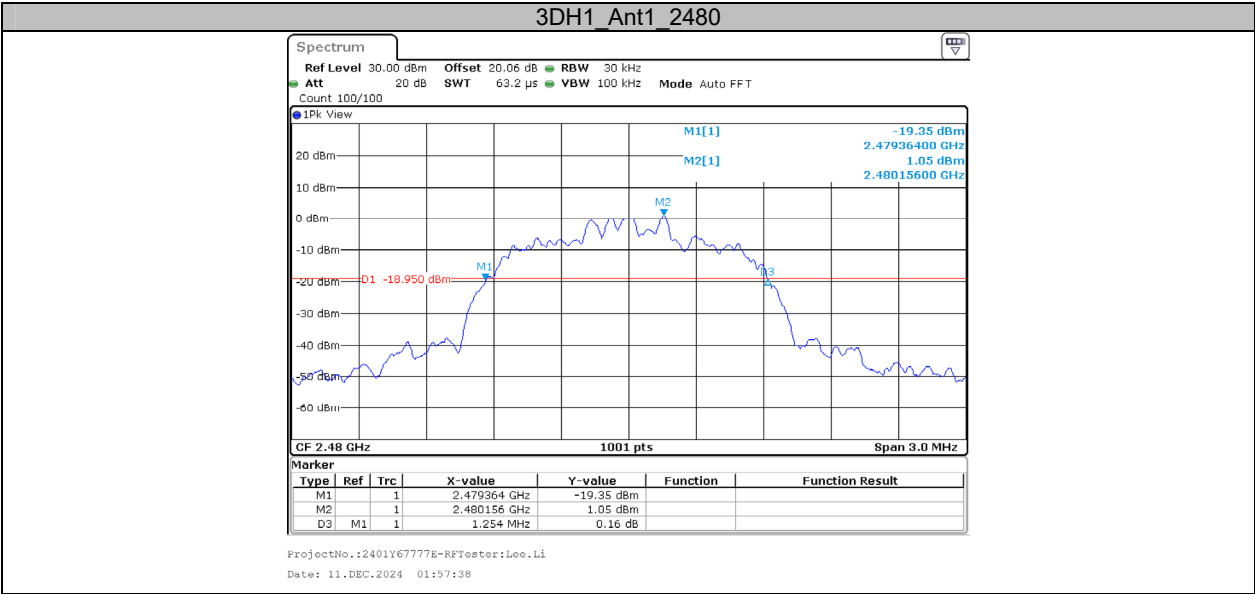






**Appendix B: Occupied Channel Bandwidth****Test Result**


Test Mode	Antenna	Channel	OCB [MHz]	Limit[MHz]	Verdict
DH1	Ant1	2402	0.860	---	---
		2441	0.863	---	---
		2480	0.863	---	---
2DH1	Ant1	2402	1.154	---	---
		2441	1.154	---	---
		2480	1.154	---	---
3DH1	Ant1	2402	1.133	---	---
		2441	1.133	---	---
		2480	1.136	---	---


Test Graphs

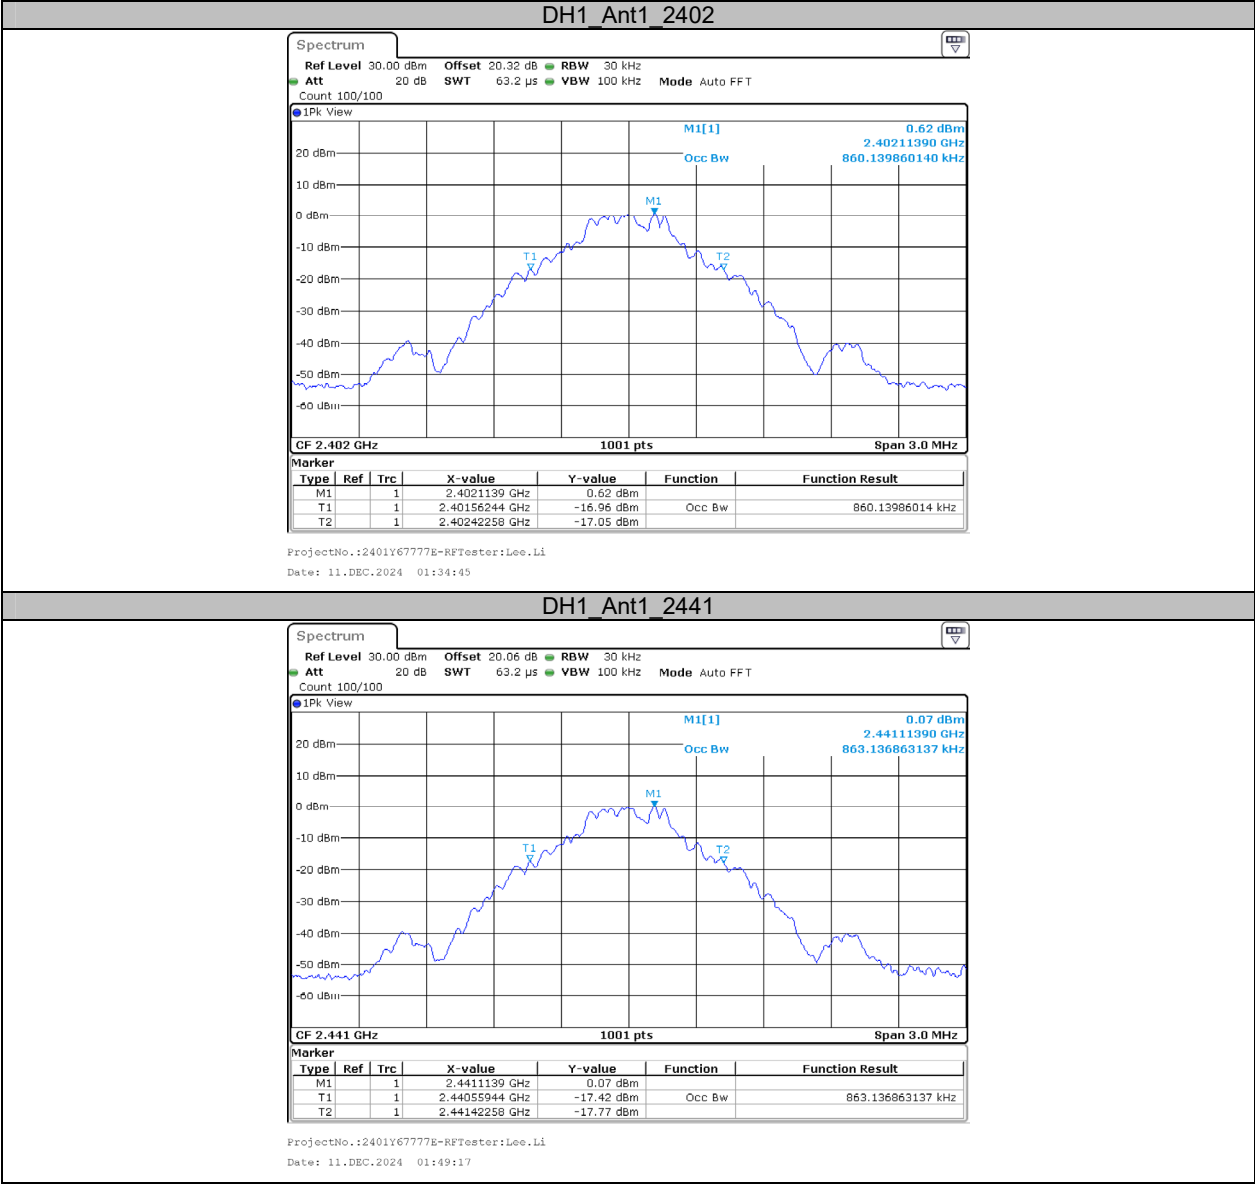

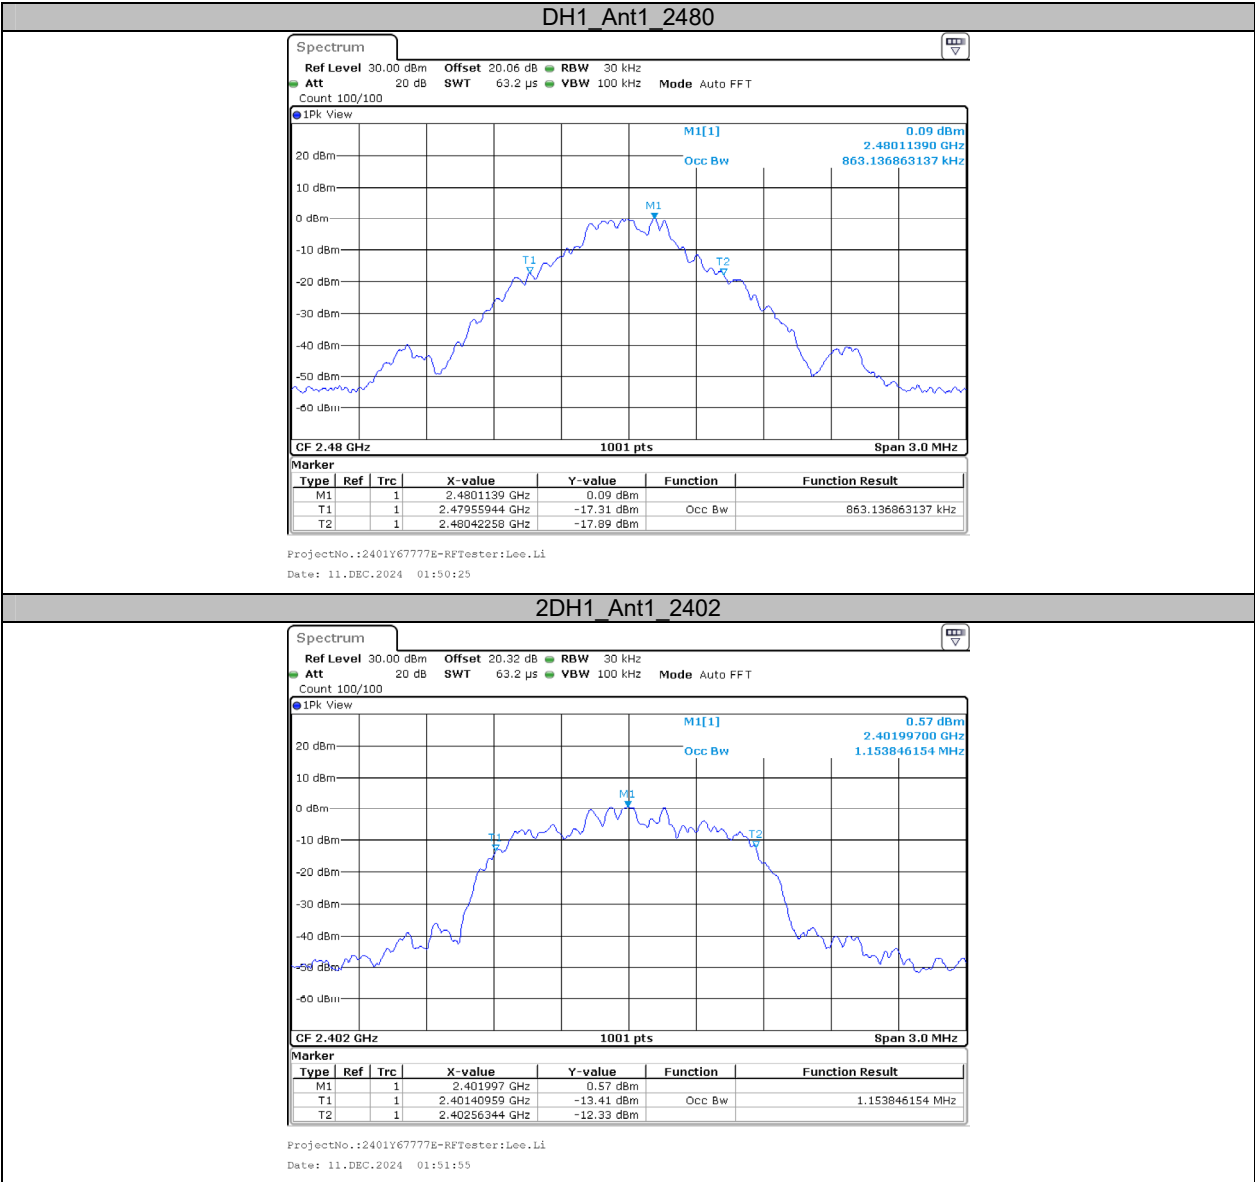

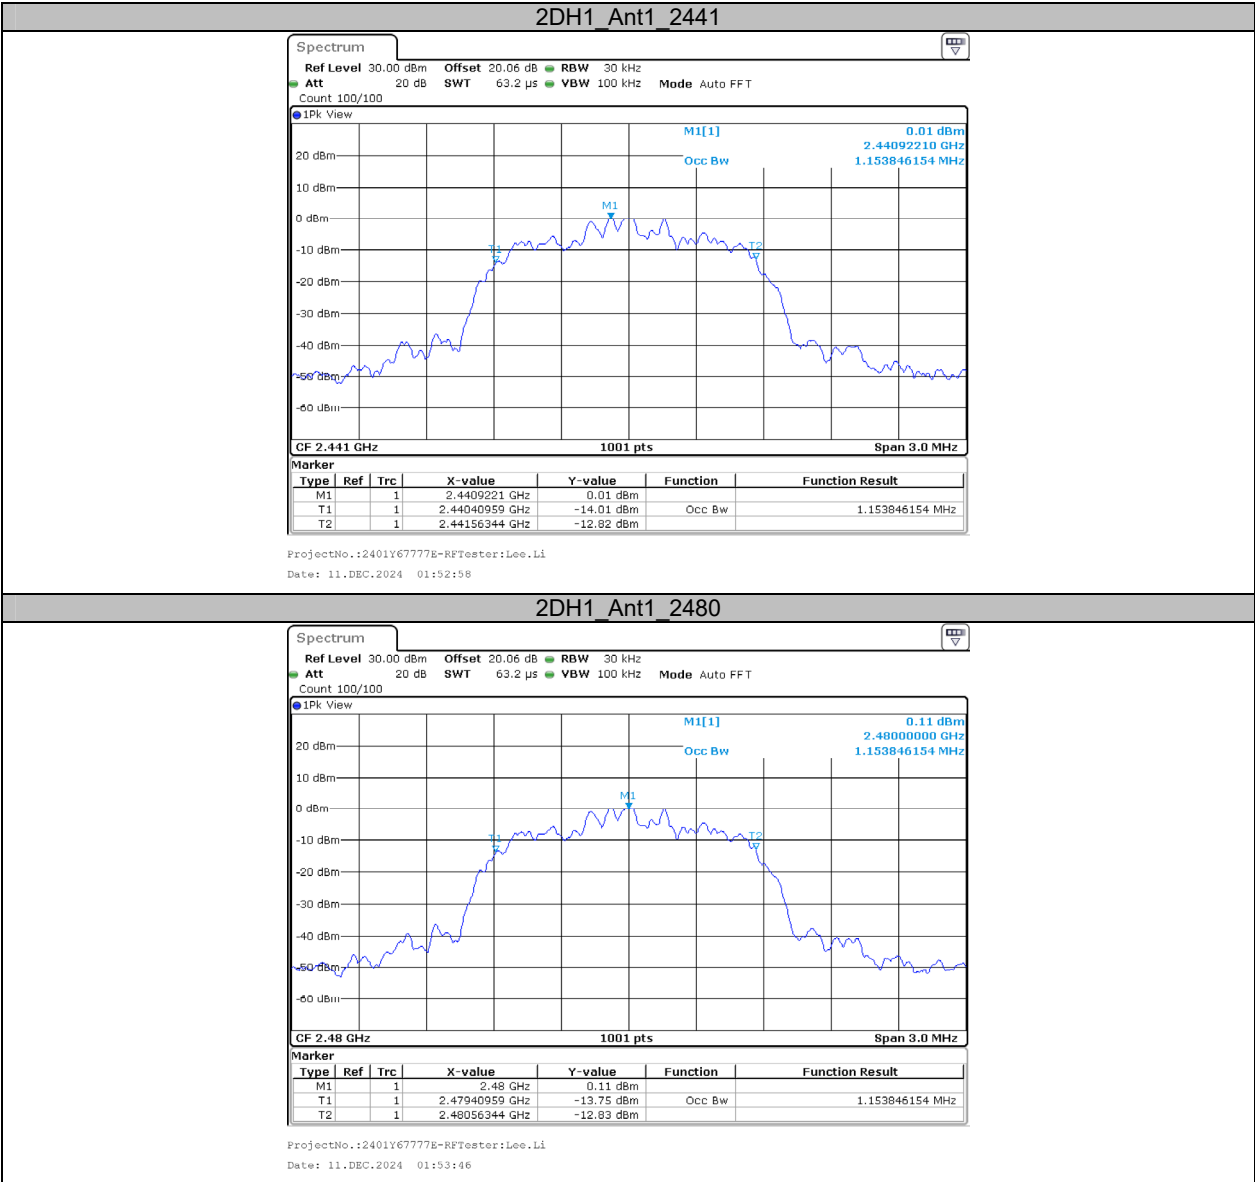

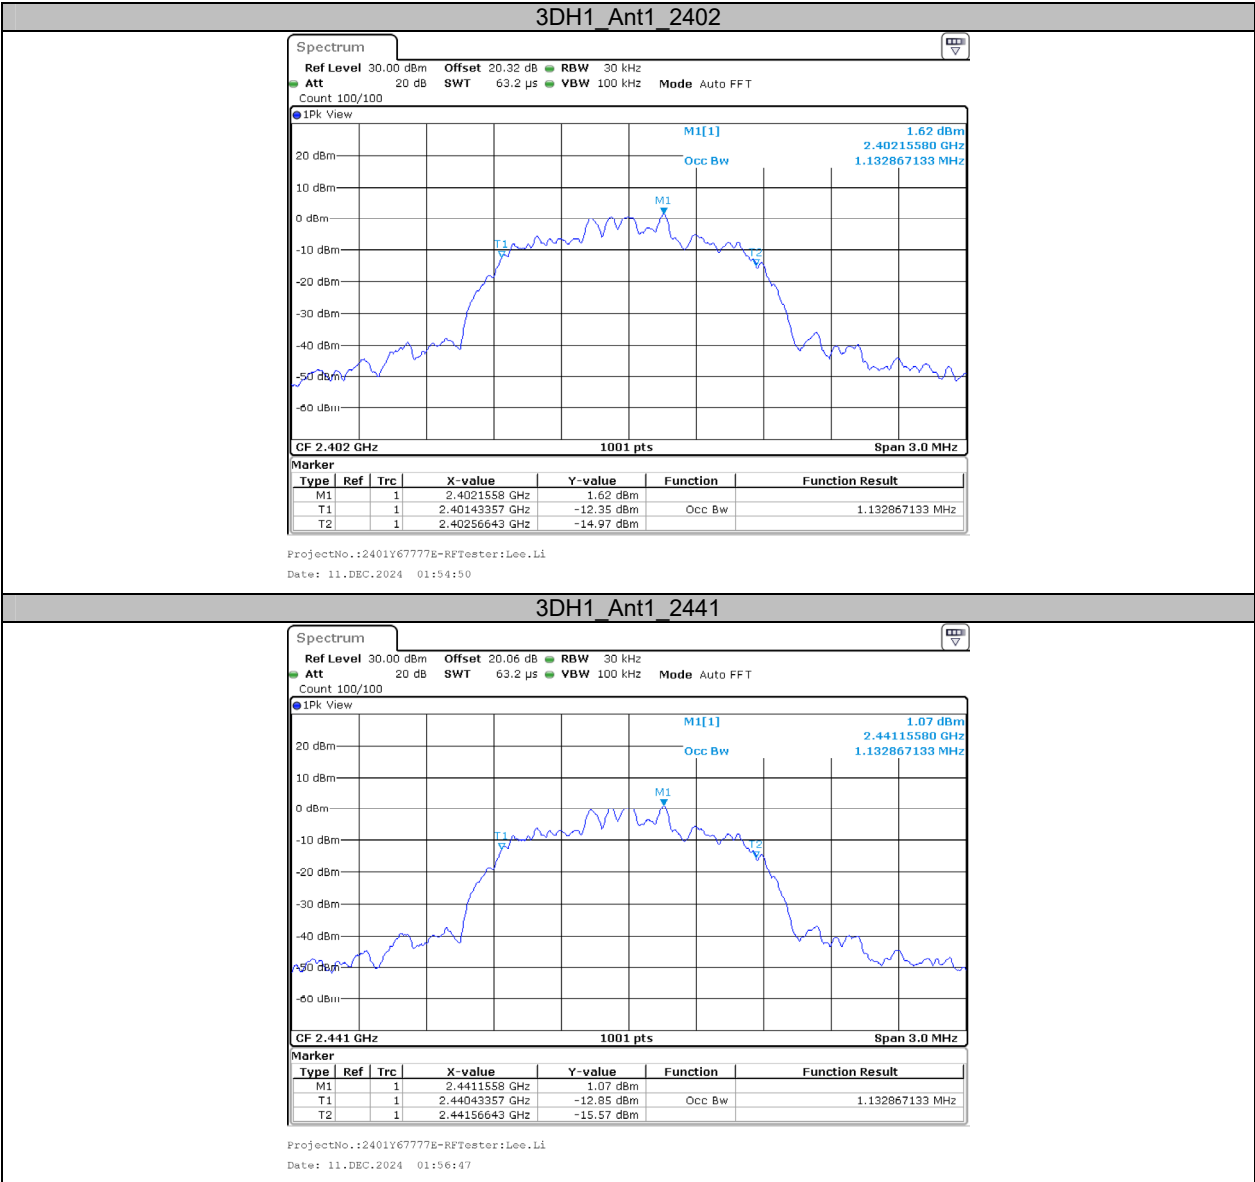


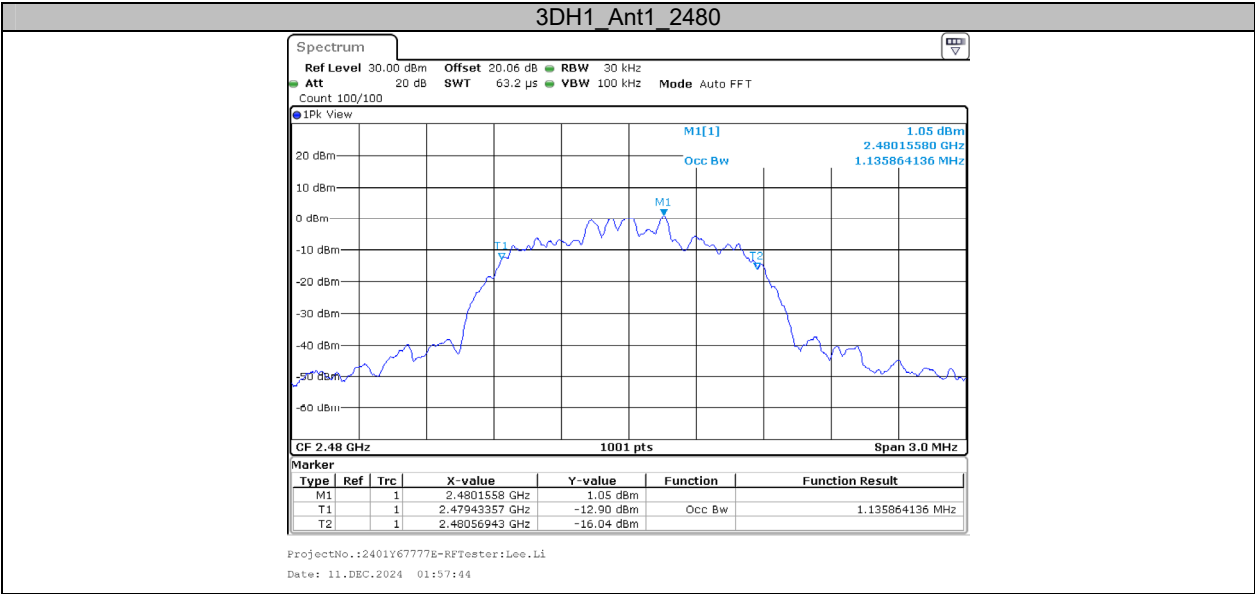


**Appendix C: Maximum conducted Peak output power****Test Result**


Test Mode	Antenna	Channel	Result[dBm]	Limit[dBm]	EIRP[dBm]	EIRP Limit [dBm]	Verdict
DH1	Ant1	2402	3.66	≤20.97	6.77	≤36	PASS
		2441	3.13	≤20.97	6.24	≤36	PASS
		2480	3.09	≤20.97	6.20	≤36	PASS
2DH1	Ant1	2402	5.69	≤20.97	8.80	≤36	PASS
		2441	5.14	≤20.97	8.25	≤36	PASS
		2480	5.12	≤20.97	8.23	≤36	PASS
3DH1	Ant1	2402	6.66	≤20.97	9.77	≤36	PASS
		2441	6.12	≤20.97	9.23	≤36	PASS
		2480	6.10	≤20.97	9.21	≤36	PASS


Test Graphs

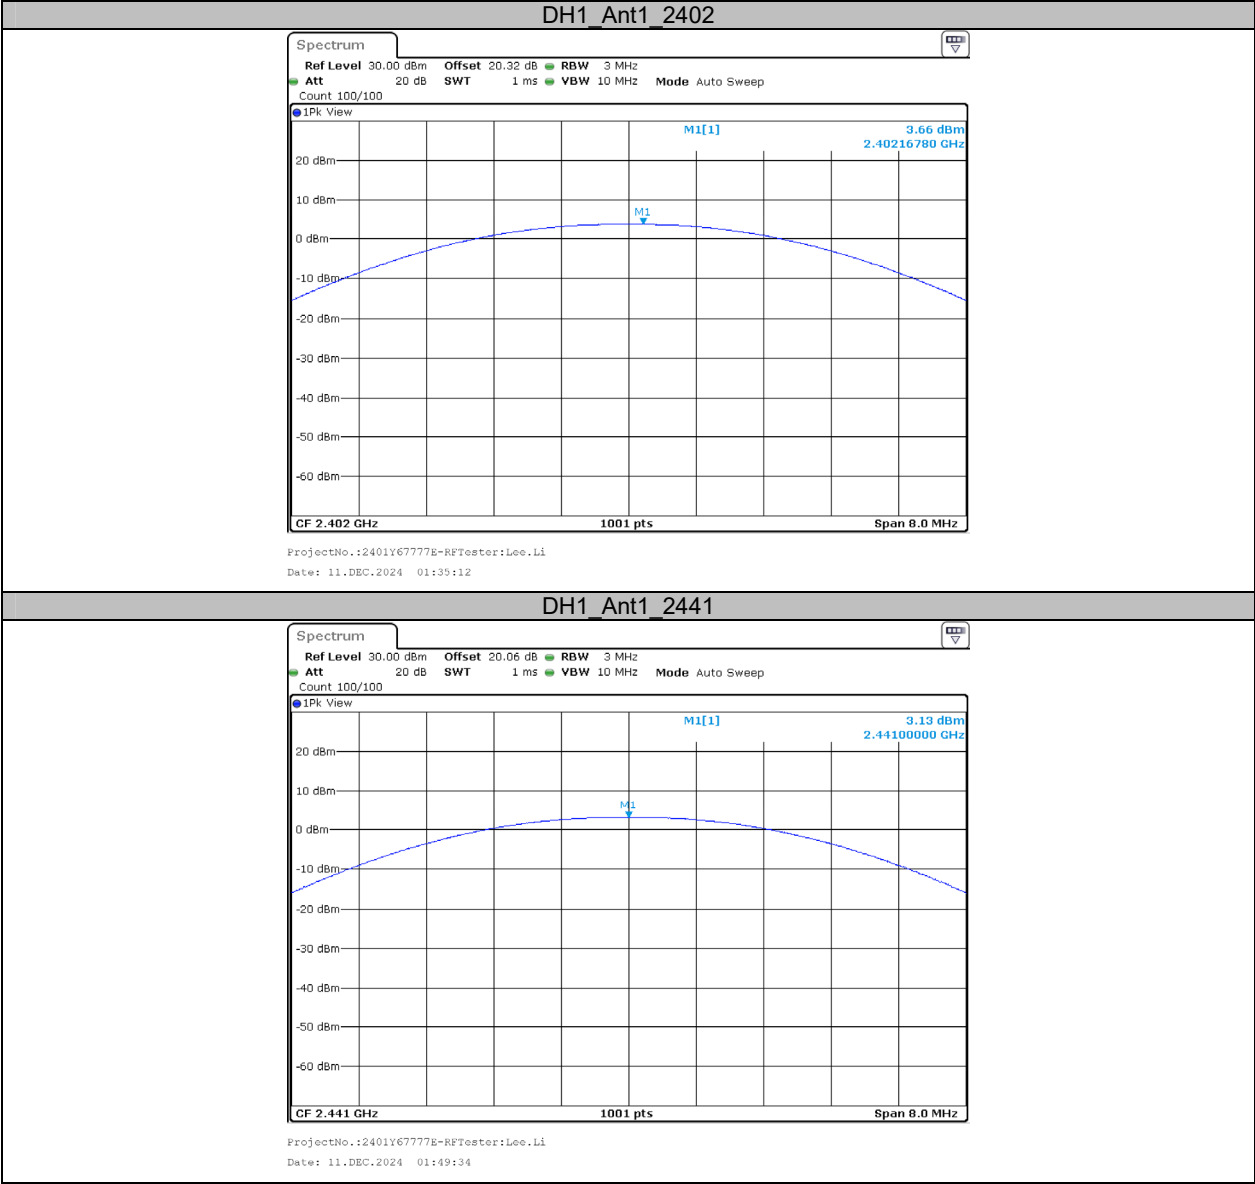




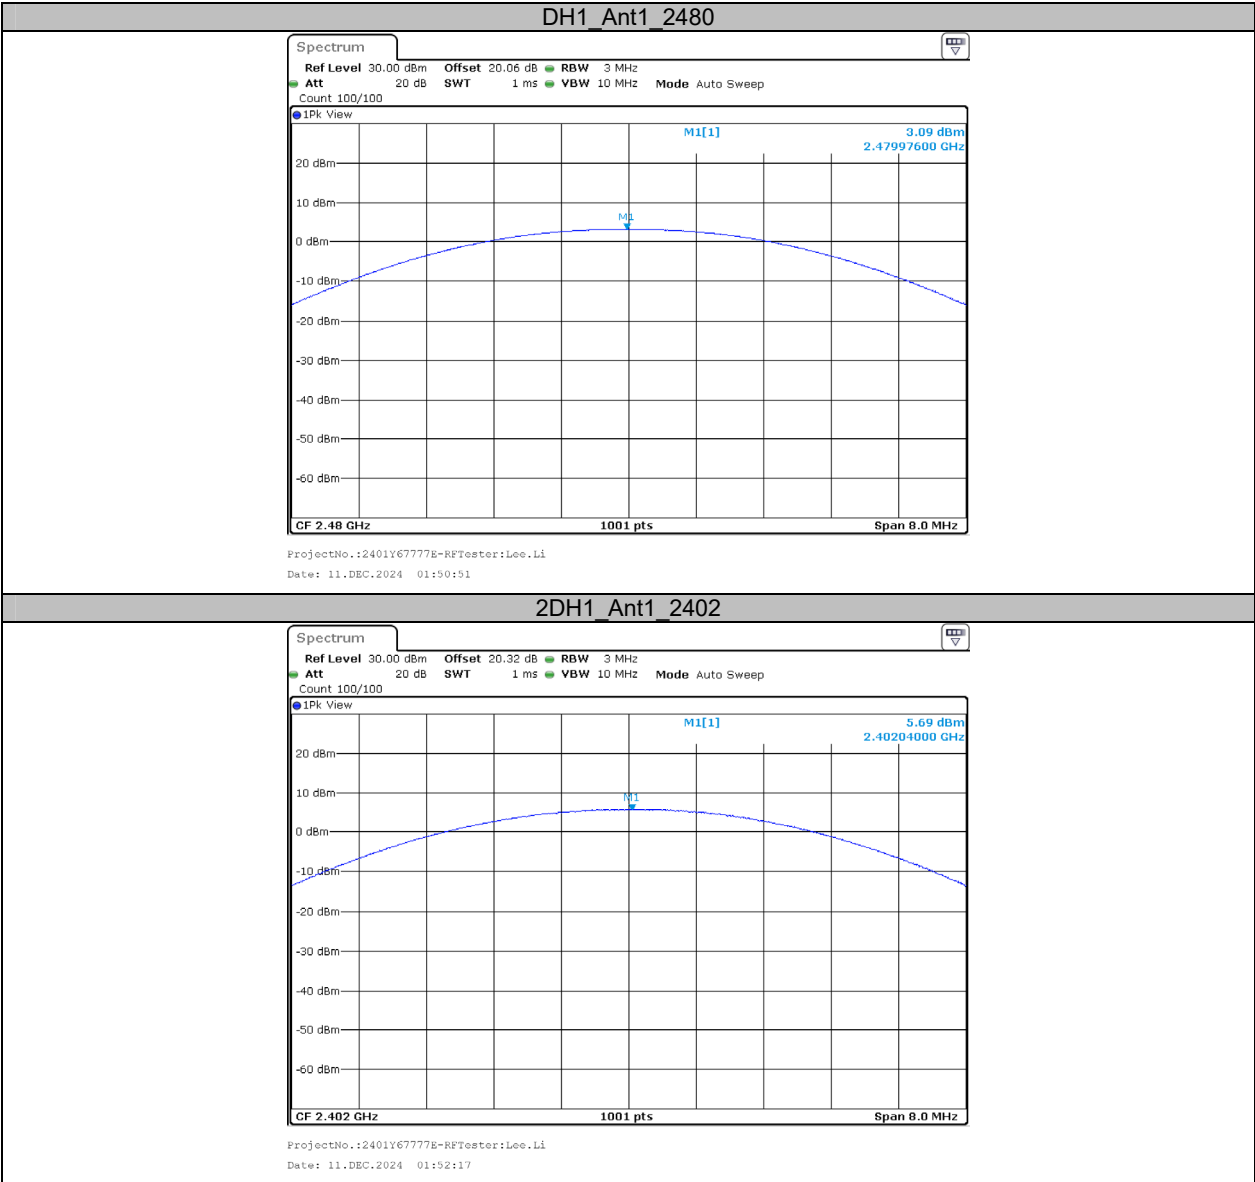

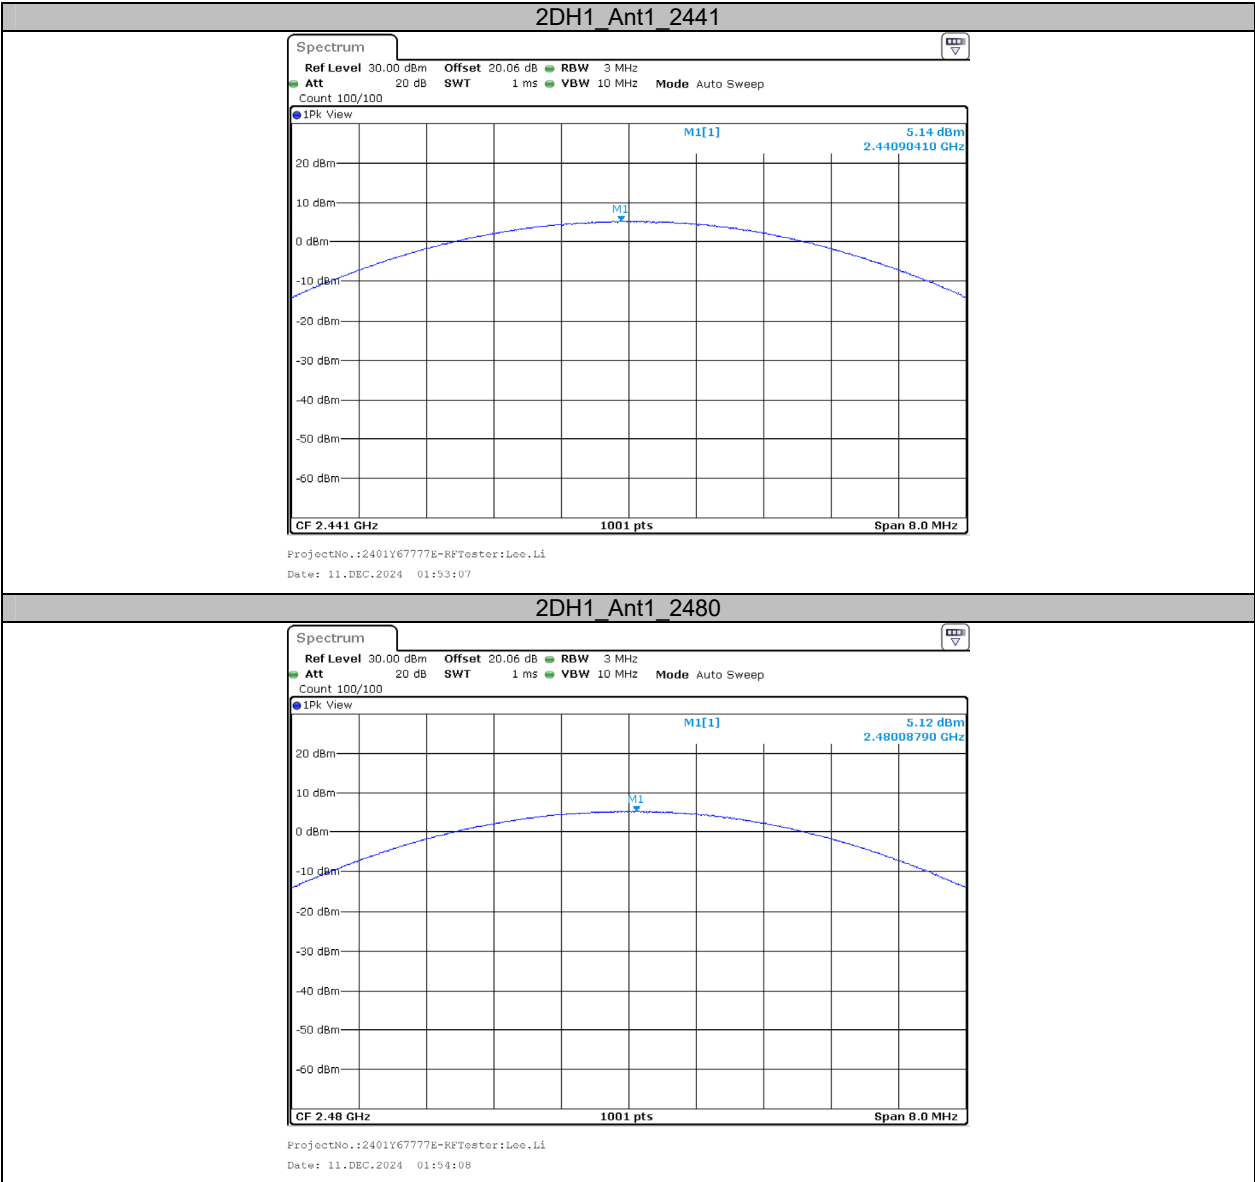

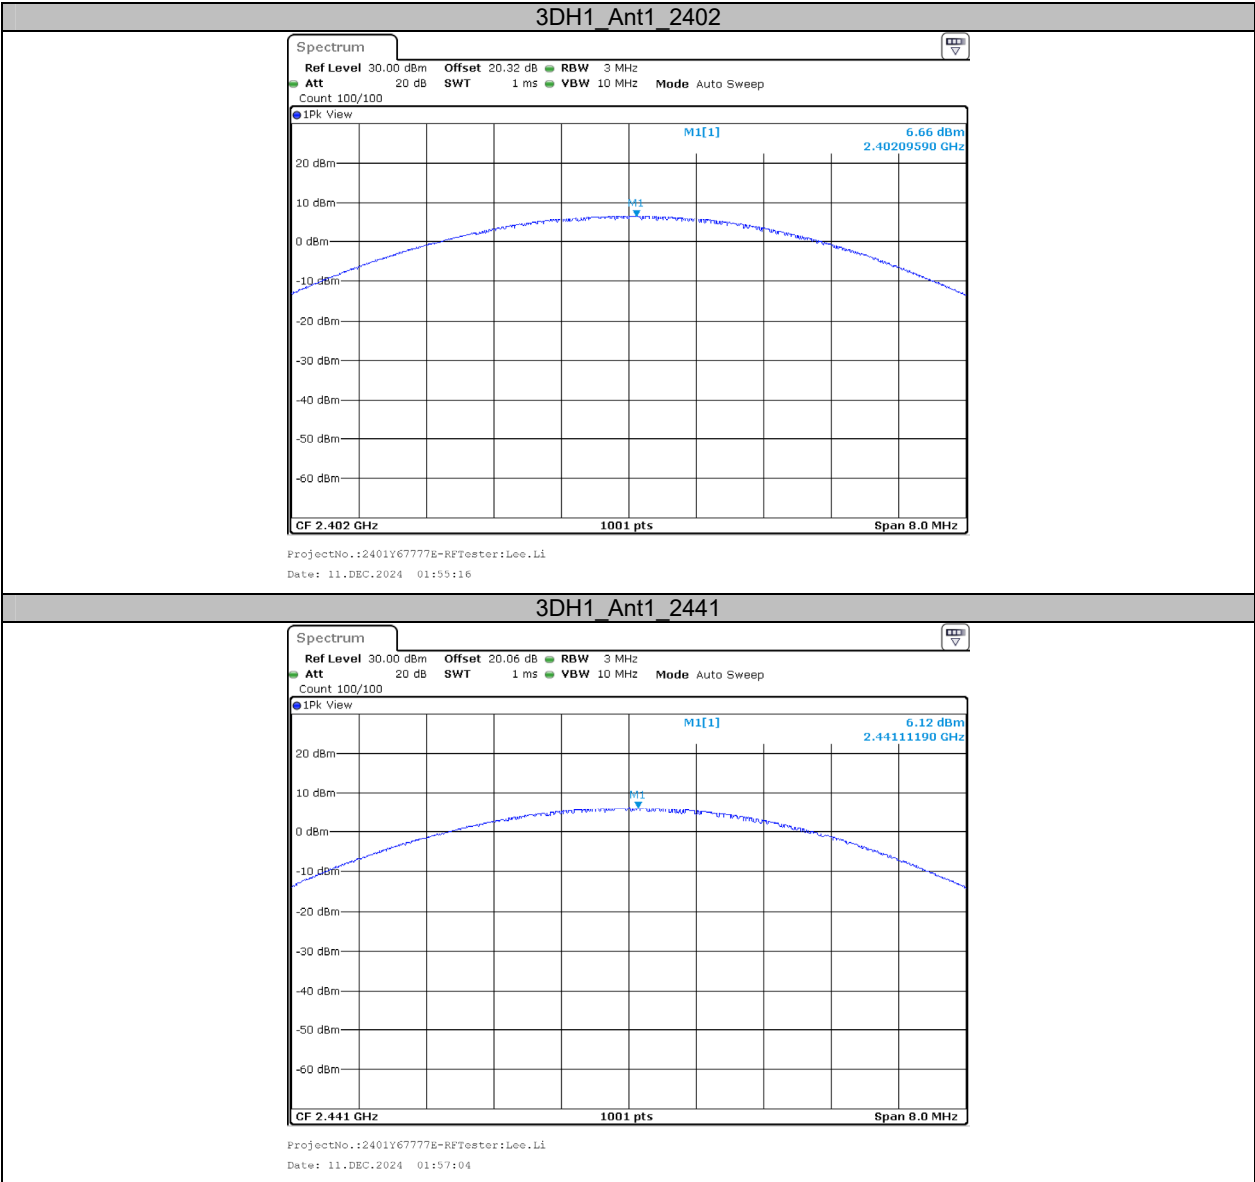


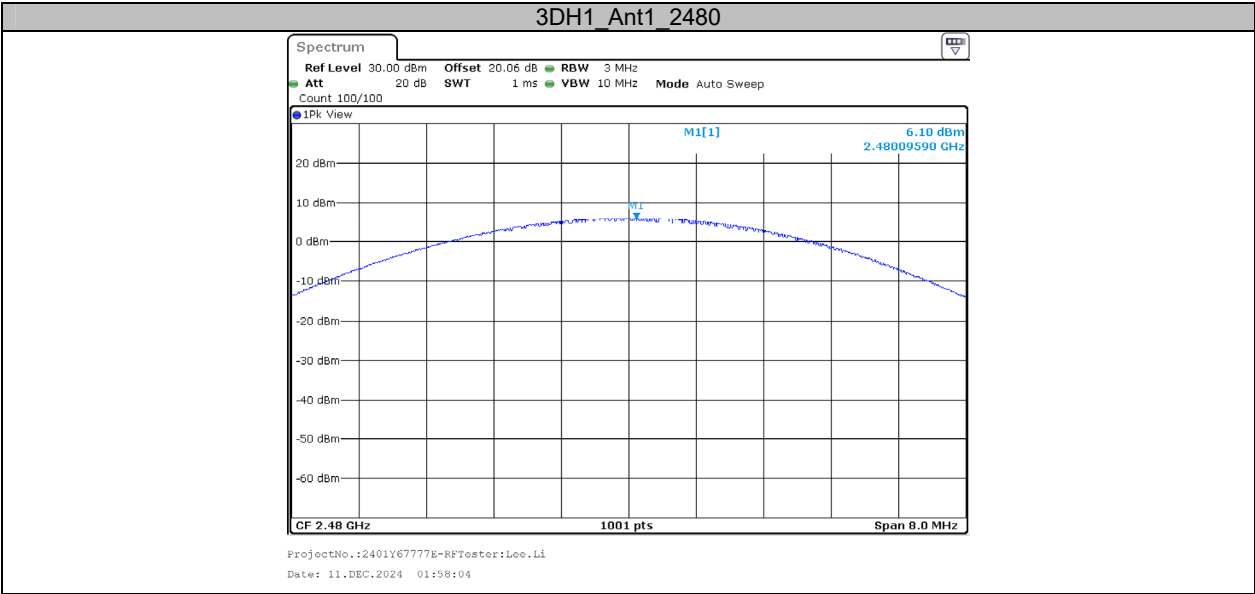


**Appendix D: Carrier frequency separation****Test Result**

Test Mode	Antenna	Channel	Result[MHz]	Limit[MHz]	Verdict
DH1	Ant1	Hop	1.000	$\geq 0.867$	PASS
2DH1	Ant1	Hop	1.003	$\geq 0.867$	PASS
3DH1	Ant1	Hop	1.000	$\geq 0.867$	PASS
Note: Only the BDR (GFSK) mode result is reported since EDR ( $\pi/4$ -DQPSK) and EDR (8DPSK) modes have the exact same channel plan, and the limit is the maximum 20dB bandwidth *2/3					

Test Graphs

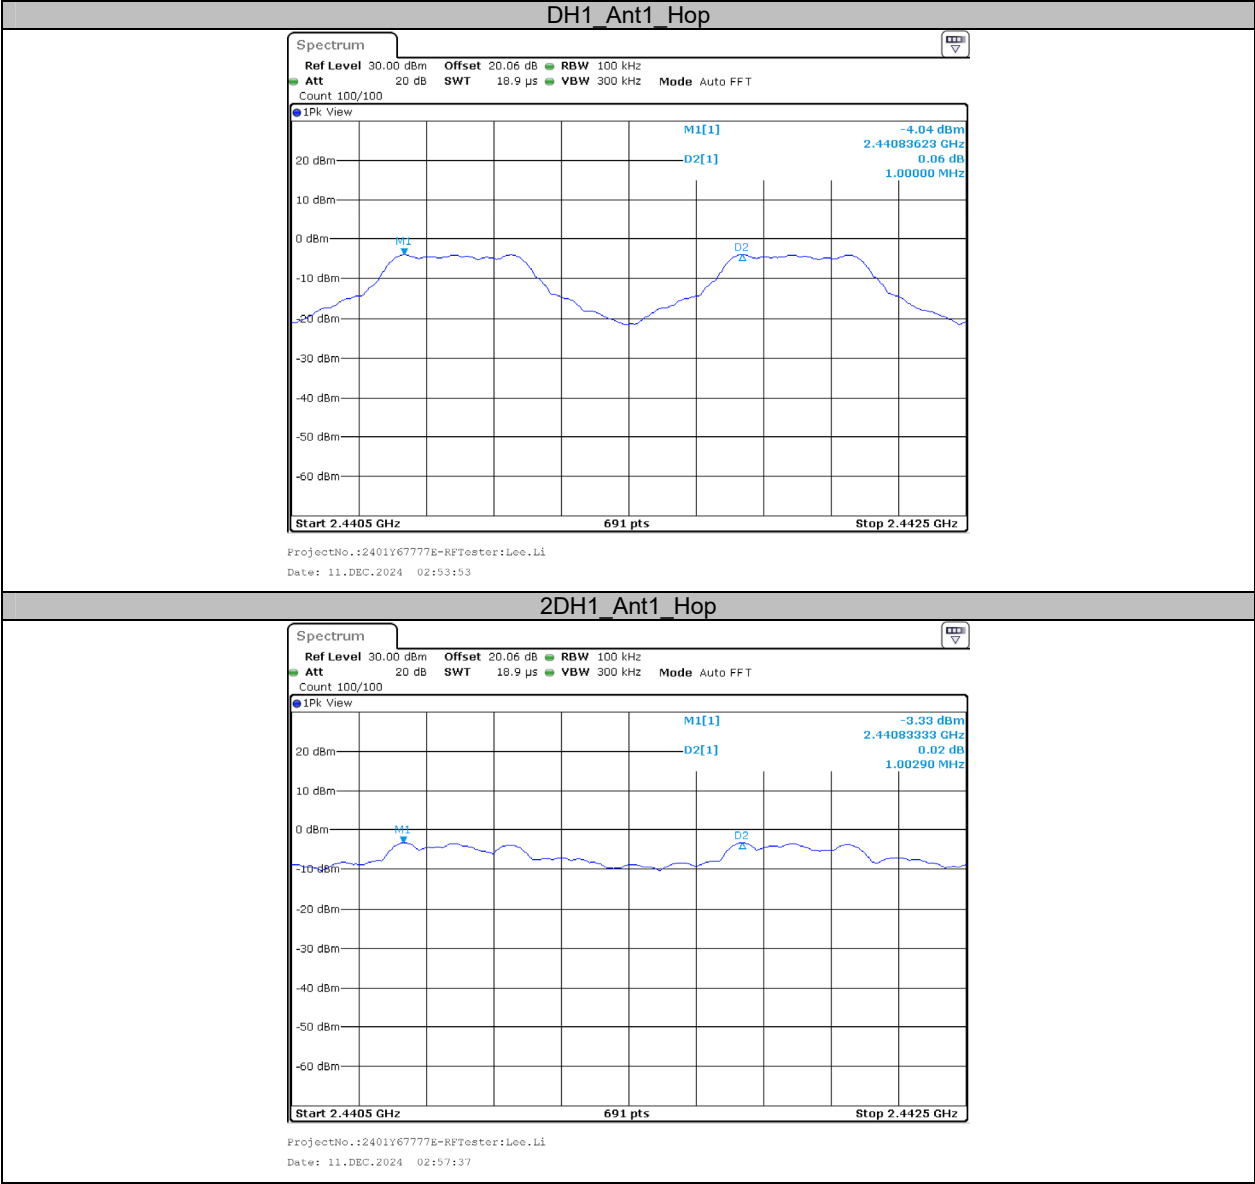

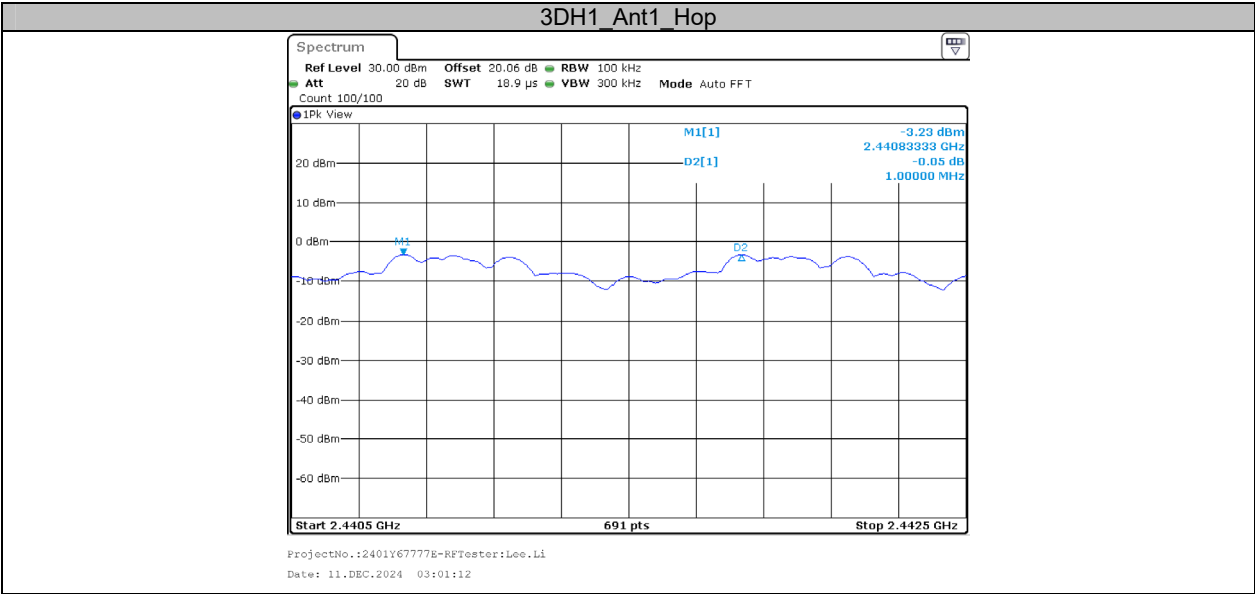

**Appendix E: Time of occupancy****Test Result**

Test Mode	Antenna	Channel	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	0.374	320	0.120	≤0.4	PASS
DH3	Ant1	Hop	1.623	150	0.243	≤0.4	PASS
DH5	Ant1	Hop	2.864	130	0.372	≤0.4	PASS
2DH1	Ant1	Hop	0.384	320	0.123	≤0.4	PASS
2DH3	Ant1	Hop	1.629	170	0.277	≤0.4	PASS
2DH5	Ant1	Hop	2.869	130	0.373	≤0.4	PASS
3DH1	Ant1	Hop	0.384	330	0.127	≤0.4	PASS
3DH3	Ant1	Hop	1.626	160	0.260	≤0.4	PASS
3DH5	Ant1	Hop	2.870	110	0.316	≤0.4	PASS


Note 1: A period time= $0.4 \times 79 = 31.6$ (S), Result=BurstWidth\*Totalhops


Note 2: Totalhops=Hopping Number in  $3.16s \times 10$


Note 3: Hopping Number in  $3.16s$ =Total of highest signals in  $3.16s$ (Second high signals were other channel)





## Test Graphs

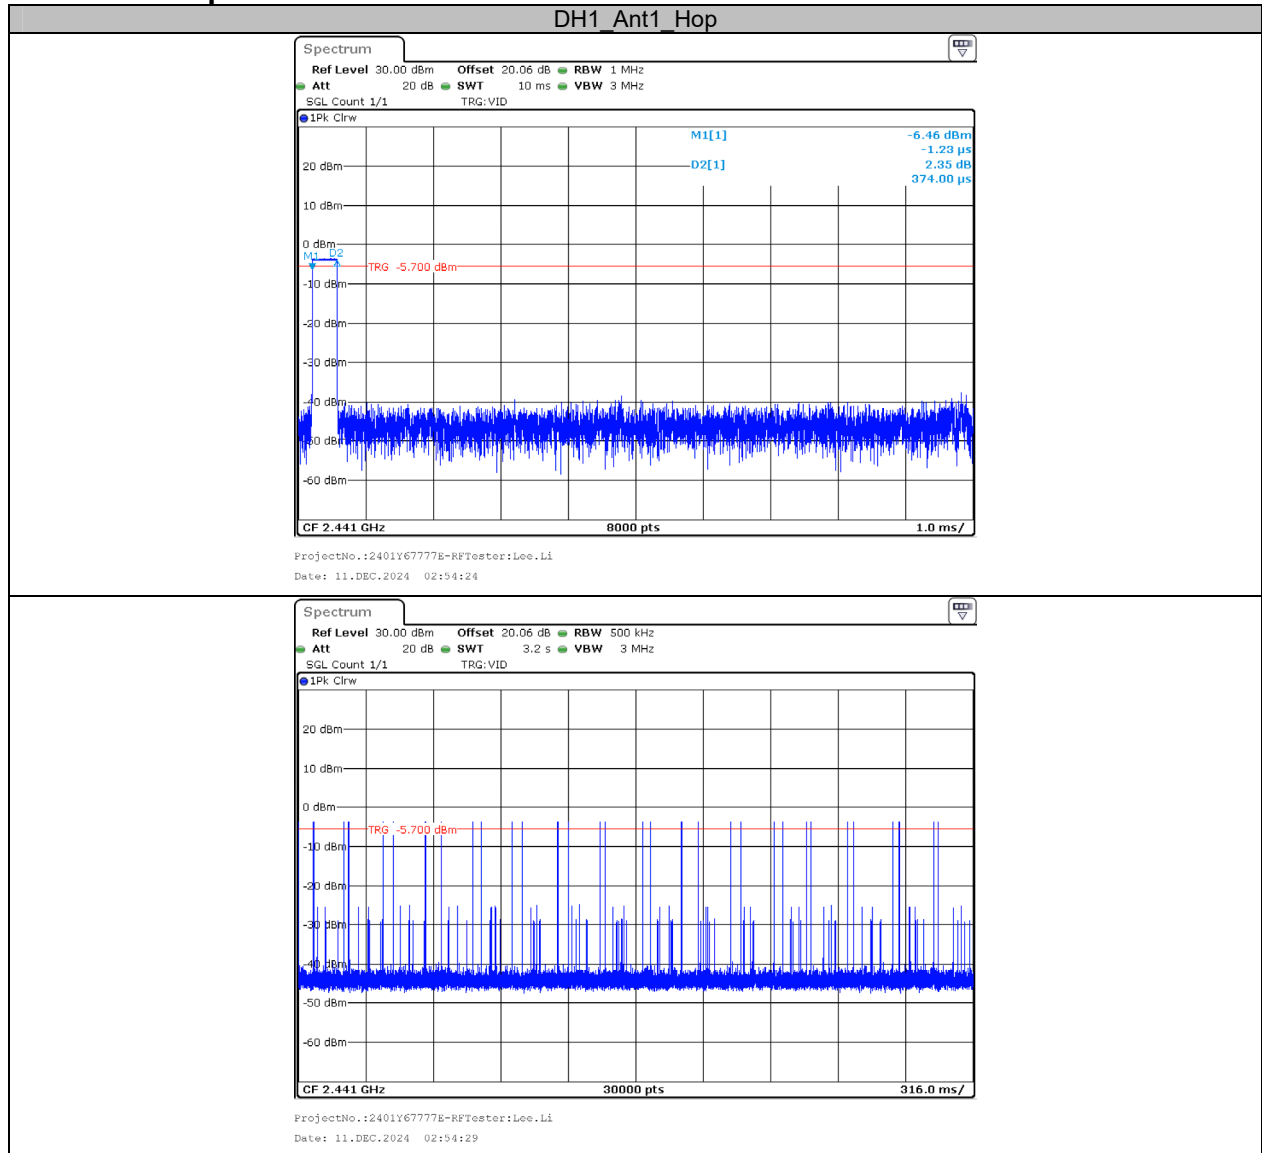


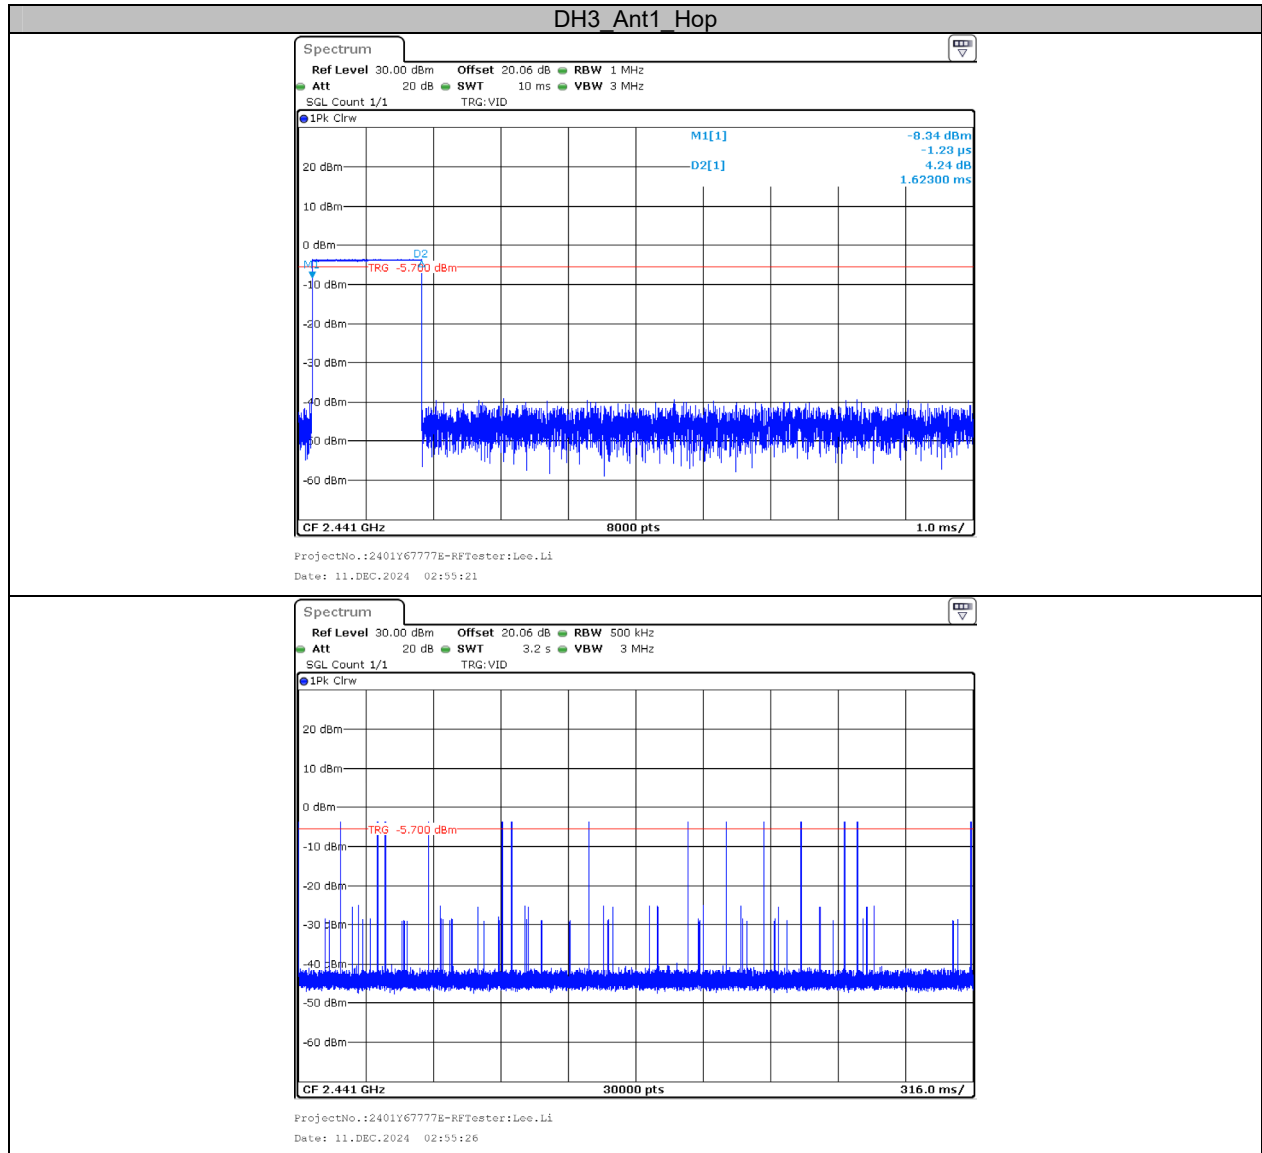


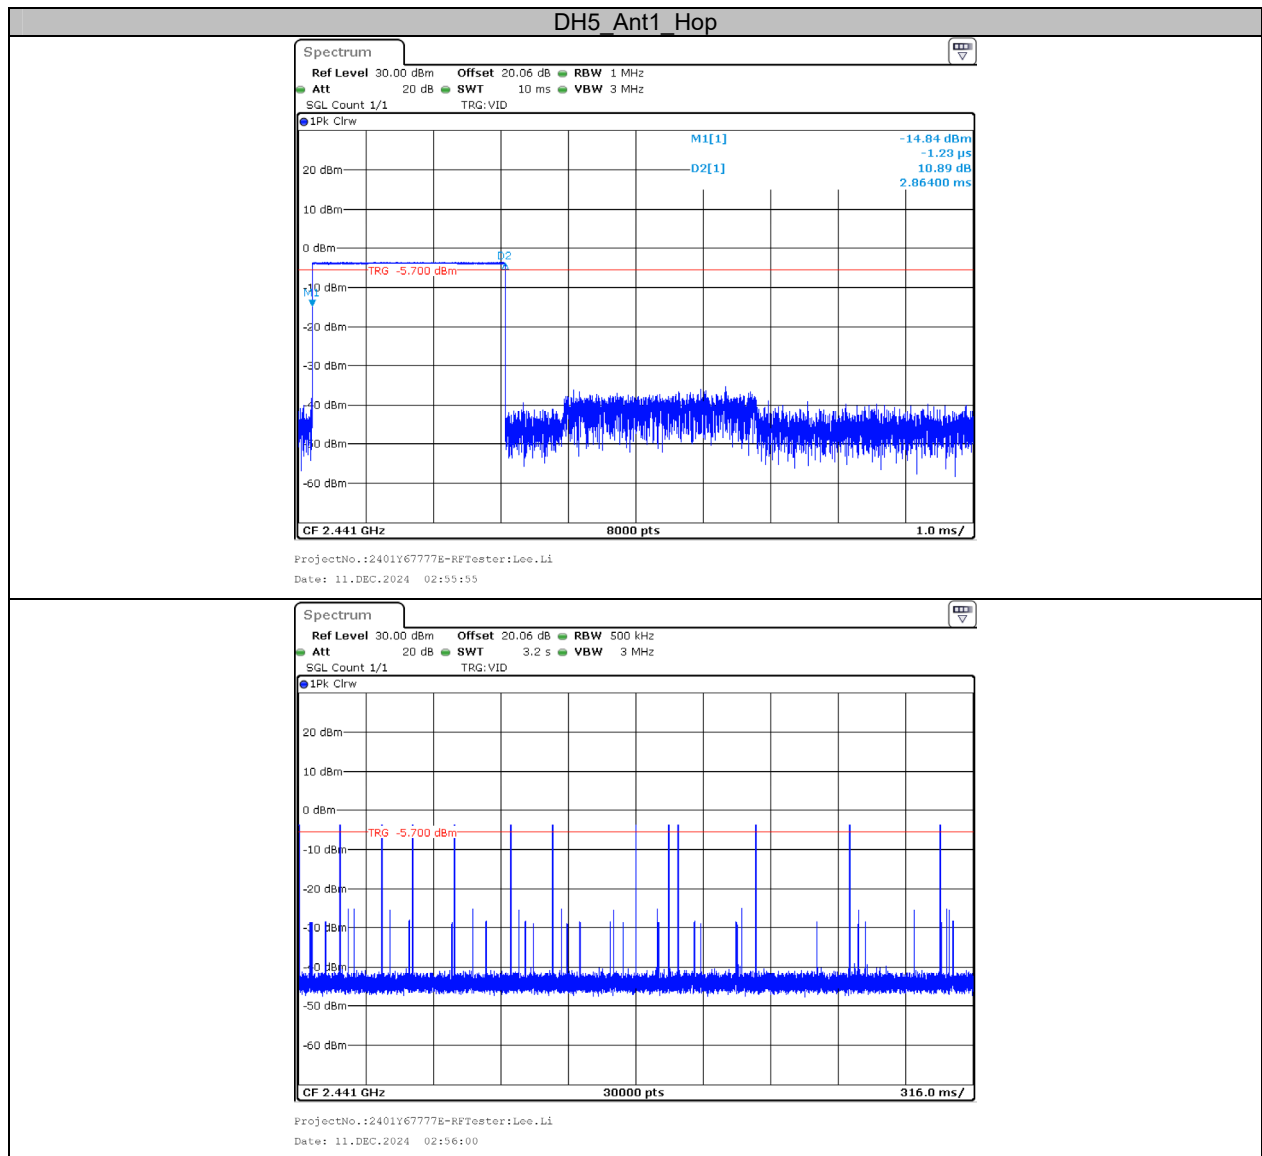


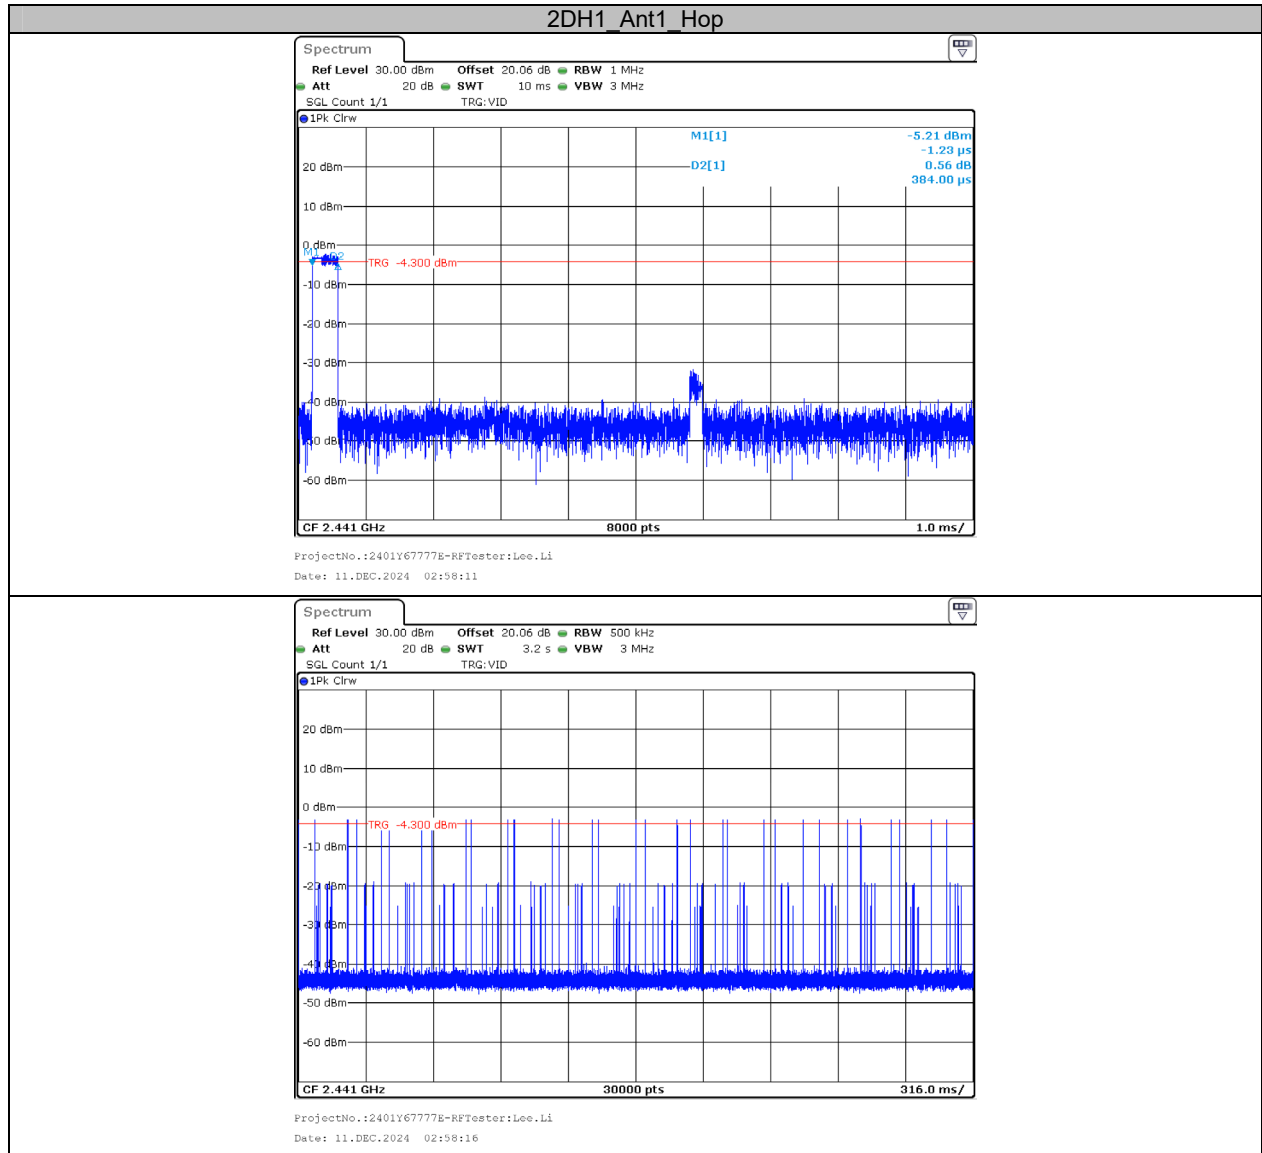

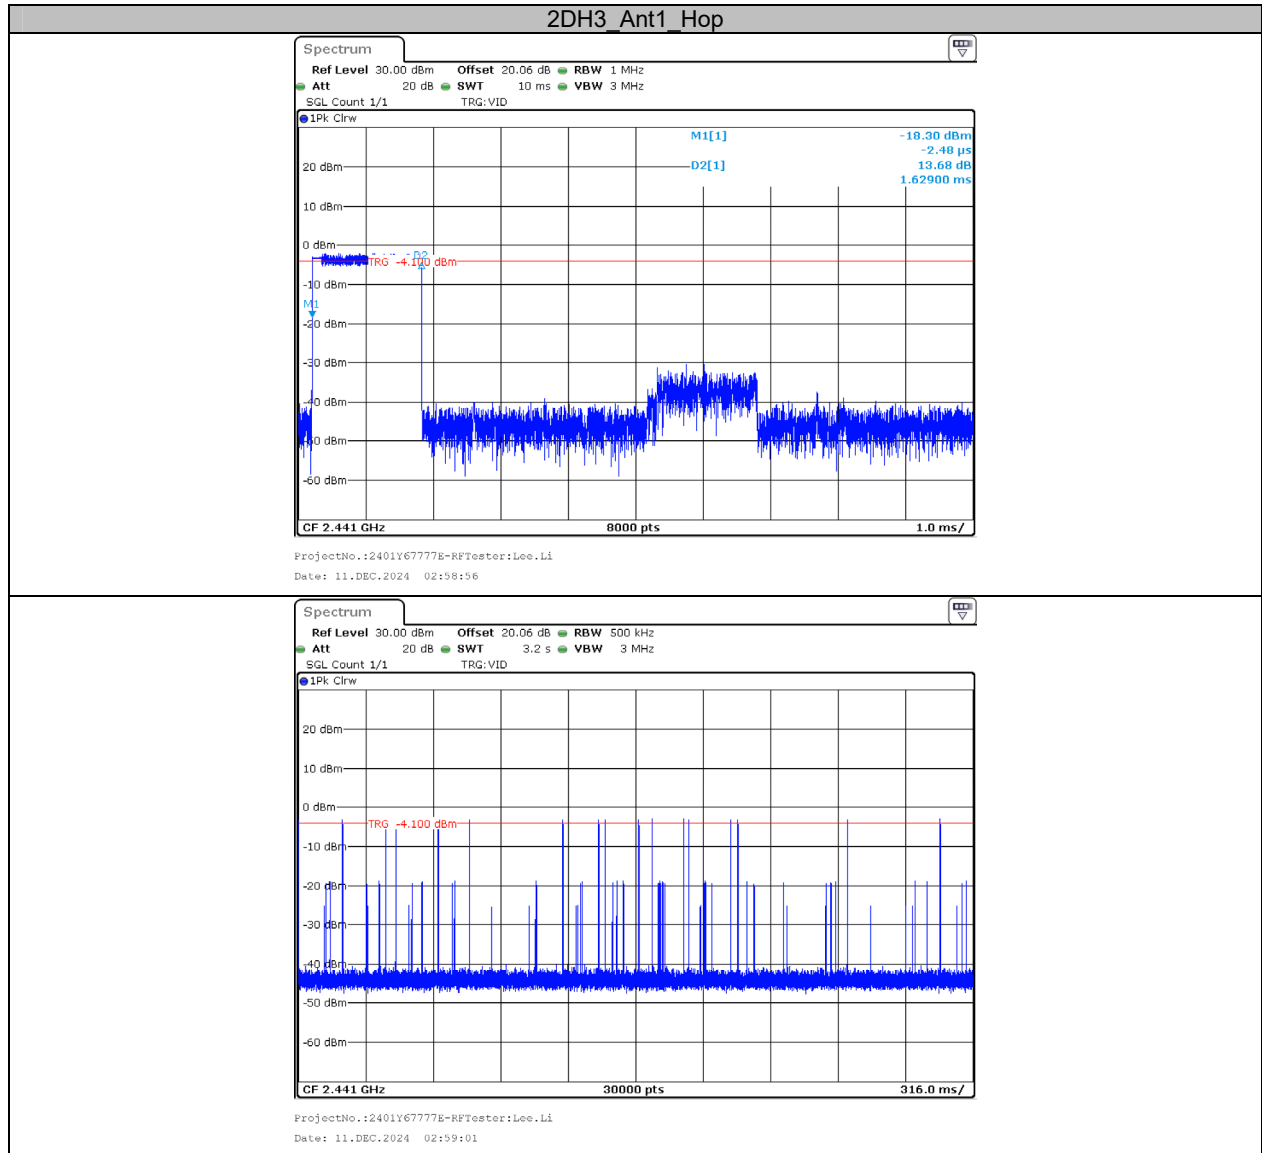


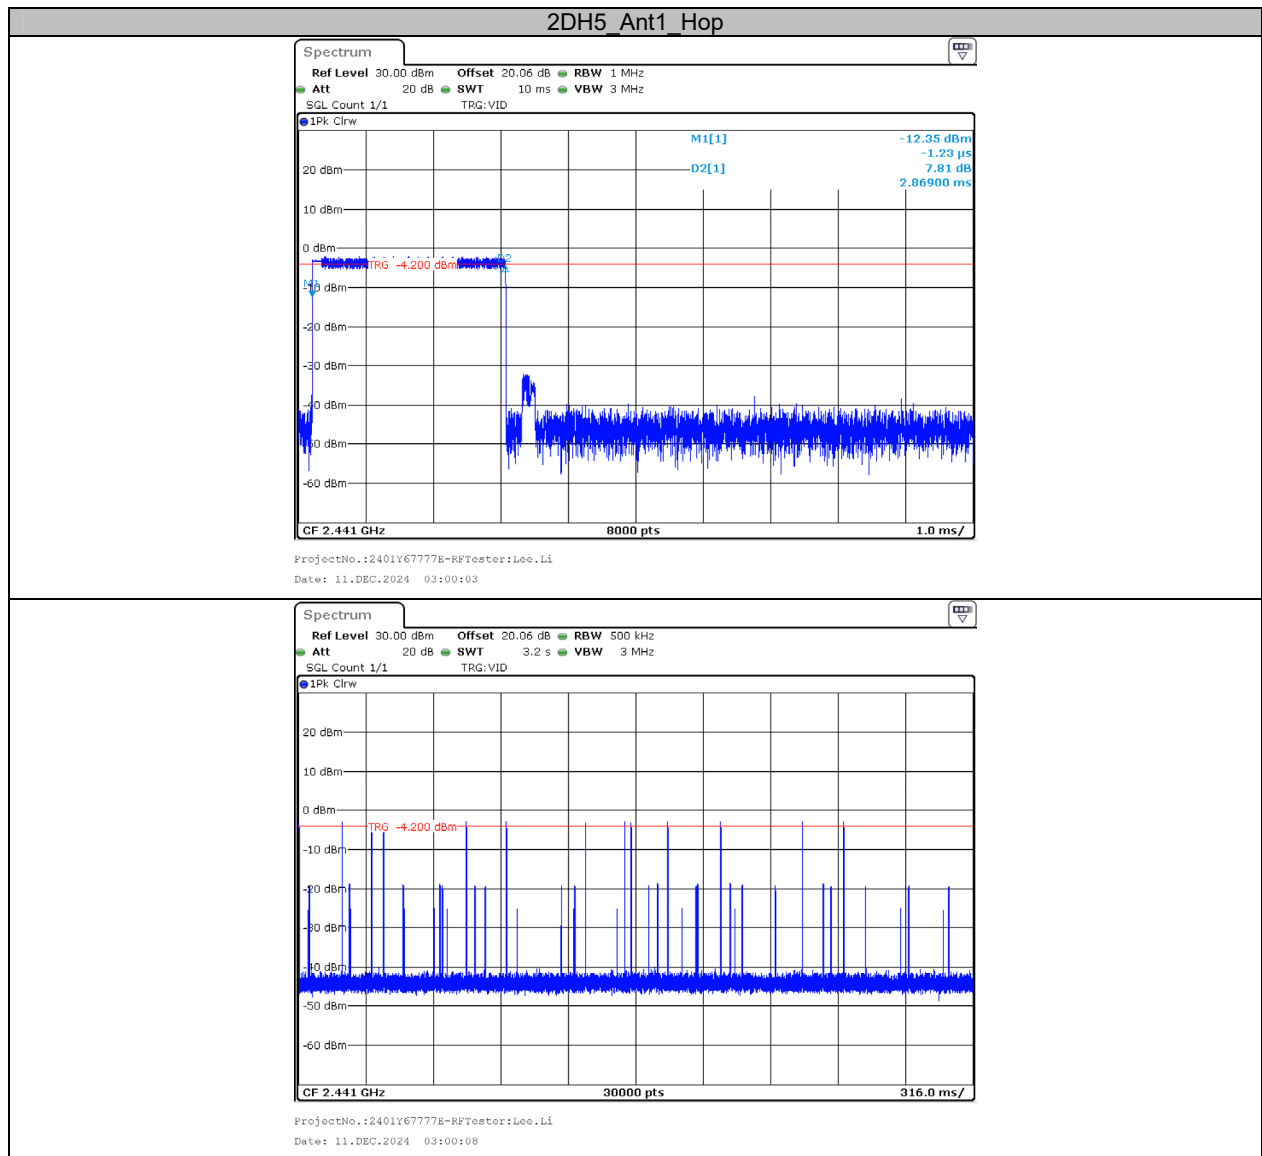

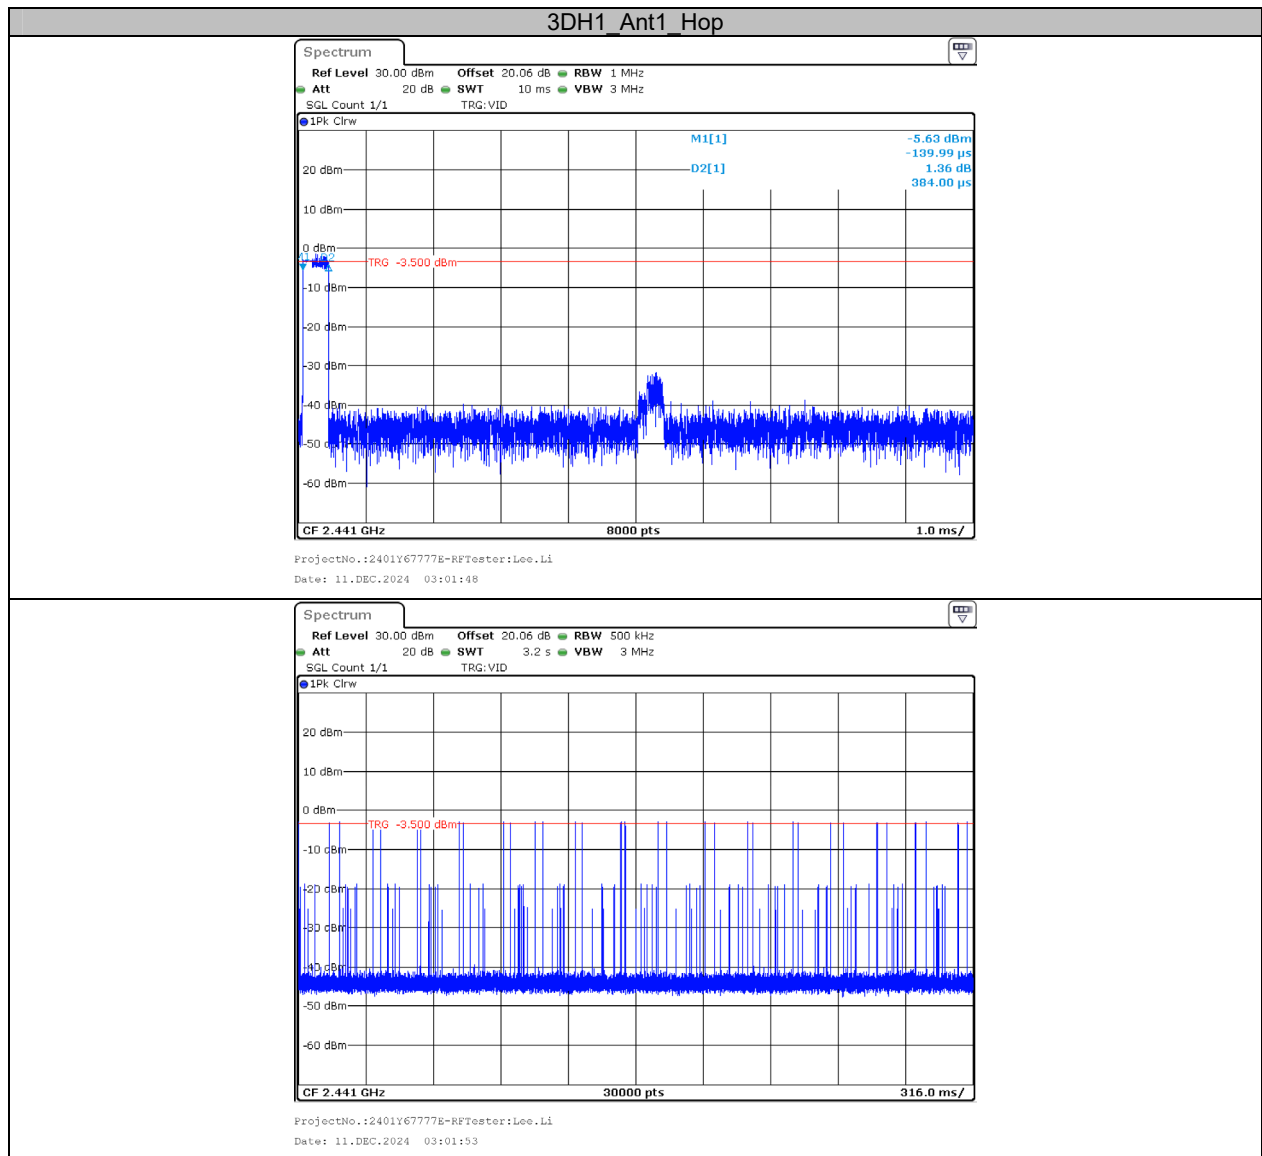

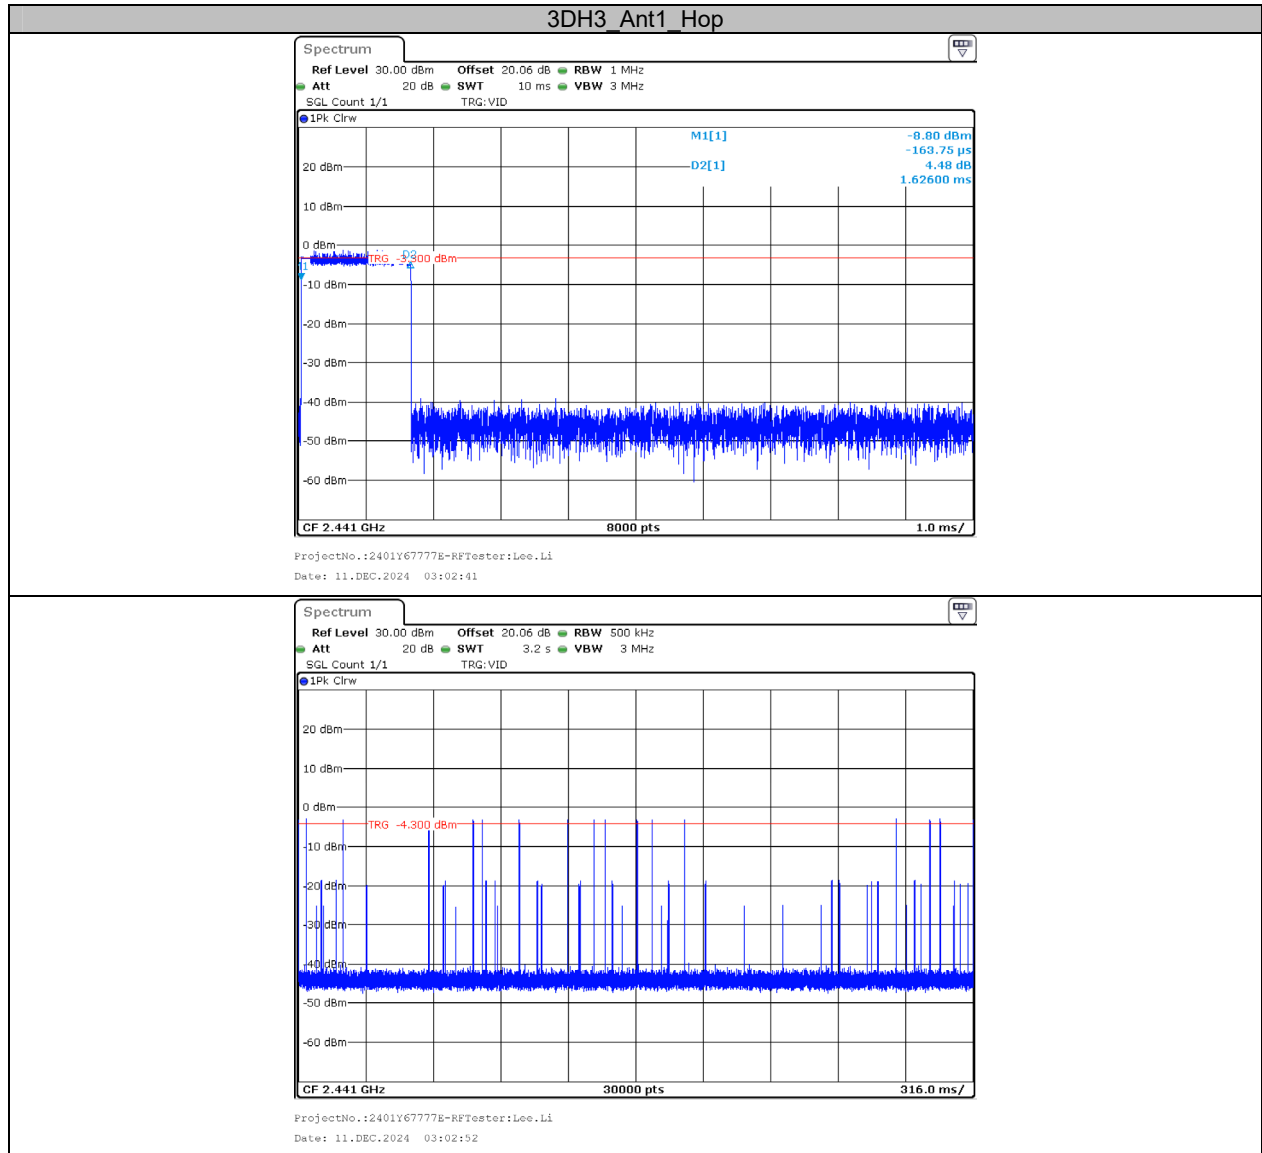



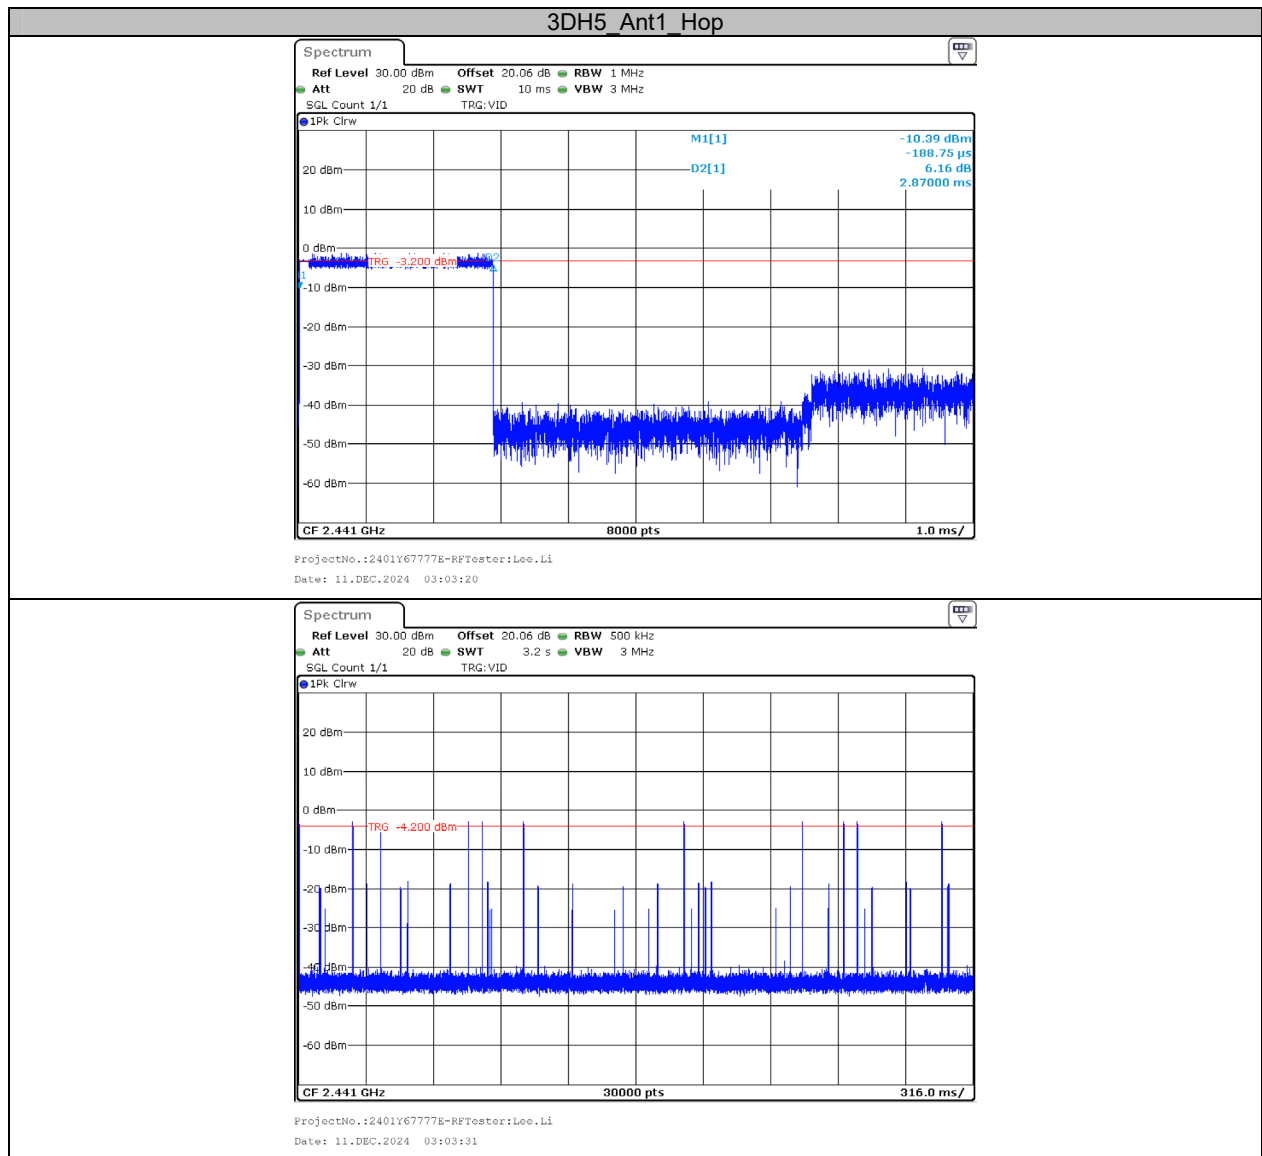



Appendix F: Number of hopping channels

Test Result

Test Mode	Antenna	Channel	Result[Num]	Limit[Num]	Verdict
DH1	Ant1	Hop	79	≥15	PASS
2DH1	Ant1	Hop	79	≥15	PASS
3DH1	Ant1	Hop	79	≥15	PASS


Test Graphs

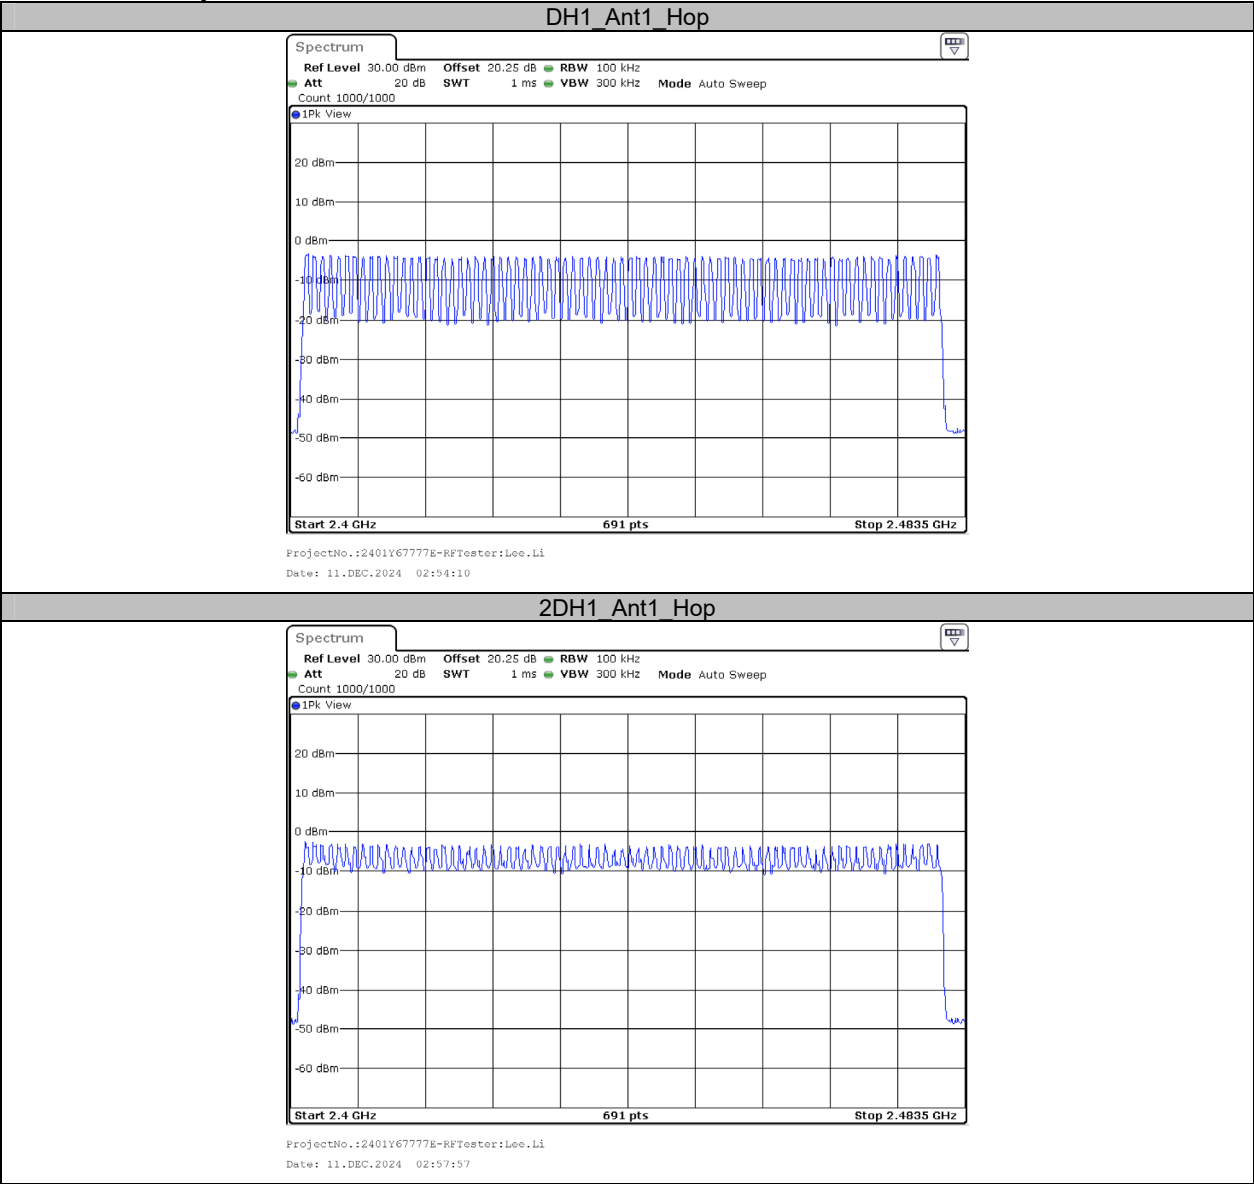


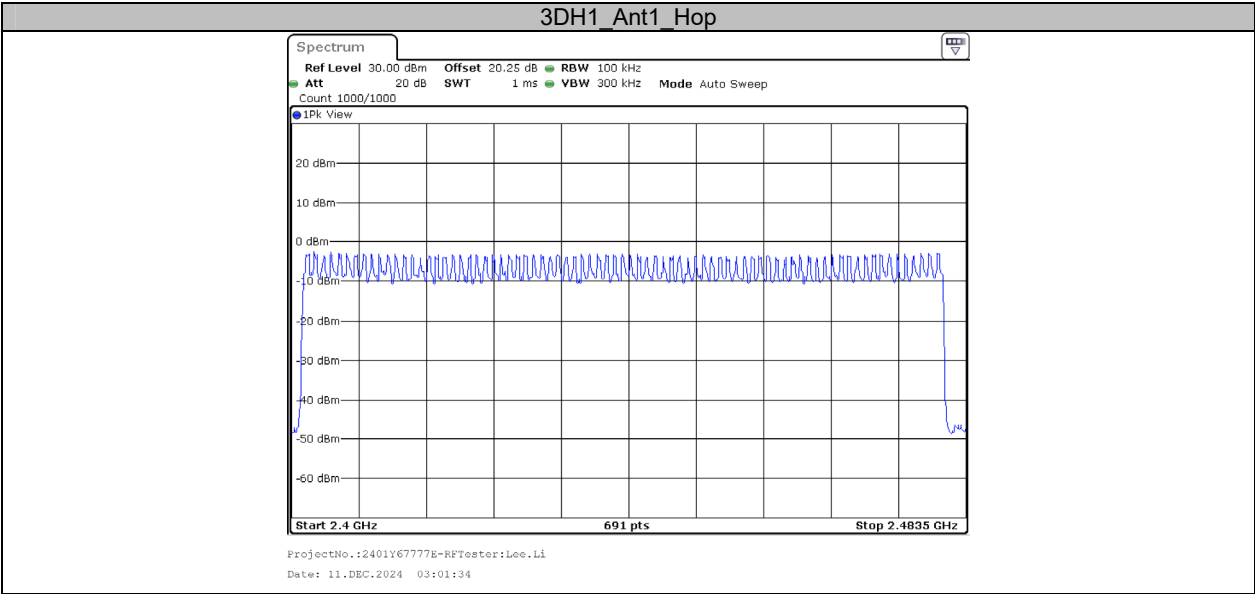



Appendix G: Band edge measurements

Test Graphs

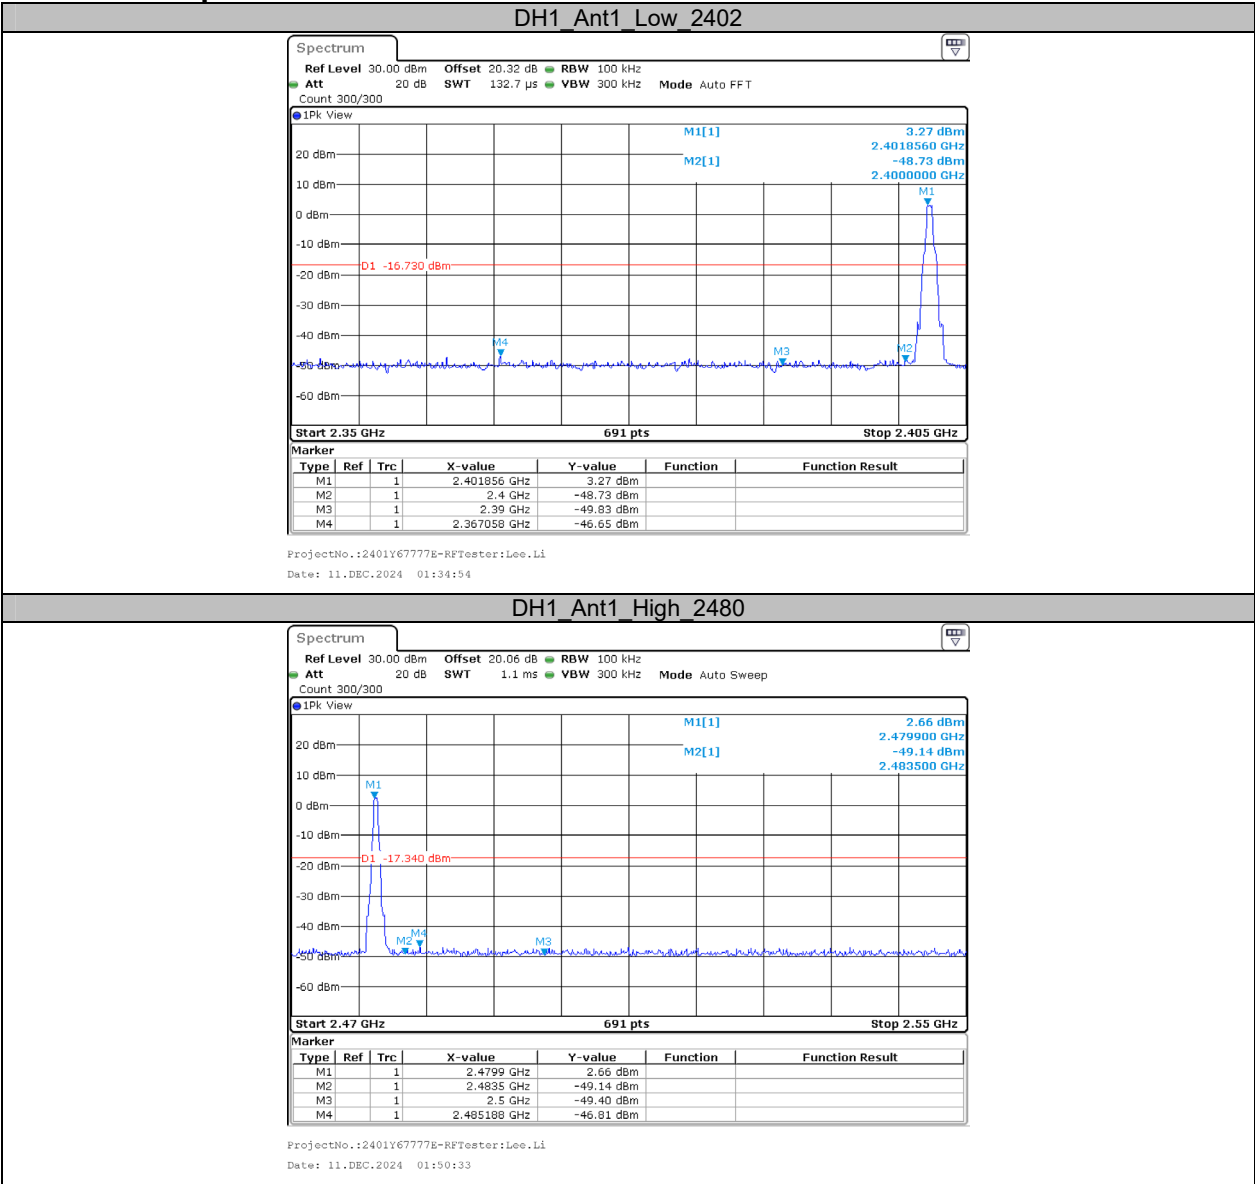


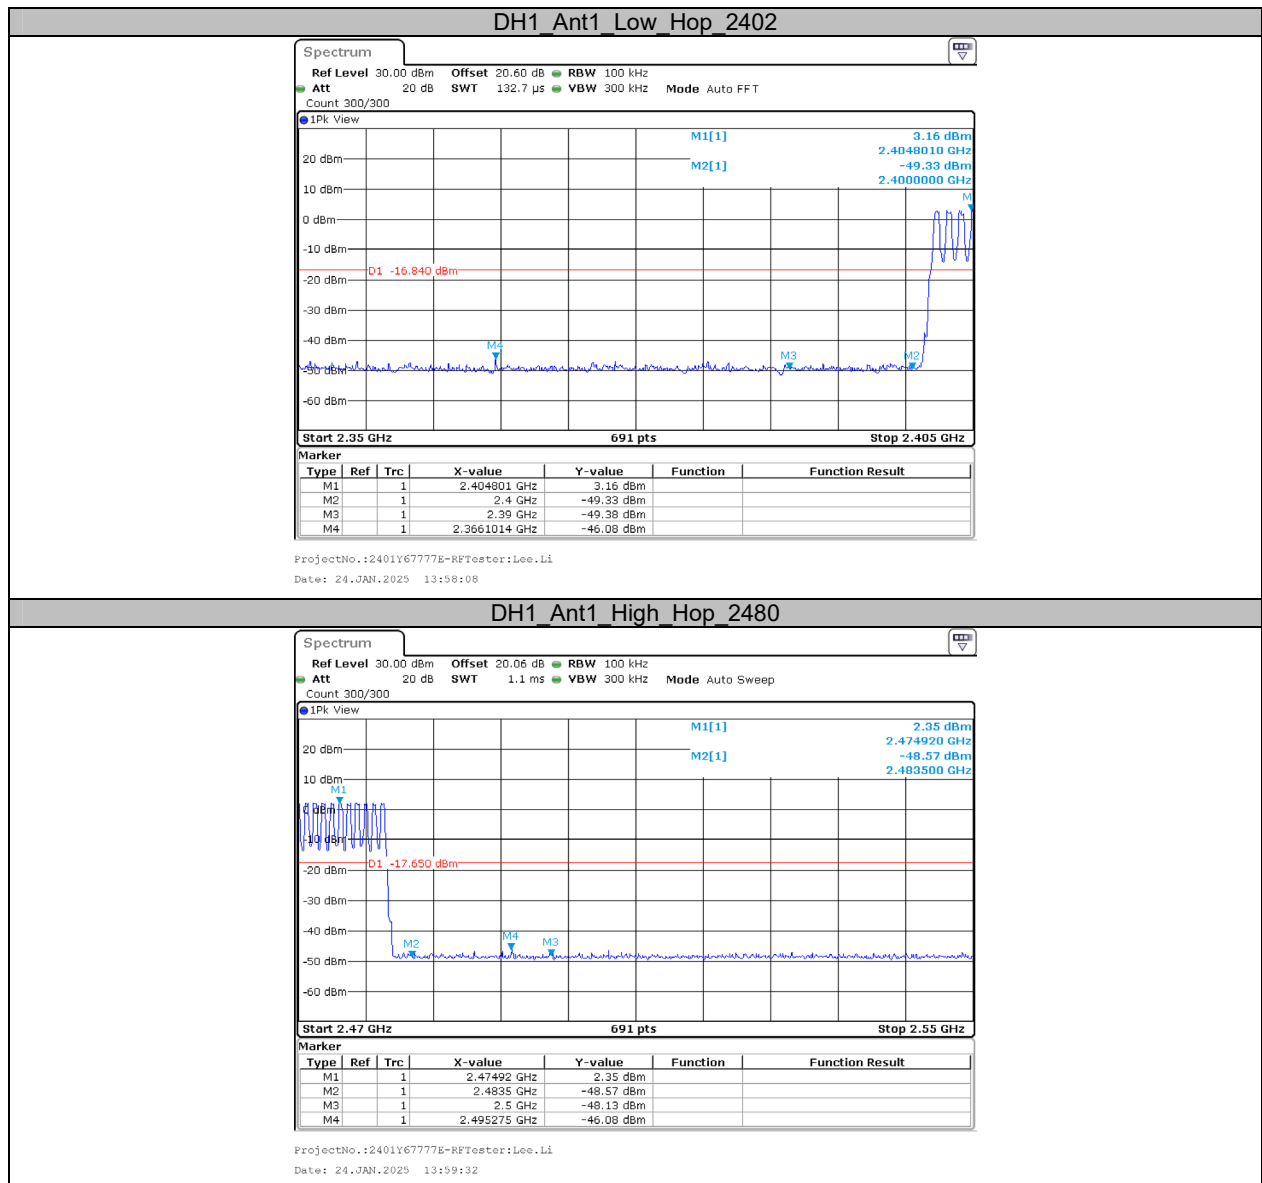

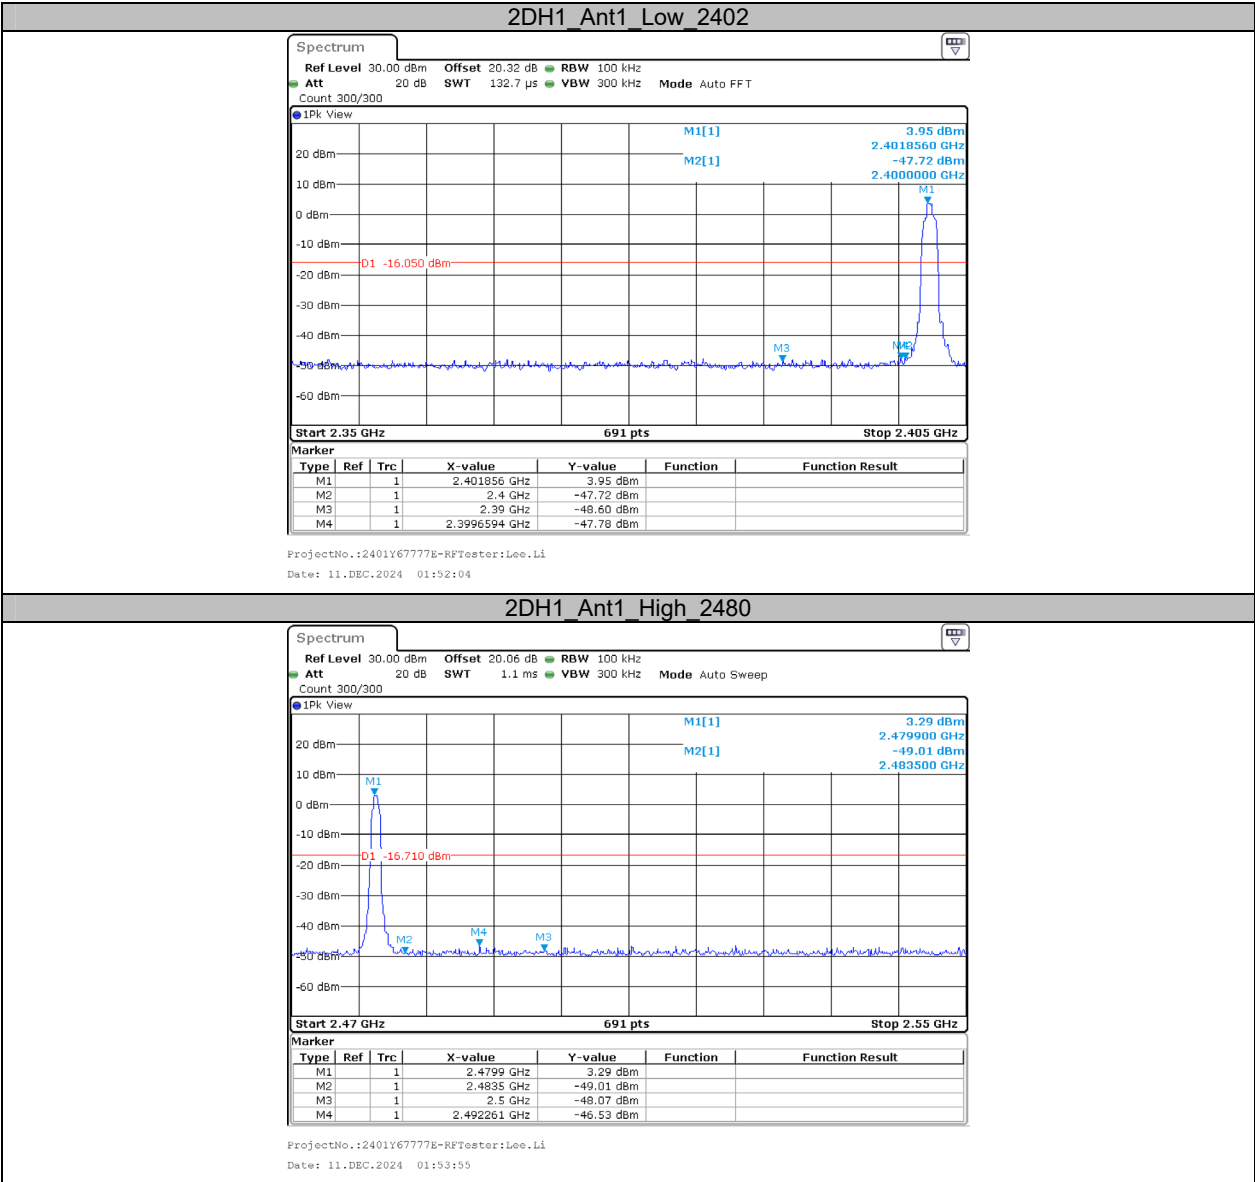

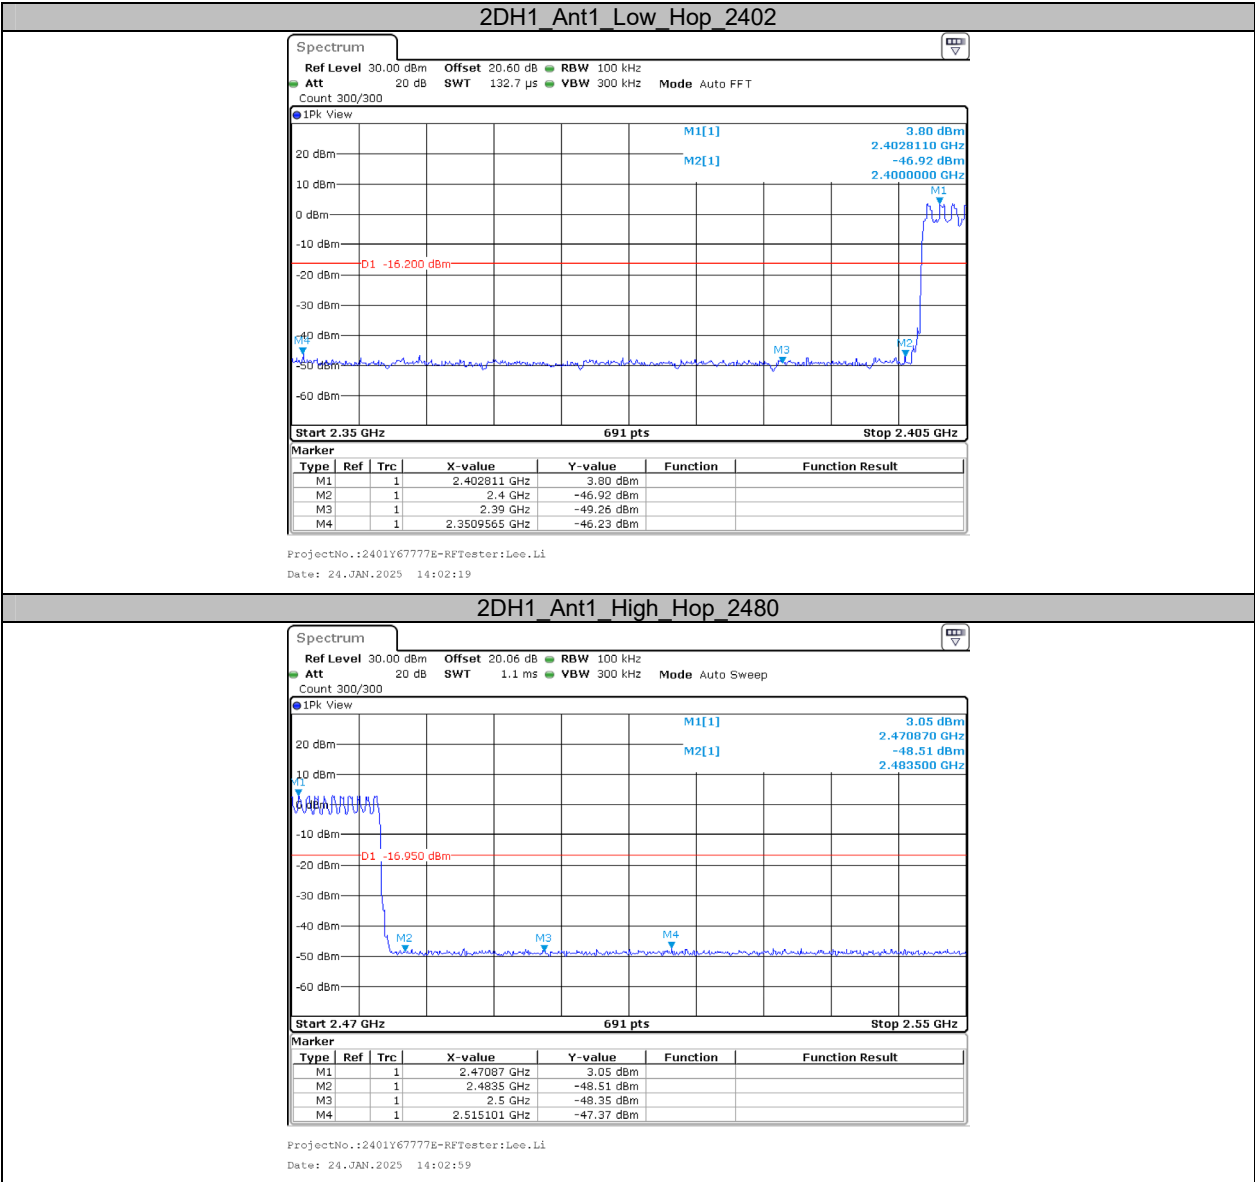


## 3DH1\_Ant1\_Low\_2402

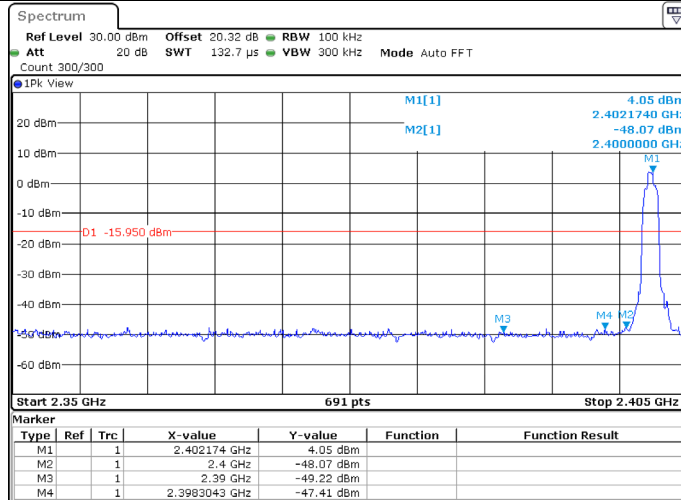

ProjectNo.:2401Y67777E-RFTester:Lee.Li

Date: 11.DEC.2024 01:54:59

## 3DH1\_Ant1\_High\_2480

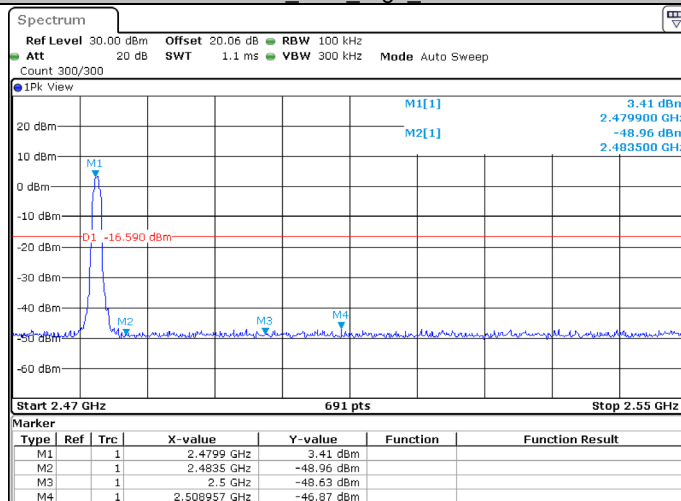

ProjectNo.:2401Y67777E-RFTester:Lee.Li

Date: 11.DEC.2024 03:06:13



