



FCC / ISSED Test Report

FOR:
CalAmp

Model Name:
LMU-3640 HSPA

Product Description:
Telematics Gateway

FCC ID: APV-3640HEB
IC ID: 5843A-3640HEB

Applied Rules and Standards:
47 CFR Part 15.247 (DSS)
RSS-247 Issue 2 (FHSs) & RSS-Gen Issue 5

REPORT #: EMC_CALAM_064_15.247_DSS

DATE: 2018-06-20



A2LA Accredited

IC recognized #
3462B-1

CETECOM Inc.

411 Dixon Landing Road • Milpitas, CA 95035 • U.S.A.

Phone: + 1 (408) 586 6200 • Fax: + 1 (408) 586 6299 • E-mail: info@cetecom.com • <http://www.cetecom.com>

CETECOM Inc. is a Delaware Corporation with Corporation number: 2905571

TABLE OF CONTENTS

1	ASSESSMENT.....	3
2	ADMINISTRATIVE DATA	4
2.1	IDENTIFICATION OF THE TESTING LABORATORY ISSUING THE EMC TEST REPORT	4
2.2	IDENTIFICATION OF THE CLIENT	4
2.3	IDENTIFICATION OF THE MANUFACTURER.....	4
3	EQUIPMENT UNDER TEST (EUT).....	5
3.1	EUT SPECIFICATIONS	5
3.2	EUT SAMPLE DETAILS	6
3.3	ACCESSORY EQUIPMENT (AE) DETAILS.....	6
3.4	TEST SAMPLE CONFIGURATION	6
3.5	JUSTIFICATION FOR WORST CASE MODE OF OPERATION.....	6
4	SUBJECT OF INVESTIGATION	7
5	MEASUREMENT RESULTS SUMMARY	7
6	MEASUREMENTS.....	8
6.1	MEASUREMENT UNCERTAINTY	8
6.2	ENVIRONMENTAL CONDITIONS DURING TESTING:.....	8
6.3	DATES OF TESTING:	8
7	MEASUREMENT PROCEDURES	9
7.1	RADIATED MEASUREMENT.....	9
7.2	POWER LINE CONDUCTED MEASUREMENT PROCEDURE	11
7.3	RF CONDUCTED MEASUREMENT PROCEDURE	11
8	TEST RESULT DATA	12
8.1	TRANSMITTER SPURIOUS EMISSIONS AND RESTRICTED BANDS	12
9	TEST SETUP PHOTOS	20
10	TEST EQUIPMENT AND ANCILLARIES USED FOR TESTING	20
11	REVISION HISTORY	21

1 Assessment

The following device was evaluated against the applicable criteria specified in FCC rules Parts 15.247 of Title 47 of the Code of Federal Regulations and the relevant ISED Canada standard RSS-247.

No deviations were ascertained.

Company	Description	Model Name
CalAmp	Telematics Gateway	LMU-3640 HSPA

Responsible for Testing Laboratory:

2018-06-20	Compliance	James Donnellan (Lab Manager-EMC)	
Date	Section	Name	Signature

Responsible for the Report:

2018-06-20	Compliance	Kevin Wang (Senior EMC Engineer)	
Date	Section	Name	Signature

The test results of this test report relate exclusively to the test item specified in Section 3.

CETECOM Inc. USA does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM Inc. USA.

2 Administrative Data

2.1 Identification of the Testing Laboratory Issuing the EMC Test Report

Company Name:	CETECOM Inc.
Department:	Compliance
Street Address:	411 Dixon Landing Road
City/Zip Code	Milpitas, CA 95035
Country	USA
Telephone:	+1 (408) 586 6200
Fax:	+1 (408) 586 6299
EMC Lab Manager:	James Donnellan
Responsible Project Leader:	Kevin Wang

2.2 Identification of the Client

Applicant's Name:	CalAmp
Street Address:	2177 Salk Ave, Suite 200
City/Zip Code	Carlsbad, CA 90228
Country	United States

2.3 Identification of the Manufacturer

Manufacturer's Name:	Same as Applicant
Manufacturers Address:	-----
City/Zip Code	-----
Country	-----

3 Equipment Under Test (EUT)

3.1 EUT Specifications

Model No:	LMU-3640 HSPA
HW Version :	REV A
SW Version :	6.2
FCC-ID :	APV-3640HEB
IC-ID:	5843A-3640HEB
FVIN:	N/A
HVIN:	LMU3640HEB
PMN:	LMU-3640 HSPA
Product Description:	Telematics Gateway
Frequency Range / number of channels:	Nominal band: 2400 MHz – 2483.5 MHz Center to center: 2402 MHz (ch 0) – 2480 MHz (ch 78), 79 Channels
Type(s) of Modulation:	Bluetooth Basic/EDR: GFSK, $\pi/4$ DQPSK, 8DPSK
Modes of Operation:	Hopping
Antenna Information as declared:	Ethertronics model: M830820; Peak Gain: 1.39dBi
Max. declared output Powers:	Conducted Power 11.51dBm from previous report (FCC ID: APV-3640LAB/APV-3640LVB)
Power Supply/ Rated Operating Voltage Range:	8V (Low) / 12-24V (Nominal) / 32V (Max), DC
Operating Temperature Range	-30°C ~ +75°C
Other Radios included in the device:	Bluetooth 4.2 Low Energy (BT LE) Cellular CINTERION EHS6:GSM/GPRS/EDGE/UMTS/HSPA
Sample Revision	☐ Prototype Unit; ☐ Production Unit; ☒ Pre-Production

3.2 EUT Sample details

EUT #	Serial Number	HW Version	SW Version	Notes/Comments
1	E17B005458	REV A	6.2	Radiated Sample
2	E17B005457	REV A	6.2	Conducted Sample

3.3 Accessory Equipment (AE) details

AE #	Type	Model	Manufacturer	Serial Number
1	DC Power Supply	3003B	Protek	-
2	Laptop	Latitude 5420	Dell	161554860001

3.4 Test Sample Configuration

EUT Set-up #	Combination of AE used for test set up	Comments
1	EUT#1+AE#1+AE#2	The EUT is directly powered by the DC power supply.

3.5 Justification for Worst Case Mode of Operation

During the testing process, the EUT was tested with transmitter sets on low, mid and high channels, and 50%-80% dynamic duty cycle.

For radiated measurements, all data in this report shows the worst case between horizontal and vertical antenna polarizations and for all orientations of the EUT.

4 Subject of Investigation

The objective of the measurements done by CETECOM Inc. was to assess the performance of the EUT according to the relevant requirements specified in FCC rules Part 15.247 of Title 47 of the Code of Federal Regulations and Radio Standard Specification RSS-247 Issue 2 of ISED Canada.

This test report is to support a request for new equipment authorization under the:

- FCC ID: APV-3640HEB
- IC ID: 5843A-3640HEB

Testing procedures are based on ANSI C63.10:2013 including section 7.8 for FHSS systems.

5 Measurement Results Summary

Test Specification	Test Case	Temperature and Voltage Conditions	Mode	Pass	NA	NP	Result
§15.247(b)(1) RSS-247 5.4(b)	Maximum Peak Conducted Output Power	Nominal	-	☐	☐	☒	Note 2
§15.247(d) RSS-247 5.5 RSS-Gen 8.10	Band Edge Compliance	Nominal	-	☐	☐	☒	Note 2
§15.247(a)(1) RSS-247 5.1(b)	Spectrum Bandwidth	Nominal	-	☐	☐	☒	Note 2
§15.247(a)(1) RSS-247 5.1(b)	Carrier Frequency Separation	Nominal	-	☐	☐	☒	Note 2
§15.247(a)(1) RSS-247 5.1(d)	Number of Hopping Channels	Nominal	-	☐	☐	☒	Note 2
§15.247(a)(1)(iii) RSS-247 5.1(d)	Time of occupancy	Nominal	-	☐	☐	☒	Note 2
§15.247(d) §15.209 (a) RSS-Gen 6.13	TX Spurious emissions-Radiated	Nominal	8DPSK	☒	☐	☐	Complies
§15.207(a) RSS-Gen 8.8	AC Conducted Emissions	Nominal	-	☐	☒	☐	Note 3

Note: NA= Not Applicable; NP= Not Performed.

Note 2: data leveraged from same Bluetooth module, FCC ID: APV-3640LAB/APV-3640LVB; IC ID: 5843A-3640LAB/5843A-3640LVB

Note 3: the EUT is DC powered.

6 Measurements

6.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus, with 95% confidence interval (in dB delta to result), based on a coverage factor k=1.

Radiated measurement

9 kHz to 30MHz	±2.5 dB (Magnetic Loop Antenna)
30 MHz to 1000 MHz	±2.0 dB (Biconilog Antenna)
1 GHz to 40 GHz	±2.3 dB (Horn Antenna)

Conducted measurement

RF conducted measurement	±0.5 dB
--------------------------	---------

6.2 Environmental Conditions During Testing:

The following environmental conditions were maintained during the course of testing:

- Ambient Temperature: 20-25°C
- Relative humidity: 40-60%

6.3 Dates of Testing:


05/23/2018 - 06/01/2018

7 Measurement Procedures


7.1 Radiated Measurement

The radiated measurement is performed according to: ANSI C63.10 (2013)


- The exploratory measurement is accomplished by running a matrix of 16 sweeps over the required frequency range with R&S Test-SW EMC32 for 4 positions of the turntable, two orthogonal positions of the EUT and both antenna polarizations. This procedure exceeds the requirement of the above standards to cover the 3 orthogonal axis of the EUT. A max peak detector is utilized during the exploratory measurement. The Test-SW creates an overall maximum trace for all 12 sweeps and saves the settings for each point of this trace. The maximum trace is part of the test report.
- The 10 highest emissions are selected with an automatic algorithm of EMC32 searching for peaks in the noise floor and ensuring that broadband signals are not selected multiple times.
- The maxima are then put through the final measurement and again maximized in a 90deg range of the turntable, fine search in frequency domain and height scan between 1m and 4m.
- The above procedure is repeated for all possible ways of power supply to EUT and for all supported modulations.
- In case there are no emissions above noise floor level only the maximum trace is reported as described above.
- The results are split up into up to 4 frequency ranges due to antenna bandwidth restrictions. A magnetic loop is used from 9 kHz to 30 MHz, a Biconilog antenna is used from 30 MHz to 1 GHz, and two different horn antennas are used to cover frequencies up to 40 GHz.

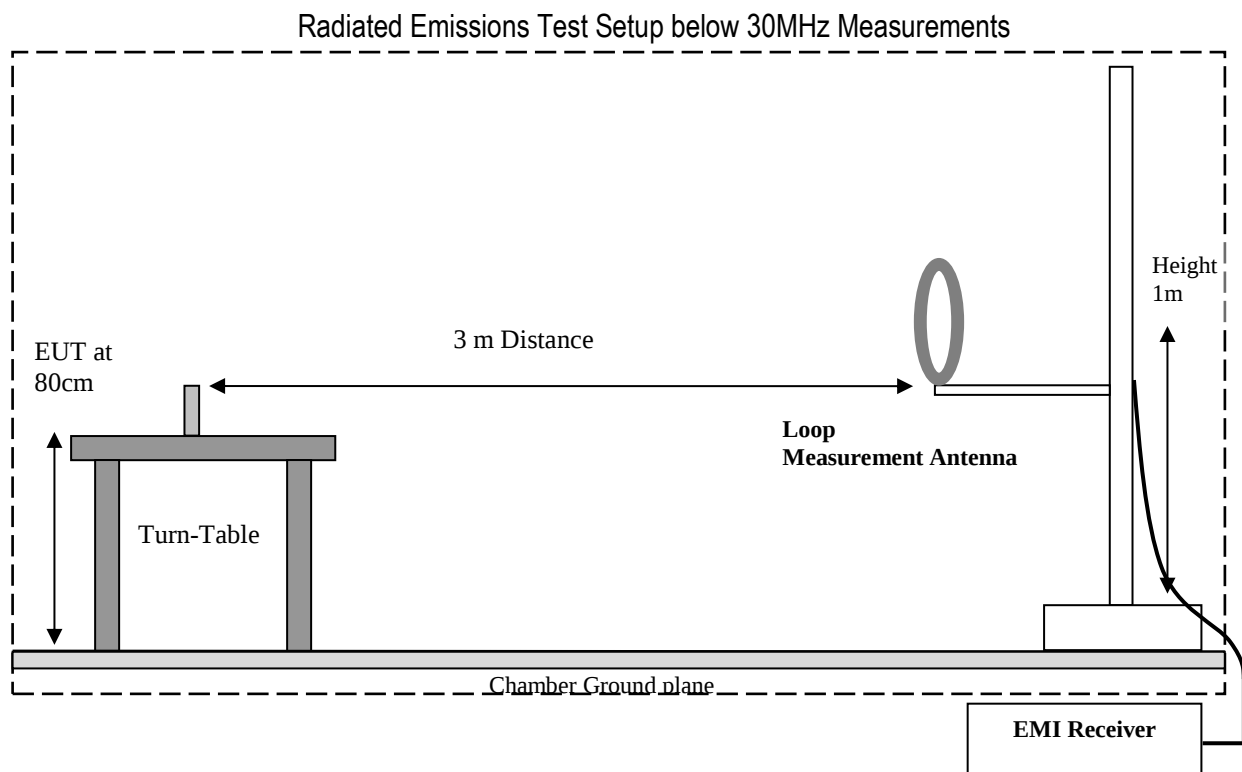

Radiated Emissions Test Setup 30MHz-1GHz Measurements

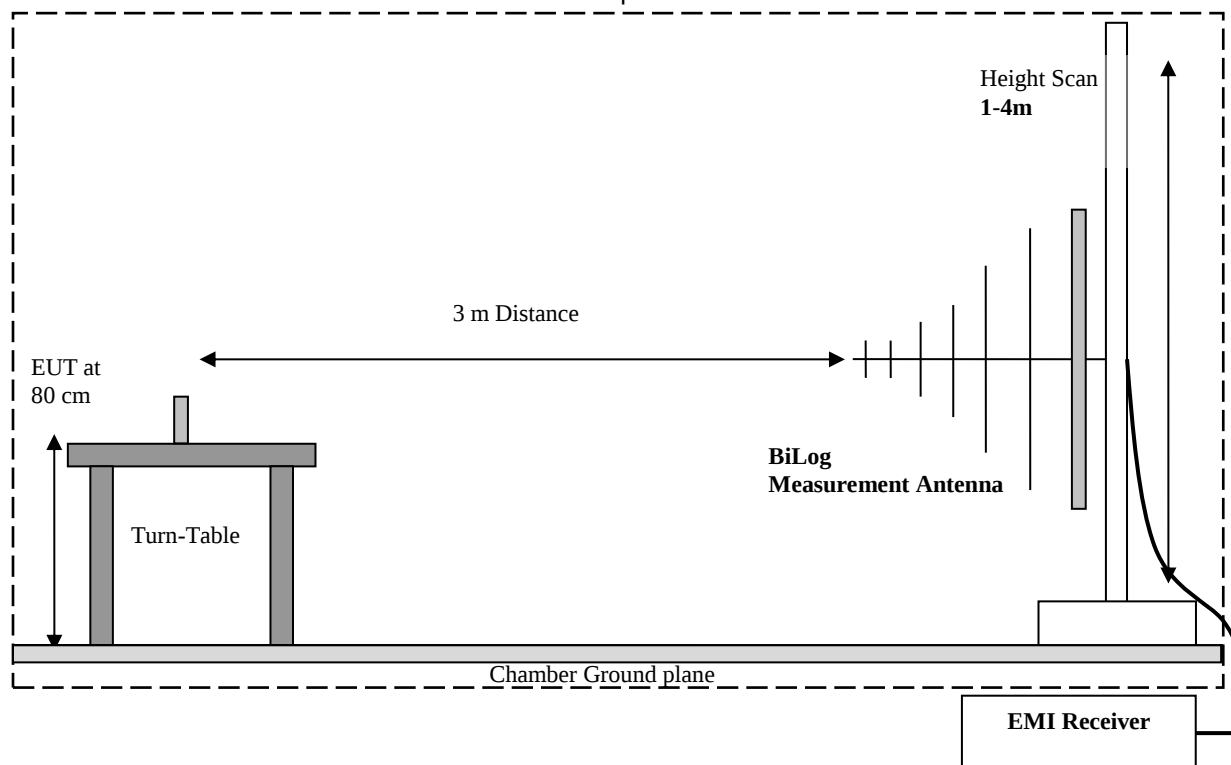

Radiated Emissions Test Setup above 1GHz Measurements

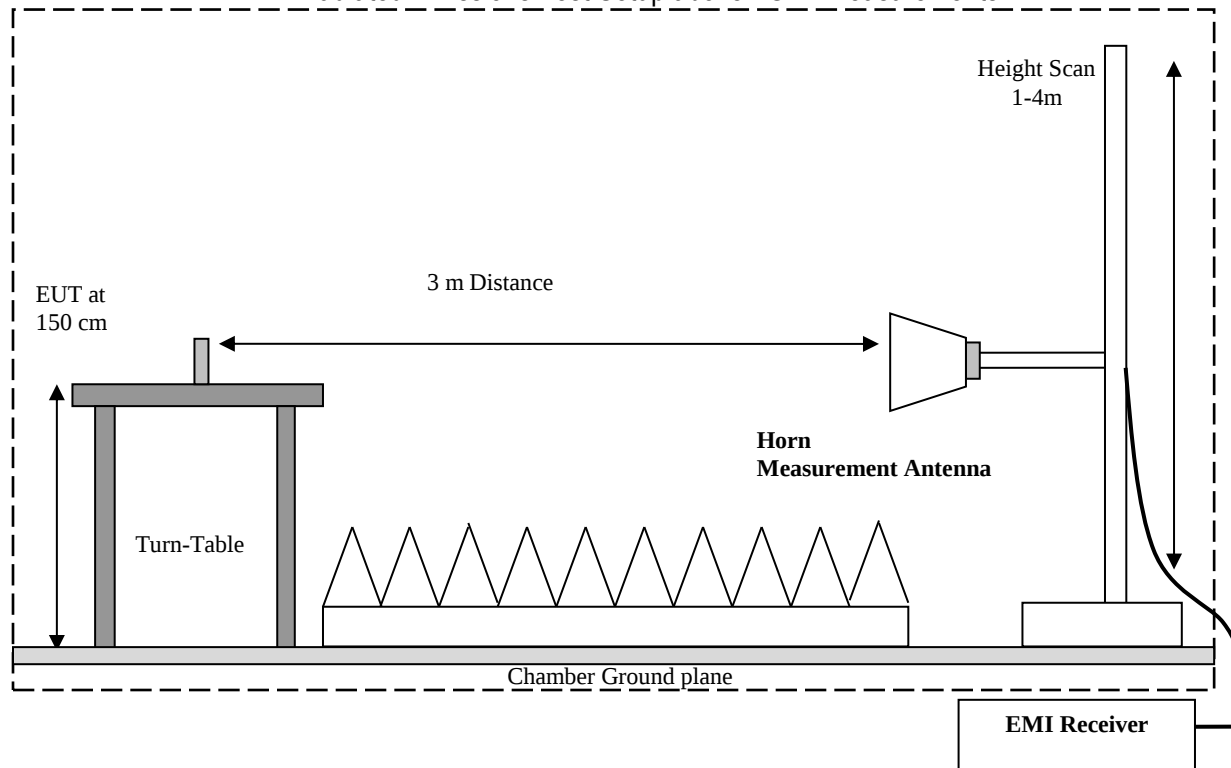

7.1.1 Sample Calculations for Field Strength Measurements

Field Strength is calculated from the Spectrum Analyzer/ Receiver readings, taking into account the following parameters:

1. Measured reading in dB μ V
2. Cable Loss between the receiving antenna and SA in dB and
3. Antenna Factor in dB/m

All radiated measurement plots in this report are taken from a test SW that calculates the Field Strength based on the following equation:

$$FS \text{ (dB}\mu\text{V/m)} = \text{Measured Value on SA (dB}\mu\text{V)} - \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)}$$

Example:


Frequency (MHz)	Measured SA (dB μ V)	Cable Loss (dB)	Antenna Factor Correction (dB)	Field Strength Result (dB μ V/m)
1000	80.5	3.5	14	98.0

7.2 Power Line Conducted Measurement Procedure

AC Power Line conducted emissions measurements performed according to: ANSI C63.4 (2014)

7.3 RF Conducted Measurement Procedure

Reference: ANSI C63.10 (2013) Section 6.9, 6.10, and 7.8

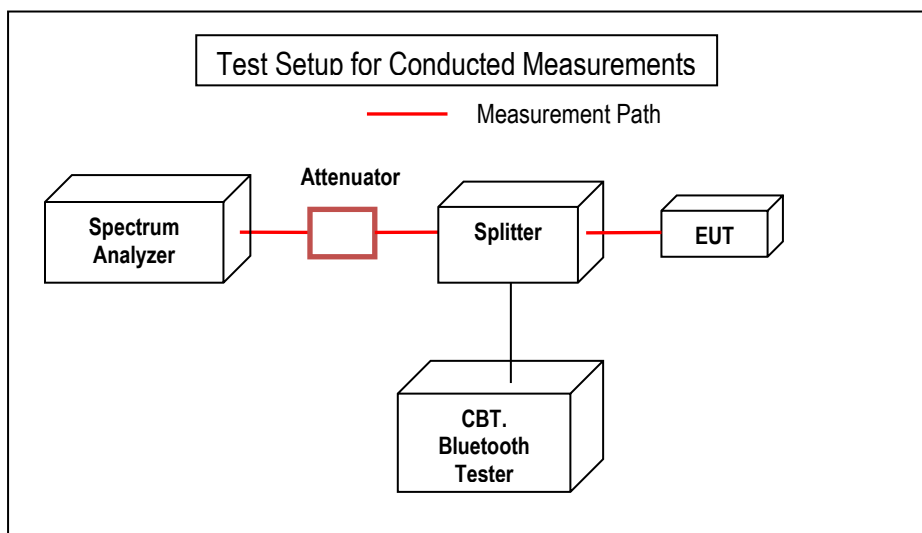

- Connect the equipment as shown in the above diagram.
- Adjust the settings of the SA (Rohde-Schwarz Spectrum Analyzer) to connect the EUT at the required mode of test.
- Measurements are to be performed with the EUT set to the low, middle and high channels and for worst case modulation schemes.

8 Test Result Data

8.1 Transmitter Spurious Emissions and Restricted Bands

8.1.1 Measurement according to ANSI C63.10

Analyzer Settings:

- Frequency = 9 KHz – 30 MHz
- RBW = 9 KHz
- Detector = Peak
- Frequency = 30 MHz – 1 GHz
- Detector = Peak / Quasi-Peak
- RBW = 120 KHz (<1 GHz)
- Frequency > 1 GHz
- Detector = Peak / Average
- RBW = 1MHz

Plots reported here represent the worst case emissions for horizontal and vertical antenna polarizations and for three orientations of the EUT. Unless mentioned otherwise, the emissions outside the limit lines in the plots are from the transmit signal.

8.1.2 Limits: FCC 15.247(d)/15.209(a) /RSS-Gen 6.13

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

- Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
- PEAK LIMIT= 74dB μ V/m
- AVG. LIMIT= 54dB μ V/m
- Except as shown in CFR 47 Part 15.205 paragraph (d), only spurious emissions are permitted in any of the frequency bands listed below

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

Radiated spurious emissions shall be measured for the transmit frequencies, transmit power, and data rate for the lowest, middle and highest channel in each frequency band of operation and for the highest gain antenna for each antenna type, and using the appropriate parameters and test requirements described in 5.4.

The highest (or worst-case) data rate shall be recorded for each measurement.

For testing at distance other than the specified in the standard, the limit conversion is calculated by using 40 dB/decade extrapolation as follow:

Conversion factor (CF) = $40 \log (D/d) = 40 \log (300 \text{ m} / 3 \text{ m}) = 80 \text{ dB}$

8.1.3 Test conditions and setup:

Ambient Temperature	EUT Set-Up #	EUT operating mode	Power Input
22° C	1	8DPSK DH5 fixed channel with Worst Case Cellular(GSM850 Low Channel)	12 VDC

8.1.4 Measurement result:



Plot #	Channel #	Scan Frequency	Limit	Result
1-3	Low	30 MHz – 18 GHz	See section 8.7.2	Pass
4-8	Mid	9 kHz – 26 GHz	See section 8.7.2	Pass
9-11	High	30 MHz – 18 GHz	See section 8.7.2	Pass



Test Report #: EMC_CALAM_064_15.247_DSS
Date of Report: 2018-06-20

Page 14 of 21

FCC ID: APV-3640HEB
IC ID: 5843A-3640HEB

8.1.5 Measurement Plots:

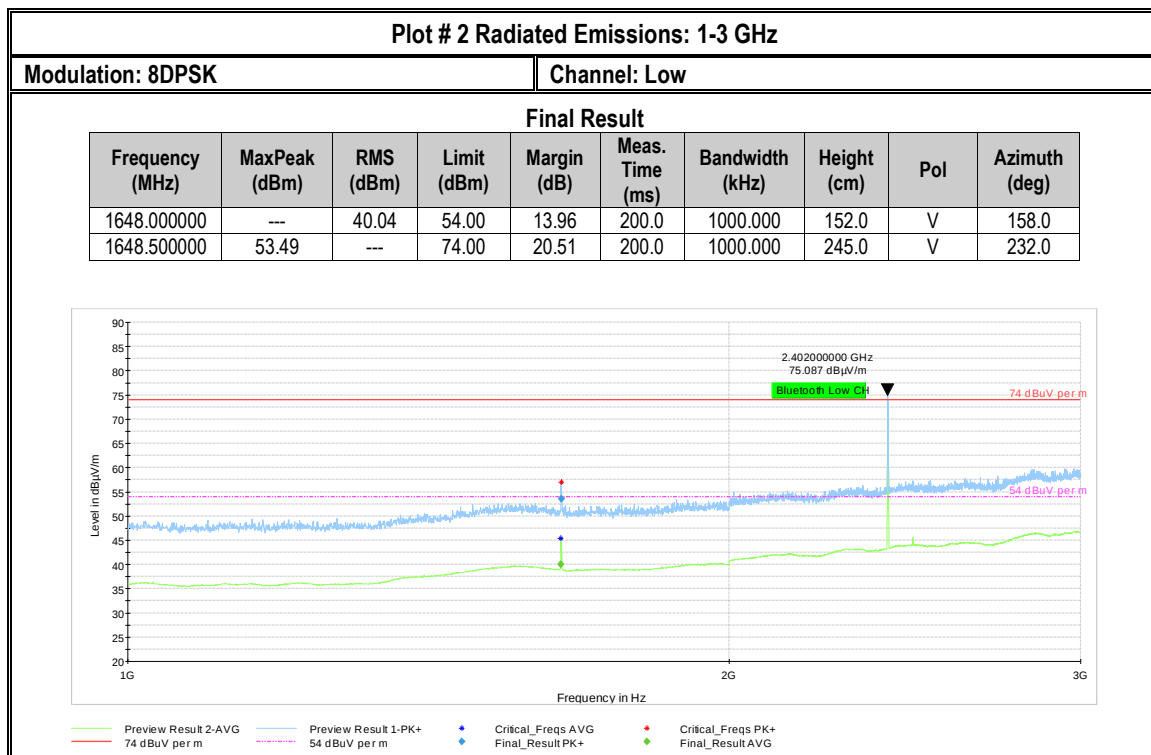
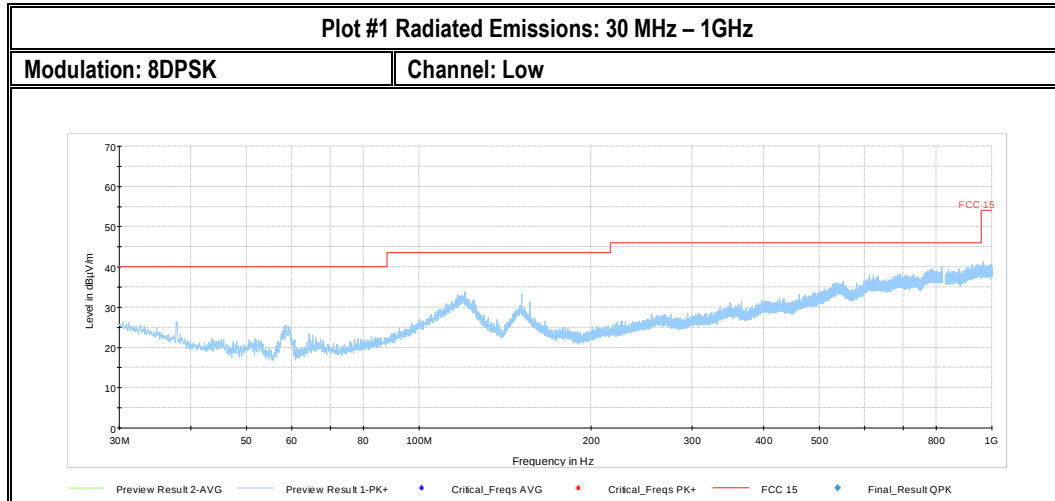


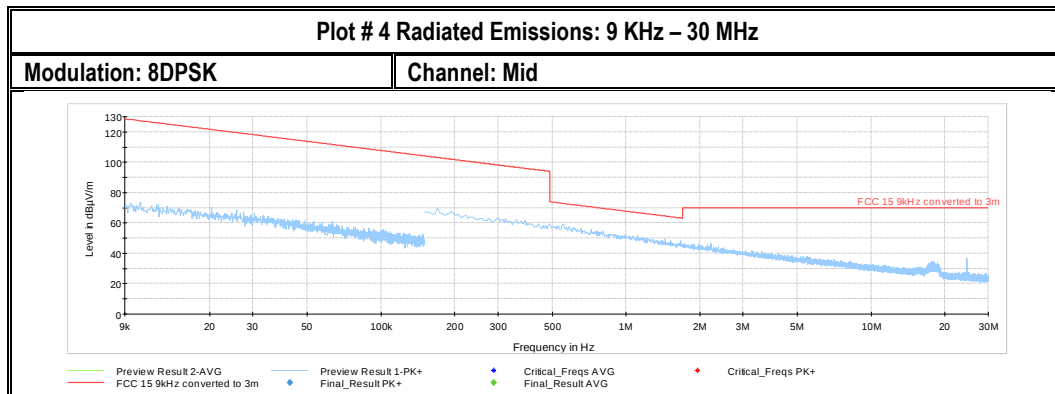
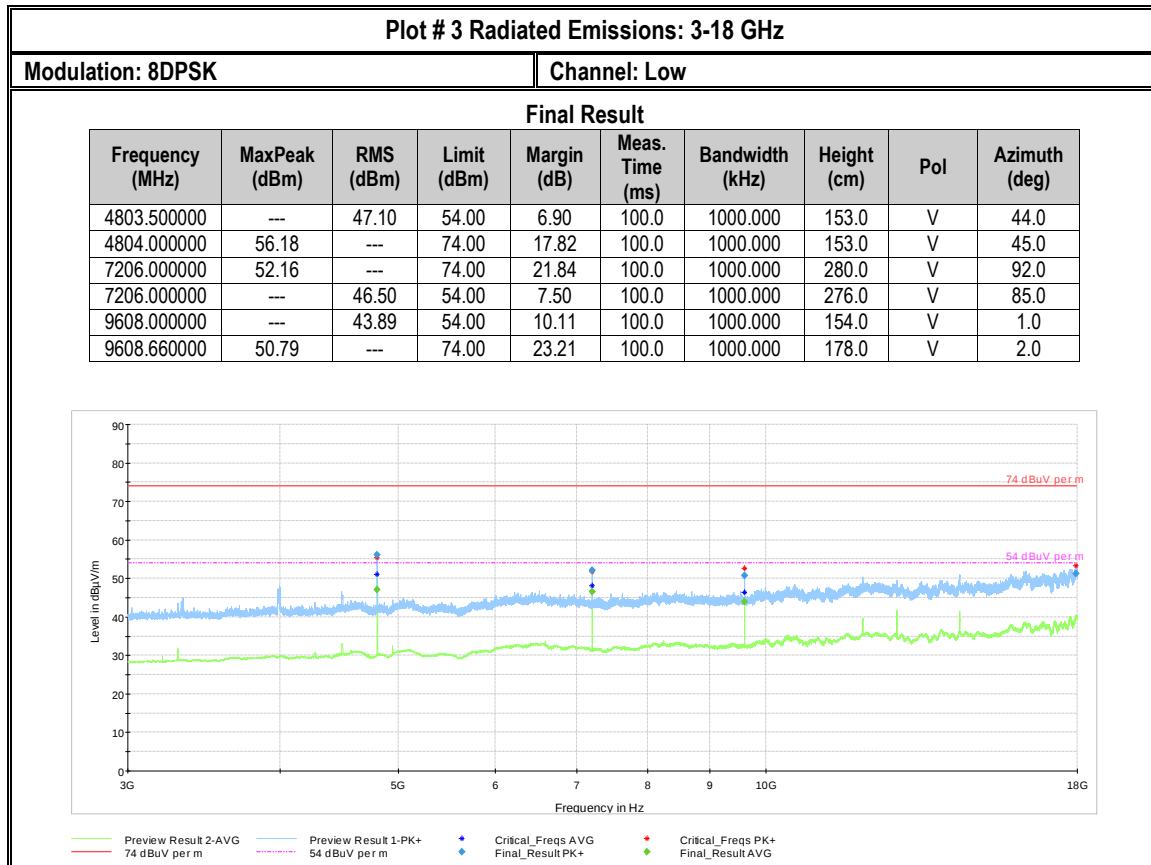


Test Report #: EMC_CALAM_064_15.247_DSS
Date of Report: 2018-06-20

Page 16 of 21

FCC ID: APV-3640HEB
IC ID: 5843A-3640HEB

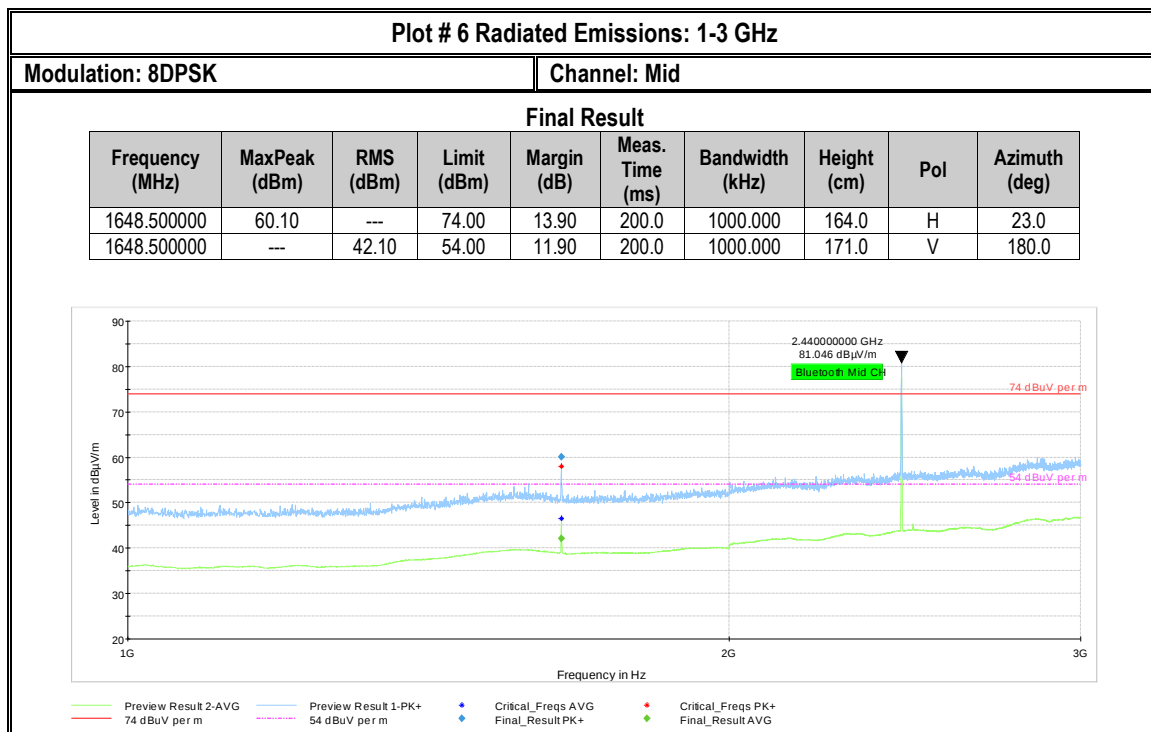
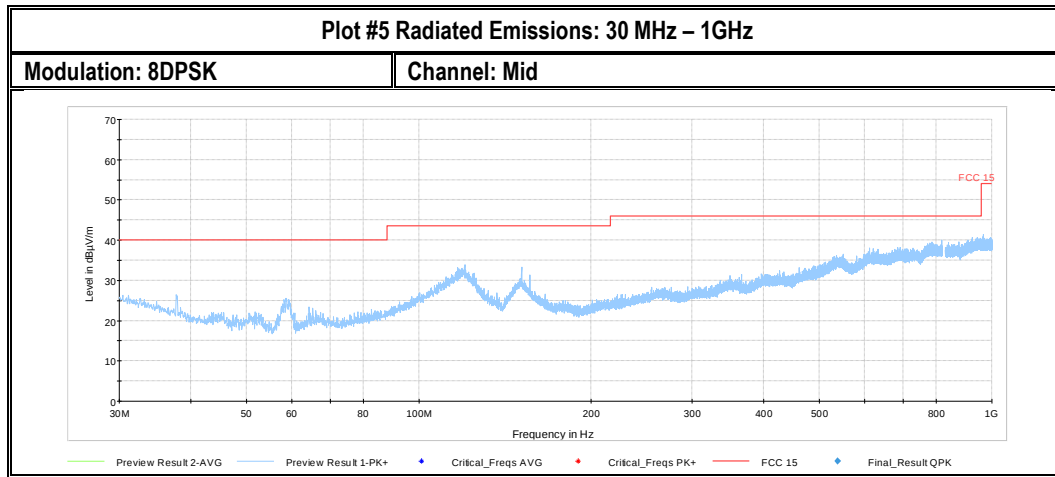


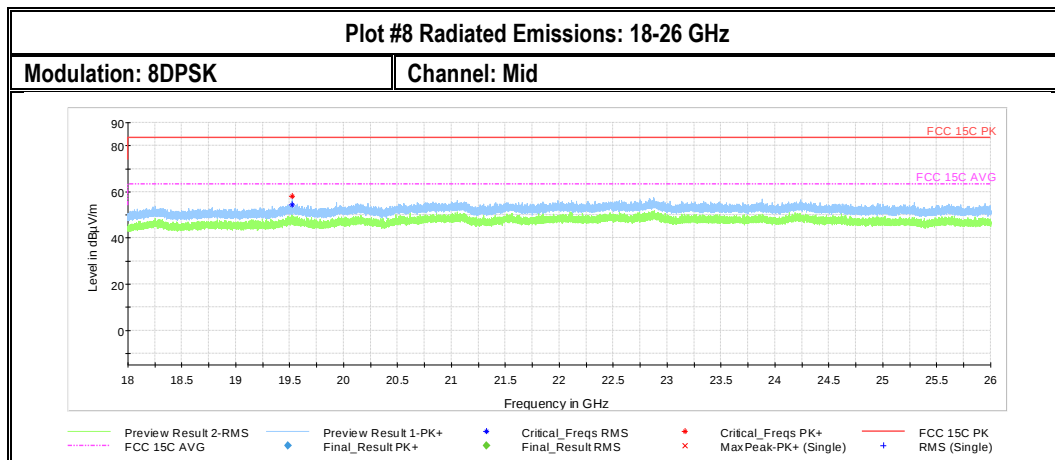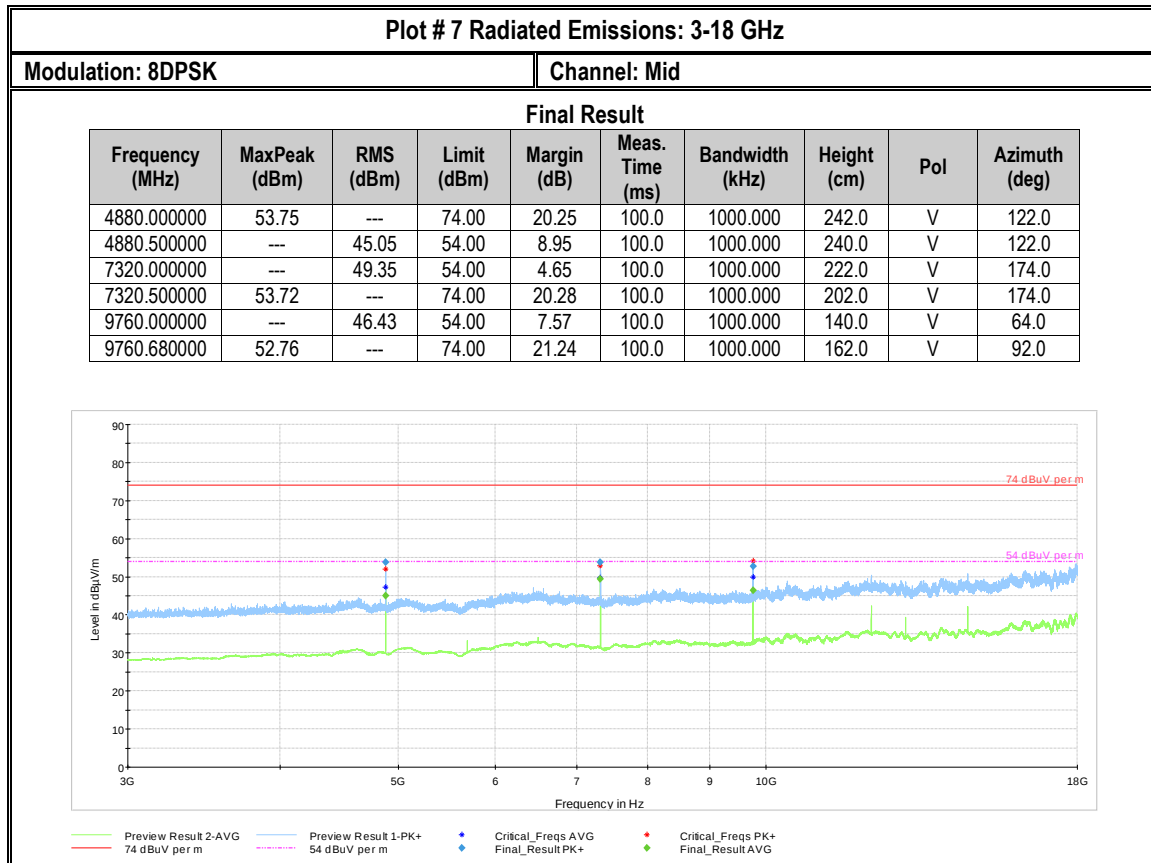


Test Report #: EMC_CALAM_064_15.247_DSS
Date of Report: 2018-06-20

Page 18 of 21

FCC ID: APV-3640HEB
IC ID: 5843A-3640HEB

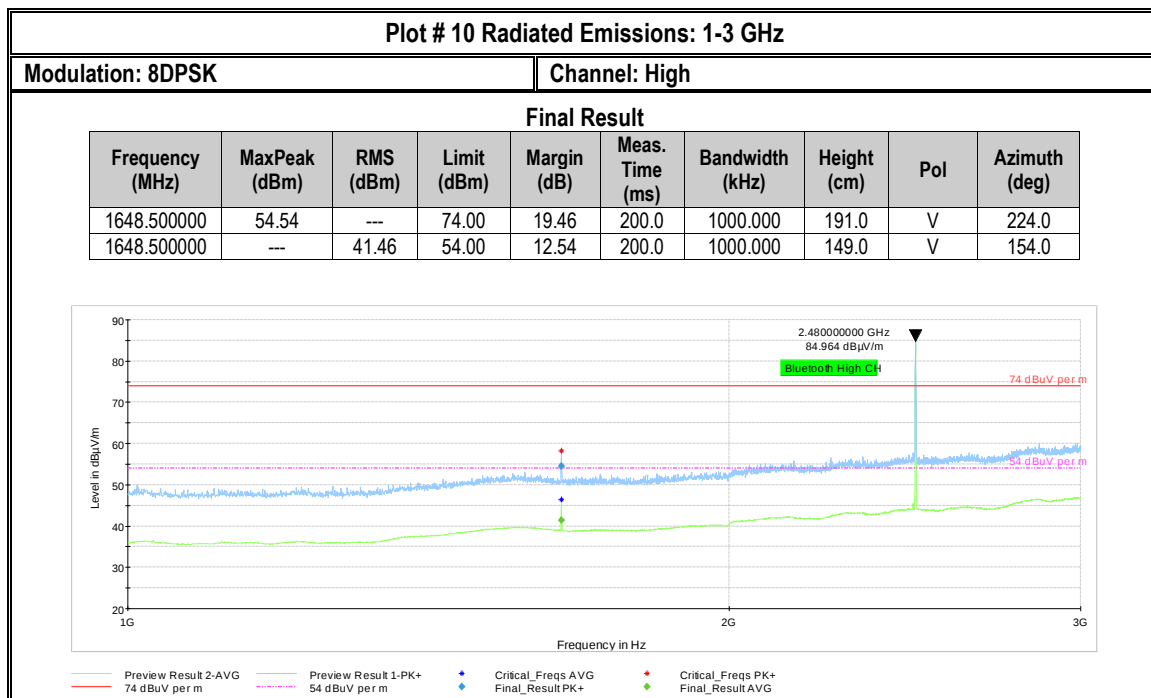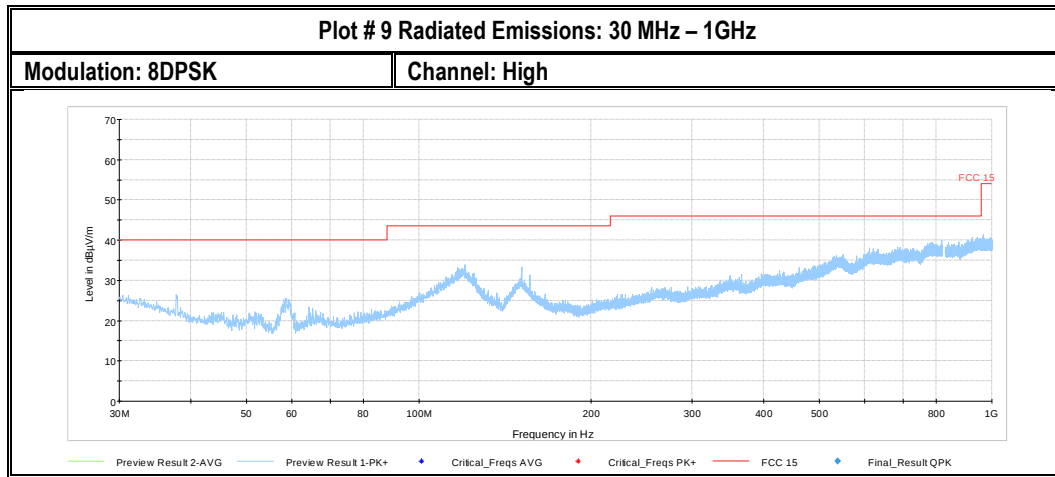

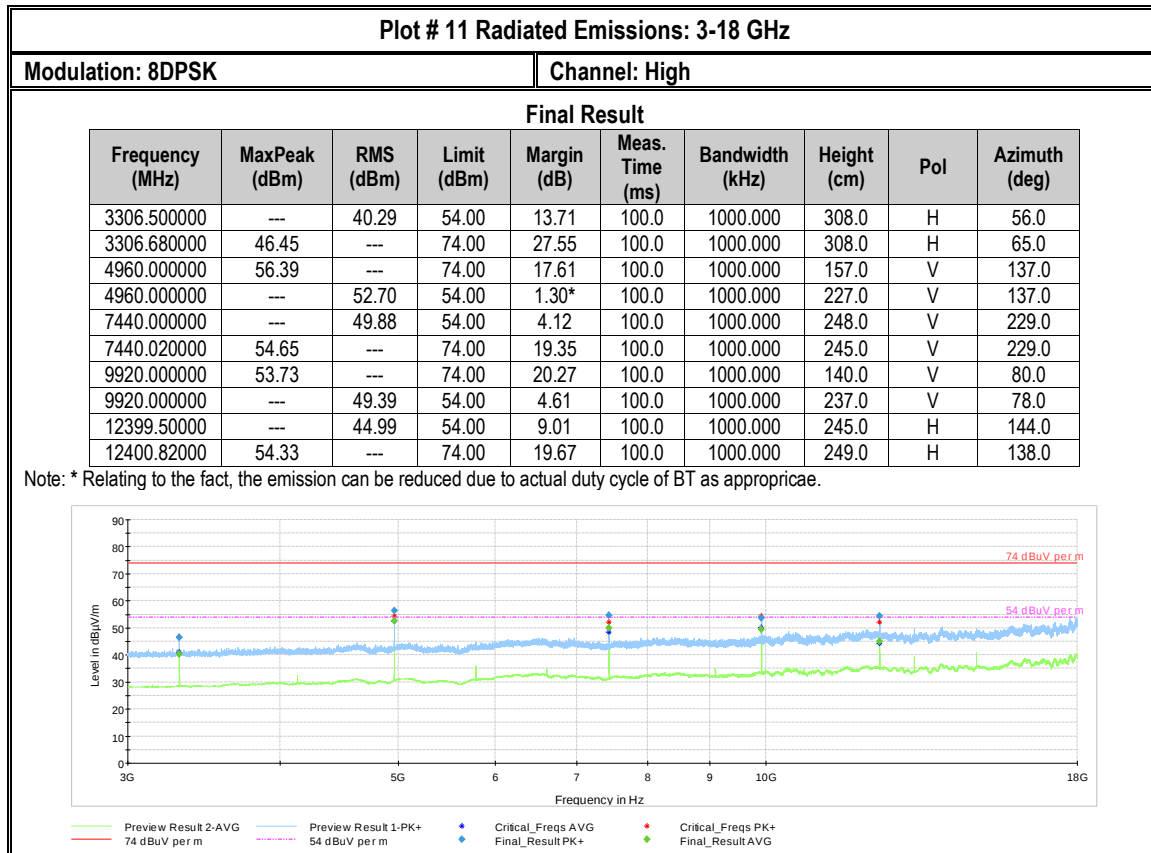

9 Test setup photos

Setup photos are included in supporting file name: "EMC_CALAM_064_Setup_Photos.pdf"

10 Test Equipment And Ancillaries Used For Testing

Item Name	Equipment Type	Manufacturer	Model	Serial #	Calibration Cycle	Last Calibration Date
Antenna Loop 6507	Active Loop Antenna	ETS Lindgren	6507	161344	3 years	10/26/2017
Antenna Biconilog 3142E	Biconlog Antenna	EMCO	3142E	166067	3 years	06/27/2017
Antenna Horn 3115 SN 35111	Horn Antenna	EMCO	3115	35111	3 years	07/24/2015
Antenna Horn 3117	Horn Antenna	ETS Lindgren	3117-PA	215984	3 years	01/26/2018
Antenna Horn 3116	Horn Antenna	ETS Lindgren	3116	70497	3 years	07/22/2015
EMI Test Receiver	EMI Test Receiver	Rohde & Schwarz	ESU40	100251	3 years	01/31/2018
Digital Barometer	Compact Digital Barometer	Control Company	35519-055	91119547	3 Years	06/08/2017
CMU 200	Digital Radio Comm. Tester	R&S	CMU 200	101821	2 Years	07/06/2017
CBT	Bluetooth Tester	R&S	CBT	100212	2 Years	07/09/2017
Thermometer Humidity TM325	Thermometer Humidity	Dickson	TM325	16253651	1 Year	11/02/2017
Agilent Signal Generator	Signal Generator	Agilent	E4433B	GB40050 855	N/A	N/A
Turn table	Turn table	EMCO	2075	N/A	N/A	N/A
MAPS Position Controller	MAPS Position Controller	ETS Lindgren	2092	0004- 1510	N/A	N/A
Antenna Mast	Antenna Mast	EMCO	2075	N/A	N/A	N/A
Relay Switch Unit	Relay Switch Unit	R&S	RSU	338964/0 01	N/A	N/A

Note: Equipment used meets the measurement uncertainty requirements as required per applicable standards for 95% confidence levels. Calibration due dates, unless defined specifically, falls on the last day of the month. Items indicated "N/A" for cal status either do not specifically require calibration or is internally characterized before use.

Test Report #: EMC_CALAM_064_15.247_DSS

FCC ID: APV-3640HEB

Date of Report 2018-06-20

Page 21 of 21

IC ID: 5843A-3640HEB

11 Revision History

Date	Report Name	Changes to report	Report prepared by
2018-06-20	EMC_CALAM_064_15.247_DSS	Initial Version	Kevin Wang