

D

C




B

A

C



B

A

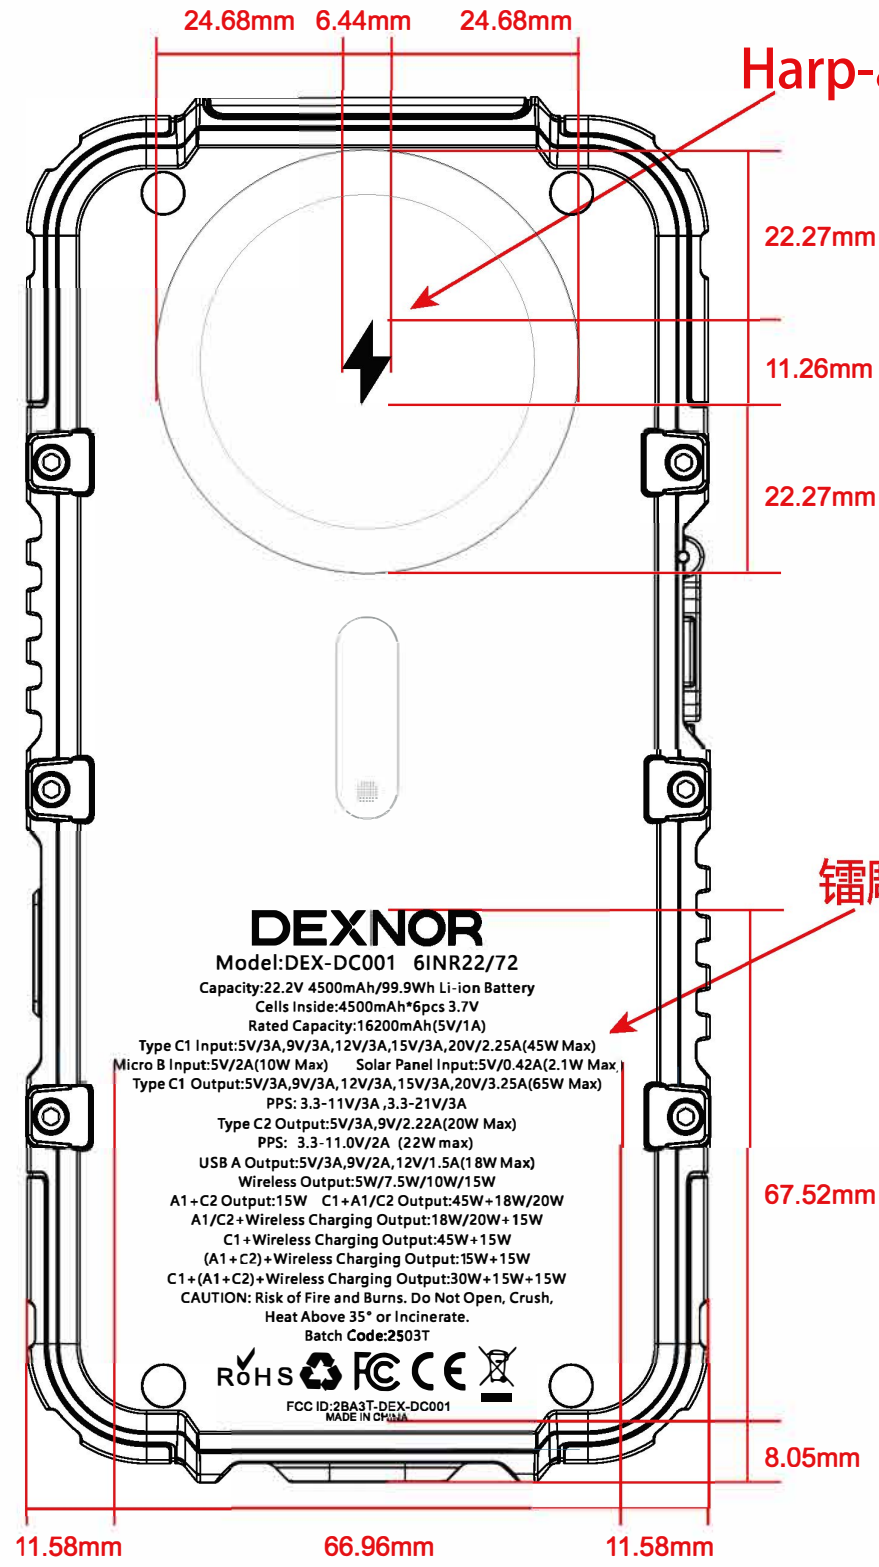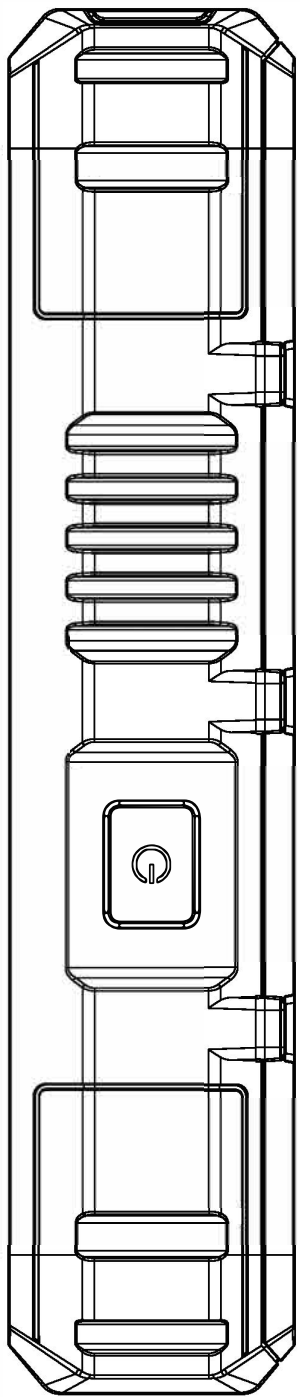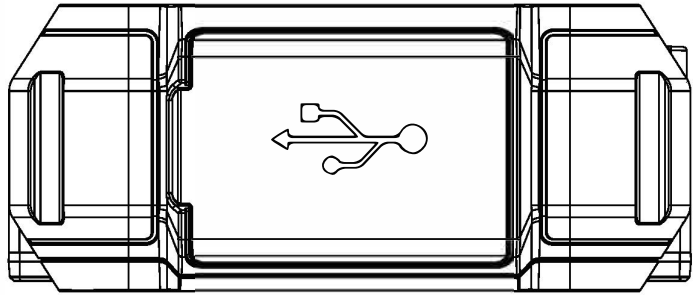

Harp-and-dart eagle

镭雕

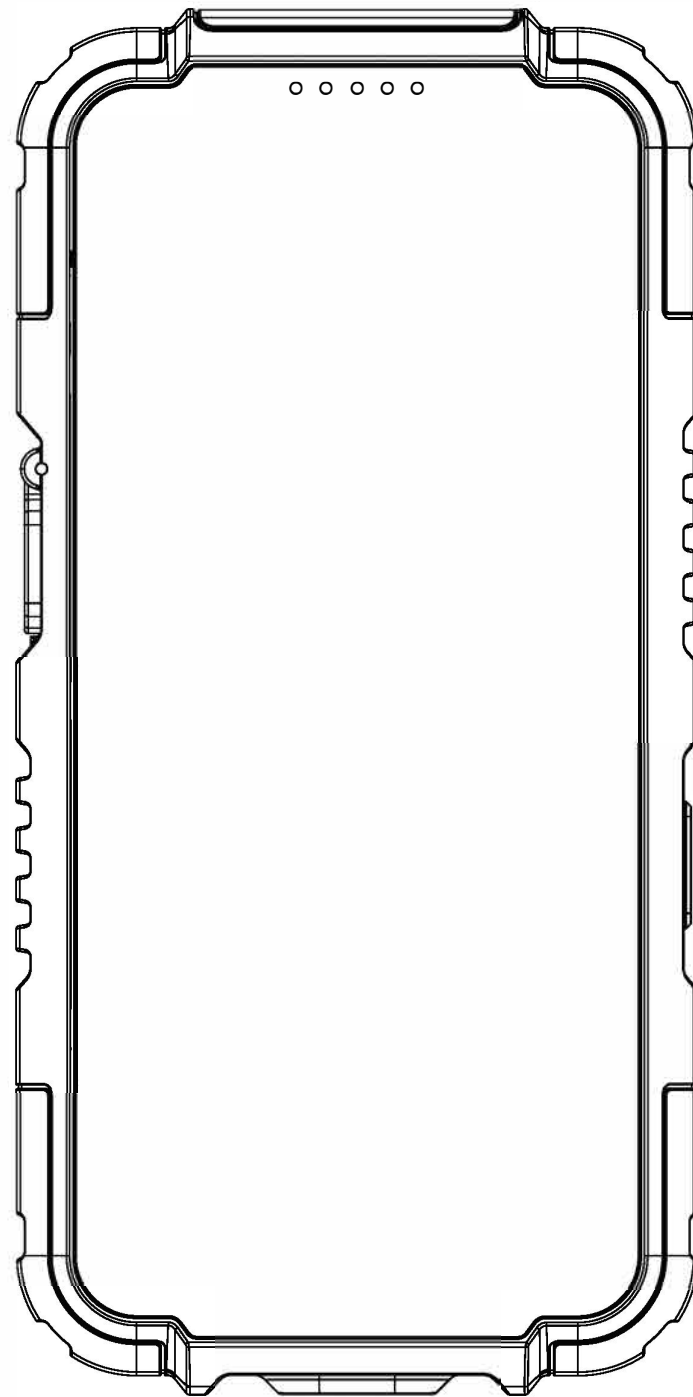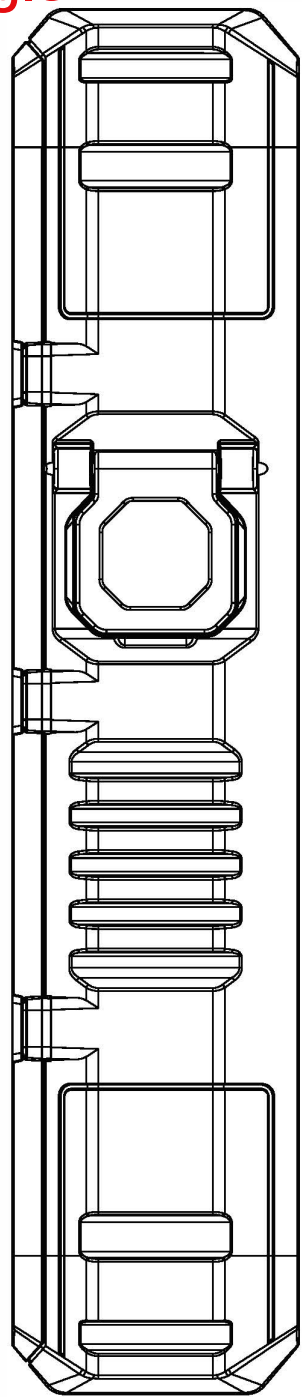

Harp-and-dart eagle:



DEXNOR
Model:DEX-DC001 6INR22/72
Capacity:22.2V 4500mAh/99.9Wh Li-ion Battery
Cells Inside:4500mAh*5pcs 3.7V
Rated Capacity:16200mAh(5V/1A)
Type C1 Input:5V/3A,9V/3A,12V/3A,15V/3A,20V/2.25A(45W Max)
Micro B Input:5V/2A(10W Max) Solar Panel Input:3V/0.42AG(1W Max)
Type C1 Output:5V/3A,9V/3A,12V/3A,15V/3A,20V/2.25A(45W Max)
PPS: 3.3-11V/3A,3.3-21V/3A
Type C2 Output:5V/3A,9V/2.22A(20W Max)
PPS: 3.3-11.0V/2A (22W max)
USB A Output:5V/3A,9V/2A,12V/1.5A(18W Max)
Wireless Output:3W/7.5W/10W/15W
A1+C2 Output:15W C1+A1/C2 Output:45W+18W/20W
A1/C2+ Wireless Charging Output:18W/20W+15W
C1+ Wireless Charging Output:45W+15W
(A1+C2)+ Wireless Charging Output:15W+15W
C1+(A1+C2)+ Wireless Charging Output:30W+15W+15W
CAUTION: Risk of Fire and Burns. Do Not Open, Crush,
Heat Above 35° or Incinerate.
Batch Code:250317
RoHS RECYCLE FC CE

tolerance:B

TrusdaShenzhen Chuangda Industrial Co., LTD

				table of limits					Product ID	BP709	name of parts	Harp-and-dart eagle	Part number			
					A	B	C	D	Product	Power Bank	图 号	BP709-L5474B	Version	B		
				0-5	±0.07	±0.10	±0.15	±0.20								
				5-20	±0.10	±0.15	±0.20	±0.30								
sign	before modification	after modification	date changed	20-50	±0.15	±0.20	±0.30	±0.40	materials		treatment process	Projection direction	Unit	mm		
1		Guest for new documents	2025-03-26	50-	±0.20	±0.30	±0.40	±0.60	ratio				Date	2025-03-26		
2									drawing:	Approval					approve:	

1

2

3

4