

FCC Test Report

Report No.: RF160202C08

FCC ID: PY316100336

Test Model: C3000v2, C3700v2

Received Date: Feb. 02, 2016

Test Date: Nov. 01 to 04, 2016

Issued Date: Mar. 30, 2017

Applicant: NETGEAR, Inc.

Address: 350 East Plumeria Drive San Jose, CA 95134

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan R.O.C.

Test Location (1): E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan R.O.C.

Test Location (2): No. 49, Ln. 206, Wende Rd., Shangshan Tsuen, Chiung Lin Hsiang, Hsin
Chu Hsien 307, Taiwan R.O.C.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Modification Record	6
3 General Information	7
3.1 General Description of EUT	7
3.2 Description of Test Modes	10
3.2.1 Test Mode Applicability and Tested Channel Detail	11
3.3 Duty Cycle of Test Signal	13
3.4 Description of Support Units	14
3.4.1 Configuration of System under Test	15
3.5 General Description of Applied Standards	16
4 Test Types and Results	17
4.1 Radiated Emission and Bandedge Measurement	17
4.1.1 Limits of Radiated Emission and Bandedge Measurement	17
4.1.2 Test Instruments	18
4.1.3 Test Procedures	19
4.1.4 Deviation from Test Standard	19
4.1.5 Test Setup	20
4.1.6 EUT Operating Conditions	21
4.1.7 Test Results (Mode 2)	22
4.2 Conducted Emission Measurement	35
4.2.1 Limits of Conducted Emission Measurement	35
4.2.2 Test Instruments	35
4.2.3 Test Procedures	36
4.2.4 Deviation from Test Standard	36
4.2.5 Test Setup	36
4.2.6 EUT Operating Conditions	36
4.2.7 Test Results (Mode 1)	37
4.2.8 Test Results (Mode 2)	39
4.2.9 Test Results (Mode 3)	41
4.2.10 Test Results (Mode 4)	43
4.3 6dB Bandwidth Measurement	45
4.3.1 Limits of 6dB Bandwidth Measurement	45
4.3.2 Test Setup	45
4.3.3 Test Instruments	45
4.3.4 Test Procedure	45
4.3.5 Deviation from Test Standard	45
4.3.6 EUT Operating Conditions	45
4.3.7 Test Result	46
4.4 Conducted Output Power Measurement	48
4.4.1 Limits of Conducted Output Power Measurement	48
4.4.2 Test Setup	48
4.4.3 Test Instruments	48
4.4.4 Test Procedures	48
4.4.5 Deviation from Test Standard	48
4.4.6 EUT Operating Conditions	48
4.4.7 Test Results	49
4.5 Power Spectral Density Measurement	50
4.5.1 Limits of Power Spectral Density Measurement	50
4.5.2 Test Setup	50
4.5.3 Test Instruments	50

4.5.4	Test Procedure	50
4.5.5	Deviation from Test Standard	50
4.5.6	EUT Operating Condition	50
4.5.7	Test Results	51
4.6	Conducted Out of Band Emission Measurement	54
4.6.1	Limits of Conducted Out of Band Emission Measurement.....	54
4.6.2	Test Setup.....	54
4.6.3	Test Instruments	54
4.6.4	Test Procedure	54
4.6.5	Deviation from Test Standard	54
4.6.6	EUT Operating Condition	54
4.6.7	Test Results	54
5	Pictures of Test Arrangements.....	62
	Appendix – Information on the Testing Laboratories	63

Release Control Record

Issue No.	Description	Date Issued
RF160202C08	Original release.	Mar. 30, 2017

1 Certificate of Conformity

Product: Cable Gateway

Brand: Netgear

Test Model: C3000v2, C3700v2

Sample Status: ENGINEERING SAMPLE

Applicant: NETGEAR, Inc.

Test Date: Nov. 01 to 04, 2016

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by : Cindy Hsin, **Date:** Mar. 30, 2017
Cindy Hsin / Specialist

Approved by : May Chen, **Date:** Mar. 30, 2017
May Chen / Manager

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (SECTION 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -5.66dB at 0.30234MHz.
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	PASS	Meet the requirement of limit. Minimum passing margin is -0.1dB at 2390.00MHz, 2483.50MHz.
15.247(d)	Antenna Port Emission	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) ($\pm$)
Conducted Emissions at mains ports	150kHz ~ 30MHz	1.83 dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	5.34 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	3.41 dB
	6GHz ~ 18GHz	3.49 dB
	18GHz ~ 40GHz	3.30 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Cable Gateway
Brand	Netgear
Test Model	C3000v2, C3700v2
Status of EUT	ENGINEERING SAMPLE
Power Supply Rating	12Vdc from power adapter
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 11ac mode only
Modulation Technology	DSSS, OFDM
Transfer Rate	802.11b: up to 11Mbps 802.11a/g: up to 54Mbps 802.11n: up to 300Mbps 802.11ac: up to 866Mbps
Operating Frequency	2.4GHz: 2.412 ~ 2.462GHz 5GHz: 5.18 ~ 5.24GHz and 5.745 ~ 5.825GHz
Number of Channel	2.4GHz: 802.11b, 802.11g, 802.11n (HT20): 11 802.11n (HT40): 7 5GHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20): 9 802.11n (HT40), 802.11ac (VHT40): 4 802.11ac (VHT80): 2
Output Power	2.4GHz: 375.048mW 5GHz: 5.18GHz ~ 5.24GHz: CDD Mode: 273.781mW Beamforming Mode: 273.781mW 5.745GHz ~ 5.825GHz: CDD Mode: 687.473mW Beamforming Mode: 687.473mW
Antenna Type	Refer to Note
Antenna Connector	NA
Accessory Device	Adapter x 1
Data Cable Supplied	LAN cable (Unshielded, 0.95m) x1

Note:

1. All models are listed as below.

Brand	Model	Difference
NETGEAR	C3700v2	2.4G + 5G
	C3000v2	2.4G

From the above models, model: **C3700v2** was selected as representative models for the test and its data was recorded in this report

2. Simultaneously transmission condition.

Condition	Technology	
1	WLAN (2.4GHz)	WLAN (5GHz)

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

3. The EUT must be supplied with a power adapter and following different models could be chosen as following table:

No	Brand Name	Model No.	PN	Spec.
1	NETGEAR	2ABB018F 1 NA	332-10750-01	Input: 100-120Vac, 50/60Hz, 0.6A Output: 12.0Vdc, 1.5A DC output cable (Unshielded, 1.8m)
2	NETGEAR	AD2032F10	332-10751-01	Input: 100-120Vac, 50/60Hz, 0.56A Output: 12Vdc, 1.5A DC output cable (Unshielded, 1.8m)
3	NETGEAR	2ABL030F 1 NA	332-10758-01	Input: 100-120Vac, 50/60Hz, 1.0A Output: 12.0Vdc, 2.5A DC output cable (Unshielded, 1.8m)
4	NETGEAR	AD2067F10	332-10797-01	Input: 100-120Vac, 50/60Hz, 1.0A Output: 12.0Vdc, 2.5A DC output cable (Unshielded, 1.85m)

Note: From the above adapters, the radiated emission worse case was found in Adapter 2. Therefore only the test data of the mode was recorded in this report.

4. The antennas provided to the EUT, please refer to the following table:

Antenna No.	Brand	Model	Antenna Gain(dBi)	Frequency range (GHz ~ GHz)	Antenna Type
1	NA	NA	3.84	2.4~2.4835	PCB
			4.78	5.15~5.25	
			4.58	5.725~5.85	
2	NA	NA	3.84	2.4~2.4835	PCB
			4.78	5.15~5.25	
			4.58	5.725~5.85	

5. The EUT incorporates a MIMO function.

2.4GHz Band			
MODULATION MODE	DATA RATE (MCS)	TX & RX CONFIGURATION	
802.11b	1 ~ 11Mbps	1Tx diversity	2RX
802.11g	6 ~ 54Mbps	2TX	2RX
802.11n (HT20)	MCS 0~7	2TX	2RX
	MCS 8~15	2TX	2RX
802.11n (HT40)	MCS 0~7	2TX	2RX
	MCS 8~15	2TX	2RX
5GHz Band			
MODULATION MODE	DATA RATE (MCS)	TX & RX CONFIGURATION	
802.11a	6 ~ 54Mbps	2TX	2RX
802.11n (HT20)	MCS 0~7	2TX	2RX
	MCS 8~15	2TX	2RX
802.11n (HT40)	MCS 0~7	2TX	2RX
	MCS 8~15	2TX	2RX
802.11ac (VHT20)	MCS0~8 Nss=1	2TX	2RX
	MCS0~8 Nss=2	2TX	2RX
802.11ac (VHT40)	MCS0~9 Nss=1	2TX	2RX
	MCS0~9 Nss=2	2TX	2RX
802.11ac (VHT80)	MCS0~9 Nss=1	2TX	2RX
	MCS0~9 Nss=2	2TX	2RX

Note:

1. All of modulation mode support beamforming function except 802.11a/b/g modulation mode

6. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 Description of Test Modes

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20):

Channel	Frequency	Channel	Frequency
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

7 channels are provided for 802.11n (HT40):

Channel	Frequency	Channel	Frequency
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE $\geq$ 1G	RE $<$ 1G	PLC	APCM	
1	-	-	√	-	With adapter 1
2	√	√	√	√	With adapter 2
3	-	-	√	-	With adapter 3
4	-	-	√	-	With adapter 4

Where RE $\geq$ 1G: Radiated Emission above 1GHz & Bandedge Measurement

RE $<$ 1G: Radiated Emission below 1GHz

PLC: Power Line Conducted Emission

APCM: Antenna Port Conducted Measurement

Radiated Emission Test (Above 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5

Radiated Emission Test (Below 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11g	1 to 11	6	OFDM	BPSK	6

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11g	1 to 11	6	OFDM	BPSK	6

Antenna Port Conducted Measurement:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5

Test Condition:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE $\geq$ 1G	24deg. C, 63%RH	120Vac, 60Hz	Jyunchun Lin
RE<1G	22deg. C, 70%RH	120Vac, 60Hz	Weiwei Lo
PLC	26deg. C, 70%RH	120Vac, 60Hz	Eagle Chen
APCM	25deg. C, 60%RH	120Vac, 60Hz	Gary Cheng Barry Lee

3.3 Duty Cycle of Test Signal

If duty cycle of test signal is $\geq 98\%$, duty factor is not required.


If duty cycle of test signal is $< 98\%$, duty factor shall be considered

802.11b: duty cycle of test signal is 100 %

802.11g: Duty cycle = $2.058/2.087 = 0.986$

802.11n (HT20): Duty cycle = $1.903/1.928 = 0.987$

802.11n (HT40): Duty cycle = $0.931/0.953 = 0.977$ Duty factor = $10 * \log(1/0.977) = 0.1$

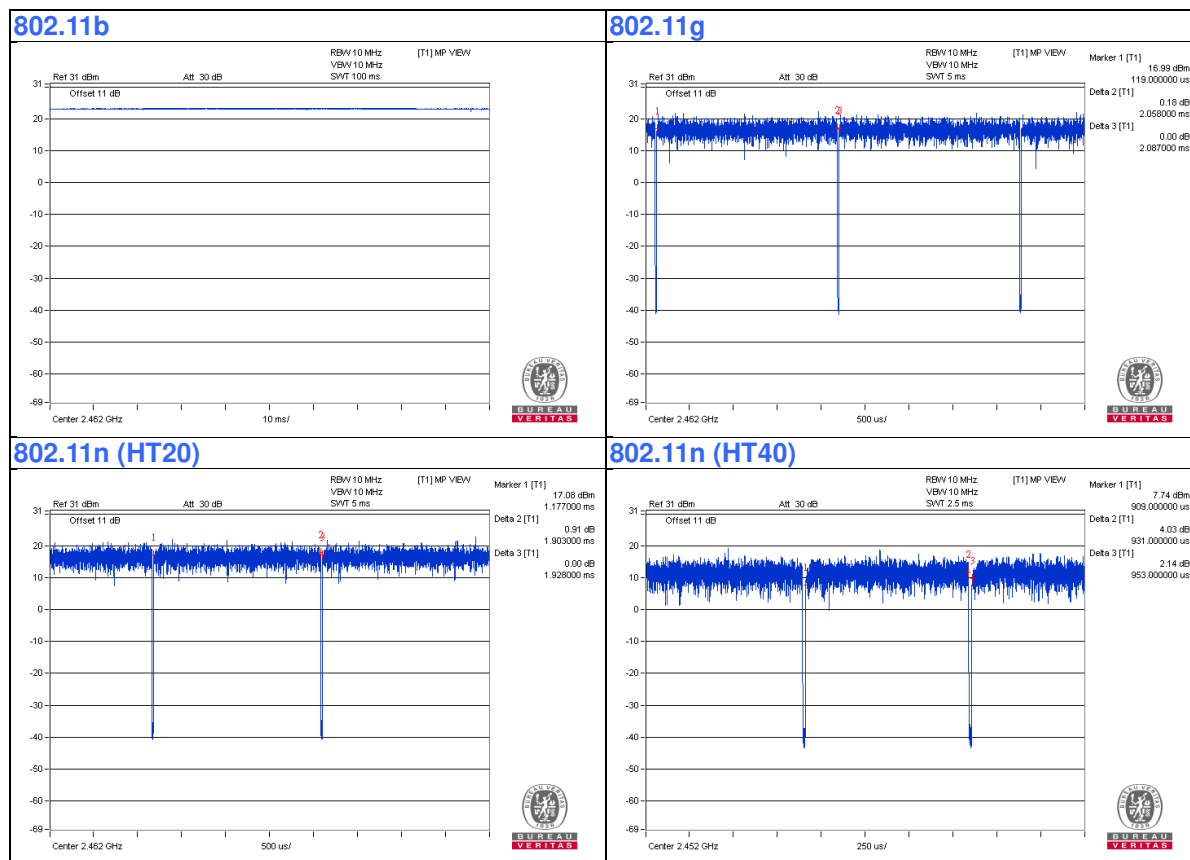

3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Laptop	DELL	PP32LA	FSLB32S	FCC DoC	Provided by Lab
B.	Laptop	LENOVO	E440	PF071LWC	FCC DoC	Provided by Lab
C.	iPod	Apple	MD778TA/A	CC4JG680F4T1	FCC DoC	Provided by Lab

Note:

1. All power cords of the above support units are non-shielded (1.8m).

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	RJ-45 Cable	1	10	No	0	Provided by Lab
2.	RJ-45 Cable	1	10	No	0	Provided by Lab
3.	DC Cable	1	1.8	No	0	Supplied by client
4.	USB Cable	1	0.1	Yes	0	Provided by Lab
5.	Coaxial Cable	1	10	Yes	0	Provided by Lab

3.4.1 Configuration of System under Test

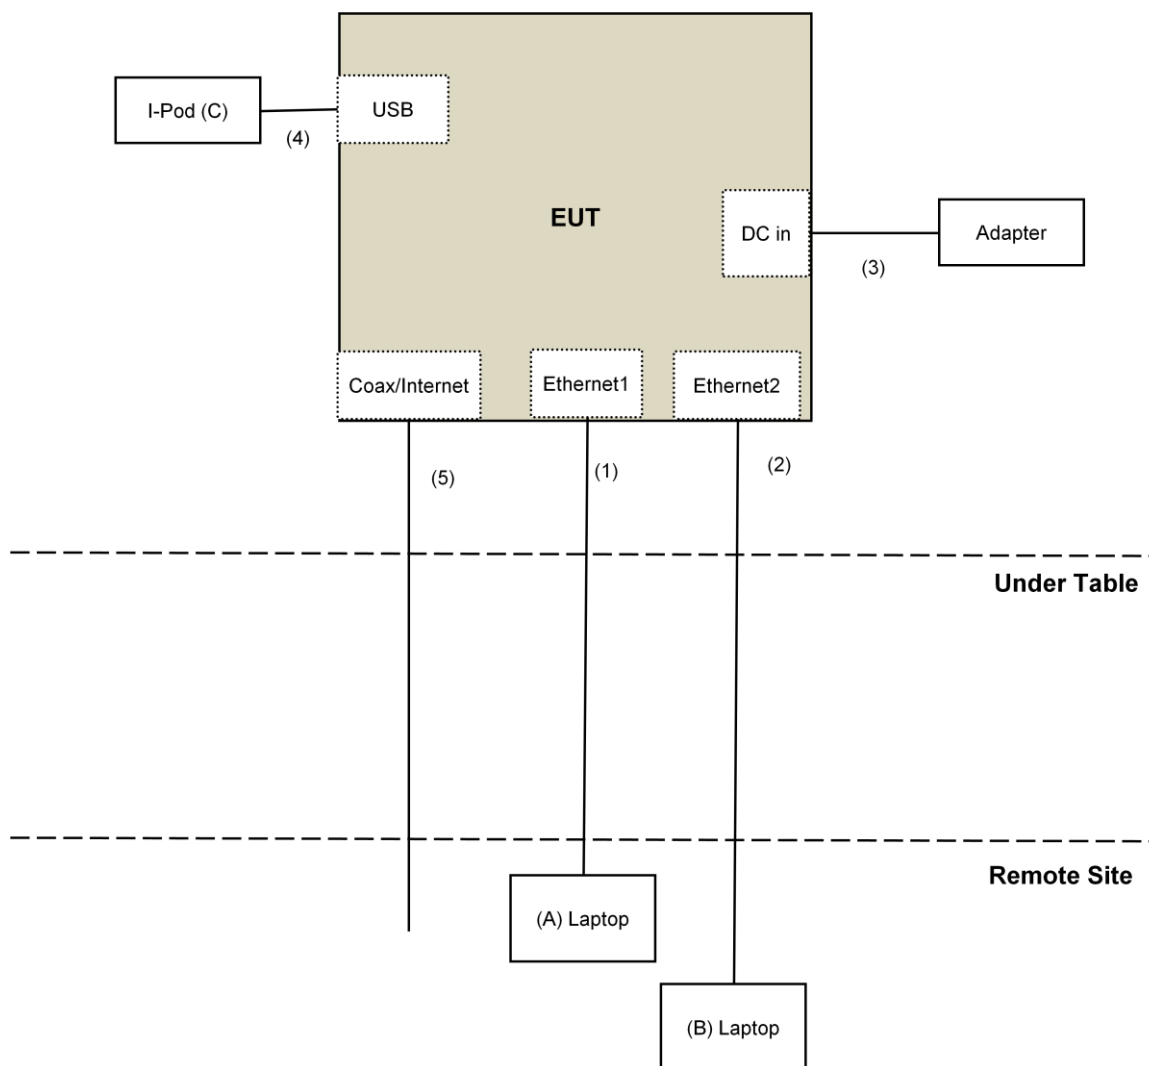

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)
KDB 558074 D01 DTS Meas Guidance v03r05
KDB 662911 D01 Multiple Transmitter Output v02r01
ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

NOTE: The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 30dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Keysight	N9038A	MY54450088	July 20, 2016	July 19, 2017
Pre-Amplifier ^(*) EMCI	EMC001340	980142	Jan. 20, 2016	Jan. 19, 2018
Loop Antenna ^(*) Electro-Metrics	EM-6879	264	Dec. 16, 2014	Dec. 15, 2016
RF Cable	NA	LOOPCAB-001 LOOPCAB-002	Jan. 18, 2016	Jan. 17, 2017
Pre-Amplifier Mini-Circuits	ZFL-1000VH2 B	AMP-ZFL-01	Nov. 11, 2015	Nov. 10, 2016
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-406	Jan. 04, 2016	Jan. 03, 2017
RF Cable	8D	966-4-1 966-4-2 966-4-3	Apr. 02, 2016	Apr. 01, 2017
Fixed attenuator Mini-Circuits	UNAT-5+	PAD-3m-4-01	Oct. 05, 2016	Oct. 04, 2017
Horn_Antenna SCHWARZBECK	BBHA 9120D	9120D-783	Jan. 19, 2016	Jan. 18, 2017
Pre-Amplifier Agilent	8449B	3008A01922	Sep. 18, 2016	Sep. 17, 2017
RF Cable	EMC104-SM- SM-2000 EMC104-SM- SM-5000 EMC104-SM- SM-5000	150318 150323 150324	Mar. 30, 2016	Mar. 29, 2017
Pre-Amplifier EMCI	EMC184045	980143	Jan. 15, 2016	Jan. 14, 2017
Horn_Antenna SCHWARZBECK	BBHA 9170	BBHA9170608	Jan. 08, 2016	Jan. 07, 2017
RF Cable	SUCOFLEX 102	36432/2 36441/2	Jan. 16, 2016	Jan. 15, 2017
Software	ADT_Radiated _V8.7.08	NA	NA	NA
Antenna Tower & Turn Table Max-Full	MF-7802	MF780208410	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP02	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. *The calibration interval of the above test instruments is 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
3. The test was performed in 966 Chamber No. 4.
4. The FCC Site Registration No. is 292998
5. The CANADA Site Registration No. is 20331-2
- 6 Loop antenna was used for all emissions below 30 MHz.
7. Tested Date: Nov. 01 to 02, 2016

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Both X and Y axes of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup


For Radiated emission below 30MHz

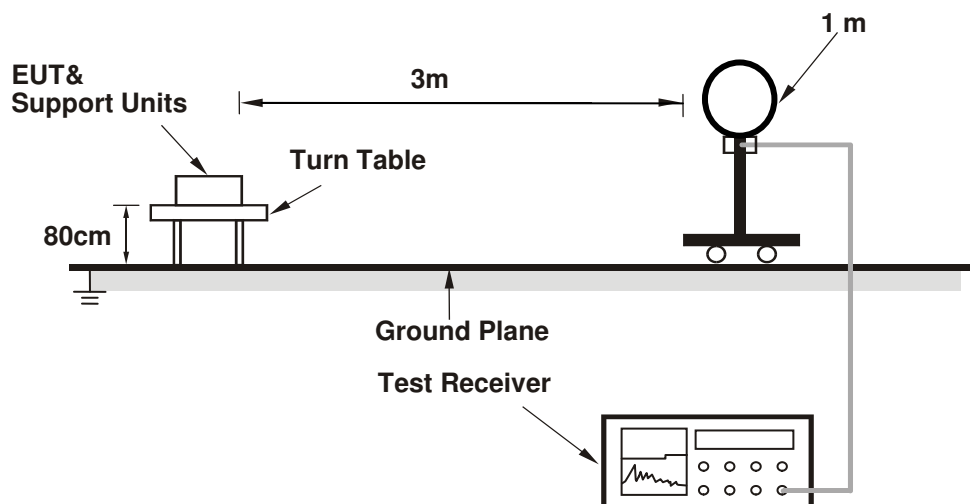

For Radiated emission 30MHz to 1GHz

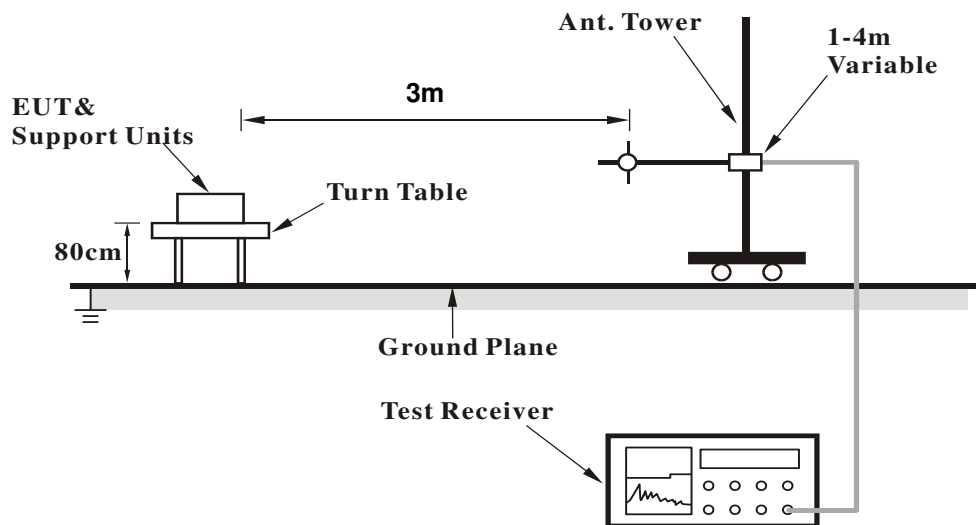

For Radiated emission above 1GHz

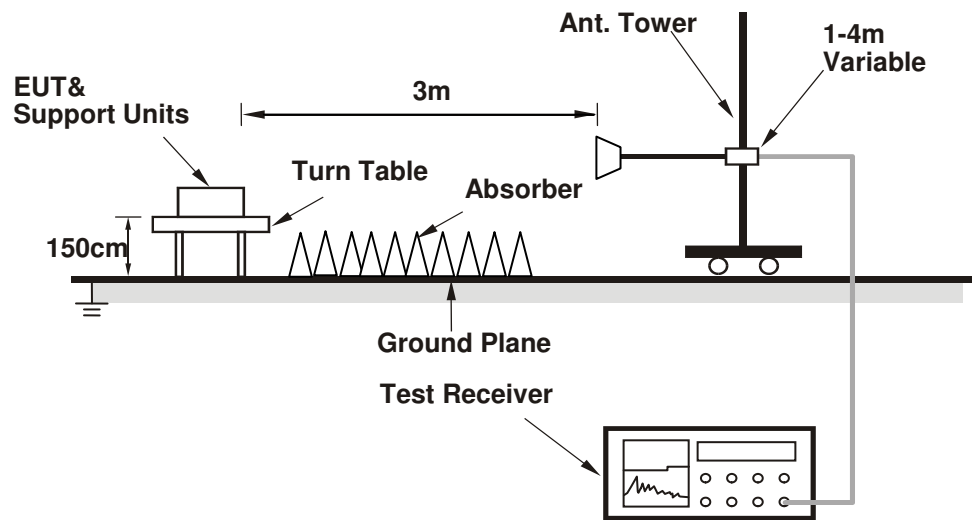

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- Connected the EUT with the laptop which is placed on remote site.
- Contorlling software (MTool_2.0.1.1.exe) has been activated to set the EUT on specific status.

4.1.7 Test Results (Mode 2)

Above 1GHz Data:

802.11b

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	61.7 PK	74.0	-12.3	3.33 H	285	67.4	-5.7
2	2390.00	53.6 AV	54.0	-0.4	3.33 H	285	59.3	-5.7
3	*2412.00	109.8 PK			3.33 H	285	115.4	-5.6
4	*2412.00	107.3 AV			3.33 H	285	112.9	-5.6
5	4824.00	43.3 PK	74.0	-30.7	1.70 H	225	42.5	0.8
6	4824.00	31.0 AV	54.0	-23.0	1.70 H	225	30.2	0.8
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	58.9 PK	74.0	-15.1	3.63 V	5	64.6	-5.7
2	2390.00	49.6 AV	54.0	-4.4	3.63 V	5	55.3	-5.7
3	*2412.00	107.6 PK			3.63 V	5	113.2	-5.6
4	*2412.00	105.2 AV			3.63 V	5	110.8	-5.6
5	4824.00	43.1 PK	74.0	-30.9	1.62 V	148	42.3	0.8
6	4824.00	30.8 AV	54.0	-23.2	1.62 V	148	30.0	0.8

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	55.8 PK	74.0	-18.2	3.15 H	276	61.5	-5.7
2	2390.00	44.0 AV	54.0	-10.0	3.15 H	276	49.7	-5.7
3	*2437.00	110.6 PK			3.15 H	276	116.1	-5.5
4	*2437.00	108.2 AV			3.15 H	276	113.7	-5.5
5	2483.50	58.9 PK	74.0	-15.1	3.15 H	276	64.4	-5.5
6	2483.50	47.1 AV	54.0	-6.9	3.15 H	276	52.6	-5.5
7	4874.00	43.8 PK	74.0	-30.2	1.75 H	223	42.9	0.9
8	4874.00	32.2 AV	54.0	-21.8	1.75 H	223	31.3	0.9
9	7311.00	55.8 PK	74.0	-18.2	3.14 H	18	48.4	7.4
10	7311.00	49.8 AV	54.0	-4.2	3.14 H	18	42.4	7.4

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	53.1 PK	74.0	-20.9	3.67 V	358	58.8	-5.7
2	2390.00	40.1 AV	54.0	-13.9	3.67 V	358	45.8	-5.7
3	*2437.00	108.4 PK			3.67 V	358	113.9	-5.5
4	*2437.00	106.1 AV			3.67 V	358	111.6	-5.5
5	2483.50	56.2 PK	74.0	-17.8	3.67 V	358	61.7	-5.5
6	2483.50	43.2 AV	54.0	-10.8	3.67 V	358	48.7	-5.5
7	4874.00	42.4 PK	74.0	-31.6	1.71 V	167	41.5	0.9
8	4874.00	31.6 AV	54.0	-22.4	1.71 V	167	30.7	0.9
9	7311.00	53.3 PK	74.0	-20.7	1.55 V	213	45.9	7.4
10	7311.00	47.5 AV	54.0	-6.5	1.55 V	213	40.1	7.4

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	111.5 PK			3.11 H	282	116.9	-5.4
2	*2462.00	109.0 AV			3.11 H	282	114.4	-5.4
3	2483.50	62.5 PK	74.0	-11.5	3.11 H	282	68.0	-5.5
4	2483.50	53.9 AV	54.0	-0.1	3.11 H	282	59.4	-5.5
5	4924.00	43.2 PK	74.0	-30.8	1.65 H	221	42.1	1.1
6	4924.00	31.2 AV	54.0	-22.8	1.65 H	221	30.1	1.1
7	7386.00	52.7 PK	74.0	-21.3	3.03 H	17	45.1	7.6
8	7386.00	45.2 AV	54.0	-8.8	3.03 H	17	37.6	7.6
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	109.3 PK			3.63 V	15	114.7	-5.4
2	*2462.00	106.9 AV			3.63 V	15	112.3	-5.4
3	2483.50	59.8 PK	74.0	-14.2	3.63 V	15	65.3	-5.5
4	2483.50	50.0 AV	54.0	-4.0	3.63 V	15	55.5	-5.5
5	4924.00	42.9 PK	74.0	-31.1	1.67 V	163	41.8	1.1
6	4924.00	31.0 AV	54.0	-23.0	1.67 V	163	29.9	1.1
7	7386.00	52.2 PK	74.0	-21.8	1.53 V	215	44.6	7.6
8	7386.00	43.0 AV	54.0	-11.0	1.53 V	215	35.4	7.6

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

802.11g

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	72.2 PK	74.0	-1.8	2.99 H	284	77.9	-5.7
2	2390.00	53.9 AV	54.0	-0.1	2.99 H	284	59.6	-5.7
3	*2412.00	110.7 PK			2.99 H	284	116.3	-5.6
4	*2412.00	100.5 AV			2.99 H	284	106.1	-5.6
5	4824.00	43.6 PK	74.0	-30.4	1.55 H	212	42.8	0.8
6	4824.00	31.8 AV	54.0	-22.2	1.55 H	212	31.0	0.8
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	69.5 PK	74.0	-4.5	3.61 V	11	75.2	-5.7
2	2390.00	49.8 AV	54.0	-4.2	3.61 V	11	55.5	-5.7
3	*2412.00	108.5 PK			3.61 V	11	114.1	-5.6
4	*2412.00	98.4 AV			3.61 V	11	104.0	-5.6
5	4824.00	43.3 PK	74.0	-30.7	1.74 V	183	42.5	0.8
6	4824.00	31.7 AV	54.0	-22.3	1.74 V	183	30.9	0.8

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	61.5 PK	74.0	-12.5	2.93 H	278	67.2	-5.7
2	2390.00	44.9 AV	54.0	-9.1	2.93 H	278	50.6	-5.7
3	*2437.00	113.5 PK			2.93 H	278	119.0	-5.5
4	*2437.00	103.5 AV			2.93 H	278	109.0	-5.5
5	2483.50	62.2 PK	74.0	-11.8	2.93 H	278	67.7	-5.5
6	2483.50	45.2 AV	54.0	-8.8	2.93 H	278	50.7	-5.5
7	4874.00	44.9 PK	74.0	-29.1	1.77 H	228	44.0	0.9
8	4874.00	32.8 AV	54.0	-21.2	1.77 H	228	31.9	0.9
9	7311.00	59.9 PK	74.0	-14.1	3.08 H	12	52.5	7.4
10	7311.00	45.4 AV	54.0	-8.6	3.08 H	12	38.0	7.4

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	58.6 PK	74.0	-15.4	3.65 V	13	64.3	-5.7
2	2390.00	41.7 AV	54.0	-12.3	3.65 V	13	47.4	-5.7
3	*2437.00	111.3 PK			3.65 V	13	116.8	-5.5
4	*2437.00	101.4 AV			3.65 V	13	106.9	-5.5
5	2483.50	59.3 PK	74.0	-14.7	3.65 V	13	64.8	-5.5
6	2483.50	42.2 AV	54.0	-11.8	3.65 V	13	47.7	-5.5
7	4874.00	44.0 PK	74.0	-30.0	1.77 V	191	43.1	0.9
8	4874.00	32.4 AV	54.0	-21.6	1.77 V	191	31.5	0.9
9	7311.00	57.6 PK	74.0	-16.4	1.58 V	200	50.2	7.4
10	7311.00	43.1 AV	54.0	-10.9	1.58 V	200	35.7	7.4

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	109.6 PK			3.11 H	275	115.0	-5.4
2	*2462.00	99.2 AV			3.11 H	275	104.6	-5.4
3	2483.50	73.8 PK	74.0	-0.2	3.11 H	275	79.3	-5.5
4	2483.50	52.0 AV	54.0	-2.0	3.11 H	275	57.5	-5.5
5	4924.00	44.5 PK	74.0	-29.5	1.60 H	209	43.4	1.1
6	4924.00	32.7 AV	54.0	-21.3	1.60 H	209	31.6	1.1
7	7386.00	52.1 PK	74.0	-21.9	2.97 H	25	44.5	7.6
8	7386.00	38.4 AV	54.0	-15.6	2.97 H	25	30.8	7.6
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	107.4 PK			3.66 V	12	112.8	-5.4
2	*2462.00	97.1 AV			3.66 V	12	102.5	-5.4
3	2483.50	70.3 PK	74.0	-3.7	3.66 V	12	75.8	-5.5
4	2483.50	48.2 AV	54.0	-5.8	3.66 V	12	53.7	-5.5
5	4924.00	44.3 PK	74.0	-29.7	1.83 V	175	43.2	1.1
6	4924.00	32.6 AV	54.0	-21.4	1.83 V	175	31.5	1.1
7	7386.00	50.1 PK	74.0	-23.9	1.54 V	222	42.5	7.6
8	7386.00	36.2 AV	54.0	-17.8	1.54 V	222	28.6	7.6

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

802.11n (HT20)

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	70.1 PK	74.0	-3.9	2.85 H	276	75.8	-5.7
2	2390.00	53.8 AV	54.0	-0.2	2.85 H	276	59.5	-5.7
3	*2412.00	108.3 PK			2.85 H	276	113.9	-5.6
4	*2412.00	97.8 AV			2.85 H	276	103.4	-5.6
5	4824.00	44.6 PK	74.0	-29.4	1.62 H	211	43.8	0.8
6	4824.00	32.8 AV	54.0	-21.2	1.62 H	211	32.0	0.8
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	67.8 PK	74.0	-6.2	3.63 V	24	73.5	-5.7
2	2390.00	50.2 AV	54.0	-3.8	3.63 V	24	55.9	-5.7
3	*2412.00	106.1 PK			3.63 V	24	111.7	-5.6
4	*2412.00	95.7 AV			3.63 V	24	101.3	-5.6
5	4824.00	43.5 PK	74.0	-30.5	1.80 V	196	42.7	0.8
6	4824.00	32.0 AV	54.0	-22.0	1.80 V	196	31.2	0.8

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	62.7 PK	74.0	-11.3	2.93 H	275	68.4	-5.7
2	2390.00	45.6 AV	54.0	-8.4	2.93 H	275	51.3	-5.7
3	*2437.00	113.4 PK			2.93 H	275	118.9	-5.5
4	*2437.00	103.2 AV			2.93 H	275	108.7	-5.5
5	2483.50	63.8 PK	74.0	-10.2	2.93 H	275	69.3	-5.5
6	2483.50	45.9 AV	54.0	-8.1	2.93 H	275	51.4	-5.5
7	4874.00	43.3 PK	74.0	-30.7	1.83 H	219	42.4	0.9
8	4874.00	33.4 AV	54.0	-20.6	1.83 H	219	32.5	0.9
9	7311.00	60.8 PK	74.0	-13.2	2.98 H	22	53.4	7.4
10	7311.00	46.1 AV	54.0	-7.9	2.98 H	22	38.7	7.4

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	60.1 PK	74.0	-13.9	3.64 V	26	65.8	-5.7
2	2390.00	42.4 AV	54.0	-11.6	3.64 V	26	48.1	-5.7
3	*2437.00	111.2 PK			3.64 V	26	116.7	-5.5
4	*2437.00	101.1 AV			3.64 V	26	106.6	-5.5
5	2483.50	60.9 PK	74.0	-13.1	3.64 V	26	66.4	-5.5
6	2483.50	42.6 AV	54.0	-11.4	3.64 V	26	48.1	-5.5
7	4874.00	44.1 PK	74.0	-29.9	1.80 V	198	43.2	0.9
8	4874.00	32.4 AV	54.0	-21.6	1.80 V	198	31.5	0.9
9	7311.00	58.3 PK	74.0	-15.7	1.59 V	187	50.9	7.4
10	7311.00	43.5 AV	54.0	-10.5	1.59 V	187	36.1	7.4

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	109.3 PK			2.92 H	271	114.7	-5.4
2	*2462.00	98.1 AV			2.92 H	271	103.5	-5.4
3	2483.50	73.8 PK	74.0	-0.2	2.92 H	271	79.3	-5.5
4	2483.50	52.2 AV	54.0	-1.8	2.92 H	271	57.7	-5.5
5	4924.00	44.8 PK	74.0	-29.2	1.65 H	202	43.7	1.1
6	4924.00	33.2 AV	54.0	-20.8	1.65 H	202	32.1	1.1
7	7386.00	51.9 PK	74.0	-22.1	3.01 H	32	44.3	7.6
8	7386.00	38.2 AV	54.0	-15.8	3.01 H	32	30.6	7.6
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	107.1 PK			3.68 V	37	112.5	-5.4
2	*2462.00	96.5 AV			3.68 V	37	101.9	-5.4
3	2483.50	70.4 PK	74.0	-3.6	3.68 V	37	75.9	-5.5
4	2483.50	48.8 AV	54.0	-5.2	3.68 V	37	54.3	-5.5
5	4924.00	44.0 PK	74.0	-30.0	1.79 V	173	42.9	1.1
6	4924.00	32.4 AV	54.0	-21.6	1.79 V	173	31.3	1.1
7	7386.00	50.1 PK	74.0	-23.9	1.48 V	227	42.5	7.6
8	7386.00	36.0 AV	54.0	-18.0	1.48 V	227	28.4	7.6

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

802.11n (HT40)

CHANNEL	TX Channel 3	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	68.2 PK	74.0	-5.8	2.95 H	279	73.9	-5.7
2	2390.00	53.8 AV	54.0	-0.2	2.95 H	279	59.5	-5.7
3	*2422.00	104.1 PK			2.95 H	279	109.6	-5.5
4	*2422.00	93.2 AV			2.95 H	279	98.7	-5.5
5	4844.00	44.3 PK	74.0	-29.7	1.66 H	223	43.5	0.8
6	4844.00	32.6 AV	54.0	-21.4	1.66 H	223	31.8	0.8
7	7266.00	50.3 PK	74.0	-23.7	2.95 H	40	42.8	7.5
8	7266.00	36.7 AV	54.0	-17.3	2.95 H	40	29.2	7.5
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	66.2 PK	74.0	-7.8	3.65 V	33	71.9	-5.7
2	2390.00	50.6 AV	54.0	-3.4	3.65 V	33	56.3	-5.7
3	*2422.00	101.9 PK			3.65 V	33	107.4	-5.5
4	*2422.00	91.6 AV			3.65 V	33	97.1	-5.5
5	4844.00	43.4 PK	74.0	-30.6	1.83 V	179	42.6	0.8
6	4844.00	32.0 AV	54.0	-22.0	1.83 V	179	31.2	0.8
7	7266.00	49.6 PK	74.0	-24.4	1.49 V	213	42.1	7.5
8	7266.00	35.5 AV	54.0	-18.5	1.49 V	213	28.0	7.5

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	70.1 PK	74.0	-3.9	2.95 H	271	75.8	-5.7
2	2390.00	53.8 AV	54.0	-0.2	2.95 H	271	59.5	-5.7
3	*2437.00	108.3 PK			2.95 H	271	113.8	-5.5
4	*2437.00	97.4 AV			2.95 H	271	102.9	-5.5
5	2483.50	69.7 PK	74.0	-4.3	2.95 H	271	75.2	-5.5
6	2483.50	52.3 AV	54.0	-1.7	2.95 H	271	57.8	-5.5
7	4874.00	44.6 PK	74.0	-29.4	1.57 H	209	43.7	0.9
8	4874.00	32.7 AV	54.0	-21.3	1.57 H	209	31.8	0.9
9	7311.00	50.6 PK	74.0	-23.4	3.00 H	37	43.2	7.4
10	7311.00	36.9 AV	54.0	-17.1	3.00 H	37	29.5	7.4

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	68.1 PK	74.0	-5.9	3.68 V	47	73.8	-5.7
2	2390.00	50.5 AV	54.0	-3.5	3.68 V	47	56.2	-5.7
3	*2437.00	106.2 PK			3.68 V	47	111.7	-5.5
4	*2437.00	95.9 AV			3.68 V	47	101.4	-5.5
5	2483.50	67.8 PK	74.0	-6.2	3.68 V	47	73.3	-5.5
6	2483.50	49.0 AV	54.0	-5.0	3.68 V	47	54.5	-5.5
7	4874.00	44.0 PK	74.0	-30.0	1.79 V	159	43.1	0.9
8	4874.00	32.3 AV	54.0	-21.7	1.79 V	159	31.4	0.9
9	7311.00	49.9 PK	74.0	-24.1	1.42 V	214	42.5	7.4
10	7311.00	35.7 AV	54.0	-18.3	1.42 V	214	28.3	7.4

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 9	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	105.6 PK			3.15 H	278	111.1	-5.5
2	*2452.00	94.3 AV			3.15 H	278	99.8	-5.5
3	2483.50	73.6 PK	74.0	-0.4	3.15 H	278	79.1	-5.5
4	2483.50	52.8 AV	54.0	-1.2	3.15 H	278	58.3	-5.5
5	4904.00	44.2 PK	74.0	-29.8	1.66 H	206	43.2	1.0
6	4904.00	32.5 AV	54.0	-21.5	1.66 H	206	31.5	1.0
7	7356.00	50.5 PK	74.0	-23.5	2.93 H	38	42.9	7.6
8	7356.00	36.8 AV	54.0	-17.2	2.93 H	38	29.2	7.6
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	103.5 PK			3.63 V	33	109.0	-5.5
2	*2452.00	92.8 AV			3.63 V	33	98.3	-5.5
3	2483.50	70.3 PK	74.0	-3.7	3.63 V	33	75.8	-5.5
4	2483.50	48.6 AV	54.0	-5.4	3.63 V	33	54.1	-5.5
5	4904.00	44.2 PK	74.0	-29.8	1.79 V	181	43.2	1.0
6	4904.00	32.8 AV	54.0	-21.2	1.79 V	181	31.8	1.0
7	7356.00	50.1 PK	74.0	-23.9	1.48 V	220	42.5	7.6
8	7356.00	36.0 AV	54.0	-18.0	1.48 V	220	28.4	7.6

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

Below 1GHz Data:

802.11g

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	32.79	30.4 QP	40.0	-9.6	2.00 H	247	40.2	-9.8
2	84.20	30.8 QP	40.0	-9.2	2.00 H	127	45.0	-14.2
3	250.00	29.2 QP	46.0	-16.8	1.00 H	283	39.2	-10.0
4	375.00	32.7 QP	46.0	-13.3	1.00 H	256	38.7	-6.0
5	499.99	30.0 QP	46.0	-16.0	1.00 H	212	32.7	-2.7
6	625.02	32.6 QP	46.0	-13.4	1.00 H	346	32.6	0.0
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	103.23	32.5 QP	43.5	-11.0	1.00 V	9	44.9	-12.4
2	211.17	28.6 QP	43.5	-14.9	1.00 V	37	40.6	-12.0
3	250.00	30.1 QP	46.0	-15.9	1.50 V	12	40.1	-10.0
4	375.00	31.8 QP	46.0	-14.2	1.50 V	77	37.8	-6.0
5	540.00	30.0 QP	46.0	-16.0	1.00 V	254	32.2	-2.2
6	749.98	35.4 QP	46.0	-10.6	1.50 V	57	33.5	1.9

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver R&S	ESCS 30	100287	Apr. 16, 2016	Apr. 15, 2017
Line-Impedance Stabilization Network (for EUT) SCHWARZBECK	NSLK-8127	8127-523	Oct. 11, 2016	Oct. 10, 2017
Line-Impedance Stabilization Network (for Peripheral) R&S	ENV216	100071	Nov. 11, 2015	Nov. 10, 2016
RF Cable	5D-FB	COACAB-001	May 24, 2016	May 23, 2017
10 dB PAD Mini-Circuits	HAT-10+	CONATT-001	Sep. 13, 2016	Sep. 12, 2017
50 ohms Terminator	N/A	EMC-01	Oct. 06, 2016	Oct. 05, 2017
50 ohms Terminator	N/A	EMC-02	Sep. 29, 2016	Sep. 28, 2017
Software BVADT	BVADT_Cond_ V7.3.7.4	NA	NA	NA

Note:

1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. C.
3. The VCCI Con C Registration No. is C-3611.
4. Tested Date: Nov 03 to 04, 2016

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

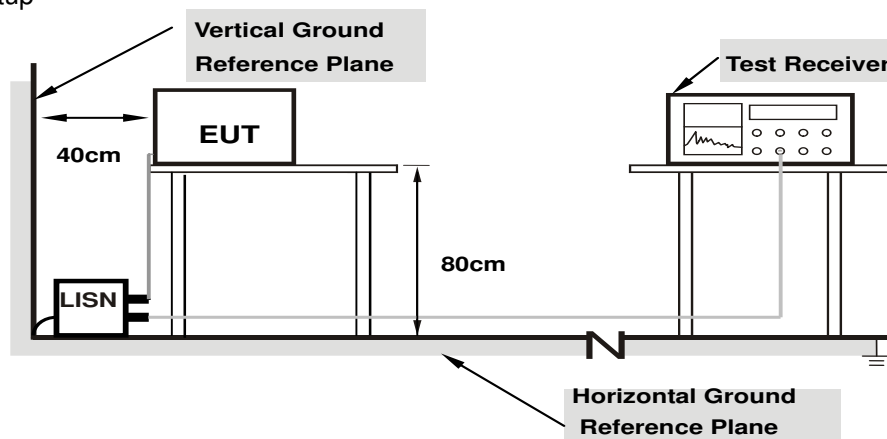

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.


4.2.7 Test Results (Mode 1)

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.30	32.29	18.95	42.59	29.25	66.00	56.00	-23.41	-26.75
2	0.18125	10.29	31.95	24.73	42.24	35.02	64.43	54.43	-22.19	-19.41
3	0.22812	10.30	31.10	23.63	41.40	33.93	62.52	52.52	-21.12	-18.59
4	0.32578	10.32	29.54	23.30	39.86	33.62	59.56	49.56	-19.70	-15.94
5	3.84375	10.49	23.88	18.60	34.37	29.09	56.00	46.00	-21.63	-16.91
6	22.08984	11.04	4.98	0.37	16.02	11.41	60.00	50.00	-43.98	-38.59

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

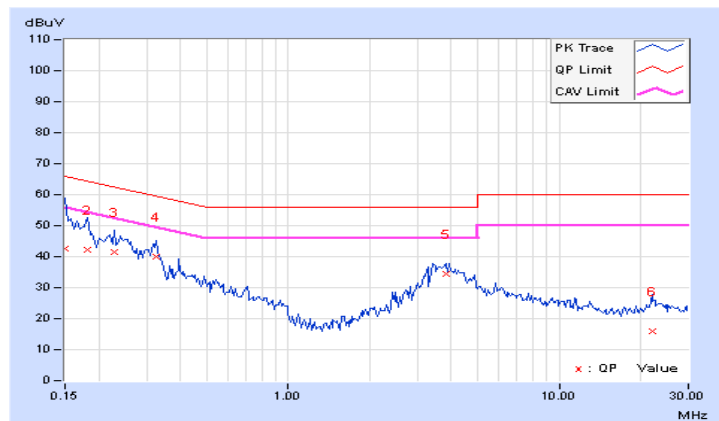


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17734	10.36	32.71	25.61	43.07	35.97	64.61	54.61	-21.54	-18.64
2	0.24375	10.38	30.33	22.38	40.71	32.76	61.97	51.97	-21.26	-19.21
3	0.41563	10.44	17.08	10.13	27.52	20.57	57.54	47.54	-30.02	-26.97
4	0.96250	10.54	12.05	6.30	22.59	16.84	56.00	46.00	-33.41	-29.16
5	3.67188	10.57	25.68	20.24	36.25	30.81	56.00	46.00	-19.75	-15.19
6	6.60156	10.61	13.08	7.96	23.69	18.57	60.00	50.00	-36.31	-31.43

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

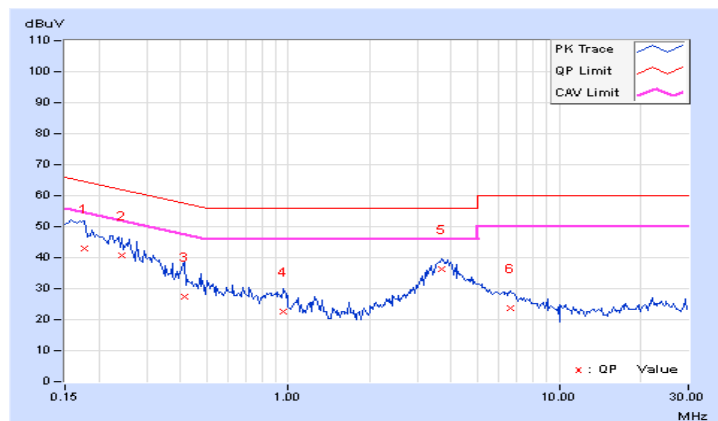


4.2.8 Test Results (Mode 2)

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16562	10.30	47.52	33.45	57.82	43.75	65.18	55.18	-7.36	-11.43
2	0.18125	10.29	42.11	23.42	52.40	33.71	64.43	54.43	-12.03	-20.72
3	0.22812	10.30	39.23	27.77	49.53	38.07	62.52	52.52	-12.99	-14.45
4	0.24375	10.30	35.73	17.47	46.03	27.77	61.97	51.97	-15.94	-24.20
5	0.32578	10.32	34.99	21.24	45.31	31.56	59.56	49.56	-14.25	-18.00
6	9.86328	10.64	25.60	19.20	36.24	29.84	60.00	50.00	-23.76	-20.16
7	16.12891	10.86	24.31	18.17	35.17	29.03	60.00	50.00	-24.83	-20.97

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

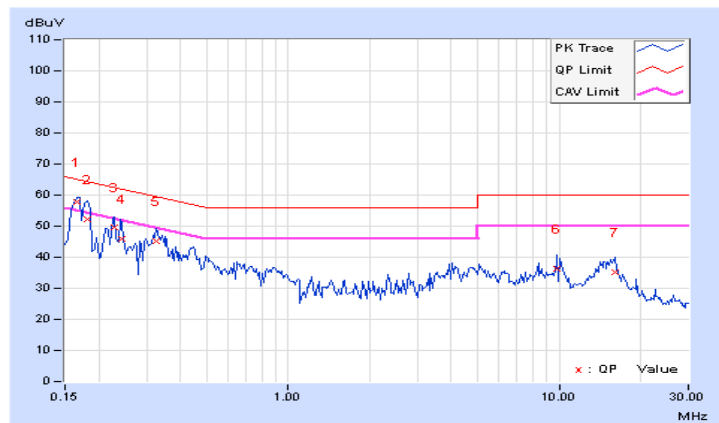


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	-----------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16622	10.36	48.63	34.83	58.99	45.19	65.15	55.15	-6.16	-9.96
2	0.18906	10.36	40.45	15.69	50.81	26.05	64.08	54.08	-13.27	-28.03
3	0.22031	10.37	40.64	28.65	51.01	39.02	62.81	52.81	-11.80	-13.79
4	0.23984	10.38	35.70	19.97	46.08	30.35	62.10	52.10	-16.02	-21.75
5	0.25156	10.38	32.97	11.15	43.35	21.53	61.71	51.71	-18.36	-30.18
6	0.32578	10.41	34.97	22.53	45.38	32.94	59.56	49.56	-14.18	-16.62
7	0.44297	10.45	29.02	21.35	39.47	31.80	57.01	47.01	-17.54	-15.21
8	10.10156	10.67	21.93	15.55	32.60	26.22	60.00	50.00	-27.40	-23.78

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

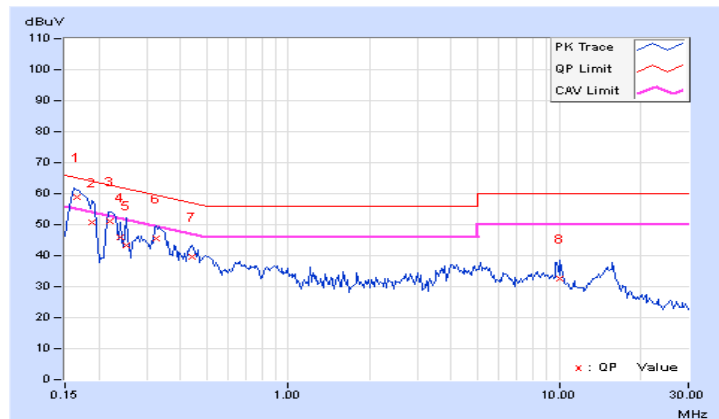


4.2.9 Test Results (Mode 3)

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	-----------------------------------

No	Freq. [MHz]	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15781	10.30	38.07	26.37	48.37	36.67	65.58	55.58	-17.21	-18.91
2	0.17344	10.30	37.09	26.67	47.39	36.97	64.79	54.79	-17.40	-17.82
3	0.21641	10.29	36.31	26.47	46.60	36.76	62.96	52.96	-16.36	-16.20
4	0.30234	10.32	39.43	34.20	49.75	44.52	60.18	50.18	-10.43	-5.66
5	0.36094	10.33	27.87	21.09	38.20	31.42	58.71	48.71	-20.51	-17.29
6	13.55859	10.77	21.03	16.38	31.80	27.15	60.00	50.00	-28.20	-22.85

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

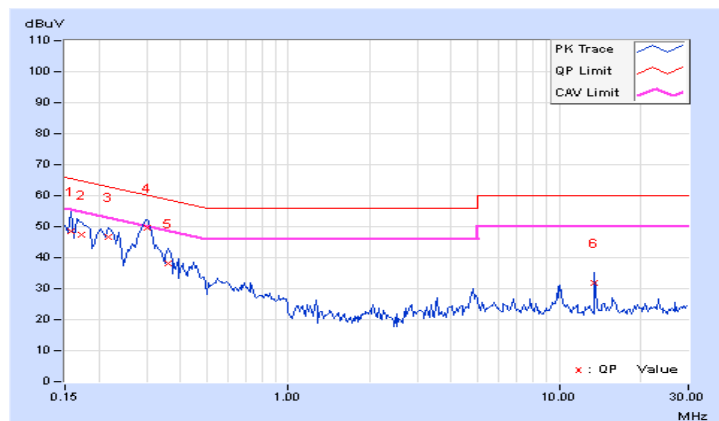


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	-----------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	10.36	40.69	27.75	51.05	38.11	65.79	55.79	-14.74	-17.68
2	0.16562	10.36	37.96	26.77	48.32	37.13	65.18	55.18	-16.86	-18.05
3	0.19687	10.36	35.27	25.09	45.63	35.45	63.74	53.74	-18.11	-18.29
4	0.22812	10.37	34.68	26.05	45.05	36.42	62.52	52.52	-17.47	-16.10
5	0.30234	10.40	37.94	32.12	48.34	42.52	60.18	50.18	-11.84	-7.66
6	0.36094	10.42	26.69	19.74	37.11	30.16	58.71	48.71	-21.60	-18.55
7	5.73047	10.60	9.19	3.27	19.79	13.87	60.00	50.00	-40.21	-36.13

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

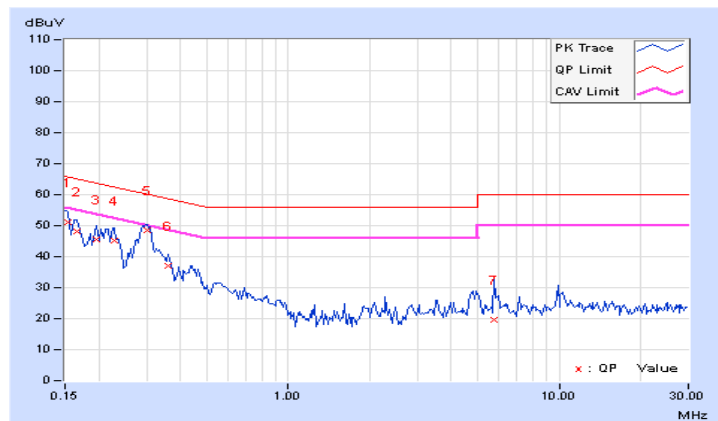


4.2.10 Test Results (Mode 4)

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15781	10.30	33.29	18.33	43.59	28.63	65.58	55.58	-21.99	-26.95
2	0.18125	10.29	34.54	25.43	44.83	35.72	64.43	54.43	-19.60	-18.71
3	0.41563	10.34	23.47	17.37	33.81	27.71	57.54	47.54	-23.73	-19.83
4	0.54844	10.38	17.63	15.93	28.01	26.31	56.00	46.00	-27.99	-19.69
5	7.02344	10.57	25.71	20.55	36.28	31.12	60.00	50.00	-23.72	-18.88
6	9.88281	10.64	23.92	17.92	34.56	28.56	60.00	50.00	-25.44	-21.44

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

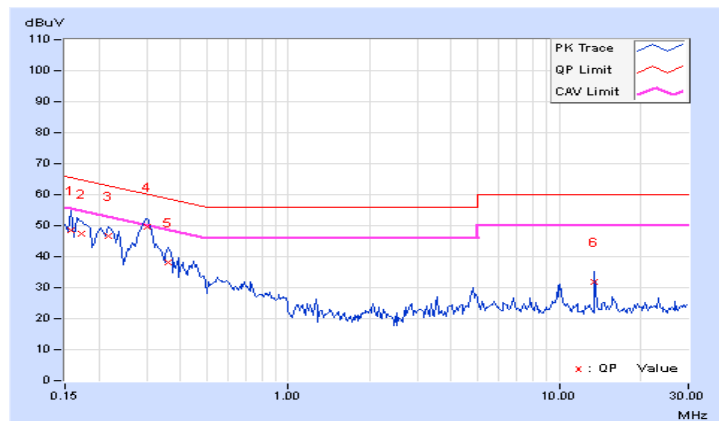


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	-----------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.36	39.85	29.36	50.21	39.72	66.00	56.00	-15.79	-16.28
2	0.16953	10.36	25.53	10.38	35.89	20.74	64.98	54.98	-29.09	-34.24
3	0.18125	10.36	34.22	25.17	44.58	35.53	64.43	54.43	-19.85	-18.90
4	0.38828	10.44	22.00	17.64	32.44	28.08	58.10	48.10	-25.66	-20.02
5	0.49375	10.46	25.23	18.03	35.69	28.49	56.10	46.10	-20.41	-17.61
6	7.05469	10.62	25.14	19.90	35.76	30.52	60.00	50.00	-24.24	-19.48
7	9.97266	10.67	24.58	17.58	35.25	28.25	60.00	50.00	-24.75	-21.75

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

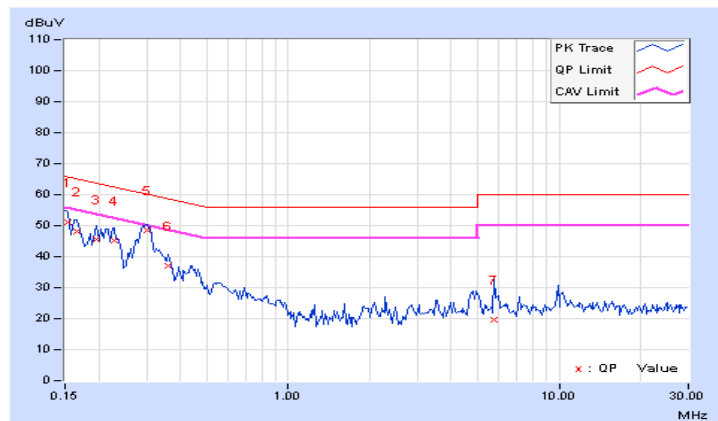


4.3 6dB Bandwidth Measurement

4.3.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 Test Setup



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

- Set resolution bandwidth (RBW) = 100kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Result

802.11b

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
1	2412	8.14	0.5	PASS
6	2437	9.09	0.5	PASS
11	2462	8.14	0.5	PASS

802.11g

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	16.46	16.47	0.5	PASS
6	2437	16.45	16.42	0.5	PASS
11	2462	16.43	16.42	0.5	PASS

802.11n (HT20)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	16.45	17.68	0.5	PASS
6	2437	17.65	17.68	0.5	PASS
11	2462	17.68	17.69	0.5	PASS

802.11n (HT40)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
3	2422	36.07	35.54	0.5	Pass
6	2437	35.58	36.04	0.5	Pass
9	2452	35.94	35.47	0.5	Pass

Spectrum Plot of Worst Value


802.11b / Chain 0 : CH11

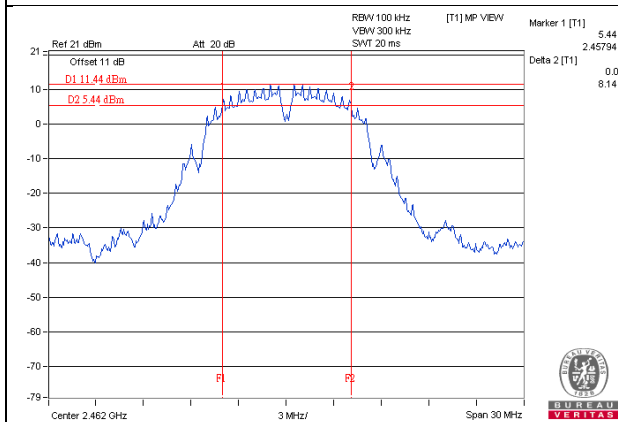


802.11g / Chain 1 : CH6

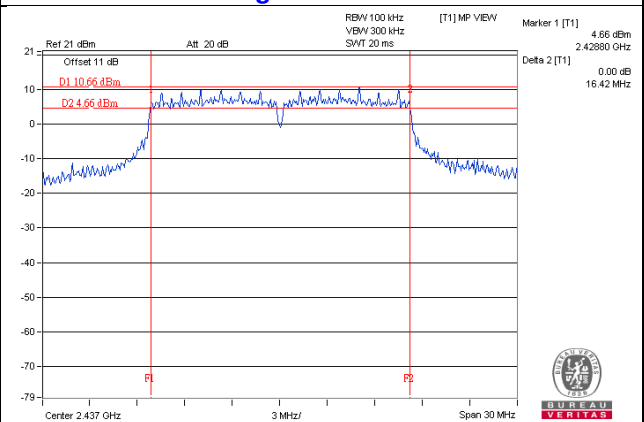

802.11n (HT20) / Chain 0 : CH1

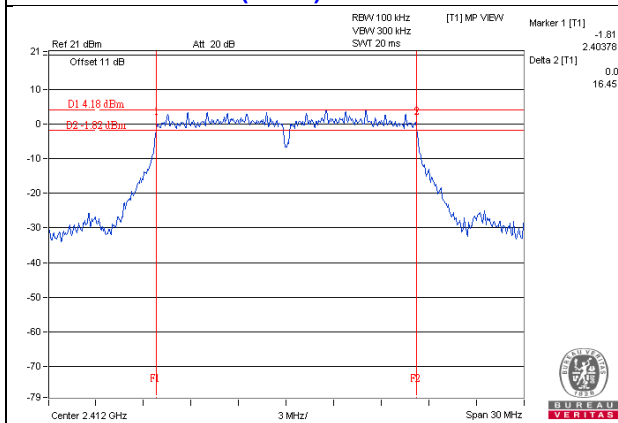

802.11n (HT40) / Chain 1 : CH9

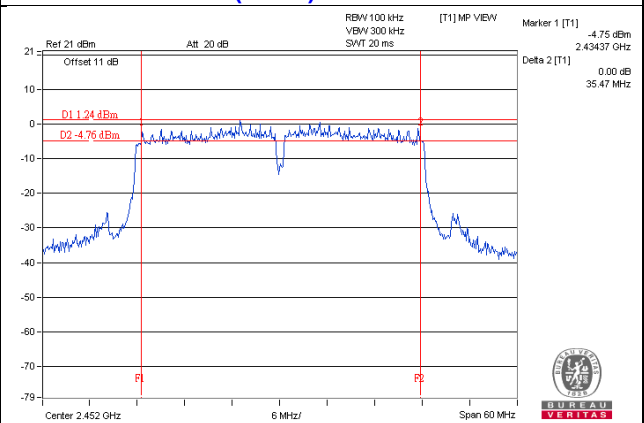

4.4 Conducted Output Power Measurement

4.4.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

4.4.2 Test Setup



4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.4 Test Procedures

An average power sensor was used on the output port of the EUT. A power meter was used to read the response of the average power sensor. Record the power level.

4.4.5 Deviation from Test Standard

No deviation.

4.4.6 EUT Operating Conditions

Same as Item 4.3.6.

4.4.7 Test Results

802.11b

Channel	Frequency (MHz)	Average Power (mW)	Average Power (dBm)	Limit (dBm)	Pass / Fail
1	2412	142.889	21.55	30	Pass
6	2437	213.304	23.29	30	Pass
11	2462	170.216	22.31	30	Pass

802.11g

Chan.	Frequency (MHz)	Avg. Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	18.06	17.82	124.507	20.95	30	Pass
6	2437	22.80	22.66	375.048	25.74	30	Pass
11	2462	17.68	17.34	112.814	20.52	30	Pass

802.11n (HT20)

Chan.	Frequency (MHz)	Avg. Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	16.15	15.88	79.936	19.03	30	Pass
6	2437	22.76	22.42	363.381	25.60	30	Pass
11	2462	17.75	17.44	115.029	20.61	30	Pass

802.11n (HT40)


Chan.	Frequency (MHz)	Avg. Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
3	2422	14.13	13.90	50.429	17.03	30	Pass
6	2437	19.02	18.81	155.832	21.93	30	Pass
9	2452	15.75	15.48	72.902	18.63	30	Pass

4.5 Power Spectral Density Measurement

4.5.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 Test Setup



4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedure

- Set instrument center frequency to DTS channel center frequency.
- Set span to at least 1.5 times the OBW.
- Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set VBW $\geq 3 \times \text{RBW}$.
- Detector = power averaging (RMS) or sample detector (when RMS not available).
- Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span/RBW}$.
- Sweep time = auto couple.
- Employ trace averaging (RMS) mode over a minimum of 100 traces.
- Use the peak marker function to determine the maximum amplitude level.

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Condition

Same as Item 4.3.6

4.5.7 Test Results

802.11b

Channel	Freq. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
1	2412	-10.25	8	Pass
6	2437	-7.36	8	Pass
11	2462	-10.48	8	Pass

802.11g

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
0	1	2412	-16.75	3.01	-13.74	7.15	Pass
	6	2437	-10.76	3.01	-7.75	7.15	Pass
	11	2462	-17.54	3.01	-14.53	7.15	Pass
1	1	2412	-16.09	3.01	-13.08	7.15	Pass
	6	2437	-11.10	3.01	-8.09	7.15	Pass
	11	2462	-17.42	3.01	-14.41	7.15	Pass

NOTE: Directional gain = 3.84dBi + 10log(2) = 6.85dBi > 6dBi , so the power density limit shall be reduced to 8-(6.85-6) = 7.15dBm.

802.11n (HT20)

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
0	1	2412	-17.15	3.01	-14.14	7.15	Pass
	6	2437	-10.94	3.01	-7.93	7.15	Pass
	11	2462	-17.24	3.01	-14.23	7.15	Pass
1	1	2412	-19.10	3.01	-16.09	7.15	Pass
	6	2437	-11.72	3.01	-8.71	7.15	Pass
	11	2462	-17.14	3.01	-14.13	7.15	Pass

NOTE: Directional gain = 3.84dBi + 10log(2) = 6.85dBi > 6dBi , so the power density limit shall be reduced to 8-(6.85-6) = 7.15dBm.


802.11n (HT40)

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
0	3	2422	-22.32	3.01	-19.21	7.15	Pass
	6	2437	-16.58	3.01	-13.47	7.15	Pass
	9	2452	-19.87	3.01	-16.76	7.15	Pass
1	3	2422	-22.34	3.01	-19.23	7.15	Pass
	6	2437	-15.90	3.01	-12.79	7.15	Pass
	9	2452	-20.32	3.01	-17.21	7.15	Pass


NOTE: Directional gain = $3.84\text{dBi} + 10\log(2) = 6.85\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $8 - (6.85 - 6) = 7.15\text{dBm}$.

Spectrum Plot of Worst Value


802.11b / Chain 0 : CH6

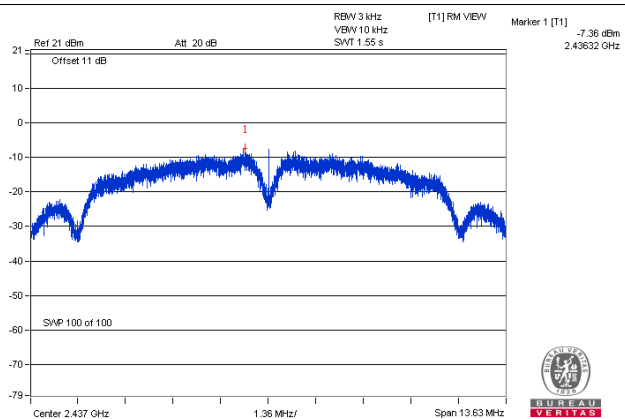


802.11g / Chain 0 : CH6

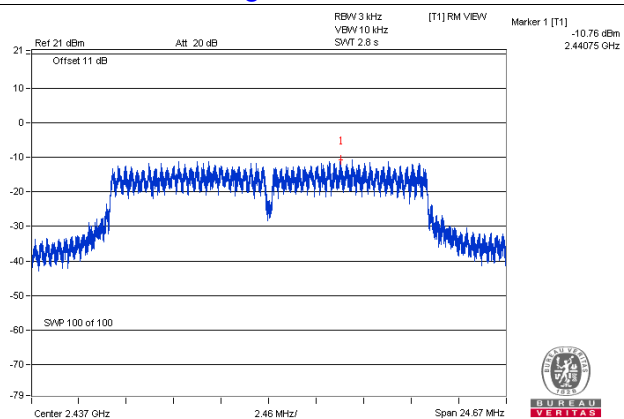

802.11n (HT20) / Chain 0 : CH6

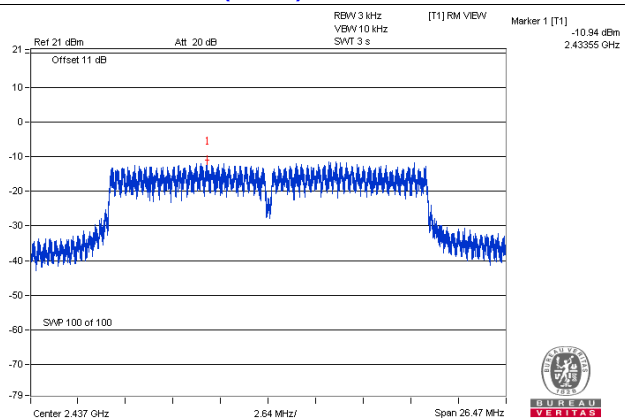

802.11n (HT40) / Chain 1 : CH6

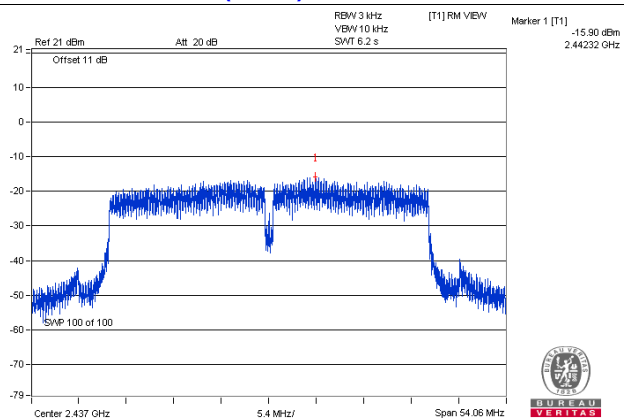


4.6 Conducted Out of Band Emission Measurement

4.6.1 Limits of Conducted Out of Band Emission Measurement

Below 30dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 Test Setup



4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

4.6.5 Deviation from Test Standard

No deviation.


4.6.6 EUT Operating Condition

Same as Item 4.3.6


4.6.7 Test Results

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 30dB offset below D1. It shows compliance with the requirement.


802.11b

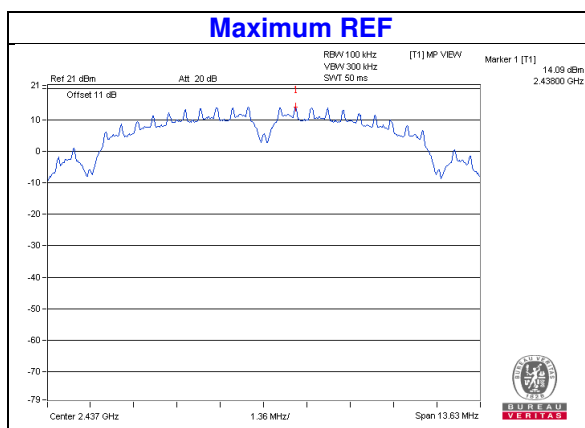


CHAIN 0

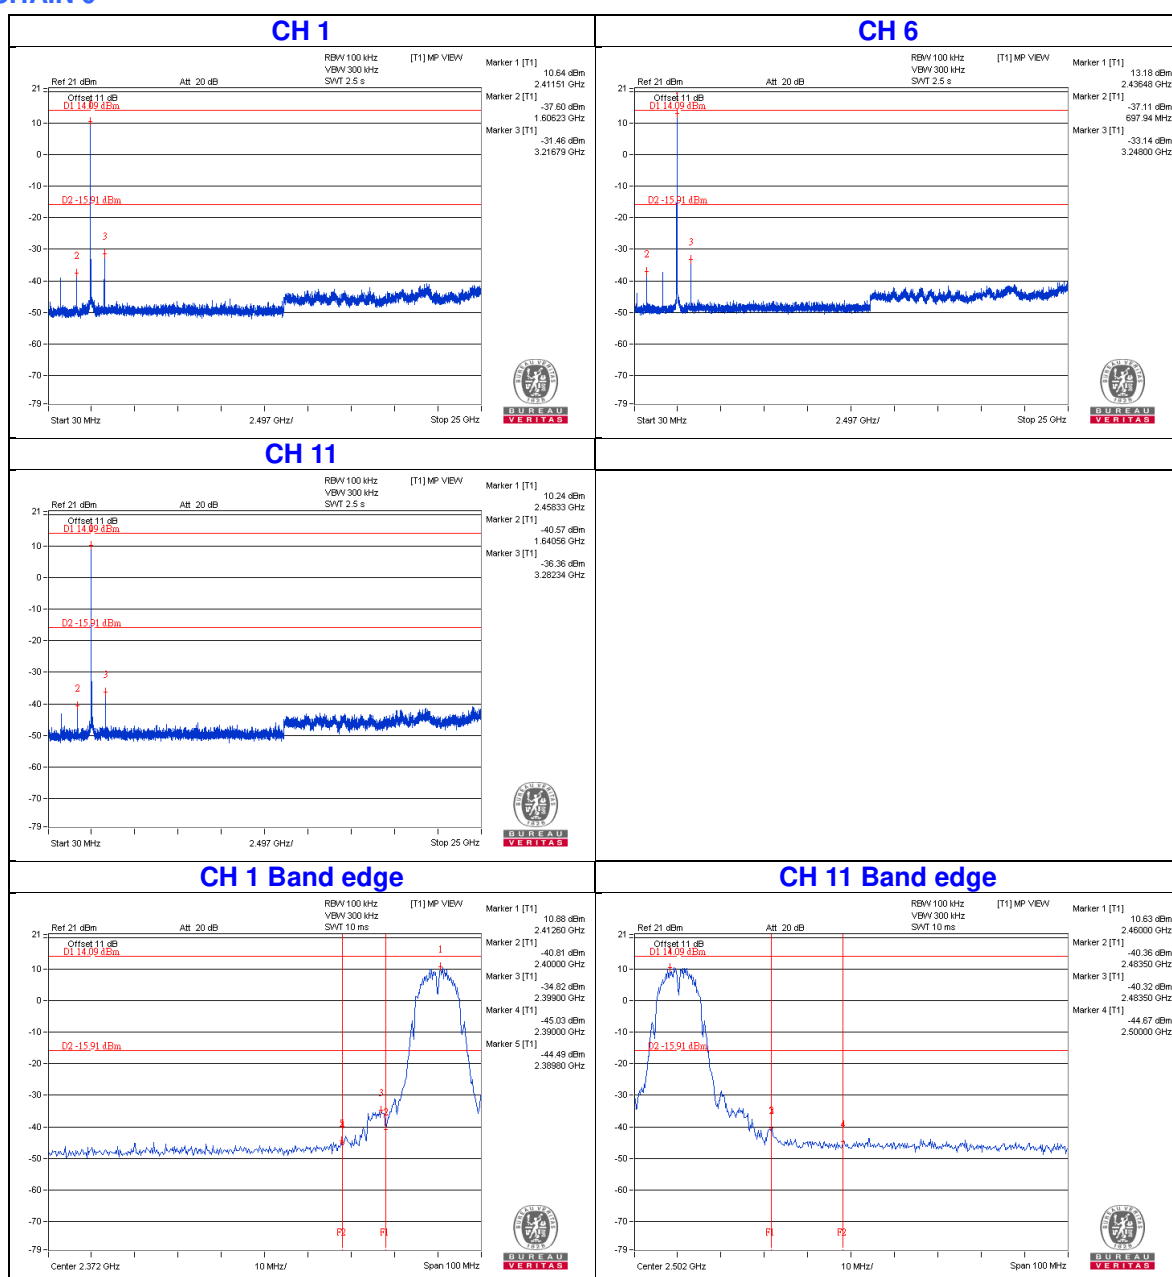


802.11g

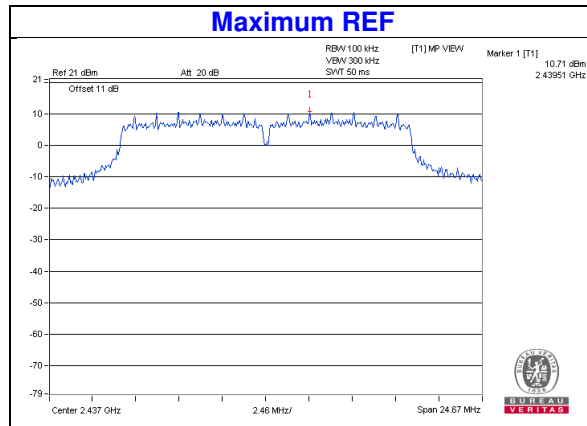


CHAIN 0

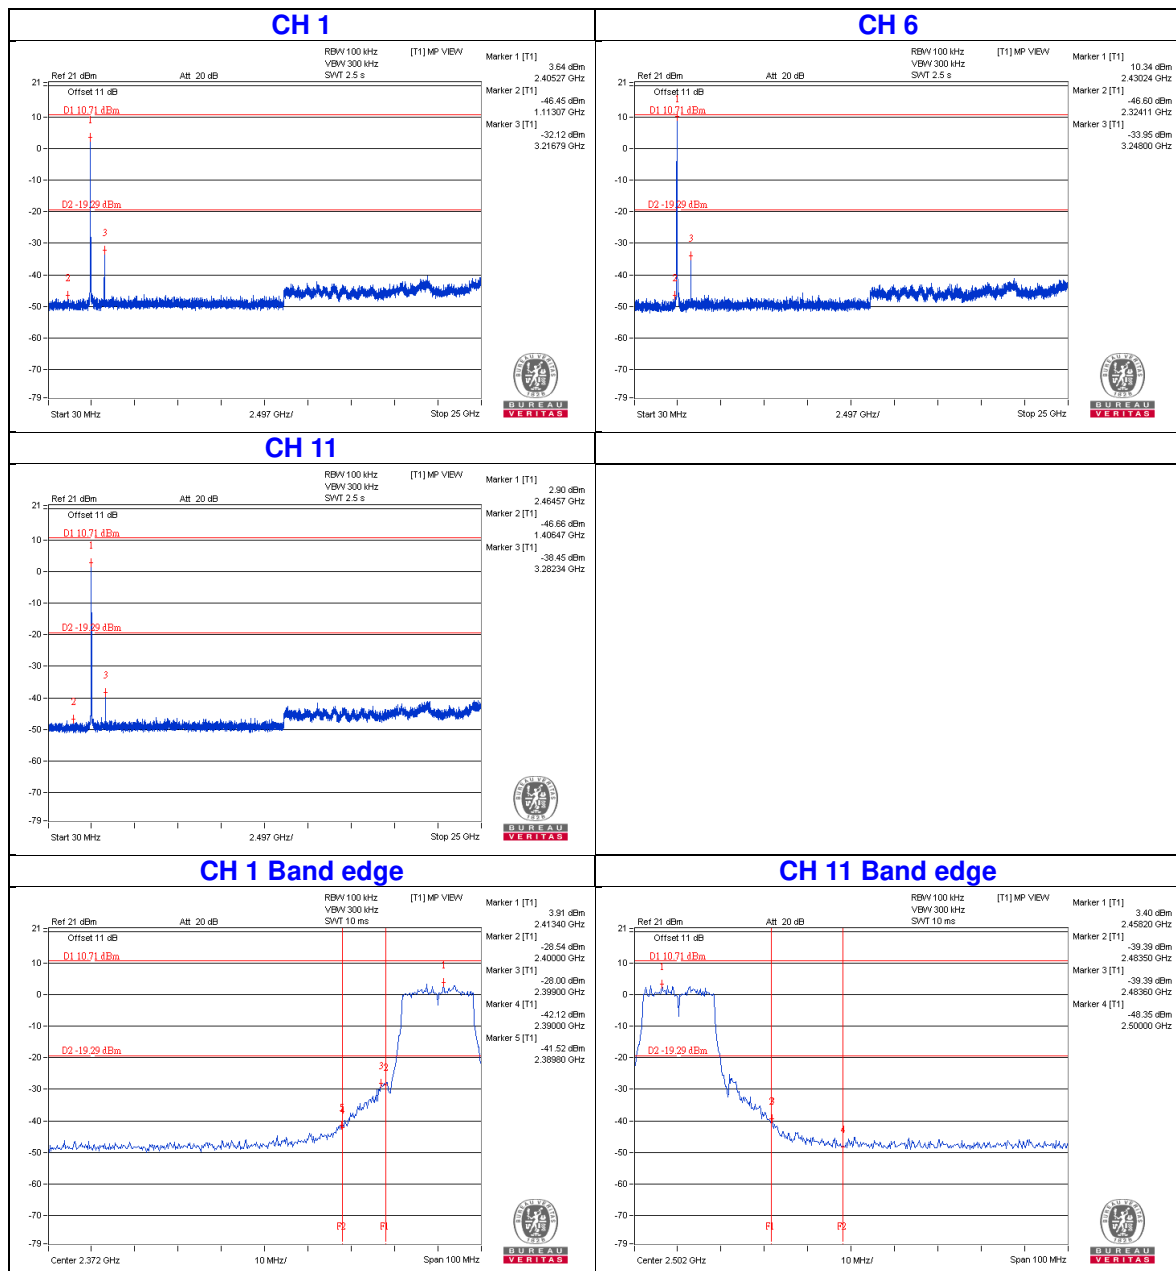


CHAIN 1

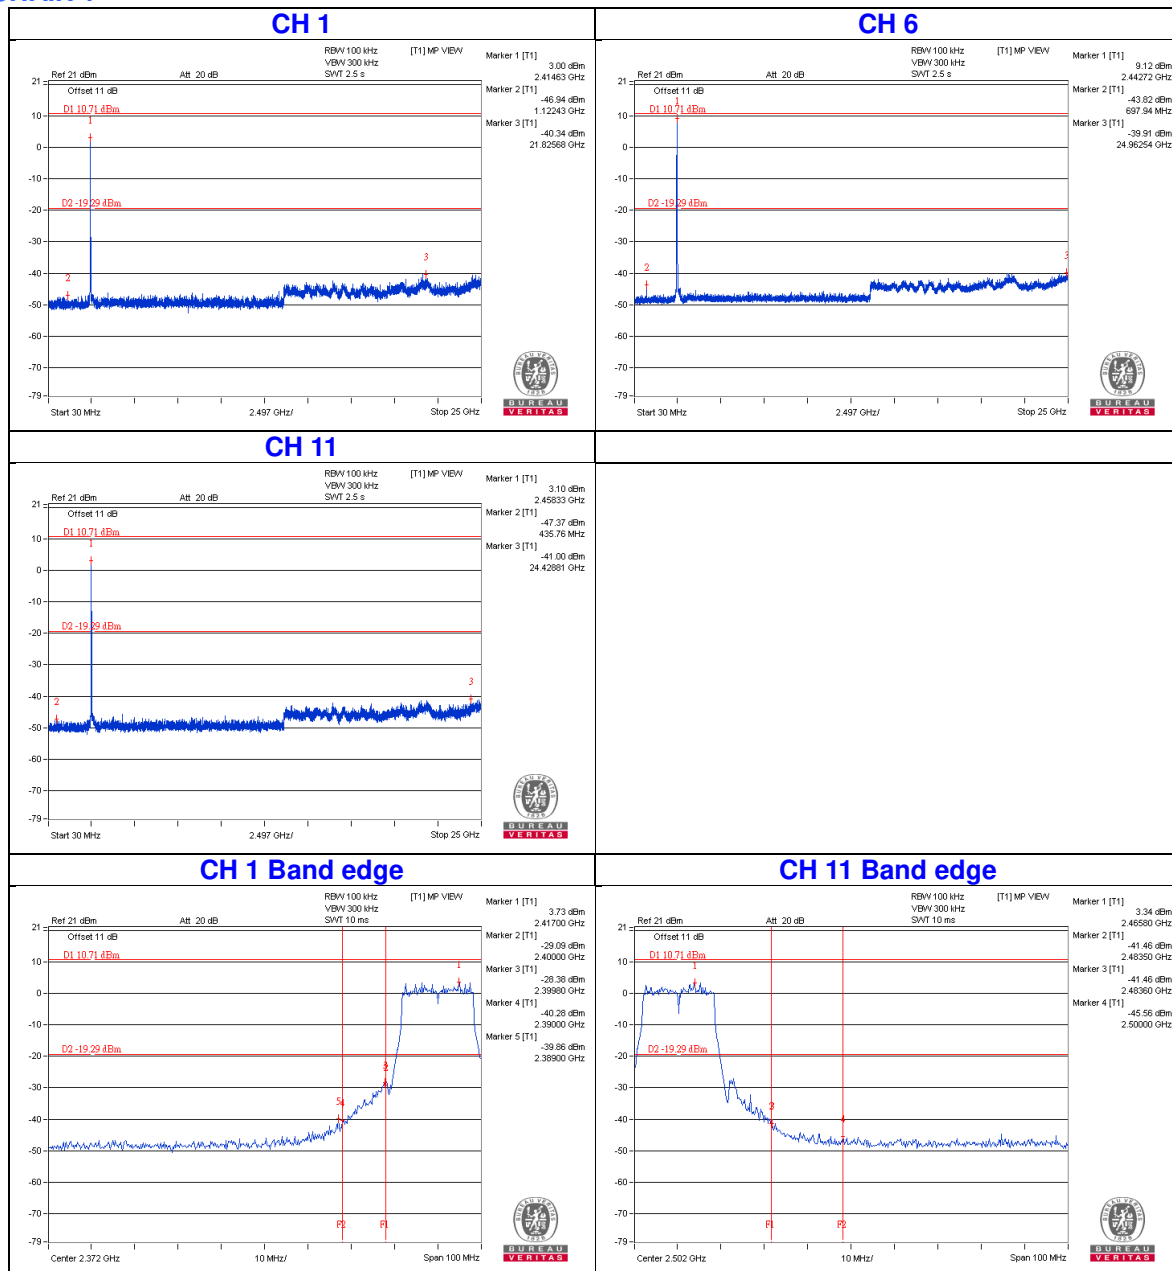


802.11n (HT20)

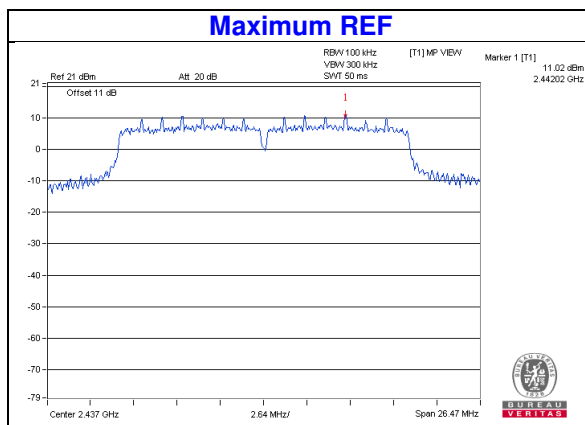


CHAIN 0

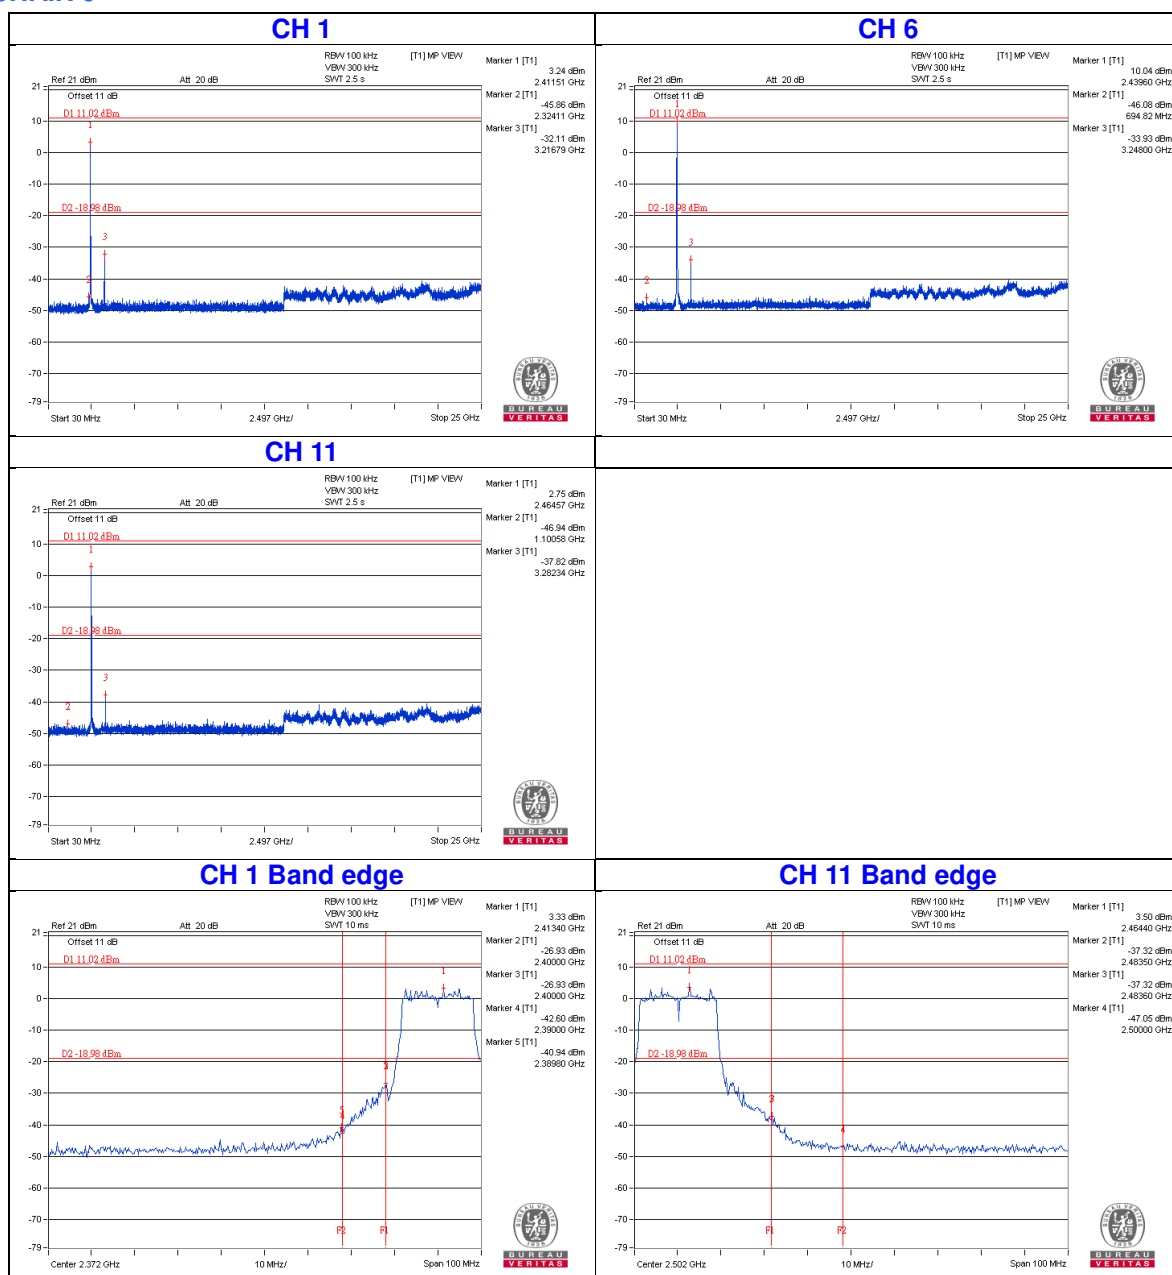


CHAIN 1

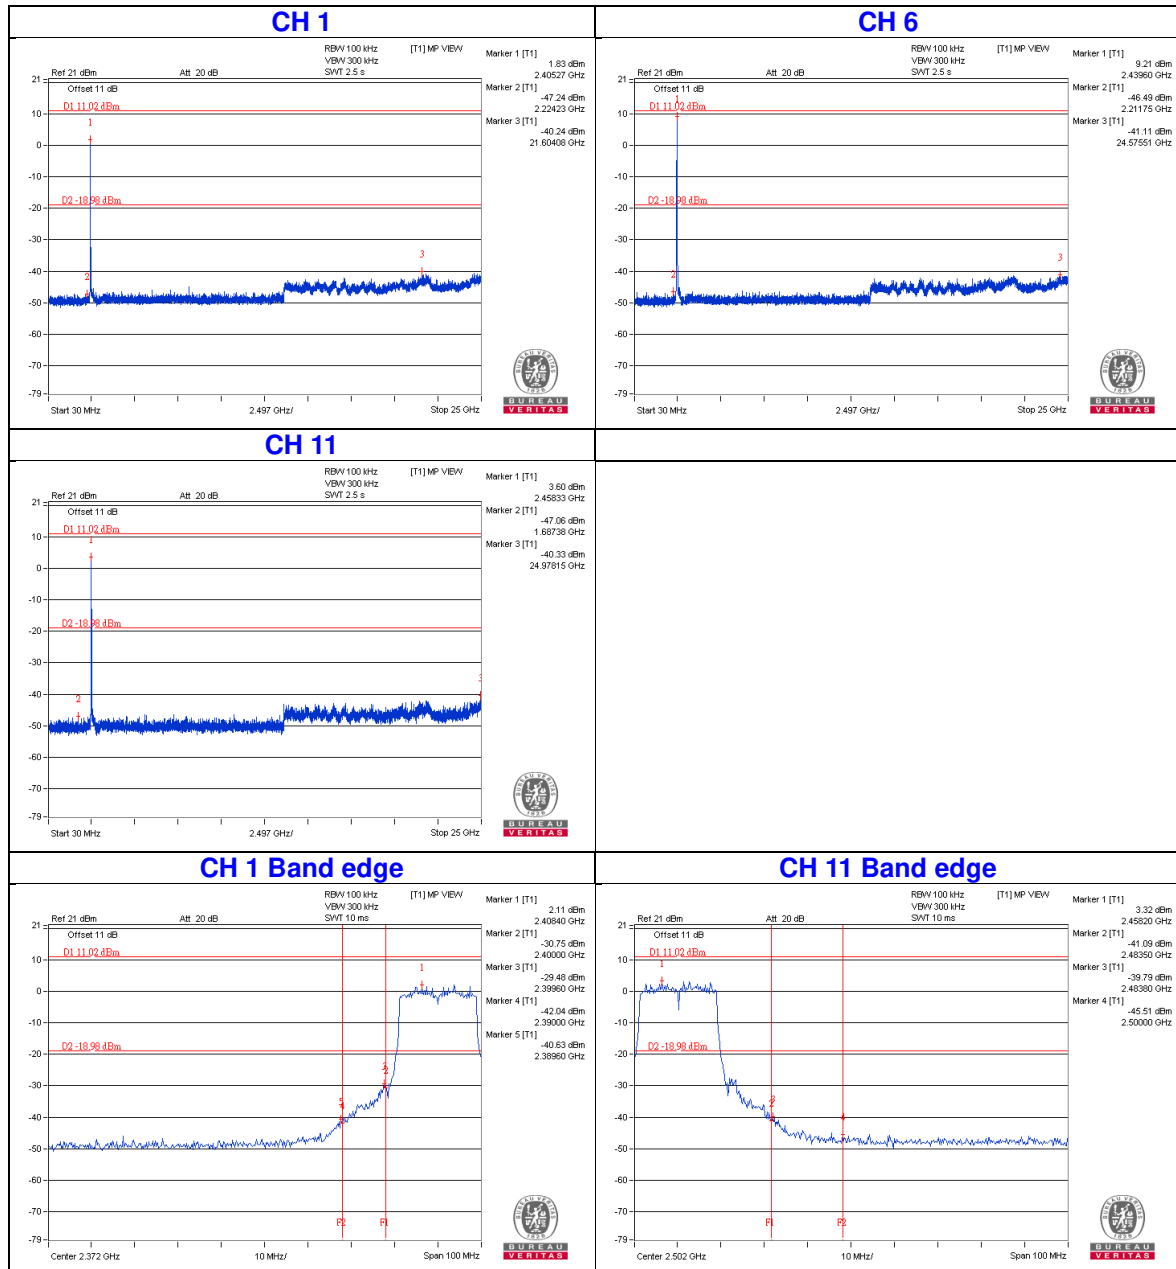


802.11n (HT40)

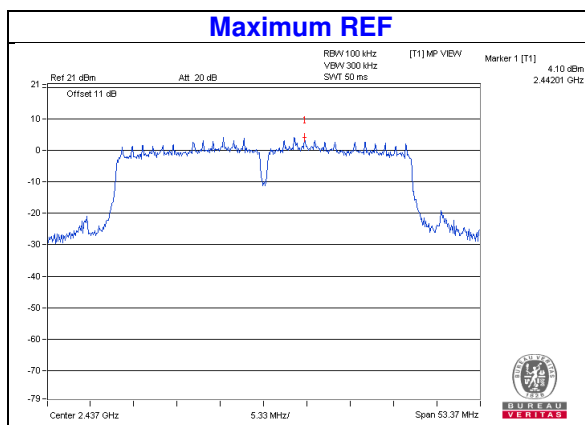

CHAIN 0

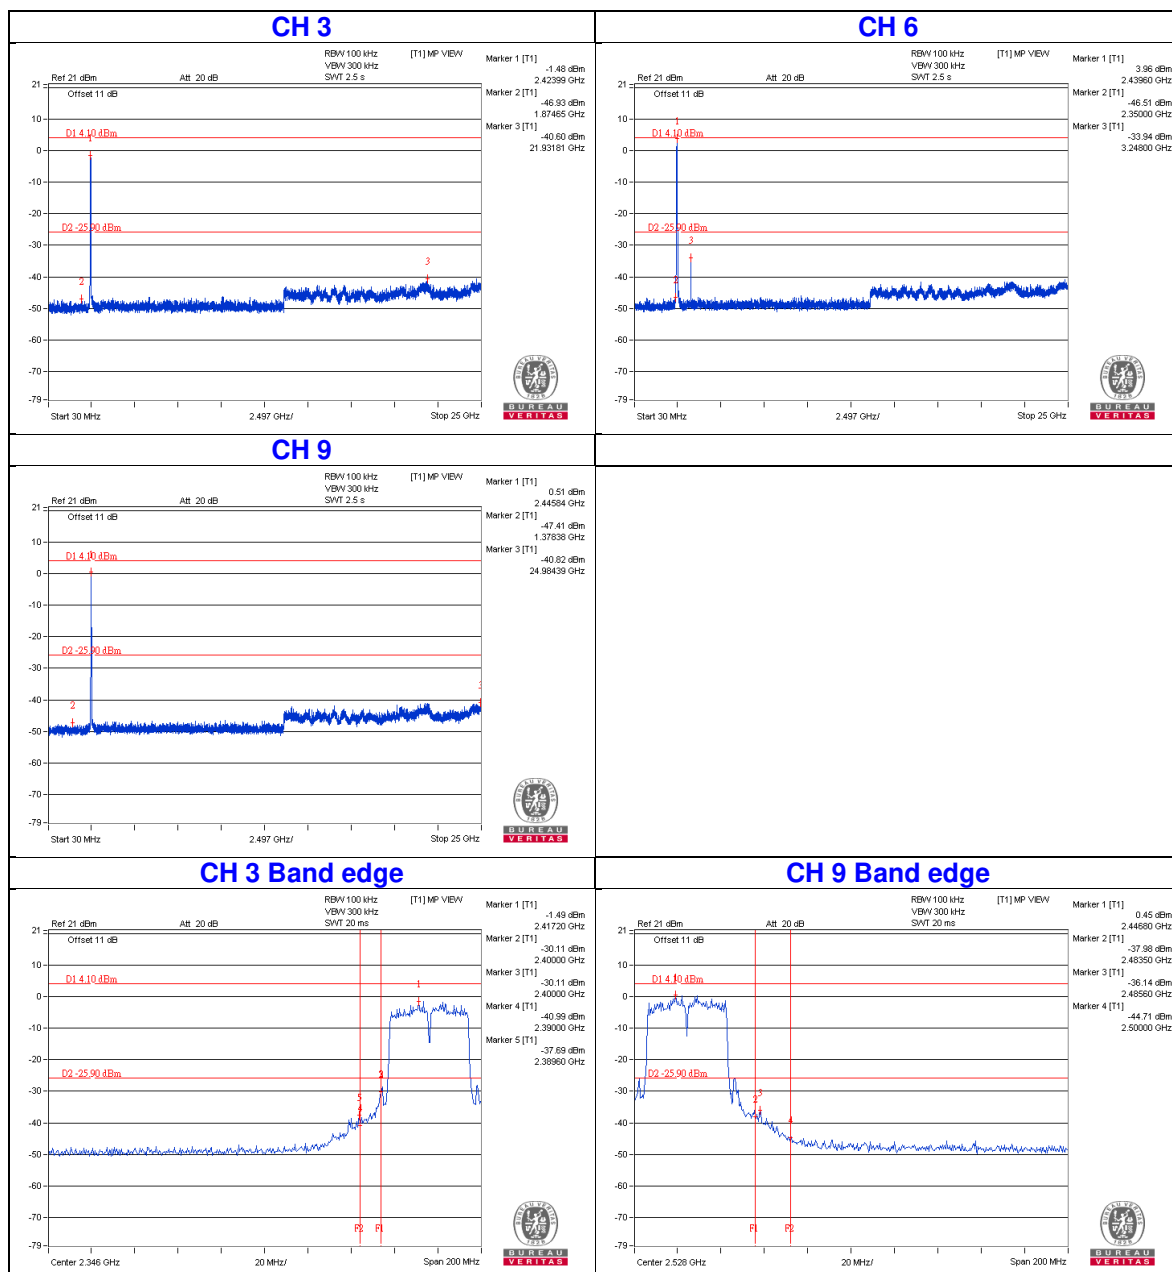

CHAIN 1

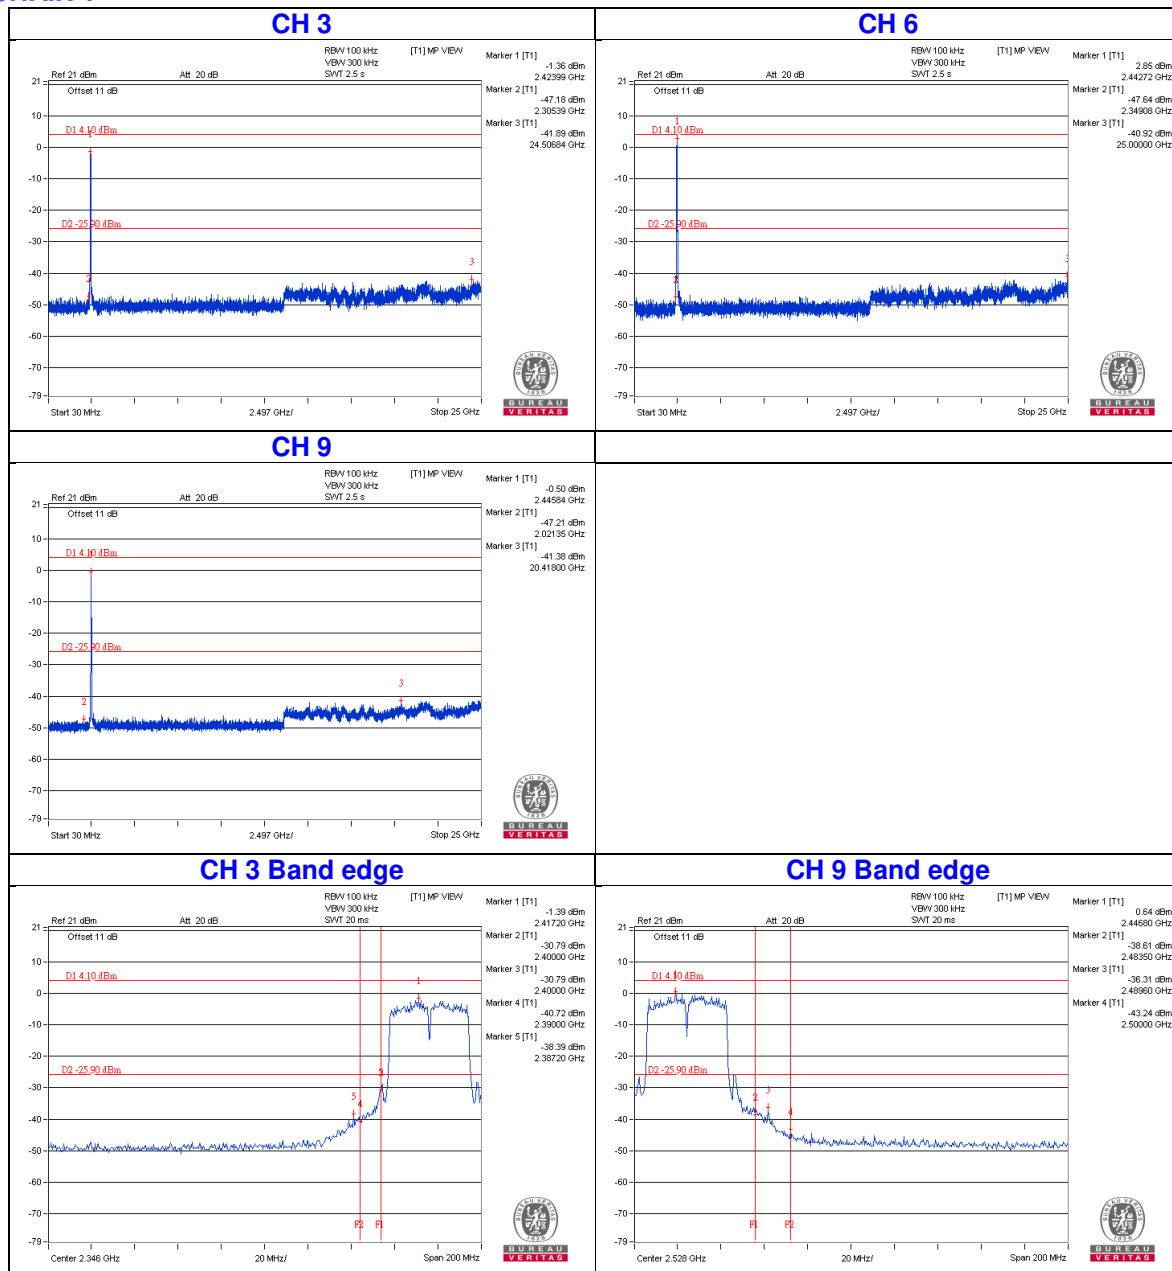

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---