

# **FCC Test Report**

Report No.: AGC02931210903FE03

FCC ID : POD-POC3

**APPLICATION PURPOSE** : Original Equipment

**PRODUCT DESIGNATION** : POC Radio

**BRAND NAME** : TYT, Tytpilot

MODEL NAME : IP-39PLUS

**APPLICANT** : TYT Electronics Co., Ltd.

**DATE OF ISSUE** : Oct. 22, 2021

**STANDARD(S)** : FCC Part 22H & 24E& 27L Rules

**REPORT VERSION**: V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd.



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test resu presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuence of the test report and in the report apply only to the test report should be addressed to AGC by agc@agc-cert.com.



Page 2 of 59

# REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	1	Oct. 22, 2021	Valid	Initial Release

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the special pedicated fresh dynaspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter appropriation of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.




Page 3 of 59

# **TABLE OF CONTENTS**

1. GENERAL INFORMATION	5
2. PRODUCT INFORMATION	6
2.1 PRODUCT TECHNICAL DESCRIPTION	
2.2 RELATED SUBMITTAL(S) / GRANT (S)	
2.3 TEST METHODOLOGY	8
2.4 DEVICE CAPABILITIES	
2.5 SPECIAL ACCESSORIES	
2.6 EQUIPMENT MODIFICATIONS	
2.7 EMISSION DESIGNATOR	
3. TEST ENVIRONMENT	10
3.1 ADDRESS OF THE TEST LABORATORY	10
3.2 TEST FACILITY	
3.3 ENVIRONMENTAL CONDITIONS	11
3.4 MEASUREMENT UNCERTAINTY	11
3.5 LIST OF TEST EQUIPMENT	
4. SYSTEM TEST CONFIGURATION	14
4.1 EUT CONFIGURATION	14
4.2 EUT EXERCISE	14
4.3 CONFIGURATION OF EUT SYSTEM	14
4.4 EQUIPMENT USED IN TESTED SYSTEM	
5. SUMMARY OF TEST RESULTS	15
5.1 TEST CONDITION : CONDUCTED TEST	
5.2 TEST CONDITION : RADIATED TEST	15
6. DESCRIPTION OF TEST MODES	16
7. CONDUCTED OUTPUT POWER	18
7.1 MEASUREMENT OVERVIEW	18
7.2 MEASUREMENT METHOD	
7.3 MEASUREMENT SETUP	
7.4 MEASUREMENT RESULT	
8. RADIATED OUTPUT POWER	
8.1 MEASUREMENT OVERVIEW	
8.2 MEASUREMENT METHOD	
8.3 MEASUREMENT SETUP	22
8.4 MEASUREMENT RESULT	24
9. PEAK-TO-AVERAGE RATIO	25

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the specificated resting/inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.





9.1 PROVISIONS APPLICABLE	25
9.2 MEASUREMENT METHOD	25
9.3 MEASUREMENT SETUP	26
9.4 MEASUREMENT RESULT	27
10. OCCUPIED BANDWIDTH	28
10.1 PROVISIONS APPLICABLE	28
10.2 MEASUREMENT METHOD	
10.3 MEASUREMENT SETUP	28
10.4 MEASUREMENT RESULT	29
11. BAND EDGE EMISSIONS AT ANTENNA TERMINAL	33
11.1 MEASUREMENT OVERVIEW	33
11.2 MEASUREMENT METHOD	33
11.3 MEASUREMENT METHOD	33
11.4 MEASUREMENT RESULT	34
12. SPURIOUS EMISSIONS AT ANTENNA TERMINAL	36
12.1 PROVISIONS APPLICABLE	36
12.2 MEASUREMENT METHOD	
12.3 MEASUREMENT SETUP	36
12.4 MEASUREMENT RESULT	37
13. RADIATED SPURIOUS EMISSION	43
13.1. PROVISIONS APPLICABLE	43
13.2. MEASUREMENT PROCEDURE	43
13.3. MEASUREMENT SETUP	
12.4 MEASUREMENT RESULT	45
14. FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	51
14.1 PROVISIONS APPLICABLE	51
14.2 MEASUREMENT METHOD	51
14.3 MEASUREMENT SETUP	
13.4 MEASUREMENT RESULT	53
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	58
APPENDIX B. PHOTOGRAPHS OF FUT	59

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



Page 5 of 59

## 1. GENERAL INFORMATION

Applicant	TYT Electronics Co., Ltd.
Address	Block 39-1, Optoelectronics-information industry base, Nan'an, Quanzhou, Fujian, China.
Manufacturer	TYT Electronics Co., Ltd.
Address	Block 39-1, Optoelectronics-information industry base, Nan'an, Quanzhou, Fujian, China.
Factory	TYT Electronics Co., Ltd.
Address  Block 39-1, Optoelectronics-information industry base, Nan'an, Quanzho China.	
Product Designation	POC Radio
Brand Name	TYT, Tytpilot
Test Model	IP-39PLUS
Date of test	Sep. 29, 2021~Oct. 22, 2021
Deviation	No any deviation from the test method.
Condition of Test Sample	Normal

#### WE HEREBY CERTIFY THAT:

The above equipment was tested by Attestation of Global Compliance(Shenzhen) Co., Ltd. The data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI/TIA-603-E-2016. The sample tested as described in this report is in compliance with the FCC Rules Part 22H, 24E and 27L. The test results of this report relate only to the tested sample identified in this report.

Reviewed By

Bibo Zhang
(Project Engineer)

Calvin Liu
(Reviewer)

Approved By

Max Zhang
Authorized Officer

Oct. 22, 2021

Oct. 22, 2021

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the content of Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



Page 6 of 59

# 2. PRODUCT INFORMATION

# 2.1 PRODUCT TECHNICAL DESCRIPTION

A major technical description of EUT is described as following:

Product Designation:	POC Radio				
Hardware Version:	V1.2	V1.2			
Software Version:	EC25AFFAR07A08M4	G	100 ac		
Support Networks:	WCDMA, HSDPA, HSU	JPA	10		
	⊠UMTS FDD Band II ⊠UMTS FDD Band IV				
Frequency Bands:	⊠UMTS FDD Band V	(U.S. Bands)			
	☐UMTS FDD Band I	UMTS FDD Band VIII (N	lon-U.S. Bands)		
Type of Modulation:	BPSK,QPSK Modulation	on For WCDMA/HSDPA/H	SUPA		
	WCDMA Band II: 1852.4MHz-1907.6 MHz				
Frequency Range:	WCDMA Band IV: 1712.4-1752.6 MHz				
	WCDMA Band V: 826.4-846.6 MHz				
	WCDMA Band II:	WCDMA Band II: 4M13F9W			
Emission Designator:	WCDMA Band IV:	nd IV: 4M14F9W			
	WCDMA Band V:	4M16F9W			
Antenna Type:	Detachable antenna	100	2.C 0		
Antenna gain:	WCDMA850:-4.00dBi	WCDMA1700:-2.00dBi	WCDMA1900:-3.00dBi		
Power Supply:	DC 3.7V by Built-in Li-i	DC 3.7V by Built-in Li-ion Battery			
Battery parameter:	DC 3.7V 4000mAh				
Dual Card:	WCDMA Card Slot				
Extreme Vol. Limits:	DC3.15V to 4.2V (Normal: DC 3.7V)				
Extreme Temp. Tolerance	-20 °C to +50 °C				

# **WCDMA SLOT 1:**

	Maximum ERP/EIRP	Max. Average	
	(dBm)	Burst Power (dBm)	
UMTS BAND V	22.05	23.14	
UMTS BAND II	21.77	23.01	
UMTS BAND IV	21.47	23.81	

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 7 of 59

## **WCDMA SLOT 2:**

	Maximum ERP/EIRP	Max. Average
	(dBm)	Burst Power (dBm)
UMTS BAND V	21.52	22.23
UMTS BAND II	20.14	21.90
UMTS BAND IV	20.12	21.68

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pasting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter purportation of AGE. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 8 of 59

# 2.2 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: POD-POC3**, filing to comply with the FCC Part 22H&24E&27L requirements.

#### 2.3 TEST METHODOLOGY

The tests were performed according to following standards:

No.	Identity	Document Title			
1	47 CFR FCC Part 2	art 2 Frequency allocations and radio treaty matters, general rules and regulations			
2	47 CFR FCC Part 22	Public Mobile Services.			
3	47 CFR FCC Part 24 Personal Communications Services.				
4	4 47 CFR FCC Part 27 Miscellaneous Wireless Communications Services.				
5	47 CFR FCC Part 90 Private Land Mobile Radio Services.				
6	ANSI C63.26-2015	American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services			
7	ANSI/TIA-603-E-2016	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards			
8	KDB 971168	D01 v03r01 Measurement Guidance For Certification Of Licensed Digital Transmitters.			

#### 2.4 DEVICE CAPABILITIES

This device contains the following capabilities:

850/1700/1900 WCDMA/HSPA, LTE, GPS.

For emissions from 1GHz – 18GHz, low, mid, and high channels were tested with highest power and worst case configuration.

The emissions below 1GHz and above 18GHz were tested with the highest transmitting power channel and the worst case configuration.

The EUT was manipulated through three orthogonal planes of X-orientation (flatbed), Y-orientation (landscape), and Z-orientation (portrait) during the testing. Only the worst case emissions were reported in this test report.

#### 2.5 SPECIAL ACCESSORIES

The battery was supplied by the applicant were used as accessories and being tested with EUT intended for FCC grant together.

#### 2.6 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



Page 9 of 59

#### 2.7 EMISSION DESIGNATOR

#### **GSM Emission Designator**

# **Emission Designator = 249KGXW**

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

#### **WCDMA Emission Designator**

## **Emission Designator = 4M17F9W**

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

# **QAM Modulation**

#### **Emission Designator = 4M48W7D**

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

## **EDGE Emission Designator**

## **Emission Designator = 249KG7W**

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

# **QPSK Modulation**

## **Emission Designator = 4M48G7D**

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the content of Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



Page 10 of 59

#### 3. TEST ENVIRONMENT

#### 3.1 ADDRESS OF THE TEST LABORATORY

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

#### 3.2 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

#### CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements) for the Competence of Testing and Calibration Laboratories

#### A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

#### FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

#### IC-Registration No.: 24842

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the common stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



Page 11 of 59

## 3.3 ENVIRONMENTAL CONDITIONS

	NORMAL CONDITIONS	EXTREME CONDITIONS
Temperature range	15~35℃	-20℃~50℃
Humidty range	20 % to 75 %.	20 % to 75 %.
Pressure range	86-106kPa	86-106kPa
Power supply	DC 3.7V	DC3.15V or 4.2V

Note: The Extreme Temperature and Extreme Voltages declared by the manufacturer.

## 3.4 MEASUREMENT UNCERTAINTY

Test	Measurement Uncertainty	Notes	
Transmitter power conducted	±0.57 dB	(1)	
Transmitter power Radiated	±2.20 dB	(1)	
Conducted spurious emission 9KHz-40 GHz	±2.20 dB	(1)	
Occupied Bandwidth	±0.01ppm	(1)	
Radiated Emission 30~1000MHz	±4.10dB	(1)	
Radiated Emission Above 1GHz	±4.32dB	(1)	
Conducted Disturbance0.15~30MHz	±3.20dB	(1)	
Radio Frequency	± 6.5 x 10-8	(1)	
RF Power, Conducted	± 0.9 dB	(1)	

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written appropriation of AGE. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 12 of 59

# 3.5 LIST OF TEST EQUIPMENT

<u> </u>			_ ( )		
Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESPI	101206	May 11, 2021	May 10, 2022
LISN	R&S	ESH2-Z5	100086	Jun. 09, 2021	Jun. 08, 2022
TEST RECEIVER	R&S	ESCI	10096	Apr. 14. 2021	Apr. 13. 2022
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Dec. 07, 2020	Dec. 06, 2021
Horn antenna	SCHWARZBECK	BBHA 9170	768	Oct. 09, 2019	Oct. 08, 2021
Horn antenna	SCHWARZBECK	BBHA 9170	768	Oct. 07, 2021	Oct. 06, 2022
preamplifier	ChengYi	EMC184045S E	980508	Sep. 19, 2021	Sep. 18, 2022
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	Apr. 23, 2021	Apr. 22, 2023
Broadband Preamplifier	SCHWARZBECK	BBV 9718	9718-205	Jun.08, 2021	Jun.07, 2022
SIGNAL ANALYZER	Agilent	N9020A	MY52090123	Sep. 01, 2021	Aug. 31, 2022
USB Wideband Power Sensor	Agilent	U2021XA	MY54110007	May 11, 2021	May 10, 2025
Universal Radio Communication Tester	R&S	CMU200	120237	Jun. 09, 2021	Jun. 08, 2022
Universal Radio Communication Tester	Agilent	8960	GB46200384	Aug. 20, 2021	Aug. 19, 2022
Power Splitter	Agilent	11636A	34	Jun.08, 2021	Jun.07, 2022
Attenuator	JFW	50FHC-006-5 0	N/A	Jun.08, 2021	Jun.07, 2022
Horn Ant (18G-40GHz)	Schwarzbeck	BBHA 9170		Sep. 19, 2021	Sep. 18, 2022
Horn Ant (18G-40GHz)	ETS	QWH_SL_18 _40_K_SG	P.C.	Sep. 19, 2021	Sep. 18, 2022
Power Splitter	Agilent	11636A	1 0	Sep.16, 2020	Sep.15, 2021
CMU200	R&S	120237		Jun. 09, 2021	Jun. 08, 2022
Artificial Mains	R&S	101242	1	Jun. 09, 2021	Jun. 08, 2022

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Sedicated Peet Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuence Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com. g/Inspection he test results



Report No.: AGC02931210903FE03 Page 13 of 59

Network ENV216	10	- GO			10
Filter Bank Notch 1(880-915MHz)	MICRO-TRONICS	010	/ ()	Feb. 23, 2021	Feb. 22, 2022
Filter Bank Notch 2 (1710-1785MHz)	MICRO-TRONICS	009	/	Feb. 23, 2021	Feb. 22, 2022
Filter Bank Notch 3 (1920-1980MHz)	MICRO-TRONICS	008	1	Feb. 23, 2021	Feb. 22, 2022

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Restriction Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written application of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc=cert.com.



Page 14 of 59

## 4. SYSTEM TEST CONFIGURATION

#### 4.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

#### **4.2 EUT EXERCISE**

The Transmitter was operated in the maximum output power mode through Communication Tester. The TX frequency was fixed which was for the purpose of the measurements.

#### 4.3 CONFIGURATION OF EUT SYSTEM

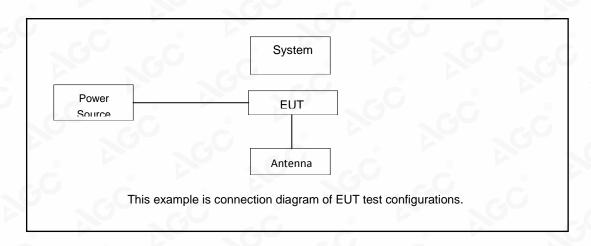


Table 2-1 Equipment Used in EUT System

#### 4.4 EQUIPMENT USED IN TESTED SYSTEM

The Following Peripheral Devices And Interface Cables Were Connected During The Measurement:

- ☐ Test Accessories Come From The Laboratory
- ☐ Test Accessories Come From The Manufacturer

Item	Equipment	Model No.	Identifier	Note
1	POC Radio	IP-39PLUS	FCC ID: POD-POC3	EUT
2	Battery	IP-39PLUS	DC 3.7V 4000mAh	Accessories
3	Back clip	N/A	N/A	Accessories
4	Adapter	CG-T050200	Input: 100-240V, 50/60Hz, 0.6A Output: DC 5V 2A	Accessories

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated Restrog/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGE. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 15 of 59

# 5. SUMMARY OF TEST RESULTS

## **5.1 TEST CONDITION: CONDUCTED TEST**

Item	Test Description	FCC Rules	Result
1	Occupied Bandwidth	§2.1049	Pass
2	Band Edge / Spurious and Harmonic Emissions at Antenna Terminal	§2.1051, §22.917(a), §24.238(a) §27.53(h)	Pass
5	Conducted Output Power	§2.1046	Pass
6	Frequency stability / variation of ambient temperature	§2.1055, § 22.355	Pass
7	Peak- to- Average Ratio	§24.232(d), §27.50(d)(5), §24.235, §27.54	Pass

#### **5.2 TEST CONDITION: RADIATED TEST**

Item	Test Description	FCC Rules	Result
1	Effective Radiated Power	§22.913(a)(5)	Pass
2	Equivalent Isotropic Radiated Power	§24.232(c), §27.50(d)(4)	Pass
3	Radiated Spurious and Harmonic Emissions	§2.1053, §22.917(a), §24.238(a), §27.53(h)	Pass

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 16 of 59

# 6. DESCRIPTION OF TEST MODES

			RF Channel	RF Channel	
Bands	Tx/Rx Frequency	Low(L)	Middle(M)	High(H)	
CO C	TX	Channel 4132	Channel 4182	Channel 4233	
WCDMA band V	(824 MHz ~ 849 MHz)	826.4 MHz	836.4 MHz	846.6 MHz	

Bands	Tx/Rx Frequency	RF Channel		
Danus	TA/IXA Frequency	Low(L)	Middle(M)	High(H)
8	TX	Channel 9262	Channel 9400	Channel 9538
WCDMA Band II	(1850 MHz-1910 MHz)	1852.4 MHz	1880.0 MHz	1907.6 MHz

		RF Channel		
Bands	Tx/Rx Frequency	Low(L)	Middle(M)	High(H)
	TX	Channel 1312	Channel 1412	Channel 1513
WCDMA Band IV	(1710 MHz-1755 MHz)	1712.4 MHz	1732.4 MHz	1752.6 MHz

Pre-scan all bandwidth and RB, find worse case mode are chosen to the report, the worse mode applicability and tested channel detail as below:

Band	Radiated	Conducted
WCDMA Band II/IV/V	RMC 12.2kbps Link	RMC 12.2kbps Link

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



Page 17 of 59

he test results

# ACCORDING TO 3GPP 25.101 SUB-CLAUSE 6.2.2, THE MAXIMUM OUTPUT POWER IS ALLOWED TO BE REDUCED BY FOLLOWING THE TABLE.

Table 6.1aA: UE maximum output power with HS-DPCCH and E-DCH

UE Transmit Channel Configuration	CM(db)	MPR(db)
For all combinations of ,DPDCH,DPCCH	0≤ CM≤3.5	MAY(CM 1 O)
HS-DPDCH,E-DPDCH and E-DPCCH	US CIVISS.5	MAX(CM-1,0)

Note: CM=1 for  $\beta_c/\beta_d$ =12/15,  $\beta_hs/\beta_c$ =24/15. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

The device supports MPR to solve linearity issues (ACLR or SEM) due to the higher peak-to average ratios (PAR) of the HSUPA signal. This prevents saturating the full range of the TX DAC inside of device and provides a reduced power output to the RF transceiver chip according to the Cubic Metric (a function of the combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH).

When E-DPDCH channels are present the beta gains on those channels are reduced firsts to try to get the power under the allowed limit. If the beta gains are lowered as far as possible, then a hard limiting is applied at the maximum allowed level.

The SW currently recalculates the cubic metric every time the beta gains on the E-DPDCH are reduced. The cubic metric will likely get lower each time this is done. However, there is no reported reduction of maximum output power in the HSUPA mode since the device also provides a compensate for the power back-off by increasing the gain of TX\_AGC in the transceiver (PA) device.

The end effect is that the DUT output power is identical to the case where there is no MPR in the device.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Specificated Fest Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuence Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



Page 18 of 59

## 7. CONDUCTED OUTPUT POWER

#### 7.1 PROVISIONS APPLICABLE

The conduction test is carried out in a shielded room.

According to the test, connect the device under test to the antenna port on the non-conductive platform directly to the test device for evaluation and measurement (ANSI-C63.26-2015 Clause 5.4)


#### 7.2 MEASUREMENT METHOD

- The transmitter output port was connected to base station.
- The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
- The path loss was compensated to the results for each measurement.

Measure the maximum burst average power and average power for other modulation signal.

The EUT was setup for the max output power with pseudo random data modulation. Power was measured with Spectrum Analyzer. The measurements were performed on all mode (WCDMA/HSPA band II, WCDMA/HSPA band IV ,WCDMA/HSPA band V)at 3 typical channels(the Top Channel, the Middle Channel and the Bottom Channel) for each band.

#### 7.3 MEASUREMENT SETUP

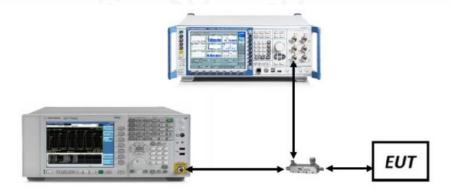

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the continuous process. Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



Page 19 of 59

## 7.4 MEASUREMENT RESULT

WCDMA Band II Maximum Average Power (dBm)			
Channel	9262	9400	9538
Frequency(MHz)	1852.4 MHz	1880.0 MHz	1907.6 MHz
RMC 12.2kbps	21.54	23.01	22.66
HSDPA Subtest-1	20.52	21.96	21.47
HSDPA Subtest-2	20.07	21.09	21.08
HSDPA Subtest-3	19.77	21.49	20.78
HSDPA Subtest-4	19.64	21.13	20.78
HSUPA Subtest-1	19.82	19.82	21.20
HSUPA Subtest-2	19.27	19.27	20.71
HSUPA Subtest-3	18.58	18.58	20.31
HSUPA Subtest-4	19.80	19.80	20.98
HSUPA Subtest-5	19.31	19.31	20.48

WCDMA Band IV Maximum Average Power (dBm)			
Channel	1312	1412	1513
Frequency(MHz)	1712.4 MHz	1732.4 MHz	1752.6 MHz
RMC 12.2kbps	23.81	21.98	22.13
HSDPA Subtest-1	22.78	20.78	21.19
HSDPA Subtest-2	21.85	20.55	20.56
HSDPA Subtest-3	21.63	20.51	20.52
HSDPA Subtest-4	21.71	20.53	20.54
HSUPA Subtest-1	22.43	21.55	21.38
HSUPA Subtest-2	21.34	20.46	20.84
HSUPA Subtest-3	21.45	20.07	20.42
HSUPA Subtest-4	22.13	21.07	21.20
HSUPA Subtest-5	22.54	21.60	21.63

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



epon No AGC0293	12109035503
	Page 20 of 59

WCDMA Band V Maximum Average Power (dBm)			
Channel	4132	4182	4233
Frequency(MHz)	826.4 MHz	836.4 MHz	846.6 MHz
RMC 12.2kbps	23.14	22.48	22.99
HSDPA Subtest-1	21.89	21.61	22.13
HSDPA Subtest-2	21.11	21.09	21.58
HSDPA Subtest-3	20.95	21.14	21.47
HSDPA Subtest-4	21.39	21.15	21.10
HSUPA Subtest-1	21.85	21.17	21.34
HSUPA Subtest-2	20.71	20.47	20.94
HSUPA Subtest-3	20.89	20.16	20.47
HSUPA Subtest-4	21.44	21.07	21.47
HSUPA Subtest-5	21.81	21.43	21.93

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the compliant of been stamped b g/Inspection The test results



Page 21 of 59

## 8. RADIATED OUTPUT POWER

#### **8.1 PROVISIONS APPLICABLE**

The radiation test is carried out in a semi-anechoic chamber.

According to the test, put the device under test on a non-conductive platform 3 meters away from the receiving antenna (ANSI/TIA-603-E-2016 Article 2.2.17).

The following rules are for the maximum radiated power limit requirements of the product:

Mode	Nominal Peak Power
WCDMA Band II	< 2 Watts max. EIRP (33dBm)
WCDMA Band IV	< 1 Watts max. EIRP (30dBm)
WCDMA Band V	< 7 Watts max. ERP (38.45dBm)

#### **8.2 MEASUREMENT METHOD**

- 1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
- 2. RBW = 1 5% of the expected OBW, not to exceed 1MHz
- 3. VBW  $\geq$  3 x RBW
- 4. Span = 1.5 times the OBW
- 5. No. of sweep points > 2 x span / RBW
- 6. Detector = RMS
- 7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
- 8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
- 9. Trace mode = trace averaging (RMS) over 100 sweeps
- 10. The trace was allowed to stabilize.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC he test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 22 of 59

#### **Radiation Construction Method:**

- 1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
- 2. A half wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.


The power is calculated by the following formula:

Where: Pd is the dipole equivalent power and Pg is the generator output power into the substitution antenna.


- 3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration
- 4. The EUT was tested in three orthogonal planes (X, Y, Z) and in all possible test configurations and positioning.
- 5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

#### 8.3 MEASUREMENT SETUP


#### Radiated Power 30MHz to 1GHz Test setup

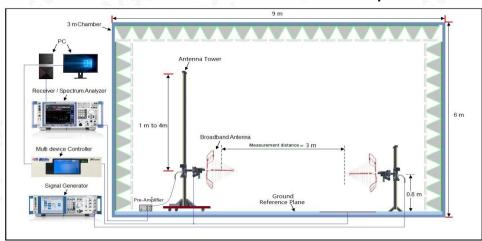


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated Restrog/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGE. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.






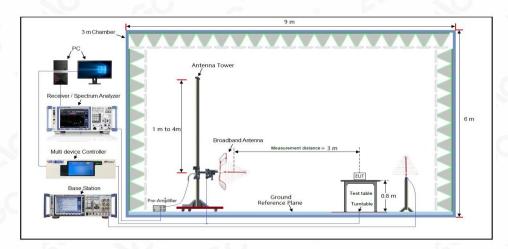

## Radiated Power Above 1GHz Test setup

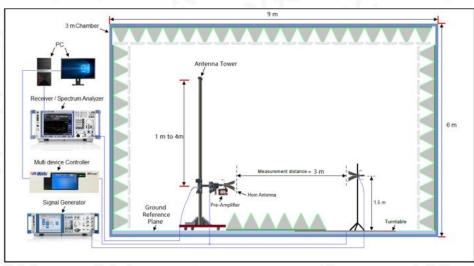

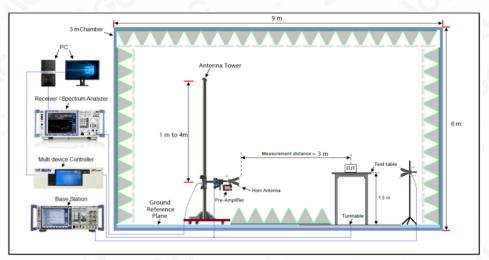

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 24 of 59

## **8.4 MEASUREMENT RESULT**

	Ch./ Freq.		Substitute	Ant.			Limit	EF	RP
Mode	channel	Freq. (MHz)	LEVEL (dBm)	Gain (dBd)	C.L	Pol.	w	W	dBm
WCDMA850	4132	826.4	26.66	5.90	1.21	Н	< 7.00	0.157	21.97
	4183	836.6	26.68	5.90	1.25	Н		0.160	22.03
	4233	846.6	26.71	5.90	1.24	Н		0.160	22.05
HSPA	4132	826.4	24.85	5.90	1.21	Н	7.00	0.104	20.16
	4183	836.6	24.87	5.90	1.25	Н		0.105	20.22
- 60	4233	846.6	24.81	5.90	1.24	Н	(8)	0.104	20.15

Mode	Ch./ Freq.		Substitute	e Ant.			Limit		EIRP	
	channel	Freq. (MHz)	LEVEL (dBm)	Gain (dBi)	C.L	Pol.	w	W	dBm	
	9262	1852.4	28.24	8.6	2.11	Н	< 2.00	0.150	21.75	
WCDMA	9400	1880.0	28.14	8.6	2.15	Н		0.148	21.69	
1900	9538	1907.6	28.22	8.6	2.15	Н		0.150	21.77	
HSPA	9262	1852.4	26.54	8.6	2.11	Н		0.101	20.05	
	9400	1880.0	26.42	8.6	2.15	Н		0.099	19.97	
	9538	1907.6	26.30	8.6	2.15	Н		0.097	19.85	
(GO)	1312	1712.4	27.72	8.3	2.05	Н	- < 1.00	0.140	21.47	
WCDMA	1412	1732.4	27.88	8.3	2.05	Н		0.146	21.63	
1700	1513	1752.6	27.76	8.3	2.06	Н		0.142	21.52	
HSPA	1312	1712.4	25.42	8.3	2.05	Н		0.083	19.17	
	1412	1732.4	25.50	8.3	2.05	Н		0.084	19.25	
	1513	1752.6	25.52	8.3	2.06	Н	(8)	0.085	19.28	

Note:1.\_EIRP/ERP = Substitute LEVEL (dBm) + Ant. Gain – C.L (Cable Loss)

2. All polarizations and modes have been tested, only the worst mode is recorded in the report

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuence of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Report No.: AGC02931210903FE03 Page 25 of 59

#### 9. PEAK-TO-AVERAGE RATIO

#### 9.1 PROVISIONS APPLICABLE

This is the test for the Peak-to-Average Ratio from the EUT.

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

#### 9.2 MEASUREMENT METHOD

#### ① CCDF Procedure for PAPR:

- 1. Set resolution/measurement bandwidth ≥ signal's occupied bandwidth;
- 2. Set the number of counts to a value that stabilizes the measured CCDF curve;
- 3. Set the measurement interval as follows:
- -for continuous transmissions, set to 1 ms,
- -or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time
  - that is less than or equal to the burst duration.
- 4. Record the maximum PAPR level associated with a probability of 0.1%.

#### 2 Alternate Procedure for PAPR:

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as PPk. Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and recordas PAvg. Determine the P.A.R. from:

P.A.R(dB) = PPk (dBm) – PAvg (dBm) (PAvg = Average Power + Duty cycle Factor) Allow trace to fully stabilize.


Use the peak marker function to determine the peak amplitude level.

#### **Test Settings(Peak Power):**

The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW  $\geq$  3 × RBW.

- 1. Set the RBW ≥ OBW.
- 2. Set VBW ≥ 3 × RBW.
- 3. Set span ≥ 2 × OBW.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.






- 4. Sweep time ≥ 10 × (number of points in sweep) × (transmission symbol period).
- 5. Detector = peak.
- 6. Trace mode = max hold.
- 7. Allow trace to fully stabilize.
- 8. Use the peak marker function to determine the peak amplitude level.

## **Test Settings(Average Power)**

- 1. Set span to  $2 \times$  to  $3 \times$  the OBW.
- 2. Set RBW ≥ OBW.
- 3. Set VBW ≥ 3 × RBW.
- 4. Set number of measurement points in sweep ≥ 2 × span / RBW.
- 5. Sweep time: Set ≥ [10 × (number of points in sweep) × (transmission period)] for single sweep (automation-compatible) measurement. The transmission period is the (on + off) time.
- 6. Detector = power averaging (rms).
- 7. Set sweep trigger to "free run."
- 8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
- 9. Use the peak marker function to determine the maximum amplitude level.
- 10. Add [10 log (1/duty cycle)] to the measured maximum power level to compute the average power during continuous transmission. For example, add [10 log (1/0.25)] = 6 dB if the duty cycle is a constant 25%.

#### 9.3 MEASUREMENT SETUP

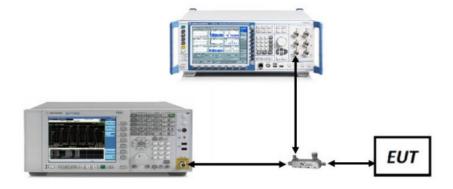

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the condicated restrouting portion of Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



Page 27 of 59

# 9.4 MEASUREMENT RESULT

Bands	Modulation	Peak-to	o-average rat	Limit	Result	
	Modulation	Lowest	Middle	Highest	(dB)	Result
WCDMA Band II	RMC 12.2kbps	3.19	3.07	5.68	13	Pass
WCDMA Band II	HSUPA	4.64	5.09	5.36	13	Pass
WCDMA Band II	HSDPA	3.17	5.24	5.82	13	Pass
WCDMA Band IV	RMC 12.2kbps	3.82	5.18	5.87	13	Pass
WCDMA Band IV	HSUPA	3.17	5.15	5.66	13	Pass
WCDMA Band IV	HSDPA	4.41	4.98	5.18	13	Pass
WCDMA Band V	RMC 12.2kbps	3.22	3.27	3.23	13	Pass
WCDMA Band V	HSUPA	4.21	4.85	5.05	13	Pass
WCDMA Band V	HSDPA	2.97	5.47	5.79	13	Pass

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 28 of 59

# 10. OCCUPIED BANDWIDTH

#### 10.1 PROVISIONS APPLICABLE

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission. The EUT makes a call to the communication simulator.

The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

#### 10.2 MEASUREMENT METHOD

- 1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
- 2. RBW = 1 5% of the expected OBW
- 3. VBW ≥ 3 x RBW
- 4. Detector = Peak
- 5. Trace mode = max hold
- 6. Sweep = auto couple
- 7. The trace was allowed to stabilize
- 8. If necessary, steps 2 7 were repeated after changing the RBW such that it would be within
  - 1 5% of the 99% occupied bandwidth observed in Step 7

#### **10.3 MEASUREMENT SETUP**



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the condicated restrouting portion of Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



Page 29 of 59


## **10.4 MEASUREMENT RESULT**

Test Band	Test Mode	Test Channel	Occupied Bandwidth	Emission Bandwidth	Vardiet
			(KHz)	(KHz)	Verdict
WCDMA 850		LCH	4149.7	4731	PASS
	UMTS	MCH	4159.1	4736	PASS
		HCH	4134.4	4733	PASS


Test Band	Test Mode	Test Channel	Occupied Bandwidth	Emission Bandwidth	\/ordict
			(KHz)	(KHz)	Verdict
WCDMA 1900		LCH	4125.9	4715	PASS
	UMTS	MCH	4134.3	4709	PASS
	- GC	HCH	4124.9	4723	PASS

Test Band Test	Toot Mode	Test Channel	Occupied Bandwidth	Emission Bandwidth	Verdict
	Test Mode		(KHz)	(KHz)	verdict
WCDMA 1700	UMTS	LCH	4126.1	4707	PASS
		MCH	4124.6	4710	PASS
	30	HCH	4139.0	4730	PASS


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.





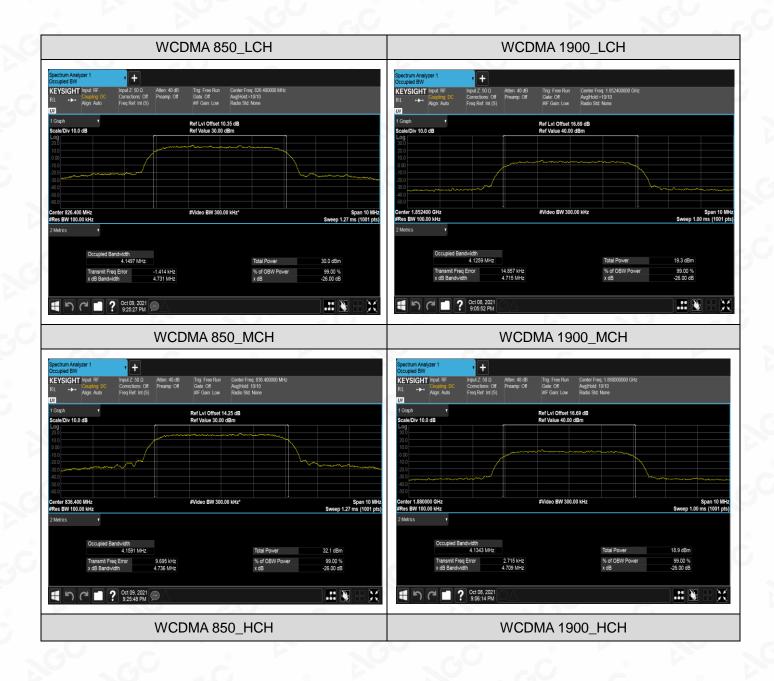


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Dedicated Pestho/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.













Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Dedicated Pestho/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.





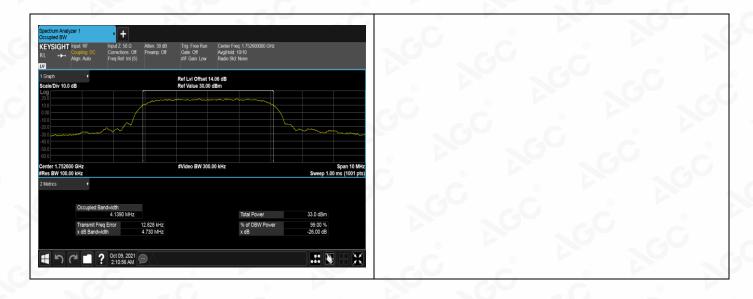

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Restrict/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written exphorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuence of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Report No.: AGC02931210903FE03 Page 33 of 59

## 11. BAND EDGE EMISSIONS AT ANTENNA TERMINAL

#### 11.1 MEASUREMENT OVERVIEW

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

#### 11.2 MEASUREMENT METHOD

- 1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
- 2. Span was set large enough so as to capture all out of band emissions near the band edge
- 3. RBW > 1% of the emission bandwidth
- 4.  $VBW > 3 \times RBW$
- 5. Detector = RMS
- 6. Number of sweep points ≥ 2 x Span/RBW
- 7. Trace mode = trace average
- 8. Sweep time = auto couple
- 9. The trace was allowed to stabilize

#### **TEST NOTE**

According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB.In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. All measurements were done at 2 channels(low and high operational frequency range.) The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

#### 11.3 MEASUREMENT METHOD




Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGE, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.




Report No.: AGC02931210903FE03 Page 34 of 59


#### 11.4 MEASUREMENT RESULT

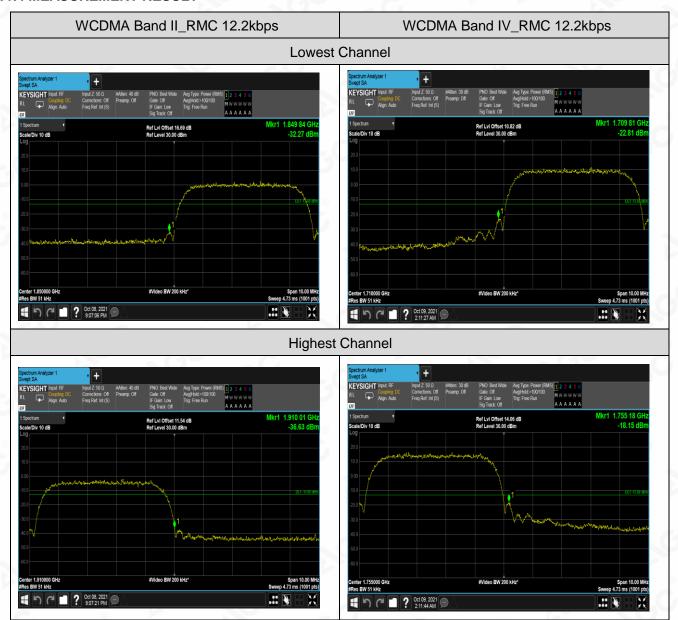

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the condition of the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.





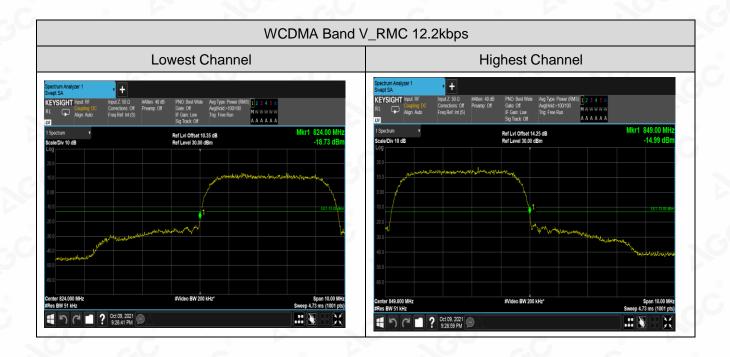

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Restriction Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 36 of 59

## 12. SPURIOUS EMISSIONS AT ANTENNA TERMINAL

#### 12.1 PROVISIONS APPLICABLE


The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

## **12.2 MEASUREMENT METHOD**

## **Test Settings (WCDMA)**

- 1. RBW = 1 MHz
- 2. VBW ≥ 3 MHz
- 3. Detector = RMS
- 4. Trace Mode = trace average
- 5. Sweep time = auto
- 6. Number of points in sweep ≥ 2 x Span / RBW

#### 12.3 MEASUREMENT SETUP

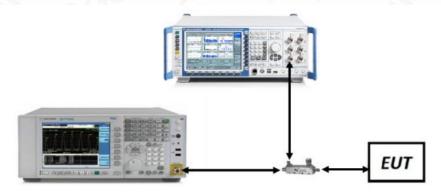


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Residual Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written exphorization of AGC whe test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc=cert.com.




Page 37 of 59

#### 12.4 MEASUREMENT RESULT

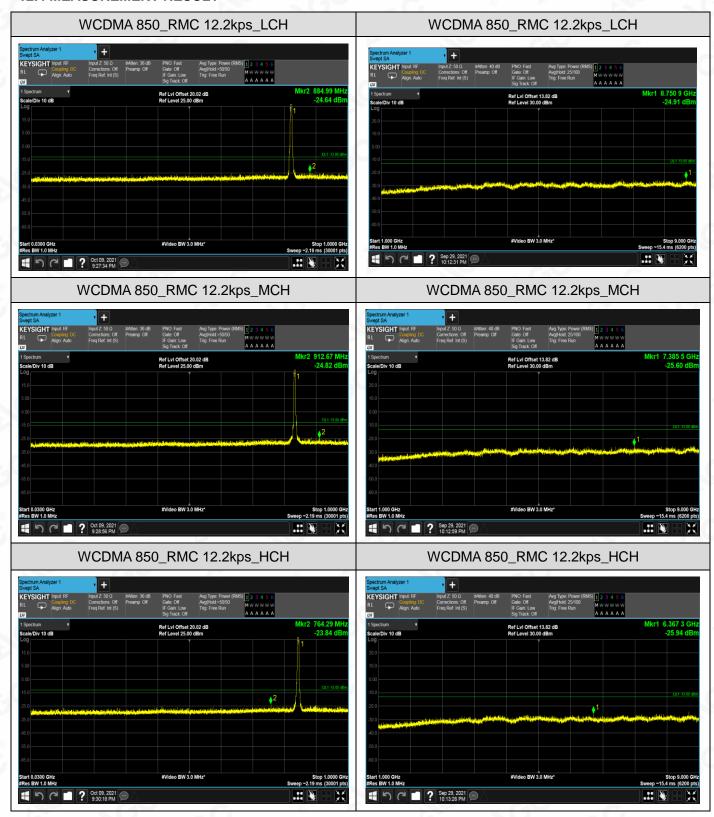


Compliance Dedicated Festing/Inspection Any report having not been signed by authorized approver, or having been altered without authorization, or naving not been stamped by the content of the report is not permitted without the written authorization of AGC. The test results the content of the report is not permitted without the written authorization of AGC. The test report is not permitted to AGC within 15days after the issuance of the test report. The test results Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/





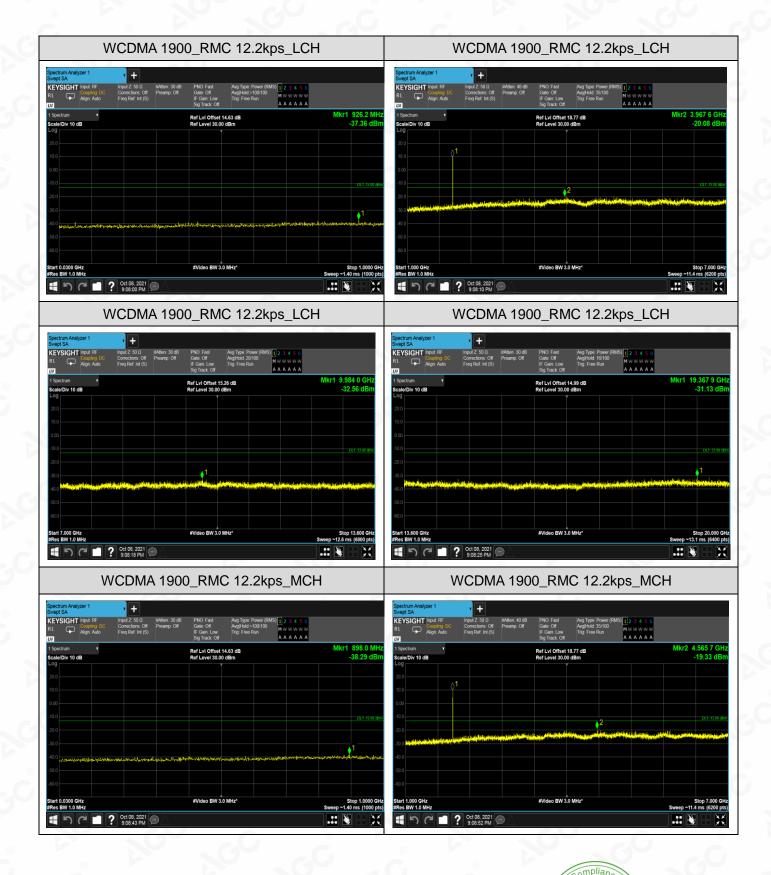

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.