


DWG. NO.
VH8162

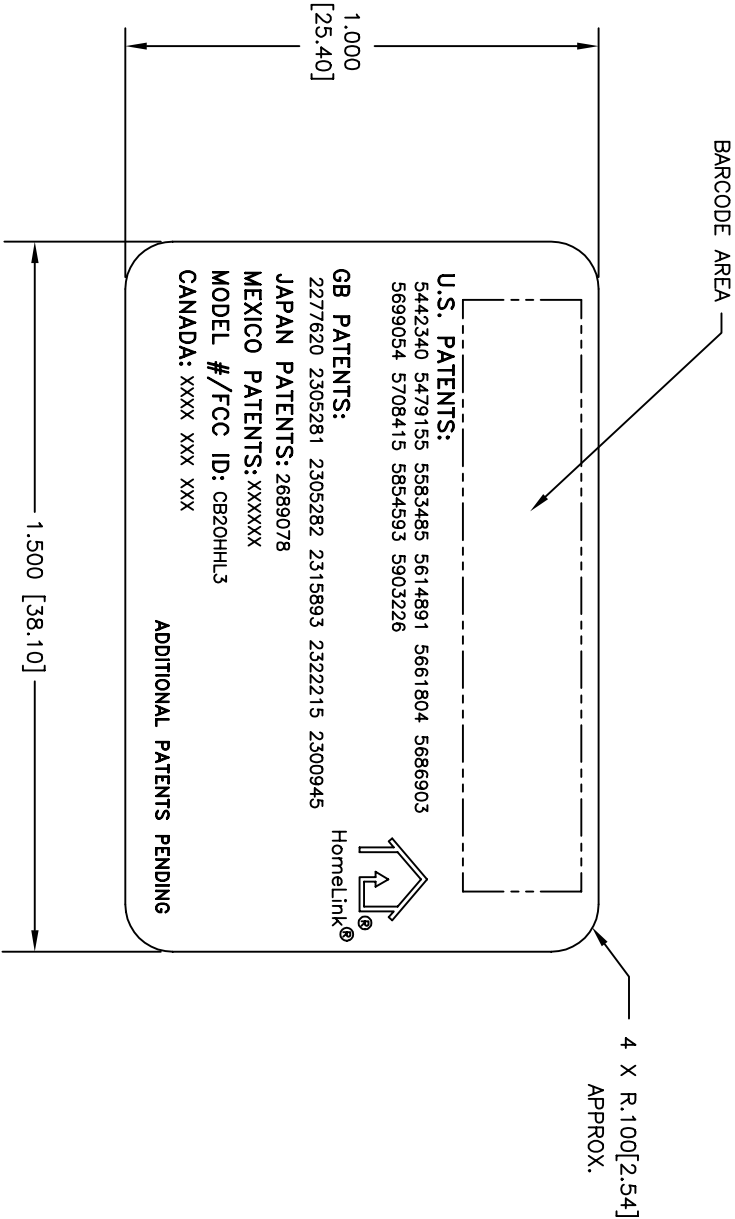

NOTES:

1. REFER TO DOCUMENT V30745 FOR MANUFACTURER OF THE PART.
2. MATERIAL – HIGH TEMPERATURE POLYESTER (WHITE, MATTE)
3. TEMPERATURE RANGE:
MINIMUM TEMP –40°C –40°F
MAXIMUM TEMP 204°C 400°F
4. ADHESIVE TYPE: ACRYLIC
MINIMUM APPLY 10°C 50°F
MAXIMUM APPLY 60°C 140°F
5. TOTAL LABEL THICKNESS = .0072[.18]
6. SHELF LIFE: SIX (6) MONTHS AT 70°F (21°C) AND 50% R.H.

REVISION BLOCK						
REV	SH/ZONE	DESCRIPTION	P.C.N.	BY	DATE	BY
A		RELEASE FOR PRODUCTION	53815	44	31 JAN00	EDICT

ELECTRONICS STD. UNLESS OTHERWISE SPECIFIED	
THIRD ANGLE PROJECTION	
DO NOT SCALE	
X.X DECIMAL ± 0.040 [± 1.0] X.XX DECIMAL ± 0.020 [± .50] X.XXX DECIMAL ± 0.008 [± .15]	ANGULAR ± 2° 0' DRAFT ANGLES NOTED
SPECIFIES FEATURES REQUIRING SPECIAL CONSIDERATIONS. SEE PRODUCT CONTROL PLAN.	
DIMENSIONS ARE INCHES WITH EQUIVALENT MILLIMETERS SHOWN IN BRACKETS.	

JOHNSON CONTROLS		AUTOMOTIVE INTERIORS PRODUCT ENGINEERING HOLLAND, MICHIGAN	
LABEL, HMLK BARCODE/PATENT			
PROJECT	HOMELINK III OH	DRWN. BY	DATE
CUSTOMER	GENERAL	CHGD. BY	DATE
SCALE	4/1	ENGR. APPR	DATE
SIZE	B	TOOL. NO. REF.	DWG. NO.
DATA FORMAT	ACAD		VH8162
			REL. A