



# MEASUREMENT REPORT

## FCC PART 15.247 / RSS-247 Bluetooth LE

---

**FCC ID:** 2ALS8-PS0001

**IC** 22636-PS0001

**Applicant:** Ninebot (Changzhou) Tech Co., Ltd.

**Application Type:** Certification

**Product:** Ninebot Gokart Pro

**Model No.:** N2C432

**Brand Name:** Ninebot

**FCC Classification:** Digital Transmission System (DTS)

**FCC Rule Part(s):** Part 15 Subpart C (Section 15.247)

**ISED Rule Part(s):** RSS-247 Issue 2, RSS-GEN Issue 5

**Test Procedure(s):** ANSI C63.10-2013, KDB 558074 D01v05

**Test Date:** January 13 ~ October 17, 2020

Reviewed By:

( Sunny Sun )

Approved By:

( Robin Wu )



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

---

### Revision History

| Report No.    | Version | Description    | Issue Date | Note  |
|---------------|---------|----------------|------------|-------|
| 2010RSU003-U1 | Rev. 01 | Initial Report | 11-05-2020 | Valid |
|               |         |                |            |       |

## CONTENTS

| Description                                     | Page      |
|-------------------------------------------------|-----------|
| <b>1. GENERAL INFORMATION .....</b>             | <b>5</b>  |
| 1.1. Applicant.....                             | 5         |
| 1.2. Manufacturer .....                         | 5         |
| 1.3. Testing Facility .....                     | 5         |
| <b>2. PRODUCT INFORMATION .....</b>             | <b>6</b>  |
| 2.1. Feature of Equipment under Test.....       | 6         |
| 2.2. Working Frequencies for this report .....  | 6         |
| 2.3. Test Mode .....                            | 7         |
| 2.4. Test Environment Condition .....           | 7         |
| 2.5. Test Software .....                        | 7         |
| 2.6. Description of Test Configuration .....    | 7         |
| 2.7. Test System Details .....                  | 8         |
| 2.8. Duty Cycle .....                           | 8         |
| <b>3. ANTENNA REQUIREMENTS .....</b>            | <b>9</b>  |
| <b>4. TEST EQUIPMENT CALIBRATION DATE .....</b> | <b>10</b> |
| <b>5. MEASUREMENT UNCERTAINTY .....</b>         | <b>13</b> |
| <b>6. TEST RESULT .....</b>                     | <b>14</b> |
| 6.1. Summary .....                              | 14        |
| 6.2. Occupied Bandwidth Measurement .....       | 15        |
| 6.2.1. Test Limit .....                         | 15        |
| 6.2.2. Test Procedure used .....                | 15        |
| 6.2.3. Test Setting.....                        | 15        |
| 6.2.4. Test Setup .....                         | 16        |
| 6.2.5. Test Result.....                         | 17        |
| 6.3. Output Power Measurement .....             | 19        |
| 6.3.1. Test Limit .....                         | 19        |
| 6.3.2. Test Procedure Used.....                 | 19        |
| 6.3.3. Test Setting.....                        | 19        |
| 6.3.4. Test Setup .....                         | 20        |
| 6.3.5. Test Result.....                         | 21        |
| 6.4. Power Spectral Density Measurement .....   | 22        |
| 6.4.1. Test Limit .....                         | 22        |
| 6.4.2. Test Procedure Used.....                 | 22        |
| 6.4.3. Test Setting.....                        | 22        |

|           |                                                     |           |
|-----------|-----------------------------------------------------|-----------|
| 6.4.4.    | Test Setup .....                                    | 22        |
| 6.4.5.    | Test Result.....                                    | 23        |
| 6.5.      | Conducted Band Edge and Out-of-Band Emissions ..... | 24        |
| 6.5.1.    | Test Limit .....                                    | 24        |
| 6.5.2.    | Test Procedure Used .....                           | 24        |
| 6.5.3.    | Test Setting.....                                   | 24        |
| 6.5.4.    | Test Setup .....                                    | 25        |
| 6.5.5.    | Test Result.....                                    | 26        |
| 6.6.      | Radiated Spurious Emission Measurement .....        | 28        |
| 6.6.1.    | Test Limit .....                                    | 28        |
| 6.6.2.    | Test Procedure Used .....                           | 29        |
| 6.6.3.    | Test Setting.....                                   | 29        |
| 6.6.4.    | Test Setup .....                                    | 30        |
| 6.6.5.    | Test Result.....                                    | 32        |
| 6.7.      | Radiated Restricted Band Edge Measurement.....      | 37        |
| 6.7.1.    | Test Limit .....                                    | 37        |
| 6.7.2.    | Test Procedure Used .....                           | 40        |
| 6.7.3.    | Test Setting.....                                   | 40        |
| 6.7.4.    | Test Setup .....                                    | 41        |
| 6.7.5.    | Test Result.....                                    | 42        |
| 6.8.      | AC Conducted Emissions Measurement.....             | 50        |
| 6.8.1.    | Test Limit .....                                    | 50        |
| 6.8.2.    | Test Setup .....                                    | 50        |
| 6.8.3.    | Test Result.....                                    | 51        |
| <b>7.</b> | <b>CONCLUSION.....</b>                              | <b>53</b> |
|           | <b>Appendix A - Test Setup Photograph.....</b>      | <b>54</b> |
|           | <b>Appendix B - EUT Photograph .....</b>            | <b>55</b> |

## 1. GENERAL INFORMATION

### 1.1. Applicant

Ninebot (Changzhou) Tech Co., Ltd.

16F-17F, Block A, Building 3, Changwu Mid Road 18#, Wujin Dist., Changzhou, Jiangsu, China

## 1.2. Manufacturer

Ninebot (Changzhou) Tech Co., Ltd.

16F-17F, Block A, Building 3, Changwu Mid Road 18#, Wujin Dist., Changzhou, Jiangsu, China

### 1.3. Testing Facility

|                                     |                                                                                                                                           |                              |
|-------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|
| <input checked="" type="checkbox"/> | <b>Test Site – MRT Suzhou Laboratory</b>                                                                                                  |                              |
|                                     | <b>Laboratory Location (Suzhou - Wuzhong)</b><br>D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China       |                              |
|                                     | <b>Laboratory Location (Suzhou - SIP)</b><br>4b Building, Liando U Valley, No.200 Xingpu Rd., Shengpu Town, Suzhou Industrial Park, China |                              |
|                                     | <b>Laboratory Accreditations</b>                                                                                                          |                              |
|                                     | A2LA: 3628.01<br>FCC: CN1166<br>VCCI: R-20025, G-20034, C-20020, T-20020                                                                  | CNAS: L10551<br>ISED: CN0001 |
| <input type="checkbox"/>            | <b>Test Site – MRT Shenzhen Laboratory</b>                                                                                                |                              |
|                                     | <b>Laboratory Location (Shenzhen)</b><br>1G, Building A, Junxiangda Building, Zhongshanyuan Road West, Nanshan District, Shenzhen, China  |                              |
|                                     | <b>Laboratory Accreditations</b>                                                                                                          |                              |
|                                     | A2LA: 3628.02<br>FCC: CN1284                                                                                                              | CNAS: L10551<br>ISED: CN0105 |
|                                     |                                                                                                                                           |                              |
| <input type="checkbox"/>            | <b>Test Site – MRT Taiwan Laboratory</b>                                                                                                  |                              |
|                                     | <b>Laboratory Location (Taiwan)</b><br>No. 38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)                           |                              |
|                                     | <b>Laboratory Accreditations</b>                                                                                                          |                              |
|                                     | TAF: L3261-190725<br>FCC: 291082, TW3261                                                                                                  | ISED: TW3261                 |

## 2. PRODUCT INFORMATION

### 2.1. Feature of Equipment under Test

|                     |                    |
|---------------------|--------------------|
| Product Name        | Ninebot Gokart Pro |
| Model No.           | N2C432             |
| Brand Name          | Ninebot            |
| Bluetooth Version   | v4.1 (BLE Only)    |
| Bluetooth Frequency | 2402 ~ 2480MHz     |
| Type of modulation  | GFSK               |
| Data Rate           | 1Mbps              |
| Antenna Type        | PCB Antenna        |
| Antenna Gain        | 5 dBi              |
| S/N                 | N2CTI2001C0011     |

Note: Above information is declared by the manufacturer.

### 2.2. Working Frequencies for this report

| Channel | Frequency | Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|---------|-----------|
| 00      | 2402 MHz  | 01      | 2404 MHz  | 02      | 2406 MHz  |
| 03      | 2408 MHz  | 04      | 2410 MHz  | 05      | 2412 MHz  |
| 06      | 2414 MHz  | 07      | 2416 MHz  | 08      | 2418 MHz  |
| 09      | 2420 MHz  | 10      | 2422 MHz  | 11      | 2424 MHz  |
| 12      | 2426 MHz  | 13      | 2428 MHz  | 14      | 2430 MHz  |
| 15      | 2432 MHz  | 16      | 2434 MHz  | 17      | 2436 MHz  |
| 18      | 2438 MHz  | 19      | 2440 MHz  | 20      | 2442 MHz  |
| 21      | 2444 MHz  | 22      | 2446 MHz  | 23      | 2448 MHz  |
| 24      | 2450 MHz  | 25      | 2452 MHz  | 26      | 2454 MHz  |
| 27      | 2456 MHz  | 28      | 2458 MHz  | 29      | 2460 MHz  |
| 30      | 2462 MHz  | 31      | 2464 MHz  | 32      | 2466 MHz  |
| 33      | 2468 MHz  | 34      | 2470 MHz  | 35      | 2472 MHz  |
| 36      | 2474 MHz  | 37      | 2476 MHz  | 38      | 2478 MHz  |
| 39      | 2480 MHz  | --      | --        | --      | --        |

### 2.3. Test Mode

|           |                         |
|-----------|-------------------------|
| Test Mode | Mode 1: Transmit by BLE |
|-----------|-------------------------|

### 2.4. Test Environment Condition


|                     |               |
|---------------------|---------------|
| Ambient Temperature | 15°C ~ 35°C   |
| Relative Humidity   | 20%RH ~ 75%RH |

### 2.5. Test Software

The test utility software used during testing was “nRFgo Studio”, and the version was “4.7.2”.

### 2.6. Description of Test Configuration

The ANSI C63.10: 2013 was used to reference the appropriate EUT setup for testing.

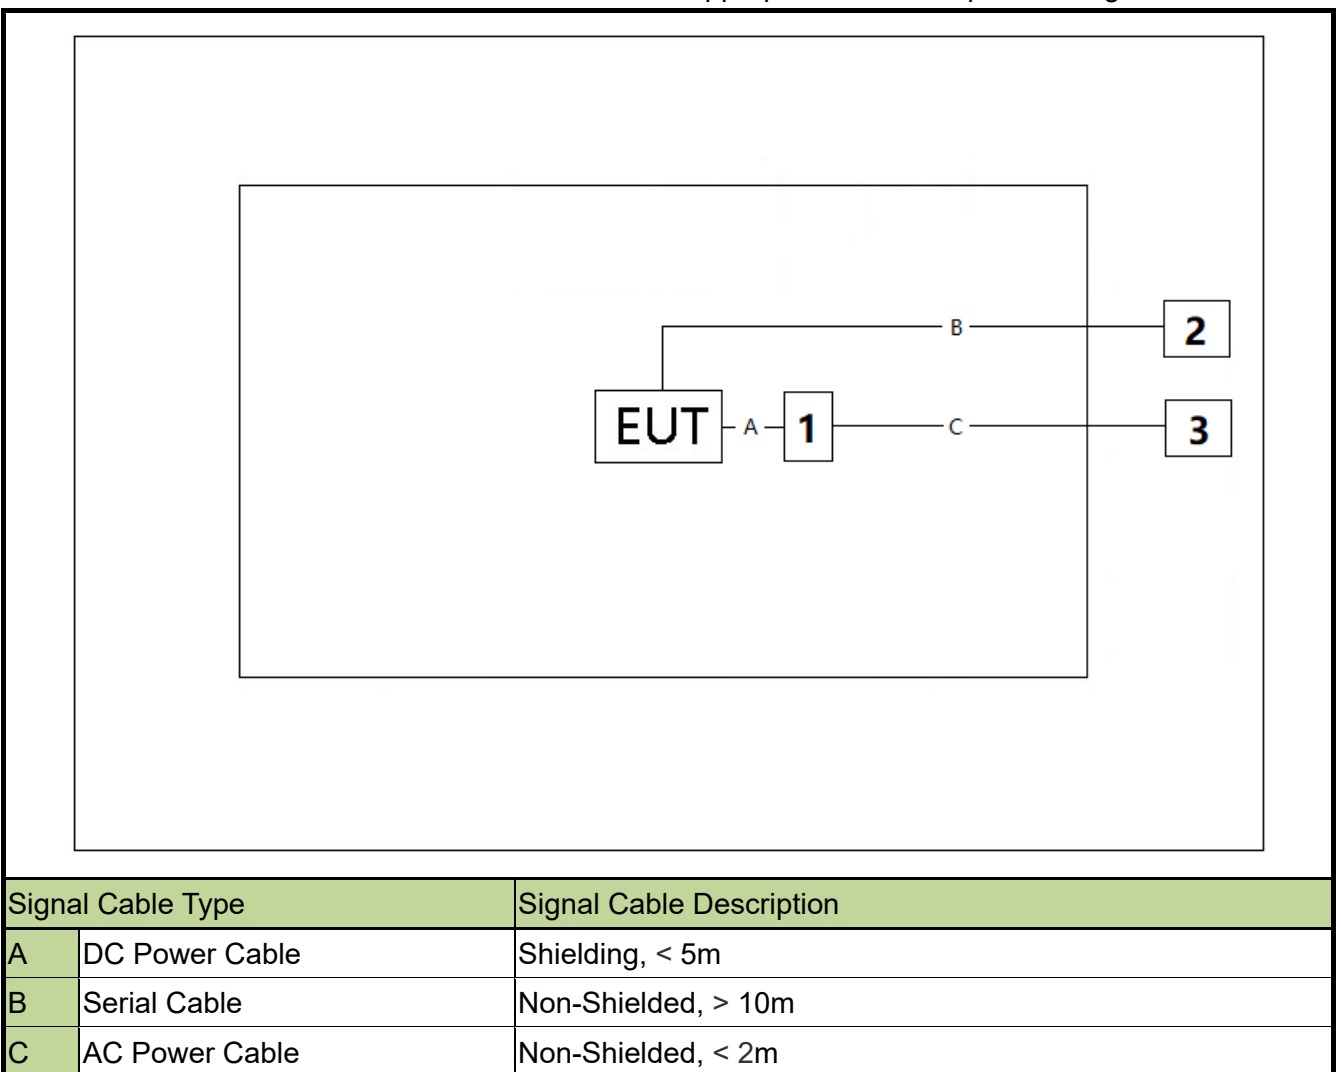

## 2.7. Test System Details


The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

| Product         | Manufacturer | Model No.   |
|-----------------|--------------|-------------|
| 1 Ninebot S-Max | Ninebot      | N3M432      |
| 2 Notebook      | Lenovo       | E495        |
| 3 AC Adapter    | Ninebot      | HT-A10-120W |

## 2.8. Duty Cycle

The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

| Test Mode | Duty Cycle |
|-----------|------------|
| BLE       | 68.38%     |

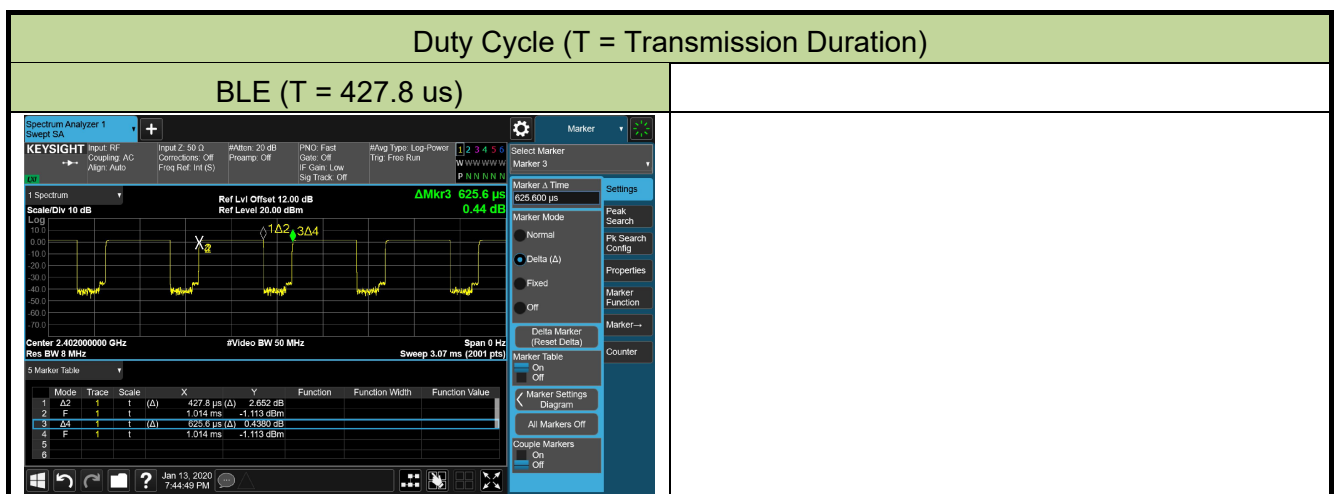

### 3. ANTENNA REQUIREMENTS

**Excerpt from §15.203 of the FCC Rules/Regulations:**

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the device is **permanently attached**.
- There are no provisions for connection to an external antenna.

**Conclusion:**

The device unit complies with the requirement of §15.203.

#### 4. TEST EQUIPMENT CALIBRATION DATE

##### Conducted Emissions - WZ-SR2

| Instrument         | Manufacturer | Type No. | Asset No.   | Cali. Interval | Cali. Due Date |
|--------------------|--------------|----------|-------------|----------------|----------------|
| EMI Test Receiver  | R&S          | ESR3     | MRTSUE06185 | 1 year         | 2021/01/18     |
|                    |              |          |             | 1 year         | 2020/04/15     |
| Two-Line V-Network | R&S          | ENV 216  | MRTSUE06002 | 1 year         | 2021/06/11     |
|                    |              |          |             | 1 year         | 2020/06/13     |
| Two-Line V-Network | R&S          | ENV 216  | MRTSUE06003 | 1 year         | 2021/06/11     |
|                    |              |          |             | 1 year         | 2020/06/13     |
| Thermal Hygrometer | testo        | 608-H1   | MRTSUE06404 | 1 year         | 2021/07/26     |
|                    |              |          |             | 1 year         | 2020/08/08     |

##### Radiated Emissions - WZ-AC1

| Instrument                 | Manufacturer | Type No.    | Asset No.   | Cali. Interval | Cali. Due Date |
|----------------------------|--------------|-------------|-------------|----------------|----------------|
| EMI Test Receiver          | R&S          | ESR7        | MRTSUE06001 | 1 year         | 2021/01/18     |
|                            |              |             |             | 1 year         | 2020/08/01     |
| PXA Signal Analyzer        | Keysight     | N9030B      | MRTSUE06395 | 1 year         | 2021/08/30     |
|                            |              |             |             | 1 year         | 2020/09/03     |
| Loop Antenna               | Schwarzbeck  | FMZB 1519   | MRTSUE06025 | 1 year         | 2020/11/13     |
| Bilog Period Antenna       | Schwarzbeck  | VULB 9168   | MRTSUE06172 | 1 year         | 2021/04/03     |
|                            |              |             |             | 1 year         | 2020/03/31     |
| Horn Antenna               | Schwarzbeck  | BBHA 9120D  | MRTSUE06023 | 1 year         | 2021/09/27     |
|                            |              |             |             | 1 year         | 2020/10/13     |
| Horn Antenna               | Schwarzbeck  | BBHA9170    | MRTSUE06597 | 1 year         | 2020/12/17     |
| Microwave System Amplifier | Agilent      | 83017A      | MRTSUE06076 | 1 year         | 2020/11/15     |
| Preamplifier               | Schwarzbeck  | BBV 9721    | MRTSUE06121 | 1 year         | 2021/06/11     |
|                            |              |             |             | 1 year         | 2020/06/11     |
| Thermal Hygrometer         | testo        | 608-H1      | MRTSUE06403 | 1 year         | 2021/07/26     |
|                            |              |             |             | 1 year         | 2020/08/08     |
| Anechoic Chamber           | TDK          | Chamber-AC1 | MRTSUE06212 | 1 year         | 2021/04/30     |
|                            |              |             |             | 1 year         | 2020/04/30     |

## Radiated Emission - WZ-AC2

| Instrument                        | Manufacturer | Type No.    | Asset No.   | Cali. Interval | Cali. Due Date |
|-----------------------------------|--------------|-------------|-------------|----------------|----------------|
| MXE EMI Receiver                  | Keysight     | N9038A      | MRTSUE06125 | 1 year         | 2021/07/02     |
|                                   |              |             |             | 1 year         | 2020/08/01     |
| Loop Antenna                      | Schwarzbeck  | FMZB 1519   | MRTSUE06025 | 1 year         | 2020/11/13     |
| Bilog Period Antenna              | Schwarzbeck  | VULB 9162   | MRTSUE06022 | 1 year         | 2021/05/26     |
|                                   |              |             |             | 1 year         | 2020/10/13     |
| Broad-Band Horn Antenna           | Schwarzbeck  | BBHA 9120D  | MRTSUE06171 | 1 year         | 2020/10/27     |
| Horn Antenna                      | Schwarzbeck  | BBHA9170    | MRTSUE06597 | 1 year         | 2020/12/17     |
| Broadband Coaxial<br>Preamplifier | Schwarzbeck  | BBV 9718    | MRTSUE06176 | 1 year         | 2020/11/15     |
| Preamplifier                      | Schwarzbeck  | BBV 9721    | MRTSUE06121 | 1 year         | 2021/06/11     |
|                                   |              |             |             | 1 year         | 2020/06/11     |
| Thermal Hygrometer                | Minggao      | ETH529      | MRTSUE06170 | 1 year         | 2020/12/15     |
| Anechoic Chamber                  | RIKEN        | Chamber-AC2 | MRTSUE06213 | 1 year         | 2021/04/30     |
|                                   |              |             |             | 1 year         | 2020/04/30     |

## Conducted Test Equipment - WZ-TR3

| Instrument                          | Manufacturer | Type No.    | Asset No.   | Cali. Interval | Cali. Due Date |
|-------------------------------------|--------------|-------------|-------------|----------------|----------------|
| EXA Signal Analyzer                 | Agilent      | N9020A      | MRTSUE06106 | 1 year         | 2021/04/14     |
|                                     |              |             |             | 1 year         | 2020/04/15     |
| EXA Signal Analyzer                 | Keysight     | N9010B      | MRTSUE06452 | 1 year         | 2021/01/08     |
|                                     |              |             |             | 1 year         | 2019/07/19     |
| Signal Analyzer                     | R&S          | FSV40       | MRTSUE06218 | 1 year         | 2021/04/14     |
|                                     |              |             |             | 1 year         | 2020/04/15     |
| Power Meter                         | Agilent      | U2021XA     | MRTSUE06030 | 1 year         | 2020/11/18     |
| USB wideband power sensor           | Keysight     | U2021XA     | MRTSUE06446 | 1 year         | 2021/06/11     |
|                                     |              |             |             | 1 year         | 2020/06/30     |
| USB wideband power sensor           | Keysight     | U2021XA     | MRTSUE06447 | 1 year         | 2021/06/11     |
|                                     |              |             |             | 1 year         | 2020/06/30     |
| Bluetooth Test Set                  | Anritsu      | MT8852B-042 | MRTSUE06389 | 1 year         | 2021/06/11     |
|                                     |              |             |             | 1 year         | 2020/06/13     |
| Audio Analyzer                      | Agilent      | U8903B      | MRTSUE06143 | 1 year         | 2021/06/11     |
|                                     |              |             |             | 1 year         | 2020/06/13     |
| Modulation Analyzer                 | HP           | HP8901A     | MRTSUE06098 | 1 year         | 2021/09/26     |
|                                     |              |             |             | 1 year         | 2020/10/10     |
| Wideband Radio Communication Tester | R&S          | CMW 500     | MRTSUE06243 | 1 year         | 2020/11/07     |
| DC Power Supply                     | GWINSTEK     | DPS-3303C   | MRTSUE06064 | 1 year         | N/A            |
| Temperature & Humidity Chamber      | BAOYT        | BYH-150CL   | MRTSUE06051 | 1 year         | 2020/11/07     |
| Thermal Hygrometer                  | testo        | 608-H1      | MRTSUE06401 | 1 year         | 2021/07/26     |
|                                     |              |             |             | 1 year         | 2020/08/08     |

| Software     | Version | Function          |
|--------------|---------|-------------------|
| EMI Software | V3      | EMI Test Software |

## 5. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k = 2$ .

|                                                                                                                                                                                                                                          |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>AC Conducted Emission Measurement</b>                                                                                                                                                                                                 |
| Measurement Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ):<br>9kHz~150kHz: 3.74dB<br>150kHz~30MHz: 3.44dB                                                                                                                  |
| <b>Radiated Disturbance</b>                                                                                                                                                                                                              |
| Measurement Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ):<br>Horizontal: 30MHz~300MHz: 5.04dB<br>300MHz~1GHz: 4.95dB<br>1GHz~40GHz: 6.40dB<br>Vertical: 30MHz~300MHz: 5.24dB<br>300MHz~1GHz: 6.03dB<br>1GHz~40GHz: 6.40dB |
| <b>Spurious Emissions, Conducted</b>                                                                                                                                                                                                     |
| Measurement Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ):<br>0.78dB                                                                                                                                                       |
| <b>Output Power</b>                                                                                                                                                                                                                      |
| Measurement Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ):<br>1.13dB                                                                                                                                                       |
| <b>Power Spectrum Density</b>                                                                                                                                                                                                            |
| Measurement Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ):<br>1.15dB                                                                                                                                                       |
| <b>Occupied Bandwidth</b>                                                                                                                                                                                                                |
| Measurement Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ):<br>0.28%                                                                                                                                                        |

## 6. TEST RESULT

### 6.1. Summary

| FCC Part Section(s) | RSS Section(s)   | Test Description                                                              | Test Limit                                                                     | Test Condition | Test Result | Reference         |
|---------------------|------------------|-------------------------------------------------------------------------------|--------------------------------------------------------------------------------|----------------|-------------|-------------------|
| 15.247(a)(2)        | RSS-247 [5.2]    | 6dB Bandwidth                                                                 | $\geq 500\text{kHz}$                                                           | Conducted      | Pass        | Section 6.2       |
| N/A                 | RSS-Gen [6.7]    | 99% Bandwidth                                                                 | N/A                                                                            |                | Pass        |                   |
| 15.247(b)(3)        | RSS-247 [5.4(d)] | Output Power                                                                  | $\leq 1\text{Watt}$ & $\text{EIRP} \leq 4\text{Watt}$                          |                | Pass        | Section 6.3       |
| 15.247(e)           | RSS-247 [5.2]    | Power Spectral Density                                                        | $\leq 8\text{dBm} / 3\text{kHz}$                                               |                | Pass        | Section 6.4       |
| 15.247(d)           | RSS-247 [5.5]    | Band Edge / Out-of-Band Emissions                                             | $\leq 20\text{dBc}$ (Peak)                                                     |                | Pass        | Section 6.5       |
| 15.205<br>15.209    | RSS-247 [5.5]    | General Field Strength Limits (Restricted Bands and Radiated Emission Limits) | Emissions in restricted bands must meet the radiated limits detailed in 15.209 | Radiated       | Pass        | Section 6.6 & 6.7 |
| 15.207              | RSS-Gen [8.8]    | AC Conducted Emissions 150kHz - 30MHz                                         | < FCC 15.207 limits                                                            | Line Conducted | Pass        | Section 6.8       |

#### Notes:

- 1) All modes of operation and data rates were investigated. For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.

## **6.2. Occupied Bandwidth Measurement**

### **6.2.1. Test Limit**

The minimum 6dB bandwidth shall be at least 500 kHz.

### **6.2.2. Test Procedure used**

ANSI C63.10-2013 - Section 11.8 (6dB bandwidth)

ANSI C63.10-2013 - Section 6.9.3 (99% bandwidth)

### **6.2.3. Test Setting**

#### **For 6dB bandwidth**


1. Set RBW = 100 kHz
2.  $VBW \geq 3 \times RBW$
3. Detector = Peak
4. Trace mode = Max hold
5. Sweep = Auto couple
6. Allow the trace was allowed to stabilize
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

#### **For 99% bandwidth**

1. Span = 1.5 times to 5 times the OBW
2. Set RBW = 1% to 5% the OBW
3.  $VBW \geq 3 \times RBW$
4. Detector = Peak
5. Trace mode = Max hold
6. Sweep = Auto couple
7. Allow the trace was allowed to stabilize

## 6.2.4. Test Setup


### Spectrum Analyzer

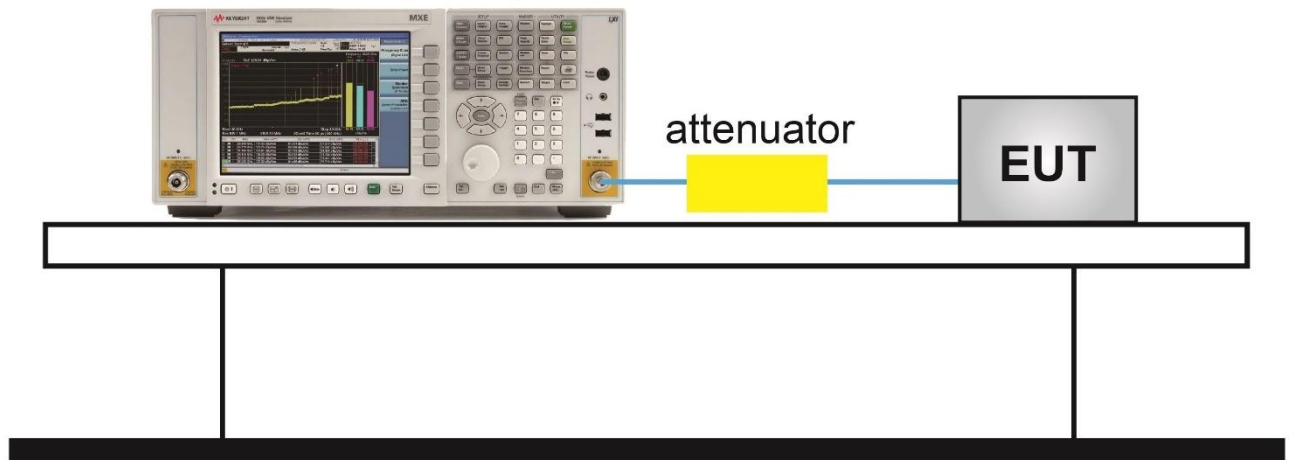

### 6.2.5. Test Result

|           |                    |               |            |
|-----------|--------------------|---------------|------------|
| Product   | Ninebot Gokart Pro | Test Engineer | Dandy Li   |
| Test Site | WZ-TR3             | Test Date     | 2020/01/13 |

| Test Mode | Data Rate (Mbps) | Channel No. | Frequency (MHz) | 6dB Bandwidth (MHz) | Limit (MHz) | 99% Bandwidth (MHz) | Result |
|-----------|------------------|-------------|-----------------|---------------------|-------------|---------------------|--------|
| BLE       | 1                | 00          | 2402            | 0.693               | $\geq 0.5$  | 1.157               | Pass   |
| BLE       | 1                | 19          | 2440            | 0.688               | $\geq 0.5$  | 1.057               | Pass   |
| BLE       | 1                | 39          | 2480            | 0.690               | $\geq 0.5$  | 1.067               | Pass   |

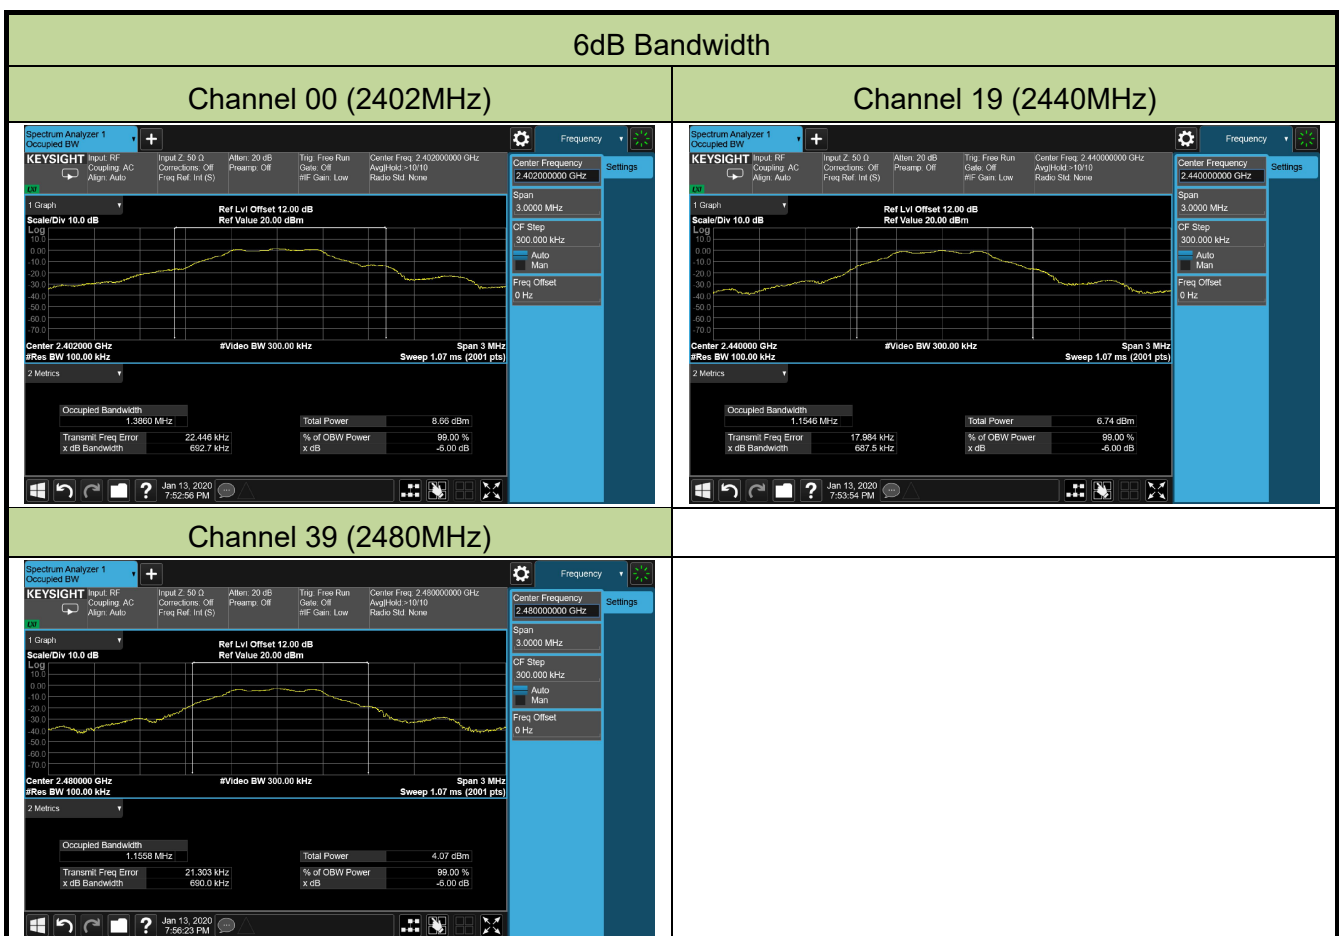


## 99% Bandwidth


### Channel 00 (2402MHz)



### Channel 19 (2440MHz)

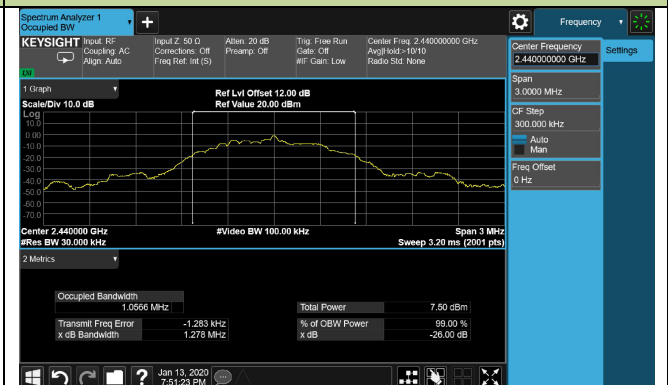

### Channel 39 (2480MHz)

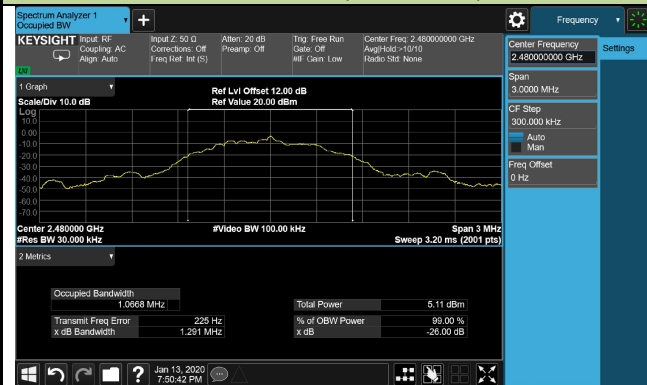

### **6.3. Output Power Measurement**

#### **6.3.1. Test Limit**

The maximum out power shall be less 1 Watt (30dBm) and the E.I.R.P shall not exceed 4 Watt (36dBm).

#### **6.3.2. Test Procedure Used**

ANSI C63.10-2013 Section 11.9.1.3

ANSI C63.10-2013 Section 11.9.2.3.2

#### **6.3.3. Test Setting**


##### **PKPM1 Peak-reading power meter method**

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

##### **Method AVGPM-G (Measurement using a gated RF average-reading power meter)**

Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since this measurement is made only during the ON time of the transmitter, no duty cycle correction is required.

### 6.3.4. Test Setup

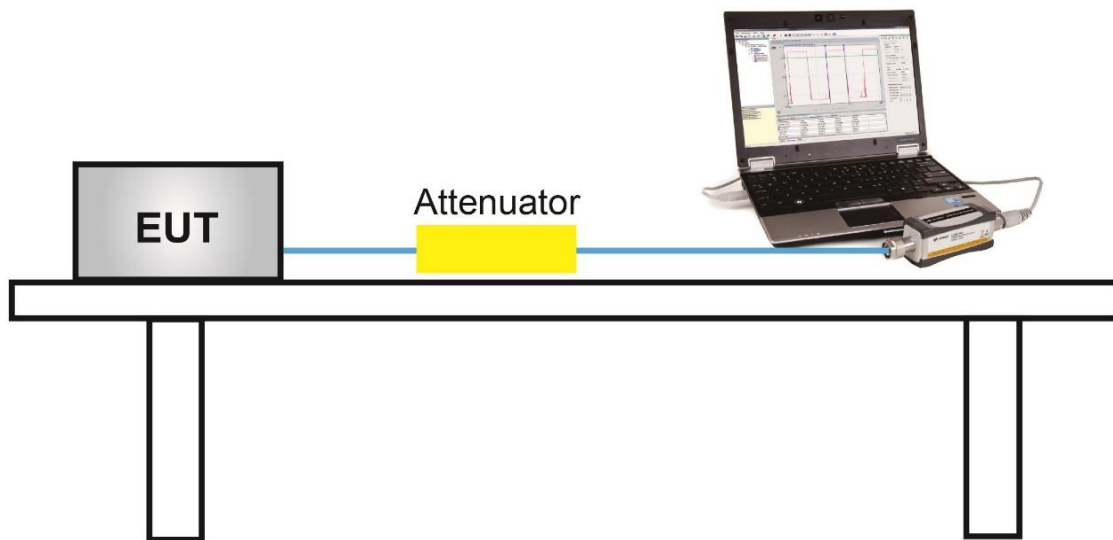

### 6.3.5. Test Result

|           |                    |               |            |
|-----------|--------------------|---------------|------------|
| Product   | Ninebot Gokart Pro | Test Engineer | Dandy Li   |
| Test Site | WZ-TR3             | Test Date     | 2020/01/13 |

#### Test Result of Peak Output Power

| Test Mode | Data Rate (Mbps) | Channel No. | Frequency (MHz) | Peak Power (dBm) | Limit (dBm) | Max EIRP (dBm) | EIRP Limit (dBm) | Result |
|-----------|------------------|-------------|-----------------|------------------|-------------|----------------|------------------|--------|
| BLE       | 1                | 00          | 2402            | 2.03             | ≤ 30.00     | 7.03           | ≤ 36.00          | Pass   |
| BLE       | 1                | 19          | 2440            | 0.43             | ≤ 30.00     | 5.43           | ≤ 36.00          | Pass   |
| BLE       | 1                | 39          | 2480            | -2.02            | ≤ 30.00     | 2.98           | ≤ 36.00          | Pass   |

Note: Max EIRP (dBm) = Peak Power (dBm) + Antenna Gain (dBi)

#### Test Result of Average Output Power (Reporting Only)

| Test Mode | Data Rate (Mbps) | Channel No. | Frequency (MHz) | Average Power (dBm) | Limit (dBm) | Max EIRP (dBm) | EIRP Limit (dBm) | Result |
|-----------|------------------|-------------|-----------------|---------------------|-------------|----------------|------------------|--------|
| BLE       | 1                | 00          | 2402            | 1.71                | ≤ 30.00     | 6.71           | ≤ 36.00          | Pass   |
| BLE       | 1                | 19          | 2440            | 0.03                | ≤ 30.00     | 5.03           | ≤ 36.00          | Pass   |
| BLE       | 1                | 39          | 2480            | -2.56               | ≤ 30.00     | 2.44           | ≤ 36.00          | Pass   |

Note: Max EIRP (dBm) = Average Power (dBm) + Antenna Gain (dBi)

## 6.4. Power Spectral Density Measurement

### 6.4.1. Test Limit

The maximum permissible power spectral density is 8dBm in any 3 kHz band.

The same method of determining the conducted output power shall be used to determine the power spectral density.


### 6.4.2. Test Procedure Used

ANSI C63.10-2013 Section 11.10.2

### 6.4.3. Test Setting

1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span = 1.5 times the DTS channel bandwidth
3. RBW = 3kHz
4. VBW = 10kHz
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Trace was allowed to stabilize


### 6.4.4. Test Setup

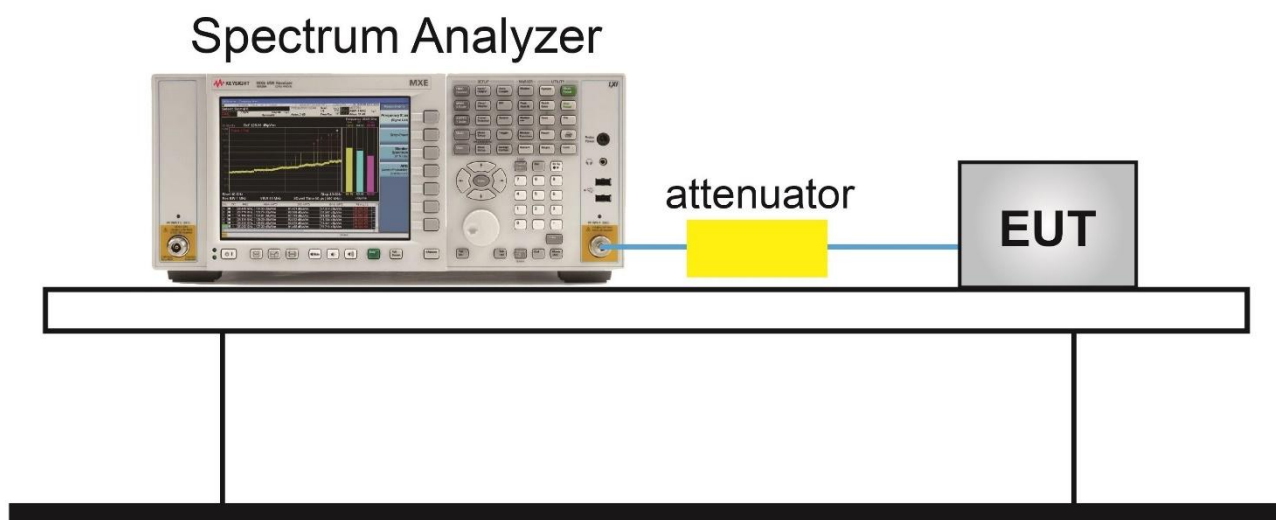

### 6.4.5. Test Result

|           |                    |               |            |
|-----------|--------------------|---------------|------------|
| Product   | Ninebot Gokart Pro | Test Engineer | Dandy Li   |
| Test Site | WZ-TR3             | Test Date     | 2020/01/13 |

| Test Mode | Data Rate (Mbps) | Channel No. | Frequency (MHz) | PSD Result (dBm / 3kHz) | Limit (dBm / 3kHz) | Result |
|-----------|------------------|-------------|-----------------|-------------------------|--------------------|--------|
| BLE       | 1                | 00          | 2402            | -11.41                  | ≤ 8.00             | Pass   |
| BLE       | 1                | 19          | 2440            | -13.73                  | ≤ 8.00             | Pass   |
| BLE       | 1                | 39          | 2480            | -16.41                  | ≤ 8.00             | Pass   |

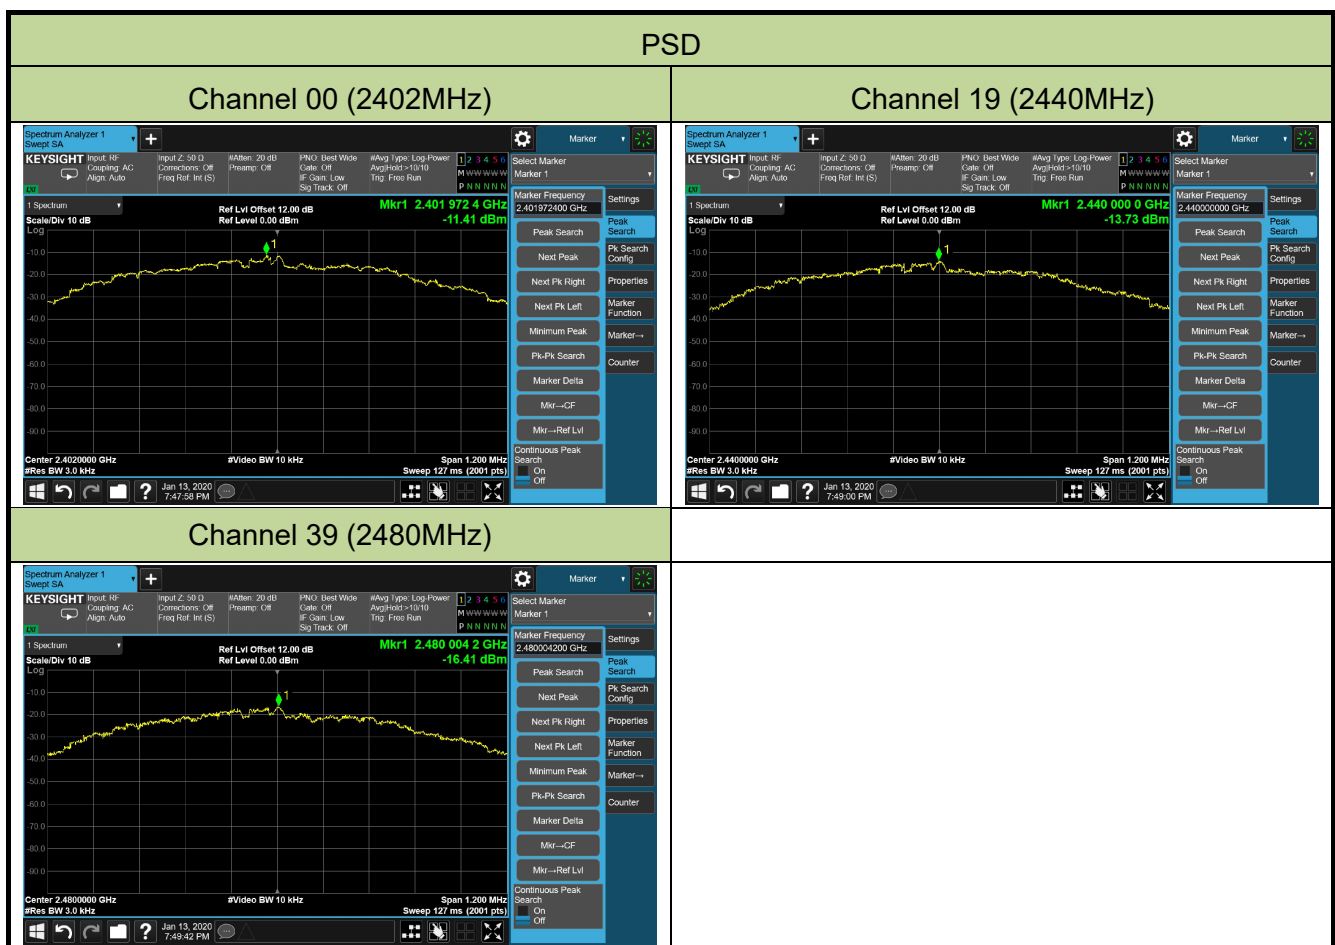

## **6.5. Conducted Band Edge and Out-of-Band Emissions**

### **6.5.1. Test Limit**

The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the PSD procedure.

### **6.5.2. Test Procedure Used**

ANSI C63.10-2013 Section 11.11

### **6.5.3. Test Setting**

#### **Reference level measurement**


1. Set instrument center frequency to DTS channel center frequency
2. Set the span to  $\geq 1.5$  times the DTS bandwidth
3. Set the RBW = 100 kHz
4. Set the VBW  $\geq 3 \times$  RBW
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Allow trace to fully stabilize

#### **Emission level measurement**

1. Set the center frequency and span to encompass frequency range to be measured
2. RBW = 100kHz
3. VBW = 300kHz
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

#### 6.5.4. Test Setup

### Spectrum Analyzer

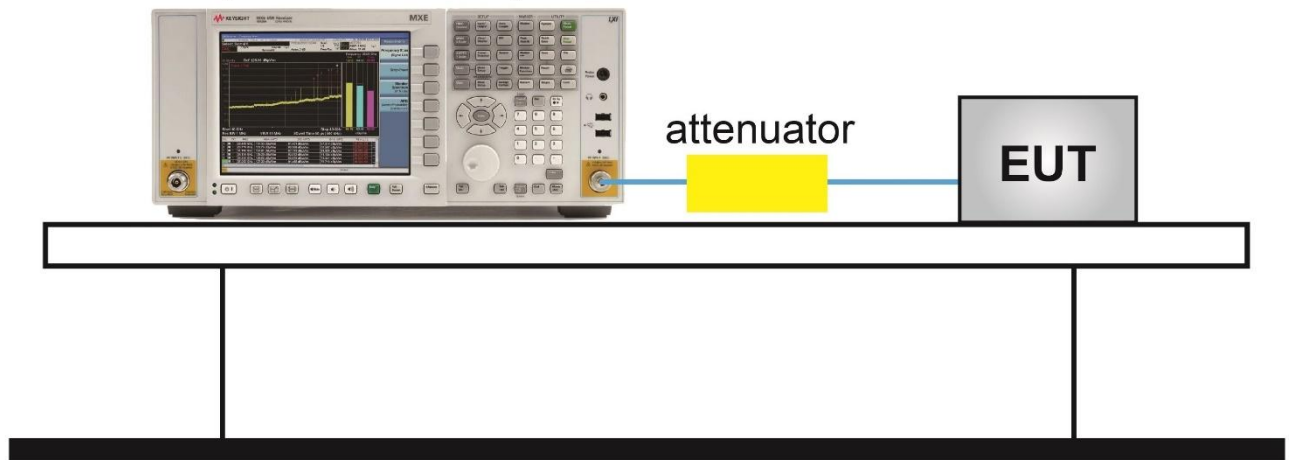


### 6.5.5. Test Result

|           |                    |               |            |
|-----------|--------------------|---------------|------------|
| Product   | Ninebot Gokart Pro | Test Engineer | Dandy Li   |
| Test Site | WZ-TR3             | Test Date     | 2020/10/16 |


| Test Mode | Data Rate (Mbps) | Channel No. | Frequency (MHz) | Limit (dBm) | Result |
|-----------|------------------|-------------|-----------------|-------------|--------|
| BLE       | 1                | 00          | 2402            | -18.30      | Pass   |
| BLE       | 1                | 19          | 2440            | -20.19      | Pass   |
| BLE       | 1                | 39          | 2480            | -22.40      | Pass   |

Note: The limit is 20dB below the fundamental emission level.

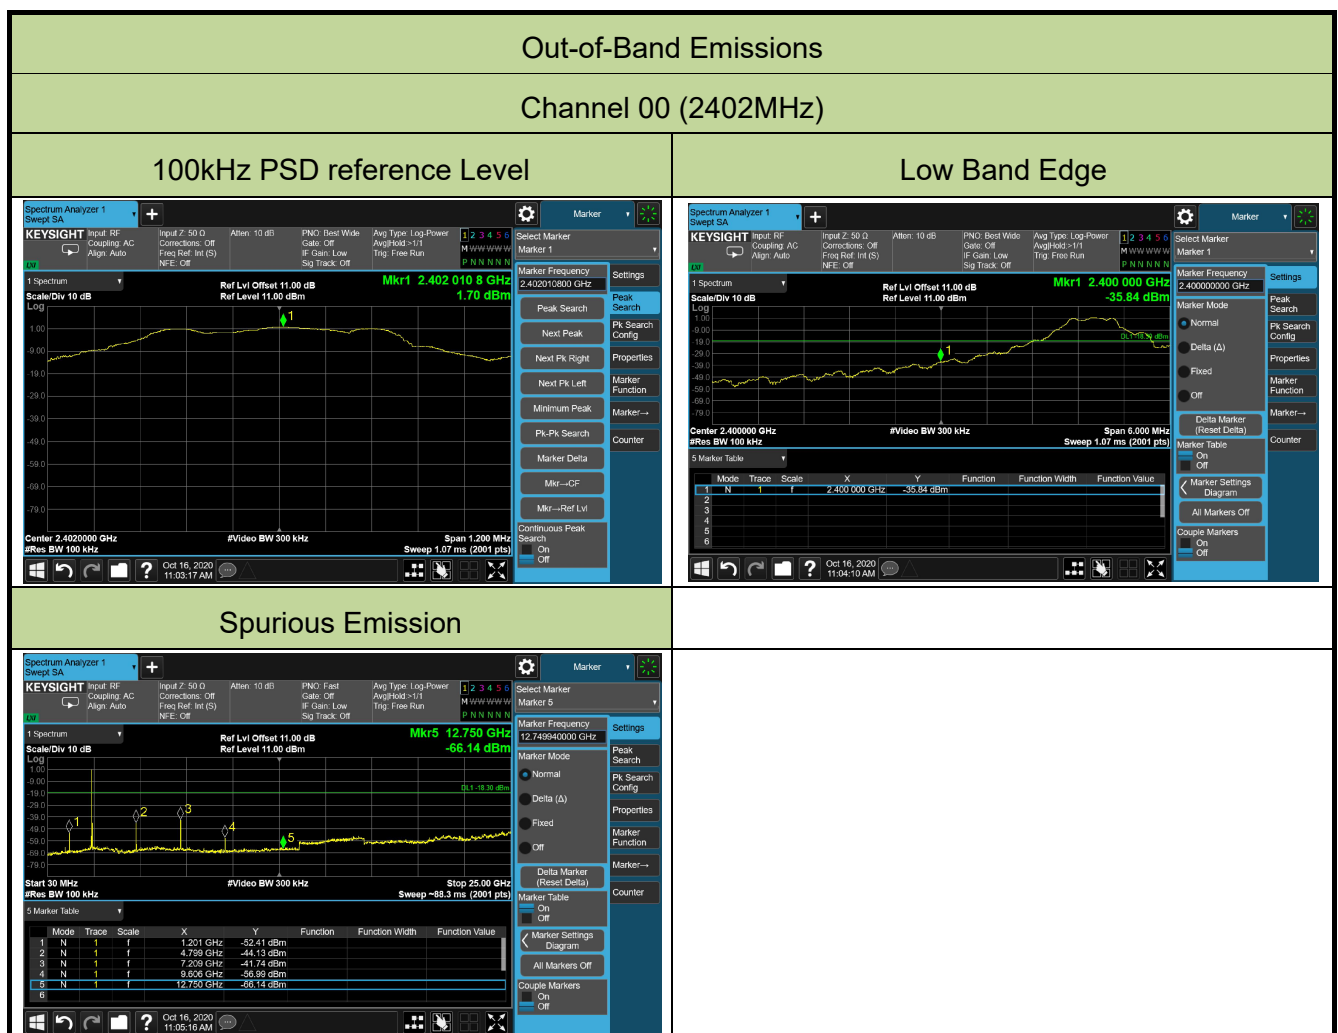


## Channel 19 (2440MHz)

### 100kHz PSD reference Level

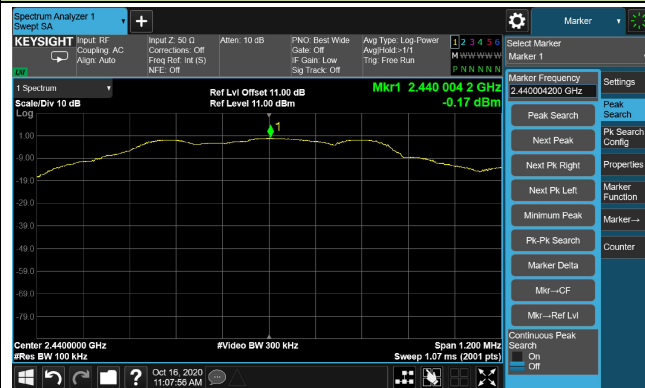


### Spurious Emission

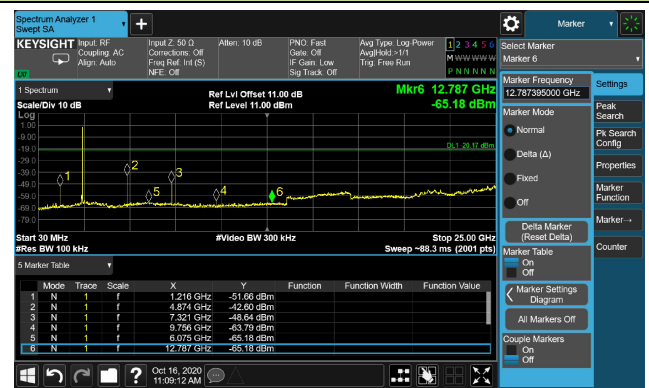

## Channel 39 (2480MHz)

### 100kHz PSD reference Level

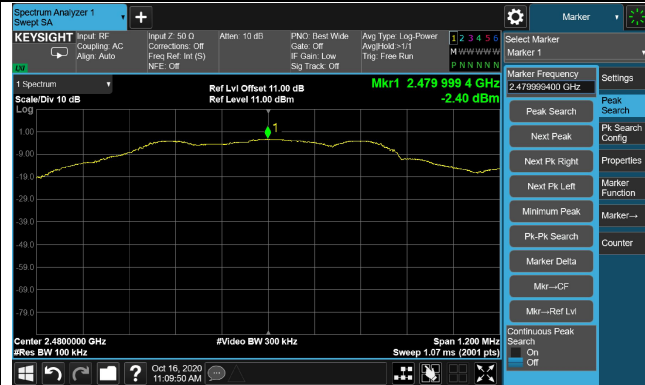

### High Band Edge



### Spurious Emission



## 6.6. Radiated Spurious Emission Measurement

### 6.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

| FCC Part 15 Subpart C Paragraph 15.209 |                                       |                               |
|----------------------------------------|---------------------------------------|-------------------------------|
| Frequency<br>[MHz]                     | Field Strength<br>[ $\mu\text{V/m}$ ] | Measured Distance<br>[Meters] |
| 0.009 - 0.490                          | 2400/F (kHz)                          | 300                           |
| 0.490 - 1.705                          | 24000/F (kHz)                         | 30                            |
| 1.705 - 30                             | 30                                    | 30                            |
| 30 - 88                                | 100                                   | 3                             |
| 88 - 216                               | 150                                   | 3                             |
| 216 - 960                              | 200                                   | 3                             |
| Above 960                              | 500                                   | 3                             |

All out of band emissions appearing in a restricted band as specified in Section 8.10 of the RSS-Gen must not exceed the limits shown in Table per Section 8.9.

| RSS-Gen Section 8.9 |                                       |                                                             |                          |
|---------------------|---------------------------------------|-------------------------------------------------------------|--------------------------|
| Frequency<br>(MHz)  | Field Strength<br>( $\mu\text{V/m}$ ) | Magnetic Field Strength<br>(H-Field)<br>( $\mu\text{A/m}$ ) | Measured Distance<br>(m) |
| 0.009 - 0.490       | --                                    | 6.37/F (F in kHz)                                           | 300                      |
| 0.490 - 1.705       | --                                    | 6.37/F (F in kHz)                                           | 30                       |
| 1.705 - 30          | --                                    | 0.08                                                        | 30                       |
| 30 - 88             | 100                                   | --                                                          | 3                        |
| 88 - 216            | 150                                   | --                                                          | 3                        |
| 216 - 960           | 200                                   | --                                                          | 3                        |
| Above 960           | 500                                   | --                                                          | 3                        |

### 6.6.2. Test Procedure Used

ANSI C63.10-2013 Section 6.3 (General Requirements)

ANSI C63.10-2013 Section 6.4 (Standard test method below 30MHz)

ANSI C63.10-2013 Section 6.5 (Standard test method above 30MHz to 1GHz)

ANSI C63.10-2013 Section 6.6 (Standard test method above 1GHz)

### 6.6.3. Test Setting

**Table 1 - RBW as a function of frequency**

| Frequency     | RBW           |
|---------------|---------------|
| 9 ~ 150 kHz   | 200 ~ 300 Hz  |
| 0.15 ~ 30 MHz | 9 ~ 10 kHz    |
| 30 ~ 1000 MHz | 100 ~ 120 kHz |
| > 1000MHz     | 1MHz          |

#### **Quasi-Peak Measurements below 1GHz**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

#### **Peak Measurements above 1GHz**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple


6. Trace mode = max hold
7. Trace was allowed to stabilize

#### **Average Measurements above 1GHz (Method VB)**


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle  $\geq 98\%$ , set VBW = 10 Hz.  
If the EUT duty cycle is  $< 98\%$ , set VBW  $\geq 1/T$ . T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

#### **6.6.4. Test Setup**

##### **Below 1GHz Test Setup:**

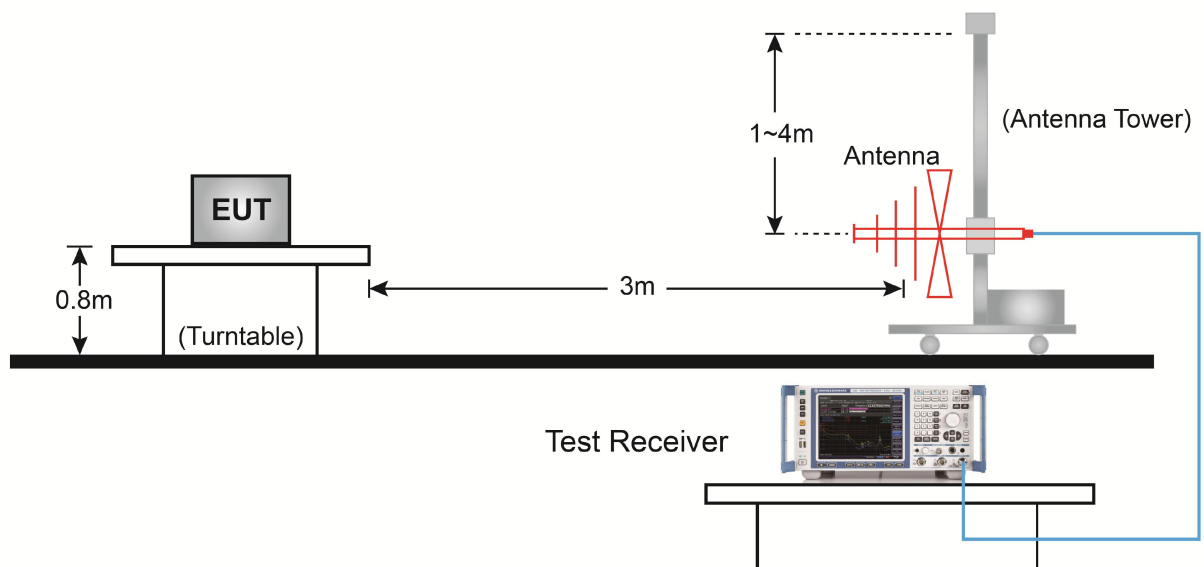

### Above 1GHz Test Setup:

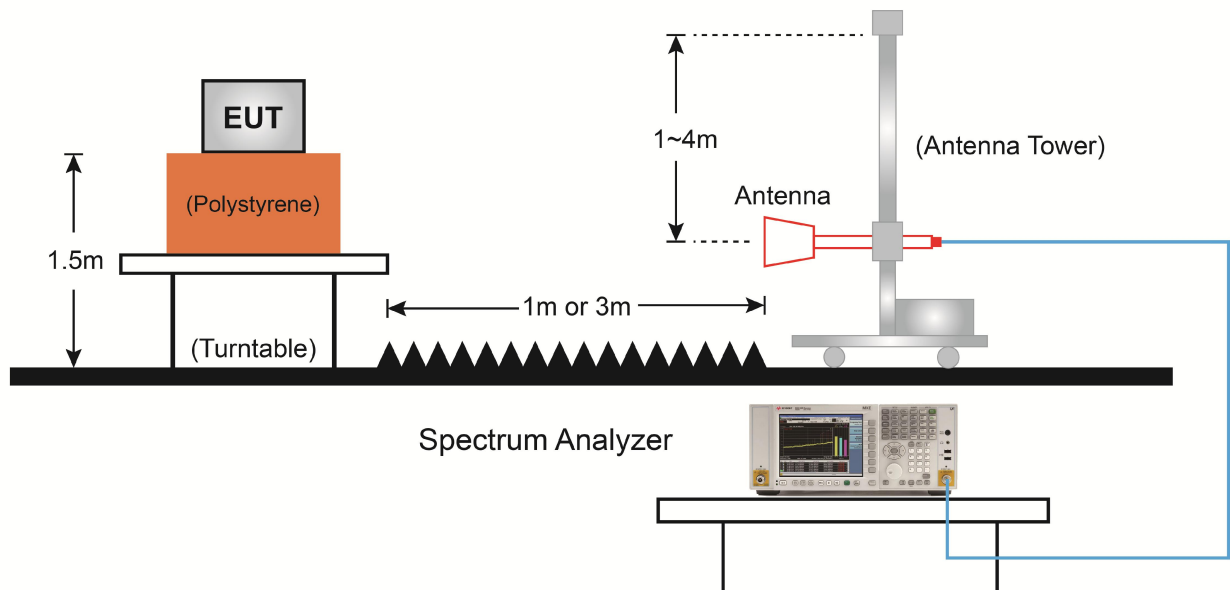

### 6.6.5. Test Result

|            |                                                                                                                                                                                   |               |            |
|------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product    | Ninebot Gokart Pro                                                                                                                                                                | Test Engineer | David Lv   |
| Test Site  | WZ-AC1                                                                                                                                                                            | Test Date     | 2020/01/17 |
| Test Mode: | BLE                                                                                                                                                                               | Test Channel: | 00         |
| Remark:    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|-------------|------------------------|----------------|-------------|----------|--------------|
|      | 4111.0          | 52.7                 | -11.9       | 40.8                   | 74.0           | -33.2       | Peak     | Horizontal   |
|      | 4808.0          | 62.8                 | -10.8       | 52.0                   | 74.0           | -22.0       | Peak     | Horizontal   |
| *    | 7205.0          | 69.3                 | -8.2        | 61.1                   | 76.0           | -14.9       | Peak     | Horizontal   |
| *    | 9610.5          | 53.3                 | -6.0        | 47.3                   | 76.0           | -28.7       | Peak     | Horizontal   |
|      | 4238.5          | 53.3                 | -11.3       | 42.0                   | 74.0           | -32.0       | Peak     | Vertical     |
|      | 4799.5          | 60.7                 | -10.9       | 49.8                   | 74.0           | -24.2       | Peak     | Vertical     |
| *    | 5989.5          | 52.4                 | -9.6        | 42.8                   | 76.0           | -33.2       | Peak     | Vertical     |
| *    | 7205.0          | 66.8                 | -8.2        | 58.6                   | 76.0           | -17.4       | Peak     | Vertical     |

Note 1: “\*” means test frequency did not fall into restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|            |                                                                                                                                                                                   |               |            |
|------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product    | Ninebot Gokart Pro                                                                                                                                                                | Test Engineer | David Lv   |
| Test Site  | WZ-AC1                                                                                                                                                                            | Test Date     | 2020/01/17 |
| Test Mode: | BLE                                                                                                                                                                               | Test Channel: | 19         |
| Remark:    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|-------------|------------------------|----------------|-------------|----------|--------------|
|      | 4884.5          | 57.3                 | -10.5       | 46.8                   | 74.0           | -27.2       | Peak     | Horizontal   |
|      | 7315.5          | 65.0                 | -8.4        | 56.6                   | 74.0           | -17.4       | Peak     | Horizontal   |
|      | 7319.9          | 59.6                 | -8.4        | 51.2                   | 54.0           | -2.8        | Average  | Horizontal   |
| *    | 9602.0          | 51.0                 | -6.0        | 44.9                   | 74.2           | -29.3       | Peak     | Horizontal   |
| *    | 10027.0         | 50.9                 | -5.7        | 45.2                   | 74.2           | -29.0       | Peak     | Horizontal   |
|      | 4876.0          | 57.2                 | -10.5       | 46.7                   | 74.0           | -27.3       | Peak     | Vertical     |
|      | 7315.5          | 63.9                 | -8.4        | 55.5                   | 74.0           | -18.5       | Peak     | Vertical     |
|      | 7319.8          | 59.1                 | -8.4        | 50.7                   | 54.0           | -3.3        | Average  | Vertical     |
| *    | 9831.5          | 51.5                 | -5.9        | 45.6                   | 74.2           | -28.6       | Peak     | Vertical     |
| *    | 10146.0         | 48.7                 | -5.8        | 42.9                   | 74.2           | -31.3       | Peak     | Vertical     |

Note 1: “\*” means test frequency did not fall into restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|            |                                                                                                                                                                                   |               |            |
|------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product    | Ninebot Gokart Pro                                                                                                                                                                | Test Engineer | David Lv   |
| Test Site  | WZ-AC1                                                                                                                                                                            | Test Date     | 2020/01/17 |
| Test Mode: | BLE                                                                                                                                                                               | Test Channel: | 39         |
| Remark:    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|-------------|------------------------|----------------|-------------|----------|--------------|
|      | 4961.0          | 58.4                 | -10.8       | 47.6                   | 74.0           | -26.4       | Peak     | Horizontal   |
|      | 7443.0          | 59.7                 | -7.9        | 51.8                   | 74.0           | -22.2       | Peak     | Horizontal   |
| *    | 8743.5          | 50.8                 | -6.2        | 44.6                   | 74.0           | -29.4       | Peak     | Horizontal   |
| *    | 9797.5          | 51.8                 | -5.9        | 45.9                   | 74.0           | -28.1       | Peak     | Horizontal   |
|      | 4961.0          | 56.6                 | -10.8       | 45.8                   | 74.0           | -28.2       | Peak     | Vertical     |
|      | 7443.0          | 57.1                 | -7.9        | 49.3                   | 74.0           | -24.7       | Peak     | Vertical     |
| *    | 8692.5          | 50.4                 | -6.1        | 44.2                   | 74.0           | -29.8       | Peak     | Vertical     |
| *    | 9831.5          | 50.7                 | -5.9        | 44.9                   | 74.0           | -29.1       | Peak     | Vertical     |


Note 1: “\*” means test frequency did not fall into restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

### The worst case of Radiated Emission below 1GHz:

|                                                      |                          |
|------------------------------------------------------|--------------------------|
| Site: WZ-AC1                                         | Time: 2020/03/25 - 13:49 |
| Limit: FCC_Part15.209_RE(3m)                         | Engineer: David Lv       |
| Probe: AC1_VULB 9168 _30-1000MHz                     | Polarity: Horizontal     |
| EUT: Ninebot Gokart Pro                              | Power: By Battery        |
| <b>Test Mode:</b> Transmit by BLE at channel 2402MHz |                          |

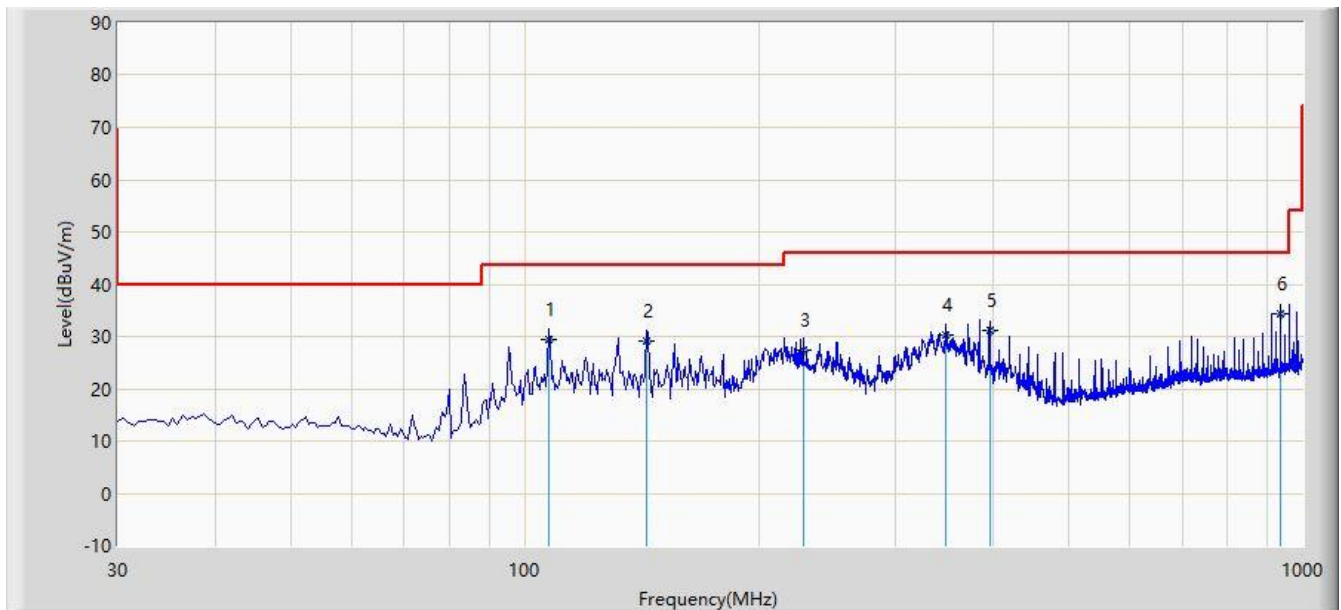

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 107.600         | 29.357                 | 18.300               | -14.143     | 43.500         | 11.057      | QP   |
| 2  |      |      | 143.490         | 29.239                 | 15.340               | -14.261     | 43.500         | 13.899      | QP   |
| 3  |      |      | 227.880         | 27.321                 | 16.070               | -18.679     | 46.000         | 11.251      | QP   |
| 4  |      |      | 348.160         | 30.413                 | 16.450               | -15.587     | 46.000         | 13.963      | QP   |
| 5  |      |      | 396.175         | 31.078                 | 16.240               | -14.922     | 46.000         | 14.838      | QP   |
| 6  |      | *    | 936.465         | 34.360                 | 12.150               | -11.640     | 46.000         | 22.210      | QP   |


Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value.

Therefore, the data is not presented in the report.

|                                                      |                          |
|------------------------------------------------------|--------------------------|
| Site: WZ-AC1                                         | Time: 2020/03/25 - 13:53 |
| Limit: FCC_Part15.209_RE(3m)                         | Engineer: David Lv       |
| Probe: AC1_VULB 9168 _30-1000MHz                     | Polarity: Vertical       |
| EUT: Ninebot Gokart Pro                              | Power: By Battery        |
| <b>Test Mode:</b> Transmit by BLE at channel 2402MHz |                          |

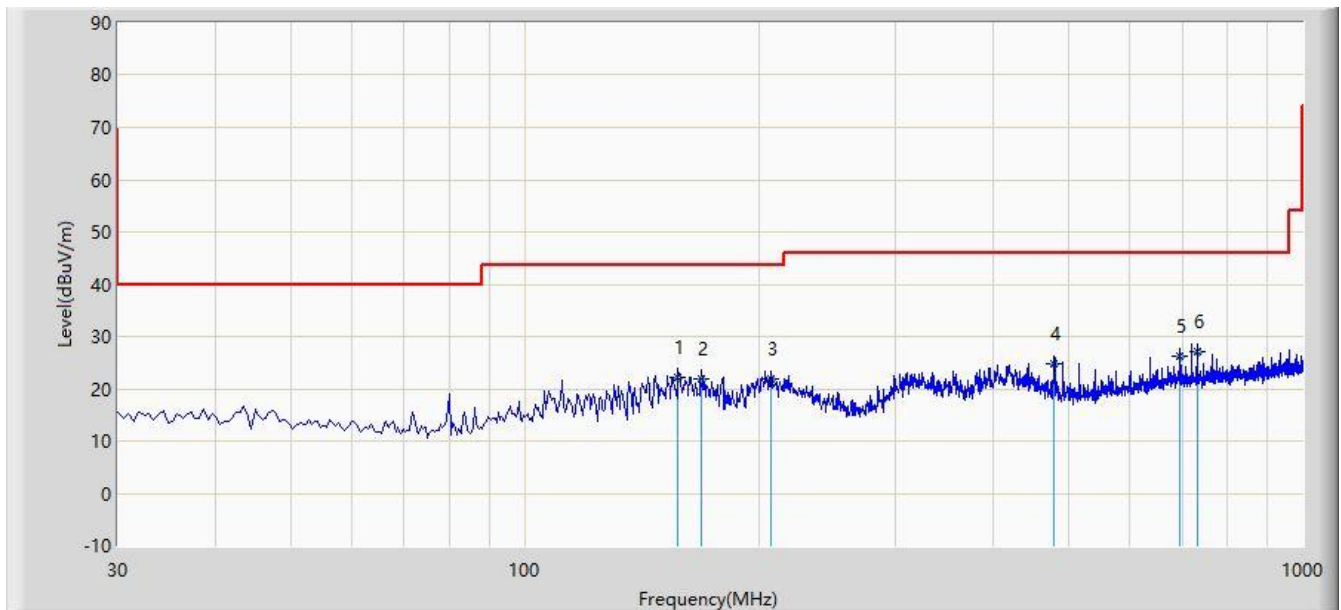

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 157.555         | 22.107                 | 7.800                | -21.393     | 43.500         | 14.307      | QP   |
| 2  |      |      | 168.710         | 21.993                 | 8.530                | -21.507     | 43.500         | 13.463      | QP   |
| 3  |      |      | 207.025         | 21.802                 | 11.620               | -21.698     | 43.500         | 10.182      | QP   |
| 4  |      |      | 479.110         | 24.673                 | 8.260                | -21.327     | 46.000         | 16.413      | QP   |
| 5  |      |      | 696.390         | 26.348                 | 6.580                | -19.652     | 46.000         | 19.768      | QP   |
| 6  |      | *    | 732.280         | 27.170                 | 6.950                | -18.830     | 46.000         | 20.220      | QP   |

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value.

Therefore, the data is not presented in the report.

## 6.7. Radiated Restricted Band Edge Measurement

### 6.7.1. Test Limit

#### For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

| Frequency<br>(MHz)         | Frequency<br>(MHz)    | Frequency<br>(MHz) | Frequency<br>(GHz) |
|----------------------------|-----------------------|--------------------|--------------------|
| 0.090 - 0.110              | 16.42 - 16.423        | 399.9 - 410        | 4.5 - 5.15         |
| <sup>1</sup> 0.495 - 0.505 | 16.69475 - 16.69525   | 608 - 614          | 5.35 - 5.46        |
| 2.1735 - 2.1905            | 16.80425 - 16.80475   | 960 - 1240         | 7.25 - 7.75        |
| 4.125 - 4.128              | 25.5 - 25.67          | 1300 - 1427        | 8.025 - 8.5        |
| 4.17725 - 4.17775          | 37.5 - 38.25          | 1435 - 1626.5      | 9.0 - 9.2          |
| 4.20725 - 4.20775          | 73 - 74.6             | 1645.5 - 1646.5    | 9.3 - 9.5          |
| 6.215 - 6.218              | 74.8 - 75.2           | 1660 - 1710        | 10.6 - 12.7        |
| 6.26775 - 6.26825          | 108 - 121.94          | 1718.8 - 1722.2    | 13.25 - 13.4       |
| 6.31175 - 6.31225          | 123 - 138             | 2200 - 2300        | 14.47 - 14.5       |
| 8.291 - 8.294              | 149.9 - 150.05        | 2310 - 2390        | 15.35 - 16.2       |
| 8.362 - 8.366              | 156.52475 - 156.52525 | 2483.5 - 2500      | 17.7 - 21.4        |
| 8.37625 - 8.38675          | 156.7 - 156.9         | 2690 - 2900        | 22.01 - 23.12      |
| 8.41425 - 8.41475          | 162.0125 - 167.17     | 3260 - 3267        | 23.6 - 24.0        |
| 12.29 - 12.293             | 167.72 - 173.2        | 3332 - 3339        | 31.2 - 31.8        |
| 12.51975 - 12.52025        | 240 - 285             | 3345.8 - 3358      | 36.43 - 36.5       |
| 12.57675 - 12.57725        | 322 - 335.4           | 3600 - 4400        | ( <sup>2</sup> )   |
| 13.36 - 13.41              | --                    | --                 | --                 |

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

| FCC Part 15 Subpart C Paragraph 15.209 |                          |                               |
|----------------------------------------|--------------------------|-------------------------------|
| Frequency<br>[MHz]                     | Field Strength<br>[uV/m] | Measured Distance<br>[Meters] |
| 0.009 - 0.490                          | 2400/F (kHz)             | 300                           |
| 0.490 - 1.705                          | 24000/F (kHz)            | 30                            |
| 1.705 - 30                             | 30                       | 30                            |
| 30 - 88                                | 100                      | 3                             |
| 88 - 216                               | 150                      | 3                             |
| 216 - 960                              | 200                      | 3                             |
| Above 960                              | 500                      | 3                             |

### **For RSS-Gen Section 8.10 Requirement**

Radiated emissions which fall in the restricted bands, as defined in Section 8.10 of RSS-Gen, must also comply with the radiated emission limits specified in Section 8.9.

| Frequency<br>(MHz)  | Frequency<br>(MHz)    | Frequency<br>(GHz) |
|---------------------|-----------------------|--------------------|
| 0.090 - 0.110       | 149.9 - 150.05        | 9.0 - 9.2          |
| 0.495 - 0.505       | 156.52475 - 156.52525 | 9.3 - 9.5          |
| 2.1735 - 2.1905     | 156.7 - 156.9         | 10.6 - 12.7        |
| 3.020 - 3.026       | 162.0125 - 167.17     | 13.25 - 13.4       |
| 4.125 - 4.128       | 167.72 - 173.2        | 14.47 - 14.5       |
| 4.17725 - 4.17775   | 240 - 285             | 15.35 - 16.2       |
| 4.20725 - 4.20775   | 322 - 335.4           | 17.7 - 21.4        |
| 5.677 - 5.683       | 399.9 - 410           | 22.01 - 23.12      |
| 6.215 - 6.218       | 608 - 614             | 23.6 - 24.0        |
| 6.26775 - 6.26825   | 960 - 1427            | 31.2 - 31.8        |
| 6.31175 - 6.31225   | 1435 - 1626.5         | 36.43 - 36.5       |
| 8.291 - 8.294       | 1645.5 - 1646.5       | Above 38.6         |
| 8.362 - 8.366       | 1660 - 1710           | --                 |
| 8.37625 - 8.38675   | 1718.8 -1722.2        |                    |
| 8.41425 - 8.41475   | 2200 - 2300           |                    |
| 12.29 - 12.293      | 2310 -2390            |                    |
| 12.51975 - 12.52025 | 2483.5 -2500          |                    |
| 12.57675 - 12.57725 | 2655 - 2900           |                    |
| 13.36 -13.41        | 3260 - 3267           |                    |
| 16.42 - 16.423      | 3332 -3339            |                    |
| 16.69475 - 16.69525 | 3345.8 - 3358         |                    |
| 16.80425 - 16.80475 | 3500 - 4400           |                    |
| 25.5 - 25.67        | 4500 - 5150           |                    |
| 37.5 - 38.25        | 5350 - 5460           |                    |
| 73 - 74.6           | 7250 - 7750           |                    |
| 74.8 - 75.2         | 8025 - 8500           |                    |
| 108 - 138           |                       |                    |

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR and in Section 8.10 of the RSS-Gen must not exceed the limits shown in Table.

| RSS-Gen Section 8.9 |                                       |                                                             |                          |
|---------------------|---------------------------------------|-------------------------------------------------------------|--------------------------|
| Frequency<br>(MHz)  | Field Strength<br>( $\mu\text{V/m}$ ) | Magnetic Field Strength<br>(H-Field)<br>( $\mu\text{A/m}$ ) | Measured Distance<br>(m) |
| 0.009 - 0.490       | --                                    | 6.37/F (F in kHz)                                           | 300                      |
| 0.490 - 1.705       | --                                    | 6.37/F (F in kHz)                                           | 30                       |
| 1.705 - 30          | --                                    | 0.08                                                        | 30                       |
| 30 - 88             | 100                                   | --                                                          | 3                        |
| 88 - 216            | 150                                   | --                                                          | 3                        |
| 216 - 960           | 200                                   | --                                                          | 3                        |
| Above 960           | 500                                   | --                                                          | 3                        |

#### 6.7.2.Test Procedure Used

ANSI C63.10-2013 Section 6.3 (General Requirements)

ANSI C63.10-2013 Section 6.6 (Standard test method above 1GHz)

#### 6.7.3.Test Setting


##### Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

### **Average Field Strength Measurements**


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW  $\geq 1/T$
4. De As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
5. Detector = Peak
6. Sweep time = auto
7. Trace mode = max hold
8. Allow max hold to run for at least 50 times (1/duty cycle) traces

#### **6.7.4.Test Setup**

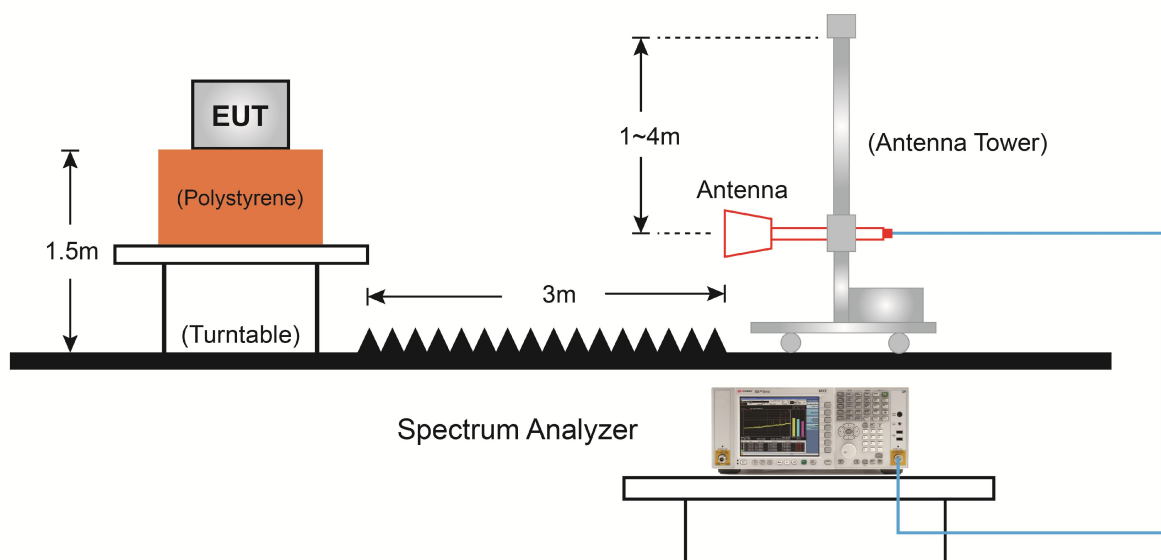

### 6.7.5.Test Result

|                                          |                          |
|------------------------------------------|--------------------------|
| Site: WZ-AC1                             | Time: 2020/10/17 - 14:42 |
| Limit: FCC_Part15.209_RE(3m)             | Engineer: Messiah Li     |
| Probe: BBHA9120D_1-18GHz                 | Polarity: Horizontal     |
| EUT: Ninebot Gokart Pro                  | Power: By Battery        |
| Note: Transmit by BLE at Channel 2402MHz |                          |

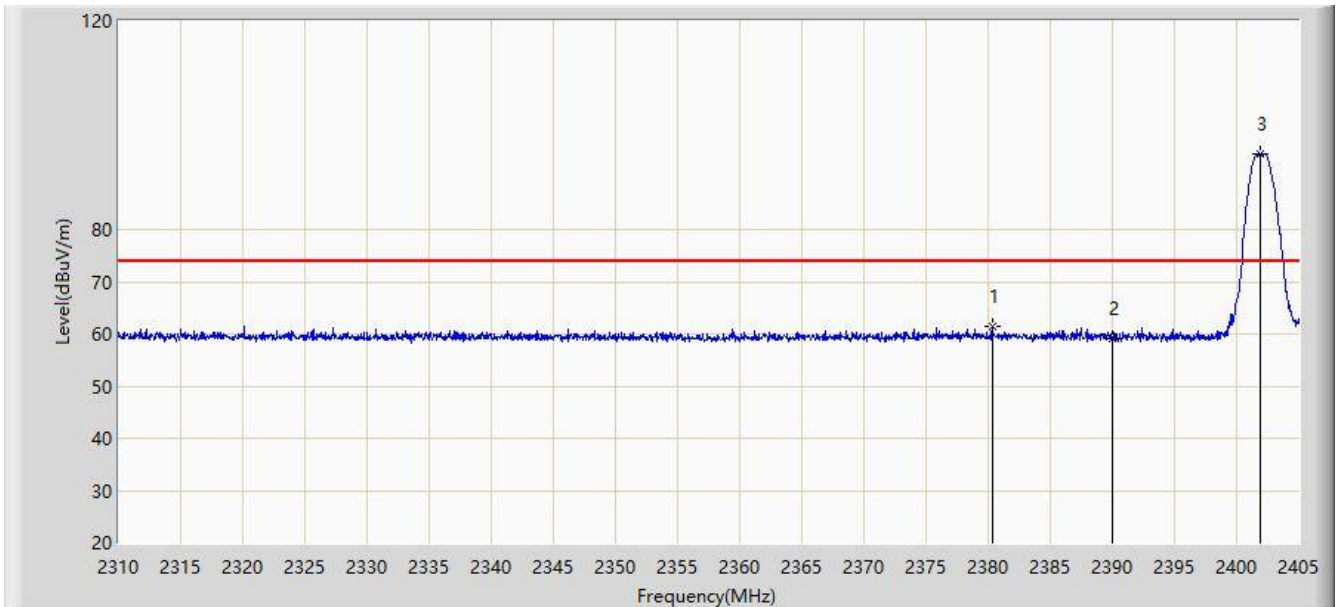


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2380.300        | 61.515                 | 28.765               | -12.485     | 74.000         | 32.750      | PK   |
| 2  |      |      | 2390.000        | 59.251                 | 26.685               | -14.749     | 74.000         | 32.566      | PK   |
| 3  |      | *    | 2401.913        | 94.468                 | 62.008               | N/A         | N/A            | 32.460      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                          |                          |
|------------------------------------------|--------------------------|
| Site: WZ-AC1                             | Time: 2020/10/17 - 15:00 |
| Limit: FCC_Part15.209_RE(3m)             | Engineer: Messiah Li     |
| Probe: BBHA9120D_1-18GHz                 | Polarity: Horizontal     |
| EUT: Ninebot Gokart Pro                  | Power: By Battery        |
| Note: Transmit by BLE at Channel 2402MHz |                          |

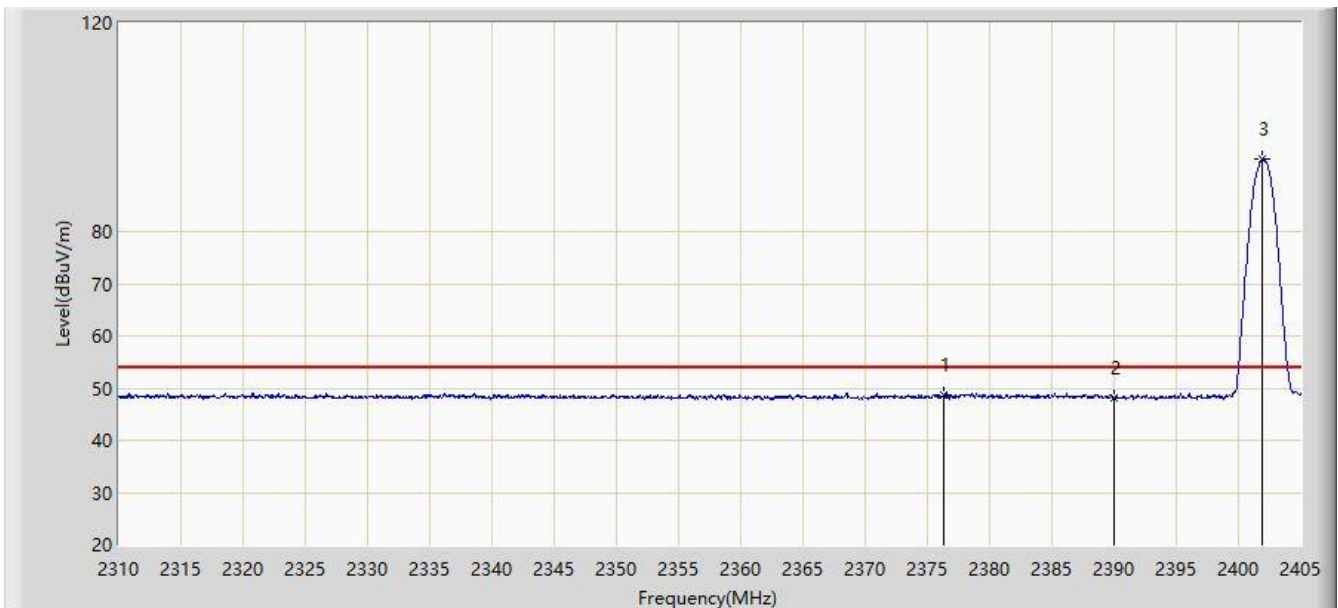


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2376.310        | 48.737                 | 16.026               | -5.263      | 54.000         | 32.711      | AV   |
| 2  |      |      | 2390.000        | 48.107                 | 15.541               | -5.893      | 54.000         | 32.566      | AV   |
| 3  |      | *    | 2401.913        | 93.847                 | 61.387               | N/A         | N/A            | 32.460      | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                          |                          |
|------------------------------------------|--------------------------|
| Site: WZ-AC1                             | Time: 2020/10/17 - 15:01 |
| Limit: FCC_Part15.209_RE(3m)             | Engineer: Messiah Li     |
| Probe: BBHA9120D_1-18GHz                 | Polarity: Vertical       |
| EUT: Ninebot Gokart Pro                  | Power: By Battery        |
| Note: Transmit by BLE at Channel 2402MHz |                          |

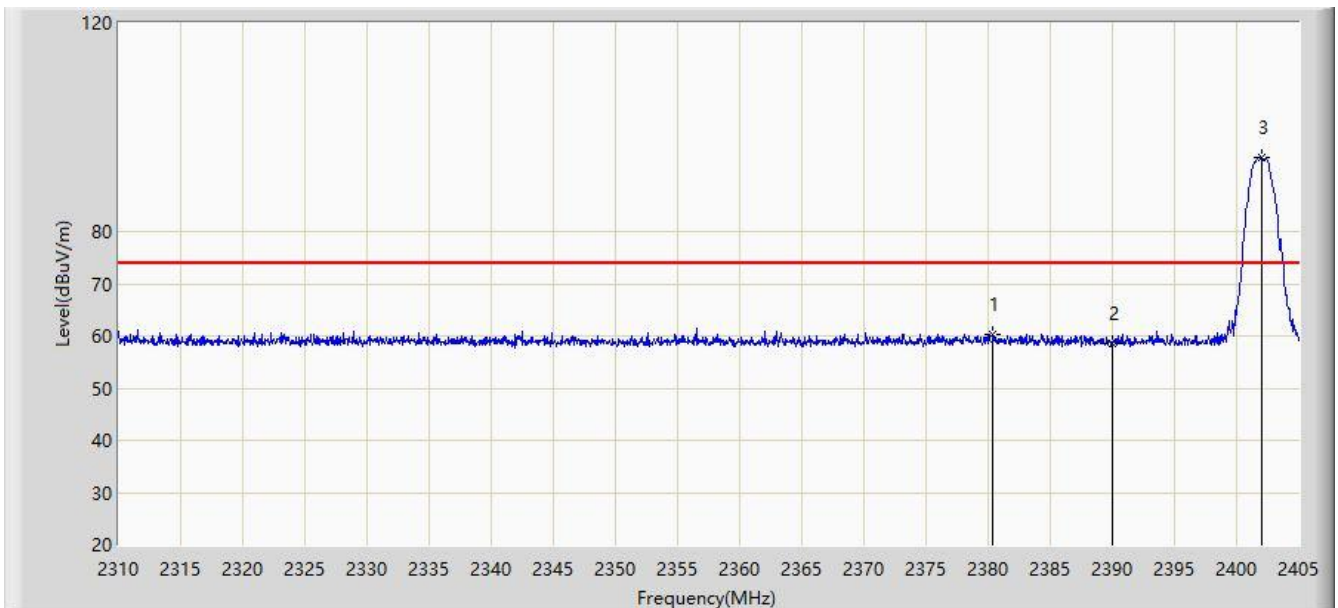


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2380.347        | 60.377                 | 27.628               | -13.623     | 74.000         | 32.749      | PK   |
| 2  |      |      | 2390.000        | 58.500                 | 25.934               | -15.500     | 74.000         | 32.566      | PK   |
| 3  |      | *    | 2402.008        | 94.115                 | 61.653               | N/A         | N/A            | 32.461      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                          |                          |
|------------------------------------------|--------------------------|
| Site: WZ-AC1                             | Time: 2020/10/17 - 15:02 |
| Limit: FCC_Part15.209_RE(3m)             | Engineer: Messiah Li     |
| Probe: BBHA9120D_1-18GHz                 | Polarity: Vertical       |
| EUT: Ninebot Gokart Pro                  | Power: By Battery        |
| Note: Transmit by BLE at Channel 2402MHz |                          |

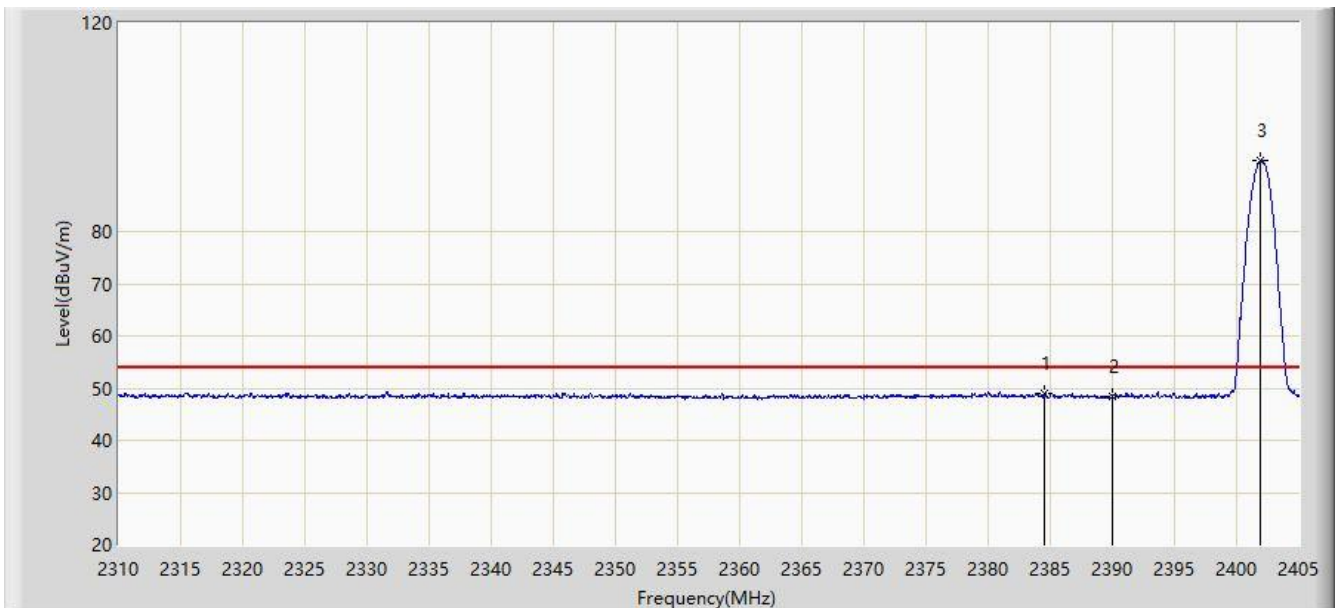


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2384.575        | 49.113                 | 16.444               | -4.887      | 54.000         | 32.668      | AV   |
| 2  |      |      | 2390.000        | 48.411                 | 15.845               | -5.589      | 54.000         | 32.566      | AV   |
| 3  |      | *    | 2401.913        | 93.545                 | 61.085               | N/A         | N/A            | 32.460      | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                          |                          |
|------------------------------------------|--------------------------|
| Site: WZ-AC1                             | Time: 2020/10/17 - 15:03 |
| Limit: FCC_Part15.209_RE(3m)             | Engineer: Messiah Li     |
| Probe: BBHA9120D_1-18GHz                 | Polarity: Horizontal     |
| EUT: Ninebot Gokart Pro                  | Power: By Battery        |
| Note: Transmit by BLE at Channel 2480MHz |                          |

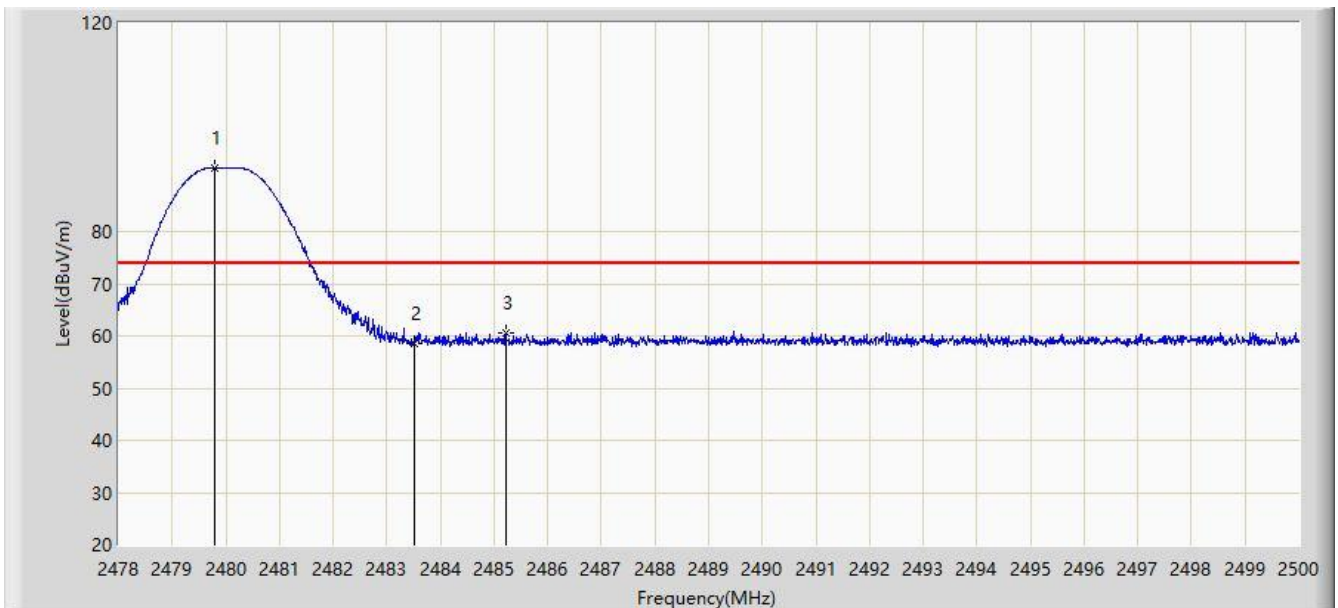


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 2479.804        | 92.223                 | 59.764               | N/A         | N/A            | 32.459      | PK   |
| 2  |      |      | 2483.500        | 58.656                 | 26.142               | -15.344     | 74.000         | 32.514      | PK   |
| 3  |      |      | 2485.216        | 60.639                 | 28.099               | -13.361     | 74.000         | 32.540      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                          |                          |
|------------------------------------------|--------------------------|
| Site: WZ-AC1                             | Time: 2020/10/17 - 15:05 |
| Limit: FCC_Part15.209_RE(3m)             | Engineer: Messiah Li     |
| Probe: BBHA9120D_1-18GHz                 | Polarity: Horizontal     |
| EUT: Ninebot Gokart Pro                  | Power: By Battery        |
| Note: Transmit by BLE at Channel 2480MHz |                          |

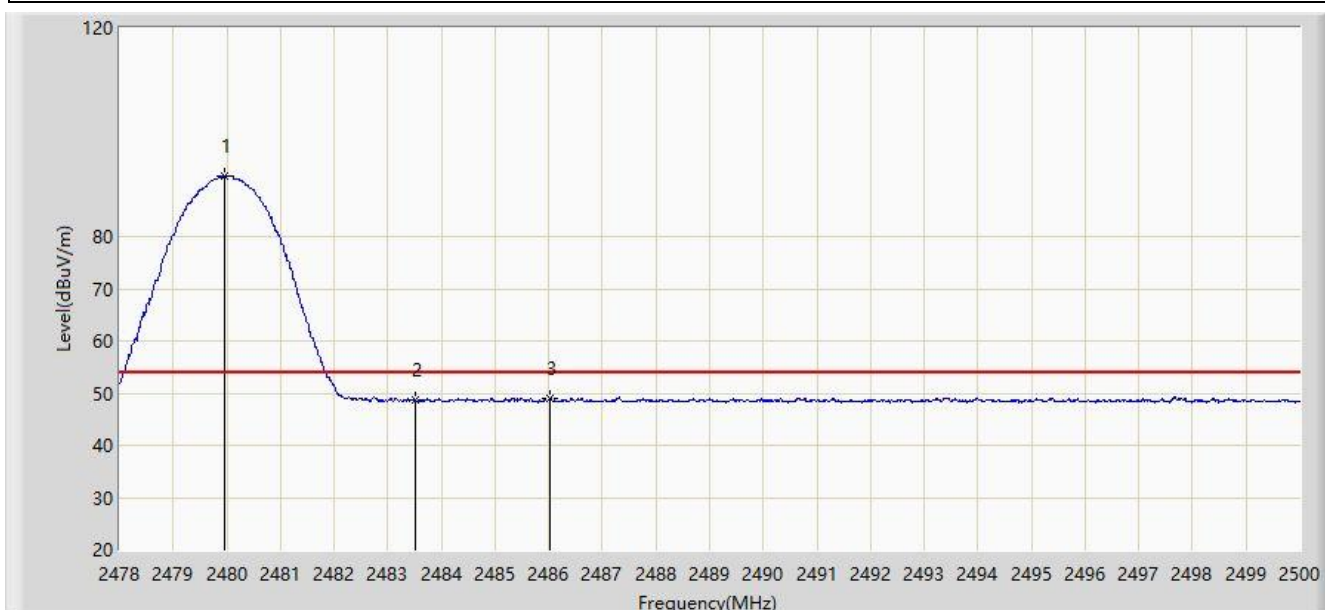


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 2479.958        | 91.631                 | 59.170               | N/A         | N/A            | 32.461      | AV   |
| 2  |      |      | 2483.500        | 48.640                 | 16.126               | -5.360      | 54.000         | 32.514      | AV   |
| 3  |      |      | 2486.030        | 49.052                 | 16.500               | -4.948      | 54.000         | 32.552      | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                          |                          |
|------------------------------------------|--------------------------|
| Site: WZ-AC1                             | Time: 2020/10/17 - 15:06 |
| Limit: FCC_Part15.209_RE(3m)             | Engineer: Messiah Li     |
| Probe: BBHA9120D_1-18GHz                 | Polarity: Vertical       |
| EUT: Ninebot Gokart Pro                  | Power: By Battery        |
| Note: Transmit by BLE at Channel 2480MHz |                          |

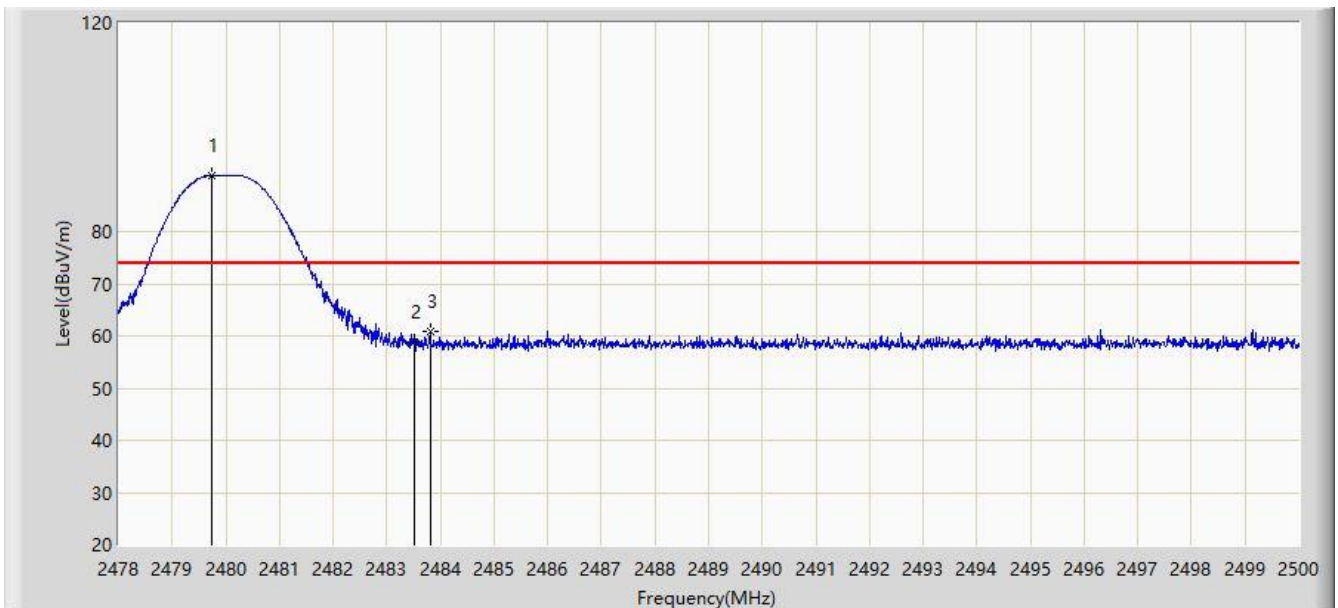


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 2479.738        | 90.715                 | 58.257               | N/A         | N/A            | 32.458      | PK   |
| 2  |      |      | 2483.500        | 58.876                 | 26.362               | -15.124     | 74.000         | 32.514      | PK   |
| 3  |      |      | 2483.808        | 60.814                 | 28.295               | -13.186     | 74.000         | 32.519      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                          |                          |
|------------------------------------------|--------------------------|
| Site: WZ-AC1                             | Time: 2020/10/17 - 15:08 |
| Limit: FCC_Part15.209_RE(3m)             | Engineer: Messiah Li     |
| Probe: BBHA9120D_1-18GHz                 | Polarity: Vertical       |
| EUT: Ninebot Gokart Pro                  | Power: By Battery        |
| Note: Transmit by BLE at Channel 2480MHz |                          |

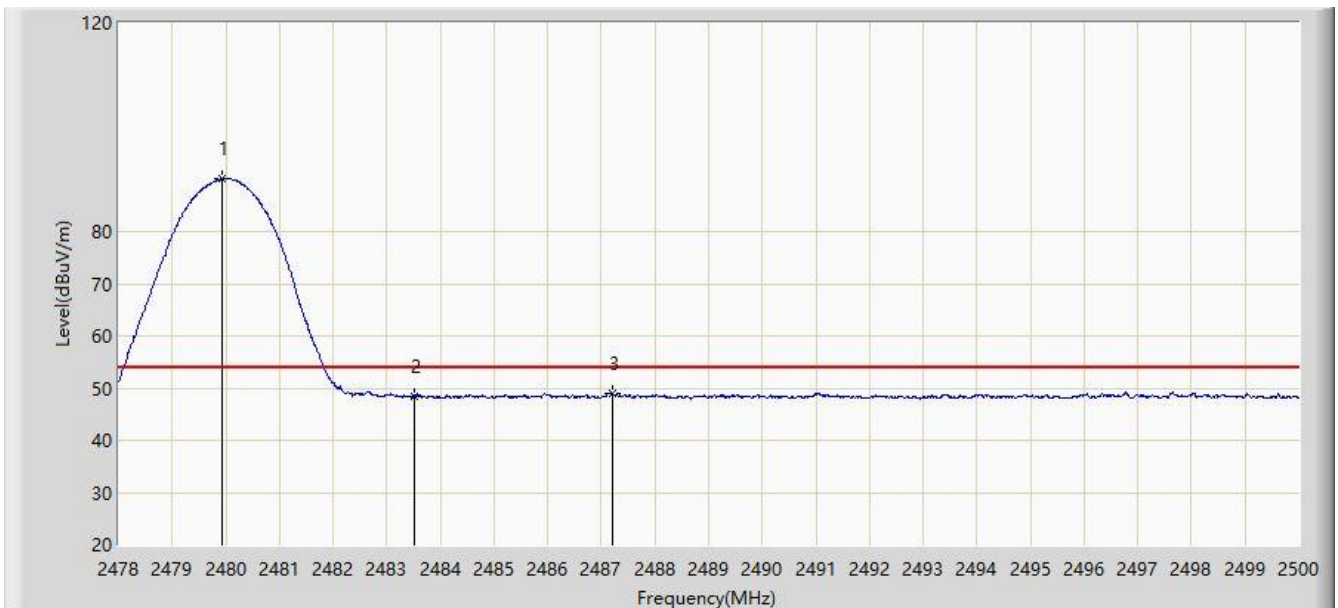

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 2479.925        | 90.040                 | 57.579               | N/A         | N/A            | 32.461      | AV   |
| 2  |      |      | 2483.500        | 48.358                 | 15.844               | -5.642      | 54.000         | 32.514      | AV   |
| 3  |      |      | 2487.196        | 49.060                 | 16.491               | -4.940      | 54.000         | 32.569      | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

## 6.8. AC Conducted Emissions Measurement

### 6.8.1. Test Limit


FCC Part 15 Subpart C Paragraph 15.207 Limits & RSS-Gen Issue 5 Section 8.8 Limits

| Frequency (MHz) | QP (dBuV) | AV (dBuV) |
|-----------------|-----------|-----------|
| 0.15 - 0.50     | 66 - 56   | 56 - 46   |
| 0.50 - 5.0      | 56        | 46        |
| 5.0 - 30        | 60        | 50        |

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

### 6.8.2. Test Setup

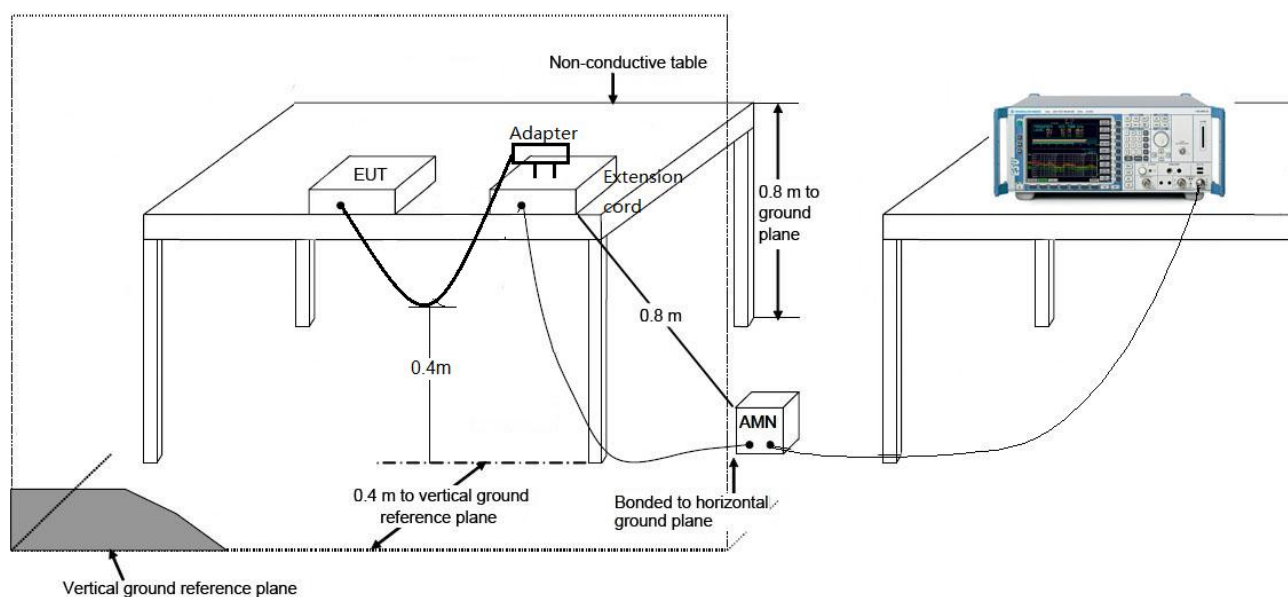

### 6.8.3.Test Result

|                                                      |                          |
|------------------------------------------------------|--------------------------|
| Site: WZ-SR2                                         | Time: 2020/03/31 - 14:13 |
| Limit: FCC_Part15.207_CE_AC Power                    | Engineer: Antony Yang    |
| Probe: ENV216_101683_Filter On                       | Polarity: Line           |
| EUT: Ninebot Gokart Pro                              | Power: AC 120V/60Hz      |
| <b>Test Mode:</b> Transmit by BLE at Channel 2480MHz |                          |

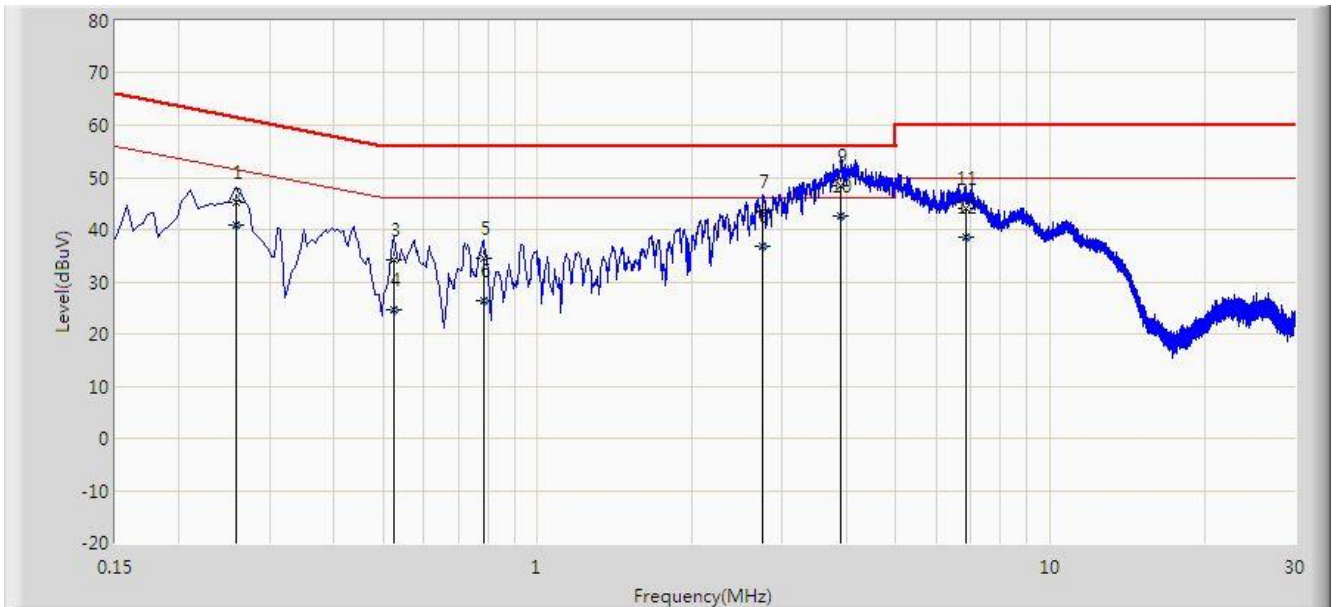


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV) | Factor (dB) | Type |
|----|------|------|-----------------|----------------------|----------------------|-------------|--------------|-------------|------|
| 1  |      |      | 0.258           | 45.212               | 35.548               | -16.284     | 61.496       | 9.664       | QP   |
| 2  |      |      | 0.258           | 40.741               | 31.077               | -10.755     | 51.496       | 9.664       | AV   |
| 3  |      |      | 0.526           | 34.242               | 24.500               | -21.758     | 56.000       | 9.742       | QP   |
| 4  |      |      | 0.526           | 24.740               | 14.998               | -21.260     | 46.000       | 9.742       | AV   |
| 5  |      |      | 0.786           | 34.529               | 24.736               | -21.471     | 56.000       | 9.792       | QP   |
| 6  |      |      | 0.786           | 26.482               | 16.689               | -19.518     | 46.000       | 9.792       | AV   |
| 7  |      |      | 2.750           | 43.335               | 33.488               | -12.665     | 56.000       | 9.848       | QP   |
| 8  |      |      | 2.750           | 36.776               | 26.928               | -9.224      | 46.000       | 9.848       | AV   |
| 9  |      |      | 3.914           | 48.493               | 38.463               | -7.507      | 56.000       | 10.030      | QP   |
| 10 |      | *    | 3.914           | 42.505               | 32.475               | -3.495      | 46.000       | 10.030      | AV   |
| 11 |      |      | 6.846           | 44.055               | 33.727               | -15.945     | 60.000       | 10.328      | QP   |
| 12 |      |      | 6.846           | 38.644               | 28.316               | -11.356     | 50.000       | 10.328      | AV   |

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

|                                                      |                          |
|------------------------------------------------------|--------------------------|
| Site: WZ-SR2                                         | Time: 2020/03/31 - 14:17 |
| Limit: FCC_Part15.207_CE_AC Power                    | Engineer: Antony Yang    |
| Probe: ENV216_101683_Filter On                       | Polarity: Neutral        |
| EUT: Ninebot Gokart Pro                              | Power: AC 120V/60Hz      |
| <b>Test Mode:</b> Transmit by BLE at Channel 2480MHz |                          |

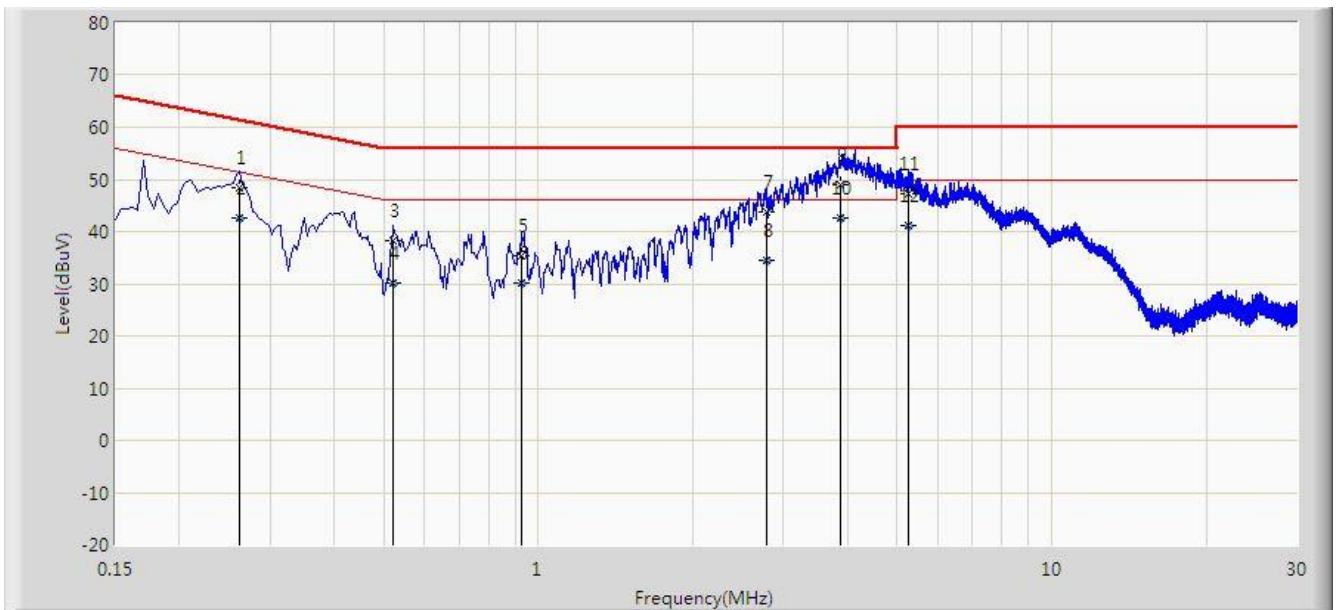

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV) | Factor (dB) | Type |
|----|------|------|-----------------|----------------------|----------------------|-------------|--------------|-------------|------|
| 1  |      |      | 0.262           | 48.326               | 38.692               | -13.042     | 61.368       | 9.634       | QP   |
| 2  |      |      | 0.262           | 42.524               | 32.891               | -8.843      | 51.368       | 9.634       | AV   |
| 3  |      |      | 0.522           | 38.320               | 28.660               | -17.680     | 56.000       | 9.661       | QP   |
| 4  |      |      | 0.522           | 30.068               | 20.407               | -15.932     | 46.000       | 9.661       | AV   |
| 5  |      |      | 0.930           | 35.337               | 25.663               | -20.663     | 56.000       | 9.674       | QP   |
| 6  |      |      | 0.930           | 30.008               | 20.334               | -15.992     | 46.000       | 9.674       | AV   |
| 7  |      |      | 2.774           | 43.792               | 33.999               | -12.208     | 56.000       | 9.793       | QP   |
| 8  |      |      | 2.774           | 34.433               | 24.640               | -11.567     | 46.000       | 9.793       | AV   |
| 9  |      |      | 3.880           | 49.088               | 39.128               | -6.912      | 56.000       | 9.960       | QP   |
| 10 |      | *    | 3.880           | 42.668               | 32.708               | -3.332      | 46.000       | 9.960       | AV   |
| 11 |      |      | 5.258           | 47.131               | 37.026               | -12.869     | 60.000       | 10.105      | QP   |
| 12 |      |      | 5.258           | 41.032               | 30.927               | -8.968      | 50.000       | 10.105      | AV   |

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

## 7. CONCLUSION

The data collected relate only the item(s) tested and show that the device is in compliance with Part 15.247 of the FCC Rules and RSS-247 Section 5 of the ISED Rules.

\_\_\_\_\_ The End \_\_\_\_\_

## **Appendix A - Test Setup Photograph**

Refer to “2010RSU003-UT” file.

## **Appendix B - EUT Photograph**

Refer to "2010RSU003-UE" file.