

FCC RF Test Report

APPLICANT : BlackBerry Ltd.
EQUIPMENT : GSM Quad-band / UMTS Penta-band
/ LTE Deca-band mobile phone
BRAND NAME : BlackBerry
MODEL NAME : STH100-2 (RJD211LW)
FCC ID : L6ARLD210LW
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System

The product was received on Apr. 29, 2016 and testing was completed on Jun. 17, 2016. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.



Prepared by: James Huang / Manager



Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL (KUNSHAN) INC.
No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China



TABLE OF CONTENTS

1	GENERAL DESCRIPTION	5
1.1	Applicant	5
1.2	Manufacturer	5
1.3	Product Feature of Equipment Under Test	5
1.4	Product Specification of Equipment Under Test	6
1.5	Modification of EUT	6
1.6	Testing Location	6
1.7	Specification of Accessory	7
1.8	Applicable Standards	7
2	TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1	Carrier Frequency Channel	8
2.2	Pre-Scanned RF Power	9
2.3	Test Mode	10
2.4	Connection Diagram of Test System	11
2.5	Support Unit used in test configuration and system	12
2.6	EUT Operation Test Setup	12
2.7	Measurement Results Explanation Example	13
3	TEST RESULT	14
3.1	6dB Bandwidth Measurement	14
3.2	Output Power Measurement	16
3.3	Power Spectral Density Measurement	18
3.4	Conducted Band Edges and Spurious Emission Measurement	20
3.5	Radiated Band Edges and Spurious Emission Measurement	36
3.6	AC Conducted Emission Measurement	40
3.7	Antenna Requirements	44
4	LIST OF MEASURING EQUIPMENT	45
5	UNCERTAINTY OF EVALUATION	46
APPENDIX A. CONDUCTED TEST RESULTS		
APPENDIX B. RADIATED TEST RESULTS		
APPENDIX C. DUTY CYCLE PLOTS		
APPENDIX D. SETUP PHOTOGRAPHS		



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR642912C	Rev. 01	Initial issue of report	Jun. 24, 2016



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.2	15.247(b)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 1.41 dB at 2483.520 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 5.51 dB at 0.540 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-



1 General Description

1.1 Applicant

BlackBerry Ltd.

2200 University Ave E., Waterloo, ON, CAN. N2K0A7

1.2 Manufacturer

TCL Communication Ltd

5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park, Pudong Area Shanghai, P.R. China. 201203

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	GSM Quad-band / UMTS Penta-band / LTE Deca-band mobile phone
Brand Name	BlackBerry
Model Name	STH100-2 (RJD211LW)
FCC ID	L6ARLD210LW
EUT supports Radios application	GSM/GPRS/EGPRS/WCDMA/HSPA/DC-HSDPA/ HSPA+(16QAM uplink is not supported)/LTE/NFC/ WLAN 2.4GHz 802.11b/g/n HT20/ WLAN 5GHz 802.11a/n HT20/HT40/ WLAN 5GHz 802.11ac VHT20/VHT40/VHT80/ Bluetooth v3.0+EDR/ Bluetooth v4.0 LE/ Bluetooth v4.2 LE
IMEI Code	Conducted: 004402243119892 Conduction: 004402243119900 Radiation: 004402243119918
HW Version	PIO
SW Version	AAF155
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	802.11b/g/n : 2412 MHz ~ 2472 MHz
Maximum (Peak) Output Power to Antenna	802.11b : 21.05 dBm (0.1274 W) 802.11g : 23.02 dBm (0.2004 W) 802.11n HT20 : 23.02 dBm (0.2004 W)
Antenna Type/Gain	IFA Antenna with gain -2.50 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Test Site	SPORTON INTERNATIONAL (KUNSHAN) INC.			
Test Site Location	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958			
Test Site No.	Sporton Site No.			FCC Registration No.
	TH01-KS	03CH03-KS	CO01-KS	306251

Note: The test site complies with ANSI C63.4 2014 requirement.

1.7 Specification of Accessory

Specification of Accessory				
AC Adapter	Brand Name	N/A	Model Name	UC13US
	Power Rating	I/P: 100 - 240Vac 0.5A, O/P:5V 2.0A		
	Manufacturer	BYD		
	S/N	CBA0059AG4C1		
Battery 1	Brand Name	N/A	Model Name	TLp026EJ
	Power Rating	3.85V 2610mAh		
	Manufacturer	COSLIGHT		
	P/N	C2610010CJ		
Battery 2	Brand Name	N/A	Model Name	TLp026E2
	Power Rating	3.84V 2610mAh		
	Manufacturer	SCUD		
	P/N	C2610011C2		
USB Cable 1	Brand Name	NA	Model Name	NA
	Signal Line Type	1.0 meter, shielded cable, without ferrite core		
	P/N	CDA0000043C8		
USB Cable 2	Brand Name	NA	Model Name	NA
	Signal Line Type	1.0 meter, shielded cable, without ferrite core		
	P/N	CDA0000043C2		
Earphone	Brand Name	NA	Model Name	NA
	Signal Line Type	1.25 meter, non-shielded cable, without ferrite core		
	P/N	CCB0045A15C3		

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.247
- FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05
- ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases were recorded in this report.

The final configuration from all the combinations and the worst-case data rates were investigated by measuring the maximum power across all the data rates and modulation modes under section 2.2.

Based on the worst configuration found above, the RF power setting is set individually to meet FCC compliance limit for the final conducted and radiated tests shown in section 2.3.

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	8	2447
	2	2417	9	2452
	3	2422	10	2457
	4	2427	11	2462
	5	2432	12	2467
	6	2437	13	2472
	7	2442	-	-

2.2 Pre-Scanned RF Power

Preliminary tests were performed in different data rate and data rate associated with the highest power were chosen for full test shown in the following tables.

2.4GHz 802.11b RF Output Power (dBm)						
Power vs. Channel			Power vs. Data Rate			
Channel	Frequency (MHz)	Data Rate 1Mbps	Channel	2Mbps	5.5Mbps	11Mbps
CH 01	2412	21.05	CH 01	20.92	20.95	21.01
CH 06	2437	20.44				
CH 11	2462	20.09				
CH 12	2467	18.23				
CH 13	2472	13.22				

2.4GHz 802.11g RF Output Power (dBm)										
Power vs. Channel			Power vs. Data Rate							
Channel	Frequency (MHz)	Data Rate	Channel	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
		6Mbps								
CH 01	2412	23.02	CH 01	22.89	22.98	22.95	22.99	22.90	22.96	23.00
CH 06	2437	22.77								
CH 11	2462	22.56								
CH 12	2467	21.56								
CH 13	2472	18.36								

2.4GHz 802.11n HT20 RF Output Power (dBm)										
Power vs. Channel			Power vs. MCS Index							
Channel	Frequency (MHz)	MCS Index	Channel	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
		MCS0								
CH 01	2412	23.02	CH 01	22.90	22.91	22.96	22.99	22.95	22.73	22.68
CH 06	2437	22.74								
CH 11	2462	22.53								
CH 12	2467	21.61								
CH 13	2472	18.42								

2.3 Test Mode

Final test mode of conducted test items and radiated spurious emissions are considering the modulation and worse data rates from the power table described in section 2.2.


<2.4GHz>

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0


Test Cases	
AC Conducted Emission	Mode 1: GSM850 Idle + Bluetooth Link + WLAN Link(2.4G) + Earphone + Battery 1 + USB Cable 1(Charging from Adapter)

2.4 Connection Diagram of Test System

<WLAN Tx Mode>

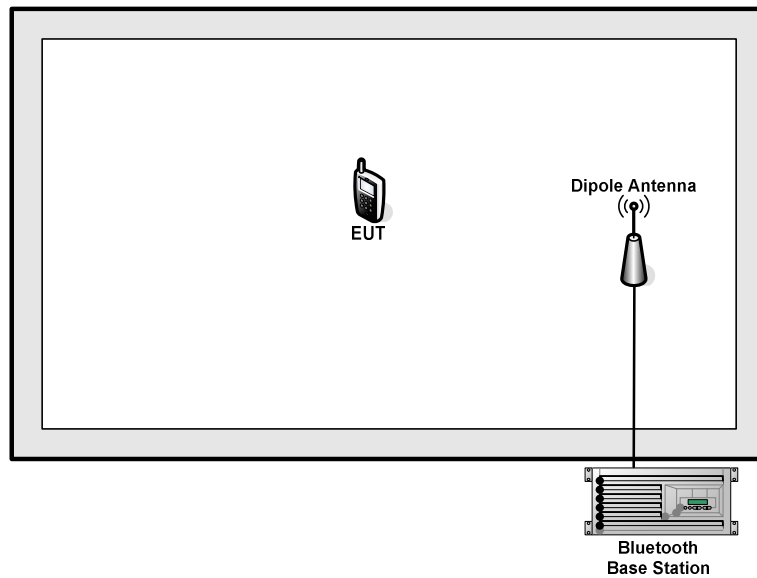

<AC Conducted Emission Mode>

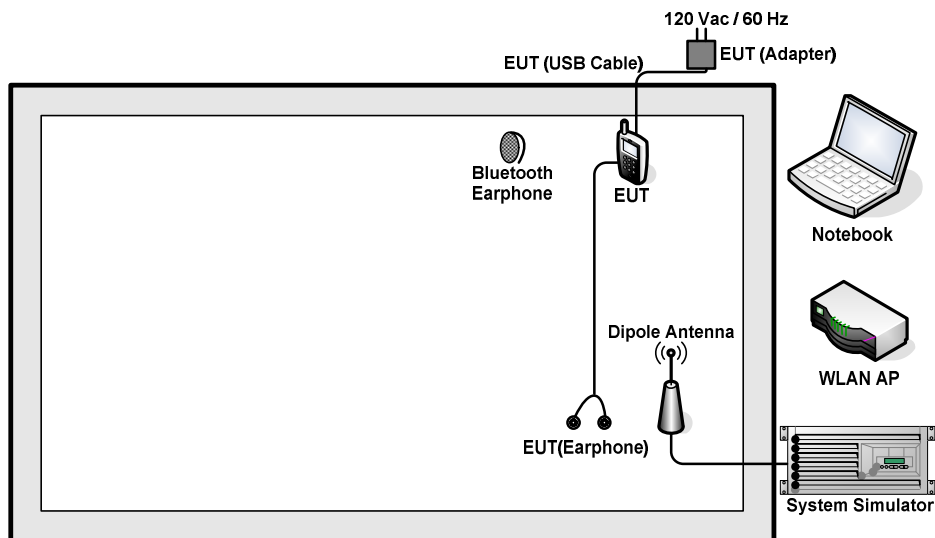



2.5 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	Bluetooth Base Station	R&S	CBT	N/A	N/A	Unshielded, 1.8 m
3.	WLAN AP	LINKSYS	WRT600N	Q87-WRT600NV11	N/A	Unshielded, 1.8 m
4.	Notebook	Lenovo	G480	N/A	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
5.	Bluetooth Earphone	Lenovo	LBH505	N/A	N/A	N/A

2.6 EUT Operation Test Setup

For WLAN function, the engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.



2.7 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 5.5 dB.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)}. \\ &= 5.5 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB Bandwidth Measurement

3.1.1 Limit of 6dB Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 DTS D01 Meas. Guidance v03r05.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. Measure and record the results in the test report.


3.1.4 Test Setup

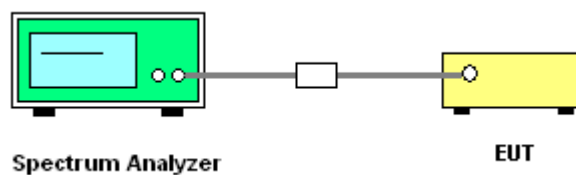



3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A of this test report.

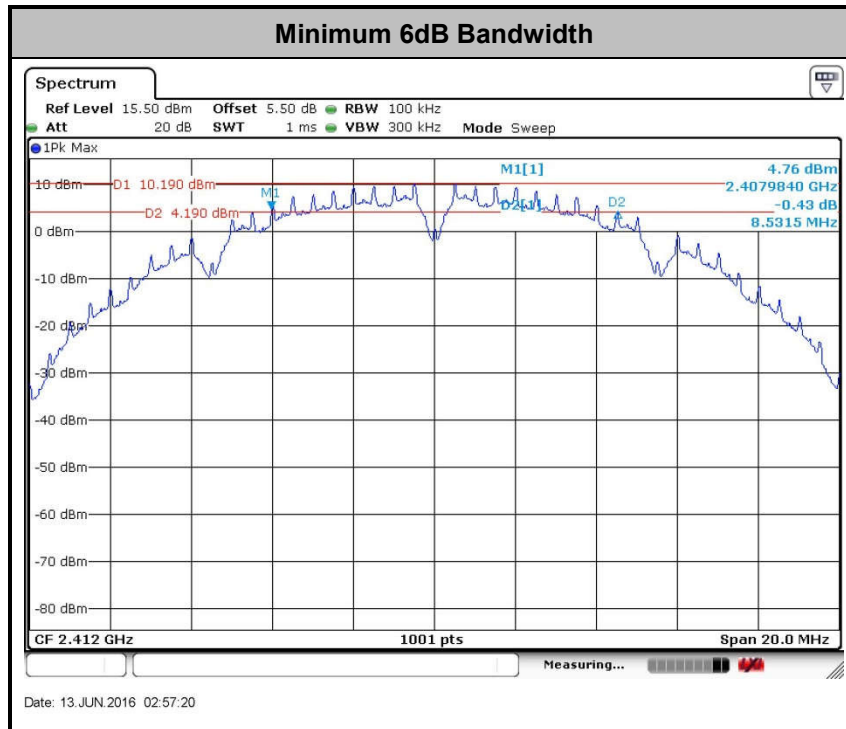

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna with directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v03r05 section 9.1.2 PKPM1 Peak power meter method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

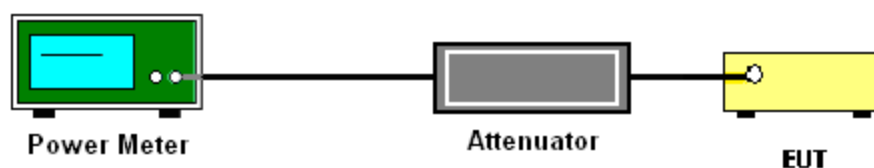



3.2.5 Test Result of Peak Output Power

Please refer to Appendix A of this test report.

3.2.6 Test Result of Average output Power (Reporting Only)

Please refer to Appendix A of this test report.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures


1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.

3.3.4 Test Setup

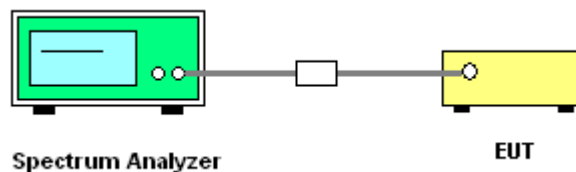

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A of this test report.

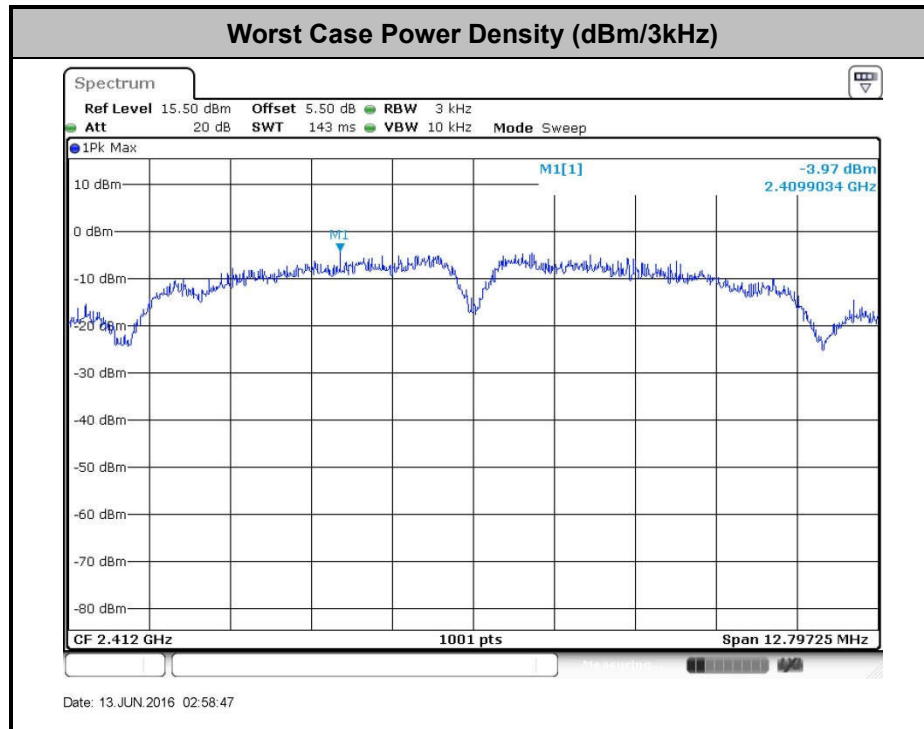

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement and radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures


1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

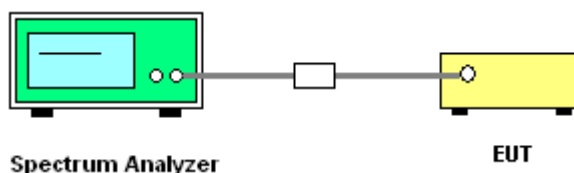




**3.4.5 Test Result of Conducted Band Edges and Spurious Emission**

Test Mode :	802.11b	Temperature :	24~25℃
Test Band :	2.4GHz Low	Relative Humidity :	54~55%
Test Channel :	01	Test Engineer :	Ivan Wang

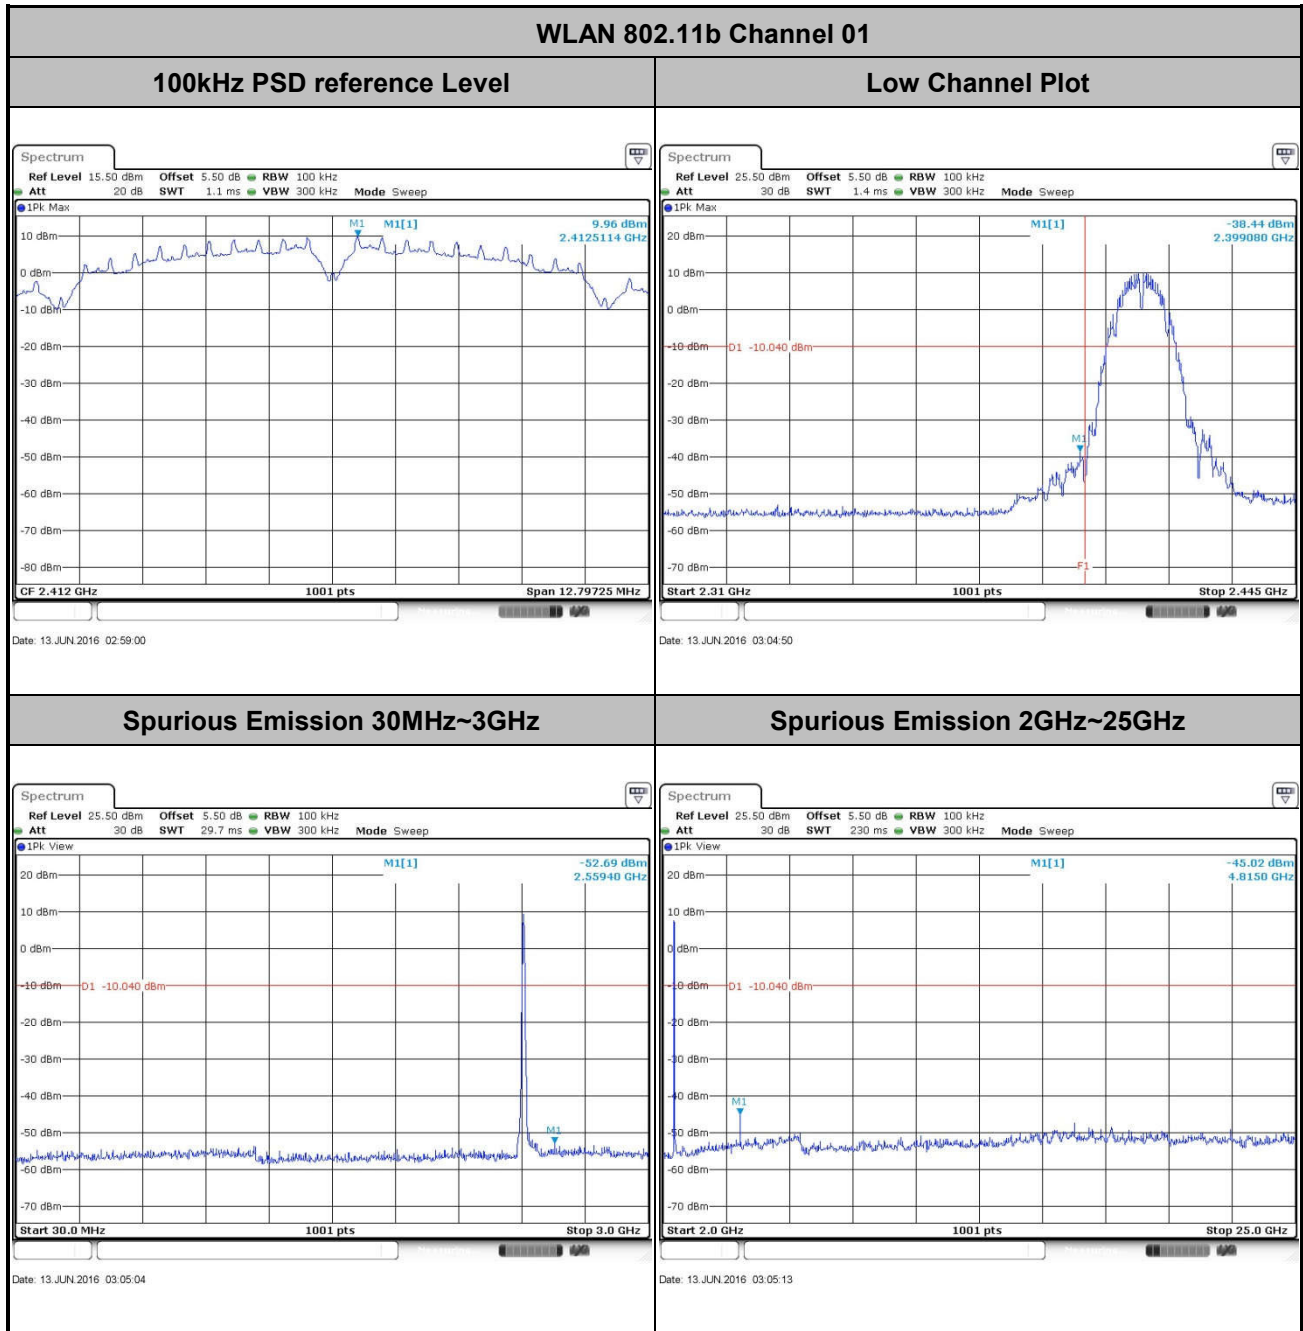




Test Mode :	802.11b	Temperature :	24~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	54~55%
Test Channel :	06	Test Engineer :	Ivan Wang

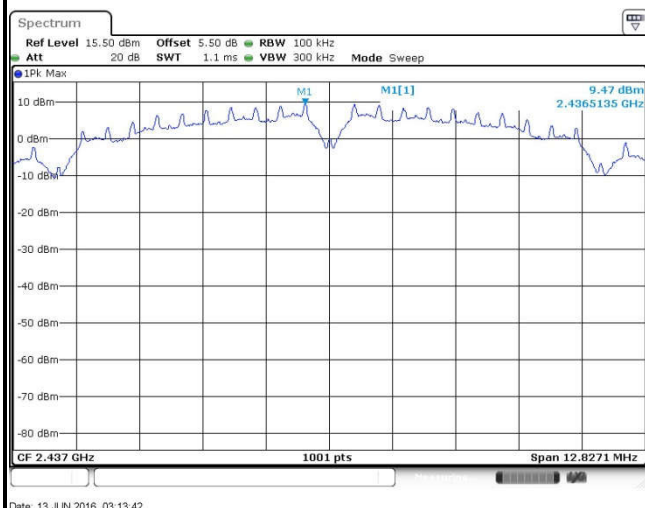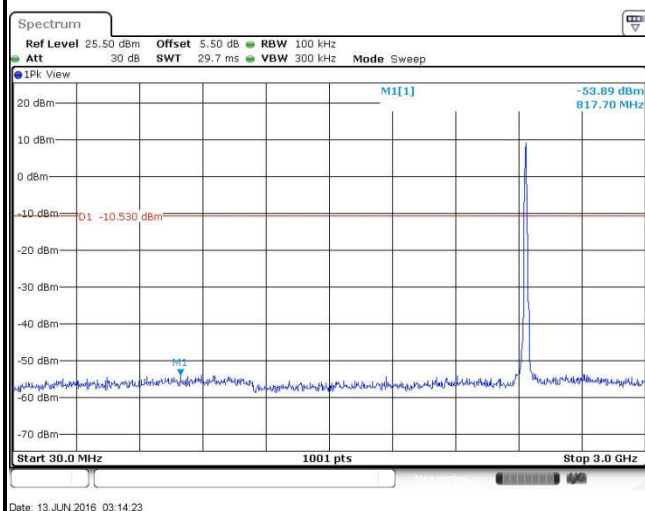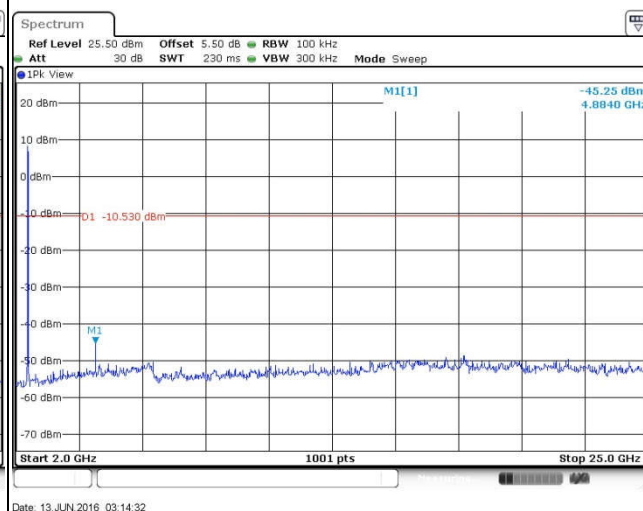
WLAN 802.11b Channel 06**100kHz PSD reference Level****Spurious Emission 30MHz~3GHz****Spurious Emission 2GHz~25GHz**




Test Mode :	802.11b	Temperature :	24~25°C
Test Band :	2.4GHz High	Relative Humidity :	54~55%
Test Channel :	11	Test Engineer :	Ivan Wang

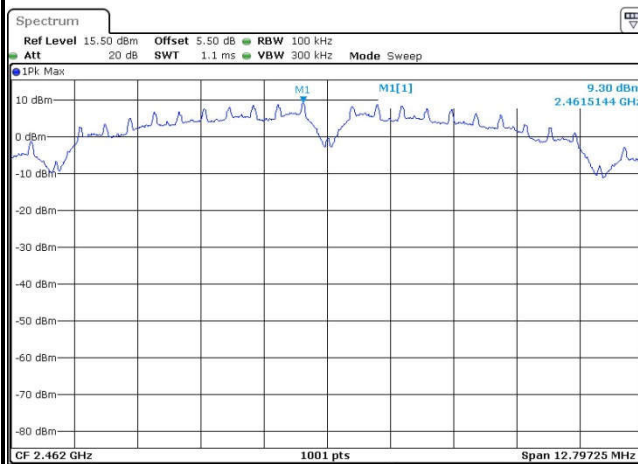WLAN 802.11b Channel 11**100kHz PSD reference Level**


Date: 13 JUN 2016 03:17:29

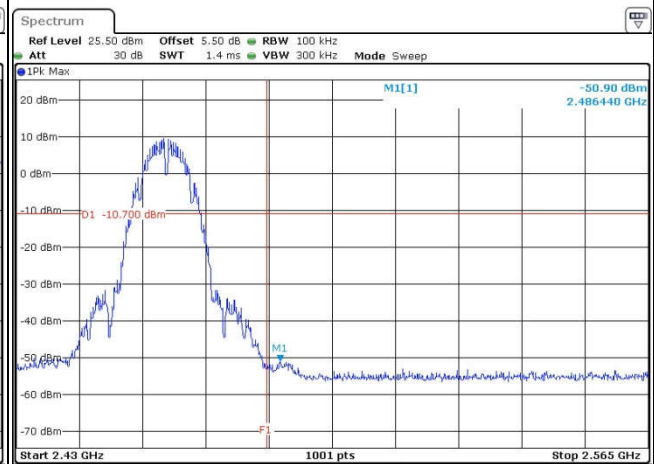High Channel Plot

Date: 13 JUN 2016 03:18:26

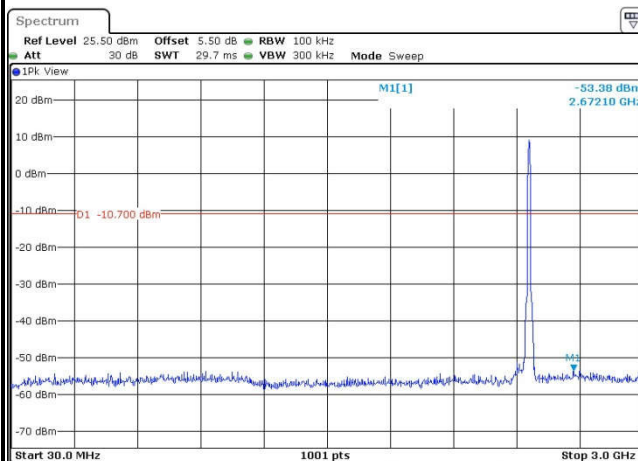Spurious Emission 30MHz~3GHz

Date: 13 JUN 2016 03:19:17

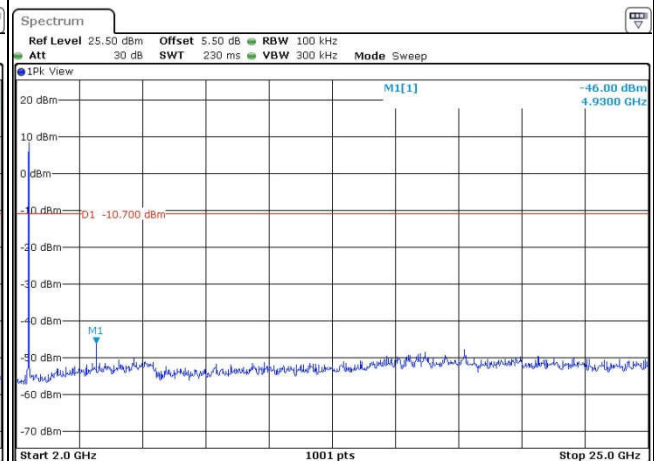Spurious Emission 2GHz~25GHz


Date: 13 JUN 2016 03:19:25



Test Mode :	802.11b	Temperature :	24~25°C
Test Band :	2.4GHz High	Relative Humidity :	54~55%
Test Channel :	12	Test Engineer :	Ivan Wang


WLAN 802.11b Channel 12

100kHz PSD reference Level

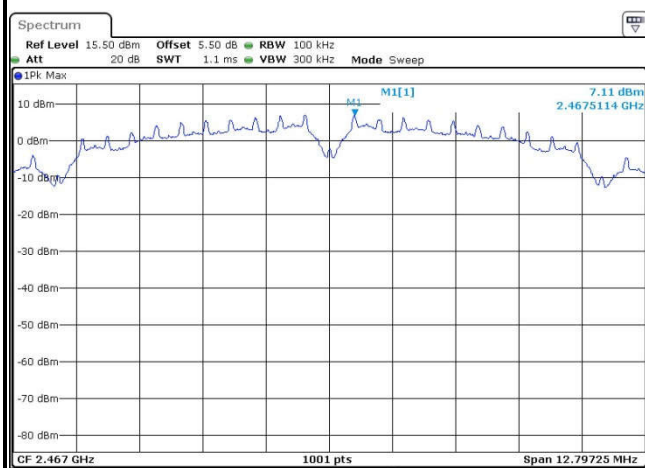


Date: 13 JUN 2016 04:09:43

High Channel Plot

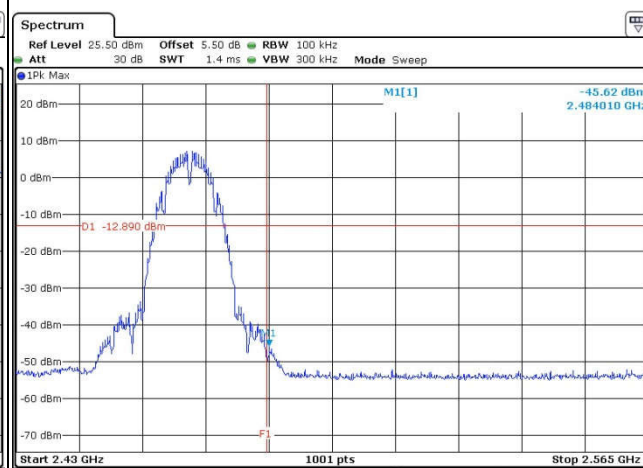


Date: 13 JUN 2016 04:14:20

Spurious Emission 30MHz~3GHz

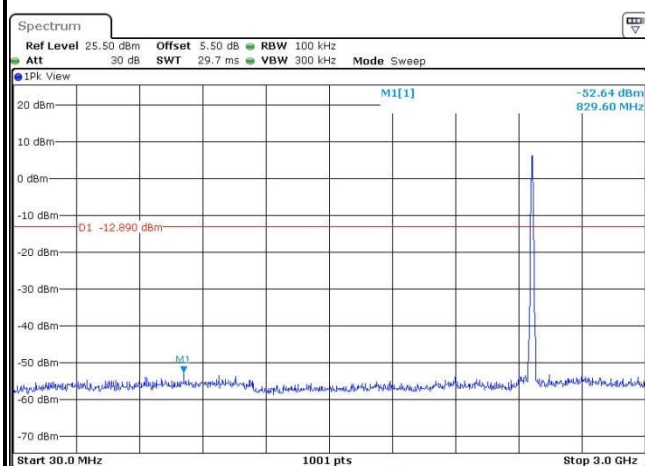

Date: 13 JUN 2016 04:15:39


Spurious Emission 2GHz~25GHz

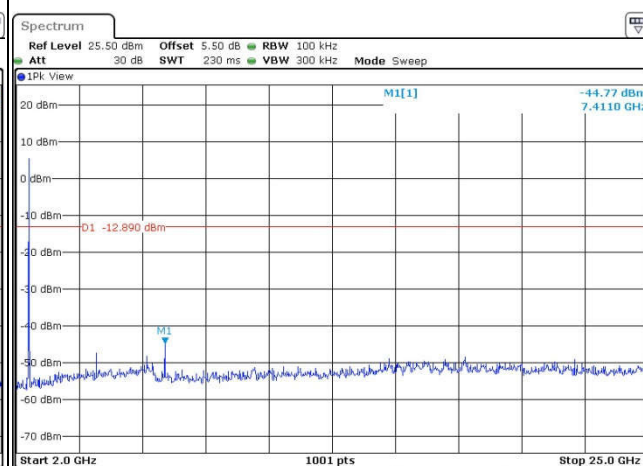


Date: 13 JUN 2016 04:15:47




Test Mode :	802.11b	Temperature :	24~25°C
Test Band :	2.4GHz High	Relative Humidity :	54~55%
Test Channel :	13	Test Engineer :	Ivan Wang

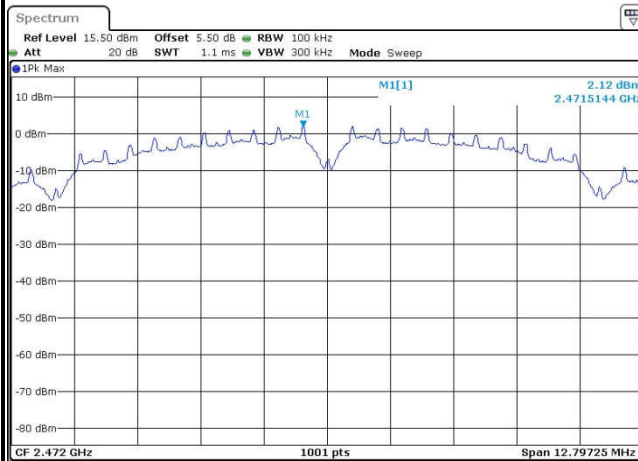WLAN 802.11b Channel 13**100kHz PSD reference Level**


Date: 13 JUN 2016 04:24:51

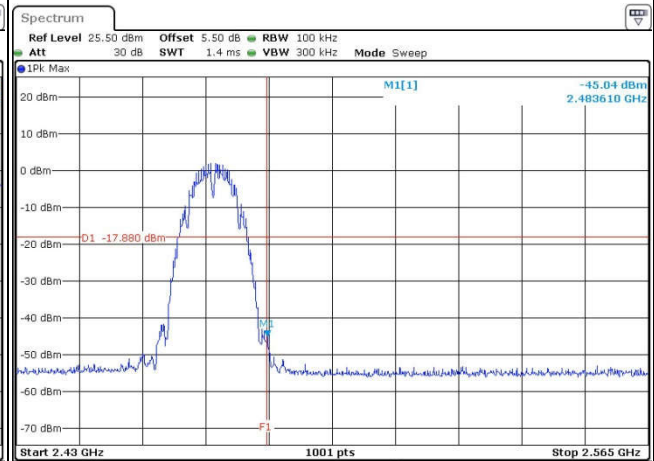High Channel Plot

Date: 13 JUN 2016 04:25:46

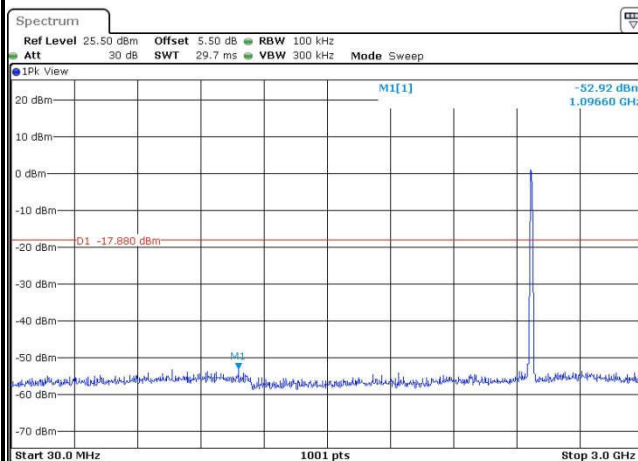Spurious Emission 30MHz~3GHz





Date: 13 JUN 2016 04:26:12

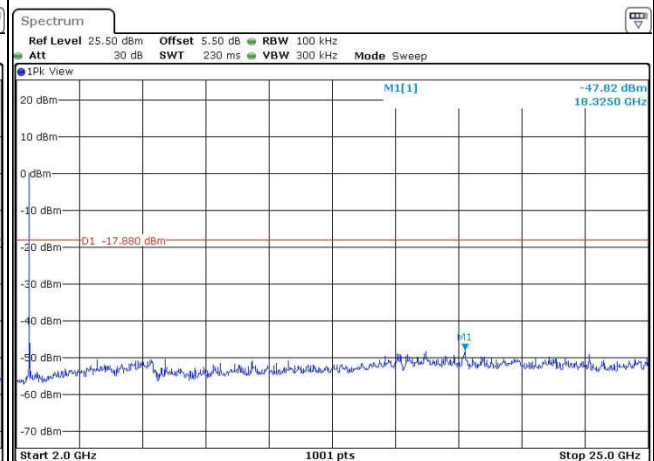Spurious Emission 2GHz~25GHz

Date: 13 JUN 2016 04:26:21






Test Mode :	802.11g	Temperature :	24~25°C
Test Band :	2.4GHz Low	Relative Humidity :	54~55%
Test Channel :	01	Test Engineer :	Ivan Wang

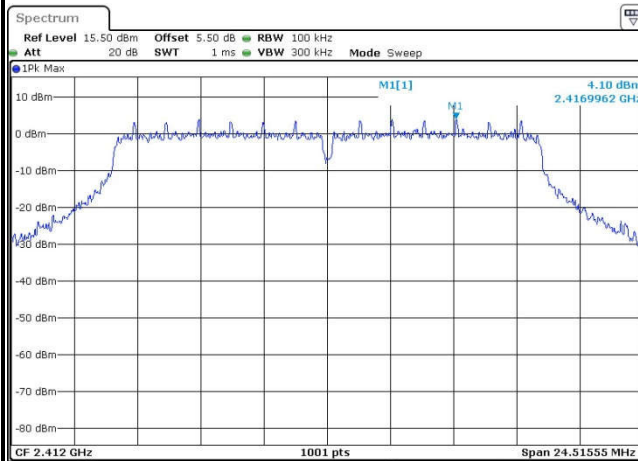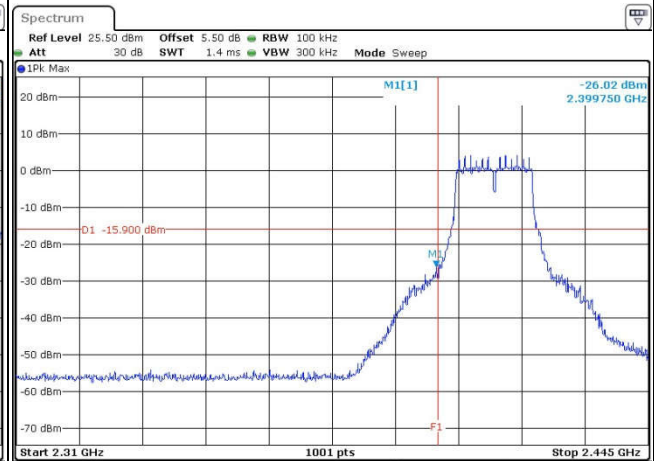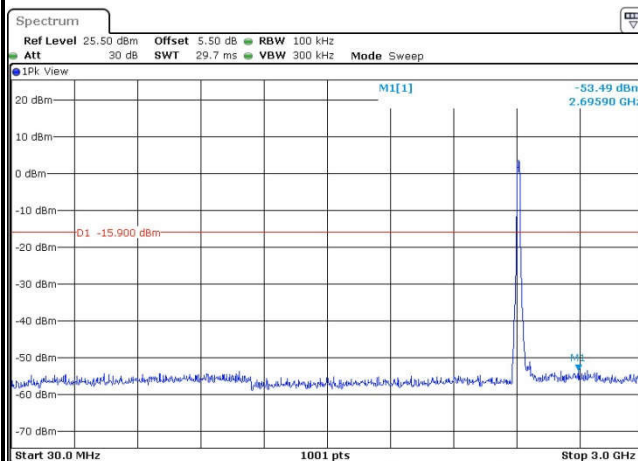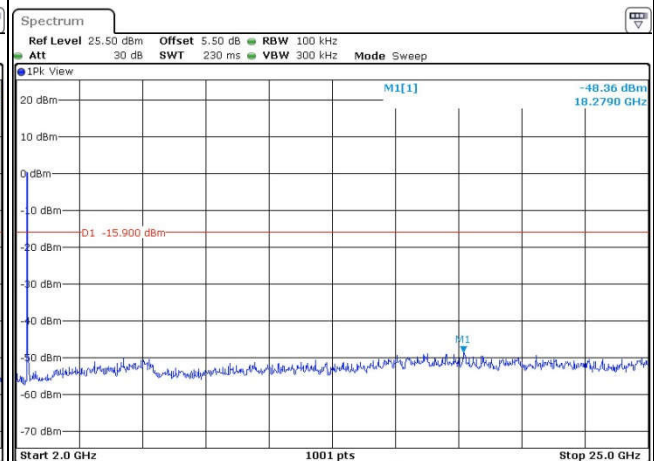WLAN 802.11g Channel 01**100kHz PSD reference Level****Low Channel Plot****Spurious Emission 30MHz~3GHz****Spurious Emission 2GHz~25GHz**



Test Mode :	802.11g	Temperature :	24~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	54~55%
Test Channel :	06	Test Engineer :	Ivan Wang

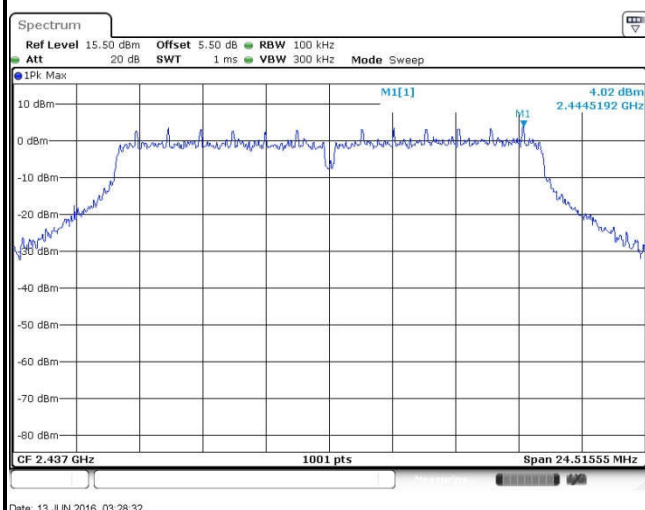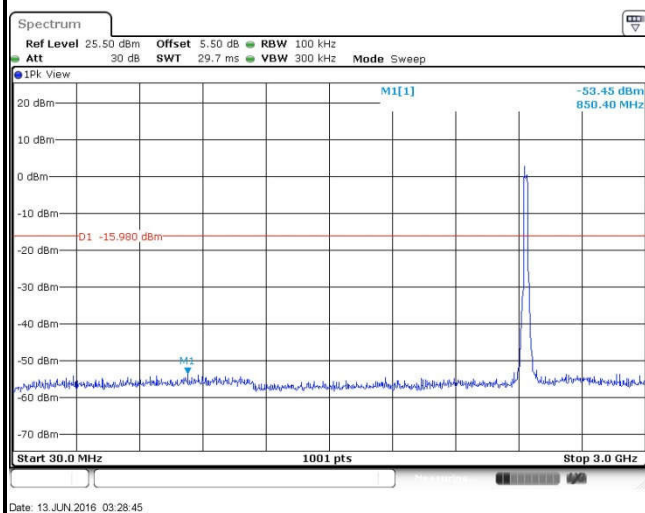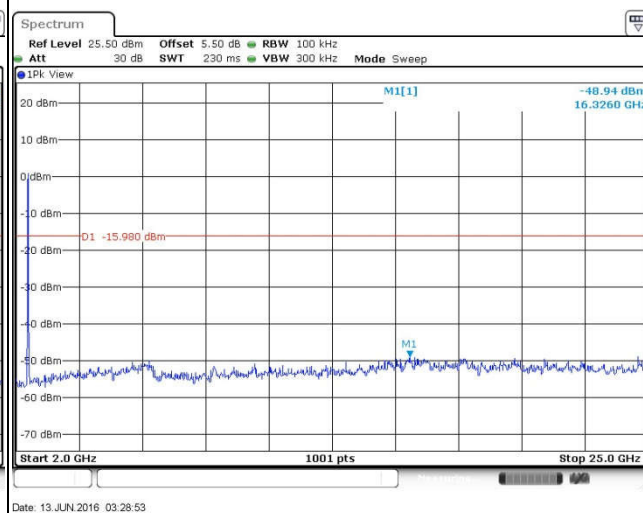
WLAN 802.11g Channel 06**100kHz PSD reference Level****Spurious Emission 30MHz~3GHz****Spurious Emission 2GHz~25GHz**



Test Mode :	802.11g	Temperature :	24~25°C
Test Band :	2.4GHz High	Relative Humidity :	54~55%
Test Channel :	11	Test Engineer :	Ivan Wang


WLAN 802.11g Channel 11

100kHz PSD reference Level

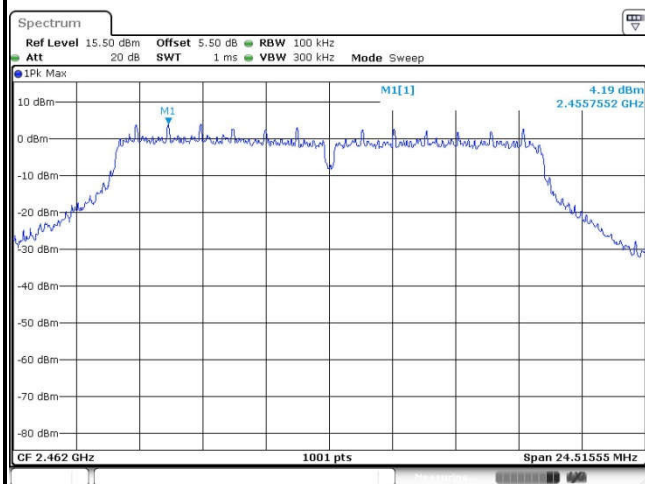


Date: 13 JUN 2016 03:31:45

High Channel Plot

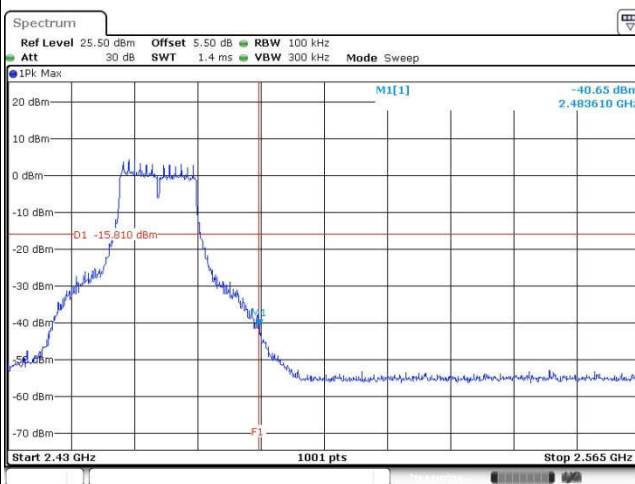


Date: 13 JUN 2016 03:32:24

Spurious Emission 30MHz~3GHz

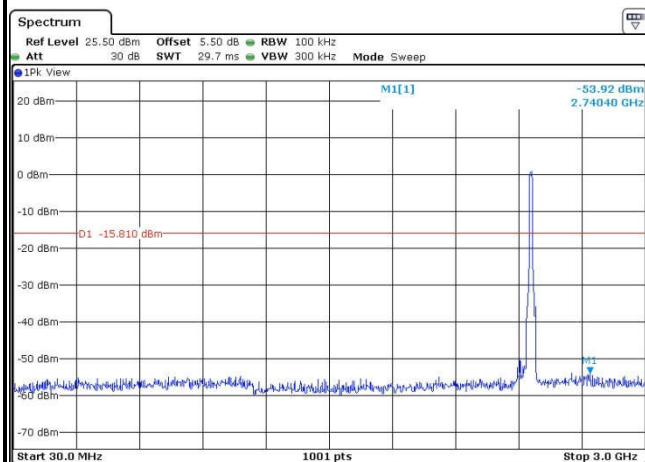

Date: 13 JUN 2016 03:36:21

Spurious Emission 2GHz~25GHz

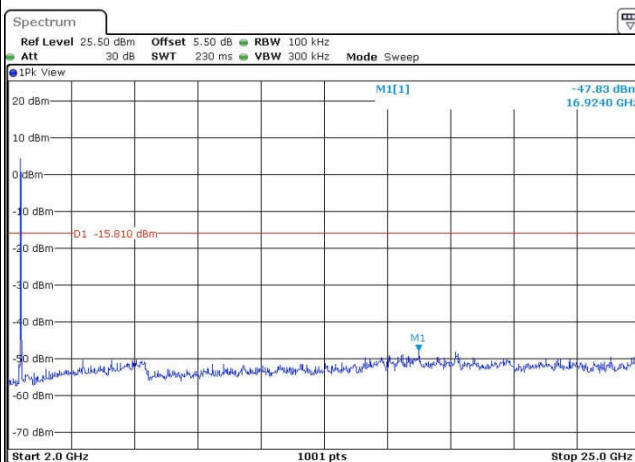


Date: 13 JUN 2016 03:34:54




Test Mode :	802.11g	Temperature :	24~25°C
Test Band :	2.4GHz High	Relative Humidity :	54~55%
Test Channel :	12	Test Engineer :	Ivan Wang

WLAN 802.11g Channel 12


100kHz PSD reference Level

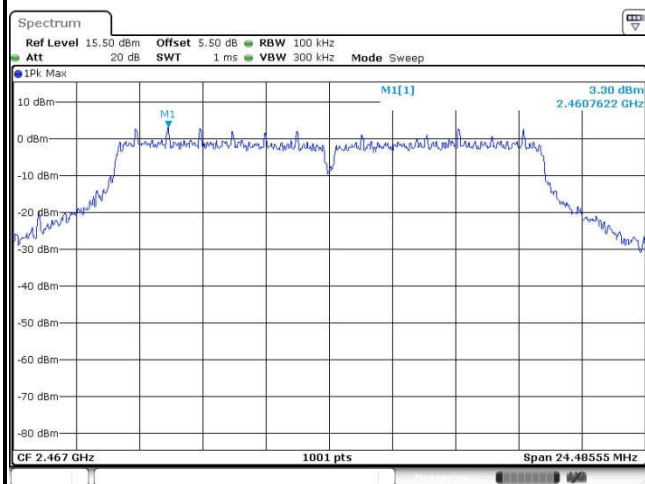


High Channel Plot

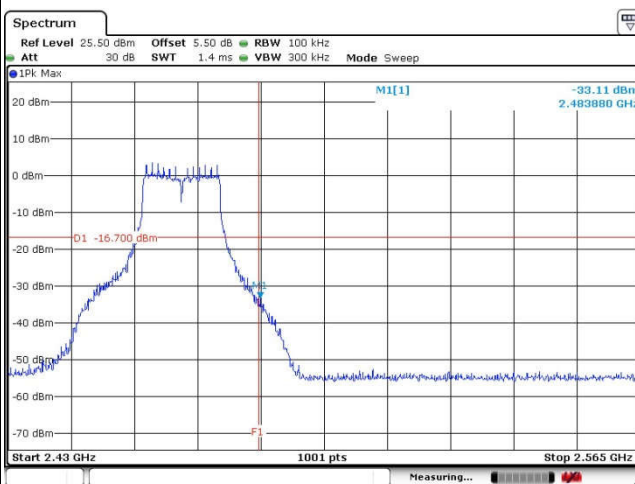

Spurious Emission 30MHz~3GHz

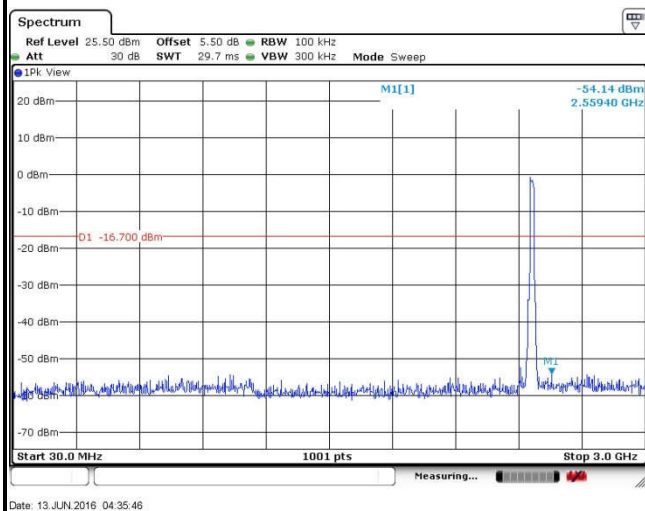


Spurious Emission 2GHz~25GHz

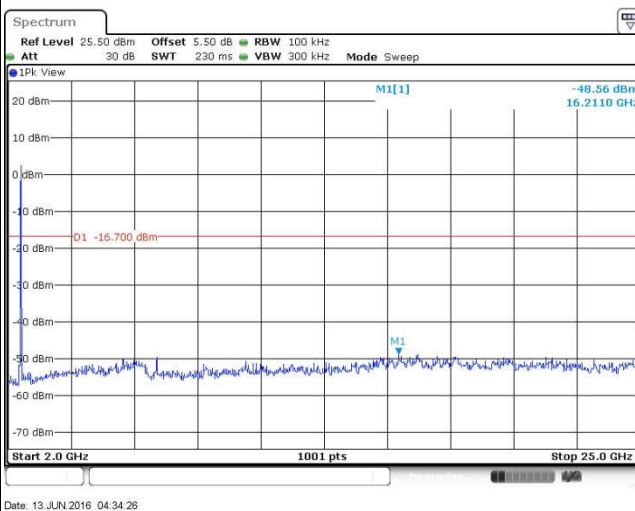





Test Mode :	802.11g	Temperature :	24~25°C
Test Band :	2.4GHz High	Relative Humidity :	54~55%
Test Channel :	13	Test Engineer :	Ivan Wang

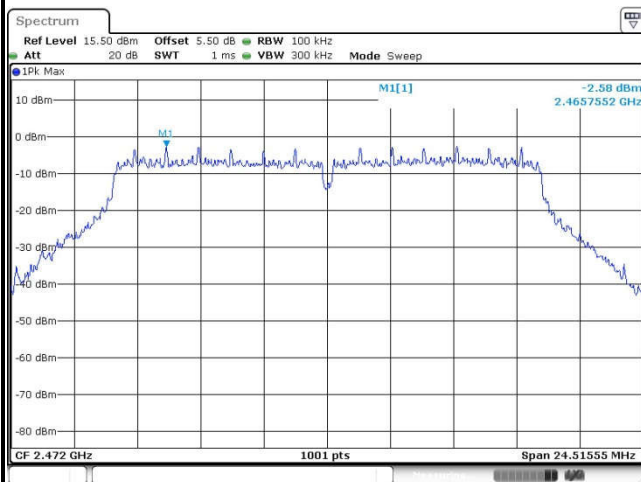WLAN 802.11g Channel 13**100kHz PSD reference Level**


Date: 13 JUN 2016 04:40:38

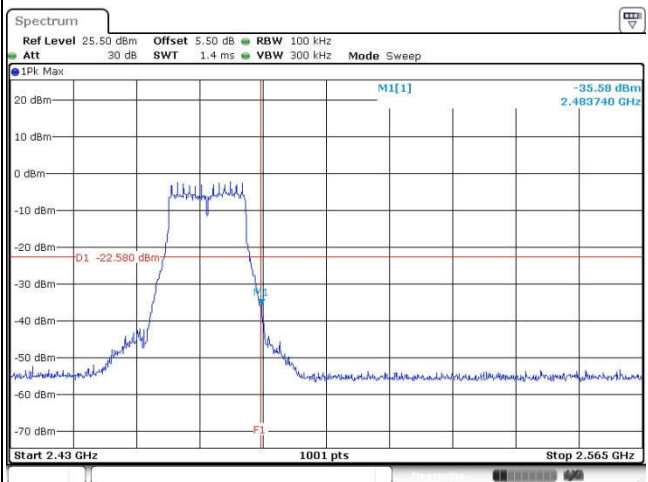High Channel Plot

Date: 13 JUN 2016 04:41:56

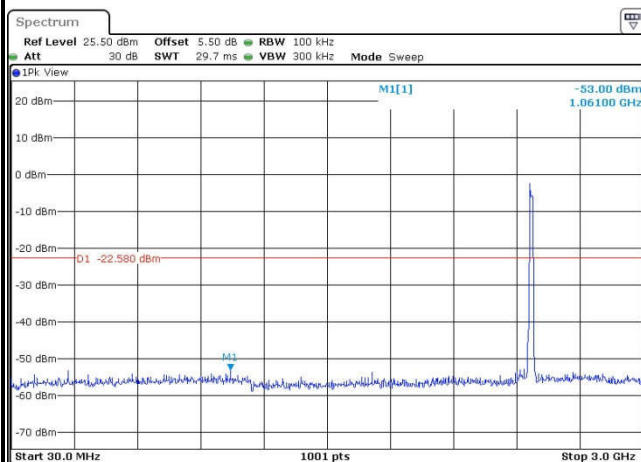Spurious Emission 30MHz~3GHz


Date: 13 JUN 2016 04:43:03

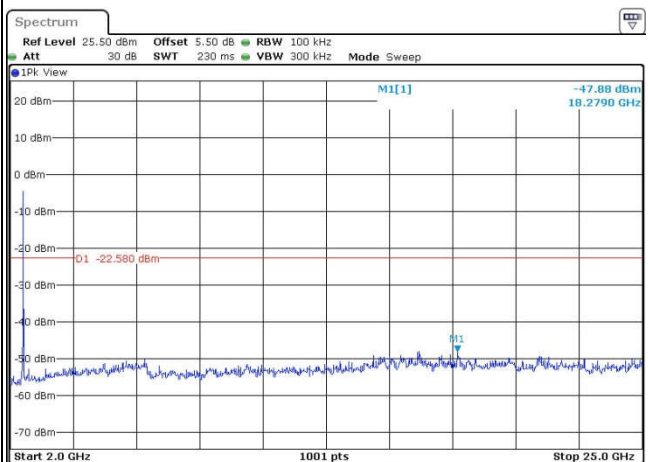Spurious Emission 2GHz~25GHz

Date: 13 JUN 2016 04:43:11






Test Mode :	802.11n HT20	Temperature :	24~25°C
Test Band :	2.4GHz Low	Relative Humidity :	54~55%
Test Channel :	01	Test Engineer :	Ivan Wang

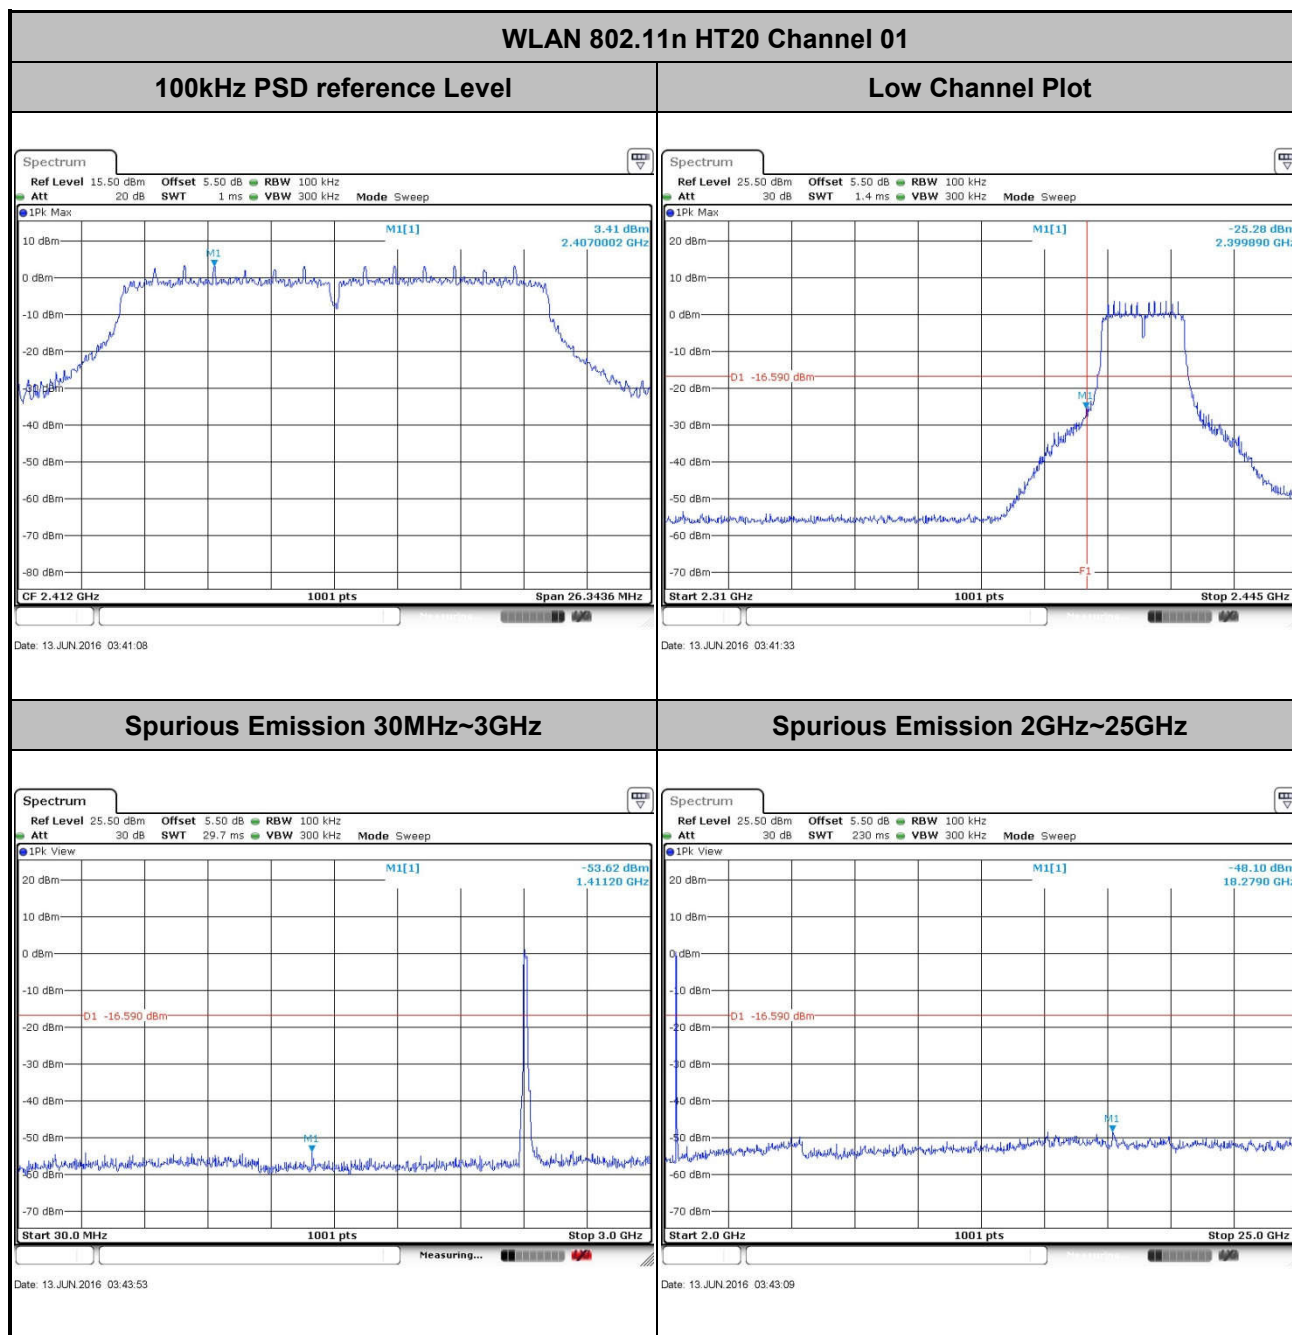







Test Mode :	802.11n HT20	Temperature :	24~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	54~55%
Test Channel :	06	Test Engineer :	Ivan Wang

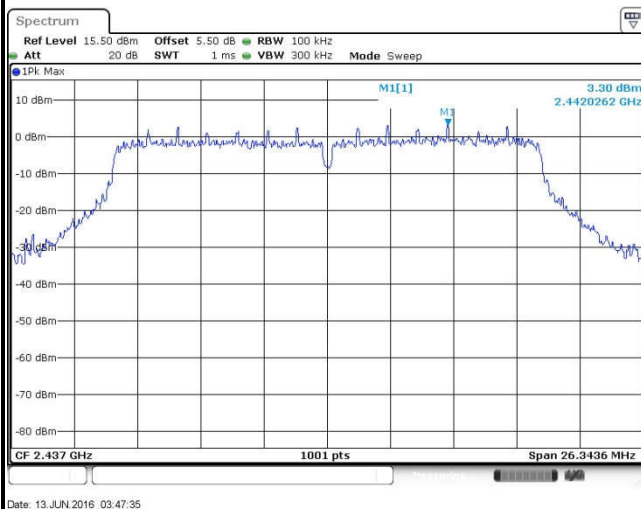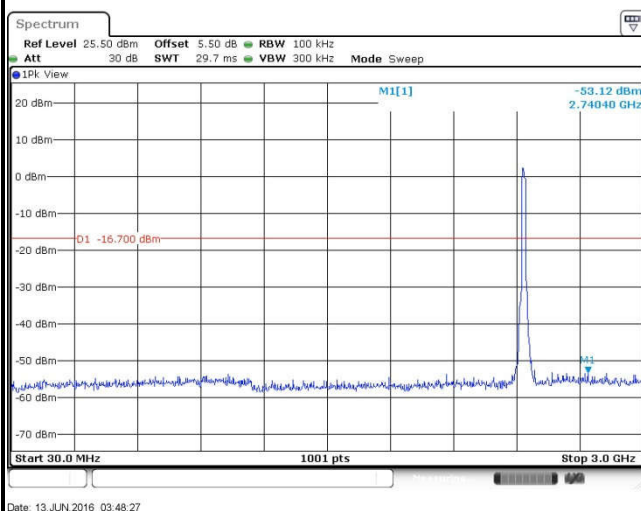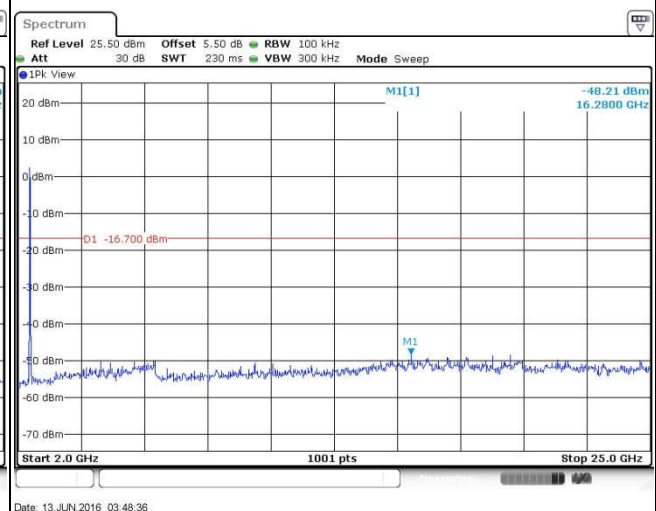WLAN 802.11n HT20 Channel 06**100kHz PSD reference Level****Spurious Emission 30MHz~3GHz****Spurious Emission 2GHz~25GHz**



Test Mode :	802.11n HT20	Temperature :	24~25°C
Test Band :	2.4GHz High	Relative Humidity :	54~55%
Test Channel :	11	Test Engineer :	Ivan Wang

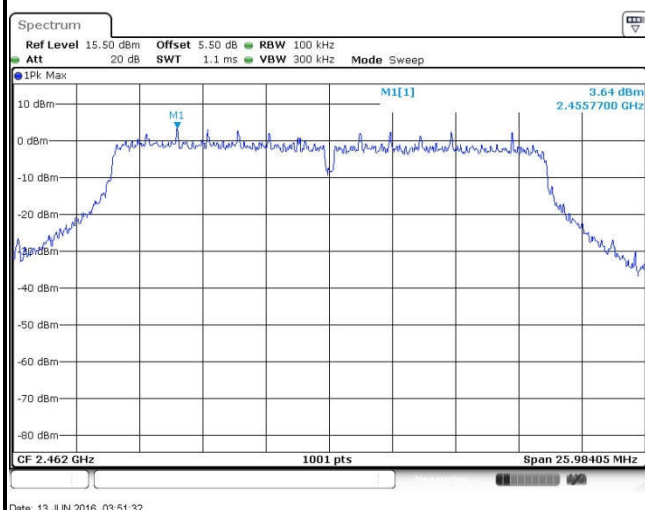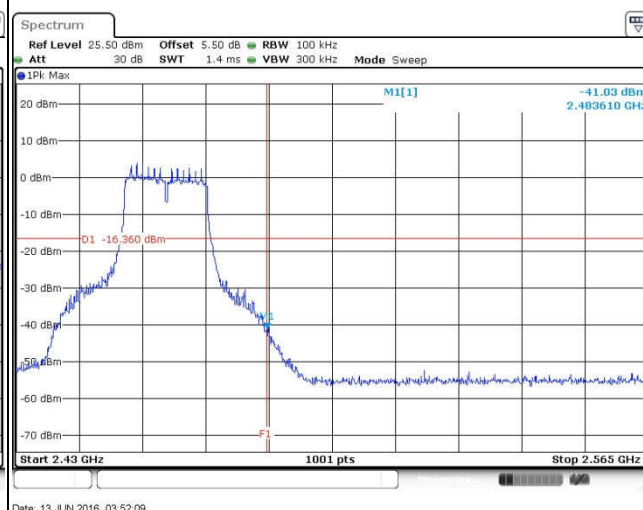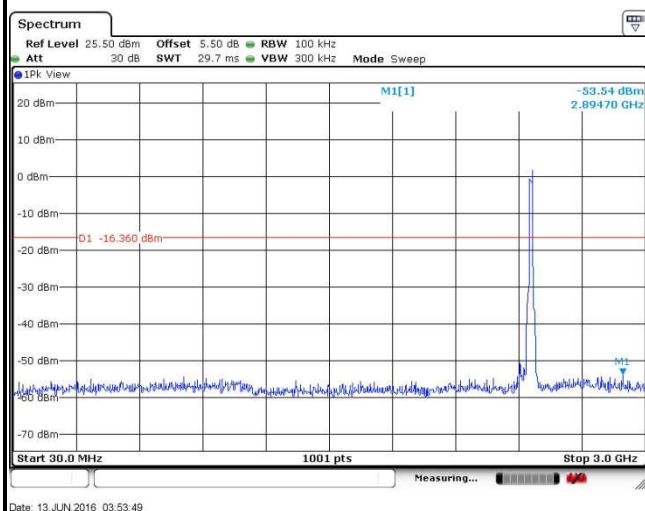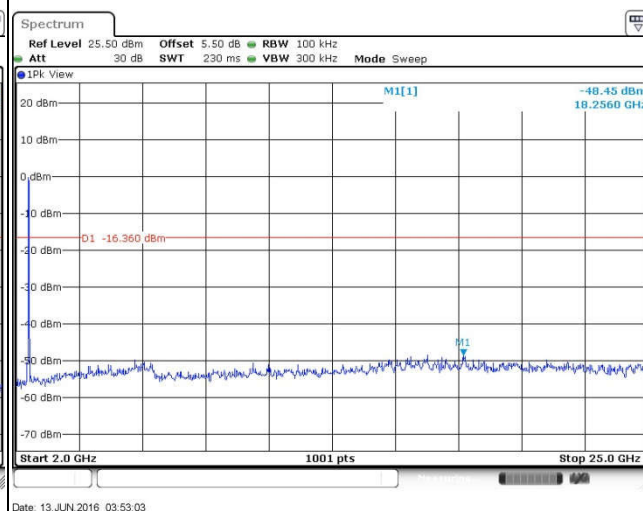
WLAN 802.11n HT20 Channel 11**100kHz PSD reference Level****High Channel Plot****Spurious Emission 30MHz~3GHz****Spurious Emission 2GHz~25GHz**



Test Mode :	802.11n HT20	Temperature :	24~25°C
Test Band :	2.4GHz High	Relative Humidity :	54~55%
Test Channel :	12	Test Engineer :	Ivan Wang


WLAN 802.11n HT20 Channel 12

100kHz PSD reference Level

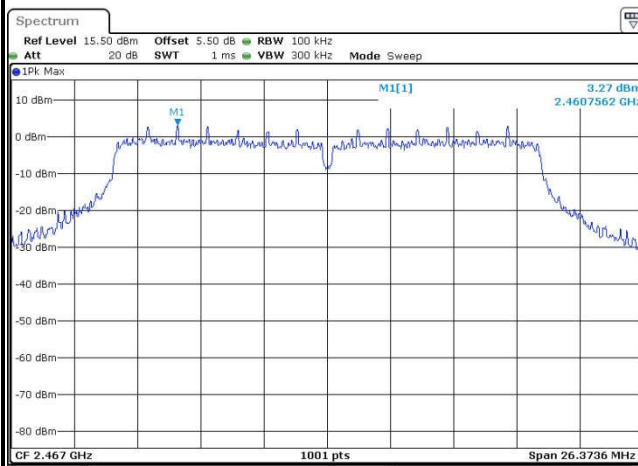


Date: 13 JUN 2016 04:57:03

High Channel Plot

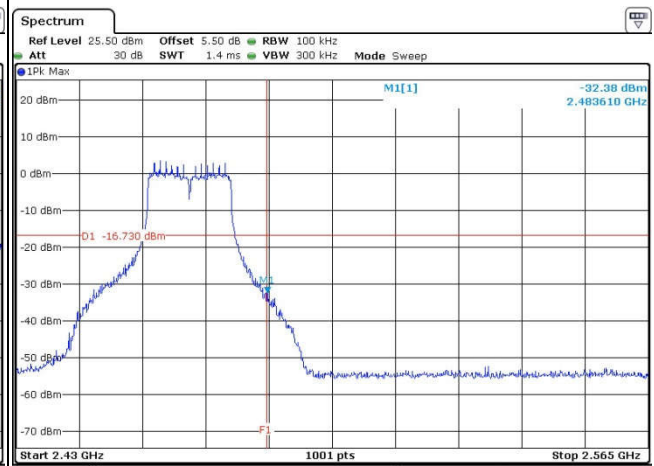


Date: 13 JUN 2016 04:58:28

Spurious Emission 30MHz~3GHz

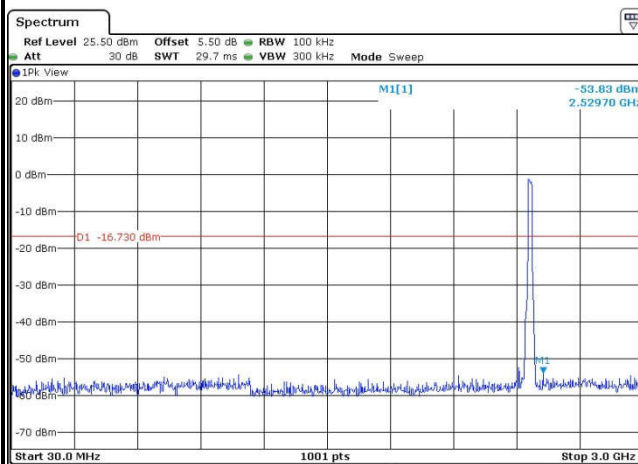

Date: 13 JUN 2016 05:03:36


Spurious Emission 2GHz~25GHz

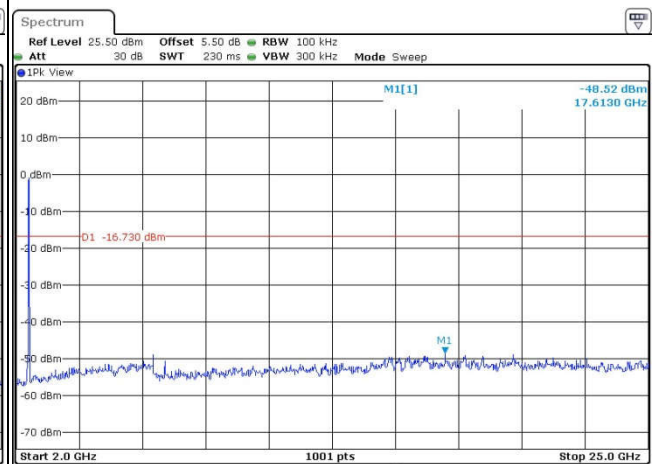

Date: 13 JUN 2016 04:59:32



Test Mode :	802.11n HT20	Temperature :	24~25°C
Test Band :	2.4GHz High	Relative Humidity :	54~55%
Test Channel :	13	Test Engineer :	Ivan Wang

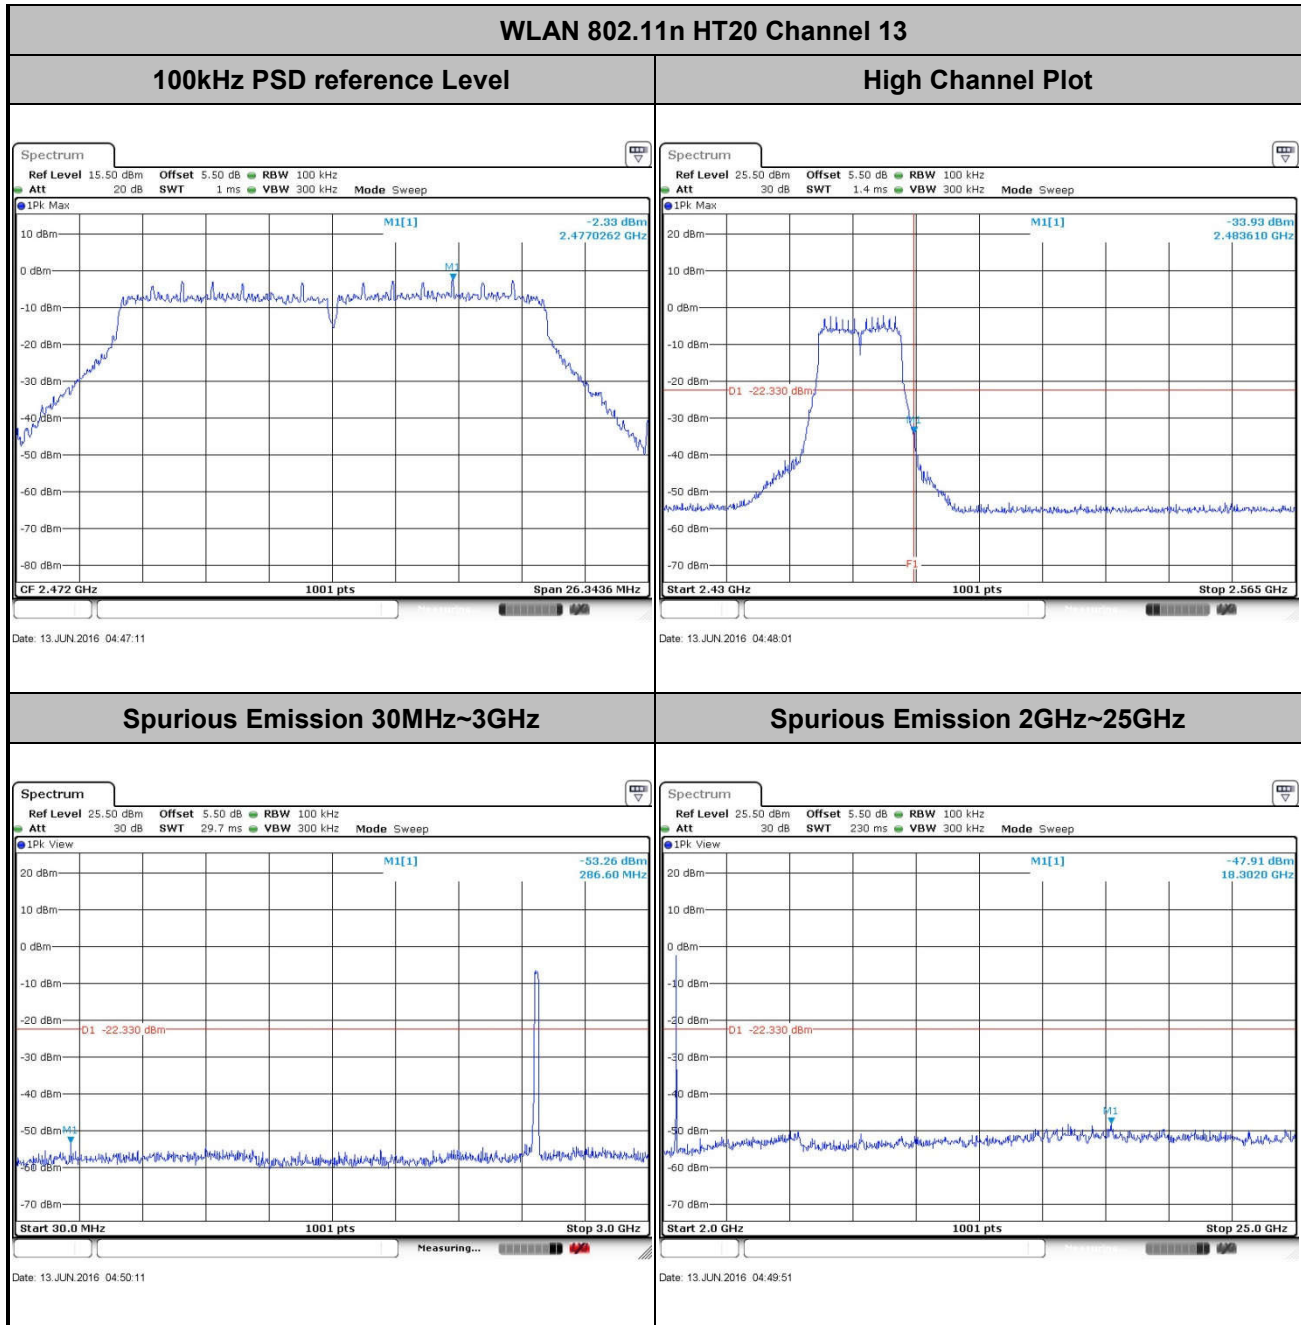

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures


1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.

For average measurement:


 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

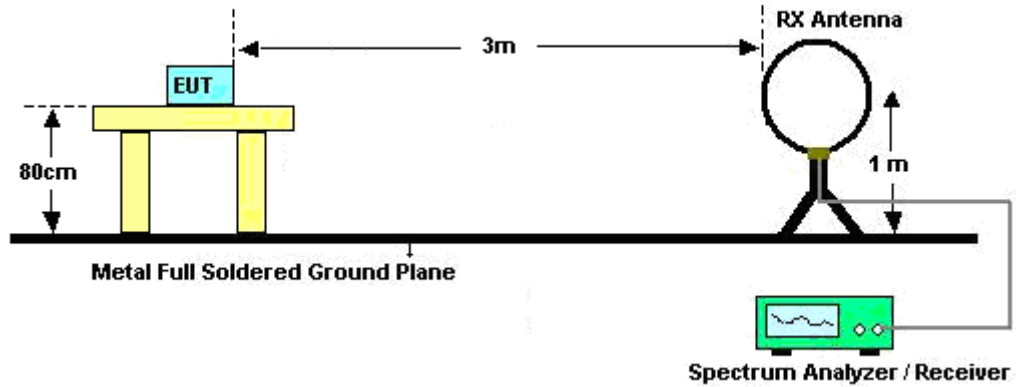

For radiated emissions from 30MHz to 1GHz

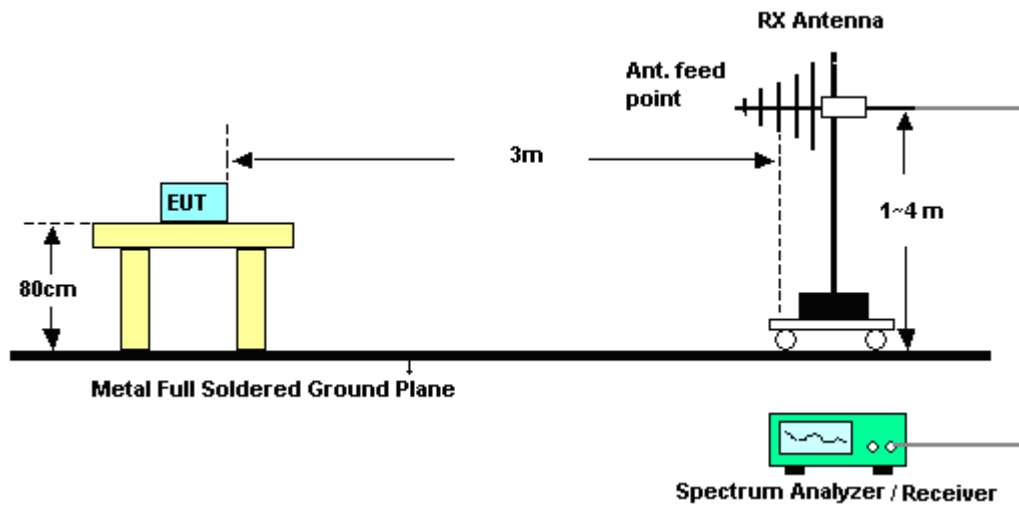

For radiated emissions above 1GHz

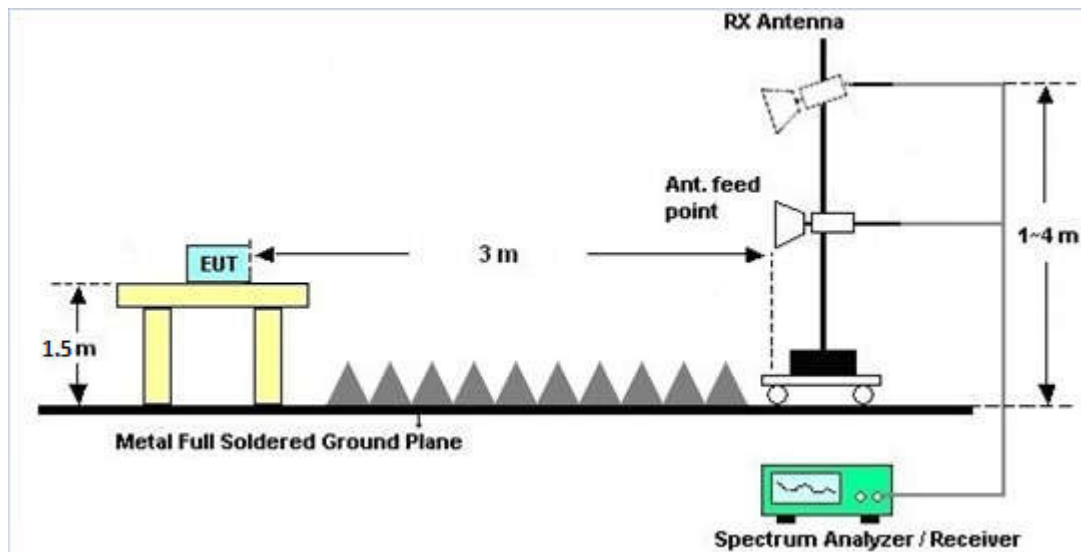

3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B.

3.5.7 Duty Cycle

Please refer to Appendix C.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix B.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.


3.6.4 Test Setup

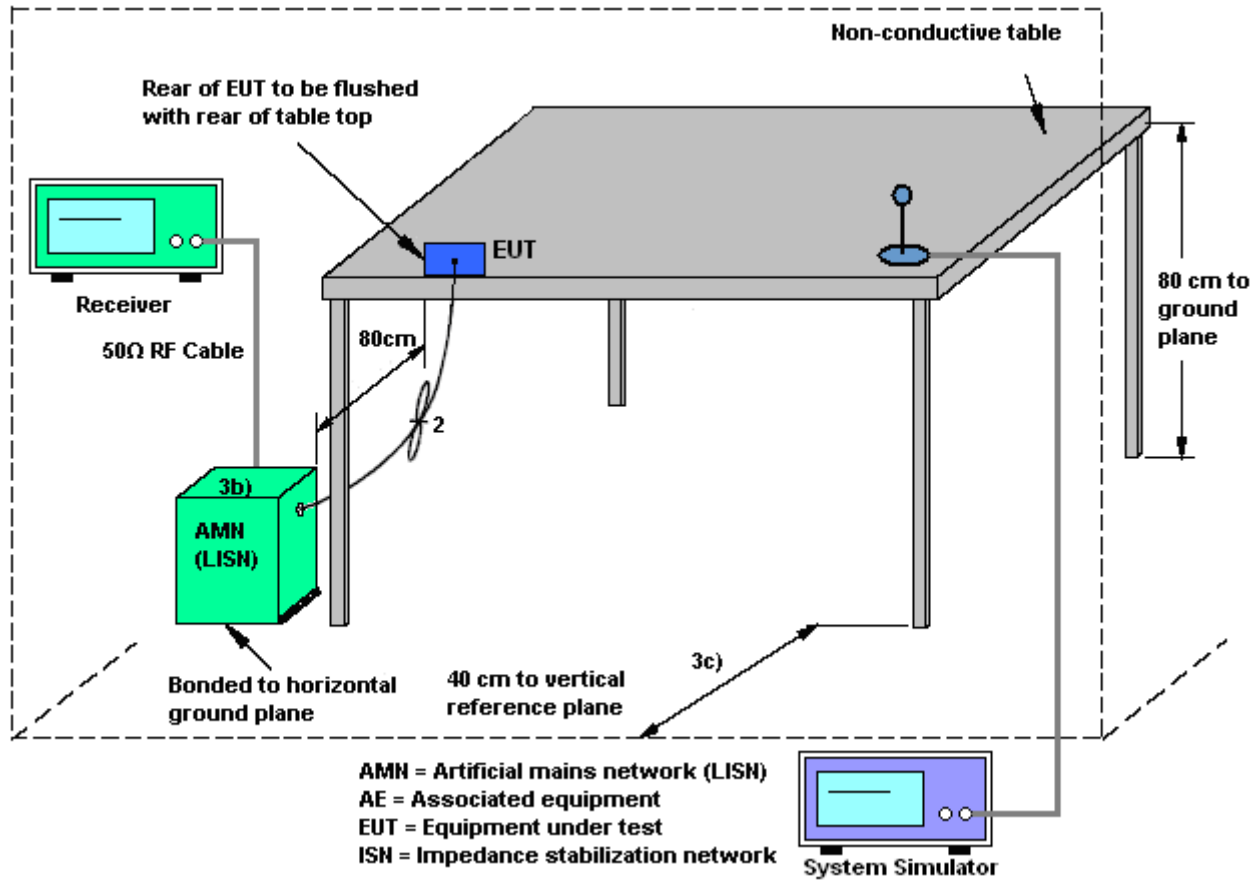



3.6.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	22~24℃
Test Engineer :	Amos Zhang	Relative Humidity :	44~46%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link(2.4G) + Earphone + Battery 1 + USB Cable 1(Charging from Adapter)		

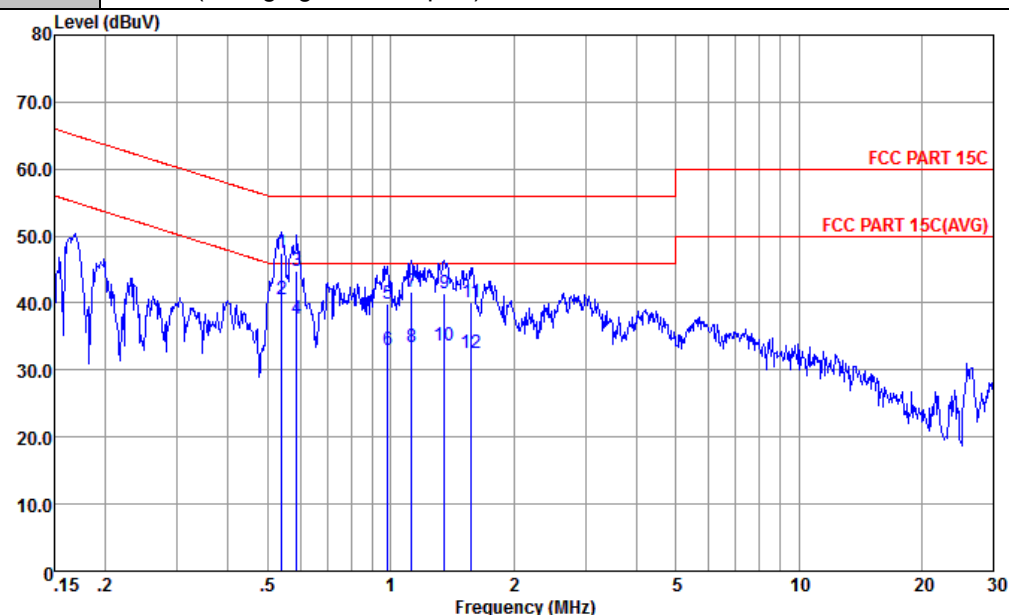


Site : CO01-KS
Condition : FCC PART 15C LISN-L-20151024 LINE
mode : Mode 1

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.54	47.49	-8.51	56.00	37.10	0.23	10.16	QP
2 *	0.54	40.49	-5.51	46.00	30.10	0.23	10.16	Average
3	0.59	44.69	-11.31	56.00	34.30	0.23	10.16	QP
4	0.59	37.69	-8.31	46.00	27.30	0.23	10.16	Average
5	0.98	39.89	-16.11	56.00	29.50	0.25	10.14	QP
6	0.98	32.99	-13.01	46.00	22.60	0.25	10.14	Average
7	1.12	41.58	-14.42	56.00	31.20	0.24	10.14	QP
8	1.12	33.48	-12.52	46.00	23.10	0.24	10.14	Average
9	1.35	41.56	-14.44	56.00	31.20	0.22	10.14	QP
10	1.35	33.66	-12.34	46.00	23.30	0.22	10.14	Average
11	1.58	40.14	-15.86	56.00	29.80	0.20	10.14	QP
12	1.58	32.44	-13.56	46.00	22.10	0.20	10.14	Average



Test Mode :	Mode 1	Temperature :	22~24℃
Test Engineer :	Amos Zhang	Relative Humidity :	44~46%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link(2.4G) + Earphone + Battery 1 + USB Cable 1(Charging from Adapter)		

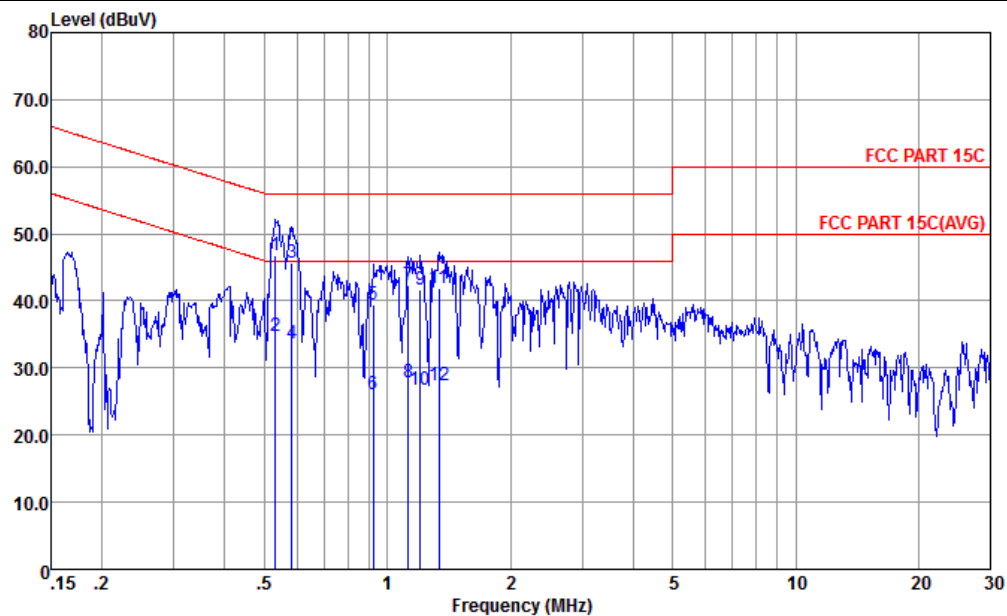

Site : CO01-KS
Condition : FCC PART 15C LISN-N-20151024 NEUTRAL
mode : Mode 1

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1 *	0.53	46.69	-9.31	56.00	36.21	0.32	10.16	QP
2	0.53	34.79	-11.21	46.00	24.31	0.32	10.16	Average
3	0.58	45.69	-10.31	56.00	35.20	0.33	10.16	QP
4	0.58	33.69	-12.31	46.00	23.20	0.33	10.16	Average
5	0.92	39.40	-16.60	56.00	28.90	0.36	10.14	QP
6	0.92	26.10	-19.90	46.00	15.60	0.36	10.14	Average
7	1.12	42.41	-13.59	56.00	31.90	0.37	10.14	QP
8	1.12	27.81	-18.19	46.00	17.30	0.37	10.14	Average
9	1.20	41.71	-14.29	56.00	31.20	0.37	10.14	QP
10	1.20	26.71	-19.29	46.00	16.20	0.37	10.14	Average
11	1.34	41.81	-14.19	56.00	31.30	0.37	10.14	QP
12	1.34	27.41	-18.59	46.00	16.90	0.37	10.14	Average



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Sep. 10, 2015	Jun. 13, 2016	Sep. 09, 2016	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 20, 2016	Jun. 13, 2016	Jan. 19, 2017	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 20, 2016	Jun. 13, 2016	Jan. 19, 2017	Conducted (TH01-KS)
EMI Test Receiver	R&S	ESCI	100534	9kHz~3GHz	Oct. 24, 2015	May 22, 2016~ Jun. 17, 2016	Oct. 23, 2016	Radiation (03CH03-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz~44GHz	Apr. 22, 2016	May 22, 2016~ Jun. 17, 2016	Apr. 21, 2017	Radiation (03CH03-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Nov. 07, 2015	May 22, 2016~ Jun. 17, 2016	Nov. 06, 2016	Radiation (03CH03-KS)
Bilog Antenna	TeseQ	CBL6112D	35406	25MHz-2GHz	Apr. 16, 2016	May 22, 2016~ Jun. 17, 2016	Apr. 15, 2017	Radiation (03CH03-KS)
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1356	1GHz~18GHz	Apr. 16, 2016	May 22, 2016~ Jun. 17, 2016	Apr. 15, 2017	Radiation (03CH03-KS)
SHF-EHF Horn	com-power	AH-840	101070	18GHz-40GHz	Oct. 10, 2015	May 22, 2016~ Jun. 17, 2016	Oct. 09, 2016	Radiation (03CH03-KS)
Amplifier	Burgeon	BPA-530	102212	0.01MHz-3000MHz	Aug. 10, 2015	May 22, 2016~ Jun. 17, 2016	Aug. 09, 2016	Radiation (03CH03-KS)
Amplifier	MITEQ	TTA1840-35-HG	1887435	18~40GHz	Aug. 27, 2015	May 22, 2016~ Jun. 17, 2016	Aug. 26, 2016	Radiation (03CH03-KS)
high gain Amplifier	MITEQ	AMF-7D-0010 1800-30-10P	1889560	1GHz-18GHz	Aug. 10, 2015	May 22, 2016~ Jun. 17, 2016	Aug. 09, 2016	Radiation (03CH03-KS)
Amplifier	Agilent	8449B	3008A02370	1GHz~26.5GHz	Oct. 24, 2015	May 22, 2016~ Jun. 17, 2016	Oct. 23, 2016	Radiation (03CH03-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	May 22, 2016~ Jun. 17, 2016	NCR	Radiation (03CH03-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	May 22, 2016~ Jun. 17, 2016	NCR	Radiation (03CH03-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 29, 2016	May 29, 2016	Apr. 28, 2017	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060103	9kHz~30MHz	Oct. 24, 2015	May 29, 2016	Oct. 23, 2016	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060105	9kHz~30MHz	Oct. 24, 2015	May 29, 2016	Oct. 23, 2016	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 24, 2015	May 29, 2016	Oct. 23, 2016	Conduction (CO01-KS)

NCR: No Calibration Required



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.3dB
---	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.5dB
---	-------



Appendix A. Conducted Test Results

A1 - DTS Part

Test Engineer:	Ivan Wang	Temperature:	24~25	°C
Test Date:	2016/6/13	Relative Humidity:	54~55	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band								
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
11b	1Mbps	1	1	2412	13.54	8.53	0.50	Pass
11b	1Mbps	1	6	2437	13.59	8.55	0.50	Pass
11b	1Mbps	1	11	2462	13.59	8.53	0.50	Pass
11b	1Mbps	1	12	2467	13.59	8.53	0.50	Pass
11b	1Mbps	1	13	2472	13.34	8.53	0.50	Pass
11g	6Mbps	1	1	2412	18.53	16.34	0.50	Pass
11g	6Mbps	1	6	2437	18.78	16.34	0.50	Pass
11g	6Mbps	1	11	2462	18.83	16.34	0.50	Pass
11g	6Mbps	1	12	2467	18.88	16.32	0.50	Pass
11g	6Mbps	1	13	2472	18.43	16.34	0.50	Pass
HT20	MCS0	1	1	2412	19.18	17.56	0.50	Pass
HT20	MCS0	1	6	2437	19.43	17.56	0.50	Pass
HT20	MCS0	1	11	2462	18.48	17.32	0.50	Pass
HT20	MCS0	1	12	2467	19.73	17.58	0.50	Pass
HT20	MCS0	1	13	2472	19.13	17.56	0.50	Pass

TEST RESULTS DATA
Peak Power Table

2.4GHz Band										
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
11b	1Mbps	1	1	2412	21.05	30.00	-2.50	18.55	36.00	Pass
11b	1Mbps	1	6	2437	20.44	30.00	-2.50	17.94	36.00	Pass
11b	1Mbps	1	11	2462	20.09	30.00	-2.50	17.59	36.00	Pass
11b	1Mbps	1	12	2467	18.23	30.00	-2.50	15.73	36.00	Pass
11b	1Mbps	1	13	2472	13.22	30.00	-2.50	10.72	36.00	Pass
11g	6Mbps	1	1	2412	23.02	30.00	-2.50	20.52	36.00	Pass
11g	6Mbps	1	6	2437	22.77	30.00	-2.50	20.27	36.00	Pass
11g	6Mbps	1	11	2462	22.56	30.00	-2.50	20.06	36.00	Pass
11g	6Mbps	1	12	2467	21.56	30.00	-2.50	19.06	36.00	Pass
11g	6Mbps	1	13	2472	18.36	30.00	-2.50	15.86	36.00	Pass
HT20	MCS0	1	1	2412	23.02	30.00	-2.50	20.52	36.00	Pass
HT20	MCS0	1	6	2437	22.74	30.00	-2.50	20.24	36.00	Pass
HT20	MCS0	1	11	2462	22.53	30.00	-2.50	20.03	36.00	Pass
HT20	MCS0	1	12	2467	21.61	30.00	-2.50	19.11	36.00	Pass
HT20	MCS0	1	13	2472	18.42	30.00	-2.50	15.92	36.00	Pass

TEST RESULTS DATA
Average Power Table
(Reporting Only)

2.4GHz Band						
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
11b	1Mbps	1	1	2412	0.10	18.42
11b	1Mbps	1	6	2437	0.10	17.85
11b	1Mbps	1	11	2462	0.10	17.35
11b	1Mbps	1	12	2467	0.10	15.42
11b	1Mbps	1	13	2472	0.10	10.23
11g	6Mbps	1	1	2412	0.59	15.21
11g	6Mbps	1	6	2437	0.59	14.82
11g	6Mbps	1	11	2462	0.59	14.58
11g	6Mbps	1	12	2467	0.59	13.93
11g	6Mbps	1	13	2472	0.59	8.70
HT20	MCS0	1	1	2412	0.63	14.86
HT20	MCS0	1	6	2437	0.63	14.51
HT20	MCS0	1	11	2462	0.63	14.22
HT20	MCS0	1	12	2467	0.63	14.05
HT20	MCS0	1	13	2472	0.63	8.80

TEST RESULTS DATA
Peak Power Density

2.4GHz Band								
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
11b	1Mbps	1	1	2412	-3.97	-2.50	8.00	Pass
11b	1Mbps	1	6	2437	-4.19	-2.50	8.00	Pass
11b	1Mbps	1	11	2462	-5.11	-2.50	8.00	Pass
11b	1Mbps	1	12	2467	-7.15	-2.50	8.00	Pass
11b	1Mbps	1	13	2472	-12.27	-2.50	8.00	Pass
11g	6Mbps	1	1	2412	-9.36	-2.50	8.00	Pass
11g	6Mbps	1	6	2437	-9.39	-2.50	8.00	Pass
11g	6Mbps	1	11	2462	-9.49	-2.50	8.00	Pass
11g	6Mbps	1	12	2467	-11.11	-2.50	8.00	Pass
11g	6Mbps	1	13	2472	-16.94	-2.50	8.00	Pass
HT20	MCS0	1	1	2412	-10.79	-2.50	8.00	Pass
HT20	MCS0	1	6	2437	-10.95	-2.50	8.00	Pass
HT20	MCS0	1	11	2462	-10.54	-2.50	8.00	Pass
HT20	MCS0	1	12	2467	-10.70	-2.50	8.00	Pass
HT20	MCS0	1	13	2472	-16.28	-2.50	8.00	Pass



Appendix B. Radiated Spurious Emission

2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 01 2412MHz		2387.04	52.69	-21.31	74	57.12	27	5.59	37.02	328	193	P	H
		2390	43.28	-10.72	54	47.71	27	5.59	37.02	328	193	A	H
	*	2410.688	101.82	-	-	106.08	27.13	5.61	37	328	193	P	H
	*	2410.938	99.4	-	-	103.66	27.13	5.61	37	328	193	A	H
		2390	52.16	-21.84	74	56.59	27	5.59	37.02	384	183	P	V
		2390	43.09	-10.91	54	47.52	27	5.59	37.02	384	183	A	V
	*	2410.771	100.59	-	-	104.85	27.13	5.61	37	384	183	P	V
	*	2410.771	98.03	-	-	102.29	27.13	5.61	37	287	117	A	V
802.11b CH 06 2437MHz	*	2438.243	100.07	-	-	104	27.39	5.65	36.97	100	244	P	H
	*	2438.326	97.62	-	-	101.55	27.39	5.65	36.97	100	244	A	H
	*	2438.243	101.56	-	-	105.49	27.39	5.65	36.97	323	126	P	V
	*	2438.326	99.13	-	-	103.06	27.39	5.65	36.97	323	126	A	V



802.11b CH 11 2462MHz	*	2460.872	100.06	-	-	103.84	27.51	5.67	36.96	253	185	P	H
	*	2460.872	97.61	-	-	101.39	27.51	5.67	36.96	253	185	A	H
		2488	52.01	-21.99	74	55.46	27.77	5.71	36.93	253	185	P	H
		2487.64	41.25	-12.75	54	44.7	27.77	5.71	36.93	253	185	A	H
	*	2460.872	99.76	-	-	103.54	27.51	5.67	36.96	400	136	P	V
	*	2460.872	97.3	-	-	101.08	27.51	5.67	36.96	400	136	A	V
		2485.44	52.2	-21.8	74	55.81	27.64	5.69	36.94	400	136	P	V
		2486.4	41.56	-12.44	54	45.17	27.64	5.69	36.94	400	136	A	V
802.11b CH 12 2467MHz	*	2465.882	95.79	-	-	99.57	27.51	5.67	36.96	100	156	P	H
	*	2465.965	93.36	-	-	97.14	27.51	5.67	36.96	100	156	A	H
		2497.64	51.81	-22.19	74	55.26	27.77	5.71	36.93	100	156	P	H
		2483.52	40.99	-13.01	54	44.6	27.64	5.69	36.94	100	156	A	H
	*	2465.882	97.19	-	-	100.97	27.51	5.67	36.96	350	135	P	V
	*	2465.965	94.66	-	-	98.44	27.51	5.67	36.96	350	135	A	V
		2488.52	52.13	-21.87	74	55.58	27.77	5.71	36.93	350	135	P	V
		2483.52	41.1	-12.9	54	44.71	27.64	5.69	36.94	350	135	A	V
802.11b CH 13 2472MHz	*	2473.229	90.23	-	-	93.84	27.64	5.69	36.94	100	155	P	H
	*	2473.229	87.72	-	-	91.33	27.64	5.69	36.94	100	155	A	H
		2483.64	52.2	-21.8	74	55.81	27.64	5.69	36.94	100	155	P	H
		2483.52	42.53	-11.47	54	46.14	27.64	5.69	36.94	100	155	A	H
	*	2473.146	91.87	-	-	95.48	27.64	5.69	36.94	350	131	P	V
	*	2473.229	89.32	-	-	92.93	27.64	5.69	36.94	350	131	A	V
		2483.72	52.57	-21.43	74	56.18	27.64	5.69	36.94	350	131	P	V
		2483.52	43.32	-10.68	54	46.93	27.64	5.69	36.94	350	131	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11b (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11b CH 01 2412MHz		4824	36.97	-37.03	74	58.43	31.51	9.13	62.1	100	360	P	H
		4824	35.4	-38.6	74	56.86	31.51	9.13	62.1	100	0	P	V
802.11b CH 06 2437MHz		4875	39.31	-34.69	74	60.55	31.59	9.2	62.03	100	360	P	H
		7311	40.72	-33.28	74	54.55	34.03	11.3	59.16	100	0	P	H
		4875	37.41	-36.59	74	58.65	31.59	9.2	62.03	100	0	P	V
		7311	39.76	-34.24	74	53.59	34.03	11.3	59.16	100	360	P	V
802.11b CH 11 2462MHz		4923	37.48	-36.52	74	58.51	31.67	9.27	61.97	100	360	P	H
		7386	40.94	-33.06	74	54.48	34.29	11.29	59.12	100	0	P	H
		4923	35.96	-38.04	74	56.99	31.67	9.27	61.97	100	0	P	V
		7386	39.76	-34.24	74	53.3	34.29	11.29	59.12	100	360	P	V
802.11b CH 12 2467MHz		4935	36.78	-37.22	74	57.81	31.67	9.27	61.97	100	360	P	H
		7401	39.39	-34.61	74	52.94	34.34	11.29	59.18	100	0	P	H
		4935	35.89	-38.11	74	56.92	31.67	9.27	61.97	100	0	P	V
		7401	39.67	-34.33	74	53.22	34.34	11.29	59.18	100	360	P	V
802.11b CH 13 2472MHz		4944	35.23	-38.77	74	56.19	31.69	9.3	61.95	100	360	P	H
		7416	39.27	-34.73	74	52.82	34.34	11.29	59.18	100	0	P	H
		4944	33.35	-40.65	74	54.31	31.69	9.3	61.95	100	0	P	V
		7416	39.67	-34.33	74	53.22	34.34	11.29	59.18	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
WIFI 802.11g (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 01 2412MHz		2390	68.39	-5.61	74	72.82	27	5.59	37.02	373	261	P	H
		2390	51.2	-2.8	54	55.63	27	5.59	37.02	373	261	A	H
	*	2407.097	101.85	-	-	106.11	27.13	5.61	37	373	261	P	H
	*	2407.264	93.01	-	-	97.27	27.13	5.61	37	373	261	A	H
		2389.83	62.64	-11.36	74	67.07	27	5.59	37.02	100	247	P	V
		2390	46.68	-7.32	54	51.11	27	5.59	37.02	100	247	A	V
	*	2405.511	95.83	-	-	100.09	27.13	5.61	37	100	247	P	V
	*	2406.93	87.88	-	-	92.14	27.13	5.61	37	100	247	A	V
802.11g CH 06 2437MHz	*	2443.921	99.38	-	-	103.31	27.39	5.65	36.97	100	153	P	H
	*	2443.086	91.41	-	-	95.34	27.39	5.65	36.97	100	153	A	H
	*	2440.748	101.5	-	-	105.43	27.39	5.65	36.97	360	132	P	V
	*	2443.67	93.35	-	-	97.28	27.39	5.65	36.97	360	132	A	V



802.11g CH 11 2462MHz	*	2457.448	98.13	-	-	101.91	27.51	5.67	36.96	155	154	P	H
	*	2455.695	90.02	-	-	93.8	27.51	5.67	36.96	155	154	A	H
		2483.52	60.71	-13.29	74	64.32	27.64	5.69	36.94	155	154	P	H
		2483.68	44.59	-9.41	54	48.2	27.64	5.69	36.94	155	154	A	H
	*	2456.029	93.97	-	-	97.75	27.51	5.67	36.96	100	341	P	V
	*	2454.776	86.22	-	-	90	27.51	5.67	36.96	100	341	A	V
		2483.84	59.35	-14.65	74	62.96	27.64	5.69	36.94	100	341	P	V
		2483.64	42.33	-11.67	54	45.94	27.64	5.69	36.94	100	341	A	V
802.11g CH 12 2467MHz	*	2463.376	96.81	-	-	100.59	27.51	5.67	36.96	100	243	P	H
	*	2460.12	88.78	-	-	92.56	27.51	5.67	36.96	100	243	A	H
		2483.64	64.04	-9.96	74	67.65	27.64	5.69	36.94	100	243	P	H
		2483.8	46.85	-7.15	54	50.46	27.64	5.69	36.94	100	243	A	H
	*	2461.039	98.82	-	-	102.6	27.51	5.67	36.96	400	116	P	V
	*	2460.037	91.06	-	-	94.84	27.51	5.67	36.96	400	116	A	V
		2484.2	68.79	-5.21	74	72.4	27.64	5.69	36.94	400	116	P	V
		2483.64	49.93	-4.07	54	53.54	27.64	5.69	36.94	400	116	A	V
802.11g CH 13 2472MHz	*	2475.818	91.04	-	-	94.65	27.64	5.69	36.94	134	245	P	H
	*	2477.238	82.53	-	-	86.14	27.64	5.69	36.94	134	245	A	H
		2483.52	65.6	-8.4	74	69.21	27.64	5.69	36.94	134	245	P	H
		2483.52	49.84	-4.16	54	53.45	27.64	5.69	36.94	134	245	A	H
	*	2475.985	93.36	-	-	96.97	27.64	5.69	36.94	400	117	P	V
	*	2477.154	85.2	-	-	88.81	27.64	5.69	36.94	400	117	A	V
		2483.52	67.21	-6.79	74	70.82	27.64	5.69	36.94	400	117	P	V
		2483.52	52.59	-1.41	54	56.2	27.64	5.69	36.94	400	117	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11g (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 01 2412MHz		4824	37.26	-36.74	74	58.72	31.51	9.13	62.1	100	360	P	H
		4824	35.81	-38.19	74	57.27	31.51	9.13	62.1	100	0	P	V
802.11g CH 06 2437MHz		4875	35.77	-38.23	74	57.01	31.59	9.2	62.03	100	360	P	H
		7311	39.47	-34.53	74	53.3	34.03	11.3	59.16	100	0	P	H
		4875	33.71	-40.29	74	54.95	31.59	9.2	62.03	100	0	P	V
		7311	39.3	-34.7	74	53.13	34.03	11.3	59.16	100	360	P	V
802.11g CH 11 2462MHz		4923	35.72	-38.28	74	56.75	31.67	9.27	61.97	100	360	P	H
		7386	39	-35	74	52.54	34.29	11.29	59.12	100	0	P	H
		4923	34.55	-39.45	74	55.58	31.67	9.27	61.97	100	0	P	V
		7386	39.19	-34.81	74	52.73	34.29	11.29	59.12	100	360	P	V
802.11g CH 12 2467MHz		4935	36.39	-37.61	74	57.42	31.67	9.27	61.97	100	360	P	H
		7401	38.93	-35.07	74	52.48	34.34	11.29	59.18	100	0	P	H
		4935	34.26	-39.74	74	55.29	31.67	9.27	61.97	100	0	P	V
		7401	40.93	-33.07	74	54.48	34.34	11.29	59.18	100	360	P	V
802.11g CH 13 2472MHz		4944	36.1	-37.9	74	57.06	31.69	9.3	61.95	100	360	P	H
		7416	38.61	-35.39	74	52.16	34.34	11.29	59.18	100	0	P	H
		4944	34.28	-39.72	74	55.24	31.69	9.3	61.95	100	0	P	V
		7416	40.06	-33.94	74	53.61	34.34	11.29	59.18	100	360	P	V
1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 01 2412MHz		2389.92	66.83	-7.17	74	71.26	27	5.59	37.02	105	46	P	H
		2389.65	47.87	-6.13	54	52.3	27	5.59	37.02	105	46	A	H
	*	2407.849	97.94	-	-	102.2	27.13	5.61	37	105	46	P	H
	*	2405.594	89.92	-	-	94.18	27.13	5.61	37	105	46	A	H
		2388.48	69.48	-4.52	74	73.91	27	5.59	37.02	107	233	P	V
		2390	52.51	-1.49	54	56.94	27	5.59	37.02	108	231	A	V
	*	2407.598	102.04	-	-	106.3	27.13	5.61	37	107	233	P	V
	*	2407.014	93.44	-	-	97.7	27.13	5.61	37	107	233	A	V
802.11n HT20 CH 06 2437MHz	*	2441.833	96.49	-	-	100.42	27.39	5.65	36.97	100	135	P	H
	*	2444.673	88.79	-	-	92.72	27.39	5.65	36.97	100	135	A	H
	*	2442.668	99.24	-	-	103.17	27.39	5.65	36.97	129	234	P	V
	*	2441.5	91.26	-	-	95.19	27.39	5.65	36.97	129	234	A	V



802.11n HT20 CH 11 2462MHz	*	2454.525	96.34	-	-	100.12	27.51	5.67	36.96	100	128	P	H
	*	2454.442	88.5	-	-	92.28	27.51	5.67	36.96	100	128	A	H
		2484.44	61.6	-12.4	74	65.21	27.64	5.69	36.94	100	128	P	H
		2483.64	44.57	-9.43	54	48.18	27.64	5.69	36.94	100	128	A	H
	*	2457.615	98.35	-	-	102.13	27.51	5.67	36.96	100	241	P	V
	*	2454.442	89.74	-	-	93.52	27.51	5.67	36.96	100	241	A	V
		2484.4	60.28	-13.72	74	63.89	27.64	5.69	36.94	100	241	P	V
		2483.68	43.6	-10.4	54	47.21	27.64	5.69	36.94	100	241	A	V
802.11n HT20 CH 12 2467MHz	*	2459.034	96.42	-	-	100.2	27.51	5.67	36.96	363	252	P	H
	*	2459.452	88.93	-	-	92.71	27.51	5.67	36.96	363	252	A	H
		2483.96	63.53	-10.47	74	67.14	27.64	5.69	36.94	363	252	P	H
		2483.52	48.06	-5.94	54	51.67	27.64	5.69	36.94	363	252	A	H
	*	2462.542	95.71	-	-	99.49	27.51	5.67	36.96	111	246	P	V
	*	2459.285	88.14	-	-	91.92	27.51	5.67	36.96	111	246	A	V
		2483.72	63.04	-10.96	74	66.65	27.64	5.69	36.94	111	246	P	V
		2483.68	48.79	-5.21	54	52.4	27.64	5.69	36.94	111	246	A	V
802.11n HT20 CH 13 2472MHz	*	2466.633	91.2	-	-	94.98	27.51	5.67	36.96	100	300	P	H
	*	2465.297	82.82	-	-	86.6	27.51	5.67	36.96	100	300	A	H
		2483.52	66.74	-7.26	74	70.35	27.64	5.69	36.94	100	300	P	H
		2483.52	51.48	-2.52	54	55.09	27.64	5.69	36.94	100	300	A	H
	*	2476.236	91.14	-	-	94.75	27.64	5.69	36.94	100	306	P	V
	*	2477.238	82.72	-	-	86.33	27.64	5.69	36.94	100	306	A	V
		2483.52	67.02	-6.98	74	70.63	27.64	5.69	36.94	100	306	P	V
		2483.52	51.56	-2.44	54	55.17	27.64	5.69	36.94	100	306	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 01 2412MHz		4824	36.63	-37.37	74	58.09	31.51	9.13	62.1	100	360	P	H
		4824	34.24	-39.76	74	55.7	31.51	9.13	62.1	100	0	P	V
802.11n HT20 CH 06 2437MHz		4875	35.09	-38.91	74	56.33	31.59	9.2	62.03	100	360	P	H
		7311	38.9	-35.1	74	52.73	34.03	11.3	59.16	100	0	P	H
		4875	34.41	-39.59	74	55.65	31.59	9.2	62.03	100	0	P	V
		7311	39.83	-34.17	74	53.66	34.03	11.3	59.16	100	360	P	V
802.11n HT20 CH 11 2462MHz		4923	34.52	-39.48	74	55.55	31.67	9.27	61.97	100	360	P	H
		7386	38.84	-35.16	74	52.38	34.29	11.29	59.12	100	0	P	H
		4923	32.56	-41.44	74	53.59	31.67	9.27	61.97	100	0	P	V
		7386	39.5	-34.5	74	53.04	34.29	11.29	59.12	100	360	P	V
802.11n HT20 CH 12 2467MHz		4935	35.17	-38.83	74	56.2	31.67	9.27	61.97	100	360	P	H
		7401	38.98	-35.02	74	52.53	34.34	11.29	59.18	100	0	P	H
		4935	33.15	-40.85	74	54.18	31.67	9.27	61.97	100	0	P	V
		7401	41.32	-32.68	74	54.87	34.34	11.29	59.18	100	360	P	V
802.11n HT20 CH 13 2472MHz		4944	36.66	-37.34	74	57.62	31.69	9.3	61.95	100	360	P	H
		7416	39	-35	74	52.55	34.34	11.29	59.18	100	0	P	H
		4944	33.61	-40.39	74	54.57	31.69	9.3	61.95	100	0	P	V
		7416	39.36	-34.64	74	52.91	34.34	11.29	59.18	100	360	P	V
Remark		1. No other spurious found. 2. All results are PASS against Peak and Average limit line.											



Emission below 1GHz

2.4GHz WIFI 802.11g (LF)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz 802.11g LF		30	18.73	-21.27	40	32.09	18.6	0.65	32.61	100	31	P	H
		119.24	14.88	-28.62	43.5	32.56	13.37	1.31	32.36	-	-	P	H
		252.13	17.09	-28.91	46	34.51	13.27	1.75	32.44	-	-	P	H
		288.02	19.42	-26.58	46	35.08	14.5	2.04	32.2	-	-	P	H
		644.01	20.73	-25.27	46	29.96	19.23	3.19	31.65	-	-	P	H
		950.53	24.49	-21.51	46	28.26	23.6	3.98	31.35	-	-	P	H
		45.52	22.32	-17.68	40	41.87	12.22	0.83	32.6	-	-	P	V
		58.13	26.62	-13.38	40	51.13	7.12	0.91	32.54	100	216	P	V
		176.47	15.98	-27.52	43.5	34.7	12.16	1.61	32.49	-	-	P	V
		305.48	22.76	-23.24	46	37.91	15	2.15	32.3	-	-	P	V
		323.91	25.25	-20.75	46	39.95	15.33	2.21	32.24	-	-	P	V
		874.87	23.21	-22.79	46	28.53	22.55	3.78	31.65	-	-	P	V
Remark	1. No other spurious found.												
	2. All results are PASS against limit line.												



2.4GHz 2400~2483.5MHz
WIFI 802.11g (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11g CH 13 2472MHz	*	2476.82	88.91	-	-	92.52	27.64	5.69	36.94	100	239	P	H
	*	2464.963	79.74	-	-	83.52	27.51	5.67	36.96	100	239	A	H
		2483.52	63.21	-10.79	74	66.82	27.64	5.69	36.94	100	239	P	H
		2483.52	47.84	-6.16	54	51.45	27.64	5.69	36.94	100	239	A	H
	*	2477.488	91.15	-	-	94.76	27.64	5.69	36.94	400	132	P	V
	*	2465.297	82.83	-	-	86.61	27.51	5.67	36.96	400	132	A	V
		2483.52	66.47	-7.53	74	70.08	27.64	5.69	36.94	400	132	P	V
		2483.52	50.25	-3.75	54	53.86	27.64	5.69	36.94	400	132	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												


2.4GHz 2400~2483.5MHz
WIFI 802.11g (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11g CH 13 2472MHz		4944	35.39	-38.61	74	56.35	31.69	9.3	61.95	100	360	P	H
		7416	39.48	-34.52	74	53.03	34.34	11.29	59.18	100	0	P	H
		4944	35.48	-38.52	74	56.44	31.69	9.3	61.95	100	0	P	V
		7416	38.53	-35.47	74	52.08	34.34	11.29	59.18	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**Note symbol**

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	P eak or A verage
H/V	H orizontal or V ertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)


= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.

Appendix C. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11b	97.63	8.24	0.12	300Hz
802.11g	87.26	1.37	0.73	1kHz
2.4GHz 802.11n HT20	86.50	1.28	0.78	1kHz


802.11b

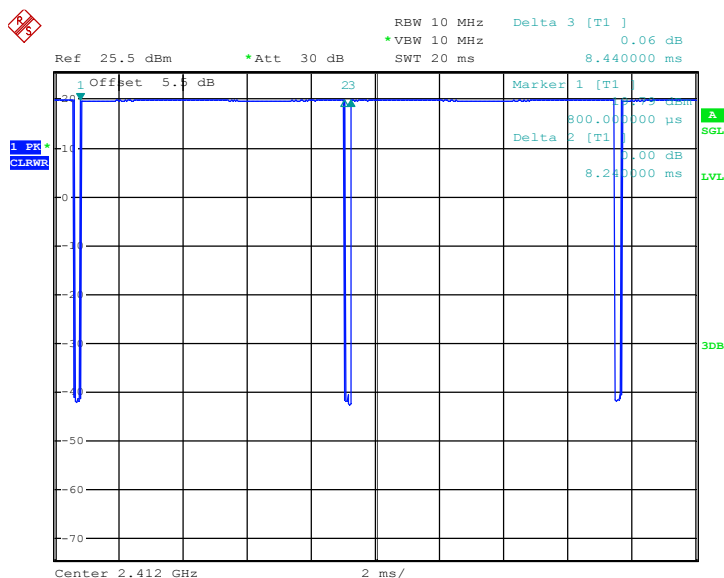

Date: 22.MAY.2016 21:44:36




802.11g

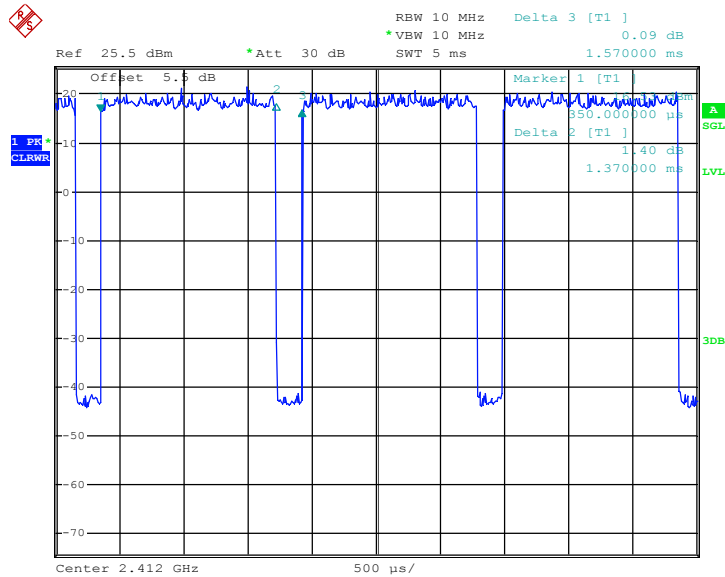

Date: 22.MAY.2016 21:48:05

802.11n HT20

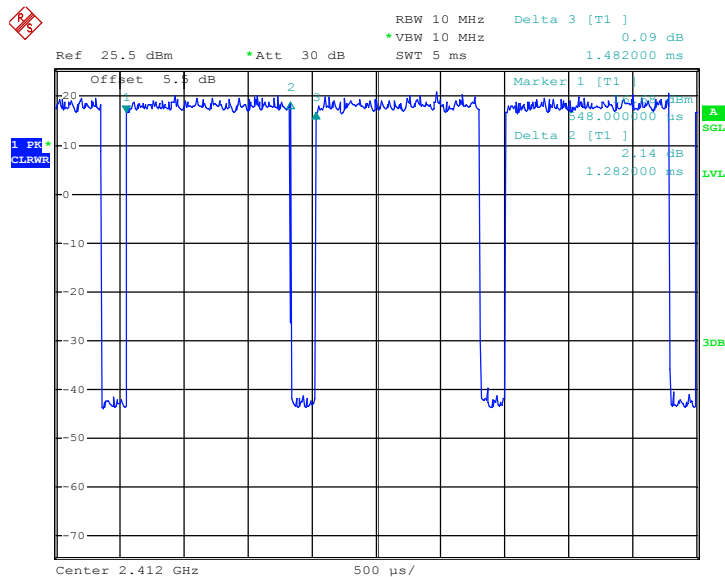

Date: 22.MAY.2016 21:55:35