

# FCC TEST REPORT

**REPORT NO.:** FD950210A19

**MODEL NO.:** 5309A

**RECEIVED:** Feb. 10, 2006

**TESTED:** Feb. 13 ~ 14, 2006

**ISSUED:** Feb. 15, 2006

**APPLICANT:** BEHAVIOR TECH COMPUTER CORP.

**ADDRESS:** 2F, 51, Tung Hsing Rd., Taipei, Taiwan, R.O.C.

**ISSUED BY:** Advance Data Technology Corporation

**LAB LOCATION:** 47 14th Lin, Chiapau Tsun, Linko, Taipei,  
Taiwan, R.O.C.

This test report consists of 21 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, A2LA or any government agencies. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.



## Table of Contents

1	CERTIFICATION .....	3
2	SUMMARY OF TEST RESULTS.....	4
2.1	MEASUREMENT UNCERTAINTY .....	4
3	GENERAL INFORMATION.....	5
3.1	GENERAL DESCRIPTION OF EUT .....	5
3.2	DESCRIPTION OF SUPPORT UNITS.....	6
4	EMISSION TEST.....	7
4.1	CONDUCTED EMISSION MEASUREMENT .....	7
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT .....	7
4.1.2	TEST INSTRUMENTS .....	8
4.1.3	TEST PROCEDURE .....	8
4.1.4	DEVIATION FROM TEST STANDARD .....	8
4.1.5	TEST SETUP .....	9
4.1.6	EUT OPERATING CONDITIONS.....	9
4.1.7	TEST RESULTS .....	10
4.2	RADIATED EMISSION MEASUREMENT .....	12
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT .....	12
4.2.2	TEST INSTRUMENTS .....	13
4.2.3	TEST PROCEDURE .....	14
4.2.4	DEVIATION FROM TEST STANDARD .....	14
4.2.5	TEST SETUP .....	15
4.2.6	EUT OPERATING CONDITIONS.....	15
4.2.7	TEST RESULTS.....	16
5	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	18
6	APPENDIX - INFORMATION ON THE TESTING LABORATORIES .....	20
	APPENDIX-A .....	A-1

## 1 CERTIFICATION

**PRODUCT:** KEYBOARD  
**BRAND NAME:** BTC  
**MODEL NO:** 5309A  
**TEST ITEM:** ENGINEERING SAMPLE  
**APPLICANT:** BEHAVIOR TECH COMPUTER CORP.  
**TESTED:** Feb. 13 ~ 14, 2006  
**STANDARDS:** FCC Part 15: 2005, Subpart B, Class B  
CISPR 22: 1997, Class B  
ICES-003: 2004, Class B  
ANSI C63.4-2003

The above equipment has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**PREPARED BY :** Kay Chen , **DATE:** Feb. 15, 2006  
(Kay Chen )

**TECHNICAL**  
**ACCEPTANCE :** Ken Liu , **DATE:** Feb. 15, 2006  
Responsible for EMI (Ken Liu )

**APPROVED BY :** Kenny Meng , **DATE:** Feb. 15, 2006  
(Kenny Meng, Deputy Manager )

## 2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

Standard	Test Type	Result	Remarks
FCC Part 15: 2005 Subpart B, Class B	Conducted Test	PASS	Meets Class B Limit Minimum passing margin is -20.15 dB at 0.201 MHz
CISPR 22: 1997, Class B	Radiated Test	PASS	Meets Class B Limit Minimum passing margin is -5.27 dB at 51.91 MHz
ICES-003: 2004, Class B			

**Note:** The limit for radiated test was performed according to CISPR 22: 1997, which was specified in FCC PART 15 Subpart B 15.109(g). Also the limits of ICES-003: 2004 and CISPR 22:1997 Subpart B are same.

### 2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4:

"This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2."

Measurement	Value
Conducted emissions	2.46 dB
Radiated emissions	3.74 dB

### 3 GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

<b>PRODUCT</b>	KEYBOARD
<b>MODEL NO.</b>	5309A
<b>POWER SUPPLY</b>	DC 5V (from PC)
<b>DATA CABLE SUPPLIED</b>	Shielded PS/2 cable (1.6m)

**NOTE:**

1. The EUT is a keyboard with PS/2 interface.
2. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

### 3.2 DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	PERSONAL COMPUTER	LEO	Persica 8620G	1A36I98A000220	FCC DoC Approved
2	COLOR MONITOR	ADI	CM100	026058T1020061 1 A	FCC DoC Approved
3	PRINTER	EPSON	LQ-300+	DCGY017096	FCC DoC Approved
4	MODEM	ACEEX	1414	980020503	IFAXDM1414
5	PS/2 MOUSE	BTC	M851	M4-010377	E5XMSM860
6	SPEAKER	KINYO	KSP-25	S5-010118	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	N/A
2	1.8 m braid shielded wire, terminated with VGA connector via metallic frame, w. 2 cores
3	1.8m braid shielded wire, terminated with DB25 and Centronics connector via metallic frame, w/o core
4	1.2 m braid shielded wire, terminated with DB25 and DB9 connector via metallic frame, w/o core.
5	1.5 m Non shielded wire, terminated with PS/2 connector via drain wire, w/o core.
6	1.1 m wrapped shielded wire, terminated via drain wire, with 3.5 mm phone plug, w/o core.

**NOTE:** All power cords of the above support units are non-shielded (1.8m).

### TEST CONFIGURATION

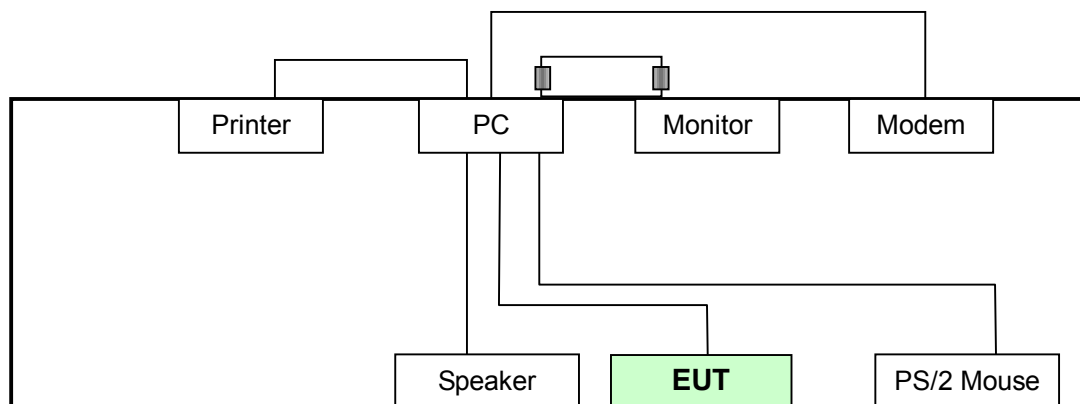

## 4 EMISSION TEST

### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

**TEST STANDARD:**

**FCC Part 15: 2005, Subpart B (Section: 15.107)**

**CISPR 22: 1997 (section 5)**

**ICES-003: 2004 (Class A: section 5.2)**

**(Class B: section 5.3)**

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.50 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

- NOTE:**
- (1) The lower limit shall apply at the transition frequencies.
  - (2) The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
  - (3) All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.



#### 4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESHS30	828109/007	Jun. 28, 2006
ROHDE & SCHWARZ Artificial Mains Network (for EUT)	ESH3-Z5	839135/006	Jun. 08, 2006
LISN With Adapter (for EUT)	AD10	C02Ada-001	Jun. 08, 2006
EMCO-L.I.S.N. (for peripheral)	3825/2	9204-1964	Jun. 01, 2006
Software	ADT_Conc_V7.3.2	NA	NA
Software	ADT_ISN_V7.3.2	NA	NA
RF cable (JYEBAO)	5D-FB	Cable-C02.01	Mar, 31, 2006
HP Terminator (For EMCO LISN)	11593A	E1-01-298	Jan. 16, 2007
HP Terminator (For EMCO LISN)	11593A	E1-01-299	Jan. 16, 2007

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
  2. The test was performed in ADT Shielded Room No. 2.
  3. The VCCI Site Registration No. C-240.

#### 4.1.3 TEST PROCEDURE

The basic test procedure was in accordance with ANSI C63.4-2003 (section 7), CISPR 22 (section 9) and ICES-003: 2004 (section 4).


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit - 20dB) were not recorded.

#### 4.1.4 DEVIATION FROM TEST STANDARD

No deviation



#### 4.1.5 TEST SETUP

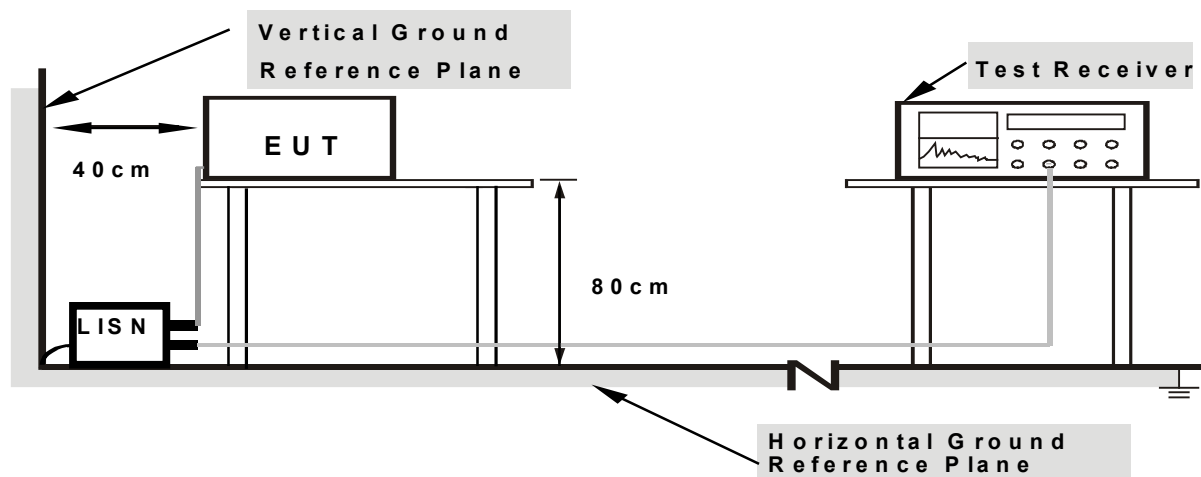

**Note:** 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### 4.1.6 EUT OPERATING CONDITIONS


- a. Turned on the power of all equipment.
- b. PC ran a test program to enable all functions.
- c. PC read and wrote messages from FDD and HDD.
- d. EUT sent "H" character to PC.
- e. PC sent "H" messages to monitor and monitor displayed "H" patterns on screen.
- f. PC sent "H" messages to modem.
- g. PC sent "H" messages to printer and printed them out.
- h. PC sent "1 kHz audio" messages to speaker.
- i. Repeated steps c-i.

## 4.1.7 TEST RESULTS

<b>TEST MODE</b>	With system	<b>6dB BANDWIDTH</b>	9 kHz
<b>INPUT POWER</b>	120Vac, 60 Hz	<b>PHASE</b>	Line (L)
<b>ENVIRONMENTAL CONDITIONS</b>	20deg. C, 78%RH, 1006hPa	<b>TESTED BY:</b> John Liao	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.201	0.20	43.22	-	43.42	-	63.57	53.57	-20.15	-
2	0.297	0.20	35.30	-	35.50	-	60.34	50.34	-24.84	-
3	0.494	0.20	29.05	-	29.25	-	56.10	46.10	-26.85	-
4	8.825	0.64	19.51	-	20.15	-	60.00	50.00	-39.85	-
5	15.045	1.10	20.59	-	21.69	-	60.00	50.00	-38.31	-
6	22.570	1.61	21.12	-	22.73	-	60.00	50.00	-37.27	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

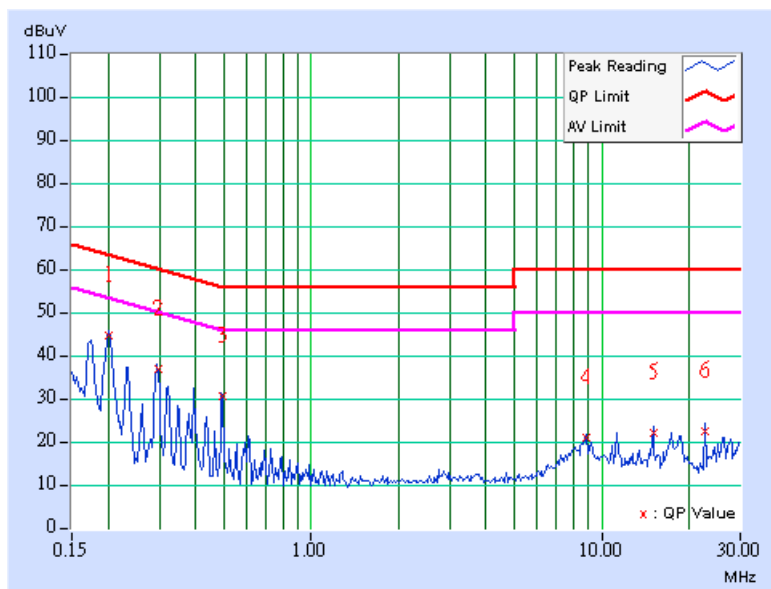

<b>TEST MODE</b>	With system	<b>6dB BANDWIDTH</b>	9 kHz
<b>INPUT POWER</b>	120Vac, 60 Hz	<b>PHASE</b>	Neutral (N)
<b>ENVIRONMENTAL CONDITIONS</b>	20deg. C, 78%RH, 1006hPa	<b>TESTED BY:</b> John Liao	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.201	0.20	42.85	-	43.05	-	63.57	53.57	-20.52	-
2	0.296	0.20	35.95	-	36.15	-	60.36	50.36	-24.21	-
3	0.495	0.20	25.54	-	25.74	-	56.09	46.09	-30.35	-
4	9.221	0.75	16.59	-	17.34	-	60.00	50.00	-42.66	-
5	15.045	1.00	20.95	-	21.95	-	60.00	50.00	-38.05	-
6	22.569	1.61	20.84	-	22.45	-	60.00	50.00	-37.55	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

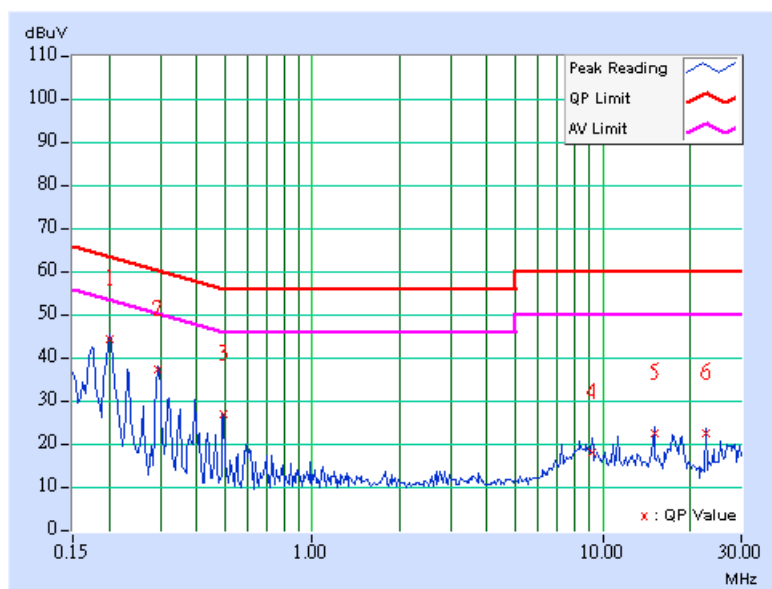

## 4.2 RADIATED EMISSION MEASUREMENT

### 4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

**TEST STANDARD:**

**FCC Part 15: 2005, Subpart B (Section: 15.109)**

**CISPR 22: 1997 (section 6)**

**ICES-003: 2004 (Class A: Section 5.4)**  
**(Class B: Section 5.5)**

#### FOR FREQUENCY BELOW 1000 MHz

FREQUENCY (MHz)	Class A (at 10m)	Class B (at 10m)
	dBuV/m	dBuV/m
30 – 230	40	30
230 - 1000	47	37

Note: The limit for radiated test was performed according to CISPR 22: 1997, which was specified in FCC PART 15B 15.109(g). Also the limits of ICES-003: 2004 and CISPR 22: 1997 are same.

#### LIMIT OF RADIATED EMISSION OF FCC PART 15, SUBPART B FOR FREQUENCY ABOVE 1000 MHz

FREQUENCY (MHz)	Class A (dBuV/m) (at 3m)		Class B (dBuV/m) (at 3m)	
	PEAK	AVERAGE	PEAK	AVERAGE
Above 1000	80.0	60.0	74.0	54.0

- Note: (1) The lower limit shall apply at the transition frequencies.  
 (2) Emission level (dBuV/m) = 20 log Emission level (uV/m).  
 (3) All emanation from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

## FREQUENCY RANGE OF RADIATED MEASUREMENT (For unintentional radiators)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 – 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	5th harmonic of the highest frequency or 40 GHz, whichever is lower

### 4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
HP Preamplifier	8449B	3008A01924	Sep. 06, 2006
HP Preamplifier	8449B	3008A01638	Sep. 21, 2006
SCHAFFNER TEST RECEIVER	SCR 3501	408	Dec. 28, 2006
CHASE BILOG Antenna	CBL6112A	2221	Oct. 12, 2006
EMCO Horn Antenna	3115	6714	Oct. 26, 2006
EMCO Horn Antenna	3115	9312-4192	Mar.21,2006
EMCO Turn Table	1060	1115	NA
CHANCE Tower	CM-AT40	CM-A010	NA
Software	ADT_Radiated_V7.5.14	NA	NA
ADT RF Switches	EM-H-01-1	1002	Sep. 01, 2006
TIMES RF cable	LMR-600	CABLE-ST5-01	Sep. 01, 2006

- NOTE:** 1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in ADT Open Site No. 5.
4. The VCCI Site Registration No. R-1039.

### 4.2.3 TEST PROCEDURE

The basic test procedure was in accordance with ANSI C63.4-2003 (section 8), CISPR 22 (section 10) and ICES-003: 2004 (section 4).

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10-meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the turn table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.


**NOTE:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz for Average detection (AV) at frequency above 1GHz.
3. For measurement of frequency above 1000 MHz, the EUT was set 3 meters away from the interference-receiving antenna.

### 4.2.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.2.5 TEST SETUP

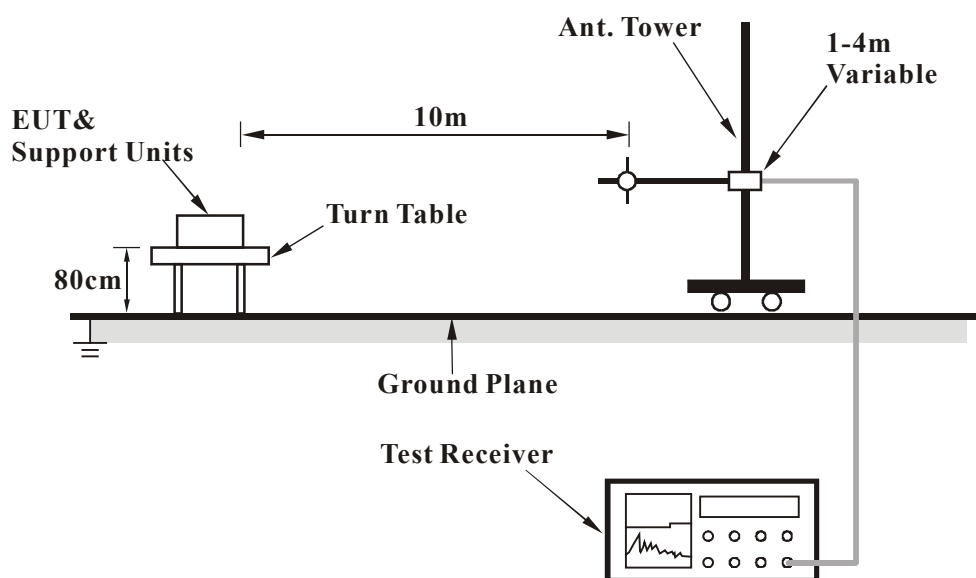

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### 4.2.6 EUT OPERATING CONDITIONS

Same as item 4.1.6


## 4.2.7 TEST RESULTS

<b>TEST MODE</b>	With system	<b>FREQUENCY RANGE</b>	30-1000 MHz
<b>INPUT POWER</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION &amp; BANDWIDTH</b>	Quasi-Peak, 120kHz
<b>ENVIRONMENTAL CONDITIONS</b>	18deg. C, 75% RH, 1006hPa	<b>TESTED BY:</b> John Liao	

### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 10 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	51.92	22.78 QP	30.00	-7.22	4.00 H	252	12.69	10.09
2	56.20	23.00 QP	30.00	-7.00	4.00 H	16	13.81	9.19
3	62.19	24.32 QP	30.00	-5.68	4.00 H	237	16.25	8.07
4	83.34	23.95 QP	30.00	-6.05	4.00 H	256	14.70	9.25
5	165.70	18.01 QP	30.00	-11.99	4.00 H	275	7.33	10.68
6	199.99	20.13 QP	30.00	-9.87	4.00 H	185	9.19	10.94
7	528.24	27.97 QP	37.00	-9.03	2.16 H	240	7.07	20.90
8	863.00	28.52 QP	37.00	-8.48	1.25 H	211	2.95	25.57

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.

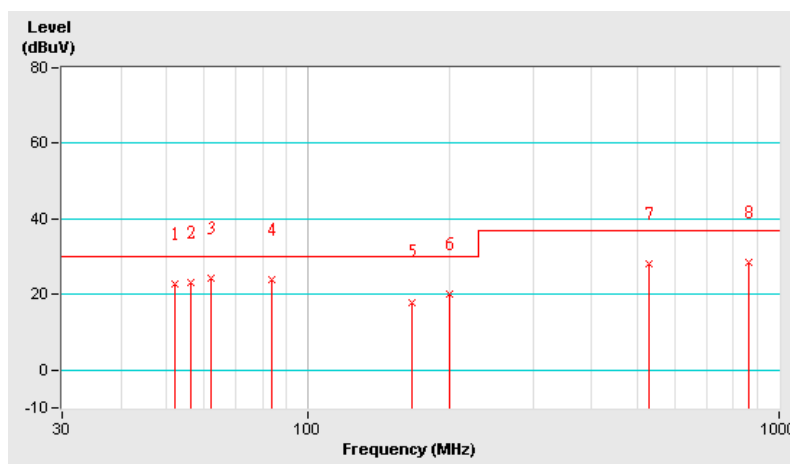




<b>TEST MODE</b>	With system	<b>FREQUENCY RANGE</b>	30-1000 MHz
<b>INPUT POWER</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION &amp; BANDWIDTH</b>	Quasi-Peak, 120kHz
<b>ENVIRONMENTAL CONDITIONS</b>	18deg. C, 75% RH, 1006hPa	<b>TESTED BY:</b> John Liao	

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 10 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	51.91	24.73 QP	30.00	-5.27	1.00 V	159	14.64	10.09
2	56.22	23.99 QP	30.00	-6.01	1.00 V	343	14.81	9.18
3	83.34	22.58 QP	30.00	-7.42	1.30 V	349	13.33	9.25
4	114.69	21.13 QP	30.00	-8.87	1.00 V	306	9.31	11.82
5	132.35	21.25 QP	30.00	-8.75	1.00 V	5	8.83	12.42
6	199.99	21.52 QP	30.00	-8.48	1.00 V	68	10.58	10.94
7	528.12	28.67 QP	37.00	-8.33	2.51 V	1	7.77	20.90

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.

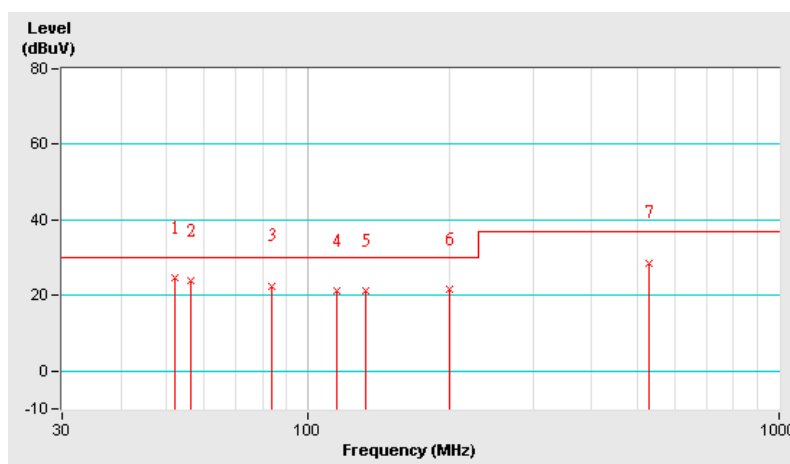


## 5 PHOTOGRAPHS OF THE TEST CONFIGURATION

### CONDUCTED EMISSION TEST



## RADIATED EMISSION TEST

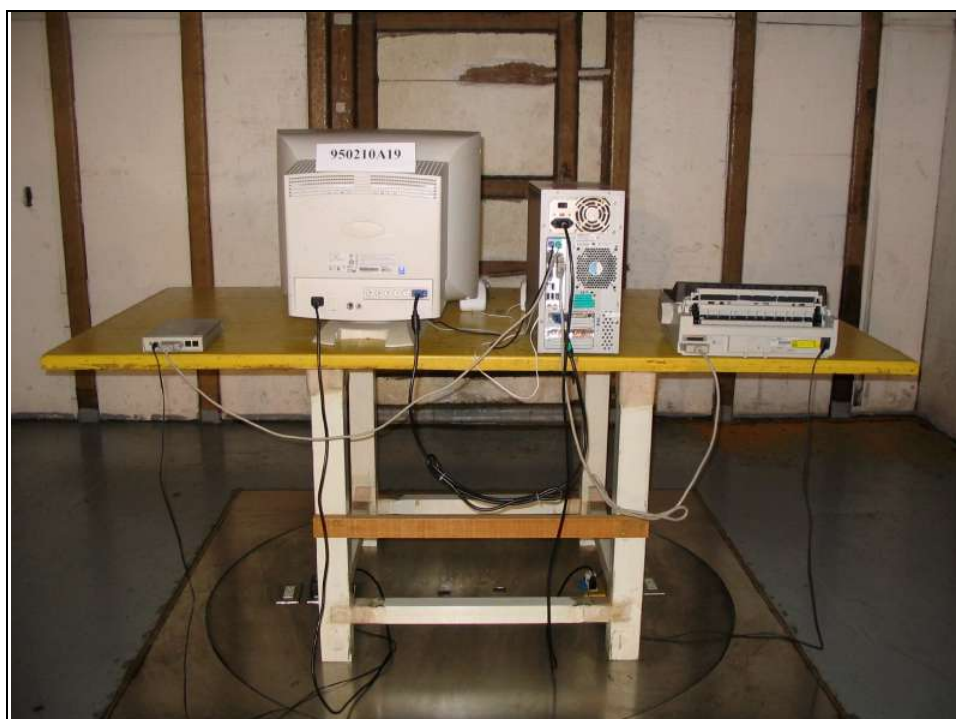



## 6 APPENDIX - INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025:

<b>USA</b>	FCC, UL, A2LA
<b>Germany</b>	TUV Rheinland
<b>Japan</b>	VCCI
<b>Norway</b>	NEMKO
<b>Canada</b>	INDUSTRY CANADA, CSA
<b>R.O.C.</b>	CNLA, BSMI, DGT
<b>Netherlands</b>	Telefication
<b>Singapore</b>	PSB, GOST-ASIA(MOU)
<b>Russia</b>	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: [www.adt.com.tw/index.5/phtml](http://www.adt.com.tw/index.5/phtml).

If you have any comments, please feel free to contact us at the following:

**Linko EMC/RF Lab:**

Tel: 886-2-26052180

Fax: 886-2-26052943

**Hsin Chu EMC/RF Lab:**

Tel: 886-3-5935343

Fax: 886-3-5935342

**Hwa Ya EMC/RF/Safety/Telecom Lab:**

Tel: 886-3-3183232

Fax: 886-3-3185050

**Email:** [service@adt.com.tw](mailto:service@adt.com.tw)

**Web Site:** [www.adt.com.tw](http://www.adt.com.tw)

The address and road map of all our labs can be found in our web site also.



## **APPENDIX-A**

### **MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB**

No any modifications are made to the EUT by the lab during the test.