


.

.

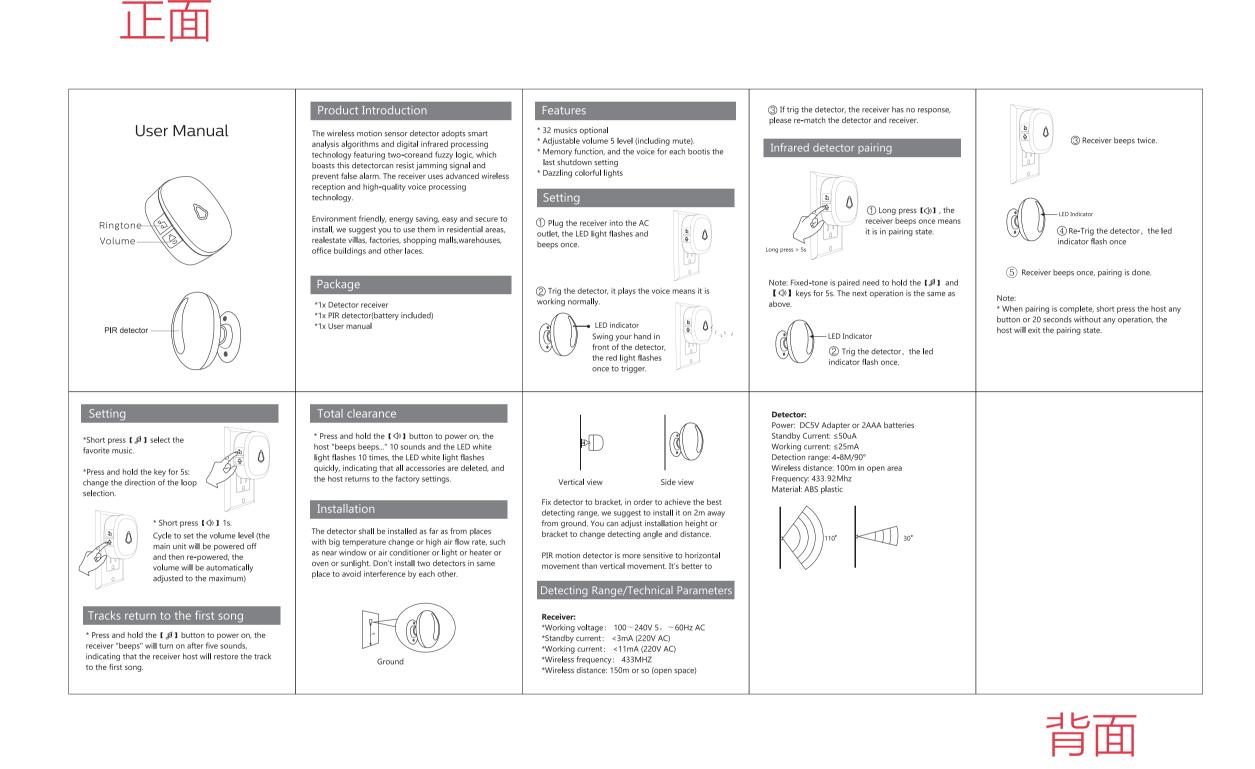

展开尺寸: 300*160mm 单页尺寸: 60x80mm 村质: 120G双铜 颜色: 单色 折成风琴折页样

深圳市刻锐智能科技有限公司 SHENZHEN KERUI SMART TECHNOLOGY CO., LTD

地址:深圳市宝安区福永街道永和路鑫豪盛鼎丰科技园刻锐楼

版本号:

存档编码:

品牌	riswond	彩盒物料编码		绘制 日期	202
图纸名称	DW520+P827 说明书	内卡物料编码		公差	-
尺寸	60x80mm	适用产品		说明	0~
材质	120G双铜	印刷要求		部门审核	
		类型			
		软件版本	AI		
		比列	原文档 1:1做		
		绘制人	杨文英		



20-8-7						文件要求		
ĸ		宽	一一一		ŧ	汀样	做货	
)~2mm		0~2mm	0~2	mm				
	需求部门签字				总经理签字			

FCC Warning

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- -Reorient or relocate the receiving antenna.
- -Increase the separation between the equipment and receiver.
- -Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- -Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.