



FCC TEST REPORT
FCC ID: YMX-EQT001A

On Behalf of

XIAMEN COMFORT SCIENCE & TECHNOLOGY GROUP CO., LTD.

Side table

Model No.: EQ-T001A, SV-10

Prepared for : XIAMEN COMFORT SCIENCE & TECHNOLOGY GROUP CO., LTD.
Address : (5/F)NO.168, QIANPU ROAD, SIMING DISTRICT, XIAMEN, Fujian
CHINA

Prepared By : Shenzhen Alpha Product Testing Co., Ltd.
Address : Building i, No.2, Lixin Road, Fuyong Street, Bao'an District,
518103, Shenzhen, Guangdong, China

Report Number : A2310120-C01-R01
Date of Receipt : October 20, 2023
Date of Test : October 31, 2023
Date of Report : November 28, 2023
Version Number : V0
Test Result : Pass

TABLE OF CONTENTS

Description	Page
1. Test Result Summary	5
2. EUT Description	6
2.1. DESCRIPTION OF DEVICE (EUT)	6
2.2. ACCESSORIES OF DEVICE (EUT)	8
2.3. TESTED SUPPORTING SYSTEM DETAILS	8
2.4. BLOCK DIAGRAM OF CONNECTION BETWEEN EUT AND SIMULATORS	8
2.5. DESCRIPTION OF TEST MODES	8
2.6. TEST CONDITIONS	9
2.7. TEST FACILITY	9
2.8. MEASUREMENT UNCERTAINTY	9
3. Test Results and Measurement Data	10
3.1. RF EXPOSURE TEST	10
4. Photos of test setup	13
5. Photos of EUT	15

TEST REPORT DECLARATION

Applicant : XIAMEN COMFORT SCIENCE & TECHNOLOGY GROUP CO., LTD.
 Address : (5/F)NO.168, QIANPU ROAD, SIMING DISTRICT, XIAMEN, Fujian CHINA
 Manufacturer : XIAMEN HEALTHCARE ELECTRONIC CO., LTD.
 Address : 65-66#, 62-63# BUILDING, SIMING ZONE, TONGAN INDUSTRIAL DISTRICT, XIAMEN CITY, FUJIAN PROVINCE, P.R.CHINA
 EUT Description : Side table
 (A) Model No. : EQ-T001A, SV-10
 (B) Trademark : N/A

Measurement Standard Used:


FCC CFR Title 47 Part 15 Subpart C

FCC KDB 680106 D01 RF Exposure Wireless Charging Apps v03r01

The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed full responsibility for the accuracy and completeness test. Also, this report shows that the EUT is technically compliant with the KDB 680106 D01 requirements.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.

Tested by (name + signature).....: Lucas Pang
 Project Engineer 

Approved by (name + signature).....: Reak Yang
 Project Manager 

Date of issue.....: November 28, 2023

Revision History

Revision	Issue Date	Revisions	Revised By
V0	November 28, 2023	Initial released Issue	Lucas Pang

1. Test Result Summary

Requirement	CFR 47 Section	Result
RF EXPOSURE	§1.1307(b)(1) & KDB680106	PASS

Note:

1. *PASS: Test item meets the requirement.*
2. *Fail: Test item does not meet the requirement.*
3. *N/A: Test case does not apply to the test object.*
4. *The test result judgment is decided by the limit of test standard.*
5. Decision rules for the conclusion of this test report: decision by actual test data without considering measurement uncertainty.

2. EUT Description

2.1. Description of Device (EUT)

EUT Name : Side table
Model No. : EQ-T001A, SV-10
DIFF. : There is no difference except the name of the model. All tests are made with the EQ-T001A model.
Power supply : Input: AC 120V/60Hz
Output: Wireless charging: 5W

Radio Technology : Wireless power transmission systems

Operation frequency : 110-205KHz

Modulation : MSK

Antenna Type : Coil Antenna, Maximum Gain is 0dBi
(This value is supplied by applicant).

Connector cable loss : 0.5dB
(This value is supplied by applicant).

Software version : V1.0

Hardware version : V1.0

Conditions requirement	Answers
Power transfer frequency is less than 1MHz.	After measuring the product the transfer frequency is 110-205KHz
Output power from each primary coil is less than or equal to 15 watts.	After measuring the product the each primary coil power is 5 watts
The system may consist of more than one source primary coils, charging one or more clients. If more than one primary coil is present, the coil pairs may be powered on at the same time.	The transfer system includes only single primary.
Client device is placed directly in contact with the transmitter.	Client device is placed directly in contact with the transmitter.
Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).	Mobile exposure conditions only.
The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.	After measuring the product the Max H-field Strength is 0.534A/m and the Max E-field Strength is 2.228V/m Far less than 50% of the MPE limit.


2.2. Accessories of Device (EUT)

Accessories	:	/
Manufacturer	:	/
Model	:	/
Ratings	:	/

2.3. Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number	Certification
1	Load	N/A	N/A	N/A	N/A

2.4. Block Diagram of connection between EUT and simulators

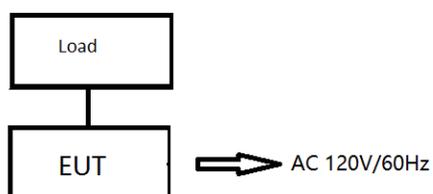

2.5. Description of Test Modes

Mode	Test mode description
1	Full Load(5W)
2	Half Load(2.5W)
3	No Load

Note: 1.The report reflects the worst mode data.

2.6. Test Conditions

Items	Required	Actual
Temperature range:	15-35°C	24°C
Humidity range:	25-75%	56%
Pressure range:	86-106kPa	98kPa

2.7. Test Facility

Shenzhen Alpha Product Testing Co., Ltd

Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103, Shenzhen, Guangdong, China

June 21, 2018 File on Federal Communication Commission
Registration Number: 293961

July 15, 2019 Certificated by IC
Registration Number: 12135A

2.8. Measurement Uncertainty


(95% confidence levels, k=2)

Item	Uncertainty
Uncertainty for H-Field	2.39dB
Uncertainty for E-Field	2.45dB
Uncertainty for conducted RF Power	0.65dB
Uncertainty for temperature	0.2°C
Uncertainty for humidity	1%
Uncertainty for DC and low frequency voltages	0.06%

3. Test Results and Measurement Data

3.1. RF EXPOSURE TEST

3.1.1. Test Specification

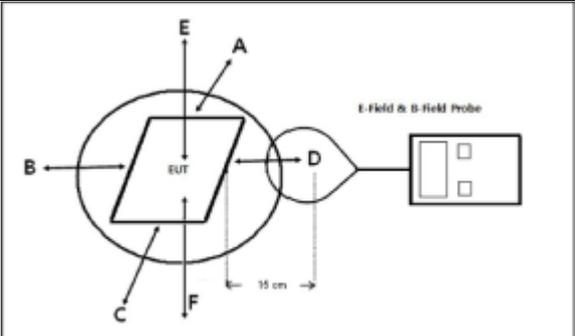Test Requirement:	FCC Rules and Regulations KDB680106
Test Method:	§1.1307(b)(1) & KDB680106
Limits:	According to §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines. According to §1.1310 and §2.1093 RF exposure is calculated. According KDB680106 D01v03r01: RF Exposure Wireless Charging.
Test Setup:	
Test Mode:	Wireless charging load has been charge at no load, middle load and full load. All test modes were pre-tested, but we only recorded the worse case in this report.
Test Procedure:	<ol style="list-style-type: none"> 1. The RF exposure test was carried out on a non-metallic table top 80cm high in the shielding darkroom. 2. The measurement probe was placed at test distance (15cm) which is between the edge of the charger and the geometric centre of probe. 3. The test time is maintained for more than one minute. 4. The highest emission level was recorded and compared with limit as soon as measurement of each points (A, B, C, D, E, F) were completed. 5. The EUT were measured according to the dictates of KDB 680106 D01v03r01.
Test Result:	PASS

3.1.2. Test Instruments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Exposure Level Tester	narda	ELT-400	N-0231	2023.08.22	1 Year
2	Magnetic field probe 100cm2	narda	ELT probe 100cm2	M0675	2023.08.22	1 Year
3	Isotropic Electric Field Probe	narda	EP-601	511WX60706	2023.08.16	1 Year

3.1.3. Test data

For Full Load(5W) mode:

E-Field Strength at 15 cm for position A, B, C, D. 20cm for position E from the edges surrounding the EUT (V/m)

Frequency Range (MHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Limit (50%) (V/m)	Limits Test (V/m)
0.115-0.205	2.134	2.035	2.051	2.134	2.228	307	614

H-Filed Strength at 15 cm for position A, B, C, D. 20cm for position E from the edges surrounding the EUT (A/m)

Frequency Range (MHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Limit (50%)	Limits Test
0.115-0.205(μ T)	0.953	0.919	0.863	0.974	0.917		
0.115-0.205(A/m)	0.762	0.735	0.690	0.779	0.734	0.815	1.63

Note: A/m= μ T/1.25

For Half Load(2.5W) mode:

E-Field Strength at 15 cm for position A, B, C, D. 20cm for position E from the edges surrounding the EUT (V/m)

Frequency Range (MHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Limit (50%) (V/m)	Limits Test (V/m)
0.115-0.205	1.936	1.955	1.893	1.958	1.889	307	614

H-Filed Strength at 15 cm for position A, B, C, D. 20cm for position E from the edges surrounding the EUT (A/m)

Frequency Range (MHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Limit (50%)	Limits Test
0.115-0.205(μ T)	0.895	0.816	0.833	0.794	0.901		
0.115-0.205(A/m)	0.716	0.653	0.666	0.635	0.721	0.815	1.63

Note: A/m= μ T/1.25

For Null Load mode:

E-Field Strength at 15 cm for position A, B, C, D. 20cm for position E from the edges surrounding the EUT (V/m)


Frequency Range (MHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Limit (50%) (V/m)	Limits Test (V/m)
0.115-0.205	1.550	1.480	1.341	1.531	1.664	307	614

H-Filed Strength at 15 cm for position A, B, C, D. 20cm for position E from the edges surrounding the EUT (A/m)

Frequency Range (MHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Limit (50%)	Limits Test
0.115-0.205(μ T)	0.815	0.807	0.783	0.839	0.752		
0.115-0.205(A/m)	0.652	0.646	0.626	0.671	0.602	0.815	1.63

Note: A/m= μ T/1.25

4. Photos of test setup

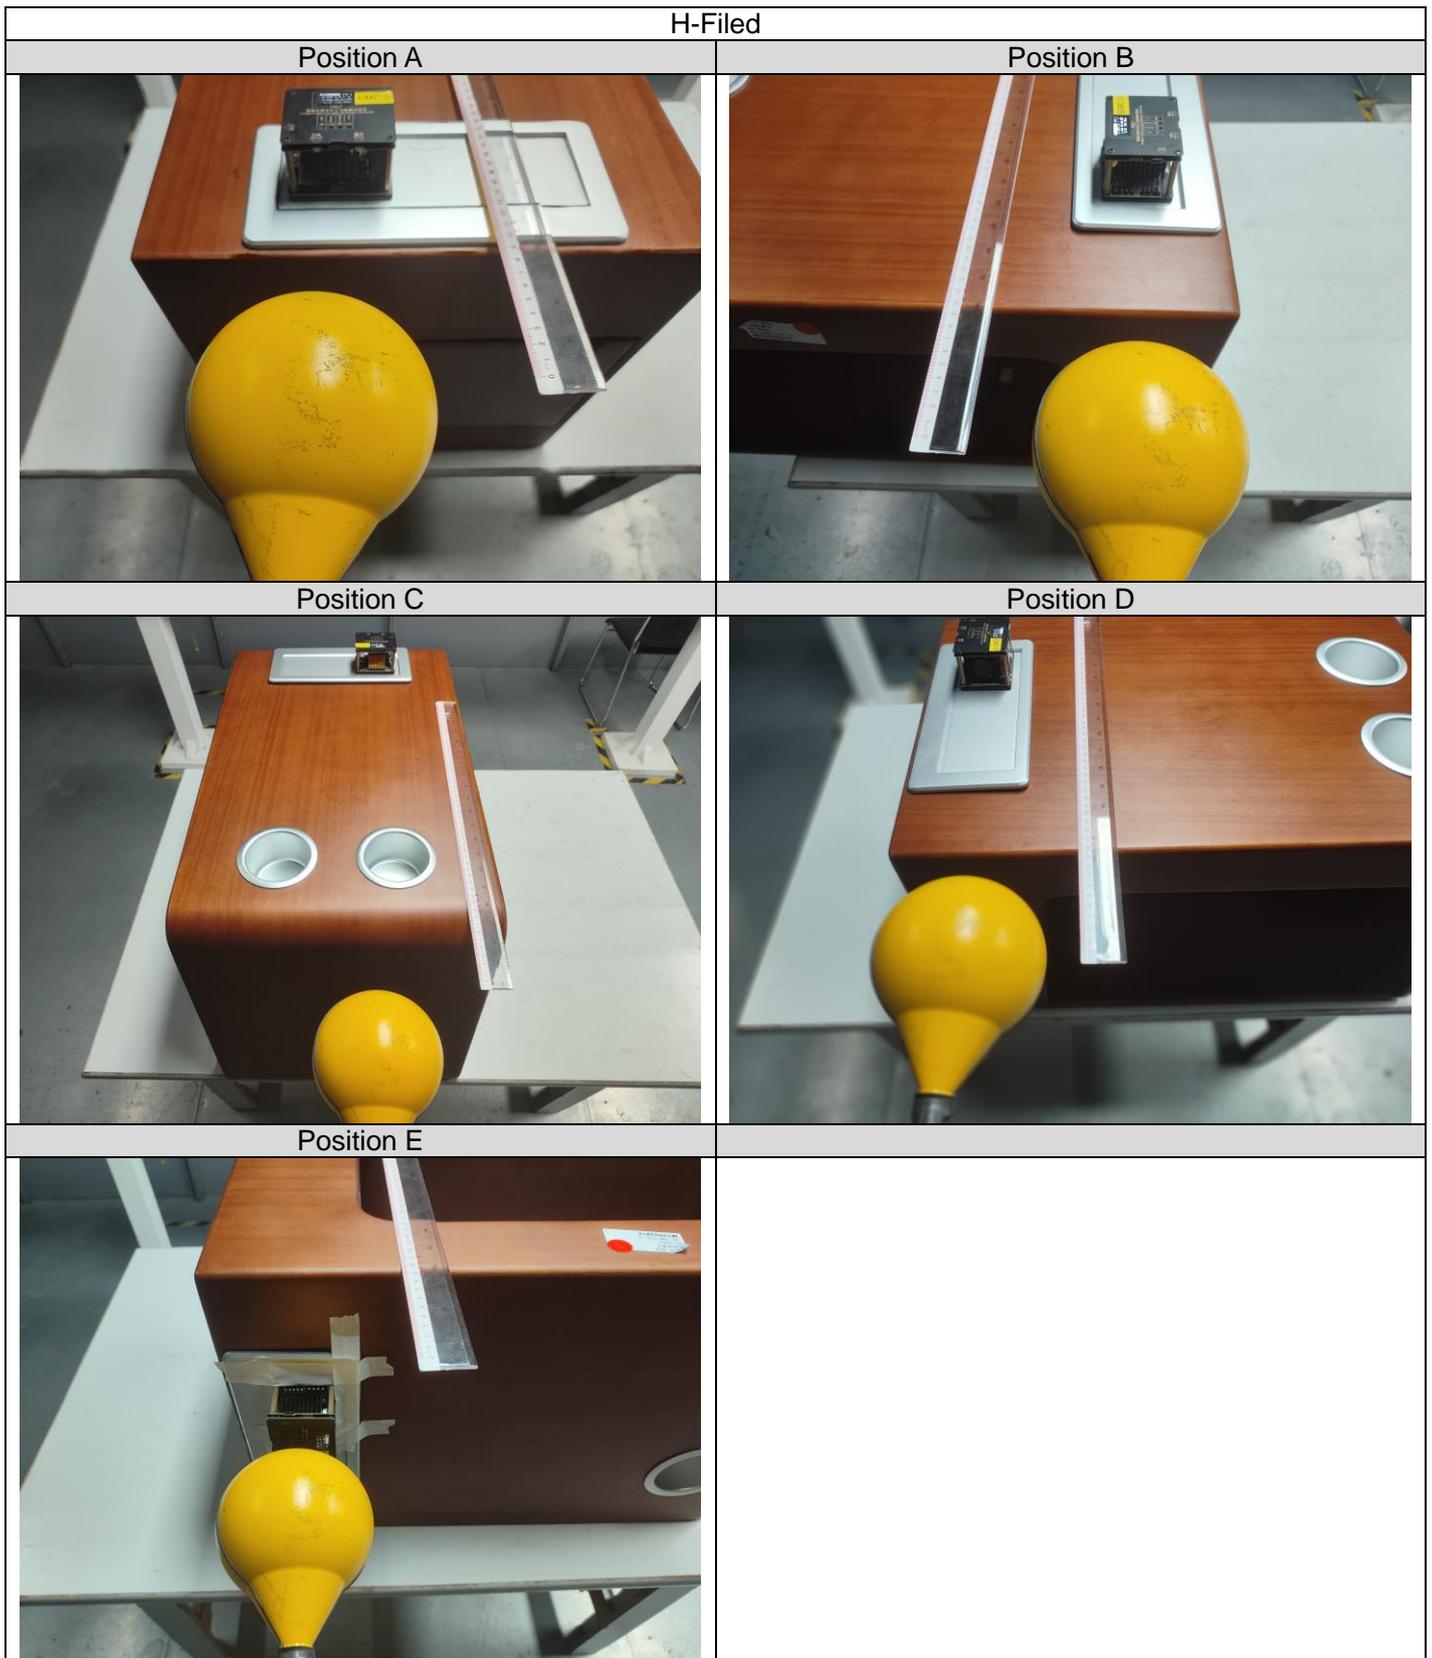

E-Filed

Position A

Position B




Position C

Position D



Position E



5. Photos of EUT

Refer to ANNEX.

-----END OF REPORT-----