

FCC TEST REPORT (WIFI 5G)

for

NEXXT SOLUTIONS

Kronos 750-AC Universal Range Extender

Model Number: AEIEL755U1

FCC ID: X4YKRNS750

Prepared for : NEXXT SOLUTIONS

Address : 3505 N.W 107th AVE. MIAMI FLORIDA 33178 U.S.A

Prepared by : Keyway Testing Technology Co., Ltd.

Address : Baishun Industrial Zone, Zhangmutou Town,
Dongguan, Guangdong, China

Tel: 86-769-8718 2258

Fax: 86-769-8718 1058

Report No. : TR17060277-E-002


Date of Test : Jul. 3~11, 2017

Date of Report : Jul. 11, 2017

TABLE OF CONTENTS

Test Report Declaration	Page
1. TEST SUMMARY	4
2. GENERAL PRODUCT INFORMATION	4
2.1. Product Function	4
2.2. Description of Device (EUT).....	4
2.3. Test Supporting System.....	4
2.4. Independent Operation Modes	5
2.5. Test Sites	5
2.6. List of Test and Measurement Instruments	6
3. TEST SET-UP AND OPERATION MODES	7
3.1. Principle of Configuration Selection	7
3.2. Block Diagram of Test Set-up	7
3.3. Test Software	7
3.4. Special Accessories and Auxiliary Equipment.....	7
4. EMISSION TEST RESULTS.....	8
4.1. Conducted Emission at the Mains Terminals Test	8
4.2. Radiated Emission Test.....	13
5. BAND EDGE COMPLIANCE TEST	21
5.1. Limits.....	21
5.2. Test Setup	21
5.3. Test Data	21
6. 26DB AND 6DB BANDWIDTH TEST	40
6.1. Applicable Standard	40
6.2. Test Procedure	40
6.3. Test Setup	40
7. OUTPUT POWER TEST	46
7.1. Limits.....	46
7.2. Test Setup	46
7.3. Test Result	47
8. DUTY CYCLE	48
8.1. Test Procedure	48
8.2. Test Setup	48
9. PEAK POWER SPECTRAL DENSITY TEST	51
9.1. Limits.....	51
9.2. Test Setup	51
9.3. Test Data	52
10. FREQUENCY STABILITY TEST	57
10.1. Limit.....	57
10.2. Test Configuration	57
10.3. Test Procedure.....	57
10.4. Test Result.....	58
11. ANTENNA REQUIREMENTS.....	60
11.1. Limits.....	60
11.2. Test Result.....	60
12. PHOTOGRAPHS OF TEST SET-UP	61
13. PHOTOGRAPHS OF THE EUT	63

Keyway Testing Technology Co., Ltd.

Applicant:	NEXXT SOLUTIONS		
Address:	3505 N.W 107 th AVE. MIAMI FLORIDA 33178 U.S.A		
Manufacturer:	YICHEN (SHENZHEN) TECHNOLOGY CO., LTD		
Address:	1-4/F, NO.6 Yashen Industrial Factory, No.8 Chengxin Road, Baolong Industrial City, Baolong Community, Longgang Street, Longgang District, Shenzhen, China		
Factor:	YICHEN (SHENZHEN) TECHNOLOGY CO., LTD		
Address:	1-4/F, NO.6 Yashen Industrial Factory, No.8 Chengxin Road, Baolong Industrial City, Baolong Community, Longgang Street, Longgang District, Shenzhen, China		
E.U.T:	Kronos 750-AC Universal Range Extender		
Model Number:	AEIEL755U1		
Trade Name:	NEXXT	Serial No.:	-----
Date of Receipt:	Jun. 30, 2017	Date of Test:	Jul. 3~11, 2017
Test Specification:	FCC Part 15, Subpart 15.407: Oct. 1, 2016 ANSI C63.10:2013 KDB558074 D01 DTS Meas Guidance v03r05		
Test Result:	The equipment under test was found to be compliance with the requirements of the standards applied.		
	Issue Date: Jul. 11, 2017		
Tested by:	Reviewed by:	Approved by:	
 Keven Wu/ Engineer	 Mark Li / Supervisor	 Andy Gao/ Supervisor	
Other Aspects:	None.		
Abbreviations: OK/P=passed fail/F=failed n.a/N=not applicable E.U.T=equipment under tested			
This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Keyway Testing Technology Co., Ltd.			

1. TEST SUMMARY

Test Items	Test Requirement	Result
Conducted Emissions	15.207	PASS
Radiated Emissions	15.407(b),15.209	PASS
26dB bandwidth and 99%dB Bandwidth	15.407 (a)	PASS
Power density	15.407 (a)	PASS
Maximum Peak Output Power	15.407 (a)	PASS
Emissions from out of band	15.407 (b)	PASS
Frequency Stability	15.407 (g)	PASS
Antenna Requirement	15.203	PASS

2. GENERAL PRODUCT INFORMATION

2.1. Product Function

Refer to Technical Construction Form and User Manual.

2.2. Description of Device (EUT)

Product Name:	Kronos 750-AC Universal Range Extender
Model No.:	AEIEL755U1
Operation Frequency:	5180-5240MHz, 5745-5825MHz(802.11a/n(HT20)) 5190-5230MHz, 5755-5795MHz(802.11n(HT40))
Channel numbers:	9 channels for 802.11a/n(HT20) 4 channels for 802.11n(HT40)
Modulation technology:	Orthogonal Frequency Division Multiplexing(OFDM)
Data speed (IEEE 802.11a):	6Mbps, 9Mbps, 12Mbps, 18Mbps, 24Mbps, 36Mbps, 48Mbps, 54Mbps
Data speed (IEEE 802.11n20):	6.5Mbps, 52Mbps, 78Mbps, 86.67Mbps, 104Mbps, 115.56Mbps, 117Mbps, 130Mbps, 144.44Mbps, 150Mbps
Data speed (IEEE 802.11n40):	13.5Mbps, 45Mbps, 54Mbps, 90Mbps, 108Mbps, 120Mbps, 150 Mbps
Antenna Type:	PCB Antenna
Antenna gain:	3.08dBi
Power supply:	AC 100-240V, 50/60Hz, 0.3A

2.3. Test Supporting System

Notebook
 Manufacturer: Lenovo
 M/N: Lenovo G475
 S/N: GB14477457

2.4. Independent Operation Modes

The basic operation modes are:

The EUT was configured for testing in an engineering mode which was provided by the manufacturer.

For 802.11a/n(HT20):

1. lowest channel : 5180MHz (Channel 36)
2. middle channel : 5200MHz (Channel 40)
3. highest channel : 5240MHz (Channel 48)

For 802.11n(HT40):

4. lowest channel : 5190MHz (Channel 38)
5. highest channel : 5230MHz (Channel 46)

For 802.11a/n(HT20):

6. lowest channel : 5745MHz (Channel 149)
7. middle channel : 5785MHz (Channel 157)
8. highest channel : 5825MHz (Channel 165)

For 802.11n(HT40):

9. lowest channel : 5755MHz (Channel 151)
10. highest channel : 5795MHz (Channel 159)

Note: For conducted emission test and radiated emissions test, we pretest all mode.

The worst mode's data was recording and show in the test report.

2.5. Test Sites

Test Facilities

Lab Qualifications	:	Certificated by Industry Canada Registration No.: 9868A Date of registration: December 8, 2011
		Certificated by FCC, USA Registration No.: 370994 Date of registration: February21, 2012
		Certificated by CNASChina Registration No.: CNAS L5783 Date of registration: August 8, 2012

2.6. List of Test and Measurement Instruments

For conducted emission at the mains terminals test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESCI	101156	Apr. 09,17	Apr. 09,18
Artificial Mains Network	Rohde&Schwarz	ENV216	101315	Apr. 09,17	Apr. 09,18
Artificial Mains Network (AUX)	Rohde&Schwarz	ENV216	101314	Apr. 09,17	Apr. 09,18
RF Cable	FUJIKURA	3D-2W	944 Cable	Apr. 09,17	Apr. 09,18

For radiated emission test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESCI	101156	Apr. 09,17	Apr. 09,18
System Simulator	Agilent	E5515C	GB43130245	Apr. 09,17	Apr. 09,18
Power Splitter	Weinschel	1506A	NW425	Apr. 09,17	Apr. 09,18
Bilog Antenna	ETS-LINDGREN	3142D	135452	Apr. 09,17	Apr. 09,18
Remark: Testable Frequency Range: 26MHz–6GHz					
Spectrum Analyzer	Agilent	E4407B	MY4511304	Apr. 09,17	Apr. 09,18
Remark: Testable Frequency Range: 100Hz–26.5GHz					
Spectrum Analyzer	R&S	FSV40	132.1.3008K39-100967	Apr. 09,17	Apr. 09,18
Remark: Testable Frequency Range: 10Hz–40GHz					
3m Semi-anechoic Chamber	ETS-LINDGREN	966	KW01	Apr. 09,17	Apr. 09,18
Signal Amplifier	SONOMA	310	187016	Apr. 09,17	Apr. 09,18
Signal Amplifier	Agilent	8449B	3008A00251	Apr. 09,17	Apr. 09,18
RF Cable	IMRO	IMRO-400	966 Cable 1#	N/A	N/A
MULTI-DEVICE Controller	ETS-LINDGREN	2090	126913	N/A	N/A
Horn Antenna	DAZE	ZN30701	11003	Apr. 09,17	Apr. 09,18
Remark: Testable Frequency Range: 1GHz–18GHz					
Horn Antenna	SCHWARZBECK	BBHA9170	9170-068	Apr. 09,17	Apr. 09,18
Remark: Testable Frequency Range: 18GHz–40GHz					
Spectrum Analyzer	Agilent	8593E	3911A04271	Apr. 09,17	Apr. 09,18
Remark: Testable Frequency Range: 9kHz–22GHz					
Spectrum Analyzer	Agilent	E4408B	MY44211125	Apr. 09,17	Apr. 09,18
Remark: Testable Frequency Range: 9kHz–26.5GHz					
Signal Amplifier	DAZE	ZN3380C	11001	Apr. 09,17	Apr. 09,18
HighPass filter	Micro	HPM50111	324216	Apr. 09,17	Apr. 09,18
Filter	COM-MW	ZBSF-C836.5-25-X	KW032	Apr. 09,17	Apr. 09,18
Filter	COM-MW	ZBSF-C1747.5-75-X2	KW035	Apr. 09,17	Apr. 09,18
Filter	COM-MW	ZBSF-C1880-60-X2	KW037	Apr. 09,17	Apr. 09,18
Constant temperature and humidity box	GF	GTH-800-40-1P	MAA9906-005	Apr. 09,17	Apr. 09,18
Splitter	Agilent	11636B	0025164	Apr. 09,17	Apr. 09,18
Power Meter	Anritsu	ML2495A	1204003	Apr. 09,17	Apr. 09,18
Power Sensor	Anritsu	MA2411B	1126150	Apr. 09,17	Apr. 09,18
Spectrum Analyzer	Agilent	N9020A	MY56070279	Apr. 09,17	Apr. 09,18
Remark: Testable Frequency Range: 10Hz–26.5GHz					

3. TEST SET-UP AND OPERATION MODES

3.1. Principle of Configuration Selection

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the Operating Instructions.

3.2. Block Diagram of Test Set-up

System Diagram of Connections between EUT and Simulators



(EUT: Kronos 750-AC Universal Range Extender)

3.3. Test Software

Final Test Mode	Description
Test Software	Ralink QA Tool

3.4. Special Accessories and Auxiliary Equipment

Notebook	
Manufacturer:	Lenovo
M/N:	Lenovo G475
S/N:	GB14477457

4. EMISSION TEST RESULTS

4.1. Conducted Emission at the Mains Terminals Test

4.1.1 Limit 15.207 limits

Frequency MHz	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

NOTE: 1.The lower limit shall apply at the transition frequencies.
2.The limit decreases linearly with the logarithm of the frequency in the range 0,15 MHz to 0,50 MHz.

4.1.2 Test Setup


1.The EUT was put on a wooden table which was 0.8 m high above the ground and connected to the AC mains through the Artificial Mains Network (AMN). Where the mains cable supplied by the manufacture was longer than 0.8 m, the excess was folded back and forth parallel to the cable at the center so as to form a bundle no longer than 0.4 m.

2.The EUT was kept 0.4 m from any other earthed conducting surface. Both sides of AC line were checked to find out the maximum conducted emission levels according to the test procedure during the conducted emission test.

3.The frequency range from 150 kHz to 30 MHz was investigated.


4.The bandwidth of the test receiver was set at 9 kHz.

5.Pretest for all mode, and the test data of the worst case condition(s) was reported on the following page.

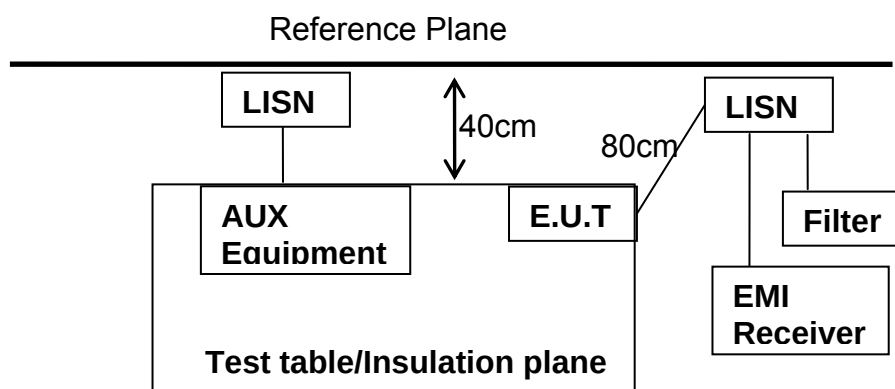


Remark: E.U.T. :Equipment Under Test
LISN: Line Impedance Stabilization Network
Test table height: 0.8m.

EUT :	Kronos 750-AC Universal Range Extender	Model Name :	AEIEL755U1
Temperature :	26°C	Relative Humidity :	54%
Pressure :	1010hPa	Phase:	L
Test Voltage :	AC 120V/60Hz	Test Mode :	Link Mode

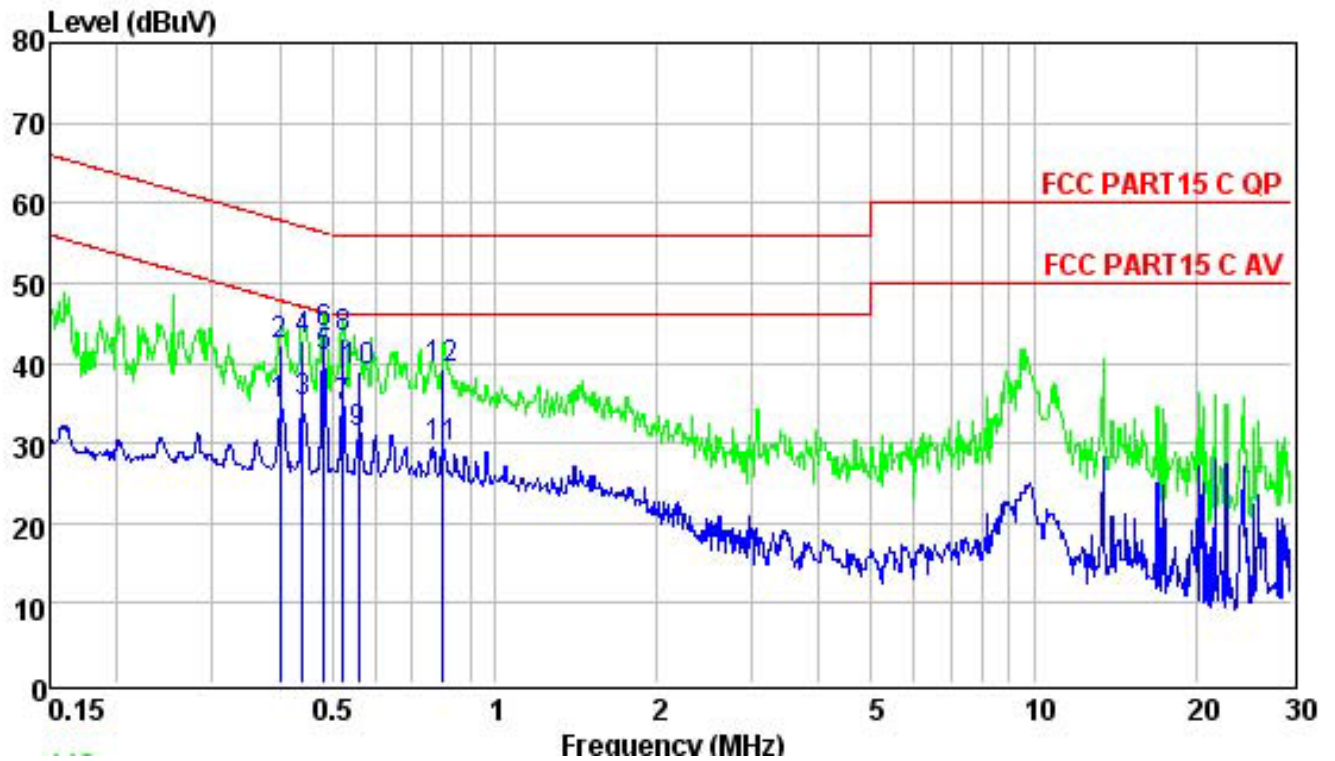


	Freq	Level	Limit	Over	
	MHz	dBuV	Line	Limit	Remark
	MHz	dBuV	dBuV	dB	
1	0.400	34.84	47.86	-13.02	Average
2	0.400	42.30	57.86	-15.56	QP
3	0.442	35.09	47.02	-11.93	Average
4	0.442	42.80	57.02	-14.22	QP
5	0.484	40.70	46.27	-5.57	Average
6	0.484	43.80	56.27	-12.47	QP
7	0.524	34.57	46.00	-11.43	Average
8	0.524	43.20	56.00	-12.80	QP
9	0.561	31.22	46.00	-14.78	Average
10	0.561	39.10	56.00	-16.90	QP
11	0.804	29.52	46.00	-16.48	Average
12	0.804	39.20	56.00	-16.80	QP

EUT :	Kronos 750-AC Universal Range Extender	Model Name :	AEIEL755U1
Temperature :	26°C	Relative Humidity :	54%
Pressure :	1010hPa	Phase:	N
Test Voltage :	AC 120V/60Hz	Test Mode :	Link Mode

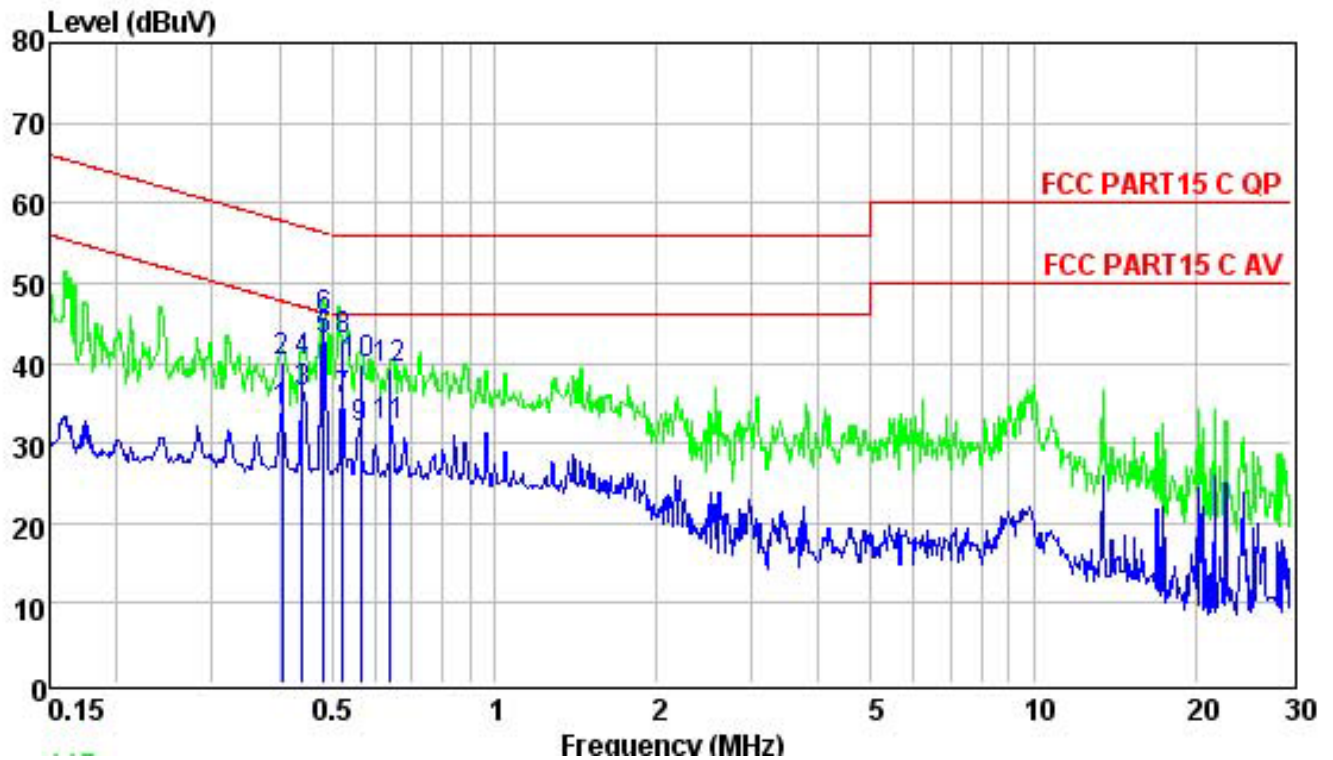


	Freq	Level	Limit	Over	Remark
	MHz	dBuV	Line	Limit	
	MHz	dBuV	dBuV	dB	
1	0.404	33.79	47.77	-13.98	Average
2	0.404	40.20	57.77	-17.57	QP
3	0.442	36.21	47.02	-10.81	Average
4	0.442	40.10	57.02	-16.92	QP
5	0.484	42.80	46.27	-3.47	Average
6	0.484	45.60	56.27	-10.67	QP
7	0.524	35.30	46.00	-10.70	Average
8	0.524	42.90	56.00	-13.10	QP
9	0.564	31.77	46.00	-14.23	Average
10	0.564	39.80	56.00	-16.20	QP
11	0.641	32.06	46.00	-13.94	Average
12	0.641	39.30	56.00	-16.70	QP

EUT :	Kronos 750-AC Universal Range Extender	Model Name :	AEIEL755U1
Temperature :	26°C	Relative Humidity :	54%
Pressure :	1010hPa	Phase:	L
Test Voltage :	AC 240V/60Hz	Test Mode :	Link Mode

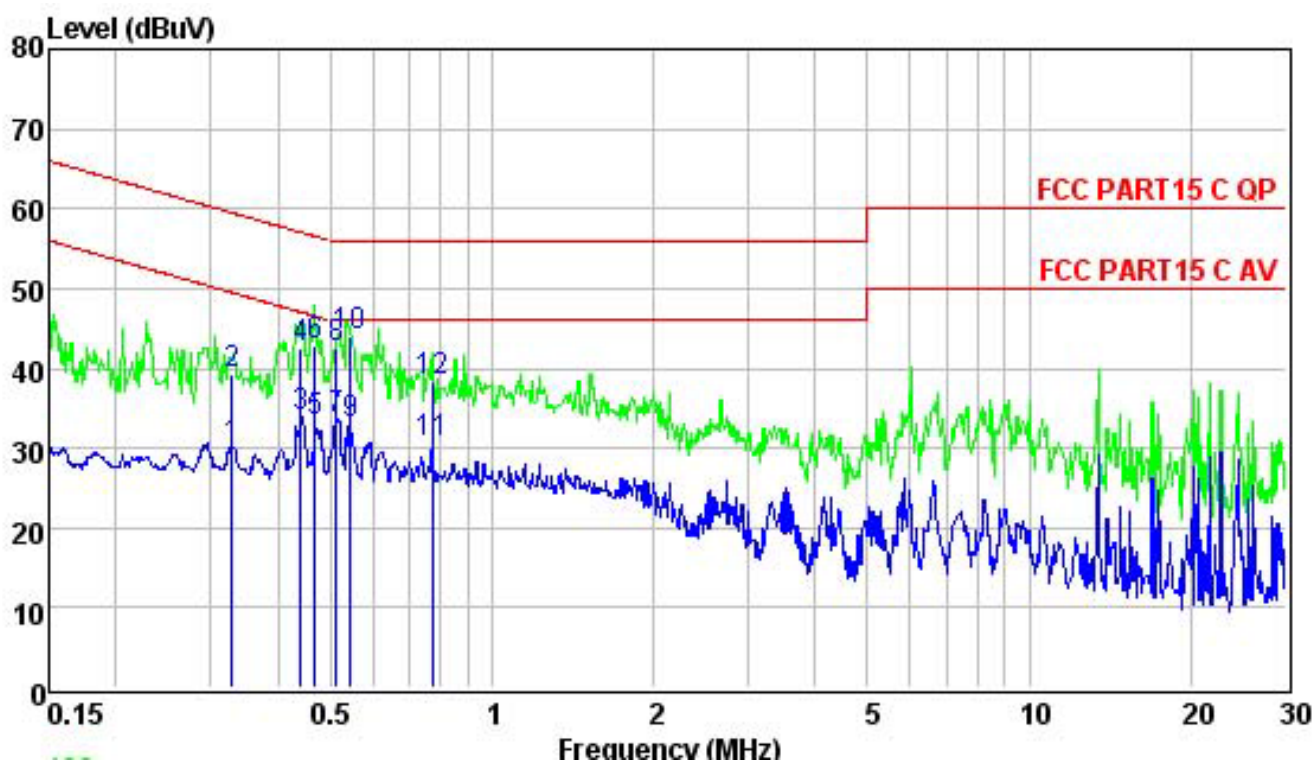

	Freq	Level	Limit	Over	Remark
	MHz	dBuV	Line	Limit	
			dBuV	dB	
1	0.329	30.18	49.49	-19.31	Average
2	0.329	39.20	59.49	-20.29	QP
3	0.442	33.83	47.02	-13.19	Average
4	0.442	42.60	57.02	-14.42	QP
5	0.469	33.42	46.54	-13.12	Average
6	0.469	42.90	56.54	-13.64	QP
7	0.513	33.58	46.00	-12.42	Average
8	0.513	42.50	56.00	-13.50	QP
9	0.546	32.90	46.00	-13.10	Average
10	0.546	43.90	56.00	-12.10	QP
11	0.775	30.56	46.00	-15.44	Average
12	0.775	38.50	56.00	-17.50	QP

EUT :	Kronos 750-AC Universal Range Extender	Model Name :	AEIEL755U1
Temperature :	26°C	Relative Humidity :	54%
Pressure :	1010hPa	Phase:	N
Test Voltage :	AC 240V/60Hz	Test Mode :	Link Mode

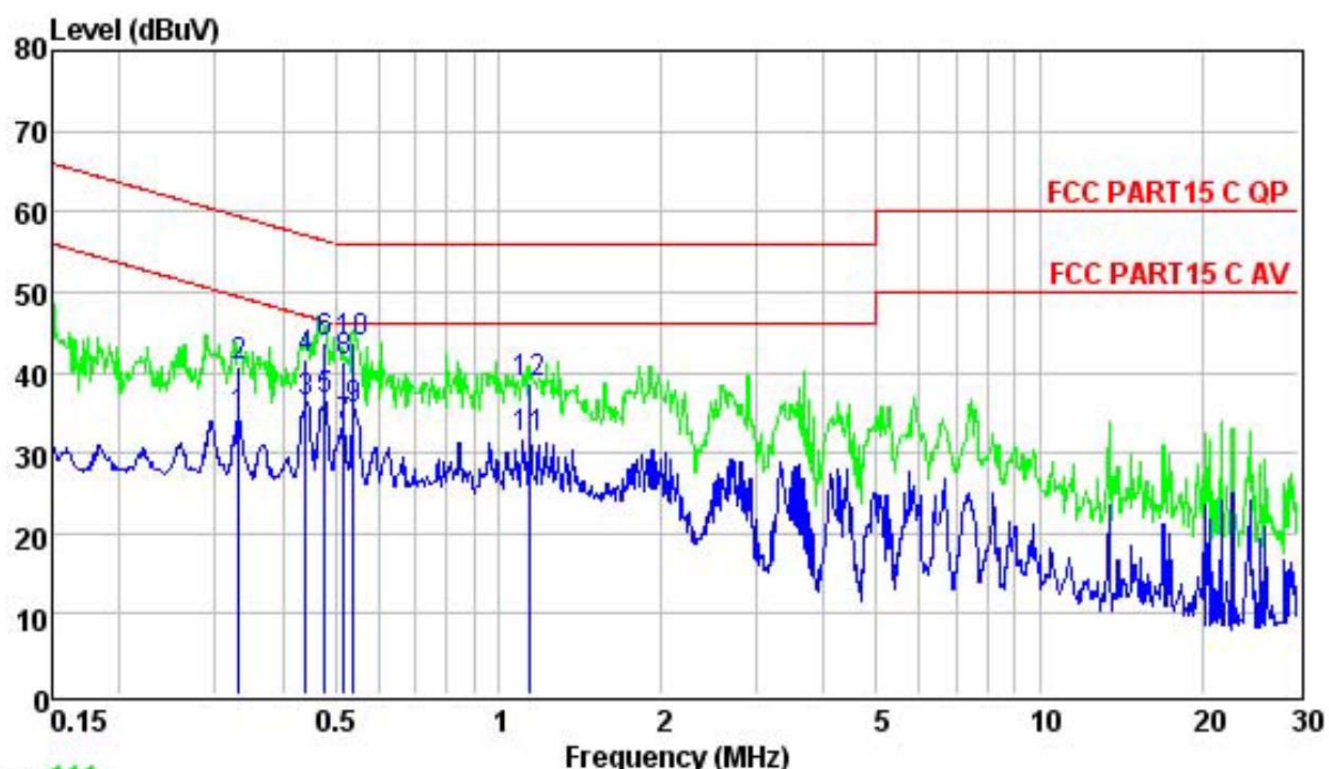

	Freq	Level	Limit	Over	
	MHz	dBuV	Line	Limit	Remark
	MHz	dBuV	dBuV	dB	
1	0.332	34.43	49.40	-14.97	Average
2	0.332	40.70	59.40	-18.70	QP
3	0.442	36.40	47.02	-10.62	Average
4	0.442	41.60	57.02	-15.42	QP
5	0.479	36.50	46.36	-9.86	Average
6	0.479	43.60	56.36	-12.76	QP
7	0.518	33.45	46.00	-12.55	Average
8	0.518	41.30	56.00	-14.70	QP
9	0.541	35.33	46.00	-10.67	Average
10	0.541	43.80	56.00	-12.20	QP
11	1.141	31.73	46.00	-14.27	Average
12	1.141	38.60	56.00	-17.40	QP

4.2. Radiated Emission Test

4.2.1 Limit 15.209 limits

Frequency MHZ	Distance Meters	Filed Strengths Limit	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}$
30~88	3	100	40.0
88~216	3	150	43.5
216~960	3	200	46.0
960~1000	3	500	54.0
Above 1000	3	74.0dB(μV)/m(Peak) 54.0dB(μV)/m(Average)	

4.2.2 Restricted bands of operation

MHz	MHz	MHz	GHz
0.009-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	
All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.			

4.2.3 Test Setup

The EUT was placed on a turn table which was 0.8 m (above 1GHz, the high was 1.5m) above the ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was set 3 m away from the receiving antenna which was mounted on an antenna tower. The measuring antenna moved up and down to find out the maximum emission level. It moved from 1 m to 4 m for both horizontal and vertical polarizations.

The EUT was tested in the Chamber Site. It was pre-scanned with a Peak detector from the spectrum, and all the final readings from the test receiver were measured with the Quasi-Peak detector.

The bandwidth of the EMI test receiver is set at 120kHz for frequency range from 30MHz to 1000 MHz.

The bandwidth of the Spectrum's VBW is set at 3MHz and RBW is set at 1MHz for peak emissions measurement above 1GHz and 1MHz RBW, 10Hz VBW for average emissions measure above 1GHz, Both PK and AV measure, PK detector is used.

The frequency range from 30MHz to 10th harmonic are checked. and no any emissions were found from 18GHz to 40 GHz, So the radiated emissions from 18GHz to 40GHz were not record.

Notes: 1. Emission Level = Antenna Factor + Cable Loss + Meter Reading-Preamp Factor.


2. Measurement Uncertainty: ± 3.2 dB at a level of confidence of 95%.

3. For emissions above 1GHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.


4. For emissions below 1GHz, pretest for all mode, the test data of the worst case condition(s) was reported on the following pages.

5. For Both PK and AV value above 1GHz, PK detector is used.


Radiated Emission Test-Up Below 30MHz

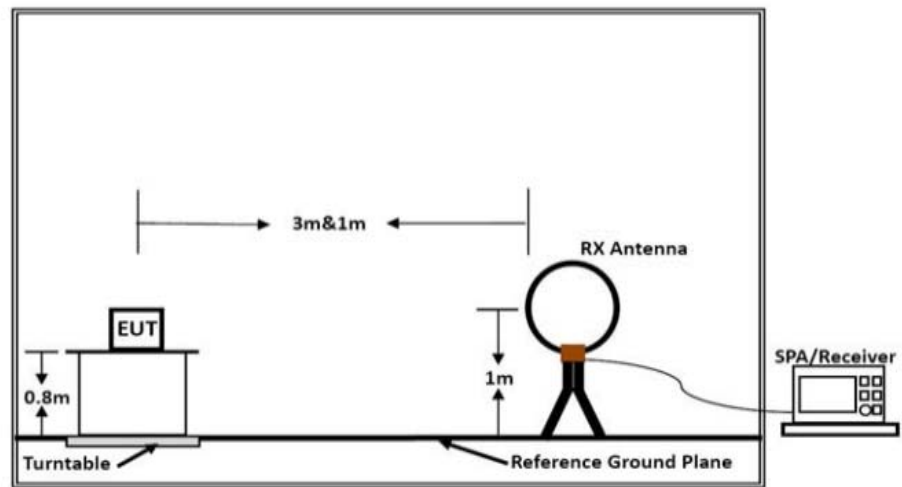

Below 1GHz

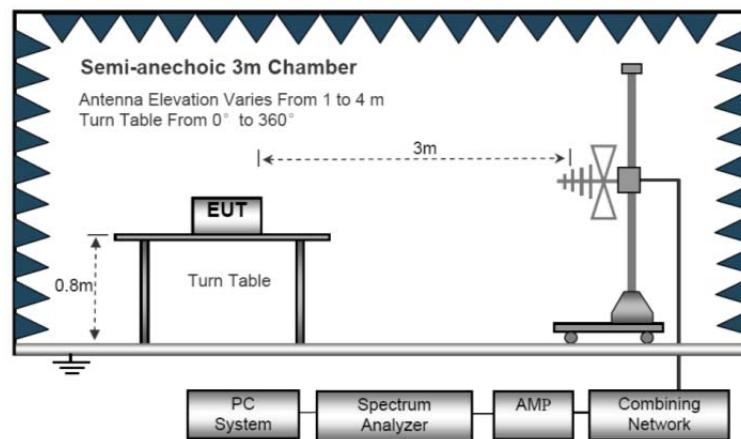

Above 1GHz

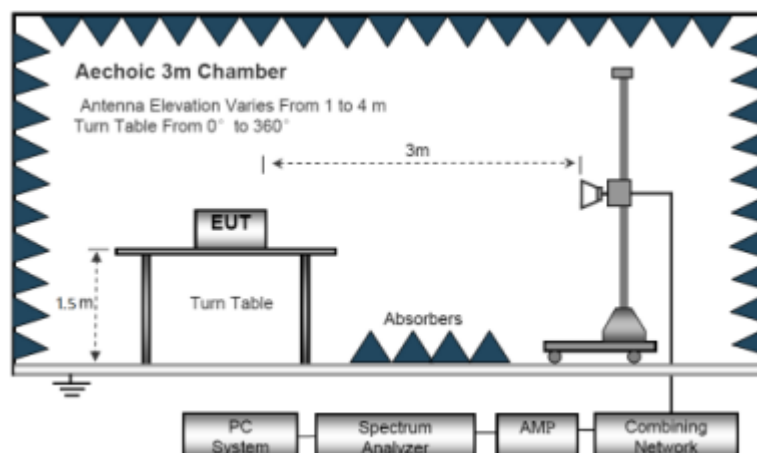

EUT :	Kronos 750-AC Universal Range Extender	Model Name :	AEIEL755U1
Temperature :	20°C	Relative Humidity :	48%
Pressure :	1010hPa	Test Mode :	TX
Test Voltage :	AC 120V/60Hz		

Below 30MHz

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	P(See Note)

Note:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported;

Distance extrapolation factor = $40 \log (\text{specific distance/test distance})$ (dB);

Limit line = specific limits(dBuV) + distance extrapolation factor.


Below 1GHz			
EUT :	Kronos 750-AC Universal Range Extender	Model Name :	AEIEL755U1
Temperature :	20℃	Relative Humidity :	48%
Pressure :	1010hPa	Test Mode :	TX-5180(802.11a)
Test Voltage :	AC 120V/60Hz		

Vertical

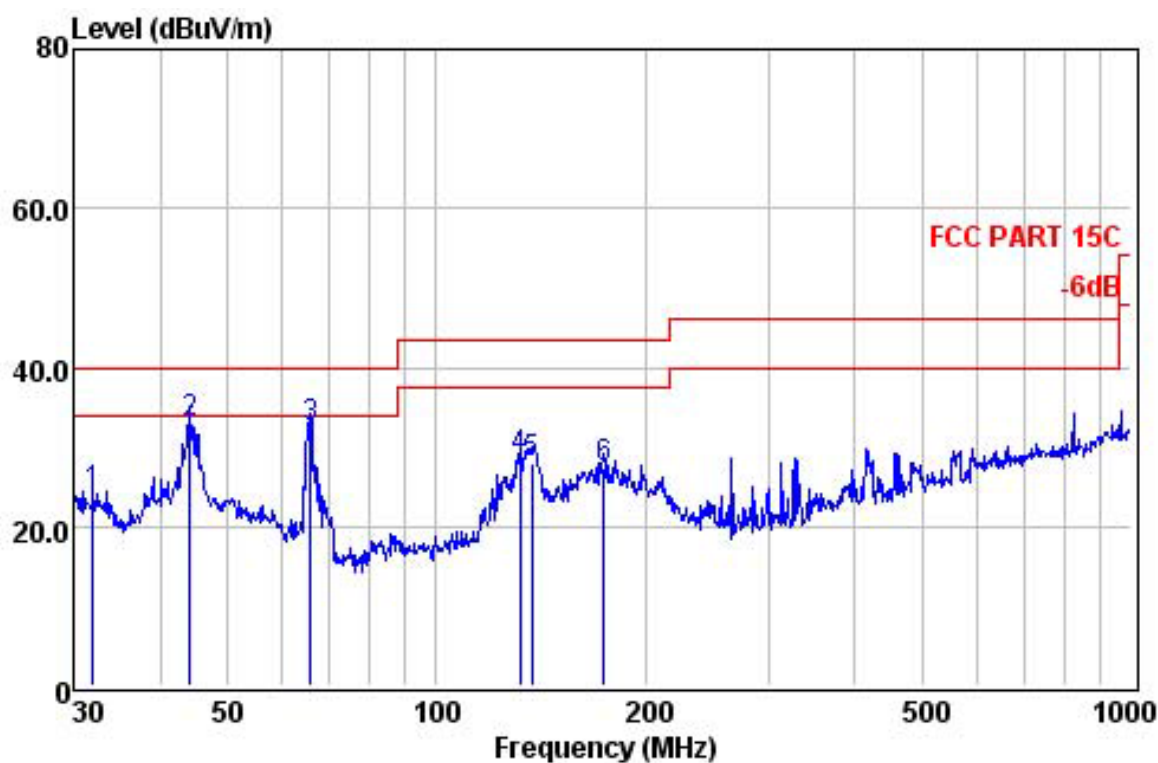

	Freq	Read Level	Cable Loss	Antenna Factor	Level	Limit	Over Limit	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	32.07	6.07	0.29	17.58	23.94	40.00	-16.06	QP
2	44.12	21.81	0.13	11.21	33.15	40.00	-6.85	QP
3	65.80	24.72	0.14	7.42	32.28	40.00	-7.72	QP
4	131.76	20.02	0.22	8.32	28.56	43.50	-14.94	QP
5	137.42	19.37	0.23	8.37	27.97	43.50	-15.53	QP
6	174.42	16.79	0.24	10.23	27.26	43.50	-16.24	QP

Horizontal

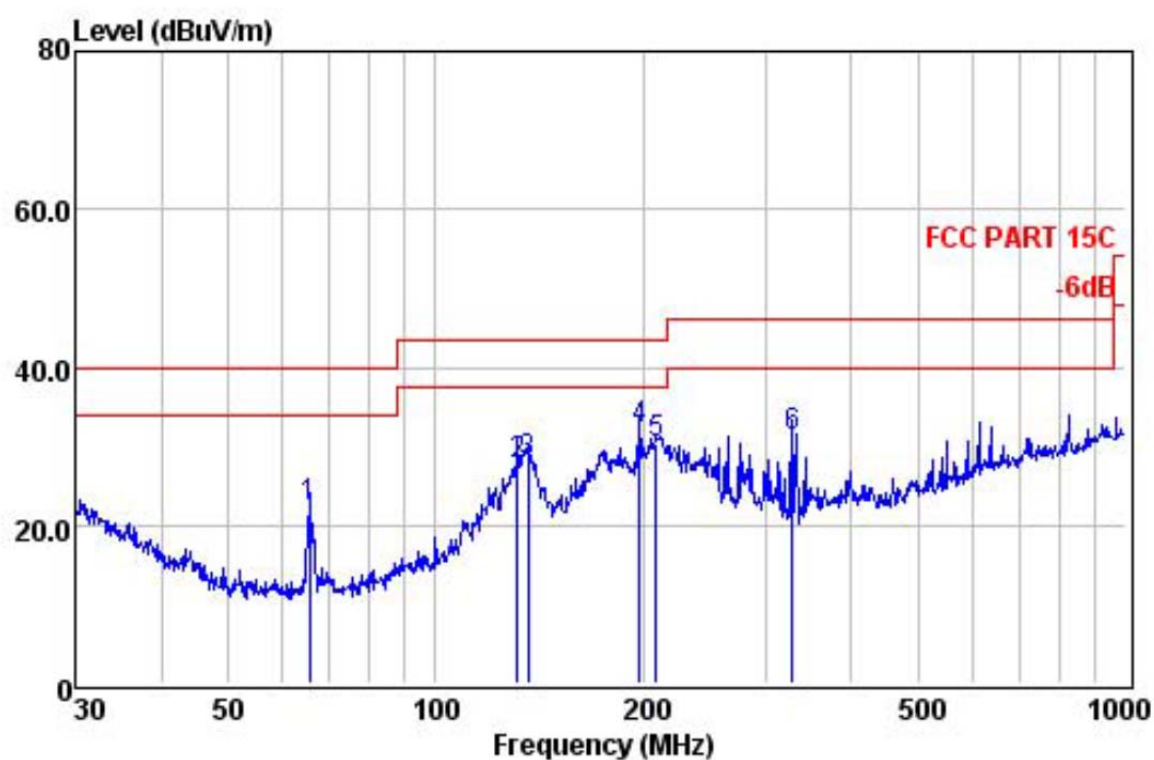

	Freq	Read Level	CableAntenna Loss	Factor	Level	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	65.57	14.66	0.14	7.41	22.21	40.00	-17.79	QP
2	131.30	19.27	0.22	8.31	27.80	43.50	-15.70	QP
3	135.98	19.31	0.23	8.36	27.90	43.50	-15.60	QP
4	197.20	20.93	0.31	10.75	31.99	43.50	-11.51	QP
5	208.58	18.51	0.35	11.41	30.27	43.50	-13.23	QP
6	329.04	15.91	0.72	14.66	31.29	46.00	-14.71	QP

Note:1. Absolute Level= Reading Level+ Antenna Factor + Cable Loss;

2. Over Limit= Absolute Level – Limit;

3. Only the worst case is presented in the report .

Above 1GHz			
EUT :	Kronos 750-AC Universal Range Extender	Model Name :	AEIEL755U1
Temperature :	20°C	Relative Humidity :	48%
Pressure :	1010hPa	Test Mode :	TX-802.11a
Test Voltage :	AC 120V/60Hz		

Polar (H/V)	Frequency	Meter Reading	Antenna Factor	Cable loss	Preamp factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
802.11a-5180									
V	10360	30.67	23.99	17.04	28.84	42.86	54.00	-11.14	Average
V	10360	43.16	23.99	17.04	28.84	55.35	74.00	-18.65	Peak
V	15540	29.68	23.53	20.34	29.63	43.92	54.00	-10.08	Average
V	15540	40.38	23.53	20.34	29.63	54.62	74.00	-19.38	Peak
H	10360	31.25	23.99	17.04	28.84	43.44	54.00	-10.56	Average
H	10360	41.56	23.99	17.04	28.84	53.75	74.00	-20.25	Peak
H	15540	29.12	23.53	20.34	29.63	43.36	54.00	-10.64	Average
H	15540	38.25	23.53	20.34	29.63	52.49	74.00	-21.51	Peak
802.11a-5200									
V	10400	31.32	24.04	17.04	28.84	43.56	54.00	-10.44	Average
V	10400	42.63	24.04	17.04	28.84	54.87	74.00	-19.13	Peak
V	15600	30.77	23.79	20.39	29.64	45.31	54.00	-8.69	Average
V	15600	38.46	23.79	20.39	29.64	53.00	74.00	-21.00	Peak
H	10400	32.27	24.04	17.04	28.84	44.51	54.00	-9.49	Average
H	10400	41.26	24.04	17.04	28.84	53.50	74.00	-20.50	Peak
H	15600	28.69	23.79	20.39	29.64	43.23	54.00	-10.77	Average
H	15600	39.73	23.79	20.39	29.64	54.27	74.00	-19.73	Peak
802.11a-5240									
V	10480	30.28	25.17	17.06	28.85	43.66	54.00	-10.34	Average
V	10480	41.25	25.17	17.06	28.85	54.63	74.00	-19.37	Peak
V	15720	30.48	24.25	20.45	29.67	45.51	54.00	-8.49	Average
V	15720	35.78	24.25	20.45	29.67	50.81	74.00	-23.19	Peak
H	10480	31.68	25.17	17.06	28.85	45.06	54.00	-8.94	Average
H	10480	43.58	25.17	17.06	28.85	56.96	74.00	-17.04	Peak
H	15720	28.85	24.25	20.45	29.67	43.88	54.00	-10.12	Average
H	15720	38.46	24.25	20.45	29.67	53.49	74.00	-20.51	Peak

Polar (H/V)	Frequency	Meter Reading	Antenna Factor	Cable loss	Preamp factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
802.11a-5745									
V	11490	32.24	23.89	17.26	28.84	44.55	54.00	-9.45	Average
V	11490	45.24	23.89	17.26	28.84	57.55	74.00	-16.45	Peak
V	17235	29.94	24.97	21.54	29.63	46.82	54.00	-7.18	Average
V	17235	40.12	24.97	21.54	29.63	57.00	74.00	-17.00	Peak
H	11490	31.54	23.89	17.26	28.84	43.85	54.00	-10.15	Average
H	11490	44.75	23.89	17.26	28.84	57.06	74.00	-16.94	Peak
H	17235	28.98	24.97	21.54	29.63	45.86	54.00	-8.14	Average
H	17235	38.03	24.97	21.54	29.63	54.91	74.00	-19.09	Peak
802.11a-5785									
V	11570	32.89	25.82	17.28	28.84	47.15	54.00	-6.85	Average
V	11570	46.25	25.82	17.28	28.84	60.51	74.00	-13.49	Peak
V	17355	30.86	25.16	21.66	29.64	48.04	54.00	-5.96	Average
V	17355	40.77	25.16	21.66	29.64	57.95	74.00	-16.05	Peak
H	11570	30.89	25.82	17.28	28.84	45.15	54.00	-8.85	Average
H	11570	44.87	25.82	17.28	28.84	59.13	74.00	-14.87	Peak
H	17355	29.25	25.16	21.66	29.64	46.43	54.00	-7.57	Average
H	17355	37.64	25.16	21.66	29.64	54.82	74.00	-19.18	Peak
802.11a-5825									
V	11650	33.21	25.76	17.06	28.85	47.18	54.00	-6.82	Average
V	11650	47.05	25.76	17.06	28.85	61.02	74.00	-12.98	Peak
V	17475	30.12	26.35	20.45	29.67	47.25	54.00	-6.75	Average
V	17475	39.77	26.35	20.45	29.67	56.90	74.00	-17.10	Peak
H	11650	30.43	25.76	17.06	28.85	44.40	54.00	-9.60	Average
H	11650	43.55	25.76	17.06	28.85	57.52	74.00	-16.48	Peak
H	17475	28.72	26.35	20.45	29.67	45.85	54.00	-8.15	Average
H	17475	37.23	26.35	20.45	29.67	54.36	74.00	-19.64	Peak

Note:

Absolute Level= Reading Level + Antenna Factor + Cable Loss - Preamp Factor,

Over Limit= Absolute Level – Limit

“802.11a” mode is the worst mode and show in the report. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has not to be reported.

5. BAND EDGE COMPLIANCE TEST

5.1. Limits

All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz. For the band 5725-5825 MHz , All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

5.2. Test Setup

Test method: FCC KDB 789033 G)& Parts 15.407(b)(4) & 15.209(a)

Same as Clause 4.2.

5.3. Test Data

Please see data as below:

5.3.1 Conduction band-edge

5.2G

802.11a : Band Edge, Left Side



802.11a : Band Edge, Right Side




802.11n (HT20) : Band Edge, Left Side



802.11n (HT20) : Band Edge, Right Side



802.11n (HT40) : Band Edge, Left Side

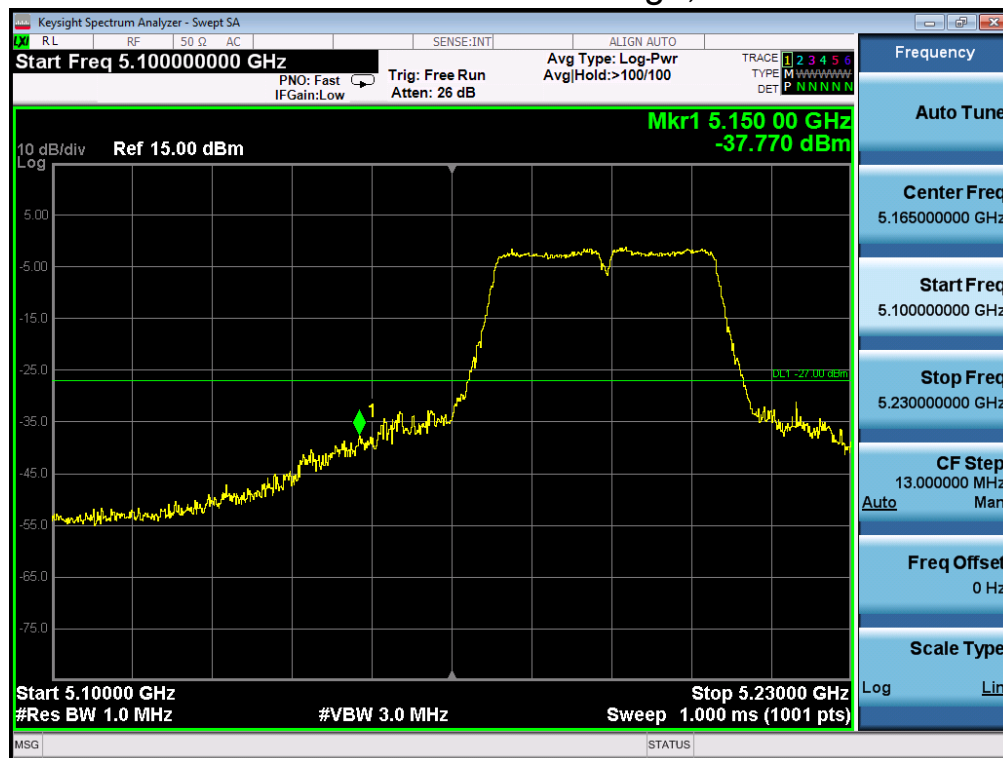


802.11n (HT40) : Band Edge, Right Side



5.8G


802.11a: Band Edge, Left Side

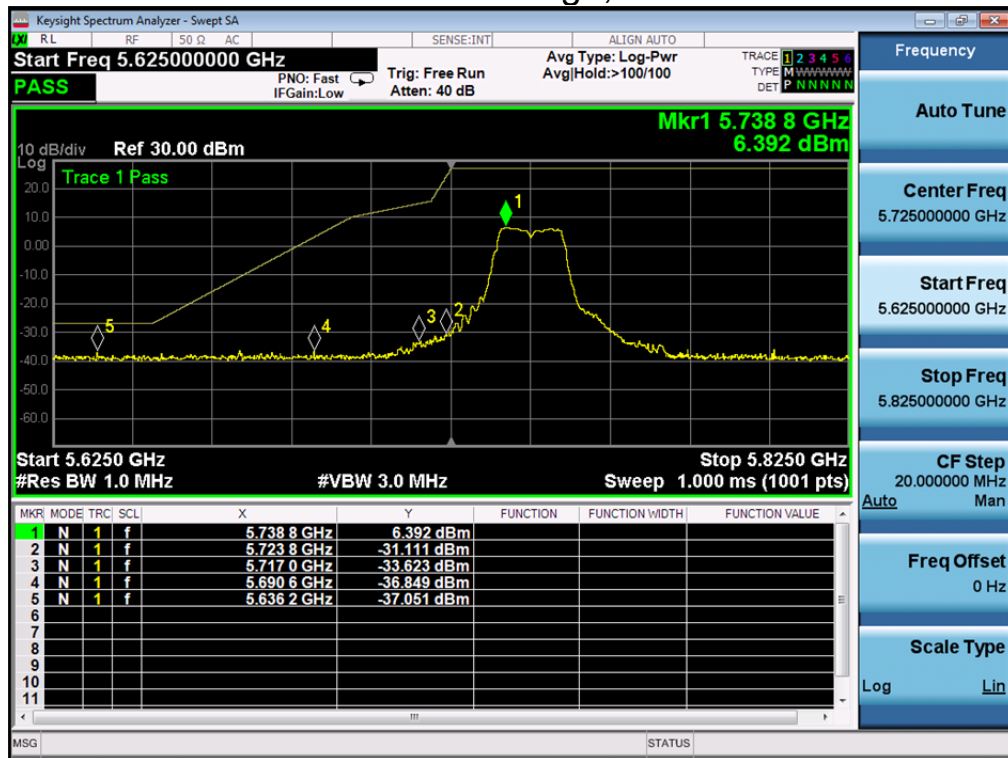

802.11a: Band Edge, Right Side




802.11n (HT20) : Band Edge, Left Side

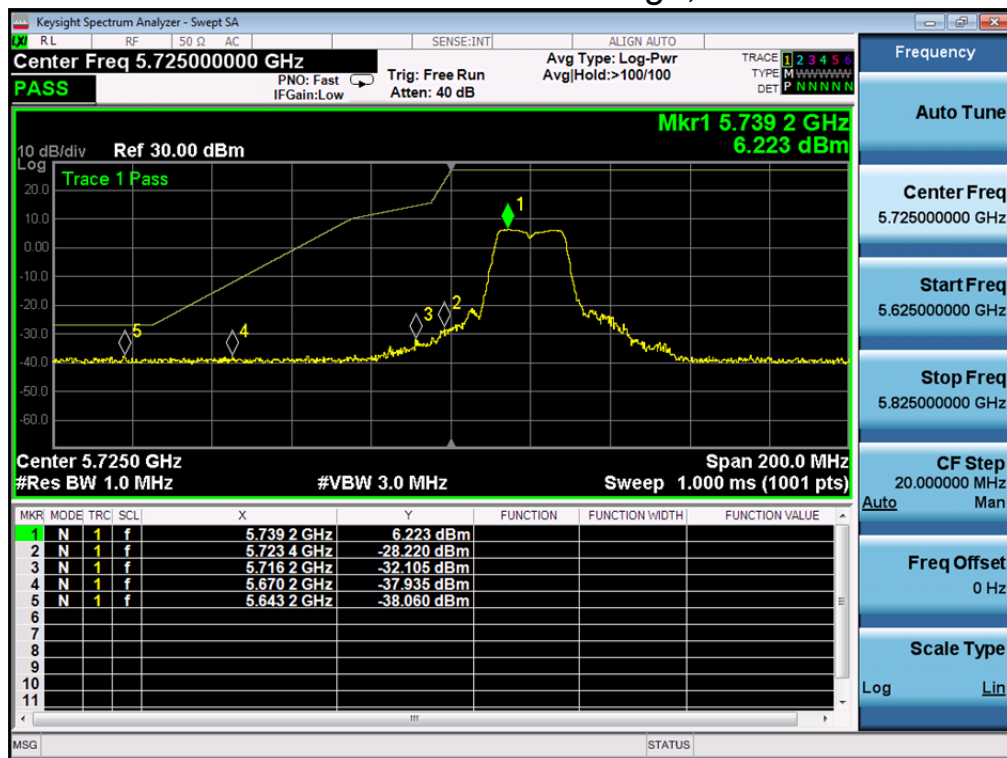

802.11n (HT20) : Band Edge, Right Side



802.11n (HT40) : Band Edge, Left Side

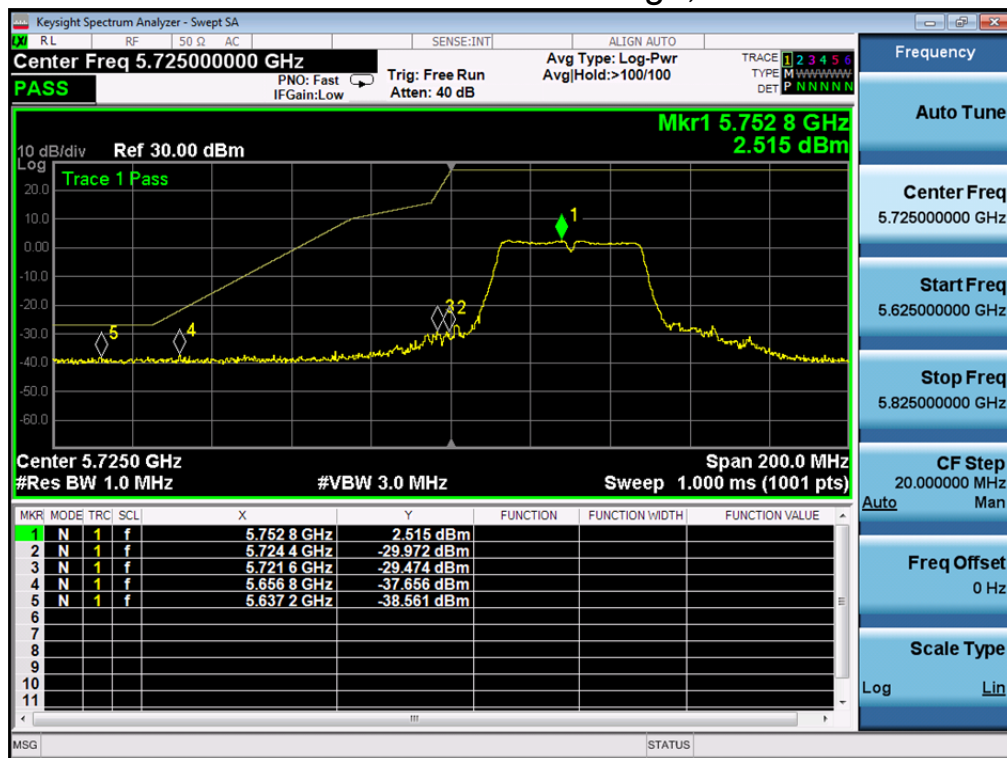


802.11n (HT40) : Band Edge, Right Side




5.3.2 Spurious Emission band-edge 5.2G

802.11a - Vertical

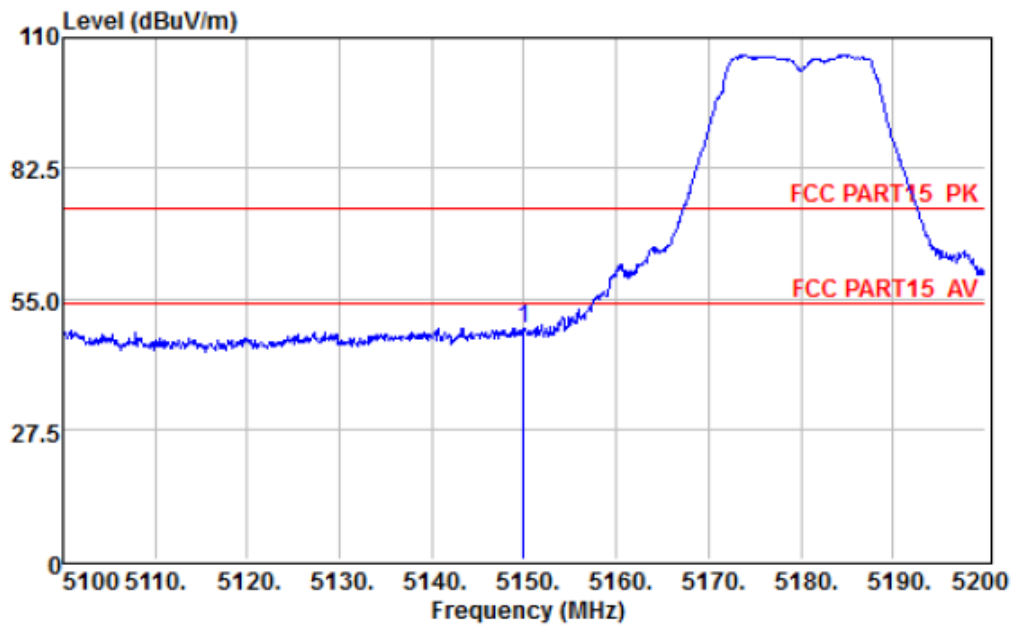


	Preamp Freq	Factor	Read Level	CableAntenna Loss	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	5150.00	27.62	29.69	12.82	33.61	48.50	74.00	-25.50	Peak

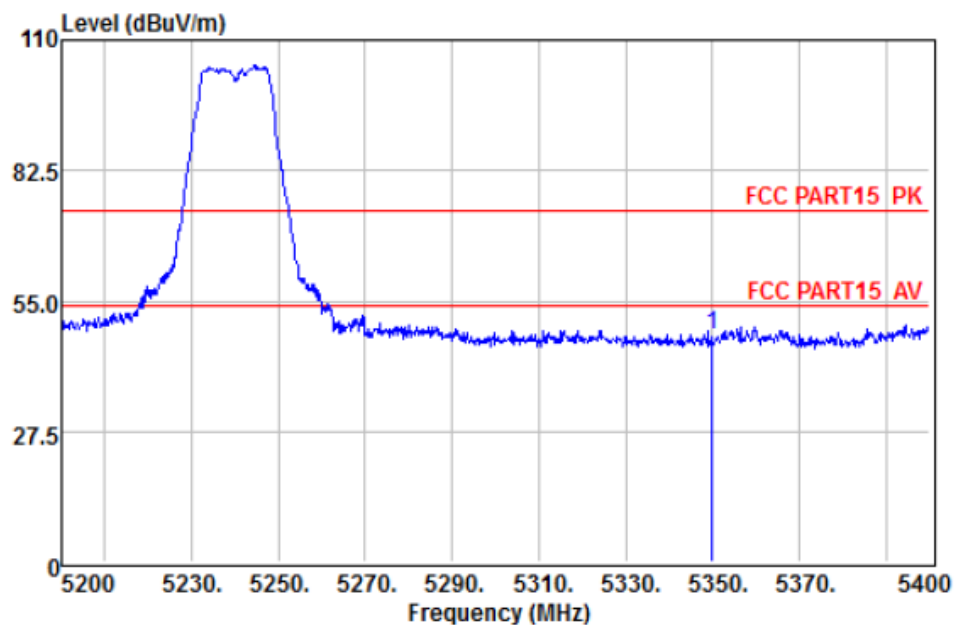


	Preamp Freq	Factor	Read Level	CableAntenna Loss	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	5350.00	27.64	28.08	13.43	33.89	47.76	74.00	-26.24	Peak

802.11a - Horizontal

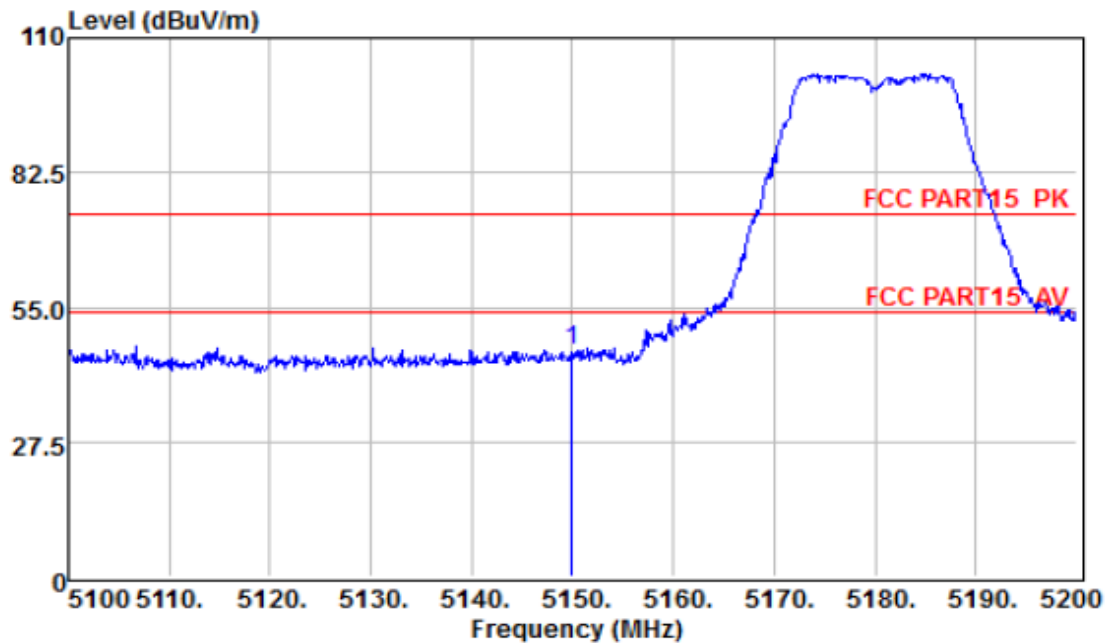


	Preamp Freq	Factor	Read Level	CableAntenna Loss	Antenna Factor	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	5150.00	27.62	27.35	12.82	33.61	46.16	74.00	-27.84	Peak

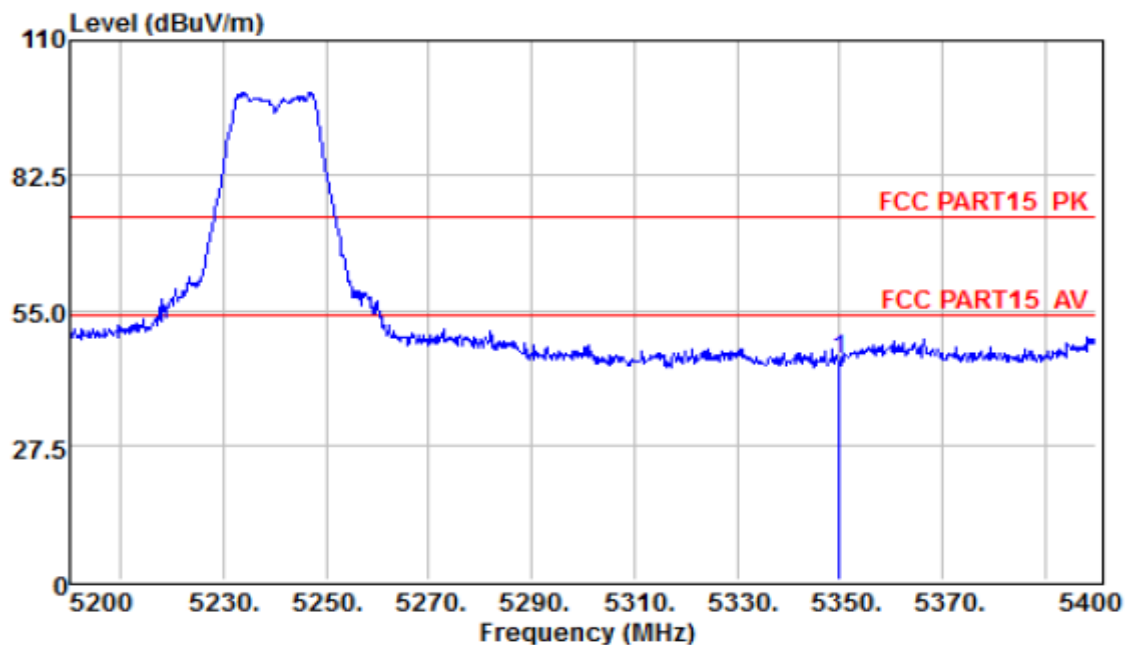


	Preamp Freq	Factor	Read Level	CableAntenna Loss	Antenna Factor	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	5350.00	27.64	25.42	13.43	33.89	45.10	74.00	-28.90	Peak

802.11n(HT20) - Vertical

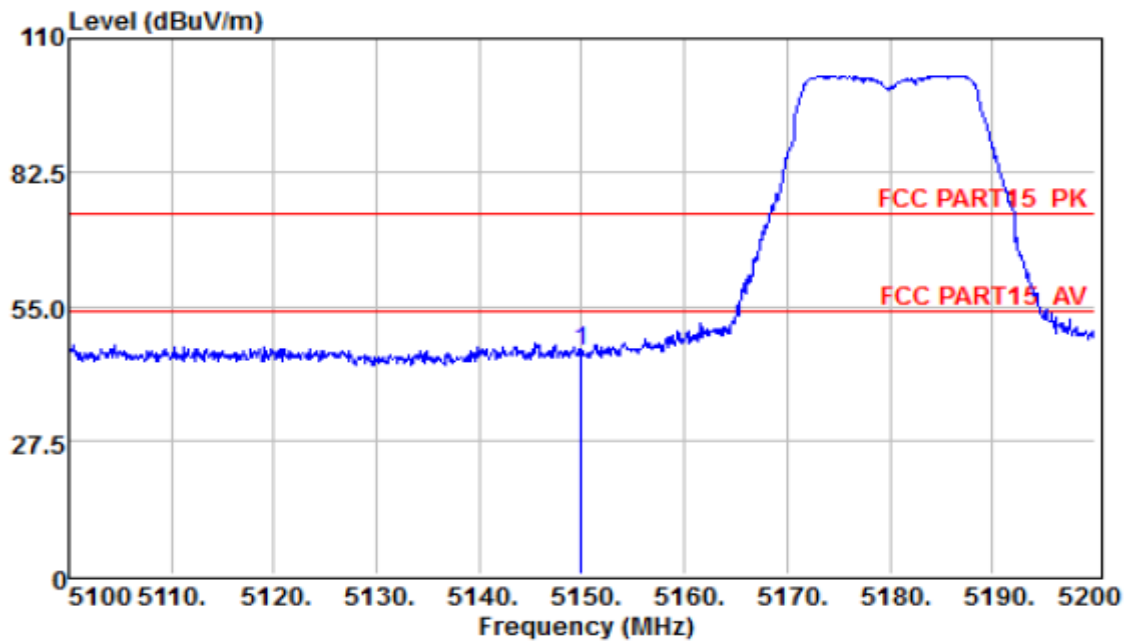


	Preamp Freq	Factor	Read Level	CableAntenna Loss	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	5150.00	27.62	26.83	12.82	33.61	45.64	74.00	-28.36	Peak

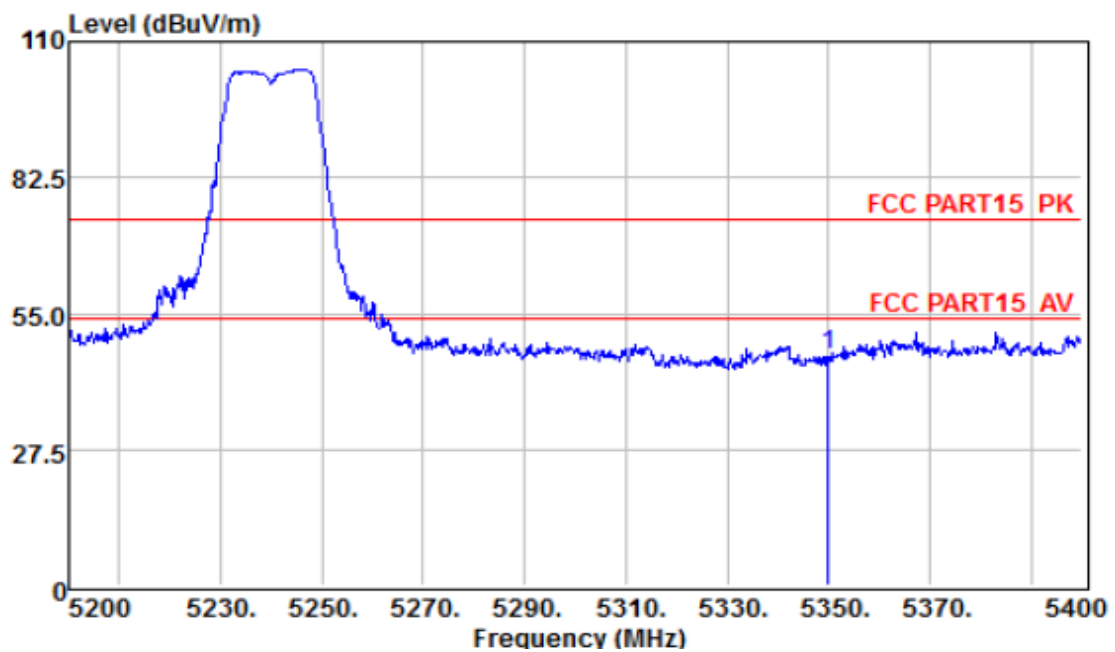


	Preamp Freq	Factor	Read Level	CableAntenna Loss	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	5350.00	27.64	26.78	13.43	33.89	46.46	74.00	-27.54	Peak

802.11n(HT20) - Horizontal

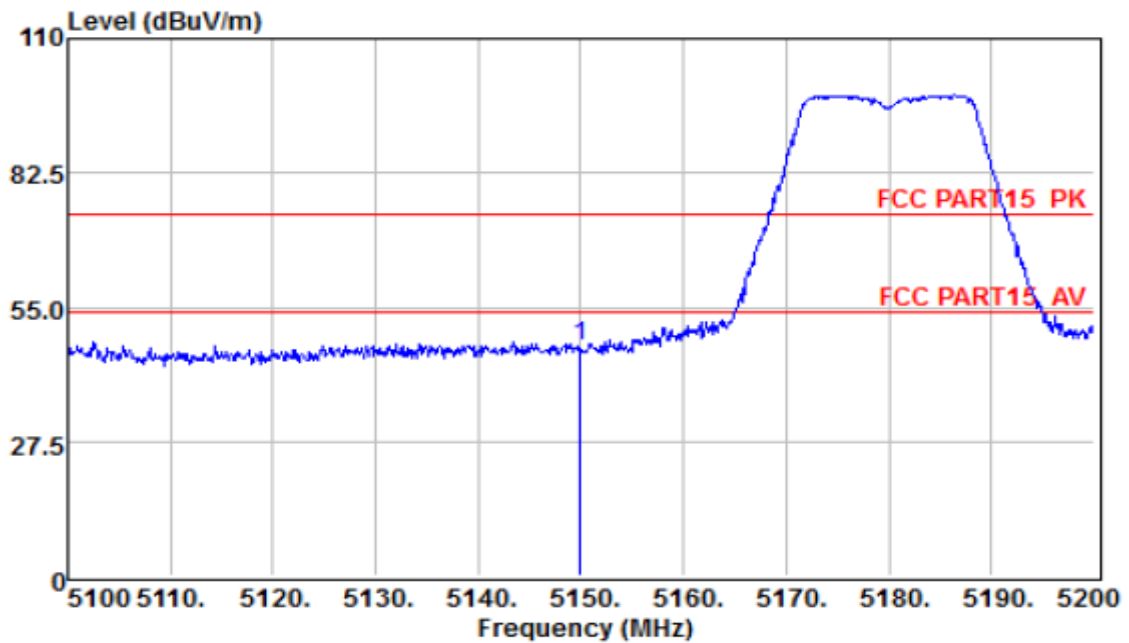


	Preamp	Read	CableAntenna		Limit	Over	
	Freq	Factor	Level	Loss	Factor	Level	Line
	MHz	dB	dBuV	dB	dB/m	dBuV/m	dBuV/m
							dB
1	5150.00	27.62	28.23	12.82	33.61	47.04	74.00 -26.96 Peak

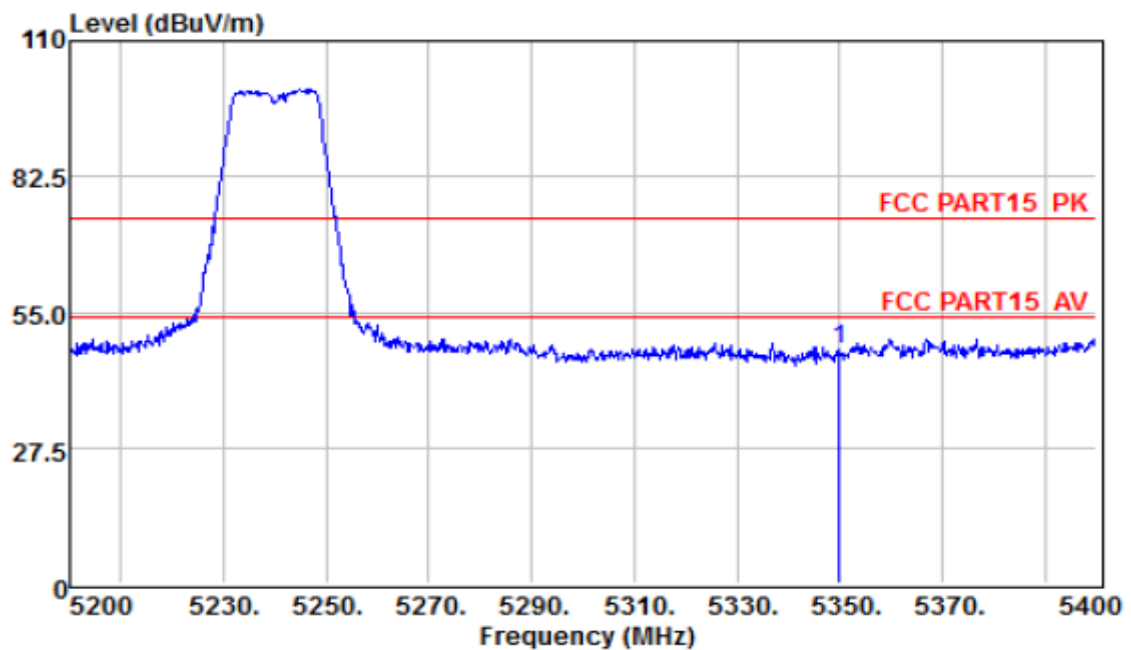


	Preamp	Read	CableAntenna		Limit	Over	
	Freq	Factor	Level	Loss	Factor	Level	Line
	MHz	dB	dBuV	dB	dB/m	dBuV/m	dBuV/m
							dB
1	5235.00	27.64	27.55	13.43	33.89	47.23	74.00 -26.77 Peak

802.11n(HT40) - Vertical

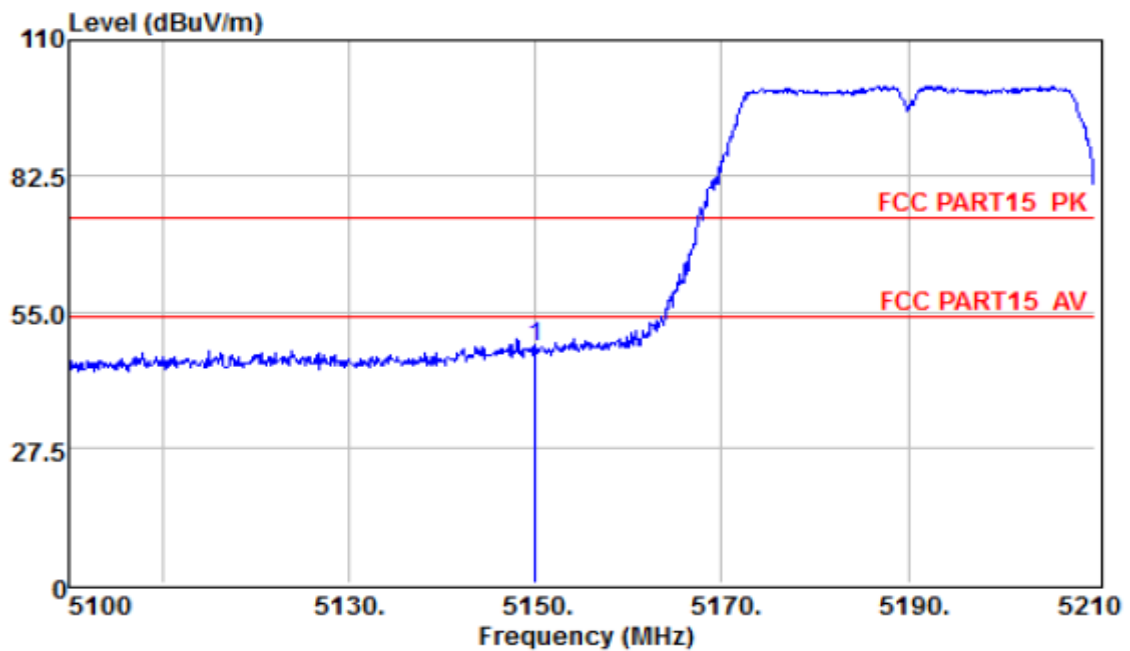


	Preamp Freq	Factor	Read Level	CableAntenna Loss	Factor	Limit	Over	
	MHz	dB	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB
1	5150.00	27.62	28.90	12.82	33.61	47.71	74.00	-26.29 Peak

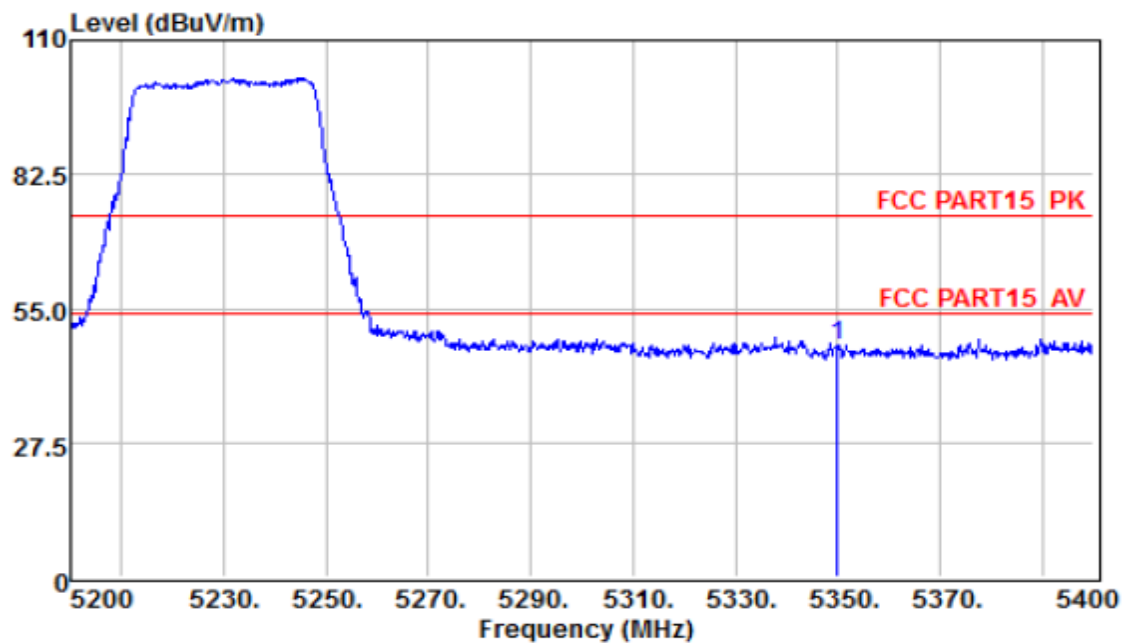


	Preamp Freq	Factor	Read Level	CableAntenna Loss	Factor	Limit	Over	
	MHz	dB	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB
1	5350.00	27.64	27.83	13.43	33.89	47.51	74.00	-26.49 Peak

802.11n(HT40) - Horizontal

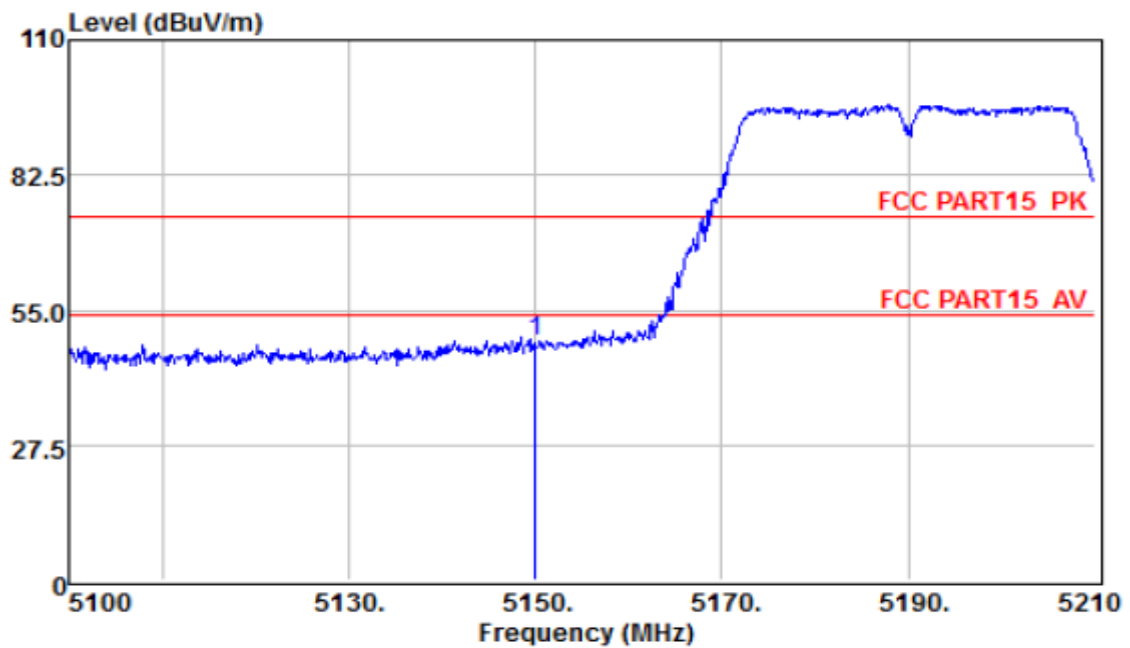



	Preamp Freq	Factor	Read Level	CableAntenna Loss	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	5150.00	27.62	29.67	12.82	33.61	48.48	74.00	-25.52	Peak

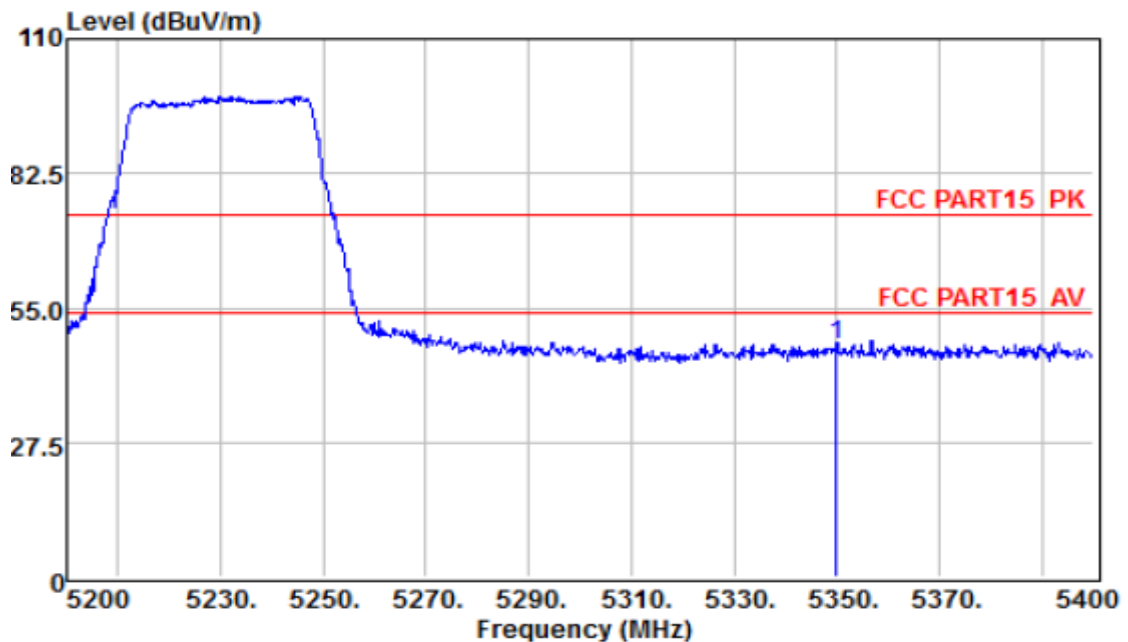


	Preamp Freq	Factor	Read Level	CableAntenna Loss	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	5350.00	27.64	27.82	13.43	33.89	47.50	74.00	-26.50	Peak

5.8G


802.11a - Vertical

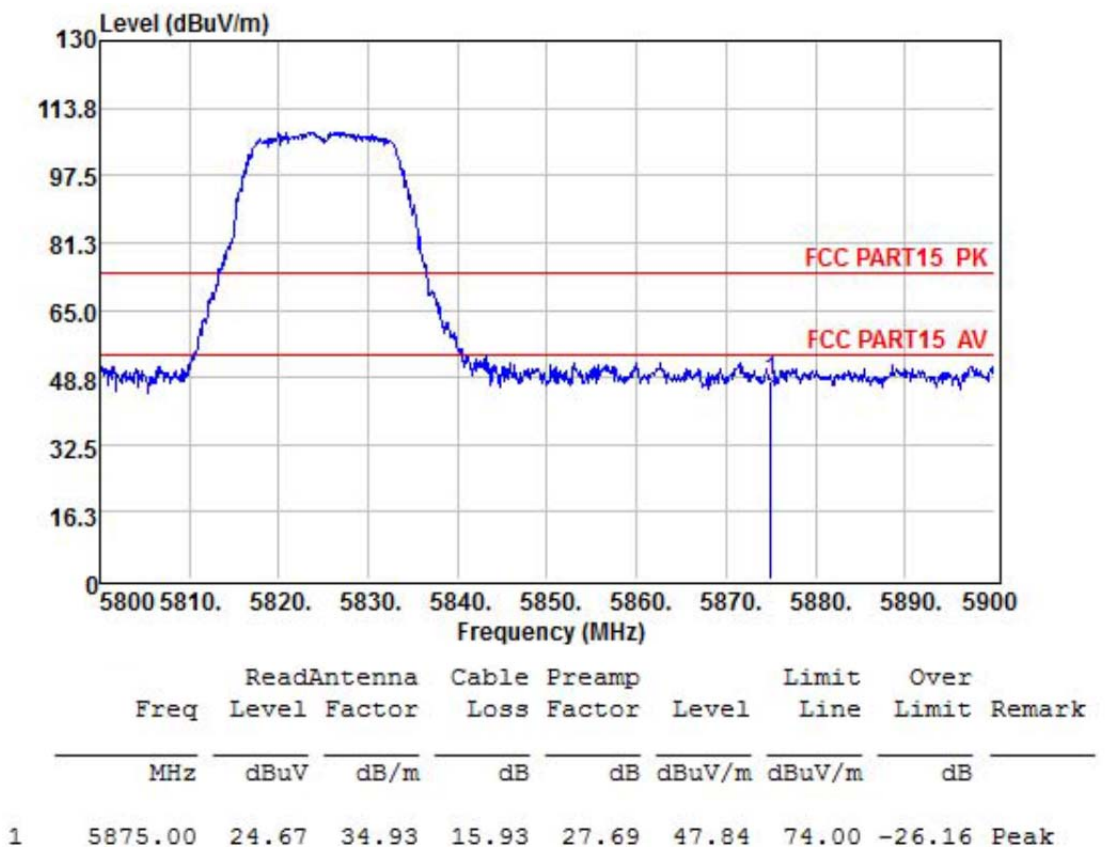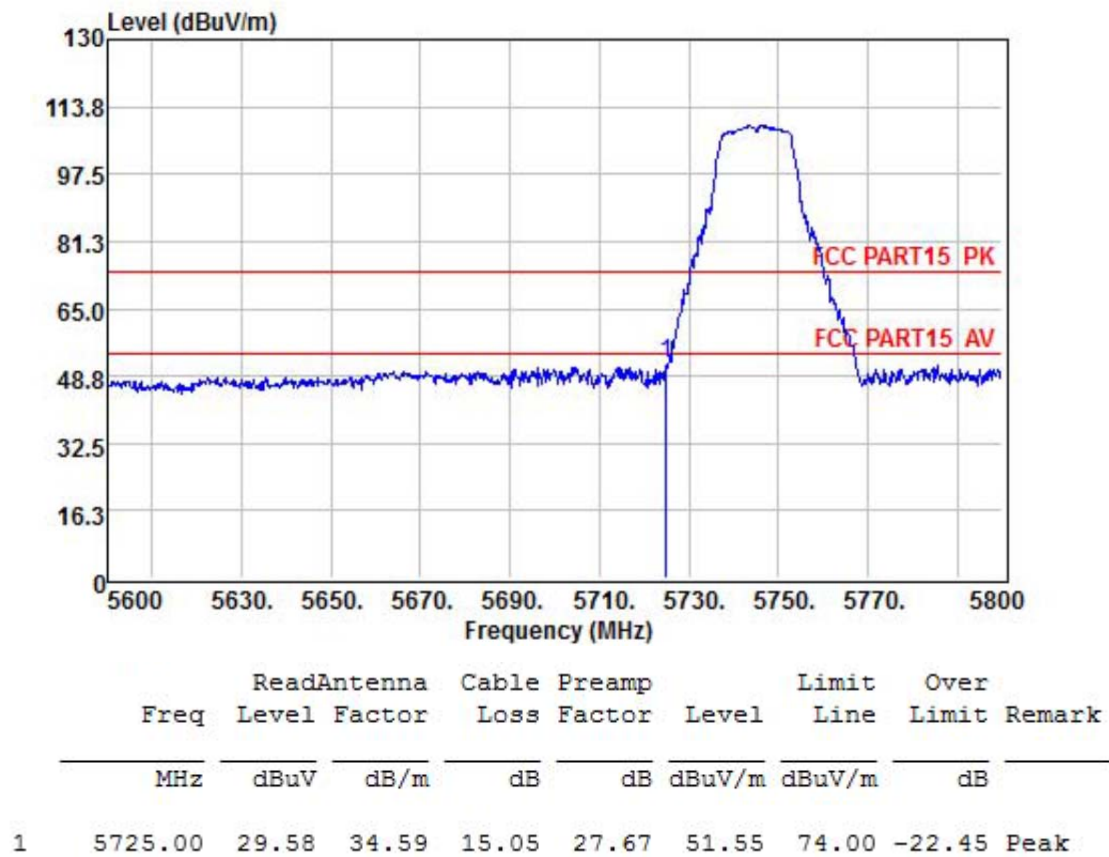

802.11a - Horizontal


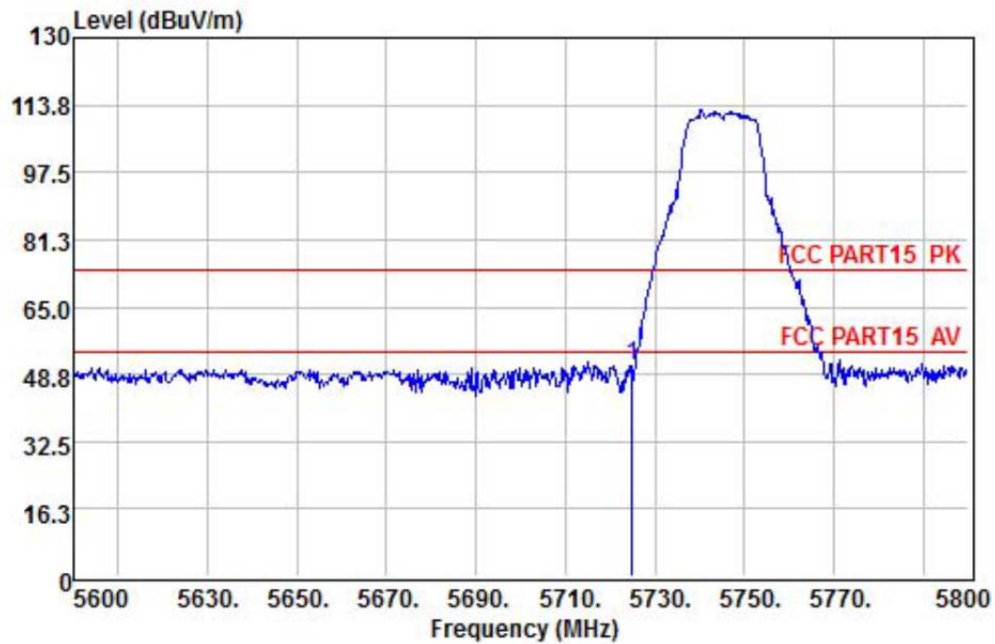


	Freq	ReadAntenna Level	Cable Loss Factor	Preamp Factor	Level	Limit	Over	Remark
	MHz	dBuV	dB/m	dB	dBuV/m	dBuV/m	dB	
1	5725.00	28.62	34.59	15.05	27.67	50.59	74.00	-23.41 Peak

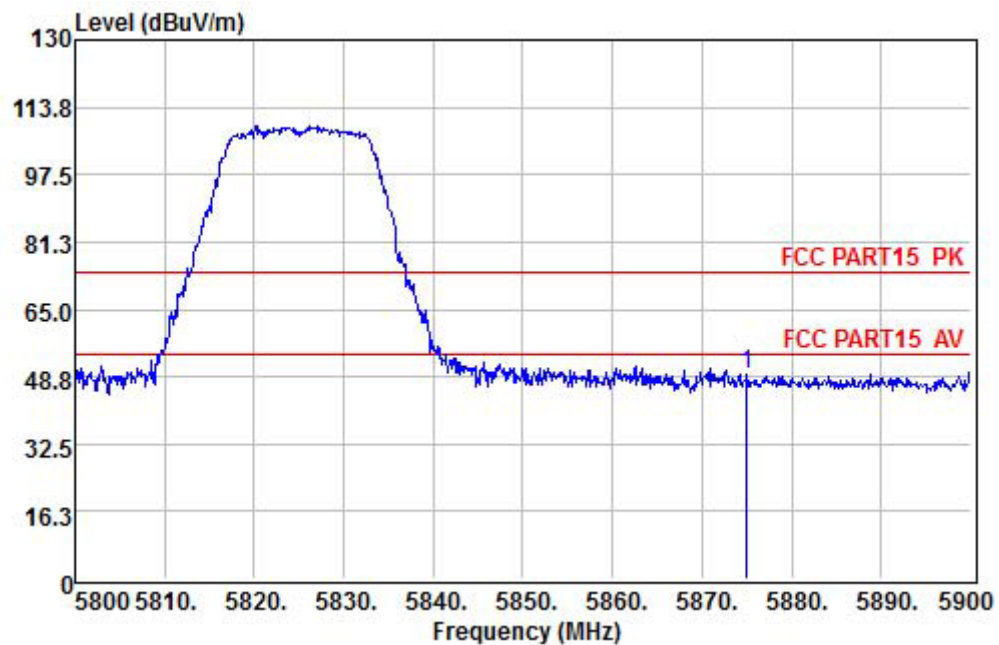


	Freq	ReadAntenna Level	Cable Loss Factor	Preamp Factor	Level	Limit	Over	Remark
	MHz	dBuV	dB/m	dB	dBuV/m	dBuV/m	dB	
1	5875.00	25.98	34.93	15.93	27.69	49.15	74.00	-24.85 Peak


802.11n(HT20) - Vertical

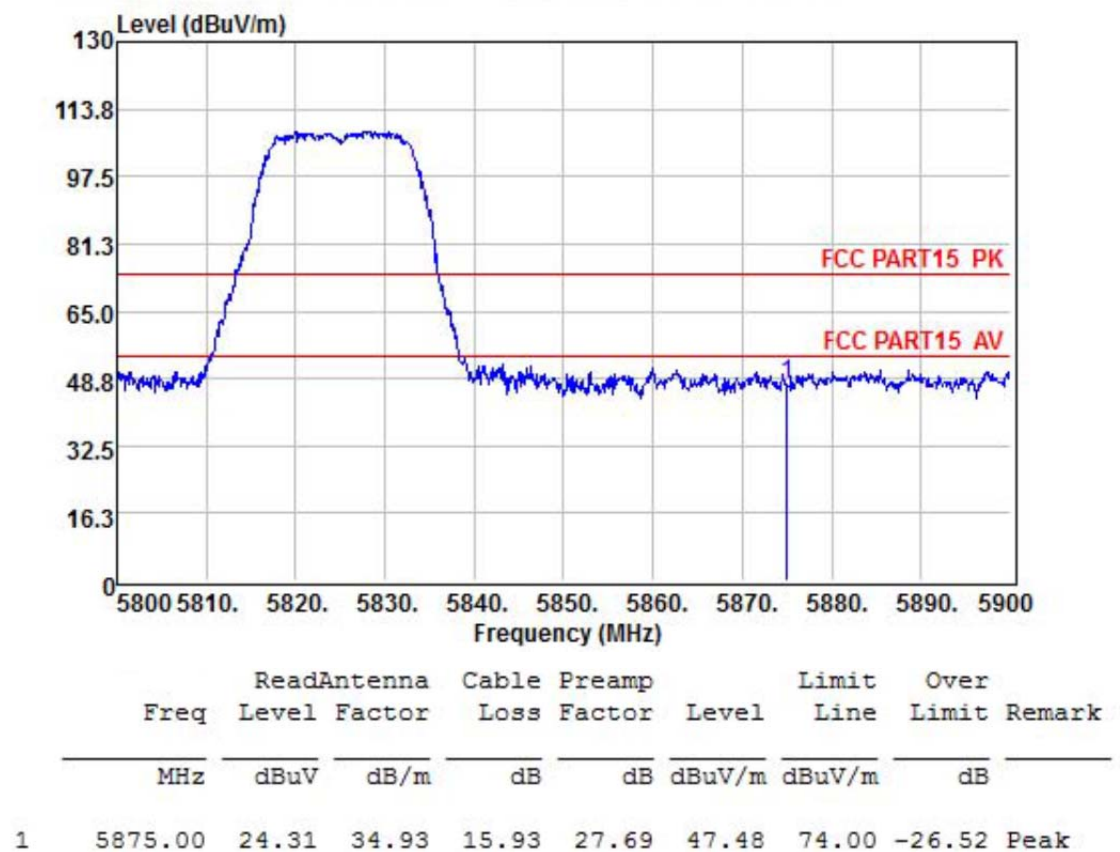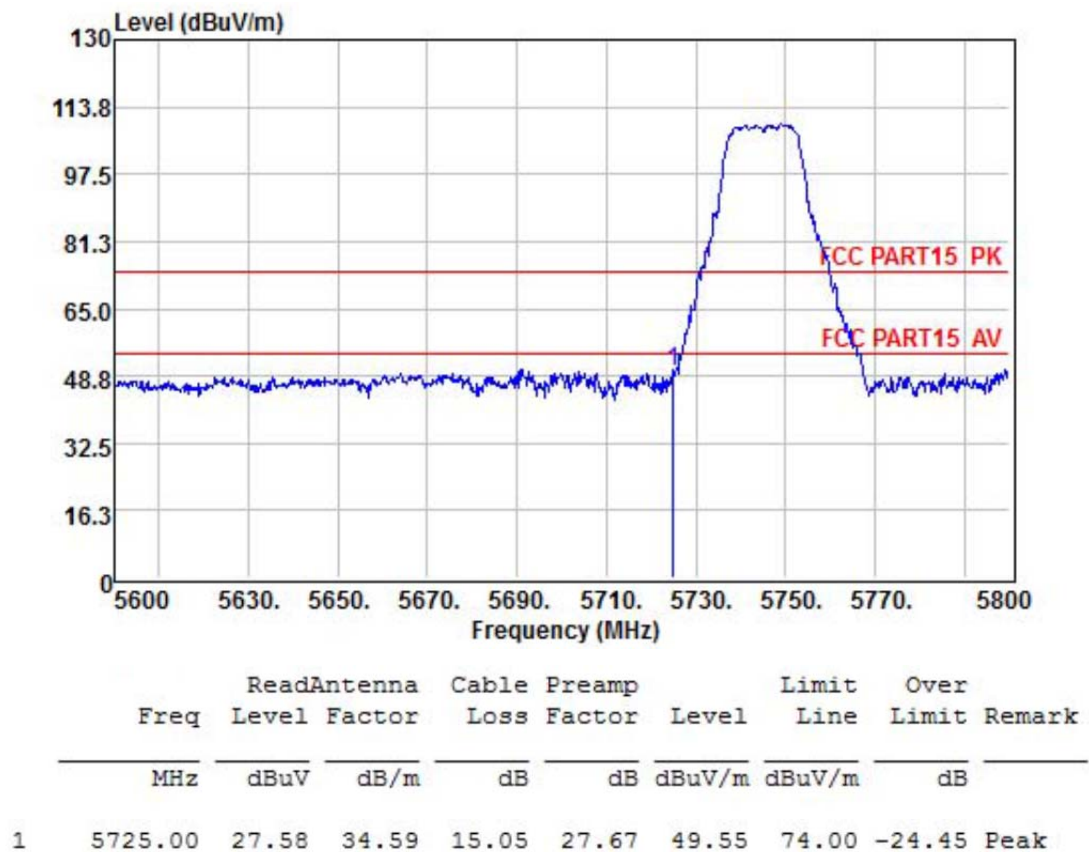

802.11n(HT20) - Horizontal


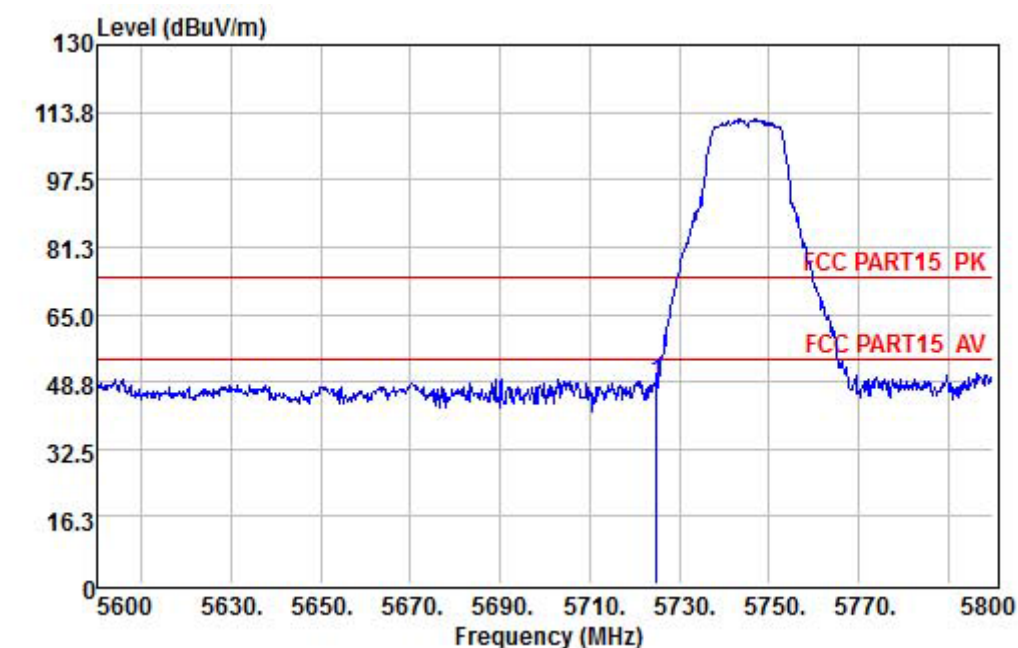


	Freq	ReadAntenna	Cable	Preamp	Level	Limit	Over	
	MHz	Level	Factor	Loss	Factor	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	5725.00	26.30	34.59	15.05	27.67	48.27	74.00	-25.73 Peak

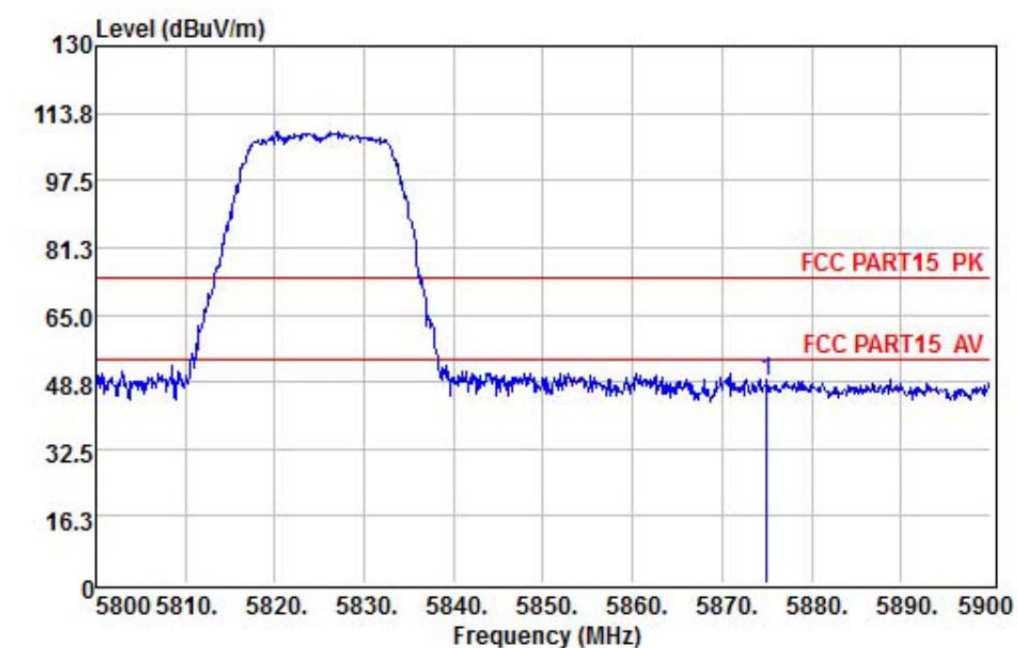


	Freq	ReadAntenna	Cable	Preamp	Level	Limit	Over	
	MHz	Level	Factor	Loss	Factor	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	5875.00	25.71	34.93	15.93	27.69	48.88	74.00	-25.12 Peak


802.11n(HT40) - Vertical

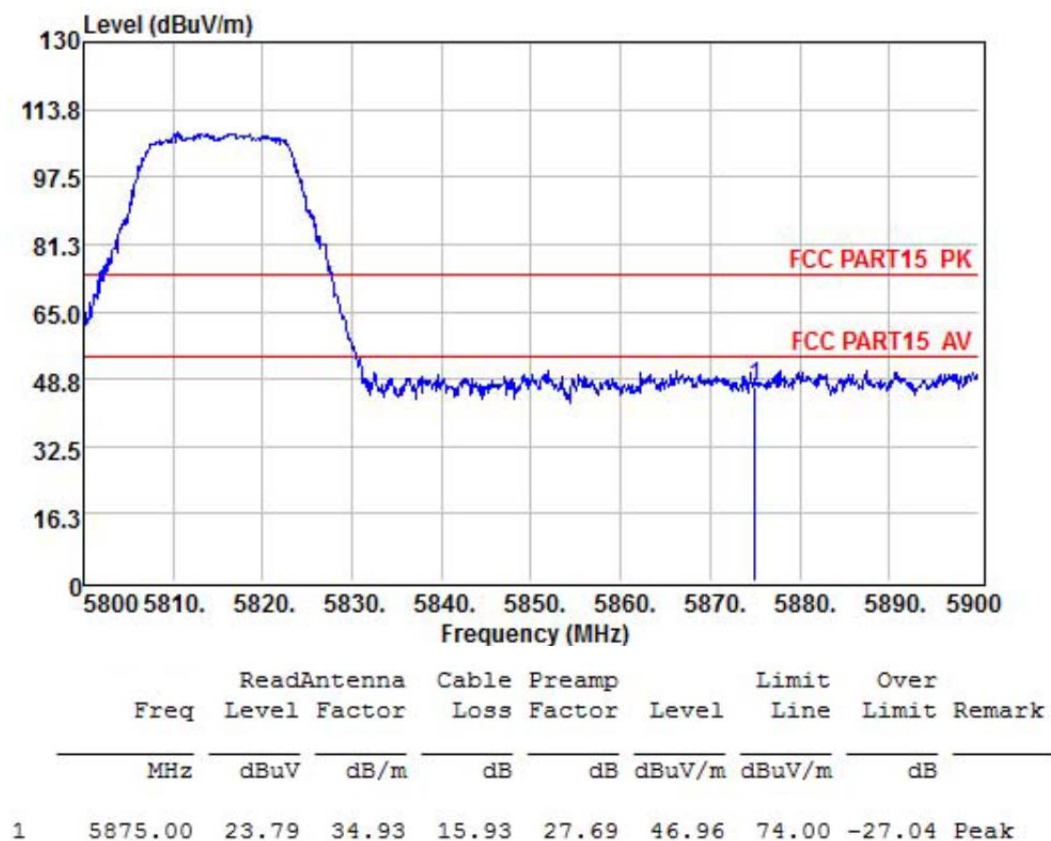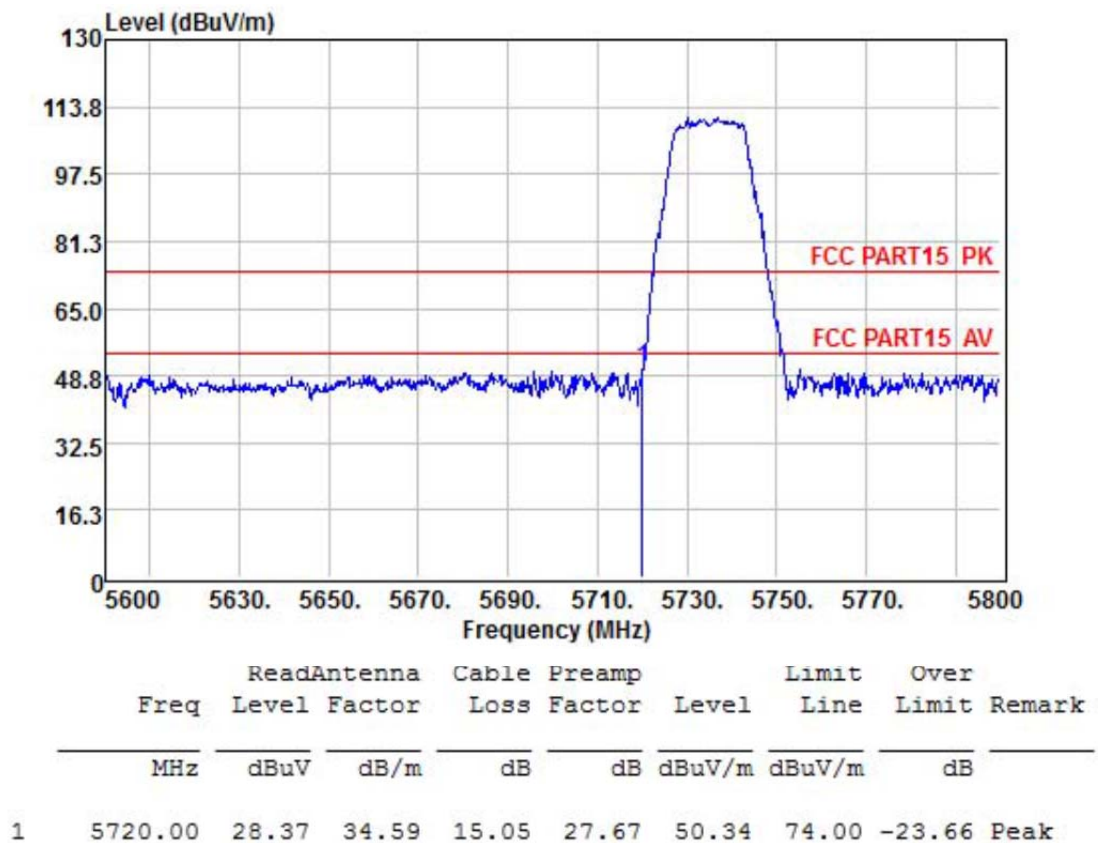

802.11n(HT40) - Horizontal

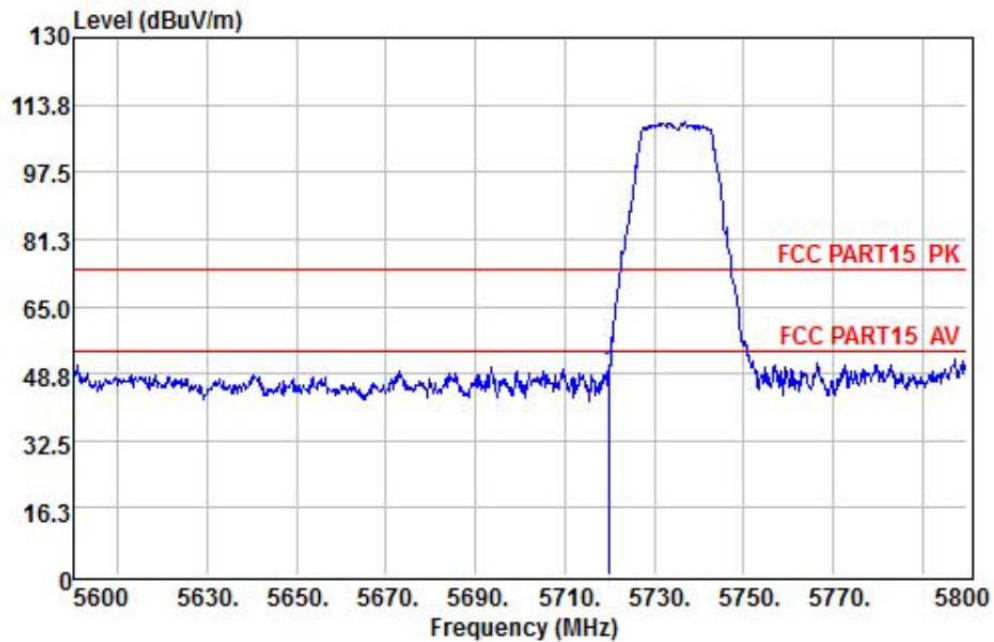

	ReadAntenna	Cable	Preamp		Limit	Over	
Freq	Level	Factor	Loss	Factor	Level	Line	Limit
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	5720.00	27.04	34.59	15.05	27.67	49.01	74.00
							-24.99
							Peak

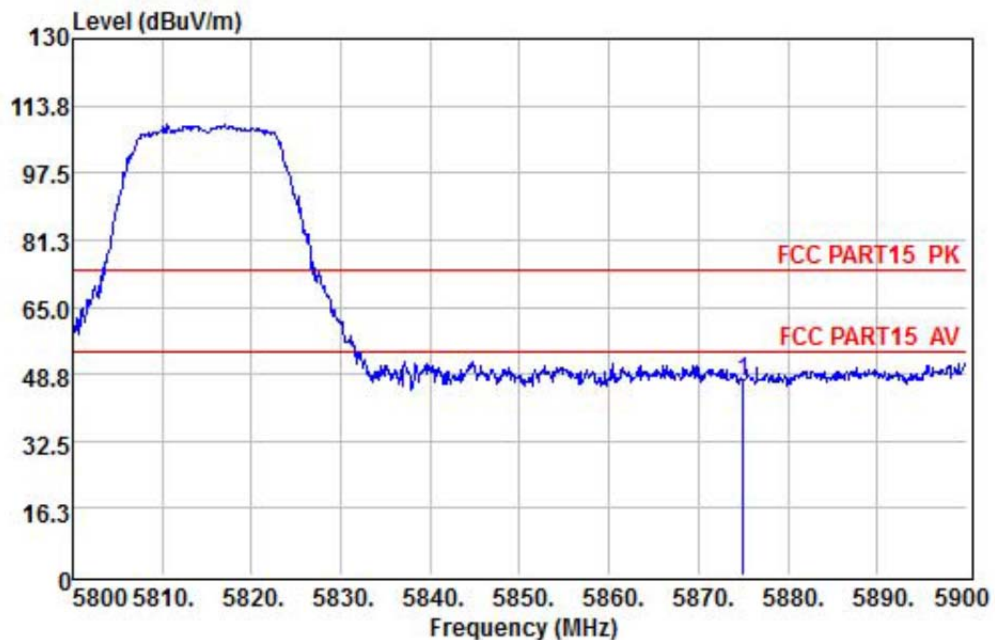

	ReadAntenna	Cable	Preamp		Limit	Over	
Freq	Level	Factor	Loss	Factor	Level	Line	Limit
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	5875.00	23.84	34.93	15.93	27.69	47.01	74.00
							-26.99
							Peak