





12.5. Test graphs

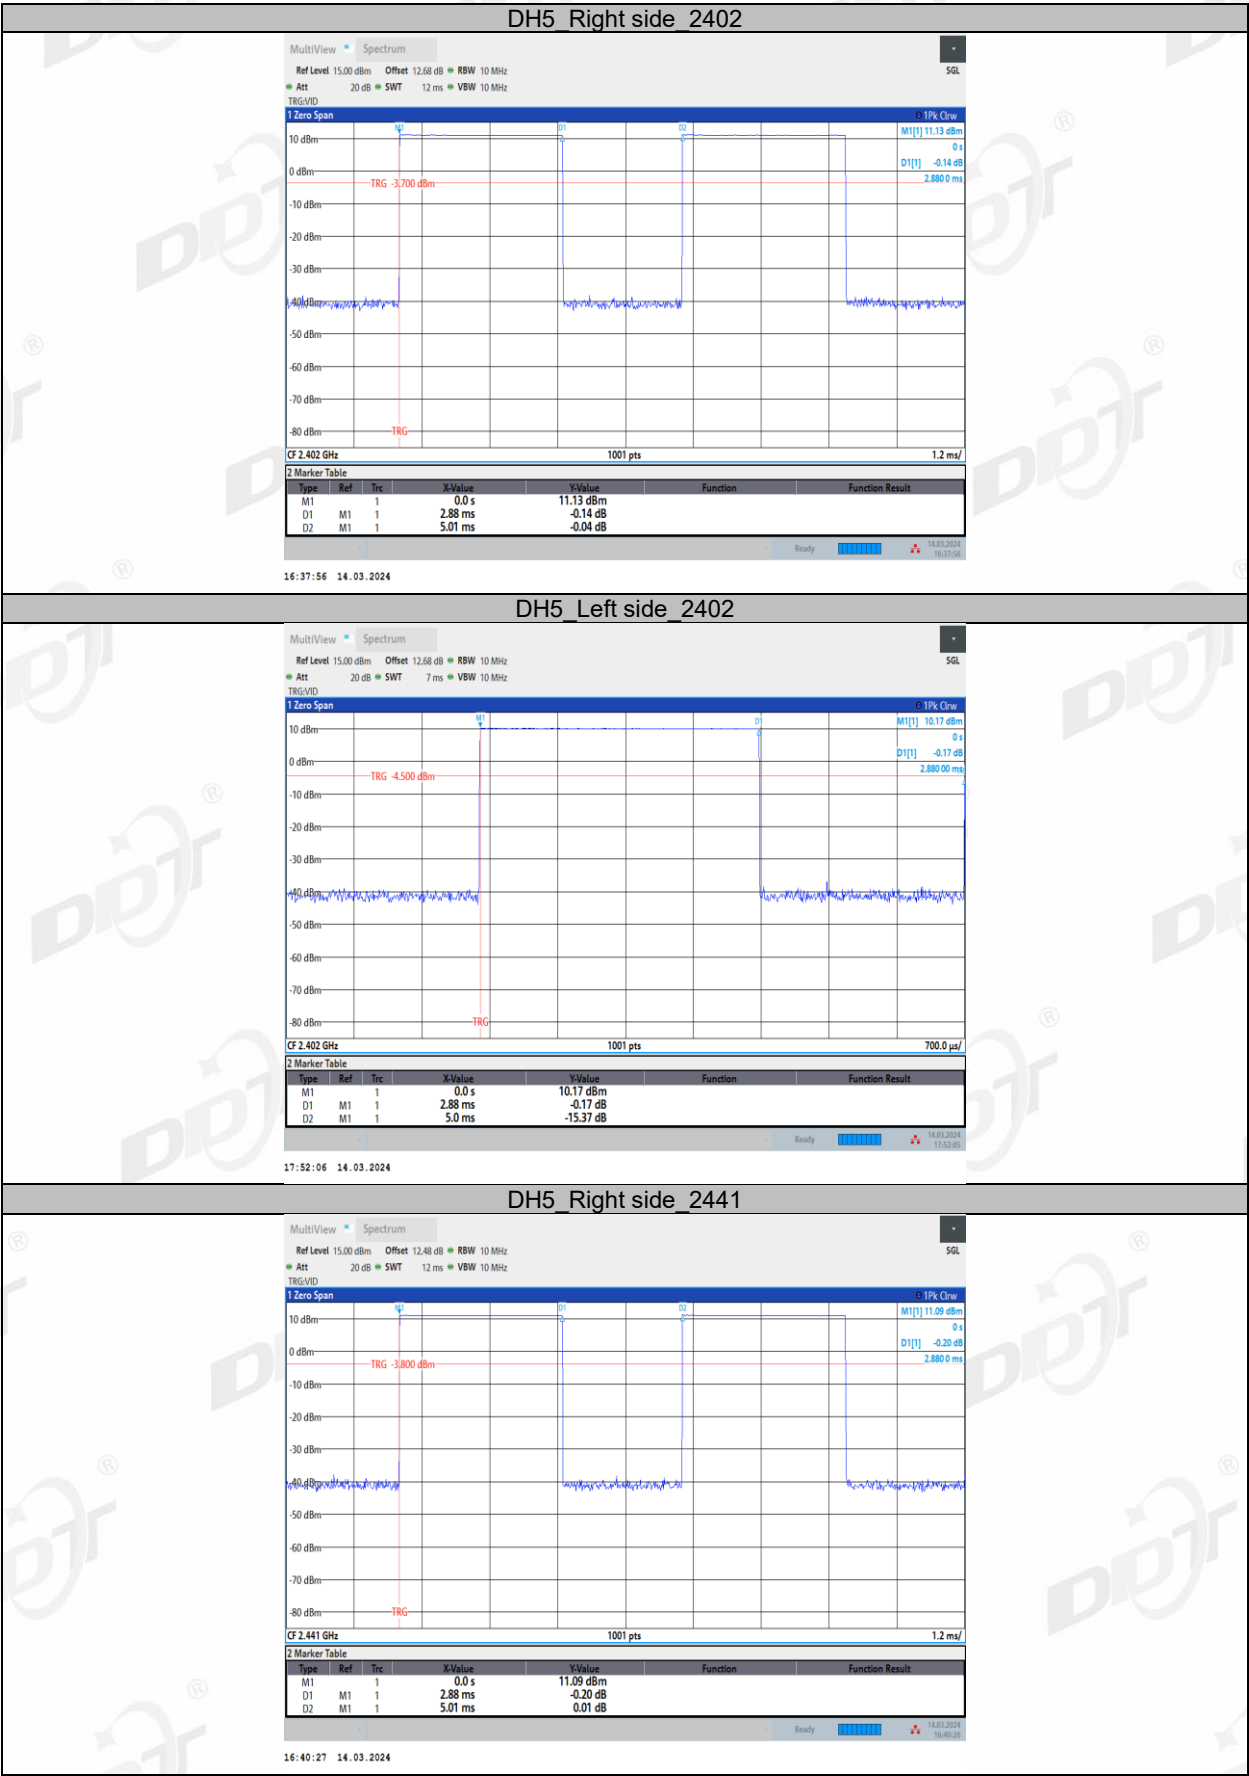

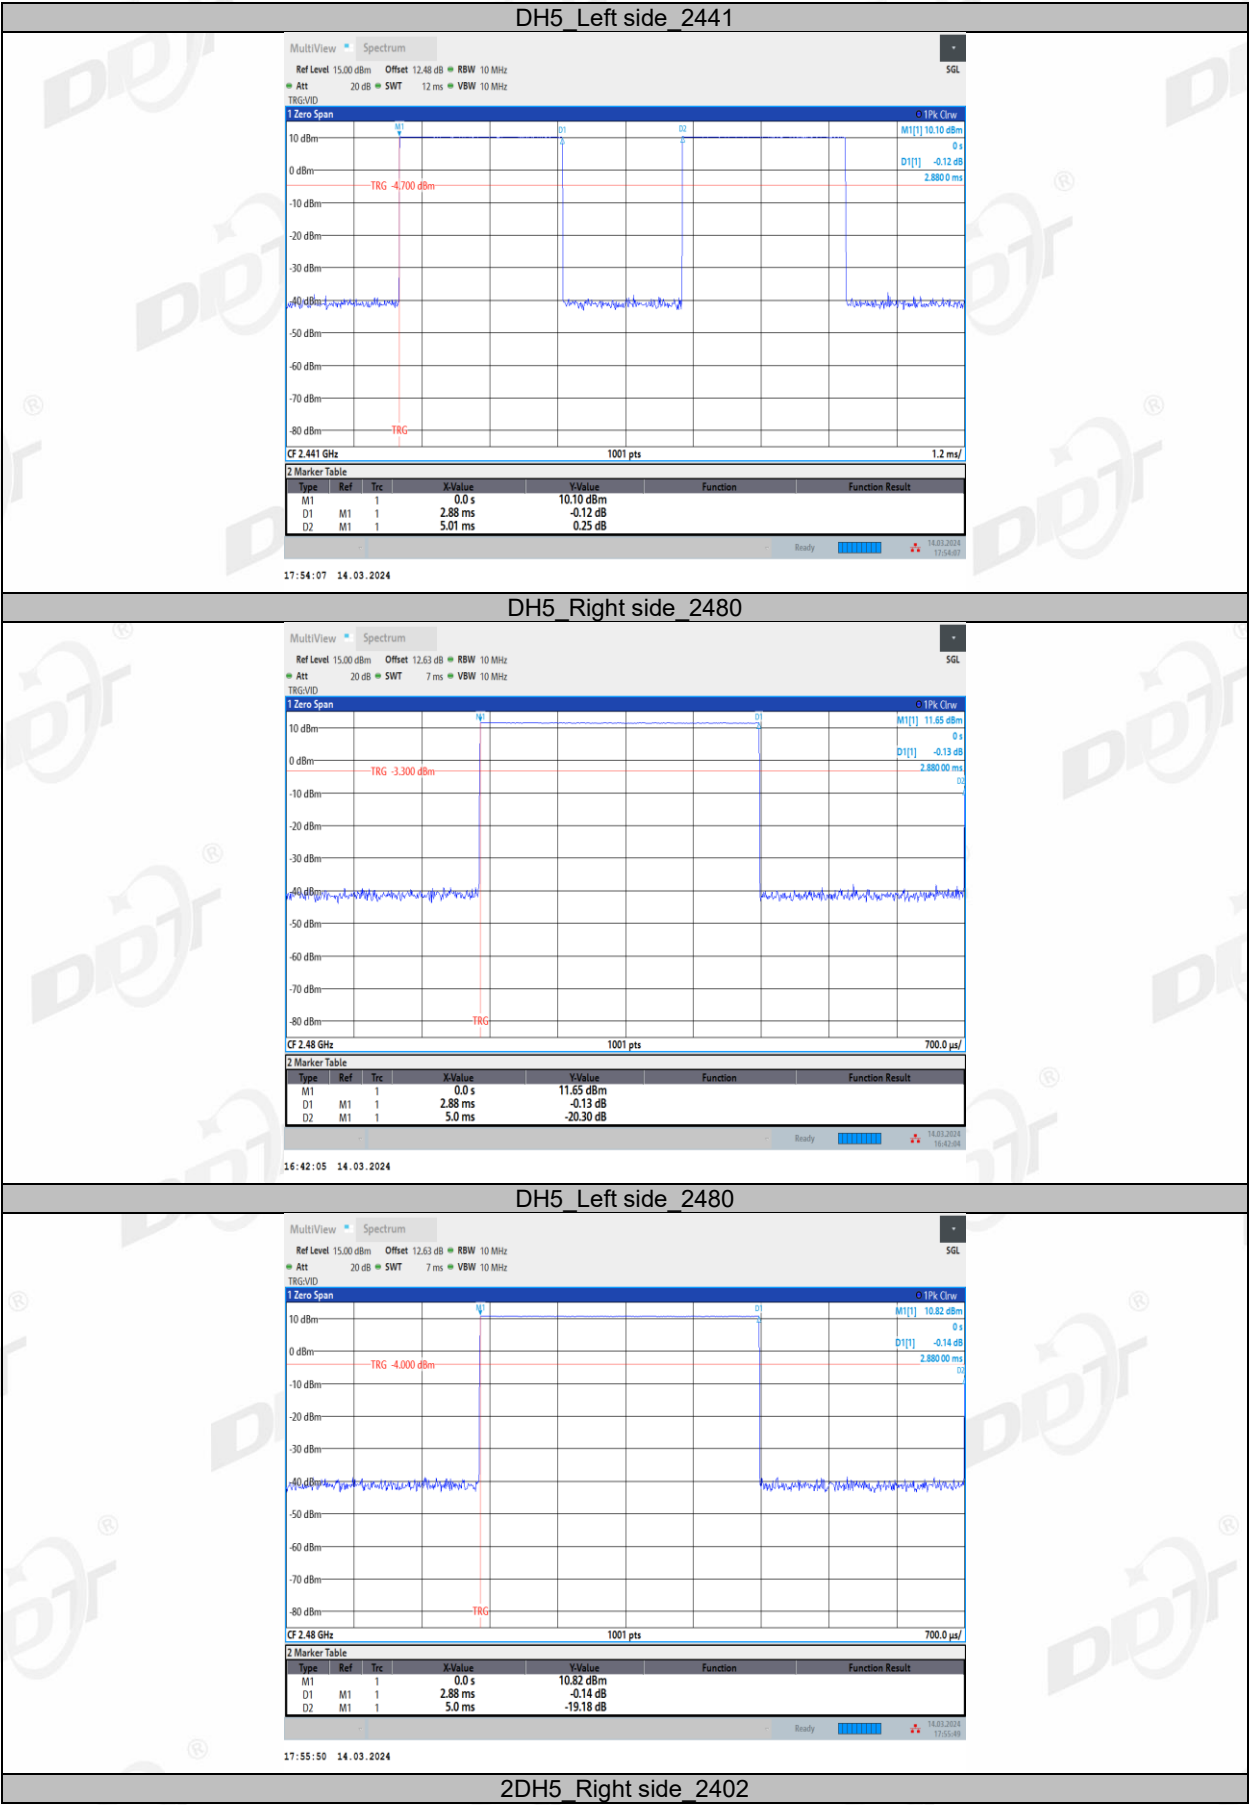


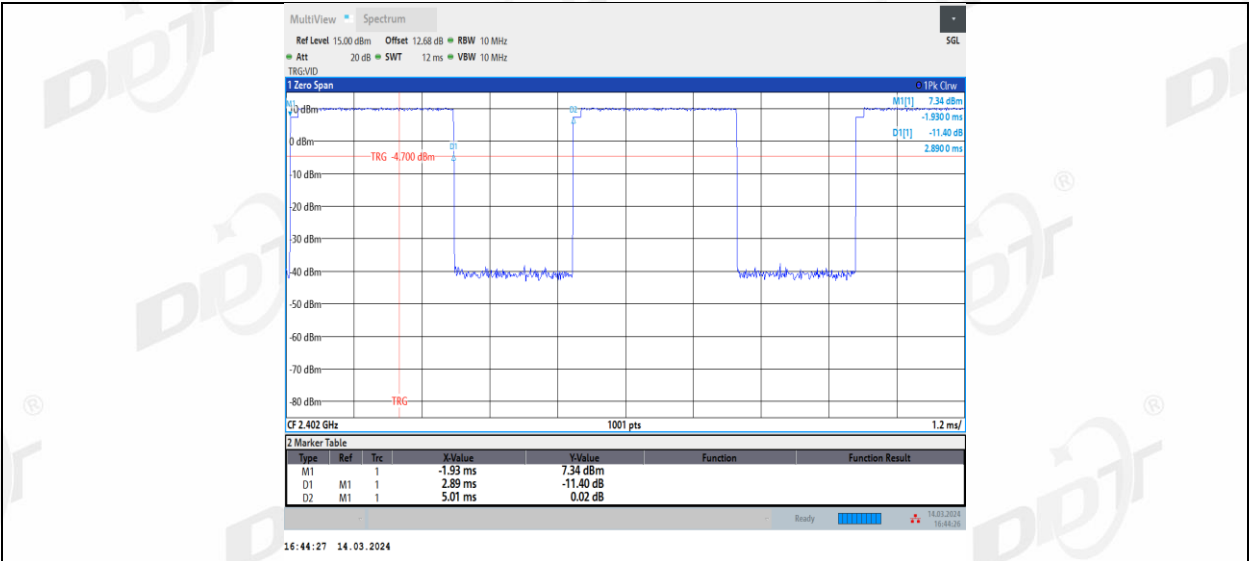


2DH5\_Left side\_2402

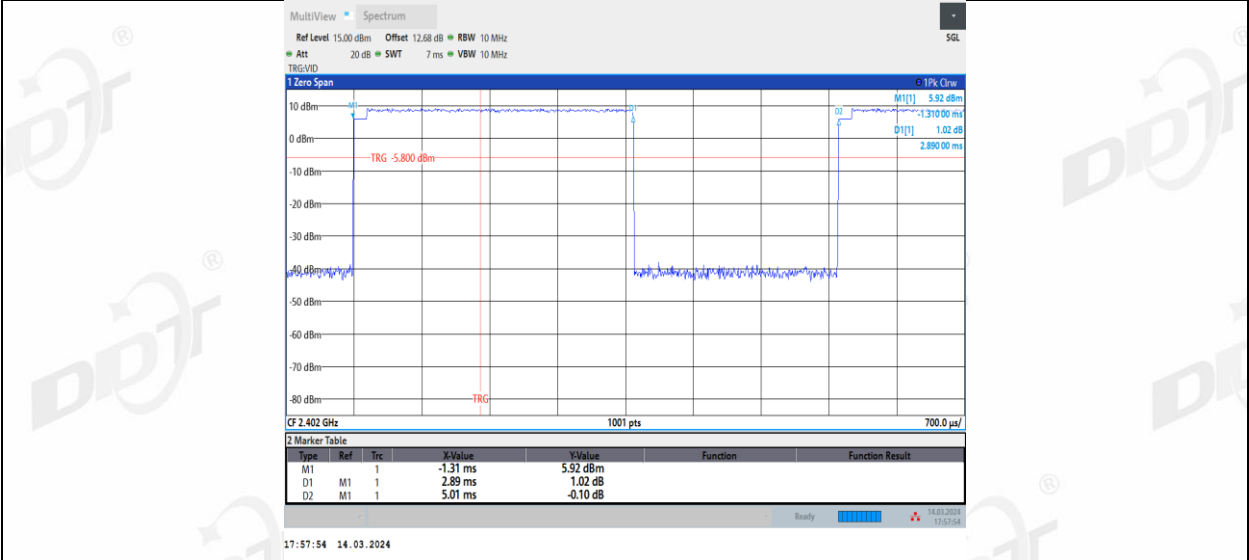


2DH5\_Right side\_2441

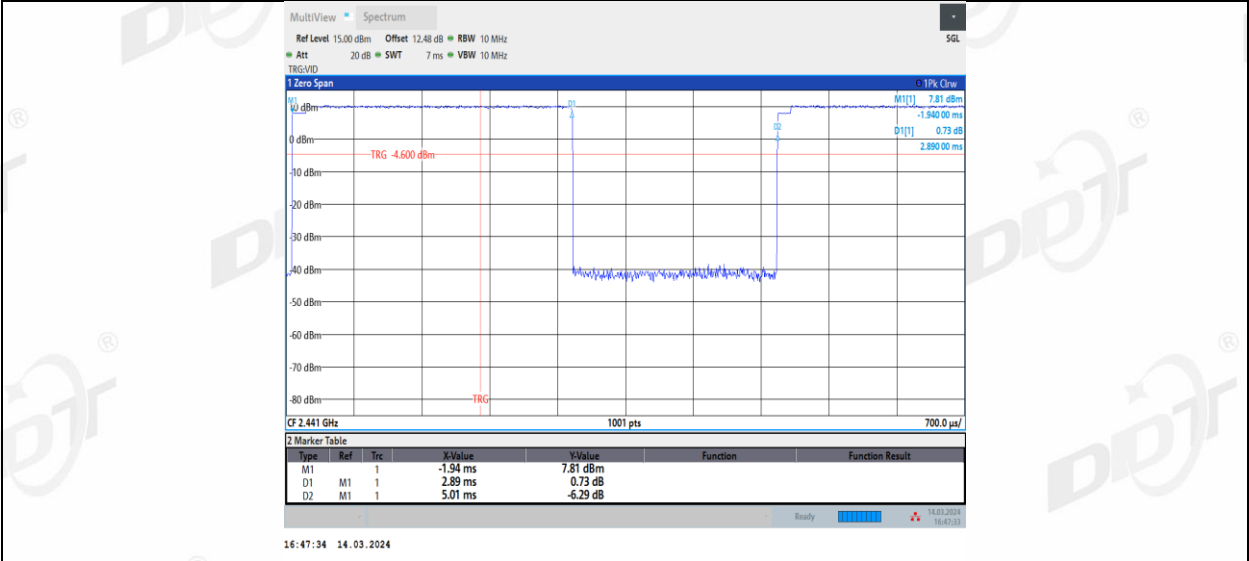


2DH5\_Left side\_2441

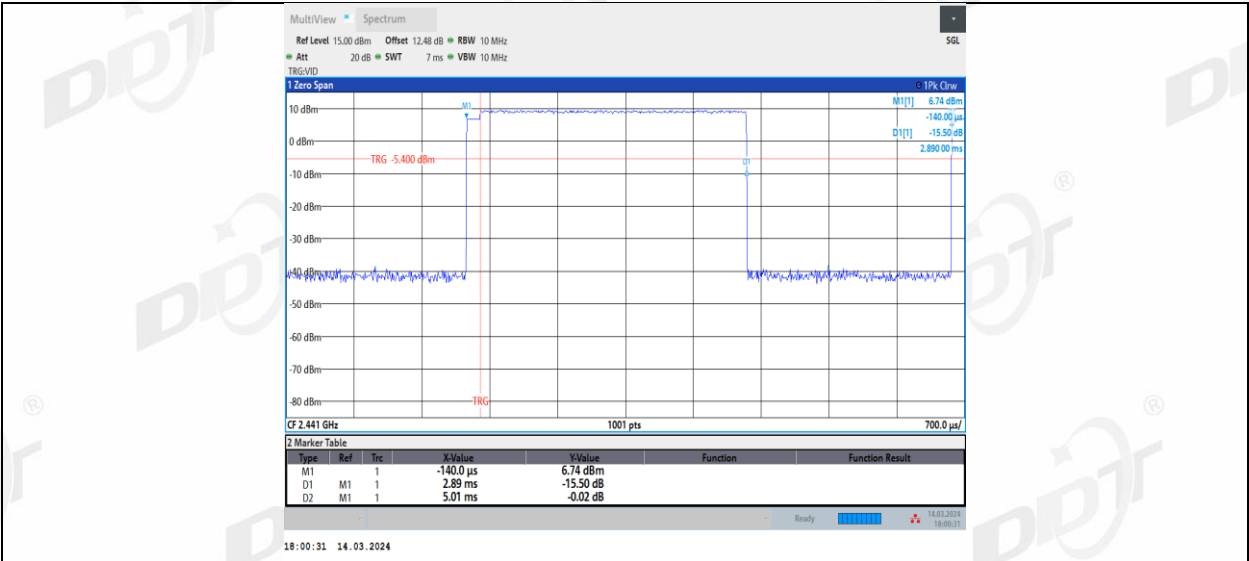


2DH5\_Right side\_2480

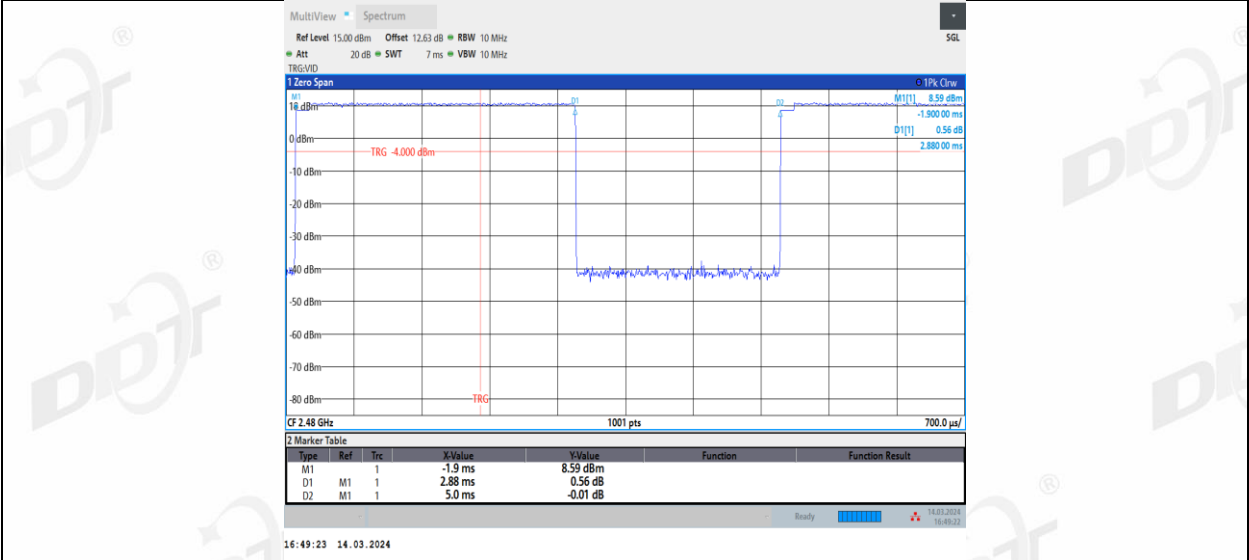


2DH5\_Left side\_2480

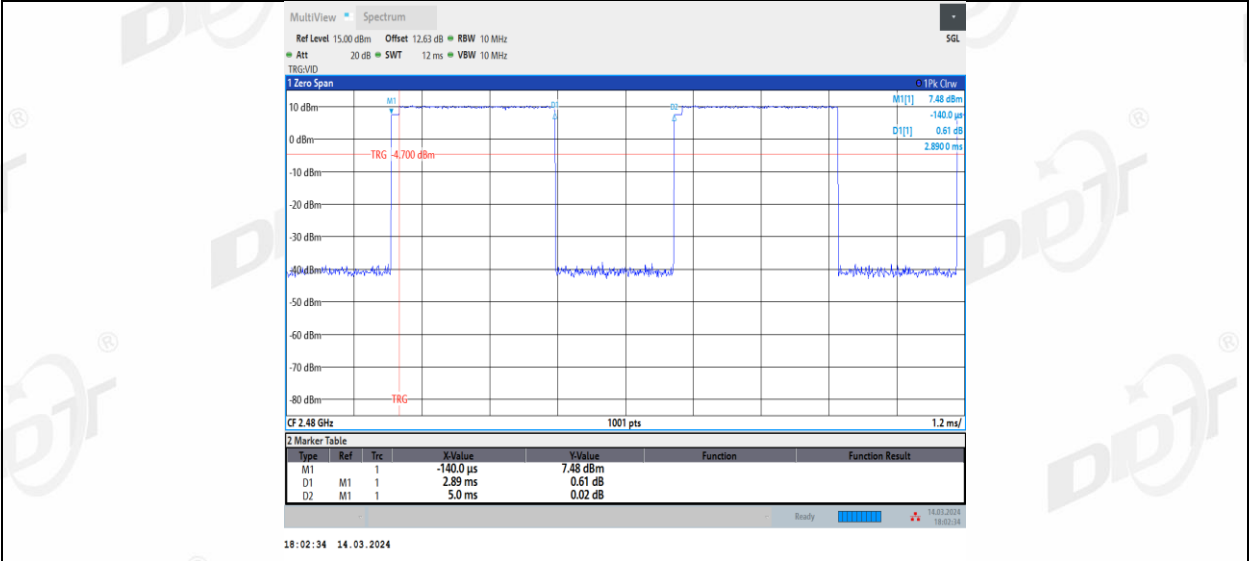


3DH5\_Right side\_2402

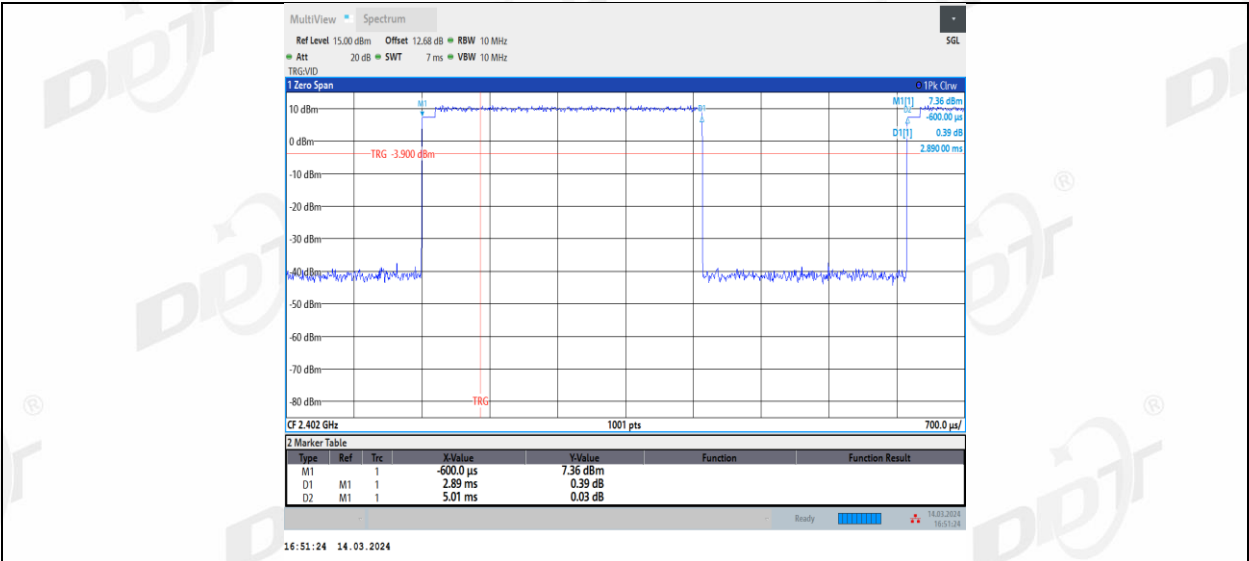


3DH5\_Left side\_2402

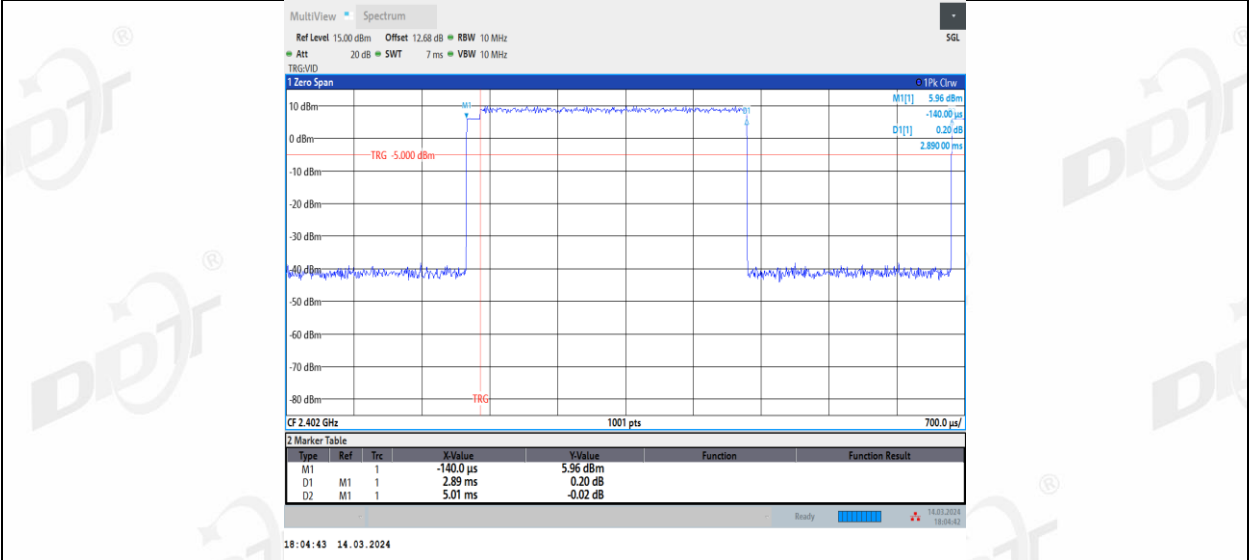


3DH5\_Right side\_2441

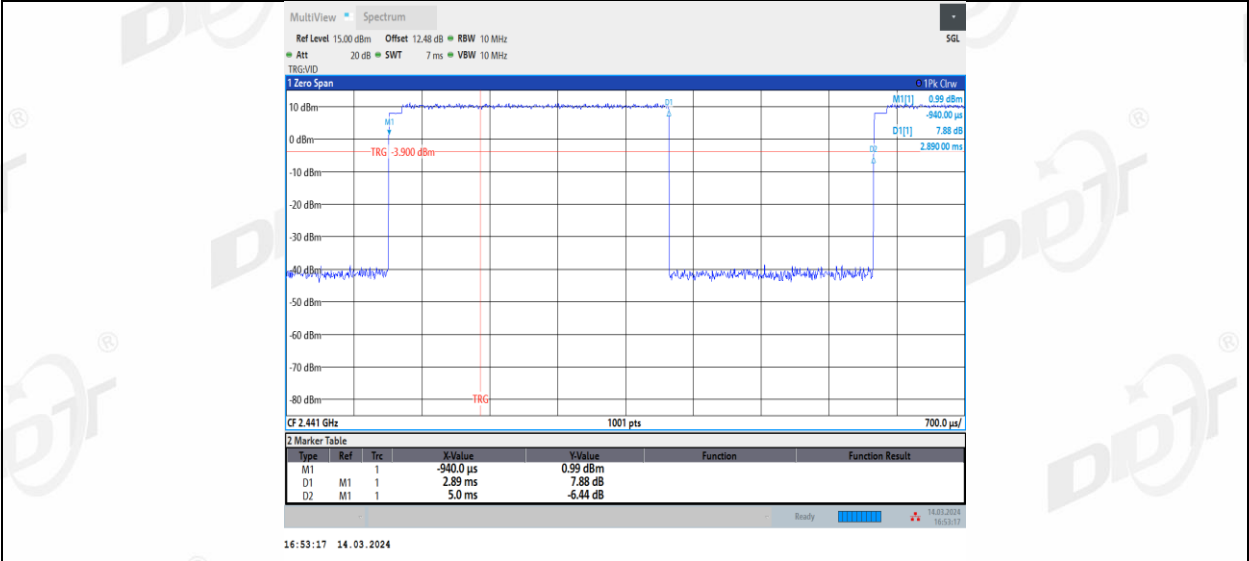


3DH5\_Left side\_2441

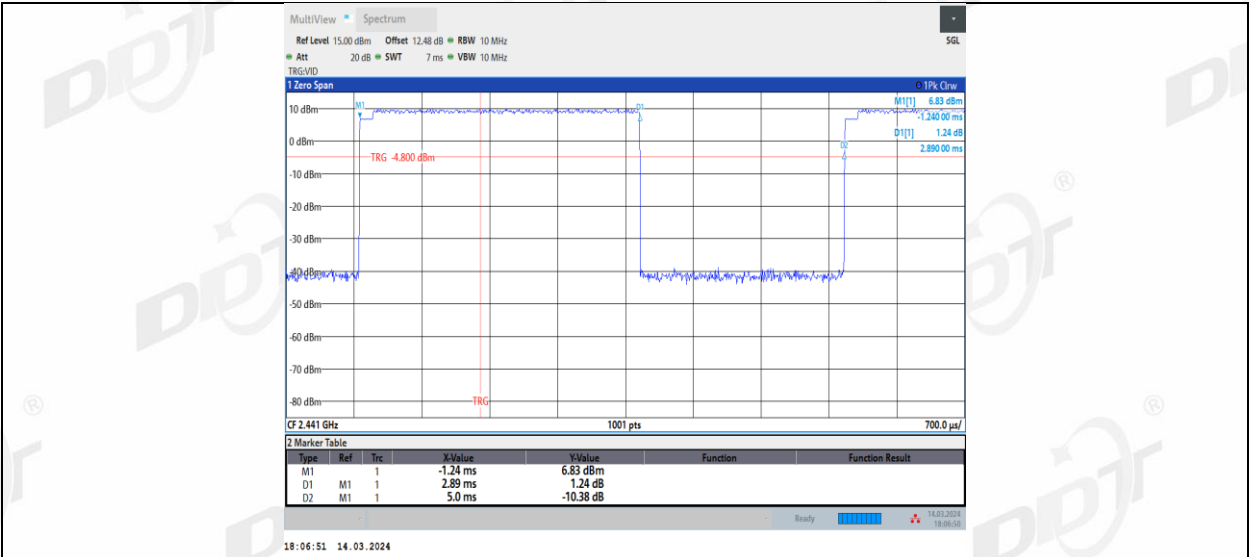

3DH5\_Right side\_2480

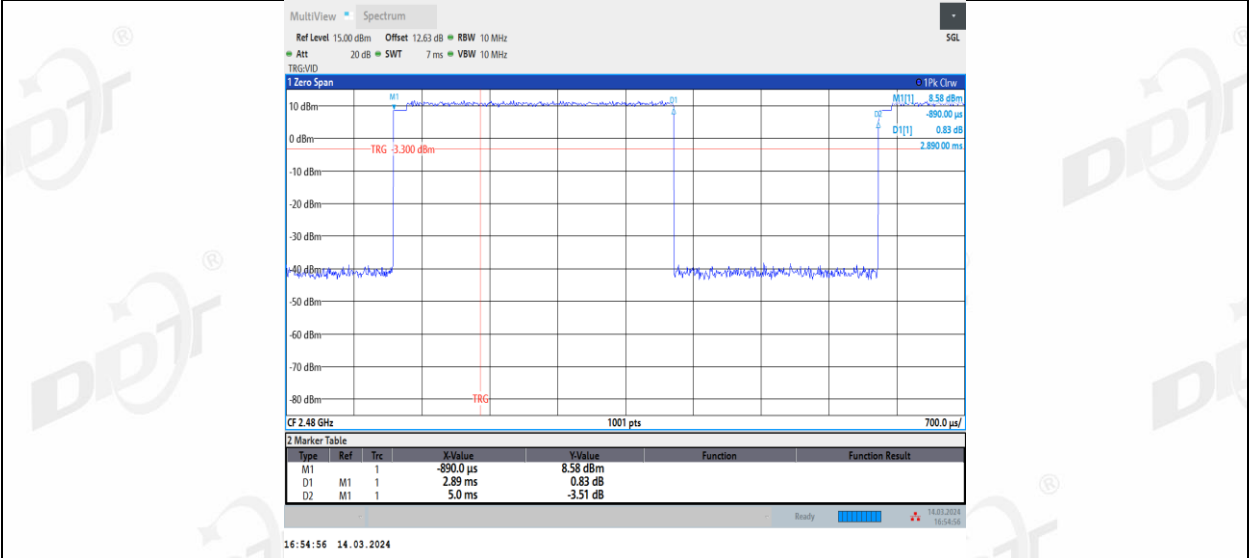

3DH5\_Left side\_2480

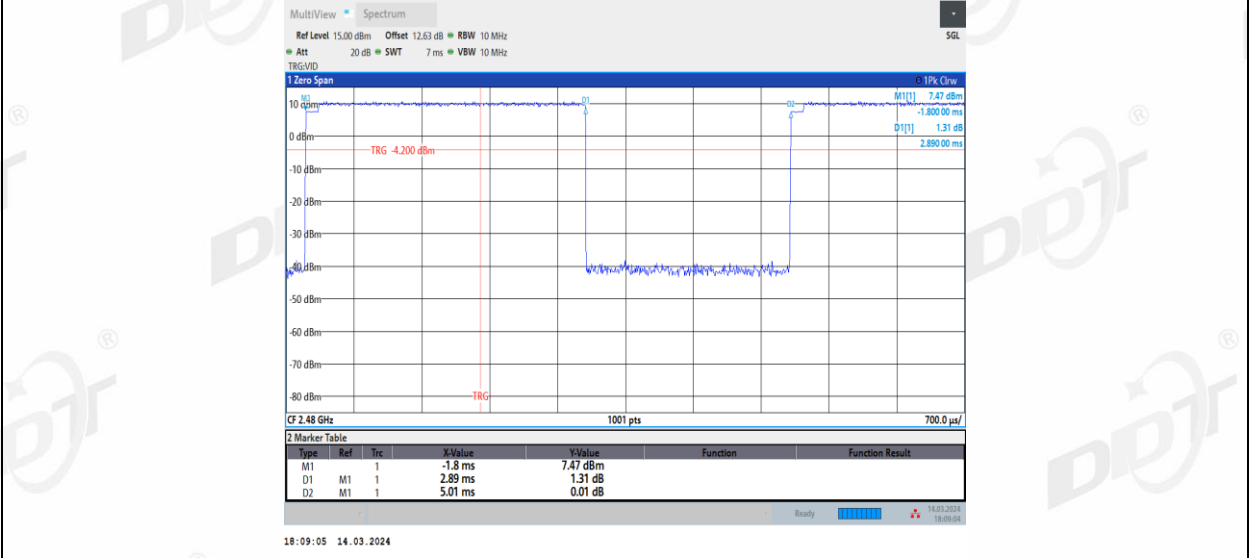

## **13. Antenna Requirements**

### **13.1. Limit**

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For intentional device, according to RSS-Gen issue 5 section 6.8.

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

### **13.2. Result**

The antenna used for this product as Antenna information described in section 2.1 of the report, and there is no other antenna than that furnished by the responsible party shall be used with the device.


## 14.Radiated Emission


### 14.1. Test equipment

| Equipment                    | Manufacturer                | Model No.          | Serial No.  | Cal Due To |
|------------------------------|-----------------------------|--------------------|-------------|------------|
| Broad-Band Horn Antenna      | Schwarzbeck                 | BBHA 9170          | DDT-ZC00506 | 2024/04/26 |
| Hochgewinn-Hornantenne       | Schwarzbeck Mess-Elektronik | BBHA 9120 D        | DDT-ZC02129 | 2024/09/17 |
| High pass filter             | Micro-Tronics               | HPM50108           | DDT-ZC00560 | 2024/05/14 |
| High Pass filter             | XIANXINGBO                  | XBLBQ-GTA67        | DDT-ZC02179 | 2024/05/14 |
| Micro-Tronics filters        | REBES                       | BRM50702           | DDT-ZC03242 | /          |
| Pre-amplifier                | COM-POWER                   | PAM-118A           | DDT-ZC01293 | 2024/07/14 |
| RF cable                     | Yuhu Technology             | ZT26S-SMAJ-SMAJ-1M | DDT-ZC02037 | 2024/04/23 |
| Pre-amplifier                | COM-POWER                   | PAM-840A           | DDT-ZC01693 | 2024/04/27 |
| EMI TEST RECEIVER            | R&S                         | ESU26              | DDT-ZC01909 | 2024/04/23 |
| PSA Series Spectrum Analyzer | Agilent                     | E4447A             | DDT-ZC00517 | 2024/04/23 |
| Trilog Broadband Antenna     | Schwarzbeck                 | VULB 9163          | DDT-ZC02050 | 2024/07/11 |
| RF Cable                     | N/A                         | W24.02 HL-562      | DDT-ZC04022 | 2024/04/21 |
| RF cable                     | Zhongke Junchuang           | JCT26S-NJ-NJ-1.5M  | DDT-ZC02762 | 2024/04/20 |
| High pass filter             | Micro-Tronics               | HPM50102           | DDT-ZC00561 | 2024/05/14 |
| RF Cable                     | N/A                         | W13.02 AP1-X2      | DDT-ZC04023 | 2024/04/21 |
| Micro-Tronics filters        | REBES                       | BRM50716           | DDT-ZC03240 | /          |
| Active Loop Antenna          | Schwarzbeck                 | FMZB1519           | DDT-ZC00524 | 2024/09/10 |
| RF cable                     | Yuhu Technology             | JCTB810-NJ-NJ-9M   | DDT-ZC02538 | 2024/04/23 |



## 14.2. Block diagram of test setup

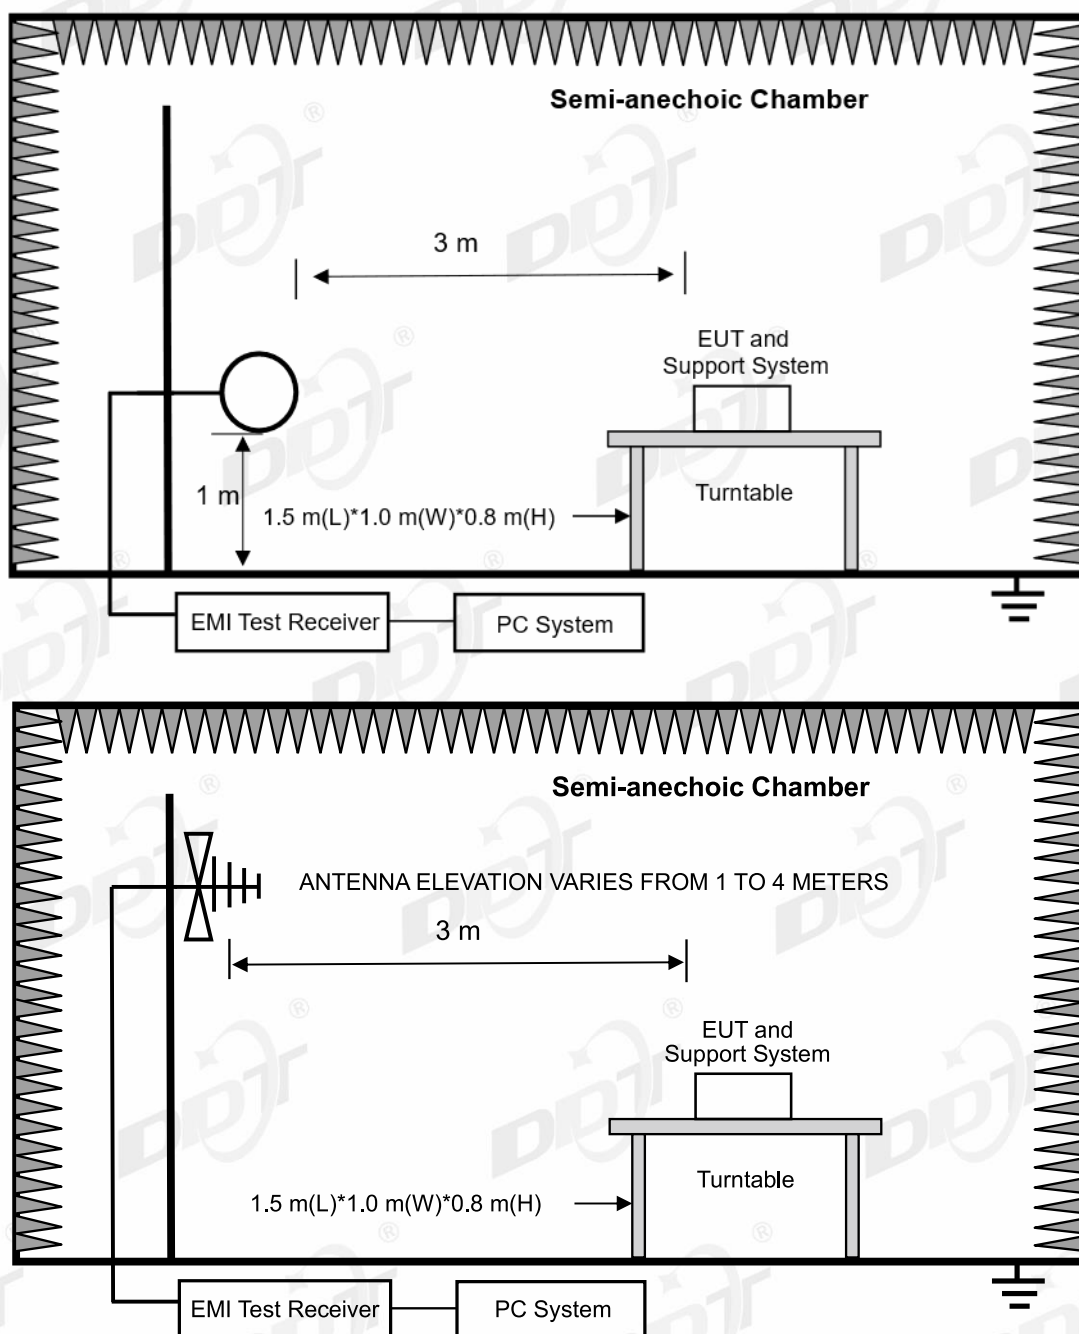

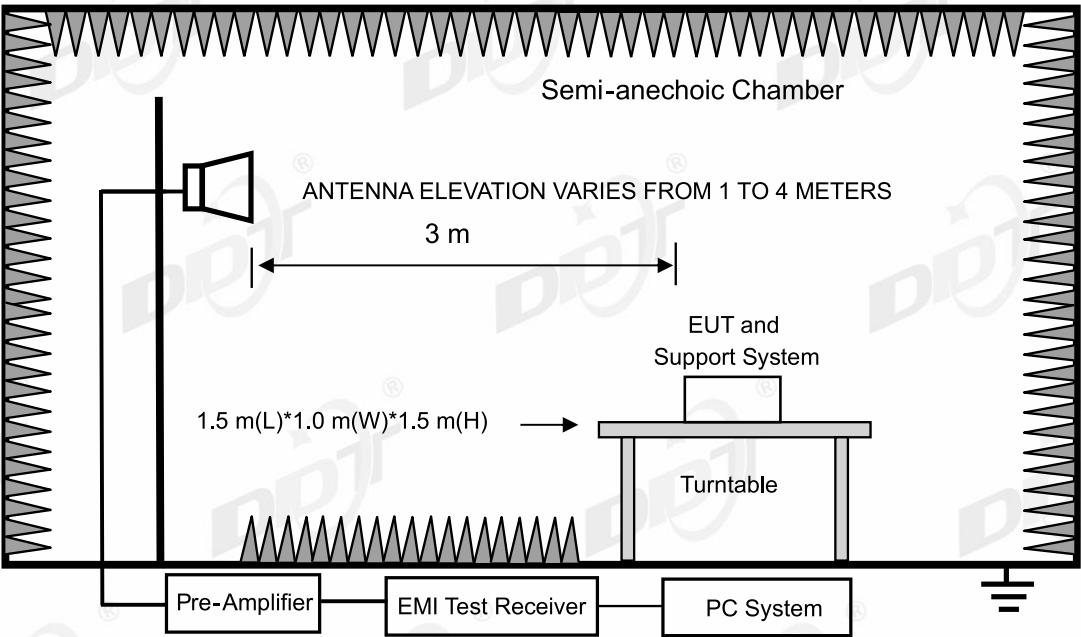

14.3. Limits

(1) FCC 15.205 Restricted frequency band

| MHz                      | MHz                 | MHz           | GHz            |
|--------------------------|---------------------|---------------|----------------|
| 0.090-0.110              | 16.42-16.423        | 399.9-410     | 4.5-5.15       |
| <sup>1</sup> 0.495-0.505 | 16.69475-16.69525   | 608-614       | 5.35-5.46      |
| 2.1735-2.1905            | 16.80425-16.80475   | 960-1240      | 7.25-7.75      |
| 4.125-4.128              | 25.5-25.67          | 1300-1427     | 8.025-8.5      |
| 4.1772&4.17775           | 37.5-38.25          | 1435-1626.5   | 9.0-9.2        |
| 4.2072&4.20775           | 73-74.6             | 1645.5-1646.5 | 9.3-9.5        |
| 6.215-6.218              | 74.8-75.2           | 1660-1710     | 10.6-12.7      |
| 6.26775-6.26825          | 108-121.94          | 1718.8-1722.2 | 13.25-13.4     |
| 6.31175-6.31225          | 123-138             | 2200-2300     | 14.47-14.5     |
| 8.291-8.294              | 149.9-150.05        | 2310-2390     | 15.35-16.2     |
| 8.362-8.366              | 156.52475-156.52525 | 2483.5-2500   | 17.7-21.4      |
| 8.37625-8.38675          | 156.7-156.9         | 2690-2900     | 22.01-23.12    |
| 8.41425-8.41475          | 162.0125-167.17     | 3260-3267     | 23.6-24.0      |
| 12.29-12.293             | 167.72-173.2        | 3332-3339     | 31.2-31.8      |
| 12.51975-12.52025        | 240-285             | 3345.8-3358   | 36.43-36.5     |
| 12.57675-12.57725        | 322-335.4           | 3600-4400     | <sup>(2)</sup> |
| 13.36-13.41              |                     |               |                |

1Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

2Above 38.6

## RSS-Gen section 8.10 Restricted frequency bands\*

| MHz             | MHz                 | MHz           | GHz         |
|-----------------|---------------------|---------------|-------------|
| 0.090-0.110     | 12.51975-12.52025   | 240-285       | 3.5-4.4     |
| 0.495-0.505     | 12.57675-12.57725   | 322-335.4     | 4.5-5.15    |
| 2.1735-2.1905   | 13.36-13.41         | 399.9-410     | 5.35-5.46   |
| 3.020-3.026     | 16.42-16.423        | 608-614       | 7.25-7.75   |
| 4.125-4.128     | 16.69475-16.69525   | 960-1427      | 8.025-8.5   |
| 4.1772&4.17775  | 16.80425-16.80475   | 1435-1626.5   | 9.0-9.2     |
| 4.2072&4.20775  | 25.5-25.67          | 1645.5-1646.5 | 9.3-9.5     |
| 5.677-5.683     | 37.5-38.25          | 1660-1710     | 10.6-12.7   |
| 6.215-6.218     | 73-74.6             | 1718.8-1722.2 | 13.25-13.4  |
| 6.26775-6.26825 | 74.8-75.2           | 2200-2300     | 14.47-14.5  |
| 6.31175-6.31225 | 108-138             | 2310-2390     | 15.35-16.2  |
| 8.291-8.294     | 149.9-150.05        | 2483.5-2500   | 17.7-21.4   |
| 8.362-8.366     | 156.52475-156.52525 | 2655-2900     | 22.01-23.12 |
| 8.37625-8.38675 | 156.7-156.9         | 3260-3267     | 23.6-24.0   |
| 8.41425-8.41475 | 162.0125-167.17     | 3332-3339     | 31.2-31.8   |
| 12.29-12.293    | 167.72-173.2        | 3345.8-3358   | 36.43-36.5  |
|                 |                     |               | Above 38.6  |

\* Certain frequency bands listed in table and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

## (2) FCC 15.209 Limit &amp; RSS-Gen section 8.9 Limit

| FREQUENCY<br>MHz |   |      | DISTANCE<br>Meters | FIELD STRENGTHS LIMIT                           |               |
|------------------|---|------|--------------------|-------------------------------------------------|---------------|
|                  |   |      |                    | mV/m                                            | dB(mV)/m      |
| 0.009 ~ 0.490    |   |      | 300                | 2400/F(kHz)                                     | 67.6-20log(F) |
| 0.490 ~ 1.705    |   |      | 30                 | 24000/F(kHz)                                    | 87.6-20log(F) |
| 1.705 ~ 30.0     |   |      | 30                 | 30                                              | 29.54         |
| 30               | ~ | 88   | 3                  | 100                                             | 40.0          |
| 88               | ~ | 216  | 3                  | 150                                             | 43.5          |
| 216              | ~ | 960  | 3                  | 200                                             | 46.0          |
| 960              | ~ | 1000 | 3                  | 500                                             | 54.0          |
| Above            |   | 1000 | 3                  | 74.0 dB(mV)/m (Peak)<br>54.0 dB(mV)/m (Average) |               |

## Note:

(1) The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz and above 1000 MHz, radiated emissions limits in these three bands are based on measurements employing an average detector.

(2) At frequencies below 30 MHz, measurement may be performed at a distance closer than that specified, and the limit at closer measurement distance can be extrapolated by below formula:

$$\text{Limit}_{3\text{m}}(\text{dBuV/m}) = \text{Limit}_{30\text{m}}(\text{dBuV/m}) + 40\text{Log}(30\text{m}/3\text{m})$$

(3) Limit for this EUT

The emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, and the emissions appearing within RSS-Gen section 8.10 Restricted frequency bands shall not exceed the limits shown in RSS-Gen section 8.9, all the other emissions shall be at least 20 dB below the fundamental emissions or comply with 15.209 limits and RSS-Gen section 8.9 limits.

#### 14.4. Assistant equipment used for test

| Assistant equipment | Manufacturer | Model number | Description | other |
|---------------------|--------------|--------------|-------------|-------|
| /                   | /            | /            | /           | /     |

#### 14.5. Test procedure

(1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber for below 1G and 150 cm above the ground plane inside a fully-anechoic chamber for above 1G.

(2) Test antenna was located 3 m from the EUT on an adjustable mast, and the antenna used as below table.

| Test frequency range | Test antenna used                        | Test antenna distance |
|----------------------|------------------------------------------|-----------------------|
| 9 kHz - 30 MHz       | Active Loop antenna                      | 3 m                   |
| 30 MHz - 1 GHz       | Trilog Broadband Antenna                 | 3 m                   |
| 1 GHz - 18 GHz       | Double Ridged Horn Antenna(1 GHz-18 GHz) | 3 m                   |
| 18 GHz - 40 GHz      | Horn Antenna(18 GHz-40 GHz)              | 1 m                   |

According ANSI C63.10:2013 clause 6.4.6 and 6.5.3, for measurements below 30 MHz, Antenna was located 3 m from EUT, the loop antenna was positioned in three antenna orientations (parallel, perpendicular, and round-parallel), for each measurement antenna alignment, the EUT shall be rotated through 0° to 360° on a turntable, and the lowest height of the magnetic antenna shall be 1 m above the ground. For measurement above 30MHz, the trilog Broadband Antenna or Horn Antenna was located 3m from EUT, Measurements were made with the antenna positioned in both the horizontal and vertical planes of Polarization, and the measurement antenna was varied from 1 m to 4 m. in height above the reference ground plane to obtain the maximum signal strength.

(3) Below pre-scan procedure was first performed in order to find prominent frequency spectrum radiated emissions from 9 kHz to 25 GHz:

(a) Scanning the peak frequency spectrum with the antenna specified in step (3), and the EUT was rotated 360 degree, the antenna height was varied from 1 m to 4 m (Except loop antenna, it's fixed 1 m above ground.)

(b) Change work frequency or channel of device if practicable.

(c) Change modulation type of device if practicable.

(d) Change power supply range from 85% to 115% of the rated supply voltage

(e) Rotated EUT through three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions.

Spectrum frequency from 9 kHz to 25 GHz (tenth harmonic of fundamental frequency) was investigated, and no any obvious emission were detected from 18 GHz to 25 GHz, so below final test was performed with frequency range from 9 kHz to 18 GHz.

(4) For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1 m and 4 m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipment and all of the interface cables were changed according to ANSI C63.10:2013 on Radiated Emission test.

(5) The emissions from 9 kHz to 1 GHz were measured based on CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz, for emissions from 9 kHz - 90 kHz, 110 kHz - 490 kHz and above 1 GHz were measured based on average detector, for emissions above 1 GHz, peak emissions also be measured and need comply with Peak limit.

(6) The emissions from 9 kHz to 1 GHz, QP or average values were measured with EMI receiver with below RBW.

| Frequency band   | RBW     |
|------------------|---------|
| 9 kHz - 150 kHz  | 200 Hz  |
| 150 kHz - 30 MHz | 9 kHz   |
| 30 MHz - 1 GHz   | 120 kHz |

(7) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1 MHz, VBW is set at 3 MHz for Peak measure; According ANSI C63.10:2013 clause 4.1.4.2.2 procedure for average measure.

(8) For portable device, X axis, Y axis, Z axis are tested, and worse setup is reported.

#### 14.6. Test result

**PASS. (See below detailed test result)**

14.7. Test data

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-03-21

Tested By:

Junchang Du

EUT:

BLUETOOTH HEADSET

Model Number:

LIVE FLEX 3

Test Mode:

Tx mode

Power Supply:

Battery

Condition:

Temp:23.4°C;Humi:62.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2024 report data\Q24031112-2E FLEX3\FCC BELOW 1G\20240321-013803\_H

Memo:

Left side Sample Number: S24031112-004

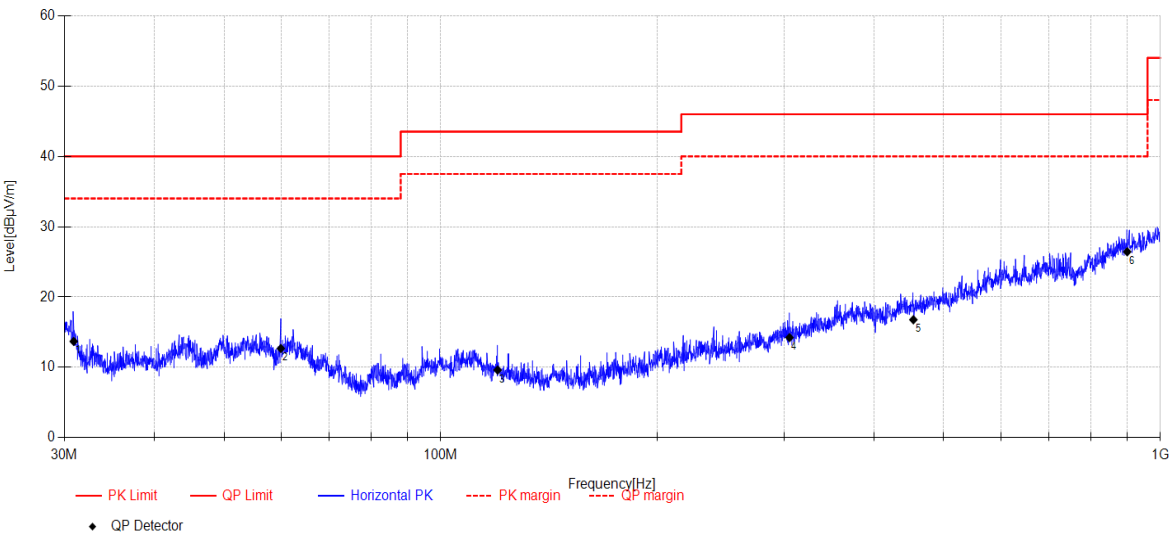

| Data List |             |                  |                     |                 |          |                 |                |             |          |            |
|-----------|-------------|------------------|---------------------|-----------------|----------|-----------------|----------------|-------------|----------|------------|
| NO.       | Freq. [MHz] | Reading [dBμV/m] | Antenna Factor [dB] | Cable Loss [dB] | AMP [dB] | Result [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity   |
| 1         | 30.92       | 29.82            | 10.39               | 4.48            | -30.99   | 13.70           | 40.00          | 26.30       | QP       | Horizontal |
| 2         | 59.98       | 25.77            | 12.79               | 4.76            | -30.63   | 12.69           | 40.00          | 27.31       | QP       | Horizontal |
| 3         | 119.99      | 25.3             | 10.00               | 5.17            | -30.84   | 9.63            | 43.50          | 33.87       | QP       | Horizontal |
| 4         | 305.32      | 24.68            | 13.67               | 6.18            | -30.29   | 14.24           | 46.00          | 31.76       | QP       | Horizontal |
| 5         | 453.74      | 24               | 15.95               | 6.82            | -29.99   | 16.78           | 46.00          | 29.22       | QP       | Horizontal |
| 6         | 899.54      | 25.27            | 21.83               | 8.34            | -29.00   | 26.44           | 46.00          | 19.56       | QP       | Horizontal |

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-03-21

Tested By:

Junchang Du

EUT:

BLUETOOTH HEADSET

Model Number:

LIVE FLEX 3

Test Mode:

Tx mode

Power Supply:

Battery

Condition:

Temp:23.4°C;Humi:62.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2024 report data\Q24031112-2E FLEX3\FCC BELOW 1G\20240321-013843\_V

Memo:

Left side Sample Number: S24031112-004

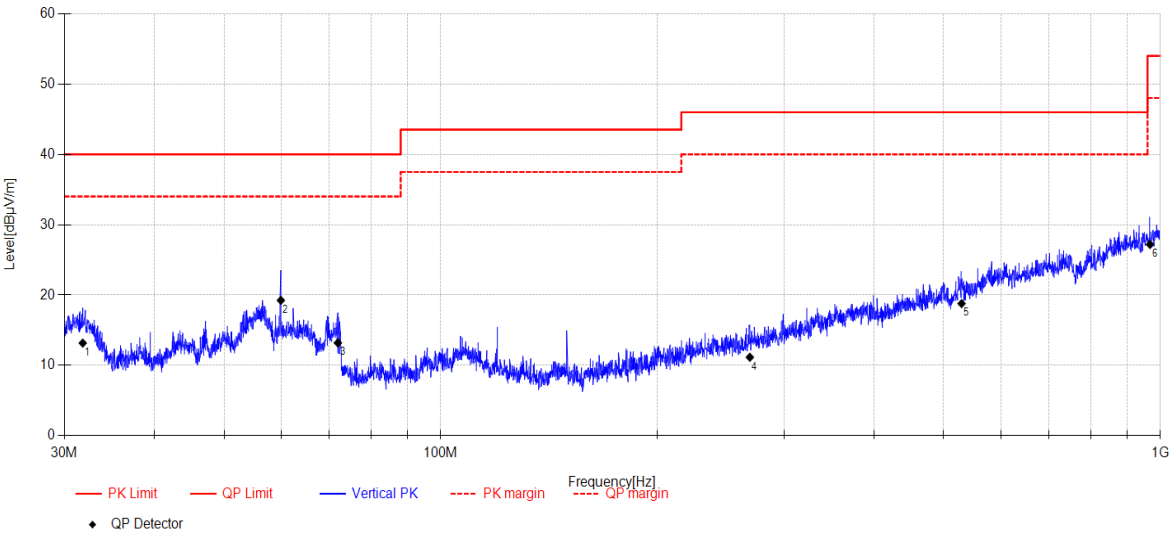

| Data List |             |                  |                     |                 |          |                 |                |             |          |          |
|-----------|-------------|------------------|---------------------|-----------------|----------|-----------------|----------------|-------------|----------|----------|
| NO.       | Freq. [MHz] | Reading [dBμV/m] | Antenna Factor [dB] | Cable Loss [dB] | AMP [dB] | Result [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity |
| 1         | 31.82       | 29.51            | 10.15               | 4.49            | -30.97   | 13.18           | 40.00          | 26.82       | QP       | Vertical |
| 2         | 59.98       | 32.33            | 12.79               | 4.76            | -30.63   | 19.25           | 40.00          | 20.75       | QP       | Vertical |
| 3         | 71.97       | 29.36            | 9.60                | 4.80            | -30.55   | 13.21           | 40.00          | 26.79       | QP       | Vertical |
| 4         | 268.93      | 23.2             | 12.33               | 6.02            | -30.39   | 11.16           | 46.00          | 34.84       | QP       | Vertical |
| 5         | 529.43      | 23.96            | 17.68               | 7.05            | -29.90   | 18.79           | 46.00          | 27.21       | QP       | Vertical |
| 6         | 967.58      | 25.26            | 21.75               | 8.58            | -28.39   | 27.20           | 54.00          | 26.80       | QP       | Vertical |

Note:

- Result Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
- Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.



TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-03-21

Tested By:

Junchang Du

EUT:

BLUETOOTH HEADSET

Model Number:

LIVE FLEX 3

Test Mode:

Tx mode

Power Supply:

Battery

Condition:

Temp:23.4°C;Humi:62.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2024 report data\Q24031112-2E FLEX3\FCC BELOW 1G\20240321-014502\_H

Memo:

Right side Sample Number: S24031112-004

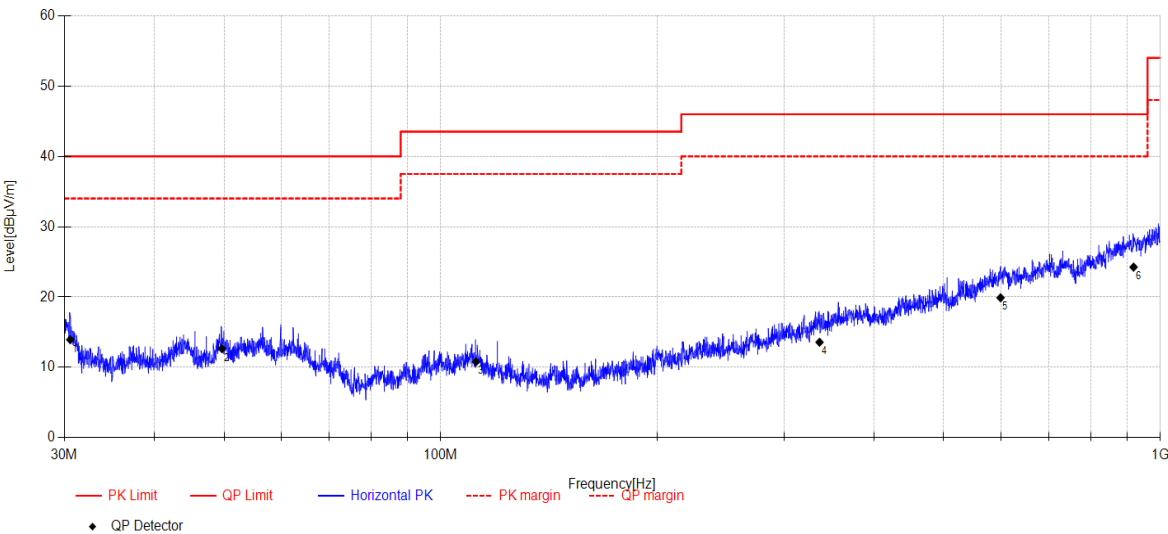

| Data List |             |                  |                     |                 |          |                 |                |             |          |            |
|-----------|-------------|------------------|---------------------|-----------------|----------|-----------------|----------------|-------------|----------|------------|
| NO.       | Freq. [MHz] | Reading [dBμV/m] | Antenna Factor [dB] | Cable Loss [dB] | AMP [dB] | Result [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity   |
| 1         | 30.57       | 30.09            | 10.36               | 4.48            | -30.99   | 13.94           | 40.00          | 26.06       | QP       | Horizontal |
| 2         | 49.67       | 25.74            | 12.90               | 4.73            | -30.70   | 12.67           | 40.00          | 27.33       | QP       | Horizontal |
| 3         | 111.94      | 24.82            | 11.71               | 5.13            | -30.86   | 10.80           | 43.50          | 32.70       | QP       | Horizontal |
| 4         | 336.11      | 22.99            | 14.47               | 6.35            | -30.23   | 13.58           | 46.00          | 32.42       | QP       | Horizontal |
| 5         | 599.80      | 23.3             | 19.18               | 7.33            | -29.90   | 19.91           | 46.00          | 26.09       | QP       | Horizontal |
| 6         | 918.01      | 23.12            | 21.58               | 8.40            | -28.84   | 24.26           | 46.00          | 21.74       | QP       | Horizontal |

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.



TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-03-21

Tested By:

Junchang Du

EUT:

BLUETOOTH HEADSET

Model Number:

LIVE FLEX 3

Test Mode:

Tx mode

Power Supply:

Battery

Condition:

Temp:23.4°C;Humi:62.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2024 report data\Q24031112-2E FLEX3\FCC BELOW 1G\20240321-014545\_V

Memo:

Right side Sample Number: S24031112-004

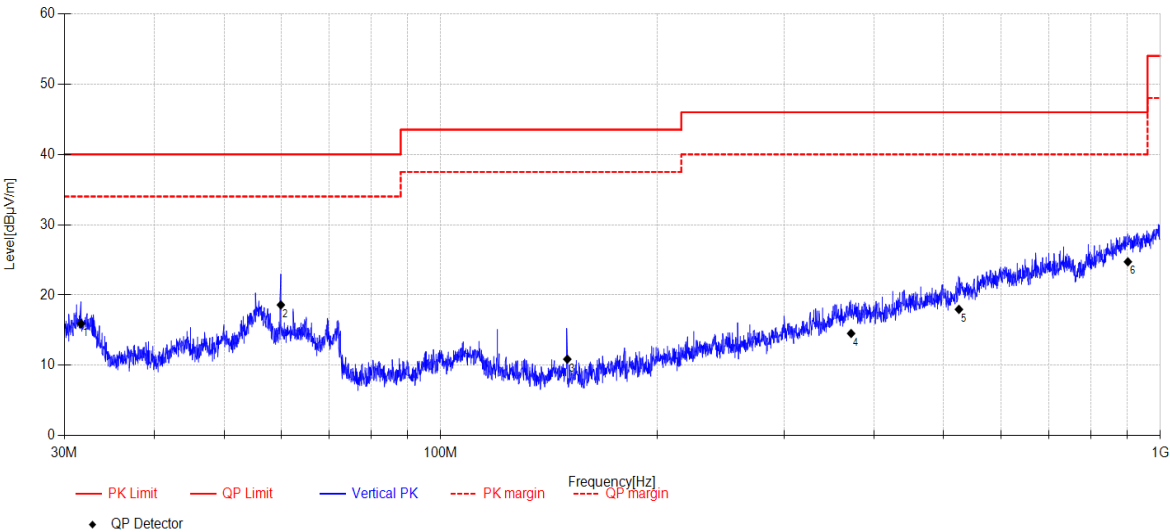

| Data List |             |                  |                     |                 |          |                 |                |             |          |          |
|-----------|-------------|------------------|---------------------|-----------------|----------|-----------------|----------------|-------------|----------|----------|
| NO.       | Freq. [MHz] | Reading [dBμV/m] | Antenna Factor [dB] | Cable Loss [dB] | AMP [dB] | Result [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity |
| 1         | 31.64       | 32.22            | 10.21               | 4.49            | -30.98   | 15.94           | 40.00          | 24.06       | QP       | Vertical |
| 2         | 59.98       | 31.68            | 12.79               | 4.76            | -30.63   | 18.60           | 40.00          | 21.40       | QP       | Vertical |
| 3         | 149.96      | 28.2             | 8.12                | 5.32            | -30.75   | 10.89           | 43.50          | 32.61       | QP       | Vertical |
| 4         | 371.82      | 22.51            | 15.65               | 6.54            | -30.16   | 14.54           | 46.00          | 31.46       | QP       | Vertical |
| 5         | 524.99      | 23.34            | 17.50               | 7.03            | -29.90   | 17.97           | 46.00          | 28.03       | QP       | Vertical |
| 6         | 901.43      | 23.47            | 21.90               | 8.35            | -28.99   | 24.73           | 46.00          | 21.27       | QP       | Vertical |

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-03-20

Tested By:

Junchang Du

EUT:

BLUETOOTH HEADSET

Model Number:

LIVE FLEX 3

Test Mode:

DH5 TX 2402MHz

Power Supply:

Battery

Condition:

Temp:23.4°C;Humi:62.3%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24031112-2E FLEX3\FCC ABOVE 1G1

Memo:

Left side Sample Number: S24031112-004

Test Graph

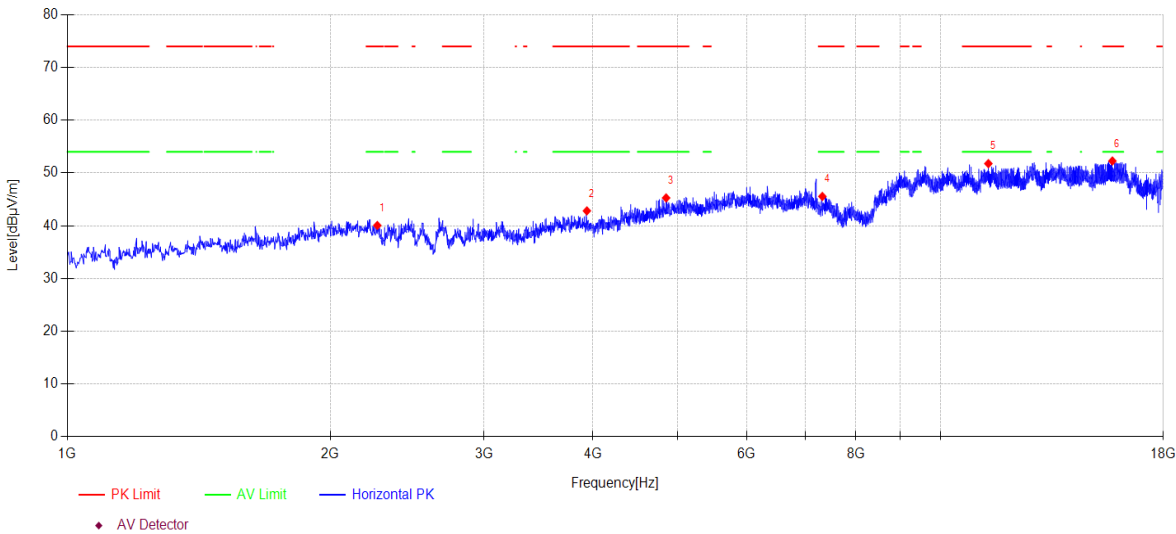

| Data List |             |                  |                     |                 |          |                |                |             |          |            |
|-----------|-------------|------------------|---------------------|-----------------|----------|----------------|----------------|-------------|----------|------------|
| NO.       | Freq. [MHz] | Reading [dBμV/m] | Antenna Factor [dB] | Cable loss [dB] | AMP [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity   |
| 1         | 2264.80     | 44.71            | 27.15               | 5.95            | -37.76   | 40.05          | 74.00          | 33.95       | PK       | Horizontal |
| 2         | 3935.90     | 46.26            | 31.13               | 5.84            | -40.41   | 42.82          | 74.00          | 31.18       | PK       | Horizontal |
| 3         | 4850.50     | 44.05            | 33.79               | 7.57            | -40.14   | 45.27          | 74.00          | 28.73       | PK       | Horizontal |
| 4         | 7324.00     | 42.58            | 36.85               | 7.63            | -41.51   | 45.55          | 74.00          | 28.45       | PK       | Horizontal |
| 5         | 11346.20    | 41.82            | 39.25               | 9.96            | -39.25   | 51.78          | 74.00          | 22.22       | PK       | Horizontal |
| 6         | 15737.30    | 38.35            | 38.43               | 14.69           | -39.20   | 52.27          | 74.00          | 21.73       | PK       | Horizontal |

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-03-20

Tested By:

Junchang Du

EUT:

BLUETOOTH HEADSET

Model Number:

LIVE FLEX 3

Test Mode:

DH5 TX 2402MHz

Power Supply:

Battery

Condition:

Temp:23.4°C;Humi:62.3%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24031112-2E FLEX3\FCC ABOVE 1G\2

Memo:

Left side Sample Number: S24031112-004

Test Graph

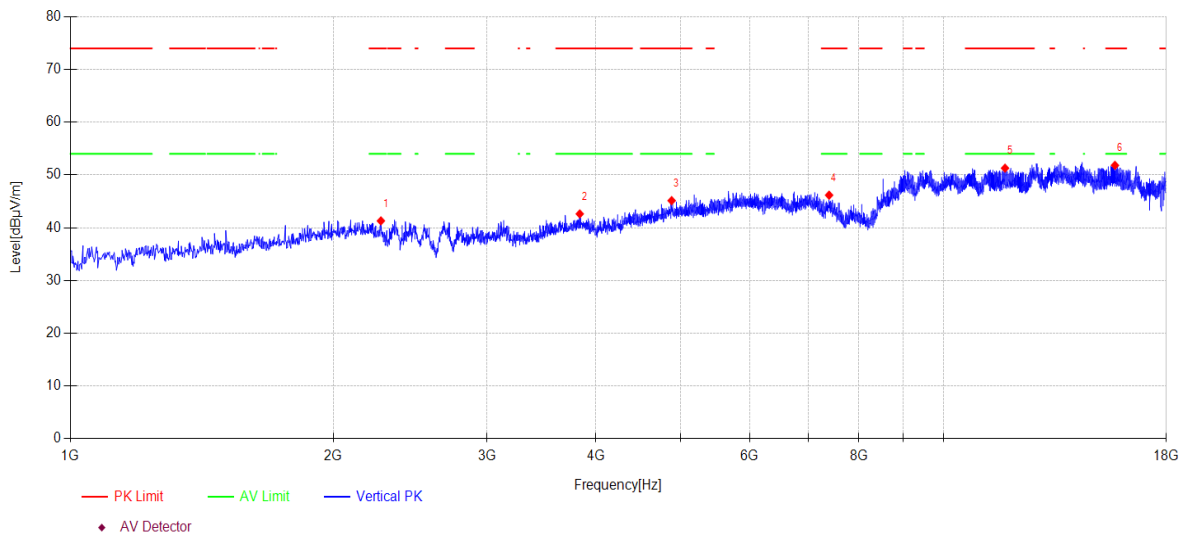

| Data List |             |                  |                     |                 |          |                |                |             |          |          |
|-----------|-------------|------------------|---------------------|-----------------|----------|----------------|----------------|-------------|----------|----------|
| NO.       | Freq. [MHz] | Reading [dBμV/m] | Antenna Factor [dB] | Cable loss [dB] | AMP [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity |
| 1         | 2268.20     | 46.00            | 27.12               | 5.95            | -37.77   | 41.30          | 74.00          | 32.70       | PK       | Vertical |
| 2         | 3832.20     | 46.33            | 30.83               | 5.81            | -40.35   | 42.62          | 74.00          | 31.38       | PK       | Vertical |
| 3         | 4882.80     | 44.35            | 33.28               | 7.63            | -40.12   | 45.14          | 74.00          | 28.86       | PK       | Vertical |
| 4         | 7397.10     | 43.51            | 36.71               | 7.64            | -41.69   | 46.17          | 74.00          | 27.83       | PK       | Vertical |
| 5         | 11762.70    | 41.47            | 38.94               | 10.33           | -39.45   | 51.29          | 74.00          | 22.71       | PK       | Vertical |
| 6         | 15718.60    | 37.94            | 38.46               | 14.61           | -39.19   | 51.82          | 74.00          | 22.18       | PK       | Vertical |

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-03-20

Tested By:

Junchang Du

EUT:

BLUETOOTH HEADSET

Model Number:

LIVE FLEX 3

Test Mode:

DH5 TX 2441MHz

Power Supply:

Battery

Condition:

Temp:23.4°C;Humi:62.3%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24031112-2E FLEX3\FCC ABOVE 1G\3

Memo:

Left side Sample Number: S24031112-004

Test Graph

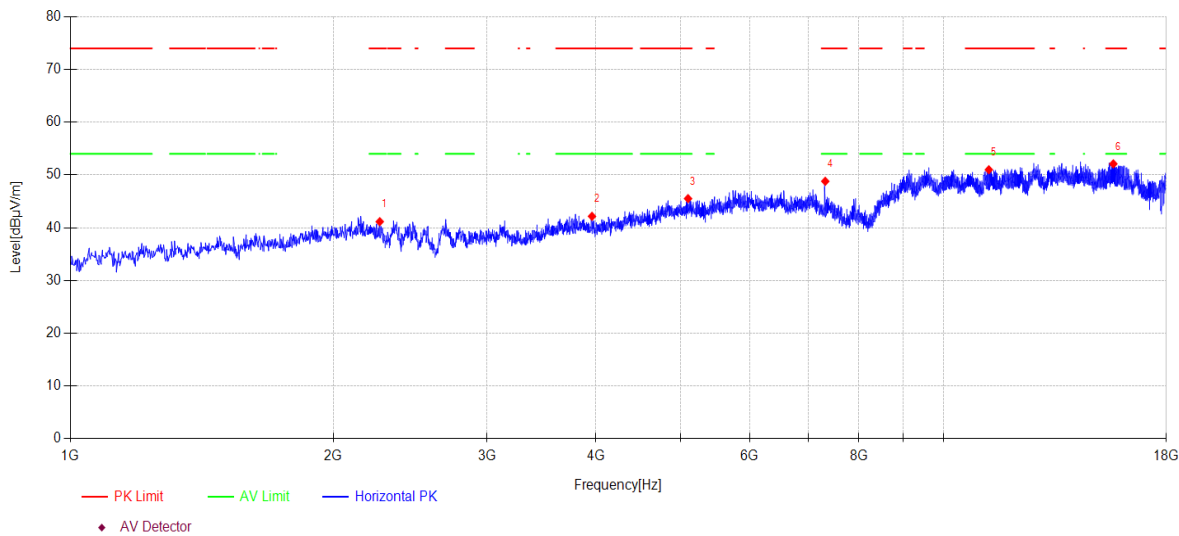

| Data List |             |                  |                     |                 |          |                |                |             |          |            |
|-----------|-------------|------------------|---------------------|-----------------|----------|----------------|----------------|-------------|----------|------------|
| NO.       | Freq. [MHz] | Reading [dBμV/m] | Antenna Factor [dB] | Cable loss [dB] | AMP [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity   |
| 1         | 2261.40     | 45.76            | 27.19               | 5.95            | -37.75   | 41.15          | 74.00          | 32.85       | PK       | Horizontal |
| 2         | 3958.00     | 45.67            | 31.07               | 5.84            | -40.42   | 42.16          | 74.00          | 31.84       | PK       | Horizontal |
| 3         | 5098.70     | 44.18            | 33.40               | 8.01            | -40.07   | 45.52          | 74.00          | 28.48       | PK       | Horizontal |
| 4         | 7322.30     | 45.82            | 36.86               | 7.63            | -41.51   | 48.80          | 74.00          | 25.20       | PK       | Horizontal |
| 5         | 11271.40    | 41.12            | 39.20               | 9.89            | -39.22   | 50.99          | 74.00          | 23.01       | PK       | Horizontal |
| 6         | 15652.30    | 38.40            | 38.55               | 14.30           | -39.15   | 52.10          | 74.00          | 21.90       | PK       | Horizontal |

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-03-20

Tested By:

Junchang Du

EUT:

BLUETOOTH HEADSET

Model Number:

LIVE FLEX 3

Test Mode:

DH5 TX 2441MHz

Power Supply:

Battery

Condition:

Temp:23.4°C;Humi:62.3%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24031112-2E FLEX3\FCC ABOVE 1G4

Memo:

Left side Sample Number: S24031112-004

Test Graph

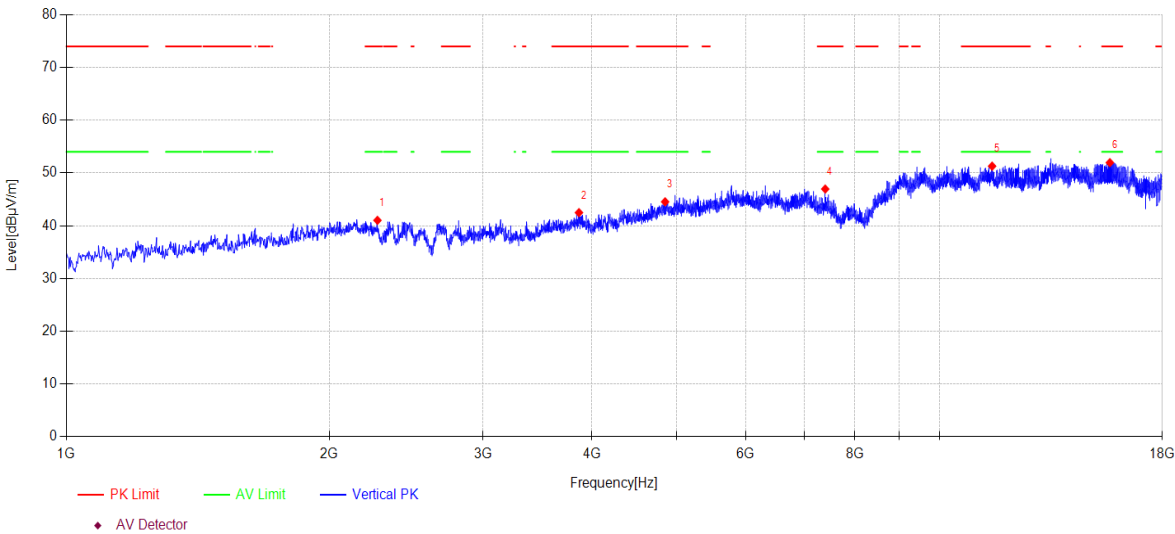

| Data List |             |                  |                     |                 |          |                |                |             |          |          |
|-----------|-------------|------------------|---------------------|-----------------|----------|----------------|----------------|-------------|----------|----------|
| NO.       | Freq. [MHz] | Reading [dBμV/m] | Antenna Factor [dB] | Cable loss [dB] | AMP [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity |
| 1         | 2271.60     | 45.77            | 27.08               | 5.95            | -37.78   | 41.02          | 74.00          | 32.98       | PK       | Vertical |
| 2         | 3864.50     | 46.04            | 30.99               | 5.82            | -40.37   | 42.48          | 74.00          | 31.52       | PK       | Vertical |
| 3         | 4850.50     | 43.31            | 33.79               | 7.57            | -40.14   | 44.53          | 74.00          | 29.47       | PK       | Vertical |
| 4         | 7398.80     | 44.32            | 36.70               | 7.64            | -41.70   | 46.96          | 74.00          | 27.04       | PK       | Vertical |
| 5         | 11489.00    | 41.31            | 39.21               | 10.09           | -39.32   | 51.29          | 74.00          | 22.71       | PK       | Vertical |
| 6         | 15672.70    | 38.18            | 38.53               | 14.40           | -39.16   | 51.95          | 74.00          | 22.05       | PK       | Vertical |

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-03-20

Tested By:

Junchang Du

EUT:

BLUETOOTH HEADSET

Model Number:

LIVE FLEX 3

Test Mode:

DH5 TX 2480MHz

Power Supply:

Battery

Condition:

Temp:23.4°C;Humi:62.3%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24031112-2E FLEX3\FCC ABOVE 1G\5

Memo:

Left side Sample Number: S24031112-004

Test Graph

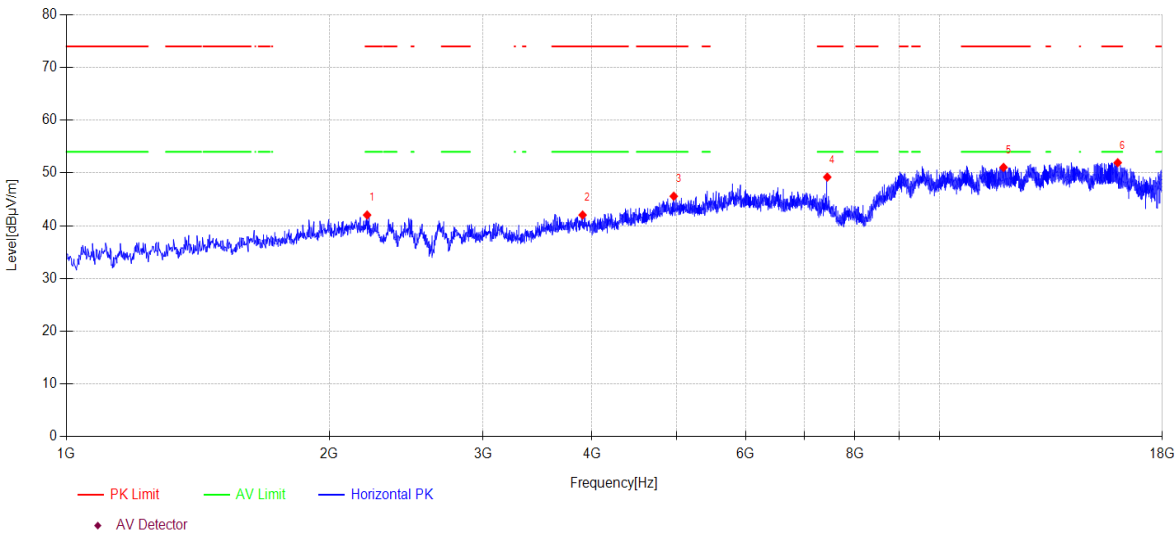

| Data List |             |                  |                     |                 |          |                |                |             |          |            |
|-----------|-------------|------------------|---------------------|-----------------|----------|----------------|----------------|-------------|----------|------------|
| NO.       | Freq. [MHz] | Reading [dBμV/m] | Antenna Factor [dB] | Cable loss [dB] | AMP [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity   |
| 1         | 2210.40     | 45.96            | 27.70               | 5.98            | -37.61   | 42.03          | 74.00          | 31.97       | PK       | Horizontal |
| 2         | 3901.90     | 45.39            | 31.20               | 5.83            | -40.39   | 42.03          | 74.00          | 31.97       | PK       | Horizontal |
| 3         | 4962.70     | 44.76            | 33.13               | 7.79            | -40.09   | 45.59          | 74.00          | 28.41       | PK       | Horizontal |
| 4         | 7439.60     | 46.75            | 36.62               | 7.64            | -41.80   | 49.21          | 74.00          | 24.79       | PK       | Horizontal |
| 5         | 11840.90    | 41.25            | 38.90               | 10.40           | -39.49   | 51.06          | 74.00          | 22.94       | PK       | Horizontal |
| 6         | 16002.50    | 37.43            | 38.00               | 15.87           | -39.36   | 51.94          | 74.00          | 22.06       | PK       | Horizontal |

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.



TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-03-20

Tested By:

Junchang Du

EUT:

BLUETOOTH HEADSET

Model Number:

LIVE FLEX 3

Test Mode:

DH5 TX 2480MHz

Power Supply:

Battery

Condition:

Temp:23.4°C;Humi:62.3%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24031112-2E FLEX3\FCC ABOVE 1G\6

Memo:

Left side Sample Number: S24031112-004

Test Graph

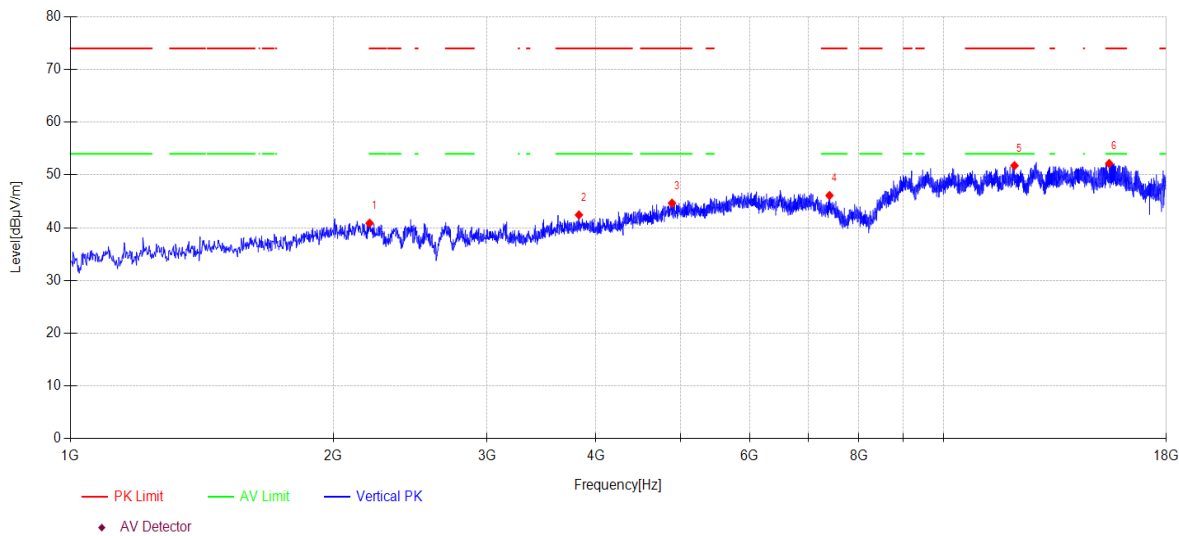

| Data List |             |                  |                     |                 |          |                |                |             |          |          |
|-----------|-------------|------------------|---------------------|-----------------|----------|----------------|----------------|-------------|----------|----------|
| NO.       | Freq. [MHz] | Reading [dBμV/m] | Antenna Factor [dB] | Cable loss [dB] | AMP [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity |
| 1         | 2201.90     | 44.68            | 27.78               | 5.98            | -37.58   | 40.86          | 74.00          | 33.14       | PK       | Vertical |
| 2         | 3823.70     | 46.17            | 30.79               | 5.81            | -40.34   | 42.43          | 74.00          | 31.57       | PK       | Vertical |
| 3         | 4887.90     | 43.95            | 33.19               | 7.64            | -40.12   | 44.66          | 74.00          | 29.34       | PK       | Vertical |
| 4         | 7403.90     | 43.49            | 36.69               | 7.64            | -41.71   | 46.11          | 74.00          | 27.89       | PK       | Vertical |
| 5         | 12060.20    | 41.55            | 39.26               | 10.54           | -39.58   | 51.77          | 74.00          | 22.23       | PK       | Vertical |
| 6         | 15482.30    | 38.85            | 38.84               | 13.53           | -39.05   | 52.17          | 74.00          | 21.83       | PK       | Vertical |

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.



TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-03-20

Tested By:

Junchang Du

EUT:

BLUETOOTH HEADSET

Model Number:

LIVE FLEX 3

Test Mode:

DH5 TX 2402MHz

Power Supply:

Battery

Condition:

Temp:23.4°C;Humi:62.3%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24031112-2E FLEX3\FCC ABOVE 1G\35

Memo:

Right side Sample Number: S24031112-004

Test Graph

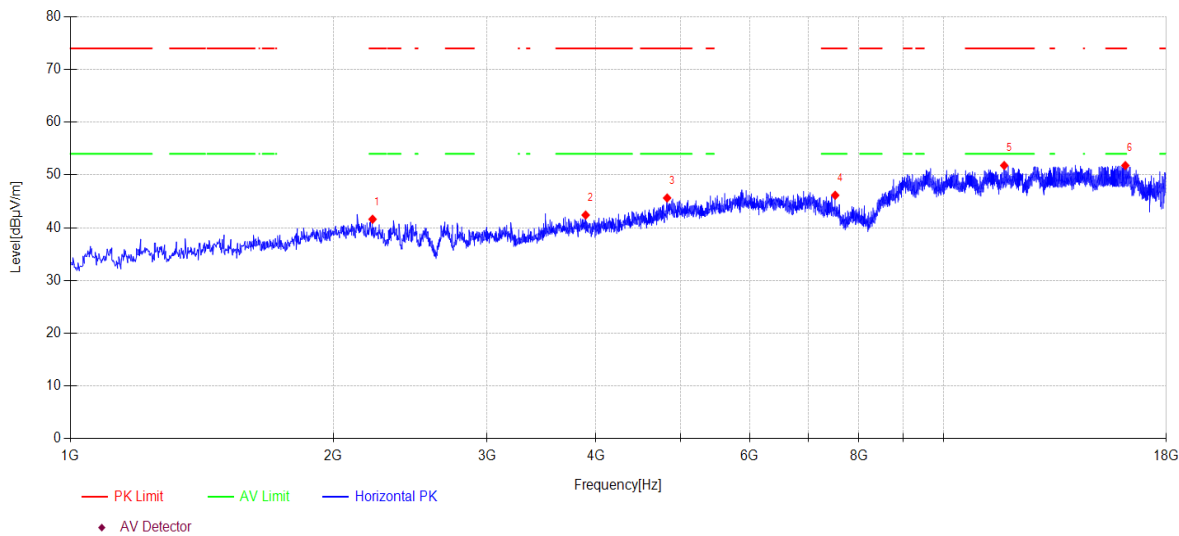

| Data List |             |                  |                     |                 |          |                |                |             |          |            |
|-----------|-------------|------------------|---------------------|-----------------|----------|----------------|----------------|-------------|----------|------------|
| NO        | Freq. [MHz] | Reading [dBµV/m] | Antenna Factor [dB] | Cable loss [dB] | AMP [dB] | Level [dBµV/m] | Limit [dBµV/m] | Margin [dB] | Detector | Polarity   |
| 1         | 2218.90     | 45.66            | 27.61               | 5.97            | -37.63   | 41.61          | 74.00          | 32.39       | PK       | Horizontal |
| 2         | 3891.70     | 45.80            | 31.15               | 5.83            | -40.38   | 42.40          | 74.00          | 31.60       | PK       | Horizontal |
| 3         | 4825.00     | 45.11            | 33.15               | 7.52            | -40.14   | 45.64          | 74.00          | 28.36       | PK       | Horizontal |
| 4         | 7516.10     | 44.02            | 36.47               | 7.65            | -41.99   | 46.15          | 74.00          | 27.85       | PK       | Horizontal |
| 5         | 11737.20    | 41.97            | 38.96               | 10.31           | -39.44   | 51.80          | 74.00          | 22.20       | PK       | Horizontal |
| 6         | 16155.50    | 38.17            | 37.84               | 15.27           | -39.49   | 51.79          | 74.00          | 22.21       | PK       | Horizontal |

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-03-20

Tested By:

Junchang Du

EUT:

BLUETOOTH HEADSET

Model Number:

LIVE FLEX 3

Test Mode:

DH5 TX 2402MHz

Power Supply:

Battery

Condition:

Temp:23.4°C;Humi:62.3%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24031112-2E FLEX3\FCC ABOVE 1G\36

Memo:

Right side Sample Number: S24031112-004

Test Graph

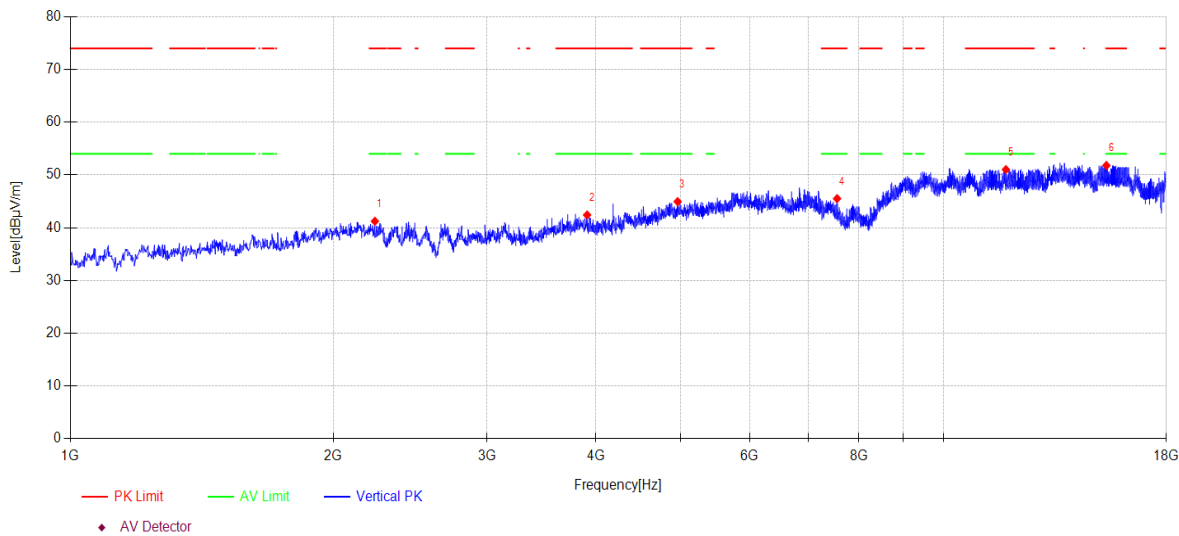

| Data List |             |                  |                     |                 |          |                |                |             |          |          |
|-----------|-------------|------------------|---------------------|-----------------|----------|----------------|----------------|-------------|----------|----------|
| NO.       | Freq. [MHz] | Reading [dBμV/m] | Antenna Factor [dB] | Cable loss [dB] | AMP [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity |
| 1         | 2232.50     | 45.45            | 27.48               | 5.97            | -37.67   | 41.23          | 74.00          | 32.77       | PK       | Vertical |
| 2         | 3907.00     | 45.79            | 31.19               | 5.83            | -40.39   | 42.42          | 74.00          | 31.58       | PK       | Vertical |
| 3         | 4961.00     | 44.13            | 33.12               | 7.79            | -40.09   | 44.95          | 74.00          | 29.05       | PK       | Vertical |
| 4         | 7553.50     | 43.53            | 36.41               | 7.65            | -42.08   | 45.51          | 74.00          | 28.49       | PK       | Vertical |
| 5         | 11789.90    | 41.23            | 38.91               | 10.35           | -39.46   | 51.03          | 74.00          | 22.97       | PK       | Vertical |
| 6         | 15368.40    | 38.51            | 39.25               | 13.02           | -38.98   | 51.80          | 74.00          | 22.20       | PK       | Vertical |

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-03-20

Tested By:

Junchang Du

EUT:

BLUETOOTH HEADSET

Model Number:

LIVE FLEX 3

Test Mode:

DH5 TX 2441MHz

Power Supply:

Battery

Condition:

Temp:23.4°C;Humi:62.3%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24031112-2E FLEX3\FCC ABOVE 1G\37

Memo:

Right side Sample Number: S24031112-004

Test Graph

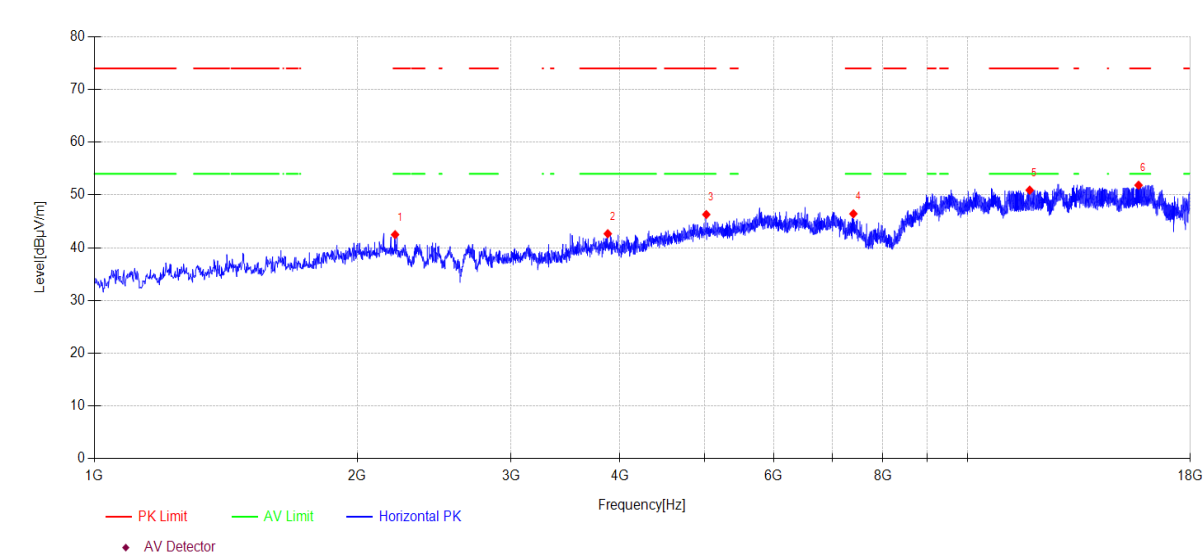

| Data List |             |                  |                     |                 |          |                |                |             |          |            |
|-----------|-------------|------------------|---------------------|-----------------|----------|----------------|----------------|-------------|----------|------------|
| NO.       | Freq. [MHz] | Reading [dBμV/m] | Antenna Factor [dB] | Cable loss [dB] | AMP [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity   |
| 1         | 2210.40     | 46.41            | 27.70               | 5.98            | -37.61   | 42.48          | 74.00          | 31.52       | PK       | Horizontal |
| 2         | 3873.00     | 46.16            | 31.04               | 5.82            | -40.37   | 42.65          | 74.00          | 31.35       | PK       | Horizontal |
| 3         | 5022.20     | 45.24            | 33.24               | 7.90            | -40.08   | 46.30          | 74.00          | 27.70       | PK       | Horizontal |
| 4         | 7402.20     | 43.80            | 36.70               | 7.64            | -41.71   | 46.43          | 74.00          | 27.57       | PK       | Horizontal |
| 5         | 11783.10    | 41.10            | 38.92               | 10.35           | -39.46   | 50.91          | 74.00          | 23.09       | PK       | Horizontal |
| 6         | 15701.60    | 38.00            | 38.50               | 14.53           | -39.18   | 51.85          | 74.00          | 22.15       | PK       | Horizontal |

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:2024-03-20

Tested By:Junchang Du

EUT:BLUETOOTH HEADSET

Model Number:LIVE FLEX 3

Test Mode:DH5 TX 2441MHz

Power Supply:Battery


Condition:Temp:23.4°C;Humi:62.3%

Test Site:DDT 3# Chamber

File Path:d:\ts\2024 report data\Q24031112-2E FLEX3\FCC ABOVE 1G\38

Memo:Right side Sample Number: S24031112-004

Test Graph

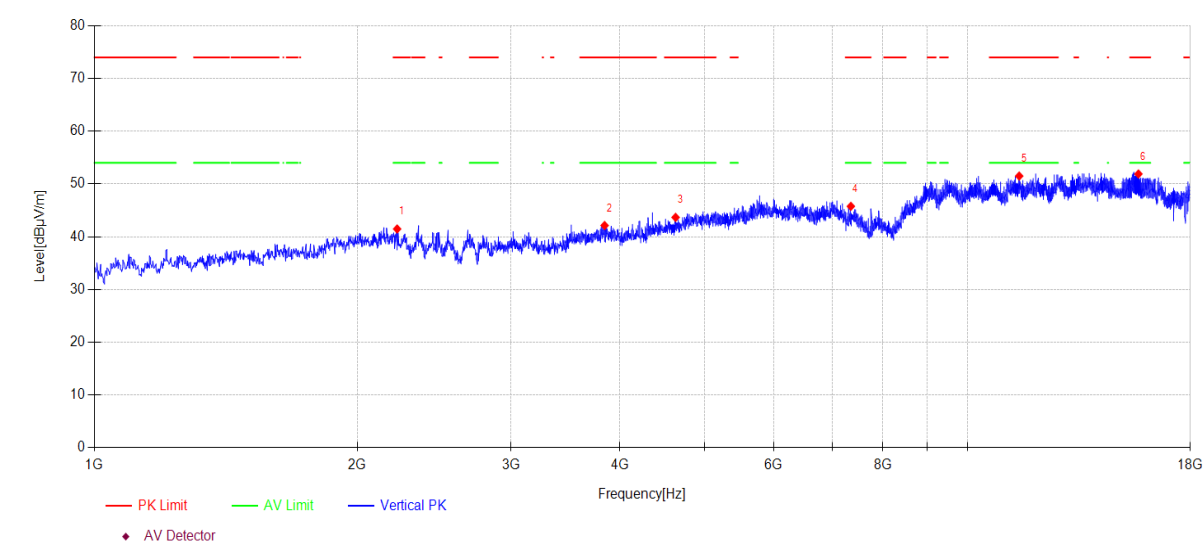

| Data List |             |                  |                     |                 |          |                |                |             |          |          |
|-----------|-------------|------------------|---------------------|-----------------|----------|----------------|----------------|-------------|----------|----------|
| NO.       | Freq. [MHz] | Reading [dBμV/m] | Antenna Factor [dB] | Cable loss [dB] | AMP [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity |
| 1         | 2222.30     | 45.56            | 27.58               | 5.97            | -37.64   | 41.47          | 74.00          | 32.53       | PK       | Vertical |
| 2         | 3840.70     | 45.81            | 30.86               | 5.81            | -40.35   | 42.13          | 74.00          | 31.87       | PK       | Vertical |
| 3         | 4631.20     | 44.80            | 31.96               | 7.13            | -40.22   | 43.67          | 74.00          | 30.33       | PK       | Vertical |
| 4         | 7352.90     | 42.92            | 36.79               | 7.63            | -41.58   | 45.76          | 74.00          | 28.24       | PK       | Vertical |
| 5         | 11461.80    | 41.51            | 39.24               | 10.06           | -39.31   | 51.50          | 74.00          | 22.50       | PK       | Vertical |
| 6         | 15698.20    | 38.07            | 38.50               | 14.51           | -39.18   | 51.90          | 74.00          | 22.10       | PK       | Vertical |

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-03-20

Tested By:

Junchang Du

EUT:

BLUETOOTH HEADSET

Model Number:

LIVE FLEX 3

Test Mode:

DH5 TX 2480MHz

Power Supply:

Battery

Condition:

Temp:23.4°C;Humi:62.3%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24031112-2E FLEX3\FCC ABOVE 1G\39

Memo:

Right side Sample Number: S24031112-004

Test Graph

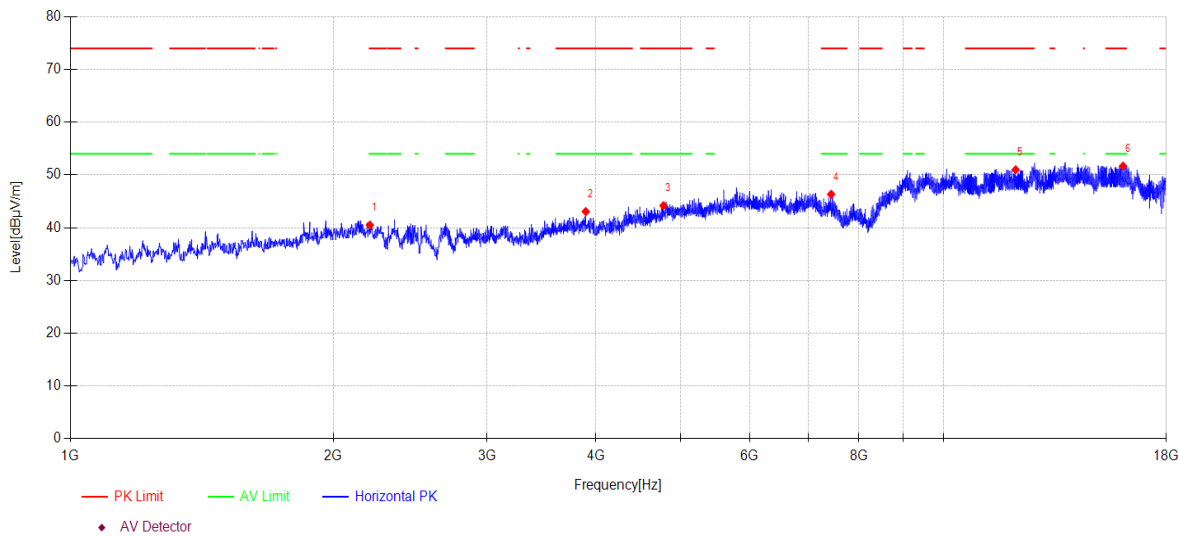

| Data List |             |                  |                     |                 |          |                |                |             |          |            |
|-----------|-------------|------------------|---------------------|-----------------|----------|----------------|----------------|-------------|----------|------------|
| NO.       | Freq. [MHz] | Reading [dBμV/m] | Antenna Factor [dB] | Cable loss [dB] | AMP [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity   |
| 1         | 2203.60     | 44.36            | 27.76               | 5.98            | -37.59   | 40.51          | 74.00          | 33.49       | PK       | Horizontal |
| 2         | 3893.40     | 46.45            | 31.16               | 5.83            | -40.38   | 43.06          | 74.00          | 30.94       | PK       | Horizontal |
| 3         | 4779.10     | 44.52            | 32.42               | 7.42            | -40.16   | 44.20          | 74.00          | 29.80       | PK       | Horizontal |
| 4         | 7436.20     | 43.86            | 36.63               | 7.64            | -41.79   | 46.34          | 74.00          | 27.66       | PK       | Horizontal |
| 5         | 12097.60    | 40.75            | 39.30               | 10.54           | -39.60   | 50.99          | 74.00          | 23.01       | PK       | Horizontal |
| 6         | 16056.90    | 37.50            | 37.94               | 15.66           | -39.41   | 51.69          | 74.00          | 22.31       | PK       | Horizontal |

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-03-20

Tested By:

Junchang Du

EUT:

BLUETOOTH HEADSET

Model Number:

LIVE FLEX 3

Test Mode:

DH5 TX 2480MHz

Power Supply:

Battery

Condition:

Temp:23.4°C;Humi:62.3%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24031112-2E FLEX3\FCC ABOVE 1G\40

Memo:

Right side Sample Number: S24031112-004

Test Graph

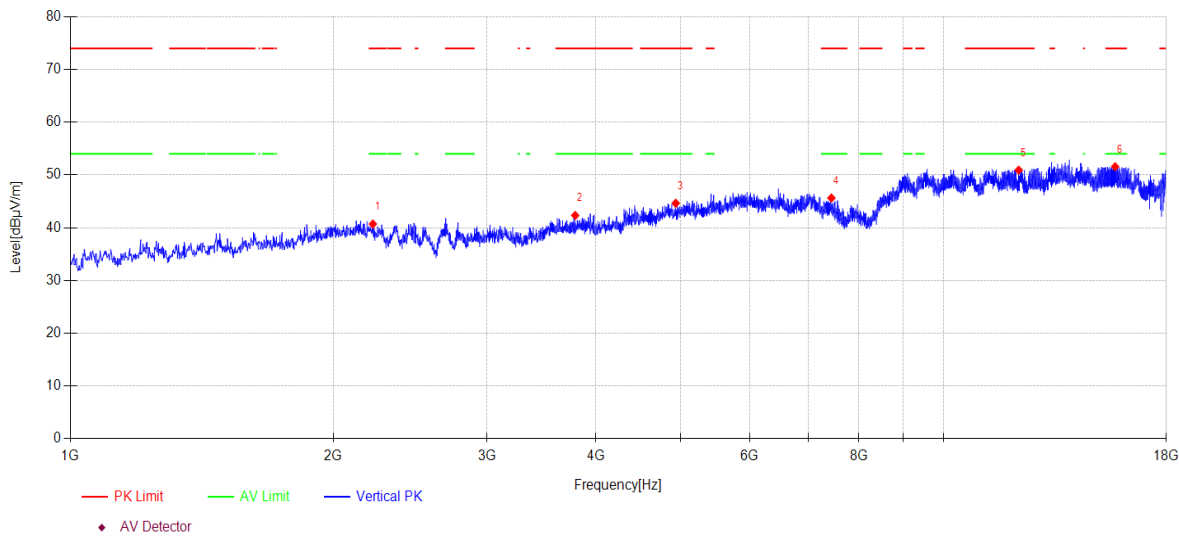

| Data List |             |                  |                     |                 |          |                |                |             |          |          |
|-----------|-------------|------------------|---------------------|-----------------|----------|----------------|----------------|-------------|----------|----------|
| NO        | Freq. [MHz] | Reading [dBμV/m] | Antenna Factor [dB] | Cable loss [dB] | AMP [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity |
| 1         | 2220.60     | 44.78            | 27.59               | 5.97            | -37.63   | 40.71          | 74.00          | 33.29       | PK       | Vertical |
| 2         | 3786.30     | 46.20            | 30.65               | 5.80            | -40.32   | 42.33          | 74.00          | 31.67       | PK       | Vertical |
| 3         | 4935.50     | 43.93            | 33.07               | 7.74            | -40.10   | 44.64          | 74.00          | 29.36       | PK       | Vertical |
| 4         | 7441.30     | 43.17            | 36.62               | 7.64            | -41.80   | 45.63          | 74.00          | 28.37       | PK       | Vertical |
| 5         | 12194.50    | 40.72            | 39.30               | 10.54           | -39.64   | 50.92          | 74.00          | 23.08       | PK       | Vertical |
| 6         | 15727.10    | 37.68            | 38.45               | 14.64           | -39.20   | 51.57          | 74.00          | 22.43       | PK       | Vertical |

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.




## 15.Band Edge Compliance

### 15.1. Test equipment

| Equipment                    | Manufacturer                | Model No.          | Serial No.  | Cal Due To |
|------------------------------|-----------------------------|--------------------|-------------|------------|
| Micro-Tronics filters        | REBES                       | BRM50716           | DDT-ZC03240 | /          |
| High pass filter             | Micro-Tronics               | HPM50102           | DDT-ZC00561 | 2024/05/14 |
| Trilog Broadband Antenna     | Schwarzbeck                 | VULB 9163          | DDT-ZC02050 | 2024/07/11 |
| High pass filter             | Micro-Tronics               | HPM50108           | DDT-ZC00560 | 2024/05/14 |
| RF Cable                     | N/A                         | W13.02 AP1-X2      | DDT-ZC04023 | 2024/04/21 |
| RF cable                     | Yuhu Technology             | ZT26S-SMAJ-SMAJ-1M | DDT-ZC02037 | 2024/04/23 |
| PSA Series Spectrum Analyzer | Agilent                     | E4447A             | DDT-ZC00517 | 2024/04/23 |
| High Pass filter             | XIANXINGBO                  | XBLBQ-GTA67        | DDT-ZC02179 | 2024/05/14 |
| EMI TEST RECEIVER            | R&S                         | ESU26              | DDT-ZC01909 | 2024/04/23 |
| Active Loop Antenna          | Schwarzbeck                 | FMZB1519           | DDT-ZC00524 | 2024/09/10 |
| Pre-amplifier                | COM-POWER                   | PAM-840A           | DDT-ZC01693 | 2024/04/27 |
| RF Cable                     | N/A                         | W24.02 HL-562      | DDT-ZC04022 | 2024/04/21 |
| RF cable                     | Zhongke Junchuang           | JCT26S-NJ-NJ-1.5M  | DDT-ZC02762 | 2024/04/20 |
| Micro-Tronics filters        | REBES                       | BRM50702           | DDT-ZC03242 | /          |
| RF cable                     | Yuhu Technology             | JCTB810-NJ-NJ-9M   | DDT-ZC02538 | 2024/04/23 |
| Broad-Band Horn Antenna      | Schwarzbeck                 | BBHA 9170          | DDT-ZC00506 | 2024/04/26 |
| Pre-amplifier                | COM-POWER                   | PAM-118A           | DDT-ZC01293 | 2024/07/14 |
| Hochgewinn-Hornantenne       | Schwarzbeck Mess-Elektronik | BBHA 9120 D        | DDT-ZC02129 | 2024/09/17 |



15.2. Block diagram of test setup

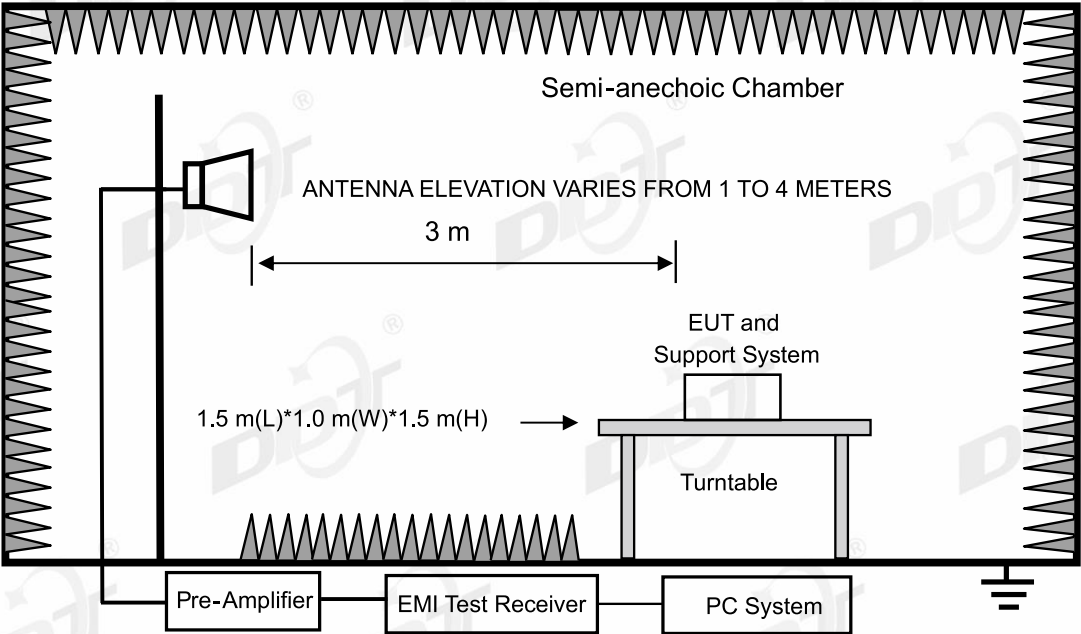

15.3. Limits

All restriction band should comply with 15.209 and RSS-Gen section 8.9 limits, other emission should be at least 20 dB below the fundamental.

15.4. Assistant equipment used for test

| Assistant equipment | Manufacturer | Model number | Description | other |
|---------------------|--------------|--------------|-------------|-------|
| /                   | /            | /            | /           | /     |

15.5. Test procedure

Same with Radiated Emission except change investigated frequency range.  
Remark: All restriction band have been tested, and only the worst case is shown in report.

15.6. Test result

PASS. (See below detailed test result)

15.7. Test data

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-03-20

Tested By:

Junchang Du

EUT:

BLUETOOTH HEADSET

Model Number:

LIVE FLEX 3

Test Mode:

DH5 TX 2402MHz

Power Supply:

Battery

Condition:

Temp:23.4°C;Humi:62.3%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24031112-2E FLEX3\FCC ABOVE 1G\19

Memo:

Left side Sample Number: S24031112-004

Test Graph

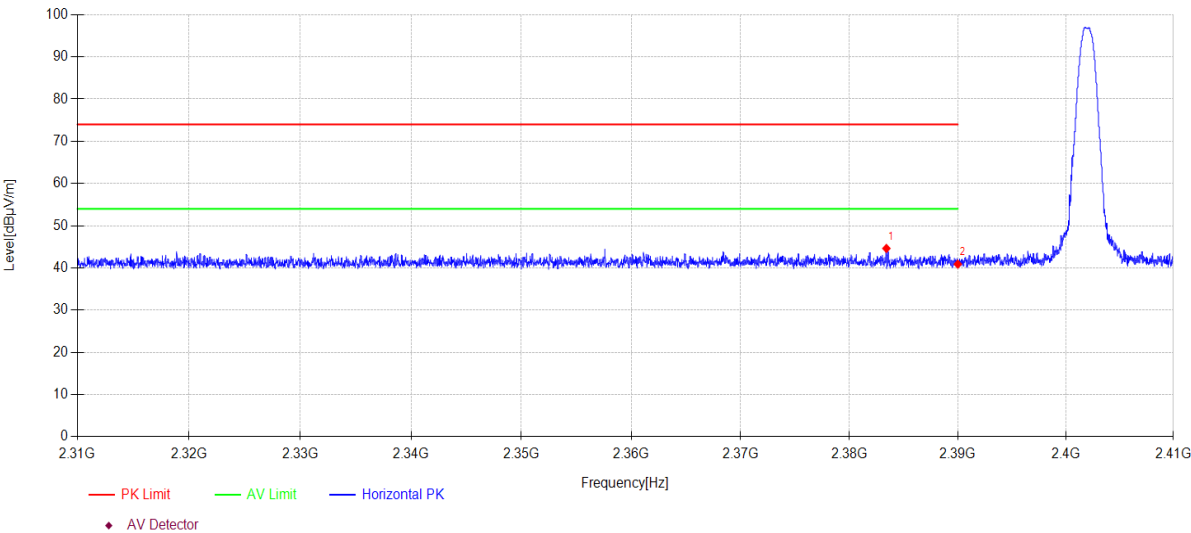

| Data List |             |                  |                     |                 |          |                |                |             |          |            |
|-----------|-------------|------------------|---------------------|-----------------|----------|----------------|----------------|-------------|----------|------------|
| NO        | Freq. [MHz] | Reading [dBμV/m] | Antenna Factor [dB] | Cable loss [dB] | AMP [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity   |
| 1         | 2383.41     | 13.53            | 27.23               | 3.86            | 0.00     | 44.62          | 74.00          | 29.38       | PK       | Horizontal |
| 2         | 2390.00     | 9.77             | 27.26               | 3.87            | 0.00     | 40.90          | 74.00          | 33.10       | PK       | Horizontal |

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-03-20

Tested By:

Junchang Du

EUT:

BLUETOOTH HEADSET

Model Number:

LIVE FLEX 3

Test Mode:

DH5 TX 2402MHz

Power Supply:

Battery

Condition:

Temp:23.4°C;Humi:62.3%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24031112-2E FLEX3\FCC ABOVE 1G\20

Memo:

Left side Sample Number: S24031112-004

Test Graph

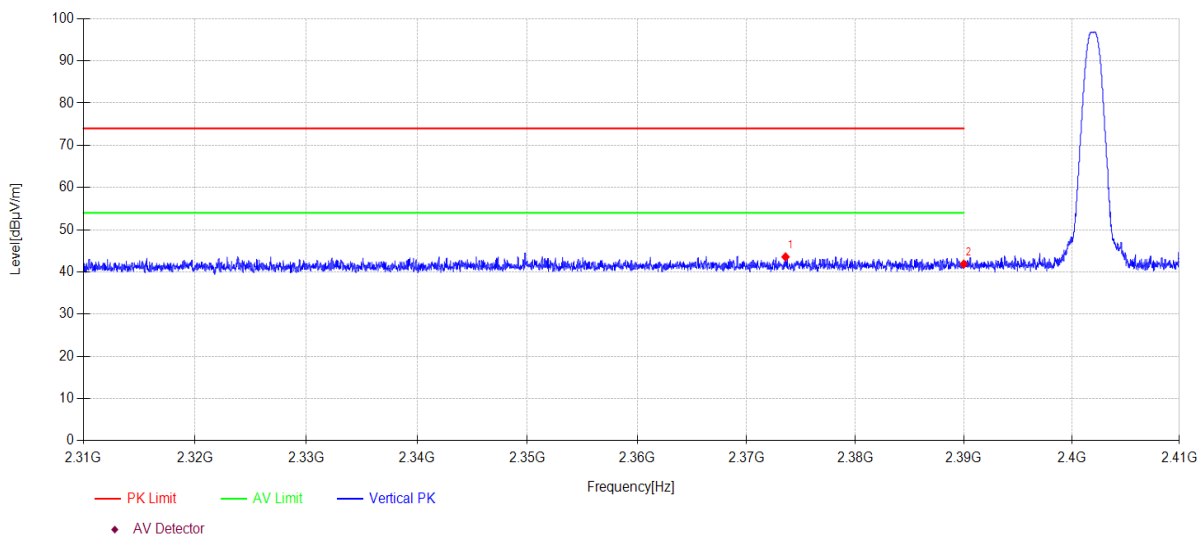

| Data List |             |                  |                     |                 |          |                |                |             |          |          |
|-----------|-------------|------------------|---------------------|-----------------|----------|----------------|----------------|-------------|----------|----------|
| NO.       | Freq. [MHz] | Reading [dBμV/m] | Antenna Factor [dB] | Cable loss [dB] | AMP [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity |
| 1         | 2373.58     | 12.52            | 27.19               | 3.85            | 0.00     | 43.56          | 74.00          | 30.44       | PK       | Vertical |
| 2         | 2390.00     | 10.73            | 27.26               | 3.87            | 0.00     | 41.86          | 74.00          | 32.14       | PK       | Vertical |

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-03-20

Tested By:

Junchang Du

EUT:

BLUETOOTH HEADSET

Model Number:

LIVE FLEX 3

Test Mode:

2DH5 TX 2402MHz

Power Supply:

Battery

Condition:

Temp:23.4°C;Humi:62.3%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24031112-2E FLEX3\FCC ABOVE 1G\21

Memo:

Left side Sample Number: S24031112-004

Test Graph

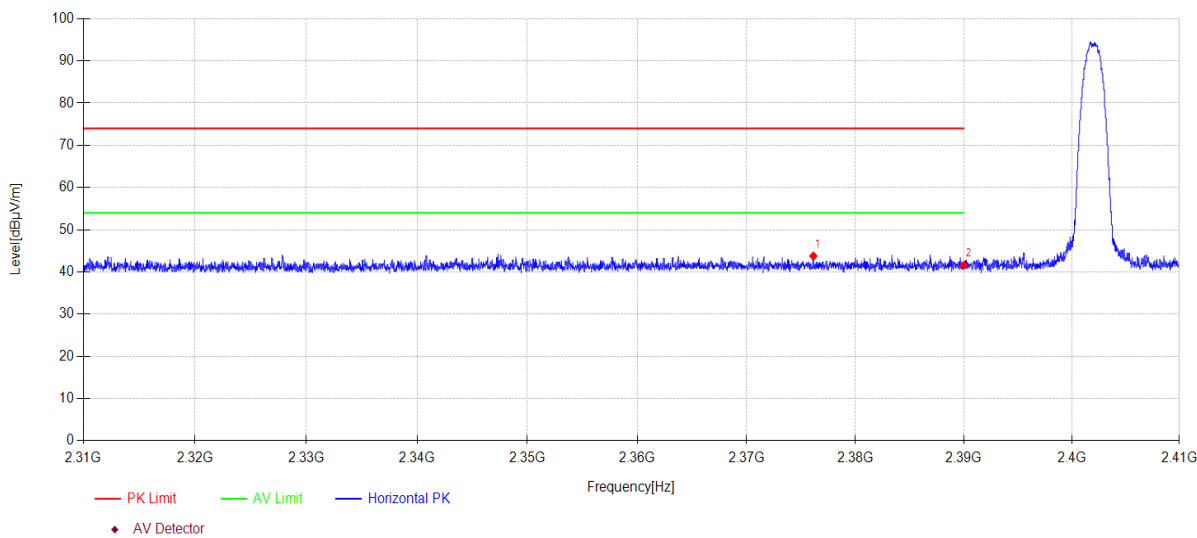

| Data List |             |                  |                     |                 |          |                |                |             |          |            |
|-----------|-------------|------------------|---------------------|-----------------|----------|----------------|----------------|-------------|----------|------------|
| NO.       | Freq. [MHz] | Reading [dBμV/m] | Antenna Factor [dB] | Cable loss [dB] | AMP [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity   |
| 1         | 2376.14     | 12.70            | 27.20               | 3.86            | 0.00     | 43.76          | 74.00          | 30.24       | PK       | Horizontal |
| 2         | 2390.00     | 10.44            | 27.26               | 3.87            | 0.00     | 41.57          | 74.00          | 32.43       | PK       | Horizontal |

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-03-20

Tested By:

Junchang Du

EUT:

BLUETOOTH HEADSET

Model Number:

LIVE FLEX 3

Test Mode:

2DH5 TX 2402MHz

Power Supply:

Battery

Condition:

Temp:23.4°C;Humi:62.3%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24031112-2E FLEX3\FCC ABOVE 1G\22

Memo:

Left side Sample Number: S24031112-004

Test Graph

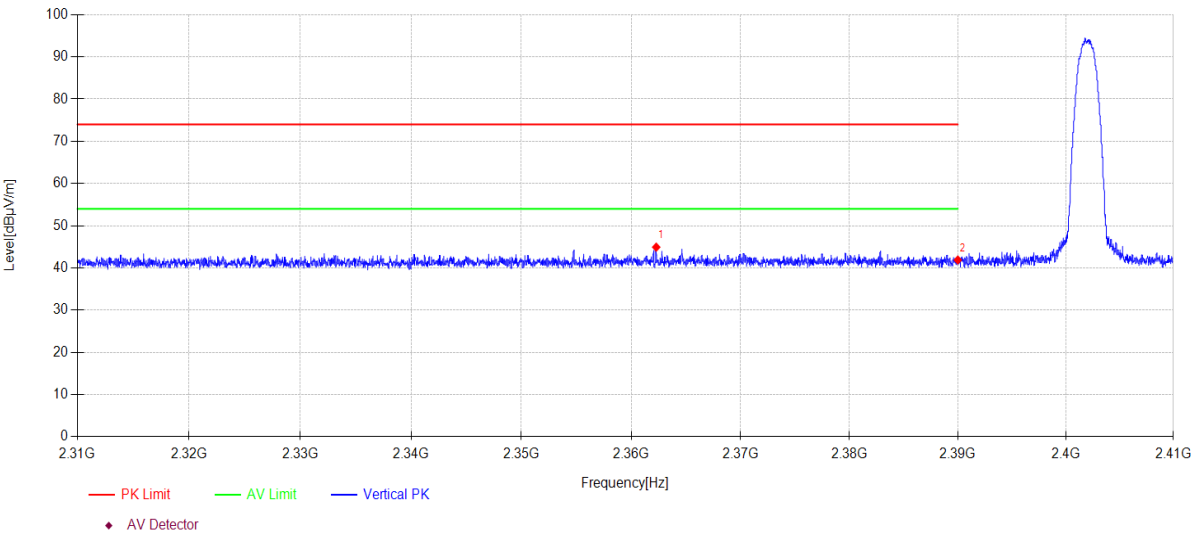

| Data List |             |                  |                     |                 |          |                |                |             |          |          |
|-----------|-------------|------------------|---------------------|-----------------|----------|----------------|----------------|-------------|----------|----------|
| NO        | Freq. [MHz] | Reading [dBμV/m] | Antenna Factor [dB] | Cable loss [dB] | AMP [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity |
| 1         | 2362.29     | 13.93            | 27.15               | 3.85            | 0.00     | 44.93          | 74.00          | 29.07       | PK       | Vertical |
| 2         | 2390.00     | 10.76            | 27.26               | 3.87            | 0.00     | 41.89          | 74.00          | 32.11       | PK       | Vertical |

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-03-20

Tested By:

Junchang Du

EUT:

BLUETOOTH HEADSET

Model Number:

LIVE FLEX 3

Test Mode:

3DH5 TX 2402MHz

Power Supply:

Battery

Condition:

Temp:23.4°C;Humi:62.3%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24031112-2E FLEX3\FCC ABOVE 1G\23

Memo:

Left side Sample Number: S24031112-004

Test Graph

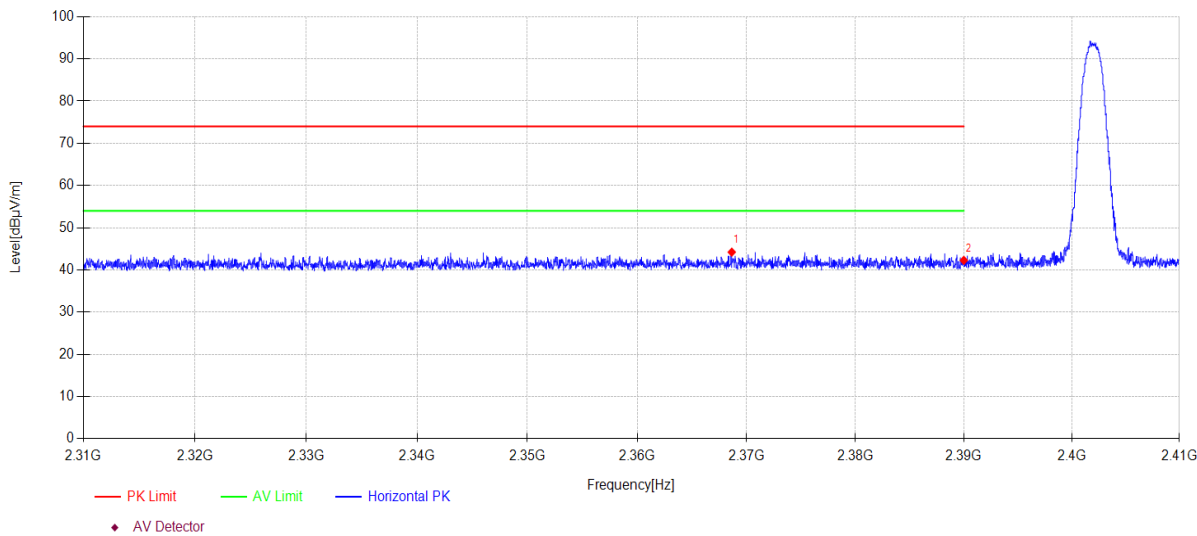

| Data List |             |                  |                     |                 |          |                |                |             |          |            |
|-----------|-------------|------------------|---------------------|-----------------|----------|----------------|----------------|-------------|----------|------------|
| NO.       | Freq. [MHz] | Reading [dBμV/m] | Antenna Factor [dB] | Cable loss [dB] | AMP [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity   |
| 1         | 2368.65     | 13.20            | 27.17               | 3.85            | 0.00     | 44.22          | 74.00          | 29.78       | PK       | Horizontal |
| 2         | 2390.00     | 11.14            | 27.26               | 3.87            | 0.00     | 42.27          | 74.00          | 31.73       | PK       | Horizontal |

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.



TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-03-20

Tested By:

Junchang Du

EUT:

BLUETOOTH HEADSET

Model Number:

LIVE FLEX 3

Test Mode:

3DH5 TX 2402MHz

Power Supply:

Battery

Condition:

Temp:23.4°C;Humi:62.3%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24031112-2E FLEX3\FCC ABOVE 1G\24

Memo:

Left side Sample Number: S24031112-004

Test Graph

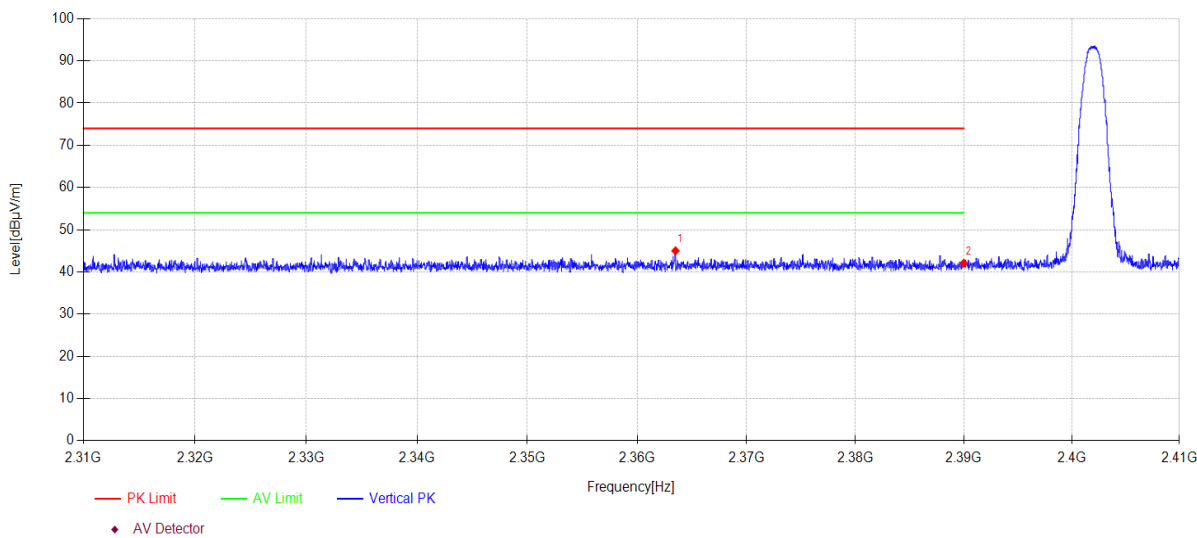

| Data List |             |                  |                     |                 |          |                |                |             |          |          |
|-----------|-------------|------------------|---------------------|-----------------|----------|----------------|----------------|-------------|----------|----------|
| NO        | Freq. [MHz] | Reading [dBμV/m] | Antenna Factor [dB] | Cable loss [dB] | AMP [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity |
| 1         | 2363.50     | 14.00            | 27.15               | 3.85            | 0.00     | 45.00          | 74.00          | 29.00       | PK       | Vertical |
| 2         | 2390.00     | 10.93            | 27.26               | 3.87            | 0.00     | 42.06          | 74.00          | 31.94       | PK       | Vertical |

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.



TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-03-20

Tested By:

Junchang Du

EUT:

BLUETOOTH HEADSET

Model Number:

LIVE FLEX 3

Test Mode:

DH5 TX 2480MHz

Power Supply:

Battery

Condition:

Temp:23.4°C;Humi:62.3%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24031112-2E FLEX3\FCC ABOVE 1G\25

Memo:

Left side Sample Number: S24031112-004

Test Graph

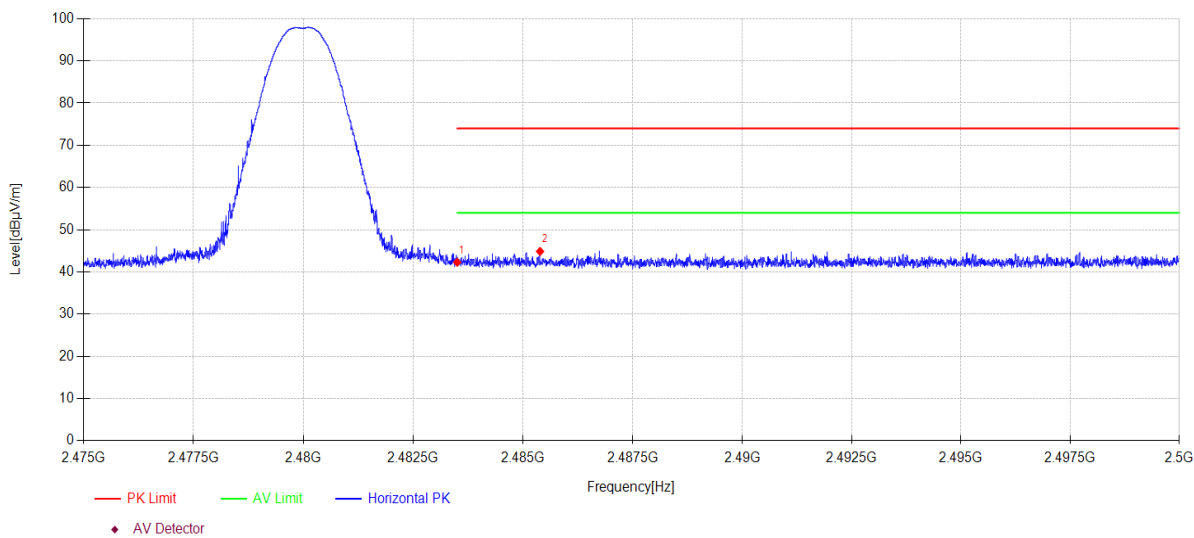

| Data List |             |                  |                     |                 |          |                |                |             |          |            |
|-----------|-------------|------------------|---------------------|-----------------|----------|----------------|----------------|-------------|----------|------------|
| NO.       | Freq. [MHz] | Reading [dBμV/m] | Antenna Factor [dB] | Cable loss [dB] | AMP [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity   |
| 1         | 2483.50     | 10.83            | 27.53               | 3.94            | 0.00     | 42.30          | 74.00          | 31.70       | PK       | Horizontal |
| 2         | 2485.39     | 13.38            | 27.54               | 3.94            | 0.00     | 44.86          | 74.00          | 29.14       | PK       | Horizontal |

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-03-20

Tested By:

Junchang Du

EUT:

BLUETOOTH HEADSET

Model Number:

LIVE FLEX 3

Test Mode:

DH5 TX 2480MHz

Power Supply:

Battery

Condition:

Temp:23.4°C;Humi:62.3%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24031112-2E FLEX3\FCC ABOVE 1G\26

Memo:

Left side Sample Number: S24031112-004

Test Graph

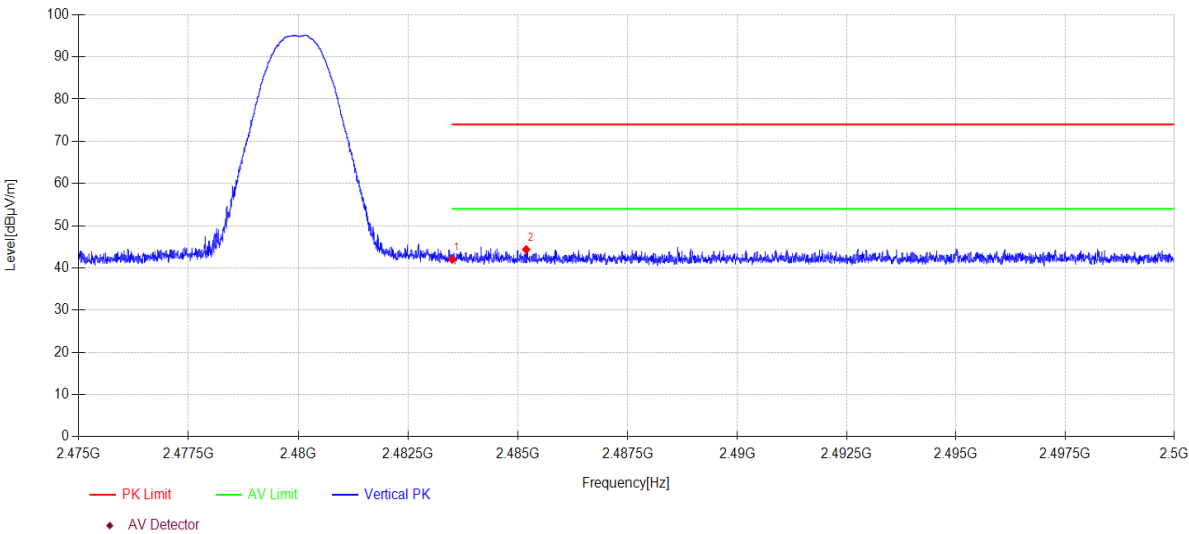

| Data List |             |                  |                     |                 |          |                |                |             |          |          |
|-----------|-------------|------------------|---------------------|-----------------|----------|----------------|----------------|-------------|----------|----------|
| NO.       | Freq. [MHz] | Reading [dBμV/m] | Antenna Factor [dB] | Cable loss [dB] | AMP [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity |
| 1         | 2483.50     | 10.56            | 27.53               | 3.94            | 0.00     | 42.03          | 74.00          | 31.97       | PK       | Vertical |
| 2         | 2485.19     | 12.88            | 27.54               | 3.94            | 0.00     | 44.36          | 74.00          | 29.64       | PK       | Vertical |

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-03-20

Tested By:

Junchang Du

EUT:

BLUETOOTH HEADSET

Model Number:

LIVE FLEX 3

Test Mode:

2DH5 TX 2480MHz

Power Supply:

Battery

Condition:

Temp:23.4°C;Humi:62.3%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24031112-2E FLEX3\FCC ABOVE 1G\27

Memo:

Left side Sample Number: S24031112-004

Test Graph

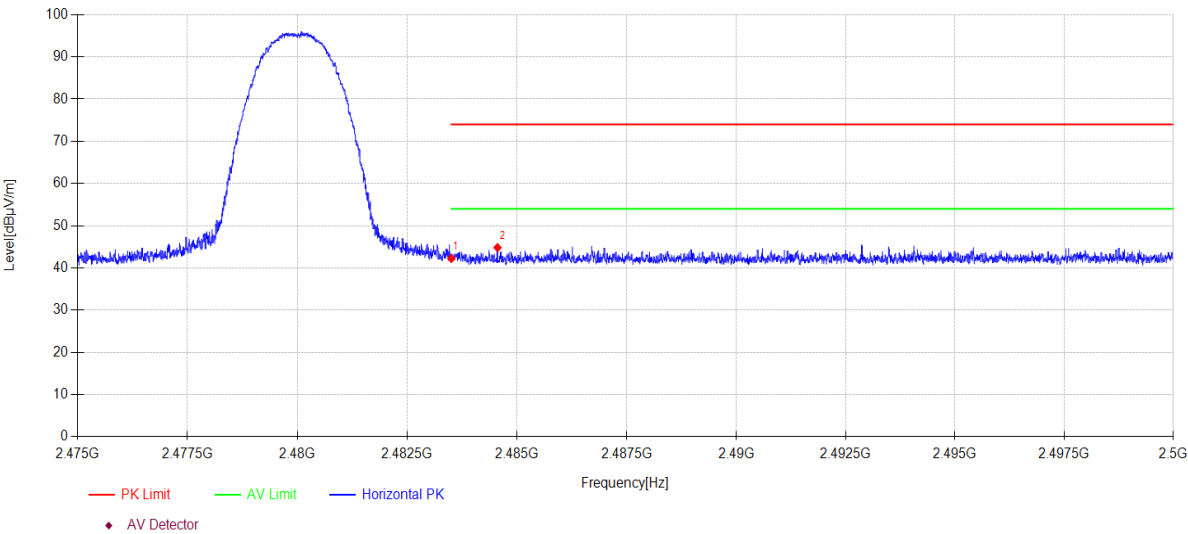

| Data List |             |                  |                     |                 |          |                |                |             |          |            |
|-----------|-------------|------------------|---------------------|-----------------|----------|----------------|----------------|-------------|----------|------------|
| NO        | Freq. [MHz] | Reading [dBμV/m] | Antenna Factor [dB] | Cable loss [dB] | AMP [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity   |
| 1         | 2483.50     | 10.79            | 27.53               | 3.94            | 0.00     | 42.26          | 74.00          | 31.74       | PK       | Horizontal |
| 2         | 2484.56     | 13.35            | 27.54               | 3.94            | 0.00     | 44.83          | 74.00          | 29.17       | PK       | Horizontal |

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-03-20

Tested By:

Junchang Du

EUT:

BLUETOOTH HEADSET

Model Number:

LIVE FLEX 3

Test Mode:

2DH5 TX 2480MHz

Power Supply:

Battery

Condition:

Temp:23.4°C;Humi:62.3%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24031112-2E FLEX3\FCC ABOVE 1G\28

Memo:

Left side Sample Number: S24031112-004

Test Graph

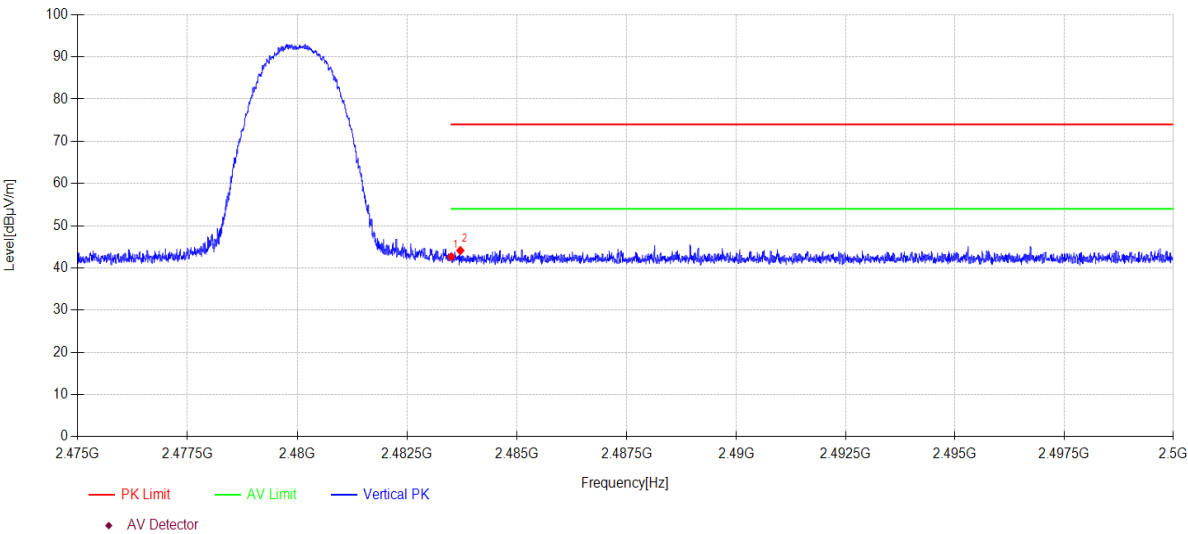

| Data List |             |                  |                     |                 |          |                |                |             |          |          |
|-----------|-------------|------------------|---------------------|-----------------|----------|----------------|----------------|-------------|----------|----------|
| NO        | Freq. [MHz] | Reading [dBμV/m] | Antenna Factor [dB] | Cable loss [dB] | AMP [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity |
| 1         | 2483.50     | 11.18            | 27.53               | 3.94            | 0.00     | 42.65          | 74.00          | 31.35       | PK       | Vertical |
| 2         | 2483.71     | 12.66            | 27.53               | 3.94            | 0.00     | 44.13          | 74.00          | 29.87       | PK       | Vertical |

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-03-20

Tested By:

Junchang Du

EUT:

BLUETOOTH HEADSET

Model Number:

LIVE FLEX 3

Test Mode:

3DH5 TX 2480MHz

Power Supply:

Battery

Condition:

Temp:23.4°C;Humi:62.3%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24031112-2E FLEX3\FCC ABOVE 1G\29

Memo:

Left side Sample Number: S24031112-004

Test Graph

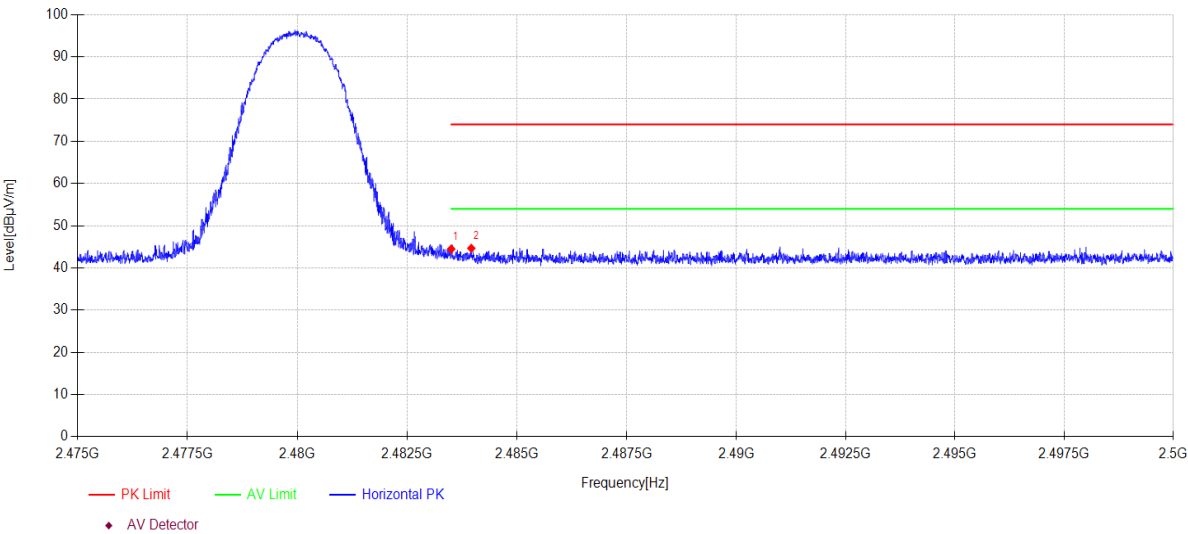

| Data List |             |                  |                     |                 |          |                |                |             |          |            |
|-----------|-------------|------------------|---------------------|-----------------|----------|----------------|----------------|-------------|----------|------------|
| NO.       | Freq. [MHz] | Reading [dBμV/m] | Antenna Factor [dB] | Cable loss [dB] | AMP [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity   |
| 1         | 2483.50     | 13.00            | 27.53               | 3.94            | 0.00     | 44.47          | 74.00          | 29.53       | PK       | Horizontal |
| 2         | 2483.96     | 13.17            | 27.54               | 3.94            | 0.00     | 44.65          | 74.00          | 29.35       | PK       | Horizontal |

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-03-20

Tested By:

Junchang Du

EUT:

BLUETOOTH HEADSET

Model Number:

LIVE FLEX 3

Test Mode:

3DH5 TX 2480MHz

Power Supply:

Battery

Condition:

Temp:23.4°C;Humi:62.3%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24031112-2E FLEX3\FCC ABOVE 1G\30

Memo:

Left side Sample Number: S24031112-004

Test Graph

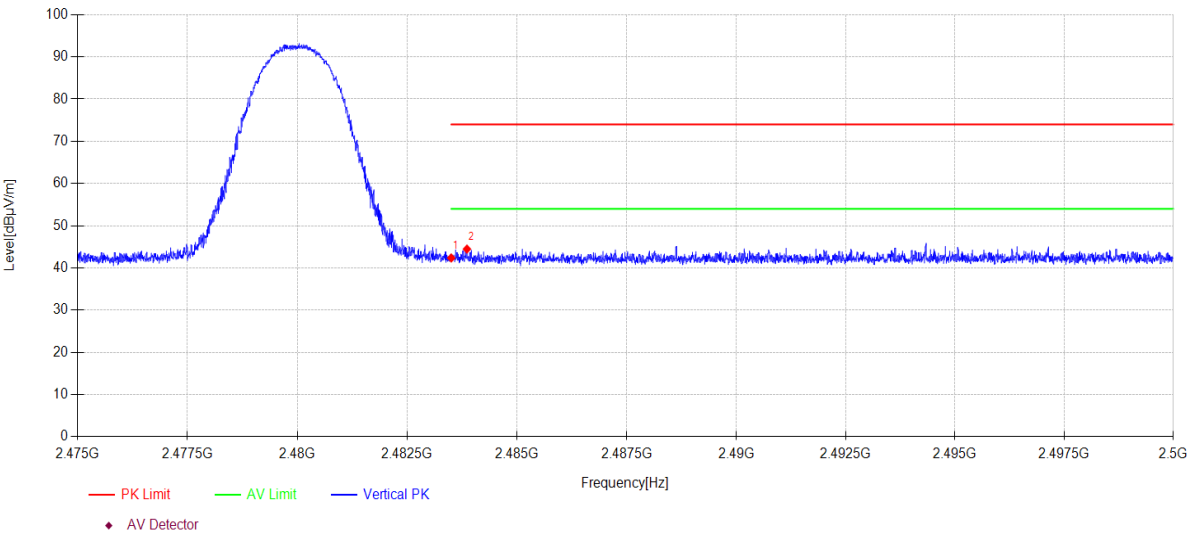

| Data List |             |                  |                     |                 |          |                |                |             |          |          |
|-----------|-------------|------------------|---------------------|-----------------|----------|----------------|----------------|-------------|----------|----------|
| NO.       | Freq. [MHz] | Reading [dBμV/m] | Antenna Factor [dB] | Cable loss [dB] | AMP [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity |
| 1         | 2483.50     | 10.89            | 27.53               | 3.94            | 0.00     | 42.36          | 74.00          | 31.64       | PK       | Vertical |
| 2         | 2483.86     | 12.99            | 27.54               | 3.94            | 0.00     | 44.47          | 74.00          | 29.53       | PK       | Vertical |

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-03-20

Tested By:

Junchang Du

EUT:

BLUETOOTH HEADSET

Model Number:

LIVE FLEX 3

Test Mode:

DH5 TX 2402MHz

Power Supply:

Battery

Condition:

Temp:23.4°C;Humi:62.3%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24031112-2E FLEX3\FCC ABOVE 1G\53

Memo:

Right side Sample Number: S24031112-004

Test Graph

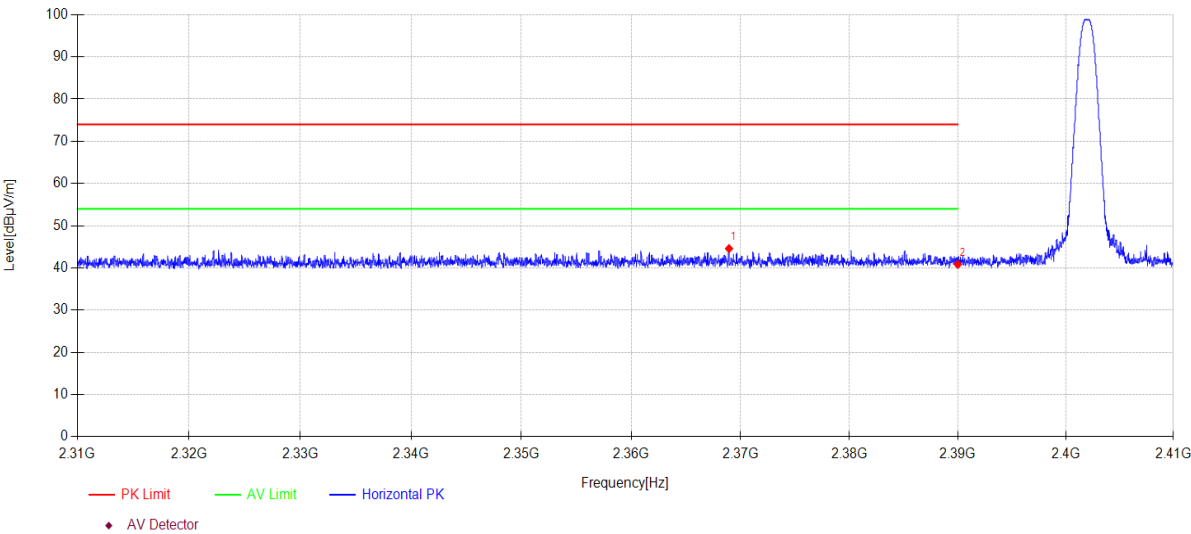

| Data List |             |                  |                     |                 |          |                |                |             |          |            |
|-----------|-------------|------------------|---------------------|-----------------|----------|----------------|----------------|-------------|----------|------------|
| NO.       | Freq. [MHz] | Reading [dBμV/m] | Antenna Factor [dB] | Cable loss [dB] | AMP [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity   |
| 1         | 2368.95     | 13.55            | 27.18               | 3.85            | 0.00     | 44.58          | 74.00          | 29.42       | PK       | Horizontal |
| 2         | 2390.00     | 9.71             | 27.26               | 3.87            | 0.00     | 40.84          | 74.00          | 33.16       | PK       | Horizontal |

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.



TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-03-20

Tested By:

Junchang Du

EUT:

BLUETOOTH HEADSET

Model Number:

LIVE FLEX 3

Test Mode:

DH5 TX 2402MHz

Power Supply:

Battery

Condition:

Temp:23.4°C;Humi:62.3%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24031112-2E FLEX3\FCC ABOVE 1G\54

Memo:

Right side Sample Number: S24031112-004

Test Graph

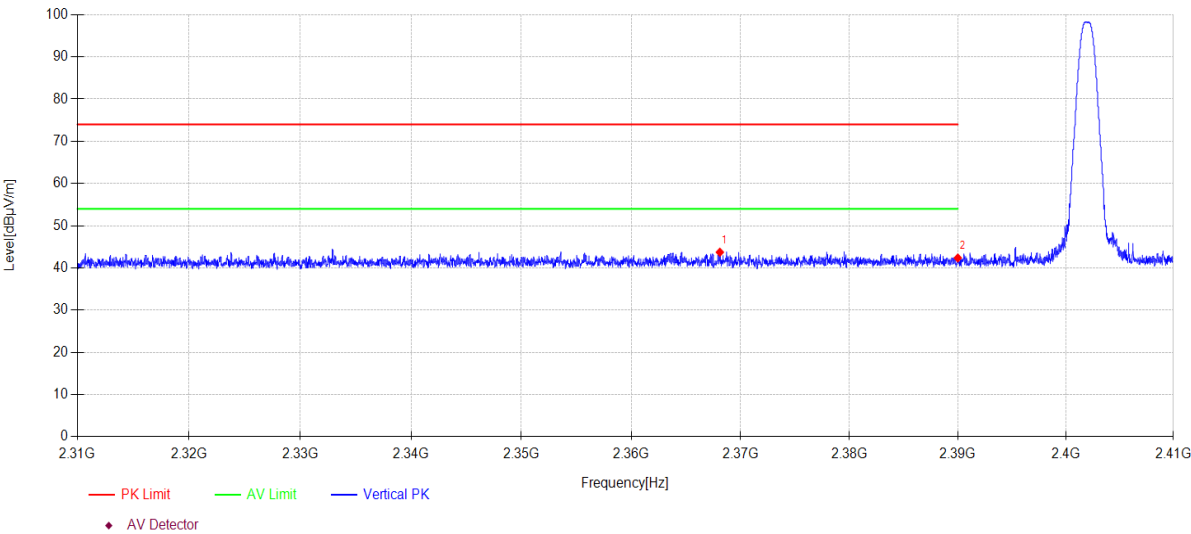

| Data List |             |                  |                     |                 |          |                |                |             |          |          |
|-----------|-------------|------------------|---------------------|-----------------|----------|----------------|----------------|-------------|----------|----------|
| NO.       | Freq. [MHz] | Reading [dBμV/m] | Antenna Factor [dB] | Cable loss [dB] | AMP [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity |
| 1         | 2368.11     | 12.70            | 27.17               | 3.85            | 0.00     | 43.72          | 74.00          | 30.28       | PK       | Vertical |
| 2         | 2390.00     | 11.23            | 27.26               | 3.87            | 0.00     | 42.36          | 74.00          | 31.64       | PK       | Vertical |

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-03-20

Tested By:

Junchang Du

EUT:

BLUETOOTH HEADSET

Model Number:

LIVE FLEX 3

Test Mode:

2DH5 TX 2402MHz

Power Supply:

Battery

Condition:

Temp:23.4°C;Humi:62.3%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24031112-2E FLEX3\FCC ABOVE 1G\55

Memo:

Right side Sample Number: S24031112-004

Test Graph

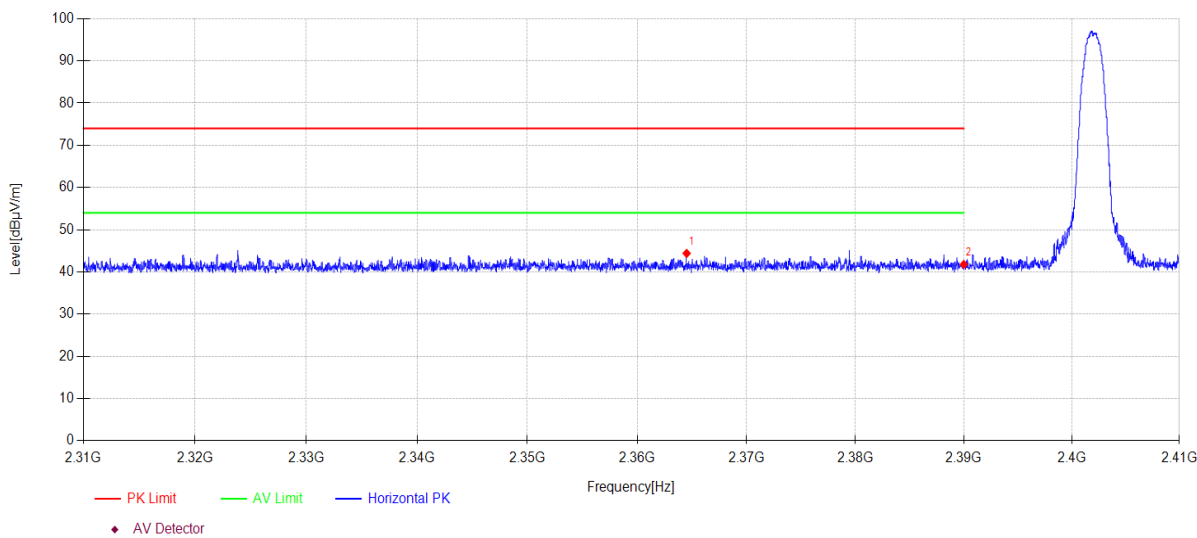

| Data List |             |                  |                     |                 |          |                |                |             |          |            |
|-----------|-------------|------------------|---------------------|-----------------|----------|----------------|----------------|-------------|----------|------------|
| NO        | Freq. [MHz] | Reading [dBμV/m] | Antenna Factor [dB] | Cable loss [dB] | AMP [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity   |
| 1         | 2364.52     | 13.39            | 27.16               | 3.85            | 0.00     | 44.40          | 74.00          | 29.60       | PK       | Horizontal |
| 2         | 2390.00     | 10.64            | 27.26               | 3.87            | 0.00     | 41.77          | 74.00          | 32.23       | PK       | Horizontal |

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-03-20

Tested By:

Junchang Du

EUT:

BLUETOOTH HEADSET

Model Number:

LIVE FLEX 3

Test Mode:

2DH5 TX 2402MHz

Power Supply:

Battery

Condition:

Temp:23.4°C;Humi:62.3%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24031112-2E FLEX3\FCC ABOVE 1G\56

Memo:

Right side Sample Number: S24031112-004

Test Graph

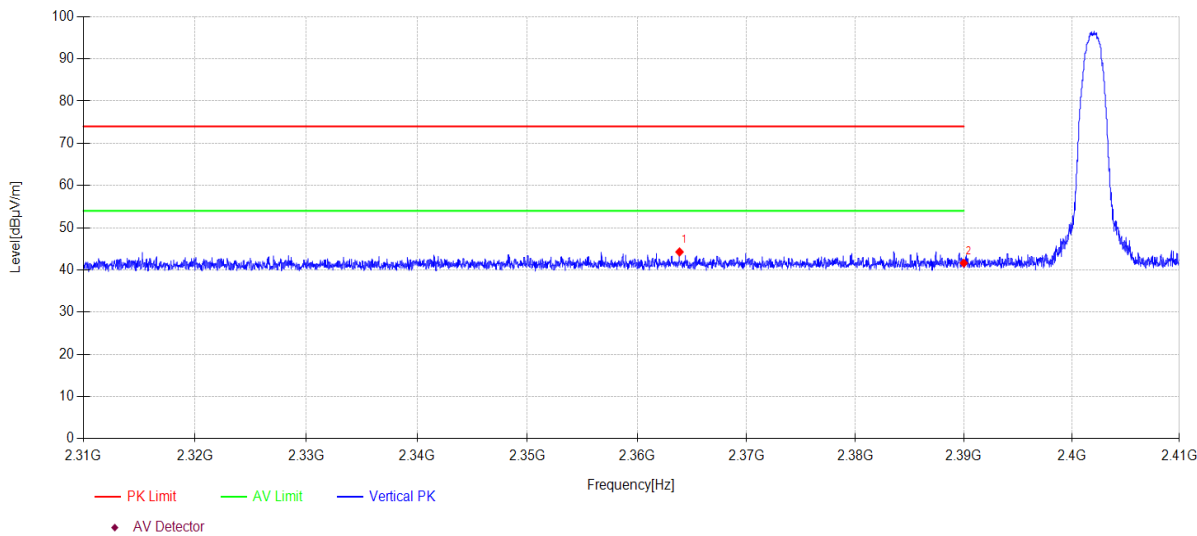

| Data List |             |                  |                     |                 |          |                |                |             |          |          |
|-----------|-------------|------------------|---------------------|-----------------|----------|----------------|----------------|-------------|----------|----------|
| NO.       | Freq. [MHz] | Reading [dBμV/m] | Antenna Factor [dB] | Cable loss [dB] | AMP [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity |
| 1         | 2363.87     | 13.25            | 27.16               | 3.85            | 0.00     | 44.26          | 74.00          | 29.74       | PK       | Vertical |
| 2         | 2390.00     | 10.50            | 27.26               | 3.87            | 0.00     | 41.63          | 74.00          | 32.37       | PK       | Vertical |

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-03-20

Tested By:

Junchang Du

EUT:

BLUETOOTH HEADSET

Model Number:

LIVE FLEX 3

Test Mode:

3DH5 TX 2402MHz

Power Supply:

Battery

Condition:

Temp:23.4°C;Humi:62.3%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24031112-2E FLEX3\FCC ABOVE 1G\57

Memo:

Right side Sample Number: S24031112-004

Test Graph

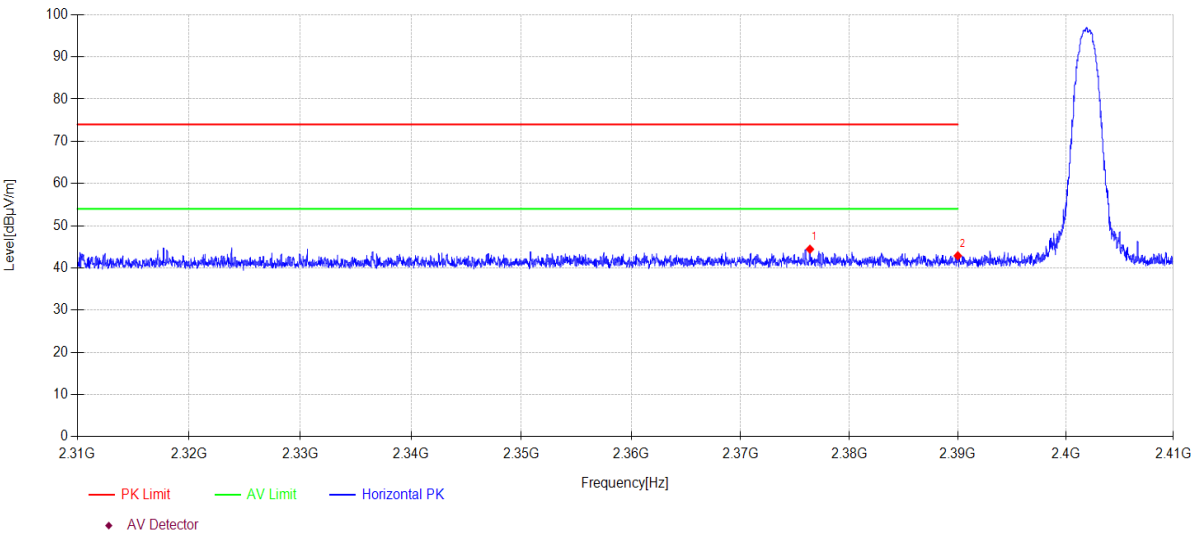

| Data List |             |                  |                     |                 |          |                |                |             |          |            |
|-----------|-------------|------------------|---------------------|-----------------|----------|----------------|----------------|-------------|----------|------------|
| NO.       | Freq. [MHz] | Reading [dBμV/m] | Antenna Factor [dB] | Cable loss [dB] | AMP [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity   |
| 1         | 2376.37     | 13.37            | 27.21               | 3.86            | 0.00     | 44.44          | 74.00          | 29.56       | PK       | Horizontal |
| 2         | 2390.00     | 11.75            | 27.26               | 3.87            | 0.00     | 42.88          | 74.00          | 31.12       | PK       | Horizontal |

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-03-20

Tested By:

Junchang Du

EUT:

BLUETOOTH HEADSET

Model Number:

LIVE FLEX 3

Test Mode:

3DH5 TX 2402MHz

Power Supply:

Battery

Condition:

Temp:23.4°C;Humi:62.3%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24031112-2E FLEX3\FCC ABOVE 1G\58

Memo:

Right side Sample Number: S24031112-004

Test Graph

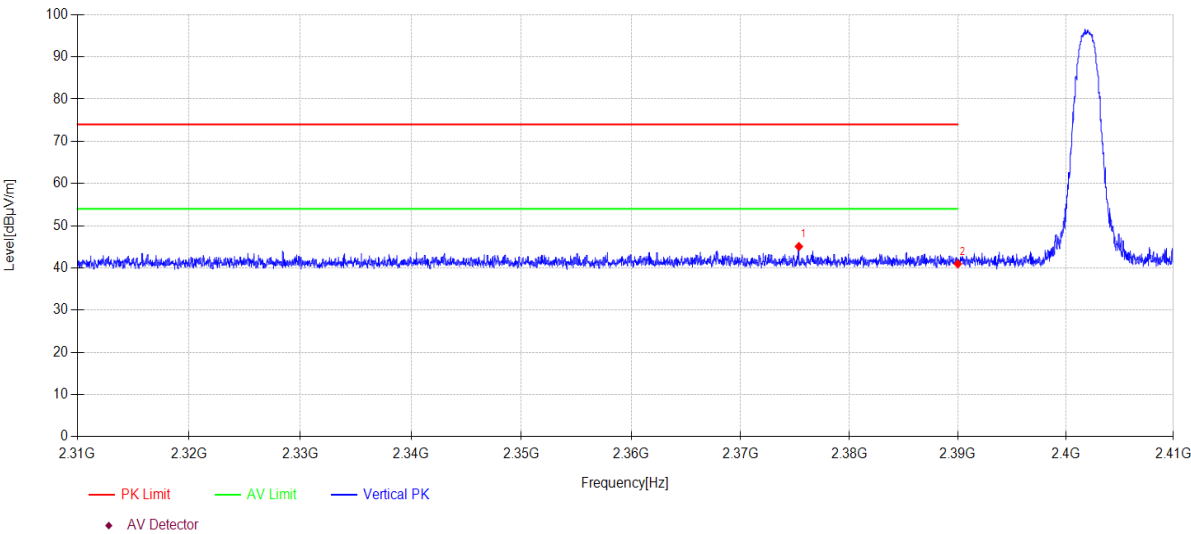

| Data List |             |                  |                     |                 |          |                |                |             |          |          |
|-----------|-------------|------------------|---------------------|-----------------|----------|----------------|----------------|-------------|----------|----------|
| NO.       | Freq. [MHz] | Reading [dBμV/m] | Antenna Factor [dB] | Cable loss [dB] | AMP [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity |
| 1         | 2375.36     | 14.02            | 27.20               | 3.86            | 0.00     | 45.08          | 74.00          | 28.92       | PK       | Vertical |
| 2         | 2390.00     | 9.83             | 27.26               | 3.87            | 0.00     | 40.96          | 74.00          | 33.04       | PK       | Vertical |

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-03-20

Tested By:

Junchang Du

EUT:

BLUETOOTH HEADSET

Model Number:

LIVE FLEX 3

Test Mode:

DH5 TX 2480MHz

Power Supply:

Battery

Condition:

Temp:23.4°C;Humi:62.3%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24031112-2E FLEX3\FCC ABOVE 1G\59

Memo:

Right side Sample Number: S24031112-004

Test Graph

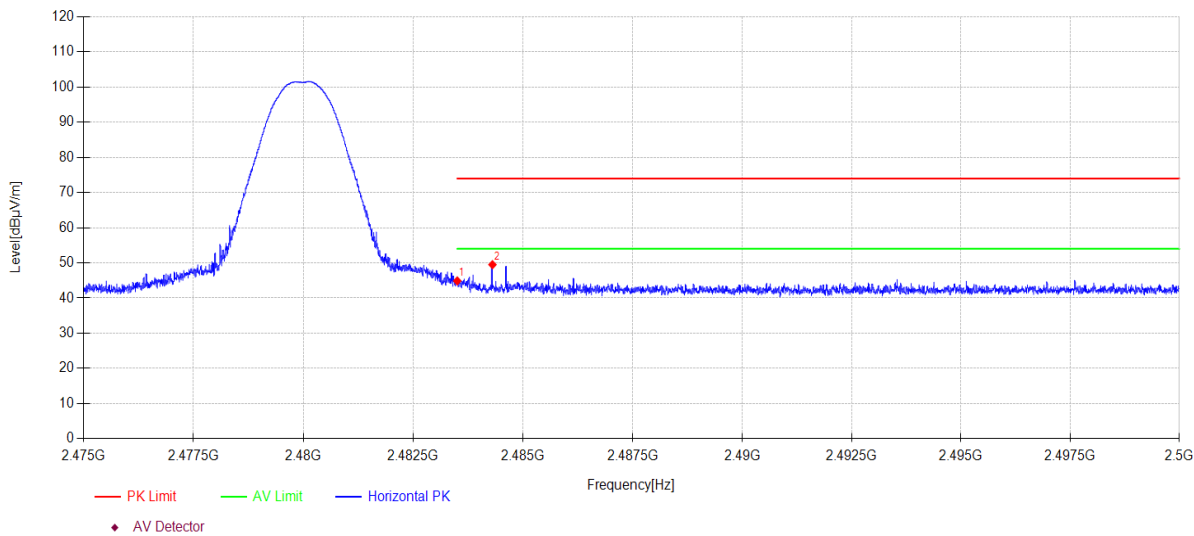

| Data List |             |                  |                     |                 |          |                |                |             |          |            |
|-----------|-------------|------------------|---------------------|-----------------|----------|----------------|----------------|-------------|----------|------------|
| NO.       | Freq. [MHz] | Reading [dBμV/m] | Antenna Factor [dB] | Cable loss [dB] | AMP [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity   |
| 1         | 2483.50     | 13.42            | 27.53               | 3.94            | 0.00     | 44.89          | 74.00          | 29.11       | PK       | Horizontal |
| 2         | 2484.30     | 18.02            | 27.54               | 3.94            | 0.00     | 49.50          | 74.00          | 24.50       | PK       | Horizontal |

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-03-20

Tested By:

Junchang Du

EUT:

BLUETOOTH HEADSET

Model Number:

LIVE FLEX 3

Test Mode:

DH5 TX 2480MHz

Power Supply:

Battery

Condition:

Temp:23.4°C;Humi:62.3%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24031112-2E FLEX3\FCC ABOVE 1G\60

Memo:

Right side Sample Number: S24031112-004

Test Graph

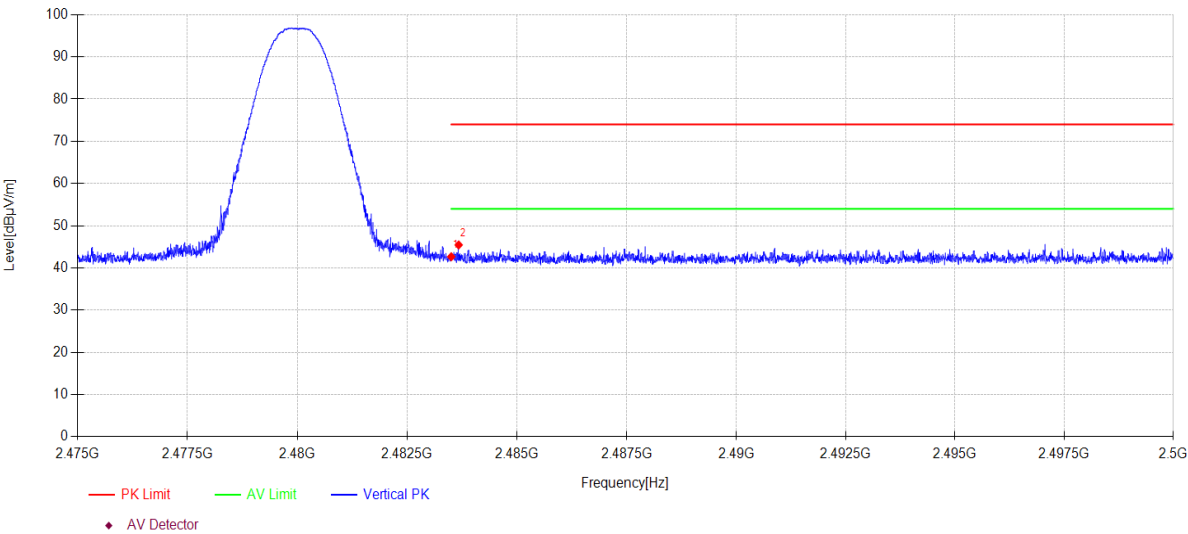

| Data List |             |                  |                     |                 |          |                |                |             |          |          |
|-----------|-------------|------------------|---------------------|-----------------|----------|----------------|----------------|-------------|----------|----------|
| NO.       | Freq. [MHz] | Reading [dBμV/m] | Antenna Factor [dB] | Cable loss [dB] | AMP [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity |
| 1         | 2483.50     | 11.18            | 27.53               | 3.94            | 0.00     | 42.65          | 74.00          | 31.35       | PK       | Vertical |
| 2         | 2483.67     | 13.98            | 27.53               | 3.94            | 0.00     | 45.45          | 74.00          | 28.55       | PK       | Vertical |

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.



TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-03-20

Tested By:

Junchang Du

EUT:

BLUETOOTH HEADSET

Model Number:

LIVE FLEX 3

Test Mode:

2DH5 TX 2480MHz

Power Supply:

Battery

Condition:

Temp:23.4°C;Humi:62.3%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24031112-2E FLEX3\FCC ABOVE 1G\61

Memo:

Right side Sample Number: S24031112-004

Test Graph

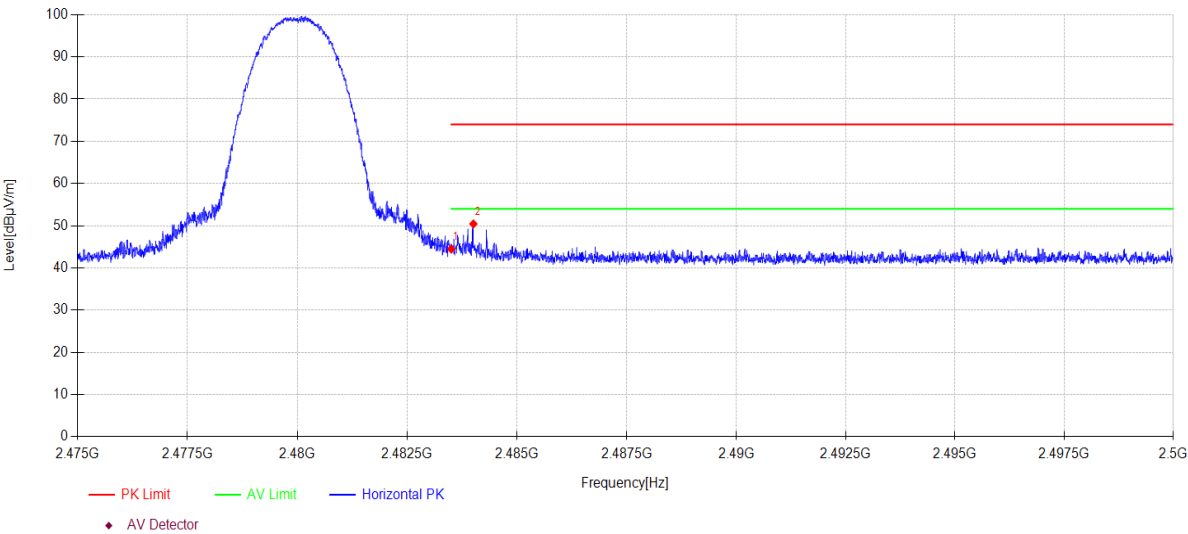

| Data List |             |                  |                     |                 |          |                |                |             |          |            |
|-----------|-------------|------------------|---------------------|-----------------|----------|----------------|----------------|-------------|----------|------------|
| NO.       | Freq. [MHz] | Reading [dBμV/m] | Antenna Factor [dB] | Cable loss [dB] | AMP [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity   |
| 1         | 2483.50     | 13.01            | 27.53               | 3.94            | 0.00     | 44.48          | 74.00          | 29.52       | PK       | Horizontal |
| 2         | 2484.01     | 18.95            | 27.54               | 3.94            | 0.00     | 50.43          | 74.00          | 23.57       | PK       | Horizontal |

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-03-20

Tested By:

Junchang Du

EUT:

BLUETOOTH HEADSET

Model Number:

LIVE FLEX 3

Test Mode:

2DH5 TX 2480MHz

Power Supply:

Battery

Condition:

Temp:23.4°C;Humi:62.3%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24031112-2E FLEX3\FCC ABOVE 1G\62

Memo:

Right side Sample Number: S24031112-004

Test Graph

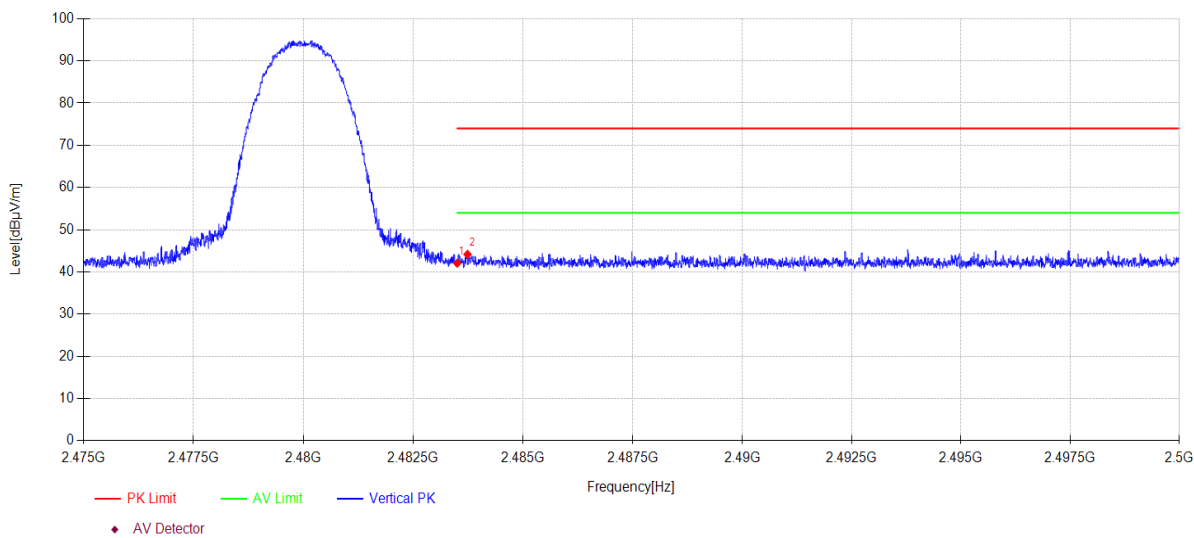

| Data List |             |                  |                     |                 |          |                |                |             |          |          |
|-----------|-------------|------------------|---------------------|-----------------|----------|----------------|----------------|-------------|----------|----------|
| NO.       | Freq. [MHz] | Reading [dBμV/m] | Antenna Factor [dB] | Cable loss [dB] | AMP [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity |
| 1         | 2483.50     | 10.61            | 27.53               | 3.94            | 0.00     | 42.08          | 74.00          | 31.92       | PK       | Vertical |
| 2         | 2483.74     | 12.69            | 27.53               | 3.94            | 0.00     | 44.16          | 74.00          | 29.84       | PK       | Vertical |

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-03-21

Tested By:

Junchang Du

EUT:

BLUETOOTH HEADSET

Model Number:

LIVE FLEX 3

Test Mode:

3DH5 TX 2480MHz

Power Supply:

Battery

Condition:

Temp:23.4°C;Humi:62.3%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24031112-2E FLEX3\FCC ABOVE 1G\63

Memo:

Right side Sample Number: S24031112-004

Test Graph

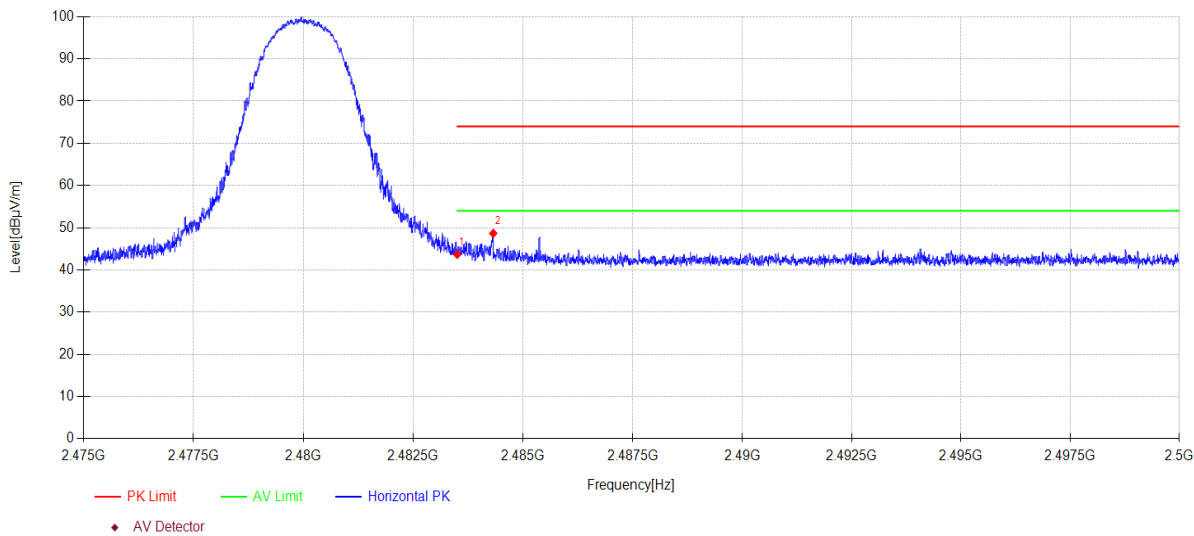

| Data List |             |                  |                     |                 |          |                |                |             |          |            |
|-----------|-------------|------------------|---------------------|-----------------|----------|----------------|----------------|-------------|----------|------------|
| NO.       | Freq. [MHz] | Reading [dBμV/m] | Antenna Factor [dB] | Cable loss [dB] | AMP [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity   |
| 1         | 2483.50     | 12.22            | 27.53               | 3.94            | 0.00     | 43.69          | 74.00          | 30.31       | PK       | Horizontal |
| 2         | 2484.32     | 17.19            | 27.54               | 3.94            | 0.00     | 48.67          | 74.00          | 25.33       | PK       | Horizontal |

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-03-21

Tested By:

Junchang Du

EUT:

BLUETOOTH HEADSET

Model Number:

LIVE FLEX 3

Test Mode:

3DH5 TX 2480MHz

Power Supply:

Battery

Condition:

Temp:23.4°C;Humi:62.3%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24031112-2E FLEX3\FCC ABOVE 1G\64

Memo:

Right side Sample Number: S24031112-004

Test Graph

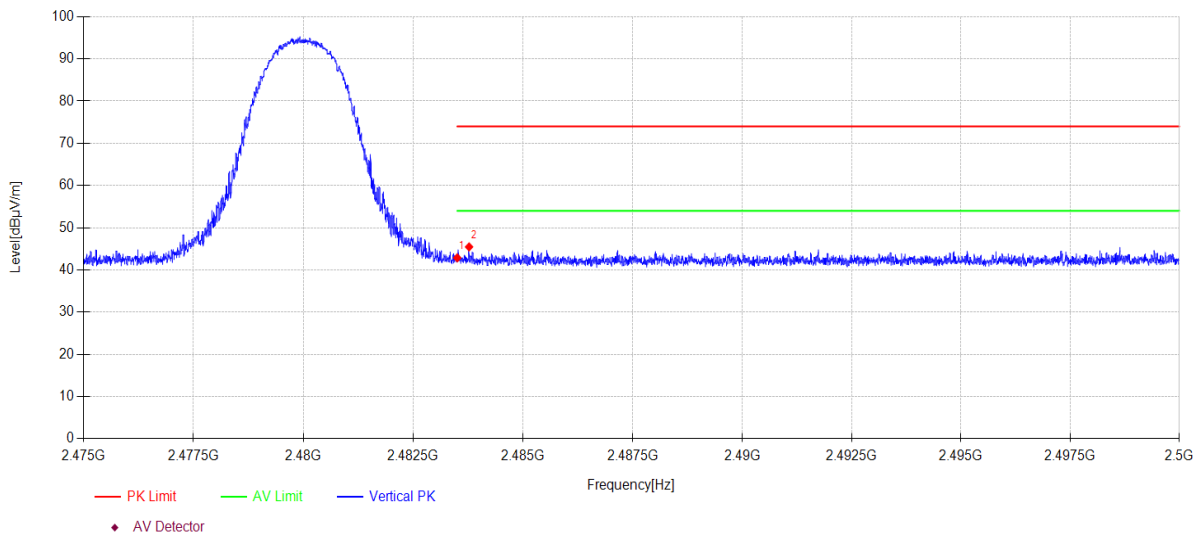

| Data List |             |                  |                     |                 |          |                |                |             |          |          |
|-----------|-------------|------------------|---------------------|-----------------|----------|----------------|----------------|-------------|----------|----------|
| NO.       | Freq. [MHz] | Reading [dBμV/m] | Antenna Factor [dB] | Cable loss [dB] | AMP [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity |
| 1         | 2483.50     | 11.40            | 27.53               | 3.94            | 0.00     | 42.87          | 74.00          | 31.13       | PK       | Vertical |
| 2         | 2483.77     | 13.98            | 27.54               | 3.94            | 0.00     | 45.46          | 74.00          | 28.54       | PK       | Vertical |

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## 16. Power Line Conducted Emissions

### 16.1. Test equipment

| Equipment                   | Manufacturer | Model No. | Serial No.  | Cal Due To |
|-----------------------------|--------------|-----------|-------------|------------|
| EMI Test Receiver           | R&S          | ESCI      | DDT-ZC01972 | 2024/04/23 |
| Two Line V-Network          | R&S          | ENV216    | DDT-ZC01247 | 2024/07/11 |
| Conducted Radiated Software | Audix        | E3        | DDT-ZC00562 | /          |
| Copper shaft signal cable   | H&S          | RG214-5   | DDT-ZC01817 | 2024/04/27 |
| Two Line V-Network          | R&S          | ENV216    | DDT-ZC00586 | 2024/07/11 |
| Pulse Limiter               | R&S          | KH43101   | DDT-ZC00747 | 2024/05/05 |

### 16.2. Block diagram of test setup

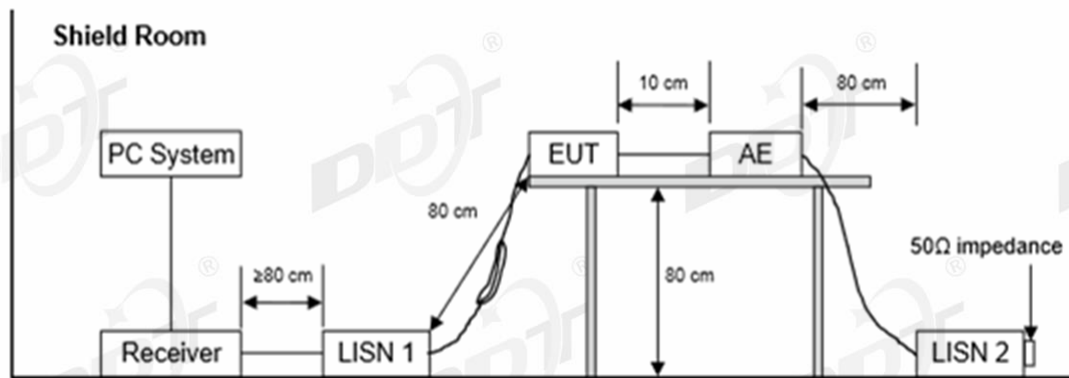

### 16.3. Limits

| Frequency       | Quasi-Peak Level<br>dB(mV) | Average Level<br>dB(mV) |
|-----------------|----------------------------|-------------------------|
| 150 kHz~500 kHz | 66 ~ 56*                   | 56 ~ 46*                |
| 500 kHz~5 MHz   | 56                         | 46                      |
| 5 MHz~30 MHz    | 60                         | 50                      |

Note 1: \* Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

### 16.4. Assistant equipment used for test

| Assistant equipment | Manufacturer | Model number | Description                                                  | other |
|---------------------|--------------|--------------|--------------------------------------------------------------|-------|
| Adapter             | SAMSUNG      | EP-TA200     | Input: 100-240~, 50/60Hz, 0.5A;<br>Output: 9V/1.67A or 5V/2A | N/A   |

### 16.5. Test procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30 MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in clause 2.4 were scanned during the preliminary test.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 kHz.

## 16.6. Test result

### **PASS. (See below detailed test result)**

Note1: All emissions not reported below are too low against the prescribed limits.

Note2: “---” means Peak detection; “---” means Average detection.

Note3: Pre-test AC conducted emission at both voltage AC 120V/60Hz and AC 240V/50Hz, recorded the worst case.



16.7. Test data

TR-4-E-010 Conducted Emission Test Result

Test Site

: DDT 5# Shield Room

Test Date

: 2024-03-23

EUT

: BLUETOOTH HEADSET

Power Supply

: AC 120V/60Hz

Condition

: Temp:24.5°C,Humi:55.5%

Memo

: S24031112-004

D:\2024 report data\Q24031112-2E\FCC CE.EM6

Tested By

: Junchang Du

Model Number

: LIVE FLEX 3


Test Mode

: Tx mode

LISN

: 2023 ENV216 2#/NEUTRAL

Data: 2

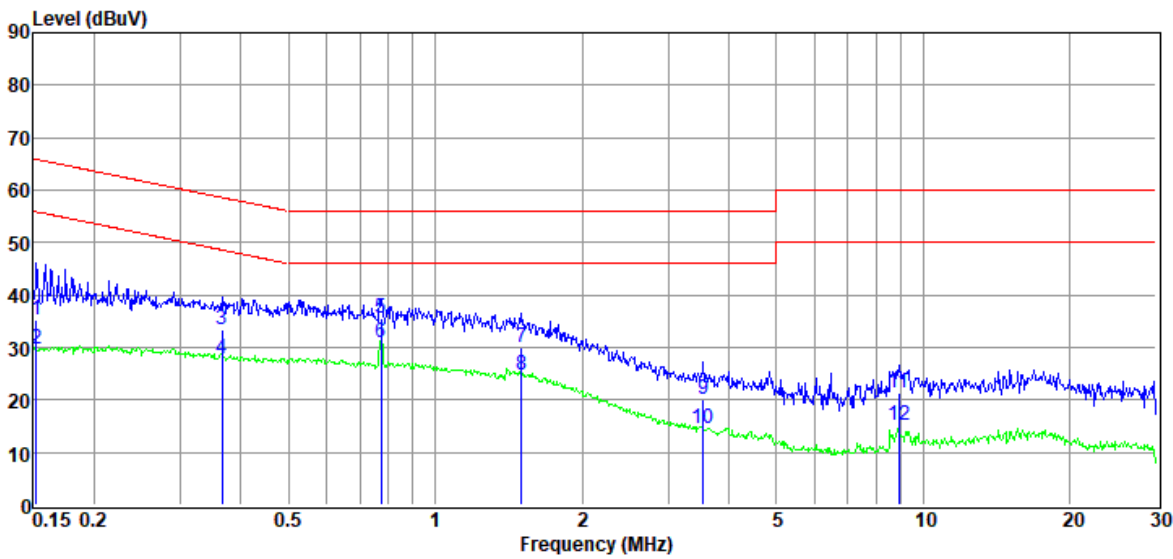

| Item   | Freq. | Read Level | LISN Factor | Cable Loss | Pulse Limiter Factor | Result Level | Limit Line | Over Limit | Detector | Phase   |
|--------|-------|------------|-------------|------------|----------------------|--------------|------------|------------|----------|---------|
| (Mark) | (MHz) | (dBμV)     | (dB)        | (dB)       | (dB)                 | (dBμV)       | (dBμV)     | (dB)       |          |         |
| 1      | 0.15  | 15.01      | 9.93        | 0.19       | 10.15                | 35.28        | 65.87      | -30.59     | QP       | NEUTRAL |
| 2      | 0.15  | 9.32       | 9.93        | 0.19       | 10.15                | 29.59        | 55.87      | -26.28     | Average  | NEUTRAL |
| 3      | 0.37  | 12.96      | 10.04       | 0.24       | 10.08                | 33.32        | 58.61      | -25.29     | QP       | NEUTRAL |
| 4      | 0.37  | 7.49       | 10.04       | 0.24       | 10.08                | 27.85        | 48.61      | -20.76     | Average  | NEUTRAL |
| 5      | 0.78  | 15.24      | 9.97        | 0.28       | 9.94                 | 35.43        | 56.00      | -20.57     | QP       | NEUTRAL |
| 6      | 0.78  | 10.77      | 9.97        | 0.28       | 9.94                 | 30.96        | 46.00      | -15.04     | Average  | NEUTRAL |
| 7      | 1.50  | 9.93       | 9.96        | 0.35       | 9.79                 | 30.03        | 56.00      | -25.97     | QP       | NEUTRAL |
| 8      | 1.50  | 4.69       | 9.96        | 0.35       | 9.79                 | 24.79        | 46.00      | -21.21     | Average  | NEUTRAL |
| 9      | 3.55  | -0.36      | 10.06       | 0.36       | 9.89                 | 19.95        | 56.00      | -36.05     | QP       | NEUTRAL |
| 10     | 3.55  | -5.63      | 10.06       | 0.36       | 9.89                 | 14.68        | 46.00      | -31.32     | Average  | NEUTRAL |
| 11     | 8.92  | 0.88       | 10.04       | 0.38       | 10.13                | 21.43        | 60.00      | -38.57     | QP       | NEUTRAL |
| 12     | 8.92  | -5.38      | 10.04       | 0.38       | 10.13                | 15.17        | 50.00      | -34.83     | Average  | NEUTRAL |

Note: 1. Result Level = Read Level +LISN Factor + Pulse Limiter Factor + Cable loss.  
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).  
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.




TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 5# Shield Room  
Test Date : 2024-03-23  
EUT : BLUETOOTH HEADSET  
Power Supply : AC 120V/60Hz  
Condition : Temp:24.5°C,Humi:55.5%  
Memo : S24031112-004

D:\2024 report data\Q24031112-2E\FCC CE.EM6  
Tested By : Junchang Du  
Model Number : LIVE FLEX 3  
Test Mode : Tx mode  
LISN : 2023 ENV216 2#/LINE

Data: 4

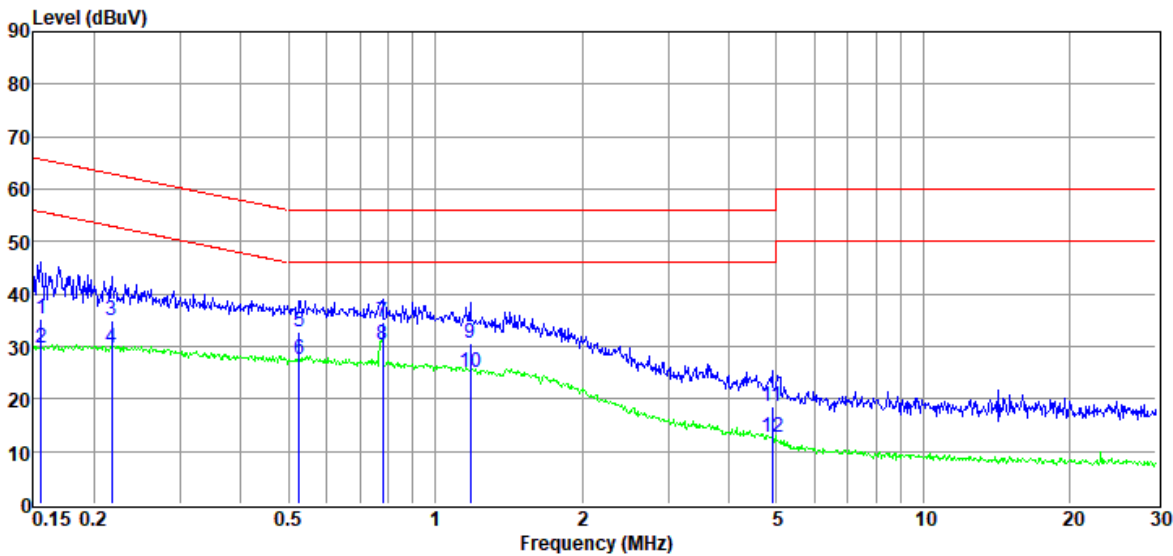

| Item   | Freq. | Read Level | LISN Factor | Cable Loss | Pulse Limiter Factor | Result Level | Limit Line | Over Limit | Detector | Phase |
|--------|-------|------------|-------------|------------|----------------------|--------------|------------|------------|----------|-------|
| (Mark) | (MHz) | (dBμV)     | (dB)        | (dB)       | (dB)                 | (dBμV)       | (dBμV)     | (dB)       |          |       |
| 1      | 0.16  | 15.07      | 9.93        | 0.19       | 10.15                | 35.34        | 65.69      | -30.35     | QP       | LINE  |
| 2      | 0.16  | 9.46       | 9.93        | 0.19       | 10.15                | 29.73        | 55.69      | -25.96     | Average  | LINE  |
| 3      | 0.22  | 14.59      | 9.95        | 0.20       | 10.14                | 34.88        | 62.92      | -28.04     | QP       | LINE  |
| 4      | 0.22  | 9.32       | 9.95        | 0.20       | 10.14                | 29.61        | 52.92      | -23.31     | Average  | LINE  |
| 5      | 0.53  | 12.47      | 9.97        | 0.25       | 10.04                | 32.73        | 56.00      | -23.27     | QP       | LINE  |
| 6      | 0.53  | 7.31       | 9.97        | 0.25       | 10.04                | 27.57        | 46.00      | -18.43     | Average  | LINE  |
| 7      | 0.78  | 14.45      | 9.97        | 0.28       | 9.94                 | 34.64        | 56.00      | -21.36     | QP       | LINE  |
| 8      | 0.78  | 10.11      | 9.97        | 0.28       | 9.94                 | 30.30        | 46.00      | -15.70     | Average  | LINE  |
| 9      | 1.18  | 10.33      | 10.03       | 0.34       | 9.84                 | 30.54        | 56.00      | -25.46     | QP       | LINE  |
| 10     | 1.18  | 4.97       | 10.03       | 0.34       | 9.84                 | 25.18        | 46.00      | -20.82     | Average  | LINE  |
| 11     | 4.90  | -1.78      | 9.90        | 0.37       | 9.98                 | 18.47        | 56.00      | -37.53     | QP       | LINE  |
| 12     | 4.90  | -7.63      | 9.90        | 0.37       | 9.98                 | 12.62        | 46.00      | -33.38     | Average  | LINE  |

Note: 1. Result Level = Read Level +LISN Factor + Pulse Limiter Factor + Cable loss.  
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).  
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

## 18. Photos of the EUT

Please refer to DDT-Q24031112-1E appendix I

-----End Report-----