



TEST REPORT

Report No. : CHTEW21090066 Report Verification: 

Project No. : SHT2108084701EW

FCC ID : UU8-TW12

Applicant's name : Lexibook America

Address : C/O NATXIX PRAMEX INTERNATIONAL-NORTH AMERICA
1251 Avenue of the Americas 34th Floor, New York, NY 10020
United States

Test item description : Walkie-Talkies

Trade Mark : LEXIBOOK

Model/Type reference : TW12

Listed Model(s) : TW12X(X represents different shell colors and markets)

Standard : FCC CFR Title 47 Part 95 Subpart B

Date of receipt of test sample : Aug.26, 2021

Date of testing : Aug.27, 2021- Sep.16, 2021

Date of issue : Sep.17, 2021

Result : PASS

Compiled by
(Position+Printed name+Signature): File administrator Fanghui Zhu

Fanghui Zhu

Supervised by
(Position+Printed name+Signature): Project Engineer Cheng Xiao

Cheng Xiao

Approved by
(Position+Printed name+Signature): RF Manager Hans Hu

Hans Hu

Testing Laboratory Name : Shenzhen Huatongwei International Inspection Co., Ltd.

Address : 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road,
Tianliao, Gongming, Shenzhen, China

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context. The test report merely correspond to the test sample.

Contents

<u>1.</u>	<u>TEST STANDARDS AND REPORT VERSION</u>	<u>3</u>
1.1.	Test Standards	3
1.2.	Report version	3
<u>2.</u>	<u>TEST DESCRIPTION</u>	<u>4</u>
<u>3.</u>	<u>SUMMARY</u>	<u>5</u>
3.1.	Client Information	5
3.2.	Product Description	5
3.3.	Radio Specification Description	5
3.4.	Testing Laboratory Information	6
<u>4.</u>	<u>TEST CONFIGURATION</u>	<u>7</u>
4.1.	Test frequency list	7
4.2.	Test mode	7
4.3.	Support unit used in test configuration and system	8
4.4.	Testing environmental condition	9
4.5.	Measurement uncertainty	9
4.6.	Equipment Used during the Test	10
<u>5.</u>	<u>TEST CONDITIONS AND RESULTS</u>	<u>11</u>
5.1.	Carrier Output Power (ERP)	11
5.2.	99% Occupied Bandwidth & 26dB Bandwidth	12
5.3.	Emission Mask	13
5.4.	Modulation Limit	14
5.5.	Audio Frequency Response	15
5.6.	Frequency stability VS Temperature	17
5.7.	Frequency stability VS Voltage	18
5.8.	Transmit Radiated Spurious Emission	19
<u>6.</u>	<u>TEST SETUP PHOTOS</u>	<u>23</u>
<u>7.</u>	<u>EXTERANAL AND INTERNAL PHOTOS</u>	<u>24</u>
7.1.	EXTERANAL PHOTOS	24
7.2.	INTERNAL PHOTOS	26
<u>8.</u>	<u>APPENDIX REPORT</u>	<u>27</u>

1. TEST STANDARDS AND REPORT VERSION

1.1. Test Standards

The tests were performed according to following standards:

- [FCC Rules Part 95](#): PERSONAL RADIO SERVICES
- [FCC Rules Part 2](#): Frequency allocations and radio treaty matters; General rules and regulations
- [ANSI C63.26-2013](#): American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services

1.2. Report version

Revision No.	Date of issue	Description
N/A	2021-09-17	Original

2. TEST DESCRIPTION

Report clause	Test Items	Standard Requirement	Result
5.1	Carrier Output Power(ERP)	Part 95.567 Part 2.1046(a)	PASS
5.2	99% Occupied Bandwidth & 26dB bandwidth	Part 95.573 Part 2.1049	PASS
5.3	Emission Mask	Part 95.579(a)(1)(2)(3) Part 2.1049	PASS
5.4	Modulation Limit	Part 95.575 Part 2.1047(b)	PASS
5.5	Audio Frequency Response	Part 95.575 Part 2.1047(a)	PASS
5.6	Frequency Stability V.S. Temperature	Part 95.565 Part 2.1055	PASS
5.7	Frequency Stability V.S. Voltage	Part 95.565 Part 2.1055	PASS
5.8	Transmit Radiated Spurious Emission	Part 95.579(a)(3) Part 2.1053	PASS

Note:

- The measurement uncertainty is not included in the test result.

3. SUMMARY

3.1. Client Information

Applicant:	Lexibook America
Address:	C/O NATXIX PRAMEX INTERNATIONAL-NORTH AMERICA 1251 Avenue of the Americas 34th Floor, New York, NY 10020 United States
Manufacturer:	LEXBOOK LIMITED
Address:	Unit 8-9,4th Floor,Kenning Industrial Bulding,19 Wang Hol Road,Kowloon Bay,Kowloon,Hong Kong

3.2. Product Description

Name of EUT:	Walkie-Talkies
Trade Mark:	LEXIBOOK
Model No.:	TW12
Listed Model(s):	TW12X(X represents different shell colors and markets)
Power supply:	DC 12V
Hardware version:	80-6386A1
Software version:	WT22_US

3.3. Radio Specification Description

Support Frequency:	462.5625MHz;462.7125MHz
Modulation Type:	FM
Emission Designator: *1	11K0F3E
Antenna Type:	Helical Antenna
Antenna Gain:	-9.7dBi

Note:

(1) *1 According to FCC Part 2.202 requirements, the Necessary Bandwidth is calculated as follows:

- For FM Voice Modulation

Channel Spacing = 12.5 KHz, D = 2.5 KHz max, K = 1, M = 3 KHz

$B_n = 2M + 2DK = 2*3 + 2*2.5*1 = 11 \text{ KHz}$

Emission designation: 11K0F3E

(2) The device only supports voice communication.

3.4. Testing Laboratory Information

Laboratory Name	Shenzhen Huatongwei International Inspection Co., Ltd.	
Laboratory Location	1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China	
Connect information:	Tel: 86-755-26715499 E-mail: cs@szhtw.com.cn http://www.szhtw.com.cn	
Qualifications	Type	Accreditation Number
	FCC	762235

4. TEST CONFIGURATION

4.1. Test frequency list

According to ANSI C63.26 section 5.1.2.1:

Measurements of transmitters shall be performed and, if required, reported for each frequency band in which the EUT can be operated with the device transmitting at the number of frequencies in each band specified in Table 2.

Frequency range over which EUT operates	Number of frequencies	Location in frequency range of operation
1 MHz or less	1	Middle
1 MHz to 10 MHz	2	1 near top and 1 near bottom
More than 10 MHz	3	1 near top, 1 near middle, and 1 near bottom

Test Channel	Frequency (MHz)
CH _{M1}	462.5625
CH _{M2}	462.7125

4.2. Test mode

Test mode	Transmitting	Receiving	FRS
TX-FRS	■		■

Note:

■: is operation mode.

Modulation Type	Description
UM	Un-modulation
AM2	Apply a 1000 Hz tone and adjust the audio frequency generator to produce 20% of the rated system deviation.
AM6	Apply a 1000 Hz modulating signal to the transmitter from the audio frequency generator, and adjust the level to obtain 60% of full rated system deviation, then increase the level from the audio generator by 20 dB
AM5	Modulate the transmitter with a 2500 Hz sine wave at an input level 16 dB greater than that necessary to produce 50% of rated system deviation.

Test item	Modulation Type	Test mode
Output Power(ERP)	UM	TX-FRS
99% Occupied Bandwidth & 26dB bandwidth	AM6	TX-FRS
Emission Mask	AM5	TX-FRS
Modulation Limit	AM6	TX-FRS
Audio Frequency Response	AM2	TX-FRS
Frequency Stability VS Temperature	UM	TX-FRS
Frequency Stability VS Voltage	UM	TX-FRS
Transmit Radiated Spurious Emission	AM5	TX-FRS

4.3. Support unit used in test configuration and system

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The following peripheral devices and interface cables were connected during the measurement:

Whether support unit is used?					
No					
Item	Equipment	Trade Name	Model No.	FCC ID	Power cord
1					
2					

4.4. Testing environmental condition

Type	Requirement	Actual
Temperature:	15~35°C	25°C
Relative Humidity:	25~75%	50%
Air Pressure:	860~1060mbar	1000mbar
Test voltage:	Normal voltage:	DC 9V
	Extreme lower voltage:	DC 8.1V
	Extreme upper voltage:	DC 9.9V

4.5. Measurement uncertainty

Test Item	Measurement Uncertainty
Frequency stability	25 Hz
Carrier output power (ERP)	2.20 dB
Occupied Bandwidth	35 Hz
Modulation Limiting	0.42 %
FM deviation	25 Hz
Audio level	0.62 dB
Radiated Spurious Emission 30~1000MHz	4.65 dB
Radiated Spurious Emission 1~18GHz	5.16 dB
AC power line Conducted Emission 9KHz-30MHz	3.39 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

4.6. Equipment Used during the Test

● Radiated Emission-6th test site						
Used	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	SAC-3m-02	N/A	2018/09/30	2021/09/29
●	EMI Test Receiver	R&S	ESCI	100900	2020/10/19	2021/10/18
●	Loop Antenna	R&S	HFH2-Z2	100020	2021/04/06	2022/04/05
●	Ultra-Broadband Antenna	SCHWARZBECK	VULB9163	546	2021/04/06	2022/04/05
●	Pre-Amplifier	SCHWARZBECK	BBV 9742	N/A	2020/11/13	2021/11/12
●	RF Connection Cable	HUBER+SUHNER	N/A	N/A	2021/02/26	2022/02/25
●	RF Connection Cable	HUBER+SUHNER	SUCOFLEX104	501184/4	2021/02/26	2022/02/25
●	Test Software	R&S	ES-K1	N/A	N/A	N/A
●	Turntable	Maturo Germany	TT2.0-1T	N/A	N/A	N/A
●	Antenna Mast	Maturo Germany	CAM-4.0-P-12	N/A	N/A	N/A

● Radiated emission-7th test site							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	HTWE0122	SAC-3m-01	N/A	2018/09/27	2021/09/26
●	Spectrum Analyzer	R&S	HTWE0098	FSP40	100597	2020/10/20	2021/10/19
●	Horn Antenna	SCHWARZBECK	HTWE0126	9120D	1011	2020/04/01	2023/03/31
●	Broadband Horn Antenna	SCHWARZBECK	HTWE0103	BBHA9170	BBHA9170472	2018/10/11	2021/10/11
●	Pre-amplifier	CD	HTWE0071	PAP-0102	12004	2020/11/13	2021/11/12
●	Broadband Pre-amplifier	SCHWARZBECK	HTWE0201	BBV 9718	9718-248	2021/03/05	2022/03/04
●	RF Connection Cable	HUBER+SUHNER	HTWE0120-01	6m 18GHz S Serisa	N/A	2021/02/26	2022/02/25
●	RF Connection Cable	HUBER+SUHNER	HTWE0120-02	6m 3GHz RG Serisa	N/A	2021/02/26	2022/02/25
●	RF Connection Cable	HUBER+SUHNER	HTWE0119-05	6m 3GHz RG Serisa	N/A	2021/02/26	2022/02/25
●	RF Connection Cable	HUBER+SUHNER	HTWE0120-04	6m 3GHz RG Serisa	N/A	2021/02/26	2022/02/25
●	RF Connection Cable	HUBER+SUHNER	HTWE0121-01	6m 18GHz S Serisa	N/A	2021/02/26	2022/02/25
●	Test Software	Audix	N/A	E3	N/A	N/A	N/A

● RF Conducted Method						
Used	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Signal and spectrum Analyzer	R&S	FSV40	100048	2020/10/19	2021/10/18
●	Spectrum Analyzer	Agilent	N9020A	MY50510187	2020/10/19	2021/10/18
○	Radio communication tester	R&S	CMW500	137688-Lv	2020/10/19	2021/10/18

5. TEST CONDITIONS AND RESULTS


5.1. Carrier Output Power (ERP)

LIMIT

FCC Part FCC Part 95.567, FCC Part 2.1046

Each FRS transmitter type must be designed such that the effective radiated power (ERP) on channels 8 through 14 does **not exceed 0.5 Watts** and the ERP on channels 1 through 7 and 15 through 22 does **not exceed 2.0 Watts**.

TEST CONFIGURATION

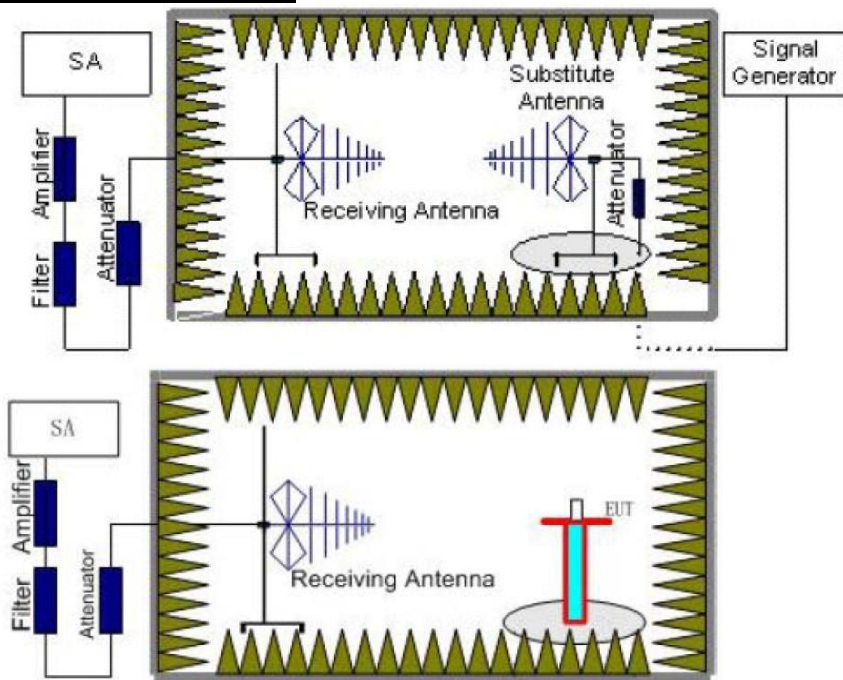

TEST PROCEDURE

- 1) The measuring distance of at 3m shall be used for measurements
- 2) The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation
- 3) The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- 4) The spectrum setting for Equivalent Isotropically Radiated Power (EIRP) is RBW = 100kHz, VBW = 300kHz. Detector Mode is Positive Peak
- 5) Record the field strength level of the EUT from the spectrum
- 6) The substitution antenna is substituted for EUT at the same position and signals generator (S.G) export the CW signal to the substitution antenna via a TX cable. The receiver antenna shall be moved height from 1m to 4m to find the highest radiation. Adjust the S.G. output level and repeat this step to get the same field strength level as the EUT
- 7) The EIRP level = S.G. output level(dBm) - TX cable(dB) + Substituted Antenna Gain(dBi)
- 8) The ERP level = EIRP - 2.15

TEST MODE

Please reference to the section 4.2

TEST RESULTS

☒ Passed ☐ Not Applicable

TEST Data

Please refer to appendix A on the appendix report


5.2. 99% Occupied Bandwidth & 26dB Bandwidth

LIMIT

FCC Part 95.573, FCC Part 2.1049

Each FRS transmitter type must be designed such that the occupied bandwidth **does not exceed 12.5 kHz**.

TEST CONFIGURATION

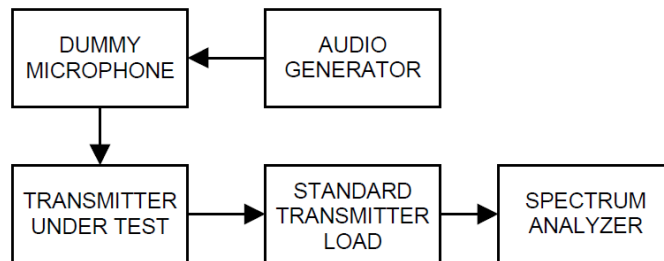

TEST PROCEDURE

- 1) Connect the equipment as illustrated
- 2) Spectrum set as follow:
Centre frequency = the nominal EUT channel center frequency,
The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts (typically a span of $1.5 \times \text{OBW}$ is sufficient)
RBW = 1% to 5% of the anticipated OBW, VBW $\geq 3 \times \text{RBW}$, Sweep = auto,
Detector function = peak, Trace = max hold
- 3) Set 99% Occupied Bandwidth and 26dB Bandwidth
- 4) Measure and record the results in the test report.

TEST MODE

Please reference to the section 4.2

TEST RESULTS

☒ Passed ☐ Not Applicable

TEST Data

Please refer to appendix B on the appendix report

5.3. Emission Mask


LIMIT

FCC Part 95.579(a)(1)(2)(3), FCC Part 2.1049

Each FRS transmitter type must be designed to satisfy the applicable unwanted emissions limits

- a) Attenuation requirements. The power of unwanted emissions must be attenuated below the carrier power output in Watts (P) by at least:
- (1) 25dB in the frequency band 6.25 kHz to 12.5 kHz removed from the channel center frequency.
 - (2) 35 dB in the frequency band 12.5 kHz to 31.25 kHz removed from the channel center frequency.
 - (3) $43 + 10 \log (P)$ dB in any frequency band removed from the channel center frequency by more than 31.25 kHz.

TEST CONFIGURATION

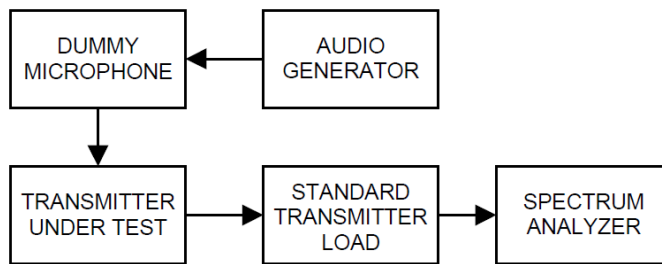

TEST PROCEDURE

- 1) Connect the equipment as illustrated.
- 2) Spectrum set as follow:
Centre frequency = fundamental frequency, RBW=300Hz, VBW=1000Hz, Sweep = auto,
Detector function = peak, Trace = max hold
- 3) Key the transmitter, and set the level of the unmodulated carrier to a full scale reference line.
This is the 0dB reference for the measurement.
- 4) Apply Input Modulation Signal to EUT according to Section 4.2
- 5) Measure and record the results in the test report.

TEST MODE

Please reference to the section 4.2

TEST RESULTS

☒ Passed ☐ Not Applicable

TEST Data

Please refer to appendix C on the appendix report


5.4. Modulation Limit

LIMIT

FCC Part 95.575, FCC Part 2.1047(b)

Each FRS transmitter type must be designed such that the peak frequency deviation does **not exceed 2.5kHz**, and the highest audio frequency contributing substantially to modulation must **not exceed 3.125kHz**.

TEST CONFIGURATION

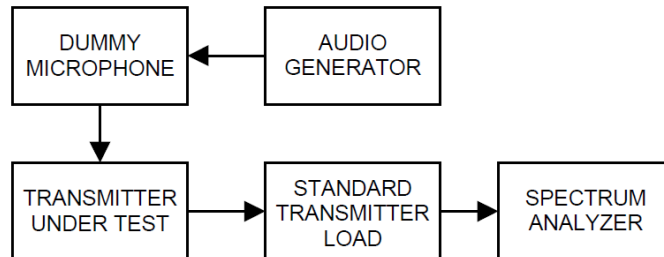

TEST PROCEDURE

- 1) Connect the equipment as illustrated.
- 2) Adjust the transmitter per the manufacturer's procedure for full rated system deviation.
- 3) Set the test receiver to measure peak positive deviation. Set the audio bandwidth for ≤ 0.25 Hz to $\geq 15,000$ Hz. Turn the de-emphasis function off.
- 4) Apply a 1000 Hz modulating signal to the transmitter from the audio frequency generator, and adjust the level to obtain 60% of full rated system deviation.
- 5) Increase the level from the audio frequency generator by 20 dB in one step (rise time between the 10% and 90% points shall be 0.1 second maximum).
- 6) Measure both the instantaneous and steady-state deviation at and after the time of increasing the audio input level
- 7) With the level from the audio frequency generator held constant at the level obtained in step 4), slowly vary the audio frequency from 300 Hz to 3000 Hz and observe the steady-state deviation. Record the maximum deviation.

TEST MODE

Please reference to the section 4.2

TEST RESULTS

☒ Passed ☐ Not Applicable

TEST Data

Please refer to appendix D on the appendix report


5.5. Audio Frequency Response

LIMIT

FCC Part 95.575, FCC Part 2.1047(a):


Each FRS transmitter type must be designed such that the peak frequency deviation does **not exceed 2.5kHz**, and the highest audio frequency contributing substantially to modulation must **not exceed 3.125kHz**.

Voice modulated communication equipment. A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz shall be submitted.

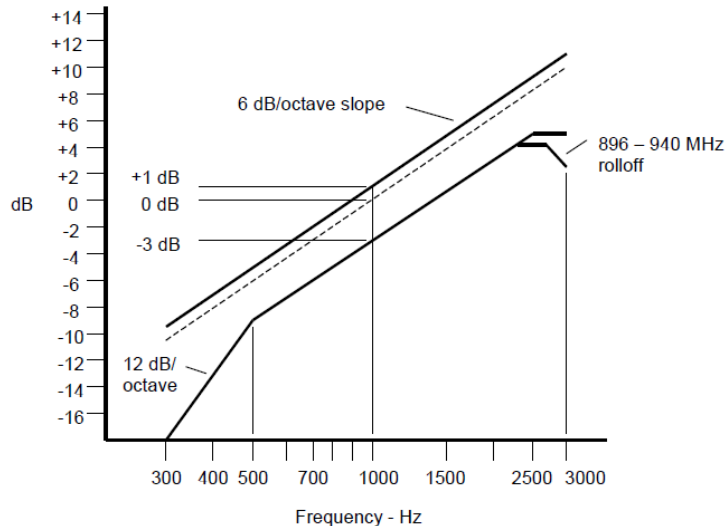

An additional 6 dB per octave attenuation is allowed from 2500 Hz to 3000 Hz in equipment operating in the 25 MHz to 869 MHz range.

TEST CONFIGURATION

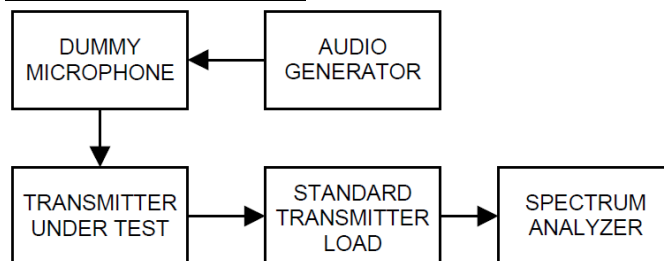

TEST PROCEDURE

- 1) Connect the equipment as illustrated.
- 2) Set the test receiver to measure peak positive deviation. Set the audio bandwidth for 50 Hz to 15,000 Hz. Turn the de-emphasis function off.
- 3) Set the DMM to measure rms voltage.
- 4) Adjust the transmitter per the manufacturer's procedure for full rated system deviation.
- 5) Apply a 1000 Hz tone and adjust the audio frequency generator to produce 20% of the rated system deviation.
- 6) Set the test receiver to measure rms deviation and record the deviation reading.
- 7) Record the DMM reading as V_{REF} .
- 8) Set the audio frequency generator to the desired test frequency between 300 Hz and 3000 Hz.
- 9) Vary the audio frequency generator output level until the deviation reading that was recorded in step 6) is obtained.
- 10) Record the DMM reading as V_{FREQ} .
- 11) Calculate the audio frequency response at the present frequency as:
audio frequency response = $20 \log_{10} (V_{FREQ}/V_{REF})$.
- 12) Repeat steps 8) through 11) for all the desired test frequencies

TEST MODE

Please reference to the section 4.2

TEST RESULTS

☒ **Passed** ☐ **Not Applicable**

TEST Data

Please refer to appendix E on the appendix report


5.6. Frequency stability VS Temperature

LIMIT

FCC Part 95.565:

Each FRS transmitter type must be designed such that the carrier frequencies remain **within ± 2.5 parts-per-million** of the channel center frequencies specified in §95.563 during normal operating conditions.

TEST CONFIGURATION

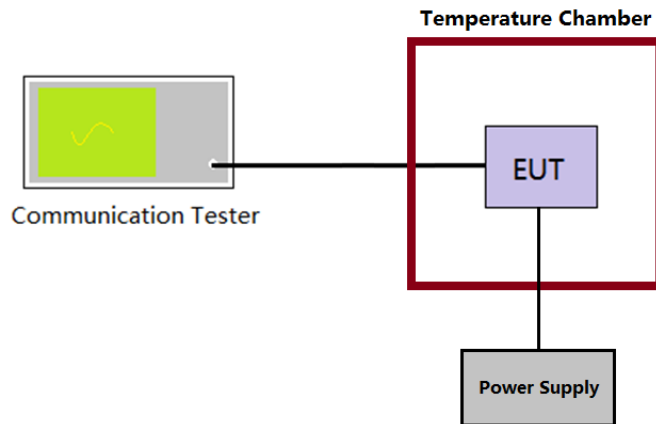

TEST PROCEDURE

- 1) The EUT output port was connected to communication tester.
- 2) The EUT was placed inside the temperature chamber.
- 3) Turn EUT off and set the chamber temperature to -30°C . After the temperature stabilized for approximately 30 minutes recorded the frequency as MCF_{MHz} .
- 4) Calculate the ppm frequency error by the following:
$$\text{ppm error} = (MCF_{\text{MHz}} / ACF_{\text{MHz}} - 1) \times 10^6$$

where
 MCF_{MHz} is the Measured Carrier Frequency in MHz
 ACF_{MHz} is the Assigned Carrier Frequency in MHz
- 5) Repeat step 3 measure with 10°C increased per stage until the highest temperature of $+50^{\circ}\text{C}$ reached.

TEST MODE

Please reference to the section 4.2

TEST RESULTS

☒ Passed ☐ Not Applicable

TEST Data

Please refer to appendix F on the appendix report


5.7. Frequency stability VS Voltage

LIMIT

FCC Part 95.565:

Each FRS transmitter type must be designed such that the carrier frequencies remain **within ± 2.5 parts-per-million** of the channel center frequencies specified in §95.563 during normal operating conditions.

TEST CONFIGURATION

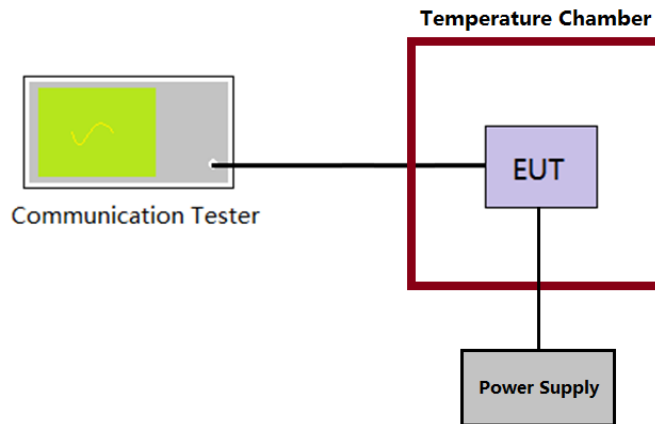

TEST PROCEDURE

- 1) The EUT output port was connected to communication tester.
- 2) The EUT was placed inside the temperature chamber at 25°C
- 3) Record the carrier frequency of the transmitter as MCF_{MHz}
- 4) Calculate the ppm frequency error by the following:
$$ppm\ error = (MCF_{MHz} / ACF_{MHz} - 1) * 10^6$$

where
 MCF_{MHz} is the Measured Carrier Frequency in MHz
 ACF_{MHz} is the Assigned Carrier Frequency in MHz
- 5) Repeat step 3 measure with varied $\pm 15\%$ of the nominal value measured at the input to the EUT

TEST MODE

Please reference to the section 4.2

TEST RESULTS

☒ Passed ☐ Not Applicable

TEST Data

Please refer to appendix G on the appendix report

5.8. Transmit Radiated Spurious Emission

LIMIT

FCC Part 95.579(a)(3):

Each FRS transmitter type must be designed to satisfy the applicable unwanted emissions limits

- a) Attenuation requirements. The power of unwanted emissions must be attenuated below the carrier power output in Watts (P) by at least:
- 1) 25dB in the frequency band 6.25 kHz to 12.5 kHz removed from the channel center frequency.
 - 2) 35 dB in the frequency band 12.5 kHz to 31.25 kHz removed from the channel center frequency.
 - 3) $43 + 10 \log(P)$ dB in any frequency band removed from the channel center frequency by more than 31.25 kHz.


Note:

Limit (dBm) = $EL - [43 + 10 \log(P)] = 10 \log(P \times 1000) - [43 + 10 \log(P)] = 10 \log(P) + 30 - 43 - 10 \log(P) = -13 \text{ dBm}$


EL is the emission level of the Output Power expressed in dBm,

TEST CONFIGURATION

Below 1GHz:

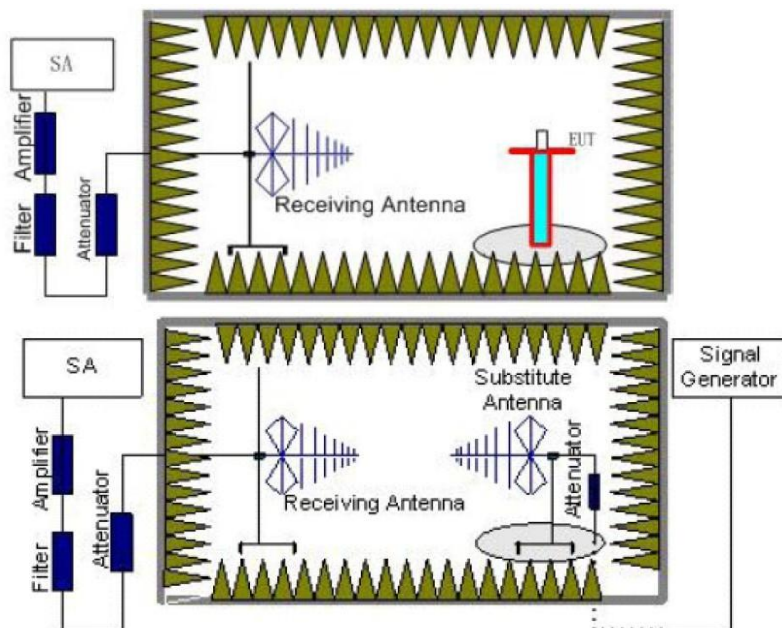

Above 1GHz:

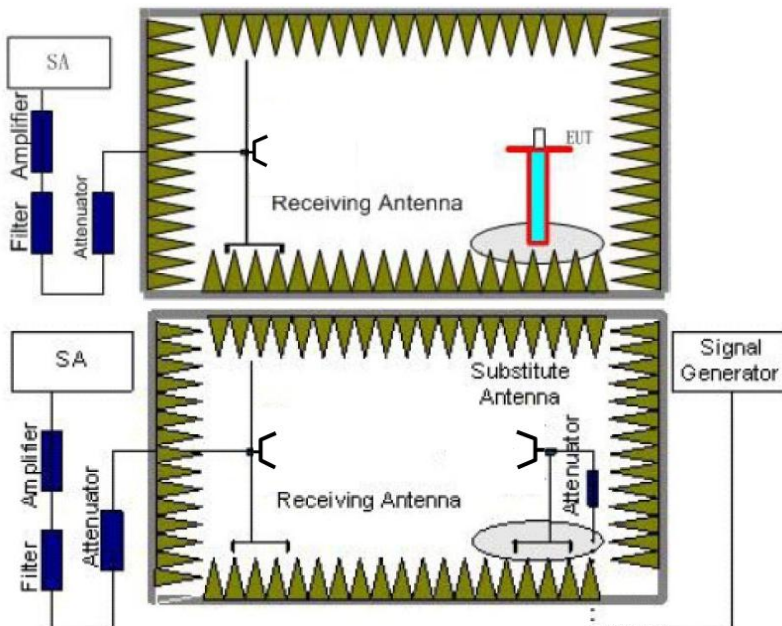

TEST PROCEDURE


- 1) The measuring distance of at 3m shall be used for measurements
- 2) The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The table was rotated 360 degrees to determine the position of the highest radiation
- 3) The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- 4) The spectrum setting as follow
Below 1 GHz: RBW=120kHz, VBW=300kHz, Sweep time=auto, Detector =peak, Trace=max hold;
Above 1GHz: RBW=1MHz, VBW=3MHz Sweep time=auto, Detector=peak, Trace=max hold
- 5) Record the field strength level of the EUT from the spectrum
- 6) The substitution antenna is substituted for EUT at the same position and signals generator (S.G) export the CW signal to the substitution antenna via a TX cable. The receiver antenna shall be moved height from 1m to 4m to find the highest radiation. Adjust the S.G. output level and repeat this step to get the same field strength level as the EUT
- 7) The EIRP level = S.G. output level(dBm)- TX cable(dB) + Substituted Antenna Gain(dBi)
- 8) Record the ERP value for below 1GHz, ERP value = EIRP-2.15; Record the EIRP for above 1GHz.


TEST MODE

Please reference to the section 4.2



TEST RESULTS

☒ **Passed** ☐ **Not Applicable**

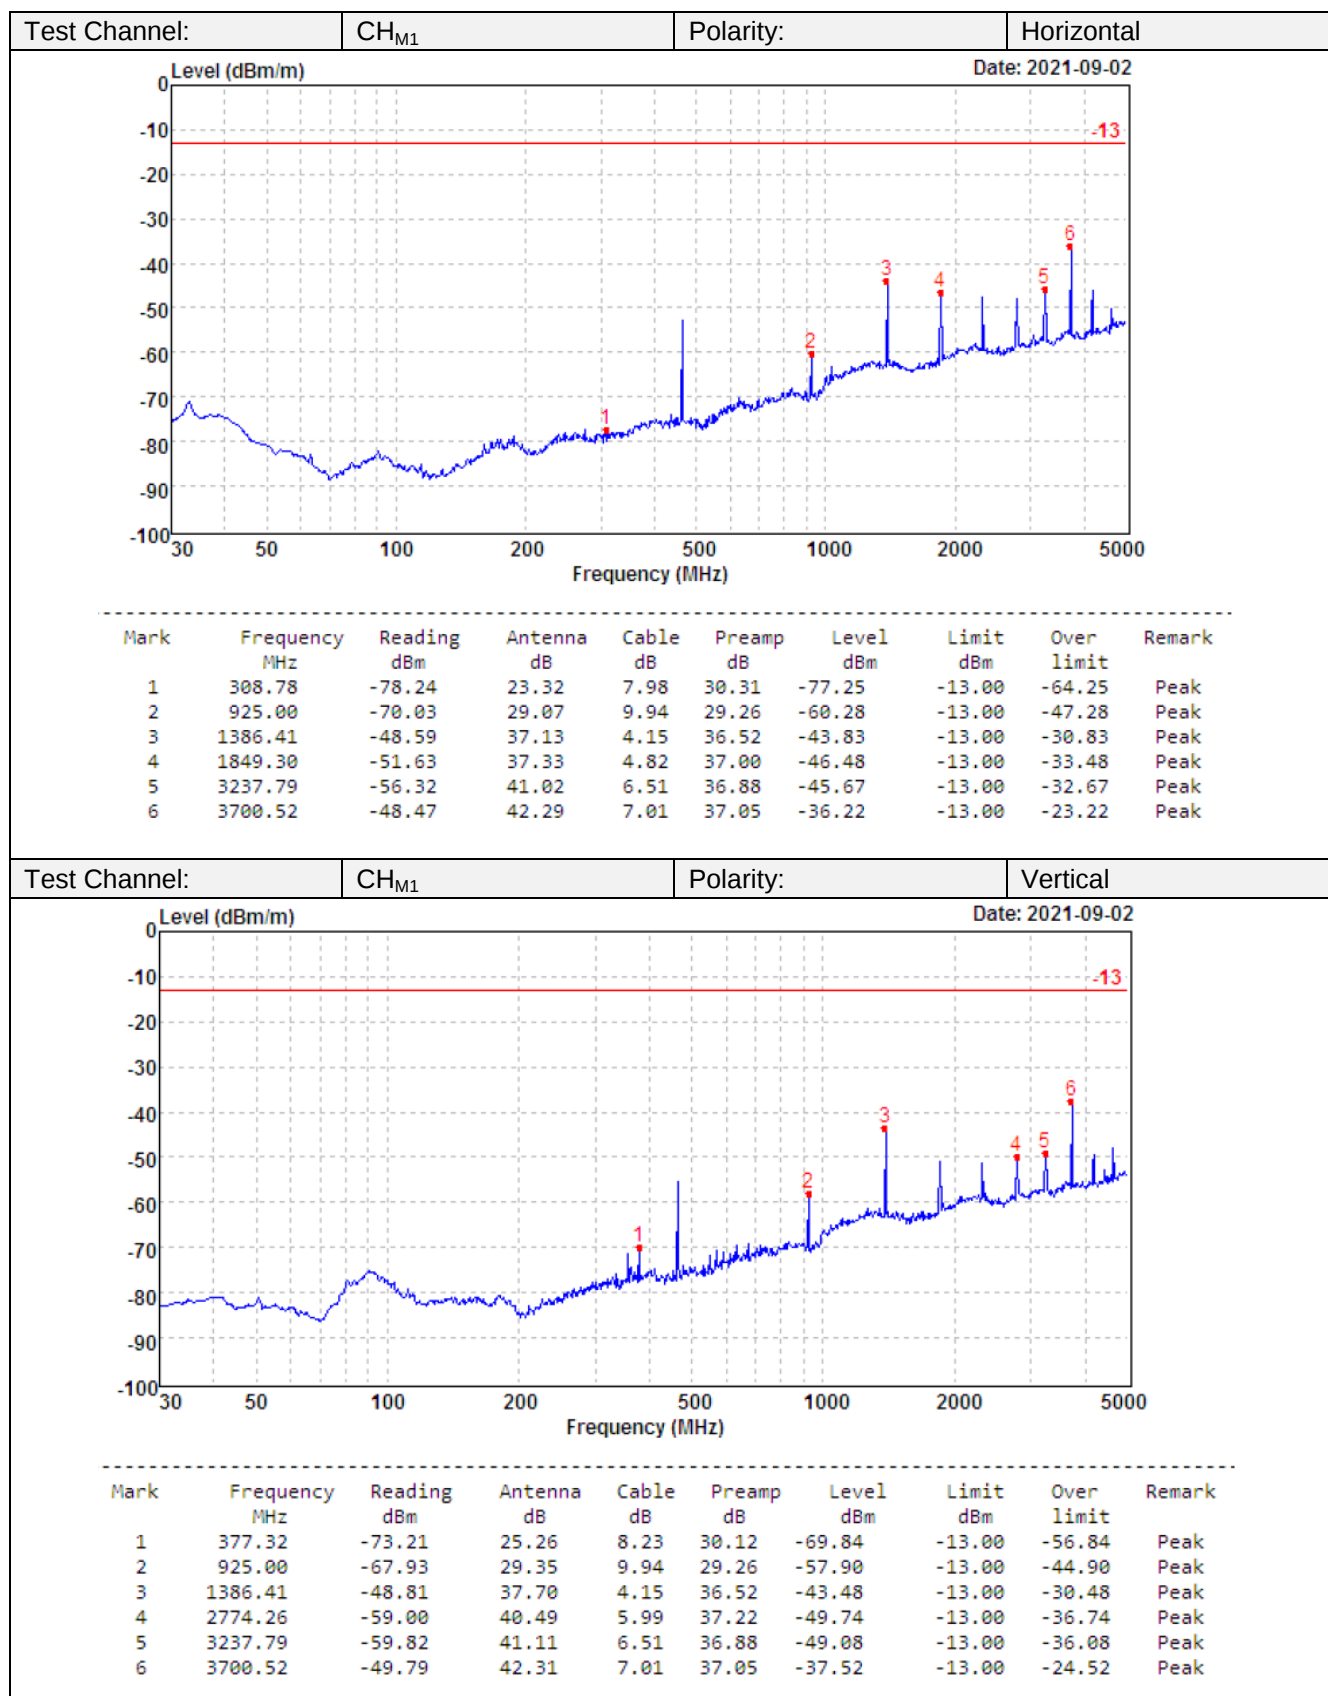

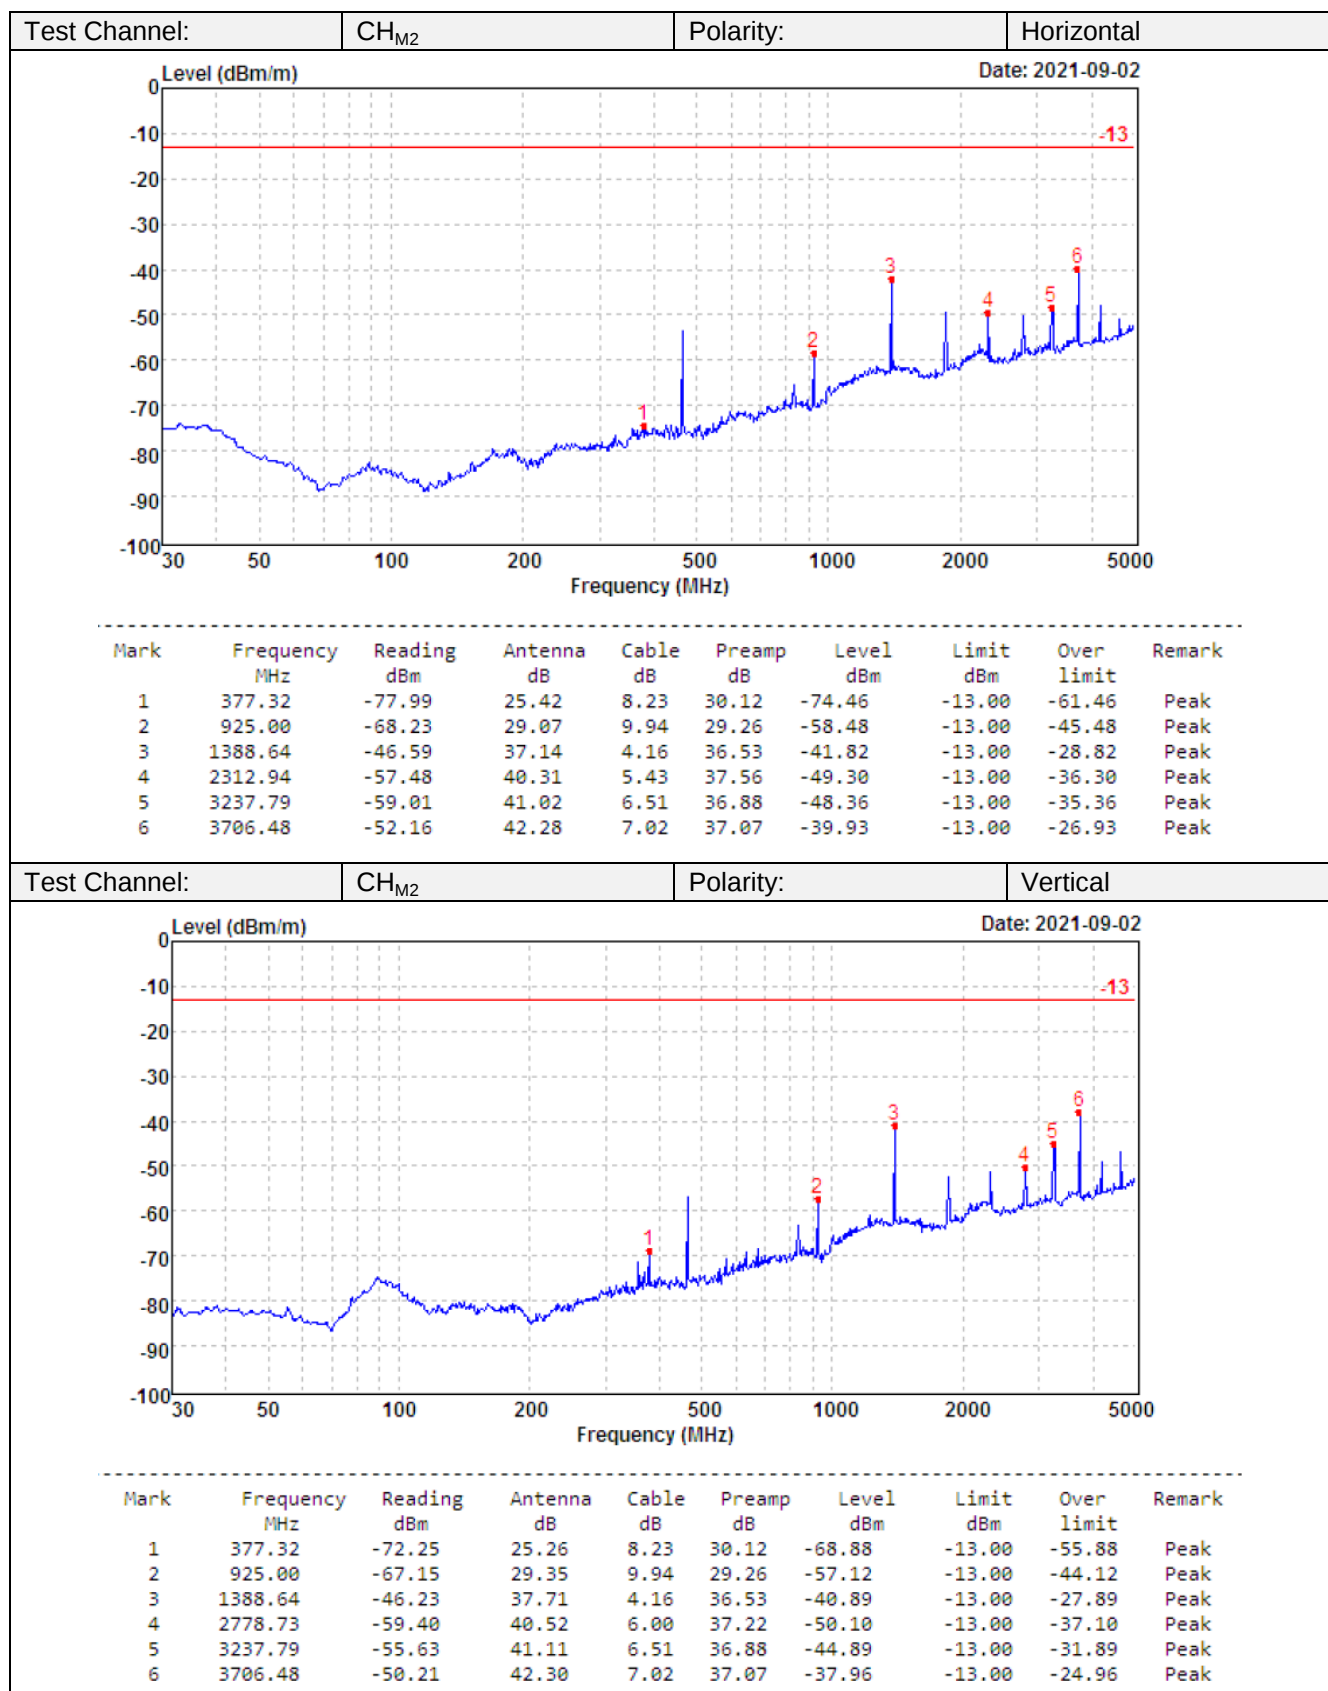


6. TEST SETUP PHOTOS

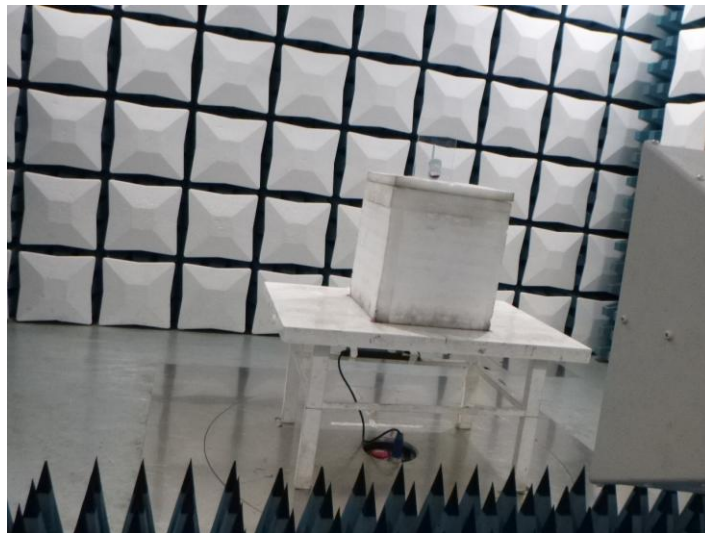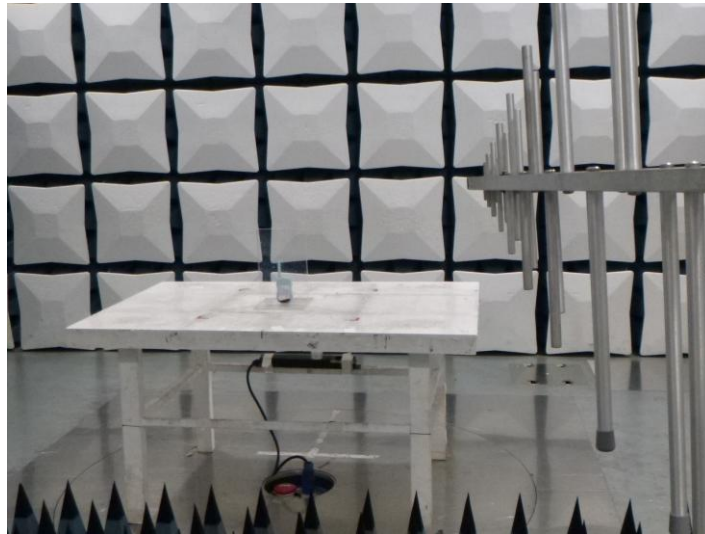



7. EXTERANAL AND INTERNAL PHOTOS


7.1. EXTERANAL PHOTOS



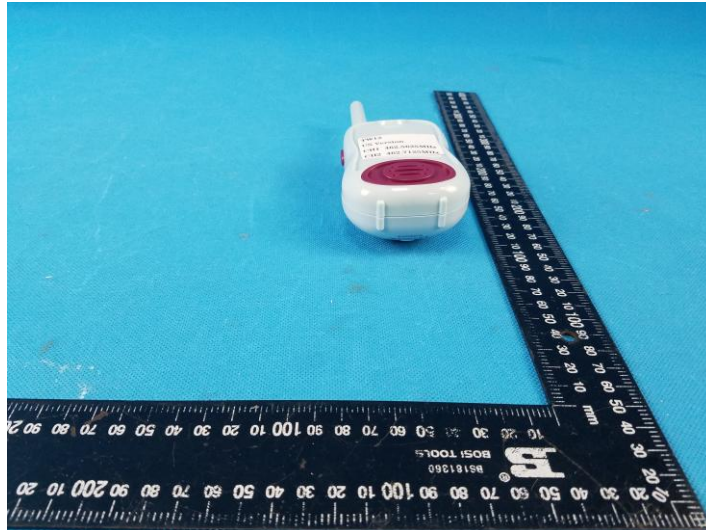

7.2. INTERNAL PHOTOS

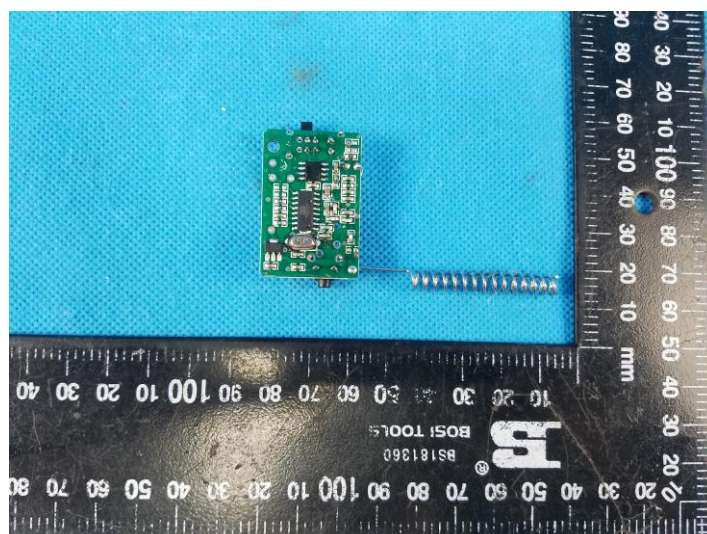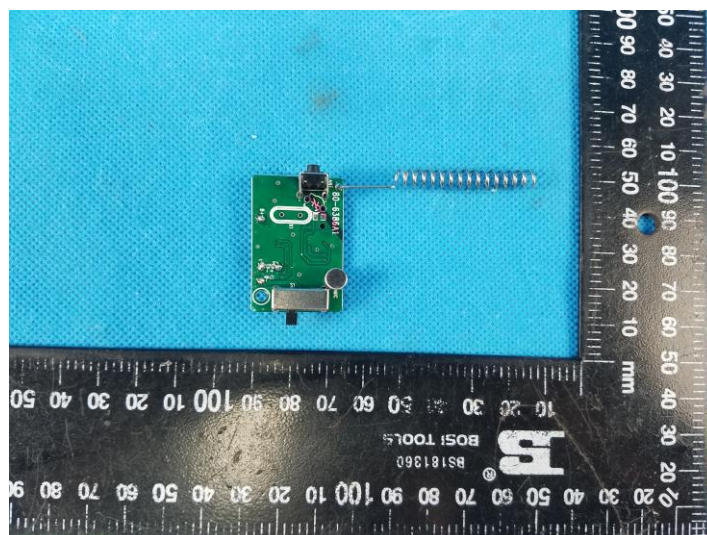

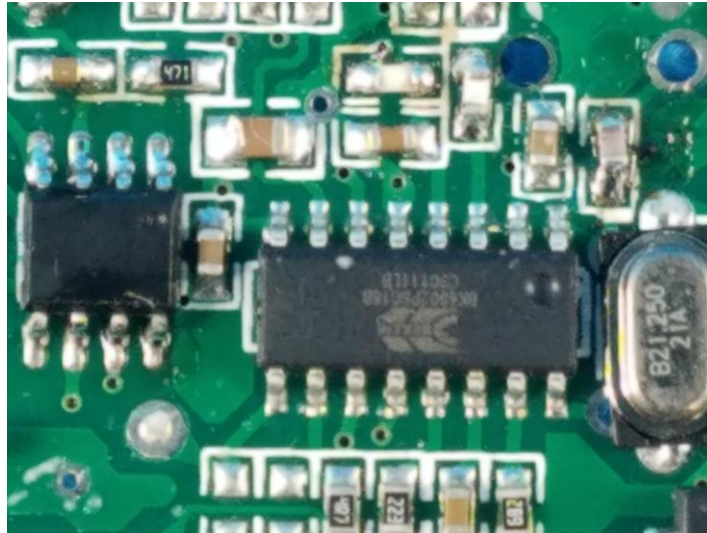

8. APPENDIX REPORT

Project No.	SHT2108084701EW		
Test sample No.	YPHT21080847004	Model No.	TW12
Start test date	2021/8/30	Finish date	2021/9/14
Temperature	24.4℃	Humidity	44%
Test Engineer	<i>Casper Chen</i>	Auditor	<i>Xiaodong Zhuo</i>

Appendix clause	Test Item	Test date (M/D)	Test Result (PASS/FAIL)
A	Transmit Power (ERP)	8/30	PASS
B	Occupied Bandwidth	8/30	PASS
C	Emission Mask	9/6	PASS
D	Modulation Limit	8/30	PASS
E	Audio Frequency Response	9/14	PASS
F	Audio Low Pass Filter Response	9/14	PASS
G	Frequency Stability Test & Temperature	9/14	PASS
H	Frequency Stability Test & Voltage	9/14	PASS

Appendix A: Transmit Power (ERP)

Test Mode	Modulation Type	Test Channel	Measured power (dBm)	Measured power (W)	Limit(W)	Result
TX-FRS	FM	CH _{M1}	-10.81	0.00	≤0.5	PASS
TX-FRS	FM	CH _{M2}	-10.96	0.00	≤0.5	PASS

Appendix B: 99% Occupied Bandwidth & 26dB Bandwidth

Test Mode	Modulation Type	Test Channel	Occupied Bandwidth		99% Limit(kHz)	Result
			99%(kHz)	26dB(kHz)		
TX-FRS	FM	CH _{M1}	8.504	10.14	≤12.5	PASS
TX-FRS	FM	CH _{M2}	8.483	10.13	≤12.5	PASS

Appendix B: 99% Occupied Bandwidth & 26dB Bandwidth

Operation Mode	Modulation Type	Test Channel	TEST PLOT RESULT
TX-FRS	FM	CH _{M1}	Agilent Spectrum Analyzer - Occupied BW Center Freq 462.562500 MHz Center Freq: 462.562500 MHz Trig: Free Run Avg/Hold: 10/10 Radio Std: None Radio Device: BTS #IF Gain: Low #Atten: 6 dB 10 dB/div Ref -6.66 dBm Center 462.6 MHz #Res BW 100 Hz #VBW 300 Hz Span 50 kHz Sweep FFT Occupied Bandwidth 8.504 kHz Total Power -9.90 dBm Transmit Freq Error 1.388 kHz OBW Power 99.00 % x dB Bandwidth 10.14 kHz x dB -26.00 dB MSO Alignment Completed Frequency Center Freq 462.562500 MHz CF Step 5.000 kHz Man Auto Freq Offset 0 Hz
TX-FRS	FM	CH _{M2}	Agilent Spectrum Analyzer - Occupied BW Center Freq 462.712500 MHz Center Freq: 462.712500 MHz Trig: Free Run Avg/Hold: 10/10 Radio Std: None Radio Device: BTS #IF Gain: Low #Atten: 6 dB 10 dB/div Ref -6.70 dBm Center 462.7 MHz #Res BW 100 Hz #VBW 300 Hz Span 50 kHz Sweep FFT Occupied Bandwidth 8.483 kHz Total Power -10.7 dBm Transmit Freq Error 1.307 kHz OBW Power 99.00 % x dB Bandwidth 10.13 kHz x dB -26.00 dB MSO Frequency Center Freq 462.712500 MHz CF Step 5.000 kHz Man Auto Freq Offset 0 Hz

Appendix C:Emission Mask

Test Mode	Modulation Type	Test Channel	TEST PLOT RESULT
TX-FRS	FM	CH _{M1}	MultiView Spectrum Ref Level 0.00 dBm Offset 0.50 dB RBW 100 Hz Att 9 dB SWI 41.9 ms (~56 ms) VBW 300 Hz Mode Auto FFT 1 Frequency Sweep Limit Check Line MASK-FRS PASS PASS M1[1] -15.14 dBm 462.563580 MHz CF 462.5625 MHz 1001 pts 12.0 kHz/ Span 120.0 kHz Date: 6 SEP 2021 09:48:27
TX-FRS	FM	CH _{M2}	MultiView Spectrum Ref Level 0.00 dBm Offset 0.50 dB RBW 100 Hz Att 9 dB SWI 41.9 ms (~56 ms) VBW 300 Hz Mode Auto FFT 1 Frequency Sweep Limit Check Line MASK-FRS PASS PASS M1[1] -15.09 dBm 462.713940 MHz CF 462.7125 MHz 1001 pts 12.0 kHz/ Span 120.0 kHz Date: 6 SEP 2021 09:50:47

Appendix D:Modulation Limit

Test Mode	Modulation Type	Test Channel	Modulation Level (dB)	Peak Frequency Deviation (Hz)				Limit (kHz)	Result
				300	1004	1500	2500		
TX-FRS	FM	CH _{M1}	-20	0.470	0.198	0.186	0.156	2.5	PASS
TX-FRS	FM	CH _{M1}	-15	0.314	0.309	0.283	0.231	2.5	PASS
TX-FRS	FM	CH _{M1}	-10	0.514	0.500	0.457	0.366	2.5	PASS
TX-FRS	FM	CH _{M1}	-5	0.858	0.861	0.773	0.614	2.5	PASS
TX-FRS	FM	CH _{M1}	0	1.490	1.516	1.356	1.048	2.5	PASS
TX-FRS	FM	CH _{M1}	5	1.932	1.837	1.843	1.700	2.5	PASS
TX-FRS	FM	CH _{M1}	10	2.122	1.988	1.944	1.901	2.5	PASS
TX-FRS	FM	CH _{M1}	15	2.205	2.040	1.994	1.956	2.5	PASS
TX-FRS	FM	CH _{M1}	20	2.201	2.034	1.986	1.963	2.5	PASS
TX-FRS	FM	CH _{M2}	-20	0.205	0.202	0.190	0.156	2.5	PASS
TX-FRS	FM	CH _{M2}	-15	0.311	0.303	0.276	0.233	2.5	PASS
TX-FRS	FM	CH _{M2}	-10	0.508	0.512	0.463	0.363	2.5	PASS
TX-FRS	FM	CH _{M2}	-5	0.864	0.863	0.782	0.612	2.5	PASS
TX-FRS	FM	CH _{M2}	0	1.470	1.505	1.347	1.049	2.5	PASS
TX-FRS	FM	CH _{M2}	5	1.931	1.845	1.848	1.705	2.5	PASS
TX-FRS	FM	CH _{M2}	10	2.099	1.990	1.946	1.885	2.5	PASS
TX-FRS	FM	CH _{M2}	15	2.199	2.046	2.001	1.964	2.5	PASS
TX-FRS	FM	CH _{M2}	20	2.200	2.035	1.986	1.966	2.5	PASS

Appendix D:Modulation Limit

Test Mode	Modulation Type	Test Channel	TEST PLOT RESULT
TX-FRS	FM	CH _{M1}	Peak Deviation (kHz) Modulation Level (dB) Legend: Limit (kHz), 300, 1004, 1500, 2500
TX-FRS	FM	CH _{M2}	Peak Deviation (kHz) Modulation Level (dB) Legend: Limit (kHz), 300, 1004, 1500, 2500

Appendix E:Audio Frequency Response

Test Mode	Modulation Type	Test Channel	Frequency (Hz)	Audio Frequency Response (dB)	Lower Limit	Upper Limit	Result
TX-FRS	FM	CH _{M1}	100	-25.47			PASS
TX-FRS	FM	CH _{M1}	200	-13.99			PASS
TX-FRS	FM	CH _{M1}	300	-10.17	-17.84	-9.42	PASS
TX-FRS	FM	CH _{M1}	400	-7.93	-12.86	-6.93	PASS
TX-FRS	FM	CH _{M1}	500	-5.98	-9.00	-5.00	PASS
TX-FRS	FM	CH _{M1}	600	-4.23	-7.42	-3.42	PASS
TX-FRS	FM	CH _{M1}	700	-2.98	-6.09	-2.09	PASS
TX-FRS	FM	CH _{M1}	800	-2.02	-4.93	-0.93	PASS
TX-FRS	FM	CH _{M1}	900	-1.06	-3.91	0.09	PASS
TX-FRS	FM	CH _{M1}	1000	-0.08	-3.00	1.00	PASS
TX-FRS	FM	CH _{M1}	1200	1.72	-1.42	2.58	PASS
TX-FRS	FM	CH _{M1}	1400	2.70	-0.09	3.91	PASS
TX-FRS	FM	CH _{M1}	1600	3.88	1.07	5.07	PASS
TX-FRS	FM	CH _{M1}	1800	5.05	2.09	6.09	PASS
TX-FRS	FM	CH _{M1}	2000	5.58	3.00	7.00	PASS
TX-FRS	FM	CH _{M1}	2100	5.89	3.42	7.42	PASS
TX-FRS	FM	CH _{M1}	2200	6.40	3.83	7.83	PASS
TX-FRS	FM	CH _{M1}	2300	6.79	4.21	8.21	PASS
TX-FRS	FM	CH _{M1}	2400	6.91	4.58	8.58	PASS
TX-FRS	FM	CH _{M1}	2500	6.90	4.93	8.93	PASS
TX-FRS	FM	CH _{M1}	2600	6.87	4.59	9.27	PASS
TX-FRS	FM	CH _{M1}	2700	6.91	4.27	9.60	PASS
TX-FRS	FM	CH _{M1}	2800	6.92	3.95	9.91	PASS
TX-FRS	FM	CH _{M1}	2900	6.77	3.65	10.22	PASS
TX-FRS	FM	CH _{M1}	3000	6.29	3.35	10.51	PASS
TX-FRS	FM	CH _{M1}	3500	-28.84			PASS
TX-FRS	FM	CH _{M1}	4000	-29.12			PASS
TX-FRS	FM	CH _{M1}	4500	-28.94			PASS
TX-FRS	FM	CH _{M1}	5000	-29.17			PASS
TX-FRS	FM	CH _{M2}	100	-25.20			PASS
TX-FRS	FM	CH _{M2}	200	-13.87			PASS
TX-FRS	FM	CH _{M2}	300	-10.08	-17.84	-9.42	PASS
TX-FRS	FM	CH _{M2}	400	-7.96	-12.86	-6.93	PASS
TX-FRS	FM	CH _{M2}	500	-5.95	-9.00	-5.00	PASS
TX-FRS	FM	CH _{M2}	600	-4.17	-7.42	-3.42	PASS
TX-FRS	FM	CH _{M2}	700	-2.91	-6.09	-2.09	PASS
TX-FRS	FM	CH _{M2}	800	-1.93	-4.93	-0.93	PASS
TX-FRS	FM	CH _{M2}	900	-1.01	-3.91	0.09	PASS
TX-FRS	FM	CH _{M2}	1000	-0.07	-3.00	1.00	PASS
TX-FRS	FM	CH _{M2}	1200	1.77	-1.42	2.58	PASS
TX-FRS	FM	CH _{M2}	1400	2.77	-0.09	3.91	PASS
TX-FRS	FM	CH _{M2}	1600	3.94	1.07	5.07	PASS

Appendix E:Audio Frequency Response

Test Mode	Modulation Type	Test Channel	Frequency (Hz)	Audio Frequency Response (dB)	Lower Limit	Upper Limit	Result
TX-FRS	FM	CH _{M2}	1800	5.10	2.09	6.09	PASS
TX-FRS	FM	CH _{M2}	2000	5.63	3.00	7.00	PASS
TX-FRS	FM	CH _{M2}	2100	5.94	3.42	7.42	PASS
TX-FRS	FM	CH _{M2}	2200	6.45	3.83	7.83	PASS
TX-FRS	FM	CH _{M2}	2300	6.83	4.21	8.21	PASS
TX-FRS	FM	CH _{M2}	2400	6.95	4.58	8.58	PASS
TX-FRS	FM	CH _{M2}	2500	6.93	4.93	8.93	PASS
TX-FRS	FM	CH _{M2}	2600	6.90	4.59	9.27	PASS
TX-FRS	FM	CH _{M2}	2700	6.94	4.27	9.60	PASS
TX-FRS	FM	CH _{M2}	2800	6.94	3.95	9.91	PASS
TX-FRS	FM	CH _{M2}	2900	6.79	3.65	10.22	PASS
TX-FRS	FM	CH _{M2}	3000	6.31	3.35	10.51	PASS
TX-FRS	FM	CH _{M2}	3500	-28.62			PASS
TX-FRS	FM	CH _{M2}	4000	-29.08			PASS
TX-FRS	FM	CH _{M2}	4500	-29.05			PASS
TX-FRS	FM	CH _{M2}	5000	-29.17			PASS

Appendix E:Audio Frequency Response



Test Mode	Modulation Type	Test Channel	TEST PLOT RESULT
TX-FRS	FM	CH _{M1}	
TX-FRS	FM	CH _{M2}	

Note: The highest audio frequency response at 3kHz<3.125kHz, so meet the requirement.

**Appendix F:Audio Low Pass Filter Response**

Test Mode	Modulation Type	Test Channel	Audio Frequency(Hz)	Audio Frequency Response(dB)	Limit	Result
TX-GMRS	FM	CH _{M1}	1000	-16.68	0	PASS
TX-GMRS	FM	CH _{M1}	3000	-27.84	0	PASS
TX-GMRS	FM	CH _{M1}	4000	-55.37	-7.5	PASS
TX-GMRS	FM	CH _{M1}	5000	-55.76	-13.3	PASS
TX-GMRS	FM	CH _{M1}	6000	-55.60	-18.1	PASS
TX-GMRS	FM	CH _{M1}	8000	-54.91	-25.6	PASS
TX-GMRS	FM	CH _{M1}	10000	-46.24	-31.4	PASS
TX-GMRS	FM	CH _{M1}	15000	-45.87	-41.9	PASS
TX-GMRS	FM	CH _{M1}	20000	-51.39	-50	PASS
TX-GMRS	FM	CH _{M1}	30000	-50.65	-50	PASS
TX-GMRS	FM	CH _{M1}	40000	-50.37	-50	PASS
TX-GMRS	FM	CH _{M1}	50000	-50.71	-50	PASS
TX-GMRS	FM	CH _{M1}	60000	-50.93	-50	PASS
TX-GMRS	FM	CH _{M1}	70000	-50.65	-50	PASS
TX-GMRS	FM	CH _{M1}	80000	-50.52	-50	PASS
TX-GMRS	FM	CH _{M1}	90000	-50.48	-50	PASS
TX-GMRS	FM	CH _{M1}	100000	-50.33	-50	PASS
TX-GMRS	FM	CH _{M2}	1000	-16.73	0	PASS
TX-GMRS	FM	CH _{M2}	3000	-27.76	0	PASS
TX-GMRS	FM	CH _{M2}	4000	-55.18	-7.5	PASS
TX-GMRS	FM	CH _{M2}	5000	-55.29	-13.3	PASS
TX-GMRS	FM	CH _{M2}	6000	-55.42	-18.1	PASS
TX-GMRS	FM	CH _{M2}	8000	-54.76	-25.6	PASS
TX-GMRS	FM	CH _{M2}	10000	-46.08	-31.4	PASS
TX-GMRS	FM	CH _{M2}	15000	-45.74	-41.9	PASS
TX-GMRS	FM	CH _{M2}	20000	-51.94	-50	PASS
TX-GMRS	FM	CH _{M2}	30000	-50.58	-50	PASS
TX-GMRS	FM	CH _{M2}	40000	-50.18	-50	PASS
TX-GMRS	FM	CH _{M2}	50000	-50.27	-50	PASS
TX-GMRS	FM	CH _{M2}	60000	-50.55	-50	PASS
TX-GMRS	FM	CH _{M2}	70000	-50.43	-50	PASS
TX-GMRS	FM	CH _{M2}	80000	-50.62	-50	PASS
TX-GMRS	FM	CH _{M2}	90000	-50.27	-50	PASS
TX-GMRS	FM	CH _{M2}	100000	-50.19	-50	PASS

**Appendix F:Audio Low Pass Filter Response**

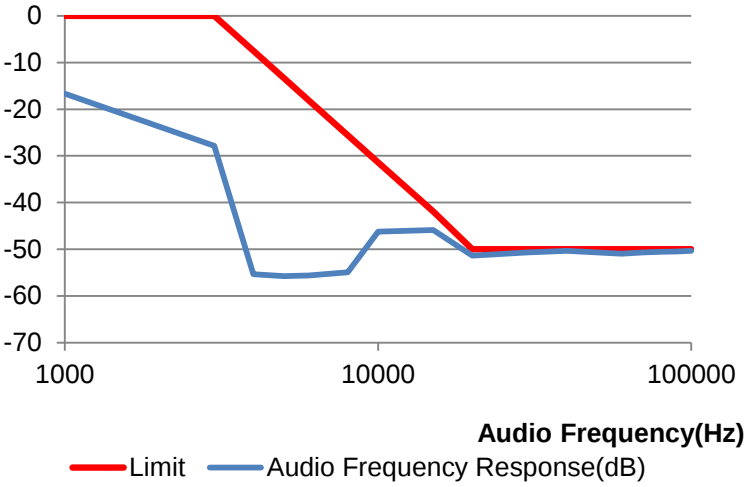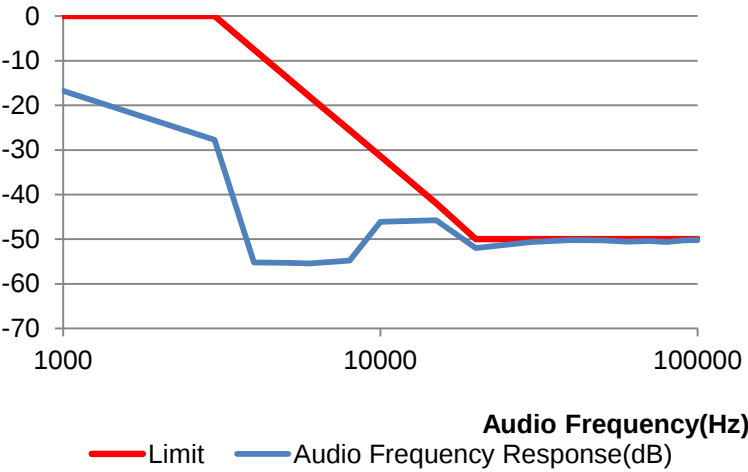Test Mode	Modulation Type	Test Channel	TEST PLOT RESULT
TX-GMRS	FM	CH _{M1}	
TX-GMRS	FM	CH _{M2}	

Appendix G:Frequency Stability Test & Temperature

Test Mode	Modulation Type	Test Conditions		Frequency error (ppm)		Limit (ppm)	Result
		Voltage	Temperature	CH _{M1}	CH _{M2}		
TX-FRS	FM	V _N	-30	1.378	1.372	±2.5	PASS
TX-FRS	FM	V _N	-20	1.340	1.398	±2.5	PASS
TX-FRS	FM	V _N	-10	1.353	1.300	±2.5	PASS
TX-FRS	FM	V _N	0	1.409	1.303	±2.5	PASS
TX-FRS	FM	V _N	10	1.330	1.313	±2.5	PASS
TX-FRS	FM	V _N	20	1.312	1.291	±2.5	PASS
TX-FRS	FM	V _N	30	1.319	1.379	±2.5	PASS
TX-FRS	FM	V _N	40	1.368	1.399	±2.5	PASS
TX-FRS	FM	V _N	50	1.367	1.308	±2.5	PASS

Appendix H:Frequency Stability Test & Voltage

Test Mode	Modulation Type	Test Conditions		Frequency error (ppm)		Limit (ppm)	Result
		Voltage	Temperature	CH _{M1}	CH _{M2}		
TX-FRS	FM	V _N	T _N	1.312	1.291	±2.5	PASS
TX-FRS	FM	V _L	T _N	1.400	1.368	±2.5	PASS
TX-FRS	FM	V _H	T _N	1.342	1.296	±2.5	PASS

-----End of Report-----